

# FCC Test Report

**FCC ID** : AK8DNURSY3  
**Equipment** : WLAN Module  
**Model No.** : DNUR-SY3  
**Brand Name** : Wistron NeWeb Corporation  
**Applicant** : Sony Corporation  
**Address** : 1-7-1 Konan Minato-ku Tokyo 108-0075  
Japan  
**Standard** : 47 CFR FCC Part 15.247  
**Received Date** : May 27, 2016  
**Tested Date** : May 31 ~ Aug. 01, 2016

We, International Certification Corp., would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It may be duplicated completely for legal use with the approval of the applicant. It shall not be reproduced except in full without the written approval of our laboratory.

Approved & Reviewed by:

  
\_\_\_\_\_  
Gary Chang / Manager



---

## Table of Contents

<b>1</b>	<b>GENERAL DESCRIPTION .....</b>	<b>5</b>
1.1	Information.....	5
1.2	Local Support Equipment List .....	7
1.3	Test Setup Chart .....	7
1.4	The Equipment List .....	8
1.5	Test Standards .....	9
1.6	Measurement Uncertainty .....	9
<b>2</b>	<b>TEST CONFIGURATION .....</b>	<b>10</b>
2.1	Testing Condition .....	10
2.2	The Worst Test Modes and Channel Details .....	10
<b>3</b>	<b>TRANSMITTER TEST RESULTS.....</b>	<b>11</b>
3.1	Conducted Emissions.....	11
3.2	6dB and Occupied Bandwidth .....	16
3.3	RF Output Power .....	19
3.4	Power Spectral Density .....	21
3.5	Unwanted Emissions into Restricted Frequency Bands .....	23
3.6	Emissions in Non-Restricted Frequency Bands .....	47
<b>4</b>	<b>TEST LABORATORY INFORMATION .....</b>	<b>57</b>

---

## Release Record

Report No.	Version	Description	Issued Date
FR652701	Rev. 01	Initial issue	Aug. 16, 2016

## Summary of Test Results

FCC Rules	Test Items	Measured	Result
15.207	Conducted Emissions	[dBuV]: 22.298MHz 37.94(Margin -12.06dB) - AV	Pass
15.247(d) 15.209	Radiated Emissions	[dBuV/m at 3m]: 2483.500MHz 52.99 (Margin -1.01dB) - AV	Pass
15.247(b)(3)	Maximum Output Power	Max Power [dBm]: 28.29	Pass
15.247(a)(2)	6dB Bandwidth	Meet the requirement of limit	Pass
15.247(e)	Power Spectral Density	Meet the requirement of limit	Pass
15.203	Antenna Requirement	Meet the requirement of limit	Pass

# 1 General Description

## 1.1 Information

### 1.1.1 Specification of the Equipment under Test (EUT)

RF General Information					
Frequency Range (MHz)	IEEE Std. 802.11	Ch. Freq. (MHz)	Channel Number	Transmit Chains (N <sub>TX</sub> )	Data Rate / MCS
2400-2483.5	b	2412-2462	1-11 [11]	2	1-11 Mbps
2400-2483.5	g	2412-2462	1-11 [11]	2	6-54 Mbps
2400-2483.5	n (HT20)	2412-2462	1-11 [11]	2	MCS 0-15

Note 1: RF output power specifies that Maximum Peak Conducted Output Power.  
 Note 2: 802.11b uses a combination of DSSS-DBPSK, DQPSK, CCK modulation.  
 Note 3: 802.11g/n uses a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.

### 1.1.2 Antenna Details

Ant. No.	Model	Type	Connector	Gain (dBi)	Remarks
1	ANT 0	PIFA	---	1.9	---
2	ANT 1	PIFA	---	2.4	---

### 1.1.3 Power Supply Type of Equipment under Test (EUT)

<b>Power Supply Type</b>	5Vdc from host
--------------------------	----------------

### 1.1.4 Accessories

N/A

### 1.1.5 Channel List

Channel	Frequency(MHz)
1	2412
2	2417
3	2422
4	2427
5	2432
6	2437
7	2442
8	2447
9	2452
10	2457
11	2462

### 1.1.6 Test Tool and Duty Cycle

Test Tool	MT7603 QA, Version: 0.0.0.96		
Duty Cycle and Duty Factor	Mode	Duty cycle (%)	Duty factor (dB)
	11b	100.00%	0.00
	11g	100.00%	0.00
	HT20	100.00%	0.00


### 1.1.7 Power Setting

Modulation Mode	Test Frequency (MHz)	Power Set
11b	2412	20
11b	2437	21
11b	2462	20
11g	2412	1E
11g	2437	28
11g	2462	19
HT20	2412	1B
HT20	2437	26
HT20	2462	19

## 1.2 Local Support Equipment List

Support Equipment List					
No.	Equipment	Brand	Model	FCC ID	Signal cable / Length (m)
1	Notebook	DELL	Latitude E5420	DoC	USB, 1m shielded.

## 1.3 Test Setup Chart

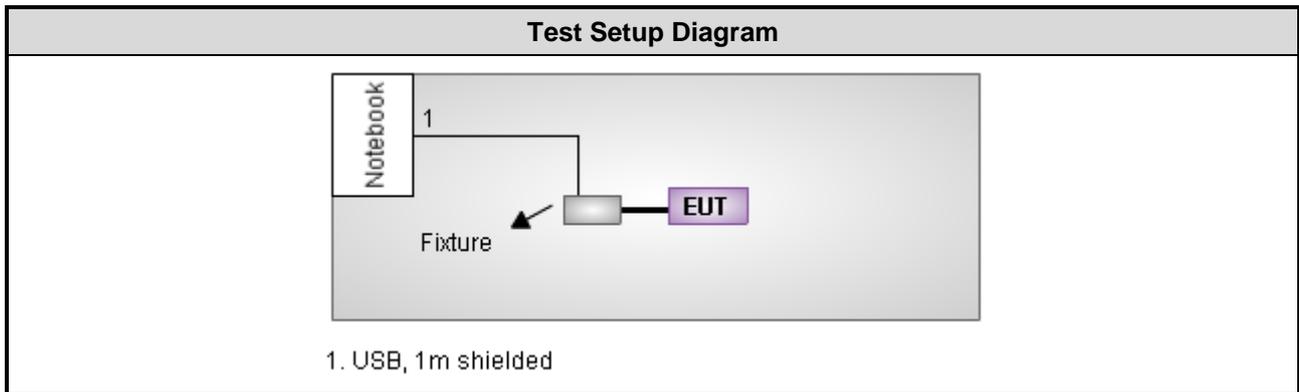

## 1.4 The Equipment List

Test Item	Conducted Emission				
Test Site	Conduction room 1 / (CO01-WS)				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
EMC Receiver	R&S	ESCS 30	100169	Oct. 21, 2015	Oct. 20, 2016
LISN	SCHWARZBECK	Schwarzbeck 8127	8127-667	Nov. 13, 2015	Nov. 12, 2016
RF Cable-CON	EMC	EMCCFD300-BM-B M-6000	50821	Dec. 21, 2015	Dec. 20, 2016
Measurement Software	AUDIX	e3	6.120210k	NA	NA

Note: Calibration Interval of instruments listed above is one year.

Test Item	Radiated Emission above 1GHz				
Test Site	966 chamber1 / (03CH01-WS)				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV40	101498	Dec. 13, 2015	Dec. 12, 2016
Receiver	R&S	ESR3	101658	Nov. 04, 2015	Nov. 03, 2016
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-522	Aug. 20, 2015	Aug. 19, 2016
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1096	Dec. 16, 2015	Dec. 15, 2016
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Nov. 04, 2015	Nov. 03, 2016
Preamplifier	Burgeon	BPA-530	SN:100219	Sep. 10, 2015	Sep. 09, 2016
Preamplifier	Agilent	83017A	MY39501308	Oct. 02, 2015	Oct. 01, 2016
Preamplifier	EMC	EMC184045B	980192	Sep. 01, 2015	Aug. 31, 2016
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16014/4	Dec. 10, 2015	Dec. 09, 2016
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16019/4	Dec. 10, 2015	Dec. 09, 2016
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16139/4	Dec. 10, 2015	Dec. 09, 2016
LF cable 3M	Woken	CFD400NL-LW	CFD400NL-001	Dec. 10, 2015	Dec. 09, 2016
LF cable 10M	Woken	CFD400NL-LW	CFD400NL-002	Dec. 10, 2015	Dec. 09, 2016
Measurement Software	AUDIX	e3	6.120210g	NA	NA

Note: Calibration Interval of instruments listed above is one year.

Test Item	RF Conducted				
Test Site	(TH01-WS)				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV40	101063	Feb. 17, 2016	Feb. 16, 2017
Power Meter	Anritsu	ML2495A	1241002	Sep. 21, 2015	Sep. 20, 2016
Power Sensor	Anritsu	MA2411B	1207366	Sep. 21, 2015	Sep. 20, 2016
DC POWER SOURCE	GW INSTRON	GPC-3060D	EM884797	Oct. 20, 2015	Oct. 19, 2016
Measurement Software	Sporton	Sporton_1	1.3.30	NA	NA

Note: Calibration Interval of instruments listed above is one year.

## 1.5 Test Standards

According to the specification of EUT, the EUT must comply with following standards and KDB documents.

47 CFR FCC Part 15.247

ANSI C63.10-2013

FCC KDB 558074 D01 DTS Meas Guidance v03r05

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

## 1.6 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Measurement Uncertainty	
Parameters	Uncertainty
Bandwidth	±34.134 Hz
Conducted power	±0.808 dB
Power density	±0.463 dB
Conducted emission	±2.670 dB
AC conducted emission	±2.90 dB
Radiated emission ≤ 1GHz	±3.66 dB
Radiated emission > 1GHz	±5.63 dB

## 2 Test Configuration

### 2.1 Testing Condition

Test Item	Test Site	Ambient Condition	Tested By
AC Conduction	CO01-WS	22°C / 63%	Howard Huang
Radiated Emissions	03CH01-WS	22-23°C / 60-62%	Felix Sung Vincent Yeh Warren Lee
RF Conducted	TH01-WS	21°C / 64%	Alex Huang

➤ FCC site registration No.: 181692

➤ IC site registration No.: 10807A-1

### 2.2 The Worst Test Modes and Channel Details

Test item	Modulation Mode	Test Frequency (MHz)	Data Rate	Test Configuration
Conducted Emissions	11g	2437	6 Mbps	1,2
Radiated Emissions ≤1GHz	11g	2437	6 Mbps	1,2
Radiated Emissions >1GHz				
Maximum Output Power	11b	2412 / 2437 / 2462	1 Mbps	1
6dB bandwidth	11g	2412 / 2437 / 2462	6 Mbps	
Power spectral density	HT20	2412 / 2437 / 2462	MCS 0	

**NOTE:**

- The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement – X, Y, and Z-plane. The **Z-plane** results were found as the worst case and were shown in this report.
- The test configurations are listed as follows:  
 Configuration 1 : with CMF (common mode filter) type  
 Configuration 2 : without CMF (common mode filter) type  
 Two configurations had been covered during the pretest and found that configuration 1 was the worst case and was selected to perform all test items.

## 3 Transmitter Test Results

### 3.1 Conducted Emissions

#### 3.1.1 Limit of Conducted Emissions


Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: \* Decreases with the logarithm of the frequency.

#### 3.1.2 Test Procedures

1. The device is placed on a test table, raised 80 cm above the reference ground plane. The vertical conducting plane is located 40 cm to the rear of the device.
2. The device is connected to line impedance stabilization network (LISN) and other accessories are connected to other LISN. Measured levels of AC power line conducted emission are across the 50  $\Omega$  LISN port.
3. AC conducted emission measurements is made over frequency range from 150 kHz to 30 MHz.
4. This measurement was performed with AC 120V / 60Hz.

#### 3.1.3 Test Setup

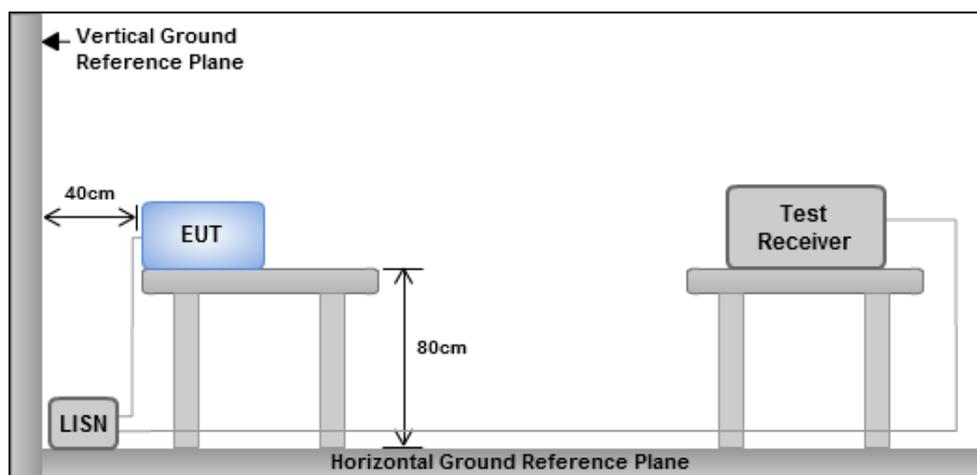


- Note: 1. Support units were connected to second LISN.  
 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

### 3.1.4 Test Result of Conducted Emissions

<b>Modulation</b>	11g	<b>Test Freq. (MHz)</b>	2437
<b>Power Phase</b>	Line	<b>Configuration</b>	1


  

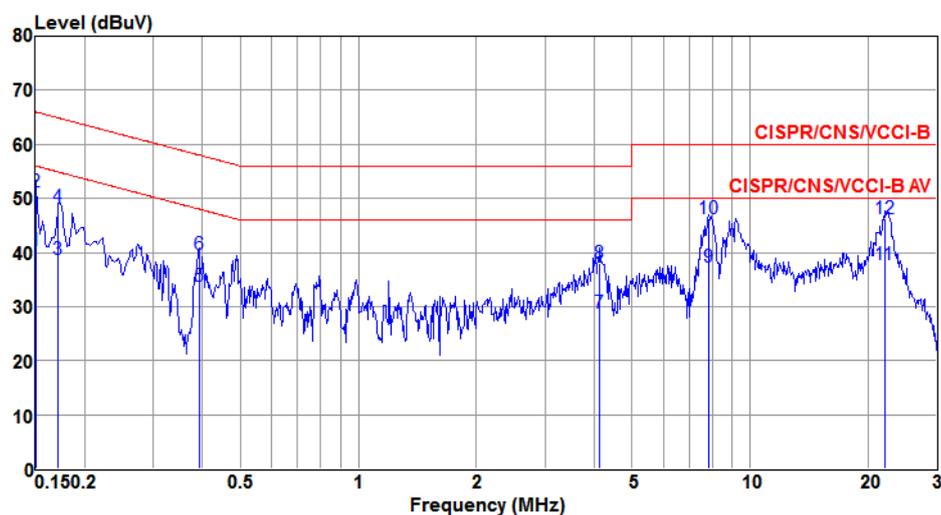

	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	LISN factor dB	cable loss dB	Remark
1	0.150	40.33	56.00	-15.67	40.20	0.11	0.02	Average
2	0.150	51.23	66.00	-14.77	51.10	0.11	0.02	QP
3	0.171	38.66	54.90	-16.24	38.53	0.11	0.02	Average
4	0.171	48.37	64.90	-16.53	48.24	0.11	0.02	QP
5	0.391	33.86	48.03	-14.17	33.70	0.13	0.03	Average
6	0.391	39.56	58.03	-18.47	39.40	0.13	0.03	QP
7	4.136	28.83	46.00	-17.17	28.52	0.19	0.12	Average
8	4.136	38.03	56.00	-17.97	37.72	0.19	0.12	QP
9	7.852	37.24	50.00	-12.76	36.86	0.23	0.15	Average
10	7.852	46.37	60.00	-13.63	45.99	0.23	0.15	QP
11	22.063	37.72	50.00	-12.28	37.13	0.39	0.20	Average
12	22.063	46.33	60.00	-13.67	45.74	0.39	0.20	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB).  
 Note 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).


<b>Modulation</b>	11g	<b>Test Freq. (MHz)</b>	2437
<b>Power Phase</b>	Neutral	<b>Configuration</b>	1

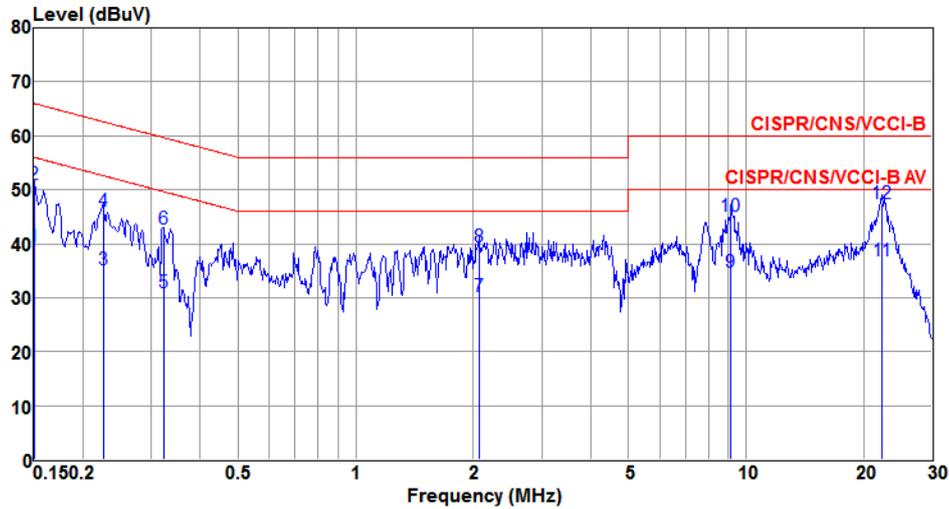

	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	LISN factor dB	cable loss dB	Remark
1	0.150	39.35	56.00	-16.65	39.20	0.13	0.02	Average
2	0.150	50.99	66.00	-15.01	50.84	0.13	0.02	QP
3	0.226	35.23	52.61	-17.38	35.10	0.11	0.02	Average
4	0.226	45.97	62.61	-16.64	45.84	0.11	0.02	QP
5	0.322	30.96	49.66	-18.70	30.80	0.13	0.03	Average
6	0.322	42.63	59.66	-17.03	42.47	0.13	0.03	QP
7	2.066	30.12	46.00	-15.88	29.87	0.17	0.08	Average
8	2.066	39.50	56.00	-16.50	39.25	0.17	0.08	QP
9	9.156	34.74	50.00	-15.26	34.32	0.26	0.16	Average
10	9.156	45.13	60.00	-14.87	44.71	0.26	0.16	QP
11	22.298	36.73	50.00	-13.27	36.10	0.42	0.21	Average
12e	22.298	47.41	60.00	-12.59	46.78	0.42	0.21	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB).  
 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).


<b>Modulation</b>	11g	<b>Test Freq. (MHz)</b>	2437
<b>Power Phase</b>	Line	<b>Configuration</b>	2

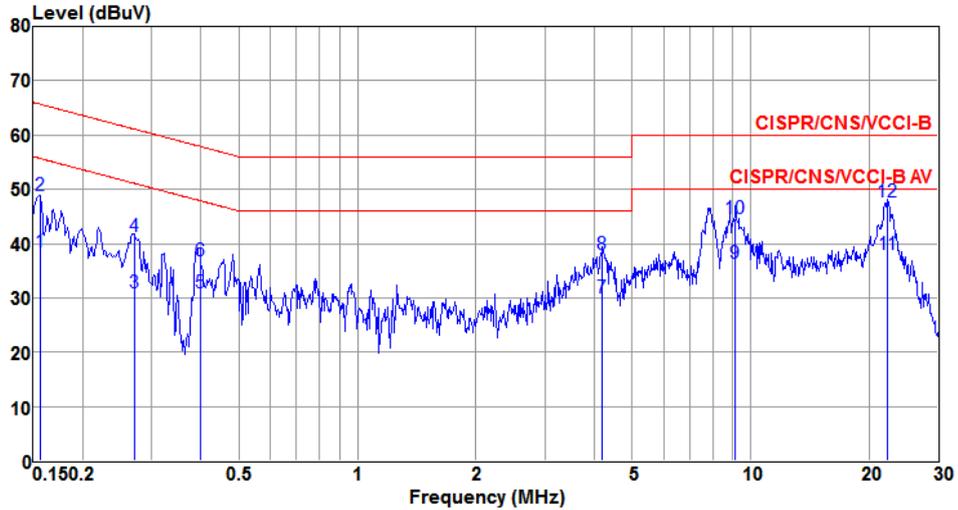

	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	LISN factor dB	cable loss dB	Remark
1	0.156	38.59	55.65	-17.06	38.46	0.11	0.02	Average
2	0.156	48.88	65.65	-16.77	48.75	0.11	0.02	QP
3	0.270	30.81	51.12	-20.31	30.67	0.12	0.02	Average
4	0.270	41.22	61.12	-19.90	41.08	0.12	0.02	QP
5	0.398	30.98	47.90	-16.92	30.82	0.13	0.03	Average
6	0.398	36.93	57.90	-20.97	36.77	0.13	0.03	QP
7	4.202	30.03	46.00	-15.97	29.72	0.19	0.12	Average
8	4.202	38.08	56.00	-17.92	37.77	0.19	0.12	QP
9	9.156	36.41	50.00	-13.59	36.01	0.24	0.16	Average
10	9.156	44.72	60.00	-15.28	44.32	0.24	0.16	QP
11	22.298	37.94	50.00	-12.06	37.34	0.39	0.21	Average
12	22.298	47.58	60.00	-12.42	46.98	0.39	0.21	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB).  
 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).

<b>Modulation</b>	11g	<b>Test Freq. (MHz)</b>	2437
<b>Power Phase</b>	Neutral	<b>Configuration</b>	2

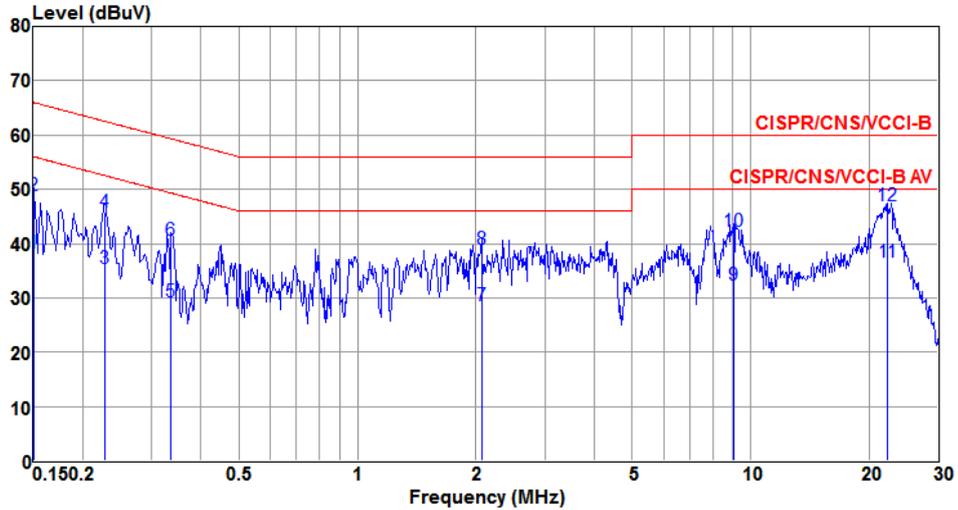

	Freq	Level	Limit	Over	Read	LISN	cable	Remark
	MHz	dBuV	Line	Limit	Level	factor	loss	
			dBuV	dB	dBuV	dB	dB	
1	0.150	38.26	56.00	-17.74	38.11	0.13	0.02	Average
2	0.150	48.79	66.00	-17.21	48.64	0.13	0.02	QP
3	0.228	35.41	52.52	-17.11	35.28	0.11	0.02	Average
4	0.228	45.90	62.52	-16.62	45.77	0.11	0.02	QP
5	0.336	29.27	49.31	-20.04	29.11	0.13	0.03	Average
6	0.336	40.52	59.31	-18.79	40.36	0.13	0.03	QP
7	2.066	28.60	46.00	-17.40	28.35	0.17	0.08	Average
8	2.066	38.90	56.00	-17.10	38.65	0.17	0.08	QP
9	9.059	32.41	50.00	-17.59	31.99	0.26	0.16	Average
10	9.059	42.26	60.00	-17.74	41.84	0.26	0.16	QP
11	22.298	36.60	50.00	-13.40	35.97	0.42	0.21	Average
12	22.298	47.03	60.00	-12.97	46.40	0.42	0.21	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB).  
 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).

## 3.2 6dB and Occupied Bandwidth

### 3.2.1 Limit of 6dB Bandwidth

The minimum 6dB bandwidth shall be at least 500 kHz.

### 3.2.2 Test Procedures


#### 6dB Bandwidth

1. Set resolution bandwidth (RBW) = 100 kHz, Video bandwidth = 300 kHz.
2. Detector = Peak, Trace mode = max hold.
3. Sweep = auto couple, Allow the trace to stabilize.
4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6dB relative to the maximum level measured in the fundamental emission.

#### Occupied Bandwidth


1. Set resolution bandwidth (RBW) = 1 MHz, Video bandwidth = 3 MHz.
2. Detector = Sample, Trace mode = max hold.
3. Sweep = auto couple, Allow the trace to stabilize.
4. Use the OBW measurement function of spectrum analyzer to measure the occupied bandwidth.

### 3.2.3 Test Setup

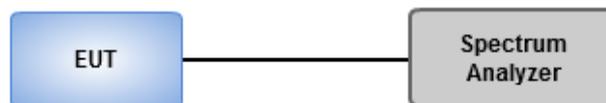


### 3.2.4 Test Result of 6dB and Occupied Bandwidth

Modulation Mode	N <sub>TX</sub>	Freq. (MHz)	6dB Bandwidth (MHz)				Limit (kHz)
			Chain 0	Chain 1	Chain 2	Chain 3	
11b	2	2412	9.57	9.10	---	---	500
11b	2	2437	9.04	9.04	---	---	500
11b	2	2462	9.04	8.58	---	---	500
11g	2	2412	16.35	16.35	---	---	500
11g	2	2437	16.35	16.06	---	---	500
11g	2	2462	16.12	16.35	---	---	500
HT20	2	2412	17.57	16.99	---	---	500
HT20	2	2437	17.57	16.29	---	---	500
HT20	2	2462	17.62	17.28	---	---	500

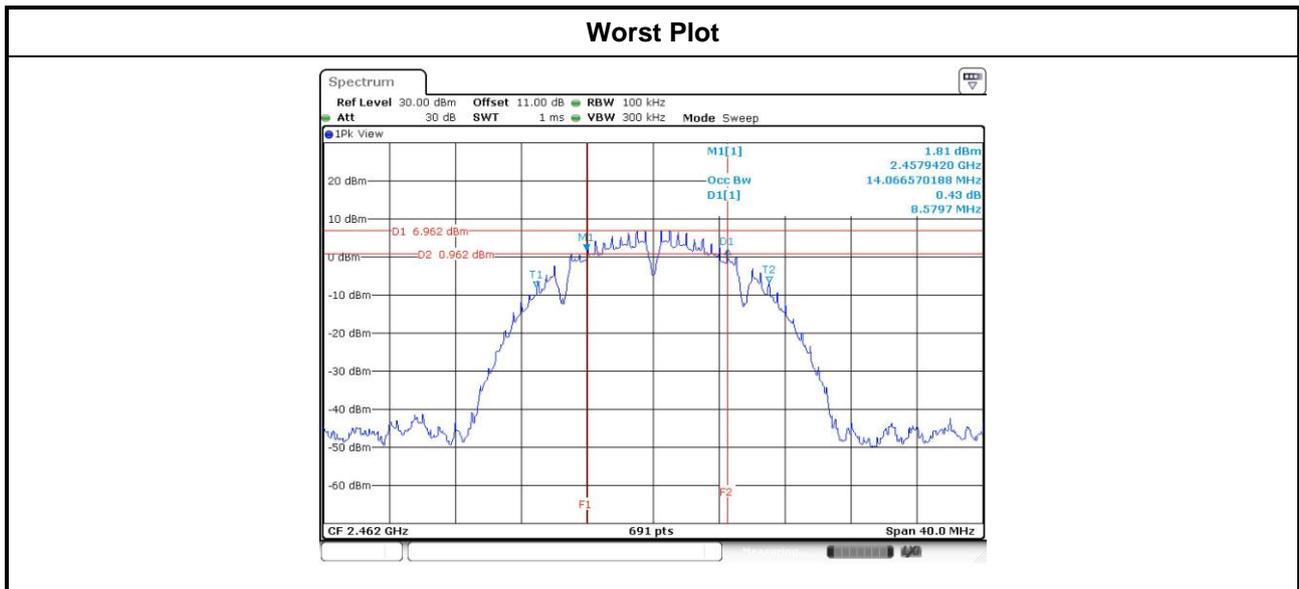

Modulation Mode	N <sub>TX</sub>	Freq. (MHz)	99% Occupied Bandwidth (MHz)			
			Chain 0	Chain 1	Chain 2	Chain 3
11b	2	2412	14.09	14.11	---	---
11b	2	2437	14.15	14.09	---	---
11b	2	2462	14.15	14.09	---	---
11g	2	2412	16.60	16.49	---	---
11g	2	2437	17.60	17.64	---	---
11g	2	2462	17.60	16.48	---	---
HT20	2	2412	17.61	17.59	---	---
HT20	2	2437	18.04	17.83	---	---
HT20	2	2462	17.64	17.59	---	---

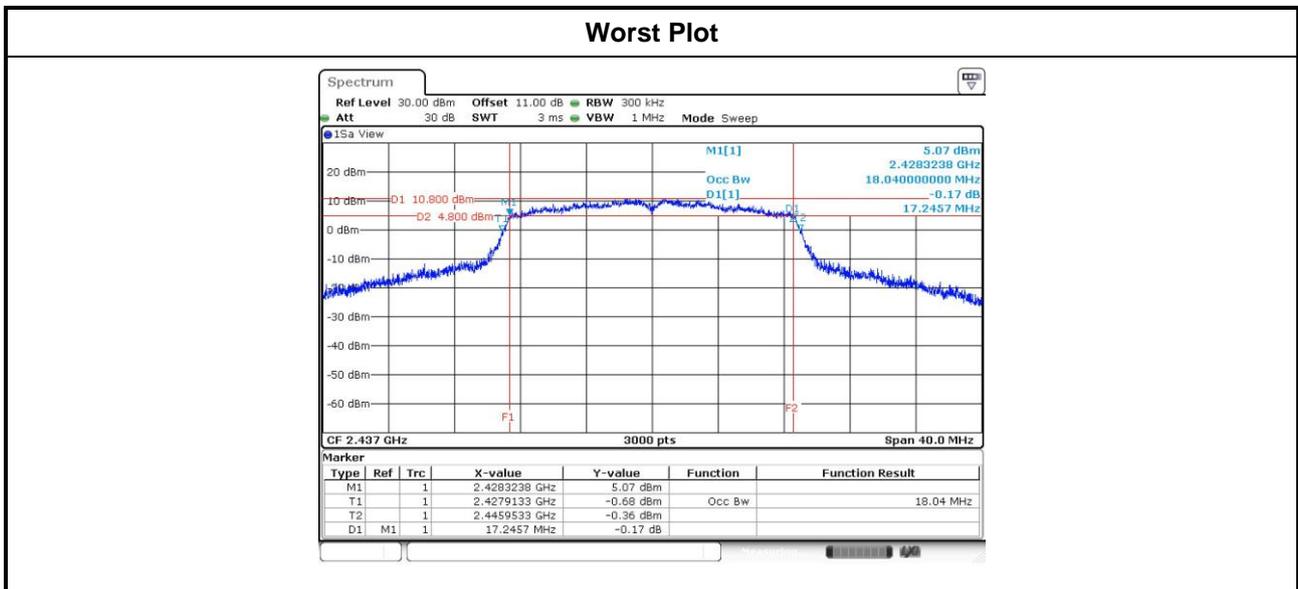

## 3.3 RF Output Power

### 3.3.1 Limit of RF Output Power

Conducted power shall not exceed 1Watt.


- Antenna gain  $\leq$  6dBi, no any corresponding reduction is in output power limit.
- Antenna gain  $>$  6dBi
  - Non Fixed, point to point operations.  
The conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dB
  - Fixed, point to point operations  
Systems operating in the 2400–2483.5 MHz band that are used exclusively for fixed, point-to-point Operations, maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

Systems operating in the 5725–5850 MHz band that are used exclusively for fixed, point-to-point operations ,no any corresponding reduction is in transmitter peak output power

### 3.3.2 Test Procedures

- Maximum Peak Conducted Output Power
  - Spectrum analyzer**
    1. Set RBW = 1MHz, VBW = 3MHz, Detector = Peak.
    2. Sweep time = auto, Trace mode = max hold, Allow trace to fully stabilize.
    3. Use the spectrum analyzer channel power measurement function with the band limits set equal to the DTS bandwidth edges.
  - Power meter**
    1. A broadband Peak RF power meter is used for output power measurement. The video bandwidth of power meter is greater than DTS bandwidth of EUT. If duty cycle of test signal is not 100 %, trigger and gating function of power meter will be enabled to capture transmission burst for measuring output power.
- Maximum Conducted Output Power ( For reference only )
  - Power meter**
    1. A broadband Average RF power meter is used for output power measurement. The video bandwidth of power meter is greater than DTS bandwidth of EUT. If duty cycle of test signal is not 100 %, trigger and gating function of power meter will be enabled to capture transmission burst for measuring output power.

### 3.3.3 Test Setup

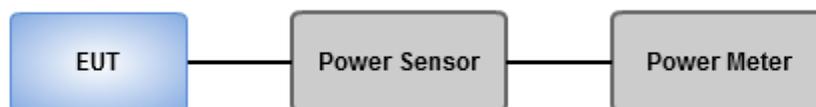

### 3.3.4 Test Result of Maximum Output Power

Modulation Mode	N <sub>TX</sub>	Freq. (MHz)	Peak conducted Output Power (dBm)							Ant. Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)
			Chain 0	Chain 1	Chain 2	Chain 3	Total Power (mW)	Total Power (dBm)	Limit (dBm)			
11b	2	2412	17.63	18.18	---	---	123.709	20.92	30.00	2.40	23.32	36.00
11b	2	2437	18.18	18.02	---	---	129.153	21.11	30.00	2.40	23.51	36.00
11b	2	2462	17.55	17.52	---	---	113.379	20.55	30.00	2.40	22.95	36.00
11g	2	2412	23.82	23.45	---	---	462.300	26.65	30.00	2.40	29.05	36.00
11g	2	2437	25.18	25.38	---	---	674.753	<b>28.29</b>	30.00	2.40	30.69	36.00
11g	2	2462	21.52	21.83	---	---	294.311	24.69	30.00	2.40	27.09	36.00
HT20	2	2412	22.69	21.95	---	---	342.456	25.35	30.00	2.40	27.75	36.00
HT20	2	2437	24.88	25.15	---	---	634.950	28.03	30.00	2.40	30.43	36.00
HT20	2	2462	22.01	22.28	---	---	327.899	25.16	30.00	2.40	27.56	36.00

Modulation Mode	N <sub>TX</sub>	Freq. (MHz)	Conducted (Average) Output Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)
			Chain 0	Chain 1	Chain 2	Chain 3			
11b	2	2412	15.65	16.25	---	---	78.898	18.97	---
11b	2	2437	16.25	16.1	---	---	82.908	19.19	---
11b	2	2462	15.62	15.58	---	---	72.616	18.61	---
11g	2	2412	15.16	14.72	---	---	62.458	17.96	---
11g	2	2437	19.66	19.84	---	---	188.853	<b>22.76</b>	---
11g	2	2462	12.42	12.73	---	---	36.208	15.59	---
HT20	2	2412	13.32	12.68	---	---	40.014	16.02	---
HT20	2	2437	18.28	18.93	---	---	145.460	21.63	---
HT20	2	2462	12.2	12.3	---	---	33.578	15.26	---

Note: Conducted average output power is for reference only.

## 3.4 Power Spectral Density

### 3.4.1 Limit of Power Spectral Density

Power spectral density shall not be greater than 8 dBm in any 3 kHz band.

### 3.4.2 Test Procedures


Method PKPSD.

1. Set the RBW = 3kHz, VBW = 10kHz.
2. Detector = Peak, Sweep time = auto couple.
3. Trace mode = max hold, allow trace to fully stabilize.
4. Use the peak marker function to determine the maximum amplitude level.

Method AVGPSD

1. Set the RBW = 100kHz, VBW = 300 kHz.
2. Detector = RMS, Sweep time = auto couple.
3. Perform the measurement over a single sweep.
4. Use the peak marker function to determine the maximum amplitude level.


### 3.4.3 Test Setup

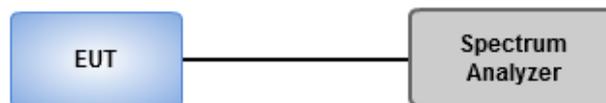

### 3.4.4 Test Result of Power Spectral Density

Modulation Mode	N <sub>TX</sub>	Freq. (MHz)	Total Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)
11b	2	2412	-4.81	8.00
11b	2	2437	-4.23	8.00
11b	2	2462	-4.51	8.00
11g	2	2412	-6.43	8.00
11g	2	2437	-2.10	8.00
11g	2	2462	-8.99	8.00
HT20	2	2412	-8.21	8.00
HT20	2	2437	-3.32	8.00
HT20	2	2462	-8.62	8.00

Note: Test result is bin-by-bin summing measured value of each TX port

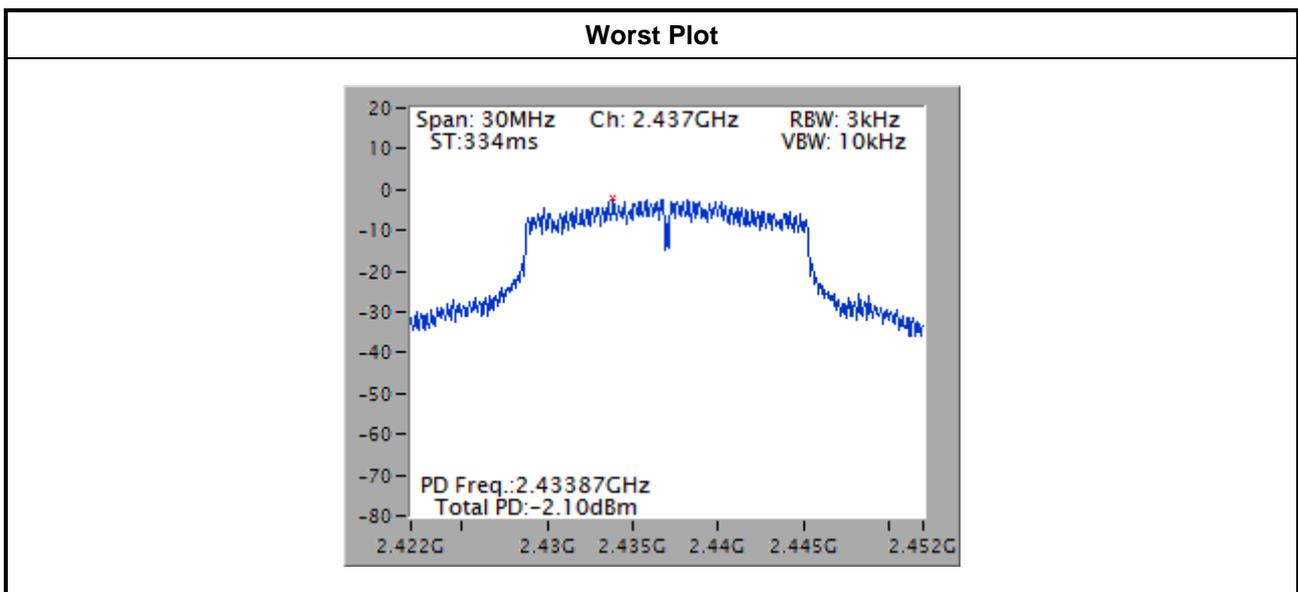

## 3.5 Unwanted Emissions into Restricted Frequency Bands

### 3.5.1 Limit of Unwanted Emissions into Restricted Frequency Bands

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

**Note 1:**  
Quasi-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit

**Note 2:**  
Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

### 3.5.2 Test Procedures


1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at test table. For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height is 1.5 m
2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.

**Note:**


1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
2. RBW=1MHz, VBW=3MHz and Peak detector is for peak measured value of radiated emission above 1GHz.
3. RBW=1MHz, VBW=1/T and Peak detector is for average measured value of radiated emission above 1GHz.

### 3.5.3 Test Setup

#### Radiated Emissions below 1 GHz

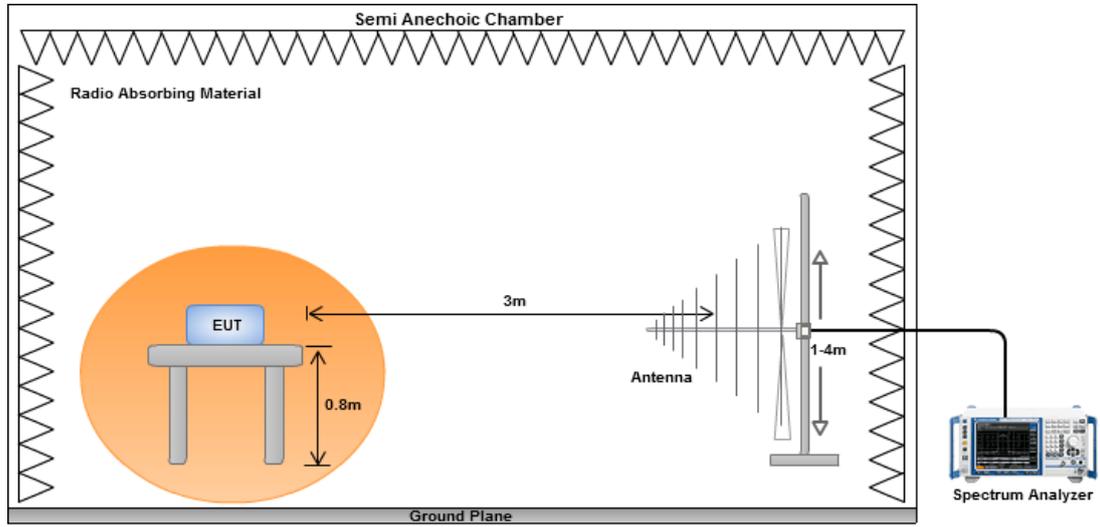


#### Radiated Emissions above 1 GHz

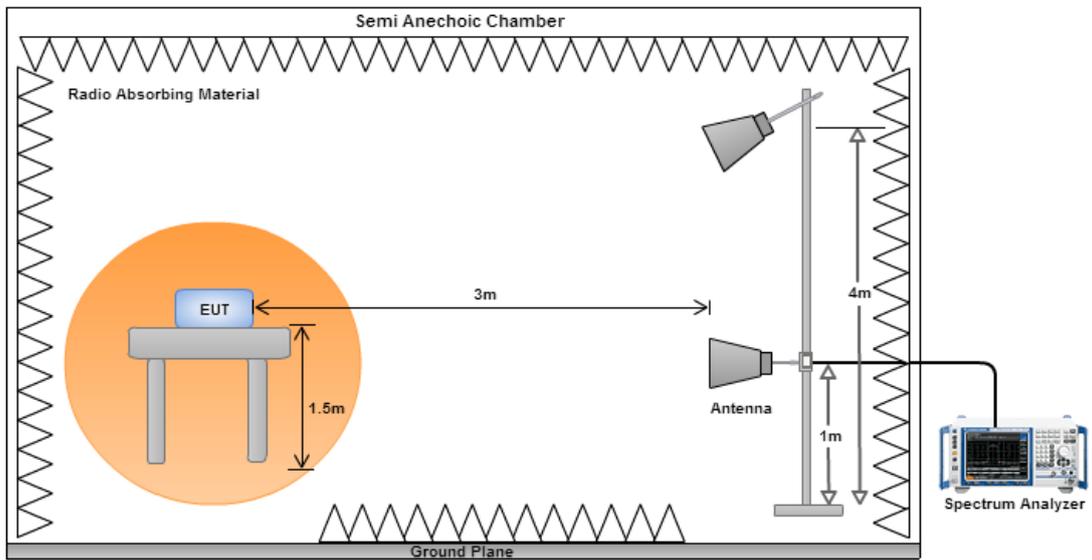

**Configuration 1 : with CMF (common mode filter) type**

**3.5.4 Transmitter Radiated Unwanted Emissions (Below 1GHz)**

<b>Modulation</b>	11g	<b>Test Freq. (MHz)</b>	2437
<b>Polarization</b>	Horizontal		

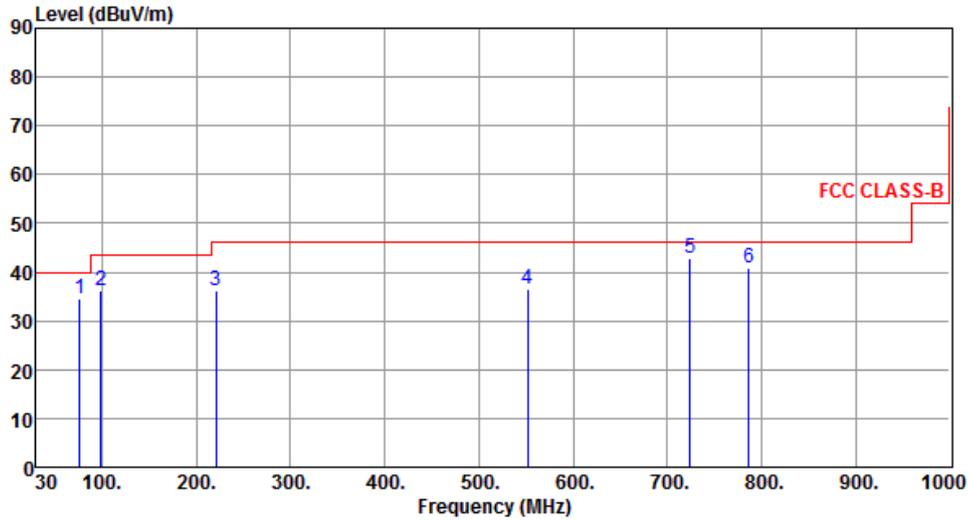

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	76.56	34.57	40.00	-5.43	50.12	-15.55	QP	149	56
2	98.87	36.06	43.50	-7.44	52.87	-16.81	Peak	---	---
3	221.09	36.33	46.00	-9.67	50.57	-14.24	Peak	---	---
4	551.86	36.56	46.00	-9.44	42.17	-5.61	Peak	---	---
5	724.52	42.79	46.00	-3.21	45.59	-2.80	QP	100	130
6	786.60	40.77	46.00	-5.23	42.80	-2.03	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

<b>Modulation</b>	11g	<b>Test Freq. (MHz)</b>	2437
<b>Polarization</b>	Vertical		

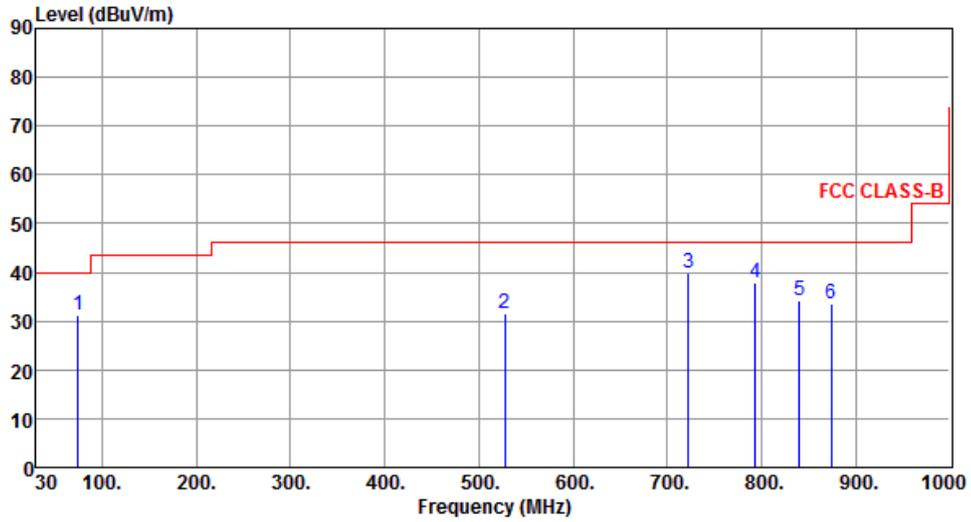

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	74.62	31.19	40.00	-8.81	46.41	-15.22	Peak	---	---
2	527.61	31.43	46.00	-14.57	37.46	-6.03	Peak	---	---
3	722.58	39.99	46.00	-6.01	42.81	-2.82	Peak	---	---
4	793.39	37.81	46.00	-8.19	39.76	-1.95	Peak	---	---
5	839.95	34.37	46.00	-11.63	35.76	-1.39	Peak	---	---
6	873.90	33.50	46.00	-12.50	34.43	-0.93	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

### 3.5.5 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 11b

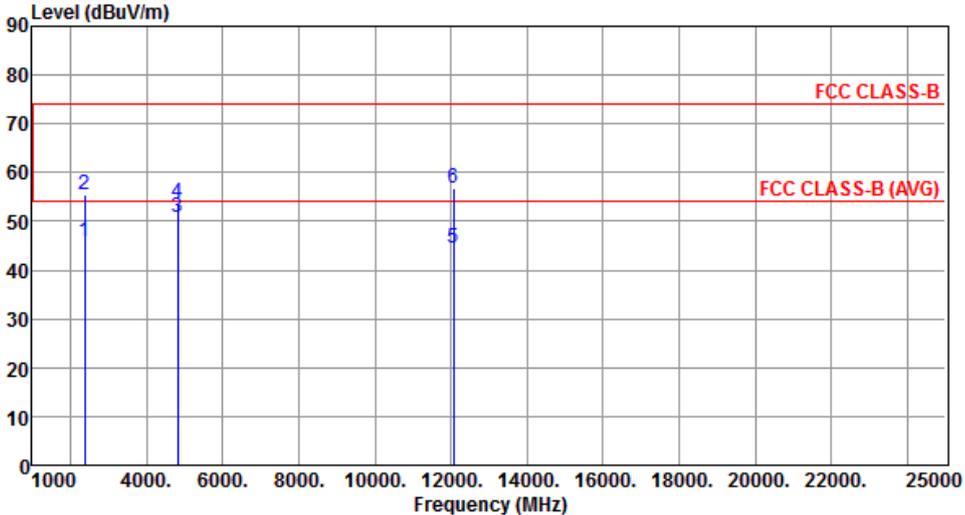Modulation	11b	Test Freq. (MHz)	2412																																																																																			
Polarization	Horizontal																																																																																					
																																																																																						
	<table border="1"> <thead> <tr> <th>Freq.</th> <th>Emission level</th> <th>Limit</th> <th>Margin</th> <th>SA reading</th> <th>Factor</th> <th>Remark</th> <th>ANT High</th> <th>Turn Table</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB</th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2390.00</td> <td>45.71</td> <td>54.00</td> <td>-8.29</td> <td>49.06</td> <td>-3.35</td> <td>Average</td> <td>239</td> <td>340</td> </tr> <tr> <td>2</td> <td>2390.00</td> <td>55.36</td> <td>74.00</td> <td>-18.64</td> <td>58.71</td> <td>-3.35</td> <td>Peak</td> <td>239</td> <td>340</td> </tr> <tr> <td>3</td> <td>4824.00</td> <td>50.89</td> <td>54.00</td> <td>-3.11</td> <td>47.30</td> <td>3.59</td> <td>Average</td> <td>225</td> <td>153</td> </tr> <tr> <td>4</td> <td>4824.00</td> <td>53.74</td> <td>74.00</td> <td>-20.26</td> <td>50.15</td> <td>3.59</td> <td>Peak</td> <td>225</td> <td>153</td> </tr> <tr> <td>5</td> <td>12060.00</td> <td>44.50</td> <td>54.00</td> <td>-9.50</td> <td>30.37</td> <td>14.13</td> <td>Average</td> <td>165</td> <td>207</td> </tr> <tr> <td>6</td> <td>12060.00</td> <td>56.84</td> <td>74.00</td> <td>-17.16</td> <td>42.71</td> <td>14.13</td> <td>Peak</td> <td>165</td> <td>207</td> </tr> </tbody> </table>	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg	1	2390.00	45.71	54.00	-8.29	49.06	-3.35	Average	239	340	2	2390.00	55.36	74.00	-18.64	58.71	-3.35	Peak	239	340	3	4824.00	50.89	54.00	-3.11	47.30	3.59	Average	225	153	4	4824.00	53.74	74.00	-20.26	50.15	3.59	Peak	225	153	5	12060.00	44.50	54.00	-9.50	30.37	14.13	Average	165	207	6	12060.00	56.84	74.00	-17.16	42.71	14.13	Peak	165	207							
Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg																																																																														
1	2390.00	45.71	54.00	-8.29	49.06	-3.35	Average	239	340																																																																													
2	2390.00	55.36	74.00	-18.64	58.71	-3.35	Peak	239	340																																																																													
3	4824.00	50.89	54.00	-3.11	47.30	3.59	Average	225	153																																																																													
4	4824.00	53.74	74.00	-20.26	50.15	3.59	Peak	225	153																																																																													
5	12060.00	44.50	54.00	-9.50	30.37	14.13	Average	165	207																																																																													
6	12060.00	56.84	74.00	-17.16	42.71	14.13	Peak	165	207																																																																													
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)            *Factor includes antenna factor , cable loss and amplifier gain            Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).</p>																																																																																						

<b>Modulation</b>	11b	<b>Test Freq. (MHz)</b>	2412
<b>Polarization</b>	Vertical		

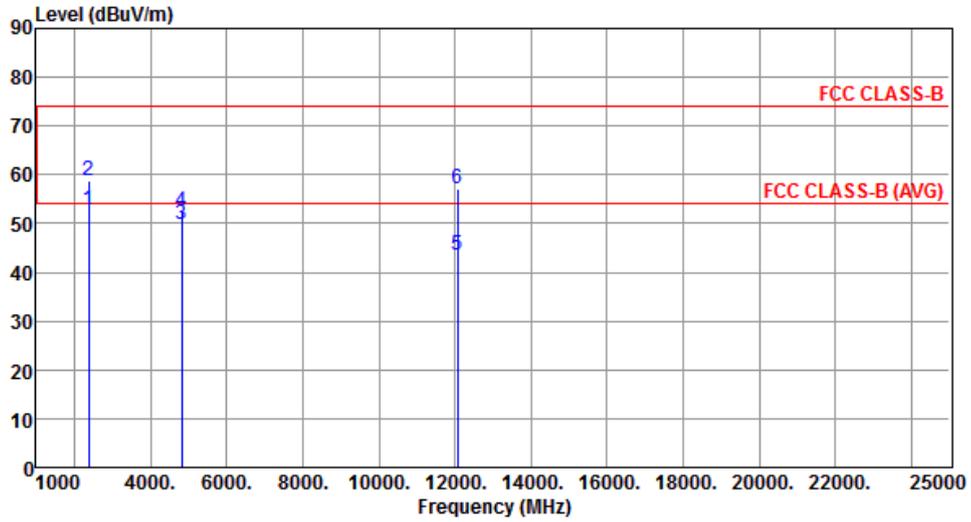


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	52.68	54.00	-1.32	56.03	-3.35	Average	100	114
2	2390.00	58.94	74.00	-15.06	62.29	-3.35	Peak	100	114
3	4824.00	49.67	54.00	-4.33	46.08	3.59	Average	100	92
4	4824.00	52.52	74.00	-21.48	48.93	3.59	Peak	100	92
5	12060.00	43.48	54.00	-10.52	29.35	14.13	Average	158	0
6	12060.00	56.98	74.00	-17.02	42.85	14.13	Peak	158	0

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	11b	<b>Test Freq. (MHz)</b>	2437
<b>Polarization</b>	Horizontal		

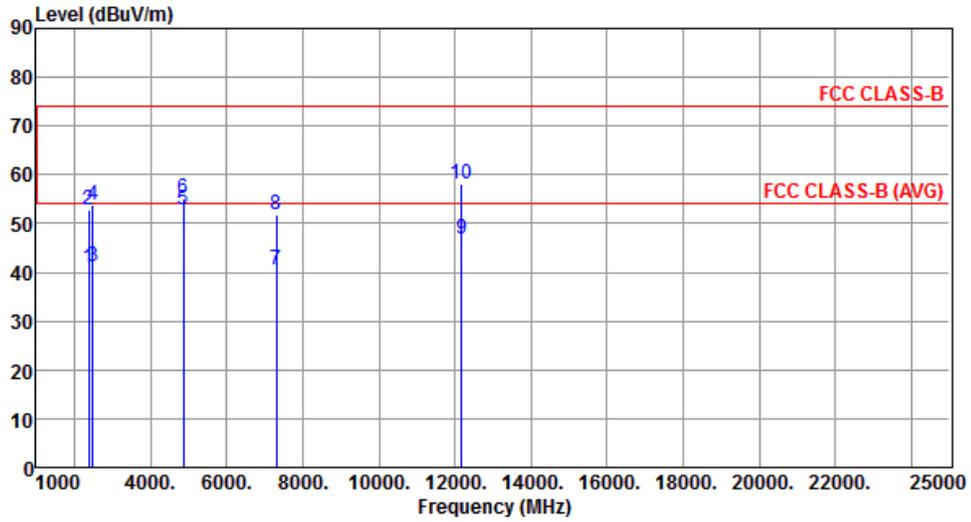


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	40.93	54.00	-13.07	44.28	-3.35	Average	268	187
2	2390.00	52.94	74.00	-21.06	56.29	-3.35	Peak	268	187
3	2483.50	41.18	54.00	-12.82	44.11	-2.93	Average	268	145
4	2483.50	53.71	74.00	-20.29	56.64	-2.93	Peak	268	145
5	4874.00	52.71	54.00	-1.29	48.96	3.75	Average	223	181
6	4874.00	55.06	74.00	-18.94	51.31	3.75	Peak	223	181
7	7311.00	40.37	54.00	-13.63	31.95	8.42	Average	184	4
8	7311.00	51.82	74.00	-22.18	43.40	8.42	Peak	184	4
9	12185.00	46.96	54.00	-7.04	32.71	14.25	Average	207	181
10	12185.00	58.18	74.00	-15.82	43.93	14.25	Peak	207	181

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	11b	<b>Test Freq. (MHz)</b>	2437
<b>Polarization</b>	Vertical		

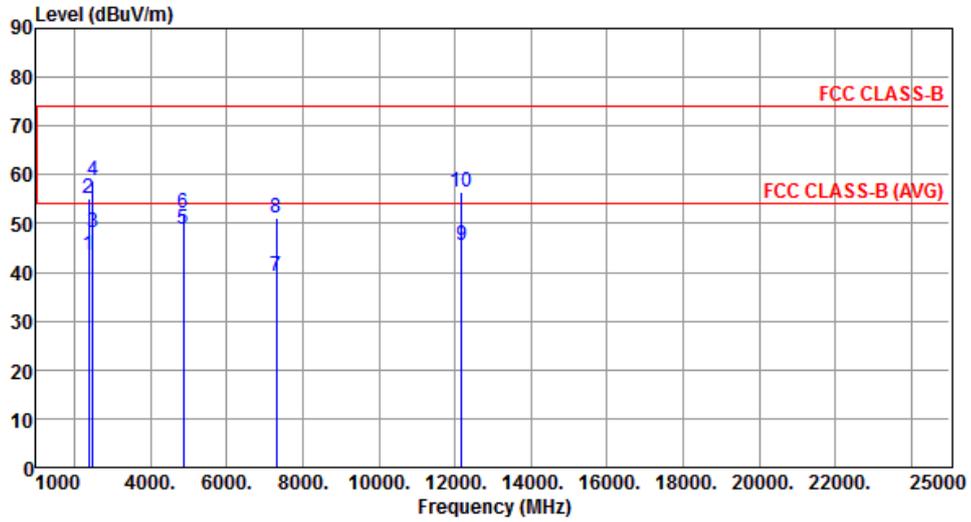


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	43.48	54.00	-10.52	46.83	-3.35	Average	100	68
2	2390.00	55.25	74.00	-18.75	58.60	-3.35	Peak	100	68
3	2483.50	48.27	54.00	-5.73	51.20	-2.93	Average	100	68
4	2483.50	58.66	74.00	-15.34	61.59	-2.93	Peak	100	68
5	4874.00	48.94	54.00	-5.06	45.19	3.75	Average	100	91
6	4874.00	52.26	74.00	-21.74	48.51	3.75	Peak	100	91
7	7311.00	39.29	54.00	-14.71	30.87	8.42	Average	204	195
8	7311.00	51.28	74.00	-22.72	42.86	8.42	Peak	204	195
9	12185.00	45.40	54.00	-8.60	31.15	14.25	Average	151	8
10	12185.00	56.53	74.00	-17.47	42.28	14.25	Peak	151	8

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	11b	<b>Test Freq. (MHz)</b>	2462
<b>Polarization</b>	Horizontal		

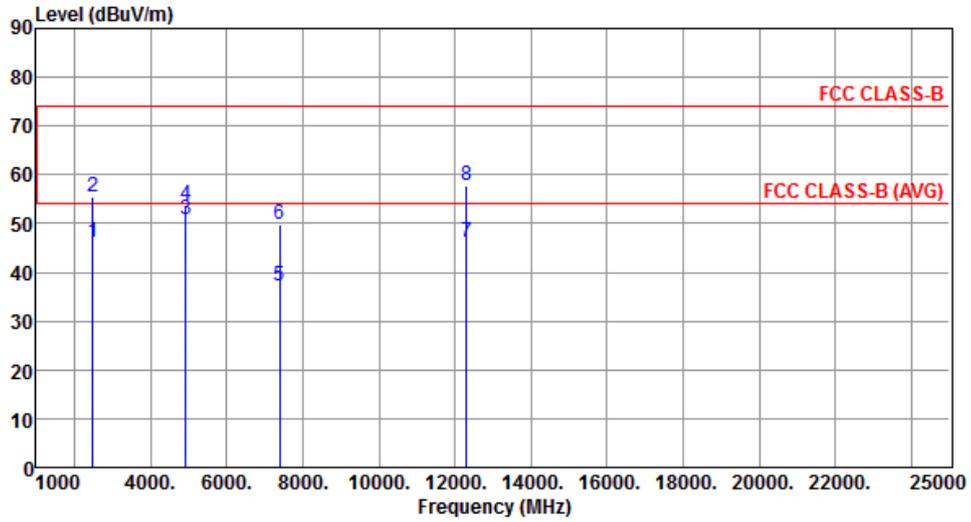


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	46.04	54.00	-7.96	48.97	-2.93	Average	319	326
2	2483.50	55.31	74.00	-18.69	58.24	-2.93	Peak	319	326
3	4924.00	50.65	54.00	-3.35	46.74	3.91	Average	214	153
4	4924.00	53.65	74.00	-20.35	49.74	3.91	Peak	214	153
5	7386.00	37.24	54.00	-16.76	28.78	8.46	Average	153	174
6	7386.00	49.80	74.00	-24.20	41.34	8.46	Peak	153	174
7	12310.00	46.26	54.00	-7.74	31.89	14.37	Average	188	158
8	12310.00	57.81	74.00	-16.19	43.44	14.37	Peak	188	158

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	11b	<b>Test Freq. (MHz)</b>	2462
<b>Polarization</b>	Vertical		

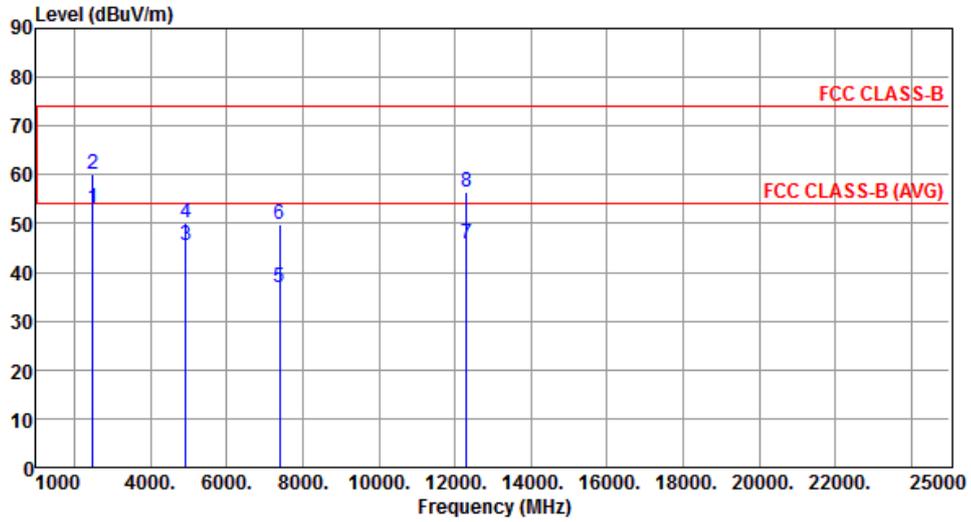

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	52.99	54.00	-1.01	55.92	-2.93	Average	100	81
2	2483.50	60.15	74.00	-13.85	63.08	-2.93	Peak	100	81
3	4924.00	45.35	54.00	-8.65	41.44	3.91	Average	100	91
4	4924.00	50.14	74.00	-23.86	46.23	3.91	Peak	100	91
5	7386.00	36.71	54.00	-17.29	28.25	8.46	Average	186	200
6	7386.00	49.92	74.00	-24.08	41.46	8.46	Peak	186	200
7	12310.00	45.74	54.00	-8.26	31.37	14.37	Average	149	11
8	12310.00	56.61	74.00	-17.39	42.24	14.37	Peak	149	11

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)


\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

### 3.5.6 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 11g

Modulation	11g	Test Freq. (MHz)	2412						
Polarization	Horizontal								
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	2390.00	47.92	54.00	-6.08	51.27	-3.35	Average	111	144
2	2390.00	66.79	74.00	-7.21	70.14	-3.35	Peak	111	144
3	4824.00	36.85	54.00	-17.15	33.26	3.59	Average	342	109
4	4824.00	49.06	74.00	-24.94	45.47	3.59	Peak	342	109
5	12060.00	43.12	54.00	-10.88	28.99	14.13	Average	109	265
6	12060.00	56.24	74.00	-17.76	42.11	14.13	Peak	109	265
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)            *Factor includes antenna factor , cable loss and amplifier gain            Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).</p>									

<b>Modulation</b>	11g	<b>Test Freq. (MHz)</b>	2412
<b>Polarization</b>	Vertical		

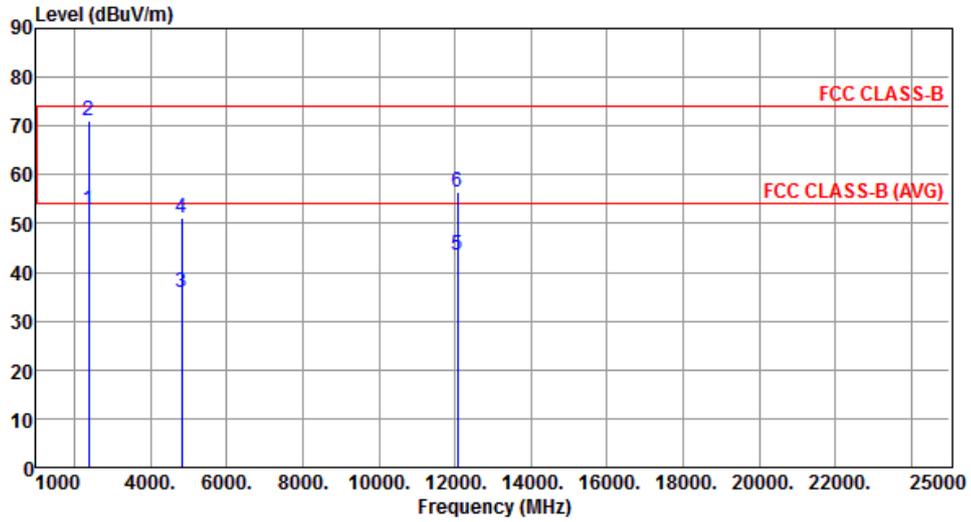


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	52.89	54.00	-1.11	56.24	-3.35	Average	113	115
2	2390.00	70.99	74.00	-3.01	74.34	-3.35	Peak	113	115
3	4824.00	35.94	54.00	-18.06	32.35	3.59	Average	169	32
4	4824.00	51.24	74.00	-22.76	47.65	3.59	Peak	169	32
5	12060.00	43.39	54.00	-10.61	29.26	14.13	Average	261	147
6	12060.00	56.39	74.00	-17.61	42.26	14.13	Peak	261	147

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	11g	<b>Test Freq. (MHz)</b>	2437
<b>Polarization</b>	Horizontal		

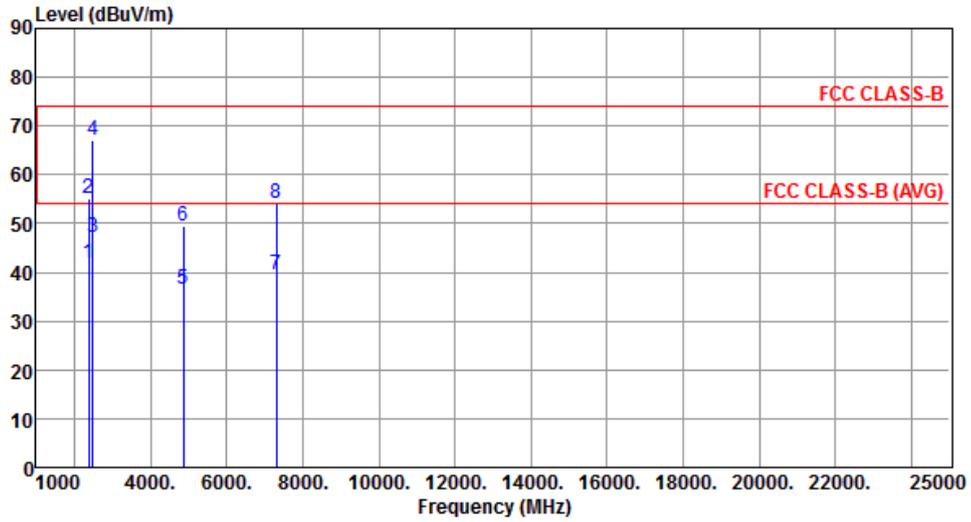


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	41.92	54.00	-12.08	45.27	-3.35	Average	156	38
2	2390.00	55.19	74.00	-18.81	58.54	-3.35	Peak	156	38
3	2483.50	47.17	54.00	-6.83	50.10	-2.93	Average	156	38
4	2483.50	67.17	74.00	-6.83	70.10	-2.93	Peak	156	38
5	4874.00	36.41	54.00	-17.59	32.66	3.75	Average	247	150
6	4874.00	49.45	74.00	-24.55	45.70	3.75	Peak	247	150
7	7311.00	39.51	54.00	-14.49	31.09	8.42	Average	175	16
8	7311.00	53.99	74.00	-20.01	45.57	8.42	Peak	175	16

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	11g	<b>Test Freq. (MHz)</b>	2437
<b>Polarization</b>	Vertical		

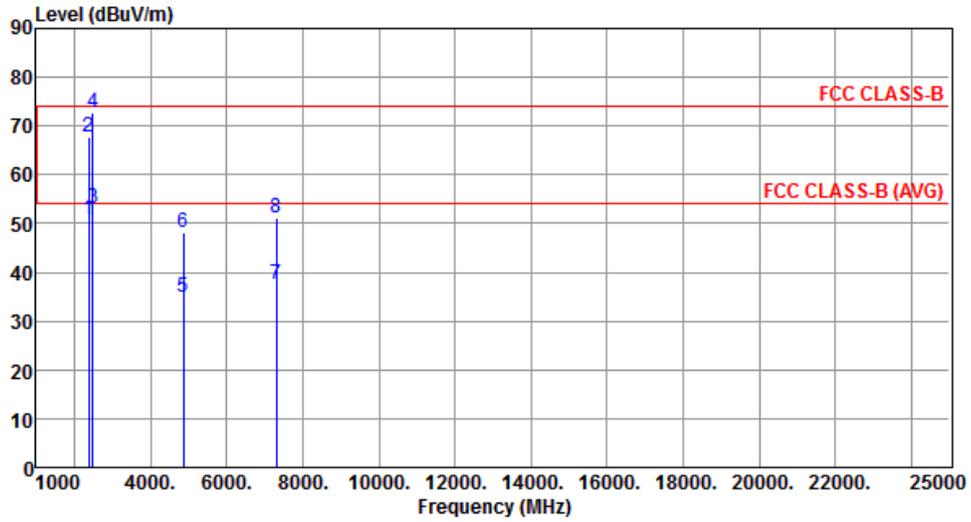


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	50.86	54.00	-3.14	54.21	-3.35	Average	186	67
2	2390.00	67.86	74.00	-6.14	71.21	-3.35	Peak	186	67
3	2483.50	52.98	54.00	-1.02	55.91	-2.93	Average	114	65
4	2483.50	72.89	74.00	-1.11	75.82	-2.93	Peak	114	65
5	4874.00	35.02	54.00	-18.98	31.27	3.75	Average	351	112
6	4874.00	48.02	74.00	-25.98	44.27	3.75	Peak	351	112
7	7311.00	37.64	54.00	-16.36	29.22	8.42	Average	250	100
8	7311.00	51.09	74.00	-22.91	42.67	8.42	Peak	250	100

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	11g	<b>Test Freq. (MHz)</b>	2462
<b>Polarization</b>	Horizontal		

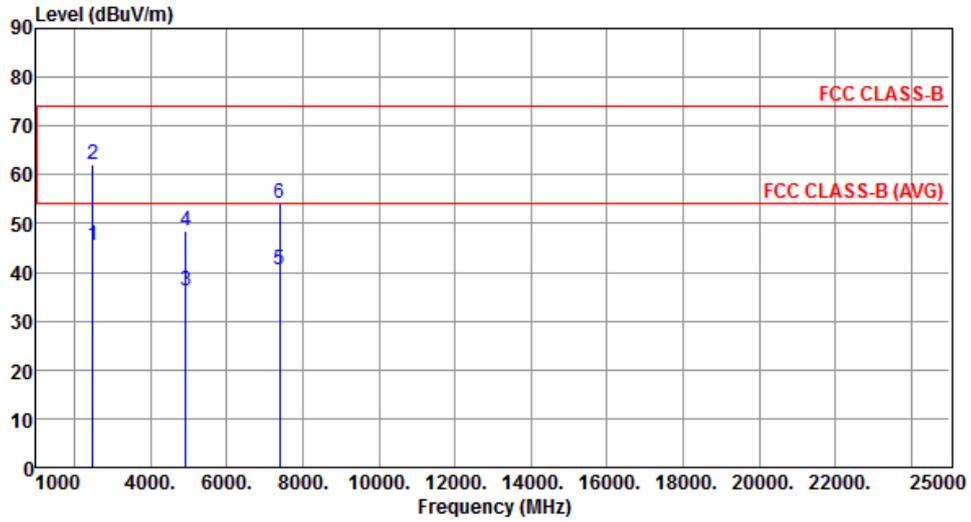


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	45.66	54.00	-8.34	48.59	-2.93	Average	125	343
2	2483.50	62.17	74.00	-11.83	65.10	-2.93	Peak	125	343
3	4924.00	36.08	54.00	-17.92	32.17	3.91	Average	239	164
4	4924.00	48.40	74.00	-25.60	44.49	3.91	Peak	239	164
5	7386.00	40.57	54.00	-13.43	32.11	8.46	Average	165	11
6	7386.00	54.06	74.00	-19.94	45.60	8.46	Peak	165	11

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	11g	<b>Test Freq. (MHz)</b>	2462
<b>Polarization</b>	Vertical		

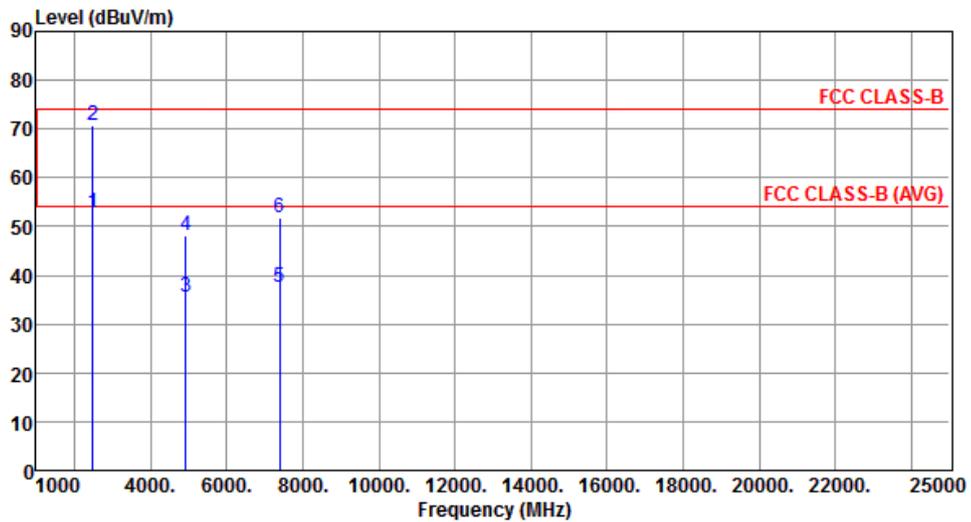


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	52.86	54.00	-1.14	55.79	-2.93	Average	127	62
2	2483.50	70.63	74.00	-3.37	73.56	-2.93	Peak	127	62
3	4924.00	35.58	54.00	-18.42	31.67	3.91	Average	320	136
4	4924.00	48.03	74.00	-25.97	44.12	3.91	Peak	320	136
5	7386.00	37.65	54.00	-16.35	29.19	8.46	Average	244	108
6	7386.00	51.82	74.00	-22.18	43.36	8.46	Peak	244	108

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)


\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

### 3.5.7 Transmitter Radiated Unwanted Emissions (Above 1GHz) for HT20

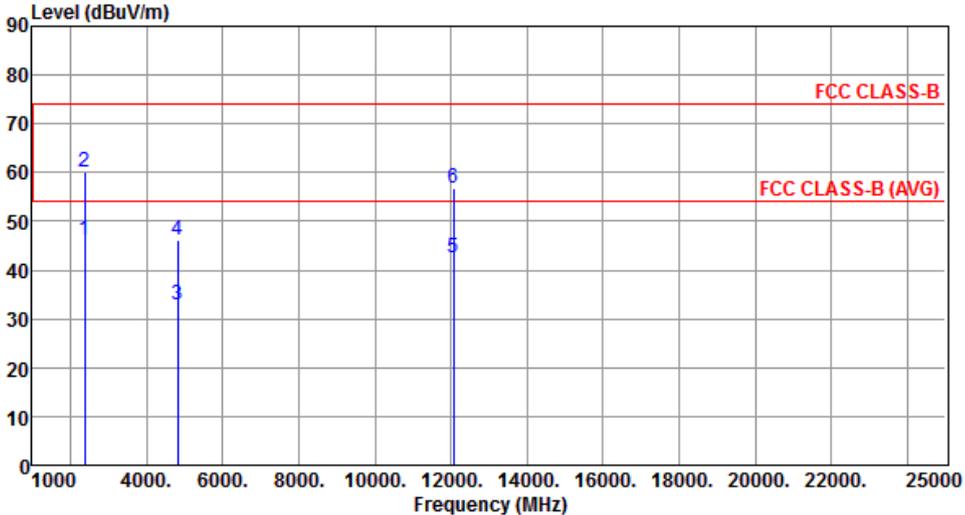Modulation	HT20	Test Freq. (MHz)	2412						
Polarization	Horizontal								
									
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	2390.00	46.22	54.00	-7.78	49.57	-3.35	Average	142	35
2	2390.00	59.99	74.00	-14.01	63.34	-3.35	Peak	142	35
3	4824.00	32.95	54.00	-21.05	29.36	3.59	Average	342	135
4	4824.00	46.25	74.00	-27.75	42.66	3.59	Peak	342	135
5	12060.00	42.45	54.00	-11.55	28.32	14.13	Average	114	295
6	12060.00	56.79	74.00	-17.21	42.66	14.13	Peak	114	295
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)            *Factor includes antenna factor , cable loss and amplifier gain            Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).</p>									

<b>Modulation</b>	HT20	<b>Test Freq. (MHz)</b>	2412
<b>Polarization</b>	Vertical		

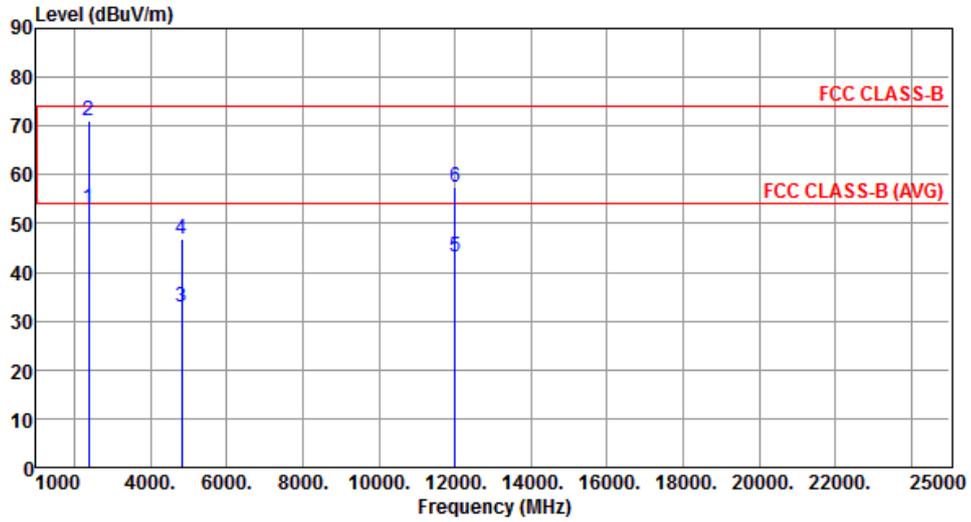


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	52.98	54.00	-1.02	56.33	-3.35	Average	136	50
2	2390.00	70.92	74.00	-3.08	74.27	-3.35	Peak	136	50
3	4824.00	32.94	54.00	-21.06	29.35	3.59	Average	165	23
4	4824.00	46.93	74.00	-27.07	43.34	3.59	Peak	165	23
5	12006.00	43.16	54.00	-10.84	29.08	14.08	Average	257	135
6	12006.00	57.34	74.00	-16.66	43.26	14.08	Peak	257	135

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	HT20	<b>Test Freq. (MHz)</b>	2437
<b>Polarization</b>	Horizontal		

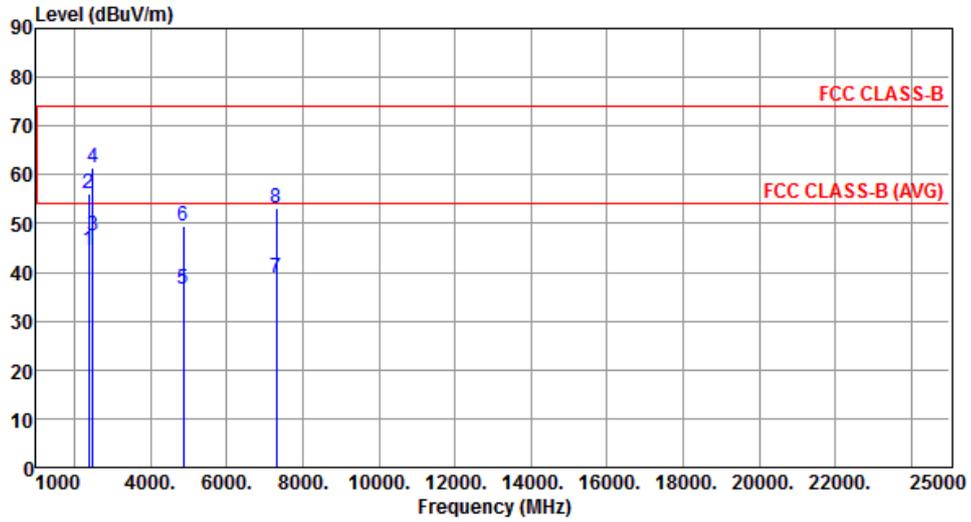


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	44.65	54.00	-9.35	48.00	-3.35	Average	115	35
2	2390.00	55.99	74.00	-18.01	59.34	-3.35	Peak	115	35
3	2483.50	47.37	54.00	-6.63	50.30	-2.93	Average	115	35
4	2483.50	61.52	74.00	-12.48	64.45	-2.93	Peak	115	35
5	4874.00	36.41	54.00	-17.59	32.66	3.75	Average	245	163
6	4874.00	49.36	74.00	-24.64	45.61	3.75	Peak	245	163
7	7311.00	38.89	54.00	-15.11	30.47	8.42	Average	181	32
8	7311.00	53.26	74.00	-20.74	44.84	8.42	Peak	181	32

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	HT20	<b>Test Freq. (MHz)</b>	2437
<b>Polarization</b>	Vertical		

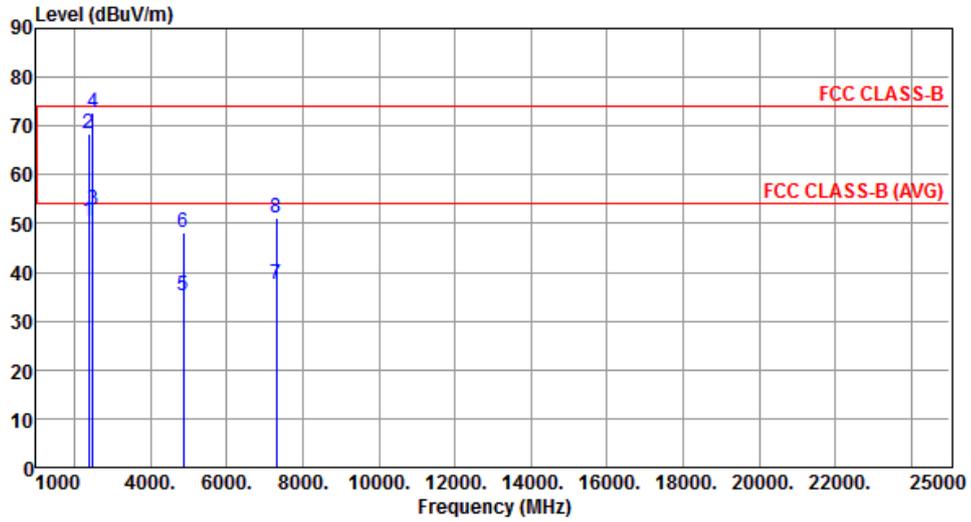


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	50.33	54.00	-3.67	53.68	-3.35	Average	147	50
2	2390.00	68.32	74.00	-5.68	71.67	-3.35	Peak	147	50
3	2483.50	52.96	54.00	-1.04	55.89	-2.93	Average	127	121
4	2483.50	72.63	74.00	-1.37	75.56	-2.93	Peak	127	121
5	4874.00	35.13	54.00	-18.87	31.38	3.75	Average	342	108
6	4874.00	48.03	74.00	-25.97	44.28	3.75	Peak	342	108
7	7311.00	37.46	54.00	-16.54	29.04	8.42	Average	246	99
8	7311.00	50.99	74.00	-23.01	42.57	8.42	Peak	246	99

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	HT20	<b>Test Freq. (MHz)</b>	2462
<b>Polarization</b>	Horizontal		

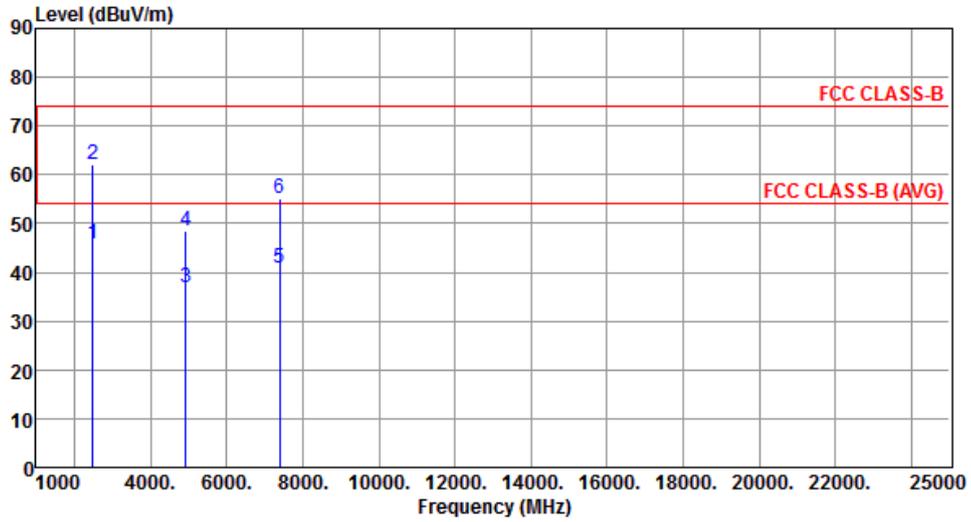


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	45.95	54.00	-8.05	48.88	-2.93	Average	124	36
2	2483.50	62.09	74.00	-11.91	65.02	-2.93	Peak	124	36
3	4924.00	36.77	54.00	-17.23	32.86	3.91	Average	235	157
4	4924.00	48.36	74.00	-25.64	44.45	3.91	Peak	235	157
5	7386.00	40.89	54.00	-13.11	32.43	8.46	Average	162	22
6	7386.00	55.10	74.00	-18.90	46.64	8.46	Peak	162	22

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	HT20	<b>Test Freq. (MHz)</b>	2462
<b>Polarization</b>	Vertical		

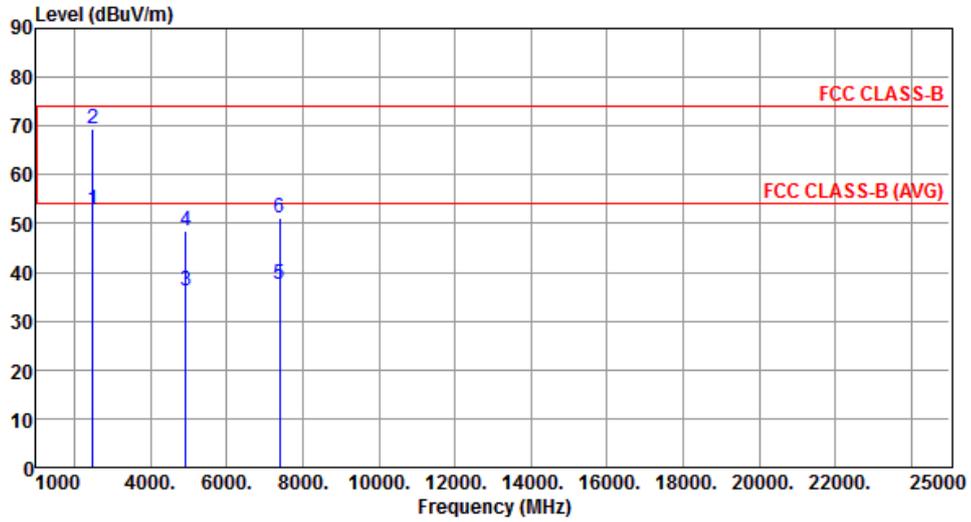

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	52.95	54.00	-1.05	55.88	-2.93	Average	106	65
2	2483.50	69.43	74.00	-4.57	72.36	-2.93	Peak	106	65
3	4924.00	36.19	54.00	-17.81	32.28	3.91	Average	317	140
4	4924.00	48.36	74.00	-25.64	44.45	3.91	Peak	317	140
5	7386.00	37.46	54.00	-16.54	29.00	8.46	Average	224	109
6	7386.00	51.09	74.00	-22.91	42.63	8.46	Peak	224	109

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)


\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

**Configuration 2 : without CMF (common mode filter) type**

**3.5.8 Transmitter Radiated Unwanted Emissions (Below 1GHz)**

<b>Modulation</b>	11g	<b>Test Freq. (MHz)</b>	2437
<b>Polarization</b>	Horizontal		

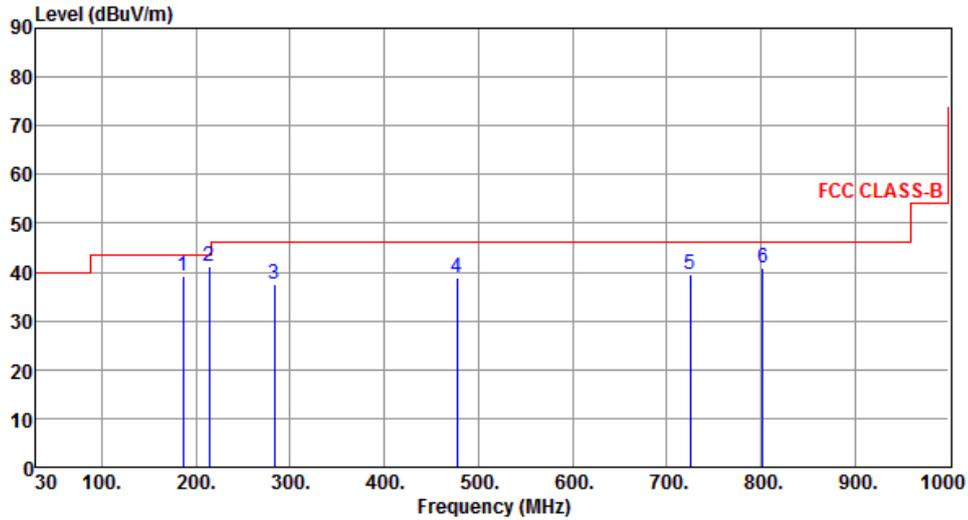

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	186.17	39.10	43.50	-4.40	53.09	-13.99	Peak	---	---
2	214.30	41.07	43.50	-2.43	55.44	-14.37	QP	112	156
3	283.17	37.53	46.00	-8.47	49.03	-11.50	Peak	---	---
4	477.17	39.01	46.00	-6.99	45.99	-6.98	Peak	---	---
5	725.49	39.63	46.00	-6.37	42.40	-2.77	Peak	---	---
6	802.12	40.80	46.00	-5.20	42.66	-1.86	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

<b>Modulation</b>	11g	<b>Test Freq. (MHz)</b>	2437
<b>Polarization</b>	Vertical		

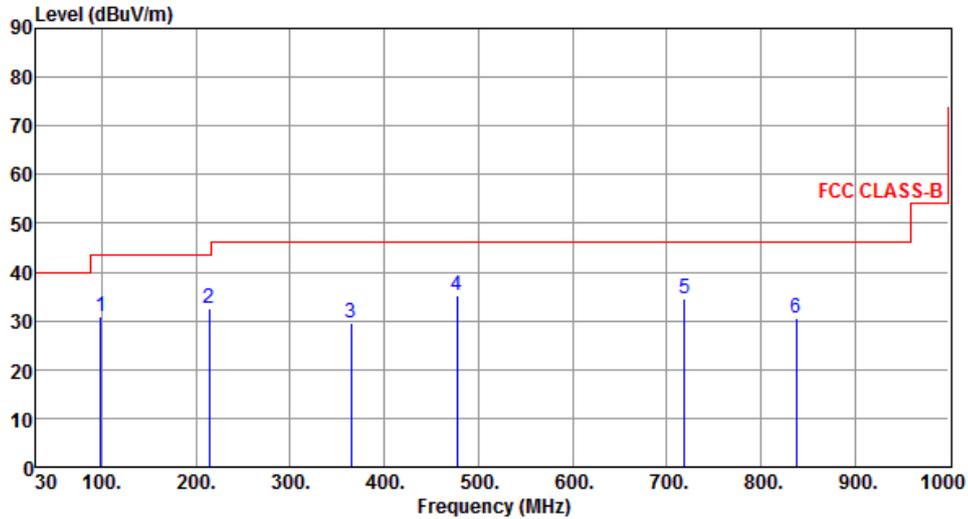

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	98.87	30.72	43.50	-12.78	47.53	-16.81	Peak	---	---
2	214.30	32.42	43.50	-11.08	46.79	-14.37	Peak	---	---
3	364.65	29.51	46.00	-16.49	39.13	-9.62	Peak	---	---
4	477.17	35.25	46.00	-10.75	42.23	-6.98	Peak	---	---
5	718.70	34.52	46.00	-11.48	37.41	-2.89	Peak	---	---
6	838.01	30.67	46.00	-15.33	32.08	-1.41	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

## 3.6 Emissions in Non-Restricted Frequency Bands

### 3.6.1 Emissions in Non-Restricted Frequency Bands Limit

Peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz

### 3.6.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

### 3.6.3 Test Procedures


#### Reference level measurement

1. Set RBW=100kHz, VBW = 300kHz , Detector = Peak, Sweep time = Auto
2. Trace = max hold , Allow Trace to fully stabilize
3. Use the peak marker function to determine the maximum PSD level

#### Emission level measurement

1. Set RBW=100kHz, VBW = 300kHz , Detector = Peak, Sweep time = Auto
2. Trace = max hold , Allow Trace to fully stabilize
3. Scan Frequency range is up to 25GHz
4. Use the peak marker function to determine the maximum amplitude level

### 3.6.4 Test Setup

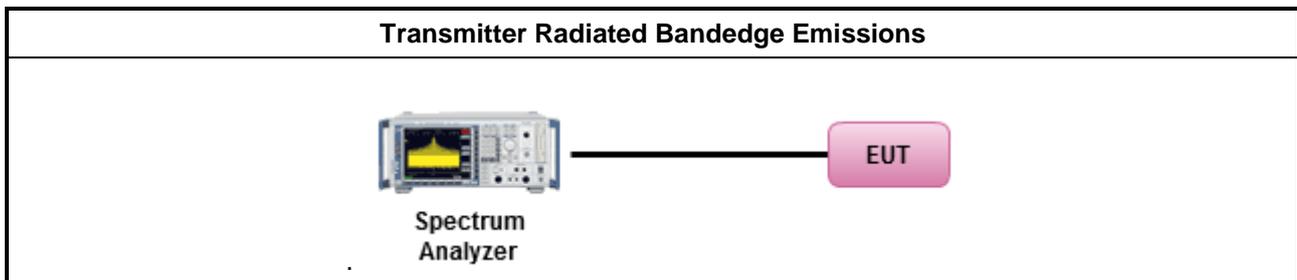



### 3.6.5 Test Result of Emissions in non-restricted frequency bands


This test item is performed on each TX output individually without summing or adding  $10 \log(N_{ANT})$  since measurements are made relative to the in-band emissions on the individual outputs. Only worst test result of each operating mode is presented.

### 3.6.6 Unwanted Emissions into Non-Restricted Frequency Bands


802.11b

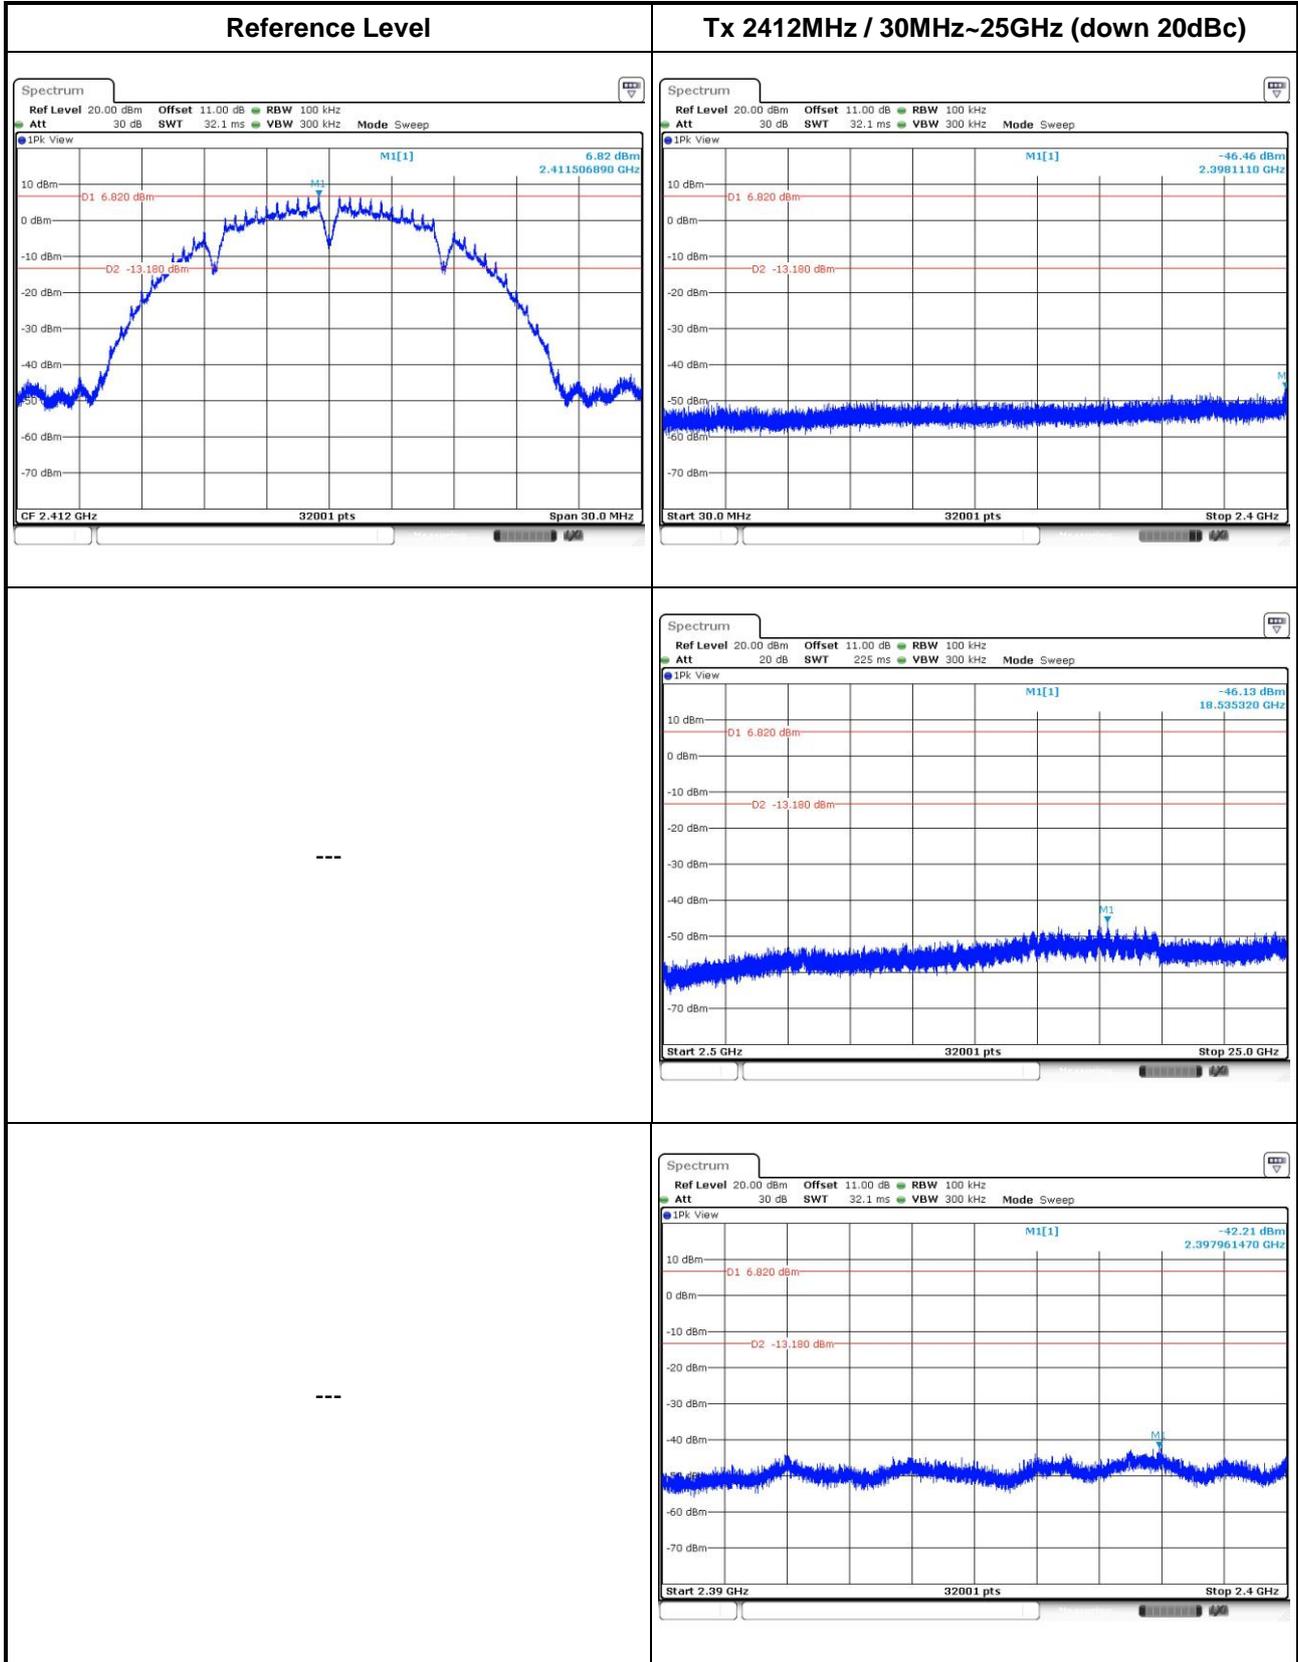


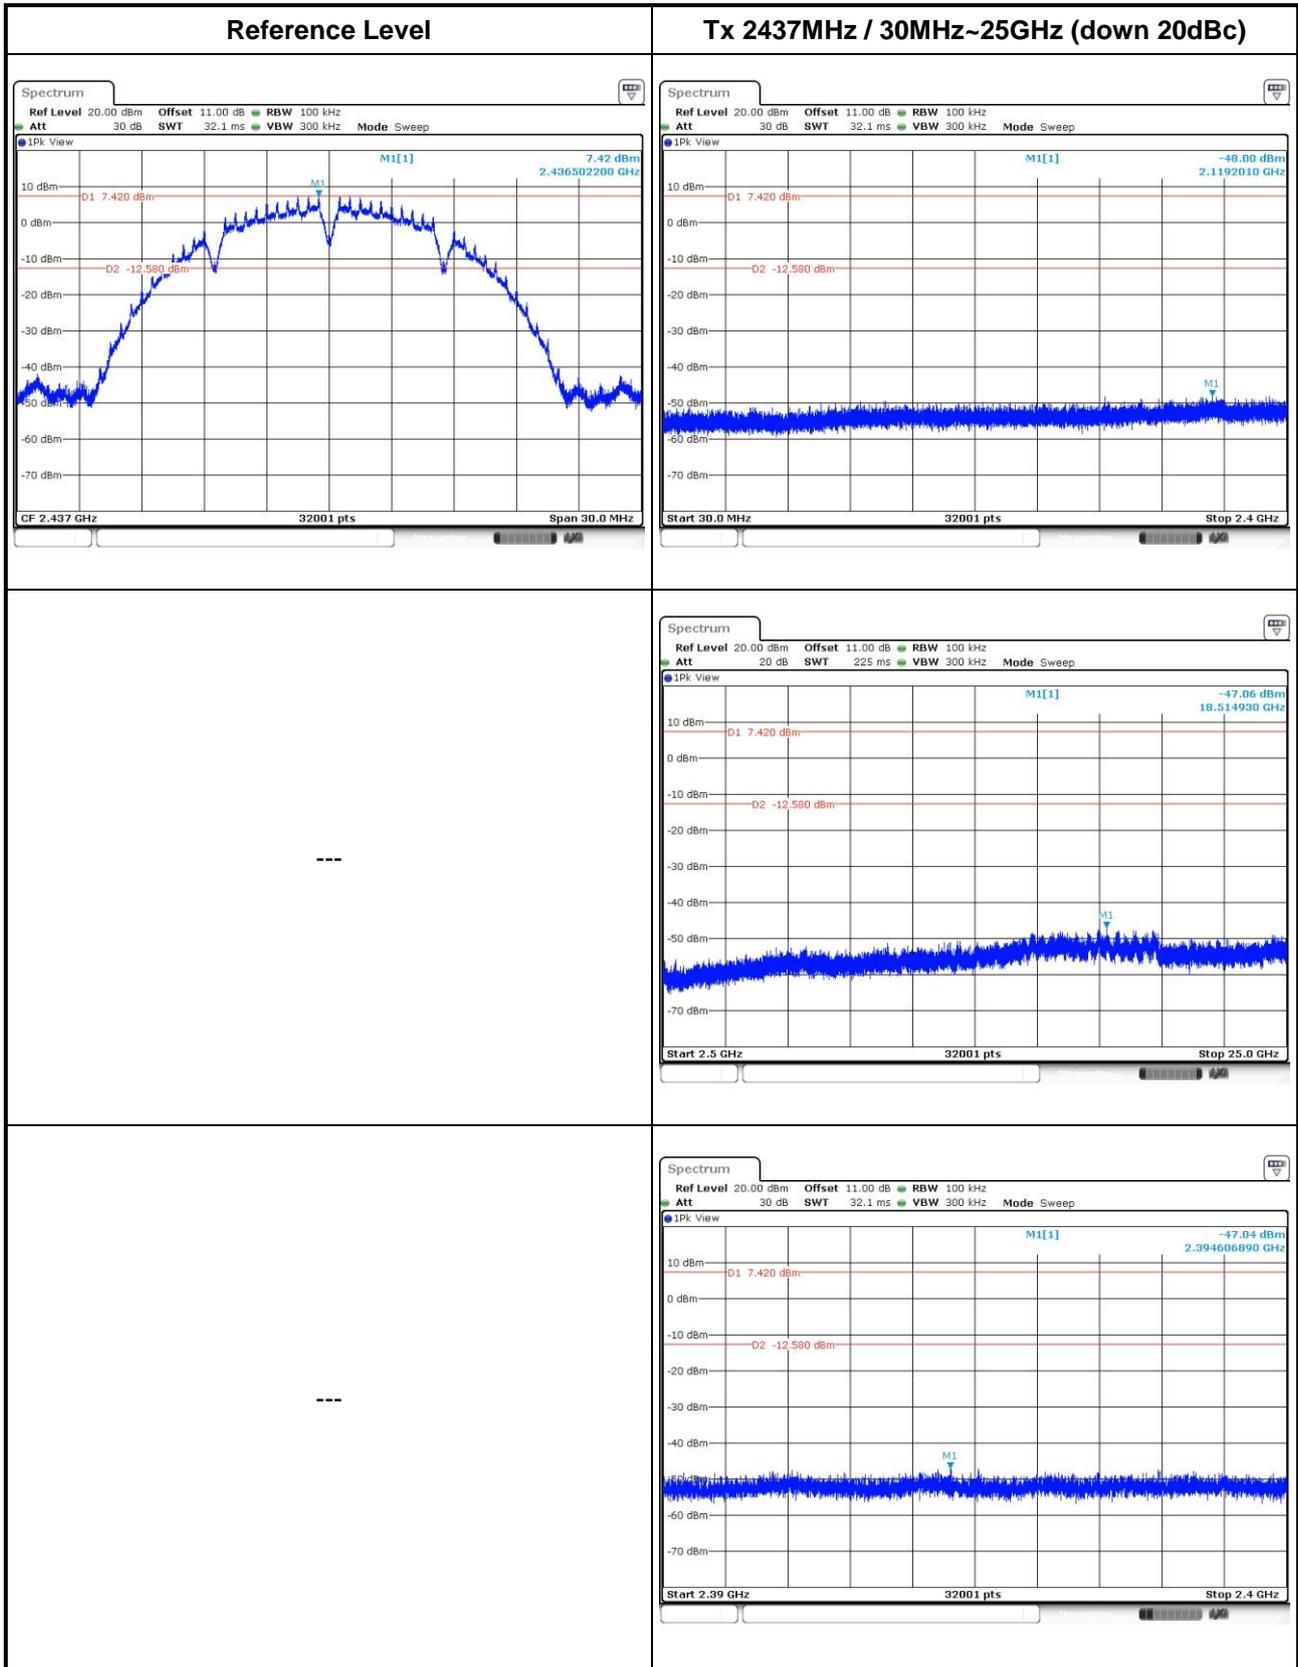


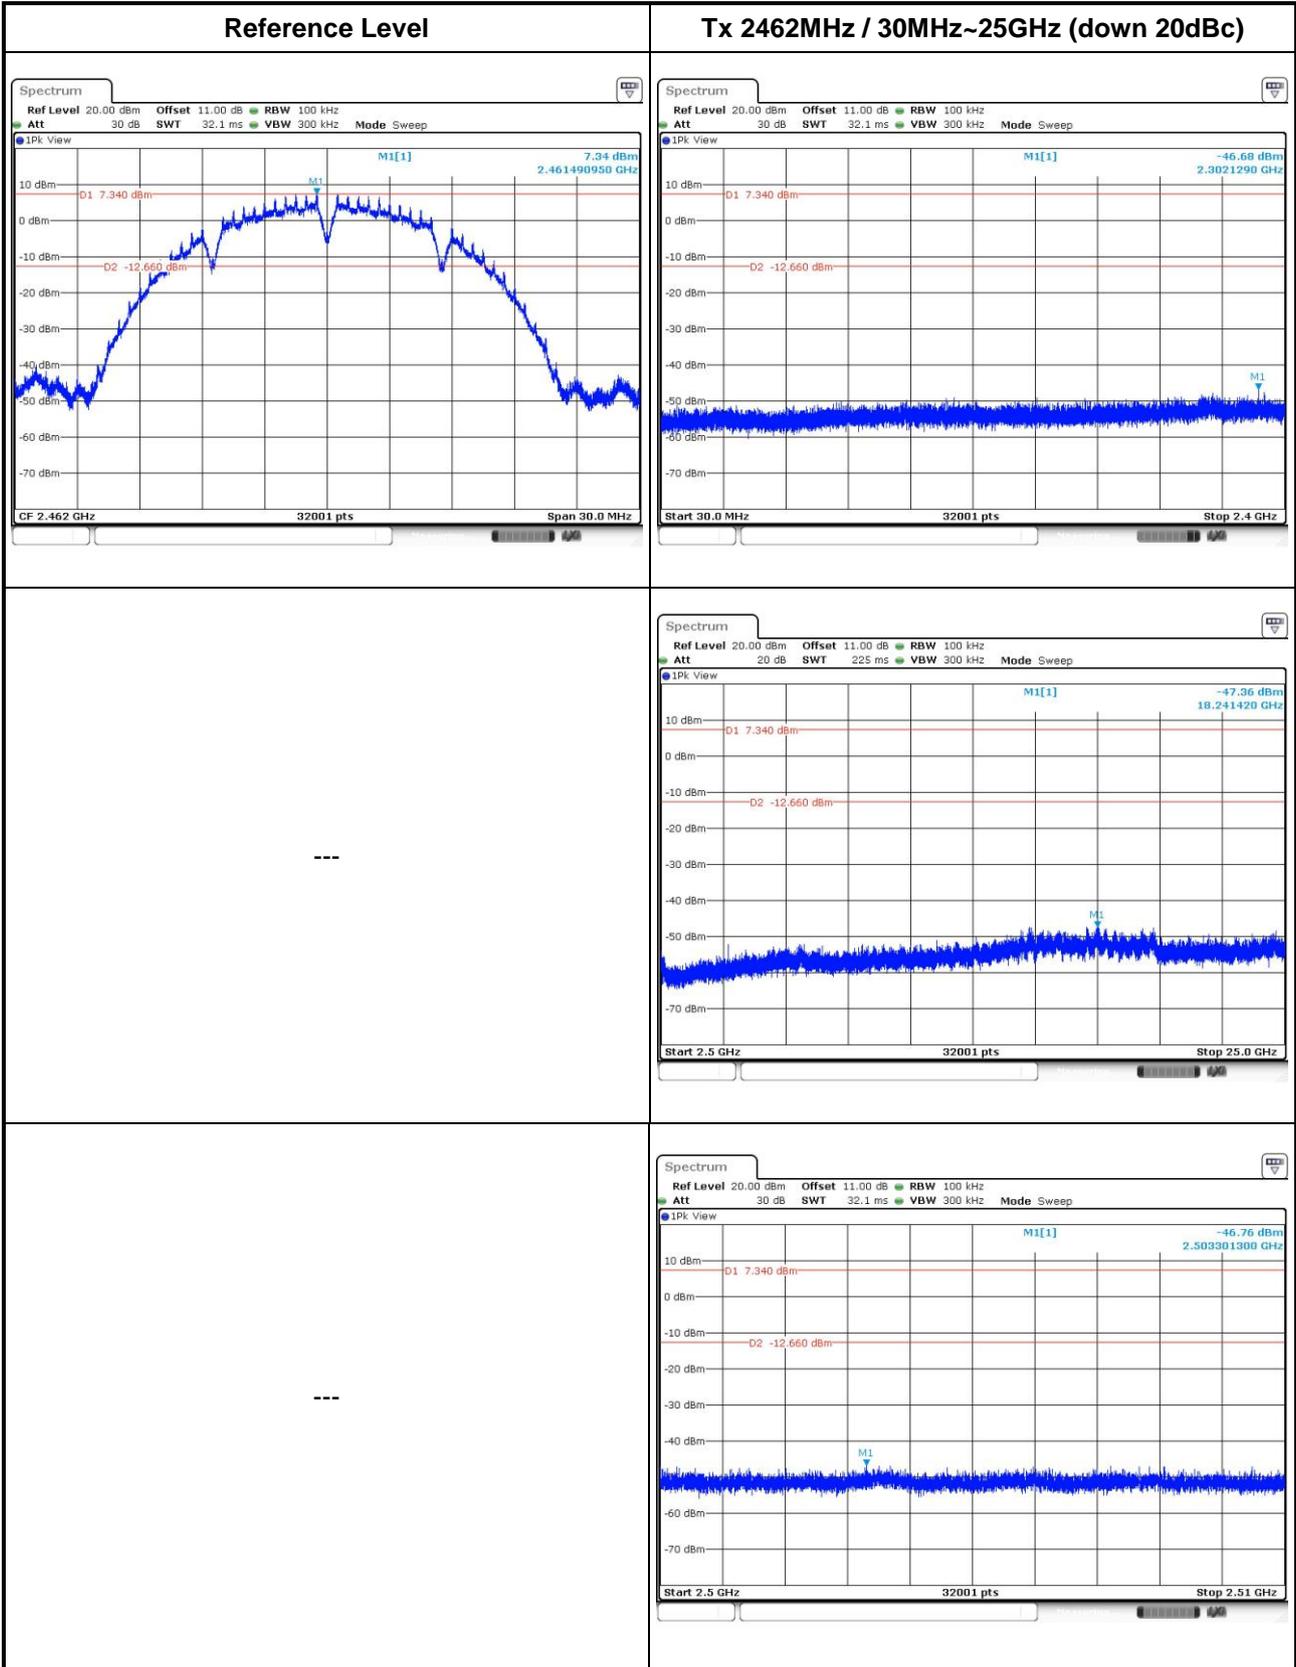


802.11g

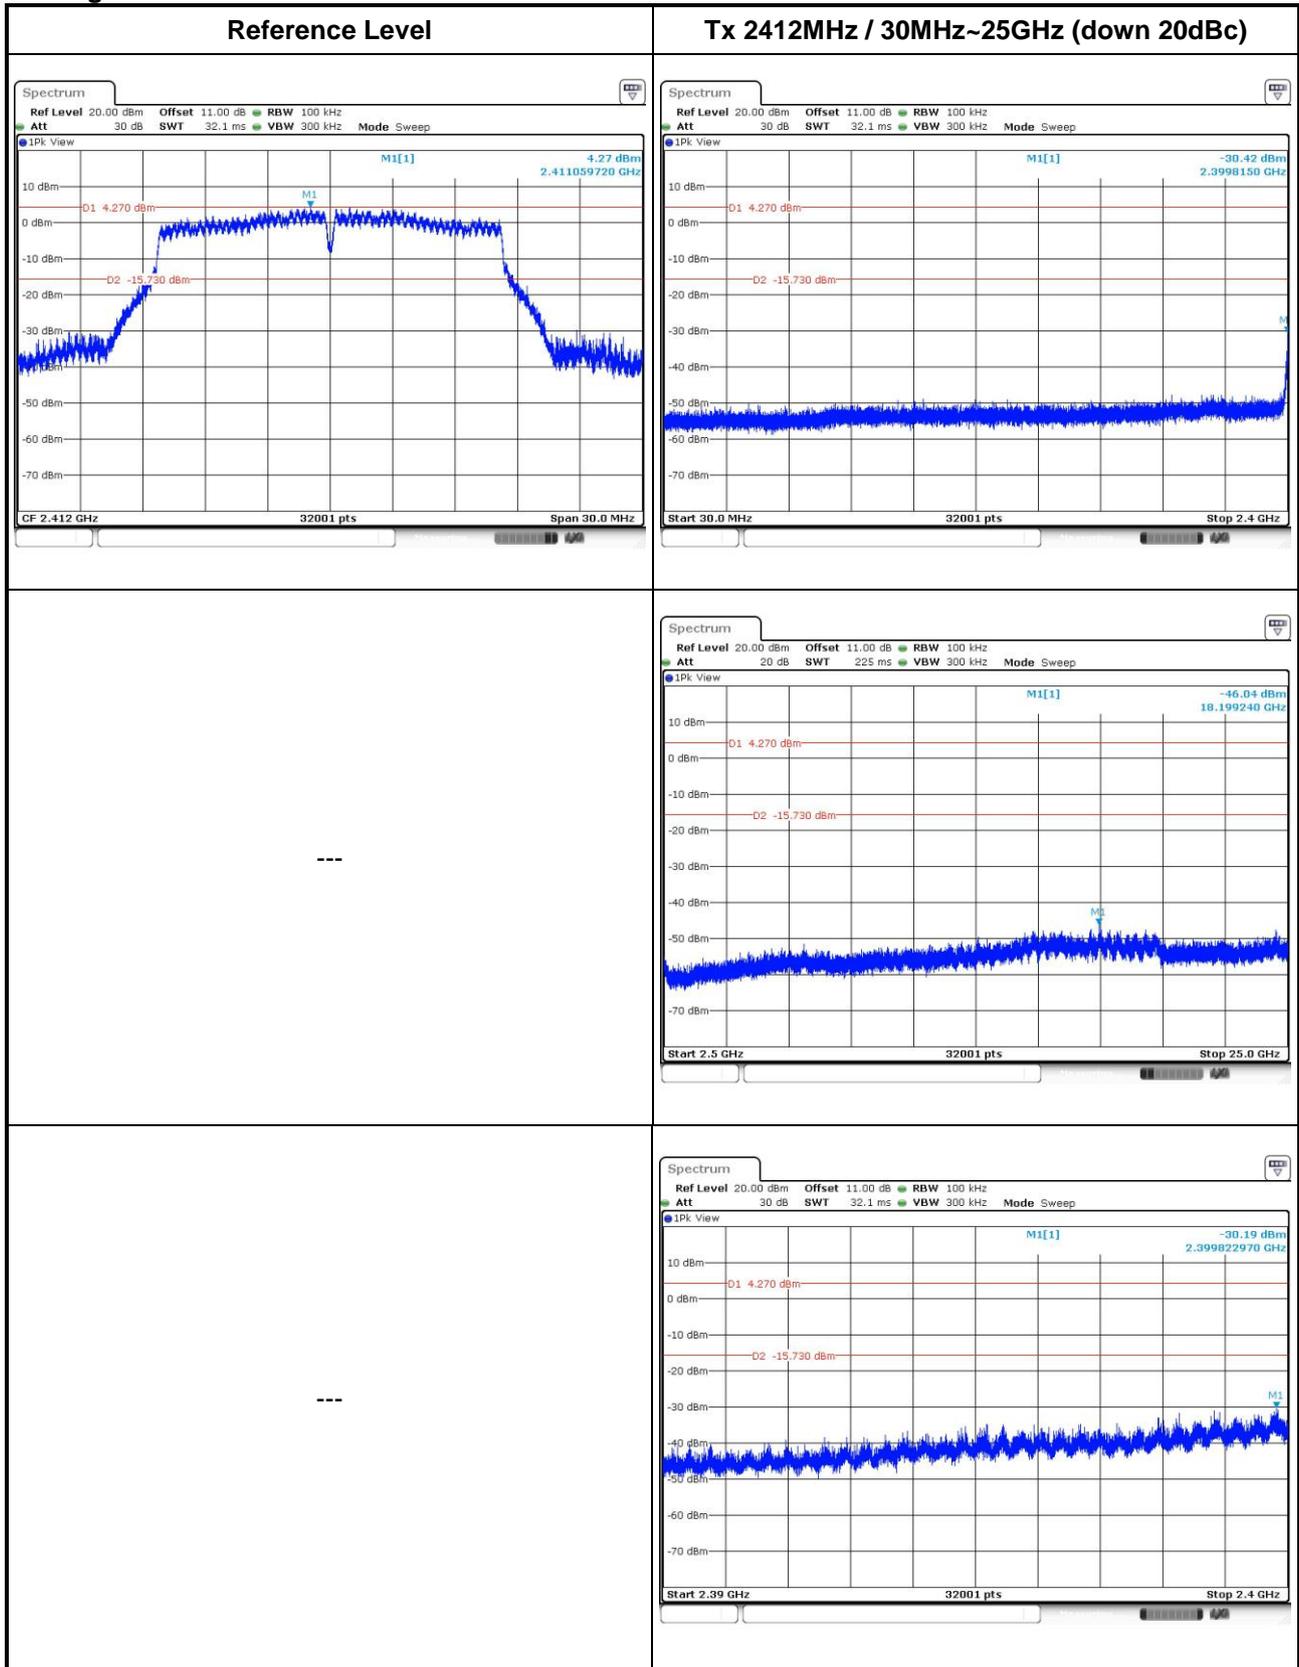


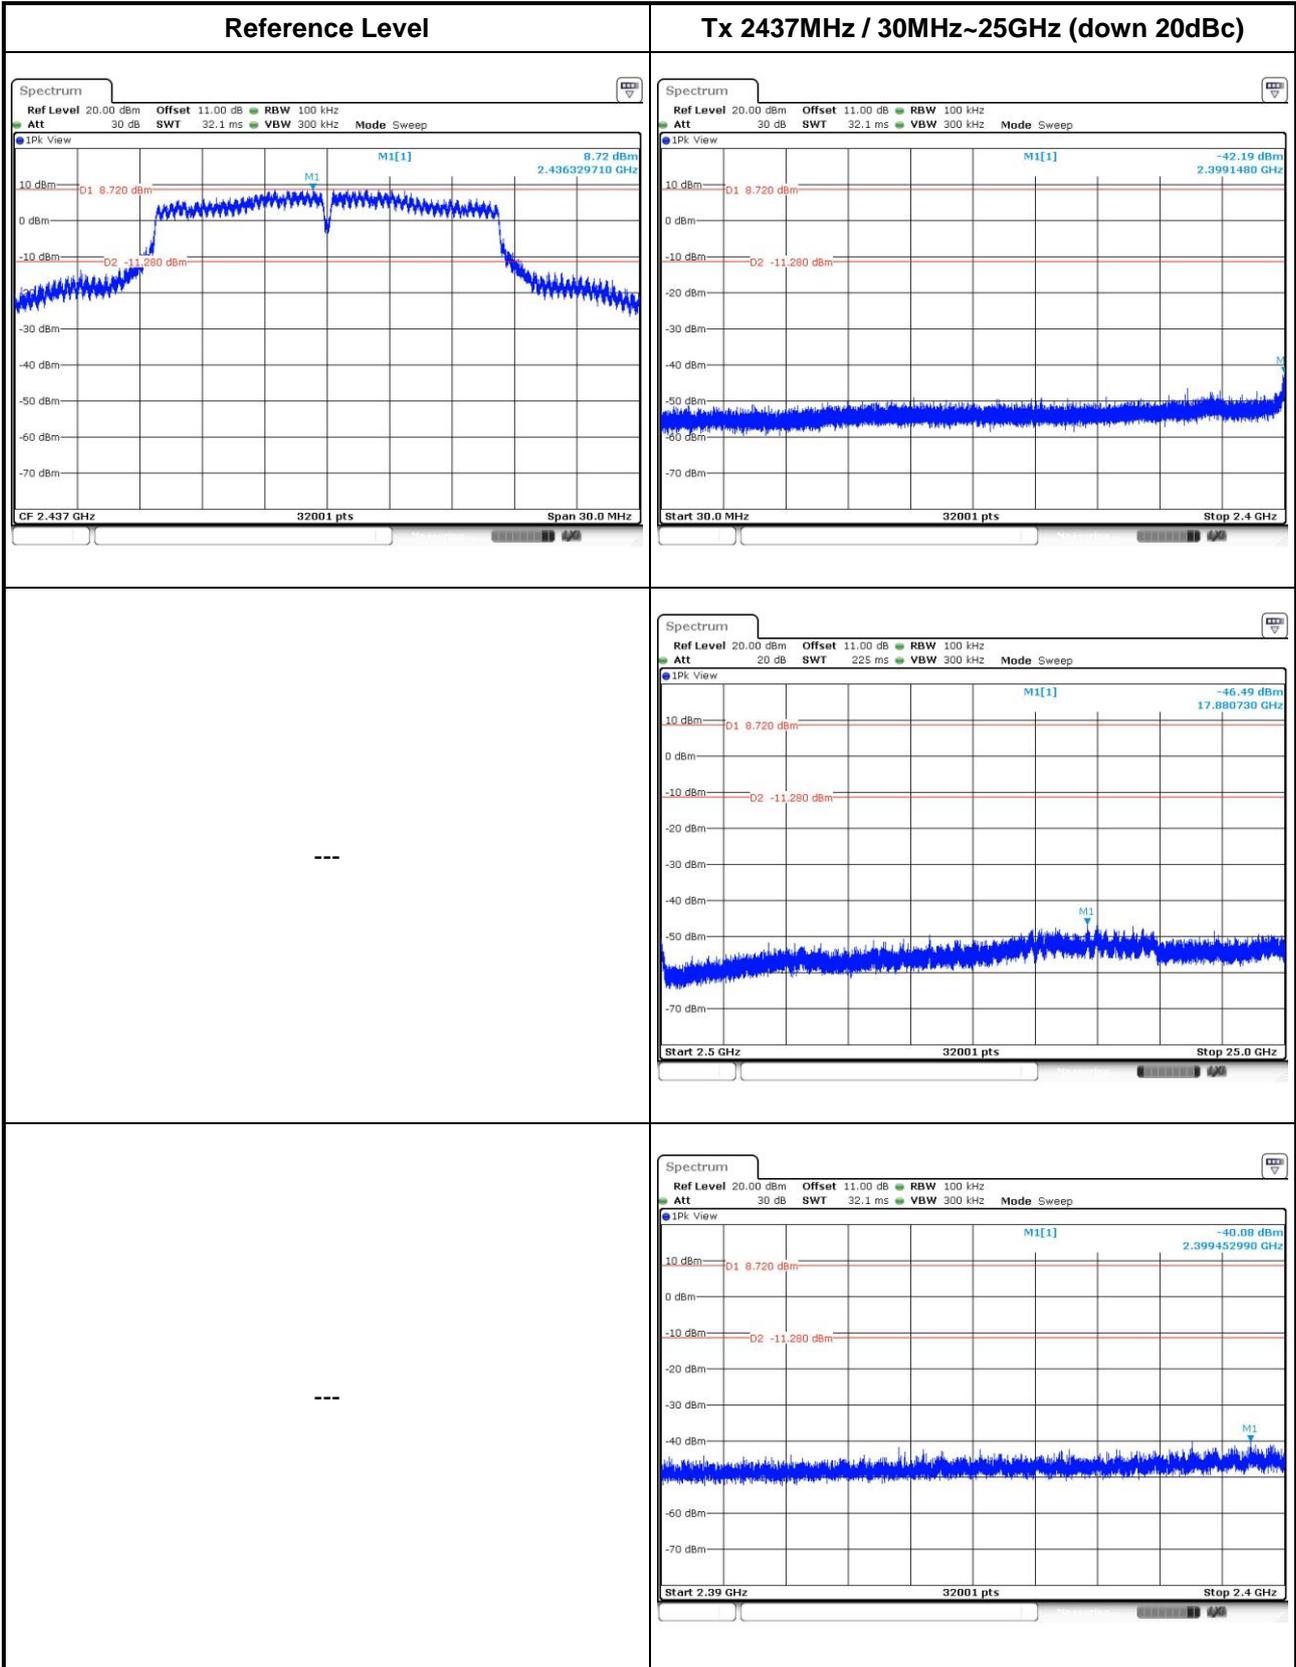


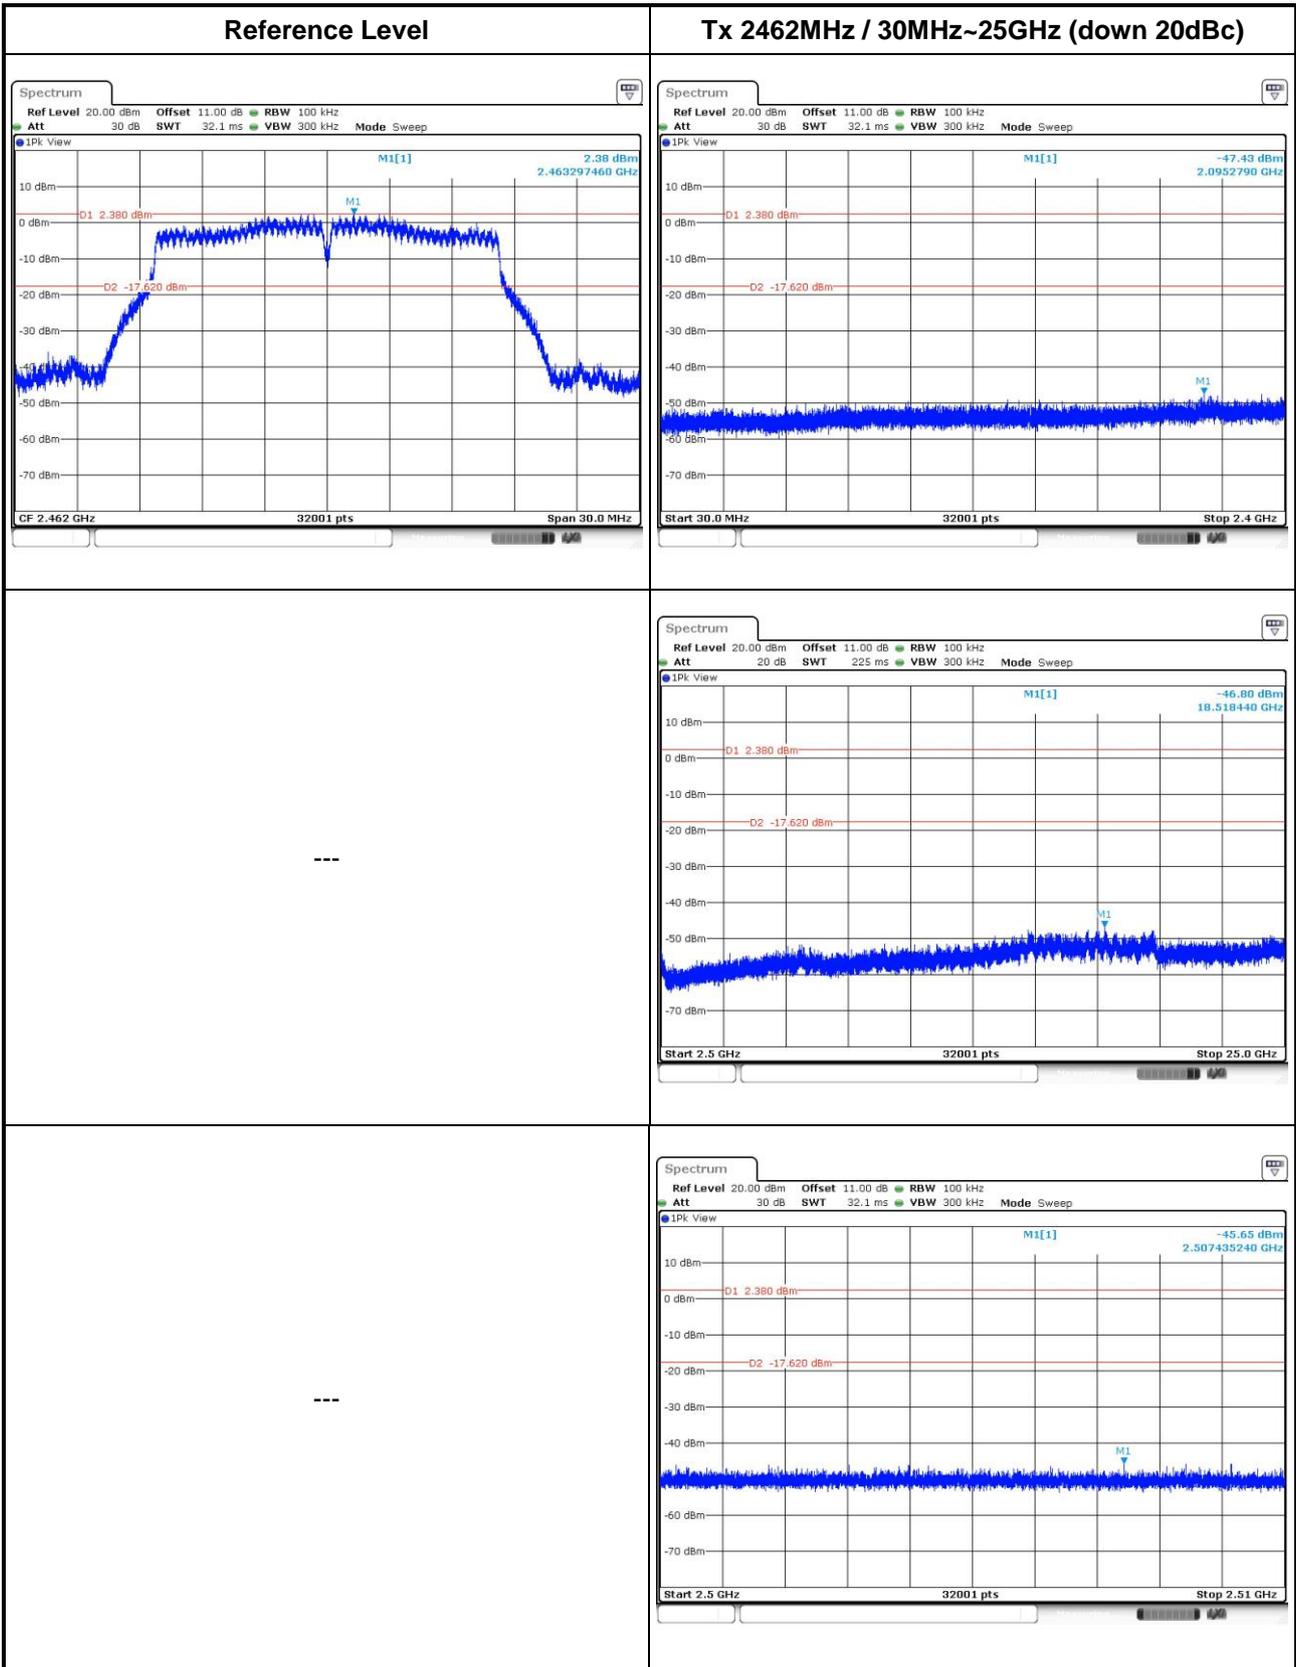

802.11n HT20

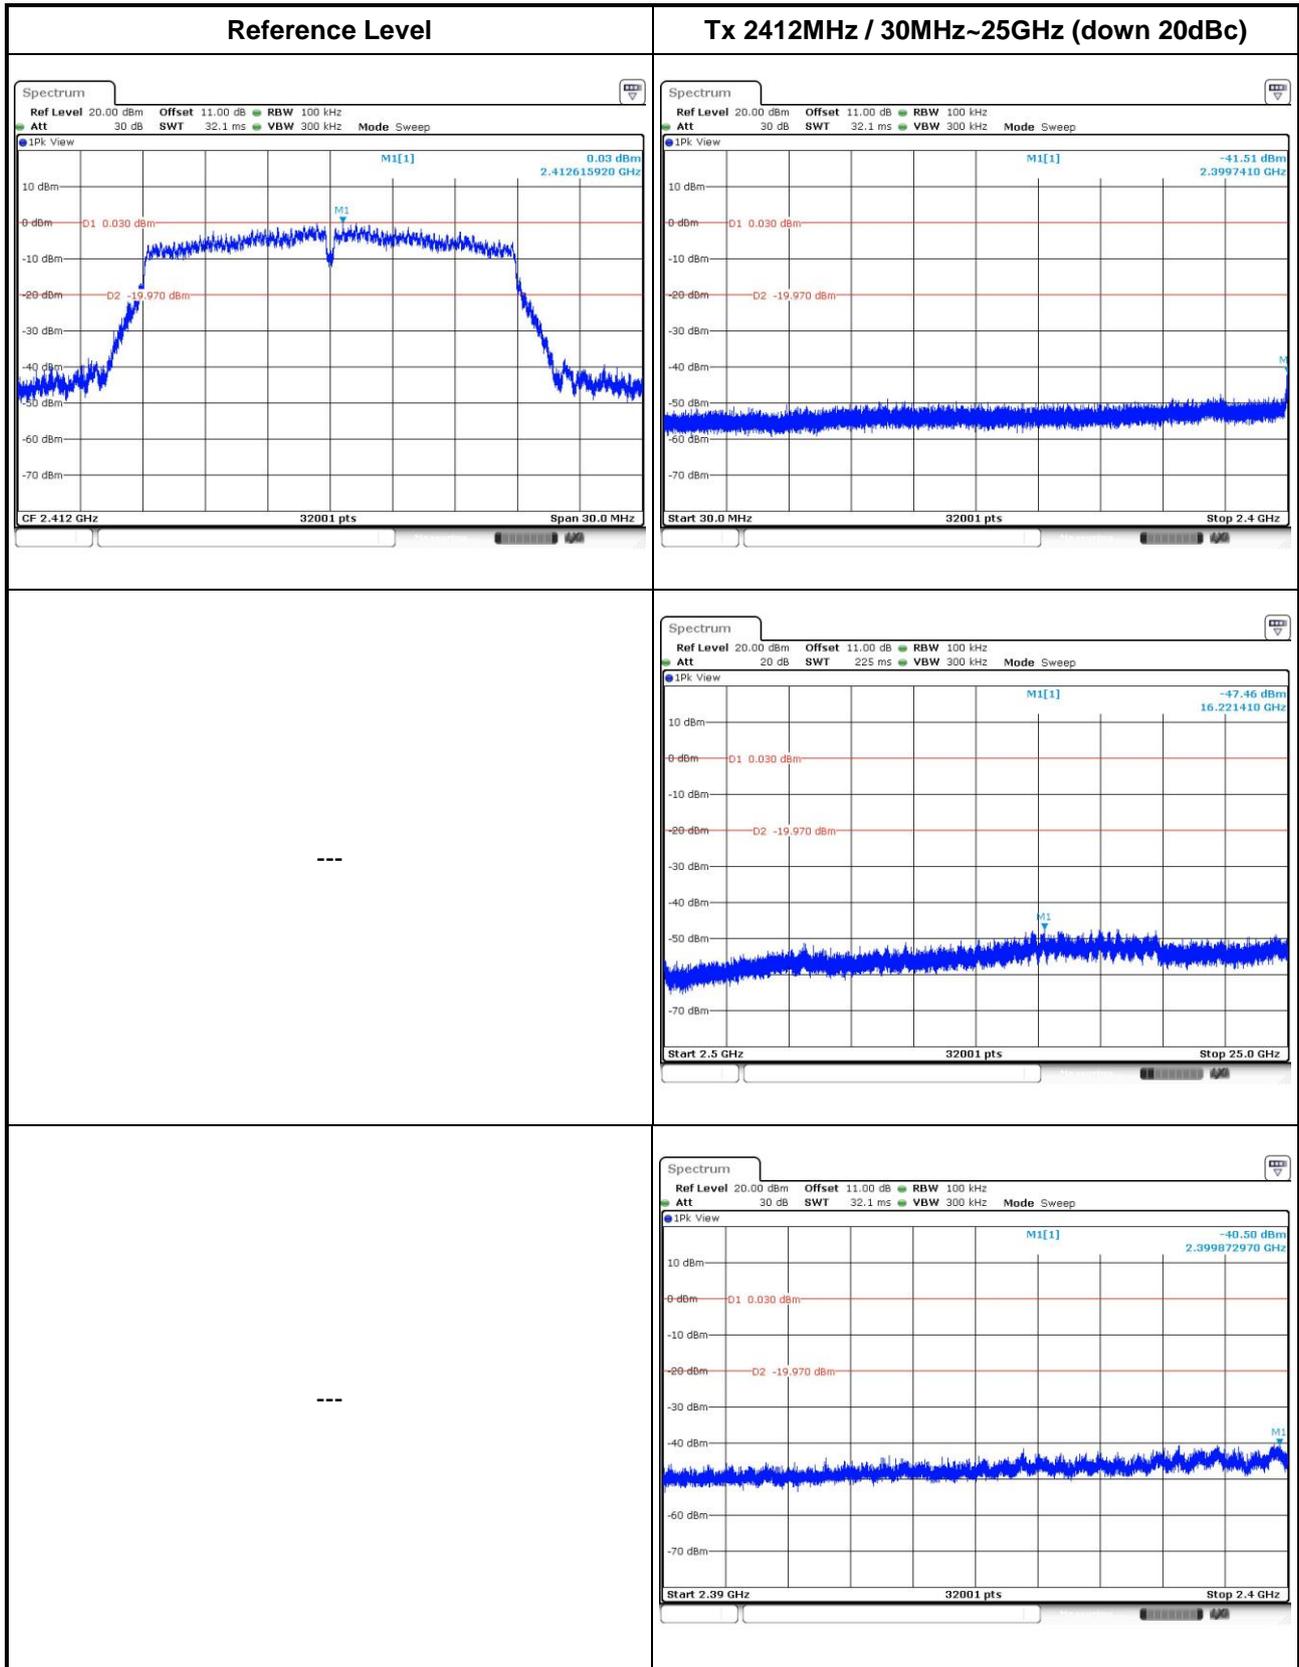

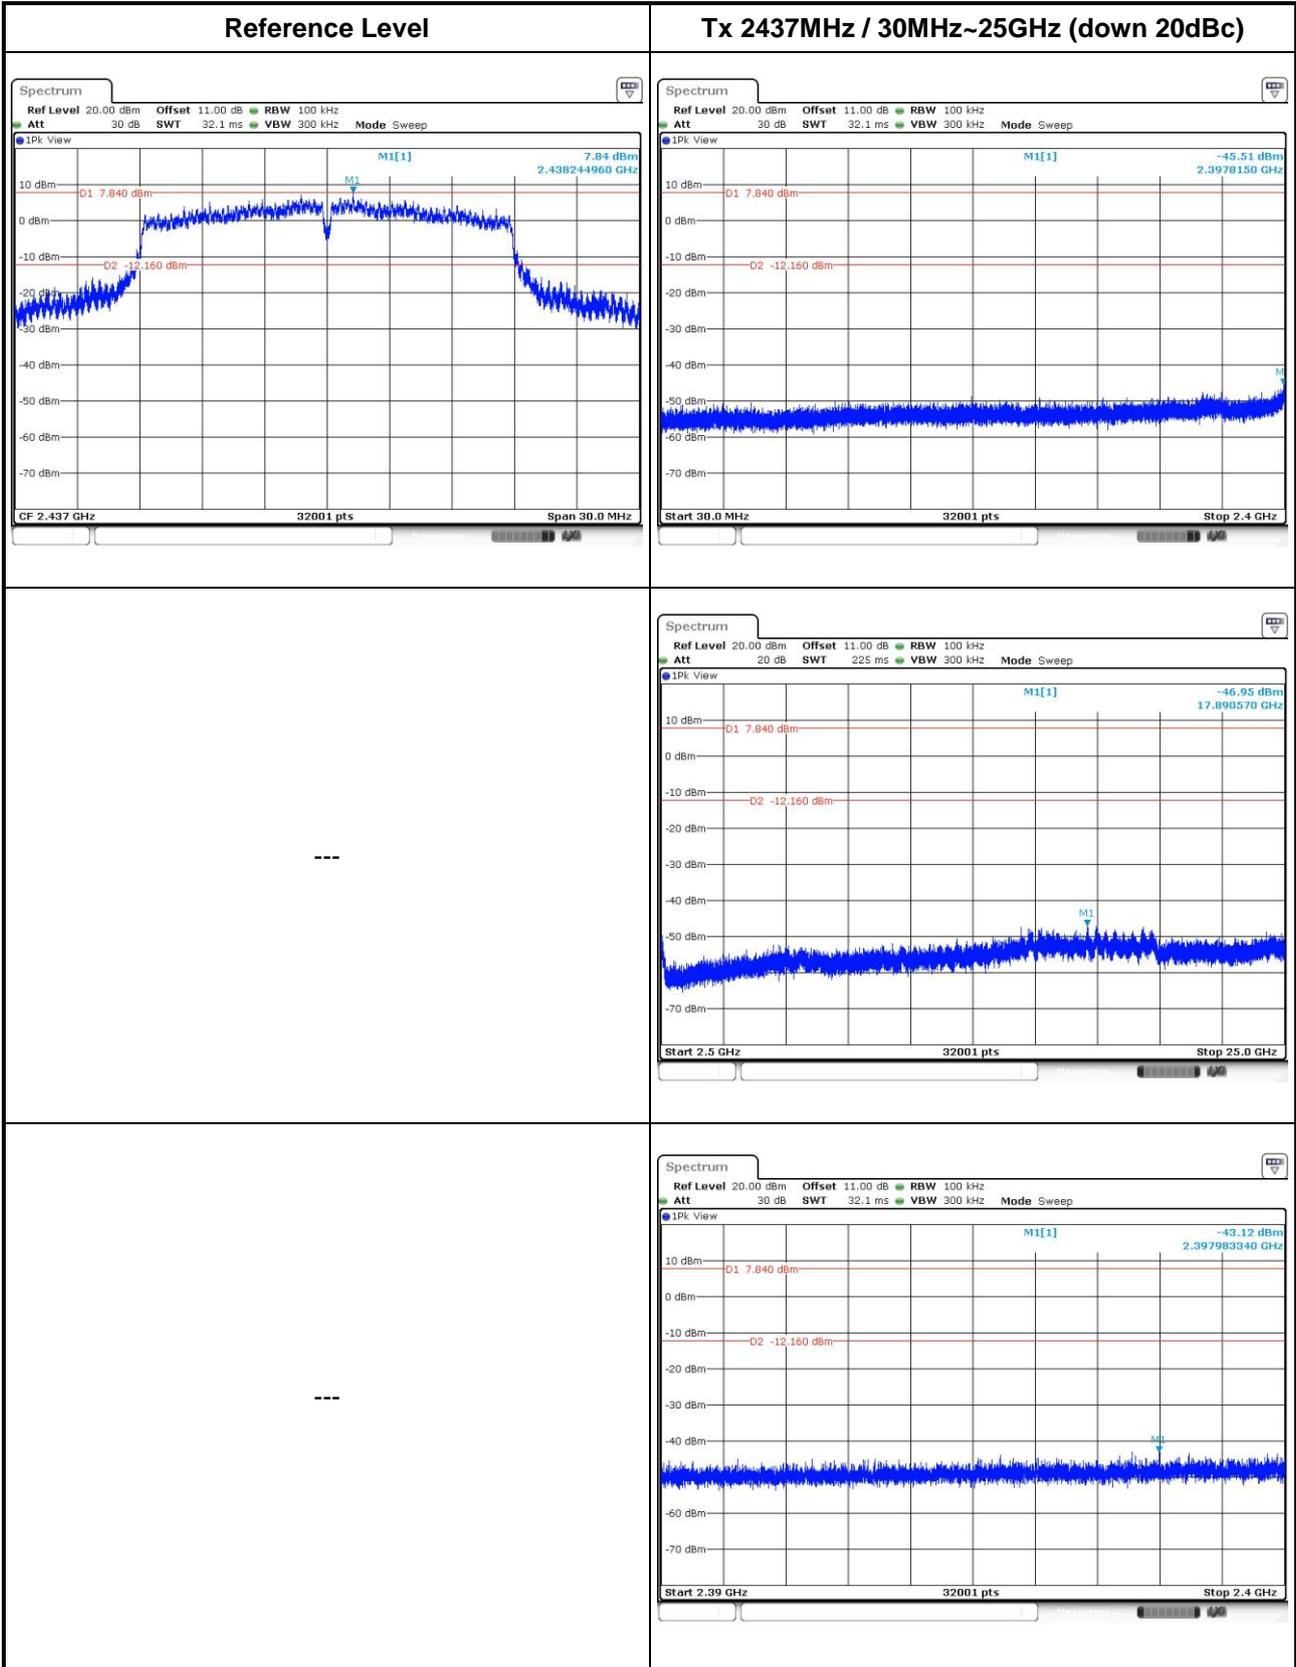

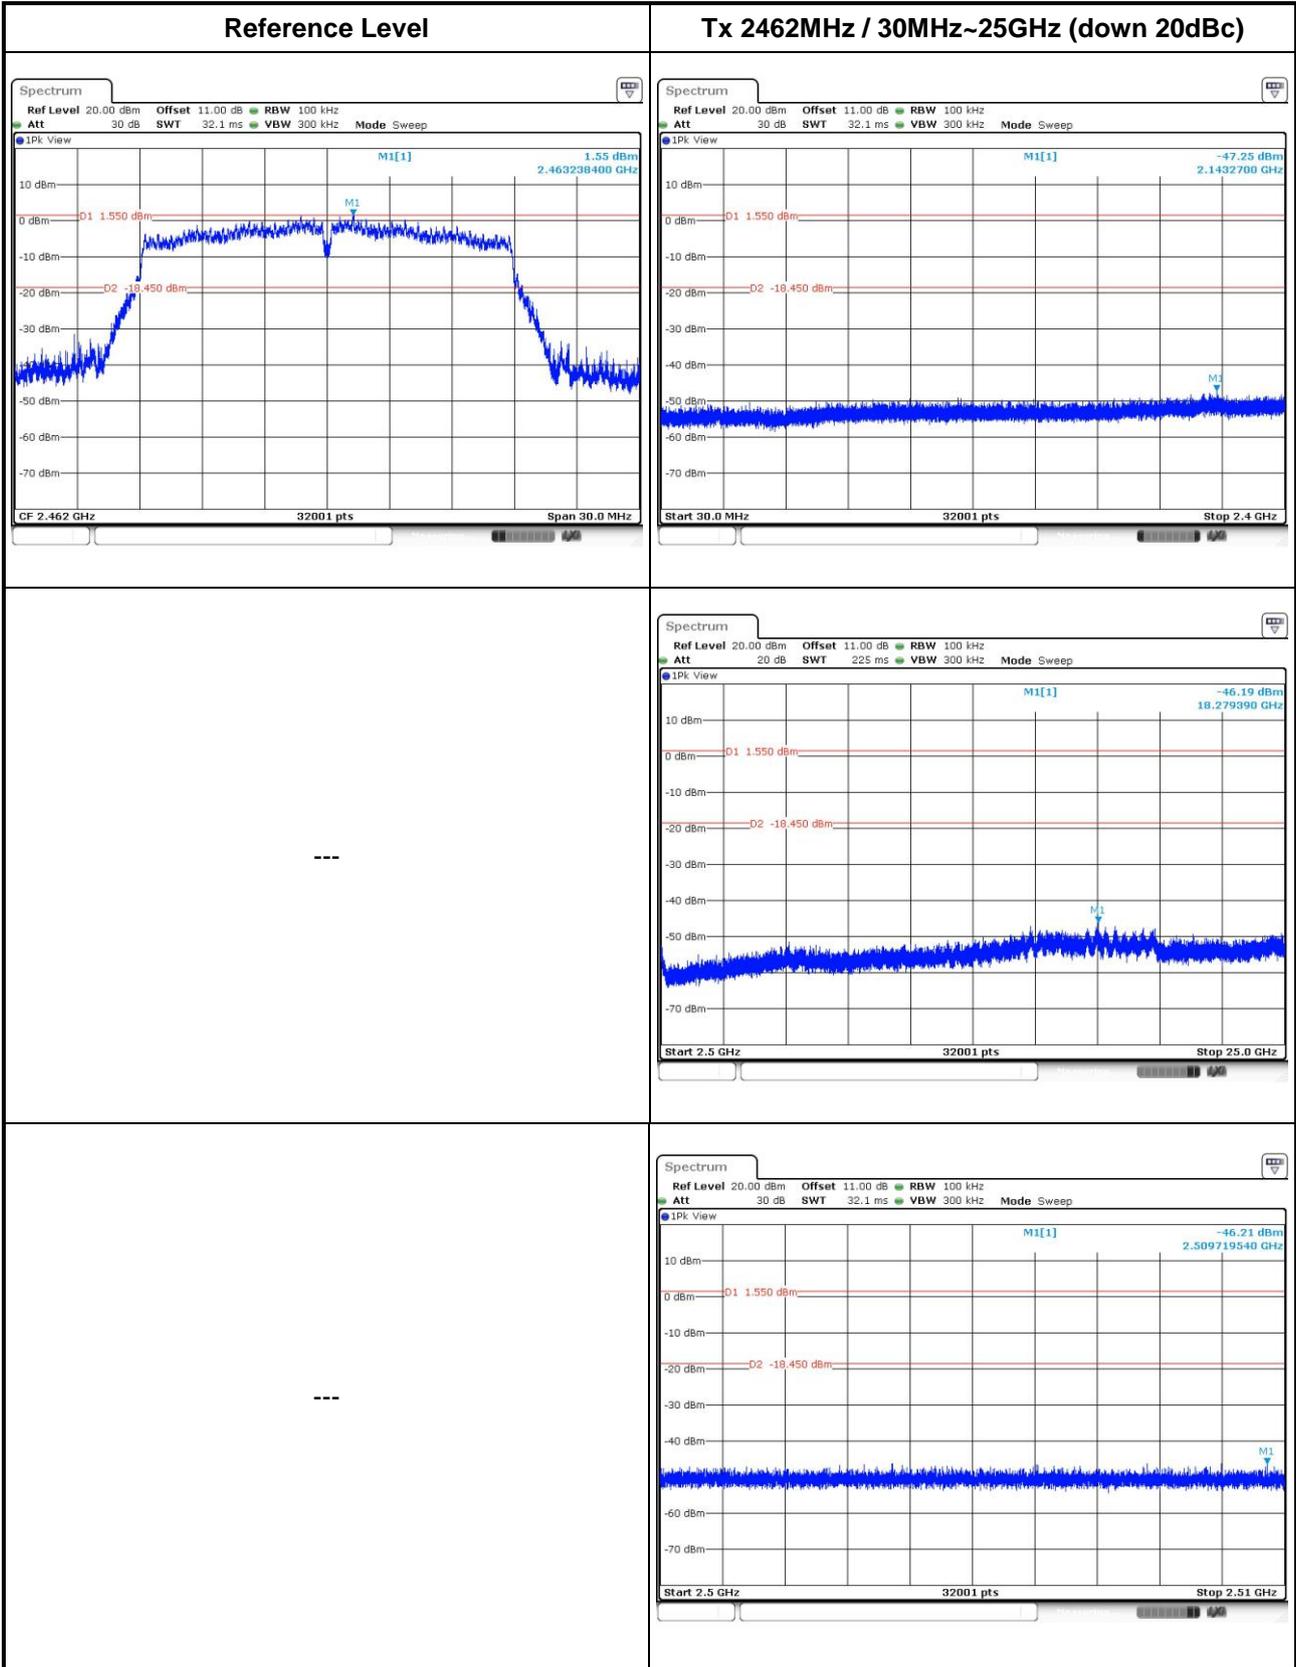

## 4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corp (EMC and Wireless Communication Laboratory), it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan Hsiang. Location map can be found on our website <http://www.icertifi.com.tw>.

### **Linkou**

Tel: 886-2-2601-1640

No. 30-2, Ding Fwu Tsuen, Lin  
Kou District, New Taipei City,  
Taiwan, R.O.C.

### **Kwei Shan**

Tel: 886-3-271-8666

No. 3-1, Lane 6, Wen San 3rd St.,  
Kwei Shan District, Tao Yuan City  
333, Taiwan, R.O.C.

### **Kwei Shan Site II**

Tel: 886-3-271-8640

No. 14-1, Lane 19, Wen San 3rd  
St., Kwei Shan District, Tao Yuan  
City 333, Taiwan, R.O.C.

If you have any suggestion, please feel free to contact us as below information.

Tel: 886-3-271-8666

Fax: 886-3-318-0155

Email: ICC\_Service@icertifi.com.tw

==END==