



RADIO TEST REPORT

Test Report No. : 26LE0231-HO-A-1

Applicant : Sony Corporation
Type of Equipment : Digital Still Camera
Model No. : DSC-G1
FCC ID : AK8DSCG1
Test standard : FCC Part 15 Subpart C
Section 15.207, Section 15.247: 2006
Test Result : Complied

1. This test report shall not be reproduced in full or partial, without the written approval of UL Apex Co., Ltd.
2. The results in this report apply only to the sample tested.
3. This equipment is in compliance with the above regulation.
4. The test results in this report are traceable to the national or international standards.

Date of test:

October 10 and 11, 2006

Tested by:

Norihisa Hashimoto
EMC Services

Takumi Shimada
EMC Services

Approved by :

Tetsuo Maeno
Site Manager of EMC Services



NVLAP LAB CODE: 200572-0

This laboratory is accredited by the NVLAP LAB CODE 200572-0, U.S.A. The tests reported herein have been performed in accordance with its terms of accreditation.

*As for the range of Accreditation in NVLAP, you may refer to the WEB address, <http://ulapex.jp/emc/nvlap.htm>

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b(14.06.06)

CONTENTS	PAGE
SECTION 1: Client information	3
SECTION 2: Equipment under test (E.U.T.).....	3
SECTION 3: Test specification, procedures & results.....	4
SECTION 4: Operation of E.U.T. during testing	7
SECTION 5: Conducted Emission.....	9
SECTION 6: Spurious Emission	10
SECTION 7: Bandwidth	11
SECTION 8: Maximum Peak Output Power	11
SECTION 9: Peak Power Density.....	11
APPENDIX 1: Photographs of test setup	12
Conducted Emission	12
Spurious Emission (Radiated)	13
Worst Case Position	14
APPENDIX 2: Data of EMI test.....	15
Conducted Emission	15
Conducted Emission	20
6dB Bandwidth.....	22
Maximum Peak OutPut Power	25
Radiated Spurious Emission (below 1GHz)	26
Radiated Spurious Emission (above 1GHz)	33
Conducted Spurious Emission (11b-11Mbps).....	40
Conducted Spurious Emission (Rx-11b/11g).....	43
Conducted Spurious Emission (11g-54Mbps)	44
Conducted emission Band Edge compliance	47
Power Density	48
99% Occupied Bandwidth (11b-11Mbps)	51
99% Occupied Bandwidth (11g-54Mbps).....	52
APPENDIX 3: Test instruments	53

SECTION 1: Client information

Company Name : Sony Corporation
Address : 6-7-35 Kitashinagawa, Shinagawa-ku, Tokyo 141-0001, Japan
Telephone Number : +81-564-62-6649
Facsimile Number : +81-564-62-6762
Contact Person : Hirofumi Tsutsui

<Remarks for data sheets>

*Sony EMCS Corporation Kohda TEC (Subsidiary Company Name) is on behalf of the applicant: Sony Corporation.

SECTION 2: Equipment under test (E.U.T.)

2.1 Identification of E.U.T.

Type of Equipment : Digital Still Camera
Model No. : DSC-G1
Serial No. : 140, 143
Rating : DC3.6V (battery), DC4.2V(AC Adaptor:AC100-240V 50/60Hz)
Country of Manufacture : Japan
Receipt Date of Sample : October 10, 2006
Condition of EUT : Engineering prototype
(Not for Sale: This sample is equivalent to mass-produced items.)
Modification of EUT : No modification by the test lab.

2.2 Product Description (Radio part)

Other clock frequencies(in RF part) : 40MHz, 32.768kHz
Equipment Type : Transceiver
Frequency of Operation : 2412-2462MHz
Bandwidth & Channel spacing : 20MHz & 5MHz
Modulation : DSSS/OFDM
Power Supply (inner) : DC 3.2V&DC1.8V (WLAN internal)
Antenna Type : Chip antenna
Antenna Connector Type : HSC (Murata)
Antenna Gain : -8 dBi

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b(14.06.06)

SECTION 3: Test specification, procedures & results

3.1 Test Specification

Test Specification : FCC Part15 Subpart C : 2006
Title : FCC 47CFR Part15 Radio Frequency Device Subpart C Intentional Radiators
Section 15.207 Conducted limits : 2006
Section 15.247 Operation within the bands 902-928MHz,
2400-2483.5MHz, and 5725-5850MHz : 2006

FCC 15.31 (e)

This EUT (Digital Still Camera) is provided with stable voltage (DC3.6V (Battery) or DC4.2V (AC Adaptor)). Through DC-DC converter, DC 3.2V&DC 1.8V (WLAN internal) is constantly converted into the RF Module part for the Operational voltage regardless of Battery or AC Adaptor. Therefore, this EUT complies with the requirement.

FCC Part 15.203 Antenna requirement

It is impossible for end users to replace the antenna, because the antenna is mounted inside of the EUT. Therefore, the equipment complies with the antenna requirement of Section 15.203.

3.2 Procedures and results

No.	Item	Test Procedure	Specification	Remarks	Deviation	Worst margin	Results
1	Conducted emission	FCC: ANSI C63.4:2003 7. AC powerline conducted emission measurements IC: RSS-Gen 7.2.2	FCC: Section 15.207 IC: RSS-Gen 7.2.2	-	N/A	13.2dB 0.19665MHz (11b Tx, L), 0.19623MHz (11g Tx, L), 0.19632MHz (11b/g Rx, L)	Complied
2	6dB Bandwidth	FCC: ANSI C63.4:2003 13. Measurement of intentional radiators IC: RSS-Gen 4.4.2	FCC: Section 15.247(a)(2) IC: RSS-210 A8.2(1)	Conducted	N/A	See data.	Complied
3	Maximum Peak Output Power	FCC: ANSI C63.4:2003 13. Measurement of intentional radiators IC: RSS-Gen 4.6	FCC: Section 15.247(b)(3) IC: RSS-210 A8.4(4)	Conducted	N/A		Complied
4	Restricted Band Edges	FCC: ANSI C63.4:2003 13. Measurement of intentional radiators IC: -	FCC: Section 15.247 (d) IC: RSS-210 A8.5	Conducted/ Radiated	N/A		Complied
5	Power Density	FCC: ANSI C63.4:2003 13. Measurement of intentional radiators IC: -	FCC: Section 15.247 (e) IC: RSS-210 A8.2(2)	Conducted	N/A		Complied
6	Spurious Emission	FCC: ANSI C63.4:2003 13. Measurement of intentional radiators IC: RSS-Gen 4.7 RSS-Gen 4.8	FCC: Section 15.247(d) IC: RSS-210 A8.5 RSS-Gen 7.2.1 and 7.2.3	Conducted/ Radiated	N/A		<Tx> 7.1dB 81.001MHz, Vertical <Rx> 9.9dB 350.996MHz, Horizontal

Note: UL Apex's EMI Work Procedures No.QPM05 and QPM15.

*0) The result is rounded off to the second decimal place. Therefore, there may be 0.1 difference for the result.

*These tests were also referred to "Guidance on Measurement of Digital Transmission Systems Operating under Section 15.247".

*These tests were performed without any deviations from test procedure except for additions or exclusions.

3.3 Addition to standards

No.	Item	Test Procedure	Specification	Remarks	Deviation	Worst margin	Results
1	99% Occupied Band Width	RSS-Gen 4.4.1	-	Conducted	N/A	N/A	N/A

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b(14.06.06)

3.4 Uncertainty

Conducted Emission

The measurement uncertainty (with a 95% confidence level) for this test is ± 2.66 dB.
The data listed in this test report has enough margin, more than the site margin.

Spurious Emission (Radiated)

The measurement uncertainty (with a 95% confidence level) for this test using Biconical antenna is ± 4.59 dB(3m).
The measurement uncertainty (with a 95% confidence level) for this test using Logperiodic antenna is ± 4.62 dB(3m).
The measurement uncertainty (with a 95% confidence level) for this test using Horn antenna is ± 5.27 dB.
The data listed in this test report has enough margin, more than the site margin.

Other test except Conducted Emission and Spurious Emission (Radiated)

The measurement uncertainty (with a 95% confidence level) for this test is ± 3.0 dB.

3.5 Test Location

UL Apex Co., Ltd. Head Office EMC Lab. *NVLAP Lab. code: 200572-0
4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116 Facsimile : +81 596 24 8124

	FCC Registration Number	IC Registration Number	Width x Depth x Height (m)	Size of reference ground plane (m) / horizontal conducting plane	Other rooms
No.1 semi-anechoic chamber	313583	IC4247A	19.2 x 11.2 x 7.7m	7.0 x 6.0m	Preparation room
No.2 semi-anechoic chamber	655103	IC4247A-2	7.5 x 5.8 x 5.2m	4.0 x 4.0m	-
No.3 semi-anechoic chamber	148738	IC4247A-3	12.0 x 8.5 x 5.9m	6.8 x 5.75m	
No.3 shielded room	-	-	4.0 x 6.0 x 2.7m	N/A	-
No.4 semi-anechoic chamber	134570	IC4247A-4	12.0 x 8.5 x 5.9m	6.8 x 5.75m	-
No.4 shielded room	-	-	4.0 x 6.0 x 2.7m	N/A	-
No.5 semi-anechoic chamber	-	-	6.0 x 6.0 x 3.9m	N/A	-
No.6 shielded room	-	-	4.0 x 4.5 x 2.7m	2.0 x 2.0 m	-
No.6 measurement room	-	-	4.75 x 5.4 x 3.0m	4.75 x 5.4 m	-
No.7 shielded room	-	-	4.7 x 7.5 x 2.7m	4.7 x 7.5m	-
No.8 measurement room	-	-	3.1 x 5.0 x 2.7m	N/A	-

* Size of vertical conducting plane (for Conducted Emission test) : 2.0 x 2.0m for No.1, No.2, No.3 and No.4 semi-anechoic chambers and No.7 shielded room.

3.6 Test set up, Test instruments and Data of EMI

Refer to APPENDIX 1 to 3.

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b(14.06.06)

SECTION 4: Operation of E.U.T. during testing

4.1 Operating Modes

The mode used for test : [DSSS and other forms of modulation]

Transmitting mode 11b (CCK 11Mbps (Worst), Packet type: Maximum, Payload: PN9)

Low Channel : 2412MHz(Ch1)

Mid Channel : 2437MHz(Ch6)

High Channel : 2462MHz(Ch11)

Transmitting mode 11g (OFDM 54Mbps (Worst), Packet type: Maximum, Payload: PN9)

Low Channel : 2412MHz(Ch1)


Mid Channel : 2437MHz(Ch6)

High Channel : 2462MHz(Ch11)

Receiving mode (11b/11g):

Mid Channel : 2437MHz(Ch6)

4.2 Configuration and peripherals

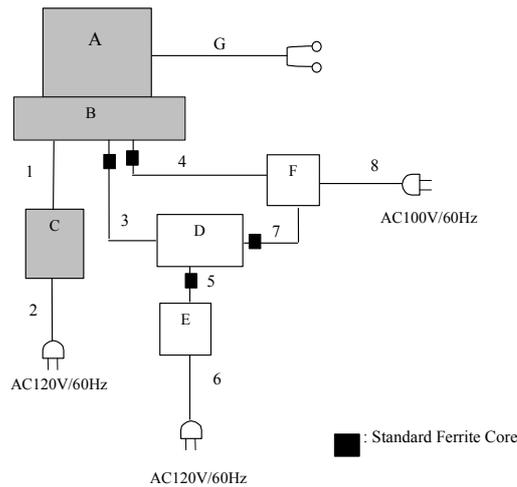

* Cabling and setup were taken into consideration and test data was taken under worse case conditions.

Description of EUT and Support equipment

No.	Item	Model number	Serial number	Manufacturer	Remarks
A	Digital Still Camera	DSC-G1	140 *1), 143 *2)	SONY	EUT
B	Cradle	UC-GA	62	SONY	EUT
C	AC Adaptor	AC-LS5	56074256	SONY	EUT
D	Note PC	2371-7VJ	KV-1936J	IBM	-
E	AC Adaptor	02K6808	11S02K6808Z1Z89H3BRAVV	IBM	-
F	LCD Monitor	LL-T1530A	1A051790	SHARP	-
G	Earphone	MDR-EX51	-	SONY	- *3)

*1) Used for Antenna terminal tests

*2) Used for Conducted and Radiated emission tests

*3) The length of the cable is 1.0. (Unshielded).

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b(14.06.06)

List of cables used

No.	Name	Length (m)	Shield	
			Cable	Connector
1	DC Cable	1.7	Unshielded	Unshielded
2	AC Cable	0.9	Unshielded	Unshielded
3	USB Cable	1.5	Shielded	Shielded
4	AV Cable	1.3	Shielded	Shielded
5	DC Cable	1.8	Unshielded	Unshielded
6	AC Cable	1.0	Unshielded	Unshielded
7	Monitor Cable	1.5	Shielded	Shielded
8	AC Cable	2.4	Unshielded	Unshielded

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b(14.06.06)

SECTION 5: Conducted Emission

Test Procedure and conditions

EUT was placed on a wooden table of nominal size, 1m by 1.5m, raised 80cm above the conducting ground plane. The rear of tabletop was located 40cm to the vertical conducting plane. The rear of EUT, including peripherals aligned and flushed with rear of tabletop. All other surfaces of tabletop were at least 80cm from any other grounded conducting surface. EUT was located 80cm from a Line Impedance Stabilization Network (LISN)/ Artificial mains Network (AMN) and excess AC cable was bundled in center.

For the tests on EUT with other peripherals (as a whole system)

I/O cable and AC cables that were connected to the peripherals were bundled in center. They were folded back and forth forming a bundle 30cm to 40cm long and were hanged at a 40cm height to the ground plane. All unused 50ohm connectors of the LISN(AMN) were resistivity terminated in 50ohm when not connected to the measuring equipment.

The AC Mains Terminal Continuous disturbance Voltage has been measured with the EUT in a Semi Anechoic Chamber or a Measurement Room.

The EUT was connected to a LISN (AMN).

An overview sweep with peak detection has been performed.

Detector : CISPR quasi-peak and average detector (IF BW 9 kHz)
Measurement range : 0.15-30MHz
Test data : APPENDIX 2
Test result : Pass

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b(14.06.06)

SECTION 6: Spurious Emission

[Conducted]

Test Procedure

The Out of Band Emission was measured with a spectrum analyzer connected to the antenna port.

Test data : APPENDIX 2

Test result : Pass

[Radiated]

Test Procedure

EUT was placed on a urethane platform of nominal size, 0.5m by 1.0m, raised 80cm above the conducting ground plane. The Radiated Electric Field Strength intensity has been measured in a Semi Anechoic Chamber with a ground plane and at a distance of 3m(Below 10GHz) and 1m(Upper 10GHz).

The height of the measuring varied between 1 and 4m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field intensity.

The measurements were performed for both vertical and horizontal antenna polarization with the Test Receiver, or the Spectrum Analyzer (in linear mode).

The test was made with the detector (RBW/VBW) in the following table.

When using Spectrum analyzer, the test was made with adjusting span to zero by using peak hold.

In any 100kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator confirmed 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on a radiated measurement.

20dBc was applied to the frequency over the limit of FCC 15.209 and outside the restricted band of FCC15.205.

Frequency	Below 1GHz	Above 1GHz
Instrument used	Test Receiver / Spectrum Analyzer	Spectrum Analyzer
Detector	QP: BW 120kHz(T/R)	PK: RBW:1MHz/VBW: 1MHz
IF Bandwidth	20dBc : RBW: 100kHz VBW: 300kHz (S/A)	AV: RBW:1MHz/VBW:10Hz 20dBc : RBW:100kHz/VBW:300kHz

- The carrier level and noise levels were confirmed at each position of X, Y and Z axes of EUT to see the position of maximum noise, and the test was made at the position that has the maximum noise.

Test data : APPENDIX 2

Test result : Pass

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b(14.06.06)

SECTION 7: Bandwidth

Test Procedure

The bandwidth was measured with a spectrum analyzer connected to the antenna port.

Test data : APPENDIX 2
Test result : Pass

SECTION 8: Maximum Peak Output Power

Test Procedure

The Maximum Peak Output Power was measured with a power meter (tested bandwidth: 50MHz) connected to the antenna port.

Test data : APPENDIX 2
Test result : Pass

SECTION 9: Peak Power Density

[Conducted]

Test Procedure

The Peak Power Density was measured with a spectrum analyzer connected to the antenna port.

Test data : APPENDIX 2
Test result : Pass

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b(14.06.06)