



FCC ID:AK8GTKXB90

AUDIX Technology (Shenzhen) Co., Ltd.

FCC PART 15C TEST REPORT FOR CERTIFICATION
On Behalf of

Sony Corporation

Home Audio System

GTK-XB90

FCC ID: AK8GTKXB90

Prepared for : Sony Corporation
1-7-1 Konan Minato-ku Tokyo, 108-0075 Japan

Prepared By : Audix Technology (Shenzhen) Co., Ltd.
No. 6, Kefeng Road, Science & Technology Park,
Nanshan District, Shenzhen, Guangdong, China

Tel: (0755) 26639496

Report Number : ACS-F17048
Date of Test : Mar.16~22, 2017
Date of Report : May.10, 2017

TABLE OF CONTENTS

Description	Page
1. SUMMARY OF STANDARDS AND RESULTS.....	1-1
1.1. Description of Standards and Results	1-1
2. GENERAL INFORMATION	2-1
2.1. Description of Device (EUT).....	2-1
2.2. Tested Supporting System Details	2-2
2.3. Block Diagram of connection between EUT and simulators.....	2-2
2.4. Test information.....	2-2
2.5. Test Facility	2-3
2.6. Measurement Uncertainty (95% confidence levels, k=2).....	2-3
3. POWER LINE CONDUCTED EMISSION TEST	3-1
3.1. Test Equipments.....	3-1
3.2. Block Diagram of Test Setup.....	3-1
3.3. Power Line Conducted Emission Test Limits.....	3-2
3.4. Configuration of EUT on Test	3-2
3.5. Operating Condition of EUT	3-2
3.6. Test Procedure	3-2
3.7. Power Line Conducted Emission Test Results	3-2
4. RADIATED EMISSION MEASUREMENT.....	4-1
4.1. Test Equipments.....	4-1
4.2. Block Diagram of Test Setup.....	4-1
4.3. Radiated Emission Limit Standard:	4-3
4.4. EUT Configuration on Test	4-3
4.5. Operating Condition of EUT	4-3
4.6. Test Procedure	4-3
4.7. Radiated Emission Test Results.....	4-4
5. CONDUCTED SPURIOUS EMISSIONS.....	5-1
5.1. Test Equipments.....	5-1
5.2. Limit.....	5-1
5.3. Test Procedure	5-1
5.4. Test result.....	5-1
6. 20 DB BANDWIDTH TEST	6-1
6.1. Test Equipments.....	6-1
6.2. Limit.....	6-1
6.3. Test Procedure	6-1
6.4. Test Results.....	6-1
7. CARRIER FREQUENCY SEPARATION TEST	7-1
7.1. Test Equipments.....	7-1
7.2. Limit.....	7-1
7.3. Test Procedure	7-1
7.4. Test Results.....	7-2
8. NUMBER OF HOPPING FREQUENCY TEST	8-1
8.1. Test Equipments.....	8-1
8.2. Limit.....	8-1
8.3. Test Procedure	8-1

8.4.	Test Results	8-1
9.	DWELL TIME	9-1
9.1.	Test Equipments.....	9-1
9.2.	Limit.....	9-1
9.3.	Test Procedure	9-1
9.4.	Test Results	9-1
10.	MAXIMUM PEAK OUTPUT POWER TEST	10-1
10.1.	Test Equipments.....	10-1
10.2.	Limit.....	10-1
10.3.	Test Procedure	10-1
10.4.	Test Results	10-1
11.	BAND EDGE COMPLIANCE TEST	11-1
11.1.	Test Equipments.....	11-1
11.2.	Limit.....	11-1
11.3.	Test Produce.....	11-1
11.4.	Test Results	11-1
12.	ANTENNA REQUIREMENT	12-1
12.1.	Standard Applicable.....	12-1
12.2.	Antenna Connected Construction	12-1
13.	DEVIATION TO TEST SPECIFICATIONS.....	13-1
14.	PHOTOGRAPH OF TEST	14-1
14.1.	Photos of Power Line Conducted Emission Test.....	14-1
14.2.	Photos of Radiated Emission Test	14-3
15.	PHOTOGRAPHS OF EUT	15-1

TEST REPORT CERTIFICATION

Applicant : Sony Corporation
Manufacturer : Sony Corporation
Product : Home Audio System
FCC ID : AK8GTKXB90
(A) Model No. : GTK-XB90
(B) Serial No. : N/A
(C) Test Voltage : AC 120V/60Hz

Tested for comply with:
FCC CRF 47 Part 15 Subpart C: 2016

Test procedure used:
ANSI C63.10: 2013

The device described above is tested by AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. to confirm comply with all the FCC Part 15 Subpart C requirements. The test results are contained in this test report and AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. is assumed full responsibility for the accuracy and completeness of these tests. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC and IC requirements. This report contains data that are not covered by the NVLAP accreditation.

This Report is made under FCC Part 2.1075. No modifications were required during testing to bring this product into compliance.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government.

Date of Test : Mar.16~22, 2017 Report of date: May.10, 2017

Prepared by : Monica Liu (for) Reviewed by : [Signature]
Cindy Zhu / Assistant Sunny Lu / Deputy Manager



Approved & Authorized Signer : David Jin
David Jin / Manager

1. SUMMARY OF STANDARDS AND RESULTS

1.1. Description of Standards and Results

The EUT has been tested according to the applicable standards as referenced below.

EMISSION		
Description of Test Item	Standard	Results
Power Line Conducted Emission Test	FCC Part 15: 15.207 ANSI C63.10 2013	PASS
Radiated Emission Test	FCC Part 15 15.209 FCC Part 15 15.247(d) ANSI C63.10 2013	PASS
Conducted Spurious Emissions	FCC Part 15: 15.247(a)(1) ANSI C63.10 2013	PASS
Carrier Frequency Separation Test	FCC Part 15: 15.247(a)(1) ANSI C63.10 2013	PASS
20dB Bandwidth Test	FCC Part 15: 15.215 ANSI C63.10 2013	PASS
Number Of Hopping Frequency Test	FCC Part 15: 15.247(a)(1)(iii) ANSI C63.10 2013	PASS
Dwell Time Test	FCC Part 15: 15.247(a)(1)(iii) ANSI C63.10 2013	PASS
Maximum Peak Output Power Test	FCC Part 15 15.247(b)(1)\ ANSI C63.10 2013	PASS
Band Edge Compliance Test	FCC Part 15 15.247(d) ANSI C63.10 2013	PASS

2. GENERAL INFORMATION


2.1. Description of Device (EUT)

Product	: Home Audio System
Model No.	: GTK-XB90
FCC ID	: AK8GTKXB90
Radio	: Bluetooth V3.0+EDR Bluetooth V4.2 NFC Rx
Operation Frequency	: 2402-2480MHz for Bluetooth 13.56MHz for NFC
Channel Number	: Bluetooth V3.0+EDR: 79 channels Bluetooth V4.2: 40 channels NFC: 1 channel
Modulation Technology	: Bluetooth V3.0+EDR: GFSK, $\pi/4$ DQPSK, 8DPSK; Bluetooth V4.2: GFSK NFC: ASK
Antenna Assembly Gain	: Integrated PCB Antenna, 1.927dBi PK gain
Applicant	: Sony Corporation 1-7-1 Konan Minato-ku Tokyo, 108-0075 Japan
Manufacturer	: Sony Corporation 1-7-1 Konan Minato-ku Tokyo, 108-0075 Japan
AC Cable	: Unshielded, Undetachable 2.0m
Date of Test	: Mar.16~22, 2017
Date of Receipt	: Mar.14, 2017
Remark	: This report only for Bluetooth V3.0+EDR.

2.2. Tested Supporting System Details

No.	Description	ACS No.	Manufacturer	Model	Serial Number
1.	USB Mp3	---	Sony	BNP-1	---
		USB Cable: Shielded, Detachable, 1.0m			
2.	Walkman	---	SONY	NWZ-E360	---
		Audio Cable: Shielded, Detachable, 1.0m			
3.	Microphone	ACS-EMC-MIC0 1	SONCN	SM-300	---
		MIC Cable: Shielded, Undetachable, 1.7m			

2.3. Block Diagram of connection between EUT and simulators

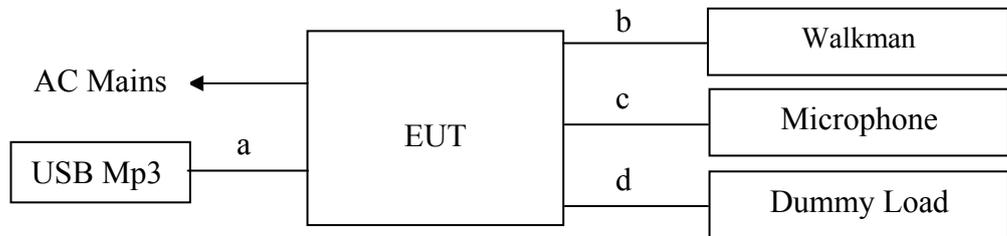

- a: USB Cable
- b: Audio In Cable
- c : MIC Cable
- d : Audio Out Cable

(EUT: Home Audio System)

2.4. Test information

A special software was used to control EUT work in Continuous TX mode(GFSK, $\pi/4$ DQPSK,8-DPSK Modulation), and select test channel.

Tested mode, channel, and data rate information			
Mode	data rate (Mbps)	Channel	Frequency (MHz)
Tx Mode GFSK modulation	1	Low :CH 0	2402
	1	Middle: CH39	2441
	1	High: CH78	2480
Tx Mode 8-DPSK modulation	3	Low :CH 0	2402
	3	Middle: CH39	2441
	3	High: CH78	2480

Note: $\pi/4$ DQPSK modulation is same type modulation with 8-DPSK, and according exploratory test, 8-DPSK will have worse emissions, so the final test were only performed with GFSK and 8-DPSK modulation.

2.5. Test Facility

Site Description

Name of Firm : Audix Technology (Shenzhen) Co., Ltd.
 No. 6, Kefeng Road, Science & Technology
 Park, Nanshan District, Shenzhen, Guangdong,
 China

3m Anechoic Chamber : Certificated by FCC, USA
 Registration Number: 90454
 Valid Date: Jul.12, 2017

3m & 10m Anechoic Chamber : Certificated by FCC, USA
 Registration Number: 794232
 Valid Date: Jul.12, 2017

EMC Lab. : Certificated by Industry Canada
 Registration Number: IC 5183A-1
 Valid Date: May.14, 2017

: Certificated by DAkkS, Germany
 Registration No: D-PL-12151-01-00
 Valid Date: Dec.07, 2021

: Accredited by NVLAP, USA
 NVLAP Code: 200372-0
 Valid Date: Mar.31, 2018

2.6. Measurement Uncertainty (95% confidence levels, k=2)

Test Item	Uncertainty
Uncertainty for Conduction emission test in No. 1 Conduction	3.2dB (150KHz to 30MHz)
Uncertainty for Radiation Emission test in 3m chamber	2.8dB (30~200MHz, Polarization: H)
	2.8dB (30~200MHz, Polarization: V)
	3.0dB (200M~1GHz, Polarization: H)
	3.0dB (200M~1GHz, Polarization: V)
Uncertainty for Radiation Emission test in 3m chamber (1GHz-18GHz)	5.8dB (1~6GHz, Distance: 3m)
	5.8dB (6~18GHz, Distance: 3m)
Uncertainty for Radiated Spurious Emission test in RF chamber	3.6dB
Uncertainty for Conduction Spurious emission test	2.0dB
Uncertainty for Output power test	0.8dB
Uncertainty for Bandwidth test	83 kHz
Uncertainty for DC power test	0.1 %
Uncertainty for test site temperature and humidity	0.6
	3%

3. POWER LINE CONDUCTED EMISSION TEST


3.1. Test Equipments

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	1# Shielding Room	AUDIX	N/A	N/A	Apr.17,16	1 Year
2.	Test Receiver	Rohde & Schwarz	ESCI	100842	Apr.24,16	1 Year
3.	L.I.S.N.#1	Rohde & Schwarz	ESH2-Z5	100429	Oct.15,16	1 Year
4.	L.I.S.N.#3	Kyoritsu	KNW-242C	8-1920-1	Apr.24,16	1 Year
5.	Terminator	Hubersuhner	50Ω	No.1	May.05,16	1 Year
6.	Terminator	Hubersuhner	50Ω	No.2	May.05,16	1 Year
7.	RF Cable	MIYAZAKI	3D-2W	No.1	Apr.24,16	1 Year
8.	Coaxial Switch	Anritsu	MP59B	6200766906	Apr.23,16	1 Year
9.	Test Software	AUDIX	e3	6.100913a	N/A	N/A


Note: N/A means Not applicable.

3.2. Block Diagram of Test Setup

EUT is Horizontal:

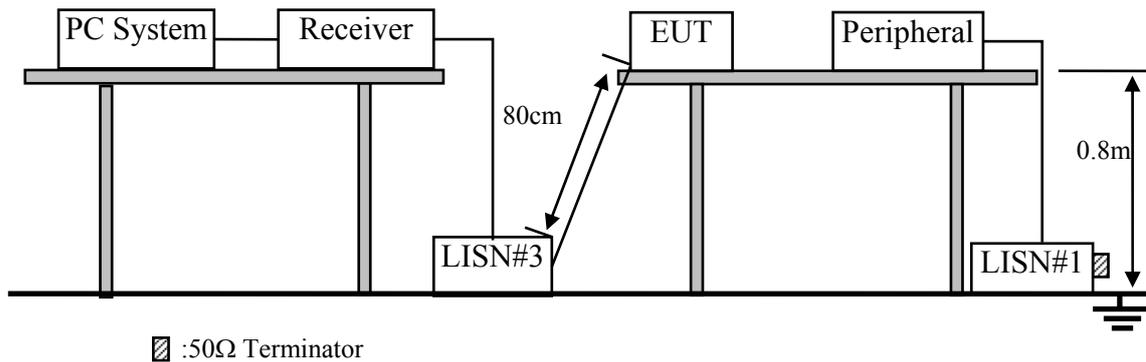

EUT is Vertical:

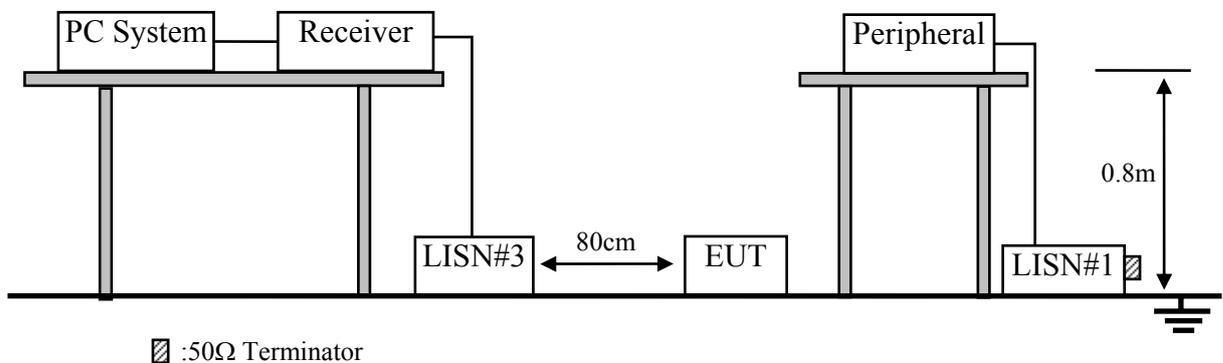

3.3. Power Line Conducted Emission Test Limits

Frequency	Maximum RF Line Voltage	
	Quasi-Peak Level dB(μ V)	Average Level dB(μ V)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

Notes: 1. * Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.

3.4. Configuration of EUT on Test

The following equipment are installed on Power Line Conducted Emission Test to meet the commission requirement and operating regulations in a manner which tends to maximize its emission characteristics in a normal application.

3.4.1. Home Audio System (EUT)

Model No. : GTK-XB90
Serial No. : N/A

3.4.2. Support Equipment: As Tested Supporting System Details, in Section 2.2.

3.5. Operating Condition of EUT

3.5.1. Setup the EUT and simulator as shown as Section 3.2.

3.5.2. Turn on the power of all equipments.

3.5.3. PC run test software to control EUT work in BT 3.0 Tx mode.

3.6. Test Procedure


When the EUT is Horizontal, it was placed on a non-metallic table, 80cm above the ground plane. When the EUT is Vertical, it was placed on ground plane that it was floor-standing equipment. The EUT Power Via PC connected to the power mains through a line impedance stabilization network (L.I.S.N. 1#). This provides a 50 ohm coupling impedance for the EUT (Please refer the block diagram of the test setup and photographs). The AC lines are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.10: 2013 on Conducted Emission Test.

The bandwidth of test receiver (R & S ESCI) is set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.

3.7. Power Line Conducted Emission Test Results


PASS. (All emissions not reported below are too low against the prescribed limits.)

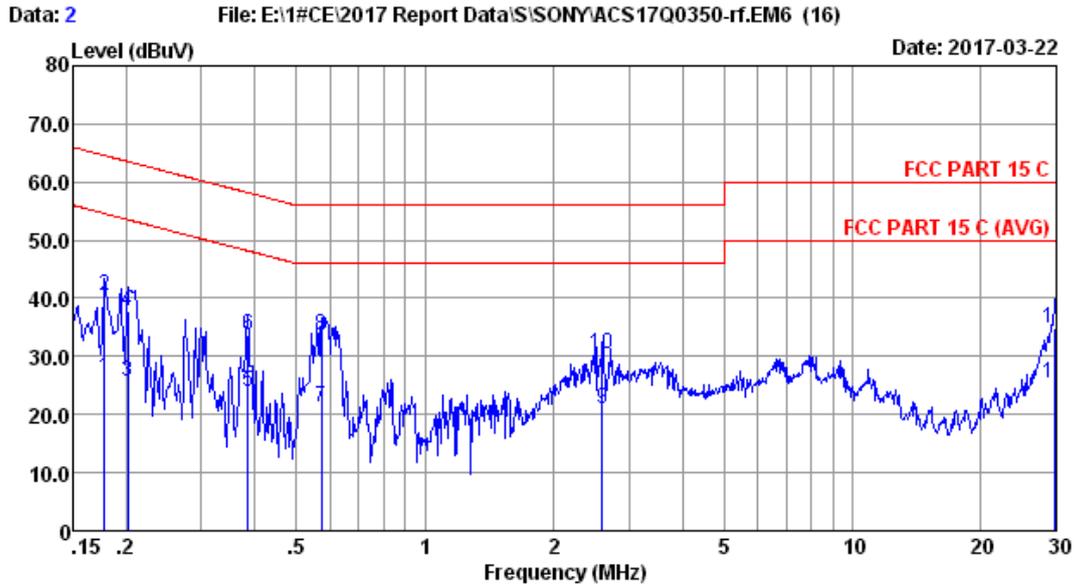

Site no :1# Conduction
 Dis./Lisn :2016 KNW-242C VA
 Limit :FCC PART 15 C
 Env./Ins. :22.5°C/50% Engineer :WILL
 EUT :Home Audio System M/M:GTK-XB90
 Power Rating :AC 120V/60Hz
 Test Mode :Tx Mode
 Horizontal

No	Freq (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.178	0.15	0.02	26.25	26.42	54.59	28.17	Average
2	0.178	0.15	0.02	40.22	40.39	64.59	24.20	QP
3	0.202	0.15	0.02	25.59	25.76	53.54	27.78	Average
4	0.202	0.15	0.02	37.65	37.82	63.54	25.72	QP
5	0.385	0.16	0.03	23.80	23.99	48.17	24.18	Average
6	0.385	0.16	0.03	33.59	33.78	58.17	24.39	QP
7	0.573	0.16	0.04	20.93	21.13	46.00	24.87	Average
8	0.573	0.16	0.04	33.35	33.55	56.00	22.45	QP
9	2.594	0.19	0.08	20.82	21.09	46.00	24.91	Average
10	2.594	0.19	0.08	30.20	30.47	56.00	25.53	QP
11	29.841	0.96	0.25	24.30	25.51	50.00	24.49	Average
12	29.841	0.96	0.25	33.73	34.94	60.00	25.06	QP


Remarks: 1.Emission Level=LISN Factor+Cable Loss+Reading.
 2.If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

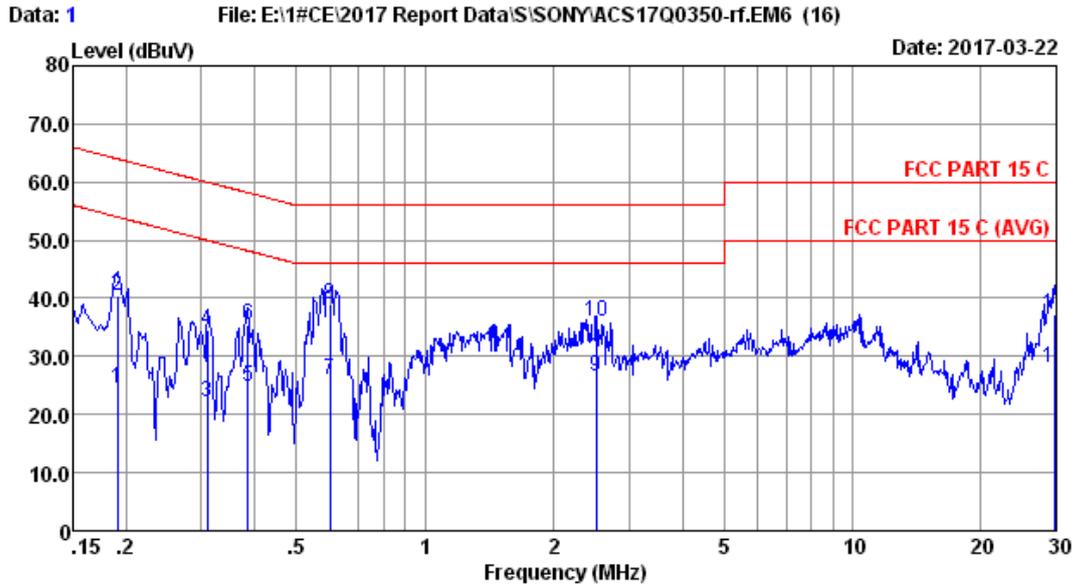

Site no :1# Conduction
 Dis./Lisn :2016 KNW-242C VB
 Limit :FCC PART 15 C
 Env./Ins. :22.5°C/50% Engineer :WILL
 EUT :Home Audio System M/M:GTK-XB90
 Power Rating :AC 120V/60Hz
 Test Mode :Tx Mode
 Horizontal

No	Freq (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.190	0.38	0.02	24.02	24.42	54.02	29.60	Average
2	0.190	0.38	0.02	40.11	40.51	64.02	23.51	QP
3	0.310	0.40	0.02	21.58	22.00	49.97	27.97	Average
4	0.310	0.40	0.02	34.16	34.58	59.97	25.39	QP
5	0.385	0.41	0.03	24.28	24.72	48.17	23.45	Average
6	0.385	0.41	0.03	35.03	35.47	58.17	22.70	QP
7	0.598	0.43	0.04	25.58	26.05	46.00	19.95	Average
8	0.598	0.43	0.04	38.38	38.85	56.00	17.15	QP
9	2.513	0.48	0.08	25.92	26.48	46.00	19.52	Average
10	2.513	0.48	0.08	35.36	35.92	56.00	20.08	QP
11	29.841	1.15	0.25	26.71	28.11	50.00	21.89	Average
12	29.841	1.15	0.25	35.68	37.08	60.00	22.92	QP


Remarks: 1.Emission Level=LISN Factor+Cable Loss+Reading.
 2.If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

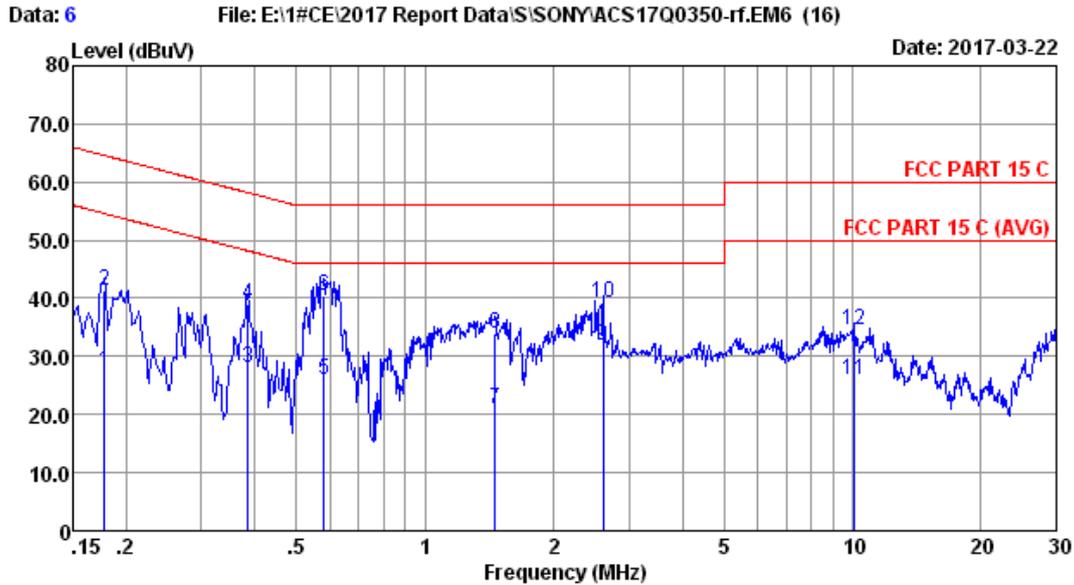

Site no :1# Conduction
 Dis./Lisn :2016 KNW-242C VA
 Limit :FCC PART 15 C
 Env./Ins. :22.5°C/50% Engineer :WILL
 EUT :Home Audio System M/M:GTK-XB90
 Power Rating :AC 120V/60Hz
 Test Mode :Tx Mode
 Vertical

No	Freq (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.178	0.15	0.02	27.22	27.39	54.59	27.20	Average
2	0.178	0.15	0.02	41.28	41.45	64.59	23.14	QP
3	0.385	0.16	0.03	27.76	27.95	48.17	20.22	Average
4	0.385	0.16	0.03	38.70	38.89	58.17	19.28	QP
5	0.579	0.16	0.04	25.80	26.00	46.00	20.00	Average
6	0.579	0.16	0.04	40.26	40.46	56.00	15.54	QP
7	1.456	0.19	0.07	20.70	20.96	46.00	25.04	Average
8	1.456	0.19	0.07	33.56	33.82	56.00	22.18	QP
9	2.608	0.19	0.08	31.50	31.77	46.00	14.23	Average
10	2.608	0.19	0.08	39.12	39.39	56.00	16.61	QP
11	10.072	0.29	0.14	25.58	26.01	50.00	23.99	Average
12	10.072	0.29	0.14	34.25	34.68	60.00	25.32	QP

Remarks: 1.Emission Level=LISN Factor+Cable Loss+Reading.
 2.If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

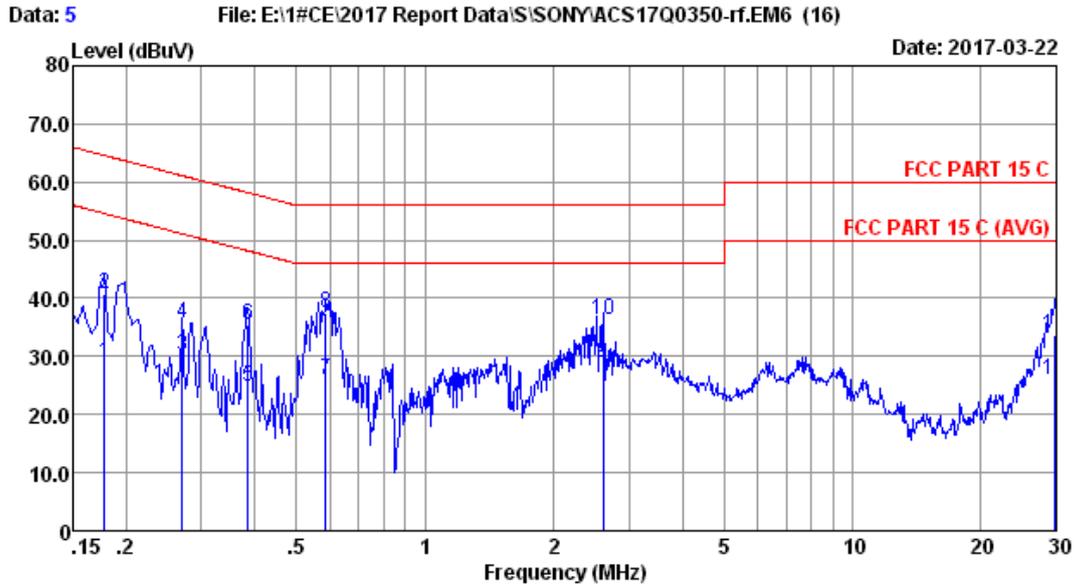

Site no :1# Conduction
 Dis./Lisn :2016 KNW-242C VB
 Limit :FCC PART 15 C
 Env./Ins. :22.5°C/50% Engineer :WILL
 EUT :Home Audio System M/M:GTK-XB90
 Power Rating :AC 120V/60Hz
 Test Mode :Tx Mode
 Vertical

No	Freq (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.178	0.38	0.02	28.58	28.98	54.59	25.61	Average
2	0.178	0.38	0.02	40.45	40.85	64.59	23.74	QP
3	0.270	0.39	0.02	29.58	29.99	51.12	21.13	Average
4	0.270	0.39	0.02	35.32	35.73	61.12	25.39	QP
5	0.385	0.41	0.03	24.39	24.83	48.17	23.34	Average
6	0.385	0.41	0.03	35.05	35.49	58.17	22.68	QP
7	0.585	0.43	0.04	25.39	25.86	46.00	20.14	Average
8	0.585	0.43	0.04	37.08	37.55	56.00	18.45	QP
9	2.608	0.48	0.08	28.50	29.06	46.00	16.94	Average
10	2.608	0.48	0.08	35.79	36.35	56.00	19.65	QP
11	29.841	1.15	0.25	24.70	26.10	50.00	23.90	Average
12	29.841	1.15	0.25	32.37	33.77	60.00	26.23	QP

Remarks: 1.Emission Level=LISN Factor+Cable Loss+Reading.
 2.If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

4. RADIATED EMISSION MEASUREMENT

4.1. Test Equipments

Frequency range: 30~1000MHz

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	3#Chamber	AUDIX	N/A	N/A	Mar.28,17	1 Year
2.	EMI Spectrum	Agilent	E4407B	MY41440292	Apr.24,16	1 Year
3.	Test Receiver	Rohde & Schwarz	ESVS10	834468/011	Apr.24,16	1 Year
4.	Amplifier	HP	8447D	2648A04738	Apr.24,16	1 Year
5.	Tri-log-Broadband Antenna	SCHWARZBECK	VULB 9168	9168-710	Jul.20,16	1 Year
6.	RF Cable	MIYAZAKI	CFD400-N W(3.5M)	No.3	Apr.24,16	1 Year
7.	RF Cable	MIYAZAKI	CFD400-L W(22M)	No.7	Apr.24,16	1 Year
8.	Coaxial Switch	Anritsu	MP59B	6201397222	Apr.23,16	1 Year
9.	Test Software	AUDIX	e3	6.2009-5-21a(n)	N/A	N/A

Note: N/A means Not applicable.

Frequency range: above 1000MHz


Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum Analyzer	Agilent	E4446A	US44300459	Apr.24,16	1 Year
2.	Amplifier	Agilent	8449B	3008A02495	Apr.24,16	1 Year
3.	RF Cable	Hubersuhner	SUCOFLEX104	274094/4	Apr.24,16	1 Year
4.	Horn Antenna	ETS	3116	00060089	Nov.16,16	1 Year
5.	Horn Antenna	ETC	MCTD 1209	DRH15F03006	Apr.11,16	1 Year
6.	Test Software	AUDIX	e3	6.2009-5-21a(n)	N/A	N/A

Note: N/A means Not applicable.


4.2. Block Diagram of Test Setup

EUT is Horizontal:

For frequency range 30MHz-1000MHz

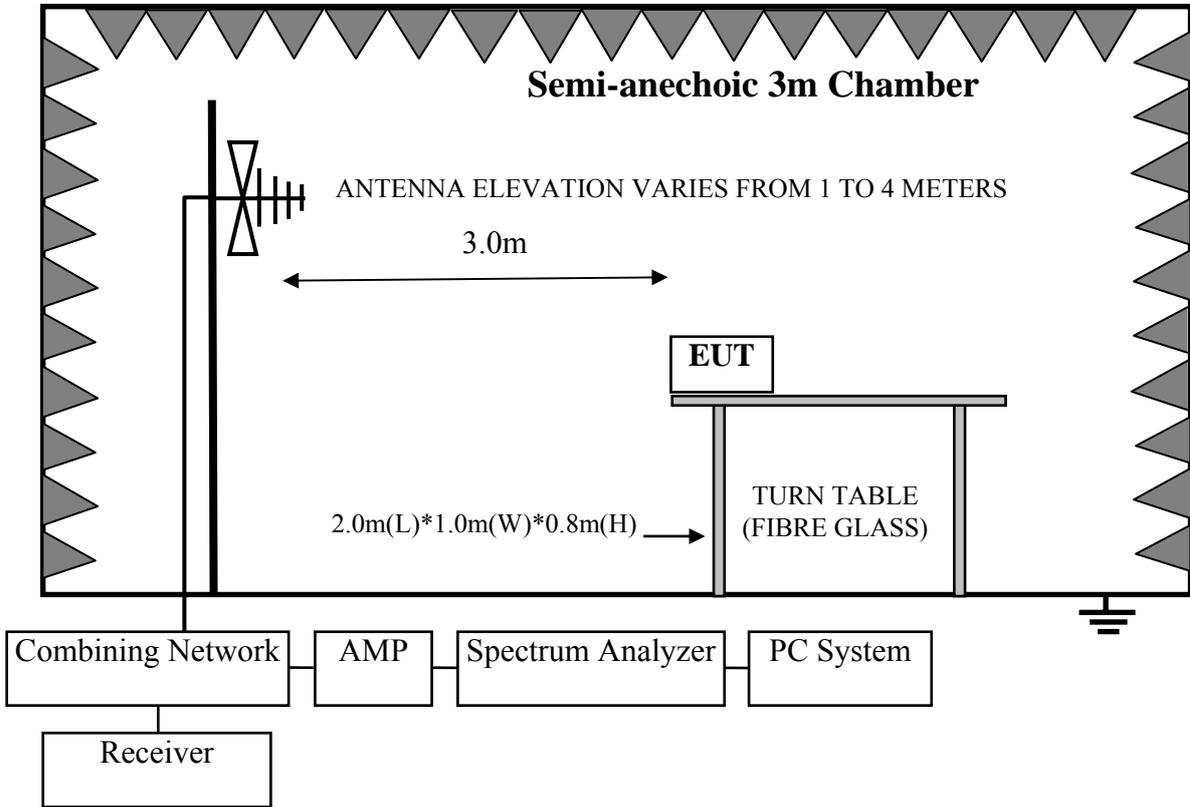


For frequency range 1GHz-25GHz

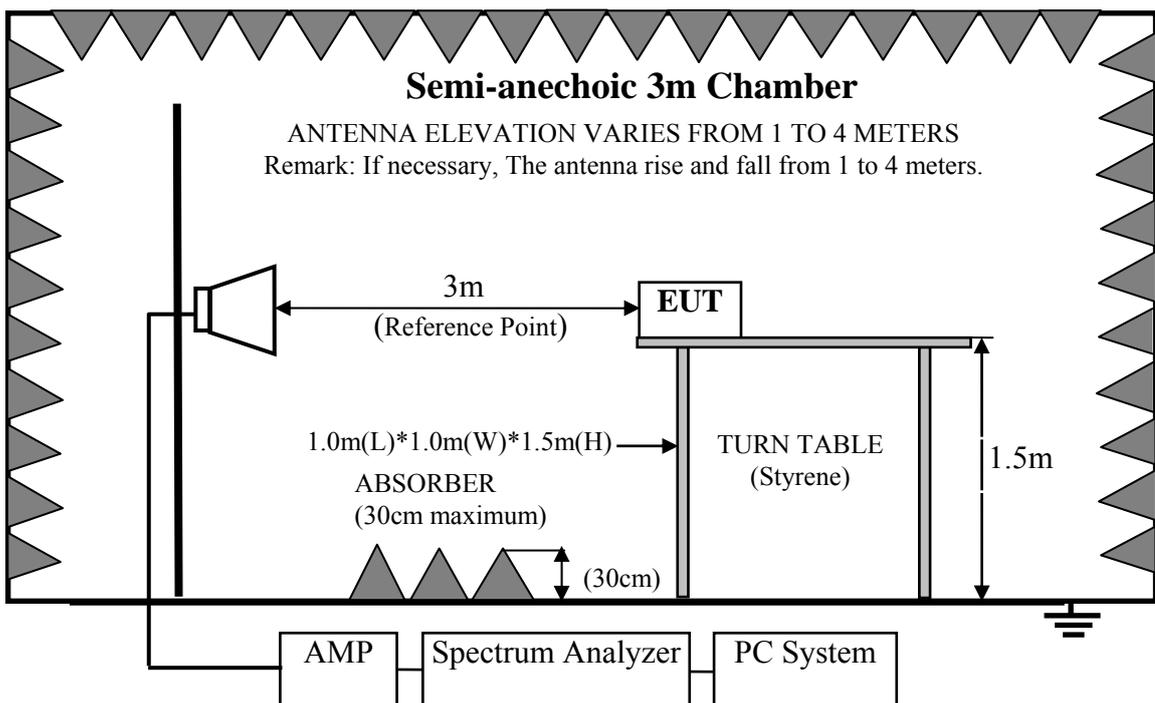


EUT is Vertical:

For frequency range 30MHz-1000MHz

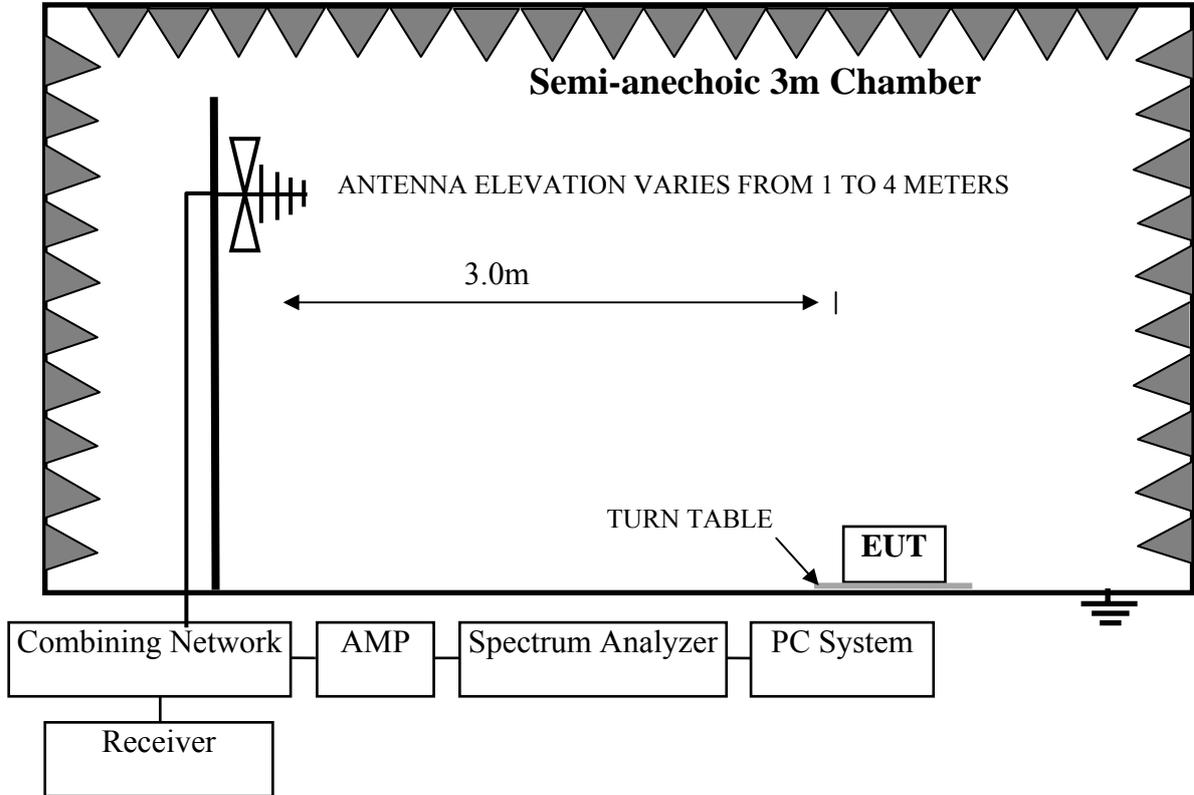

For frequency range 1GHz-25GHz

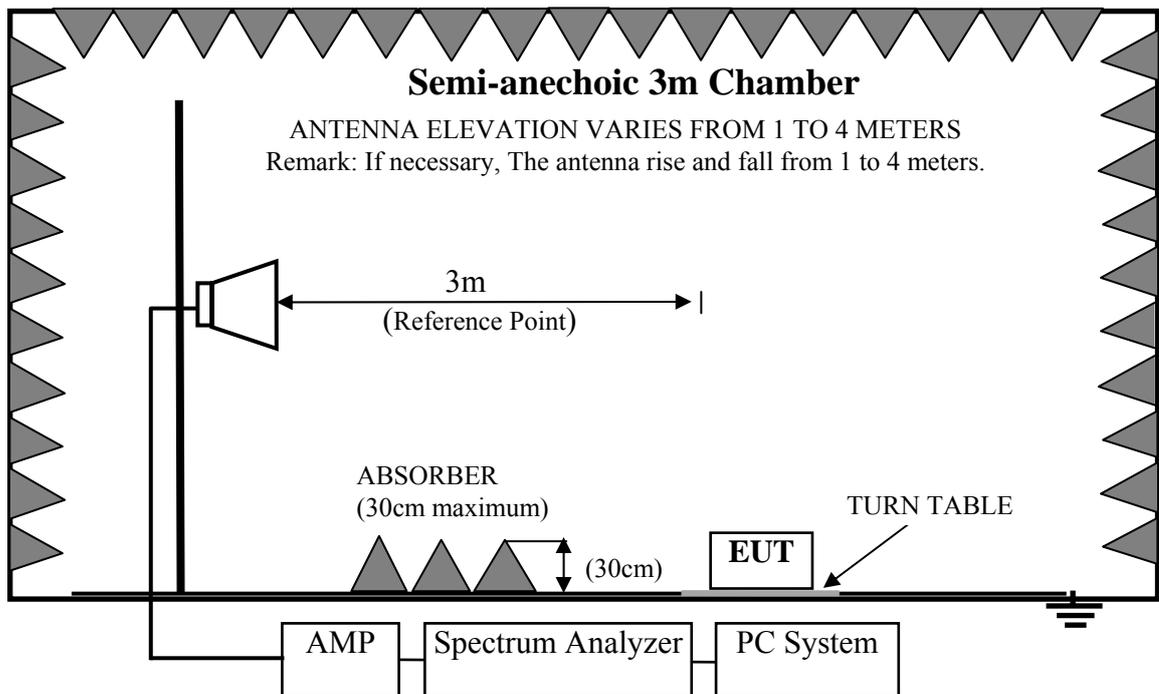

4.3. Radiated Emission Limit Standard:

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		μV/m	dB(μV)/m
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000MHz	3	74.0 dB(μV)/m (Peak) 54.0 dB(μV)/m (Average)	

- Remark :
- (1) Emission level $\text{dB}\mu\text{V} = 20 \log \text{Emission level } \mu\text{V/m}$
 - (2) The smaller limit shall apply at the cross point between two frequency bands.
 - (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.
 - (4) The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

4.4. EUT Configuration on Test

The following equipment are installed on Radiated Emission Test to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

4.4.1. Home Audio System (EUT)

Model No. : GTK-XB90
 Serial No. : N/A

4.5. Operating Condition of EUT

- 4.5.1. Setup the EUT and simulator as shown as Section 4.2.
- 4.5.2. Turn on the power of all equipments.
- 4.5.3. Let EUT work in BT 3.0 Tx mode.

4.6. Test Procedure

When the EUT is Horizontal, it and its simulators are placed on a turn table, which is 0.8 meter high above ground for frequency 30MHz~1000MHz, 1.5 meter high above ground for frequency above 1GHz and put the absorbing with 2.4m(L)*2.4m(W)*0.3m(H) on the ground . When the EUT is Vertical, it and its simulators are placed on a turn table. The turn table can rotate 360 degrees to determine the position of the maximum emission level. Power on the EUT and let it working in test mode, then test it. EUT is set 3 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna for frequency 30MHz~1000MHz, and the Horn antenna is used as receiving antenna for frequency above 1GHz. Both horizontal and vertical polarization of the antenna is set on Test. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.10-2013 on radiated emission Test.

This test was performed with EUT in X, Y, Z position, and the worse case was found when EUT in X position as the test photo indicated.

The bandwidth of the EMI test receiver (R&S ESVS10) is set at 120kHz for frequency range from 30MHz to 1000MHz.

The bandwidth of the Spectrum's RBW is set at 1MHz and VBW is set at 3MHz for peak emissions measurement above 1GHz

This device is pulse Modulated, a duty cycle factor was used to calculated average level based measured peak level.

The frequency range from 30MHz to 10th harmonic (25GHz) are checked. and no any emissions were found from 18GHz to 25 GHz, So the radiated emissions from 18GHz to 25GHz were not record.



4.7.Radiated Emission Test Results

PASS.

All the emissions from 30MHz to 25GHz were comply with the 15.209 Limit.

Note: The duty cycle factor for calculate average level is -24.568dB, and average limit is 20dB below peak limit, so if peak measured level comply with average limit, the average level was deemed to comply with average limit.

Duty cycle factor = $20\log(\text{Dwell time}/100\text{ms}) = -24.568\text{dB}$

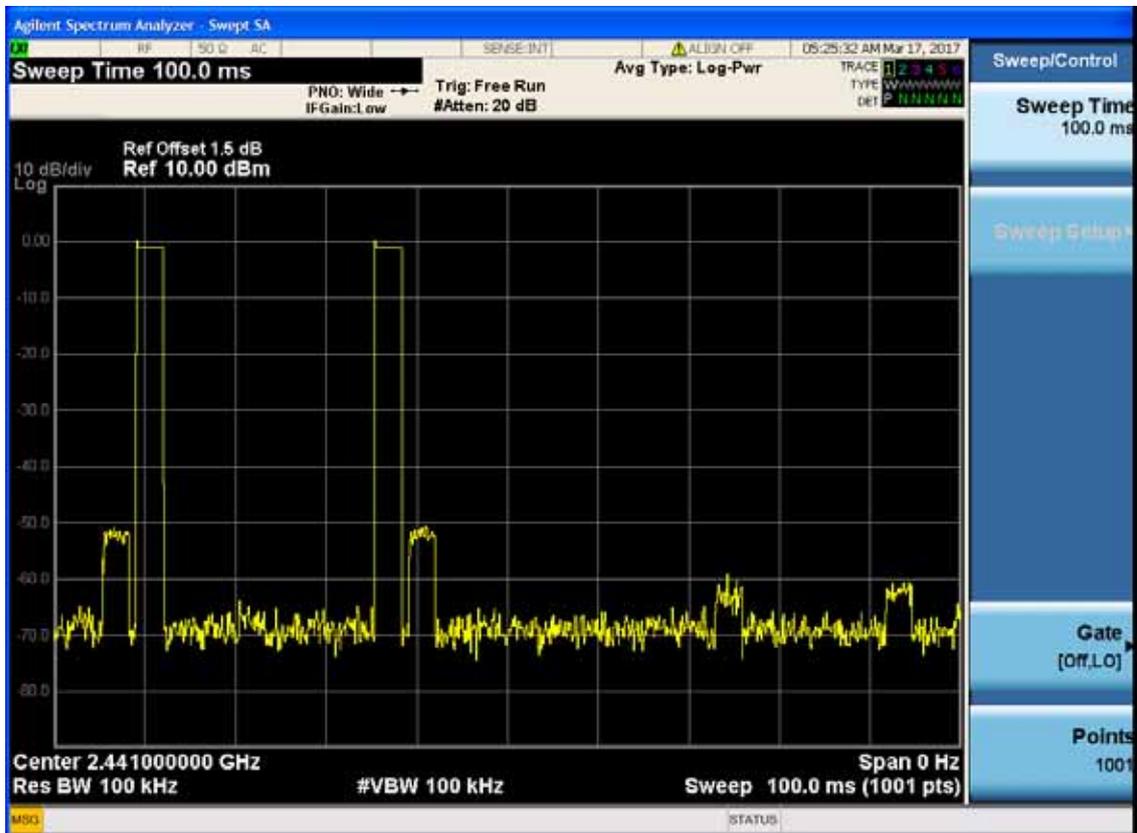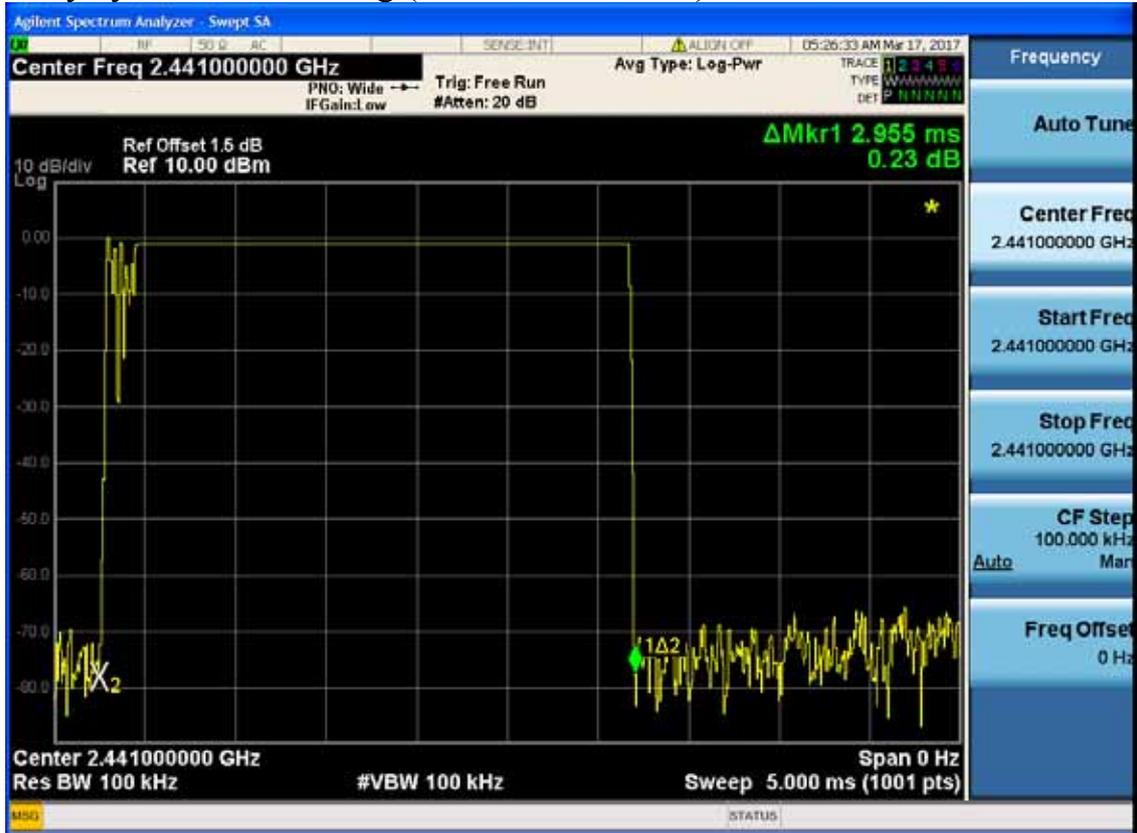


Frequency: 30MHz~1GHz

Data: 2

File: E:\2017 Report Data\S\Sony\ACS17Q0350-rf.EM6 (8)


Date: 2017-03-21

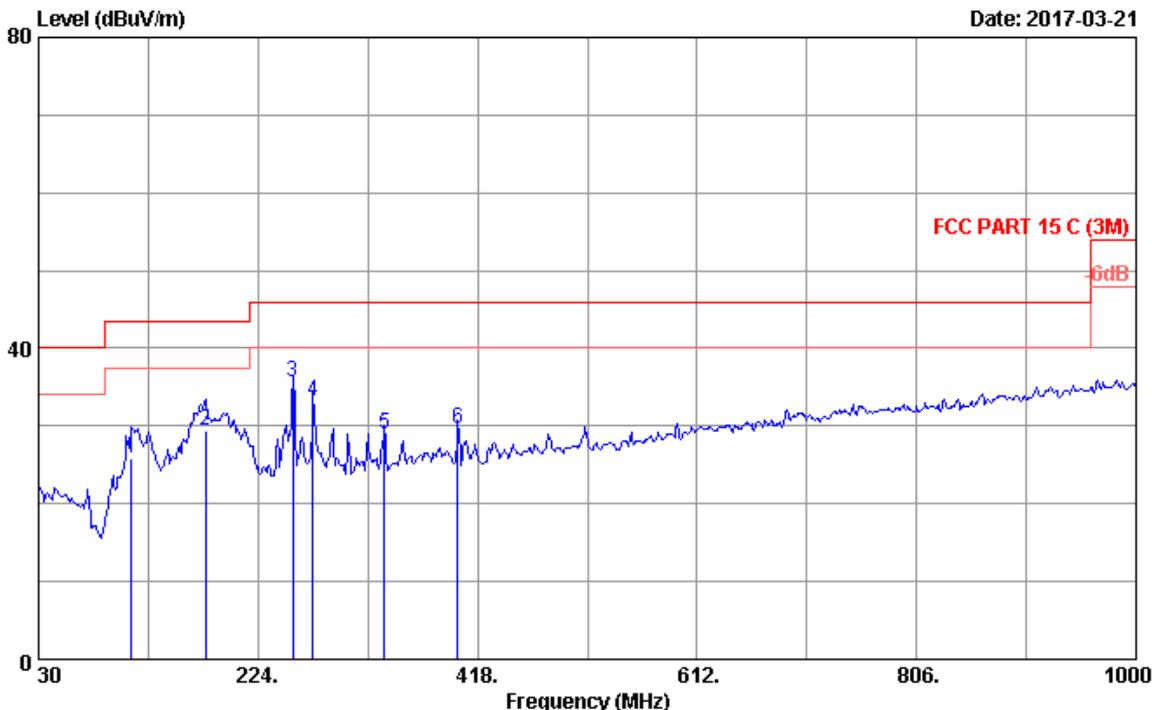

Site no. : 3m Chamber Data no. : 2
 Dis. / Ant. : 3m ANT 2016 9168 710 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 C (3M)
 Env. / Ins. : 21.4°C/54% Engineer : Garry
 EUT : Home Audio System M/N:GTK-XB90
 Power rating : AC 120V/60Hz
 Test Mode : Tx Mode
 Horizontal

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	112.450	16.90	1.12	7.85	25.87	43.50	17.63	QP
2	177.440	18.78	1.03	9.66	29.47	43.50	14.03	QP
3	255.040	18.39	1.55	15.67	35.61	46.00	10.39	QP
4	272.500	19.12	1.72	12.44	33.28	46.00	12.72	QP
5	335.550	20.86	2.15	5.96	28.97	46.00	17.03	QP
6	400.540	22.12	2.44	5.09	29.65	46.00	16.35	QP


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

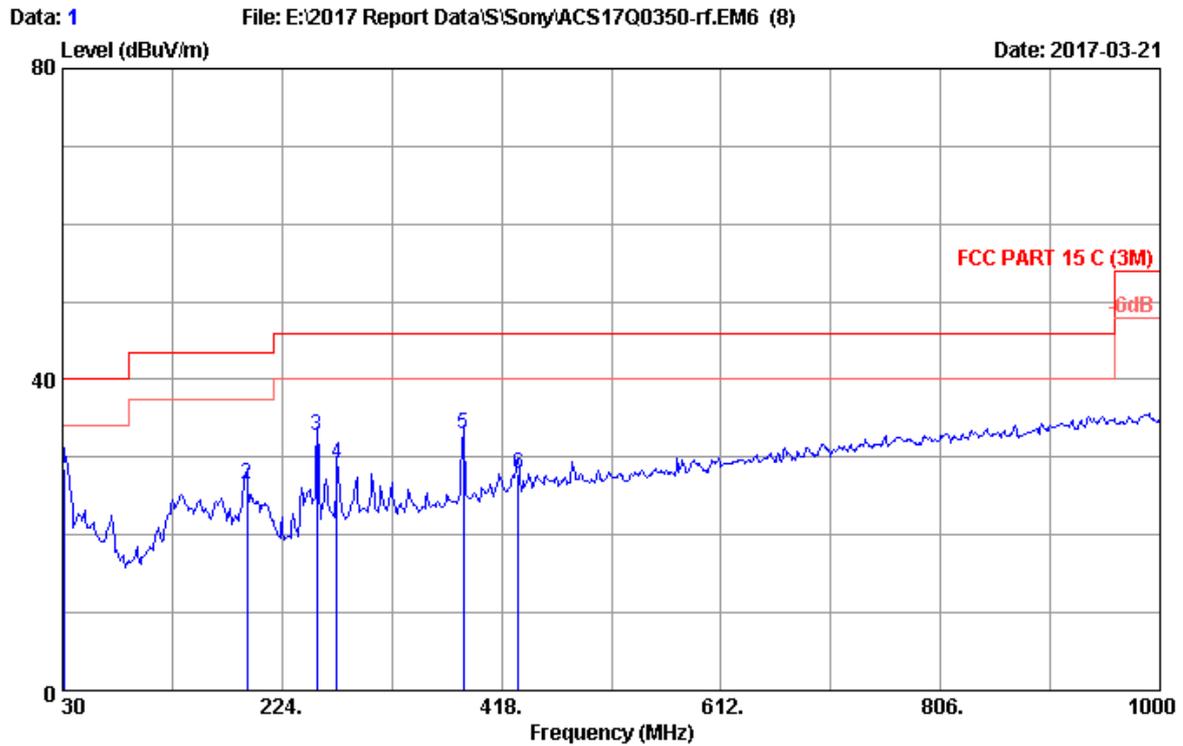

Site no. : 3m Chamber Data no. : 1
 Dis. / Ant. : 3m ANT 2016 9168 710 Ant. pol. : VERTICAL
 Limit : FCC PART 15 C (3M)
 Env. / Ins. : 21.4°C/54% Engineer : Garry
 EUT : Home Audio System M/N:GTK-XB90
 Power rating : AC 120V/60Hz
 Test Mode : Tx Mode
 Horizontal

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	31.940	19.24	0.61	8.78	28.63	40.00	11.37	QP
2	192.960	16.98	1.01	8.52	26.51	43.50	16.99	QP
3	255.040	18.39	1.55	12.87	32.81	46.00	13.19	QP
4	272.500	19.12	1.72	8.34	29.18	46.00	16.82	QP
5	384.050	21.84	2.37	8.86	33.07	46.00	12.93	QP
6	432.550	22.90	2.54	2.43	27.87	46.00	18.13	QP


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

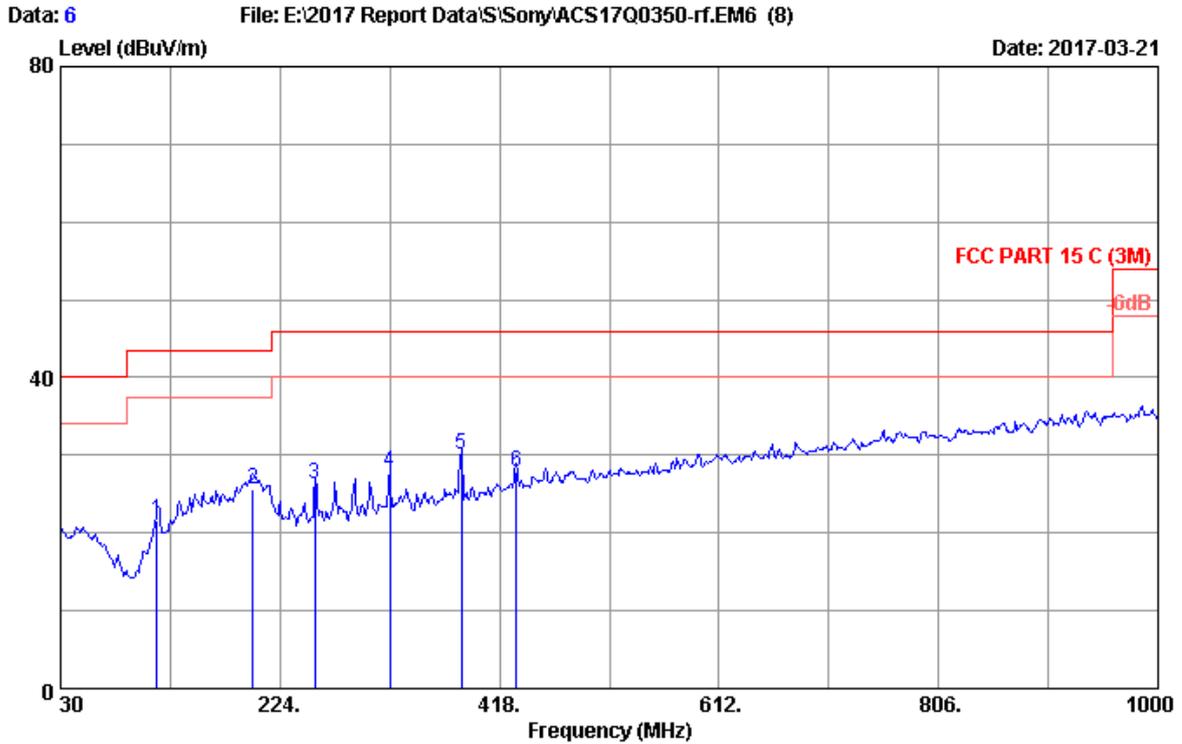

Site no. : 3m Chamber Data no. : 6
 Dis. / Ant. : 3m ANT 2016 9168 710 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 C (3M)
 Env. / Ins. : 21.4°C/54% Engineer : Garry
 EUT : Home Audio System M/N:GTK-XB90
 Power rating : AC 120V/60Hz
 Test Mode : Tx Mode
 Vertical

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	115.360	17.08	1.12	3.43	21.63	43.50	21.87	QP
2	199.750	16.76	1.00	7.80	25.56	43.50	17.94	QP
3	255.040	18.39	1.55	6.30	26.24	46.00	19.76	QP
4	321.000	20.42	2.09	5.24	27.75	46.00	18.25	QP
5	384.050	21.84	2.37	5.85	30.06	46.00	15.94	QP
6	432.550	22.90	2.54	2.49	27.93	46.00	18.07	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

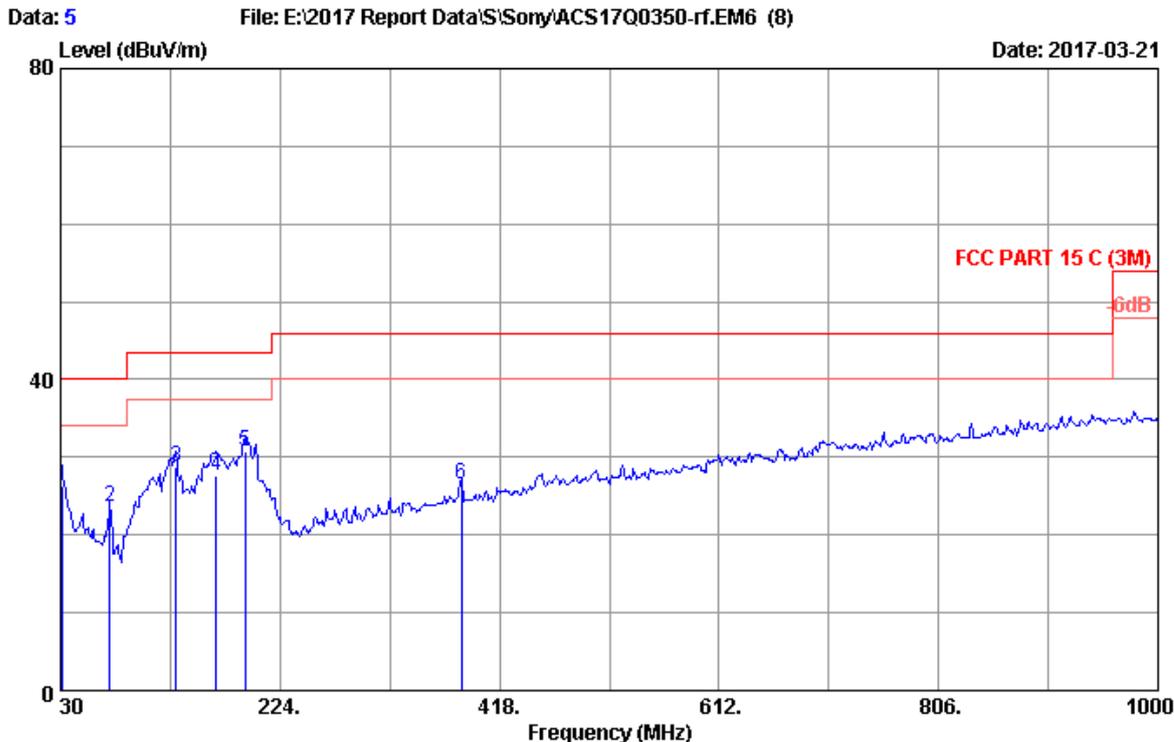


Site no. : 3m Chamber Data no. : 5
 Dis. / Ant. : 3m ANT 2016 9168 710 Ant. pol. : VERTICAL
 Limit : FCC PART 15 C (3M)
 Env. / Ins. : 21.4°C/54% Engineer : Garry
 EUT : Home Audio System M/N:GTK-XB90
 Power rating : AC 120V/60Hz
 Test Mode : Tx Mode
 Vertical

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	31.940	19.24	0.61	6.47	26.32	40.00	13.68	QP
2	73.650	16.70	1.05	5.79	23.54	40.00	16.46	QP
3	131.850	18.43	1.10	9.18	28.71	43.50	14.79	QP
4	167.740	19.57	1.04	7.05	27.66	43.50	15.84	QP
5	192.960	16.98	1.01	12.83	30.82	43.50	12.68	QP
6	384.050	21.84	2.37	2.20	26.41	46.00	19.59	QP


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Frequency: 1GHz~18GHz

Horizontal:

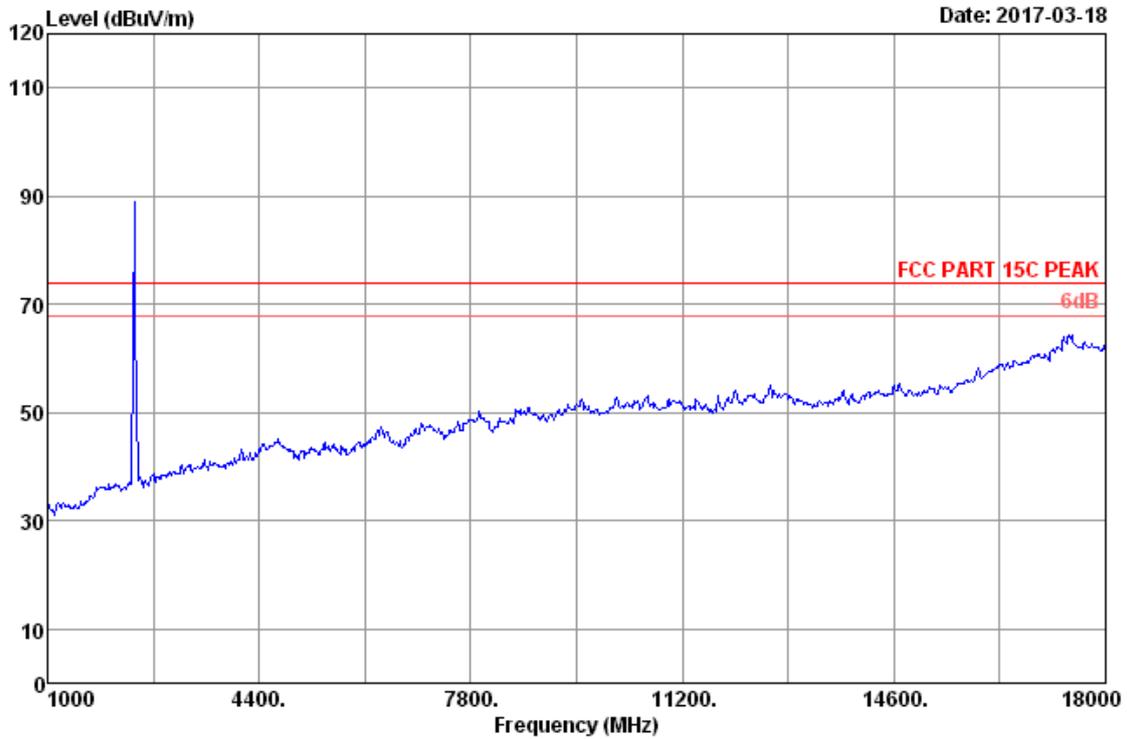


Site no. : 3m Chamber Data no. : 1
Dis. / Ant. : 3m 2016 MCTD1209 3006 Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK Pre : 101.2kPa
Env. / Ins. : 23.1°C/56.9% Engineer : Lynn
EUT : Home Audio System M/N:GTK-XB90
Power rating : AC 120V/60Hz
Test Mode : GFSK 2402MHz Tx Mode
Horizontal

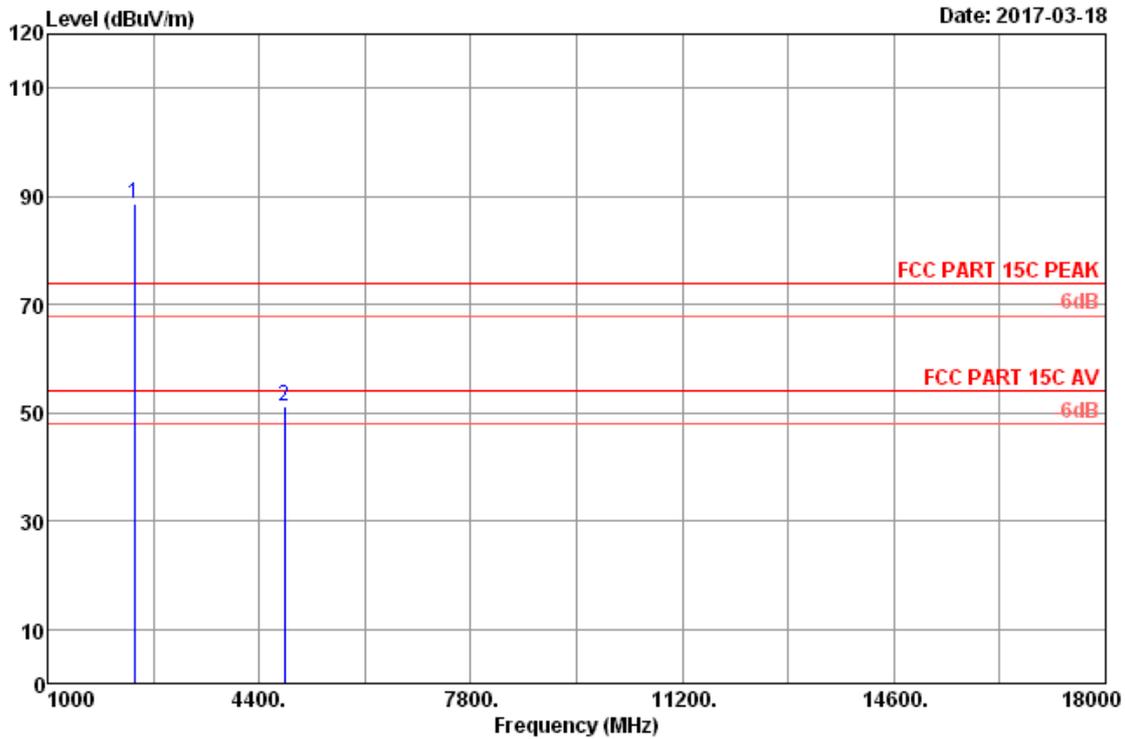


Site no. : 3m Chamber Data no. : 2
 Dis. / Ant. : 3m 2016 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1°C/56.9% Engineer : Lynn
 EUT : Home Audio System M/N:GTK-XB90
 Power rating : AC 120V/60Hz
 Test Mode : GFSK 2402MHz Tx Mode
 Horizontal

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2402.00	28.14	8.34	87.35	35.33	88.50	74.00	-14.50	Peak
2	4804.00	32.79	11.75	42.26	35.65	51.15	74.00	22.85	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

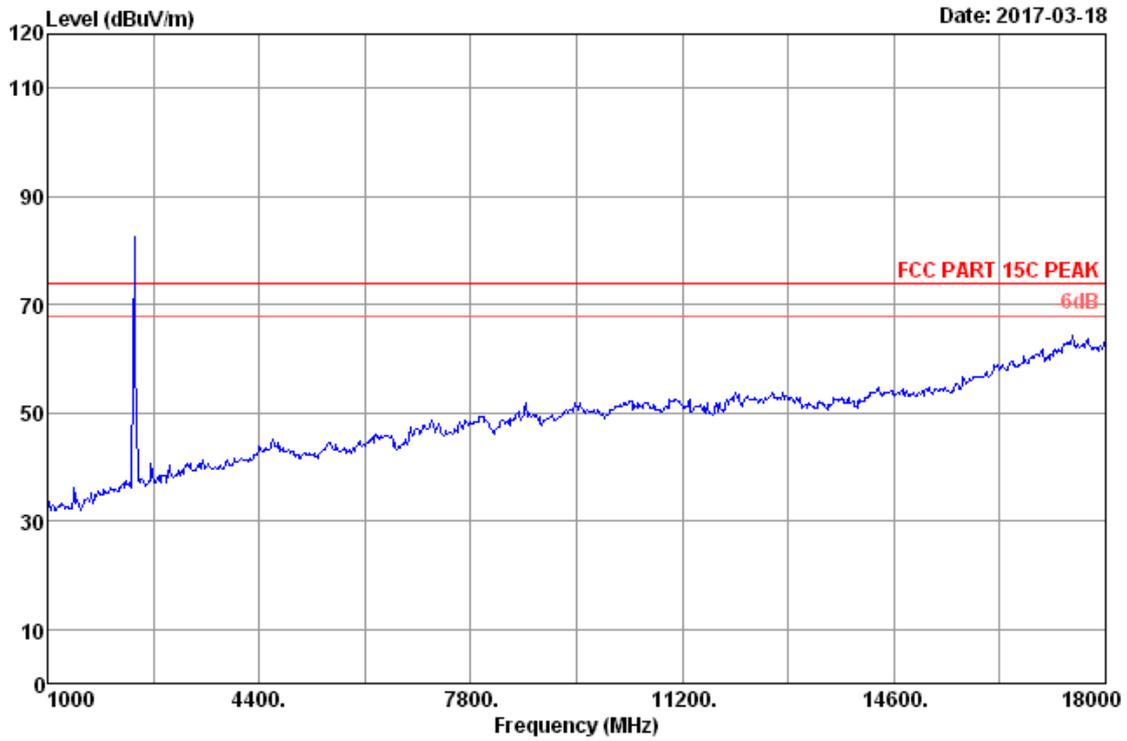


Site no. : 3m Chamber Data no. : 3
Dis. / Ant. : 3m 2016 MCTD1209 3006 Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK Pre : 101.2kPa
Env. / Ins. : 23.1°C/56.9% Engineer : Lynn
EUT : Home Audio System M/N:GTK-XB90
Power rating : AC 120V/60Hz
Test Mode : GFSK 2402MHz Tx Mode
Horizontal

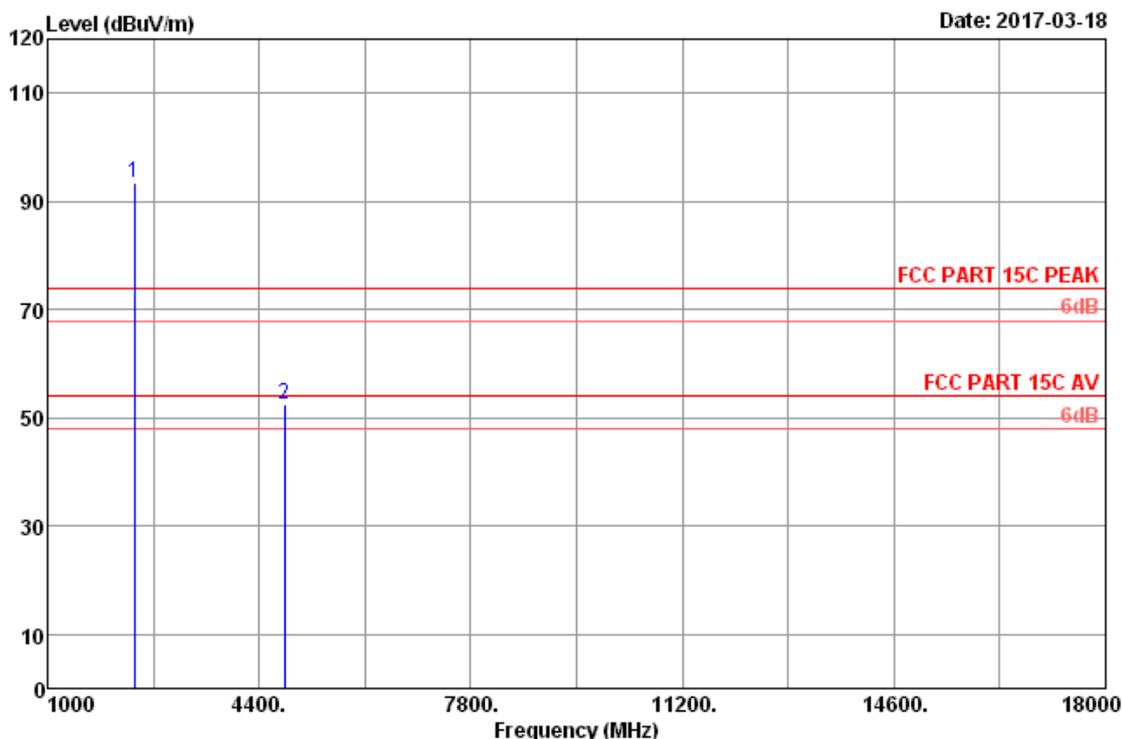


Site no. : 3m Chamber Data no. : 4
 Dis. / Ant. : 3m 2016 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1°C/56.9% Engineer : Lynn
 EUT : Home Audio System M/N:GTK-XB90
 Power rating : AC 120V/60Hz
 Test Mode : GFSK 2402MHz Tx Mode
 Horizontal

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2402.00	28.14	8.34	92.21	35.33	93.36	74.00	-19.36	Peak
2	4804.00	32.79	11.75	43.59	35.65	52.48	74.00	21.52	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

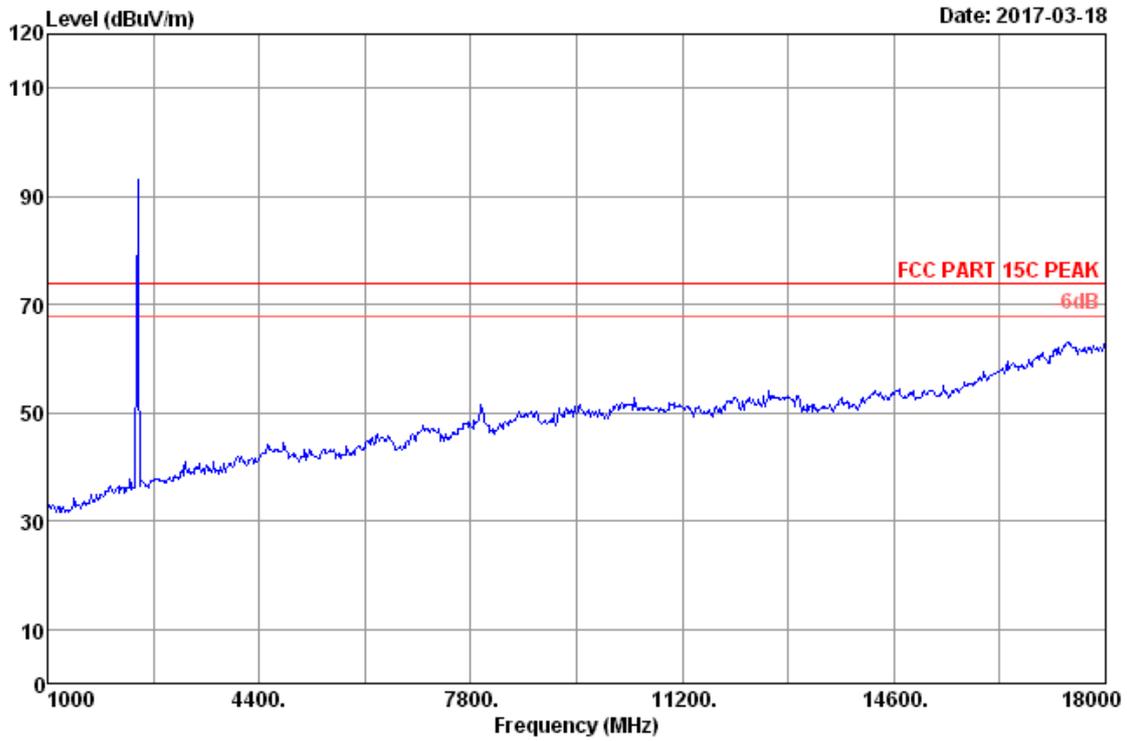


Site no. : 3m Chamber Data no. : 7
Dis. / Ant. : 3m 2016 MCTD1209 3006 Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK Pre : 101.2kPa
Env. / Ins. : 23.1°C/56.9% Engineer : Lynn
EUT : Home Audio System M/N:GTK-XB90
Power rating : AC 120V/60Hz
Test Mode : GFSK 2441MHz Tx Mode
Horizontal

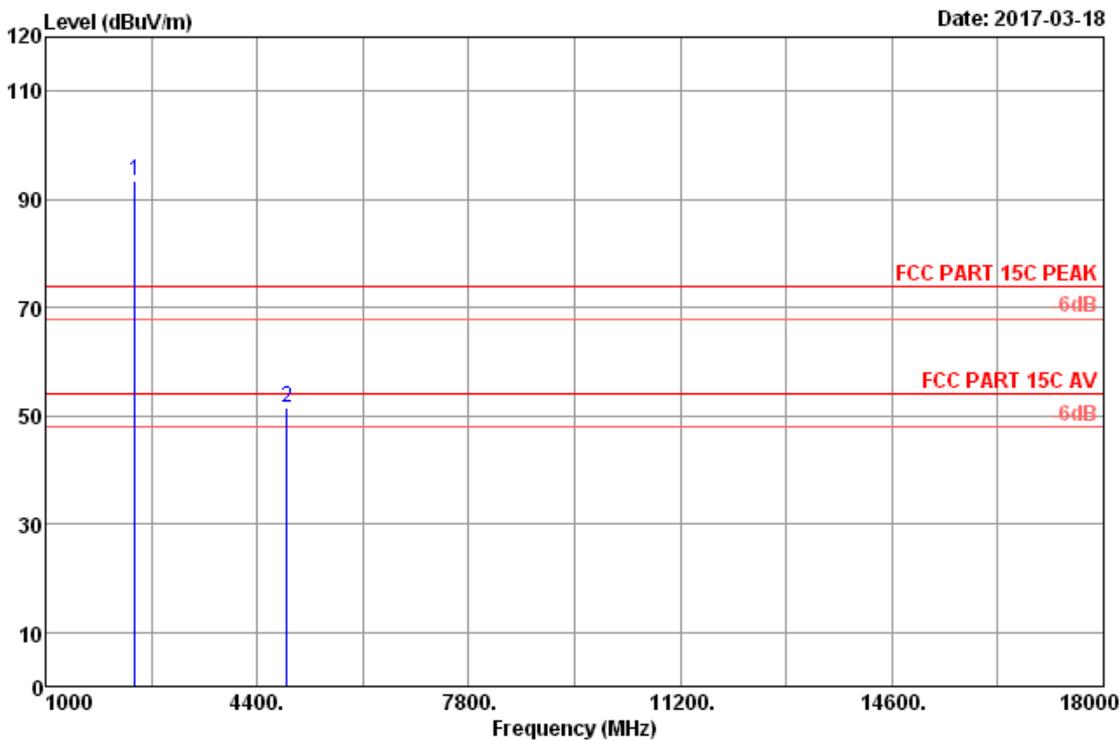


Site no. : 3m Chamber Data no. : 8
 Dis. / Ant. : 3m 2016 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1°C/56.9% Engineer : Lynn
 EUT : Home Audio System M/N:GTK-XB90
 Power rating : AC 120V/60Hz
 Test Mode : GFSK 2441MHz Tx Mode
 Horizontal

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2441.00	28.21	8.38	92.10	35.33	93.36	74.00	-19.36	Peak
2	4882.00	32.64	11.80	42.82	35.64	51.62	74.00	22.38	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

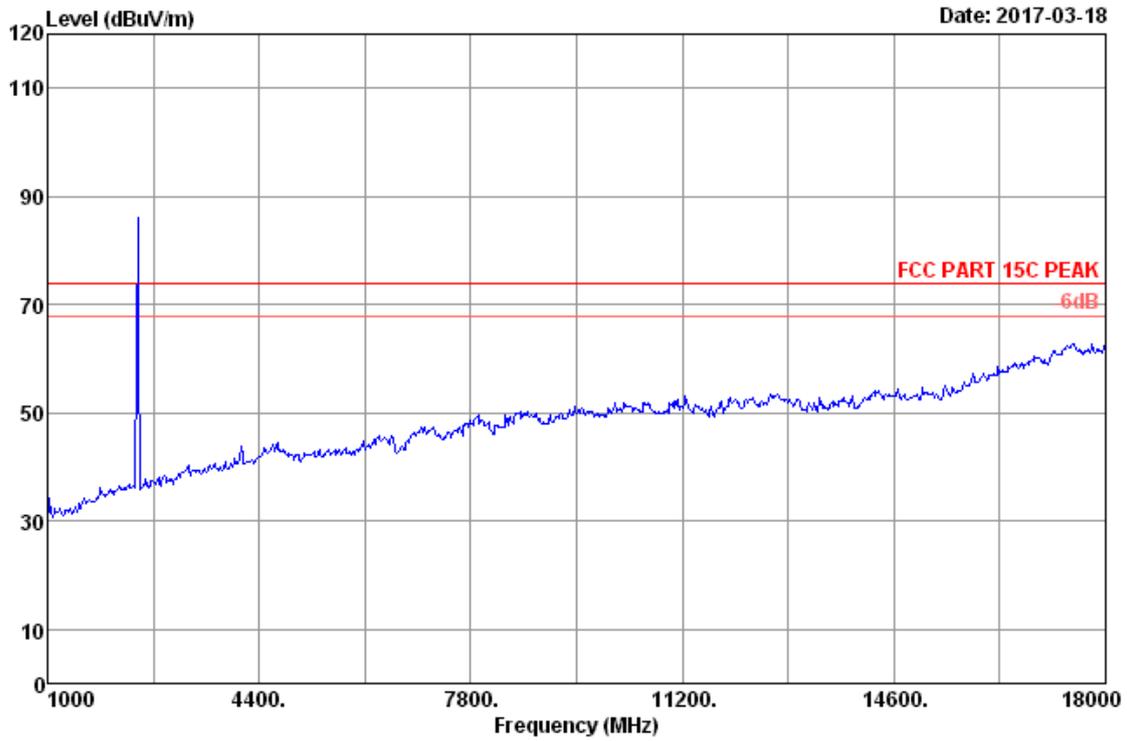


Site no. : 3m Chamber Data no. : 9
Dis. / Ant. : 3m 2016 MCTD1209 3006 Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK Pre : 101.2kPa
Env. / Ins. : 23.1°C/56.9% Engineer : Lynn
EUT : Home Audio System M/N:GTK-XB90
Power rating : AC 120V/60Hz
Test Mode : GFSK 2441MHz Tx Mode
Horizontal

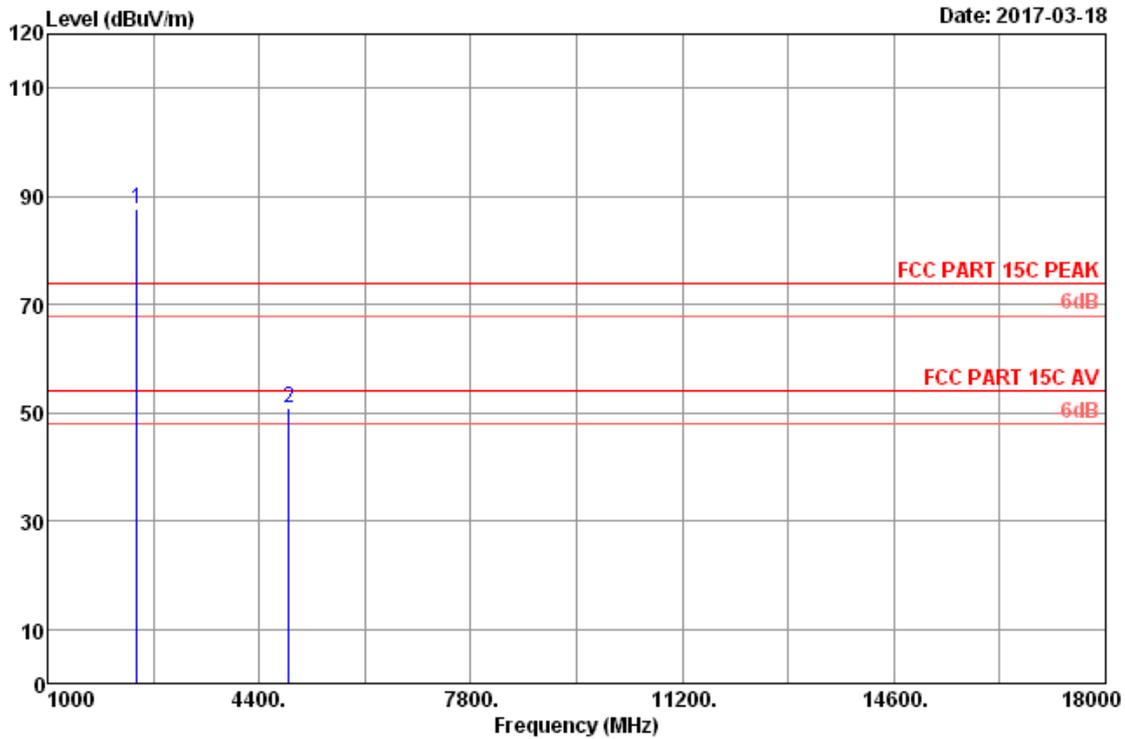


Site no. : 3m Chamber Data no. : 10
 Dis. / Ant. : 3m 2016 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1°C/56.9% Engineer : Lynn
 EUT : Home Audio System M/N:GTK-XB90
 Power rating : AC 120V/60Hz
 Test Mode : GFSK 2441MHz Tx Mode
 Horizontal

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2441.00	28.21	8.38	86.46	35.33	87.72	74.00	-13.72	Peak
2	4882.00	32.64	11.80	42.15	35.64	50.95	74.00	23.05	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

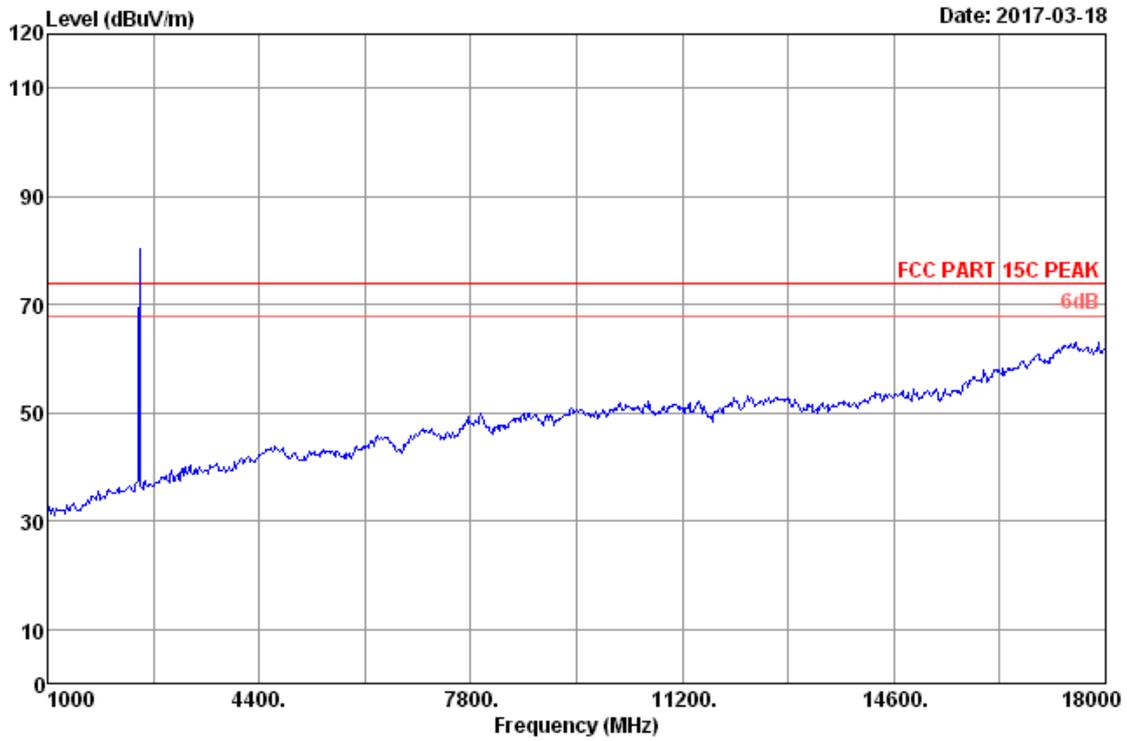


Site no. : 3m Chamber Data no. : 11
Dis. / Ant. : 3m 2016 MCTD1209 3006 Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK Pre : 101.2kPa
Env. / Ins. : 23.1°C/56.9% Engineer : Lynn
EUT : Home Audio System M/N:GTK-XB90
Power rating : AC 120V/60Hz
Test Mode : GFSK 2480MHz Tx Mode
Horizontal

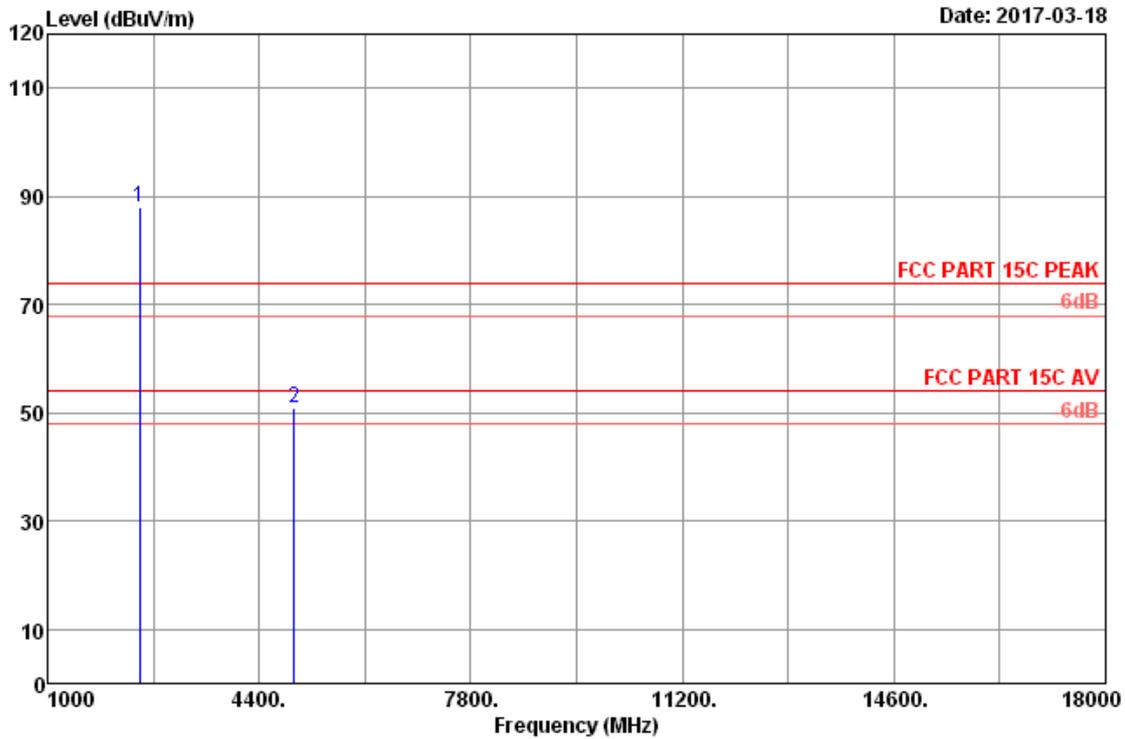


Site no. : 3m Chamber Data no. : 12
 Dis. / Ant. : 3m 2016 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1°C/56.9% Engineer : Lynn
 EUT : Home Audio System M/N:GTK-XB90
 Power rating : AC 120V/60Hz
 Test Mode : GFSK 2480MHz Tx Mode
 Horizontal

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.00	28.27	8.42	86.59	35.34	87.94	74.00	-13.94	Peak
2	4960.00	32.48	11.85	42.07	35.63	50.77	74.00	23.23	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

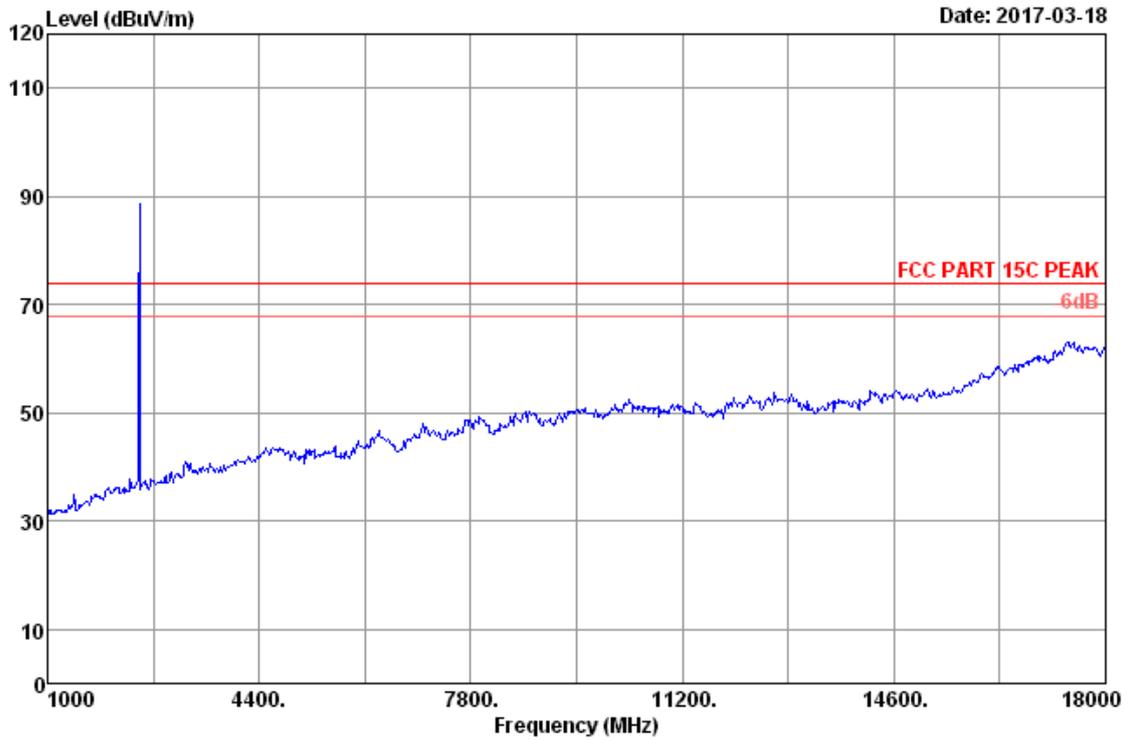


Site no. : 3m Chamber Data no. : 13
Dis. / Ant. : 3m 2016 MCTD1209 3006 Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK Pre : 101.2kPa
Env. / Ins. : 23.1°C/56.9% Engineer : Lynn
EUT : Home Audio System M/N:GTK-XB90
Power rating : AC 120V/60Hz
Test Mode : GFSK 2480MHz Tx Mode
Horizontal

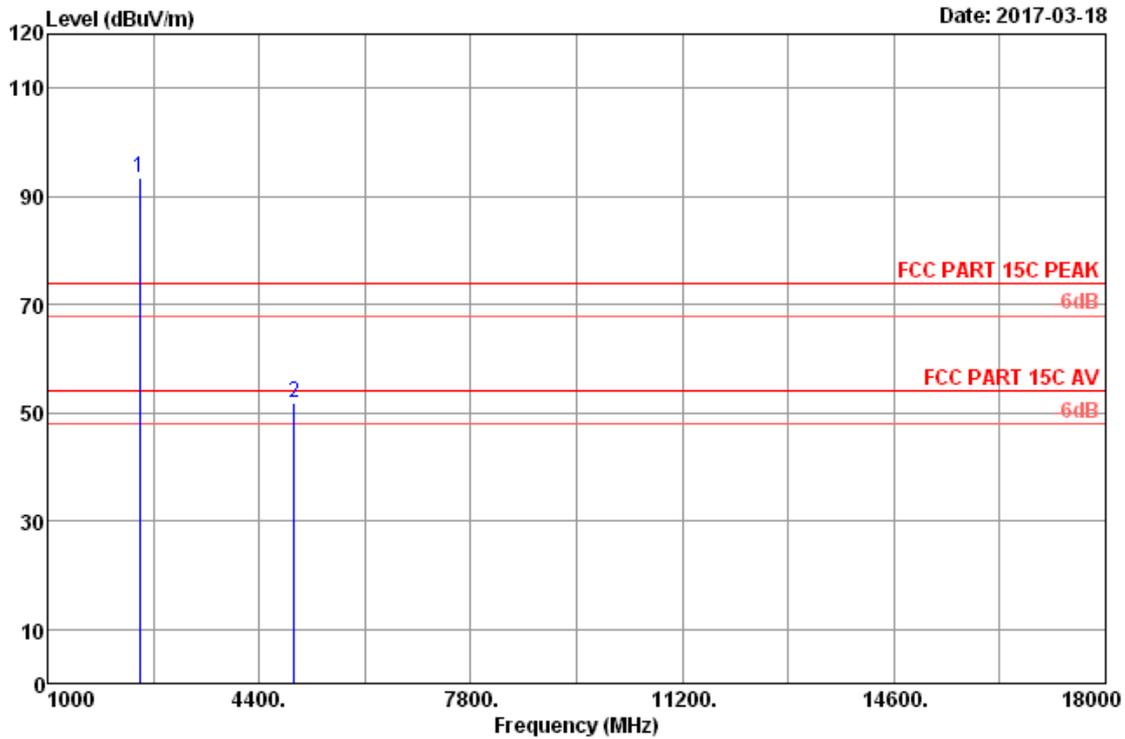


Site no. : 3m Chamber Data no. : 14
 Dis. / Ant. : 3m 2016 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1°C/56.9% Engineer : Lynn
 EUT : Home Audio System M/N:GTK-XB90
 Power rating : AC 120V/60Hz
 Test Mode : GFSK 2480MHz Tx Mode
 Horizontal

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.00	28.27	8.42	92.14	35.34	93.49	74.00	-19.49	Peak
2	4960.00	32.48	11.85	43.05	35.63	51.75	74.00	22.25	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

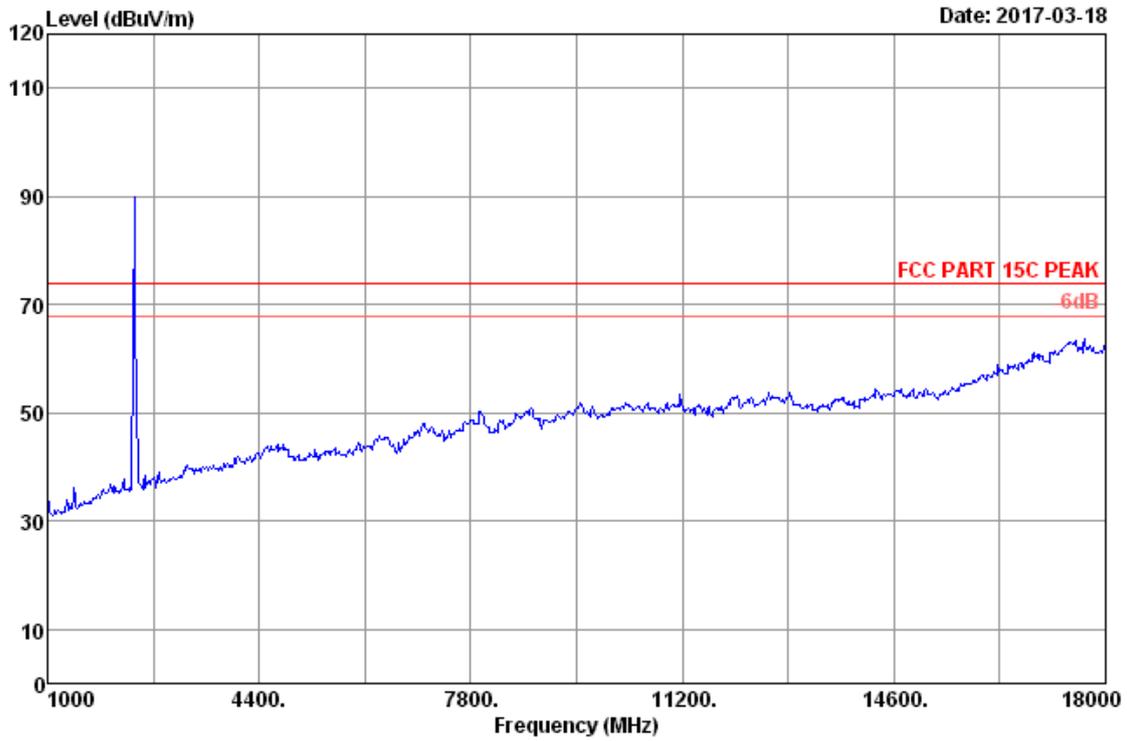


Site no. : 3m Chamber Data no. : 17
Dis. / Ant. : 3m 2016 MCTD1209 3006 Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK Pre : 101.2kPa
Env. / Ins. : 23.1°C/56.9% Engineer : Lynn
EUT : Home Audio System M/N:GTK-XB90
Power rating : AC 120V/60Hz
Test Mode : 8-DPSK 2402MHz Tx Mode
Horizontal

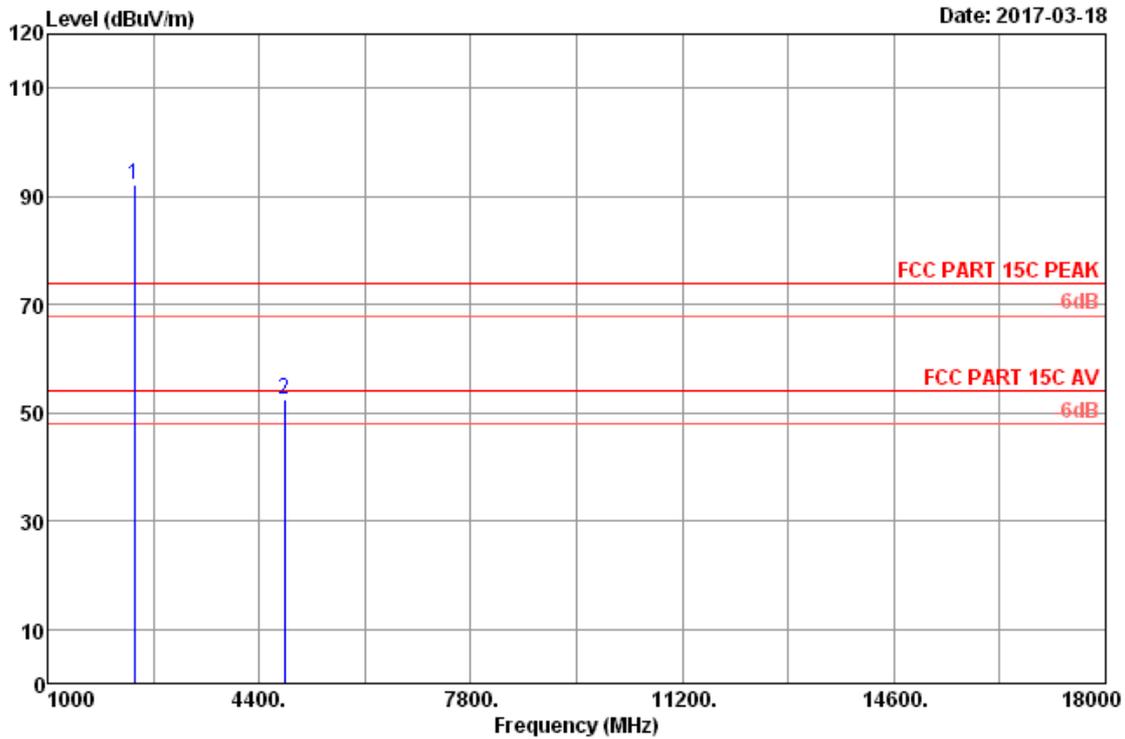


Site no. : 3m Chamber Data no. : 18
 Dis. / Ant. : 3m 2016 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1°C/56.9% Engineer : Lynn
 EUT : Home Audio System M/N:GTK-XB90
 Power rating : AC 120V/60Hz
 Test Mode : 8-DPSK 2402MHz Tx Mode
 Horizontal

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2402.00	28.14	8.34	91.04	35.33	92.19	74.00	-18.19	Peak
2	4804.00	32.79	11.75	43.69	35.65	52.58	74.00	21.42	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

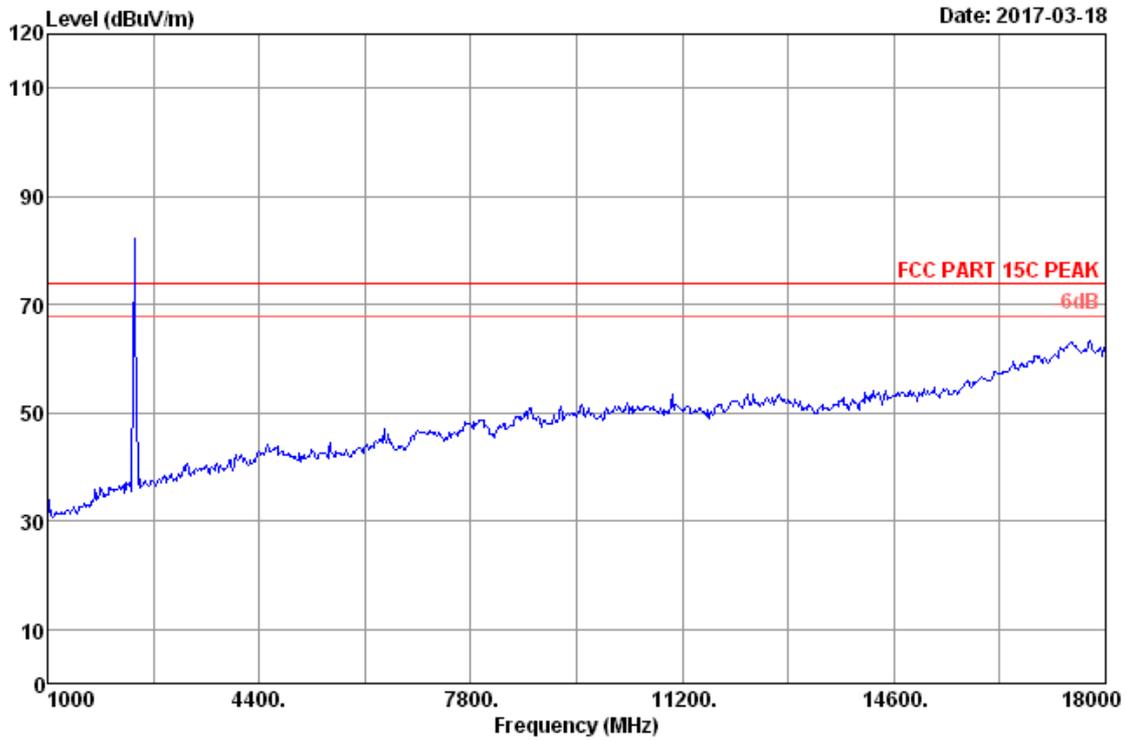


Site no. : 3m Chamber Data no. : 19
Dis. / Ant. : 3m 2016 MCTD1209 3006 Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK Pre : 101.2kPa
Env. / Ins. : 23.1°C/56.9% Engineer : Lynn
EUT : Home Audio System M/N:GTK-XB90
Power rating : AC 120V/60Hz
Test Mode : 8-DPSK 2402MHz Tx Mode
Horizontal

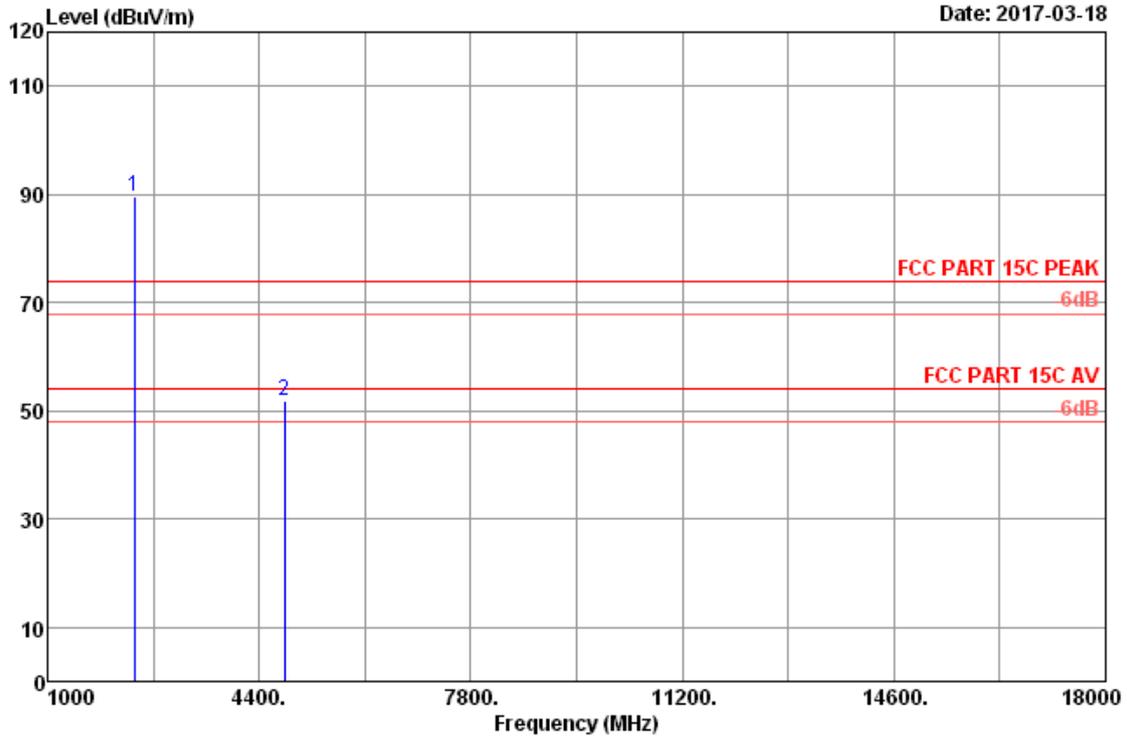

Site no. : 3m Chamber Data no. : 20
 Dis. / Ant. : 3m 2016 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1°C/56.9% Engineer : Lynn
 EUT : Home Audio System M/N:GTK-XB90
 Power rating : AC 120V/60Hz
 Test Mode : 8-DPSK 2402MHz Tx Mode
 Horizontal

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2402.00	28.14	8.34	88.36	35.33	89.51	74.00	-15.51	Peak
2	4804.00	32.79	11.75	42.86	35.65	51.75	74.00	22.25	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

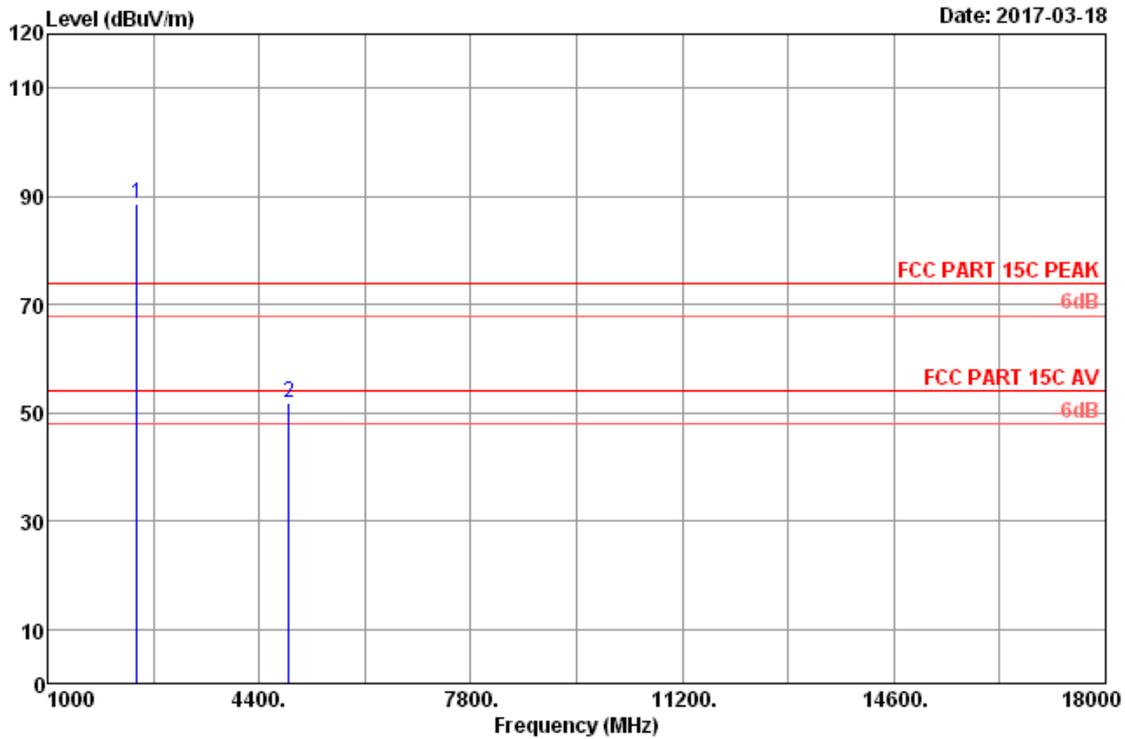


Site no. : 3m Chamber Data no. : 24
 Dis. / Ant. : 3m 2016 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1°C/56.9% Engineer : Lynn
 EUT : Home Audio System M/N:GTK-XB90
 Power rating : AC 120V/60Hz
 Test Mode : 8-DPSK 2441MHz Tx Mode
 Horizontal

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2441.00	28.21	8.38	87.30	35.33	88.56	74.00	-14.56	Peak
2	4882.00	32.64	11.80	42.92	35.64	51.72	74.00	22.28	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

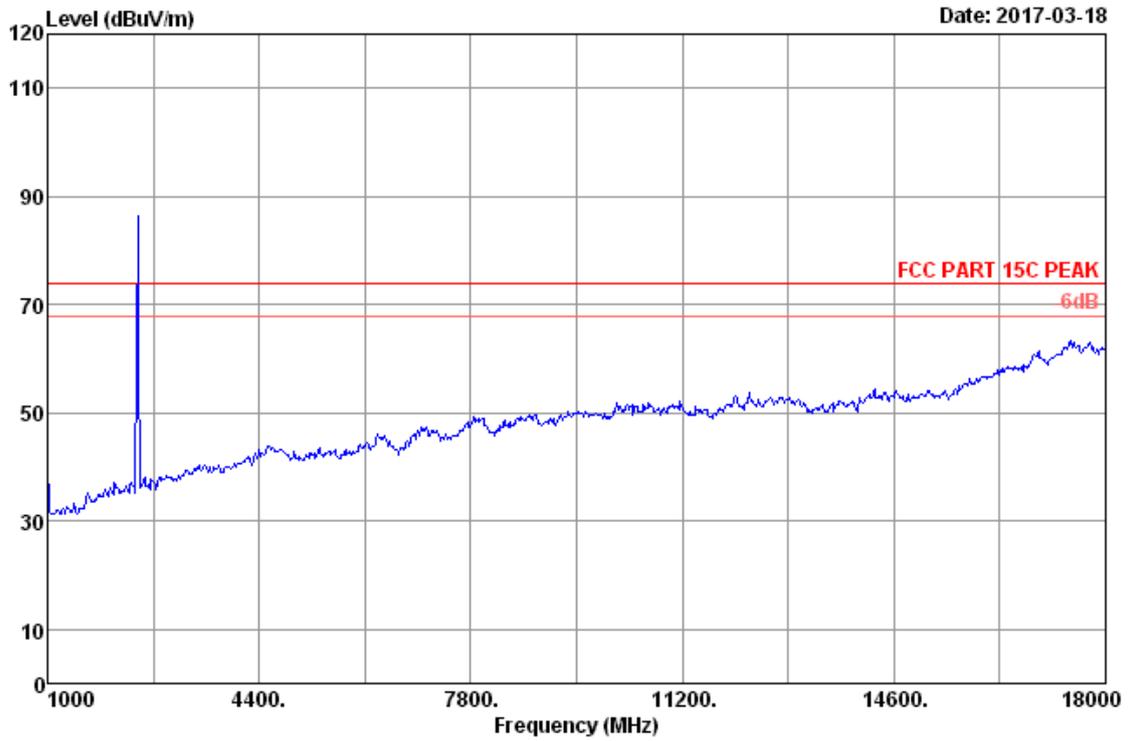


Site no. : 3m Chamber Data no. : 25
Dis. / Ant. : 3m 2016 MCTD1209 3006 Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK Pre : 101.2kPa
Env. / Ins. : 23.1°C/56.9% Engineer : Lynn
EUT : Home Audio System M/N:GTK-XB90
Power rating : AC 120V/60Hz
Test Mode : 8-DPSK 2441MHz Tx Mode
Horizontal

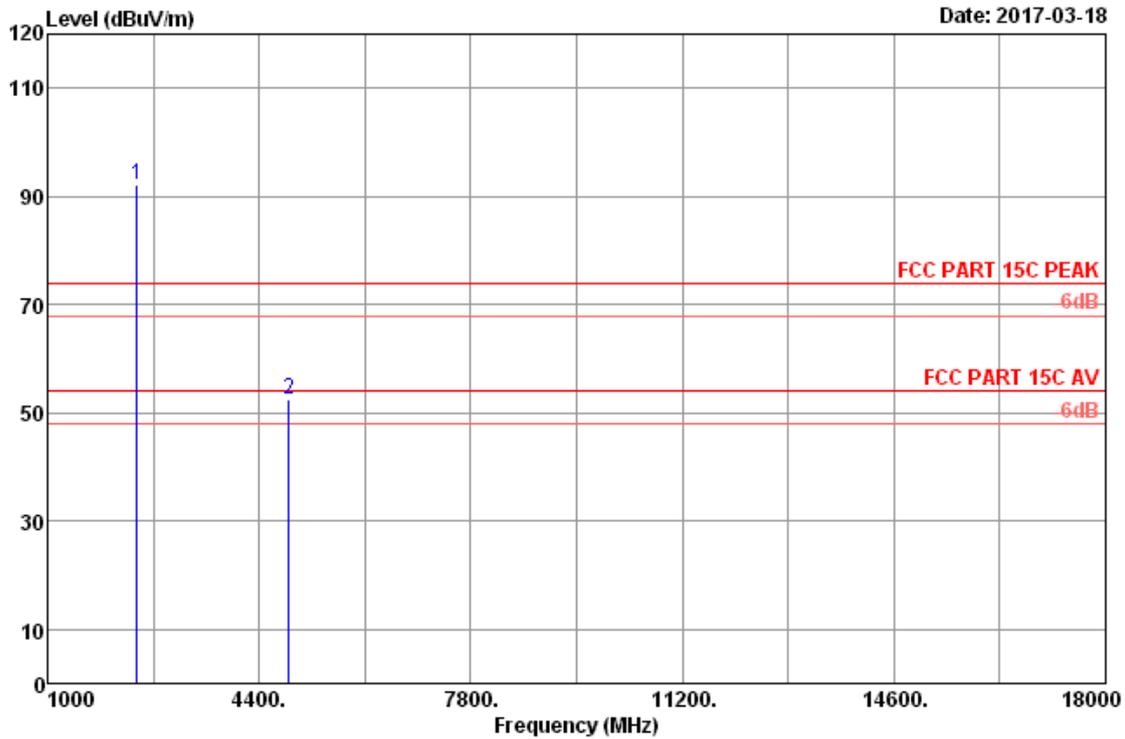


Site no. : 3m Chamber Data no. : 26
 Dis. / Ant. : 3m 2016 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1°C/56.9% Engineer : Lynn
 EUT : Home Audio System M/N:GTK-XB90
 Power rating : AC 120V/60Hz
 Test Mode : 8-DPSK 2441MHz Tx Mode
 Horizontal

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2441.00	28.21	8.38	90.74	35.33	92.00	74.00	-18.00	Peak
2	4882.00	32.64	11.80	43.68	35.64	52.48	74.00	21.52	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

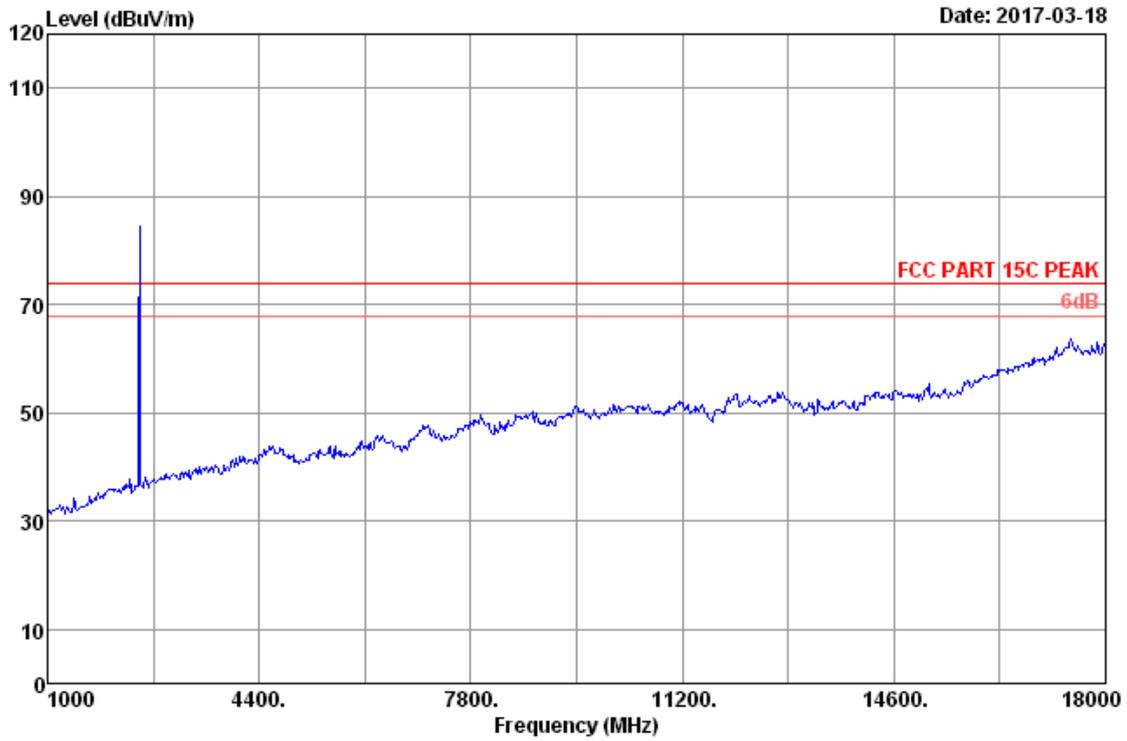


Site no. : 3m Chamber Data no. : 29
Dis. / Ant. : 3m 2016 MCTD1209 3006 Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK Pre : 101.2kPa
Env. / Ins. : 23.1°C/56.9% Engineer : Lynn
EUT : Home Audio System M/N:GTK-XB90
Power rating : AC 120V/60Hz
Test Mode : 8-DPSK 2480MHz Tx Mode
Horizontal

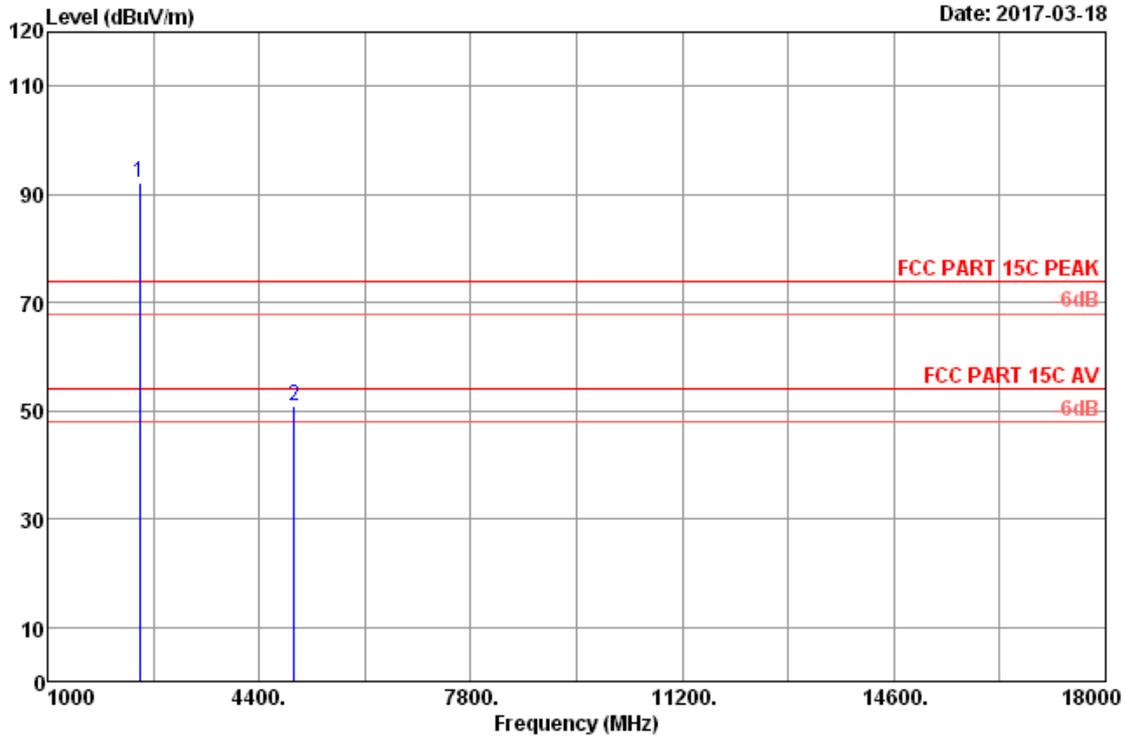

Site no. : 3m Chamber Data no. : 30
 Dis. / Ant. : 3m 2016 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1°C/56.9% Engineer : Lynn
 EUT : Home Audio System M/N:GTK-XB90
 Power rating : AC 120V/60Hz
 Test Mode : 8-DPSK 2480MHz Tx Mode
 Horizontal

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.00	28.27	8.42	90.82	35.34	92.17	74.00	-18.17	Peak
2	4960.00	32.48	11.85	42.15	35.63	50.85	74.00	23.15	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

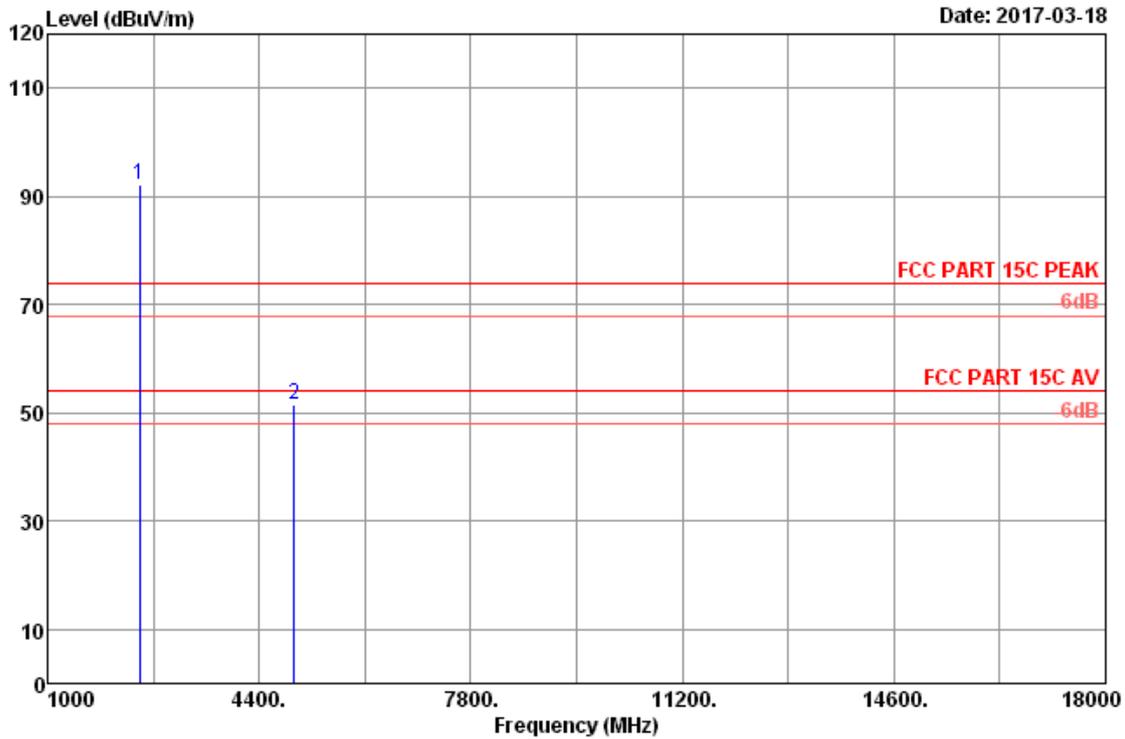


Site no. : 3m Chamber Data no. : 32
 Dis. / Ant. : 3m 2016 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1°C/56.9% Engineer : Lynn
 EUT : Home Audio System M/N:GTK-XB90
 Power rating : AC 120V/60Hz
 Test Mode : 8-DPSK 2480MHz Tx Mode
 Horizontal


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.00	28.27	8.42	90.69	35.34	92.04	74.00	-18.04	Peak
2	4960.00	32.48	11.85	42.82	35.63	51.52	74.00	22.48	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

Vertical:

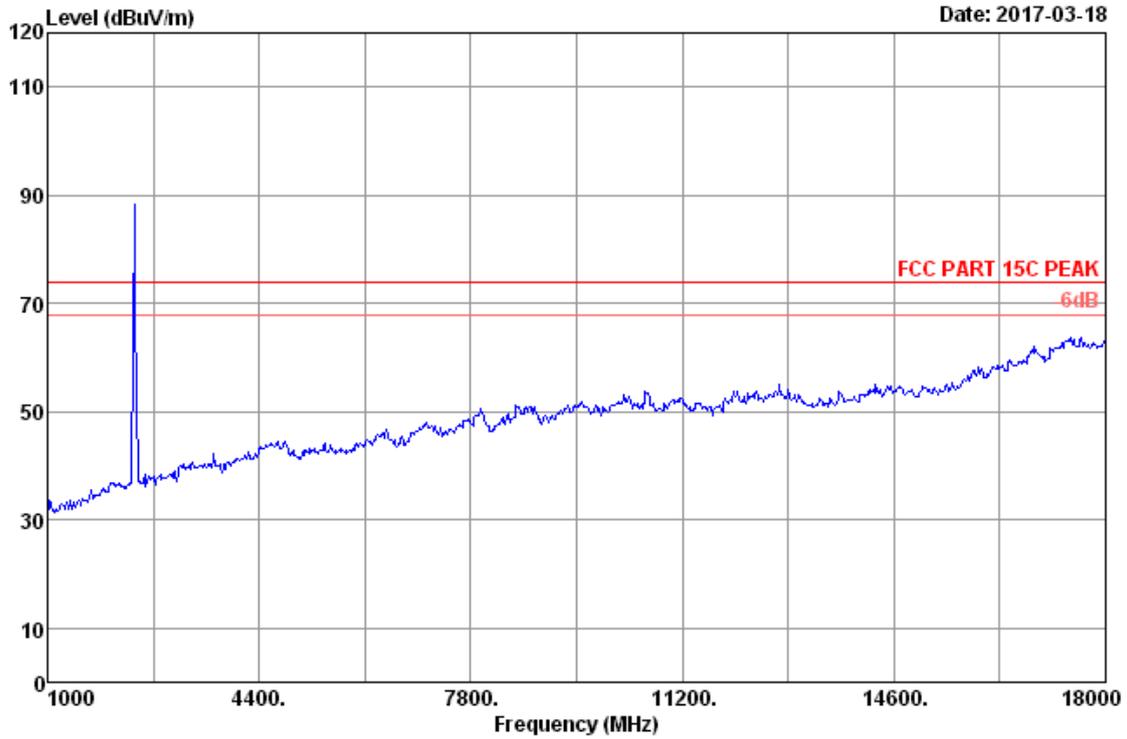


Site no. : 3m Chamber Data no. : 1
Dis. / Ant. : 3m 2016 MCTD1209 3006 Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK Pre : 101.2kPa
Env. / Ins. : 23.1°C/56.9% Engineer : Lynn
EUT : Home Audio System M/N:GTK-XB90
Power rating : AC 120V/60Hz
Test Mode : GFSK 2402MHz Tx Mode
Vertical

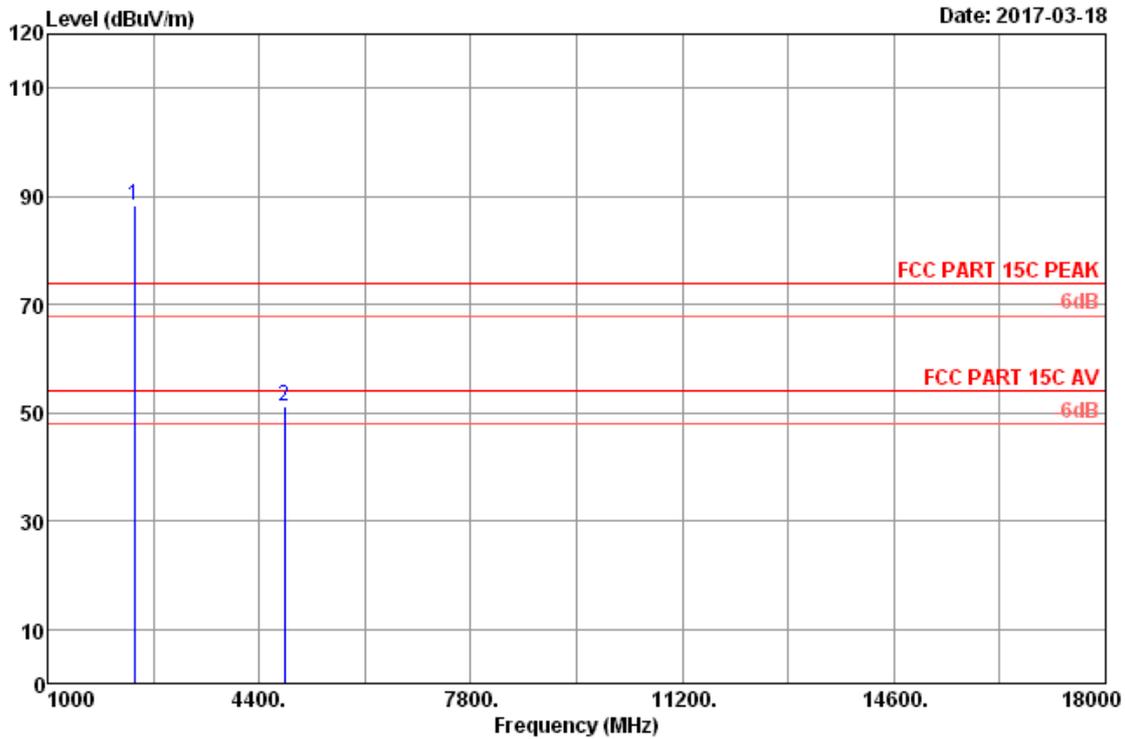


Site no. : 3m Chamber Data no. : 2
 Dis. / Ant. : 3m 2016 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1°C/56.9% Engineer : Lynn
 EUT : Home Audio System M/N:GTK-XB90
 Power rating : AC 120V/60Hz
 Test Mode : GFSK 2402MHz Tx Mode
 Vertical

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2402.00	28.14	8.34	87.17	35.33	88.32	74.00	-14.32	Peak
2	4804.00	32.79	11.75	42.16	35.65	51.05	74.00	22.95	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

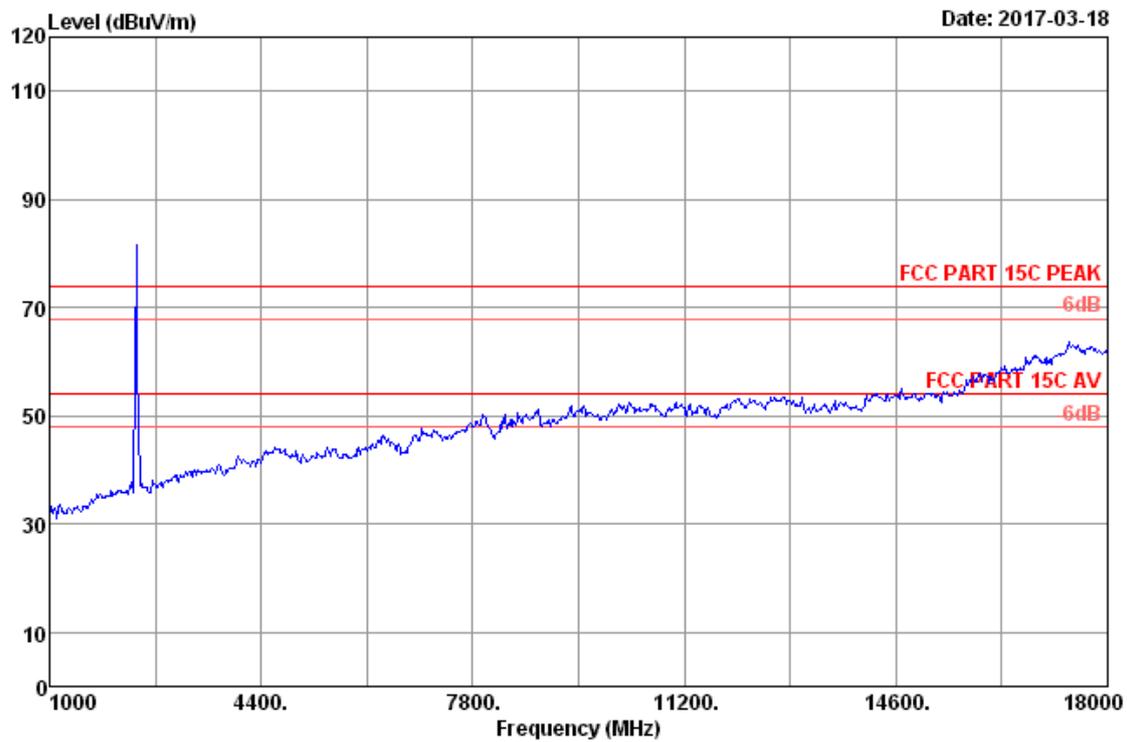


Site no. : 3m Chamber Data no. : 3
Dis. / Ant. : 3m 2016 MCTD1209 3006 Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK Pre : 101.2kPa
Env. / Ins. : 23.1°C/56.9% Engineer : Lynn
EUT : Home Audio System M/N:GTK-XB90
Power rating : AC 120V/60Hz
Test Mode : GFSK 2402MHz Tx Mode
Vertical

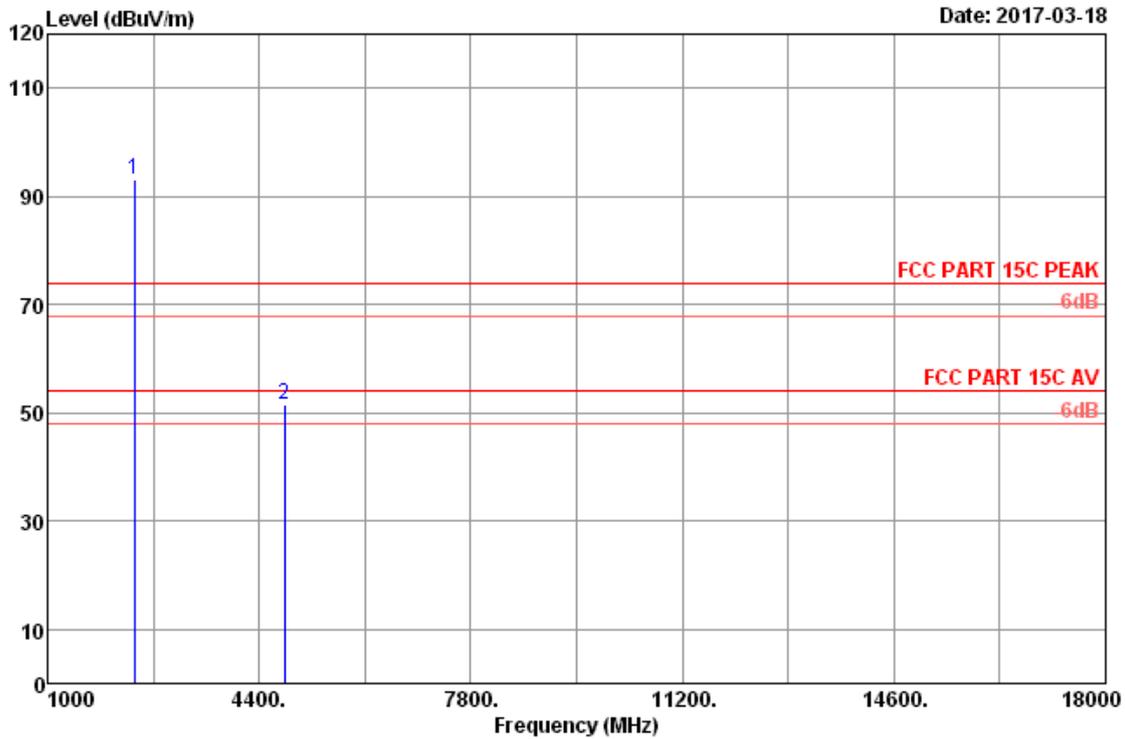


Site no. : 3m Chamber Data no. : 4
 Dis. / Ant. : 3m 2016 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1°C/56.9% Engineer : Lynn
 EUT : Home Audio System M/N:GTK-XB90
 Power rating : AC 120V/60Hz
 Test Mode : GFSK 2402MHz Tx Mode
 Vertical

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2402.00	28.14	8.34	91.82	35.33	92.97	74.00	-18.97	Peak
2	4804.00	32.79	11.75	42.59	35.65	51.48	74.00	22.52	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

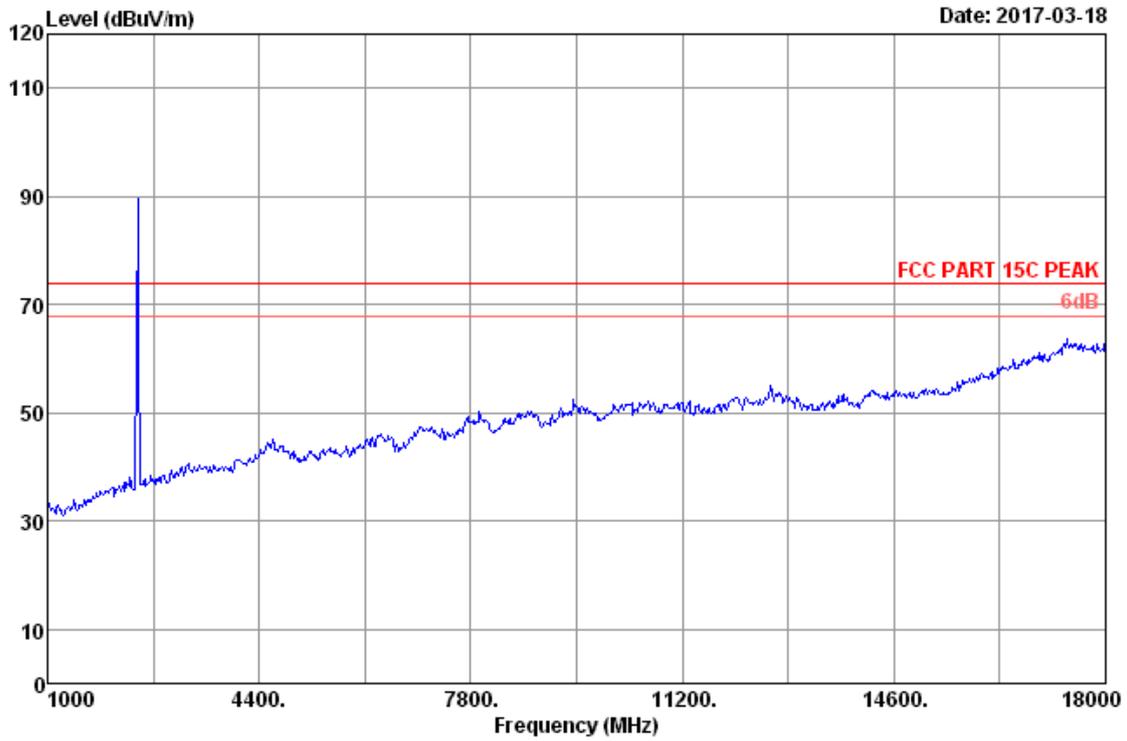


Site no. : 3m Chamber Data no. : 7
Dis. / Ant. : 3m 2016 MCTD1209 3006 Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK Pre : 101.2kPa
Env. / Ins. : 23.1°C/56.9% Engineer : Lynn
EUT : Home Audio System M/N:GTK-XB90
Power rating : AC 120V/60Hz
Test Mode : GFSK 2441MHz Tx Mode
Vertical

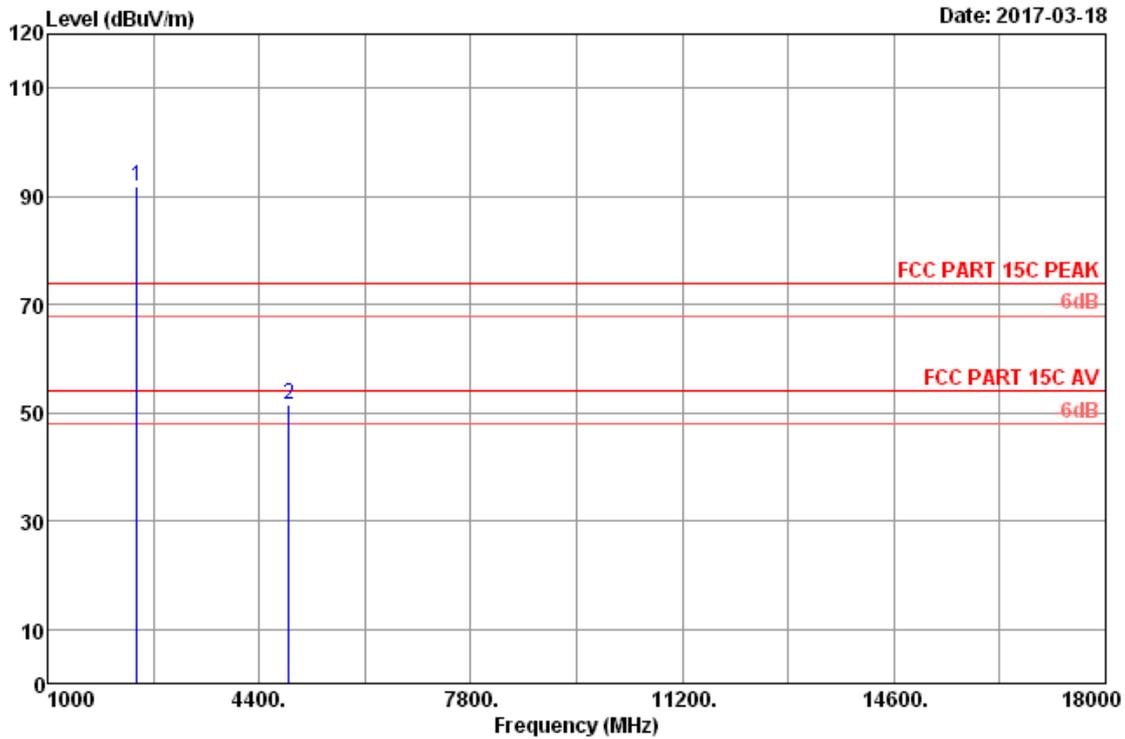

Site no. : 3m Chamber Data no. : 8
 Dis. / Ant. : 3m 2016 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1°C/56.9% Engineer : Lynn
 EUT : Home Audio System M/N:GTK-XB90
 Power rating : AC 120V/60Hz
 Test Mode : GFSK 2441MHz Tx Mode
 Vertical

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2441.00	28.21	8.38	90.44	35.33	91.70	74.00	-17.70	Peak
2	4882.00	32.64	11.80	42.63	35.64	51.43	74.00	22.57	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

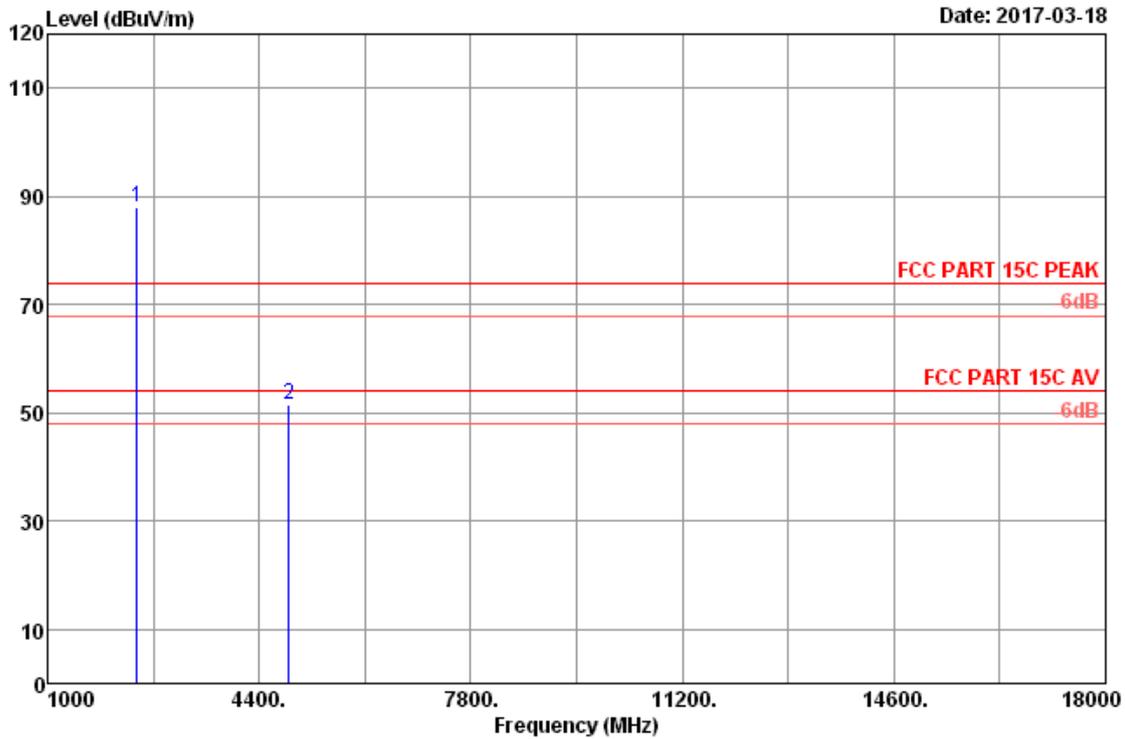


Site no. : 3m Chamber Data no. : 10
 Dis. / Ant. : 3m 2016 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1°C/56.9% Engineer : Lynn
 EUT : Home Audio System M/N:GTK-XB90
 Power rating : AC 120V/60Hz
 Test Mode : GFSK 2441MHz Tx Mode
 Vertical

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2441.00	28.21	8.38	86.88	35.33	88.14	74.00	-14.14	Peak
2	4882.00	32.64	11.80	42.58	35.64	51.38	74.00	22.62	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

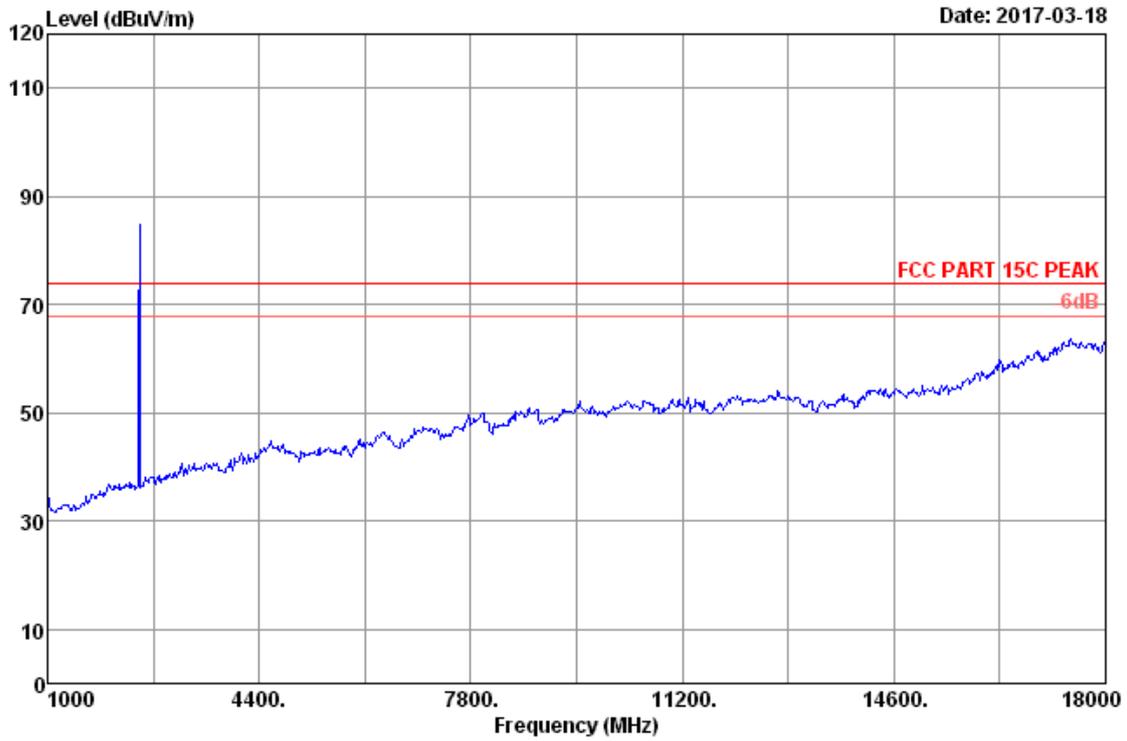


Site no. : 3m Chamber Data no. : 11
Dis. / Ant. : 3m 2016 MCTD1209 3006 Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK Pre : 101.2kPa
Env. / Ins. : 23.1°C/56.9% Engineer : Lynn
EUT : Home Audio System M/N:GTK-XB90
Power rating : AC 120V/60Hz
Test Mode : GFSK 2480MHz Tx Mode
Vertical

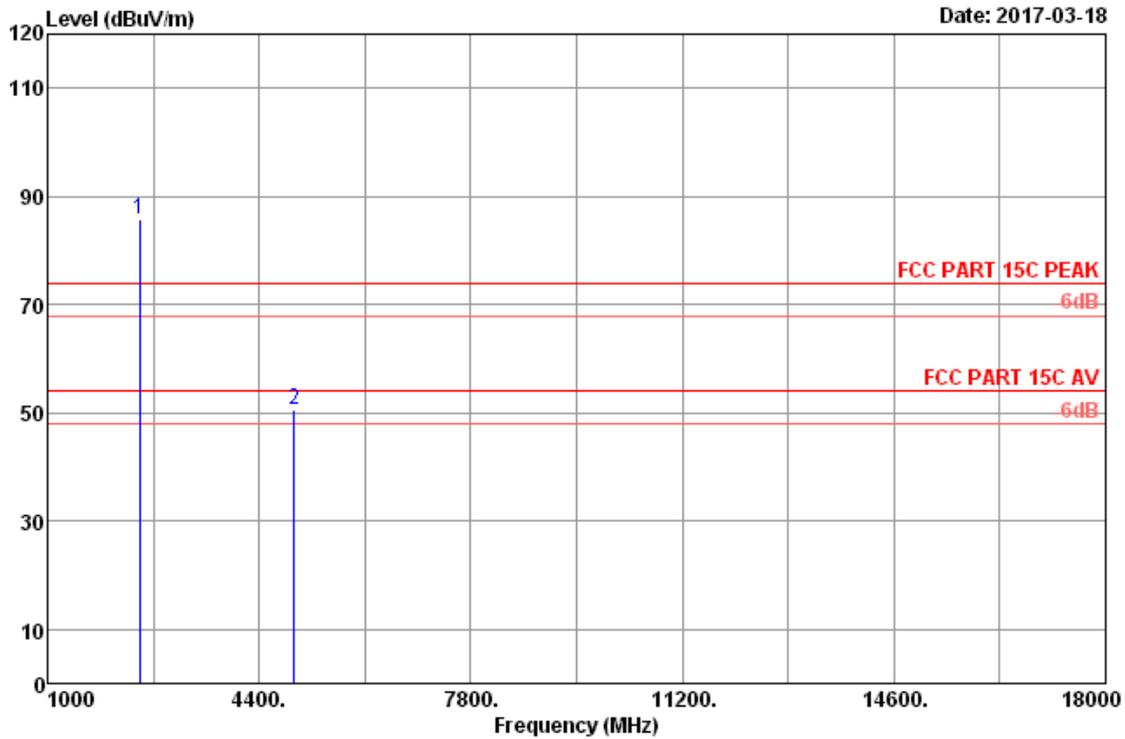


Site no. : 3m Chamber Data no. : 12
 Dis. / Ant. : 3m 2016 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1°C/56.9% Engineer : Lynn
 EUT : Home Audio System M/N:GTK-XB90
 Power rating : AC 120V/60Hz
 Test Mode : GFSK 2480MHz Tx Mode
 Vertical

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.00	28.27	8.42	84.28	35.34	85.63	74.00	-11.63	Peak
2	4960.00	32.48	11.85	41.77	35.63	50.47	74.00	23.53	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

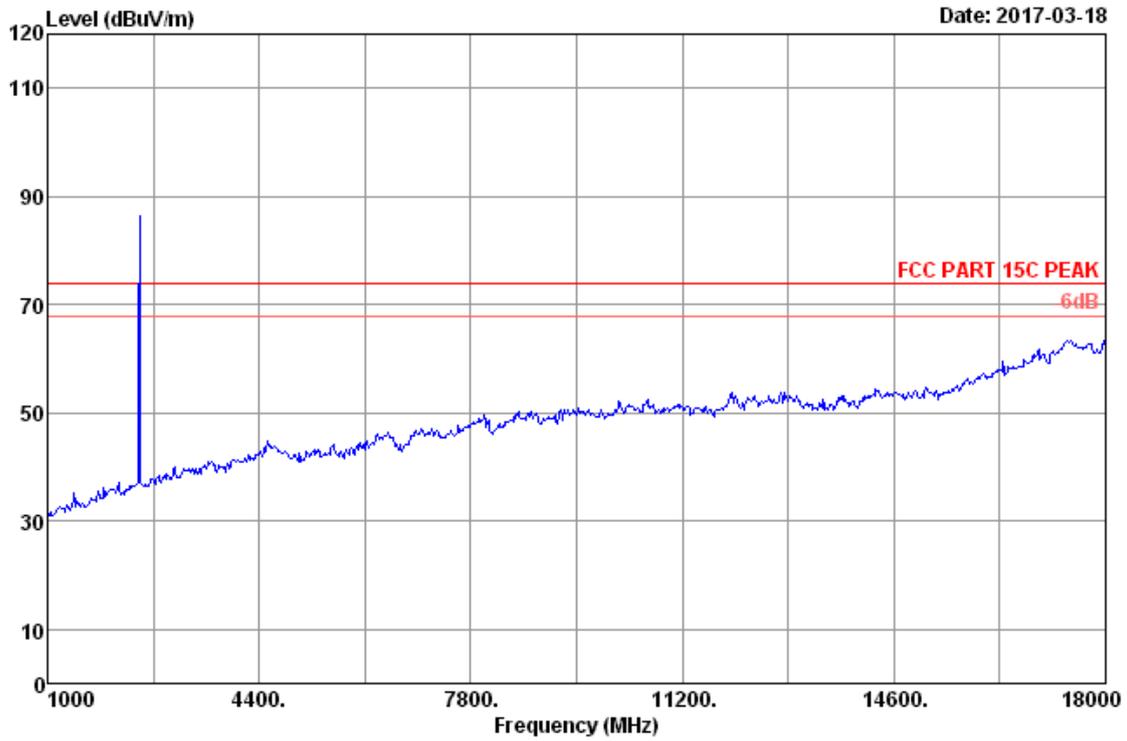


Site no. : 3m Chamber Data no. : 13
Dis. / Ant. : 3m 2016 MCTD1209 3006 Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK Pre : 101.2kPa
Env. / Ins. : 23.1°C/56.9% Engineer : Lynn
EUT : Home Audio System M/N:GTK-XB90
Power rating : AC 120V/60Hz
Test Mode : GFSK 2480MHz Tx Mode
 Vertical

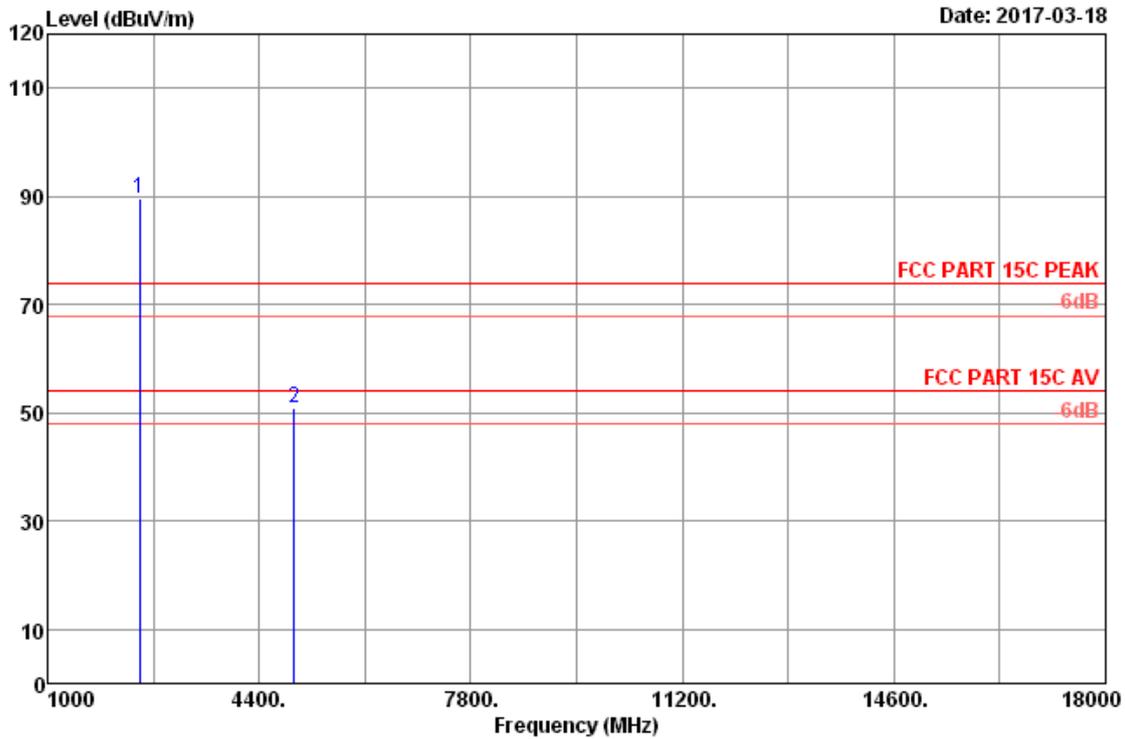

Site no. : 3m Chamber Data no. : 14
 Dis. / Ant. : 3m 2016 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1°C/56.9% Engineer : Lynn
 EUT : Home Audio System M/N:GTK-XB90
 Power rating : AC 120V/60Hz
 Test Mode : GFSK 2480MHz Tx Mode
 Vertical

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.00	28.27	8.42	88.36	35.34	89.71	74.00	-15.71	Peak
2	4960.00	32.48	11.85	42.14	35.63	50.84	74.00	23.16	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

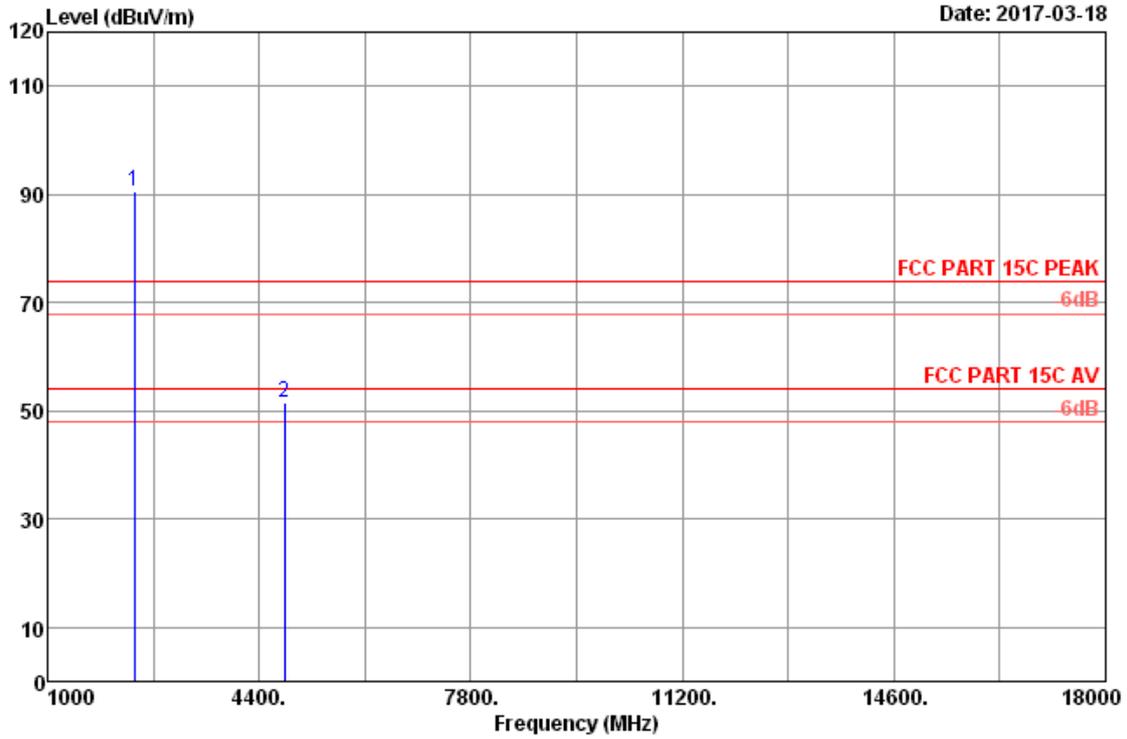

Site no. : 3m Chamber Data no. : 18
 Dis. / Ant. : 3m 2016 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1°C/56.9% Engineer : Lynn
 EUT : Home Audio System M/N:GTK-XB90
 Power rating : AC 120V/60Hz
 Test Mode : 8-DPSK 2402MHz Tx Mode
 Vertical

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2402.00	28.14	8.34	89.36	35.33	90.51	74.00	-16.51	Peak
2	4804.00	32.79	11.75	42.59	35.65	51.48	74.00	22.52	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

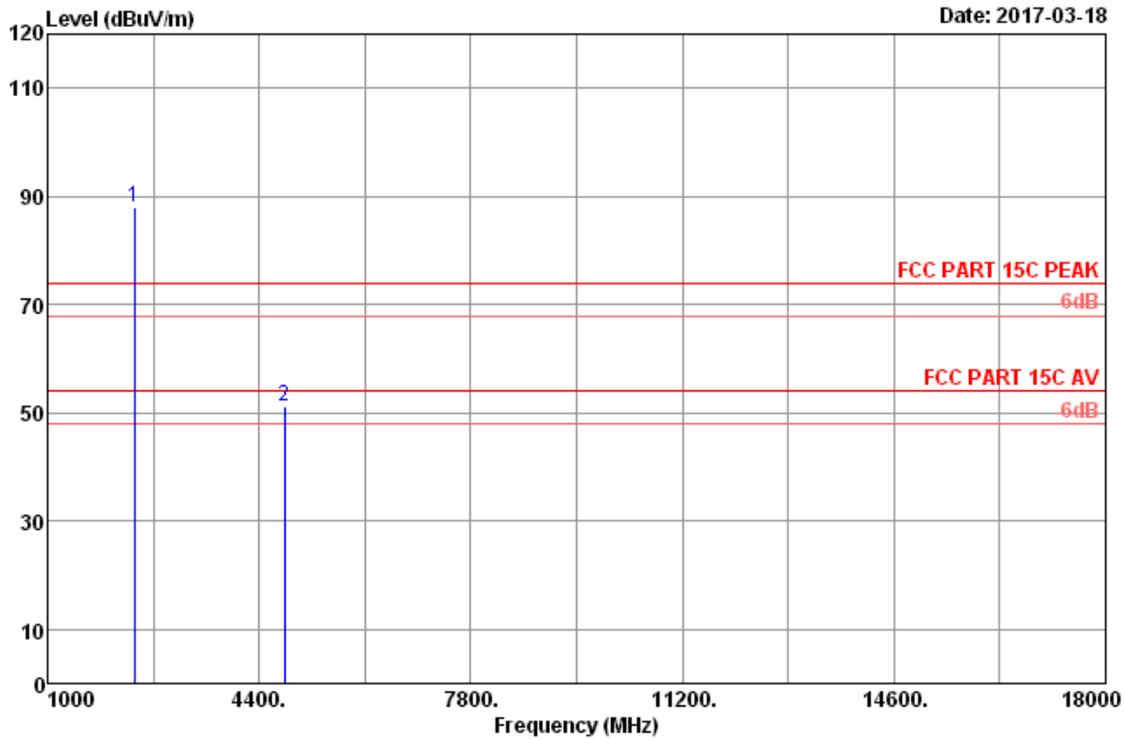

Site no. : 3m Chamber Data no. : 20
 Dis. / Ant. : 3m 2016 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1°C/56.9% Engineer : Lynn
 EUT : Home Audio System M/N:GTK-XB90
 Power rating : AC 120V/60Hz
 Test Mode : 8-DPSK 2402MHz Tx Mode
 Vertical

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2402.00	28.14	8.34	86.71	35.33	87.86	74.00	-13.86	Peak
2	4804.00	32.79	11.75	42.17	35.65	51.06	74.00	22.94	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

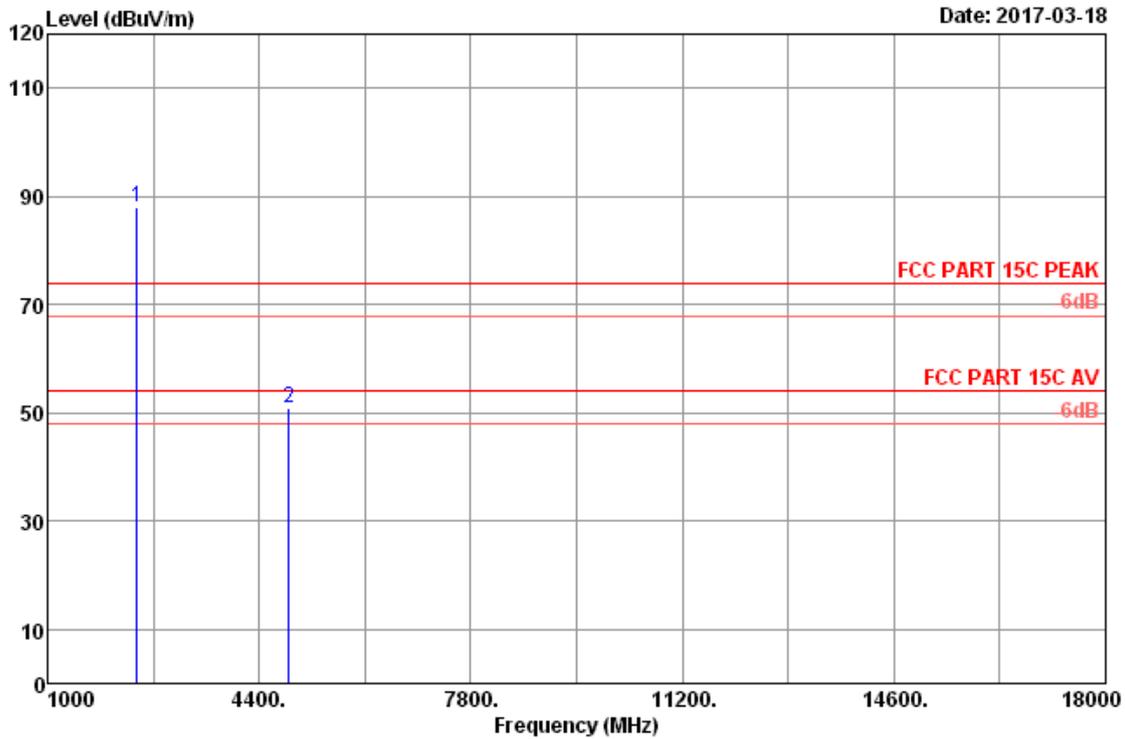


Site no. : 3m Chamber Data no. : 24
 Dis. / Ant. : 3m 2016 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1°C/56.9% Engineer : Lynn
 EUT : Home Audio System M/N:GTK-XB90
 Power rating : AC 120V/60Hz
 Test Mode : 8-DPSK 2441MHz Tx Mode
 Vertical

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2441.00	28.21	8.38	86.68	35.33	87.94	74.00	-13.94	Peak
2	4882.00	32.64	11.80	42.01	35.64	50.81	74.00	23.19	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

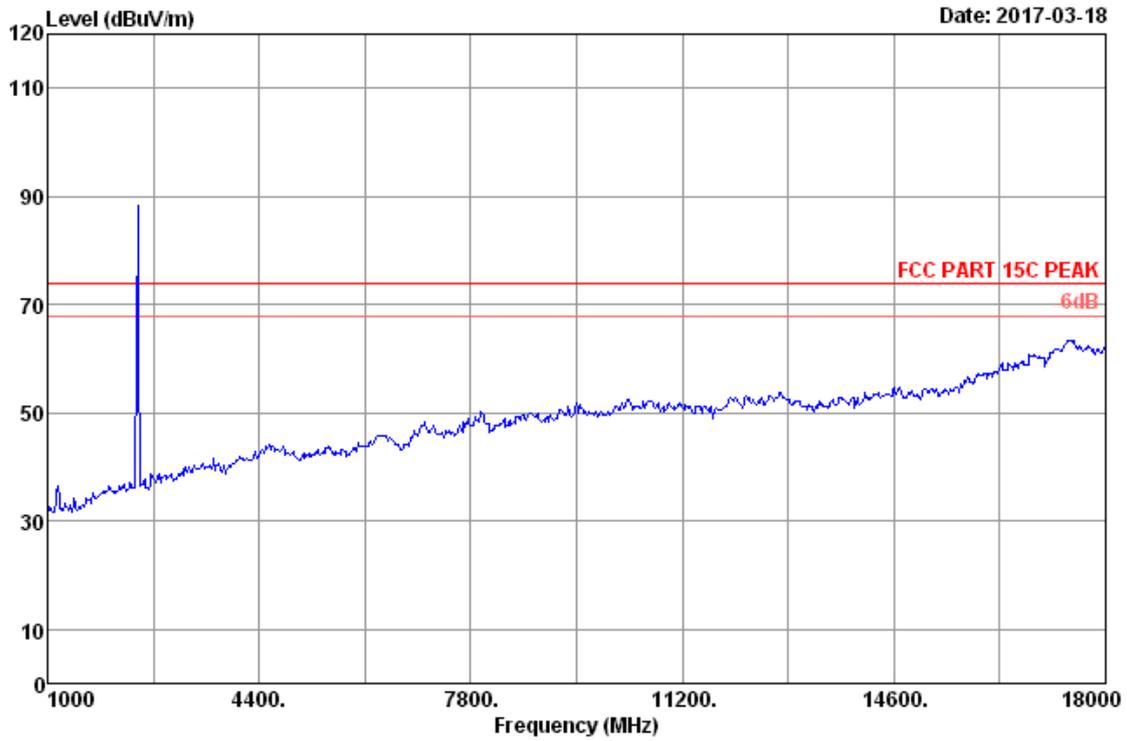


Site no. : 3m Chamber Data no. : 25
Dis. / Ant. : 3m 2016 MCTD1209 3006 Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK Pre : 101.2kPa
Env. / Ins. : 23.1°C/56.9% Engineer : Lynn
EUT : Home Audio System M/N:GTK-XB90
Power rating : AC 120V/60Hz
Test Mode : 8-DPSK 2441MHz Tx Mode
Vertical

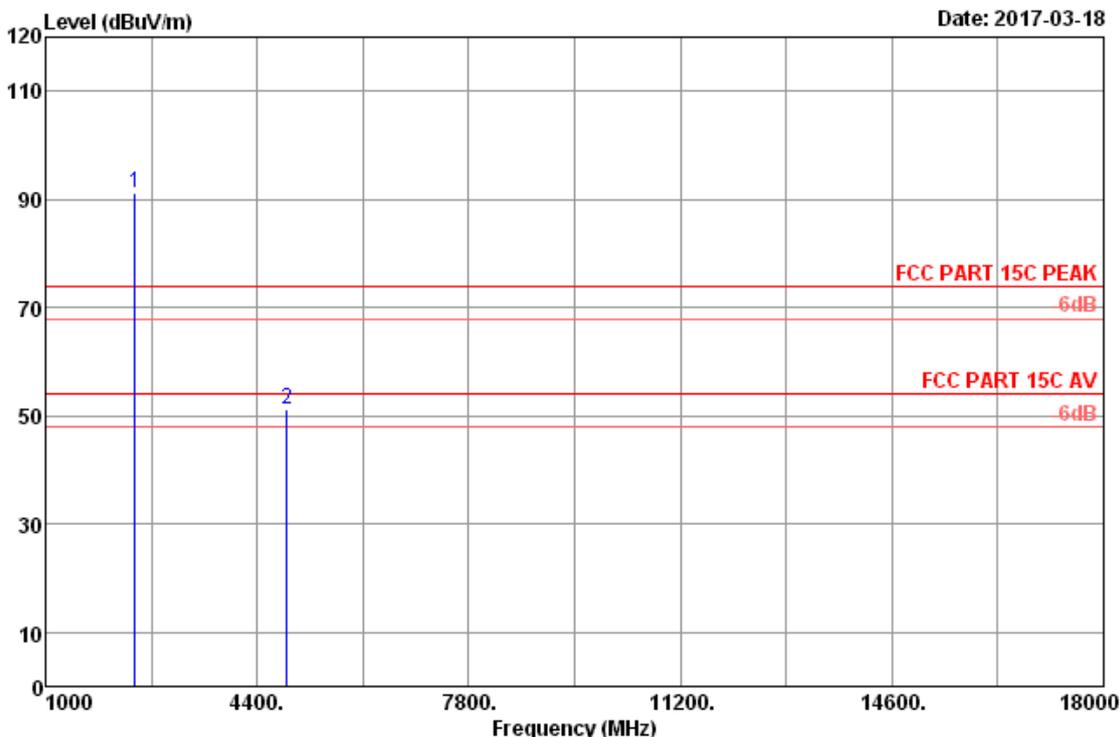

Site no. : 3m Chamber Data no. : 26
 Dis. / Ant. : 3m 2016 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1°C/56.9% Engineer : Lynn
 EUT : Home Audio System M/N:GTK-XB90
 Power rating : AC 120V/60Hz
 Test Mode : 8-DPSK 2441MHz Tx Mode
 Vertical

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2441.00	28.21	8.38	89.85	35.33	91.11	74.00	-17.11	Peak
2	4882.00	32.64	11.80	42.46	35.64	51.26	74.00	22.74	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

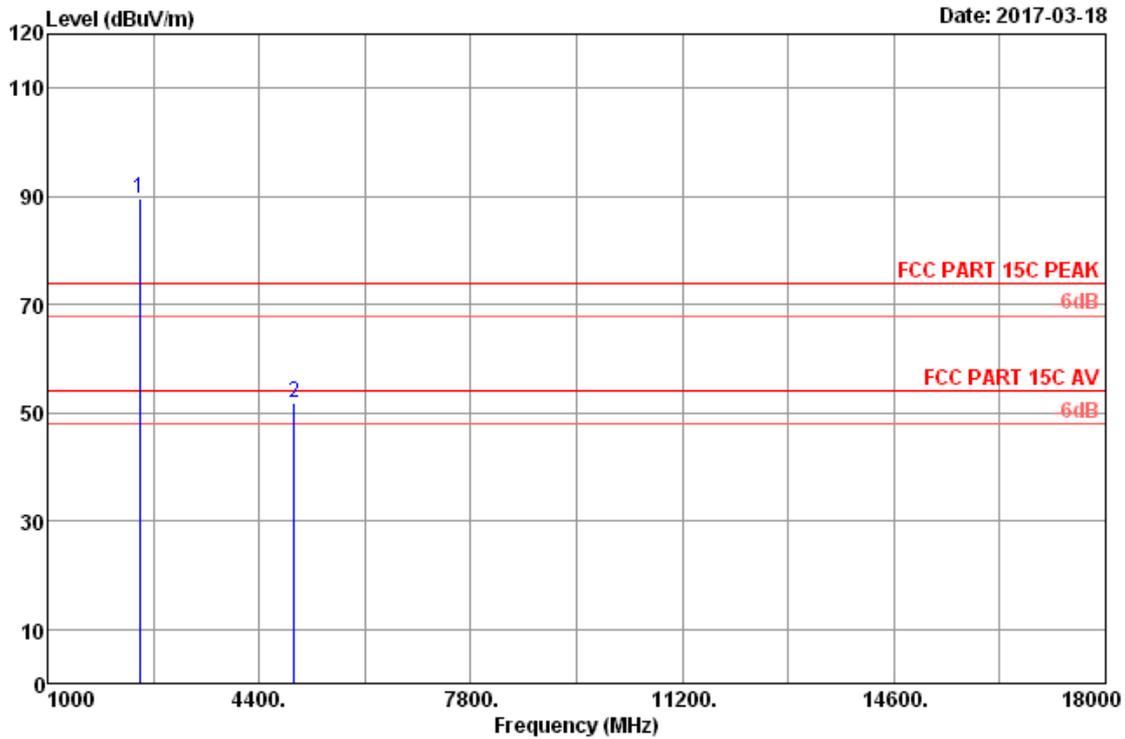


Site no. : 3m Chamber Data no. : 30
 Dis. / Ant. : 3m 2016 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1°C/56.9% Engineer : Lynn
 EUT : Home Audio System M/N:GTK-XB90
 Power rating : AC 120V/60Hz
 Test Mode : 8-DPSK 2480MHz Tx Mode
 Vertical

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.00	28.27	8.42	88.17	35.34	89.52	74.00	-15.52	Peak
2	4960.00	32.48	11.85	43.06	35.63	51.76	74.00	22.24	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

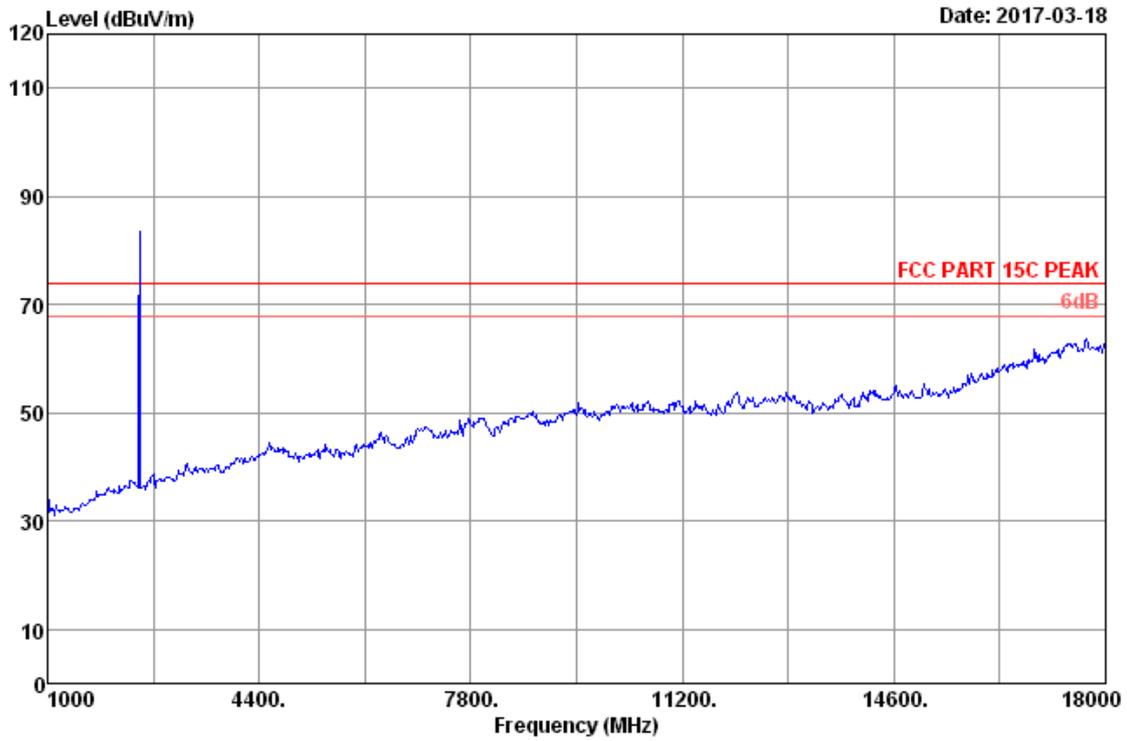

Site no. : 3m Chamber Data no. : 31
Dis. / Ant. : 3m 2016 MCTD1209 3006 Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK Pre : 101.2kPa
Env. / Ins. : 23.1°C/56.9% Engineer : Lynn
EUT : Home Audio System M/N:GTK-XB90
Power rating : AC 120V/60Hz
Test Mode : 8-DPSK 2480MHz Tx Mode
Vertical

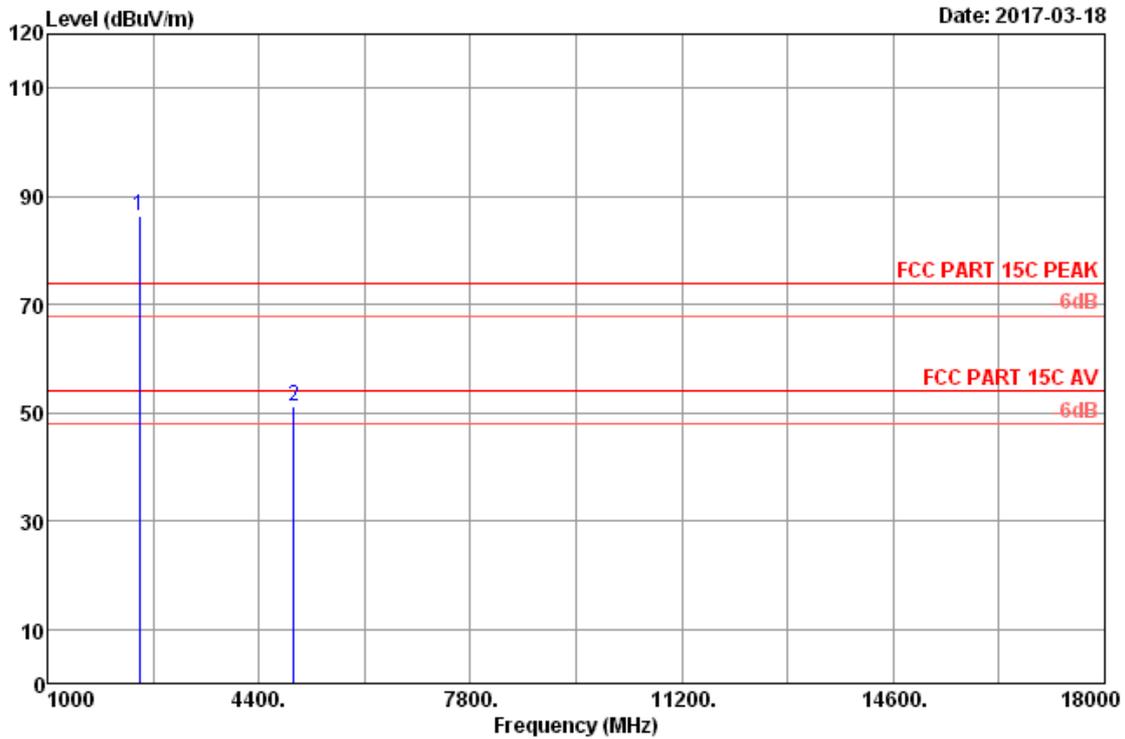

Site no. : 3m Chamber Data no. : 32
 Dis. / Ant. : 3m 2016 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1°C/56.9% Engineer : Lynn
 EUT : Home Audio System M/N:GTK-XB90
 Power rating : AC 120V/60Hz
 Test Mode : 8-DPSK 2480MHz Tx Mode
 Vertical

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.00	28.27	8.42	85.04	35.34	86.39	74.00	-12.39	Peak
2	4960.00	32.48	11.85	42.58	35.63	51.28	74.00	22.72	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

5. CONDUCTED SPURIOUS EMISSIONS

5.1. Test Equipments

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum	Agilent	N9030A	MY51380221	Oct.15,16	1 Year
2.	Attenuator	Agilent	8491B	MY39262165	Apr.23,16	1 Year
3.	RF Cable	Marvelous Microwave Inc	SFL402105FLEX	NO.1	Oct.15,16	1 Year

5.2. Limit

In any 100kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.

5.3. Test Procedure

The transmitter output was connected to a spectrum analyzer, The resolution bandwidth is set to 100 kHz, The video bandwidth is set to 300 kHz and measure all the emissions With peak detector.


5.4. Test result

PASS (The testing data was attached in the next pages.)


Hopping off

GFSK


2402MHz(30MHz – 1GHz)

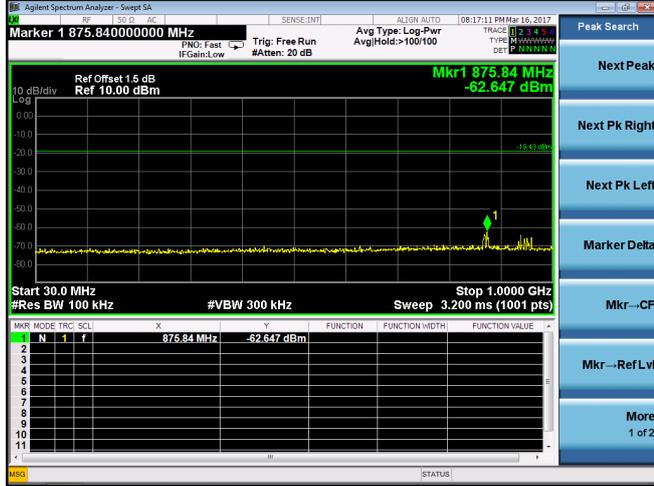


2402MHz(10GHz – 25GHz)

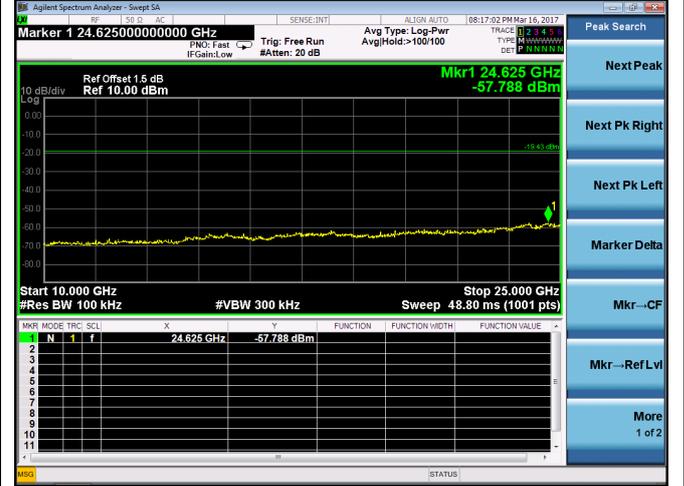


2402MHz(1GHz – 10GHz)

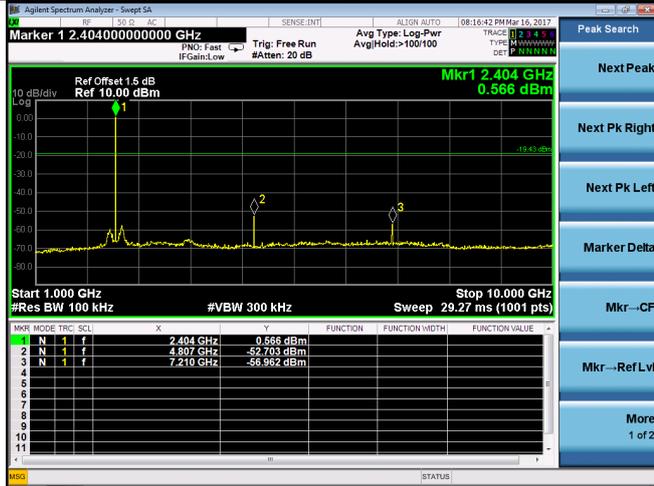


2441(30MHz – 1GHz)

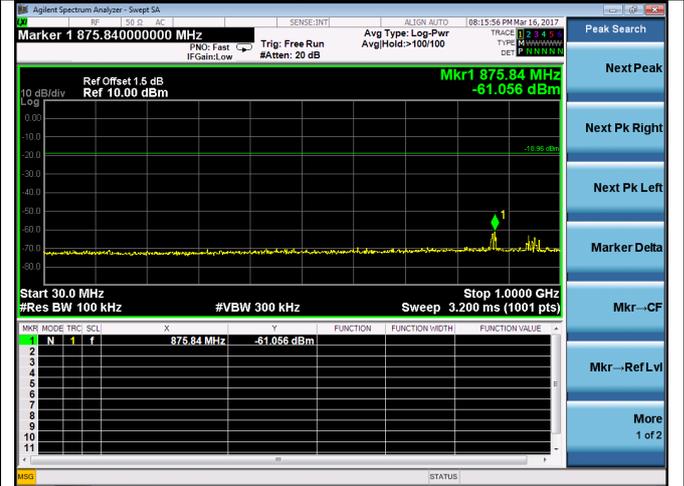


2402MHz(2.3GHz – 2.4GHz)

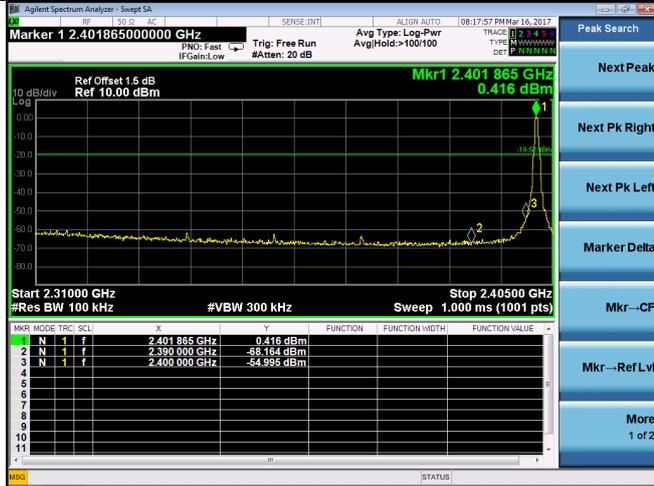


2441(1GHz – 10GHz)

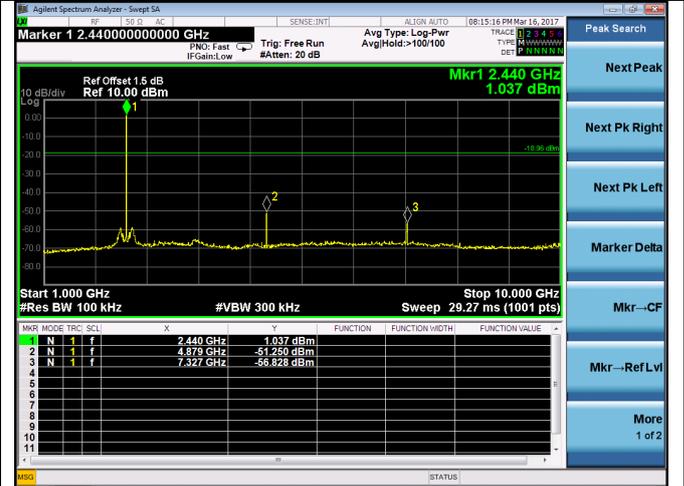


2441(10GHz – 25GHz)

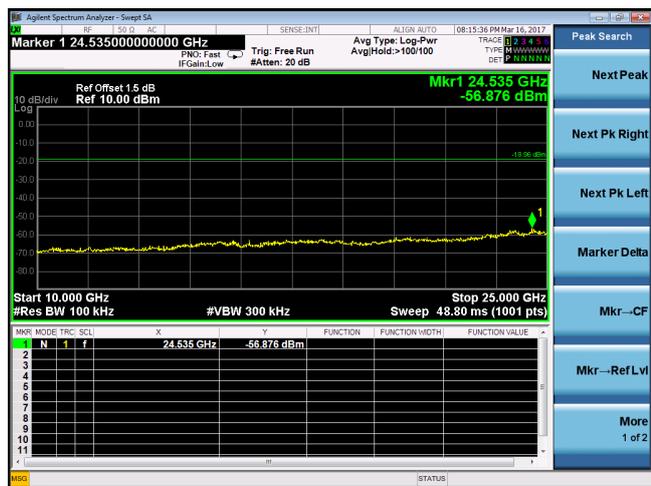


2480MHz(2.4GHz – 2.5GHz)

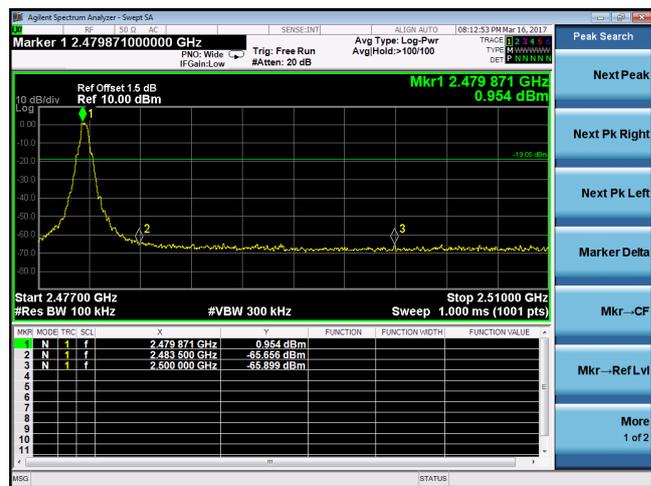


2480MHz(30MHz – 1GHz)

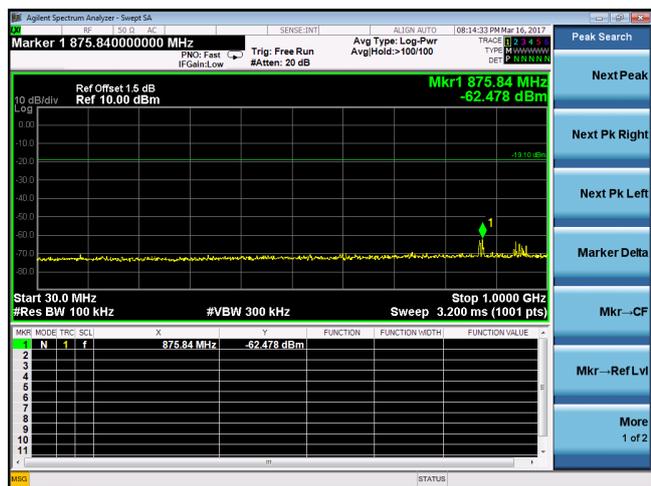

2480MHz(10GHz – 25GHz)

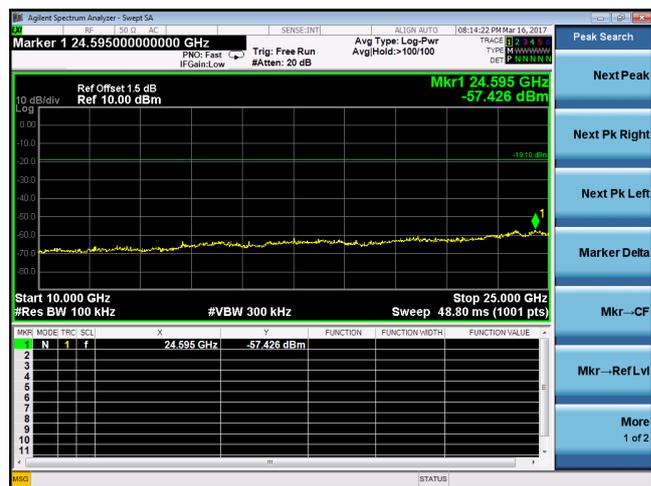


2480MHz(1GHz – 10GHz)

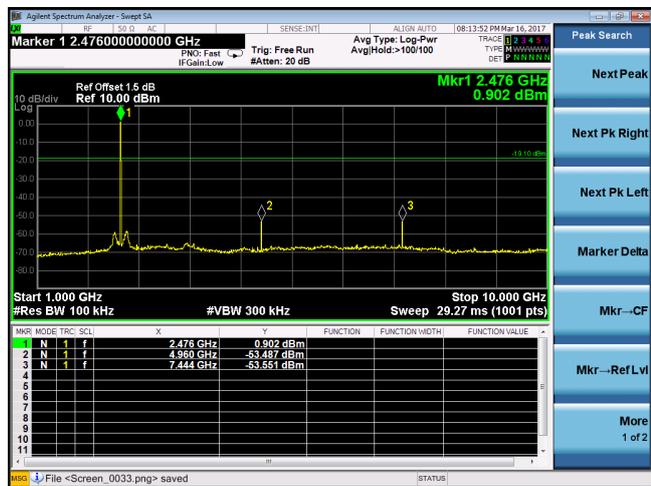


8-DPSK


2402MHz(30MHz – 1GHz)

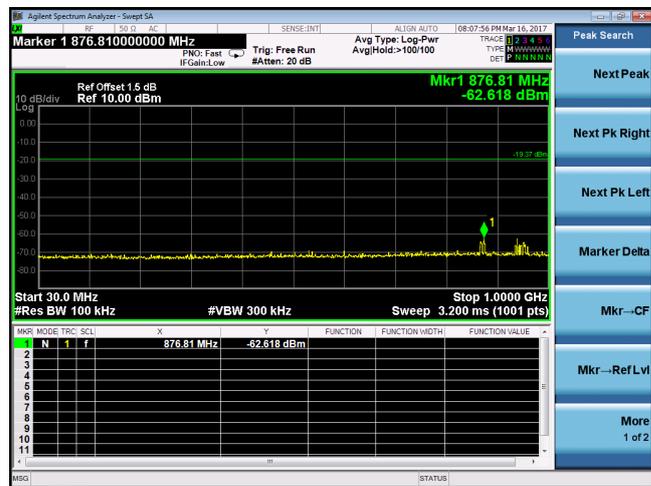


2402MHz(1GHz – 10GHz)

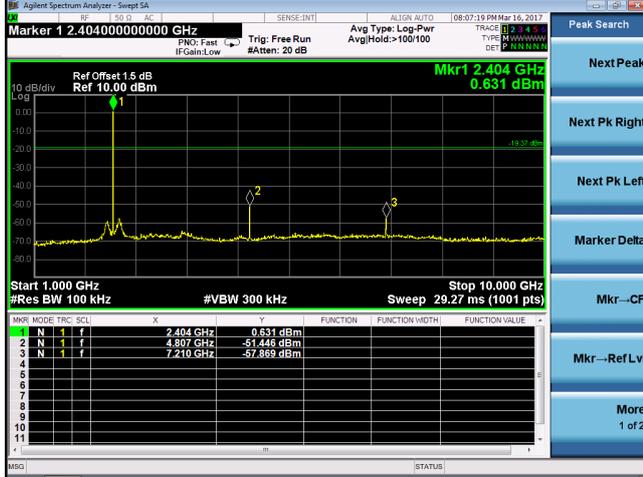


2441MHz (30MHz – 1GHz)

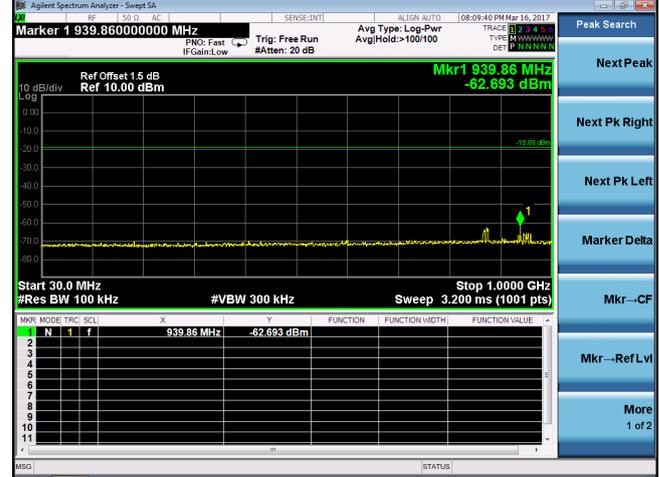


2402MHz(2.3GHz – 2.4GHz)

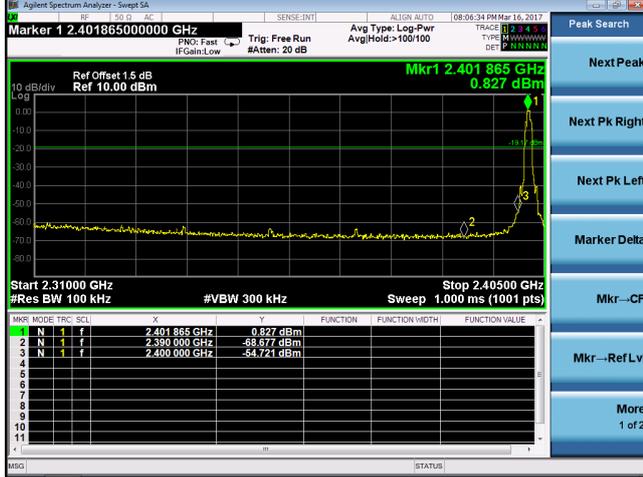


2441MHz(1GHz – 10GHz)

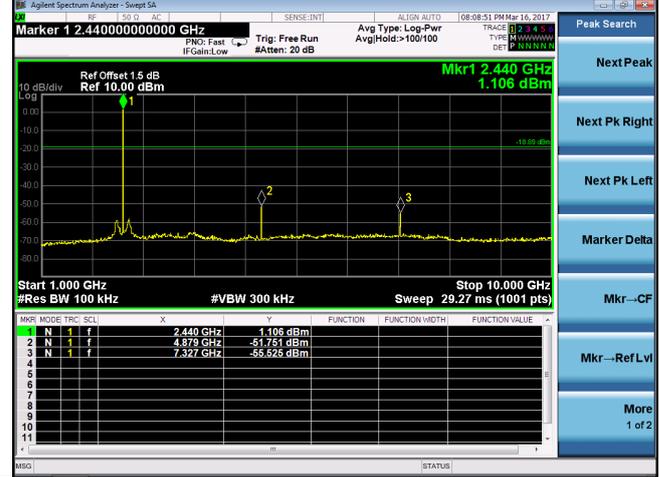


2402MHz(10GHz – 25GHz)

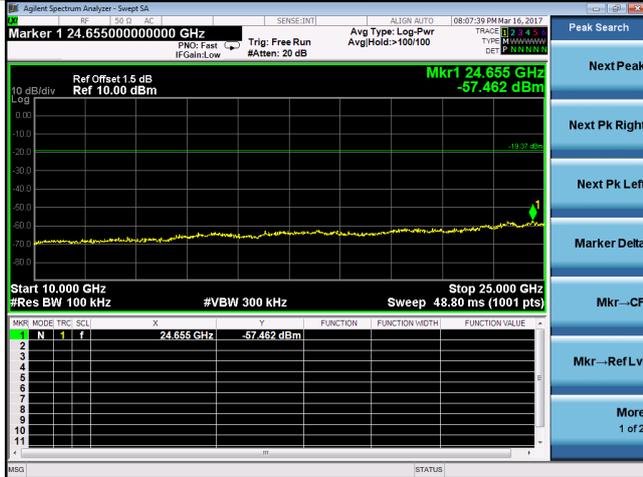


2441MHz(10GHz – 25GHz)

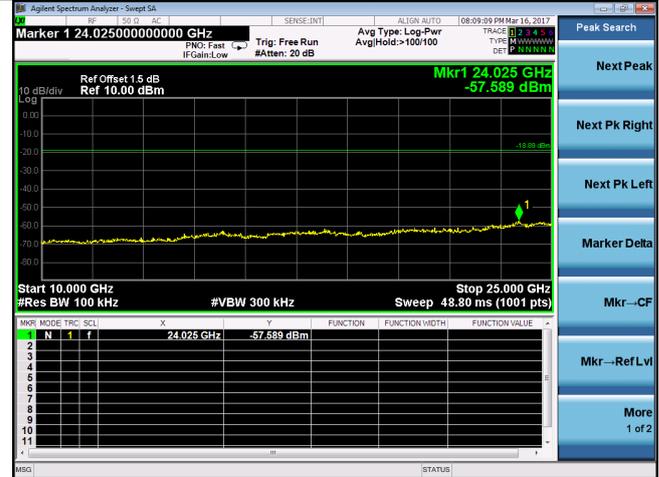


2480MHz(30MHz – 1GHz)

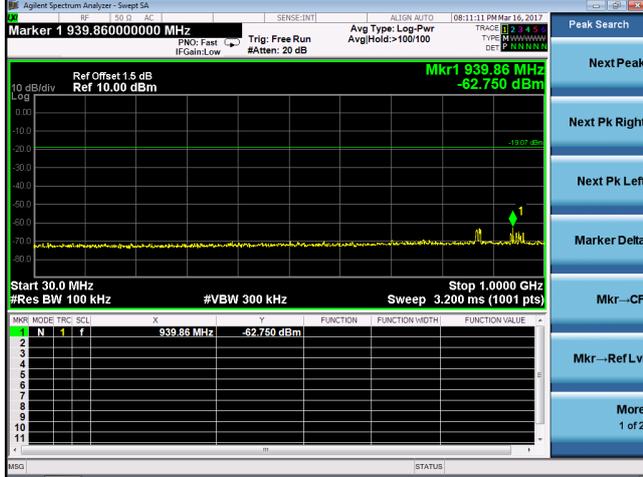


2480MHz(10GHz – 25GHz)

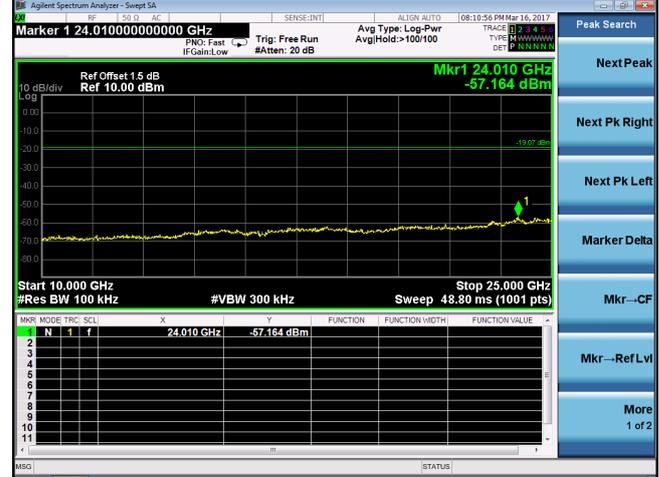


2480MHz(1GHz – 10GHz)

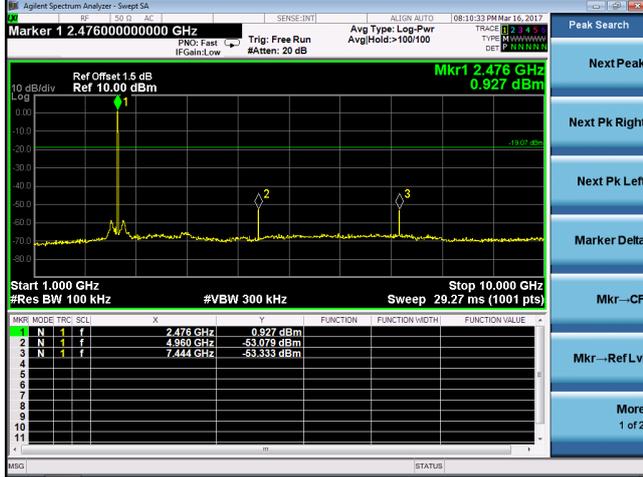


Hopping on GFSK(2.3GHz – 2.4GHz)

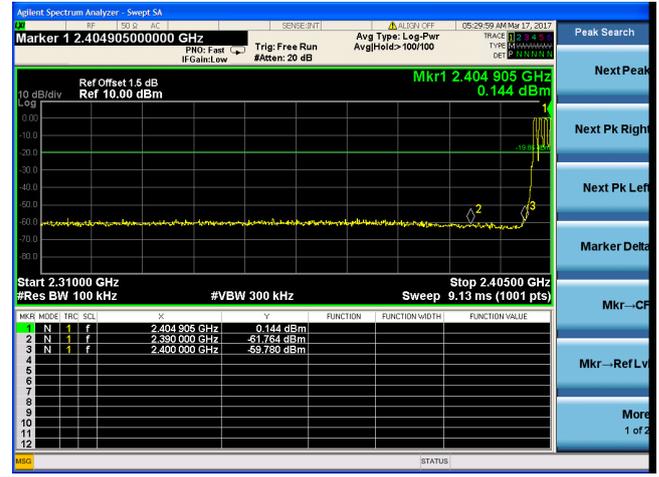


2480MHz(2.4GHz – 2.5GHz)

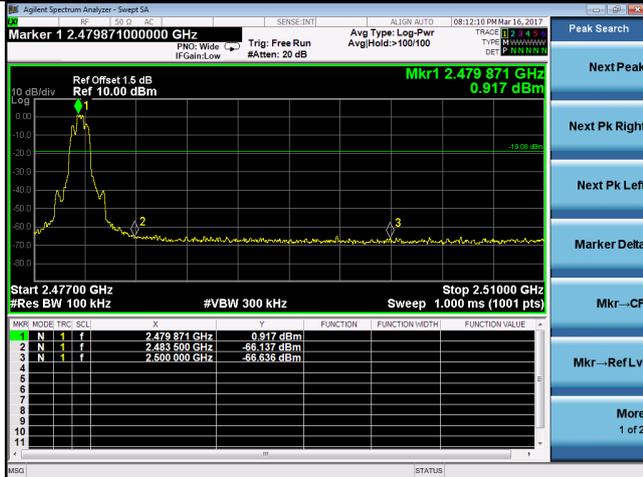


(2.4GHz – 2.5GHz)

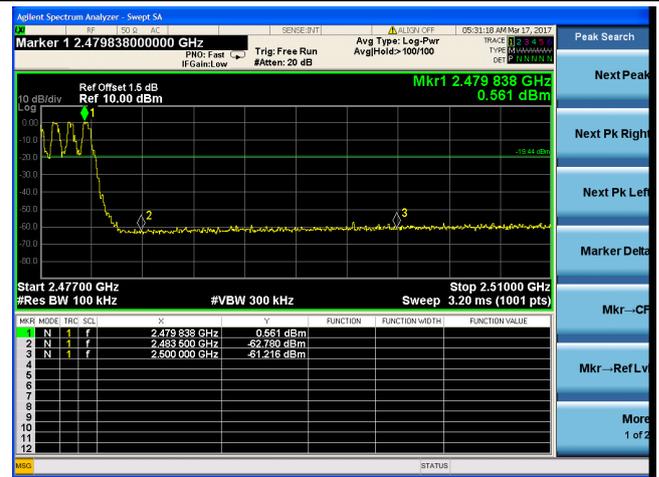

8-DPSK(2.3GHz – 2.4GHz)

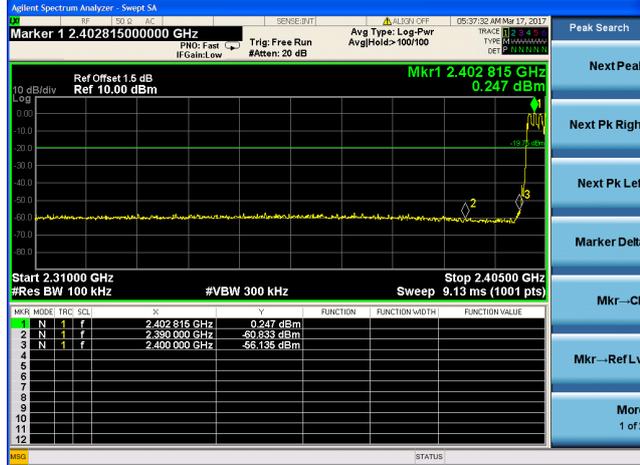

(2.4GHz – 2.5GHz)

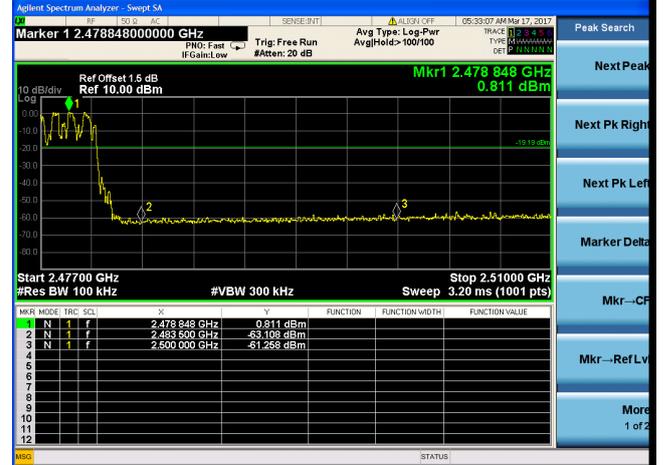

6. 20 DB BANDWIDTH TEST

6.1. Test Equipments

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum	Agilent	N9030A	MY51380221	Oct.15,16	1Year
2.	Attenuator (20dB)	Agilent	8491B	MY39262165	Apr.23,16	1 Year
3.	RF Cable	Marvelous Microwave Inc	SFL402105FLEX	NO.1	Oct.15,16	1 Year

6.2. Limit

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

6.3. Test Procedure

1. Connect the antenna port of the EUT to the spectrum analyzer.
2. Let the EUT transmit at Low/ Mid/ High channel with test software.
3. Setting of SA is following as: RBW: 30kHz / VBW: 100kHz
Sweep Mode: Continuous sweep
Detect mode: Positive peak
Trace mode: Max hold.
4. Use the occupied bandwidth function of the SA measure the 20dB bandwidth directly.

6.4. Test Results

EUT: Home Audio System			
M/N: GTK-XB90			
Test date: 2017-03-17		Pressure: 102.8±1.0 kpa	Humidity: 52.8±3.0%
Tested by: Lynn		Test site: RF site	Temperature: 23.2±0.6 °C
Test Mode	Frequency (MHz)	20dB bandwidth (KHz)	Limit (KHz)
GFSK	2402	680.3	N/A
	2441	678.1	N/A
	2480	679.3	N/A
8-DPSK	2402	1162	N/A
	2441	1163	N/A
	2480	1164	N/A
Conclusion : PASS			

GFSK

2402MHz



8-DPSK

2402MHz



2441MHz



2441MHz



2480MHz



2480MHz



7. CARRIER FREQUENCY SEPARATION TEST

7.1. Test Equipments

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	Spectrum	Agilent	N9030A	MY51380221	Oct.15,16	1Year
2.	RF Cable	Marvelous Microwave Inc	SFL402105FLEX	NO.1	Oct.15,16	1 Year

7.2. Limit

Frequency hopping systems shall have hopping channel carrier frequency separated by a minimum of 25kHz or the 20dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.


7.3. Test Procedure

1. Connect the antenna port of the EUT to the Spectrum analyzer.
2. Let the EUT transmit at Low/ Mid/ High channel.
3. Setting of SA is following as: RBW: 100kHz / VBW: 300kHz.Span:5MHz
4. Use the mark Delta function of the SA measure out the channel separation.

7.4. Test Results.

EUT: Home Audio System		
M/N: GTK-XB90		
Test date: 2017-03-17	Pressure: 101.4±1.0kpa	Humidity: 51.4±3.0%
Tested by: Alice	Test site: RF Site	Temperature: 23.4±0.6

Test Mode	Channel separation	Limit(KHz)	Conclusion
GFSK	1.0MHz	453.760	PASS
8-DPSK	1.0MHz	776.388	PASS

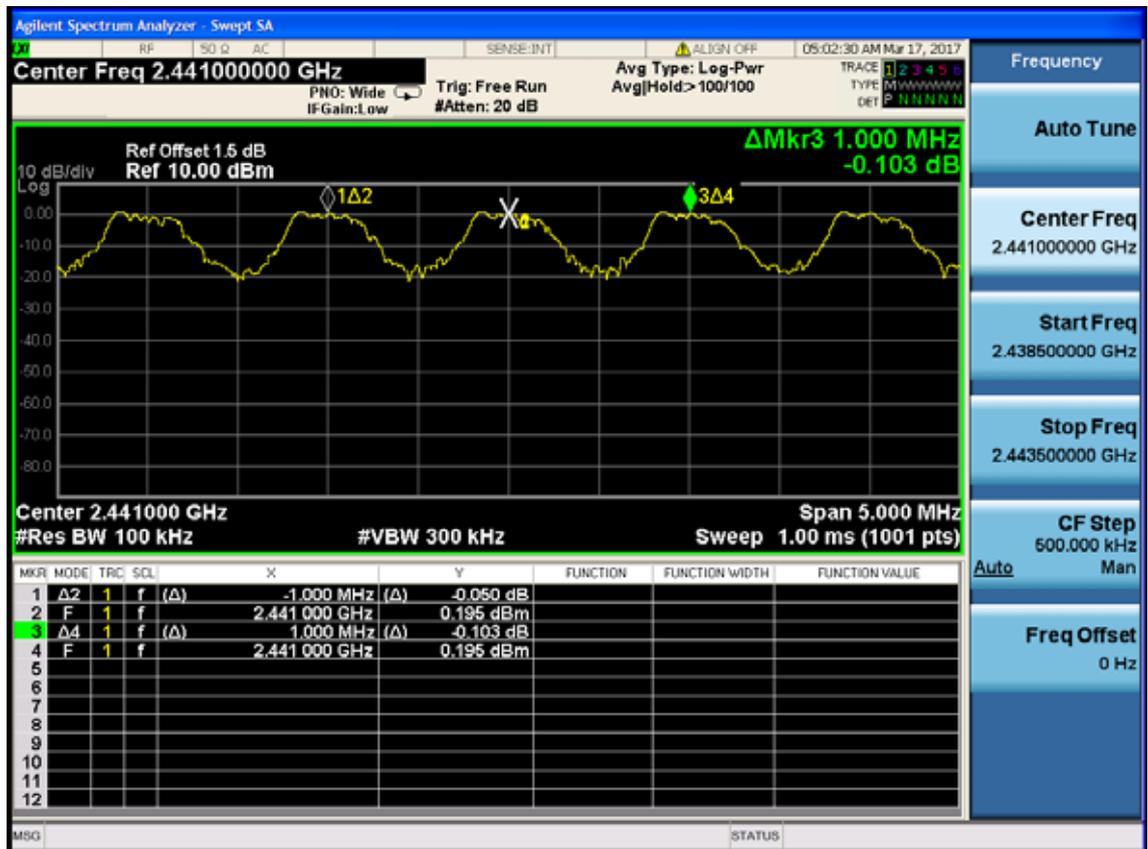

8. NUMBER OF HOPPING FREQUENCY TEST

8.1. Test Equipments

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	Spectrum	Agilent	N9030A	MY51380221	Oct.15,16	1 Year
2.	RF Cable	Marvelous Microwave Inc	SFL402105FLEX	NO.1	Oct.15,16	1 Year

8.2. Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels

8.3. Test Procedure



1. Connect the antenna of the EUT to Spectrum analyzer and let the EUT working at hopping mode.
2. Setting of SA is following as: RBW: 100kHz / VBW: 300kHz ,
 Start frequency: 2390MHz
 Stop frequency: 2483.5MHz
 And waiting for the hopping trace until stability, count out the number of the hopping.

8.4. Test Results



EUT: Home Audio System		
M/N: GTK-XB90		
Test date: 2017-03-17	Pressure: 101.4±1.0 kpa	Humidity: 51.4±3.0%
Tested by: Alice	Test site: RF Site	Temperature: 23.4±0.6

Test Mode	Number of channel	Limit	Conclusion
GFSK	79	≥15	PASS
8-DPSK	79	≥15	PASS

GFSK

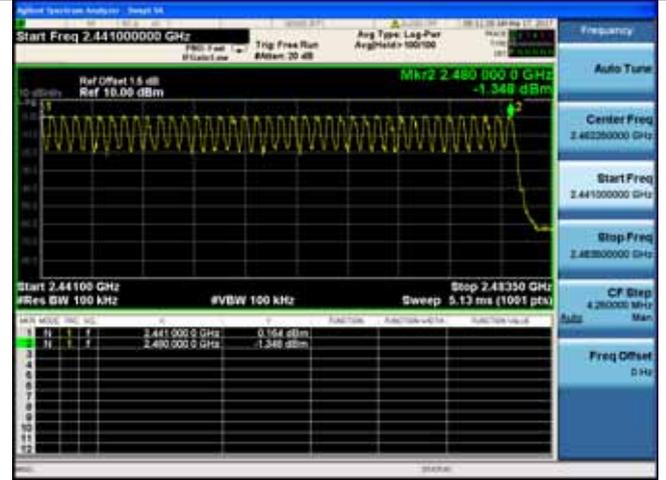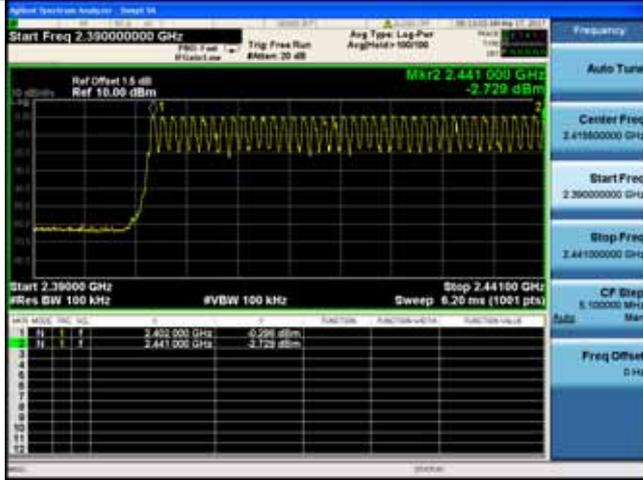

8-DPSK

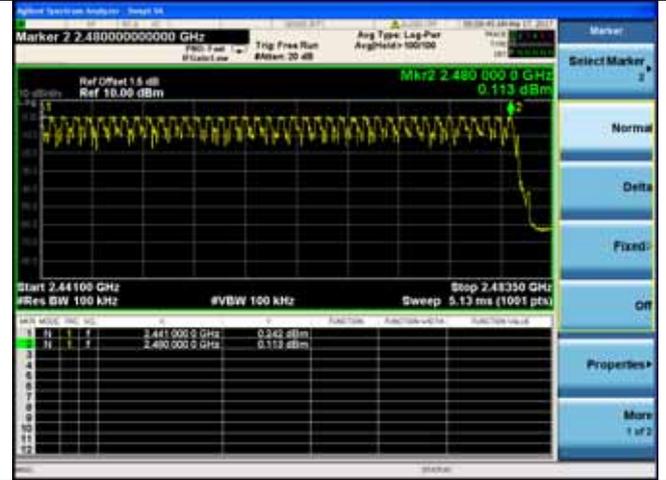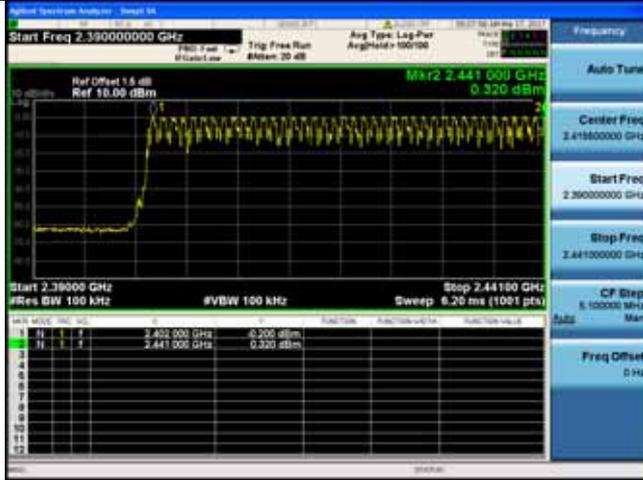

9. DWELL TIME

9.1. Test Equipments

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	Spectrum	Agilent	N9030A	MY51380221	Oct.15,16	1 Year
2.	RF Cable	Marvelous Microwave Inc	SFL402105FLEX	NO.1	Oct.15,16	1 Year

9.2. Limit

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

9.3. Test Procedure

1. Connect the antenna of the EUT to Spectrum analyzer and let the EUT working at hopping mode.
2. Setting of SA is following as:
 RBW: 100kHz / VBW: 100kHz
 Sweep Mode: Single
 Detect mode: Positive peak
 Trace mode: Auto
 Span: 0Hz
 Sweep time: 5s and big enough to measure one hopping signal
3. Use below formula calculate the Dwell time

$$\text{Dwell time} = \text{Hopping number per second} * 0.4 * \text{channel number} * \text{Pulse bandwidth per hopping.}$$

9.4. Test Results



EUT: Home Audio System		
M/N: GTK-XB90		
Test date: 2017-03-17	Pressure: 101.4±1.0kpa	Humidity: 51.4±3.0%
Tested by: Alice	Test site: RF Site	Temperature: 23.4±0.6

Mode		dwell time	Limit	Conclusion
GFSK	DH1	44 hops/5s*0.4*79channels* 0.431 ms =119.852ms	400ms	PASS
	DH3	20 hops/5s*0.4*79channels* 1.689 ms =213.490ms	400ms	PASS
	DH5	16 hops/5s*0.4*79channels* 2.945 ms =297.798ms	400ms	PASS
8-DPSK	3-DH1	48 hops/5s*0.4*79channels* 0.432 ms =131.052ms	400ms	PASS
	3-DH3	26 hops/5s*0.4*79channels* 1.686 ms =277.044ms	400ms	PASS
	3-DH5	16 hops/5s*0.4*79channels* 2.960 ms =299.315ms	400ms	PASS



Note: All the lower levels were signaled from receiver and should not be considered in here.

GFSK



DH 1

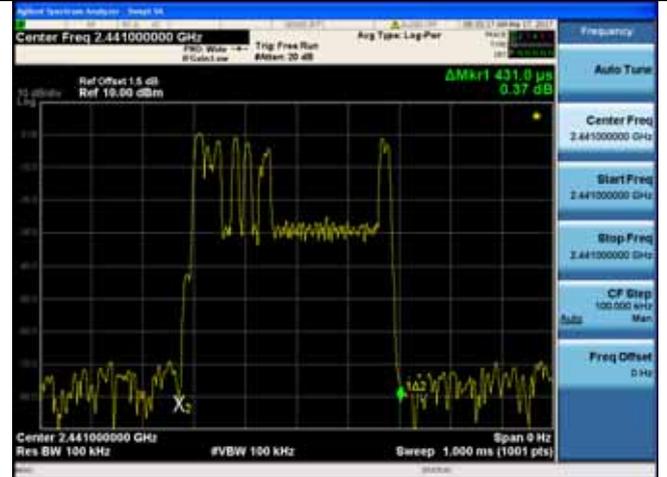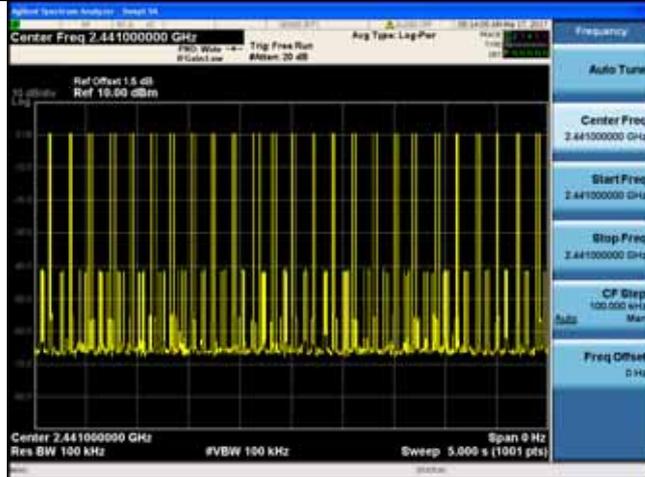

DH 3

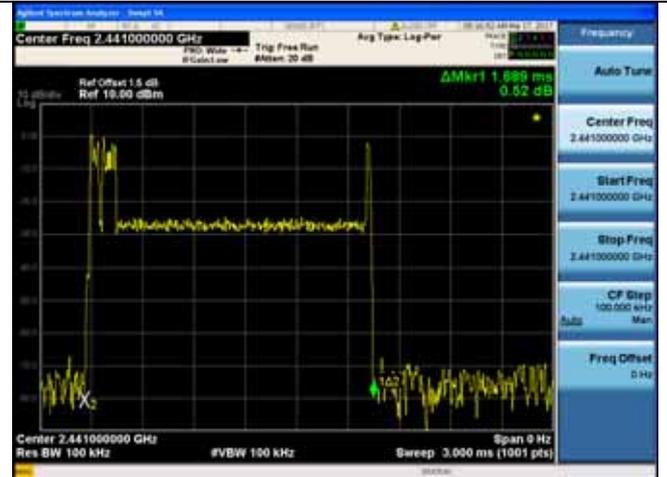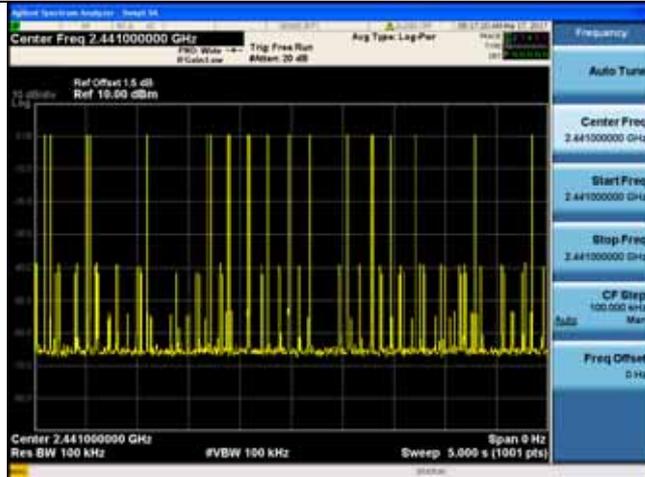


DH 5

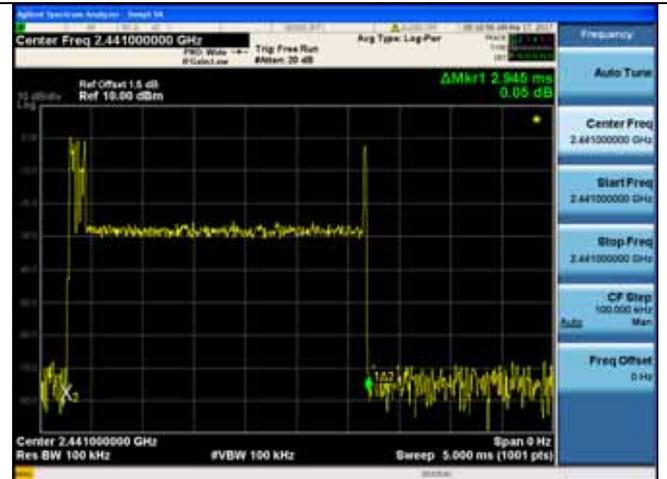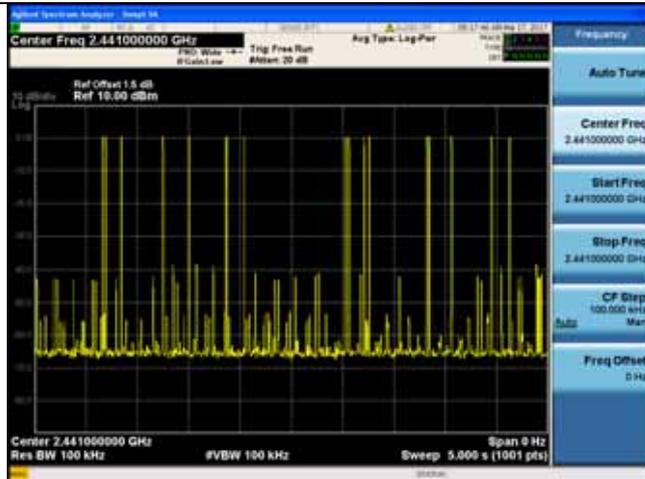


8-DPSK



3DH 1

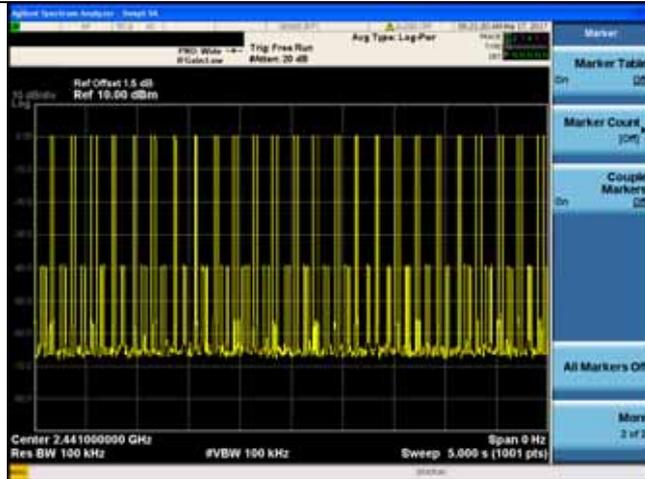

3DH 3

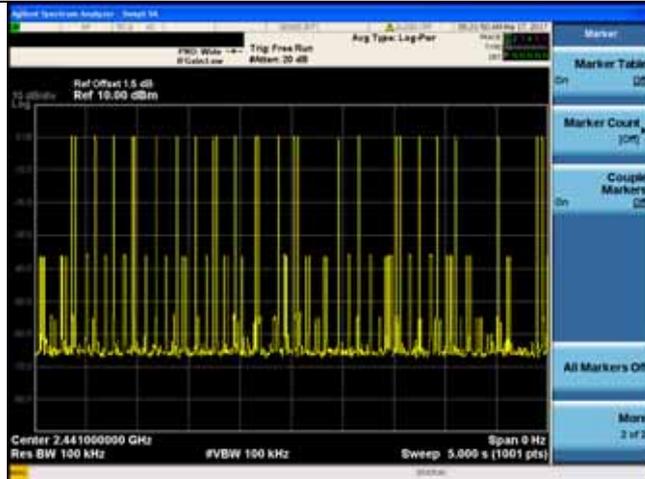

3DH 5

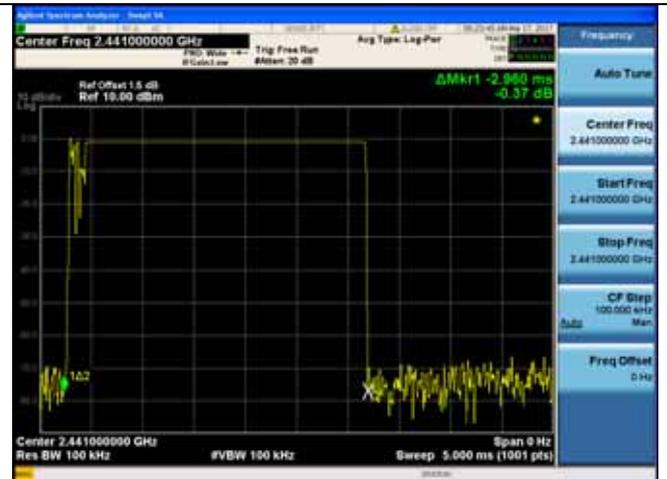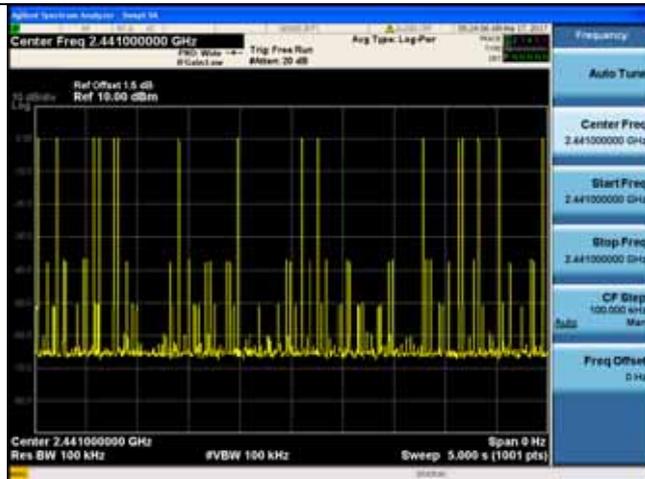

10. MAXIMUM PEAK OUTPUT POWER TEST

10.1. Test Equipments

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum	Agilent	N9030A	MY51380221	Oct.15,16	1 Year
2.	Power meter	Anritsu	ML2487A	6K00002472	Apr.23,16	1 Year
3.	Power sensor	Anritsu	MA2491A	0033005	Apr.23,16	1 Year
4.	Attenuator (20dB)	Agilent	8491B	MY39262165	Apr.23,16	1 Year
5.	RF Cable	Marvelous Microwave Inc	SFL402105FLEX	NO.1	Oct.15,16	1 Year

10.2. Limit

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt.

10.3. Test Procedure

Connected the EUT's antenna port to Power Sensor, and use power meter to test peak output power directly.

10.4. Test Results

EUT: Home Audio System			
M/N: GTK-XB90			
Test date: 2017-03-17		Pressure: 102.8±1.0 kpa	Humidity: 52.8±3.0%
Tested by: Lynn		Test site: RF site	Temperature: 23.2±0.6
Test Mode	Frequency (MHz)	Peak Output Power (dBm)	Limit (dBm)
GFSK	2402	0.679	30
	2441	1.153	30
	2480	1.056	30
8-DPSK	2402	1.005	30
	2441	1.460	30
	2480	1.348	30
Conclusion: PASS			

11.BAND EDGE COMPLIANCE TEST

11.1.Test Equipments

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum	Agilent	E4446A	US44300459	Apr.24,16	1 Year
2.	Amp	HP	8449B	3008A02495	Apr.24,16	1 Year
3.	Horn Antenna	ETC	MCTD 1209	DRH15F03006	Apr.11,16	1 Year
4.	HF Cable	Hubersuhner	Sucoflex104	274094/4	Apr.24,16	1 Year

11.2.Limit

All the lower and upper band-edges emissions appearing within 2310MHz to 2390MHz and 2483.5MHz to 2500MHz restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions outside operation frequency band 2400MHz to 2483.5MHz shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

11.3.Test Produce

For upper band emissions that are up to two bandwidths(2MHz) away (2483.5MHz to 2485.5MHz) from the band-edge use below produce:

1. Choose a spectrum analyzer span that encompasses both the peak of the fundamental emission and the band-edge emission under investigation. Set the analyzer RBW to 100KHz and with a video bandwidth 300KHz. Record the peak levels of the fundamental emission and the relevant band-edge emission, Observe the stored trace and measure the amplitude delta between the peak of the fundamental and the peak of the band-edge emission. This is not a field strength measurement, it is only a relative measurement to determine the amount by which the emission drops at the band edge relative to the highest fundamental emission level.
2. Subtract the delta measured in step (1) from the maximum field strengths measured in clause 4 .The resultant field strengths are then used to determine band-edge compliance as required by Section 15.205


For emissions above two bandwidths away from the band-edge use below produce:

1. The EUT is placed on a insulating material (up to 12mm thick) worked at highest radiated power.
2. The turntable was rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upperband-edges of the emission:
 - (a) PEAK: RBW=1MHz ;VBW=3MHz, PK detector, Sweep=AUTO
 - (b) This is pulse Modulation device a duty cycle factor was used to calculate average level based measured peak level.

11.4.Test Results

Pass (The testing data was attached in the next pages.)


Note: If the PK measured levels comply with average limit, then the average level were deemed to comply with average limit.

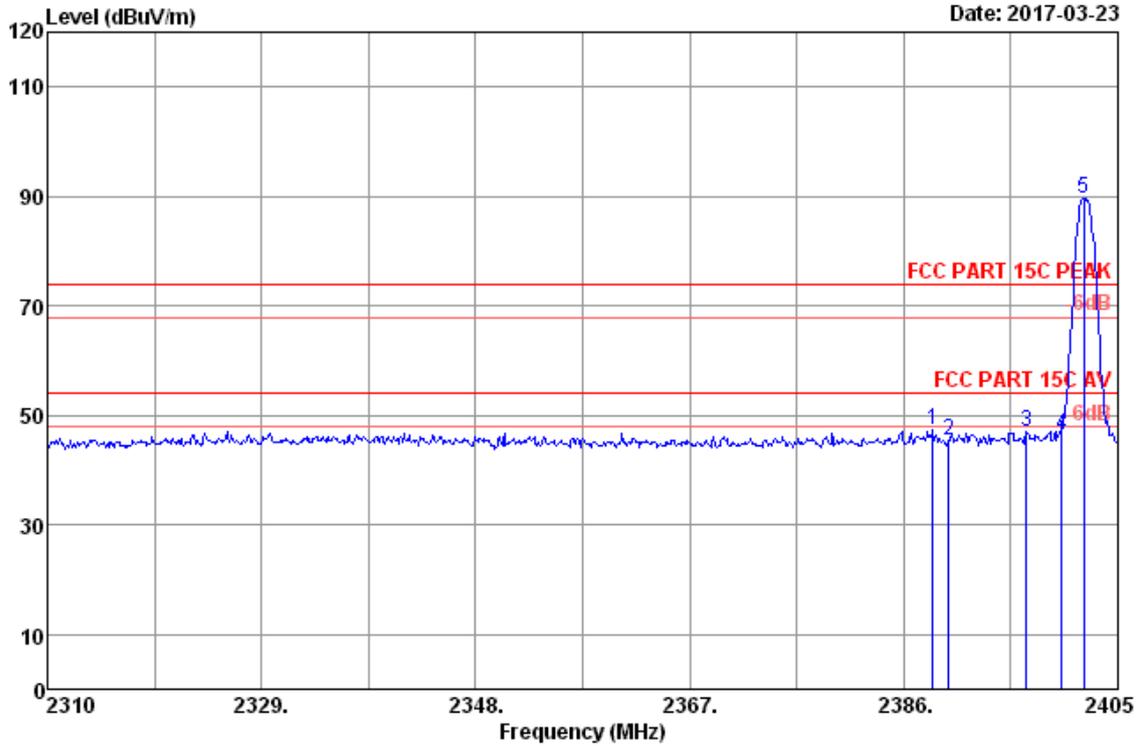

Site no. : 3m Chamber Data no. : 5
 Dis. / Ant. : 3m 2016 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1°C/56.9% Engineer : Lynn
 EUT : Home Audio System M/N:GTK-XB90
 Power rating : AC 120V/60Hz
 Test Mode : GFSK 2402MHz Tx Mode
 Horizontal

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2388.57	28.12	8.33	46.38	35.33	47.50	74.00	26.50	Peak
2	2390.00	28.12	8.33	44.31	35.33	45.43	74.00	28.57	Peak
3	2396.93	28.14	8.33	46.02	35.33	47.16	74.00	26.84	Peak
4	2400.00	28.14	8.34	45.15	35.33	46.30	74.00	27.70	Peak
5	2401.96	28.14	8.34	88.41	35.33	89.56	74.00	-15.56	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

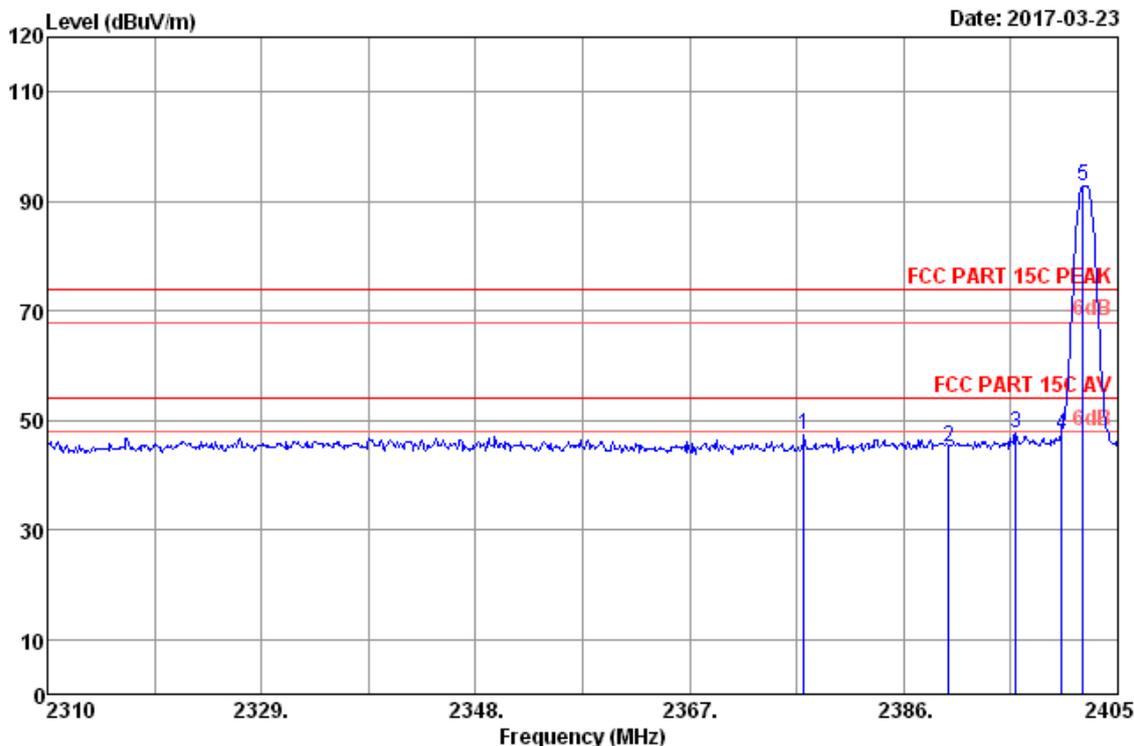

Site no. : 3m Chamber Data no. : 6
 Dis. / Ant. : 3m 2016 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1°C/56.9% Engineer : Lynn
 EUT : Home Audio System M/N:GTK-XB90
 Power rating : AC 120V/60Hz
 Test Mode : GFSK 2402MHz Tx Mode
 Horizontal

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2377.17	28.10	8.31	46.25	35.33	47.33	74.00	26.67	Peak
2	2390.00	28.12	8.33	43.97	35.33	45.09	74.00	28.91	Peak
3	2395.98	28.13	8.33	46.69	35.33	47.82	74.00	26.18	Peak
4	2400.00	28.14	8.34	46.07	35.33	47.22	74.00	26.78	Peak
5	2401.87	28.14	8.34	91.80	35.33	92.95	74.00	-18.95	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

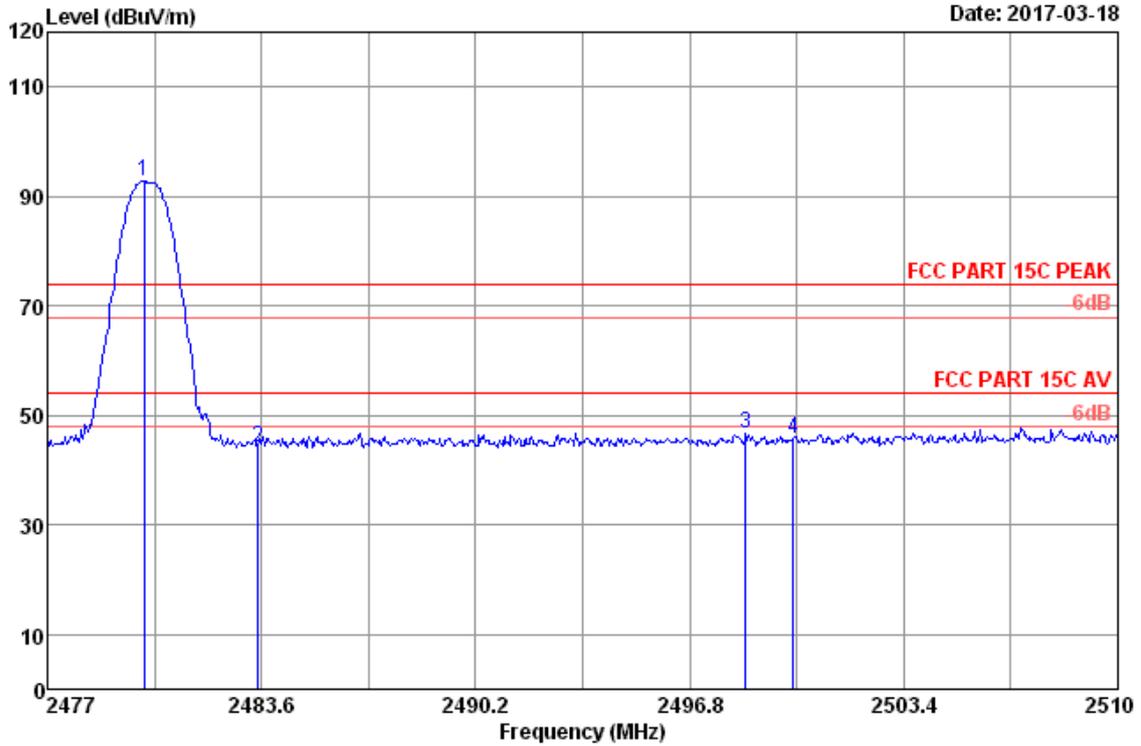

Site no. : 3m Chamber Data no. : 15
 Dis. / Ant. : 3m 2016 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1°C/56.9% Engineer : Lynn
 EUT : Home Audio System M/N:GTK-XB90
 Power rating : AC 120V/60Hz
 Test Mode : GFSK 2480MHz Tx Mode
 Horizontal

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2479.97	28.27	8.42	91.38	35.34	92.73	74.00	-18.73	Peak
2	2483.50	28.27	8.42	42.91	35.34	44.26	74.00	29.74	Peak
3	2498.52	28.30	8.44	45.41	35.34	46.81	74.00	27.19	Peak
4	2500.00	28.30	8.44	44.20	35.34	45.60	74.00	28.40	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

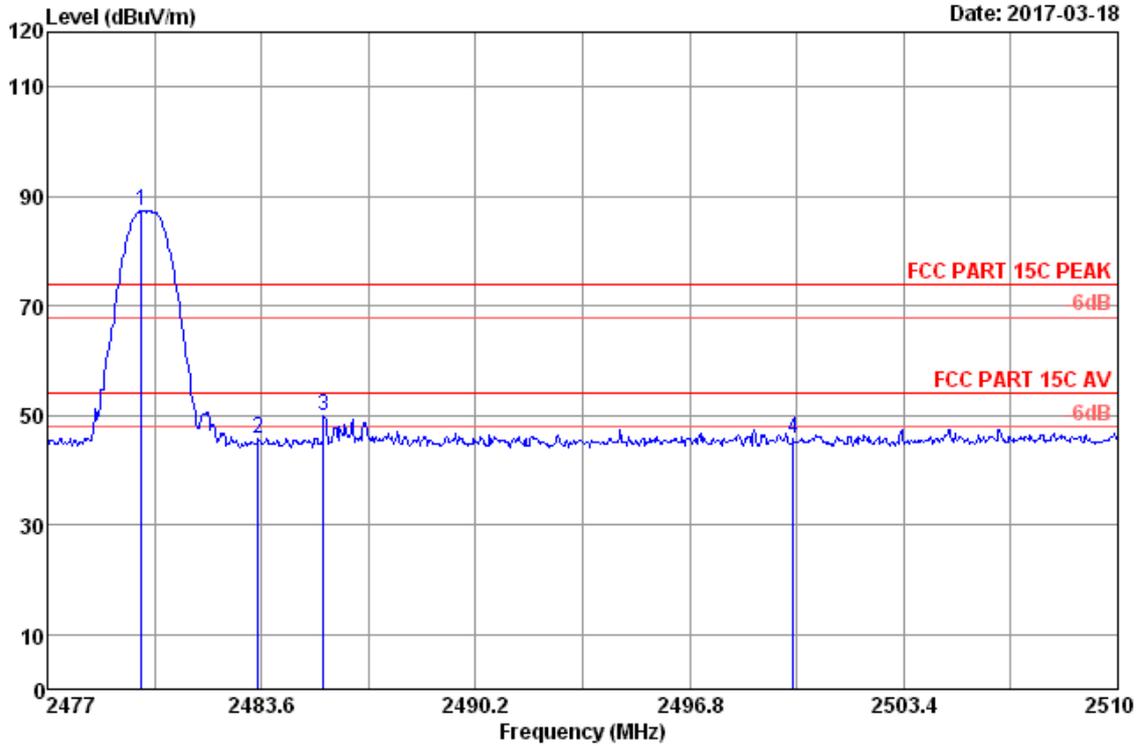

Site no. : 3m Chamber Data no. : 16
 Dis. / Ant. : 3m 2016 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1°C/56.9% Engineer : Lynn
 EUT : Home Audio System M/N:GTK-XB90
 Power rating : AC 120V/60Hz
 Test Mode : GFSK 2480MHz Tx Mode
 Horizontal

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2479.90	28.27	8.42	86.06	35.34	87.41	74.00	-13.41	Peak
2	2483.50	28.27	8.42	44.39	35.34	45.74	74.00	28.26	Peak
3	2485.51	28.28	8.43	48.50	35.34	49.87	74.00	24.13	Peak
4	2500.00	28.30	8.44	44.33	35.34	45.73	74.00	28.27	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

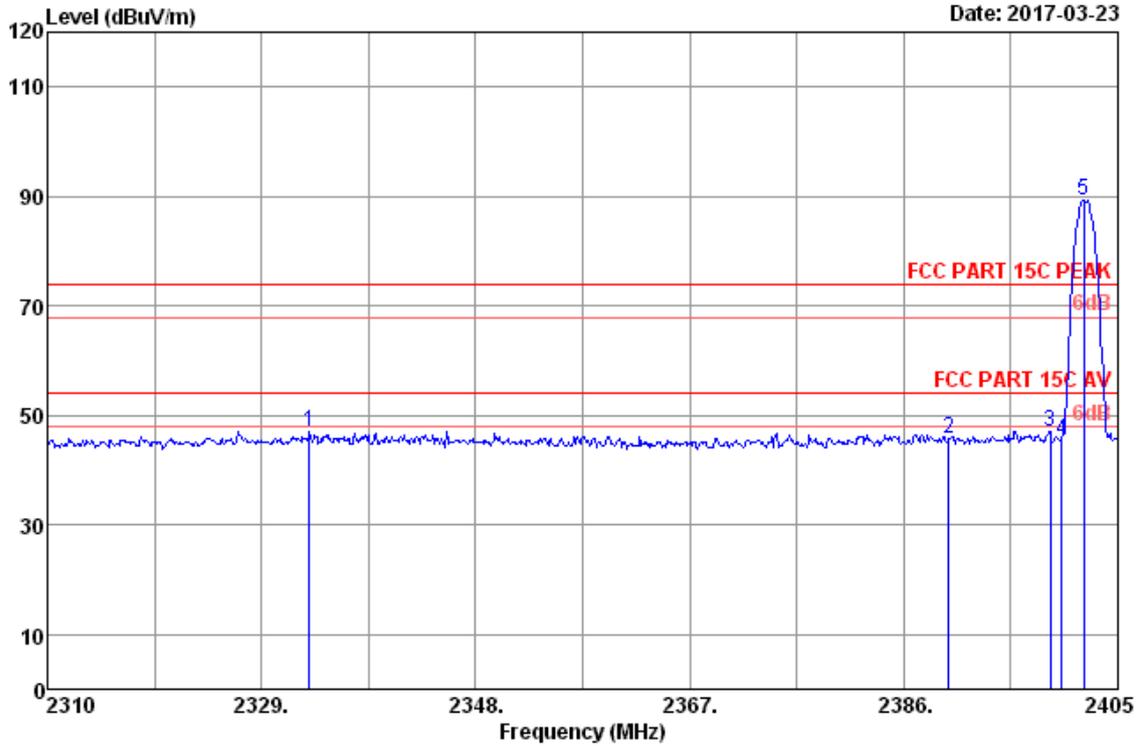

Site no. : 3m Chamber Data no. : 21
 Dis. / Ant. : 3m 2016 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1°C/56.9% Engineer : Lynn
 EUT : Home Audio System M/N:GTK-XB90
 Power rating : AC 120V/60Hz
 Test Mode : 8-DPSK 2402MHz Tx Mode
 Horizontal

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2333.28	28.03	8.27	46.02	35.32	47.00	74.00	27.00	Peak
2	2390.00	28.12	8.33	44.68	35.33	45.80	74.00	28.20	Peak
3	2399.02	28.14	8.34	45.89	35.33	47.04	74.00	26.96	Peak
4	2400.00	28.14	8.34	44.44	35.33	45.59	74.00	28.41	Peak
5	2401.96	28.14	8.34	88.25	35.33	89.40	74.00	-15.40	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

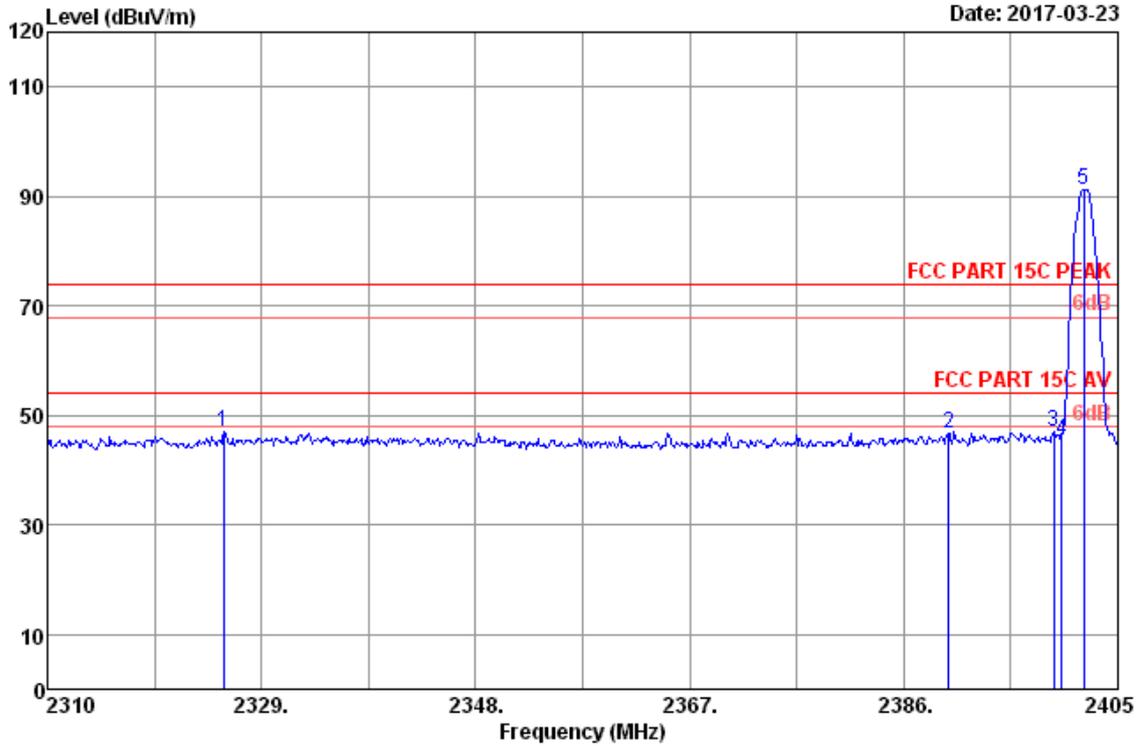

Site no. : 3m Chamber Data no. : 22
 Dis. / Ant. : 3m 2016 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1°C/56.9% Engineer : Lynn
 EUT : Home Audio System M/N:GTK-XB90
 Power rating : AC 120V/60Hz
 Test Mode : 8-DPSK 2402MHz Tx Mode
 Horizontal

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2325.68	28.02	8.26	45.95	35.32	46.91	74.00	27.09	Peak
2	2390.00	28.12	8.33	45.52	35.33	46.64	74.00	27.36	Peak
3	2399.30	28.14	8.34	45.96	35.33	47.11	74.00	26.89	Peak
4	2400.00	28.14	8.34	44.21	35.33	45.36	74.00	28.64	Peak
5	2401.96	28.14	8.34	90.14	35.33	91.29	74.00	-17.29	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

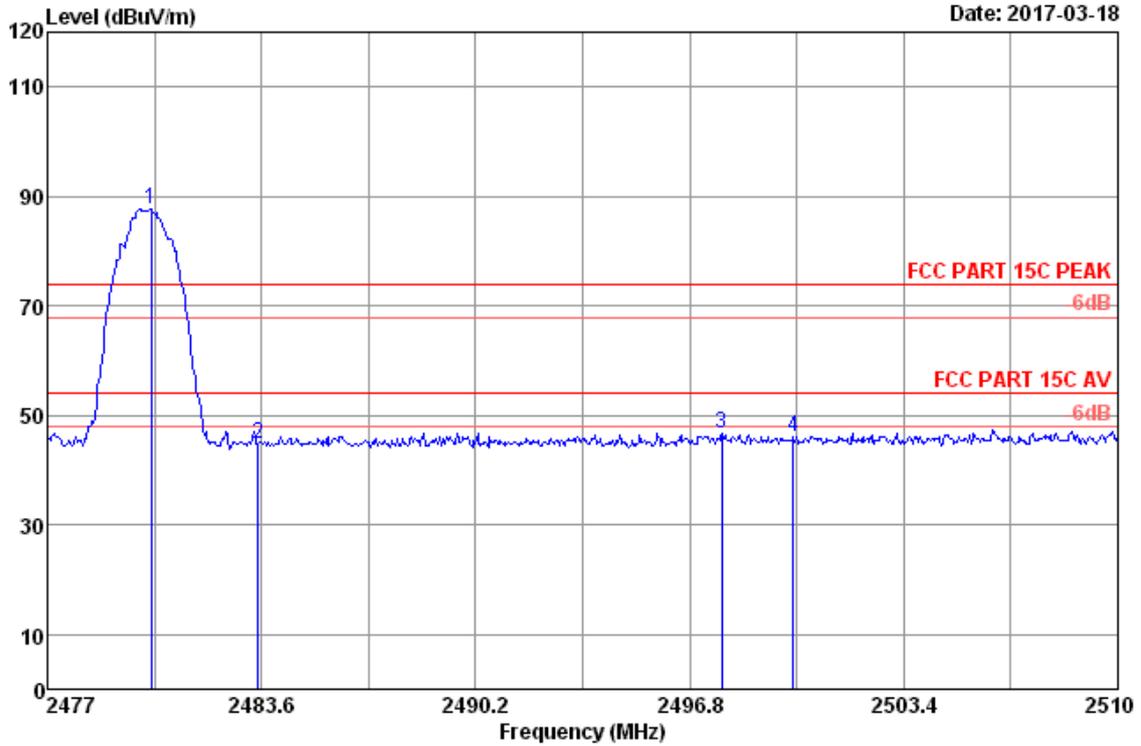

Site no. : 3m Chamber Data no. : 27
 Dis. / Ant. : 3m 2016 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1°C/56.9% Engineer : Lynn
 EUT : Home Audio System M/N:GTK-XB90
 Power rating : AC 120V/60Hz
 Test Mode : 8-DPSK 2480MHz Tx Mode
 Horizontal

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.20	28.27	8.42	86.36	35.34	87.71	74.00	-13.71	Peak
2	2483.50	28.27	8.42	43.49	35.34	44.84	74.00	29.16	Peak
3	2497.79	28.30	8.44	45.47	35.34	46.87	74.00	27.13	Peak
4	2500.00	28.30	8.44	44.62	35.34	46.02	74.00	27.98	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

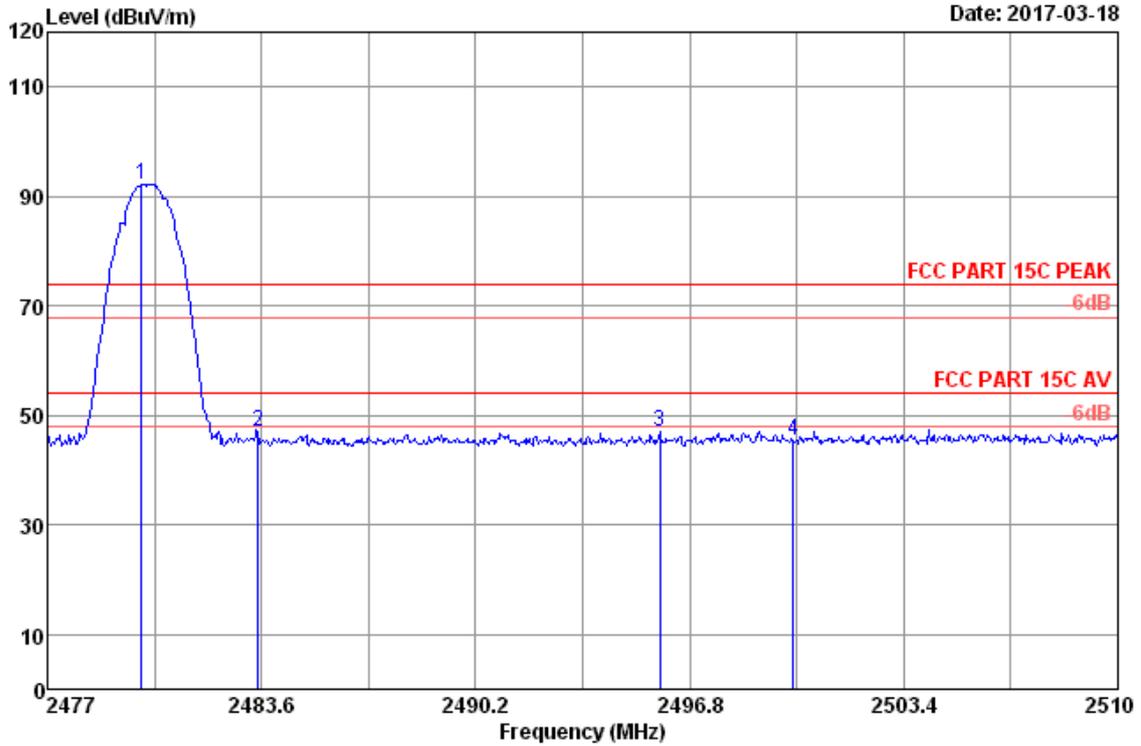

Site no. : 3m Chamber Data no. : 28
 Dis. / Ant. : 3m 2016 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1°C/56.9% Engineer : Lynn
 EUT : Home Audio System M/N:GTK-XB90
 Power rating : AC 120V/60Hz
 Test Mode : 8-DPSK 2480MHz Tx Mode
 Horizontal

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2479.90	28.27	8.42	90.78	35.34	92.13	74.00	-18.13	Peak
2	2483.50	28.27	8.42	45.69	35.34	47.04	74.00	26.96	Peak
3	2495.88	28.29	8.44	45.54	35.34	46.93	74.00	27.07	Peak
4	2500.00	28.30	8.44	43.93	35.34	45.33	74.00	28.67	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

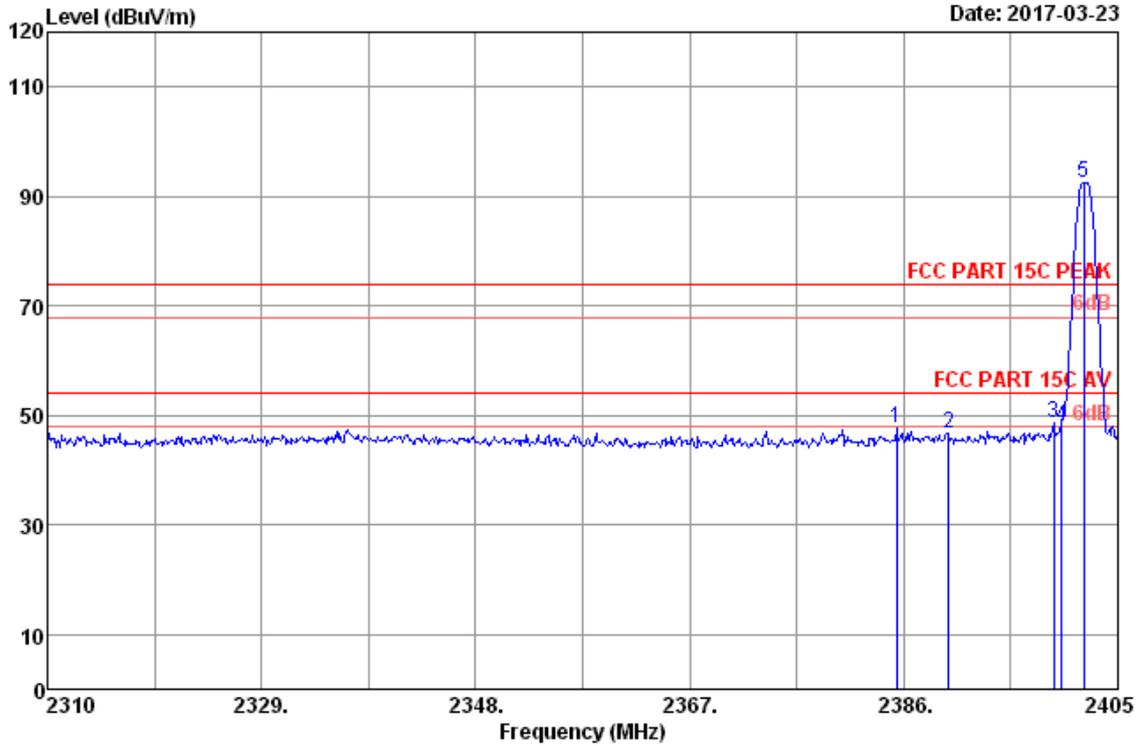

Site no. : 3m Chamber Data no. : 5
 Dis. / Ant. : 3m 2016 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1°C/56.9% Engineer : Lynn
 EUT : Home Audio System M/N:GTK-XB90
 Power rating : AC 120V/60Hz
 Test Mode : GFSK 2402MHz Tx Mode
 Vertical

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2385.34	28.12	8.32	46.49	35.33	47.60	74.00	26.40	Peak
2	2390.00	28.12	8.33	45.50	35.33	46.62	74.00	27.38	Peak
3	2399.30	28.14	8.34	47.38	35.33	48.53	74.00	25.47	Peak
4	2400.00	28.14	8.34	46.81	35.33	47.96	74.00	26.04	Peak
5	2401.96	28.14	8.34	91.41	35.33	92.56	74.00	-18.56	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

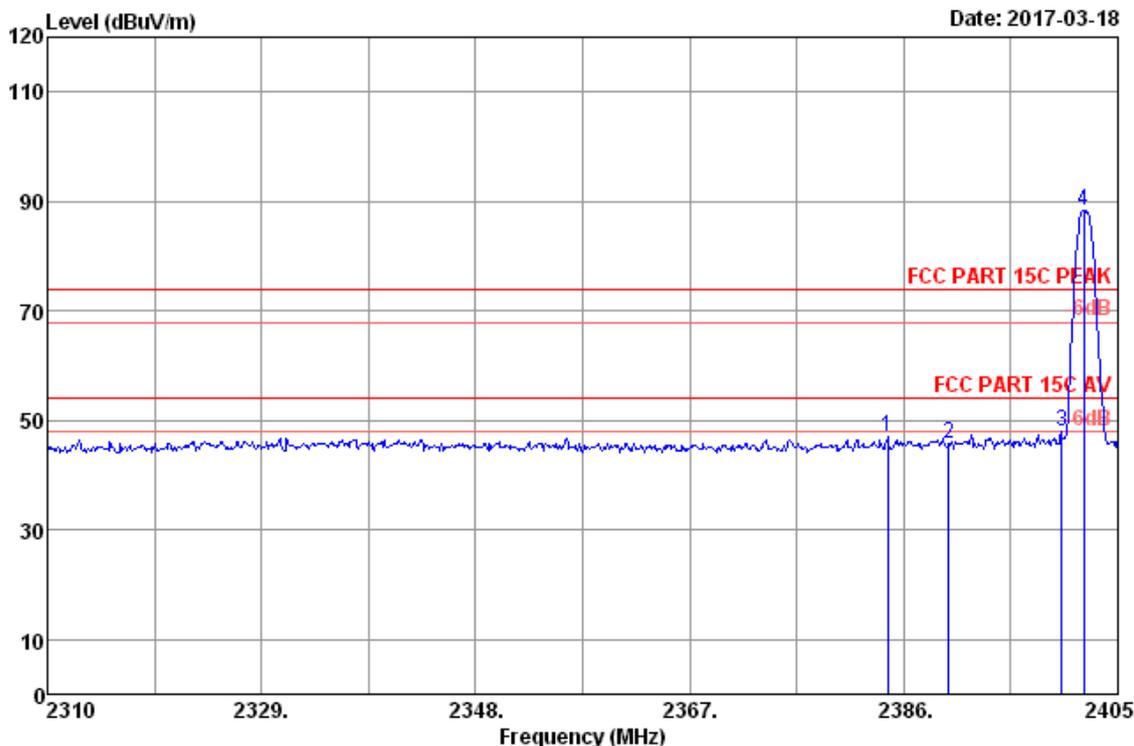

Site no. : 3m Chamber Data no. : 6
 Dis. / Ant. : 3m 2016 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1°C/56.9% Engineer : Lynn
 EUT : Home Audio System M/N:GTK-XB90
 Power rating : AC 120V/60Hz
 Test Mode : GFSK 2402MHz Tx Mode
 Vertical

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2384.58	28.12	8.32	45.78	35.33	46.89	74.00	27.11	Peak
2	2390.00	28.12	8.33	44.72	35.33	45.84	74.00	28.16	Peak
3	2400.00	28.14	8.34	46.77	35.33	47.92	74.00	26.08	Peak
4	2401.96	28.14	8.34	87.19	35.33	88.34	74.00	-14.34	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

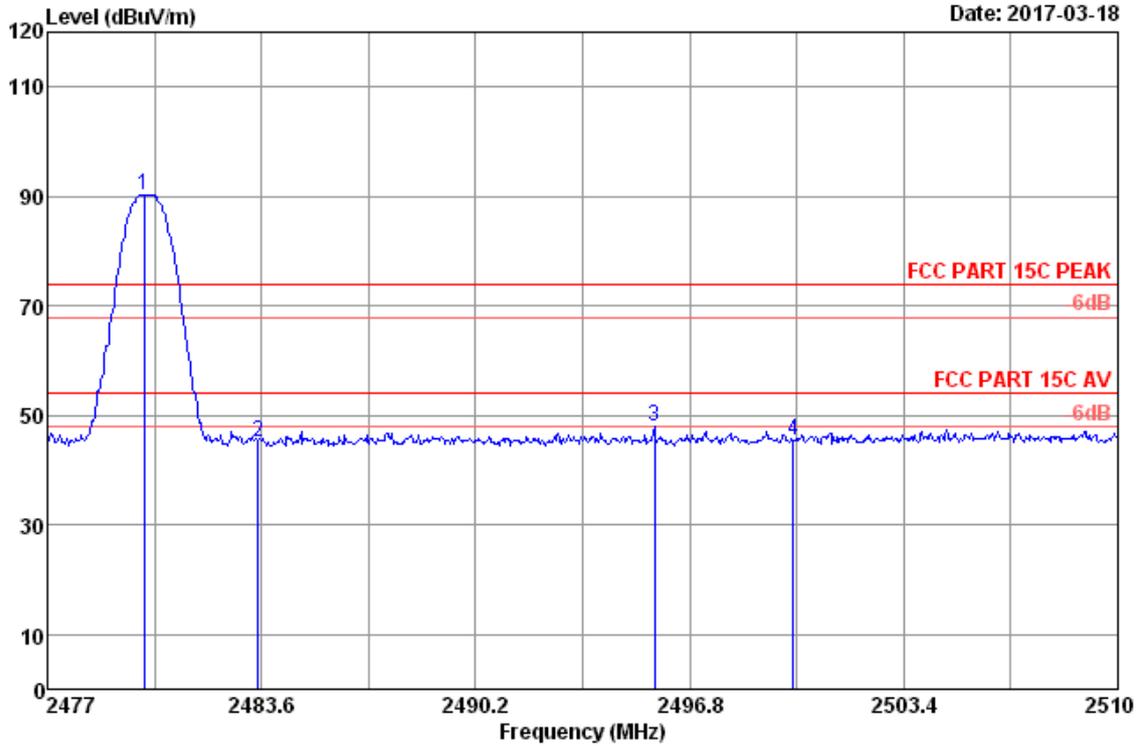

Site no. : 3m Chamber Data no. : 15
 Dis. / Ant. : 3m 2016 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1°C/56.9% Engineer : Lynn
 EUT : Home Audio System M/N:GTK-XB90
 Power rating : AC 120V/60Hz
 Test Mode : GFSK 2480MHz Tx Mode
 Vertical

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2479.97	28.27	8.42	88.88	35.34	90.23	74.00	-16.23	Peak
2	2483.50	28.27	8.42	43.66	35.34	45.01	74.00	28.99	Peak
3	2495.71	28.29	8.44	46.47	35.34	47.86	74.00	26.14	Peak
4	2500.00	28.30	8.44	43.97	35.34	45.37	74.00	28.63	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

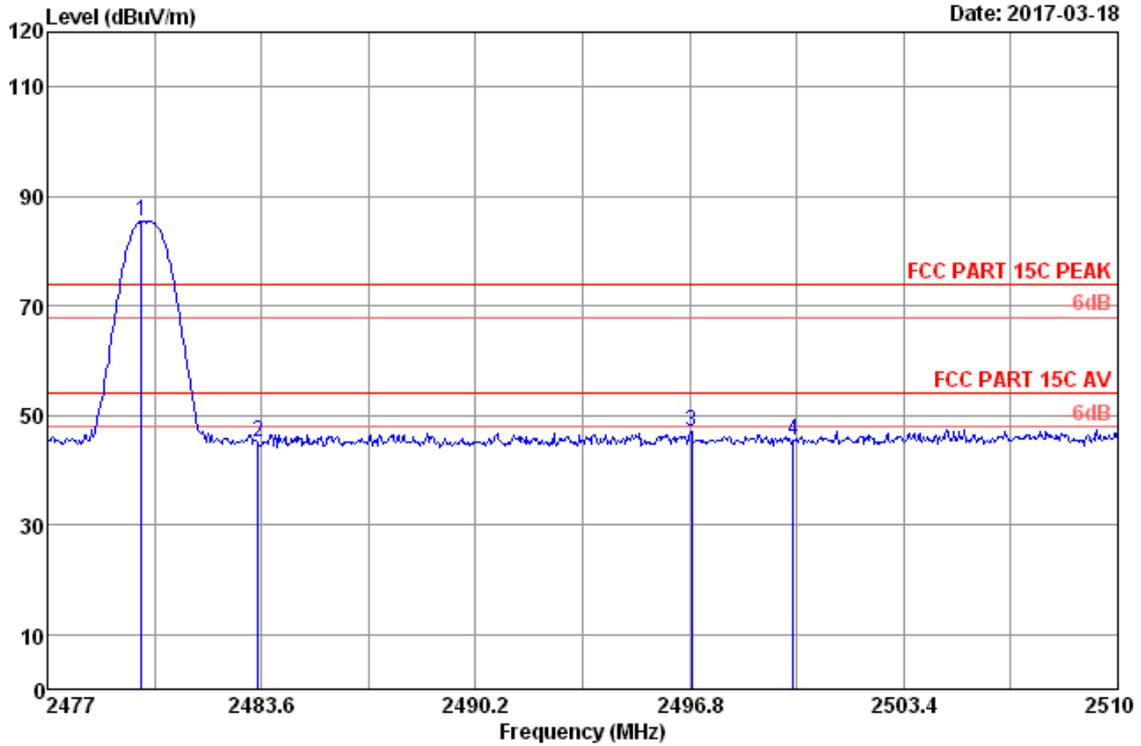

Site no. : 3m Chamber Data no. : 16
 Dis. / Ant. : 3m 2016 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1°C/56.9% Engineer : Lynn
 EUT : Home Audio System M/N:GTK-XB90
 Power rating : AC 120V/60Hz
 Test Mode : GFSK 2480MHz Tx Mode
 Vertical

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2479.90	28.27	8.42	84.05	35.34	85.40	74.00	-11.40	Peak
2	2483.50	28.27	8.42	43.83	35.34	45.18	74.00	28.82	Peak
3	2496.87	28.29	8.44	45.59	35.34	46.98	74.00	27.02	Peak
4	2500.00	28.30	8.44	44.18	35.34	45.58	74.00	28.42	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

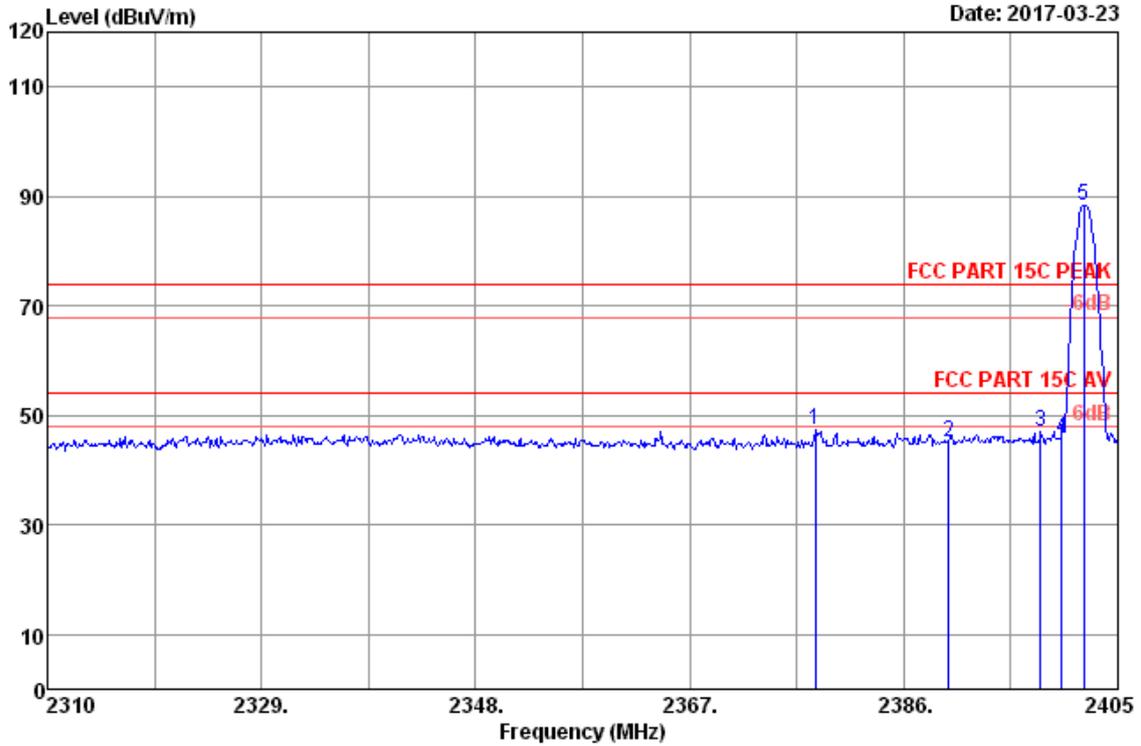

Site no. : 3m Chamber Data no. : 21
 Dis. / Ant. : 3m 2016 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1°C/56.9% Engineer : Lynn
 EUT : Home Audio System M/N:GTK-XB90
 Power rating : AC 120V/60Hz
 Test Mode : 8-DPSK 2402MHz Tx Mode
 Vertical

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2378.12	28.10	8.32	46.19	35.33	47.28	74.00	26.72	Peak
2	2390.00	28.12	8.33	44.06	35.33	45.18	74.00	28.82	Peak
3	2398.16	28.14	8.34	45.81	35.33	46.96	74.00	27.04	Peak
4	2400.00	28.14	8.34	44.60	35.33	45.75	74.00	28.25	Peak
5	2401.96	28.14	8.34	87.16	35.33	88.31	74.00	-14.31	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

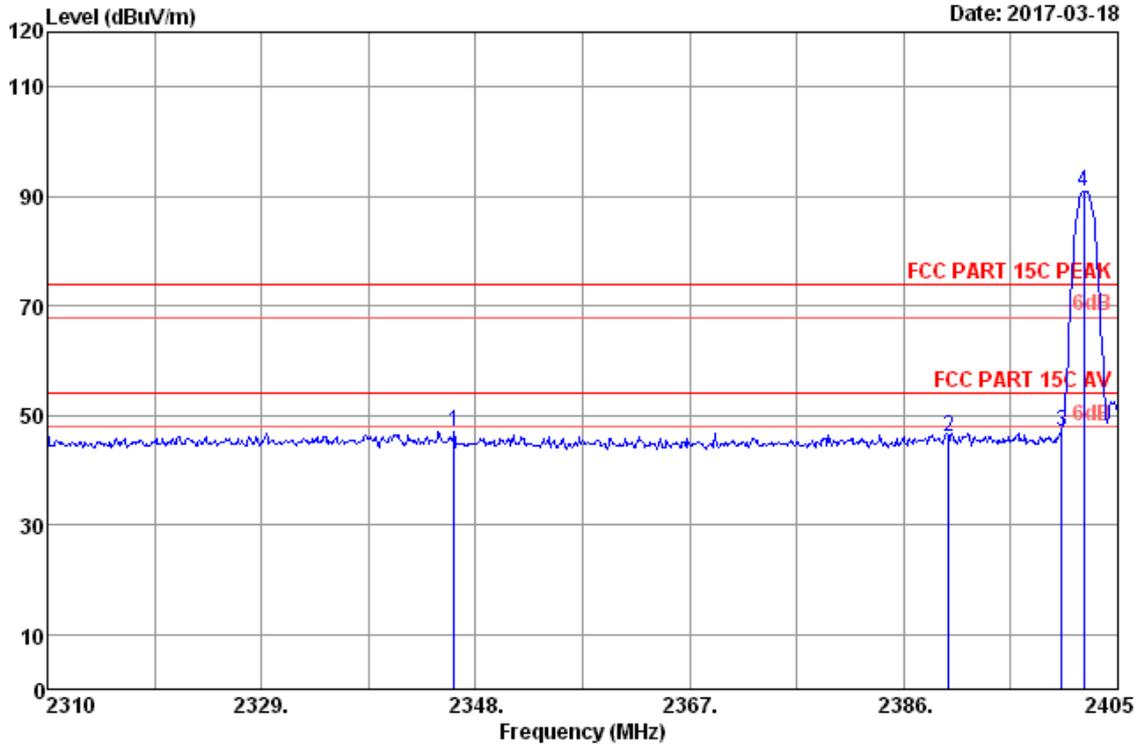

Site no. : 3m Chamber Data no. : 22
 Dis. / Ant. : 3m 2016 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1°C/56.9% Engineer : Lynn
 EUT : Home Audio System M/N:GTK-XB90
 Power rating : AC 120V/60Hz
 Test Mode : 8-DPSK 2402MHz Tx Mode
 Vertical

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2346.10	28.05	8.28	46.18	35.32	47.19	74.00	26.81	Peak
2	2390.00	28.12	8.33	44.83	35.33	45.95	74.00	28.05	Peak
3	2400.00	28.14	8.34	45.77	35.33	46.92	74.00	27.08	Peak
4	2401.96	28.14	8.34	89.83	35.33	90.98	74.00	-16.98	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

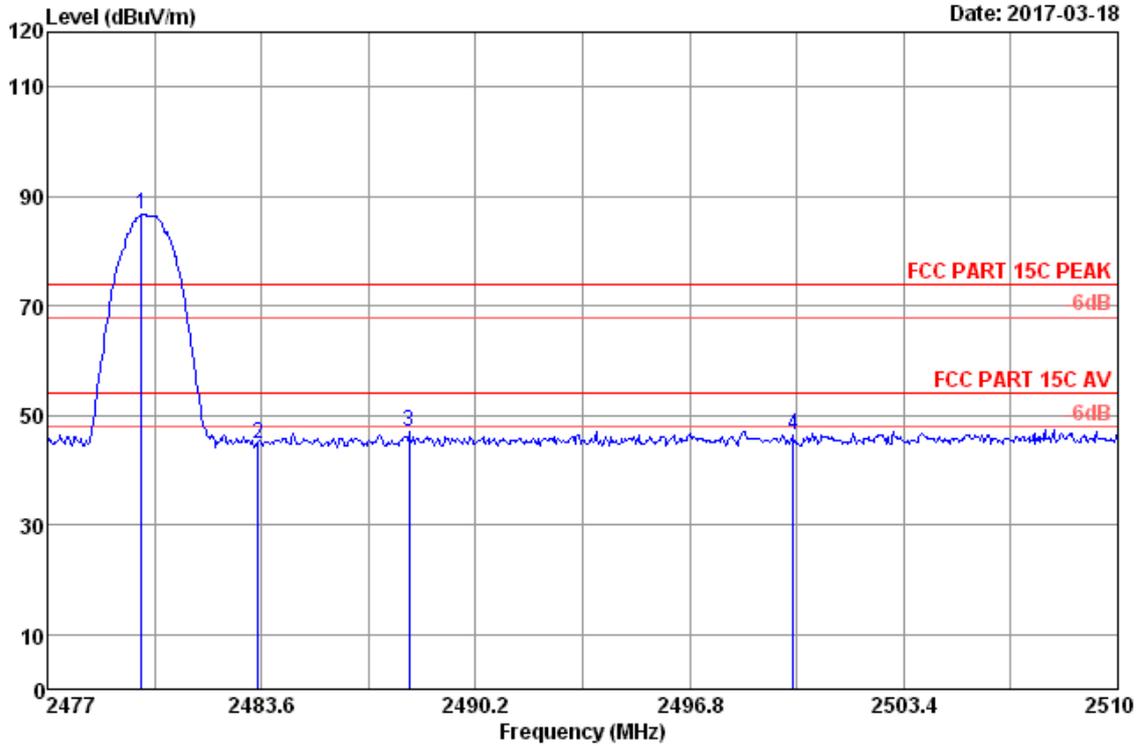

Site no. : 3m Chamber Data no. : 27
 Dis. / Ant. : 3m 2016 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1°C/56.9% Engineer : Lynn
 EUT : Home Audio System M/N:GTK-XB90
 Power rating : AC 120V/60Hz
 Test Mode : 8-DPSK 2480MHz Tx Mode
 Vertical

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2479.90	28.27	8.42	85.43	35.34	86.78	74.00	-12.78	Peak
2	2483.50	28.27	8.42	43.61	35.34	44.96	74.00	29.04	Peak
3	2488.15	28.28	8.43	45.82	35.34	47.19	74.00	26.81	Peak
4	2500.00	28.30	8.44	44.87	35.34	46.27	74.00	27.73	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

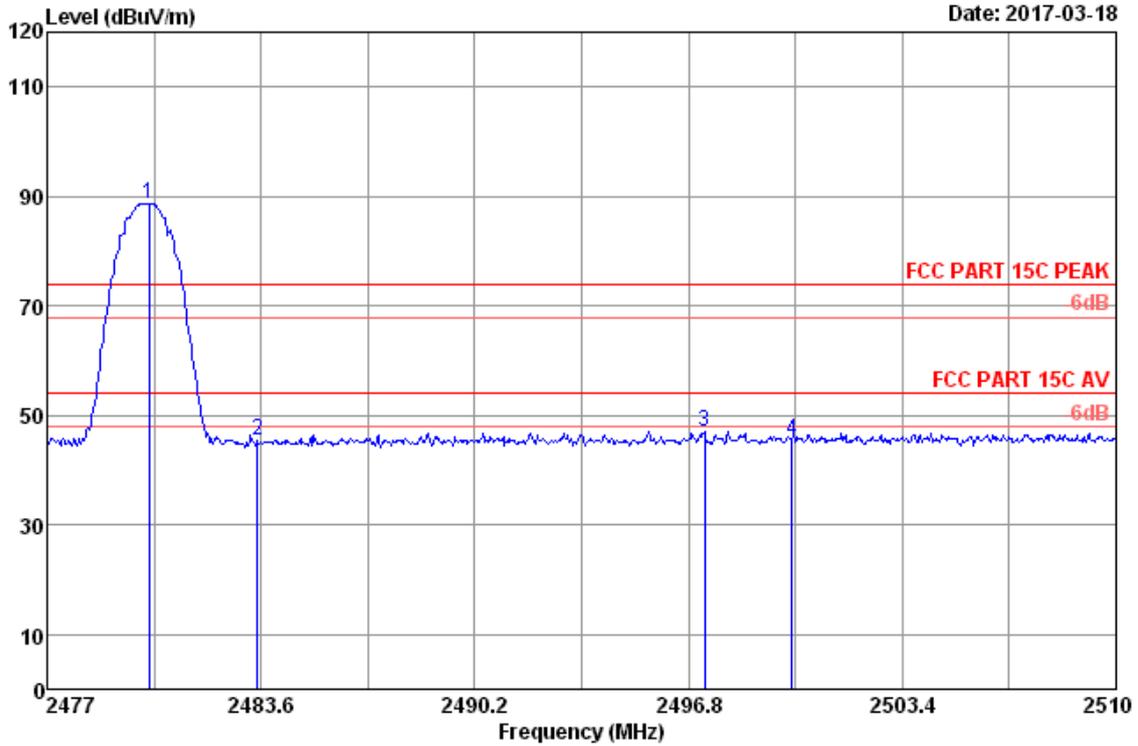

Site no. : 3m Chamber Data no. : 28
 Dis. / Ant. : 3m 2016 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1°C/56.9% Engineer : Lynn
 EUT : Home Audio System M/N:GTK-XB90
 Power rating : AC 120V/60Hz
 Test Mode : 8-DPSK 2480MHz Tx Mode
 Vertical

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.14	28.27	8.42	87.43	35.34	88.78	74.00	-14.78	Peak
2	2483.50	28.27	8.42	43.99	35.34	45.34	74.00	28.66	Peak
3	2497.30	28.30	8.44	45.68	35.34	47.08	74.00	26.92	Peak
4	2500.00	28.30	8.44	44.14	35.34	45.54	74.00	28.46	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

12. ANTENNA REQUIREMENT

12.1. Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

12.2. Antenna Connected Construction

The antennas used for this product are Integrated PCB antenna that no antenna other than that furnished by the responsible party shall be used with the device, the maximum peak gain of the transmit antenna is 1.927dBi

13.DEVIATION TO TEST SPECIFICATIONS

[NONE]