



EMI TEST REPORT

Test Report No. : 24HE0082-HO-3

Applicant : Sony Corporation
Type of Equipment : Wireless LAN Module
Model No. : IRF302U
Test standard : FCC Part 15 Subpart E
Section 15.407 : 2004
FCC ID : AK8IRF302U
Test Result : Complied

1. This test report shall not be reproduced in full or partial, without the written approval of UL Apex Co., Ltd.
2. The results in this report apply only to the sample tested.
3. This equipment is in compliance with above regulation. We hereby certify that the data contain a true representation of the EMC profile.
4. The test results in this report are traceable to the national or international standards.


Date of test:

June 14 , 2004 to June 25, 2004

Tested by:


Hiroka Umeyama
EMC Service

Approved by :


Hironobu Shimoji
Group Leader of
EMC Service

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b(10.04.03)

CONTENTS	PAGE
SECTION 1: Client information	3
SECTION 2: Equipment under test (E.U.T.)	3
SECTION 3: Test specification, procedures & results	6
SECTION 4: Operation of E.U.T. during testing	8
SECTION 5: Conducted Emission, Section 15.407(b)(6) / 15.207	10
SECTION 6: Spurious Emission , Band Edge Compliance 15.407(b)(1)(2)(3)(4)(6)(7)	11
SECTION 7: 26dB Emission Bandwidth, Section 15.407(a)(1)(2)(3)	12
SECTION 8: Peak Transmit Power, Section 15.407(a)(1)(2)(3)	12
SECTION 9: Peak Power Spectral Density, Section 15.407 (a)(1)(2)(3)	12
SECTION 10: Peak Excursion Ratio, Section 15.407 (a)(6)	12
APPENDIX 1: Photographs of test setup	13
Conducted Emission	13
Spurious Emission (Radiated)	14
Worst Case Position (Z-axis:Horizontal / Z-axis:Vertical).....	15
APPENDIX 2:Test instruments	16
APPENDIX 3: Data of EMI test	17
Conducted Emission	17
26dB Emission Bandwidth	24
Peak Transmit Power.....	26
Radiated Spurious Emission (below 1GHz)	28
Radiated Spurious Emission (above 1GHz:Inside of the restricted band)	34
Radiated Spurious Emission (above 1GHz:Outside of the restricted band)	44
Radiated emission Band Edge compliance.....	52
Conducted emission Band Edge compliance	53
Peak Power Spectral Density.....	54
Peak Excursion Ratio.....	56
99%Occupied Bandwidth.....	58

SECTION 1: Client information

Company Name : Sony Corporation
Address : Gate City Osaki West Tower Osaki East Tec.
1-11-1 Osaki Shinagawa-ku, Tokyo, 141-0032 Japan
Telephone Number : +81-3-5435-3977
Facsimile Number : +81-3-5436-3963
Contact Person : Masaki Nishimura

SECTION 2: Equipment under test (E.U.T.)

2.1 Identification of E.U.T.

Type of Equipment : Wireless LAN Module
Model No. : IRF302U
Serial No. : 125 (on Radiated and Conducted Emission Test)
77 (on Peak Transmit Power Test by Conducted)
11 (on Other Test by Conducted)
Rating : DC3.3V 0.81A
Country of Manufacture : Japan
Receipt Date of Sample : May 31, 2004
Condition of EUT : Engineering prototype
(Not for Sale: This sample is equivalent to mass-produced items.)

2.2 Product Description

The Sony model IRF302U is ISM and UNII transceiver module that is designed to provide a Wireless LAN access using 802.11b/g/a protocols for data rates of up-to 54Mbps.

Normally the EUT is installed to Sony's "Wireless Location free TV" .

System clock : 40MHz

[W-LAN:IEEE802.11a]

Equipment Type : Transceiver
Frequency of operation : 5180-5320MHz / 5745-5805MHz
Channel Support : 5180,5200,5220,5240,5260,5280,5300,5320MHz / 5745,5765,5785,5805MHz
Modulation Techniques : OFDM
Channel number : 12channels
Power control : Non
Mode of operation : Duplex
Antenna Type : Patch Antenna
Antenna Gain : 2.0dBi(MAX)
Antenna Connector Type : U.FL
Operating voltage (inner) : DC3.3V

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b(10.04.03)

FCC 15.31(e)

This EUT provides stable voltage(DC3.3V) constantly to RF Module regardless of input voltage. Therefore, this EUT complies with the requirement.

FCC Part 15.407(d) Antenna requirement

This EUT has the external (particular) antenna connector, and the installation is to be done by the professionals. Therefore, the equipment complies with the antenna requirement of Section 15.203.

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b(10.04.03)

SECTION 3: Test specification, procedures & results

3.1 Test Specification

Test Specification : FCC Part15 Subpart E : 2004
Title : FCC 47CFR Part15 Radio Frequency Device
Subpart E Unlicensed National Information Infrastructure Devices
Section 15.407 General technical requirements

3.2 Procedures and results

No.	Item	Test Procedure	Specification	Remarks	Deviation	Worst margin	Results
1	26dB Emission Bandwidth	ANSI C63.4:2003	Section 15.407(a)(1)(2)(3)	-	N/A	*See the worst margins in the data sheet in APPENDIX 3	Complied
2	Peak Transmit Power	ANSI C63.4:2003	Section 15.407(a)(1)(2)(3)	Conducted	N/A		Complied
3	Peak Power Spectral Density	ANSI C63.4:2003	Section 15.407(a)(1)(2)(3)	Conducted	N/A		Complied
4	Peak Excursion Ratio	ANSI C63.4:2003	Section 15.407(a)(6)	Conducted	N/A		Complied
5	Spurious Emission	ANSI C63.4:2003	Section 15.407(b)(1)(2)(3)(4)(5)	Conducted	N/A		Complied
6	Spurious Emission	ANSI C63.4:2003	(6)(7) 15.205/15.209	Radiated	N/A		Complied
7	AC Conducted Emission	ANSI C63.4:2003	Section 15.407(b)(6)/15.207	-	N/A		Complied
8	Band Edge Compliance	ANSI C63.4:2003	Section 15.407(b)(7)/15.205	Conducted Radiated	N/A		Complied

Note: UL Apex's EMI Work Procedures No.QPM05 and QPM15.

Uncertainty:

*In case of the margin below the EMC Head Office's uncertainty.

The data listed in this report meets the limits unless the uncertainty is taken into consideration.

Conducted Emission

The measurement uncertainty (with a 95% confidence level) for this test is ± 1.3 dB.

Spurious Emission (Radiated)

The measurement uncertainty (with a 95% confidence level) for this test using Biconical antenna is ± 4.5 dB(3m)/ ± 4.7 dB(10m).

The measurement uncertainty (with a 95% confidence level) for this test using Logperiodic antenna is ± 5.2 dB(3m)/ ± 3.8 dB(10m).

The measurement uncertainty (with a 95% confidence level) for this test using Horn antenna is ± 6.6 dB.

Other test except Conducted Emission and Spurious Emission (Radiated)

The measurement uncertainty (with a 95% confidence level) for this test is ± 3.0 dB.

*These tests were also referred to FCC Public Notice DA 02-2138 "Measurement Procedure Updated for Peak Transmit Power in the Unlicensed National Information Infrastructure (U-NII) Bands".

*These tests were performed without any deviations from test procedure except for additions or exclusions.

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b(10.04.03)

3.3 Addition to standards

No.	Item	Test Procedure	Specification	Remarks	Deviation	Worst margin	Results
1	99% Occupied Band Width	RSS210(issue 5): 2001 + Amendment:2002 + Amendment2:2003 + Amendment3:2004	RSS210(issue 5): 2001 + Amendment:2002 + Amendment2:2003 + Amendment3:2004	Conducted	N/A	N/A	N/A

3.4 Test Location

UL Apex Co., Ltd. Head Office EMC Lab. *NVLAP Lab. code: 200572-0
4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN
Telephone : +81 596 24 8116
Facsimile : +81 596 24 8124

	Listed date (for FCC)	FCC Registration Number	IC Registration Number	Width x Depth x Height (m)	Size of reference ground plane (m) / horizontal conducting plane	Other rooms
No.1 semi-anechoic chamber	February 01, 2002	313583	IC4247	19.2 x 11.2 x 7.7m	7.0 x 6.0m	Preparation room
No.2 semi-anechoic chamber	June 05, 2002	846015	IC4247-2	7.5 x 5.8 x 5.2m	4.0 x 4.0m	-
No.3 shielded room	-	-	-	4.7 x 7.5 x 2.7m	4.7 x 7.5m	-
No.4 shielded room	-	-	-	3.1 x 5.0 x 2.7m	N/A	-

* Size of vertical conducting plane (for Conducted Emission test) : 2.0 x 2.0m for No.1 and No.2 semi-anechoic and No.3 shielded room.

3.5 Test set up, Test instruments and Data of EMI

Refer to APPENDIX 1 to 3.

SECTION 4: Operation of E.U.T. during testing

4.1 Operating Modes

The EUT was operating in a manner similar to typical use during the tests.


The mode is used : Transmitting mode (OFDM 54Mbps)
 Channel 36: 5180MHz
 Channel 52: 5260MHz
 Channel 64: 5320MHz
 Channel 149: 5745MHz
 Channel 153: 5765MHz
 Channel 161: 5805MHz

*The two antennas are the same one so that the test was made with one antenna of the two .

* The EUT has an ability to provide some different modulation and data rates. Some of these modulation and data rates did not change in the spectrum envelopes of the EUT at conducted Measurement with the antenna terminal. Therefore, the results of the final measurements were 54Mbps modulation as the highest data rate.

Justification: The system was configured in typical fashion (as a customer would normally use it) for testing.

4.2 Configuration and peripherals

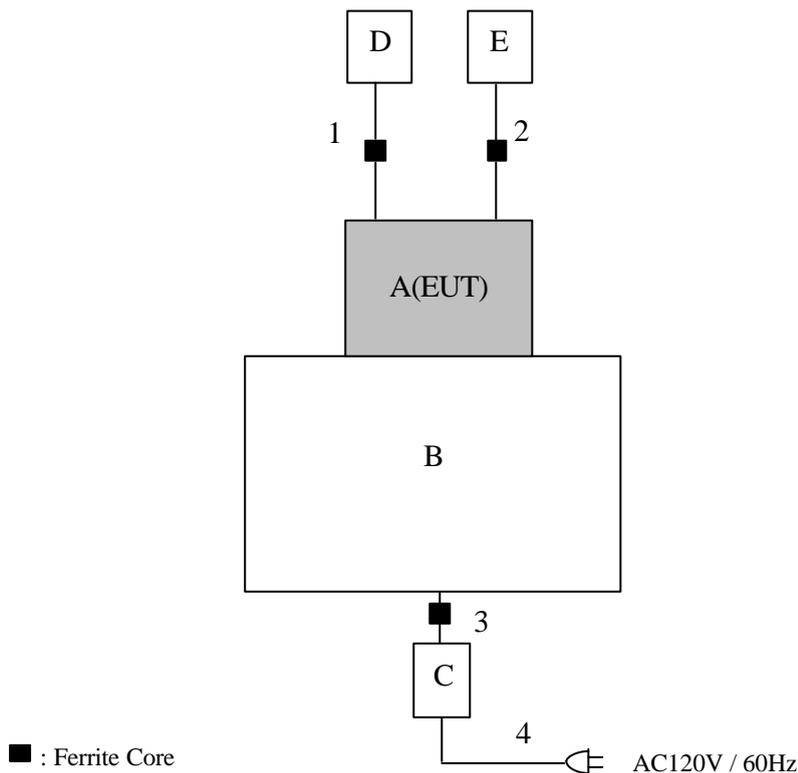

* Cabling was taken into consideration and test data was taken under worse case conditions.

Description of EUT and Support equipment

No.	Item	Model number	Serial number	Manufacturer	FCC ID
A	Wireless LAN Module	IRF302U	125*1 77*2 11*3	SONY	AK8IRFU302U
B	Notebook Personal Computer	PP01L	CN-04P449- 48643-318-7190	DELL	-
C	AC Adaptor	ADP-70EB	TH-09364U- 17971-181-1SHK	DELL	-
D	Patch Antenna	SDA2452A	-	TOKO	-
E	Patch Antenna	SDA2452A	-	TOKO	-

*1:on Radiated and Conducted Emission Test

*2:on Peak Transmit Power Test by Conducted

*3:on Other Test by Co nducted

List of cables used

No.	Name	Length (m)	Shield	Backshell Material
1	Antenna Cable	0.04	Y	FEP
2	Antenna Cable	0.04	Y	FEP
3	DC Cable	1.8	N	Polyvinyl chloride
4	AC Cable	1.8	N	Polyvinyl chloride

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b(10.04.03)

SECTION 5: Conducted Emission, Section 15.407(b)(5) / 15.207

Test Procedure

EUT was placed on a platform of nominal size, 0.5m by 0.5m, raised 80cm above the conducting ground plane. The rear of tabletop was located 40cm to the vertical conducting plane. All other surfaces of tabletop were at least 80cm from any other grounded conducting surface. EUT was located 80cm from a Line Impedance Stabilization Network (LISN)/ Artificial mains Network (AMN) and excess AC cable was bundled in center .

The EUT was set on the center of the table.

Each EUT current-carrying power lead, except the ground (safety) lead, was individually connected through a LISN / (AMN) to the input power source. All unused 50ohm connectors of the LISN(AMN) were resistively terminated in 50ohm when not connected to the measuring equipment.

The AC Mains Terminal Continuous disturbance Voltage has been measured with the EUT in a Semi Anechoic Chamber or a Measurement Room.

The EUT was connected to a LISN (AMN).

An overview sweep with peak detection has been performed.

The measurements have been performed with a CISPR quasi-peak and average detector (IF BW 9 kHz).

Measurement range: 0.15-30MHz

Test data : APPENDIX 3

Test result : Pass

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b(10.04.03)

SECTION 6: Spurious Emission , Band Edge Compliance 15.407(b)(1)(2)(3)(4)(6)(7)

[Conducted]

Test Procedure

The Out of Band Emission was measured with a spectrum analyzer connected to the antenna port.

Test data : APPENDIX 3
Test result : Pass

[Radiated]

Test Procedure

EUT was placed on a platform of nominal size, 0.5m by 0.5m, raised 80cm above the conducting ground plane.

The Radiated Electric Field Strength intensity has been measured in a Semi Anechoic Chamber with a ground plane and at a distance of 3m(Below 10GHz) , 1m(10-26.5GHz, Distance Factor : $20\log(3[m]/1[m])$) and 0.5m(Upper 26.5GHz, Distance Factor : $20\log(3[m]/0.5[m])$).

The height of the measuring varied between 1 and 4m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field intensity.

The measurements were performed for both vertical and horizontal antenna polarization with the Test Receiver or the Spectrum Analyzer.

Below 1GHz

The result also satisfied with the general limits specified in section 15.209(a).

Above 1GHz

Inside of the restricted bands (Section 15.205) : Apply to limit in the Section 15.209(a)

Outside of the restricted bands (Section 15.205) : Limit -27dBm EIRP
-17dBm EIRP (5.725-5.825GHz Band Edge)

Frequency	Below 1GHz	Above 1GHz (Inside of the restricted bands)	Above 1GHz (Outside of the restricted bands)
Instrument use	Test Receiver	Spectrum Analyzer	Spectrum Analyzer
Detector	QP: BW 120kHz	PK: RBW:1MHz/VBW: 1MHz	RBW:1MHz/VBW: 1MHz
IF Bandwidth		AV: RBW:1MHz/VBW:10Hz	

Test data : APPENDIX 3
Test result : Pass

*The noise from the EUT was not seen in the above 18GHz. The measurement was made in the residual noise levels.

SECTION 7: 26dB Emission Bandwidth, Section 15.407(a)(1)(2)(3)

Test Procedure

The 26dB Emission Bandwidth was measured with a spectrum analyzer connected to the antenna port.

Test data : APPENDIX 3
Test result : Pass

SECTION 8: Peak Transmit Power, Section 15.407(a)(1)(2)(3)

Test Procedure

The Peak Transmit Power was measured with a spectrum analyzer connected to the antenna port.

Test data : APPENDIX 3
Test result : Pass

SECTION 9: Peak Power Spectral Density, Section 15.407 (a)(1)(2)(3)

Test Procedure

The Peak Power Spectral Density was measured with a spectrum analyzer connected to the antenna port.

Test data : APPENDIX 3
Test result : Pass

SECTION 10: Peak Excursion Ratio, Section 15.407 (a)(6)

Test Procedure


The Peak Excursion Ratio was measured with a spectrum analyzer connected to the antenna port.

Test data : APPENDIX 3
Test result : Pass


APPENDIX 1: Photographs of test setup

Conducted Emission

Front

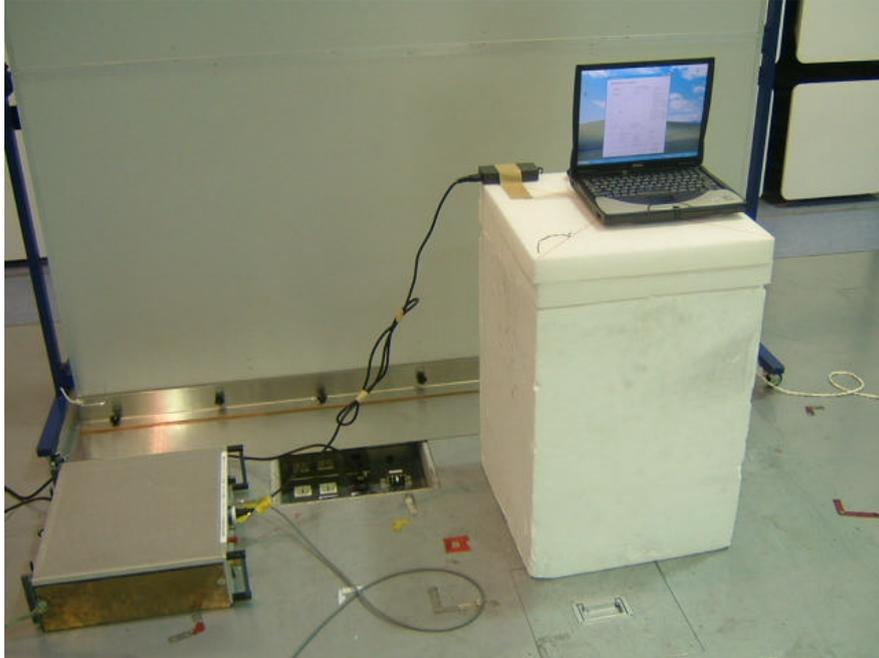

Rear

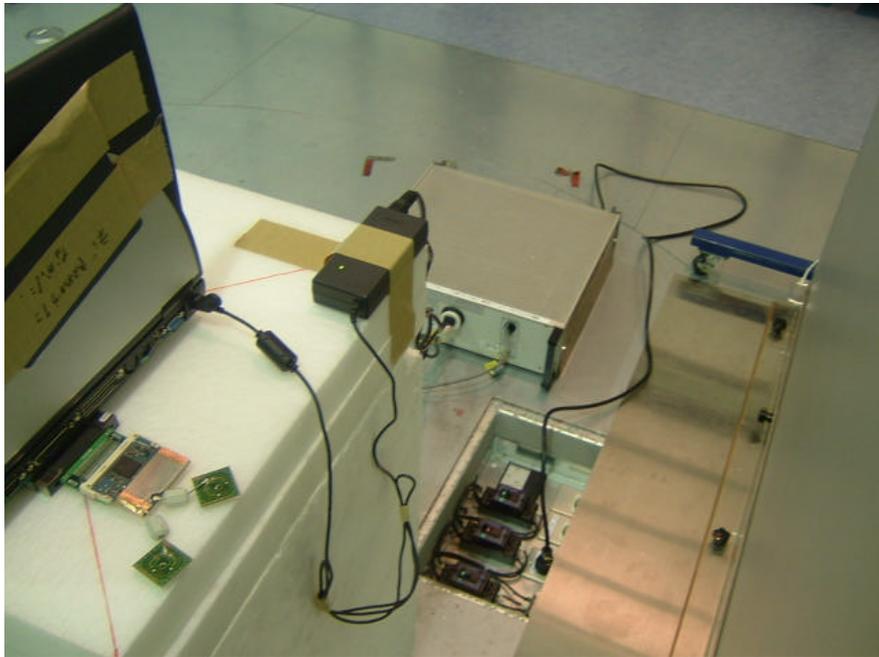


Spurious Emission (Radiated)

Front



Rear

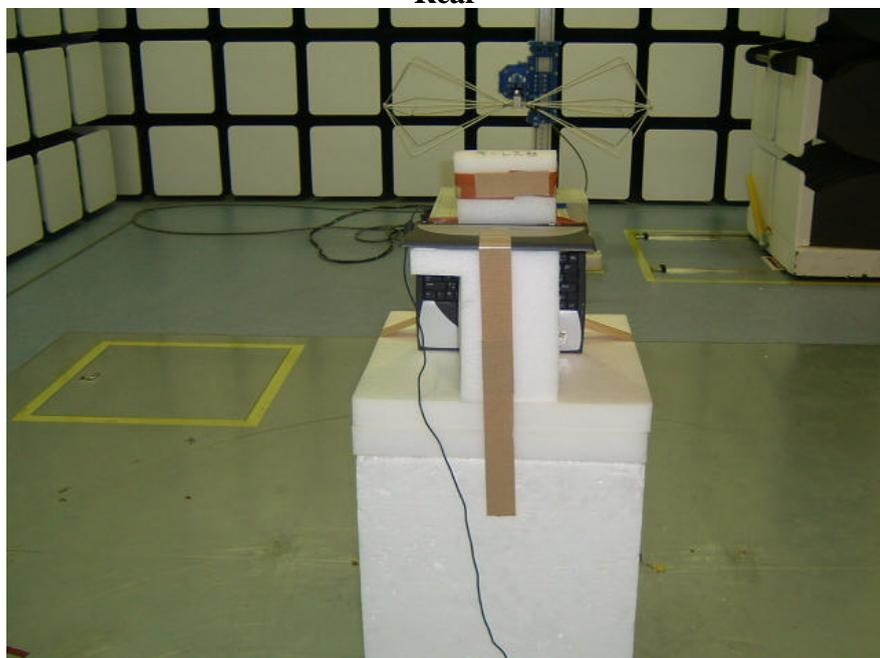


Worst Case Position (Z-axis:Horizontal / Z-axis:Vertical)

X-axis



Y-axis

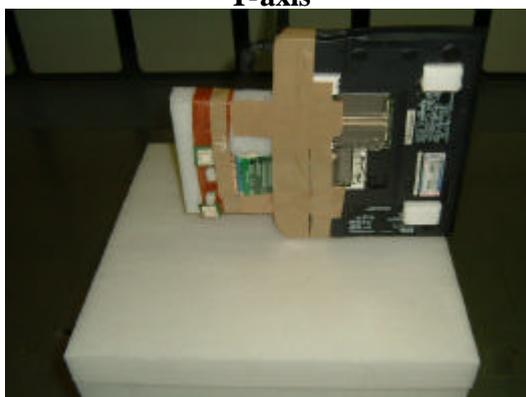

Z-axis



APPENDIX 2:Test instruments

EMI test equipment (Conducted Emission)

Control No.	Instrument	Manufacturer	Model No	Calibration Date * Interval(month)
MAEC-02	Anechoic Chamber	TDK	Semi Anechoic Chamber 3m	2004/04/12 * 12
MTR-02	Test Receiver	Rohde & Schwarz	ESCS30	2004/02/03 * 12
MRENT-09	Spectrum Analyzer	Advantest	R3273	2004/02/18 * 12
MCC-13	Coaxial Cable	Fujikura/Agilent	-	2004/02/24 * 12
MLS-06	LISN(AMN)	Schwarzbeck	NSLK8127	2004/02/17 * 12

EMI test equipment (Spurious Emission and Band Edge Compliance(Radiated))

Control No.	Instrument	Manufacturer	Model No	Calibration Date * Interval(month)
MAEC-02	Anechoic Chamber	TDK	Semi Anechoic Chamber 3m	2004/04/12 * 12
MRENT-09	Spectrum Analyzer	Advantest	R3273	2004/02/18 * 12
MCC-04	Microwave Cable	Storm	421-011	2004/01/06 * 12
MCC-24	Microwave Cable	Storm	-	2004/05/01 * 12
MCC-25	Microwave Cable	Suhner	SUCOFLEX10 4	2003/06/30 * 12
MPA-01	Pre Amplifier	Agilent	8449B	2004/02/06 * 12
MPA-03	Microwave System Power Amplifier	Agilent	83050A	2004/06/12 * 12
MBF-03	SHF Bandpass Filter	M-City	13GHz BPF	2004/05/21 * 12
MHA-02	Horn Antenna	EMCO	3160-09	2004/01/10 * 12
MHA-04	Horn Antenna	EMCO	3160-10	2004/01/10 * 12
MHA-06	Horn Antenna	Schwarzbeck	BBHA9120D	2004/01/10 * 12
MSA-03	Spectrum Analyzer	Agilent	E4448A	2004/06/12 * 12
MTR-02	Test Receiver	Rohde & Schwarz	ESI40	2003/11/12 * 12
MCC-12	Coaxial Cable	Suhner/storm/Agilent/TSJ	-	2003/12/19 * 12
MBA-02	Biconical Antenna	Schwarzbeck	BBA9106	2003/10/15 * 12
MLA-02	Logperiodic Antenna	Schwarzbeck	USLP9143	2003/10/15 * 12
MPA-02	Pre Amplifier	Agilent	8447D	2004/05/25 * 12
MAT-07	Attenuator(6dB)	Weinschel Corp	2	2003/12/16 * 12
MHF-02	High Pass Filter	Tokimec	TF323DCA	2003/09/19 * 12

EMI test equipment (Other)

Control No.	Instrument	Manufacturer	Model No	Calibration Date * Interval(month)
MSA-03	Spectrum Analyzer	Agilent	E4448A	2004/06/12 * 12
MAT-22	Attenuator (10dB)	Orient Microwave	BX10-0476-00	2004/03/30 * 12
MRENT-09	Spectrum Analyzer	Advantest	R3273	2004/02/18 * 12

All equipment is calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

APPENDIX 3: Data of EMI test

Conducted Emission

DATA OF CONDUCTED EMISSION TEST

UL Apex Co., Ltd. Head Office EMC Lab. No.2 Semi Anechoic Chamber
Date : 2004/06/24 01:50:04

Applicant : Sony Corporation Report No. : 24HE0082-HO
Kind of EUT : Wireless LAN Module Power : DC 3.3V(PC INPUT: AC120V/60Hz)
Model No. : IRF302U Temp /Humi% : 20deg C / 61%
Serial No. : 125 Operator : Hiroka Umeyama

Mode / Remarks : Transmitting IEEE802.11a, 54Mbps ch153(5765MHz)

LIMIT : FCC15C §15.207 (QP)
FCC15C §15.207 (AV)

NO	FREQ [MHz]	READING		C.F	RESULT		LIMIT		MARGIN		PHASE
		QP [dB μV]	AV [dB μV]		QP [dB μV]	AV [dB μV]	QP [dB μV]	AV [dB μV]	QP [dB]	AV [dB]	
1	0.1818	49.1	36.0	0.1	49.2	36.1	64.4	54.4	15.2	18.3	N
2	0.2417	40.1	----	0.1	40.2	----	62.0	----	21.8	----	N
3	0.3016	35.8	----	0.1	35.9	----	60.2	----	24.3	----	N
4	0.5420	26.4	----	0.1	26.5	----	56.0	----	29.5	----	N
5	3.0162	24.8	----	1.0	25.8	----	56.0	----	30.2	----	N
6	4.9464	27.4	----	1.1	28.5	----	56.0	----	27.5	----	N
7	7.2062	38.5	----	1.2	39.7	----	60.0	----	20.3	----	N
8	7.8170	37.6	----	1.3	38.9	----	60.0	----	21.1	----	N
9	14.4074	28.8	----	1.5	30.3	----	60.0	----	29.7	----	N
10	15.6330	24.8	----	1.5	26.3	----	60.0	----	33.7	----	N
11	0.1818	48.9	35.3	0.1	49.0	35.4	64.4	54.4	15.4	19.0	L
12	0.2417	40.1	----	0.1	40.2	----	62.0	----	21.8	----	L
13	0.3016	36.1	----	0.1	36.2	----	60.2	----	24.0	----	L
14	0.5420	28.2	----	0.1	28.3	----	56.0	----	27.7	----	L
15	3.0162	26.4	----	1.0	27.4	----	56.0	----	28.6	----	L
16	4.9487	28.3	----	1.1	29.4	----	56.0	----	28.6	----	L
17	7.1972	39.1	----	1.2	40.3	----	60.0	----	19.7	----	L
18	7.8170	37.4	----	1.3	38.7	----	60.0	----	21.3	----	L
19	14.3909	29.6	----	1.5	31.1	----	60.0	----	28.9	----	L
20	15.6330	24.5	----	1.5	26.0	----	60.0	----	34.0	----	L

CHART:WITH FACTOR,Peak hold data.Data is uncorrected. CALCURATION:RESULT=READING+C.F(LISN LOSS+CABLE LOSS)
Except for the above table : adequate margin data below the limits.

DATA OF CONDUCTED EMISSION TEST

UL Apex Co., Ltd. Head Office EMC Lab. No.2 Semi Anechoic Chamber
 Date : 2004/06/24 01:19:54

Applicant : Sony Corporation Kind of EUT : Wireless LAN Module Model No. : IRF302U Serial No. : 125	Report No. : 24HE0082-HO Power : DC 3.3V(PC INPUT: AC120V/60Hz) Temp /Humi% : 20deg.C / 61% Operator : Hiroka Umeyama
--	--

Mode / Remarks : Transmitting IEEE802 11a, 54Mbps ch 36(5180MHz)
 LIMIT : FCC15C § 15.207 (QP)
 FCC15C § 15.207 (AV)

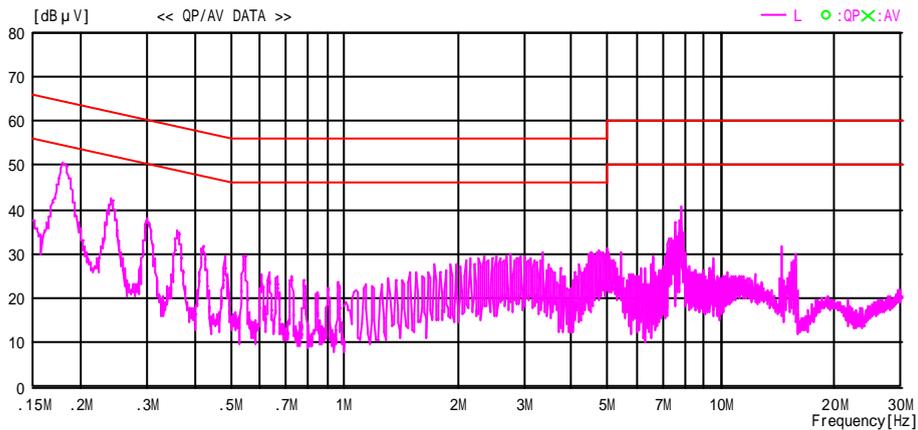
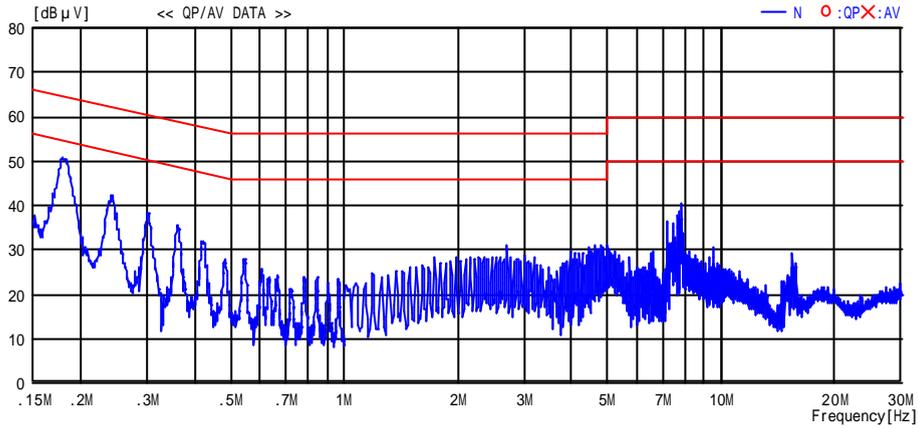


CHART:WITH FACTOR,Peak hold data.Data is uncorrected. CALCURATION:RESULT=READING+C.F(LISN LOSS+CABLE LOSS)
 Except for the above table : adequate margin data below the limits.

DATA OF CONDUCTED EMISSION TEST

UL Apex Co., Ltd. Head Office EMC Lab. No.2 Semi Anechoic Chamber
 Date : 2004/06/24 01:30:23

Applicant : Sony Corporation Kind of EUT : Wireless LAN Module Model No. : IRF302U Serial No. : 125	Report No. : 24HE0082-HO Power : DC 3.3V(PC INPUT: AC120V/60Hz) Temp /Humi% : 20deg.C / 61% Operator : Hiroka Uneyama
--	--

Mode / Remarks : Transmitting IEEE802 11a, 54Mbps ch 52(5260MHz)

LIMIT : FCC15C §15.207 (QP)
 FCC15C §15.207 (AV)

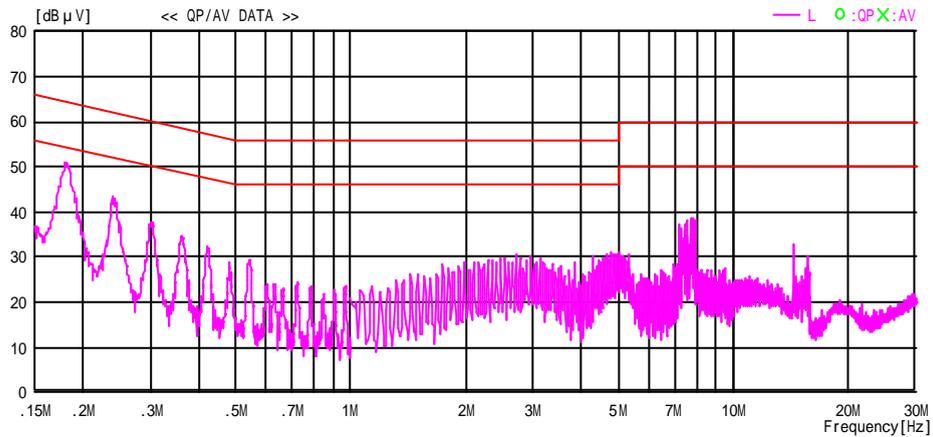
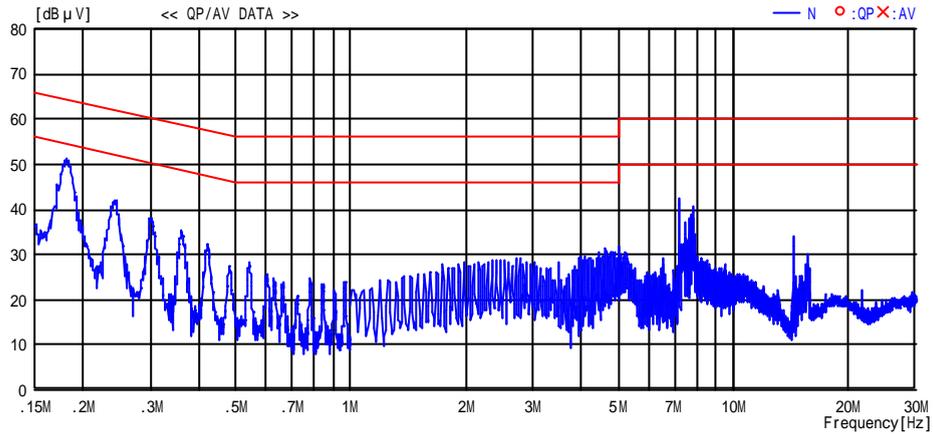


CHART:WITH FACTOR,Peak hold data.Data is uncorrected. CALCURATION:RESULT=READING+C.F(L1SN LOSS+CABLE LOSS)
 Except for the above table : adequate margin data below the limits.

DATA OF CONDUCTED EMISSION TEST

UL Apex Co., Ltd. Head Office EMC Lab. No.2 Semi Anechoic Chamber
 Date : 2004/06/24 01:37:09

Applicant : Sony Corporation Kind of EUT : Wireless LAN Module Model No. : IRF302U Serial No. : 125	Report No. : 24HE0082-HO Power : DC 3.3V(PC INPUT: AC120V/60Hz) Temp /Humi% : 20deg.C / 61% Operator : Hiroka Umeyama
--	--

Mode / Remarks : Transmitting IEEE802 11a, 54Mbps ch 64(5320MHz)

LIMIT : FCC15C § 15.207 (QP)
 FCC15C § 15.207 (AV)

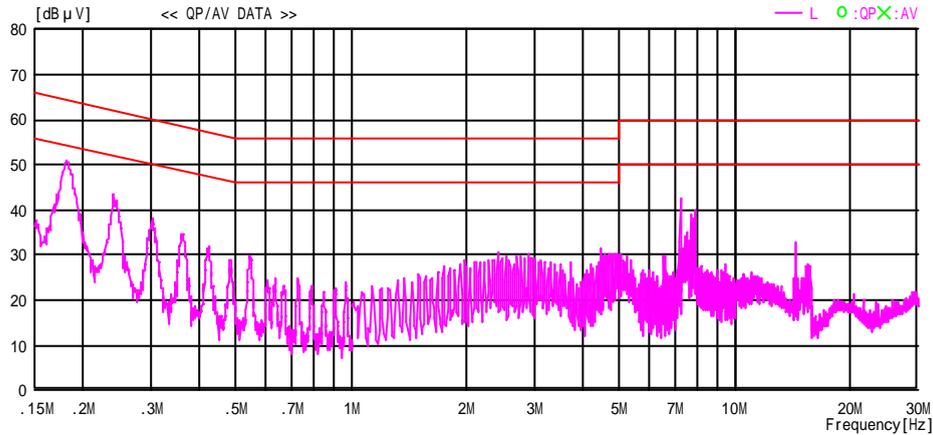
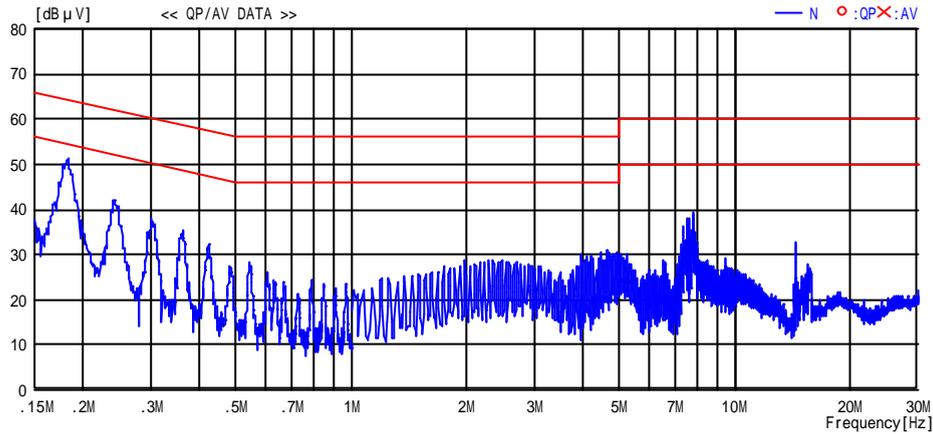


CHART: WITH FACTOR, Peak hold data. Data is uncorrected. CALCURATION: RESULT=READING+C.F(L1SN LOSS+CABLE LOSS)
 Except for the above table : adequate margin data below the limits.

DATA OF CONDUCTED EMISSION TEST

UL Apex Co., Ltd. Head Office EMC Lab. No.2 Semi Anechoic Chamber
 Date : 2004/06/24 01:43:03

Applicant : Sony Corporation Kind of EUT : Wireless LAN Module Model No. : IRF302U Serial No. : 125	Report No. : 24HE0082-HO Power : DC 3.3V(PC INPUT: AC120V/60Hz) Temp /Humi% : 20deg.C / 61% Operator : Hiroka Umeyama
--	--

Mode / Remarks : Transmitting IEEE802 11a, 54Mbps ch149(5745MHz)

LIMIT : FCC15C § 15.207 (QP)
 FCC15C § 15.207 (AV)

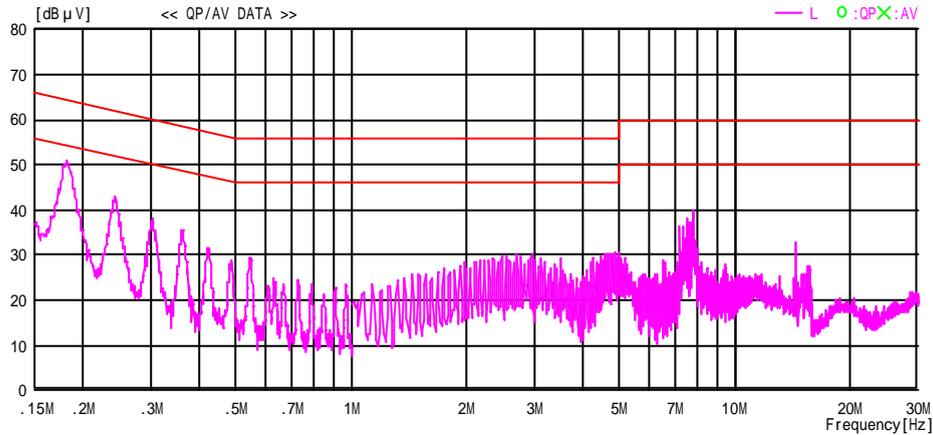
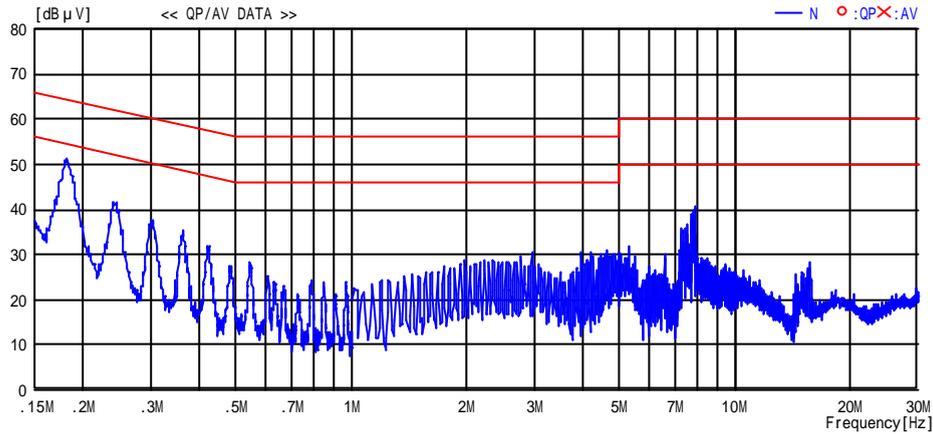


CHART: WITH FACTOR, Peak hold data. Data is uncorrected. CALCURATION: RESULT=READING+C.F(L1SN LOSS+CABLE LOSS)
 Except for the above table : adequate margin data below the limits.

DATA OF CONDUCTED EMISSION TEST

UL Apex Co., Ltd. Head Office EMC Lab. No.2 Semi Anechoic Chamber
 Date : 2004/06/24 01:50:04

Applicant : Sony Corporation Kind of EUT : Wireless LAN Module Model No. : IRF302U Serial No. : 125	Report No. : 24HE0082-HO Power : DC 3.3V(PC INPUT: AC120V/60Hz) Temp /Humi% : 20deg.C / 61% Operator : Hiroka Umeyama
--	--

Mode / Remarks : Transmitting IEEE802 11a, 54Mbps ch153(5765MHz)

LIMIT : FCC15C § 15.207 (QP)
 FCC15C § 15.207 (AV)

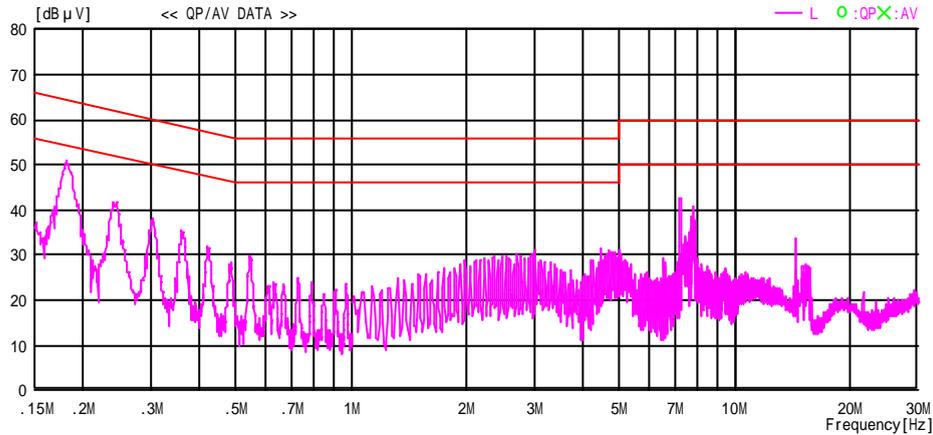
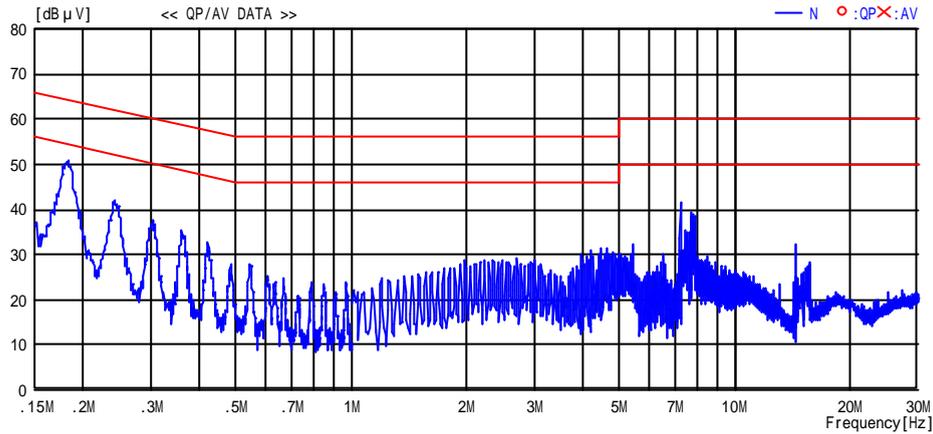


CHART:WITH FACTOR,Peak hold data.Data is uncorrected. CALCURATION:RESULT=READING+C.F(L1SN LOSS+CABLE LOSS)
 Except for the above table : adequate margin data below the limits.

DATA OF CONDUCTED EMISSION TEST

UL Apex Co., Ltd. Head Office EMC Lab. No.2 Semi Anechoic Chamber
 Date : 2004/06/24 01:59:04

Applicant : Sony Corporation Kind of EUT : Wireless LAN Module Model No. : IRF302U Serial No. : 125	Report No. : 24HE0082-HO Power : DC 3.3V(PC INPUT: AC120V/60Hz) Temp /Humi% : 20deg.C / 61% Operator : Hiroka Umeyama
--	--

Mode / Remarks : Transmitting IEEE802 11a, 54Mbps ch161(5805MHz)

LIMIT : FCC15C § 15.207 (QP)
 FCC15C § 15.207 (AV)

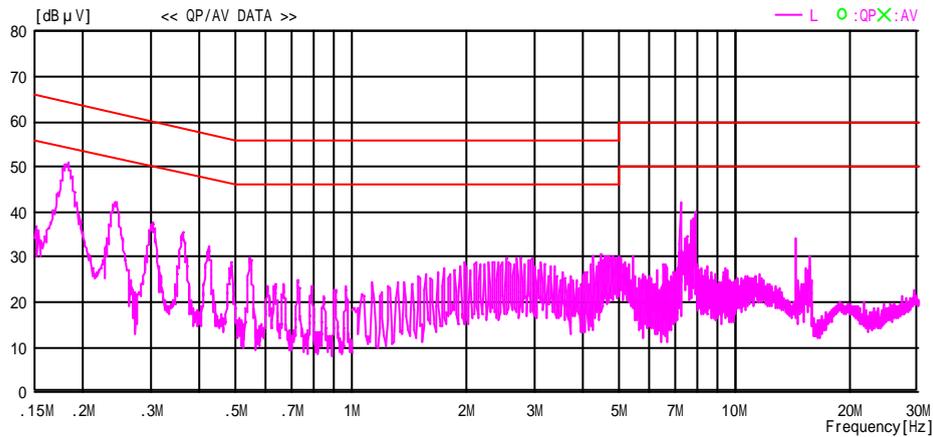
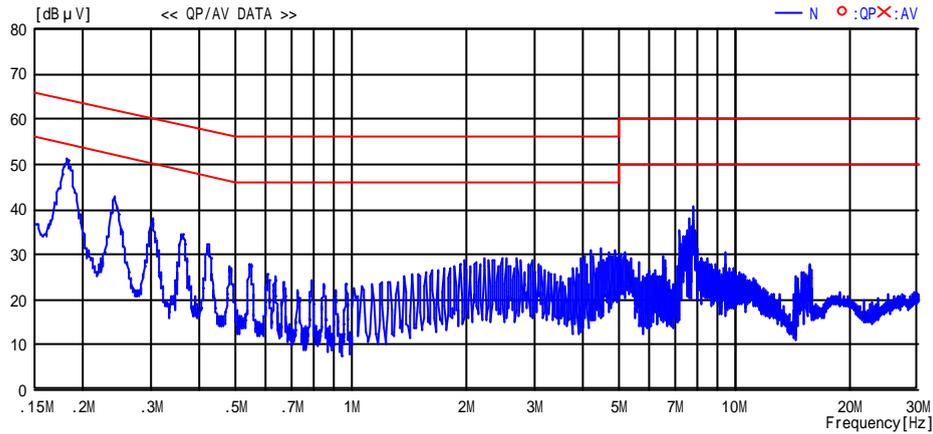


CHART: WITH FACTOR, Peak hold data. Data is uncorrected. CALCURATION: RESULT=READING+C.F(L1SN LOSS+CABLE LOSS)
 Except for the above table : adequate margin data below the limits.

26dB Emission Bandwidth


UL Apex Co., Ltd.
Head Office EMC Lab. No.3 Measurement Room

Company : Sony Corporation
Equipment : Wireless LAN Module
Model : IRF302U
Sample No. : 11
Power : DC3.3V
Mode : Tx IEEE 802.11a 54Mbps

REPORT NO : 24HE0082-HO
REGULATION : FCC 15.407(a)(1)(2)(3)
TEST DISTANCE : -
DATE : 06/15/2004
TEMPERATURE : 25deg.C
HUMIDITY : 48%
ENGINEER : Hiroka Umeyama

Ch	Freq. [MHz]	26dB Bandwidth [MHz]	Limit [MHz]
36	5180.0	21.596	-
52	5260.0	22.850	-
64	5320.0	23.006	-
149	5745.0	29.386	-
153	5765.0	29.999	-
161	5805.0	29.265	-

26dB Emission Bandwidth

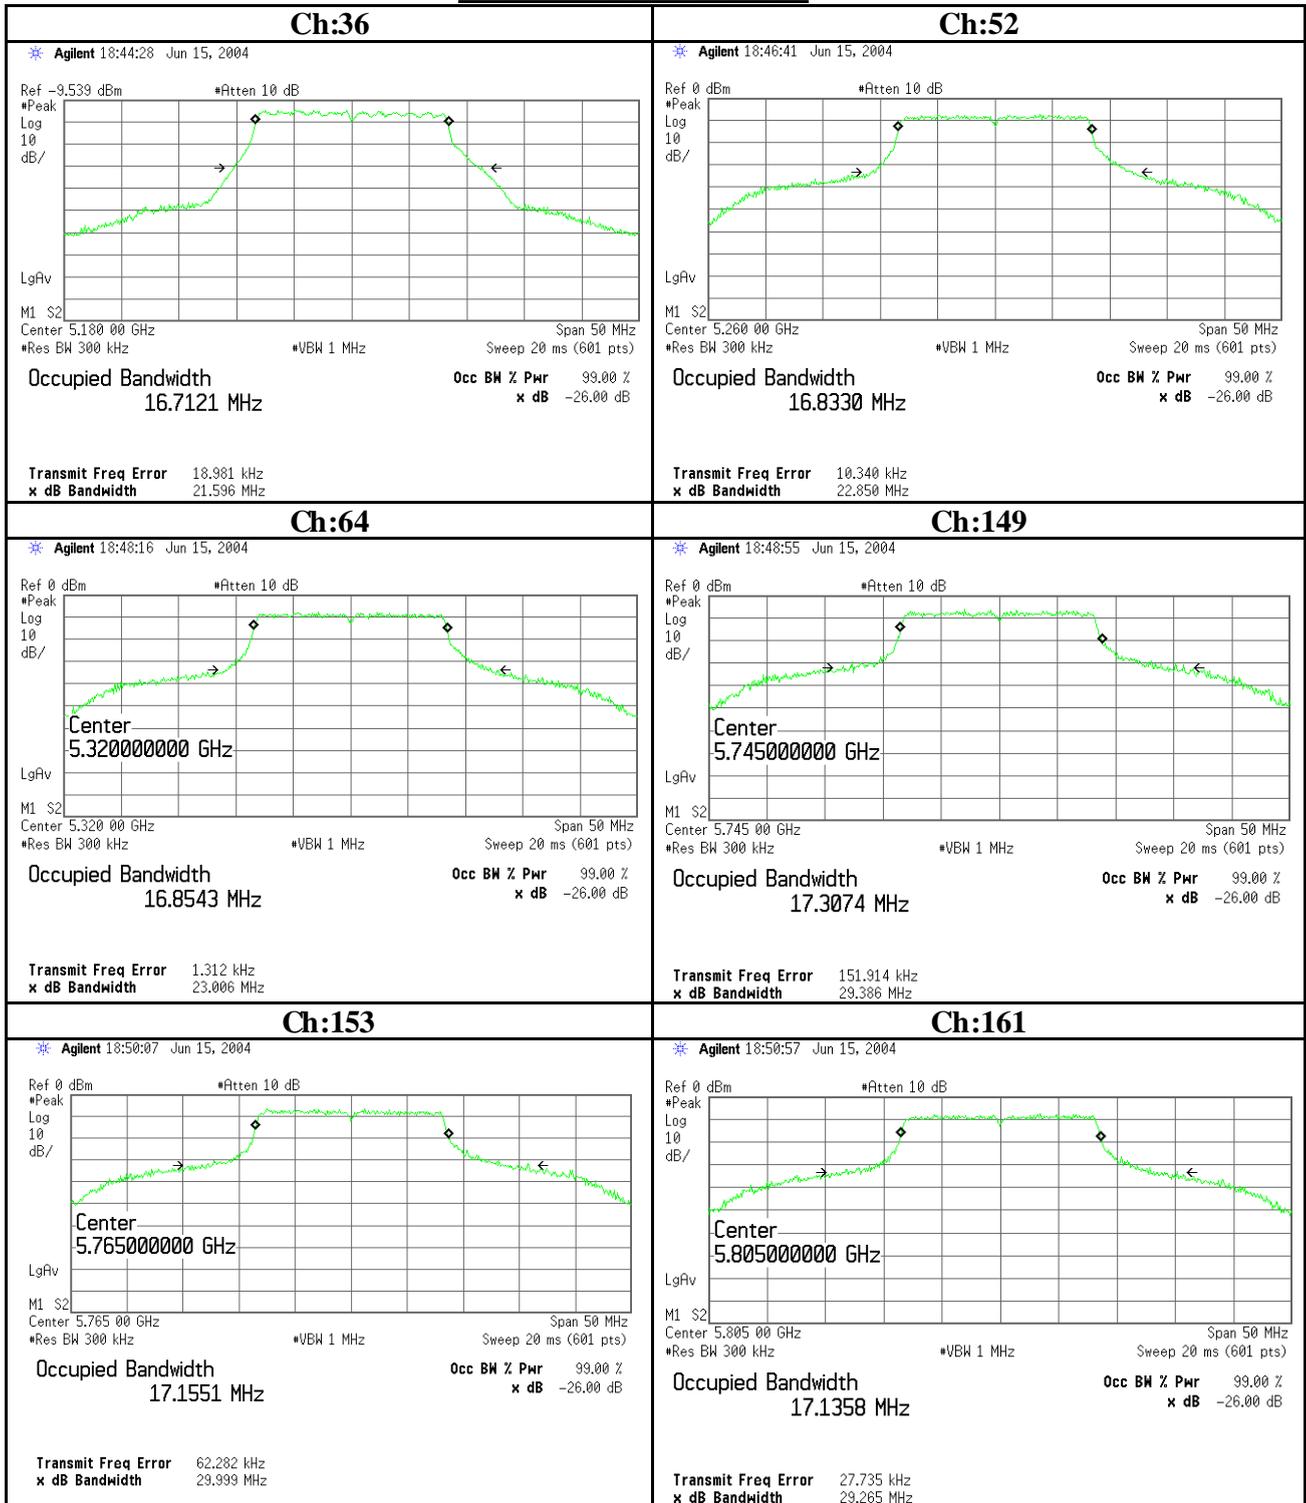

Peak Transmit Power

UL Apex Co., Ltd.
Head Office EMC Lab. No.3 Measurement Room

Company : Sony Corporation
Equipment : Wireless LAN Module
Model : IRF302U
Sample No. : 77
Power : DC3.3V
Mode : Tx IEEE 802.11a 54Mbps

REPORT NO : 24HE0082-HO
REGULATION : FCC 15.407(a)(1)(2)(3)
TEST DISTANCE : -
DATE : 06/25/2004
TEMPERATURE : 25deg.C
HUMIDITY : 60%
ENGINEER : Hiroka Umeyama


Ch	Freq. [MHz]	S/A Reading [dBm]	Cable Loss [dB]	Atten. [dB]	Result [dBm]	Limit [dBm]	Margin [dB]
36	5180.0	0.54	0.21	10.0	10.75	17.0	6.3
52	5260.0	5.31	0.21	10.0	15.52	24.0	8.5
64	5320.0	5.03	0.21	10.0	15.24	24.0	8.8
149	5745.0	6.36	0.22	10.0	16.58	30.0	13.4
153	5765.0	6.07	0.22	10.0	16.29	30.0	13.7
161	5805.0	5.36	0.22	10.0	15.58	30.0	14.4

Sample Calculation:

Result = Reading + Cable Loss + Attenuator

* In the above table, factor 0.0dB represents no use of Atten. and/or Filter.

Peak Transmit Power

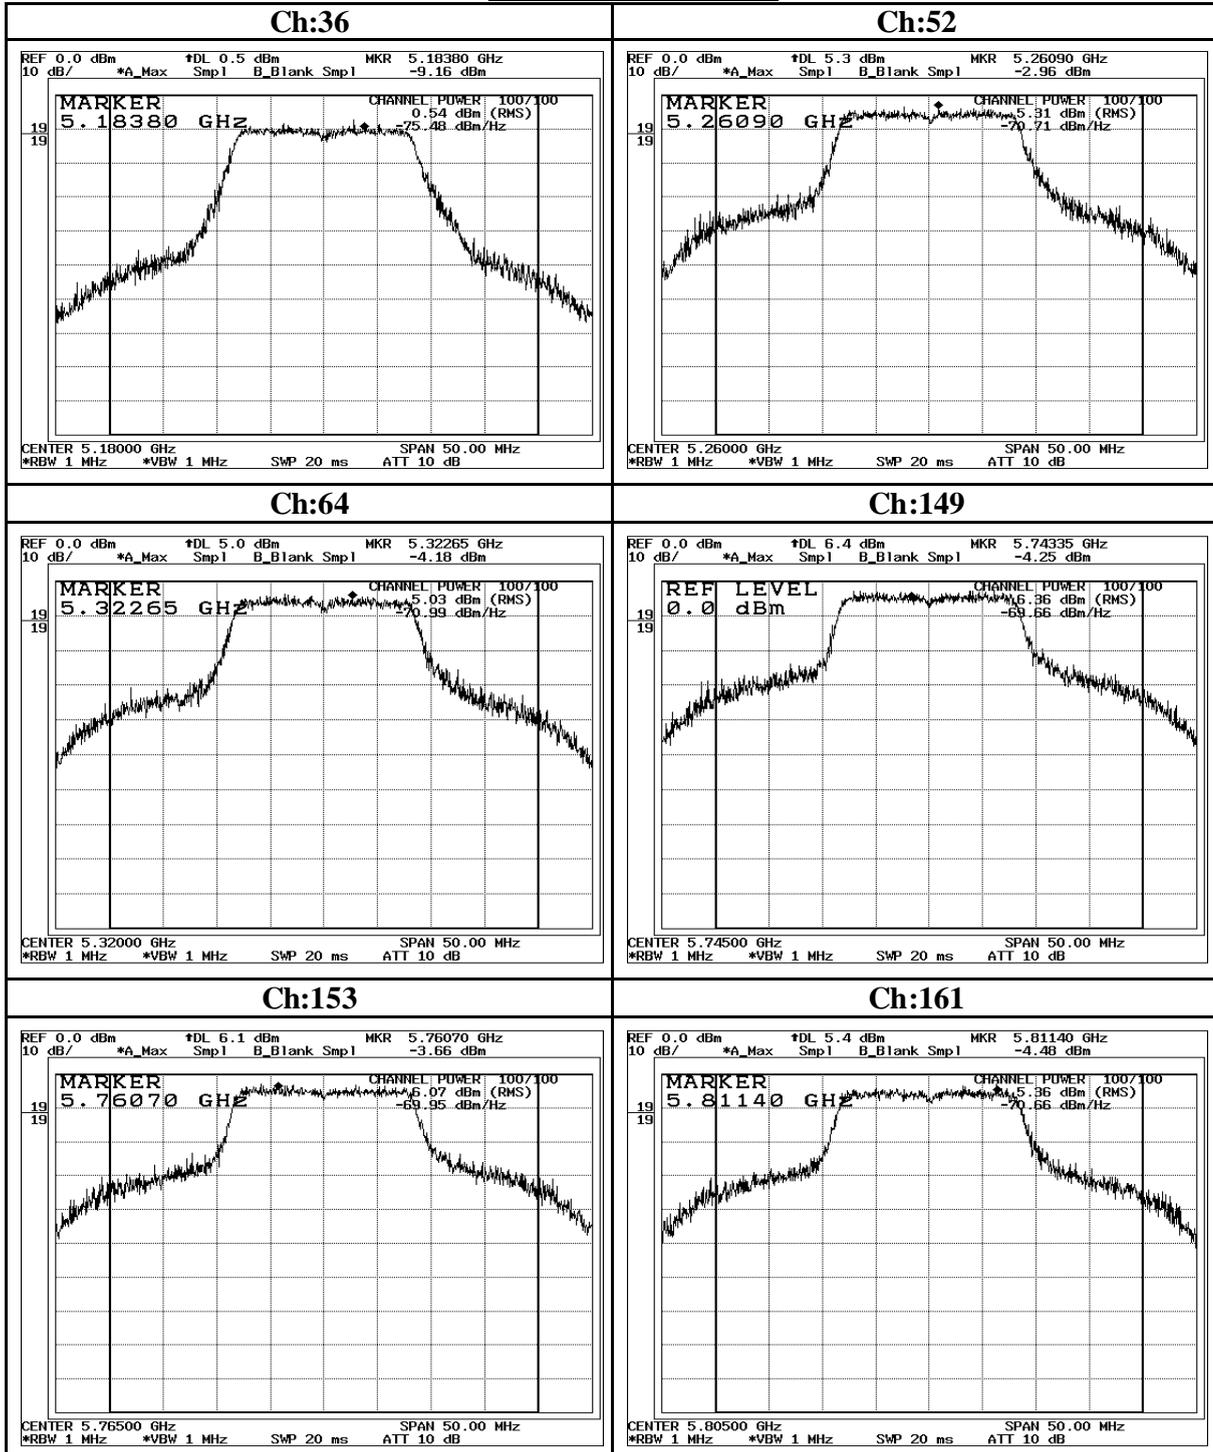

Radiated Spurious Emission (below 1GHz)


DATA OF RADIATED EMISSION TEST

UL Apex Co., Ltd. Head Office EMC Lab. No.2 Semi Anechoic Chamber
Date : 2004/06/13 14:04:30

Applicant : Sony Corporation Report No. : 24HE0082-HO
Kind of EUT : Wireless LAN Module Power : DC 3.3V
Model No. : IRF302U Temp./Humi. : 27 deg.C. / 44 %
Serial No. : 125 Operator : Hiroka Umeyama

Mode / Remarks : Transmitting IEEE802.11a, 54Mbps, ch 36(5180MHz) HOR:X-Axis,VER:Z-Axis(MAX)

LIMIT : FCC 15C §15.209 3m
Except for the data below : adequate margin data below the limits.

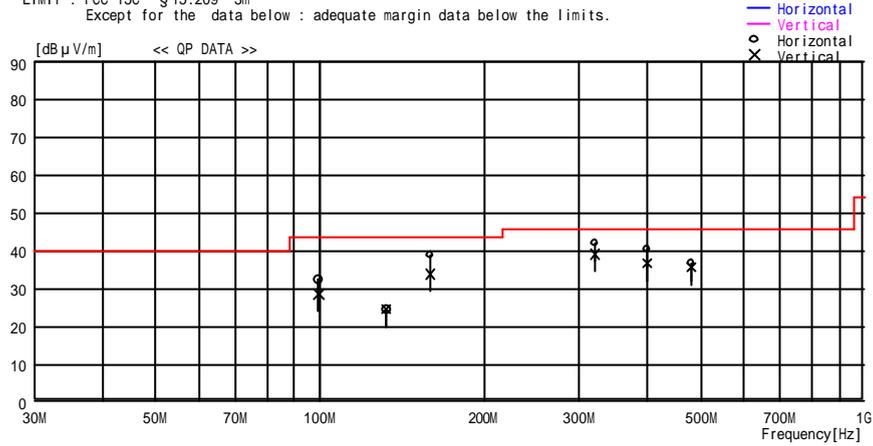

No.	FREQ [MHz]	READING QP [dB μV]	ANT FACTOR [dB/m]	LOSS [dB]	GAIN [dB]	RESULT [dB μV/m]	LIMIT [dB μV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	99.699	38.0	10.1	7.2	23.0	32.3	43.5	11.2	315	65
2	132.938	26.2	13.7	7.4	23.0	24.3	43.5	19.2	166	90
3	160.000	39.0	15.2	7.6	23.0	38.8	43.5	4.7	239	258
4	320.001	41.5	14.9	8.4	22.9	41.9	46.0	4.1	100	259
5	400.004	35.9	18.3	8.9	22.8	40.3	46.0	5.7	100	279
6	480.003	32.0	18.3	9.2	22.9	36.6	46.0	9.4	208	115
----- Vertical -----										
7	99.698	34.2	10.1	7.2	23.0	28.5	43.5	15.0	100	115
8	132.960	26.4	13.7	7.4	23.0	24.5	43.5	19.0	100	360
9	160.002	34.0	15.2	7.6	23.0	33.8	43.5	9.7	100	277
10	320.000	38.8	14.9	8.4	22.9	39.2	46.0	6.8	139	309
11	400.004	32.3	18.3	8.9	22.8	36.7	46.0	9.3	115	262
12	480.000	31.2	18.3	9.2	22.9	35.8	46.0	10.2	100	0

CHART: WITH FACTOR ANT TYPE : -30MHz LOOP, 30-300MHz BICONICAL, 300MHz-1000MHz LOGPERIODIC, 1000MHz- HORN
CALCULATION: RESULT = READING + ANT FACTOR + LOSS(CABLE+ATTEN.) - GAIN(AMP)


DATA OF RADIATED EMISSION TEST

UL Apex Co., Ltd. Head Office EMC Lab. No.2 Semi Anechoic Chamber
Date : 2004/06/13 14:04:30

Applicant : Sony Corporation
 Kind of EUT : Wireless LAN Module
 Model No. : IRF302U
 Serial No. : 125
 Report No. : 24HE0082-HO
 Power : DC 3.3V
 Temp./Humi. : 27 deg.C. / 44 %
 Operator : Hiroka Umeyama

Mode / Remarks : Transmitting IEEE802.11a, 54Mbps, ch 52(5260MHz) HOR:X-Axis,VER:Z-Axis(MAX)

LIMIT : FCC 15C §15.209 3m
 Except for the data below : adequate margin data below the limits.

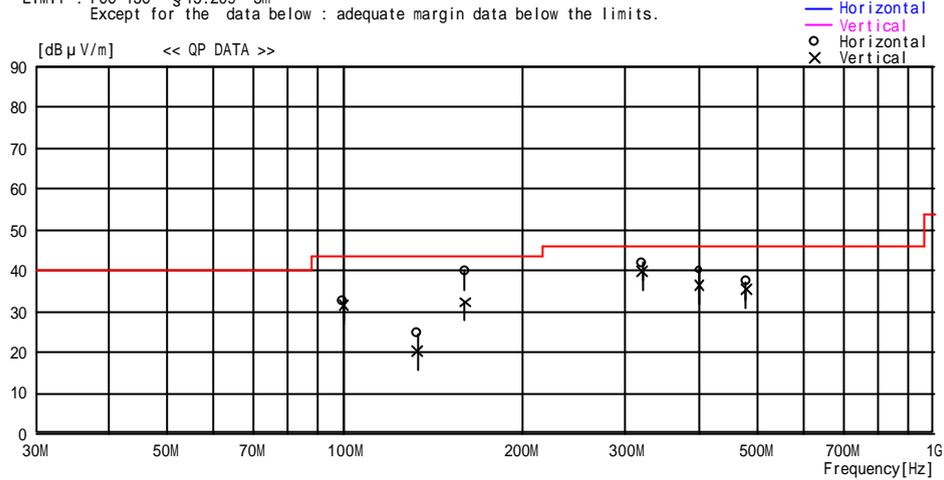

No.	FREQ [MHz]	READING QP [dB μV]	ANT FACTOR [dB/m]	LOSS [dB]	GAIN [dB]	RESULT [dB μV/m]	LIMIT [dB μV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	99.699	38.3	10.1	7.2	23.0	32.6	43.5	10.9	312	78
2	132.973	26.6	13.7	7.4	23.0	24.7	43.5	18.8	199	293
3	160.011	40.1	15.2	7.6	23.0	39.9	43.5	3.6	239	258
4	320.002	41.6	14.9	8.4	22.9	42.0	46.0	4.1	100	258
5	400.003	35.7	18.3	8.9	22.8	40.1	46.0	5.9	100	248
6	480.000	32.7	18.3	9.2	22.9	37.3	46.0	8.7	209	123
----- Vertical -----										
7	99.699	37.3	10.1	7.2	23.0	31.6	43.5	11.9	100	294
8	132.914	22.2	13.7	7.4	23.0	20.3	43.5	23.2	100	0
9	160.002	32.5	15.2	7.6	23.0	32.3	43.5	11.2	100	0
10	320.001	39.5	14.9	8.4	22.9	39.9	46.0	6.1	149	310
11	400.003	32.0	18.3	8.9	22.8	36.4	46.0	9.6	100	266
12	480.002	30.8	18.3	9.2	22.9	35.4	46.0	10.7	100	0

CHART: WITH FACTOR ANT TYPE : -30MHz LOOP, 30-300MHz BICONICAL, 300MHz-1000MHz LOGPERIODIC, 1000MHz- HORN
 CALCULATION: RESULT = READING + ANT FACTOR + LOSS(CABLE+ATTEN.) - GAIN(AMP)


DATA OF RADIATED EMISSION TEST

UL Apex Co., Ltd. Head Office EMC Lab. No.2 Semi Anechoic Chamber
Date : 2004/06/13 14:04:30

Applicant : Sony Corporation
 Kind of EUT : Wireless LAN Module
 Model No. : IRF302U
 Serial No. : 125
 Report No. : 24HE0082-HO
 Power : DC 3.3V
 Temp./Humi. : 27 deg.C. / 44 %
 Operator : Hiroka Umeyama

Mode / Remarks : Transmitting IEEE802.11a, 54Mbps, ch 64(5320MHz) HOR:X-Axis,VER:Z-Axis(MAX)

LIMIT : FCC 15C §15.209 3m
 Except for the data below : adequate margin data below the limits.

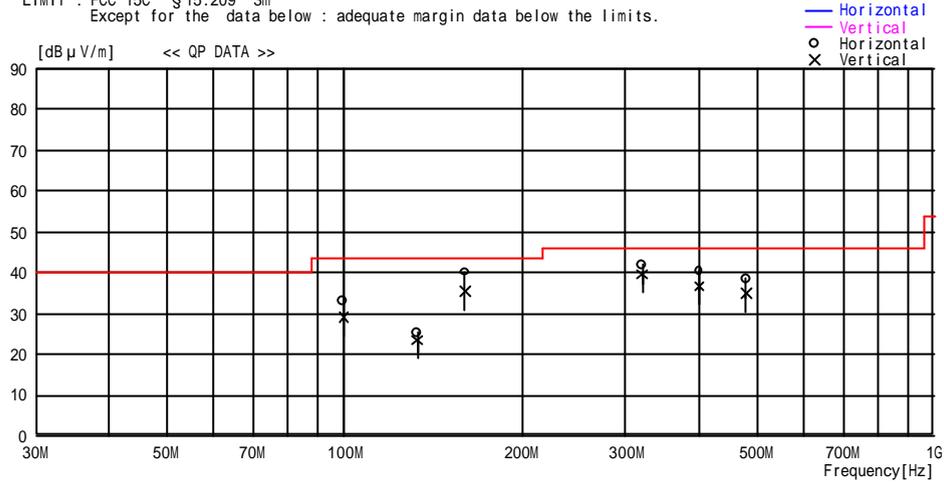

No.	FREQ [MHz]	READING QP [dB μV]	ANT FACTOR [dB/m]	LOSS [dB]	GAIN [dB]	RESULT [dB μV/m]	LIMIT [dB μV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	99.710	38.8	10.1	7.2	23.0	33.1	43.5	10.4	307	70
2	132.973	27.1	13.7	7.4	23.0	25.2	43.5	18.3	194	272
3	160.011	40.3	15.2	7.6	23.0	40.1	43.5	3.4	136	253
4	320.004	41.5	14.9	8.4	22.9	41.9	46.0	4.2	100	103
5	400.004	36.0	18.3	8.9	22.8	40.4	46.0	5.6	100	264
6	480.005	33.8	18.3	9.2	22.9	38.4	46.0	7.6	210	117
----- Vertical -----										
7	99.699	34.8	10.1	7.2	23.0	29.1	43.5	14.5	100	0
8	132.914	25.3	13.7	7.4	23.0	23.4	43.5	20.1	100	0
9	160.005	35.6	15.2	7.6	23.0	35.4	43.5	8.1	100	277
10	320.006	39.2	14.9	8.4	22.9	39.6	46.0	6.4	143	339
11	400.006	32.2	18.3	8.9	22.8	36.6	46.0	9.4	120	273
12	480.000	30.3	18.3	9.2	22.9	34.9	46.0	11.1	100	0

CHART: WITH FACTOR ANT TYPE : -30MHz LOOP, 30-300MHz BICONICAL, 300MHz-1000MHz LOGPERIODIC, 1000MHz- HORN
 CALCULATION: RESULT = READING + ANT FACTOR + LOSS(CABLE+ATTEN.) - GAIN(AMP)


DATA OF RADIATED EMISSION TEST

UL Apex Co., Ltd. Head Office EMC Lab. No.2 Semi Anechoic Chamber
Date : 2004/06/13 14:04:30

Applicant : Sony Corporation
 Kind of EUT : Wireless LAN Module
 Model No. : IRF302U
 Serial No. : 125
 Report No. : 24HE0082-HO
 Power : DC 3.3V
 Temp./Humi. : 27 deg.C. / 44 %
 Operator : Hiroka Umeyama

Mode / Remarks : Transmitting IEEE802.11a, 54Mbps, ch 149(5745MHz) HOR:X-Axis,VER:Z-Axis(MAX)

LIMIT : FCC 15C §15.209 3m
 Except for the data below : adequate margin data below the limits.

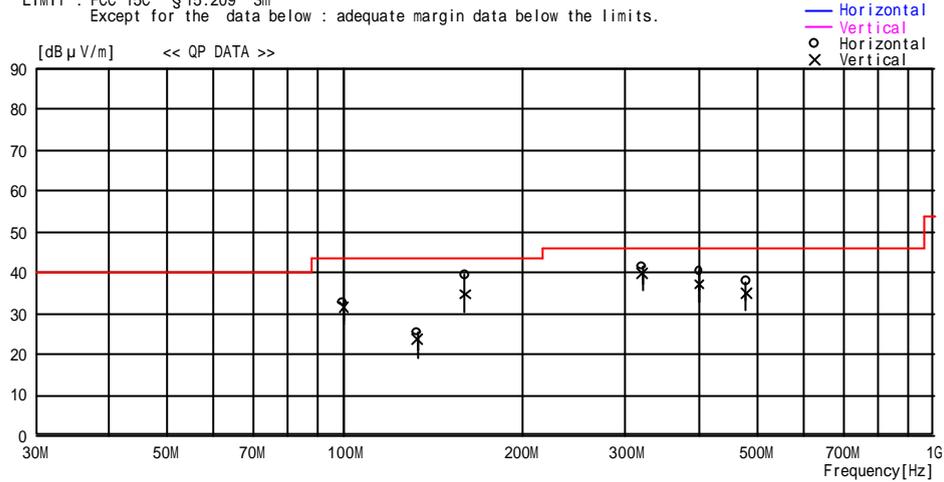

No.	FREQ [MHz]	READING QP [dB μV]	ANT FACTOR [dB/m]	LOSS [dB]	GAIN [dB]	RESULT [dB μV/m]	LIMIT [dB μV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	99.697	38.5	10.1	7.2	23.0	32.8	43.5	10.7	308	59
2	132.964	27.4	13.7	7.4	23.0	25.5	43.5	18.0	148	72
3	160.016	39.6	15.2	7.6	23.0	39.4	43.5	4.1	164	235
4	319.999	41.1	14.9	8.4	22.9	41.5	46.0	4.5	100	90
5	400.000	36.1	18.3	8.9	22.8	40.5	46.0	5.6	100	262
6	480.001	33.2	18.3	9.2	22.9	37.8	46.0	8.2	214	111
----- Vertical -----										
7	99.712	37.4	10.1	7.2	23.0	31.7	43.5	11.8	100	108
8	132.959	25.7	13.7	7.4	23.0	23.8	43.5	19.7	100	0
9	160.007	34.9	15.2	7.6	23.0	34.7	43.5	8.8	100	280
10	320.000	39.6	14.9	8.4	22.9	40.0	46.0	6.0	144	320
11	400.006	32.8	18.3	8.9	22.8	37.2	46.0	8.8	111	269
12	480.007	30.5	18.3	9.2	22.9	35.1	46.0	10.9	100	7

CHART: WITH FACTOR ANT TYPE : -30MHz LOOP, 30-300MHz BICONICAL, 300MHz-1000MHz LOGPERIODIC, 1000MHz- HORN
 CALCULATION: RESULT = READING + ANT FACTOR + LOSS(CABLE+ATTEN.) - GAIN(AMP)


DATA OF RADIATED EMISSION TEST

UL Apex Co., Ltd. Head Office EMC Lab. No.2 Semi Anechoic Chamber
Date : 2004/06/13 14:04:30

Applicant : Sony Corporation
Kind of EUT : Wireless LAN Module
Model No. : IRF302U
Serial No. : 125
Report No. : 24HE0082-HO
Power : DC 3.3V
Temp./Humi. : 27 deg.C. / 44 %
Operator : Hiroka Umeyama

Mode / Remarks : Transmitting IEEE802.11a, 54Mbps, ch 153(5765MHz) HOR:X-Axis,VER:Z-Axis(MAX)

LIMIT : FCC 15C §15.209 3m
Except for the data below : adequate margin data below the limits.

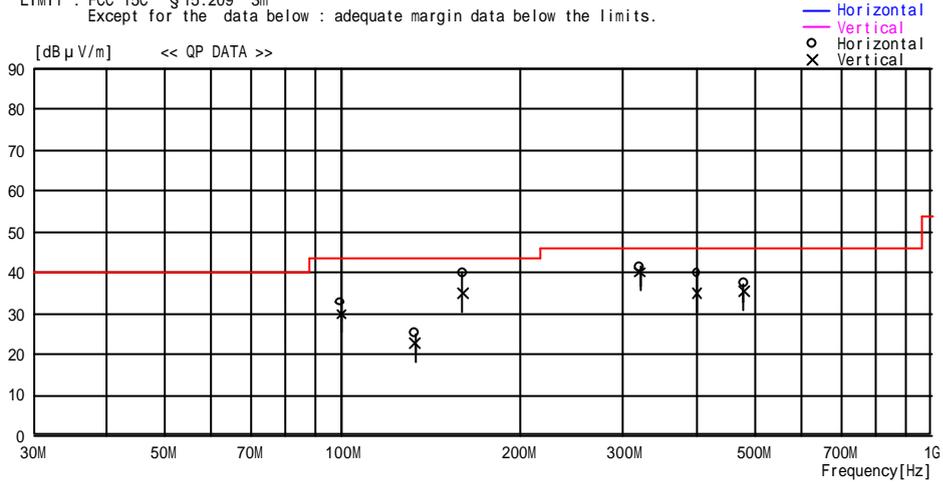

No.	FREQ [MHz]	READING QP [dB μV]	ANT FACTOR [dB/m]	LOSS [dB]	GAIN [dB]	RESULT [dB μV/m]	LIMIT [dB μV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	99.704	38.6	10.1	7.2	23.0	32.9	43.5	10.7	307	65
2	132.941	27.0	13.7	7.4	23.0	25.1	43.5	18.4	189	256
3	160.007	40.1	15.2	7.6	23.0	39.9	43.5	3.6	202	236
4	320.000	41.0	14.9	8.4	22.9	41.4	46.0	4.6	100	88
5	399.997	35.5	18.3	8.8	22.8	39.8	46.0	6.2	100	261
6	480.001	32.7	18.3	9.2	22.9	37.3	46.0	8.7	211	125
----- Vertical -----										
7	99.711	35.6	10.1	7.2	23.0	29.9	43.5	13.6	100	74
8	132.952	24.6	13.7	7.4	23.0	22.7	43.5	20.8	145	0
9	160.000	35.0	15.2	7.6	23.0	34.8	43.5	8.7	100	266
10	319.999	39.8	14.9	8.4	22.9	40.2	46.0	5.8	145	319
11	400.001	30.7	18.3	8.9	22.8	35.1	46.0	10.9	100	0
12	480.000	30.9	18.3	9.2	22.9	35.5	46.0	10.5	100	360

CHART:WITH FACTOR ANT TYPE : -30MHz LOOP,30-300MHz BICONICAL,300MHz-1000MHz LOGPERIODIC,1000MHz- HORN
CALCULATION:RESULT = READING + ANT FACTOR + LOSS(CABLE+ATTEN.) - GAIN(AMP)

DATA OF RADIATED EMISSION TEST


UL Apex Co., Ltd. Head Office EMC Lab. No.2 Semi Anechoic Chamber
Date : 2004/06/13 14:04:30

Applicant : Sony Corporation
Kind of EUT : Wireless LAN Module
Model No. : IRF302U
Serial No. : 125

Report No. : 24HE0082-HO
Power : DC 3.3V
Temp./Humi. : 27 deg.C. / 44 %
Operator : Hiroka Umeyama

Mode / Remarks : Transmitting IEEE802.11a, 54Mbps, ch 161(5805MHz) HOR:X-Axis,VER:Z-Axis(MAX)

LIMIT : FCC 15C §15.209 3m
Except for the data below : adequate margin data below the limits.

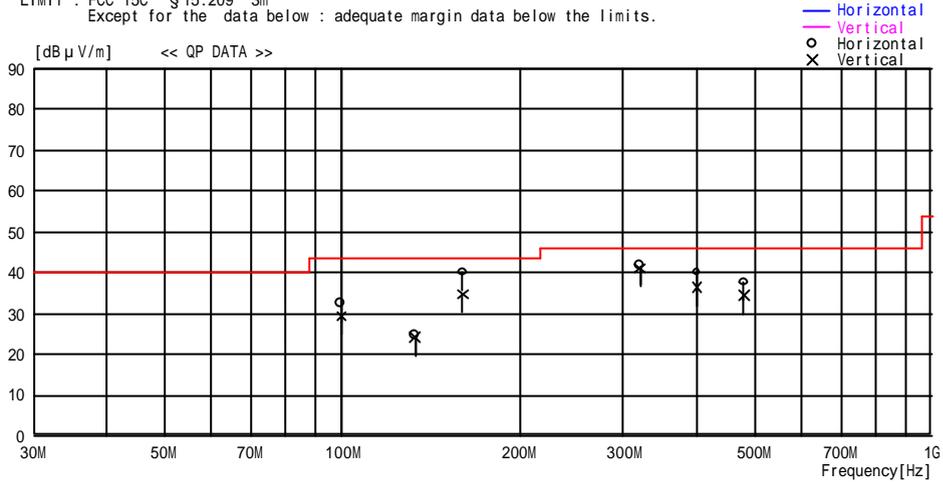

No.	FREQ [MHz]	READING QP [dB μV]	ANT FACTOR [dB/m]	LOSS [dB]	GAIN [dB]	RESULT [dB μV/m]	LIMIT [dB μV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	99.705	38.3	10.1	7.2	23.0	32.6	43.5	10.9	322	70
2	132.949	26.6	13.7	7.4	23.0	24.7	43.5	18.8	169	264
3	160.000	40.3	15.2	7.6	23.0	40.1	43.5	3.5	118	254
4	320.000	41.3	14.9	8.4	22.9	41.7	46.0	4.3	100	92
5	400.000	35.7	18.3	8.9	22.8	40.1	46.0	5.9	100	256
6	479.997	33.1	18.3	9.2	22.9	37.7	46.0	8.3	210	123
----- Vertical -----										
7	99.700	35.1	10.1	7.2	23.0	29.4	43.5	14.1	100	82
8	132.935	26.1	13.7	7.4	23.0	24.2	43.5	19.3	100	0
9	160.011	34.9	15.2	7.6	23.0	34.7	43.5	8.8	100	260
10	320.003	40.6	14.9	8.4	22.9	41.0	46.0	5.0	143	310
11	400.004	31.9	18.3	8.9	22.8	36.3	46.0	9.7	100	287
12	480.003	29.7	18.3	9.2	22.9	34.3	46.0	11.7	100	82

CHART:WITH FACTOR ANT TYPE : -30MHz LOOP,30-300MHz BICONICAL,300MHz-1000MHz LOGPERIODIC,1000MHz- HORN
CALCULATION:RESULT = READING + ANT FACTOR + LOSS(CABLE+ATTEN.) - GAIN(AMP)

Radiated Spurious Emission (above 1GHz:Inside of the restricted band)

***Detector:PK**


DATA OF RADIATED EMISSION TEST

UL Apex Co., Ltd. Head Office EMC Lab. No.2 Semi Anechoic Chamber

Applicant : Sony Corporation
Kind of EUT : Wireless LAN Module
Model No. : IRF302U
Serial No. : 125
Report No. : 24HE0082-HO
Power : DC 3.3V
Temp./Humi. : 25 deg. C. / 60 % 2004/06/20
Operator : Hiroka Umeyama

Mode / Remarks : Transmitting IEEE802.11a,
54Mbps, HOR/VER: Z-Axis (MAX)

LIMIT : FCC15C § 15.407 3m
Except for the data below : adequate margin data below the limits.

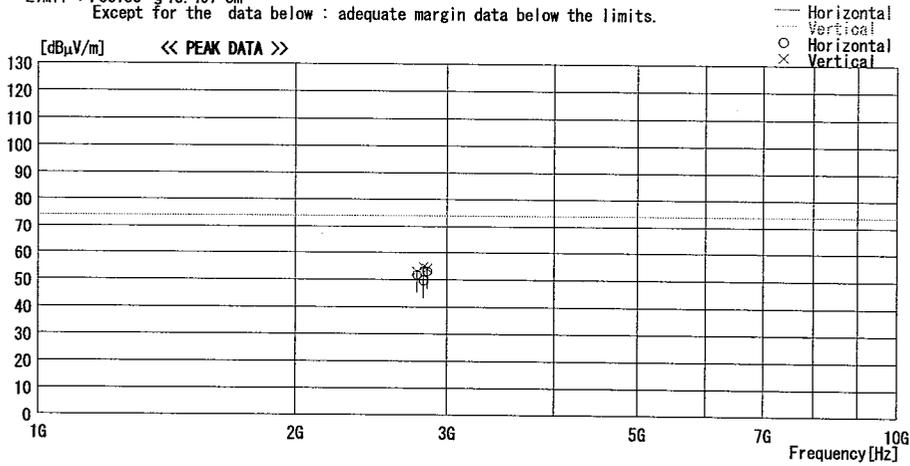

Frequency	Reading	DET	Antenna	Loss&	Level
[MHz]	[dBuV]		Factor	Gain	[dBuV/m]
			[dB/m]	[dB]	
2770.000	50.8	PK	31.8	-29.5	53.1
2770.000	49.5	PK	31.8	-29.5	51.8
2817.000	47.2	PK	31.9	-29.3	49.8
2817.000	52.2	PK	31.9	-29.3	54.8
2847.000	50.4	PK	32.0	-29.3	53.1
2847.000	51.5	PK	32.0	-29.3	54.2

Polar.	Limit	Margin
	[dBuV/m]	[dB]
Vert.	74.0	20.9
Hori.	74.0	22.2
Hori.	74.0	24.2
Vert.	74.0	19.2
Hori.	74.0	20.9
Vert.	74.0	19.8

Tx:Ch36
Tx:Ch36
Tx:Ch52
Tx:Ch52
Tx:Ch64
Tx:Ch64

CHART: WITH FACTOR ANT TYPE: -30MHz LOOP, 30-300MHz BICONICAL, 300MHz-1000MHz LOGPERIODIC, 1000MHz- HORN
CALCULATION: RESULT = READING + ANT FACTOR + LOSS (CABLE+ATTEN.) - GAIN (AMP)


DATA OF RADIATED EMISSION TEST

UL Apex Co., Ltd. Head Office EMC Lab. No. 2 Semi Anechoic Chamber

Applicant : Sony Corporation
Kind of EUT : Wireless LAN Module
Model No. : IRF302U
Serial No. : 125

Report No. : 24HE0082-HO
Power : DC 3.3V / distance 1m
Temp./Humi. : 25 deg. C. / 60 % 2004/06/20
Operator : Hiroka Umeyama

Mode / Remarks : Transmitting IEEE802.11a
54Mbps, HOR/VER:Z-Axis (MAX)
Limit : FCC15C §15.407 3m (used Distance Factor: 1m)
Except for the data below : adequate margin data below the limits.

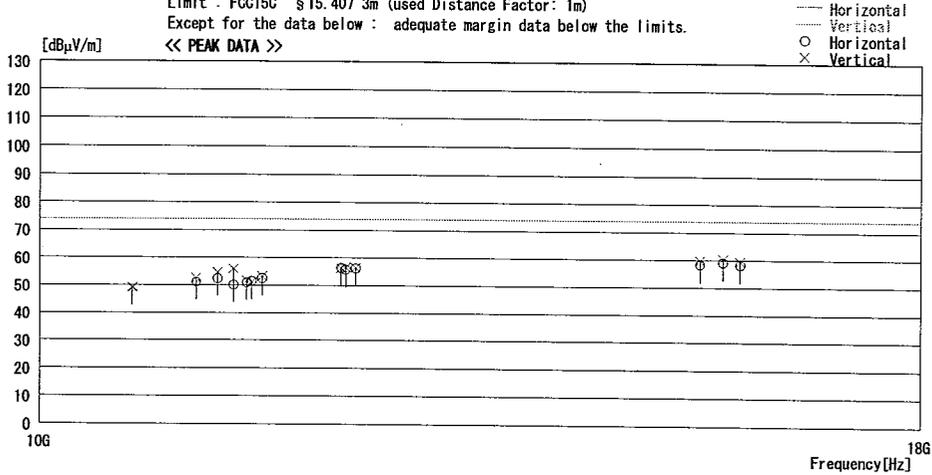

Frequency [MHz]	Reading [dBuV]	DET	Antenna Factor [dB/m]	Loss & Gain [dB]	Level [dBuV/m]
10640.000	31.8	PK	37.9	-20.5	49.2
10640.000	31.6	PK	37.9	-20.5	49.0
11108.000	34.4	PK	38.7	-20.5	52.6
11108.000	32.9	PK	38.7	-20.5	51.1
11268.000	33.7	PK	39.1	-20.4	52.4
11268.000	36.0	PK	39.1	-20.4	54.7
11388.000	31.2	PK	39.4	-20.4	50.2
11388.000	36.9	PK	39.4	-20.4	55.9
11490.000	31.7	PK	39.7	-19.7	51.7
11490.000	31.0	PK	39.7	-19.7	51.0
11530.000	31.1	PK	39.8	-19.7	51.2
11530.000	31.4	PK	39.8	-19.7	51.5
11610.000	32.4	PK	40.0	-19.8	52.6
11610.000	33.1	PK	40.0	-19.8	53.3
12238.000	34.8	PK	41.5	-20.0	56.3
12238.000	34.8	PK	41.5	-20.0	56.3
12278.000	34.9	PK	41.6	-20.0	56.5
12278.000	34.2	PK	41.6	-20.0	55.8
12358.000	34.2	PK	41.8	-19.8	56.2
12358.000	34.4	PK	41.8	-19.8	56.4

Polar.	Limit [dBuV/m]	Margin [dB]	
Vert.	74.0	24.8	Tx:Ch64
Vert.	74.0	25.0	Tx:Ch64
Vert.	74.0	21.4	Tx:Ch36
Hori.	74.0	22.9	Tx:Ch36
Hori.	74.0	21.6	Tx:Ch52
Vert.	74.0	19.3	Tx:Ch52
Hori.	74.0	23.8	Tx:Ch64
Vert.	74.0	18.1	Tx:Ch64
Vert.	74.0	22.3	Tx:Ch149
Hori.	74.0	23.0	Tx:Ch149
Vert.	74.0	22.8	Tx:Ch153
Hori.	74.0	22.5	Tx:Ch153
Hori.	74.0	21.4	Tx:Ch161
Vert.	74.0	20.7	Tx:Ch161
Vert.	74.0	17.7	Tx:Ch149
Hori.	74.0	17.7	Tx:Ch149
Vert.	74.0	17.5	Tx:Ch153
Hori.	74.0	18.2	Tx:Ch153
Hori.	74.0	17.8	Tx:Ch161
Vert.	74.0	17.6	Tx:Ch161

CHART: WITH FACTOR ANT TYPE : -30MHz LOOP, 30-300MHz BICONICAL, 300MHz-1000MHz LOGPERIODIC, 1000MHz- HORN
CALCULATION: RESULT = READING (-Distance Factor) + ANT FACTOR + LOSS (CABLE+ATTEN.) - GAIN (AMP)

DATA OF RADIATED EMISSION TEST

UL Apex Co., Ltd. Head Office EMC Lab. No.2 Semi Anechoic Chamber

Applicant : Sony Corporation
Kind of EUT : Wireless LAN Module
Model No. : IRF302U
Serial No. : 125

Report No. : 24HE0082-HO
Power : DC 3.3V / distance 1m
Temp./Humi. : 25 deg. C. / 60 % 2004/06/20
Operator : Hiroka Uneyama

Mode / Remarks : Transmitting IEEE802.11a
54Mbps. HOR/VER:Z-Axis(MAX)
Limit : FCC15C §15.407 3m (used Distance Factor : 1m)
Except for the data below : adequate margin data below the limits.

Frequency [MHz]	Reading [dBuV]	DET	Antenna	Loss &	Level [dBuV/m]
			Factor [dB/m]	Gain [dB]	
15540.000	33.2	PK	42.7	-17.4	58.5
15540.000	34.6	PK	42.7	-17.4	59.9
15780.000	33.9	PK	43.0	-17.6	59.3
15780.000	35.1	PK	43.0	-17.6	60.5
15960.000	32.6	PK	43.3	-17.6	58.3
15960.000	33.8	PK	43.3	-17.6	59.5

Polar.	Limit		Margin
	[dBuV/m]	[dB]	
Hori.	74.0	15.5	Tx:Ch36
Vert.	74.0	14.1	Tx:Ch36
Hori.	74.0	14.7	Tx:Ch52
Vert.	74.0	13.5	Tx:Ch52
Hori.	74.0	15.7	Tx:Ch64
Vert.	74.0	14.5	Tx:Ch64

CHART: WITH FACTOR ANT TYPE : -30MHz LOOP, 30-300MHz BICONICAL, 300MHz-1000MHz LOGPERIODIC, 1000MHz- HORN
CALCULATION: RESULT = READING (-Distance Factor) + ANT FACTOR + LOSS (CABLE+ATTEN.) - GAIN (AMP)


DATA OF RADIATED EMISSION TEST

UL Apex Co., Ltd. Head Office EMC Lab. No. 2 Semi Anechoic Chamber

Applicant : Sony Corporation
 Kind of EUT : Wireless LAN Module
 Model No. : IRF302U
 Serial No. : 125

Report No. : 24HE0082-HO
 Power : DC 3.3V / distance 1m
 Temp./Humi. : 25 deg. C / 60 % 2004/06/20
 Operator : Hiroka Umeyama

Mode / Remarks : Transmitting IEEE802.11a
 54Mbps, HOR/VER:Z-Axis(MAX)
 Limit : FCC15C §15.407 3m (used Distance Factor : 1m)
 Except for the data below : adequate margin data below the limits.

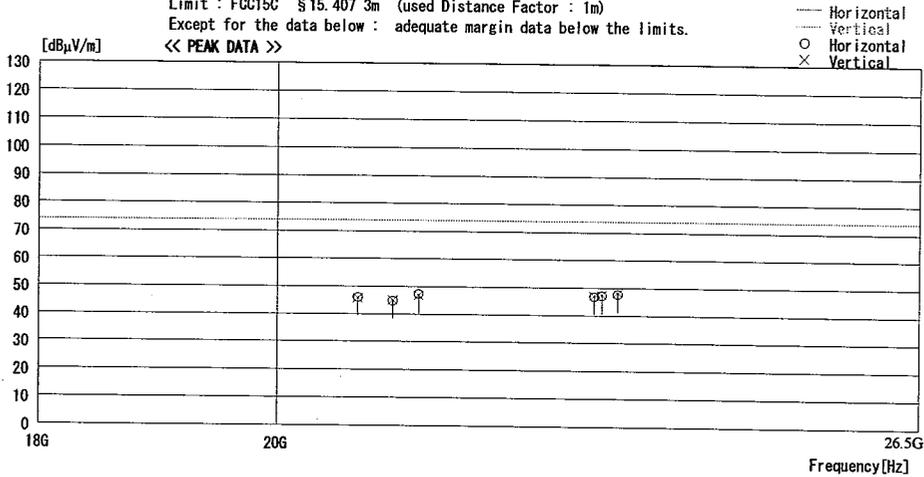

Frequency [MHz]	Reading [dBμV]	DET	Antenna	Loss&	Level [dBμV/m]
			Factor [dB/m]	Gain [dB]	
20720.000	34.1	PK	40.2	-28.6	45.7
20720.000	34.4	PK	40.2	-28.6	46.0
21040.000	32.7	PK	40.3	-28.3	44.7
21040.000	32.8	PK	40.3	-28.3	44.8
21280.000	34.2	PK	40.6	-28.1	46.7
21280.000	34.8	PK	40.6	-28.1	47.3
22980.000	34.0	PK	40.8	-28.0	46.8
22980.000	34.2	PK	40.8	-28.0	47.0
23060.000	34.7	PK	40.7	-28.0	47.4
23060.000	34.4	PK	40.7	-28.0	47.1
23220.000	35.2	PK	40.4	-27.9	47.7
23220.000	35.6	PK	40.4	-27.9	48.1

Polar.	Limit		Margin
	[dBμV/m]	[dB]	
Vert.	74.0	28.3	Tx:Ch36
Hori.	74.0	28.0	Tx:Ch36
Hori.	74.0	29.3	Tx:Ch52
Vert.	74.0	29.2	Tx:Ch52
Vert.	74.0	27.3	Tx:Ch64
Hori.	74.0	26.7	Tx:Ch64
Hori.	74.0	27.2	Tx:Ch149
Vert.	74.0	27.0	Tx:Ch149
Vert.	74.0	26.6	Tx:Ch153
Hori.	74.0	26.9	Tx:Ch153
Hori.	74.0	26.3	Tx:Ch161
Vert.	74.0	25.9	Tx:Ch161


CHART: WITH FACTOR ANT TYPE : -30MHz LOOP, 30-300MHz BICONICAL, 300MHz-1000MHz LOGPERIODIC, 1000MHz- HORN
 CALCULATION: RESULT = READING (-Distance Factor) + ANT FACTOR + LOSS (CABLE+ATTEN.) - GAIN (AMP)

DATA OF RADIATED EMISSION TEST

UL Apex Co., Ltd. Head Office EMC Lab. No.2 Semi Anechoic Chamber

Applicant : Sony Corporation
Kind of EUT : Wireless LAN Module
Model No. : IRF302U
Serial No. : 125
Report No. : 24HE0082-HO
Power : DC 3.3V / distance 0.5m
Temp./Humi. : 25 deg. C. / 60 % 2004/06/20
Operator : Hiroka Umeyama

Mode / Remarks : Transmitting IEEE802.11a
54Mbps, HOR/VER:Z-Axis(MAX)
Limit : FCC15C §15.407 3m (used Distance Factor : 0.5m)
Except for the data below : adequate margin data below the limits.

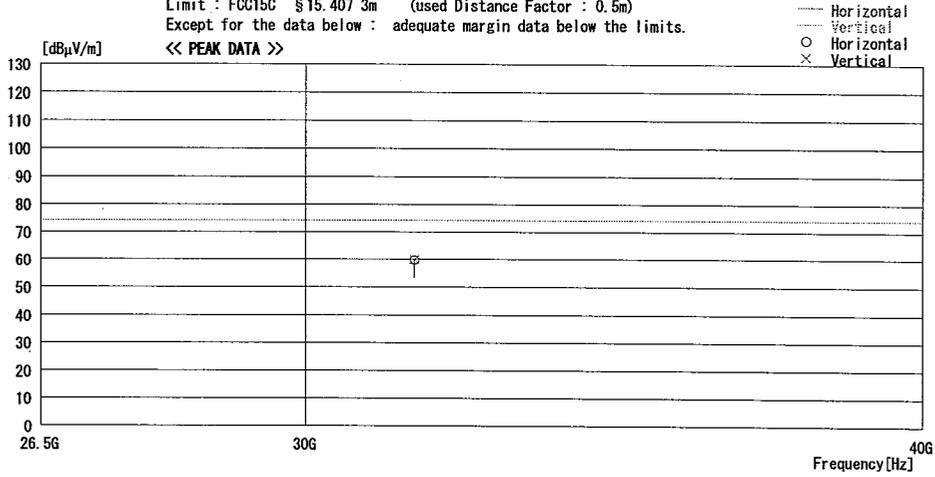

Frequency [MHz]	Reading [dBµV]	DET	Antenna	Loss&	Level [dBµV/m]
			Factor [dB/m]	Gain [dB]	
31560.000	31.4	PK	43.3	-15.0	59.7
31560.000	31.5	PK	43.3	-15.0	59.8

Polar.	Limit	Margin
	[dBµV/m]	[dB]
Hori.	74.0	14.3
Vert.	74.0	14.2

Tx:Ch52
Tx:Ch52

CHART: WITH FACTOR ANT TYPE : -30MHz LOOP, 30-300MHz BICONICAL, 300MHz-1000MHz LOGPERIODIC, 1000MHz- HORN
CALCULATION-RESULT = READING (-Distance Factor) + ANT FACTOR + LOSS (GABLE+ATTEN.) - GAIN (AMP)

Radiated Spurious Emission (above 1GHz:Inside of the restricted band)


***Detector:AV**

DATA OF RADIATED EMISSION TEST

UL Apex Co., Ltd. Head Office EMC Lab. No.2 Semi Anechoic Chamber

Applicant : Sony Corporation
Kind of EUT : Wireless LAN Module
Model No. : IRE302U
Serial No. : 125
Report No. : 24HE0082-HO
Power : DC 3.3V
Temp./Humi. : 25 deg.C. / 60 % 2004/06/20
Operator : Hiroka Umeyama

Mode / Remarks : Transmitting IEEE802.11a
54Mbps, HOR/VER:Z-Axis(MAX)
Limit : FCC15C §15.407 3m
Except for the data below : adequate margin data below the limits.
<< AV DATA >>

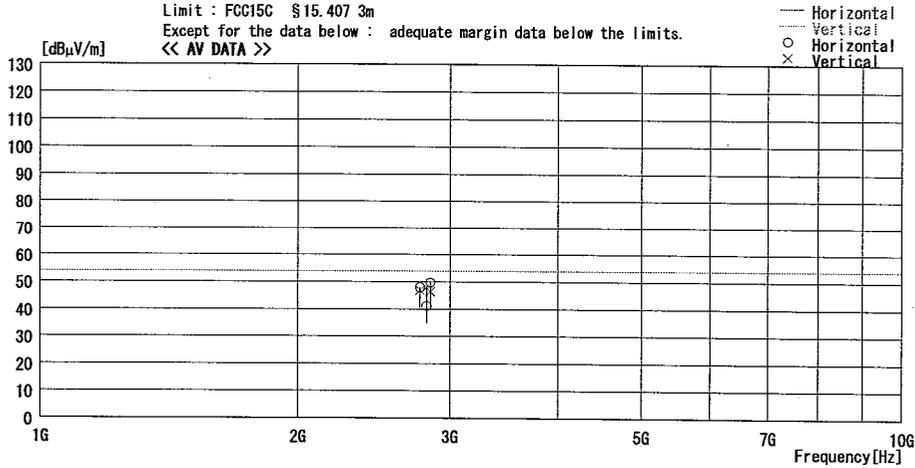

Frequency [MHz]	Reading [dBuV]	DET	Antenna		Level [dBuV/m]
			Factor [dB/m]	Loss & Gain [dB]	
2770.000	44.7	AV	31.8	-29.5	47.0
2770.000	45.7	AV	31.8	-29.5	48.0
2817.000	38.6	AV	31.9	-29.3	41.2
2817.000	45.3	AV	31.9	-29.3	47.9
2847.000	47.1	AV	32.0	-29.3	49.8
2847.000	43.7	AV	32.0	-29.3	46.4

Polar.	Limit		Tx:Ch
	[dBuV/m]	[dB]	
Vert.	54.0	7.0	Tx:Ch36
Hori.	54.0	6.0	Tx:Ch36
Hori.	54.0	12.8	Tx:Ch52
Vert.	54.0	6.1	Tx:Ch52
Hori.	54.0	4.2	Tx:Ch64
Vert.	54.0	7.6	Tx:Ch64


CHART: WITH FACTOR ANT TYPE: -30MHz LOOP, 30-300MHz BICONICAL, 300MHz-1000MHz LOGPERIODIC, 1000MHz- HORN
CALCULATION: RESULT = READING + ANT FACTOR + LOSS (CABLE+ATTEN.) - GAIN (AMP)

DATA OF RADIATED EMISSION TEST

UL Apex Co., Ltd. Head Office EMC Lab. No.2 Semi Anechoic Chamber

Applicant : Sony Corporation	Report No. : 24HE0082-HO
Kind of EUT : Wireless LAN Module	Power : DC 3.3V / distance 1m
Model No. : 1RF302U	Temp./Humi. : 25 deg.C / 60 % 2004/06/20
Serial No. : 125	Operator : Hiroka Umeyama

Mode / Remarks : Transmitting IEEE802.11a
54Mbps, HOR/VER:Z-Axis(MAX)
Limit : FCC15C §15.407 3m (used Distance Factor : 1m)
Except for the data below : adequate margin data below the limits.

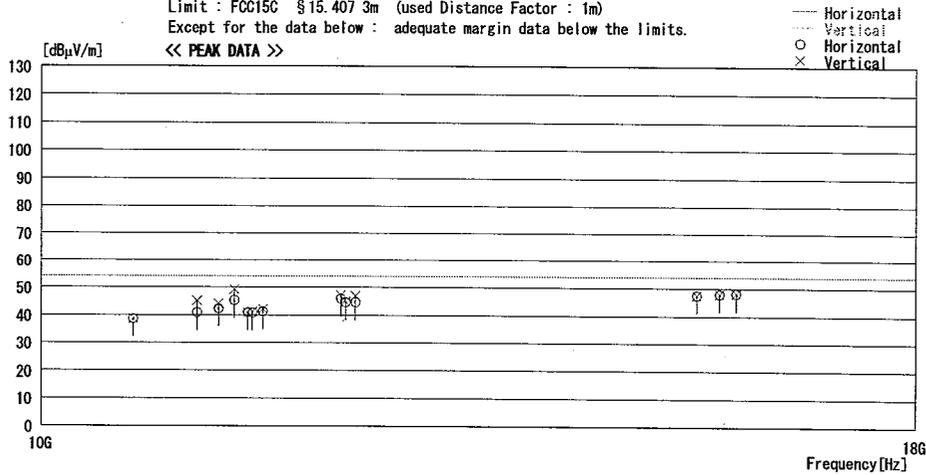

Frequency [MHz]	Reading [dBµV]	DET	Antenna		Level [dBµV/m]
			Factor [dB/m]	Loss& Gain [dB]	
10640.000	21.2	AV	37.9	-20.5	38.6
10640.000	21.2	AV	37.9	-20.5	38.6
11108.000	27.0	AV	38.7	-20.5	45.2
11108.000	22.7	AV	38.7	-20.5	40.9
11268.000	23.6	AV	39.1	-20.4	42.3
11268.000	25.4	AV	39.1	-20.4	44.1
11388.000	26.4	AV	39.4	-20.4	45.4
11388.000	30.3	AV	39.4	-20.4	49.3
11490.000	20.9	AV	39.7	-19.7	40.9
11490.000	21.0	AV	39.7	-19.7	41.0
11530.000	21.1	AV	39.8	-19.7	41.2
11530.000	20.8	AV	39.8	-19.7	40.9
11610.000	22.0	AV	40.0	-19.8	42.2
11610.000	21.1	AV	40.0	-19.8	41.3
12238.000	25.7	AV	41.5	-20.0	47.2
12238.000	24.5	AV	41.5	-20.0	46.0
12278.000	23.3	AV	41.6	-20.0	44.9
12278.000	23.1	AV	41.6	-20.0	44.7
12358.000	22.7	AV	41.8	-19.8	44.7
12358.000	25.0	AV	41.8	-19.8	47.0

Polar.	Limit		Tx:Ch
	[dBµV/m]	[dB]	
Vert.	54.0	15.4	Tx:Ch64
Hori.	54.0	15.4	Tx:Ch64
Vert.	54.0	8.8	Tx:Ch36
Hori.	54.0	13.1	Tx:Ch36
Hori.	54.0	11.7	Tx:Ch52
Vert.	54.0	9.9	Tx:Ch52
Hori.	54.0	8.6	Tx:Ch64
Vert.	54.0	4.7	Tx:Ch64
Vert.	54.0	13.1	Tx:Ch149
Hori.	54.0	13.0	Tx:Ch149
Vert.	54.0	12.8	Tx:Ch153
Hori.	54.0	13.1	Tx:Ch153
Vert.	54.0	11.8	Tx:Ch161
Hori.	54.0	12.7	Tx:Ch161
Vert.	54.0	6.8	Tx:Ch149
Hori.	54.0	8.0	Tx:Ch149
Vert.	54.0	9.1	Tx:Ch153
Hori.	54.0	9.3	Tx:Ch153
Hori.	54.0	9.3	Tx:Ch161
Vert.	54.0	7.0	Tx:Ch161

CHART: WITH FACTOR ANT TYPE : -30MHz LOOP, 30-300MHz BICONICAL, 300MHz-1000MHz LOGPERIODIC, 1000MHz- HORN
CALCULATION: RESULT = READING (-Distance Factor) + ANT FACTOR + LOSS (CABLE+ATTEN.) - GAIN (AMP)

DATA OF RADIATED EMISSION TEST

UL Apex Co., Ltd. Head Office EMC Lab. No. 2 Semi Anechoic Chamber

Applicant : Sony Corporation
Kind of EUT : Wireless LAN Module
Model No. : IRF302U
Serial No. : 125

Report No. : 24HE0082-HO
Power : DC 3.3V / distance 1m
Temp./Humi. : 25 deg.C / 60 % 2004/06/20
Operator : Hiroka Umeyama

Mode / Remarks : Transmitting IEEE802.11a
54Mbps, HOR/VER:Z-Axis(MAX)
Limit : FCC15C \$15.407 3m (used Distance Factor : 1m)
Except for the data below : adequate margin data below the limits.

Frequency [MHz]	Reading [dBuV]	DET	Antenna	Loss&	Level [dBuV/m]
			Factor [dB/m]	Gain [dB]	
15540.000	22.2	AV	42.7	-17.4	47.5
15540.000	22.2	AV	42.7	-17.4	47.5
15780.000	22.6	AV	43.0	-17.6	48.0
15780.000	22.6	AV	43.0	-17.6	48.0
15960.000	22.5	AV	43.3	-17.6	48.2
15960.000	22.5	AV	43.3	-17.6	48.2

Polar.	Limit	Margin	
	[dBuV/m]	[dB]	
Hori.	54.0	6.5	Tx:Ch36
Vert.	54.0	6.5	Tx:Ch36
Hori.	54.0	6.0	Tx:Ch52
Vert.	54.0	6.0	Tx:Ch52
Hori.	54.0	5.8	Tx:Ch64
Vert.	54.0	5.8	Tx:Ch64

CHART: WITH FACTOR ANT TYPE : -30MHz LOOP, 30-300MHz BICONICAL, 300MHz-1000MHz LOGPERIODIC, 1000MHz- HORN
CALCULATION: RESULT = READING (-Distance Factor) + ANT FACTOR + LOSS (CABLE+ATTEN.) - GAIN (AMP)


DATA OF RADIATED EMISSION TEST

UL Apex Co., Ltd. Head Office EMC Lab. No. 2 Semi Anechoic Chamber

Applicant : Sony Corporation
Kind of EUT : Wireless LAN Module
Model No. : IRF302U
Serial No. : 125

Report No. : 24HE0082-HO
Power : DC 3.3V / distance 1m
Temp./Humi. : 25 deg.C. / 60 % 2004/06/20
Operator : Hiroka Umeyama

Mode / Remarks : Transmitting IEEE802.11a
54Mbps, HOR/VER:Z-Axis(MAX)
Limit : FCC15C §15.407 3m (used Distance Factor : 1m)
Except for the data below : adequate margin data below the limits.

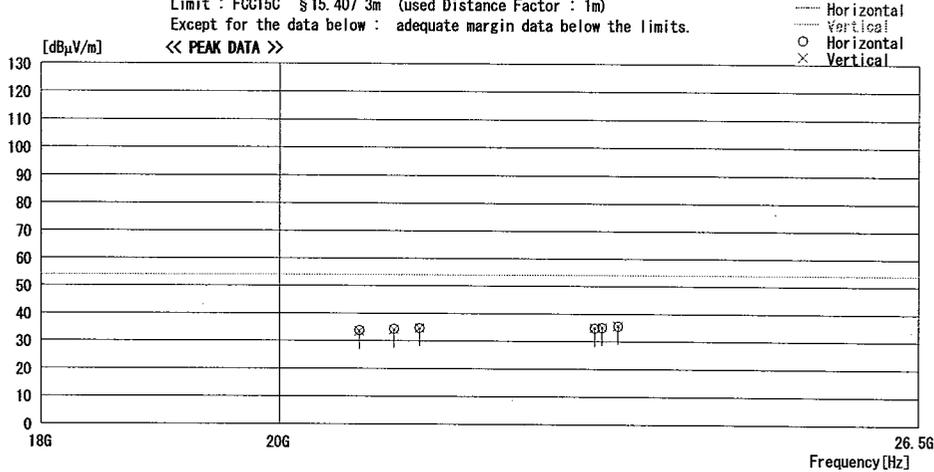

Frequency [MHz]	Reading [dBuV]	DET	Antenna	Loss&	Level [dBuV/m]
			Factor [dB/m]	Gain [dB]	
20720.000	21.8	AV	40.2	-28.6	33.4
20720.000	22.0	AV	40.2	-28.6	33.6
21040.000	22.2	AV	40.3	-28.3	34.2
21040.000	21.9	AV	40.3	-28.3	33.9
21280.000	22.0	AV	40.6	-28.1	34.5
21280.000	22.0	AV	40.6	-28.1	34.5
22980.000	21.9	AV	40.8	-28.0	34.7
22980.000	22.0	AV	40.8	-28.0	34.8
23060.000	22.2	AV	40.7	-28.0	34.9
23060.000	22.2	AV	40.7	-28.0	34.9
23220.000	23.0	AV	40.4	-27.9	35.5
23220.000	23.0	AV	40.4	-27.9	35.5

Polar.	Limit	Margin	Tx:Ch
	[dBuV/m]	[dB]	
Vert.	54.0	20.6	Tx:Ch36
Hori.	54.0	20.4	Tx:Ch36
Hori.	54.0	19.8	Tx:Ch52
Vert.	54.0	20.1	Tx:Ch52
Vert.	54.0	19.5	Tx:Ch64
Hori.	54.0	19.5	Tx:Ch64
Hori.	54.0	19.3	Tx:Ch149
Vert.	54.0	19.2	Tx:Ch149
Vert.	54.0	19.1	Tx:Ch153
Hori.	54.0	19.1	Tx:Ch153
Hori.	54.0	18.5	Tx:Ch161
Vert.	54.0	18.5	Tx:Ch161

CHART: WITH FACTOR ANT TYPE : -30MHz LOOP, 30-300MHz BICONICAL, 300MHz-1000MHz LOGPERIODIC, 1000MHz- HORN
CALCULATION: RESULT = READING (-Distance Factor) + ANT FACTOR + LOSS (CABLE+ATTEN.) - GAIN (AMP)


DATA OF RADIATED EMISSION TEST

UL Apex Co., Ltd. Head Office EMC Lab. No. 2 Semi Anechoic Chamber

Applicant : Sony Corporation
Kind of EUT : Wireless LAN Module
Model No. : IRF302U
Serial No. : 125

Report No. : 24HE0082-HO
Power : DC 3.3V / distance 0.5m
Temp./Humi. : 25 deg. C / 60 % 2004/06/20
Operator : Hiroka Umeyama

Mode / Remarks : Transmitting IEEE802.11a
54Mbps, HOR/VER:Z-Axis(MAX)
Limit : FCC15C §15.407 3m (used Distance Factor : 0.5m)
Except for the data below : adequate margin data below the limits.

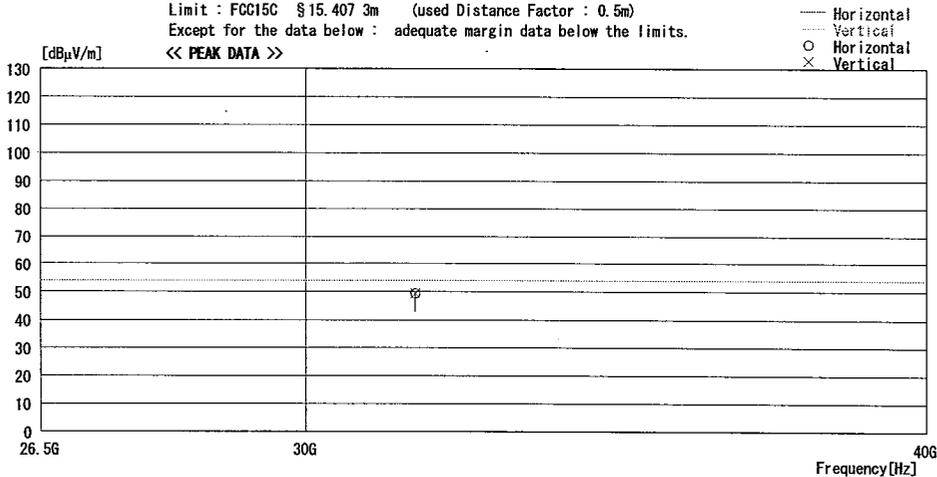

Frequency [MHz]	Reading [dBμV]	DET	Antenna	Loss&	Level [dBμV/m]
			Factor [dB/m]	Gain [dB]	
31560.000	21.1	AV	43.3	-15.0	49.4
31560.000	21.2	AV	43.3	-15.0	49.5

Polar.	Limit	Margin
	[dBμV/m]	[dB]
Hori.	54.0	4.6
Vert.	54.0	4.5

Tx:Ch52
Tx:Ch52

CHART: WITH FACTOR ANT TYPE: -30MHz LOOP, 30-300MHz BICONICAL, 300MHz-1000MHz LOGPERIODIC, 1000MHz- HORN
CALCULATION: RESULT = READING (-Distance Factor) + ANT FACTOR + LOSS (CABLE+ATTEN.) - GAIN (AMP)

Radiated Spurious Emission (above 1GHz:Outside of the restricted band)

***used substitution**

COMPANY	Sony Corporation	REPORT NO	24HE0082-HO
EQUIPMENT	Wireless LAN Module	REGULATION	FCC15.407
MODEL	IRF302U	TEST DISTANCE	3m
S/N	125	DATE	20/06/2004
POWER	DC3.3V	TEMPERATURE	25
MODE	Tx 5180/5260/5320/5745/5765/5805	HUMIDITY	60%
POSITION	H: Z-axis / V: Z-axis	CALIBRATION	OK
TX ANTENNA HIGH	0.8m	ENGINEER	Hiroka Umeyama

No.	FREQUENCY [MHz]	(After Factor Calculation) [dBuV/m]		RESULT (EIRP) [dBm]		LIMIT [dBm]	MARGIN [dB]		Mode
		HOR	VER	HOR	VER		HOR	VER	
1	3059.50	54.0	57.2	-47.5	-44.5	-27.0	20.5	17.5	Operating
2	3069.50	54.3	57.2	-47.2	-44.5	-27.0	20.2	17.5	Operating
3	3089.50	54.0	58.5	-47.5	-43.2	-27.0	20.5	16.2	Operating
4	5554.00	55.8	58.3	-47.1	-44.5	-27.0	20.1	17.5	Operating
5	5634.00	55.2	56.5	-47.6	-46.1	-27.0	20.6	19.1	Operating
6	5694.00	54.0	56.1	-48.7	-46.4	-27.0	21.7	19.4	Operating
7	6119.00	58.0	56.6	-44.1	-45.1	-27.0	17.1	18.1	Operating
8	6139.00	55.2	55.8	-46.9	-45.9	-27.0	19.9	18.9	Operating
9	6179.00	54.6	56.7	-47.4	-44.9	-27.0	20.4	17.9	Operating

Tx:Ch149
Tx:Ch153
Tx:Ch161
Tx:Ch36
Tx:Ch52
Tx:Ch64
Tx:Ch149
Tx:Ch153
Tx:Ch161

Rx-ANTENNA : Biconical Antena(25-300MHz), Logperriodic Antenna(300-1000MHz), Horn Antenna(1-12.75GHz)
Tx-ANTENNA : Dipole Antenna(25-1000MHz), Horn Antenna(1-12.75GHz)

With the result above, the effective radiated power was calculated on the basis of the reference value - for the calibration data on the substitution measurement.

Result is calculated to two places of decimals. Therefore, there may be 0.1 difference for the result.

Detector: Below 1GHz : T/R QP(BW:120kHz), Above 1GHz : S/A PK(RBW/VBW:1MHz)

*25MHz to 4GHz for equipment for Operating frequencies below 470MHz

*25MHz to 12.75GHz for equipment for Operating frequencies above 470MHz

EN300220 Transmitters limits for spurious emissions

Radiated Spurious Emission (above 1GHz:Outside of the restricted band)
*** used conversion formula**

UL Apex Co., Ltd.
Head Office EMC Lab. Semi Anechoic Chamber : No.2

COMPANY	Sony Corporation	REPORT NO	24HE0082-HO
EQUIPMENT	Wireless LAN Module	REGULATION	FCC15.407
MODEL	IRF302U	TEST DISTANCE	1 / 0.5 m
S/N	125	DATE	20/06/2004
POWER	DC3.3V	TEMPERATURE	25
MODE	Tx 5180/5320/5745/5805	HUMIDITY	60%
POSITION	H: Z-axis / V: Z-axis	CALIBRATION	OK
TX ANTENNA HIGH	0.8m	ENGINEER	Hiroka Umeyama


No.	FREQUENCY [MHz]	(After Factor Calculation) [dBuV/m]		RESULT (EIRP) [dBm] (dBm)		LIMIT [dBm]	MARGIN [dB]		Mode
		HOR	VER	HOR	VER		HOR	VER	
1	10360.00	50.5	47.3	-44.7	-47.9	-27.0	17.7	20.9	Operating
2	10520.00	49.6	49.9	-45.6	-45.3	-27.0	18.6	18.3	Operating
3	17235.00	63.0	63.7	-32.2	-31.5	-27.0	5.2	4.5	Operating
4	17295.00	63.5	62.4	-31.7	-32.8	-27.0	4.7	5.8	Operating
5	17415.00	63.7	65.0	-31.5	-30.2	-27.0	4.5	3.2	Operating
6	25900.00	49.5	47.5	-45.7	-47.7	-27.0	18.7	20.7	Operating
7	26300.00	49.3	49.1	-45.9	-46.1	-27.0	18.9	19.1	Operating
8	26600.00	54.9	55.3	-40.3	-39.9	-27.0	13.3	12.9	Operating
9	28725.00	51.5	51.7	-43.7	-43.5	-27.0	16.7	16.5	Operating
10	28825.00	52.9	52.7	-42.3	-42.5	-27.0	15.3	15.5	Operating
11	29025.00	53.4	52.9	-41.8	-42.3	-27.0	14.8	15.3	Operating
12	31080.00	59.3	59.4	-35.9	-35.8	-27.0	8.9	8.8	Operating
13	31920.00	60.8	60.1	-34.4	-35.1	-27.0	7.4	8.1	Operating
14	34470.00	57.7	57.2	-37.5	-38.0	-27.0	10.5	11.0	Operating
15	34590.00	58.3	57.6	-36.9	-37.6	-27.0	9.9	10.6	Operating
16	34830.00	57.1	57.8	-38.1	-37.4	-27.0	11.1	10.4	Operating
17	36260.00	67.0	67.0	-28.2	-28.2	-27.0	1.2	1.2	Operating
18	36820.00	63.9	64.0	-31.3	-31.2	-27.0	4.3	4.2	Operating
19	37240.00	67.0	67.0	-28.2	-28.2	-27.0	1.2	1.2	Operating

Rx-ANTENNA : Horn Antenna
Result(EIRP[dBm])=10*LOG((Electric Field Strength [V/m] * Distance:3[m]) ^ 2) / 30)


Result is calculated to two places of decimals. Therefore, there may be 0.1 difference for the result.

Conducted Spurious Emission(DSSS and other forms of modulation)


Ch : 36

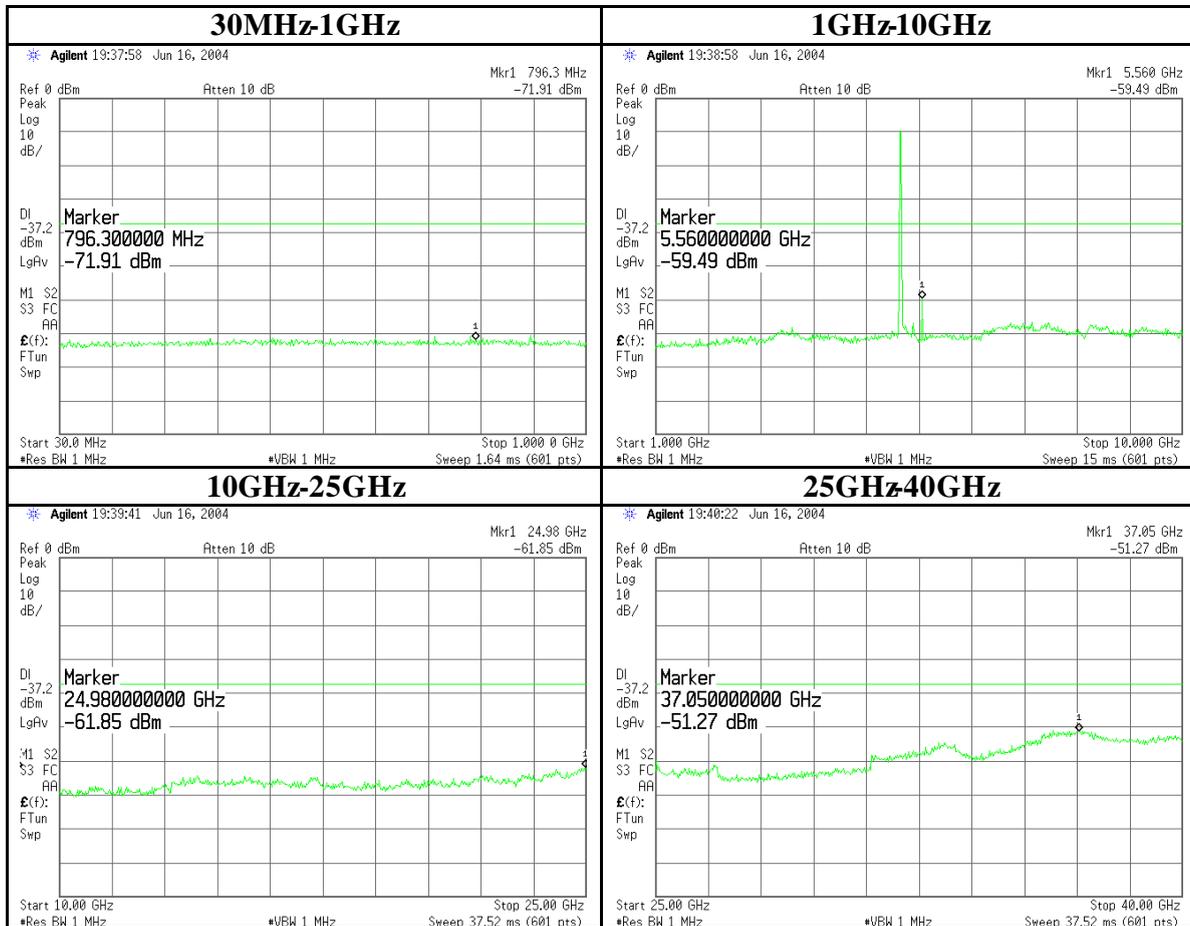


Conducted Spurious Emission(DSSS and other forms of modulation)
Ch : 52

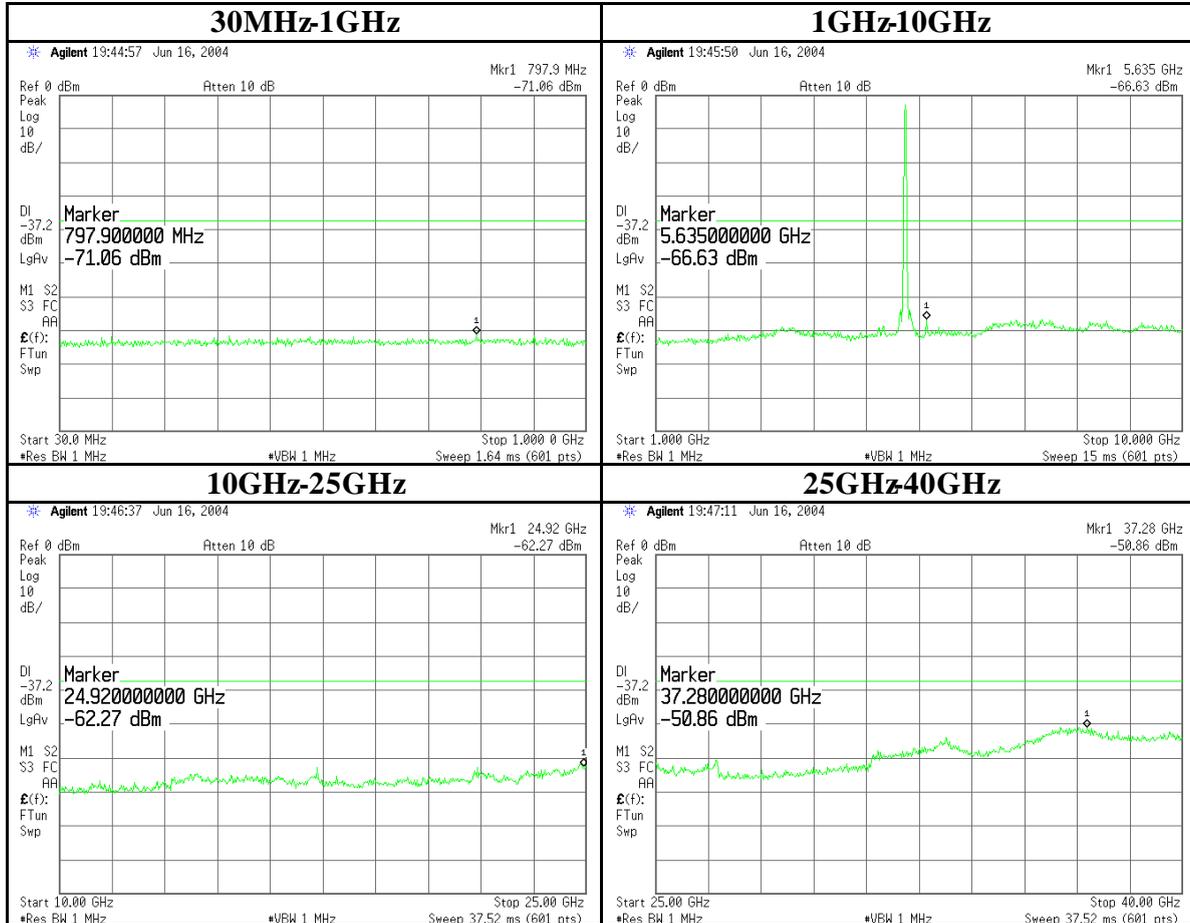


Conducted Spurious Emission(DSSS and other forms of modulation)
Ch : 64

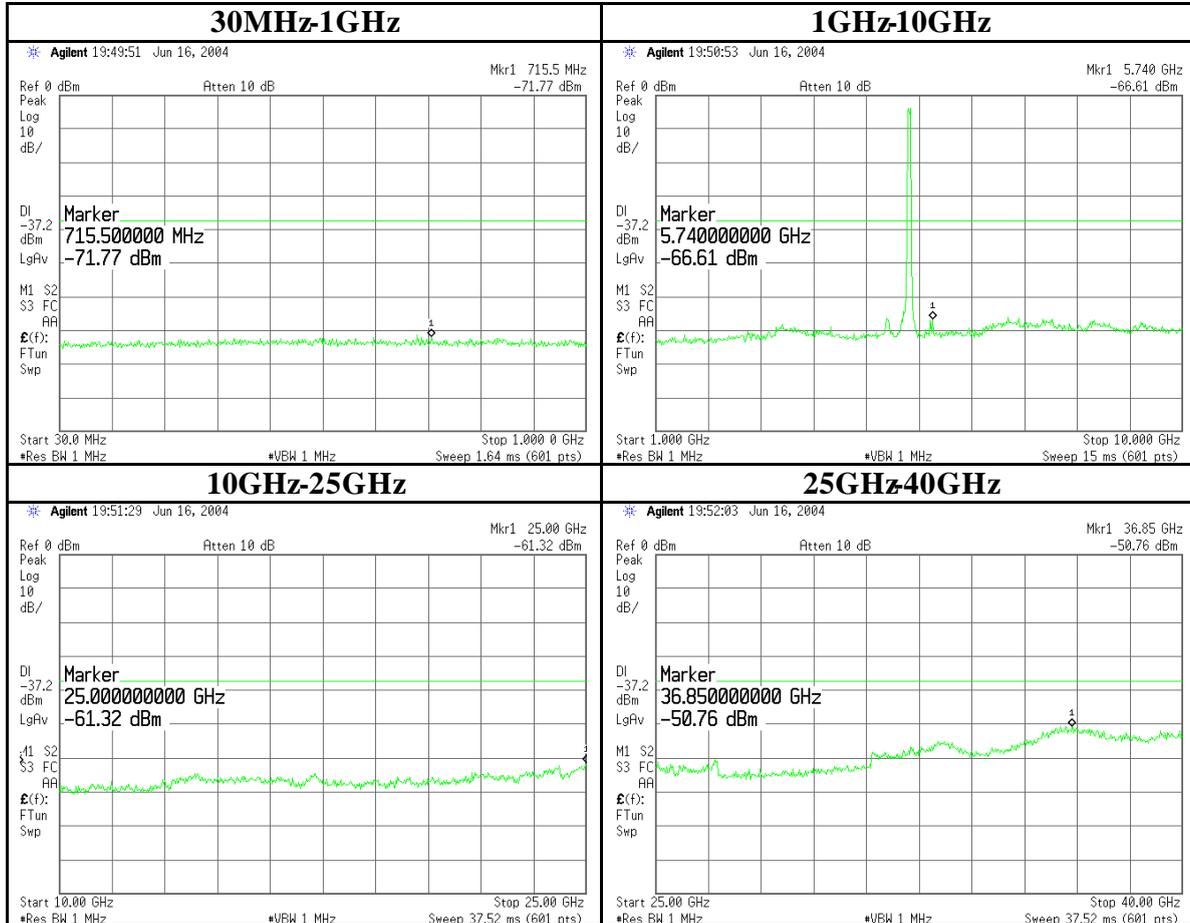


Conducted Spurious Emission(DSSS and other forms of modulation)
Ch : 149

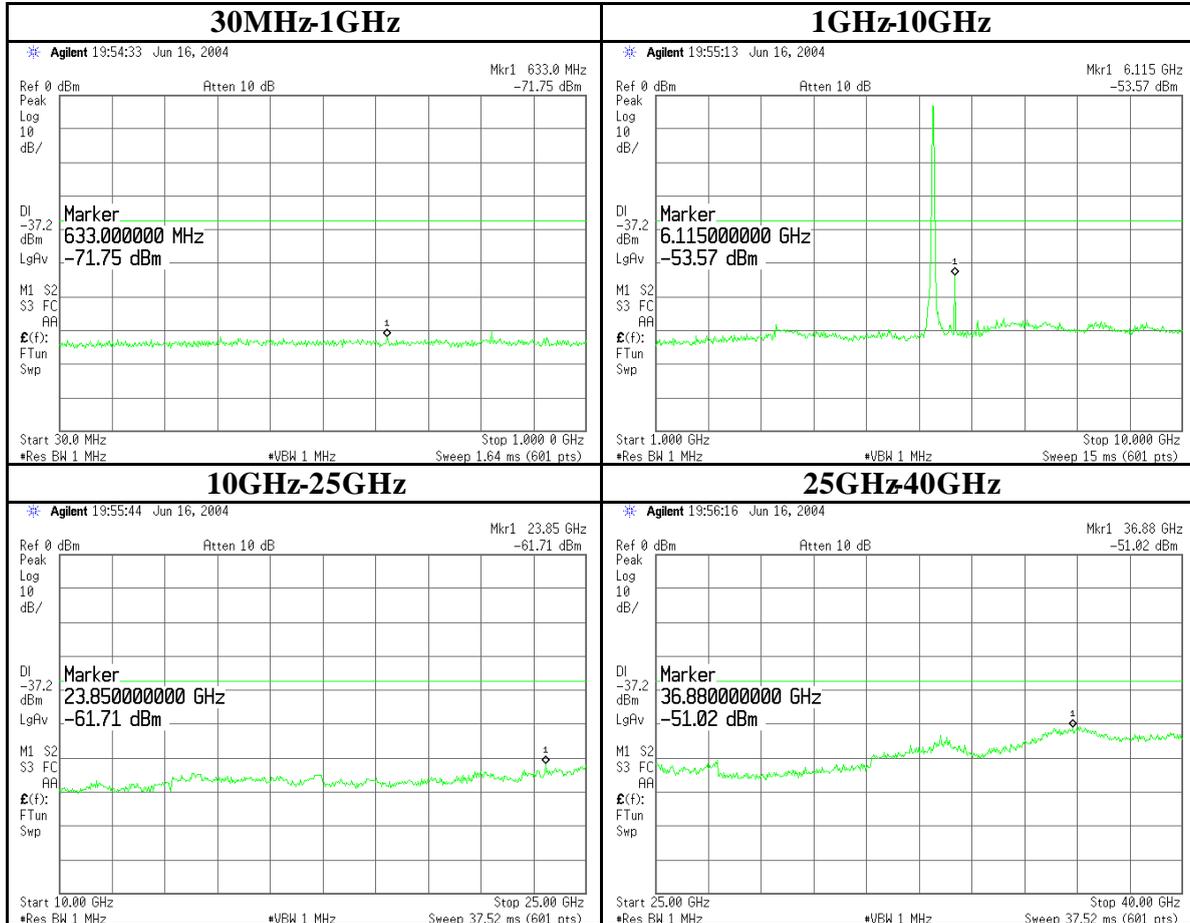

Conducted Spurious Emission(DSSS and other forms of modulation)
Ch : 153

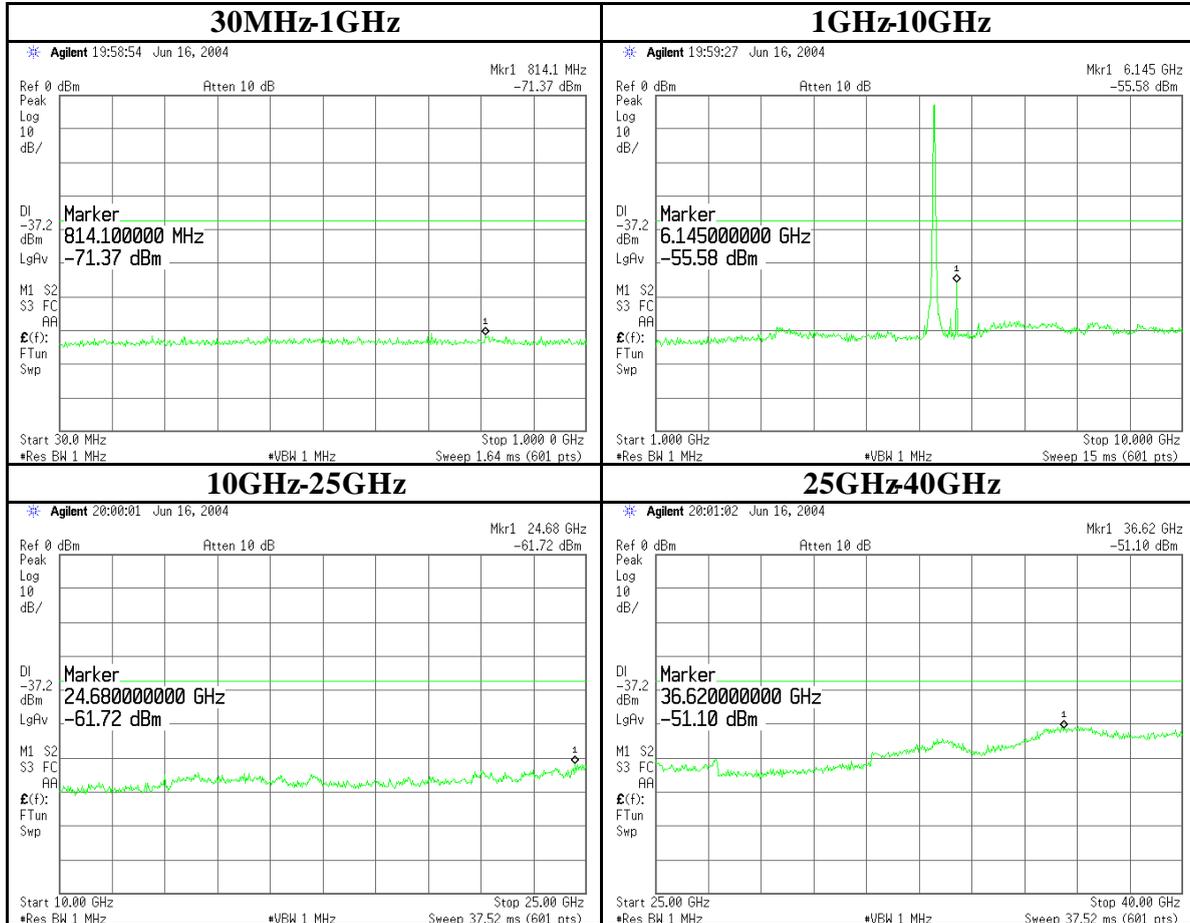

Conducted Spurious Emission(DSSS and other forms of modulation)
Ch : 161

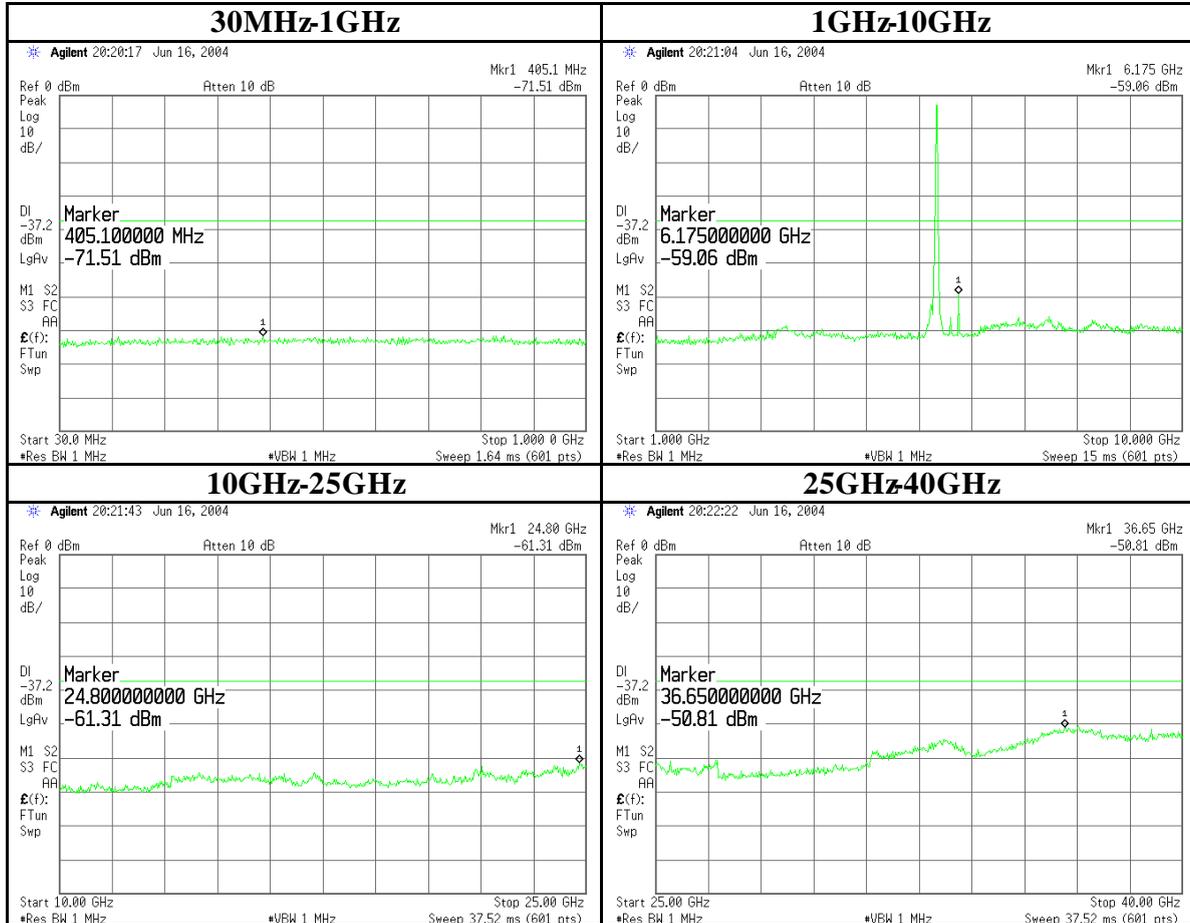

Radiated emission Band Edge compliance

UL Apex Co., Ltd.
Head Office EMC Lab. Semi Anechoic Chamber : No.2

COMPANY	Sony Corporation	REPORT NO	24HE0082-HO
EQUIPMENT	Wireless LAN Module	REGULATION	FCC15.407
MODEL	IRF302U	TEST DISTANCE	3m
S/N	125	DATE	13/06/2004
POWER	DC3.3V	TEMPERATURE	25
MODE	Tx 5180/5320/5745/5805	HUMIDITY	60%
POSITION	H: Z-axis / V: Z-axis	CALIBRATION	OK
TX ANTENNA HIGH	0.8m	ENGINEER	Hiroka Umeyama

No.	FREQUENCY [MHz]	(After Factor Calculation) [dBuV/m]		RESULT (EIRP) [dBm] (dBm)		LIMIT [dBm] (EIRP)	MARGIN [dB]		Mode
		HOR	VER	HOR	VER		HOR	VER	
3	5715.00	71.7	71.9	-31.0	-30.6	-27.0	4.0	3.6	Operating
4	5725.00	83.1	82.3	-19.5	-20.2	-17.0	2.5	3.2	Operating
5	5825.00	78.5	75.5	-24.0	-26.8	-17.0	7.0	9.8	Operating
6	5835.00	66.2	63.3	-36.3	-39.0	-27.0	9.3	12.0	Operating

Tx:Ch149
Tx:Ch149
Tx:Ch161
Tx:Ch161

Rx-ANTENNA : Biconical Antenna(25-300MHz), Logperriodic Antenna(300-1000MHz), Horn Antenna(1-12.75GHz)
Tx-ANTENNA : Dipole Antenna(25-1000MHz), Horn Anrenna(1-12.75GHz)
Result(EIRP) = Result(ERP)+2.15

With the result above, the effective radiated power was calculated on the basis of the reference value - for the calibration data on the substitution measurement.

Result is calculated to two places of decimals. Therefore, there may be 0.1 difference for the result.

PK DETECT (RBW: 1MHz, VBW:1MHz)

No.	FREQ [MHz]	S/A READING [dBuV/m]		ANT Factor [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	Band-Pass Filter [dB]	RESULT [dBuV/m]		Limit PK [dBuV/m]	MARGIN [dB]	
		HOR	VER					HOR	VER		HOR	VER
Test distance 3meters RESULT=Reading + ANT Factor + Amp Gain + CABLE LOSS + Band Pass												
1	5150.0	42.8	40.2	36.3	35.9	9.9	0.0	53.1	50.5	74.0	20.9	23.5
2	5350.0	55.7	56.4	36.2	35.8	10.0	0.0	66.1	66.8	74.0	7.9	7.2


Tx:Ch36
Tx:Ch64

AV DETECT (RBW: 1MHz, VBW:10Hz)

No.	FREQ [MHz]	S/A READING [dBuV/m]		ANT Factor [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	Band-Pass Filter [dB]	RESULT [dBuV/m]		Limit AV [dBuV/m]	MARGIN [dB]	
		HOR	VER					HOR	VER		HOR	VER
Test distance 3meters RESULT=Reading + ANT Factor + Amp Gain + CABLE LOSS + Band Pass												
1	5150.0	31.2	31.1	36.3	35.9	9.9	0.0	41.5	41.4	54.0	12.5	12.6
2	5350.0	38.5	37.9	36.2	35.8	10.0	0.0	48.9	48.3	54.0	5.1	5.7

Tx:Ch36
Tx:Ch64

Conducted emission Band Edge compliance

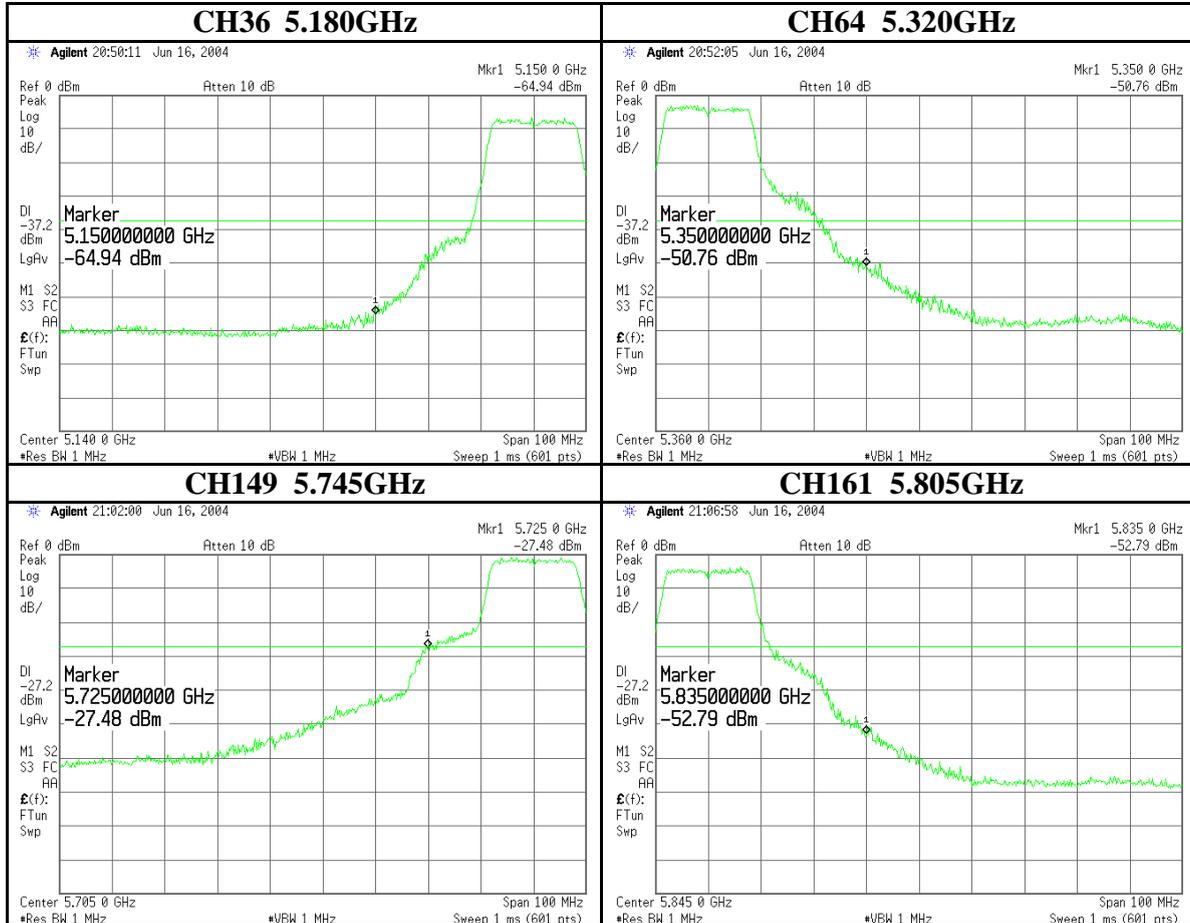

Peak Power Spectral Density

UL Apex Co., Ltd.
Head Office EMC Lab. No.3 Measurement Room

Company : Sony Corporation
Equipment : Wireless LAN Module
Model : IRF302U
Sample No. : 11
Power : DC3.3V
Mode : Tx IEEE 802.11a 54Mbps

REPORT NO : 24HE0082-HO
REGULATION : FCC 15.407(a)(1)(2)(3)
TEST DISTANCE : -
DATE : 06/16/2004
TEMPERATURE : 24deg.C
HUMIDITY : 39%
ENGINEER : Hiroka Umeyama

Ch	Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. [dB]	Result [dBm]	Limit [dBm]	Margin [dB]
36	5180.0	-17.12	2.1	10.0	-5.0	4.0	9.0
52	5260.0	-9.42	2.1	10.0	2.7	11.0	8.3
64	5320.0	-9.29	2.1	10.0	2.8	11.0	8.2
149	5745.0	-7.43	2.1	10.0	4.7	17.0	12.3
153	5765.0	-8.16	2.1	10.0	3.9	17.0	13.1
161	5805.0	-8.81	2.1	10.0	3.3	17.0	13.7

Sample Calculation:

Result = Reading + Cable Loss + Attenuator

* Atten. was not used for factor 0.0dB of the above table.


Peak Excursion Ratio

UL Apex Co., Ltd.
Head Office EMC Lab. No.3 Measurement Room

Company	: Sony Corporation	REPORT NO	: 24HE0082-HO
Equipment	: Wireless LAN Module	REGULATION	: FCC 15.407(a)(6)
Model	: IRF302U	TEST DISTANCE	: -
Sample No.	: 11	DATE	: 06/16/2004
Power	: DC3.3V	TEMPERATURE	: 24deg.C
Mode	: Tx IEEE 802.11a 54Mbps	HUMIDITY	: 48%
		ENGINEER	: Hiroka Umeyama

Ch	Freq. [MHz]	Peak Power Excursion [dB]	Limit [dB]
36	5180.0	6.770	13.0
52	5260.0	7.650	13.0
64	5320.0	7.940	13.0
149	5745.0	8.040	13.0
153	5765.0	8.100	13.0
161	5805.0	7.700	13.0

Peak Excursion Ratio

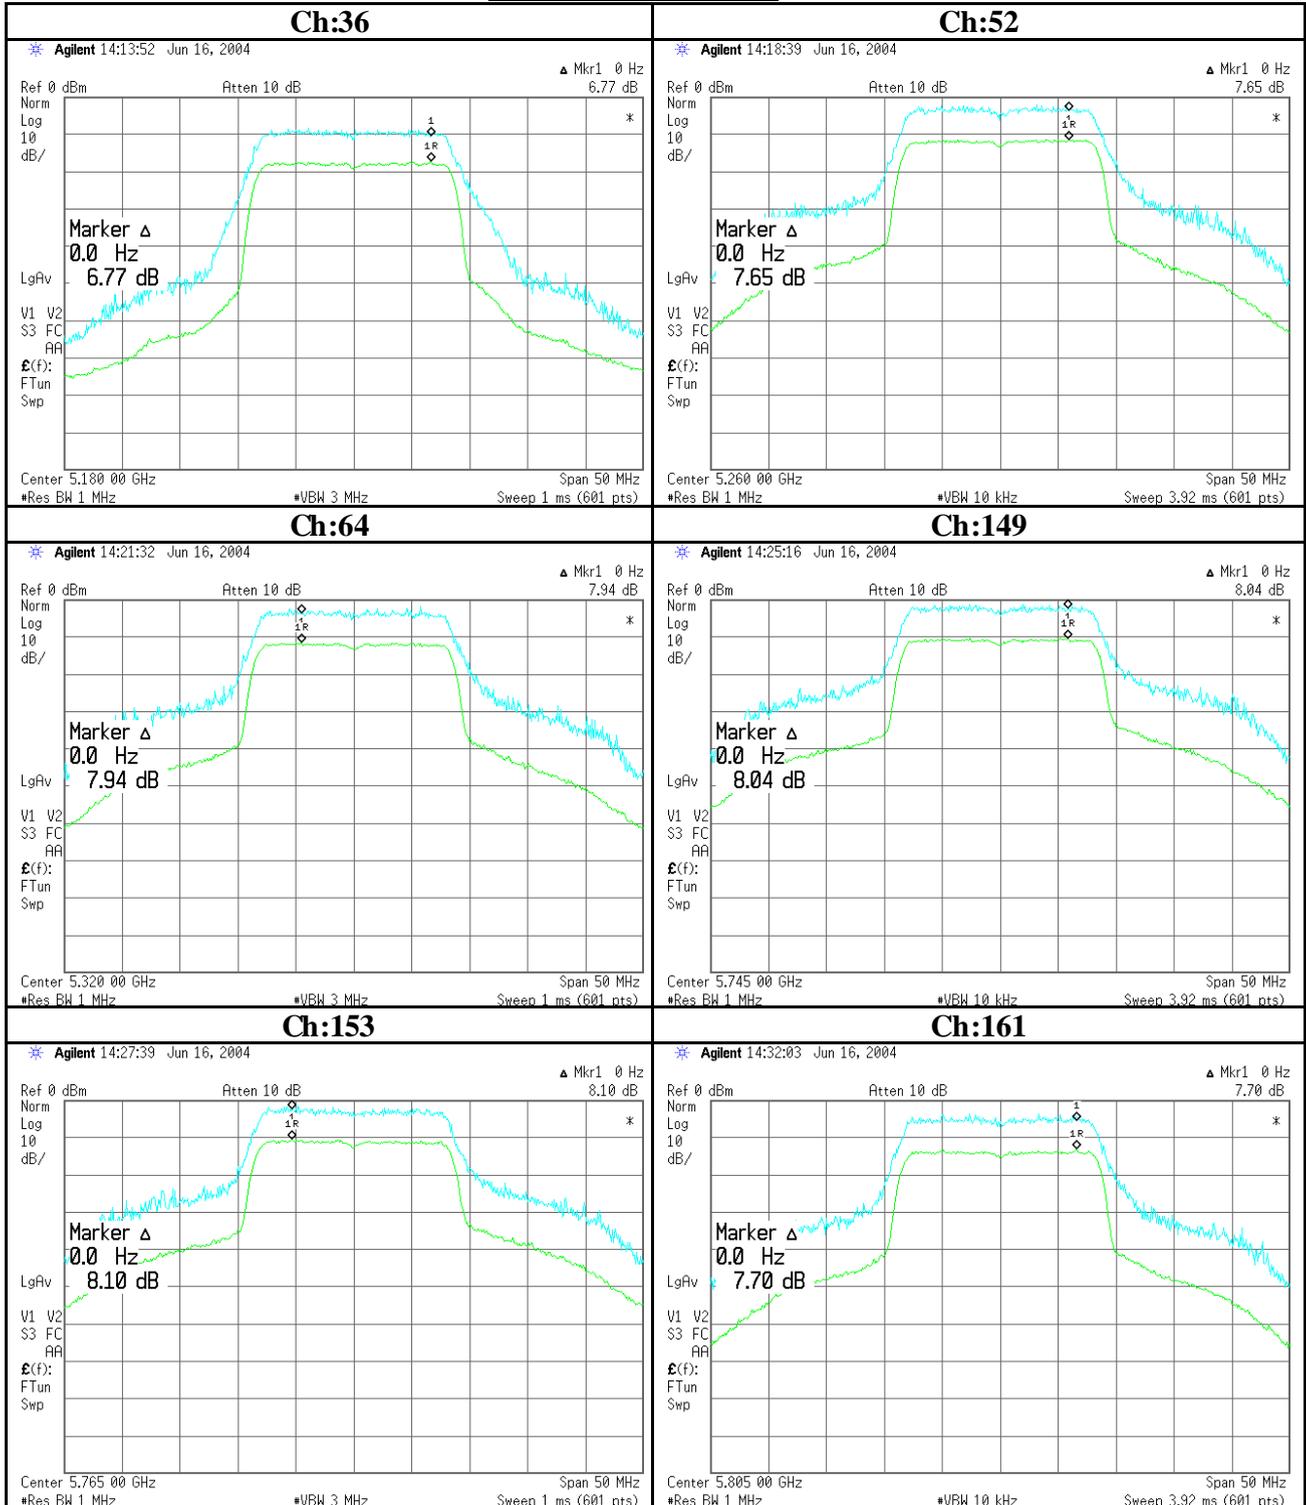

99% Occupied Bandwidth

