



## SAR EVALUATION REPORT

Report No. : 24HE0082-HO-5

Applicant : Sony Corporation  
Type of Equipment : Wireless LAN Module  
Model No. : IRF302U  
FCC ID : AK8IRF302U  
Test standard : FCC47CFR 2.1093  
FCC OET Bulletin 65, Supplement C  
Test Result : Complied  
Max SAR Measured : 0.87W/kg( Body, 5260MHz )

1. This test report shall not be reproduced except full or partial, without the written approval of UL Apex Co., Ltd.
2. The results in this report apply only to the sample tested.
3. This equipment is in compliance with above regulation. We hereby certify that the data contain a true representation of the SAR profile.
4. The test results in this test report are traceable to the national or international standards.

Date of test : June 11,13 and 17-19 ,2004

Tested by : H. Shimoji M. Ikuta  
Hirnobu Shimoji Miyo Ikuta  
Group Reader of Head Office EMC Lab. Head Office EMC Lab.

Approved by : T. Maeno  
Tetsuo Maeno  
Site Manager of Head Office EMC Lab.

**UL Apex Co., Ltd.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

---

<u>CONTENTS</u>	PAGE
SECTION 1 : Client information .....	3
SECTION 2 : Equipment under test.....	4
SECTION 3 : Requirements for compliance testing defined by the FCC .....	5
SECTION 4 : Dosimetry assessment setup.....	5
SECTION 5 : Test system specifications .....	10
SECTION 6 : Measurement outline.....	12
SECTION 7 : Test setup of EUT .....	13
SECTION 8 : Measurement uncertainty.....	17
SECTION 9 : Simulated tissue liquid parameter .....	19
SECTION 10 : System validation data .....	22
SECTION 11 : Evaluation procedure.....	24
SECTION 12 : Exposure limit.....	25
SECTION 13 : SAR Measurement results (IEEE 802.11b / g : 2.4GHz ).....	26
SECTION 14 : SAR Measurement results (IEEE 802.11a : 5.15-5.35GHz).....	29
SECTION 15 : SAR Measurement results (IEEE 802.11a : 5.725-5.825GHz).....	31
SECTION 16 : Equipment & calibration information.....	33
SECTION 17 : References .....	34
APPENDIX 1 : Photographs of test setup .....	35
APPENDIX 2 : SAR Measurement data (IEEE 802.11b / g : 2.4GHz ).....	45
APPENDIX 3 : SAR Measurement data (IEEE 802.11a : 5.15-5.35GHz).....	71
APPENDIX 4 : SAR Measurement data (IEEE 802.11a : 5.725-5.825GHz).....	92
APPENDIX 5 : Validation Measurement data .....	111
APPENDIX 6 : System Validation Dipole (D2450V2,S/N: 713) .....	116
APPENDIX 7 : System Validation Dipole (D5GHzV2,S/N: 1020) .....	125
APPENDIX 8 : Dosimetric E-field Probe Calibration (ET3DV6, S/N:1685) .....	136
APPENDIX 9 : Dosimetric E-field Probe Calibration (EX3DV3, S/N:3507).....	149
APPENDIX 10 : The 5-6GHz Extension (SPEAG information) .....	159

---

**UL Apex Co., Ltd.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

**SECTION 1 : Client information**

Company Name : Sony Corporation

Brand Name : SONY

Address : Gate City Osaki West Tower Osaki East Tec.  
1-11-1 Osaki Shinagawa-ku, Tokyo141-0032, Japan

Telephone Number : 81-3-5435-3977

Facsimile Number : 81-3-5435-3963

Contact Person : Masaki Nishimura

---

***UL Apex Co., Ltd.***

***Head Office EMC Lab.***

*4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN*

*Telephone: +81 596 24 8116*

*Facsimile: +81 596 24 8124*

## **SECTION 2 : Equipment under test**

### **2.1 Identification of EUT**

APPLICANT : Sony Corporation

Type of Equipment : Wireless LAN Module

Model No. : IRF302U

Serial No. : 77

Country of Manufacture : Japan

Receipt Date of Sample : June 04,2004

Condition of EUT : Engineering prototype

Category Identified : Portable device

### **2.2 Product description of EUT**

Tx Frequency : 2412-2462MHz(802.11b/g)  
5180-5320MHz(802.11a UNII-Lower & Middle)  
5745-5805MHz(802.11a UNII-Upper)

Modulation : DSSS,OFDM

Rating : DC3.3V

Max.Output Power Tested : 21.11 dBm Peak Conducted

Antenna Type : Patch Antenna



---

***UL Apex Co., Ltd.***

***Head Office EMC Lab.***

*4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN*

*Telephone: +81 596 24 8116*

*Facsimile: +81 596 24 8124*

### **SECTION 3 : Requirements for compliance testing defined by the FCC**

The US Federal Communications Commission has released the report and order "Guidelines for Evaluating the Environmental Effects of RF Radiation", ET Docket No. 93-62 in August 1996. The order requires routine SAR evaluation prior to equipment authorization of portable transmitter devices, including portable telephones. For consumer products, the applicable limit is 1.6 mW/g for an uncontrolled environment and 8.0 mW/g for an occupational/controlled environment as recommended by the ANSI/IEEE standard C95.1-1992. According to the Supplement C of OET Bulletin 65 "Evaluating Compliance with FCC Guide-lines for Human Exposure to Radio frequency Electromagnetic Fields", released on Jun 29, 2001 by the FCC, the device should be evaluated at maximum output power (radiated from the antenna) under "worst-case" conditions for normal or intended use, incorporating normal antenna operating positions, device peak performance frequencies and positions for maximum RF energy coupling.

- 1 Specific Absorption Rate (SAR) is a measure of the rate of energy absorption due to exposure to an RF transmitting source (wireless portable device).
- 2 IEEE/ANSI Std. C95.1-1992 limits are used to determine compliance with FCC ET Docket 93-62.

### **SECTION 4 : Dosimetry assessment setup**

These measurements were performed with the automated near-field scanning system DASY4 from Schmid & Partner Engineering AG (SPEAG). The system is based on a high precision robot (working range greater than 0.9 m), which positions the probes with a positional repeatability of better than +/- 0.02 mm. Special E- and H-field probes have been developed for measurements close to material discontinuity, the sensors of which are directly loaded with a Schottky diode and connected via highly resistive lines to the data acquisition unit. The SAR measurements were conducted with the dosimetry probe ET3DV6, SN: 1685 (2.4G) and EX3DV3, SN 3507 (5GHz) (manufactured by SPEAG), designed in the classical triangular configuration and optimized for dosimetric evaluation. The probe has been calibrated according to the procedure described in [2] with accuracy of better than +/-10%. The spherical isotropy was evaluated with the procedure described in [3] and found to be better than +/-0.25 dB. The phantom used was the

SAM Twin Phantom as described in FCC supplement C, IEEE P1528 and CENELEC EN50361.

---

***UL Apex Co., Ltd.***


***Head Office EMC Lab.***

*4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN*

*Telephone: +81 596 24 8116*

*Facsimile: +81 596 24 8124*

#### 4.1 Configuration and peripherals

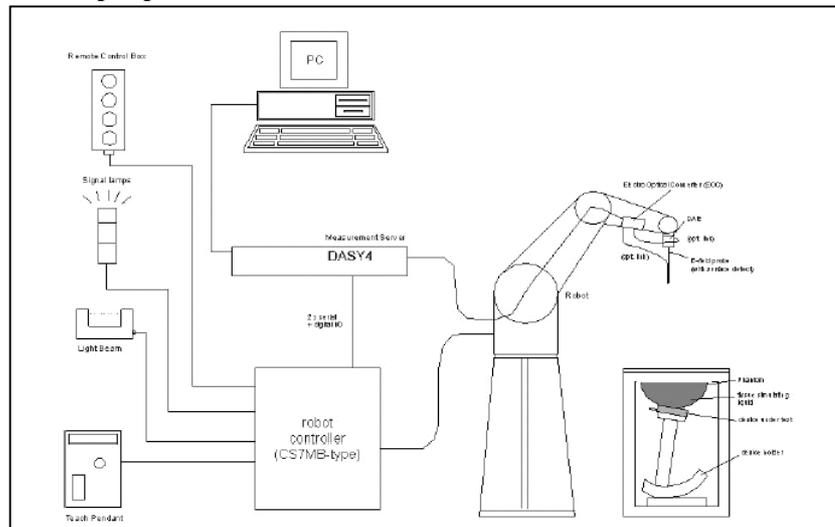

The DASy4 system for performing compliance tests consist of the following items:

1. A standard high precision 6-axis robot (Stäubli RX family) with controller and software.  
An arm extension for accommodating the data acquisition electronics (DAE).
2. A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
3. A data acquisition electronic (DAE), which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
4. The Electro-optical converter (EOC) performs the conversion between optical and electrical of the signals for the digital communication to the DAE and for the analog signal from the optical surface detection. The EOC is connected to the measurement server.
5. The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
6. A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
7. A computer operating Windows 2000.
8. DASy4 software.
9. Remote control with teaches pendant and additional circuitry for robot safety such as warning lamps, etc.
10. The SAM twin phantom enabling testing left-hand and right-hand usage.
11. The device holder for handheld mobile phones.
12. Tissue simulating liquid mixed according to the given recipes.
13. Validation dipole kits allowing to validate the proper functioning of the system.

**UL Apex Co., Ltd.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

---

## 4.2 System components

### 4.2.1 ET3DV6 Probe Specification

#### Construction:

Symmetrical design with triangular core  
Built-in optical fiber for surface detection System  
Built-in shielding against static charges  
PEEK enclosure material (resistant to organic solvents, e.g., glycol ether)

#### Calibration:

Basic Broad Band calibration in air from 10 MHz to 2.5 GHz  
In brain and muscle simulating tissue at  
Frequencies of 450 MHz, 900 MHz, 1.8 GHz and 2.45GHz (accuracy +/-8%)

#### Frequency:

10 MHz to 3GHz; Linearity: +/-0.2 dB

#### Directivity:

+/-0.2 dB in brain tissue (rotation around probe axis)  
+/-0.4 dB in brain tissue (rotation normal probe axis)

#### Dynamic Range:

5 mW/g to > 100 mW/g; Linearity: +/-0.2 dB

#### Optical Surface Detection:

+/-0.2 mm repeatability in air and clear liquids over diffuse reflecting surfaces.

#### Dimensions:


Overall length: 330 mm (Tip: 16 mm)  
Tip length: 16 mm  
Body diameter: 12 mm (Body: 12 mm)

Tip diameter: 6.8 mm

Distance from probe tip to dipole centers: 2.7 mm

#### Application:

General dosimetric up to 3 GHz  
Compliance tests of mobile phones  
Fast automatic scanning in arbitrary phantoms

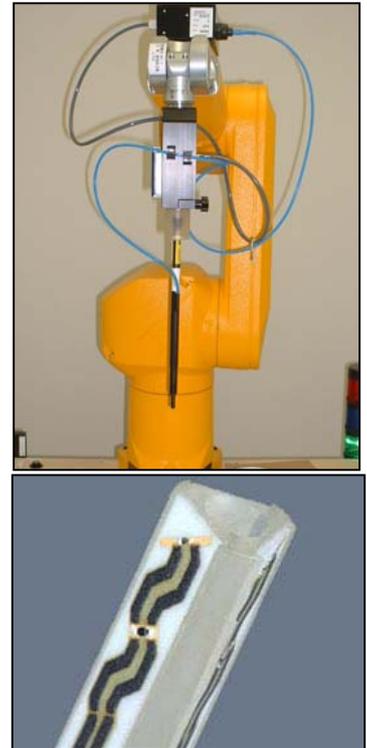

ET3DV6 E-field Probe

---

#### 4.2.2 EX3DV3 Probe Specification

**Construction:**

Symmetrical design with triangular core  
Built-in shielding against static charges  
PEEK enclosure material (resistant to organic solvents, e.g., glycol ether)

**Calibration:**

Basic Broad Band calibration in air : 10-3000 MHz  
Conversion Factors (CF) for HSL900 and HSL 1800  
Additional CF for other liquids and frequencies upon request

**Frequency:**

10 MHz to > 6GHz; Linearity: +/-0.2 dB

**Directivity:**

+/-0.3 dB in HSL (rotation around probe axis)  
+/-0.5 dB in tissue material (rotation normal probe axis)

**Dynamic Range:**

10uW/g to > 100 mW/g; Linearity: +/-0.2 dB(noise: typically < 1uW/g)

**Dimensions:**

Overall length: 330 mm (Tip: 20 mm)  
Tip diameter: 2.5mm (Body: 12 mm)  
Typical distance from probe tip to dipole centers: 1 mm

**Application:**

Highprecision dosimetric measurement in any exposure scenario  
(e.g., very strong gradient fields). Only probe which enables compliance  
testing for frequencies up to 6GHz with precision of better 30%.



**EX3DV3 E-field Probe**

#### 4.2.3 SAM Phantom

**Construction:**

The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528-200X, CENELEC EN 50361 and IEC 62209. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points with the robot.

**Shell Thickness:**


2 +/-0.2 mm

**Filling Volume:**

Approx. 25 liters

**Dimensions:**

(H x L x W): 810 x 1000 x 500 mm

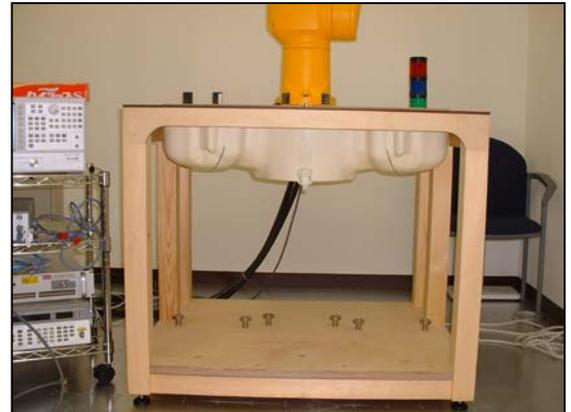

**SAM Phantom**

#### 4.2.4 Device Holder for Transmitters

In combination with the SAM Twin Phantom V4.0, the Mounting Device enables the rotation of the mounted transmitter

in spherical coordinates whereby the rotation points is the ear opening. The devices can be easily, accurately, and repeatedly positioned according to the FCC and CENELEC specifications. The device holder can be locked at different phantom locations (left head, right head, flat phantom).

\* Note: A simulating human hand is not used due to the complex anatomical and geometrical structure of the hand that may produced infinite number of configurations.

To produce the worst-case condition (the hand absorbs antenna output power), the hand is omitted during the tests.



**Device Holder**

Device holder couldn't be used at this SAR measurement.

**UL Apex Co., Ltd.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

---

**SECTION 5 : Test system specifications****Robot RX60L**

<b>Number of Axes</b>	:	6
<b>Payload</b>	:	1.6 kg
<b>Reach</b>	:	800mm
<b>Repeatability</b>	:	+/-0.025mm
<b>Control Unit</b>	:	CS7M
<b>Programming Language</b>	:	V+
<b>Manufacture</b>	:	Stäubli Unimation Corp. Robot Model: RX60

**DASY4 Measurement sever**

<b>Features</b>	:	166MHz low power Pentium MMX 32MB chipdisk and 64MB RAM Serial link to DAE (with watchdog supervision) 16 Bit A/D converter for surface detection system Two serial links to robot (one for real-time communication which is supervised by watchdog) Ethernet link to PC (with watchdog supervision) Emergency stop relay for robot safety chain Two expansion slots for future applications
<b>Manufacture</b>	:	Schimid & Partner Engineering AG

**Data Acquisition Electronic (DAE)**

<b>Features</b>	:	Signal amplifier, multiplexer, A/D converter and control logic Serial optical link for communication with DASY4 embedded system (fully remote controlled) 2 step probe touch detector for mechanical surface detection and emergency robot stop (not in -R version)
<b>Measurement Range</b>	:	1 $\mu$ V to > 200 mV (16 bit resolution and two range settings: 4mV, 400mV)
<b>Input Offset voltage</b>	:	< 1 $\mu$ V (with auto zero)
<b>Input Resistance</b>	:	200 M $\Omega$
<b>Battery Power</b>	:	> 10 h of operation (with two 9 V battery)
<b>Dimension</b>	:	60 x 60 x 68 mm
<b>Manufacture</b>	:	Schimid & Partner Engineering AG

**Software**

<b>Item</b>	:	Dosimetric Assesment System DASY4
<b>Type No.</b>	:	SD 000 401A, SD 000 402A
<b>Software version No.</b>	:	4.1
<b>Manufacture / Origin</b>	:	Schimid & Partner Engineering AG

---

***UL Apex Co., Ltd.******Head Office EMC Lab.****4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN**Telephone: +81 596 24 8116**Facsimile: +81 596 24 8124*

### **E-Field Probe**

#### **Used probe in measurement of 802.11b / 11g mode**

**Model** : ET3DV6  
**Serial No.** : 1685  
**Construction** : Triangular core fiber optic detection system  
**Frequency** : 10 MHz to 3 GHz  
**Linearity** : +/-0.2 dB  
**Manufacture** : Schimid & Partner Engineering AG

#### **Used probe in measurement of 802.11a mode**

**Model** : EX3DV3  
**Serial No.** : 3507  
**Construction** : Symmetrical design with triangular core  
**Frequency** : 10 MHz to 6 GHz  
**Linearity** : +/-0.2 dB  
**Manufacture** : Schimid & Partner Engineering AG

### **Phantom**

**Type** : SAM Twin Phantom V4.0  
**Shell Material** : Fiberglass  
**Thickness** : 2.0 +/-0.2 mm  
**Volume** : Approx. 25 liters  
**Manufacture** : Schimid & Partner Engineering AG

---

***UL Apex Co., Ltd.***

***Head Office EMC Lab.***

*4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN*

*Telephone: +81 596 24 8116*

*Facsimile: +81 596 24 8124*

## SECTION 6 : Measurement outline

We tested the air board with which this EUT was inserted.

The operation of the EUT was controlled by the PC. Therefore, we performed the test with connecting the PC and the air board which inserted the EUT.


The detail of the air board that we used for SAR testing is showing in the following.

The shortest distance between the surface of this air board and transmitting antenna is 5.8mm.

### 6.1 Information of model

Type of Equipment : Air board


Manufacture : SONY

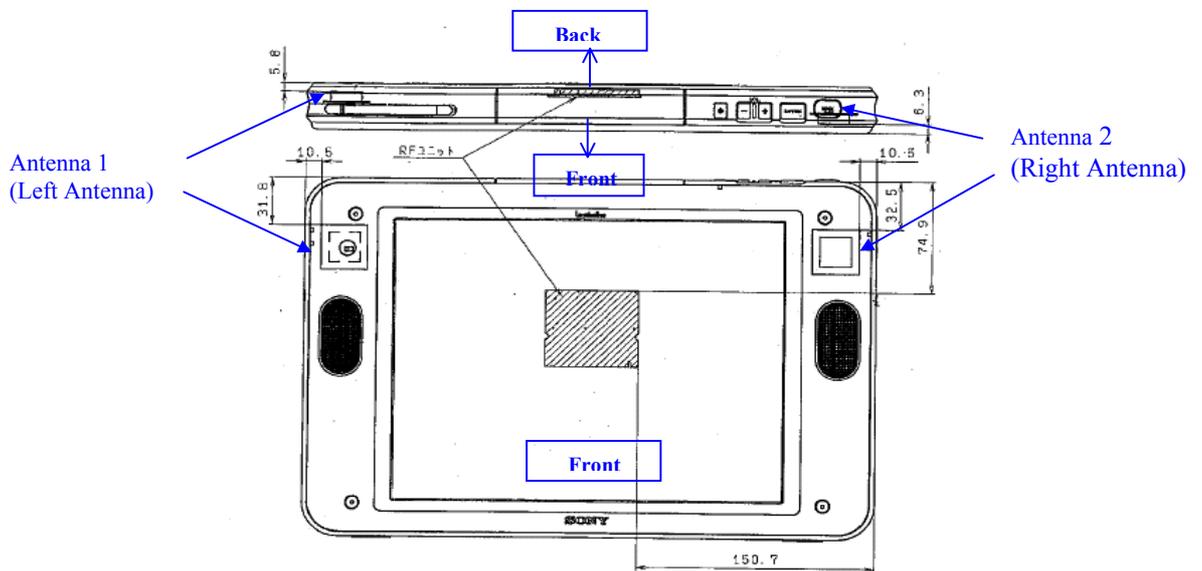

Front



Back of display

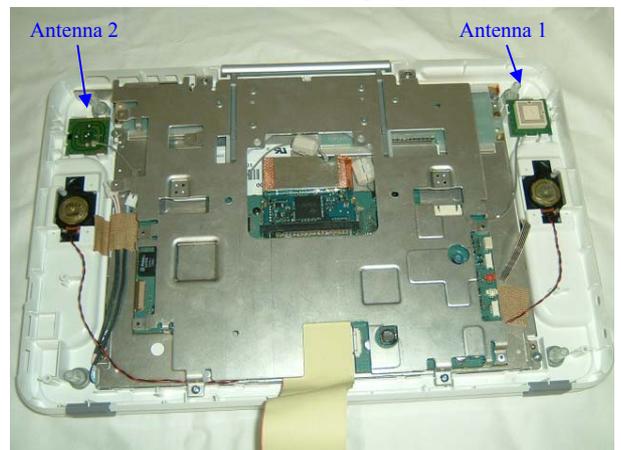

**UL Apex Co., Ltd.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

---

## **SECTION 7 : Test setup of EUT**


### **7.1 Photographs of test setup**

This EUT was inserted into the Air board.

When users operate or carry the Air board, it could be considered to touch or get close to their bodies. In order to assume this situation, we performed the test at the following positions. Please refer to "APPENDIX 1" for more details.

1. Left Front : The test was performed in touch with left front surface (ANT1) of the air board to the flat section.
2. Right Front : The test was performed in touch with right front surface (ANT2) of the air board to the flat section.
3. Left Back : The test was performed in touch with left back surface (ANT1) of the air board to the flat section.
4. Right Back : The test was performed in touch with right back surface (ANT2) of the air board to the flat section.
5. Left Side : The test was performed in touch with left side (ANT1) of the air board to the flat section.
6. Right Side : The test was performed in touch with right side (ANT2) of the air board to the flat section.

#### **1. Front**

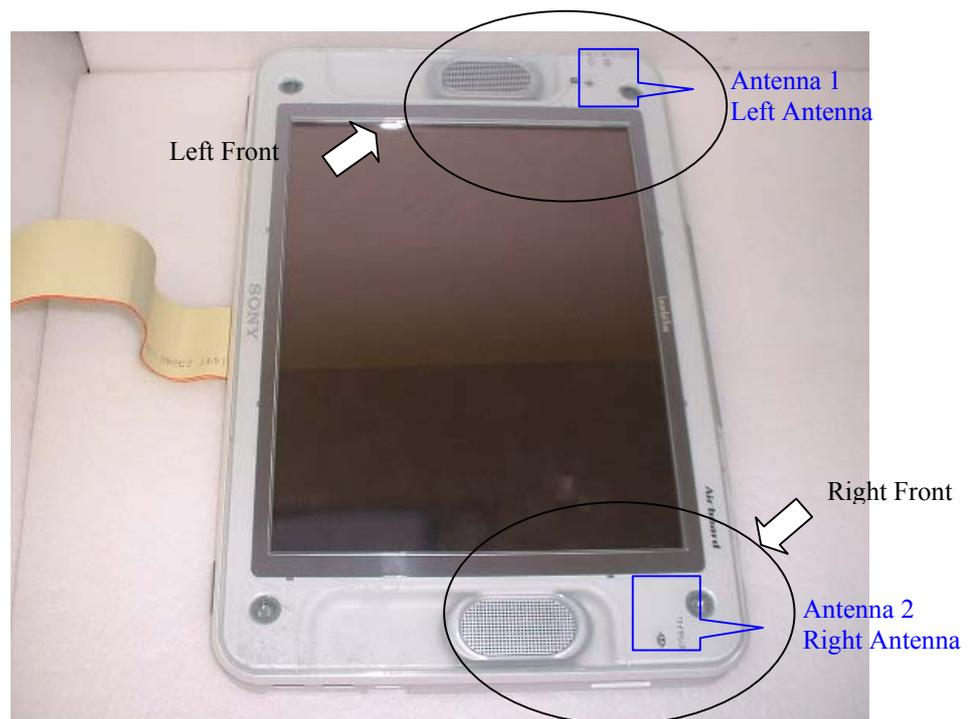

---

**UL Apex Co., Ltd.**


**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124


2. Back

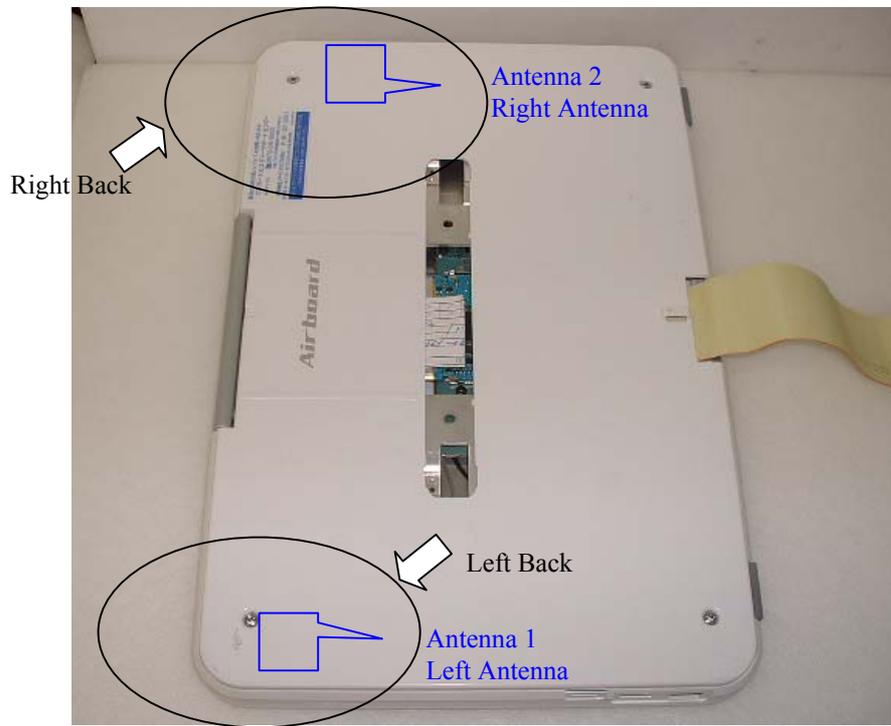

3. Left Side



#### 4. Right Side

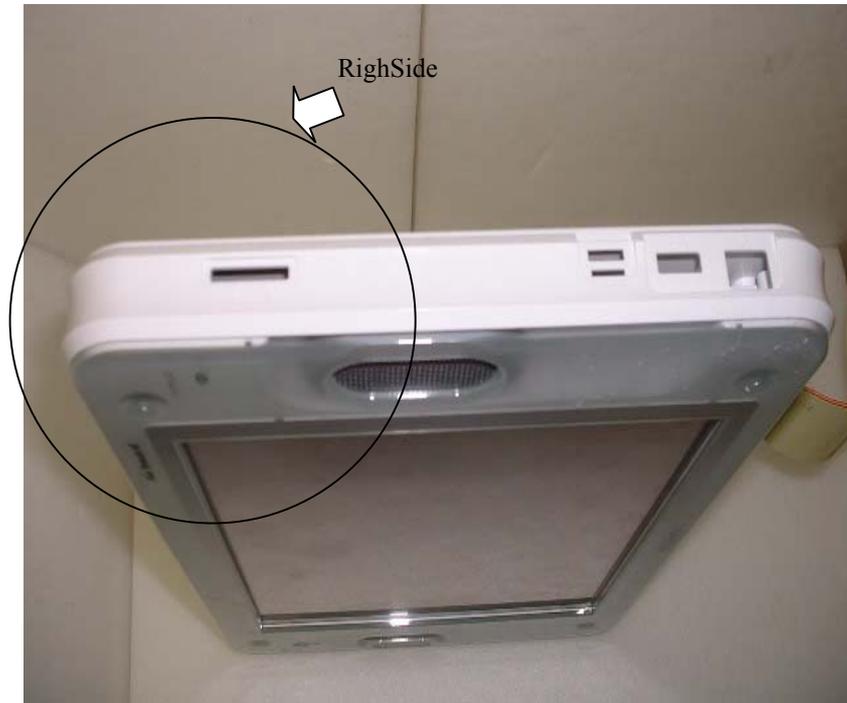

## 7.2 EUT Tune-up procedure

This EUT (Wireless LAN module) has IEEE.802.11a/11b/11g modes.

The frequency range and the modulation used in the testing of each mode are shown as a following.

1. IEEE 802.11b mode

Frequency band : 2412-2462MHz  
Channel : 1ch(2412MHz),6ch(2437MHz),11ch(2462MHz)  
Modulation : DSSS(CCK)  
Crest factor : 1

2. IEEE 802.11g mode

Frequency band : 2412-2462MHz  
Channel : 1ch(2412MHz),6ch(2437MHz),11ch(2462MHz)  
Modulation : OFDM(64QAM & QPSK)  
Crest factor : 1

3. IEEE 802.11a mode

Frequency band : 5.15-5.35GHz  
Channel : 36ch(5180MHz), 52ch(5260MHz), 64ch(5320MHz)  
Modulation : OFDM(64QAM & QPSK)  
Crest factor : 1

Frequency band : 5.725-5.825GHz  
Channel number : 149ch(5745MHz), 153ch(5765MHz),161ch(5805MHz)  
Modulation : OFDM(64QAM & QPSK)  
Crest factor : 1

## 7.3 Methode of measurement

Step1. We performed the tests in middle channels by each three frequency bands (2.4G, 5.2G and 5.8G).

Step2. We performed the test in low and high channels at the position of SAR value within 3dB of the SAR limit value (1.6W/kg) in the Step1.

Step3. We performed the test in low and high channels at the position of the highest SAR value in the both ANT 1(Left Antenna) and ANT 2(Right Antenna) antennas

Step4 We performed the test of a distance 0mm (touch) in from Step 1 to Step3. However the distance 0mm may not have the worst value. Therefore we performed the test of the distance 5mm,10mm and 15mm at the max SAR measured position. As a result, the distance 0mm had the worst value.

---

**UL Apex Co., Ltd.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

## **SECTION 8 : Measurement uncertainty**

### **8.1 Uncertainty of 802.11b/g modes testing**

The uncertainty budget has been determined for the DASY4 measurement system according to the NIS81 [13] and the NIST1297 [6] documents and is given in the following Table.

Error Description	Uncertainty value $\pm$ %	Probability distribution	divisor	(ci)1 lg	Standard Uncertainty (1g)	vi or veff
<b>Measurement System</b>						
Probe calibration	$\pm 4.8$	Normal	1	1	$\pm 4.8$	$\infty$
Axial isotropy of the probe	$\pm 4.7$	Rectangular	$\sqrt{3}$	$(1-c_p)^{1/2}$	$\pm 1.9$	$\infty$
Spherical isotropy of the probe	$\pm 9.6$	Rectangular	$\sqrt{3}$	$(c_p)^{1/2}$	$\pm 3.9$	$\infty$
Boundary effects	$\pm 1.0$	Rectangular	$\sqrt{3}$	1	$\pm 0.6$	$\infty$
Probe linearity	$\pm 4.7$	Rectangular	$\sqrt{3}$	1	$\pm 2.7$	$\infty$
Detection limit	$\pm 1.0$	Rectangular	$\sqrt{3}$	1	$\pm 0.6$	$\infty$
Readout electronics	$\pm 1.0$	Normal	1	1	$\pm 1.0$	$\infty$
Response time	$\pm 0.8$	Rectangular	$\sqrt{3}$	1	$\pm 0.5$	$\infty$
Integration time	$\pm 2.6$	Rectangular	$\sqrt{3}$	1	$\pm 1.5$	$\infty$
RF ambient conditions	$\pm 3.0$	Rectangular	$\sqrt{3}$	1	$\pm 1.7$	$\infty$
Mech. constraints of robot	$\pm 0.4$	Rectangular	$\sqrt{3}$	1	$\pm 0.2$	$\infty$
Probe positioning	$\pm 2.9$	Rectangular	$\sqrt{3}$	1	$\pm 1.7$	$\infty$
Extrap. and integration	$\pm 1.0$	Rectangular	$\sqrt{3}$	1	$\pm 0.6$	$\infty$
<b>Test Sample Related</b>						
Device positioning	$\pm 2.9$	Rectangular	$\sqrt{3}$	1	$\pm 2.9$	6
Device holder uncertainty	$\pm 3.6$	Rectangular	$\sqrt{3}$	1	$\pm 3.6$	4
Power drift	$\pm 10.0$	Rectangular	$\sqrt{3}$	1	$\pm 2.9$	$\infty$
<b>Phantom and Setup</b>						
Phantom uncertainty	$\pm 4.0$	Rectangular	$\sqrt{3}$	1	$\pm 2.3$	$\infty$
Liquid conductivity (target)	$\pm 5.0$	Rectangular	$\sqrt{3}$	0.64	$\pm 1.8$	$\infty$
Liquid conductivity (meas.)	$\pm 5.0$	Rectangular	$\sqrt{3}$	0.64	$\pm 1.8$	$\infty$
Liquid permittivity (target)	$\pm 5.0$	Rectangular	$\sqrt{3}$	0.6	$\pm 1.7$	$\infty$
Liquid permittivity (meas.)	$\pm 5.0$	Rectangular	$\sqrt{3}$	0.6	$\pm 1.7$	$\infty$
<b>Combined Standard Uncertainty</b>					<b><math>\pm 11.514</math></b>	
<b>Expanded Uncertainty (k=2)</b>					<b><math>\pm 23.0</math></b>	

The result of some test showed that the power drift has exceeded 5%. Therefore, the uncertainty of power drift expanded to 10%. However, the extended uncertainty (k= 2) of a test is less than 30%.

\*The probe was used model name ET3DV6

**UL Apex Co., Ltd.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

## 8.2 Uncertainty of 802.11a mode testing

The uncertainty budget has been determined for the DASY4 measurement system according to the NIS81 [13] and the NIST1297 [6] documents and is given in the following Table.

Error Description	Uncertainty value $\pm$ %	Probability distribution	divisor	(ci)1 lg	Standard Uncertainty (1g)	vi or veff
<b>Measurement System</b>						
Probe calibration	$\pm 6.8$	Normal	1	1	$\pm 6.8$	$\infty$
Axial isotropy of the probe	$\pm 4.7$	Rectangular	$\sqrt{3}$	0.7	$\pm 1.9$	$\infty$
Spherical isotropy of the probe	$\pm 9.6$	Rectangular	$\sqrt{3}$	0.7	$\pm 3.9$	$\infty$
Boundary effects	$\pm 2.0$	Rectangular	$\sqrt{3}$	1	$\pm 1.2$	$\infty$
Probe linearity	$\pm 4.7$	Rectangular	$\sqrt{3}$	1	$\pm 2.7$	$\infty$
Detection limit	$\pm 1.0$	Rectangular	$\sqrt{3}$	1	$\pm 0.6$	$\infty$
Readout electronics	$\pm 1.0$	Normal	1	1	$\pm 1.0$	$\infty$
Response time	$\pm 0.8$	Rectangular	$\sqrt{3}$	1	$\pm 0.5$	$\infty$
Integration time	$\pm 2.6$	Rectangular	$\sqrt{3}$	1	$\pm 1.5$	$\infty$
RF ambient conditions	$\pm 3.0$	Rectangular	$\sqrt{3}$	1	$\pm 1.7$	$\infty$
Mech. constraints of robot	$\pm 0.8$	Rectangular	$\sqrt{3}$	1	$\pm 0.5$	$\infty$
Probe positioning	$\pm 5.7$	Rectangular	$\sqrt{3}$	1	$\pm 5.7$	$\infty$
Extrap. and integration	$\pm 4.0$	Rectangular	1	1	$\pm 2.3$	$\infty$
<b>Test Sample Related</b>						
Device positioning	$\pm 2.9$	Rectangular	$\sqrt{3}$	1	$\pm 2.9$	6
Device holder uncertainty	$\pm 3.6$	Rectangular	$\sqrt{3}$	1	$\pm 3.6$	4
Power drift	$\pm 10.0$	Rectangular	$\sqrt{3}$	1	$\pm 2.9$	$\infty$
<b>Phantom and Setup</b>						
Phantom uncertainty	$\pm 4.0$	Rectangular	$\sqrt{3}$	1	$\pm 2.3$	$\infty$
Liquid conductivity (target)	$\pm 5.0$	Rectangular	$\sqrt{3}$	0.64	$\pm 1.8$	$\infty$
Liquid conductivity (meas.)	$\pm 5.0$	Rectangular	$\sqrt{3}$	0.64	$\pm 1.8$	$\infty$
Liquid permittivity (target)	$\pm 5.0$	Rectangular	$\sqrt{3}$	0.6	$\pm 1.7$	$\infty$
Liquid permittivity (meas.)	$\pm 5.0$	Rectangular	$\sqrt{3}$	0.6	$\pm 1.7$	$\infty$
<b>Combined Standard Uncertainty</b>					<b><math>\pm 13.038</math></b>	
<b>Expanded Uncertainty (k=2)</b>					<b><math>\pm 26.1</math></b>	

The result of some test showed that the power drift has exceeded 5%. Therefore, the uncertainty of power drift expanded to 10%. However, the extended uncertainty (k= 2) of a test is less than 30%.

\*The probe was used model name EX3DV3

**UL Apex Co., Ltd.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

**SECTION 9 : Simulated tissue liquid parameter**

**9.1 Simulated Tissue Liquid Parameter confirmation**

The dielectric parameters were checked prior to assessment using the HP85070D dielectric probe kit. The dielectric parameters measurement are reported in each correspondent section.

**9.2 Head 2450 MHz**

Type of liquid : **Head 2450 MHz**  
 Ambient temperature (deg.c.) : **24.8(June 11)and 13)**  
 Relative Humidity (%) : **49(June 11), 50(June 13)**  
 Liquid depth (cm) : **15.2**

DIELECTRIC PARAMETERS MEASUREMENT RESULTS								
Date	Frequency	Liquid Temp [deg.c]		Parameters	Target Value	Measured	Deviation [%]	Limit [%]
		Before	After					
June 11	2450	23.6	23.6	Relative Permittivity $\epsilon_r$	39.2	37.4	-4.6	+/-5
				Conductivity $\sigma$ [mho/m]	1.80	1.86	3.3	+/-5
June 13	2450	23.6	23.6	Relative Permittivity $\epsilon_r$	39.2	37.4	-4.6	+/-5
				Conductivity $\sigma$ [mho/m]	1.80	1.87	3.9	+/-5

**9.3 Muscle 2450 MHz**

Type of liquid : **Muscle 2450 MHz**  
 Ambient temperature (deg.c.) : **24.4(June 11), 24.5(June 13)**  
 Relative Humidity (%) : **54(June 11), 53(June 13)**  
 Liquid depth (cm) : **15.2**

DIELECTRIC PARAMETERS MEASUREMENT RESULTS								
Date	Frequency	Liquid Temp [deg.c]		Parameters	Target Value	Measured	Deviation [%]	Limit [%]
		Before	After					
June 11	2450	23.8	23.8	Relative Permittivity $\epsilon_r$	52.7	50.5	-4.2	+/-5
				Conductivity $\sigma$ [mho/m]	1.95	1.97	1.0	+/-5
June 13	2450	23.6	23.6	Relative Permittivity $\epsilon_r$	52.7	50.3	-4.6	+/-5
				Conductivity $\sigma$ [mho/m]	1.95	2.02	3.6	+/-5

**9.4 Simulated Tissues Composition of 2450MHz**

Ingredient	Mixture(%)	
	Head 2450MHz	Muscle 2450MHz
Water	45.0	69.83
DGMBE	55.0	30.17

Note:DGMBE(Diethylenglycol-monobuthyl ether)

**UL Apex Co., Ltd.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

**9.5 Muscle 5800 MHz**

Type of liquid : Muscle 5800 MHz  
 Ambient temperature (deg.c.) : 24.2(June 17), 24.5(June 18 and 19)  
 Relative Humidity (%) : 54(June 17), 56(June 18), 66(June 19)  
 Liquid depth (cm) : 15.2

DIELECTRIC PARAMETERS MEASUREMENT RESULTS								
Date	Frequency	Liquid Temp [deg.c]		Parameters	Target Value	Measured	Deviation [%]	Limit [%]
		Before	After					
June 17	5200	24.1	24.1	Relative Permittivity $\epsilon_r$	49.0	48.8	-0.4	+/-5
				Conductivity $\sigma$ [mho/m]	5.30	5.4	1.9	+/-5
June 17	5260	24.1	24.1	Relative Permittivity $\epsilon_r$	49.0	48.7	-0.6	+/-5
				Conductivity $\sigma$ [mho/m]	5.30	5.5	3.8	+/-5
June 19	5260	24.5	24.5	Relative Permittivity $\epsilon_r$	49.0	48.8	-0.4	+/-5
				Conductivity $\sigma$ [mho/m]	5.30	5.5	3.8	+/-5
June 18	5800	24.1	24.1	Relative Permittivity $\epsilon_r$	48.2	47.2	-2.1	+/-5
				Conductivity $\sigma$ [mho/m]	6.00	6.3	5.0	+/-5
June 18	5765	24.1	24.1	Relative Permittivity $\epsilon_r$	48.2	47.9	-0.6	+/-5
				Conductivity $\sigma$ [mho/m]	6.00	6.3	5.0	+/-5

**9.6 Simulated Tissues Composition of 5800MHz**

Ingredient	MiXTURE(%)	
	Head 5800MHz	Muscle 5800MHz
Water	64.0	78.0
Mineral Oil	18.0	11.0
Emulsifiers	15.0	9.0
Additives and salt	3.0	2.0

**UL Apex Co., Ltd.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

## 9.7 Decision on Simulated Tissues of 5.2GHz

In the current standards (e.g., IEEE P1528, OET 65 Supplement C), the dielectric parameters suggested for head and body tissue simulating liquid are given at 3.0 GHz and 5.8 GHz. As an intermediate solution, dielectric parameters for the frequencies between 5 to 5.8 GHz were obtained using linear interpolation.

Therefore the dielectric parameters of 5.2GHz was decided as following.

(5.2GHz Body Tissue/ Relative Permittivity  $\epsilon_r$ : **49.0**, Conductivity  $\sigma$  : **5.30** )

f (GHz)	Head Tissue		Body Tissue		Reference
	$\epsilon_r$	$\sigma$ [mho/m]	$\epsilon_r$	$\sigma$ [mho/m]	
3.0	38.5	2.40	52.0	2.73	Standard
5.8	35.3	5.27	48.2	6.00	Standard
5.0	36.2	4.45	49.3	5.07	Interpolated
5.1	36.1	4.55	49.1	5.18	Interpolated
5.2	36.0	4.66	49.0	5.30	Interpolated
5.3	35.9	4.76	48.9	5.42	Interpolated
5.4	35.8	4.86	48.7	5.53	Interpolated
5.5	35.6	4.96	48.6	5.65	Interpolated
5.6	35.5	5.07	48.5	5.77	Interpolated
5.7	35.4	5.17	48.3	5.88	Interpolated

Standard and interpolated dielectric parameters for head and body tissue simulating liquid in the frequency range 3 to 5.8 GHz.

**UL Apex Co., Ltd.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

## SECTION 10 : System validation data


Prior to the assessment, the system validation kit was used to test whether the system was operating within its specifications of +/-10%.

### 10.1 System validation of 2450MHz

Type of liquid : **HEAD 2450MHz**  
 Frequency : **2450MHz**  
 Ambient temperature (deg.c.) : **24.8(June 11and 13)**  
 Relative Humidity (%) : **49(June 11), 50(June 13)**  
 Liquid depth (cm) : **15.2**  
 Dipole : **D2450V2 SN:713**  
 Power : **250mW**

SYSTEM PERFORMANCE CHECK										
Date	Liquid (HEAD 2450MHz)						System dipole validation target & measured			
	Liquid Temp [deg.c.]		Relative Permittivity $\epsilon_r$		Conductivity $\sigma$ [mho/m]		SAR 1g [W/kg]		Deviation [%]	Limit [%]
	Before	After	Target	Measured	Target	Measured	Target	Measured		
June 11	23.2	23.2	39.2	37.4	1.80	1.86	13.1	13.8	5.3	+/-10
June 13	23.6	23.6	39.2	37.4	1.80	1.87	13.1	13.9	6.1	+/-10

Note: Please refer to Attachment for the result representation in plot format

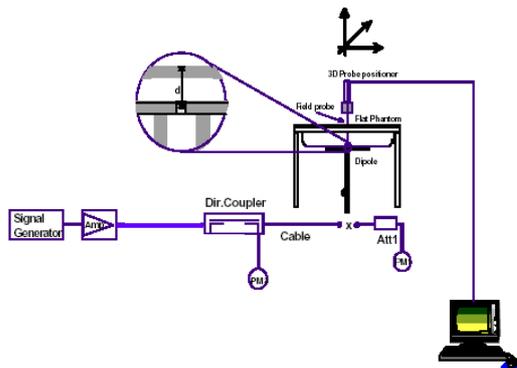

2450MHz System performance check setup

Test system for the system performance check setup diagram

**UL Apex Co., Ltd.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

## 10.2 System validation of 5GHz band


The target values of 5GHz were not defined by IEEE 1528. So, the target values were made into the calibration values of SPEAG. And each of the validation results of 5.2GHz and 5.8GHz checked (Evaluation of muscle) that it was within +/-10% as compared with the calibration values of SPEAG. (Please refer to APPENDIX 7) The validation results are tabulated below.

Type of liquid : **Muscle 5800 MHz**  
 Ambient temperature (deg.c.) : **24.2(June 17), 24.5(June 18)**  
 Relative Humidity (%) : **54(June 17), 56(June 18)**  
 Dipole : **D5GHzV2**  
 Power : **250mW**

SYSTEM PERFORMANCE CHECK										
Liquid ( Muscle 5100-5800 MHz )							System dipole validation target & measured			
Frequency	Liquid Temp [deg.c.]		Relative Permittivity		Conductivity		SAR 1g [W/kg]		Deviation [%]	Limit [%]
	Before	After	Target	Measured	Target	Measured	Target	Measured		
			$\epsilon_r$	$\sigma$ [mho/m]						
5200	24.1	24.1	49.0	48.8	5.3	5.4	20.5	20.5	0.0	+/-10
5800	24.1	24.1	48.2	47.8	6.0	6.3	19.6	21.4	9.2	+/-10

Note: The target value is the calibration value of SPEAG.

Please refer to Attachment for the result representation in plot format

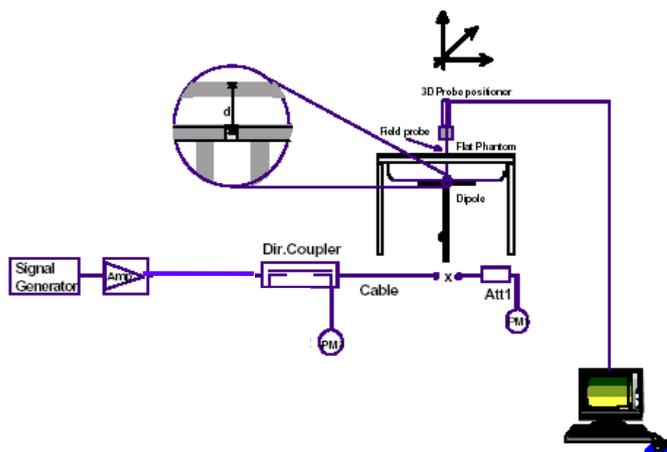

5100-5800MHz  
System performance check setup

Test system for the system performance check setup diagram

**UL Apex Co., Ltd.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

---

## **SECTION 11 : Evaluation procedure**

**The evaluation was performed with the following procedure:**

The portions of [\*\*\*] are for a procedure of IEEE 802.11a testing. (Used EX3DV3 probe)

**Step 1:** Measurement of the E-field at a fixed location above the ear point or central position of flat phantom was used as a reference value for assessing the power drop.

**Step 2:** The SAR distribution at the exposed side of head or body position was measured at a distance of each device from the inner surface of the shell. The area covered the entire dimension of the antenna of EUT and the horizontal grid spacing was 20 mm x 20 mm [**10mm x 10mm**]. Based on these data, the area of the maximum absorption was determined by spline interpolation.

**Step 3:** Around this point found in the Step 2 (area scan) , a volume of 32 mm x 32 mm x 30 mm [**30mm x 30mm x 21mm**] was assessed by measuring 5 x 5 x 7 [**7 x 7 x 8**] points. And for any secondary peaks found in the Step2 which are within 2dB of maximum peak and not with this Step3 (Zoom scan) is repeated. On the basis of this data set, the spatial peak SAR value was evaluated under the following procedure:

1. The data at the surface were extrapolated, since the center of the dipoles is 2.7 mm [**1 mm**] away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.3 mm. The extrapolation was based on a least square algorithm [4]. A polynomial of the fourth order was calculated through the points in z-axes. This polynomial was then used to evaluate the points between the surface and the probe tip.
2. The maximum interpolated value was searched with a straightforward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1 g or 10 g) were computed by the 3D-Spline interpolation algorithm. The 3D-Spline is composed of three one-dimensional splines with the "Not a knot"-condition (in x, y and z-directions) [4], [5]. The volume was integrated with the trapezoidal-algorithm. One thousand points (10 x 10 x 10) were interpolated to calculate the average.
3. All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.

**Step 4:** Re-measurement of the E-field at the same location as in Step 1.

---

***UL Apex Co., Ltd.***

***Head Office EMC Lab.***

*4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN*

*Telephone: +81 596 24 8116*

*Facsimile: +81 596 24 8124*

**SECTION 12 : Exposure limit****(A) Limits for Occupational/Controlled Exposure (W/kg)**

Spatial Average (averaged over the whole body)	Spatial Peak (averaged over any 1g of tissue)	Spatial Peak (hands/wrists/feet/ankles averaged over 10g)
0.4	8.0	20.0

**(B) Limits for General population/Uncontrolled Exposure (W/kg)**

Spatial Average (averaged over the whole body)	Spatial Peak (averaged over any 1g of tissue)	Spatial Peak (hands/wrists/feet/ankles averaged over 10g)
0.08	1.6	4.0

**Occupational/Controlled Environments:** are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure, (i.e. as a result of employment or occupation).

**General Population/Uncontrolled Environments:** are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

<b>NOTE:GENERAL POPULATION/UNCONTROLLED EXPOSURE SPATIAL PEAK(averaged over any 1g of tissue) LIMIT 1.6 W/kg</b>
--

---

***UL Apex Co., Ltd.***

***Head Office EMC Lab.***

*4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN*

*Telephone: +81 596 24 8116*

*Facsimile: +81 596 24 8124*

**SECTION 13 : SAR Measurement results (IEEE 802.11b / g : 2.4GHz)****13.1 Conducted power measurement results****13.1.1 Antenna 1(Left Antenna)**

CONDUCTED POWER MEASUREMENT RESULTS													
Frequency [MHz]	Modulation	Before					After					Deviation [%]	Limit [%]
		Reading [dBm]	Cable loss [dB]	Att. [dB]	Result [dBm]	Convert [mW]	Reading [dBm]	Cable loss [dB]	Att. [dB]	Result [dBm]	Convert [mW]		
2412	DSSS (CCK)	10.3	0.21	10.00	20.51	112.5	10.2	0.21	10.00	20.41	109.9	-2.3	+/-5
2437		10.9	0.21	10.00	21.11	129.1	10.9	0.21	10.00	21.11	129.1	0.0	+/-5
2462		10.4	0.21	10.00	20.61	115.1	10.3	0.21	10.00	20.51	112.5	-2.3	+/-5
2412	OFDM (64QAM)	10.9	0.21	10.00	21.11	129.1	10.9	0.21	10.00	21.11	129.1	0.0	+/-5
2437		9.20	0.21	10.00	19.41	87.3	9.25	0.21	10.00	19.46	88.3	1.2	+/-5
2462		9.02	0.21	10.00	19.23	83.8	9.11	0.21	10.00	19.32	85.5	2.1	+/-5
2412	OFDM (QPSK)	7.44	0.21	10.00	17.65	58.2	7.44	0.21	10.00	17.65	58.2	0.0	+/-5
2437		8.00	0.21	10.00	18.21	66.2	7.80	0.21	10.00	18.01	63.2	-4.5	+/-5
2462		7.64	0.21	10.00	17.85	61.0	7.48	0.21	10.00	17.69	58.7	-3.6	+/-5

**13.1.2 Antenna 2(Right Antenna)**

CONDUCTED POWER MEASUREMENT RESULTS													
Frequency [MHz]	Modulation	Before					After					Deviation [%]	Limit [%]
		Reading [dBm]	Cable loss [dB]	Att. [dB]	Result [dBm]	Convert [mW]	Reading [dBm]	Cable loss [dB]	Att. [dB]	Result [dBm]	Convert [mW]		
2412	DSSS (CCK)	9.97	0.21	10.00	20.18	104.2	9.78	0.21	10.00	19.99	99.8	-4.3	+/-5
2437		10.37	0.21	10.00	20.58	114.3	10.20	0.21	10.00	20.41	109.9	-3.8	+/-5
2462		10.30	0.21	10.00	20.51	112.5	10.21	0.21	10.00	20.42	110.2	-2.1	+/-5
2412	OFDM (64QAM)	8.57	0.21	10.00	18.78	75.5	8.38	0.21	10.00	18.59	72.3	-4.3	+/-5
2437		8.26	0.21	10.00	18.47	70.3	8.08	0.21	10.00	18.29	67.5	-4.1	+/-5
2462		8.28	0.21	10.00	18.49	70.6	8.10	0.21	10.00	18.31	67.8	-4.1	+/-5
2412	OFDM (QPSK)	7.14	0.21	10.00	17.35	54.3	7.00	0.21	10.00	17.21	52.6	-3.2	+/-5
2437		7.75	0.21	10.00	17.96	62.5	7.53	0.21	10.00	17.74	59.4	-4.9	+/-5
2462		7.63	0.21	10.00	17.84	60.8	7.52	0.21	10.00	17.73	59.3	-2.5	+/-5

**UL Apex Co., Ltd.****Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

**13.2 Body 2450MHz SAR**

Liquid Depth (cm) : **15.2** Model : **IRF302U**  
Parameters :  $\epsilon_r = 50.5, \sigma = 1.97$  (June 11)  
 $\epsilon_r = 50.3, \sigma = 2.02$  (June 13)  
Ambient Temperature[deg.c.] : **24.4(June 11)/ 24.5(June 13)** Serial No. : **77**  
Relative Humidity (%) : **49(June 11), 50(June 13)** Modulation : **DSSS, OFDM**  
Crest factor : **1**

Date : June 11 and 13, 2004

<b>BODY SAR MEASUREMENT RESULTS (2.4G DSSS)</b>									
Frequency		Modulation	Phantom Section	EUT Set-up Conditions			Liquid Temp.[deg.c]		SAR(1g) [W/kg]
Channel	[MHz]			Antenna	Position	Separation [mm]	Before	After	Maximum value of multi-peak
Mid	2437	DSSS(CCK)	Flat	ANT1	Left Front	0	23.1	23.1	<b>0.057</b>
Mid	2437	DSSS(CCK)	Flat	ANT1	Left Back	0	23.1	23.1	<b>0.201</b>
Mid	2437	DSSS(CCK)	Flat	ANT1	Left Side	0	22.9	22.9	<b>0.0543</b>
Mid	2437	DSSS(CCK)	Flat	ANT2	Right Front	0	23.0	23.0	<b>0.301</b>
Mid	2437	DSSS(CCK)	Flat	ANT2	Right Back	0	23.1	23.1	<b>0.0392</b>
Mid	2437	DSSS(CCK)	Flat	ANT2	Right Side	0	22.9	22.9	<b>0.0565</b>
Low	2412	DSSS(CCK)	Flat	ANT2	Right Front	0	23.0	23.0	<b>0.436</b>
High	2462	DSSS(CCK)	Flat	ANT2	Right Front	0	23.0	22.9	<b>0.444</b>
<b>ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure / General Population</b>							<b>Body SAR: 1.6 W/kg (averaged over 1 gram)</b>		

**UL Apex Co., Ltd.****Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

BODY SAR MEASUREMENT RESULTS (2.4G OFDM)									
Frequency		Modulation	Phantom Section	EUT Set-up Conditions			Liquid Temp.[deg.c]		SAR(1g) [W/kg]
Channel	[MHz]			Antenna	Position	Separation [mm]	Before	After	Maximum value of multi-peak
Mid	2437	OFDM (64QAM)	Flat	ANT1	Left Front	0	23.5	23.5	<b>0.0243</b>
Mid	2437	OFDM (64QAM)	Flat	ANT1	Left Back	0	23.1	23.1	<b>0.197</b>
Mid	2437	OFDM (64QAM)	Flat	ANT1	Left Side	0	23.1	23.1	<b>0.0289</b>
Mid	2437	OFDM (64QAM)	Flat	ANT2	Right Front	0	23.1	23.1	<b>0.219</b>
Mid	2437	OFDM (64QAM)	Flat	ANT2	Right Back	0	23.1	23.2	<b>0.0379</b>
Mid	2437	OFDM (64QAM)	Flat	ANT2	Right Side	0	23.0	23.0	<b>0.0237</b>
Low	2412	OFDM (64QAM)	Flat	ANT2	Right Front	0	23.3	23.3	<b>0.25</b>
High	2462	OFDM (64QAM)	Flat	ANT2	Right Front	0	23.2	23.2	<b>0.211</b>
Mid	2437	OFDM (QPSK)	Flat	ANT1	Left Front	0	23.1	23.1	<b>0.0568</b>
Mid	2437	OFDM (QPSK)	Flat	ANT1	Left Back	0	23.1	23.1	<b>0.184</b>
Mid	2437	OFDM (QPSK)	Flat	ANT1	Left Side	0	22.9	22.9	<b>0.0115</b>
Mid	2437	OFDM (QPSK)	Flat	ANT2	Right Front	0	23.0	22.9	<b>0.221</b>
Mid	2437	OFDM (QPSK)	Flat	ANT2	Right Back	0	23.0	23.0	<b>0.0402</b>
Mid	2437	OFDM (QPSK)	Flat	ANT2	Right Side	0	23.0	23.0	<b>0.0266</b>
Low	2412	OFDM (QPSK)	Flat	ANT2	Right Front	0	23.1	23.1	<b>0.22</b>
High	2462	OFDM (QPSK)	Flat	ANT2	Right Front	0	23.1	23.1	<b>0.225</b>
<b>ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure / General Population</b>							<b>Body SAR: 1.6 W/kg (averaged over 1 gram)</b>		

**UL Apex Co., Ltd.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

**SECTION 14 : SAR Measurement results (IEEE 802.11a : 5.15-5.35GHz)****14.1 Conducted power measurement results****14.1.1 Antenna 1(Left Antenna)**

CONDUCTED POWER MEASUREMENT RESULTS													
Frequency [MHz]	Modulation	Before					After					Deviation [%]	Limit [%]
		Reading [dBm]	Cable loss [dB]	Att. [dB]	Result [dBm]	Convert [mW]	Reading [dBm]	Cable loss [dB]	Att. [dB]	Result [dBm]	Convert [mW]		
5180	OFDM (64QAM)	0.61	0.21	10.0	10.82	12.1	0.58	0.21	10.0	10.79	12.0	-0.7	+/-5
5260		5.42	0.21	10.0	15.63	36.6	5.31	0.21	10.0	15.52	35.6	-2.5	+/-5
5320		5.21	0.21	10.0	15.42	34.8	5.09	0.21	10.0	15.30	33.9	-2.7	+/-5
5180	OFDM (QPSK)	0.40	0.21	10.0	10.61	11.5	0.41	0.21	10.0	10.62	11.5	0.2	+/-5
5260		5.06	0.21	10.0	15.27	33.7	5.26	0.21	10.0	15.47	35.2	4.7	+/-5
5320		4.80	0.21	10.0	15.01	31.7	4.96	0.21	10.0	15.17	32.9	3.8	+/-5

**14.1.2 Antenna 2(Right Antenna)**

CONDUCTED POWER MEASUREMENT RESULTS													
Frequency [MHz]	Modulation	Before					After					Deviation [%]	Limit [%]
		Reading [dBm]	Cable loss [dB]	Att. [dB]	Result [dBm]	Convert [mW]	Reading [dBm]	Cable loss [dB]	Att. [dB]	Result [dBm]	Convert [mW]		
5180	OFDM (64QAM)	0.50	0.21	10.0	10.71	11.8	0.53	0.21	10.0	10.74	11.9	0.7	+/-5
5260		5.24	0.21	10.0	15.45	35.1	5.18	0.21	10.0	15.39	34.6	-1.4	+/-5
5320		5.01	0.21	10.0	15.22	33.3	5.20	0.21	10.0	15.41	34.8	4.5	+/-5
5180	OFDM (QPSK)	0.40	0.21	10.0	10.61	11.5	0.51	0.21	10.0	10.72	11.8	2.6	+/-5
5260		5.08	0.21	10.0	15.29	33.8	5.24	0.21	10.0	15.45	35.1	3.8	+/-5
5320		4.75	0.21	10.0	14.96	31.3	4.77	0.21	10.0	14.98	31.5	0.5	+/-5

**UL Apex Co., Ltd.****Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

**14.2 Body 5.15-5.35GHz SAR**

Liquid Depth (cm) : **15.2** Model : **IRF302U**  
 Parameters :  $\epsilon_r = 48.7, \sigma = 5.5$  (June 17)  
 $\epsilon_r = 48.8, \sigma = 5.5$  (June 19)  
 Ambient Temperature[deg.c.] : **24.2(June 17) / 24.5(June 19)** Serial No. : **77**  
 Relative Humidity (%) : **54(June 17), 66(June 19)** Modulation : **OFDM**  
 Crest factor : **1**

Date : June 17 and 19 , 2004

<b>BODY SAR MEASUREMENT RESULTS (5.15-5.35G)</b>									
Frequency		Modulation	Phantom Section	EUT Set-up Conditions			Liquid Temp.[deg.c]		SAR(1g) [W/kg]
Channel	[MHz]			Antenna	Position	Separation [mm]	Before	After	Maximum value of multi-peak
Mid	5260	OFDM (64QAM)	Flat	ANT1	Left Front	0	24.0	24.0	<b>0.0219</b>
Mid	5260	OFDM (64QAM)	Flat	ANT1	Left Back	0	24.0	24.0	<b>0.87</b>
Mid	5260	OFDM (64QAM)	Flat	ANT1	Left Side	0	24.0	24.0	<b>0.0389</b>
Mid	5260	OFDM (64QAM)	Flat	ANT2	Right Front	0	23.7	23.7	<b>0.746</b>
Mid	5260	OFDM (64QAM)	Flat	ANT2	Right Back	0	23.9	23.9	<b>0.0335</b>
Mid	5260	OFDM (64QAM)	Flat	ANT2	Right Side	0	24.1	24.1	<b>0.0266</b>
Low	5180	OFDM (64QAM)	Flat	ANT1	Left Back	0	24.3	24.3	<b>0.287</b>
High	5320	OFDM (64QAM)	Flat	ANT1	Left Back	0	24.3	24.3	<b>0.548</b>
<b>Measurement of the distance</b>									
Mid	5260	OFDM (64QAM)	Flat	ANT1	Left Back	5	24.2	24.2	<b>0.177</b>
Mid	5260	OFDM (64QAM)	Flat	ANT1	Left Back	10	24.0	24.0	<b>0.119</b>
Mid	5260	OFDM (64QAM)	Flat	ANT1	Left Back	15	24.0	24.0	<b>0.0703</b>
Mid	5260	OFDM (QPSK)	Flat	ANT1	Left Front	0	24.0	24.0	<b>0.0314</b>
Mid	5260	OFDM (QPSK)	Flat	ANT1	Left Back	0	23.9	23.9	<b>0.525</b>
Mid	5260	OFDM (QPSK)	Flat	ANT1	Left Side	0	24.0	24.0	<b>0.0389</b>
Mid	5260	OFDM (QPSK)	Flat	ANT2	Right Front	0	24.3	24.3	<b>0.701</b>
Mid	5260	OFDM (QPSK)	Flat	ANT2	Right Back	0	23.9	23.9	<b>0.0318</b>
Mid	5260	OFDM (QPSK)	Flat	ANT2	Right Side	0	24.1	24.1	<b>0.0425</b>
Low	5180	OFDM (QPSK)	Flat	ANT2	Right Front	0	24.3	24.3	<b>0.285</b>
High	5320	OFDM (QPSK)	Flat	ANT2	Right Front	0	24.3	24.3	<b>0.503</b>
<b>ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure / General Population</b>							<b>Body SAR: 1.6 W/kg (averaged over 1 gram)</b>		

**UL Apex Co., Ltd.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

**SECTION 15 : SAR Measurement results (IEEE 802.11a : 5.725-5.825GHz)****15.1 Conducted power measurement results****15.1.1 Antenna 1(Left Antenna)**

CONDUCTED POWER MEASUREMENT RESULTS													
Frequency [MHz]	Modulation	Before					After					Deviation [%]	Limit [%]
		Reading [dBm]	Cable loss [dB]	Att. [dB]	Result [dBm]	Convert [mW]	Reading [dBm]	Cable loss [dB]	Att. [dB]	Result [dBm]	Convert [mW]		
5745	OFDM (64QAM)	6.41	0.22	10.0	16.63	46.0	6.39	0.22	10.0	16.61	45.8	-0.5	+/-5
5765		6.17	0.22	10.0	16.39	43.6	6.19	0.22	10.0	16.41	43.8	0.5	+/-5
5805		5.40	0.22	10.0	15.62	36.5	5.40	0.22	10.0	15.62	36.5	0.0	+/-5
5745	OFDM (QPSK)	5.91	0.22	10.0	16.13	41.0	5.70	0.22	10.0	15.92	39.1	-4.7	+/-5
5765		5.74	0.22	10.0	15.96	39.4	5.81	0.22	10.0	16.03	40.1	1.6	+/-5
5805		4.99	0.22	10.0	15.21	33.2	5.02	0.22	10.0	15.24	33.4	0.7	+/-5

**15.1.2 Antenna 2(Right Antenna)**

CONDUCTED POWER MEASUREMENT RESULTS													
Frequency [MHz]	Modulation	Before					After					Deviation [%]	Limit [%]
		Reading [dBm]	Cable loss [dB]	Att. [dB]	Result [dBm]	Convert [mW]	Reading [dBm]	Cable loss [dB]	Att. [dB]	Result [dBm]	Convert [mW]		
5745	OFDM (64QAM)	6.35	0.22	10.0	16.57	45.4	6.21	0.22	10.0	16.43	44.0	-3.2	+/-5
5765		6.07	0.22	10.0	16.29	42.6	5.99	0.22	10.0	16.21	41.8	-1.8	+/-5
5805		5.35	0.22	10.0	15.57	36.1	5.30	0.22	10.0	15.52	35.6	-1.1	+/-5
5745	OFDM (QPSK)	6.13	0.22	10.0	16.35	43.2	6.02	0.22	10.0	16.24	42.1	-2.5	+/-5
5765		5.67	0.22	10.0	15.89	38.8	5.49	0.22	10.0	15.71	37.2	-4.1	+/-5
5805		4.98	0.22	10.0	15.20	33.1	4.99	0.22	10.0	15.21	33.2	0.2	+/-5

**UL Apex Co., Ltd.****Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

**15.2 Body 5.725-5.825GHz SAR**

Liquid Depth (cm) : **15.2** Model : **IRF302U**  
 Parameters :  $\epsilon_r = 47.9, \sigma = 6.3$  Serial No. : **77**  
 Ambient Temperature[deg.c.] : **24.5(June 18)**  
 Relative Humidity (%) : **56(June 18)** Modulation : **OFDM**  
 Crest factor : **1**

Date : June 18, 2004

<b>BODY SAR MEASUREMENT RESULTS (5.725-5.825G)</b>									
Frequency		Modulation	Phantom Section	EUT Set-up Conditions			Liquid Temp.[deg.c]		SAR(1g) [W/kg]
Channel	[MHz]			Antenna	Position	Separation [mm]	Before	After	Maximum value of multi-peak
Mid	5765	OFDM (64QAM)	Flat	ANT1	Left Front	0	24.1	24.1	<b>0.0559</b>
Mid	5765	OFDM (64QAM)	Flat	ANT1	Left Back	0	24.0	24.0	<b>0.266</b>
Mid	5765	OFDM (64QAM)	Flat	ANT1	Left Side	0	24.1	24.1	<b>0.0259</b>
Mid	5765	OFDM (64QAM)	Flat	ANT2	Right Front	0	23.8	23.8	<b>0.273</b>
Mid	5765	OFDM (64QAM)	Flat	ANT2	Right Back	0	24.0	24.0	<b>0.0223</b>
Mid	5765	OFDM (64QAM)	Flat	ANT2	Right Side	0	24.2	24.2	<b>0.0617</b>
Low	5745	OFDM (64QAM)	Flat	ANT2	Right Front	0	24.4	24.4	<b>0.14</b>
High	5805	OFDM (64QAM)	Flat	ANT2	Right Front	0	24.4	24.4	<b>0.242</b>
Mid	5765	OFDM (QPSK)	Flat	ANT1	Left Front	0	24.1	24.1	<b>0.0512</b>
Mid	5765	OFDM (QPSK)	Flat	ANT1	Left Back	0	24.0	24.0	<b>0.254</b>
Mid	5765	OFDM (QPSK)	Flat	ANT1	Left Side	0	24.1	24.1	<b>0.0468</b>
Mid	5765	OFDM (QPSK)	Flat	ANT2	Right Front	0	24.0	24.0	<b>0.273</b>
Mid	5765	OFDM (QPSK)	Flat	ANT2	Right Back	0	24.1	24.1	<b>0.0274</b>
Mid	5765	OFDM (QPSK)	Flat	ANT2	Right Side	0	24.0	24.0	<b>0.0606</b>
Low	5745	OFDM (QPSK)	Flat	ANT2	Right Front	0	24.3	24.3	<b>0.248</b>
High	5805	OFDM (QPSK)	Flat	ANT2	Right Front	0	24.0	24.0	<b>0.247</b>
<b>ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure / General Population</b>							<b>Body SAR: 1.6 W/kg (averaged over 1 gram)</b>		

**UL Apex Co., Ltd.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

**SECTION 16 : Equipment & calibration information**

Name of Equipment	Manufacture	Model number	Serial number	Calibration	
				Last Cal	due date
Power Meter	Agilent	E4417A	GB41290639	2003/11/12	2004/11/11
Power Sensor	Agilent	E9300B	US40010300	2003/11/17	2004/11/16
Power Sensor	Agilent	E9327A	US40440576	2003/11/13	2004/11/12
S-Parameter Network Analyzer	Agilent	E8358A	US41080381	2003/8/13	2004/8/12
Signal Generator	Rohde&Schwarz	SML40	100023	2003/11/26	2004/11/25
RF Amplifier	OPHIR	5056F	1005	2004/2/17	2005/2/16
RF Amplifier	TSJ	CBP02063033	-	2004/2/24	2005/2/23
Dosimetric E-Field Probe	Schmid&Partner Engineering AG	ET3DV6	1685	2003/10/10	2004/10/9
Dosimetric E-Field Probe	Schmid&Partner Engineering AG	EX3DV3	3507	2004/2/20	2005/2/19
Data Acquisition Electronics	Schmid&Partner Engineering AG	DAE3 V1	509	2004/4/22	2005/4/21
Robot,SAM Phantom	Schmid&Partner Engineering AG	DASY4	I021834	N/A	N/A
Attenuator	Agilent	US40010300	08498-60012	2003/12/16	2004/12/15
Attenuator	Orient Microwave	BX10-0476-00	-	2004/3/30	2005/3/29
Spectrum Analyzer	Advantest	R3273	110101630	2004/2/18	2005/2/17
2450MHz System Validation Dipole	Schmid&Partner Engineering AG	D2450V2	713	2002/11/15	2004/11/14
5GHz System Validation Dipole	Schmid&Partner Engineering AG	D5GHzV2	1020	2004/2/23	2005/2/22
Dual Directional Coupler	N/A	Narda	3702	N/A	N/A
Head 2450MHz	N/A	N/A	N/A	N/A	N/A
Body 2450MHz	N/A	N/A	N/A	N/A	N/A
Body 5800MHz	N/A	N/A	N/A	N/A	N/A

**UL Apex Co., Ltd.****Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

## **SECTION 17 : References**

- [1] ANSI, ANSI/IEEE C95.1-1992: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz, The Institute of Electrical and Electronics Engineers, Inc., New York, NY 10017, 1992.
- [2] Katja Pokovic, Thomas Schmid, and Niels Kuster, "Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequencies", in ICECOM '97, Dubrovnik, October 15-17, 1997, pp. 120-124.
- [3] Katja Pokovic, Thomas Schmid, and Niels Kuster, "E-field probe with improved isotropy in brain simulating liquids", in Proceedings of the ELMAR, Zadar, Croatia, 23-25 June, 1996, pp.172-175.
- [4] W. Gander, Computermathematik, Birkhaeuser, Basel, 1992.
- [5] W. H. Press, S. A. Teukolsky, W. T. Vetterling, and B. P. Flannery, Numerical Recipes in C, The Art of Scientific Computing, Second Edition, Cambridge University Press, 1992.
- [6] Barry N. Taylor and Christ E. Kuyatt, "Guidelines for evaluating and expressing the uncertainty of NIST measurement results", Tech. Rep., National Institute of Standards and Technology, 1994.

---

***UL Apex Co., Ltd.***

***Head Office EMC Lab.***


*4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN*

*Telephone: +81 596 24 8116*

*Facsimile: +81 596 24 8124*

## **APPENDIX 1 : Photographs of test setup**


**Left Front**

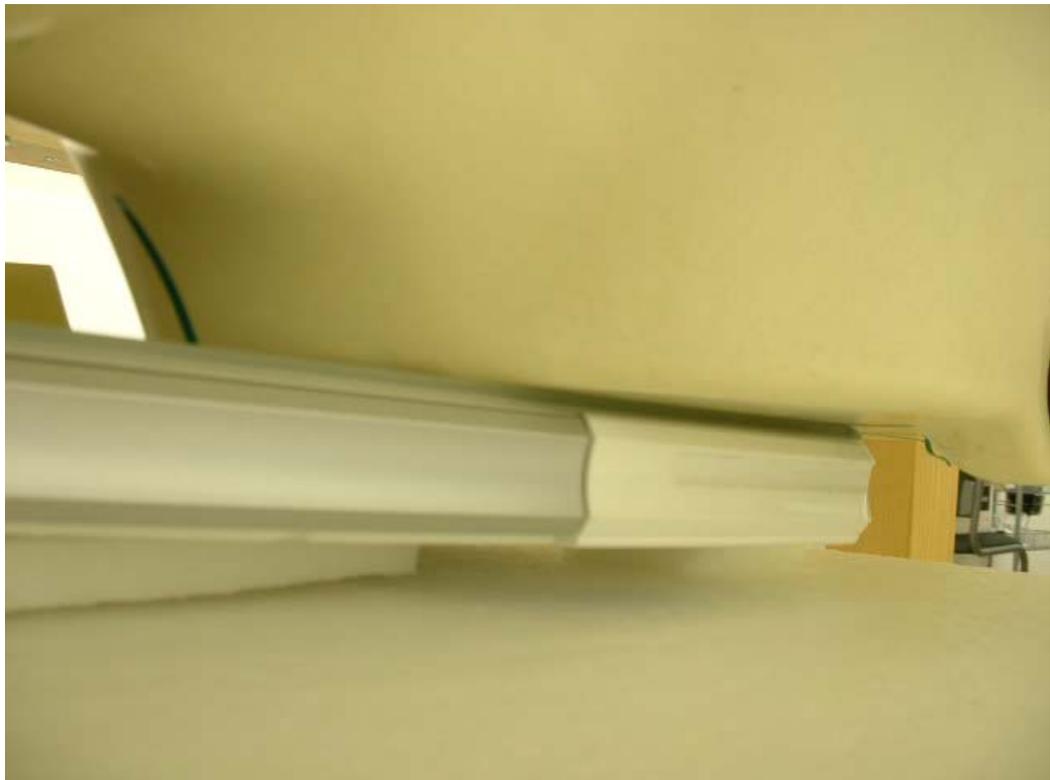


**Right Front**



**Left Back**

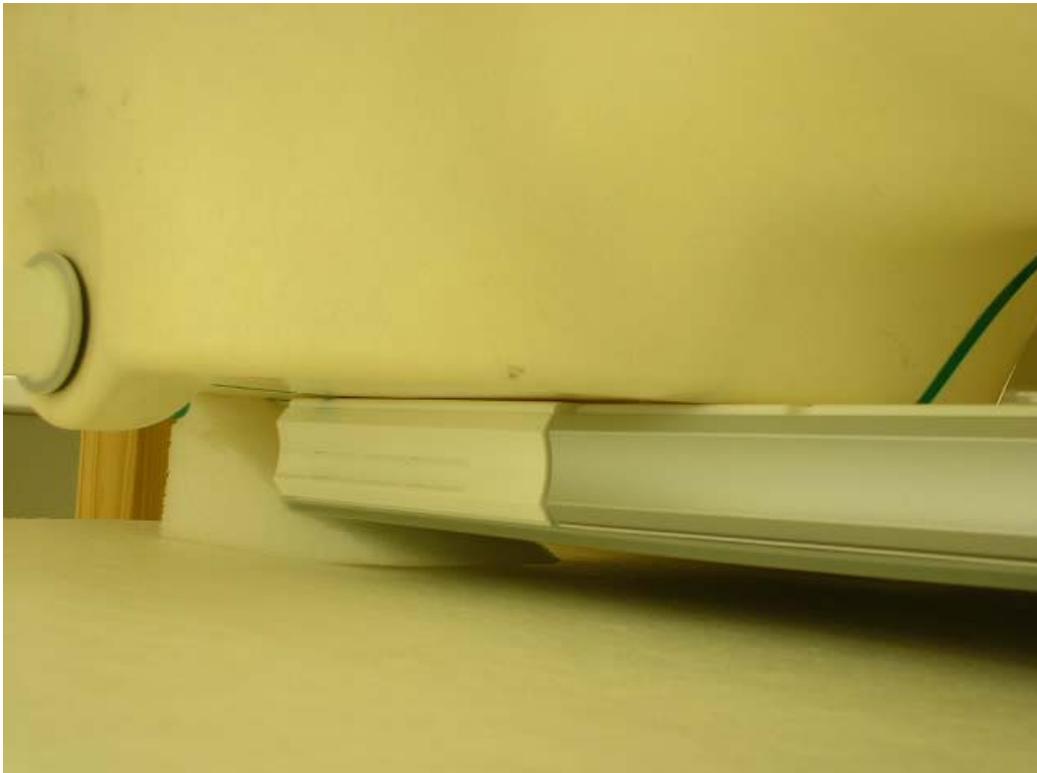

**Right Back**

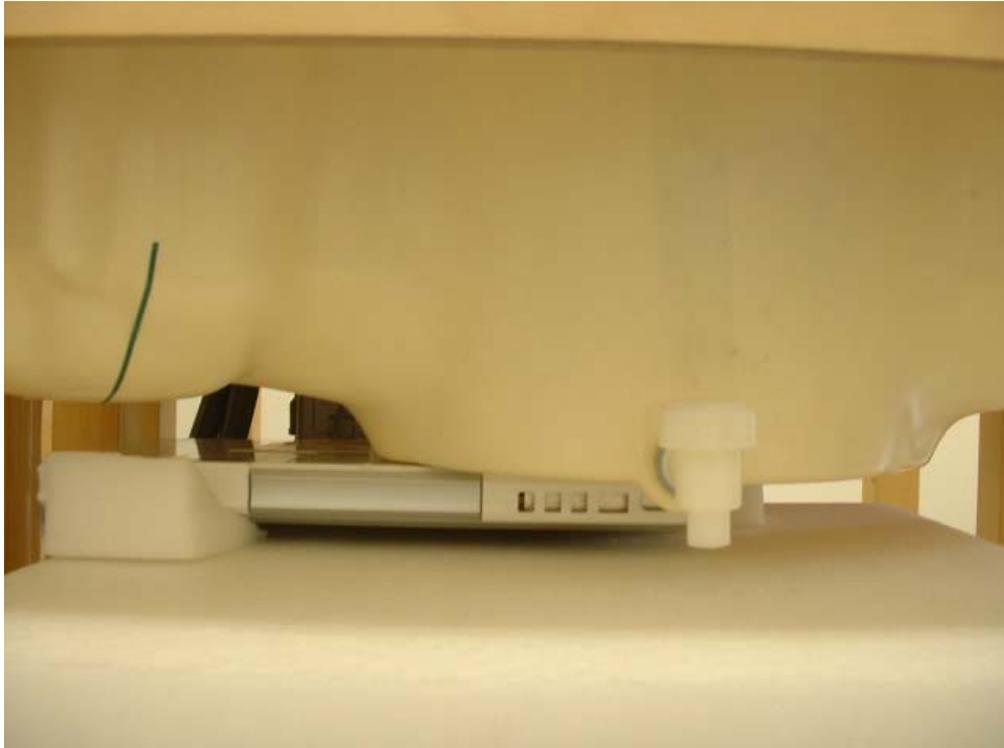


**Left Side**




**Right Side**



**Left Front 5mm**

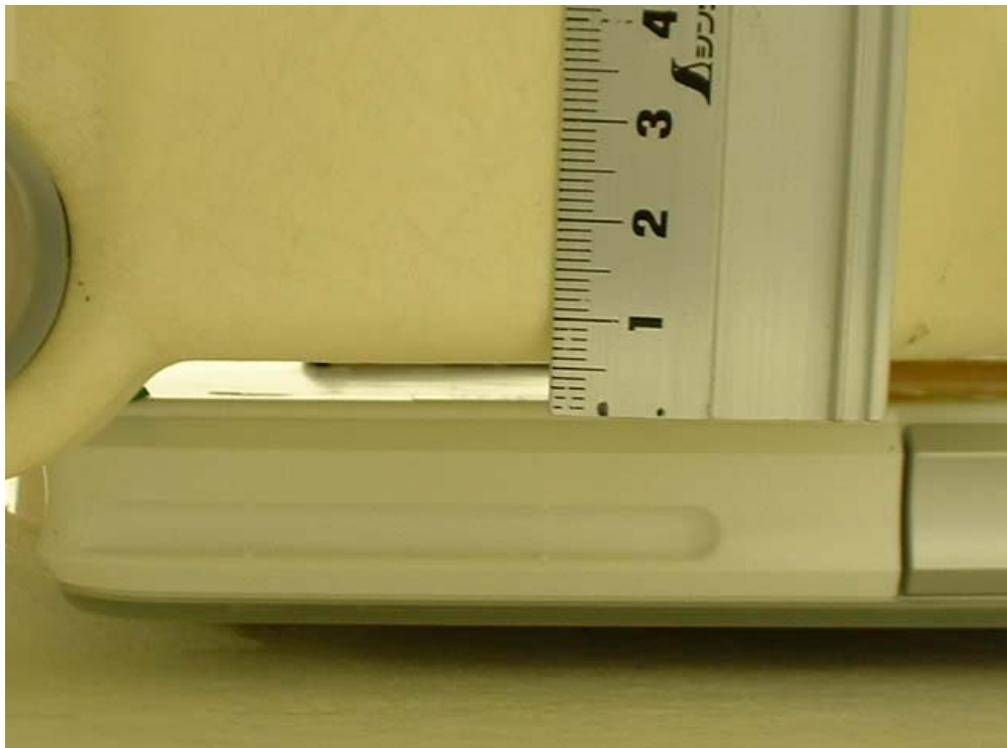

**Left Front 10mm**

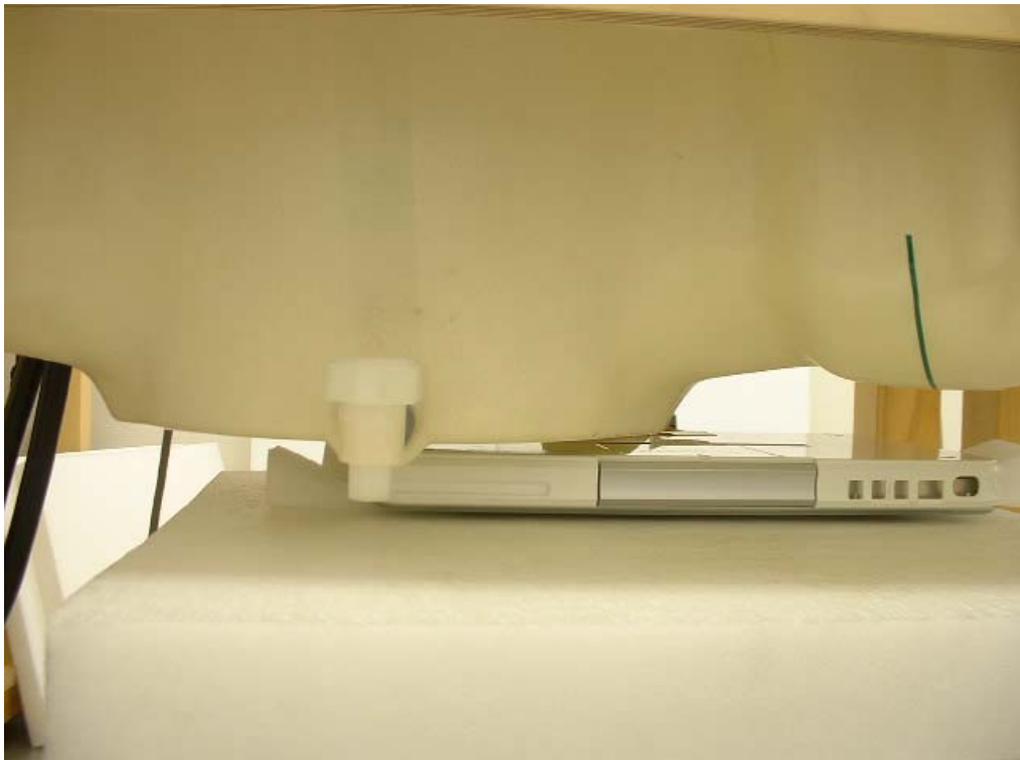

**Left Front 15mm**

