

APPENDIX 6 : System Validation Dipole (D2450V2,S/N: 713)

Schmid & Partner Engineering AG

Zeughausstrasse 43, 8004 Zurich, Switzerland, Phone +41 1 245 97 00, Fax +41 1 245 97 79

Calibration Certificate

2450 MHz System Validation Dipole

Type:

D2450V2

Serial Number:

713

Place of Calibration:

Zurich

Date of Calibration:

November 15, 2002

Calibration Interval:

24 months


Schmid & Partner Engineering AG hereby certifies, that this device has been calibrated on the date indicated above. The calibration was performed in accordance with specifications and procedures of Schmid & Partner Engineering AG.

Wherever applicable, the standards used in the calibration process are traceable to international standards. In all other cases the standards of the Laboratory for EMF and Microwave Electronics at the Swiss Federal Institute of Technology (ETH) in Zurich, Switzerland have been applied.

Calibrated by:



Approved by:



UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

**Schmid & Partner
Engineering AG**

Zeughausstrasse 43, 8004 Zurich, Switzerland, Phone +41 1 245 97 00, Fax +41 1 245 97 79

DASY

Dipole Validation Kit

Type: D2450V2

Serial: 713

Manufactured: July 5, 2002

Calibrated: November 15, 2002

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

1. Measurement Conditions

The measurements were performed in the flat section of the SAM twin phantom filled with head simulating solution of the following electrical parameters at 2450 MHz:

Relative permittivity	38.0	± 5%
Conductivity	1.87 mho/m	± 10%

The DASY4 System with a dosimetric E-field probe ET3DV6 (SN:1507, conversion factor 5.0 at 2450 MHz) was used for the measurements.

The dipole feedpoint was positioned below the center marking and oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 10mm from dipole center to the solution surface. The included distance holder was used during measurements for accurate distance positioning.

The coarse grid with a grid spacing of 15mm was aligned with the dipole. The 7x7x7 fine cube was chosen for cube integration.

The dipole input power (forward power) was 250mW ± 3 %. The results are normalized to 1W input power.

2. SAR Measurement with DASY4 System

Standard SAR-measurements were performed according to the measurement conditions described in section 1. The results (see figure supplied) have been normalized to a dipole input power of 1W (forward power). The resulting averaged SAR-values measured with the dosimetric probe ET3DV6 SN:1507 and applying the advanced extrapolation are:

averaged over 1 cm ³ (1 g) of tissue:	54.4 mW/g
averaged over 10 cm ³ (10 g) of tissue:	24.2 mW/g

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

3. Dipole impedance and return loss

The impedance was measured at the SMA-connector with a network analyzer and numerically transformed to the dipole feedpoint. The transformation parameters from the SMA-connector to the dipole feedpoint are:

Electrical delay: **1.158 ns** (one direction)
Transmission factor: **0.997** (voltage transmission, one direction)

The dipole was positioned at the flat phantom sections according to section 1 and the distance holder was in place during impedance measurements.

Feedpoint impedance at 2450 MHz: $\text{Re}\{Z\} = \mathbf{51.3 \Omega}$

$\text{Im}\{Z\} = \mathbf{2.4 \Omega}$

Return Loss at 2450 MHz **- 31.4 dB**

4. Measurement Conditions

The measurements were performed in the flat section of the SAM twin phantom filled with body simulating solution of the following electrical parameters at 2450 MHz:

Relative permittivity **51.2** $\pm 5\%$
Conductivity **1.96 mho/m** $\pm 10\%$

The DASY4 System with a dosimetric E-field probe ET3DV6 (SN:1507, conversion factor 4.5 at 2450 MHz) was used for the measurements.

The dipole feedpoint was positioned below the center marking and oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 10mm from dipole center to the solution surface. The included distance holder was used during measurements for accurate distance positioning.

The coarse grid with a grid spacing of 15mm was aligned with the dipole. The 7x7x7 fine cube was chosen for cube integration.

The dipole input power (forward power) was 250mW $\pm 3\%$. The results are normalized to 1W input power.

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

Date/Time: 11/13/02 21:52:22

Test Laboratory: SPEAG, Zurich, Switzerland
File Name: SN713_SN1507_HSL2450_131102.da4

DUT: Dipole 2450 MHz Type & Serial Number: D2450V2 - SN713
Program: Dipole Calibration; Pin = 250 mW; d = 10 mm

Communication System: CW-2450; Frequency: 2450 MHz; Duty Cycle: 1:1
Medium: HSL 2450 MHz ($\sigma = 1.87$ mho/m, $\epsilon = 38.03$, $\rho = 1000$ kg/m³)
Phantom section: FlatSection

DASY4 Configuration:

- Probe: ET3DV6 - SN1507; ConvF(5, 5, 5); Calibrated: 1/24/2002
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 - SN410; Calibrated: 7/18/2002
- Phantom: SAM 4.0 - TP:1006
- Software: DASY4, V4.0 Build 35

Area Scan (81x81x1): Measurement grid: dx=15mm, dy=15mm


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm

Reference Value = 94.4 V/m

Peak SAR = 29.6 mW/g

SAR(1 g) = 13.6 mW/g; SAR(10 g) = 6.04 mW/g

Power Drift = 0.01 dB

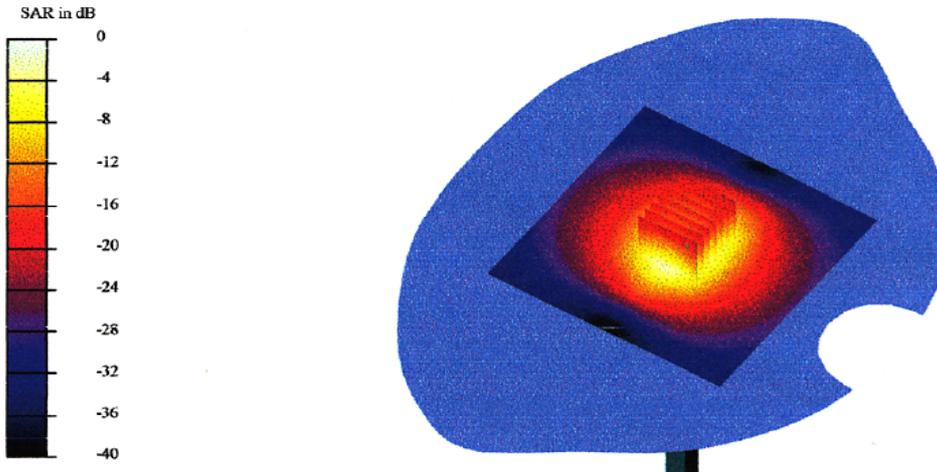

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

13 Nov 2002 20:32:38
CH1 S11 1 U FS 1: 51.254 ϕ 2.4414 ϕ 158.60 pH 2 450.000 000 MHz

γ


De1

PRM


Cor

Avg

15

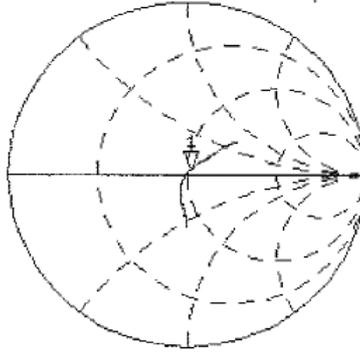

CH2 S11 LOG 5 dB/REF 0 dB 1: -31.367 dB 2 450.000 000 MHz

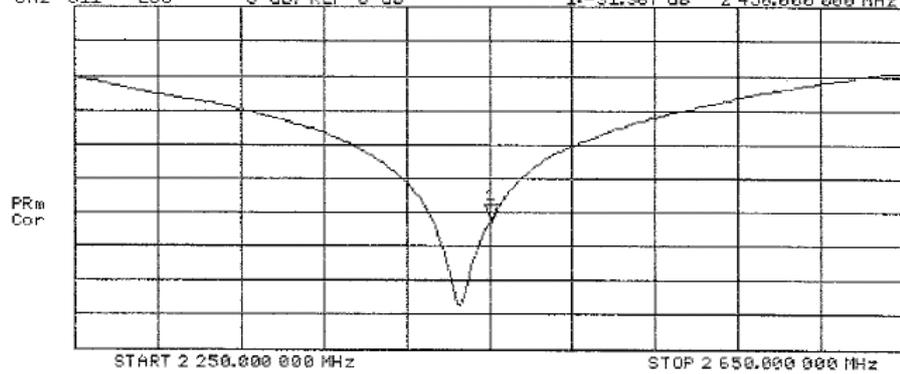

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

Date/Time: 11/15/02 14:25:17

Test Laboratory: SPEAG, Zurich, Switzerland
File Name: SN713_SN1507_M2450_141102.da4


DUT: Dipole 2450 MHz Type & Serial Number: D2450V2 - SN713
Program: Dipole Calibration; Pin = 250 mW; d = 10 mm

Communication System: CW-2450; Frequency: 2450 MHz; Duty Cycle: 1:1
Medium: Muscle 2450 MHz ($\sigma = 1.96$ mho/m, $\epsilon = 51.15$, $\rho = 1000$ kg/m³)
Phantom section: FlatSection

DASY4 Configuration:

- Probe: ET3DV6 - SN1507; ConvF(4.5, 4.5, 4.5); Calibrated: 1/24/2002
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 - SN410; Calibrated: 7/18/2002
- Phantom: SAM 4.0 - TP:1006
- Software: DASY4, V4.0 Build 35

Area Scan (81x81x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm
Reference Value = 95.2 V/m
Peak SAR = 25 mW/g
SAR(1 g) = 12.9 mW/g; SAR(10 g) = 5.99 mW/g
Power Drift = 0.02 dB

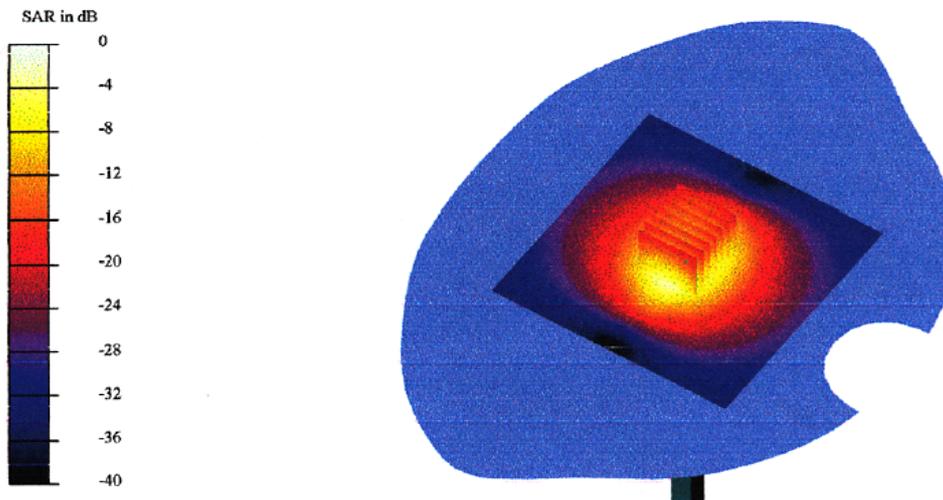

UL Apex Co., Ltd.



Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

14 Nov 2002 21:43:05
CH1 S11 1 U FS 1: 46.896 α 3.6405 α 236.50 pH 2 450.000 000 MHz

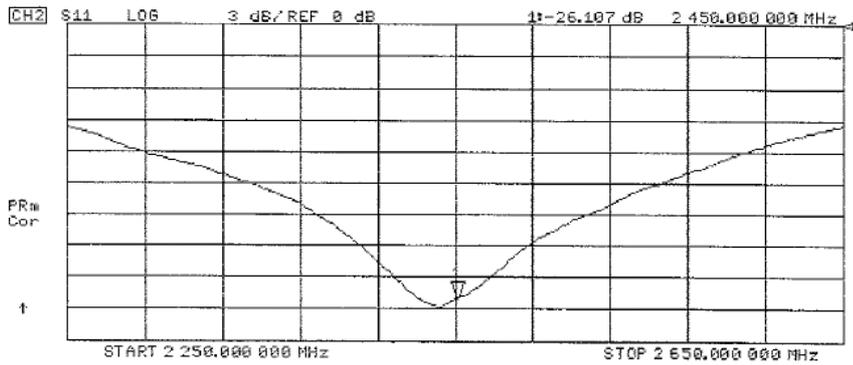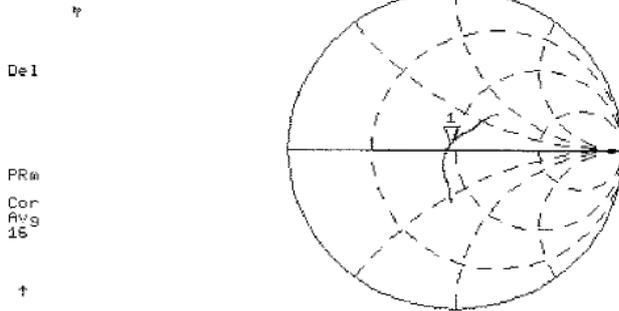

APPENDIX 7 : System Validation Dipole (D5GHzV2,S/N: 1020)

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

Schmid & Partner Engineering AG

s p e a g

Zeughausstrasse 43, 8004 Zurich, Switzerland
Phone +41 1 245 9700, Fax +41 1 245 9779
info@speag.com, http://www.speag.com

IMPORTANT NOTICE

DIPOLE TRANSPORTATION CASE

Important Note:

Please use only this suitcase for any future dipole transportation!

s p e a g

Schmid & Partner Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland
Phone +41 1 245 9700, Fax +41 1 245 9779
info@speag.com, http://www.speag.com

Schmid & Partner Engineering AG

June 2003

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland

Client **UL Apex (MTT)**

CALIBRATION CERTIFICATE			
Object(s)	D5GHzV2 - SN 1020		
Calibration procedure(s)	QA CAL-05 v2 Calibration procedure for dipole validation kits		
Calibration date:	February 23, 2004		
Condition of the calibrated item	In Tolerance (according to the specific calibration document)		
This calibration statement documents traceability of M&TE used in the calibration procedures and conformity of the procedures with the ISO/IEC 17025 international standard.			
All calibrations have been conducted in the closed laboratory facility: environment temperature 22 +/- 2 degrees Celsius and humidity < 75%.			
Calibration Equipment used (M&TE critical for calibration)			
Model Type	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power meter EPM E4419B	GB41293874	2-Apr-03 (METAS, No 252-0250)	Apr-04
Power sensor E4412A	MY41495277	2-Apr-03 (METAS, No 252-0250)	Apr-04
Power sensor HP 8481A	MY41092317	18-Oct-02 (Agilent, No. 20021018)	Oct-04
RF generator R&S SMT06	100058	23-May-01 (SPEAG, in house check May-03)	In house check: May-05
Network Analyzer HP 8753E	US37390585	18-Oct-01 (SPEAG, in house check Nov-03)	In house check: Oct 05
Calibrated by:	Name Kaga Pokovic	Function Laboratory Director	Signature 
Approved by:	Name Fin Bensch	Function EMC Director	Signature 
Date issued: February 26, 2004			
This calibration certificate is issued as an intermediate solution until the accreditation process (based on ISO/IEC 17025 International Standard) for Calibration Laboratory of Schmid & Partner Engineering AG is completed.			

UL Apex Co., Ltd.
Head Office EMC Lab.
4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN
Telephone: +81 596 24 8116
Facsimile: +81 596 24 8124

Schmid & Partner Engineering AG

s p e a g

Zeughausstrasse 43, 8004 Zurich, Switzerland
Phone +41 1 245 9700, Fax +41 1 245 9779
info@speag.com, <http://www.speag.com>

DASY

Dipole Validation Kit

Type: D5GHzV2

Serial: 1020

Manufactured: February 5, 2004

Calibrated: February 23, 2004

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

1. Measurement Conditions

The measurements were performed in the flat section of the SAM twin phantom filled with **head simulating solution** of the following electrical parameters:

Frequency:	5200 MHz	
Relative Dielectricity	36.3	± 5%
Conductivity	4.57 mho/m	± 5%
Frequency:	5800 MHz	
Relative Dielectricity	35.4	± 5%
Conductivity	5.20 mho/m	± 5%

The DASY4 System with a dosimetric E-field probe EX3DV3 - SN:3503 was used for the measurements. The dipole was mounted on the small tripod so that the dipole feedpoint was positioned below the center marking of the flat phantom section and the dipole was oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 10mm from dipole center to the solution surface. Lossless spacer was used during measurements for accurate distance positioning.

The coarse grid with a grid spacing of 10mm was aligned with the dipole. Special 8x8x8 fine cube was chosen for cube integration (dx=dy=4.3mm, dz=3mm). Distance between probe sensors and phantom surface was set to 2.5 mm. The dipole input power (forward power) was 250 mW ± 3 %. The results are normalized to 1W input power.

2. SAR Measurement with DASY System

Standard SAR-measurements were performed according to the measurement conditions described in section 1. The results (see figures supplied) have been normalized to a dipole input power of 1W (forward power). The resulting averaged SAR-values measured at **5200 MHz (Head Tissue)** with the dosimetric probe EX3DV3 SN:3503 and applying the advanced extrapolation are:

averaged over 1 cm ³ (1 g) of tissue:	87.6 mW/g ± 20.3 % (k=2)¹
averaged over 10 cm ³ (10 g) of tissue:	24.5 mW/g ± 19.8 % (k=2)¹

The resulting averaged SAR-values measured at **5800 MHz (Head Tissue)** with the dosimetric probe EX3DV3 SN:3503 and applying the advanced extrapolation are:

averaged over 1 cm ³ (1 g) of tissue:	86.8 mW/g ± 20.3 % (k=2)²
averaged over 10 cm ³ (10 g) of tissue:	24.2 mW/g ± 19.8 % (k=2)²

¹ Target dipole values determined by FDTD (feedpoint impedance set to 50 Ohm). The values are SAR_1g=76.5 mW/g, SAR_10g=21.6 mW/g and SAR_peak=310.3 mW/g.

² Target dipole values determined by FDTD (feedpoint impedance set to 50 Ohm). The values are SAR_1g=78.0 mW/g, SAR_10g=21.9 mW/g and SAR_peak=340.9 mW/g.

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

3. Dipole Transformation Parameters

The impedance was measured at the SMA-connector with a network analyzer and numerically transformed to the dipole feedpoint (please refer to the graphics attached to this document). The transformation parameters from the SMA-connector to the dipole feedpoint are:

Electrical delay: **1.200 ns** (one direction)
Transmission factor: **0.974** (voltage transmission, one direction)

4. Measurement Conditions

The measurements were performed in the flat section of the SAM twin phantom filled with **body simulating solution** of the following electrical parameters:

Frequency:	5200 MHz	
Relative Dielectricity	49.7	± 5%
Conductivity	5.18 mho/m	± 5%
Frequency:	5800 MHz	
Relative Dielectricity	48.5	± 5%
Conductivity	6.01 mho/m	± 5%

The DASY3 System with a dosimetric E-field probe EX3DV3 - SN:3503 was used for the measurements. The dipole was mounted on the small tripod so that the dipole feedpoint was positioned below the center marking of the flat phantom section and the dipole was oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 10mm from dipole center to the solution surface. Lossless spacer was used during measurements for accurate distance positioning.

The coarse grid with a grid spacing of 10mm was aligned with the dipole. The 8x8x8 fine cube was chosen for cube integration (dx=dy=4.3mm, dz=3mm). Distance between probe sensors and phantom surface was set to 2.5 mm. The dipole input power (forward power) was 250 mW ± 3 %. The results are normalized to 1W input power.

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

5. SAR Measurement with DASY System

Standard SAR-measurements were performed according to the measurement conditions described in section 4. The results (see figures supplied) have been normalized to a dipole input power of 1W (forward power). The resulting averaged SAR-values measured at **5200 MHz (Body Tissue)** with the dosimetric probe EX3DV3 SN:3503 and applying the advanced extrapolation are:

averaged over 1 cm³ (1 g) of tissue: **82.0 mW/g ± 20.3 % (k=2)³**

averaged over 10 cm³ (10 g) of tissue: **23.0 mW/g ± 19.8 % (k=2)³**

The resulting averaged SAR-values measured at **5800 MHz (Body Tissue)** with the dosimetric probe EX3DV3 SN:3503 and applying the advanced extrapolation are:

averaged over 1 cm³ (1 g) of tissue: **78.4 mW/g ± 20.3 % (k=2)⁴**

averaged over 10 cm³ (10 g) of tissue: **21.5 mW/g ± 19.8 % (k=2)⁴**

6. Handling

Do not apply excessive force to the dipole arms, because they might bend. Bending of the dipole arms stresses the soldered connections near the feedpoint leading to a damage of the dipole.

7. Design

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals.

Small end caps have been added to the dipole arms in order to increase frequency bandwidth at the position as explained in Sections 1 and 4.

8. Power Test

After long term use with 40W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

³ Target dipole values determined by FDTD (feedpoint impedance set to 50 Ohm). The values are SAR_1g=71.8 mW/g, SAR_10g=20.1 mW/g and SAR_peak=284.7 mW/g.

⁴ Target dipole values determined by FDTD (feedpoint impedance set to 50 Ohm). The values are SAR_1g=74.1 mW/g, SAR_10g=20.5 mW/g and SAR_peak=324.7 mW/g.

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 5GHz; Serial: D5GHzV2 - SN:1020

Communication System: CW-5GHz;Duty Cycle: 1:1;Medium: HSL5800

Medium parameters used: $f = 5200$ MHz; $\sigma = 4.57$ mho/m; $\epsilon_r = 36.3$; $\rho = 1000$ kg/m³

Medium parameters used: $f = 5800$ MHz; $\sigma = 5.2$ mho/m; $\epsilon_r = 35.4$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV3 - SN3503; ConvF(5.7, 5.7, 5.7)
ConvF(5, 5, 5); Calibrated: 6/27/2003
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 600; Calibrated: 9/30/2003
- Phantom: SAM with CRP - TP:1312; Phantom section: Flat Section
- Measurement SW: DASY4, V4.2 Build 30; Postprocessing SW: SEMCAD, V1.8 Build 98

d=10mm, Pin=250mW, f=5200 MHz/Area Scan (91x91x1): Measurement grid: dx=10mm, dy=10mm

Reference Value = 97.3 V/m

Power Drift = 0.0 dB

Maximum value of SAR = 40.4 mW/g

d=10mm, Pin=250mW, f=5800 MHz 2/Zoom Scan (8x8x8), dist=2.5mm (7x7x8)/Cube 0:

Measurement grid: dx=4.3mm, dy=4.3mm, dz=3mm

Peak SAR (extrapolated) = 89.6 W/kg


SAR(1 g) = 21.5 mW/g; SAR(10 g) = 6.05 mW/g

d=10mm, Pin=250mW, f=5200 MHz/Zoom Scan (8x8x8), dist=2.5mm (7x7x8)/Cube 0:

Measurement grid: dx=4.3mm, dy=4.3mm, dz=3mm

Peak SAR (extrapolated) = 85 W/kg

SAR(1 g) = 21.9 mW/g; SAR(10 g) = 6.12 mW/g

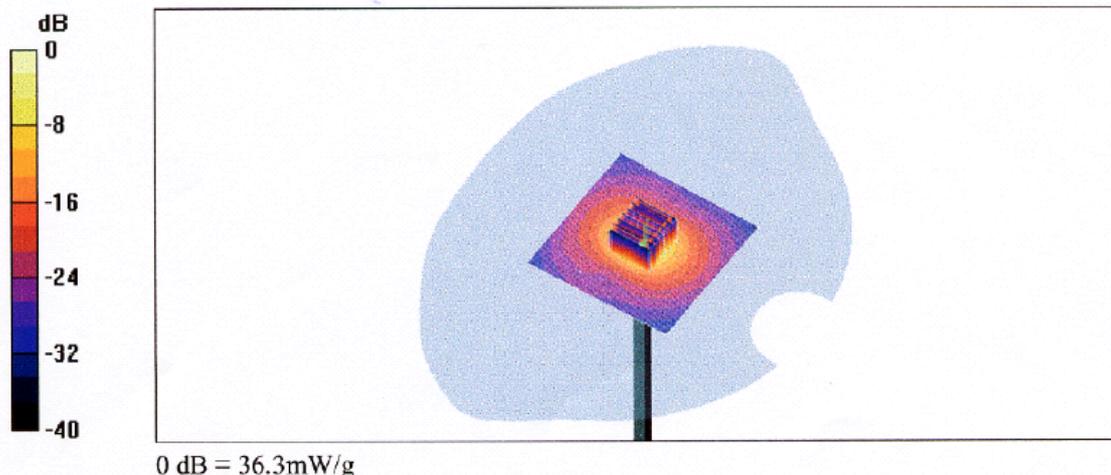

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN


Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

Head

20 Feb 2004 11:20:06
 CH1 S11 1 U FS 2: 46.127 α 7.1191 α 217.89 μ H 5 200.000 000 MHz

De1
 Smo
 Cor



CH1 Markers

1: 46.885 α
 11.502 α
 5.10000 GHz
 3: 51.748 α
 1.3672 α
 5.50000 GHz
 4: 43.691 α
 -1.1172 α
 5.80000 GHz

avg
 16


↑

CH2 S11 L06 5 dB/REF -20 dB 2: -21.490 dB 5 200.000 000 MHz

Smo
 Cor

avg
 16

↑

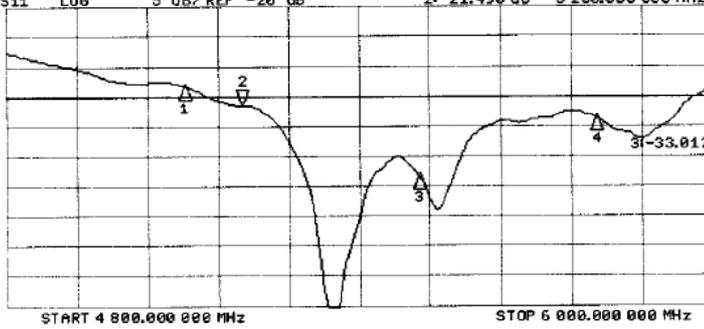

CH2 Markers

1: -18.244 dB
 5.10000 GHz
 5.50000 GHz
 4: -23.386 dB
 5.80000 GHz

START 4 800.000 000 MHz

STOP 5 000.000 000 MHz

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 5GHz; Serial: D5GHzV2 - SN:1020

Communication System: CW-5GHz;Duty Cycle: 1:1;Medium: MSL5800

Medium parameters used: $f = 5200$ MHz; $\sigma = 5.18$ mho/m; $\epsilon_r = 49.7$; $\rho = 1000$ kg/m³

Medium parameters used: $f = 5800$ MHz; $\sigma = 6.01$ mho/m; $\epsilon_r = 48.5$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV3 - SN3503; ConvF(5, 5, 5)
ConvF(4.6, 4.6, 4.6); Calibrated: 6/27/2003
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 600; Calibrated: 9/30/2003
- Phantom: SAM with CRP - TP:1312; Phantom section: Flat Section
- Measurement SW: DASY4, V4.2 Build 34; Postprocessing SW: SEMCAD, V1.8 Build 105

d=10mm, Pin=250mW, f=5200 MHz/Area Scan (91x91x1): Measurement grid: dx=10mm, dy=10mm

Reference Value = 80.3 V/m; Power Drift = 0.0 dB

Maximum value of SAR (interpolated) = 37.5 mW/g

d=10mm, Pin=250mW, f=5800 MHz/Zoom Scan (8x8x8), dist=2.5mm (7x7x8)/Cube 0:

Measurement grid: dx=4.3mm, dy=4.3mm, dz=3mm

Peak SAR (extrapolated) = 80.6 W/kg


SAR(1 g) = 19.6 mW/g; SAR(10 g) = 5.38 mW/g

d=10mm, Pin=250mW, f=5200 MHz/Zoom Scan (8x8x8), dist=2.5mm (7x7x8)/Cube 0:

Measurement grid: dx=4.3mm, dy=4.3mm, dz=3mm

Peak SAR (extrapolated) = 71.6 W/kg

SAR(1 g) = 20.5 mW/g; SAR(10 g) = 5.74 mW/g

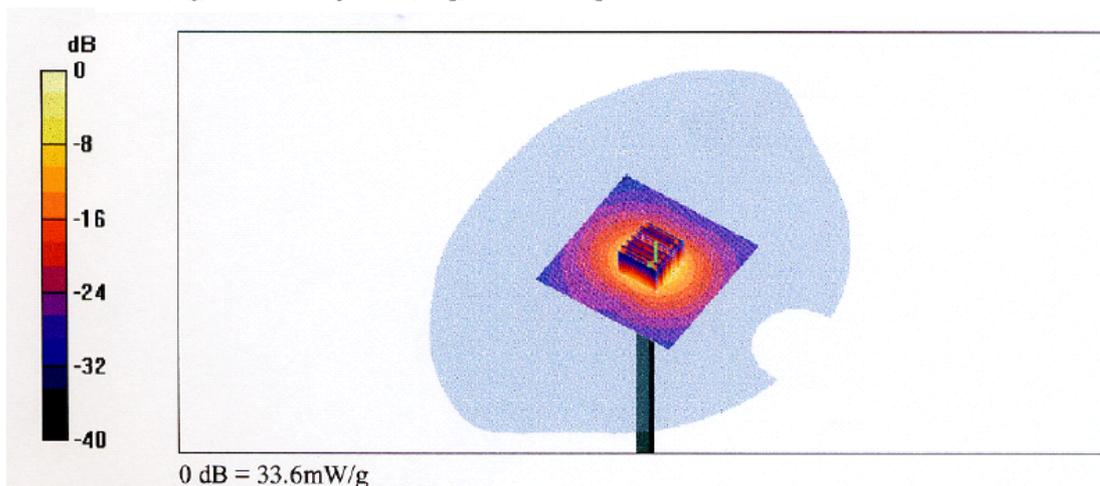

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

Body

