



FCC TEST REPORT (WLAN 15.247)

REPORT NO.: RF140515E03 R1

MODEL NO.: J20H084ac, J20H084

FCC ID: AK8J20H084AC

RECEIVED: May 15, 2014

TESTED: May 27 to June 12, 2014

ISSUED: July 29, 2014

APPLICANT: Sony Corporation

ADDRESS: 1-7-1 Konan Minato-ku Tokyo, 108-0075
Japan

ISSUED BY: Bureau Veritas Consumer Products Services
(H.K.) Ltd., Taoyuan Branch Hsin Chu Laboratory

LAB ADDRESS : No. 81-1, Lu Liao Keng, 9th Ling, Wu Lung Tsuen,
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan,
R.O.C.

TEST LOCATION (1): No. 81-1, Lu Liao Keng, 9th Ling, Wu Lung Tsuen,
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan,
R.O.C.

TEST LOCATION (2): No. 49, Ln. 206, Wende Rd., Shangshan Tsuen,
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan,
R.O.C.

This report should not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification



A D T

Table of Contents

RELEASE CONTROL RECORD.....	4
1. CERTIFICATION	5
2. SUMMARY OF TEST RESULTS.....	6
2.1 MEASUREMENT UNCERTAINTY	7
3. GENERAL INFORMATION.....	8
3.1 GENERAL DESCRIPTION OF EUT (WLAN).....	8
3.2 DESCRIPTION OF TEST MODES.....	23
3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL.....	24
3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS	26
3.4 DUTY CYCLE OF TEST SIGNAL.....	27
3.5 DESCRIPTION OF SUPPORT UNITS	28
3.6 CONFIGURATION OF SYSTEM UNDER TEST	28
4. TEST TYPES AND RESULTS	29
4.1 CONDUCTED EMISSION MEASUREMENT	29
4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT.....	29
4.1.2 TEST INSTRUMENTS	29
4.1.3 TEST PROCEDURES	30
4.1.4 DEVIATION FROM TEST STANDARD	30
4.1.5 TEST SETUP	30
4.1.6 EUT OPERATING CONDITIONS	31
4.1.7 TEST RESULTS	32
4.2 RADIATED EMISSION AND BANDEDGE MEASUREMENT.....	34
4.2.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT	34
4.2.2 TEST INSTRUMENTS	35
4.2.3 TEST PROCEDURES	37
4.2.4 DEVIATION FROM TEST STANDARD	37
4.2.5 TEST SETUP	38
4.2.6 EUT OPERATING CONDITIONS	38
4.2.7 TEST RESULTS	39
4.3 6DB BANDWIDTH MEASUREMENT.....	49
4.3.1 LIMITS OF 6DB BANDWIDTH MEASUREMENT	49
4.3.2 TEST INSTRUMENTS	49
4.3.3 TEST PROCEDURE	49
4.3.4 DEVIATION FROM TEST STANDARD	49
4.3.5 TEST SETUP	49
4.3.6 EUT OPERATING CONDITIONS	49
4.3.7 TEST RESULTS	50
4.4 CONDUCTED OUTPUT POWER MEASUREMENT	52
4.4.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT.....	52
4.4.2 TEST INSTRUMENTS	52
4.4.3 TEST PROCEDURES	52
4.4.4 DEVIATION FROM TEST STANDARD	53
4.4.5 TEST SETUP	53
4.4.6 EUT OPERATING CONDITIONS	53
4.4.7 TEST RESULTS	54
4.5 POWER SPECTRAL DENSITY MEASUREMENT.....	56
4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	56
4.5.2 TEST INSTRUMENTS	56
4.5.3 TEST PROCEDURE	56
4.5.4 DEVIATION FROM TEST STANDARD	56
4.5.5 TEST SETUP	56



A D T

4.5.6	EUT OPERATING CONDITION	56
4.5.7	TEST RESULTS	57
4.6	CONDUCTED OUT-BAND EMISSION MEASUREMENT.....	59
4.6.1	LIMITS OF CONDUCTED OUT-BAND EMISSION MEASUREMENT	59
4.6.2	TEST INSTRUMENTS	59
4.6.3	TEST PROCEDURE	59
4.6.4	DEVIATION FROM TEST STANDARD	60
4.6.5	TEST SETUP	60
4.6.6	EUT OPERATING CONDITION	60
4.6.7	TEST RESULTS	60
5.	PHOTOGRAPHS OF THE TEST CONFIGURATION.....	67
6.	INFORMATION ON THE TESTING LABORATORIES	68
7.	APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB.....	69



A D T

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF140515E03	Original release	June 27, 2014
RF140515E03 R1	Modified information of applicant.	July 29, 2014



A D T

1. CERTIFICATION

PRODUCT: WLAN Module
BRAND NAME: FOXCONN
MODEL NO.: J20H084ac, J20H084
TEST SAMPLE: ENGINEERING SAMPLE
APPLICANT: Sony Corporation
TESTED: May 27 to June 12, 2014
STANDARDS: **FCC Part 15, Subpart C (Section 15.247)**
ANSI C63.10-2009

The above equipment (Model: J20H084ac) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Phoenix Huang , **DATE:** July 29, 2014
(Phoenix Huang, Specialist)

APPROVED BY : May Chen , **DATE:** July 29, 2014
(May Chen, Manager)



A D T

2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 15, SUBPART C (SECTION 15.247)			
STANDARD SECTION	TEST TYPE	RESULT	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -15.24dB at 0.66563MHz
15.247(d) 15.209	Radiated Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -0.2dB at 4874MHz & 2483.50MHz
15.247(d)	Band Edge Measurement	PASS	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted Output power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	No antenna connector is used.

NOTE: 1. For WLAN: The EUT was operating in 2400 ~ 2483.5MHz, 5.15~5.35GHz, 5.47~5.725GHz and 5.725~5.850GHz frequencies band. This report was recorded the RF parameters including 2400 ~ 2483.5MHz. For the 5.15~5.35GHz, 5.47~5.725GHz and 5.725~5.850GHz RF parameters was recorded in another test report.



A D T

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Measurement	Value
Conducted emissions	2.86 dB
Radiated emissions (30MHz-1GHz) for Chamber H	5.43 dB
Radiated emissions (1GHz -6GHz) for Chamber G	3.65 dB
Radiated emissions (6GHz -18GHz) for Chamber H	3.88 dB
Radiated emissions (18GHz -40GHz)	4.11 dB



3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT (WLAN)

PRODUCT	WLAN Module
MODEL NO.	J20H084ac, J20H084
POWER SUPPLY	3.3Vdc \pm 5% (from host equipment)
MODULATION TYPE	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM 256QAM for OFDM in 11ac mode only
MODULATION TECHNOLOGY	DSSS,OFDM
TRANSFER RATE	802.11b: up to 11Mbps 802.11a / g: up to 54Mbps 802.11n: up to 300Mbps 802.11ac: up to 866.7Mbps
OPERATING FREQUENCY	For 15.407 5.18 ~ 5.24GHz, 5.26 ~ 5.32GHz, 5.50 ~ 5.70GHz, 5.745 ~ 5.825GHz
	For 15.247 2.412 ~ 2.462GHz
NUMBER OF CHANNEL	For 15.407 24 for 802.11a, 802.11n (HT20), 802.11ac (VHT20) 11 for 802.11n (HT40), 802.11ac (VHT40) 5 for 802.11ac (VHT80)
	For 15.247 11 for 802.11b, 802.11g, 802.11n (HT20)
MAXIMUM OUTPUT POWER	For 15.407 802.11a: 233.91mW 802.11ac (VHT20): 328.794mW 802.11ac (VHT40): 145.631mW 802.11ac (VHT80): 180.565mW
	For 15.247 802.11b: 325.835mW 802.11g: 709.261mW 802.11n (HT20): 700.427mW



A D T

ANTENNA TYPE	Please see NOTE
DATA CABLE	NA
I/O PORTS	Refer to user's manual
ASSOCIATED DEVICES	NA

NOTE:

1. The EUT has two model names which are the same hardware (chip). This different function (base on different model) is controlled by firmware, one is enable 802.11ac mode, the other is disable 802.11ac mode, but the hardware is identical.

Model Name	Different
J20H084ac	Chip support 802.11ac function.
J20H084	Chip doesn't support 802.11ac function.

From the above models, models: **J20H084ac** was selected as representative model for the test and its data was recorded in this report.

2. There are Bluetooth 4.0 and WLAN technology used for the EUT.
3. For WLAN, 2.4GHz and 5GHz technology can not transmit at same time.
4. The emission of the simultaneous operation (WLAN & Bluetooth) has been evaluated and no non-compliance was found.
5. The antennas provided to the EUT, please refer to the following table:

For WLAN								
Antenna No.	Transmitter Circuit	Brand	Model	Antenna Gain(dBi) < including cable loss>	Frequency range (GHz)	Antenna Type	Connecter Type	Cable Length
1	Chain (0)	Foxconn WiFi	J20H084	2.81	2.4	PCB printing	NA	NA
				3.05	2.45			
				3.40	2.5			
				3.50	5.15			
				3.28	5.45			
				3.79	5.85			
2	Chain (1)	Foxconn WiFi	J20H084	2.93	2.4	PCB printing	NA	NA
				2.91	2.45			
				2.76	2.5			
				2.96	5.15			
				2.57	5.45			
				2.82	5.85			



A D T

For BT used

Antenna No.	Brand	Model	Antenna Gain(dBi) <exclude cable loss>	Frequency range (MHz to MHz)	Cable Loss(dB)	Antenna Type	Connector Type	Cable Length (mm)
3	Foxconn Corporation	WDAN-S1TV0100-DH	-0.58	2400-2500	0.24	PIFA	UFL	100
4	Foxconn Corporation	WDAN-S1TV0300-DH	-0.58	2400-2500	0.7	PIFA	UFL	300
5	Foxconn Corporation	WDAN-S1TV0310-DH	-0.58	2400-2500	0.8	PIFA	UFL	310
6	Foxconn Corporation	WDAN-S1TV0320-DH	-0.58	2400-2500	0.8	PIFA	UFL	320
7	Foxconn Corporation	WDAN-S1TV0330-DH	-0.58	2400-2500	0.8	PIFA	UFL	330
8	Foxconn Corporation	WDAN-S1TV0340-DH	-0.58	2400-2500	0.8	PIFA	UFL	340
9	Foxconn Corporation	WDAN-S1TV0350-DH	-0.58	2400-2500	0.9	PIFA	UFL	350
10	Foxconn Corporation	WDAN-S1TV0360-DH	-0.58	2400-2500	0.9	PIFA	UFL	360
11	Foxconn Corporation	WDAN-S1TV0370-DH	-0.58	2400-2500	0.9	PIFA	UFL	370
12	Foxconn Corporation	WDAN-S1TV0380-DH	-0.58	2400-2500	0.9	PIFA	UFL	380
13	Foxconn Corporation	WDAN-S1TV0390-DH	-0.58	2400-2500	1.0	PIFA	UFL	390
14	Foxconn Corporation	WDAN-S1TV0400-DH	-0.58	2400-2500	1.0	PIFA	UFL	400
15	Foxconn Corporation	WDAN-S1TV0410-DH	-0.58	2400-2500	1.0	PIFA	UFL	410
16	Foxconn Corporation	WDAN-S1TV0420-DH	-0.58	2400-2500	1.0	PIFA	UFL	420
17	Foxconn Corporation	WDAN-S1TV0430-DH	-0.58	2400-2500	1.1	PIFA	UFL	430
18	Foxconn Corporation	WDAN-S1TV0440-DH	-0.58	2400-2500	1.1	PIFA	UFL	440
19	Foxconn Corporation	WDAN-S1TV0450-DH	-0.58	2400-2500	1.1	PIFA	UFL	450
20	Foxconn Corporation	WDAN-S1TV0460-DH	-0.58	2400-2500	1.1	PIFA	UFL	460



A D T

Antenna No.	Brand	Model	Antenna Gain(dBi) <exclude cable loss>	Frequency range (MHz to MHz)	Cable Loss(dB)	Antenna Type	Connector Type	Cable Length (mm)
21	Foxconn Corporation	WDAN-S1TV0470-DH	-0.58	2400-2500	1.2	PIFA	UFL	470
22	Foxconn Corporation	WDAN-S1TV0480-DH	-0.58	2400-2500	1.2	PIFA	UFL	480
23	Foxconn Corporation	WDAN-S1TV0490-DH	-0.58	2400-2500	1.2	PIFA	UFL	490
24	Foxconn Corporation	WDAN-S1TV0500-DH	-0.58	2400-2500	1.2	PIFA	UFL	500
25	Foxconn Corporation	WDAN-S1TV0510-DH	-0.58	2400-2500	1.2	PIFA	UFL	510
26	Foxconn Corporation	WDAN-S1TV0520-DH	-0.58	2400-2500	1.3	PIFA	UFL	520
27	Foxconn Corporation	WDAN-S1TV0530-DH	-0.58	2400-2500	1.3	PIFA	UFL	530
28	Foxconn Corporation	WDAN-S1TV0540-DH	-0.58	2400-2500	1.3	PIFA	UFL	540
29	Foxconn Corporation	WDAN-S1TV0550-DH	-0.58	2400-2500	1.3	PIFA	UFL	550
30	Foxconn Corporation	WDAN-S1TV0560-DH	-0.58	2400-2500	1.4	PIFA	UFL	560
31	Foxconn Corporation	WDAN-S1TV0570-DH	-0.58	2400-2500	1.4	PIFA	UFL	570
32	Foxconn Corporation	WDAN-S1TV0580-DH	-0.58	2400-2500	1.4	PIFA	UFL	580
33	Foxconn Corporation	WDAN-S1TV0590-DH	-0.58	2400-2500	1.4	PIFA	UFL	590
34	Foxconn Corporation	WDAN-S1TV0600-DH	-0.58	2400-2500	1.5	PIFA	UFL	600
35	Foxconn Corporation	WDAN-S1TV0610-DH	-0.58	2400-2500	1.5	PIFA	UFL	610
36	Foxconn Corporation	WDAN-S1TV0620-DH	-0.58	2400-2500	1.5	PIFA	UFL	620
37	Foxconn Corporation	WDAN-S1TV0630-DH	-0.58	2400-2500	1.5	PIFA	UFL	630
38	Foxconn Corporation	WDAN-S1TV0640-DH	-0.58	2400-2500	1.6	PIFA	UFL	640
39	Foxconn Corporation	WDAN-S1TV0650-DH	-0.58	2400-2500	1.6	PIFA	UFL	650
40	Foxconn Corporation	WDAN-S1TV0660-DH	-0.58	2400-2500	1.6	PIFA	UFL	660



A D T

Antenna No.	Brand	Model	Antenna Gain(dBi) <exclude cable loss>	Frequency range (MHz to MHz)	Cable Loss(dB)	Antenna Type	Connector Type	Cable Length (mm)
41	Foxconn Corporation	WDAN-S1TV0670-DH	-0.58	2400-2500	1.6	PIFA	UFL	670
42	Foxconn Corporation	WDAN-S1TV0680-DH	-0.58	2400-2500	1.7	PIFA	UFL	680
43	Foxconn Corporation	WDAN-S1TV0690-DH	-0.58	2400-2500	1.7	PIFA	UFL	690
44	Foxconn Corporation	WDAN-S1TV0700-DH	-0.58	2400-2500	1.7	PIFA	UFL	700
45	Foxconn Corporation	WDAN-S1TV0710-DH	-0.58	2400-2500	1.7	PIFA	UFL	710
46	Foxconn Corporation	WDAN-S1TV0720-DH	-0.58	2400-2500	1.7	PIFA	UFL	720
47	Foxconn Corporation	WDAN-S1TV0730-DH	-0.58	2400-2500	1.8	PIFA	UFL	730
48	Foxconn Corporation	WDAN-S1TV0740-DH	-0.58	2400-2500	1.8	PIFA	UFL	740
49	Foxconn Corporation	WDAN-S1TV0750-DH	-0.58	2400-2500	1.8	PIFA	UFL	750
50	Foxconn Corporation	WDAN-S1TV0760-DH	-0.58	2400-2500	1.8	PIFA	UFL	760
51	Foxconn Corporation	WDAN-S1TV0770-DH	-0.58	2400-2500	1.9	PIFA	UFL	770
52	Foxconn Corporation	WDAN-S1TV0780-DH	-0.58	2400-2500	1.9	PIFA	UFL	780
53	Foxconn Corporation	WDAN-S1TV0790-DH	-0.58	2400-2500	1.9	PIFA	UFL	790
54	Foxconn Corporation	WDAN-S1TV0800-DH	-0.58	2400-2500	1.9	PIFA	UFL	800
55	Foxconn Corporation	WDAN-S1TV0810-DH	-0.58	2400-2500	2.0	PIFA	UFL	810
56	Foxconn Corporation	WDAN-S1TV0820-DH	-0.58	2400-2500	2.0	PIFA	UFL	820
57	Foxconn Corporation	WDAN-S1TV0830-DH	-0.58	2400-2500	2.0	PIFA	UFL	830
58	Foxconn Corporation	WDAN-S1TV0840-DH	-0.58	2400-2500	2.0	PIFA	UFL	840
59	Foxconn Corporation	WDAN-S1TV0850-DH	-0.58	2400-2500	2.1	PIFA	UFL	850
60	Foxconn Corporation	WDAN-S1TV0860-DH	-0.58	2400-2500	2.1	PIFA	UFL	860



A D T

Antenna No.	Brand	Model	Antenna Gain(dBi) <exclude cable loss>	Frequency range (MHz to MHz)	Cable Loss(dB)	Antenna Type	Connector Type	Cable Length (mm)
61	Foxconn Corporation	WDAN-S1TV0870-DH	-0.58	2400-2500	2.1	PIFA	UFL	870
62	Foxconn Corporation	WDAN-S1TV0880-DH	-0.58	2400-2500	2.1	PIFA	UFL	880
63	Foxconn Corporation	WDAN-S1TV0890-DH	-0.58	2400-2500	2.2	PIFA	UFL	890
64	Foxconn Corporation	WDAN-S1TV0900-DH	-0.58	2400-2500	2.2	PIFA	UFL	900
65	Foxconn Corporation	WDAN-S1TV0910-DH	-0.58	2400-2500	2.2	PIFA	UFL	910
66	Foxconn Corporation	WDAN-S1TV0920-DH	-0.58	2400-2500	2.2	PIFA	UFL	920
67	Foxconn Corporation	WDAN-S1TV0930-DH	-0.58	2400-2500	2.3	PIFA	UFL	930
68	Foxconn Corporation	WDAN-S1TV0940-DH	-0.58	2400-2500	2.3	PIFA	UFL	940
69	Foxconn Corporation	WDAN-S1TV0950-DH	-0.58	2400-2500	2.3	PIFA	UFL	950
70	Foxconn Corporation	WDAN-S1TV0960-DH	-0.58	2400-2500	2.3	PIFA	UFL	960
71	Foxconn Corporation	WDAN-S1TV0970-DH	-0.58	2400-2500	2.3	PIFA	UFL	970
72	Foxconn Corporation	WDAN-S1TV0980-DH	-0.58	2400-2500	2.4	PIFA	UFL	980
73	Foxconn Corporation	WDAN-S1TV0990-DH	-0.58	2400-2500	2.4	PIFA	UFL	990
74	Foxconn Corporation	WDAN-S1TV1000-DH	-0.58	2400-2500	2.4	PIFA	UFL	1000
75	Foxconn Corporation	WDAN-S1TV1010-DH	-0.58	2400-2500	2.4	PIFA	UFL	1010
76	Foxconn Corporation	WDAN-S1TV1020-DH	-0.58	2400-2500	2.5	PIFA	UFL	1020
77	Foxconn Corporation	WDAN-S1TV1030-DH	-0.58	2400-2500	2.5	PIFA	UFL	1030
78	Foxconn Corporation	WDAN-S1TV1040-DH	-0.58	2400-2500	2.5	PIFA	UFL	1040
79	Foxconn Corporation	WDAN-S1TV1050-DH	-0.58	2400-2500	2.5	PIFA	UFL	1050
80	Foxconn Corporation	WDAN-S1TV1060-DH	-0.58	2400-2500	2.6	PIFA	UFL	1060



A D T

Antenna No.	Brand	Model	Antenna Gain(dBi) <exclude cable loss>	Frequency range (MHz to MHz)	Cable Loss(dB)	Antenna Type	Connector Type	Cable Length (mm)
81	Foxconn Corporation	WDAN-S1TV1070-DH	-0.58	2400-2500	2.6	PIFA	UFL	1070
82	Foxconn Corporation	WDAN-S1TV1080-DH	-0.58	2400-2500	2.6	PIFA	UFL	1080
83	Foxconn Corporation	WDAN-S1TV1090-DH	-0.58	2400-2500	2.6	PIFA	UFL	1090
84	Foxconn Corporation	WDAN-S1TV1100-DH	-0.58	2400-2500	2.7	PIFA	UFL	1100
85	Foxconn Corporation	WDAN-S1TV1110-DH	-0.58	2400-2500	2.7	PIFA	UFL	1110
86	Foxconn Corporation	WDAN-S1TV1120-DH	-0.58	2400-2500	2.7	PIFA	UFL	1120
87	Foxconn Corporation	WDAN-S1TV1130-DH	-0.58	2400-2500	2.7	PIFA	UFL	1130
88	Foxconn Corporation	WDAN-S1TV1140-DH	-0.58	2400-2500	2.8	PIFA	UFL	1140
89	Foxconn Corporation	WDAN-S1TV1150-DH	-0.58	2400-2500	2.8	PIFA	UFL	1150
90	Foxconn Corporation	WDAN-S1TV1160-DH	-0.58	2400-2500	2.8	PIFA	UFL	1160
91	Foxconn Corporation	WDAN-S1TV1170-DH	-0.58	2400-2500	2.8	PIFA	UFL	1170
92	Foxconn Corporation	WDAN-S1TV1180-DH	-0.58	2400-2500	2.8	PIFA	UFL	1180
93	Foxconn Corporation	WDAN-S1TV1190-DH	-0.58	2400-2500	2.9	PIFA	UFL	1190
94	Foxconn Corporation	WDAN-S1TV1200-DH	-0.58	2400-2500	2.9	PIFA	UFL	1200
95	Foxconn Corporation	WDAN-S1TV1210-DH	-0.58	2400-2500	2.9	PIFA	UFL	1210
96	Foxconn Corporation	WDAN-S1TV1220-DH	-0.58	2400-2500	2.9	PIFA	UFL	1220
97	Foxconn Corporation	WDAN-S1TV1230-DH	-0.58	2400-2500	3.0	PIFA	UFL	1230
98	Foxconn Corporation	WDAN-S1TV1240-DH	-0.58	2400-2500	3.0	PIFA	UFL	1240
99	Foxconn Corporation	WDAN-S1TV1250-DH	-0.58	2400-2500	3.0	PIFA	UFL	1250
100	Foxconn Corporation	WDAN-S1TV1260-DH	-0.58	2400-2500	3.0	PIFA	UFL	1260



A D T

Antenna No.	Brand	Model	Antenna Gain(dBi) <exclude cable loss>	Frequency range (MHz to MHz)	Cable Loss(dB)	Antenna Type	Connector Type	Cable Length (mm)
101	Foxconn Corporation	WDAN-S1TV1270-DH	-0.58	2400-2500	3.1	PIFA	UFL	1270
102	Foxconn Corporation	WDAN-S1TV1280-DH	-0.58	2400-2500	3.1	PIFA	UFL	1280
103	Foxconn Corporation	WDAN-S1TV1290-DH	-0.58	2400-2500	3.1	PIFA	UFL	1290
104	Foxconn Corporation	WDAN-S1TV1300-DH	-0.58	2400-2500	3.1	PIFA	UFL	1300
105	Foxconn Corporation	WDAN-S1TV1310-DH	-0.58	2400-2500	3.2	PIFA	UFL	1310
106	Foxconn Corporation	WDAN-S1TV1320-DH	-0.58	2400-2500	3.2	PIFA	UFL	1320
107	Foxconn Corporation	WDAN-S1TV1330-DH	-0.58	2400-2500	3.2	PIFA	UFL	1330
108	Foxconn Corporation	WDAN-S1TV1340-DH	-0.58	2400-2500	3.2	PIFA	UFL	1340
109	Foxconn Corporation	WDAN-S1TV1350-DH	-0.58	2400-2500	3.3	PIFA	UFL	1350
110	Foxconn Corporation	WDAN-S1TV1360-DH	-0.58	2400-2500	3.3	PIFA	UFL	1360
111	Foxconn Corporation	WDAN-S1TV1370-DH	-0.58	2400-2500	3.3	PIFA	UFL	1370
112	Foxconn Corporation	WDAN-S1TV1380-DH	-0.58	2400-2500	3.3	PIFA	UFL	1380
113	Foxconn Corporation	WDAN-S1TV1390-DH	-0.58	2400-2500	3.3	PIFA	UFL	1390
114	Foxconn Corporation	WDAN-S1TV1400-DH	-0.58	2400-2500	3.4	PIFA	UFL	1400
115	Foxconn Corporation	WDAN-S1TV1410-DH	-0.58	2400-2500	3.4	PIFA	UFL	1410
116	Foxconn Corporation	WDAN-S1TV1420-DH	-0.58	2400-2500	3.4	PIFA	UFL	1420
117	Foxconn Corporation	WDAN-S1TV1430-DH	-0.58	2400-2500	3.4	PIFA	UFL	1430
118	Foxconn Corporation	WDAN-S1TV1440-DH	-0.58	2400-2500	3.5	PIFA	UFL	1440
119	Foxconn Corporation	WDAN-S1TV1450-DH	-0.58	2400-2500	3.5	PIFA	UFL	1450
120	Foxconn Corporation	WDAN-S1TV1460-DH	-0.58	2400-2500	3.5	PIFA	UFL	1460



A D T

Antenna No.	Brand	Model	Antenna Gain(dBi) <exclude cable loss>	Frequency range (MHz to MHz)	Cable Loss(dB)	Antenna Type	Connector Type	Cable Length (mm)
121	Foxconn Corporation	WDAN-S1TV1470-DH	-0.58	2400-2500	3.5	PIFA	UFL	1470
122	Foxconn Corporation	WDAN-S1TV1480-DH	-0.58	2400-2500	3.6	PIFA	UFL	1480
123	Foxconn Corporation	WDAN-S1TV1490-DH	-0.58	2400-2500	3.6	PIFA	UFL	1490
124	Foxconn Corporation	WDAN-S1TV1500-DH	-0.58	2400-2500	3.6	PIFA	UFL	1500
125	Foxconn Corporation	WDAN-S1TV1510-DH	-0.58	2400-2500	3.6	PIFA	UFL	1510
126	Foxconn Corporation	WDAN-S1TV1520-DH	-0.58	2400-2500	3.7	PIFA	UFL	1520
127	Foxconn Corporation	WDAN-S1TV1530-DH	-0.58	2400-2500	3.7	PIFA	UFL	1530
128	Foxconn Corporation	WDAN-S1TV1540-DH	-0.58	2400-2500	3.7	PIFA	UFL	1540
129	Foxconn Corporation	WDAN-S1TV1550-DH	-0.58	2400-2500	3.7	PIFA	UFL	1550
130	Foxconn Corporation	WDAN-S1TV1560-DH	-0.58	2400-2500	3.8	PIFA	UFL	1560
131	Foxconn Corporation	WDAN-S1TV1570-DH	-0.58	2400-2500	3.8	PIFA	UFL	1570
132	Foxconn Corporation	WDAN-S1TV1580-DH	-0.58	2400-2500	3.8	PIFA	UFL	1580
133	Foxconn Corporation	WDAN-S1TV1590-DH	-0.58	2400-2500	3.8	PIFA	UFL	1590
134	Foxconn Corporation	WDAN-S1TV1600-DH	-0.58	2400-2500	3.9	PIFA	UFL	1600
135	Foxconn Corporation	WDAN-S1TV1610-DH	-0.58	2400-2500	3.9	PIFA	UFL	1610
136	Foxconn Corporation	WDAN-S1TV1620-DH	-0.58	2400-2500	3.9	PIFA	UFL	1620
137	Foxconn Corporation	WDAN-S1TV1630-DH	-0.58	2400-2500	3.9	PIFA	UFL	1630
138	Foxconn Corporation	WDAN-S1TV1640-DH	-0.58	2400-2500	3.9	PIFA	UFL	1640
139	Foxconn Corporation	WDAN-S1TV1650-DH	-0.58	2400-2500	4.0	PIFA	UFL	1650
140	Foxconn Corporation	WDAN-S1TV1660-DH	-0.58	2400-2500	4.0	PIFA	UFL	1660



A D T

Antenna No.	Brand	Model	Antenna Gain(dBi) <exclude cable loss>	Frequency range (MHz to MHz)	Cable Loss(dB)	Antenna Type	Connector Type	Cable Length (mm)
141	Foxconn Corporation	WDAN-S1TV1670-DH	-0.58	2400-2500	4.0	PIFA	UFL	1670
142	Foxconn Corporation	WDAN-S1TV1680-DH	-0.58	2400-2500	4.0	PIFA	UFL	1680
143	Foxconn Corporation	WDAN-S1TV1690-DH	-0.58	2400-2500	4.1	PIFA	UFL	1690
144	Foxconn Corporation	WDAN-S1TV1700-DH	-0.58	2400-2500	4.1	PIFA	UFL	1700
145	Foxconn Corporation	WDAN-S1TV1710-DH	-0.58	2400-2500	4.1	PIFA	UFL	1710
146	Foxconn Corporation	WDAN-S1TV1720-DH	-0.58	2400-2500	4.1	PIFA	UFL	1720
147	Foxconn Corporation	WDAN-S1TV1730-DH	-0.58	2400-2500	4.2	PIFA	UFL	1730
148	Foxconn Corporation	WDAN-S1TV1740-DH	-0.58	2400-2500	4.2	PIFA	UFL	1740
149	Foxconn Corporation	WDAN-S1TV1750-DH	-0.58	2400-2500	4.2	PIFA	UFL	1750
150	Foxconn Corporation	WDAN-S1TV1760-DH	-0.58	2400-2500	4.2	PIFA	UFL	1760
151	Foxconn Corporation	WDAN-S1TV1770-DH	-0.58	2400-2500	4.3	PIFA	UFL	1770
152	Foxconn Corporation	WDAN-S1TV1780-DH	-0.58	2400-2500	4.3	PIFA	UFL	1780
153	Foxconn Corporation	WDAN-S1TV1790-DH	-0.58	2400-2500	4.3	PIFA	UFL	1790
154	Foxconn Corporation	WDAN-S1TV1800-DH	-0.58	2400-2500	4.3	PIFA	UFL	1800
155	Foxconn Corporation	WDAN-S1TV2000-DH	-0.58	2400-2500	4.8	PIFA	UFL	2000
156	SAA	SN6506-11-010-C	-2.42	2400-2500	0.5	PIFA	UFL	100
157	SAA	SN6506-11-030-C	-2.42	2400-2500	1.1	PIFA	UFL	300
158	SAA	SN6506-11-031-C	-2.42	2400-2500	1.1	PIFA	UFL	310
159	SAA	SN6506-11-032-C	-2.42	2400-2500	1.1	PIFA	UFL	320
160	SAA	SN6506-11-033-C	-2.42	2400-2500	1.1	PIFA	UFL	330
161	SAA	SN6506-11-034-C	-2.42	2400-2500	1.2	PIFA	UFL	340
162	SAA	SN6506-11-035-C	-2.42	2400-2500	1.2	PIFA	UFL	350
163	SAA	SN6506-11-036-C	-2.42	2400-2500	1.2	PIFA	UFL	360
164	SAA	SN6506-11-037-C	-2.42	2400-2500	1.2	PIFA	UFL	370
165	SAA	SN6506-11-038-C	-2.42	2400-2500	1.3	PIFA	UFL	380

**A D T**

Antenna No.	Brand	Model	Antenna Gain(dBi) <exclude cable loss>	Frequency range (MHz to MHz)	Cable Loss(dB)	Antenna Type	Connector Type	Cable Length (mm)
166	SAA	SN6506-11-039-C	-2.42	2400-2500	1.3	PIFA	UFL	390
167	SAA	SN6506-11-040-C	-2.42	2400-2500	1.3	PIFA	UFL	400
168	SAA	SN6506-11-041-C	-2.42	2400-2500	1.3	PIFA	UFL	410
169	SAA	SN6506-11-042-C	-2.42	2400-2500	1.4	PIFA	UFL	420
170	SAA	SN6506-11-043-C	-2.42	2400-2500	1.4	PIFA	UFL	430
171	SAA	SN6506-11-044-C	-2.42	2400-2500	1.4	PIFA	UFL	440
172	SAA	SN6506-11-045-C	-2.42	2400-2500	1.5	PIFA	UFL	450
173	SAA	SN6506-11-046-C	-2.42	2400-2500	1.5	PIFA	UFL	460
174	SAA	SN6506-11-047-C	-2.42	2400-2500	1.5	PIFA	UFL	470
175	SAA	SN6506-11-048-C	-2.42	2400-2500	1.5	PIFA	UFL	480
176	SAA	SN6506-11-049-C	-2.42	2400-2500	1.6	PIFA	UFL	490
177	SAA	SN6506-11-050-C	-2.42	2400-2500	1.6	PIFA	UFL	500
178	SAA	SN6506-11-051-C	-2.42	2400-2500	1.6	PIFA	UFL	510
179	SAA	SN6506-11-052-C	-2.42	2400-2500	1.6	PIFA	UFL	520
180	SAA	SN6506-11-053-C	-2.42	2400-2500	1.7	PIFA	UFL	530
181	SAA	SN6506-11-054-C	-2.42	2400-2500	1.7	PIFA	UFL	540
182	SAA	SN6506-11-055-C	-2.42	2400-2500	1.7	PIFA	UFL	550
183	SAA	SN6506-11-056-C	-2.42	2400-2500	1.7	PIFA	UFL	560
184	SAA	SN6506-11-057-C	-2.42	2400-2500	1.8	PIFA	UFL	570
185	SAA	SN6506-11-058-C	-2.42	2400-2500	1.8	PIFA	UFL	580
186	SAA	SN6506-11-059-C	-2.42	2400-2500	1.8	PIFA	UFL	590
187	SAA	SN6506-11-060-C	-2.42	2400-2500	1.8	PIFA	UFL	600
188	SAA	SN6506-11-061-C	-2.42	2400-2500	1.9	PIFA	UFL	610
189	SAA	SN6506-11-062-C	-2.42	2400-2500	1.9	PIFA	UFL	620
190	SAA	SN6506-11-063-C	-2.42	2400-2500	1.9	PIFA	UFL	630
191	SAA	SN6506-11-064-C	-2.42	2400-2500	2.0	PIFA	UFL	640
192	SAA	SN6506-11-065-C	-2.42	2400-2500	2.0	PIFA	UFL	650
193	SAA	SN6506-11-066-C	-2.42	2400-2500	2.0	PIFA	UFL	660
194	SAA	SN6506-11-067-C	-2.42	2400-2500	2.0	PIFA	UFL	670
195	SAA	SN6506-11-068-C	-2.42	2400-2500	2.1	PIFA	UFL	680
196	SAA	SN6506-11-069-C	-2.42	2400-2500	2.1	PIFA	UFL	690
197	SAA	SN6506-11-070-C	-2.42	2400-2500	2.1	PIFA	UFL	700
198	SAA	SN6506-11-071-C	-2.42	2400-2500	2.1	PIFA	UFL	710
199	SAA	SN6506-11-072-C	-2.42	2400-2500	2.2	PIFA	UFL	720
200	SAA	SN6506-11-073-C	-2.42	2400-2500	2.2	PIFA	UFL	730

**A D T**

Antenna No.	Brand	Model	Antenna Gain(dBi) <exclude cable loss>	Frequency range (MHz to MHz)	Cable Loss(dB)	Antenna Type	Connector Type	Cable Length (mm)
201	SAA	SN6506-11-074-C	-2.42	2400-2500	2.2	PIFA	UFL	740
202	SAA	SN6506-11-075-C	-2.42	2400-2500	2.2	PIFA	UFL	750
203	SAA	SN6506-11-076-C	-2.42	2400-2500	2.3	PIFA	UFL	760
204	SAA	SN6506-11-077-C	-2.42	2400-2500	2.3	PIFA	UFL	770
205	SAA	SN6506-11-078-C	-2.42	2400-2500	2.3	PIFA	UFL	780
206	SAA	SN6506-11-079-C	-2.42	2400-2500	2.3	PIFA	UFL	790
207	SAA	SN6506-11-080-C	-2.42	2400-2500	2.4	PIFA	UFL	800
208	SAA	SN6506-11-081-C	-2.42	2400-2500	2.4	PIFA	UFL	810
209	SAA	SN6506-11-082-C	-2.42	2400-2500	2.4	PIFA	UFL	820
210	SAA	SN6506-11-083-C	-2.42	2400-2500	2.5	PIFA	UFL	830
211	SAA	SN6506-11-084-C	-2.42	2400-2500	2.5	PIFA	UFL	840
212	SAA	SN6506-11-085-C	-2.42	2400-2500	2.5	PIFA	UFL	850
213	SAA	SN6506-11-086-C	-2.42	2400-2500	2.5	PIFA	UFL	860
214	SAA	SN6506-11-087-C	-2.42	2400-2500	2.6	PIFA	UFL	870
215	SAA	SN6506-11-088-C	-2.42	2400-2500	2.6	PIFA	UFL	880
216	SAA	SN6506-11-089-C	-2.42	2400-2500	2.6	PIFA	UFL	890
217	SAA	SN6506-11-090-C	-2.42	2400-2500	2.6	PIFA	UFL	900
218	SAA	SN6506-11-091-C	-2.42	2400-2500	2.7	PIFA	UFL	910
219	SAA	SN6506-11-092-C	-2.42	2400-2500	2.7	PIFA	UFL	920
220	SAA	SN6506-11-093-C	-2.42	2400-2500	2.7	PIFA	UFL	930
221	SAA	SN6506-11-094-C	-2.42	2400-2500	2.7	PIFA	UFL	940
222	SAA	SN6506-11-095-C	-2.42	2400-2500	2.8	PIFA	UFL	950
223	SAA	SN6506-11-096-C	-2.42	2400-2500	2.8	PIFA	UFL	960
224	SAA	SN6506-11-097-C	-2.42	2400-2500	2.8	PIFA	UFL	970
225	SAA	SN6506-11-098-C	-2.42	2400-2500	2.8	PIFA	UFL	980
226	SAA	SN6506-11-099-C	-2.42	2400-2500	2.9	PIFA	UFL	990
227	SAA	SN6506-11-100-C	-2.42	2400-2500	2.9	PIFA	UFL	1000
228	SAA	SN6506-11-101-C	-2.42	2400-2500	2.9	PIFA	UFL	1010
229	SAA	SN6506-11-102-C	-2.42	2400-2500	3.0	PIFA	UFL	1020
230	SAA	SN6506-11-103-C	-2.42	2400-2500	3.0	PIFA	UFL	1030
231	SAA	SN6506-11-104-C	-2.42	2400-2500	3.0	PIFA	UFL	1040
232	SAA	SN6506-11-105-C	-2.42	2400-2500	3.0	PIFA	UFL	1050
233	SAA	SN6506-11-106-C	-2.42	2400-2500	3.1	PIFA	UFL	1060
234	SAA	SN6506-11-107-C	-2.42	2400-2500	3.1	PIFA	UFL	1070
235	SAA	SN6506-11-108-C	-2.42	2400-2500	3.1	PIFA	UFL	1080



A D T

Antenna No.	Brand	Model	Antenna Gain(dBi) <exclude cable loss>	Frequency range (MHz to MHz)	Cable Loss(dB)	Antenna Type	Connector Type	Cable Length (mm)
236	SAA	SN6506-11-109-C	-2.42	2400-2500	3.1	PIFA	UFL	1090
237	SAA	SN6506-11-110-C	-2.42	2400-2500	3.2	PIFA	UFL	1100
238	SAA	SN6506-11-111-C	-2.42	2400-2500	3.2	PIFA	UFL	1110
239	SAA	SN6506-11-112-C	-2.42	2400-2500	3.2	PIFA	UFL	1120
240	SAA	SN6506-11-113-C	-2.42	2400-2500	3.2	PIFA	UFL	1130
241	SAA	SN6506-11-114-C	-2.42	2400-2500	3.3	PIFA	UFL	1140
242	SAA	SN6506-11-115-C	-2.42	2400-2500	3.3	PIFA	UFL	1150
243	SAA	SN6506-11-116-C	-2.42	2400-2500	3.3	PIFA	UFL	1160
244	SAA	SN6506-11-117-C	-2.42	2400-2500	3.3	PIFA	UFL	1170
245	SAA	SN6506-11-118-C	-2.42	2400-2500	3.4	PIFA	UFL	1180
246	SAA	SN6506-11-119-C	-2.42	2400-2500	3.4	PIFA	UFL	1190
247	SAA	SN6506-11-120-C	-2.42	2400-2500	3.4	PIFA	UFL	1200
248	SAA	SN6506-11-121-C	-2.42	2400-2500	3.5	PIFA	UFL	1210
249	SAA	SN6506-11-122-C	-2.42	2400-2500	3.5	PIFA	UFL	1220
250	SAA	SN6506-11-123-C	-2.42	2400-2500	3.5	PIFA	UFL	1230
251	SAA	SN6506-11-124-C	-2.42	2400-2500	3.5	PIFA	UFL	1240
252	SAA	SN6506-11-125-C	-2.42	2400-2500	3.6	PIFA	UFL	1250
253	SAA	SN6506-11-126-C	-2.42	2400-2500	3.6	PIFA	UFL	1260
254	SAA	SN6506-11-127-C	-2.42	2400-2500	3.6	PIFA	UFL	1270
255	SAA	SN6506-11-128-C	-2.42	2400-2500	3.6	PIFA	UFL	1280
256	SAA	SN6506-11-129-C	-2.42	2400-2500	3.7	PIFA	UFL	1290
257	SAA	SN6506-11-130-C	-2.42	2400-2500	3.7	PIFA	UFL	1300
258	SAA	SN6506-11-131-C	-2.42	2400-2500	3.7	PIFA	UFL	1310
259	SAA	SN6506-11-132-C	-2.42	2400-2500	3.7	PIFA	UFL	1320
260	SAA	SN6506-11-133-C	-2.42	2400-2500	3.8	PIFA	UFL	1330
261	SAA	SN6506-11-134-C	-2.42	2400-2500	3.8	PIFA	UFL	1340
262	SAA	SN6506-11-135-C	-2.42	2400-2500	3.8	PIFA	UFL	1350
263	SAA	SN6506-11-136-C	-2.42	2400-2500	3.8	PIFA	UFL	1360
264	SAA	SN6506-11-137-C	-2.42	2400-2500	3.9	PIFA	UFL	1370
265	SAA	SN6506-11-138-C	-2.42	2400-2500	3.9	PIFA	UFL	1380
266	SAA	SN6506-11-139-C	-2.42	2400-2500	3.9	PIFA	UFL	1390
267	SAA	SN6506-11-140-C	-2.42	2400-2500	4.0	PIFA	UFL	1400
268	SAA	SN6506-11-141-C	-2.42	2400-2500	4.0	PIFA	UFL	1410
269	SAA	SN6506-11-142-C	-2.42	2400-2500	4.0	PIFA	UFL	1420
270	SAA	SN6506-11-143-C	-2.42	2400-2500	4.0	PIFA	UFL	1430



A D T

Antenna No.	Brand	Model	Antenna Gain(dBi) <exclude cable loss>	Frequency range (MHz to MHz)	Cable Loss(dB)	Antenna Type	Connector Type	Cable Length (mm)
271	SAA	SN6506-11-144-C	-2.42	2400-2500	4.1	PIFA	UFL	1440
272	SAA	SN6506-11-145-C	-2.42	2400-2500	4.1	PIFA	UFL	1450
273	SAA	SN6506-11-146-C	-2.42	2400-2500	4.1	PIFA	UFL	1460
274	SAA	SN6506-11-147-C	-2.42	2400-2500	4.1	PIFA	UFL	1470
275	SAA	SN6506-11-148-C	-2.42	2400-2500	4.2	PIFA	UFL	1480
276	SAA	SN6506-11-149-C	-2.42	2400-2500	4.2	PIFA	UFL	1490
277	SAA	SN6506-11-150-C	-2.42	2400-2500	4.2	PIFA	UFL	1500
278	SAA	SN6506-11-151-C	-2.42	2400-2500	4.2	PIFA	UFL	1510
279	SAA	SN6506-11-152-C	-2.42	2400-2500	4.3	PIFA	UFL	1520
280	SAA	SN6506-11-153-C	-2.42	2400-2500	4.3	PIFA	UFL	1530
281	SAA	SN6506-11-154-C	-2.42	2400-2500	4.3	PIFA	UFL	1540
282	SAA	SN6506-11-155-C	-2.42	2400-2500	4.3	PIFA	UFL	1550
283	SAA	SN6506-11-156-C	-2.42	2400-2500	4.4	PIFA	UFL	1560
284	SAA	SN6506-11-157-C	-2.42	2400-2500	4.4	PIFA	UFL	1570
285	SAA	SN6506-11-158-C	-2.42	2400-2500	4.4	PIFA	UFL	1580
286	SAA	SN6506-11-159-C	-2.42	2400-2500	4.5	PIFA	UFL	1590
287	SAA	SN6506-11-160-C	-2.42	2400-2500	4.5	PIFA	UFL	1600
288	SAA	SN6506-11-161-C	-2.42	2400-2500	4.5	PIFA	UFL	1610
289	SAA	SN6506-11-162-C	-2.42	2400-2500	4.5	PIFA	UFL	1620
290	SAA	SN6506-11-163-C	-2.42	2400-2500	4.6	PIFA	UFL	1630
291	SAA	SN6506-11-164-C	-2.42	2400-2500	4.6	PIFA	UFL	1640
292	SAA	SN6506-11-165-C	-2.42	2400-2500	4.6	PIFA	UFL	1650
293	SAA	SN6506-11-166-C	-2.42	2400-2500	4.6	PIFA	UFL	1660
294	SAA	SN6506-11-167-C	-2.42	2400-2500	4.7	PIFA	UFL	1670
295	SAA	SN6506-11-168-C	-2.42	2400-2500	4.7	PIFA	UFL	1680
296	SAA	SN6506-11-169-C	-2.42	2400-2500	4.7	PIFA	UFL	1690
297	SAA	SN6506-11-170-C	-2.42	2400-2500	4.7	PIFA	UFL	1700
298	SAA	SN6506-11-171-C	-2.42	2400-2500	4.8	PIFA	UFL	1710
299	SAA	SN6506-11-172-C	-2.42	2400-2500	4.8	PIFA	UFL	1720
300	SAA	SN6506-11-173-C	-2.42	2400-2500	4.8	PIFA	UFL	1730



A D T

Antenna No.	Brand	Model	Antenna Gain(dBi) <exclude cable loss>	Frequency range (MHz to MHz)	Cable Loss(dB)	Antenna Type	Connector Type	Cable Length (mm)
301	SAA	SN6506-11-174-C	-2.42	2400-2500	4.8	PIFA	UFL	1740
302	SAA	SN6506-11-175-C	-2.42	2400-2500	4.9	PIFA	UFL	1750
303	SAA	SN6506-11-176-C	-2.42	2400-2500	4.9	PIFA	UFL	1760
304	SAA	SN6506-11-177-C	-2.42	2400-2500	4.9	PIFA	UFL	1770
305	SAA	SN6506-11-178-C	-2.42	2400-2500	5.0	PIFA	UFL	1780
306	SAA	SN6506-11-179-C	-2.42	2400-2500	5.0	PIFA	UFL	1790
307	SAA	SN6506-11-180-C	-2.42	2400-2500	5.0	PIFA	UFL	1800
308	SAA	SN6506-11-200-C	-2.42	2400-2500	5.5	PIFA	UFL	2000

From the above antennas for BT used, the **Ant. No.: 3** (BT max antenna gain: -0.82dBi) were selected as representative value for the test and its data was recorded in this report.

6. The EUT incorporates a MIMO function without beamforming.

MODULATION MODE	DATA RATE (MCS)	TX & RX CONFIGURATION	
802.11a	6 ~ 54Mbps	2TX	2RX
802.11b	1 ~ 11Mbps	2TX	2RX
802.11g	6 ~ 54Mbps	2TX	2RX
802.11n (HT20)	MCS 0~7	2TX	2RX
	MCS 8~15	2TX	2RX
802.11n (HT40) (5GHz)	MCS 0~7	2TX	2RX
	MCS 8~15	2TX	2RX
802.11ac (VHT20) (5GHz)	MCS0~8 (256QAM) Nss= 1	2TX	2RX
	MCS0~8 (256QAM) Nss= 2	2TX	2RX
802.11ac (VHT40) (5GHz)	MCS0~9 (256QAM) Nss= 1	2TX	2RX
	MCS0~9 (256QAM) Nss= 2	2TX	2RX
802.11ac (VHT80) (5GHz)	MCS0~9 (256QAM) Nss= 1	2TX	2RX
	MCS0~9 (256QAM) Nss= 2	2TX	2RX

Note: The modulation and bandwidth are similar for 802.11n mode for 20MHz (40MHz) and 802.11ac mode for 20MHz (40MHz), therefore investigated worst case to representative mode in test report. (Final test mode refer section 3.2.1)

7. The above EUT information was declared by the manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.



A D T

3.2 DESCRIPTION OF TEST MODES

Operated in 2400 ~ 2483.5MHz band:

11 channels are provided for 802.11b, 802.11g, 802.11n (HT20):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412MHz	7	2442MHz
2	2417MHz	8	2447MHz
3	2422MHz	9	2452MHz
4	2427MHz	10	2457MHz
5	2432MHz	11	2462MHz
6	2437MHz		



3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT CONFIGURE MODE	APPLICABLE TO					DESCRIPTION
	PLC	RE < 1G	RE ≥ 1G	APCM	OB	
-	√	√	√	√	√	-

Where **PLC**: Power Line Conducted Emission **RE < 1G**: Radiated Emission below 1GHz
RE ≥ 1G: Radiated Emission above 1GHz **APCM**: Antenna Port Conducted Measurement
OB: Conducted Out-Band Emission Measurement

NOTE: 1. The EUT's antenna had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **X-plane**

POWER LINE CONDUCTED EMISSION TEST:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11g	1 to 11	6	OFDM	BPSK	6

RADIATED EMISSION TEST (BELOW 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11g	1 to 11	6	OFDM	BPSK	6



A D T

RADIATED EMISSION TEST (ABOVE 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5

ANTENNA PORT CONDUCTED MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5

CONDUCTED OUT-BAND EMISSION MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5



A D T

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER (SYSTEM)	TESTED BY
PLC	26deg. C, 74%RH	120Vac, 60Hz	Ping Liu
RE<1G	23deg. C, 67%RH	120Vac, 60Hz	Andy Ho
RE≥1G	24deg. C, 67%RH	120Vac, 60Hz	Nelson Teng
APCM	25deg. C, 60%RH	120Vac, 60Hz	Robert Cheng
OB	25deg. C, 60%RH	120Vac, 60Hz	Robert Cheng

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (15.247)

558074 D01 DTS Meas Guidance v03r01

662911 D01 Multiple Transmitter Output v02r01

ANSI C63.10-2009

All test items have been performed and recorded as per the above standards.

Note: The EUT has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.



A D T


3.4 DUTY CYCLE OF TEST SIGNAL

Duty cycle of test signal is $\geq 98\%$, duty factor is not required.

802.11b: Duty cycle = $8.675\text{ ms}/8.71\text{ ms} = 0.996$

802.11g: Duty cycle = $1.44\text{ ms}/1.45\text{ ms} = 0.993$

802.11n (HT20): Duty cycle = $1.346\text{ ms}/1.356\text{ ms} = 0.992$

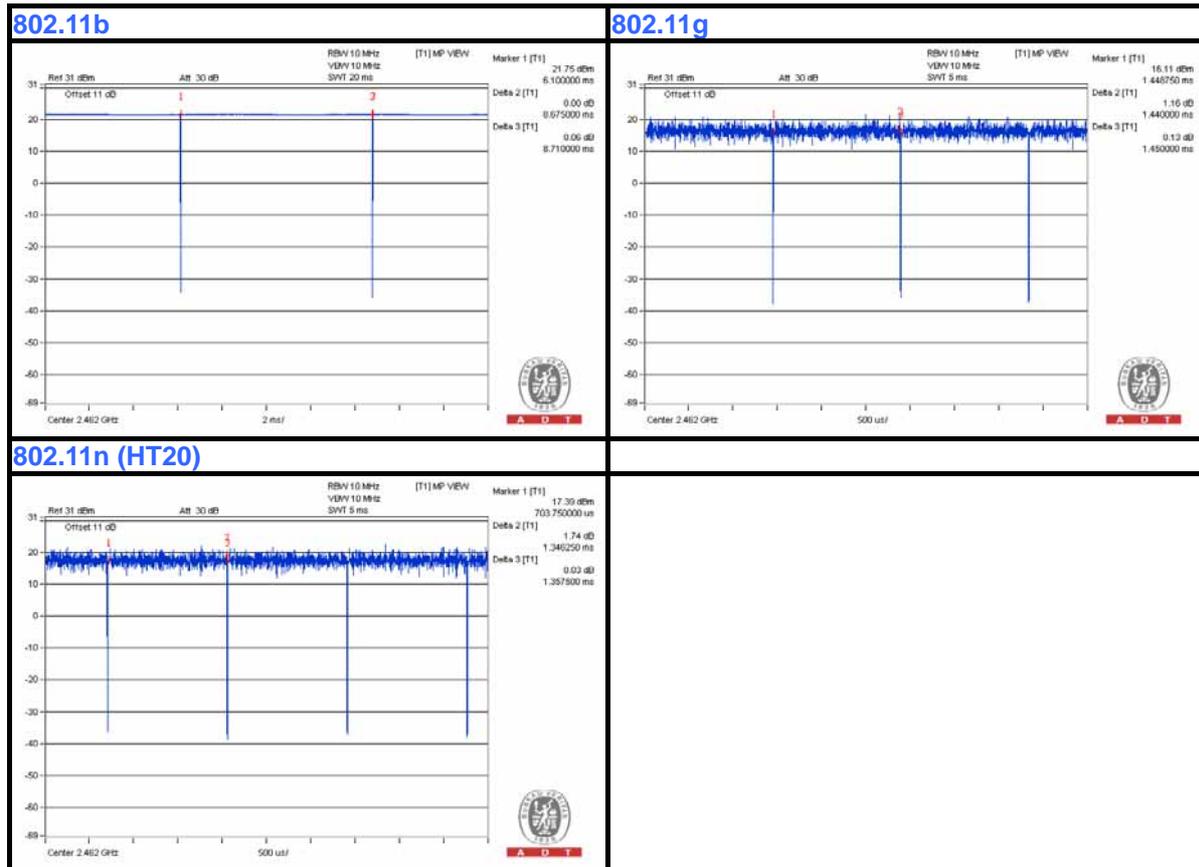



3.5 DESCRIPTION OF SUPPORT UNITS


The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

No.	Product	Brand	Model No.	Serial No.	FCC ID
1	NOTEBOOK COMPUTER	DELL	PP32LA	HSLB32S	FCC DoC
2	TEST TOOL	FOXCONN	NA	NA	NA

No.	Signal cable description
1	NA
2	Data cable, 0.1m

Note: The power cords of the above support units were unshielded (1.8m).

3.6 CONFIGURATION OF SYSTEM UNDER TEST

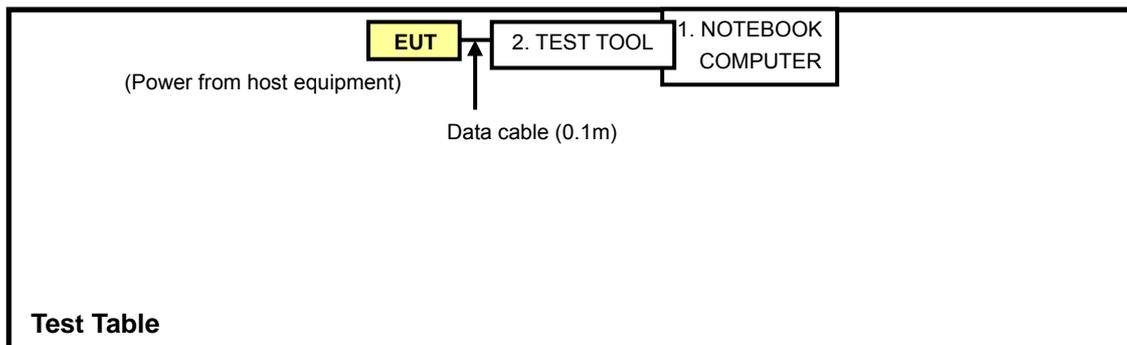



A D T

4. TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESCS 30	100375	Apr. 29, 2014	Apr. 28, 2015
Line-Impedance Stabilization Network (for EUT) SCHWARZBECK	NSLK8127	8127-522	Sep. 12, 2013	Sep. 11, 2014
Line-Impedance Stabilization Network (for Peripheral)	ENV216	100071	Nov. 13, 2013	Nov. 12, 2014
RF Cable (JYEBAO)	5DFB	COCCAB-001	Mar. 10, 2014	Mar. 09, 2015
50 ohms Terminator	N/A	EMC-03	Sep. 24, 2013	Sep. 23, 2014
50 ohms Terminator	N/A	EMC-02	Oct. 01, 2013	Sep. 30, 2014
Software ADT	BV ADT_Cond_V7.3.7. 3	NA	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Shielded Room No. C.
3. The VCCI Con C Registration No. is C-3611.
4. Tested Date: May 29, 2014

4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN.
- b. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- c. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- d. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) were not recorded.


NOTE:

1. The resolution bandwidth of test receiver is 9kHz for Quasi-peak detection (QP) & Average detection (AV).

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

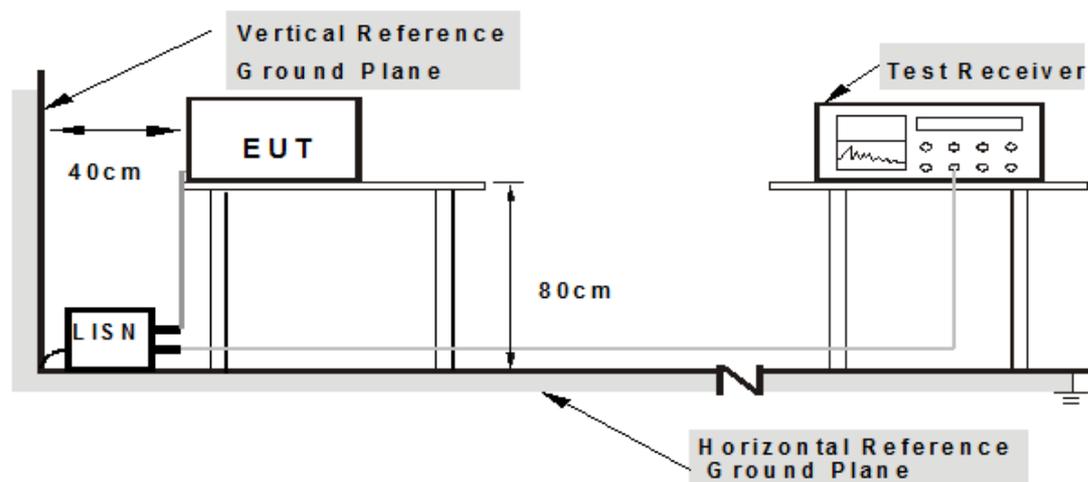

Note: 1. Support units were connected to second LISN.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.



A D T

4.1.6 EUT OPERATING CONDITIONS

1. Connect the EUT with the support unit 1 (Notebook Computer) which is placed on a testing table.
2. The communication partner run test program “QA Tool[V 1.0.3.0]” to enable EUT under transmission/receiving condition continuously at specific channel frequency.


4.1.7 TEST RESULTS

PHASE	Line (L)	DETECTOR FUNCTION	Quasi-Peak (QP) / Average (AV)
--------------	----------	--------------------------	--------------------------------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
	1	0.44297	0.09	36.89	23.38	36.98	23.47	57.01	47.01	-20.02
2	0.56016	0.10	39.28	25.56	39.38	25.66	56.00	46.00	-16.62	-20.34
3	0.66953	0.11	40.50	28.26	40.61	28.37	56.00	46.00	-15.39	-17.63
4	1.08984	0.13	31.11	17.82	31.24	17.95	56.00	46.00	-24.76	-28.05
5	17.87891	0.66	29.60	23.78	30.26	24.44	60.00	50.00	-29.74	-25.56
6	22.91016	0.79	26.82	15.67	27.61	16.46	60.00	50.00	-32.39	-33.54

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission Level – Limit value
4. Correction Factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

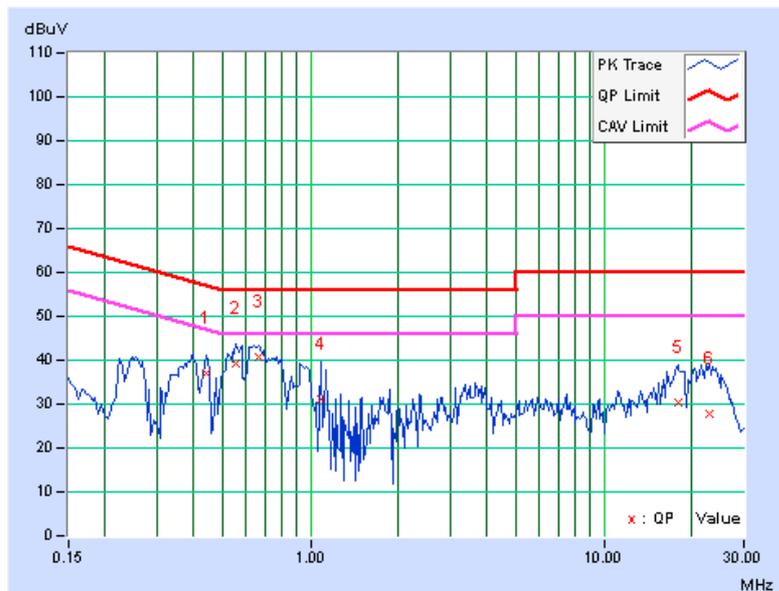


PHASE	Neutral (N)	DETECTOR FUNCTION	Quasi-Peak (QP) / Average (AV)
--------------	-------------	--------------------------	--------------------------------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
	1	0.22812	0.07	42.86	33.89	42.93	33.96	62.52	52.52	-19.59
2	0.25156	0.08	42.75	31.86	42.83	31.94	61.71	51.71	-18.88	-19.77
3	0.55625	0.10	39.50	26.15	39.60	26.25	56.00	46.00	-16.40	-19.75
4	0.66563	0.11	40.65	28.25	40.76	28.36	56.00	46.00	-15.24	-17.64
5	0.78672	0.12	35.09	21.91	35.21	22.03	56.00	46.00	-20.79	-23.97
6	0.90391	0.12	30.89	18.98	31.01	19.10	56.00	46.00	-24.99	-26.90

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission Level – Limit value
4. Correction Factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

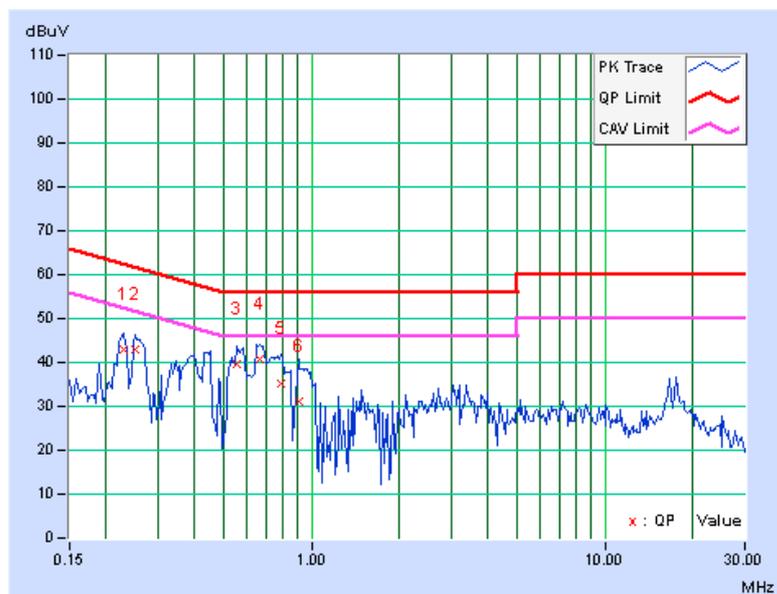



A D T

4.2 RADIATED EMISSION AND BANDEDGE MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



A D T

4.2.2 TEST INSTRUMENTS

For Below 1GHz:

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
MXE EMI Receiver Agilent	N9038A	MY50010156	Jan. 15, 2014	Jan. 14, 2015
Pre-Amplifier Mini-Circuits	ZFL-1000VH2 B	AMP-ZFL-04	Nov. 13, 2013	Nov. 12, 2014
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-361	Feb. 27, 2014	Feb. 26, 2015
RF Cable	NA	CHHCAB_001	Oct. 06, 2013	Oct. 05, 2014
Spectrum Analyzer R&S	FSV40	100964	July 15, 2013	July 14, 2014
Horn_Antenna AISI	AIH.8018	0000220091110	Dec. 06, 2013	Dec. 05, 2014
Pre-Amplifier Agilent	8449B	3008A01923	Oct. 29, 2013	Oct. 28, 2014
RF Cable	NA	RF104-205 RF104-207 RF104-202	Dec. 12, 2013	Dec. 11, 2014
Spectrum Analyzer Agilent	E4446A	MY48250253	Aug. 28, 2013	Aug. 27, 2014
Pre-Amplifier SPACEK LABS	SLKka-48-6	9K16	Nov. 13, 2013	Nov. 12, 2014
Horn_Antenna SCHWARZBECK	BBHA 9170	9170-424	Oct. 08, 2013	Oct. 07, 2014
Software	ADT_Radiated _V8.7.07	NA	NA	NA
Antenna Tower & Turn Table CT	NA	NA	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The horn antenna, preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
3. The test was performed in 966 Chamber No. H.
4. The FCC Site Registration No. is 797305.
5. The CANADA Site Registration No. is IC 7450H-3.
6. Tested Date: May 27, 2014

**A D T****For Above 1GHz:**

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
MXE EMI Receiver Agilent	N9038A	MY51210105	Jan. 21,2014	Jan. 20,2015
Pre-Amplifier Mini-Circuits	ZFL-1000VH2 B	AMP-ZFL-03	Nov. 13, 2013	Nov. 12, 2014
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-360	Feb. 26, 2014	Feb. 25, 2015
RF Cable	NA	CHGCAB_001	Oct. 05, 2013	Oct. 04, 2014
Spectrum Analyzer R&S	FSV40	100964	July 15, 2013	July 14, 2014
Horn_Antenna AISI	AIH.8018	0000320091110	Nov. 18, 2013	Nov. 17, 2014
Pre-Amplifier Agilent	8449B	3008A02578	June 25, 2013	June 24, 2014
RF Cable	NA	RF104-201 RF104-203 RF104-204	Dec. 12, 2013	Dec. 11, 2014
Spectrum Analyzer Agilent	E4446A	MY48250253	Aug. 28, 2013	Aug. 27, 2014
Pre-Amplifier SPACEK LABS	SLKKa-48-6	9K16	Nov. 13, 2013	Nov. 12, 2014
Horn_Antenna SCHWARZBECK	BBHA 9170	9170-424	Oct. 08, 2013	Oct. 07, 2014
Software	ADT_Radiated _V8.7.07	NA	NA	NA
Antenna Tower & Turn Table CT	NA	NA	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The horn antenna, preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
- 3 The test was performed in 966 Chamber No. G.
4. The FCC Site Registration No. is 966073.
- 5 The VCCI Site Registration No. is G-137.
- 6 The CANADA Site Registration No. is IC 7450H-2.
- 7 Tested Date: June 12, 2014

4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for RMS Average (Duty cycle < 98%) for Average detection (AV) at frequency above 1GHz, then the measurement results was added to a correction factor ($10 \log(1/\text{duty cycle})$).
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
5. All modes of operation were investigated and the worst-case emissions are reported.

4.2.4 DEVIATION FROM TEST STANDARD


No deviation

4.2.5 TEST SETUP

<Frequency Range below 1GHz>

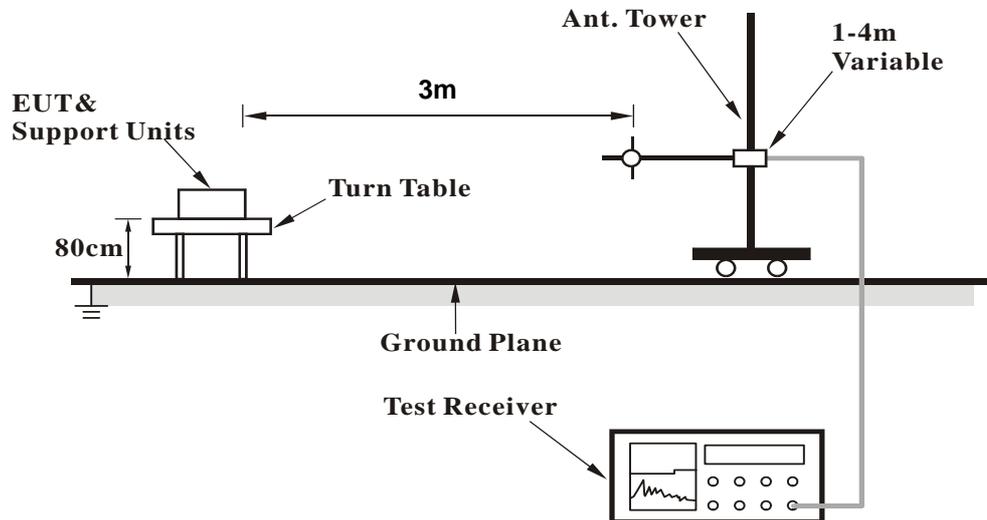

<Frequency Range above 1GHz>

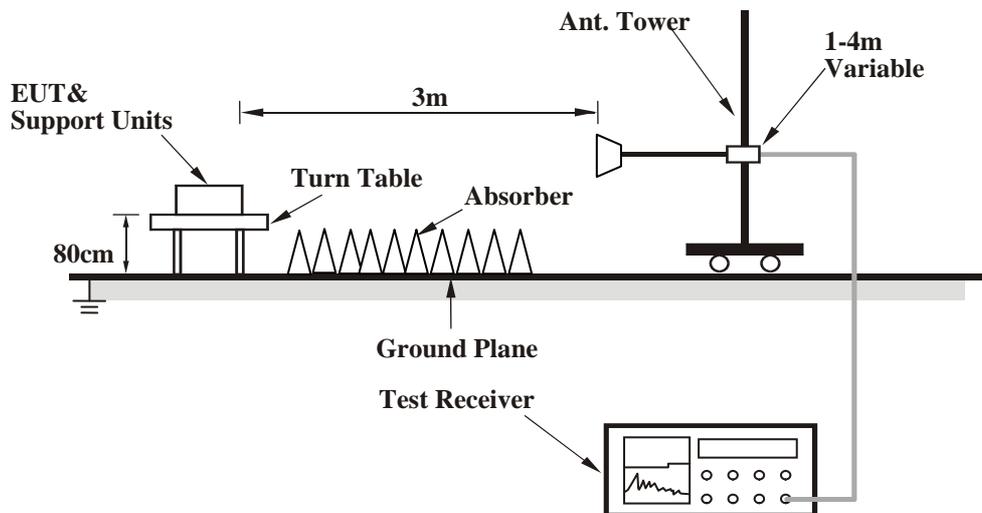

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6



A D T

4.2.7 TEST RESULTS

BELOW 1GHz WORST-CASE DATA

802.11g

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	Below 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	76.95	30.2 QP	40.0	-9.8	2.00 H	238	47.00	-16.79
2	157.85	33.3 QP	43.5	-10.2	1.50 H	162	45.82	-12.53
3	214.83	35.3 QP	43.5	-8.2	1.50 H	0	51.09	-15.76
4	240.30	41.4 QP	46.0	-4.6	1.50 H	0	55.22	-13.79
5	295.15	36.0 QP	46.0	-10.0	1.50 H	0	47.95	-11.91
6	747.56	34.8 QP	46.0	-11.2	1.50 H	0	36.47	-1.68

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	75.54	33.7 QP	40.0	-6.3	2.00 V	294	50.04	-16.32
2	159.54	34.9 QP	43.5	-8.6	1.00 V	199	47.36	-12.45
3	238.41	38.4 QP	46.0	-7.6	1.50 V	304	52.26	-13.85
4	293.40	33.0 QP	46.0	-13.0	2.00 V	45	44.99	-11.96
5	696.83	35.4 QP	46.0	-10.6	1.00 V	236	38.56	-3.16
6	848.97	36.1 QP	46.0	-9.9	1.00 V	243	36.45	-0.33

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value



A D T

ABOVE 1GHz DATA

802.11b

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2387.26	65.1 PK	74.0	-8.9	1.28 H	121	35.23	29.87
2	2387.26	52.0 AV	54.0	-2.0	1.28 H	121	22.13	29.87
3	*2412.00	108.6 PK			1.28 H	121	78.69	29.91
4	*2412.00	106.4 AV			1.28 H	121	76.49	29.91
5	4824.00	56.2 PK	74.0	-17.8	1.43 H	111	18.34	37.86
6	4824.00	52.6 AV	54.0	-1.4	1.43 H	111	14.74	37.86

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	64.5 PK	74.0	-9.5	1.33 V	194	34.62	29.88
2	2390.00	50.0 AV	54.0	-4.0	1.33 V	194	20.12	29.88
3	*2412.00	103.5 PK			1.33 V	184	73.59	29.91
4	*2412.00	101.4 AV			1.33 V	184	71.49	29.91
5	4824.00	57.0 PK	74.0	-17.0	1.30 V	135	19.14	37.86
6	4824.00	53.6 AV	54.0	-0.4	1.30 V	135	15.74	37.86

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



A D T

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	109.4 PK			1.33 H	111	79.45	29.95
2	*2437.00	107.3 AV			1.33 H	111	77.35	29.95
3	4874.00	55.9 PK	74.0	-18.1	1.45 H	286	18.09	37.81
4	4874.00	52.1 AV	54.0	-1.9	1.45 H	286	14.29	37.81
5	7311.00	52.5 PK	74.0	-21.5	1.00 H	46	10.72	41.78
6	7311.00	40.0 AV	54.0	-14.0	1.00 H	46	-1.78	41.78

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	104.3 PK			1.27 V	192	74.35	29.95
2	*2437.00	102.1 AV			1.27 V	192	72.15	29.95
3	4874.00	56.9 PK	74.0	-17.1	1.27 V	133	19.09	37.81
4	4874.00	53.8 AV	54.0	-0.2	1.27 V	133	15.99	37.81
5	7311.00	52.1 PK	74.0	-21.9	1.29 V	288	10.32	41.78
6	7311.00	39.5 AV	54.0	-14.5	1.29 V	288	-2.28	41.78

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



A D T

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	112.1 PK			1.24 H	280	82.10	30.00
2	*2462.00	109.8 AV			1.24 H	280	79.80	30.00
3	2483.50	70.0 PK	74.0	-4.0	1.24 H	280	39.96	30.04
4	2483.50	50.2 AV	54.0	-3.8	1.24 H	280	20.16	30.04
5	4924.00	56.7 PK	74.0	-17.3	1.33 H	329	18.93	37.77
6	4924.00	53.5 AV	54.0	-0.5	1.33 H	329	15.73	37.77
7	7386.00	52.6 PK	74.0	-21.4	1.02 H	52	10.56	42.04
8	7386.00	40.0 AV	54.0	-14.0	1.02 H	52	-2.04	42.04

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	107.1 PK			1.33 V	194	77.10	30.00
2	*2462.00	104.9 AV			1.33 V	194	74.90	30.00
3	4924.00	56.4 PK	74.0	-17.6	1.11 V	132	18.63	37.77
4	4924.00	53.3 AV	54.0	-0.7	1.11 V	132	15.53	37.77
5	7386.00	52.7 PK	74.0	-21.3	1.33 V	278	10.66	42.04
6	7386.00	39.9 AV	54.0	-14.1	1.33 V	278	-2.14	42.04

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



A D T

802.11g

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	70.9 PK	74.0	-3.1	1.25 H	236	41.02	29.88
2	2390.00	53.4 AV	54.0	-0.6	1.25 H	236	23.52	29.88
3	*2412.00	112.0 PK			1.25 H	236	82.09	29.91
4	*2412.00	101.5 AV			1.25 H	236	71.59	29.91
5	4824.00	42.6 PK	74.0	-31.4	1.29 H	333	4.74	37.86
6	4824.00	40.1 AV	54.0	-13.9	1.29 H	333	2.24	37.86

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	65.3 PK	74.0	-8.7	1.30 V	203	35.42	29.88
2	2390.00	51.1 AV	54.0	-2.9	1.30 V	203	21.22	29.88
3	*2412.00	107.3 PK			1.30 V	203	77.39	29.91
4	*2412.00	96.4 AV			1.30 V	203	66.49	29.91
5	4824.00	43.6 PK	74.0	-30.4	1.14 V	122	5.74	37.86
6	4824.00	41.0 AV	54.0	-13.0	1.14 V	122	3.14	37.86

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



A D T

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	73.1 PK	74.0	-0.9	1.21 H	289	43.22	29.88
2	2390.00	53.2 AV	54.0	-0.8	1.21 H	289	23.32	29.88
3	*2437.00	118.2 PK			1.26 H	283	88.25	29.95
4	*2437.00	108.6 AV			1.26 H	283	78.65	29.95
5	2483.50	72.5 PK	74.0	-1.5	1.22 H	275	42.46	30.04
6	2483.50	53.4 AV	54.0	-0.6	1.22 H	275	23.36	30.04
7	4874.00	46.2 PK	74.0	-27.8	1.31 H	322	8.39	37.81
8	4874.00	43.5 AV	54.0	-10.5	1.31 H	322	5.69	37.81
9	7311.00	52.7 PK	74.0	-21.3	1.05 H	44	10.92	41.78
10	7311.00	40.1 AV	54.0	-13.9	1.05 H	44	-1.68	41.78

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	68.2 PK	74.0	-5.8	1.35 V	219	38.32	29.88
2	2390.00	51.2 AV	54.0	-2.8	1.35 V	219	21.32	29.88
3	*2437.00	113.4 PK			1.35 V	219	83.45	29.95
4	*2437.00	103.4 AV			1.35 V	219	73.45	29.95
5	2483.50	67.3 PK	74.0	-6.7	1.35 V	219	37.26	30.04
6	2483.50	51.6 AV	54.0	-2.4	1.35 V	219	21.56	30.04
7	4874.00	46.2 PK	74.0	-27.8	1.11 V	118	8.39	37.81
8	4874.00	43.4 AV	54.0	-10.6	1.11 V	118	5.59	37.81
9	7311.00	51.9 PK	74.0	-22.1	1.36 V	271	10.12	41.78
10	7311.00	39.1 AV	54.0	-14.9	1.36 V	271	-2.68	41.78

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



A D T

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	111.7 PK			1.27 H	280	81.70	30.00
2	*2462.00	101.4 AV			1.27 H	280	71.40	30.00
3	2483.50	73.7 PK	74.0	-0.3	1.27 H	280	43.66	30.04
4	2483.50	52.1 AV	54.0	-1.9	1.27 H	280	22.06	30.04
5	4924.00	43.0 PK	74.0	-31.0	1.32 H	349	5.23	37.77
6	4924.00	40.6 AV	54.0	-13.4	1.32 H	349	2.83	37.77
7	7386.00	52.7 PK	74.0	-21.3	1.01 H	56	10.66	42.04
8	7386.00	40.3 AV	54.0	-13.7	1.01 H	56	-1.74	42.04

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	107.1 PK			1.24 V	191	77.10	30.00
2	*2462.00	96.5 AV			1.24 V	191	66.50	30.00
3	2483.50	65.8 PK	74.0	-8.2	1.24 V	191	35.76	30.04
4	2483.50	51.5 AV	54.0	-2.5	1.24 V	191	21.46	30.04
5	4924.00	43.4 PK	74.0	-30.6	1.20 V	120	5.63	37.77
6	4924.00	40.5 AV	54.0	-13.5	1.20 V	120	2.73	37.77
7	7386.00	52.3 PK	74.0	-21.7	1.33 V	276	10.26	42.04
8	7386.00	39.2 AV	54.0	-14.8	1.33 V	276	-2.84	42.04

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



A D T

802.11n (HT20)

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	71.2 PK	74.0	-2.8	1.22 H	246	41.32	29.88
2	2390.00	53.7 AV	54.0	-0.3	1.22 H	246	23.82	29.88
3	*2412.00	112.1 PK			1.22 H	246	82.19	29.91
4	*2412.00	101.7 AV			1.22 H	246	71.79	29.91
5	4824.00	42.4 PK	74.0	-31.6	1.26 H	326	4.54	37.86
6	4824.00	39.9 AV	54.0	-14.1	1.26 H	326	2.04	37.86

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	65.0 PK	74.0	-9.0	1.29 V	213	35.12	29.88
2	2390.00	50.9 AV	54.0	-3.1	1.29 V	213	21.02	29.88
3	*2412.00	107.3 PK			1.33 V	216	77.39	29.91
4	*2412.00	96.4 AV			1.33 V	216	66.49	29.91
5	4824.00	43.1 PK	74.0	-30.9	1.14 V	114	5.24	37.86
6	4824.00	40.6 AV	54.0	-13.4	1.14 V	114	2.74	37.86

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



A D T

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	73.0 PK	74.0	-1.0	1.26 H	295	43.12	29.88
2	2390.00	53.0 AV	54.0	-1.0	1.26 H	295	23.12	29.88
3	*2437.00	118.3 PK			1.24 H	286	88.35	29.95
4	*2437.00	108.5 AV			1.24 H	286	78.55	29.95
5	2483.50	72.5 PK	74.0	-1.5	1.21 H	279	42.46	30.04
6	2483.50	53.4 AV	54.0	-0.6	1.21 H	279	23.36	30.04
7	4874.00	46.9 PK	74.0	-27.1	1.37 H	330	9.09	37.81
8	4874.00	43.9 AV	54.0	-10.1	1.37 H	330	6.09	37.81
9	7311.00	52.9 PK	74.0	-21.1	1.09 H	46	11.12	41.78
10	7311.00	40.1 AV	54.0	-13.9	1.09 H	46	-1.68	41.78

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	68.7 PK	74.0	-5.3	1.35 V	233	38.82	29.88
2	2390.00	51.6 AV	54.0	-2.4	1.35 V	233	21.72	29.88
3	*2437.00	114.0 PK			1.32 V	230	84.05	29.95
4	*2437.00	103.7 AV			1.32 V	230	73.75	29.95
5	2483.50	67.1 PK	74.0	-6.9	1.34 V	215	37.06	30.04
6	2483.50	51.4 AV	54.0	-2.6	1.34 V	215	21.36	30.04
7	4874.00	46.1 PK	74.0	-27.9	1.11 V	124	8.29	37.81
8	4874.00	43.4 AV	54.0	-10.6	1.11 V	124	5.59	37.81
9	7311.00	52.0 PK	74.0	-22.0	1.35 V	266	10.22	41.78
10	7311.00	39.1 AV	54.0	-14.9	1.35 V	266	-2.68	41.78

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



A D T

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	111.3 PK			1.24 H	272	81.30	30.00
2	*2462.00	101.0 AV			1.24 H	272	71.00	30.00
3	2483.50	73.8 PK	74.0	-0.2	1.24 H	272	43.76	30.04
4	2483.50	51.8 AV	54.0	-2.2	1.24 H	272	21.76	30.04
5	4924.00	42.7 PK	74.0	-31.3	1.34 H	346	4.93	37.77
6	4924.00	40.6 AV	54.0	-13.4	1.34 H	346	2.83	37.77
7	7386.00	52.5 PK	74.0	-21.5	1.00 H	58	10.46	42.04
8	7386.00	40.2 AV	54.0	-13.8	1.00 H	58	-1.84	42.04

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	105.2 PK			1.30 V	183	75.20	30.00
2	*2462.00	95.4 AV			1.30 V	183	65.40	30.00
3	2483.50	69.4 PK	74.0	-4.6	1.30 V	183	39.36	30.04
4	2483.50	47.1 AV	54.0	-6.9	1.30 V	183	17.06	30.04
5	4924.00	43.0 PK	74.0	-31.0	1.17 V	128	5.23	37.77
6	4924.00	40.3 AV	54.0	-13.7	1.17 V	128	2.53	37.77
7	7386.00	52.1 PK	74.0	-21.9	1.37 V	261	10.06	42.04
8	7386.00	39.0 AV	54.0	-15.0	1.37 V	261	-3.04	42.04

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
SPECTRUM ANALYZER R&S	FSV 40	100964	July 15, 2013	July 14, 2014

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : June 12, 2014


4.3.3 TEST PROCEDURE

1. Set resolution bandwidth (RBW) = 100kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
3. Trace mode = max hold.
4. Sweep = auto couple.
5. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

4.3.4 DEVIATION FROM TEST STANDARD

No deviation

4.3.5 TEST SETUP

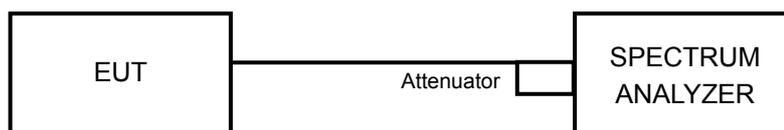

4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



A D T

4.3.7 TEST RESULTS

802.11b

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
1	2412	10.11	9.20	0.5	PASS
6	2437	9.66	10.11	0.5	PASS
11	2462	10.07	10.08	0.5	PASS

802.11g

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
1	2412	16.34	15.73	0.5	PASS
6	2437	16.35	16.42	0.5	PASS
11	2462	16.41	16.36	0.5	PASS

802.11n (HT20)

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
1	2412	17.02	17.16	0.5	PASS
6	2437	17.44	16.36	0.5	PASS
11	2462	16.96	17.00	0.5	PASS




A D T

SPECTRUM PLOT OF WORST VALUE


802.11b / Chain (1) : CH1



802.11g / Chain (1) : CH1

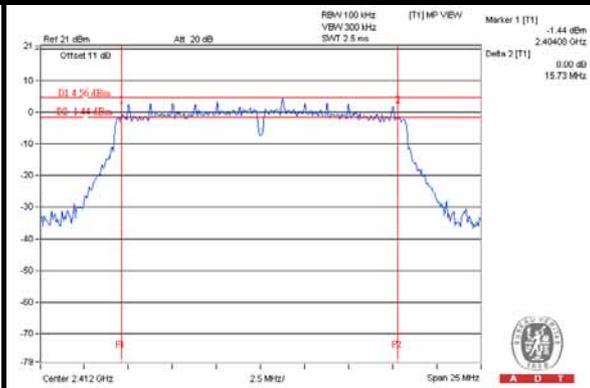

802.11n (HT20) / Chain (1) : CH6

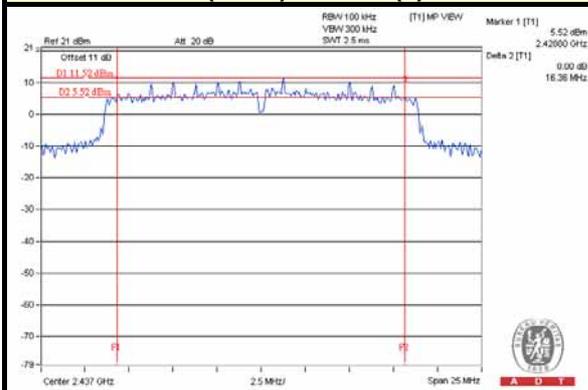



A D T

4.4 CONDUCTED OUTPUT POWER MEASUREMENT

4.4.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30dBm)

Per KDB 662911 D01 Multiple Transmitter Output Method of conducted output power measurement on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for NANT \leq 4;

Array Gain = 0 dB (i.e., no array gain) for channel widths \geq 40 MHz for any NANT;

Array Gain = 5 log(NANT/NSS) dB or 3 dB, whichever is less for 20-MHz channel widths with NANT \geq 5.

For power measurements on all other devices: Array Gain = 10 log(NANT/NSS) dB.

4.4.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Power meter Anritsu	ML2495A	1014008	Apr. 30, 2014	Apr. 29, 2015
Power sensor Anritsu	MA2411B	0917122	Apr. 30, 2014	Apr. 29, 2015

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : June 12, 2014


4.4.3 TEST PROCEDURES

The peak / average power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak / average power sensor. Record the peak power level.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation.

4.4.5 TEST SETUP

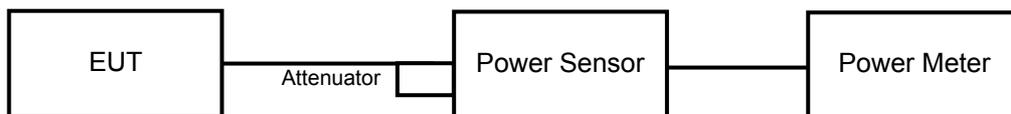

4.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6



A D T

4.4.7 TEST RESULTS

FOR PEAK POWER

802.11b

CHANNEL	FREQUENCY (MHz)	PEAK POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
1	2412	20.56	19.34	199.664	23.00	30	PASS
6	2437	21.52	20.11	244.471	23.88	30	PASS
11	2462	22.83	21.27	325.835	25.13	30	PASS

802.11g

CHANNEL	FREQUENCY (MHz)	PEAK POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
1	2412	23.15	23.64	437.744	26.41	30	PASS
6	2437	25.65	25.34	709.261	28.51	30	PASS
11	2462	23.55	23.69	460.348	26.63	30	PASS

802.11n (HT20)

CHANNEL	FREQUENCY (MHz)	PEAK POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
1	2412	23.01	23.28	412.8	26.16	30	PASS
6	2437	25.61	25.27	700.427	28.45	30	PASS
11	2462	23.12	22.81	396.101	25.98	30	PASS



A D T

FOR AVERAGE POWER

802.11b

CHANNEL	FREQUENCY (MHz)	AVERAGE POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)
		CHAIN 0	CHAIN 1		
1	2412	17.11	15.97	90.941	19.59
6	2437	18.13	16.71	111.894	20.49
11	2462	19.56	17.97	153.026	21.85

802.11g

CHANNEL	FREQUENCY (MHz)	AVERAGE POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)
		CHAIN 0	CHAIN 1		
1	2412	15.14	15.28	66.388	18.22
6	2437	22.07	21.95	317.740	25.02
11	2462	14.46	14.98	59.402	17.74

802.11n (HT20)

CHANNEL	FREQUENCY (MHz)	AVERAGE POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)
		CHAIN 0	CHAIN 1		
1	2412	15.04	14.65	61.089	17.86
6	2437	22.06	21.88	314.864	24.98
11	2462	14.72	14.68	59.024	17.71



A D T

4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
SPECTRUM ANALYZER R&S	FSV 40	100964	July 15, 2013	July 14, 2014

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : June 12, 2014


4.5.3 TEST PROCEDURE

1. Set the RBW = 3 kHz, VBW =10 kHz, Detector = peak.
2. Sweep time = auto couple, Trace mode = max hold, allow trace to fully stabilize.
3. Use the peak marker function to determine the maximum amplitude level.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation

4.5.5 TEST SETUP

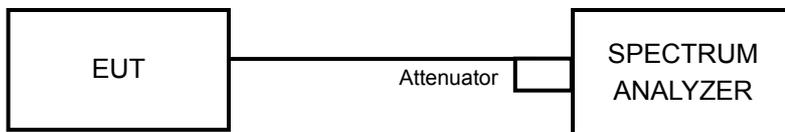

4.5.6 EUT OPERATING CONDITION

Same as Item 4.3.6



A D T

4.5.7 TEST RESULTS

802.11b

TX CHAIN	CHANNEL	FREQUENCY (MHz)	PSD (dBm)	10 log (N=2) dB	TOTAL PSD (dBm)	LIMIT (dBm)	PASS /FAIL
0	1	2412	-6.42	3.01	-3.41	7.82	PASS
	6	2437	-6.71	3.01	-3.70	7.82	PASS
	11	2462	-4.22	3.01	-1.21	7.82	PASS
1	1	2412	-8.55	3.01	-5.54	7.82	PASS
	6	2437	-7.02	3.01	-4.01	7.82	PASS
	11	2462	-5.14	3.01	-2.13	7.82	PASS

NOTE: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20})^2 / 2] = 6.18\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $8-(6.18-6) = 7.82\text{dBm}$.

802.11g

TX CHAIN	CHANNEL	FREQUENCY (MHz)	PSD (dBm)	10 log (N=2) dB	TOTAL PSD (dBm)	LIMIT (dBm)	PASS /FAIL
0	1	2412	-8.85	3.01	-5.84	7.82	PASS
	6	2437	-3.42	3.01	-0.41	7.82	PASS
	11	2462	-11.97	3.01	-8.96	7.82	PASS
1	1	2412	-10.44	3.01	-7.43	7.82	PASS
	6	2437	-3.82	3.01	-0.81	7.82	PASS
	11	2462	-9.81	3.01	-6.80	7.82	PASS

NOTE: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20})^2 / 2] = 6.18\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $8-(6.18-6) = 7.82\text{dBm}$.

802.11n (HT20)

TX CHAIN	CHANNEL	FREQUENCY (MHz)	PSD (dBm)	10 log (N=2) dB	Total PSD (dBm)	Limit (dBm)	PASS /FAIL
0	1	2412	-10.04	3.01	-7.03	7.82	PASS
	6	2437	-4.03	3.01	-1.02	7.82	PASS
	11	2462	-10.47	3.01	-7.46	7.82	PASS
1	1	2412	-11.84	3.01	-8.83	7.82	PASS
	6	2437	-4.92	3.01	-1.91	7.82	PASS
	11	2462	-11.23	3.01	-8.22	7.82	PASS


NOTE: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20})^2 / 2] = 6.18\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $8-(6.18-6) = 7.82\text{dBm}$.




A D T

SPECTRUM PLOT OF WORST VALUE


802.11b / Chain (0) : CH11

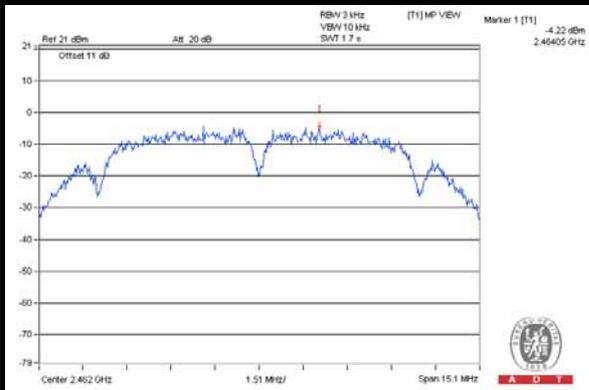

802.11g / Chain (0) : CH6

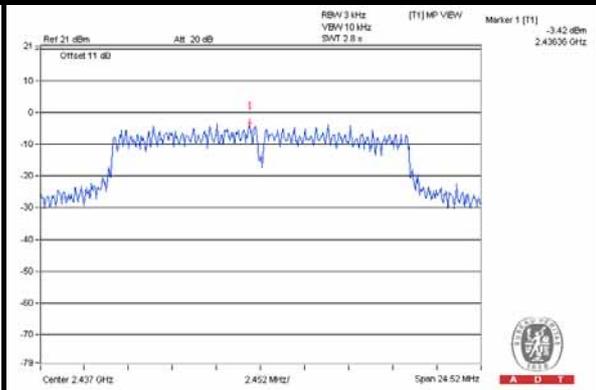

802.11n (HT20) / Chain(0) : CH6

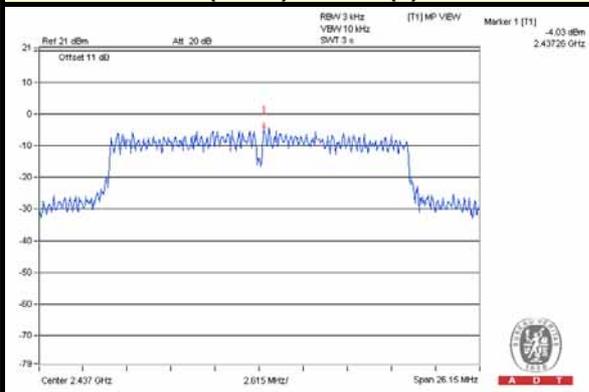



A D T

4.6 CONDUCTED OUT-BAND EMISSION MEASUREMENT

4.6.1 LIMITS OF CONDUCTED OUT-BAND EMISSION MEASUREMENT

Below 20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
SPECTRUM ANALYZER R&S	FSV 40	100964	July 15, 2013	July 14, 2014

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : June 12, 2014

4.6.3 TEST PROCEDURE

Measurement Procedure - Reference Level

1. Set the RBW = 100 kHz.
2. Set the VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.


Measurement Procedure –Unwanted Emission Level

1. Set RBW = 100 kHz.
2. Set VBW \geq 300 kHz.
3. Set span to encompass the spectrum to be examined
4. Detector = peak.
5. Trace Mode = max hold.
6. Sweep = auto couple.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation

4.6.5 TEST SETUP

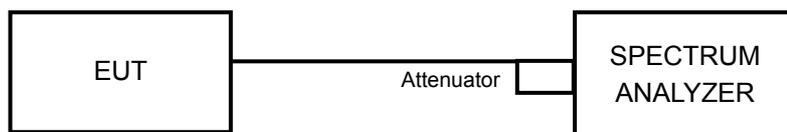

4.6.6 EUT OPERATING CONDITION

Same as Item 4.3.6

4.6.7 TEST RESULTS

The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement.





A D T



802.11b

Chain (0)



CH 1

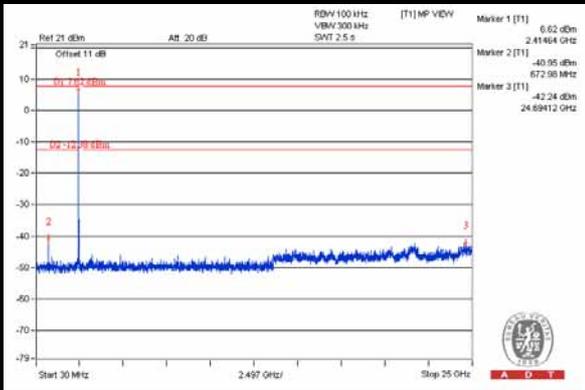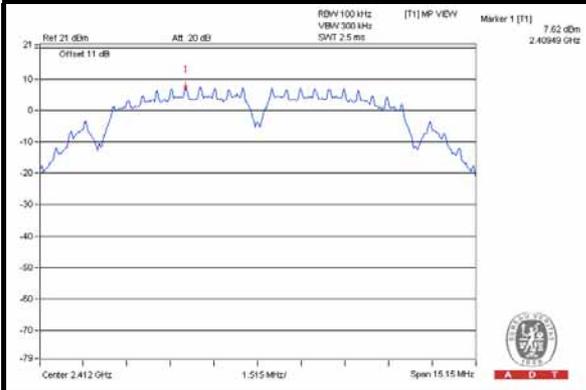


CH 6

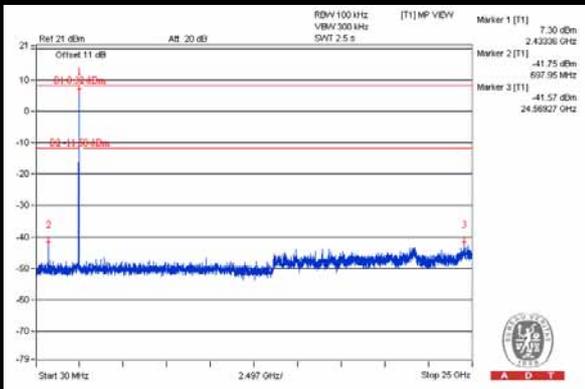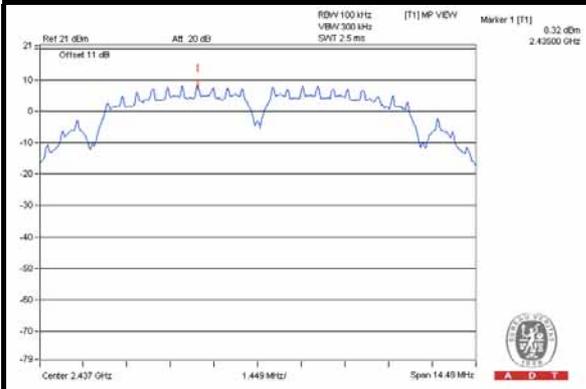


CH 11

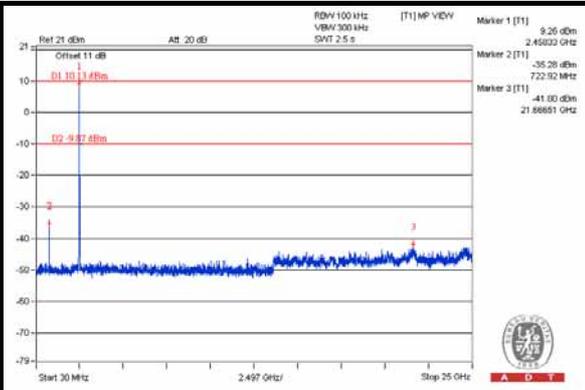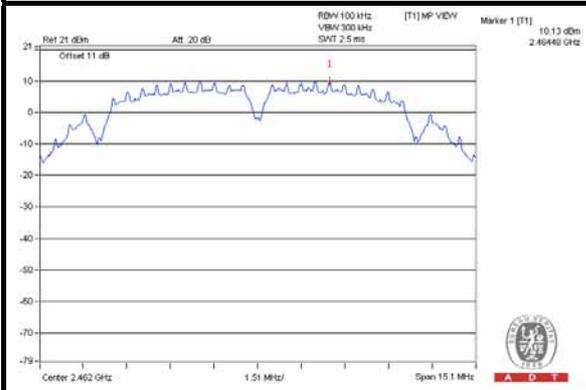

CH 1 Band edge

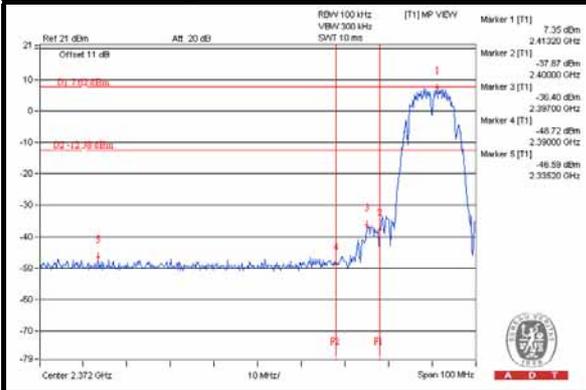

CH 11 Band edge


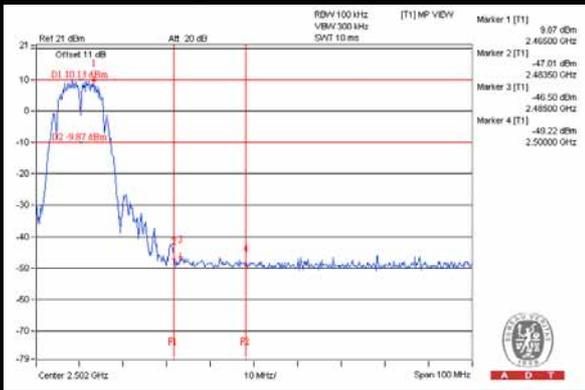






A D T

Chain (1)



CH 1

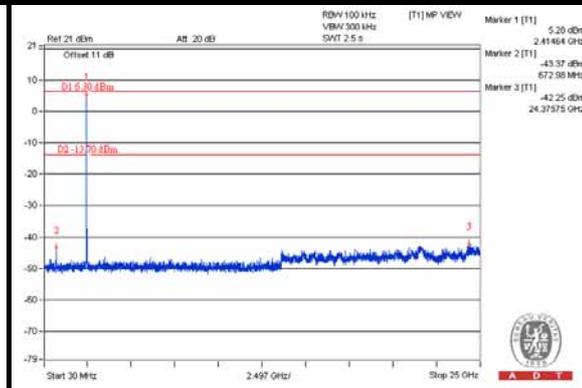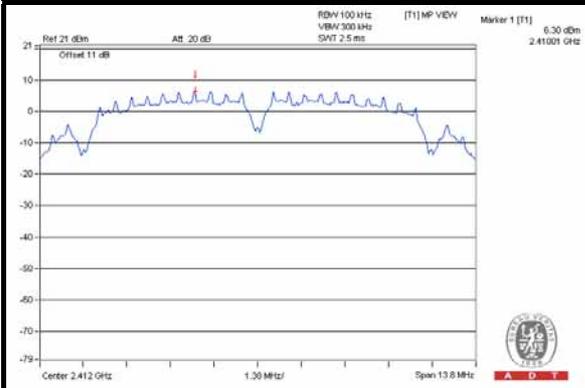


CH 6

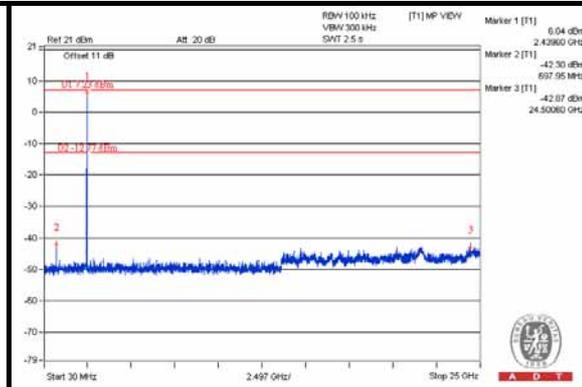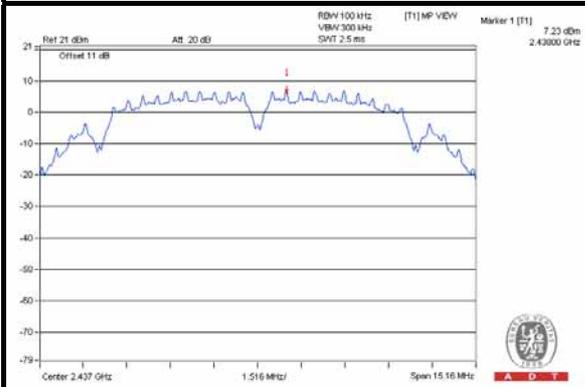


CH 11

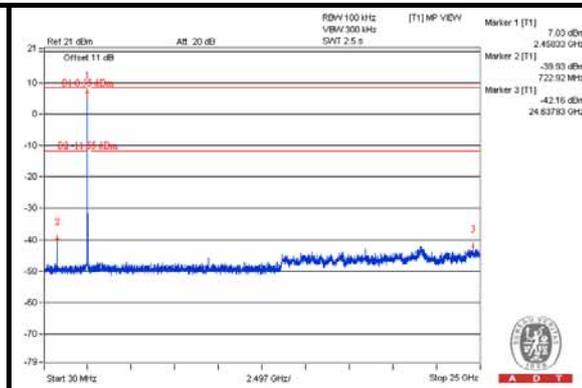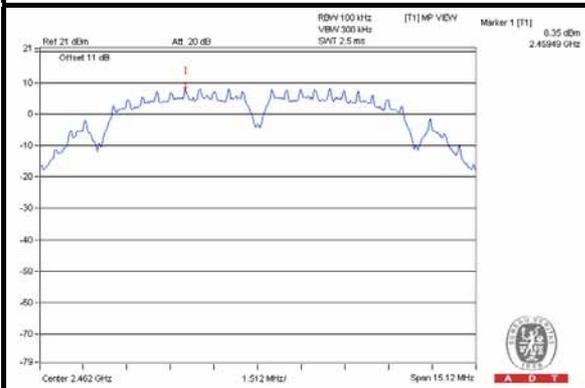

CH 1 Band edge

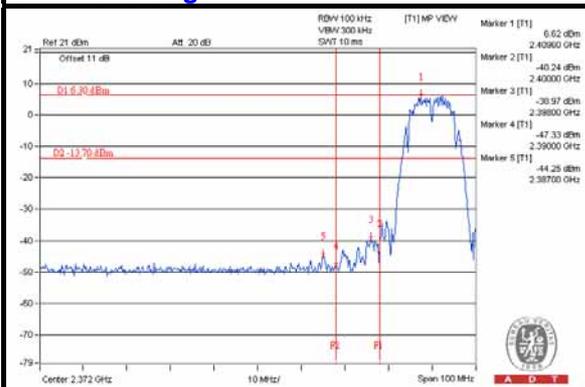

CH 11 Band edge

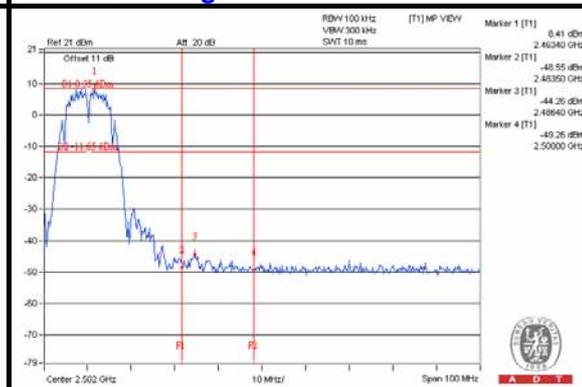





A D T



802.11g

Chain (0)



CH 1

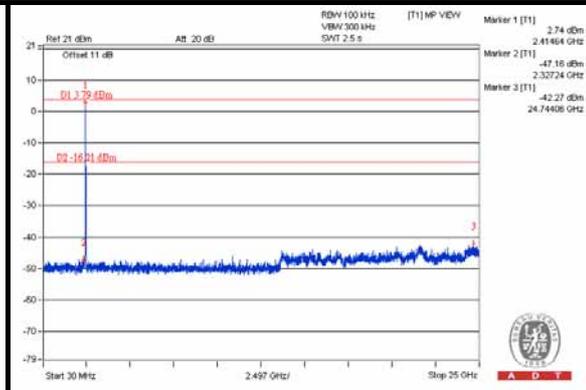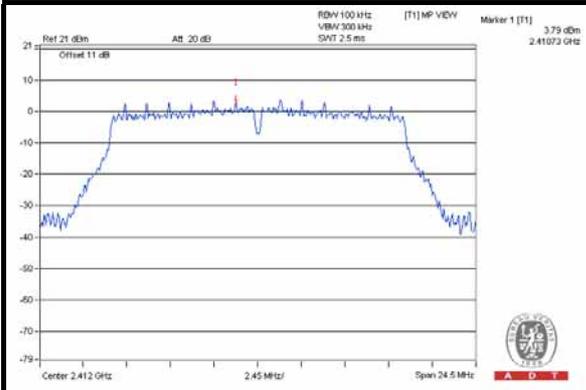


CH 6

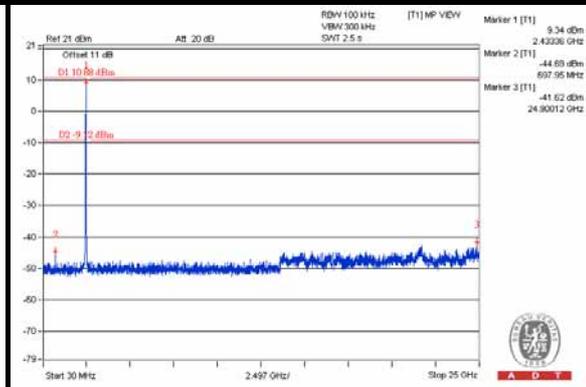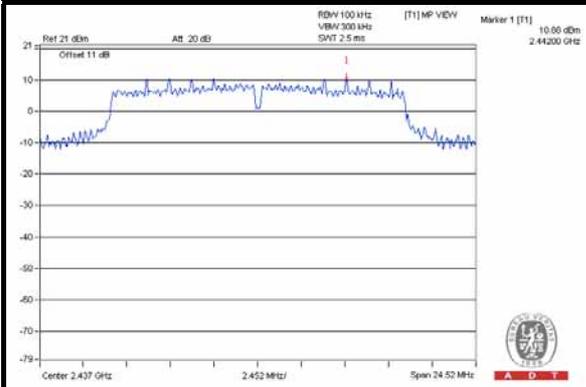


CH 11

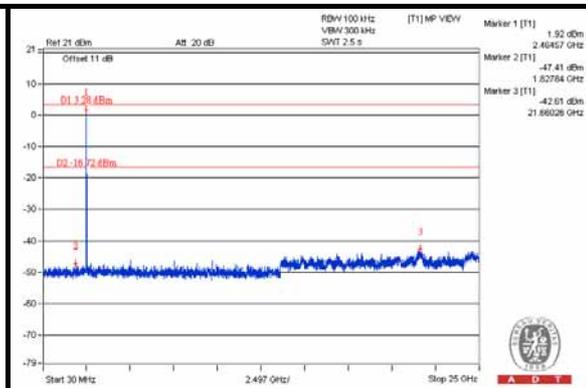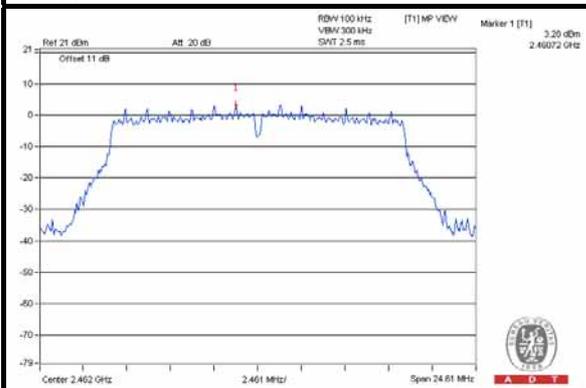

CH 1 Band edge

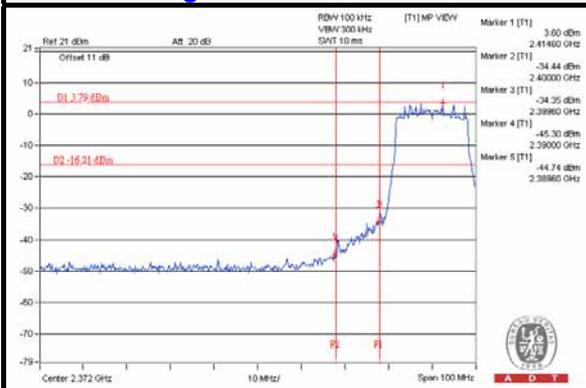

CH 11 Band edge


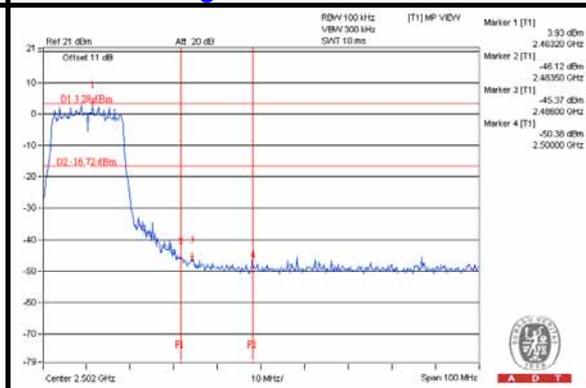






A D T

Chain (1)



CH 1

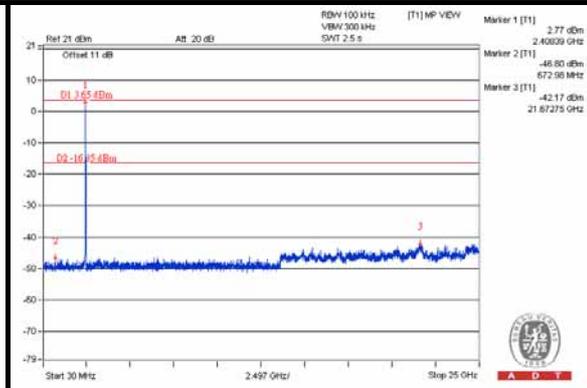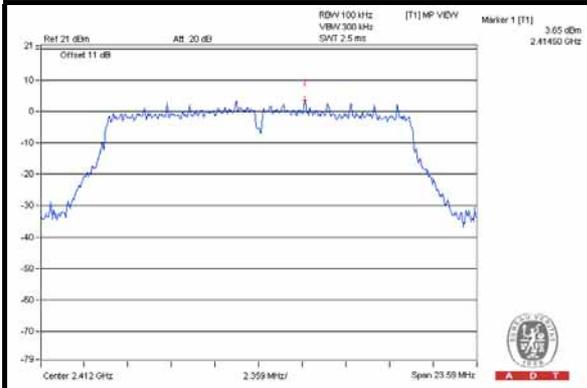


CH 6

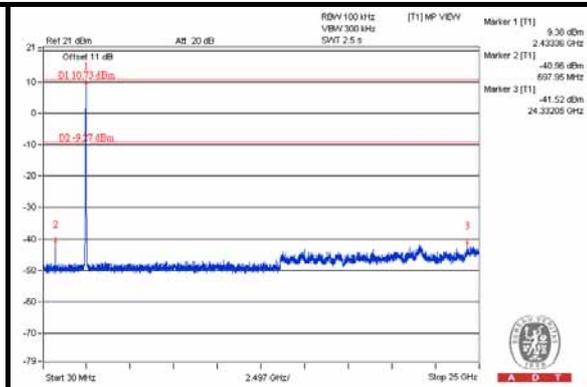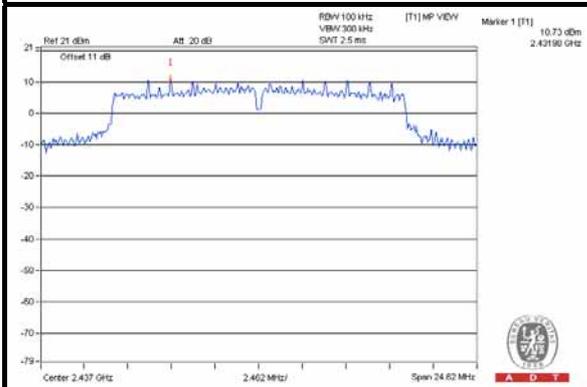


CH 11

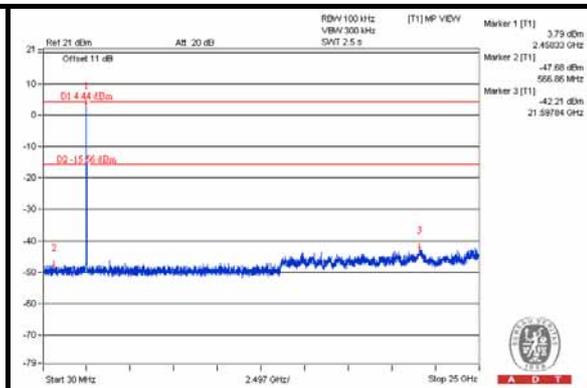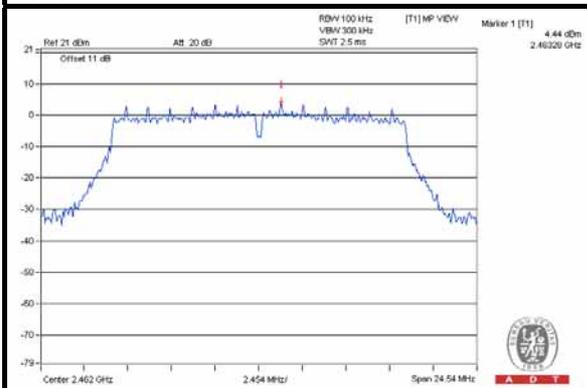

CH 1 Band edge

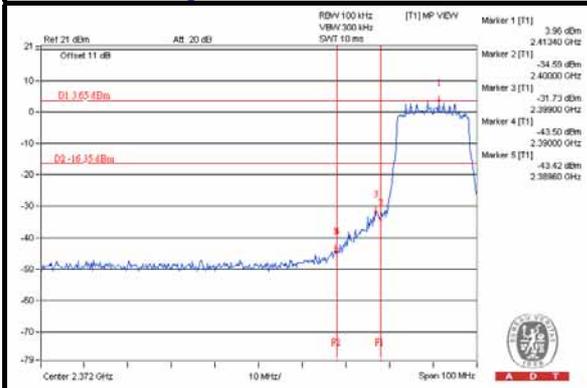

CH 11 Band edge

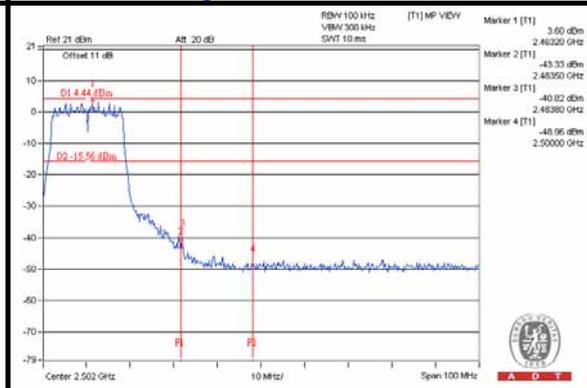





A D T



802.11n (HT20)

Chain (0)



CH 1

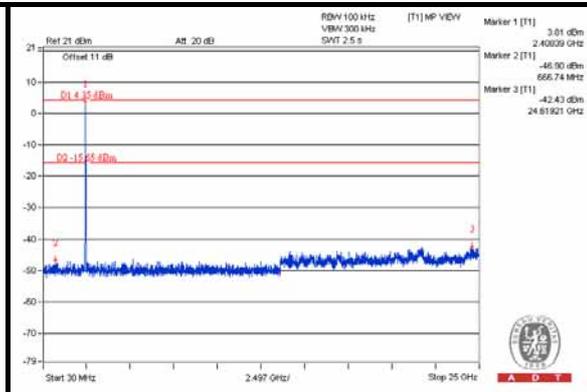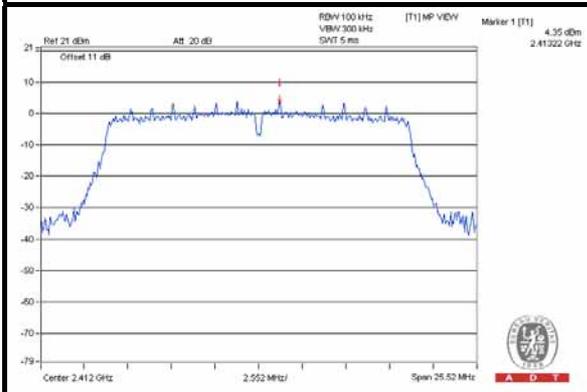


CH 6

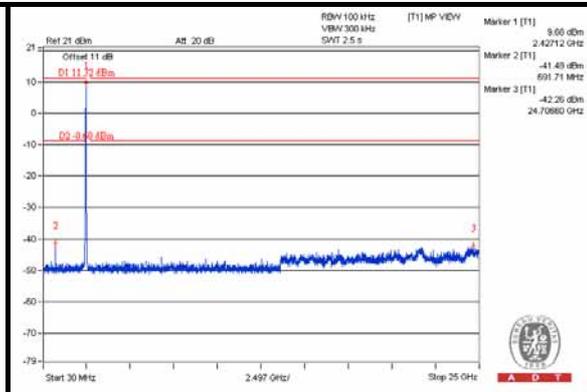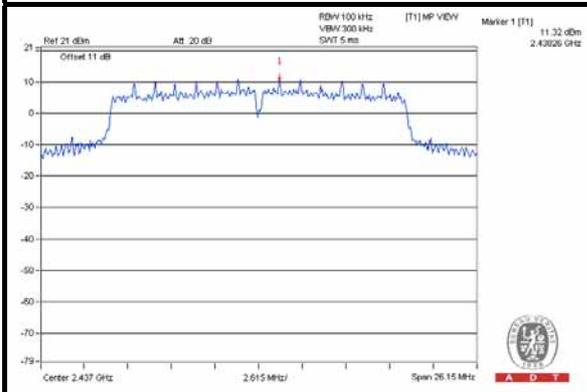


CH 11

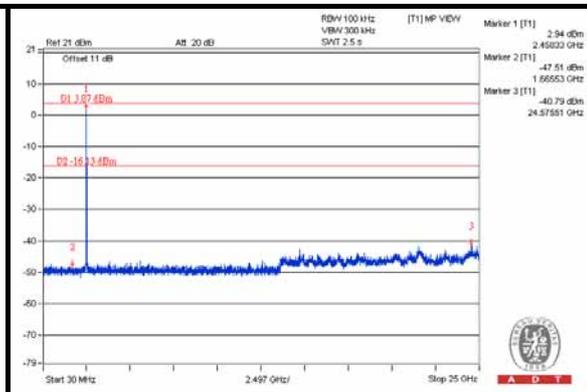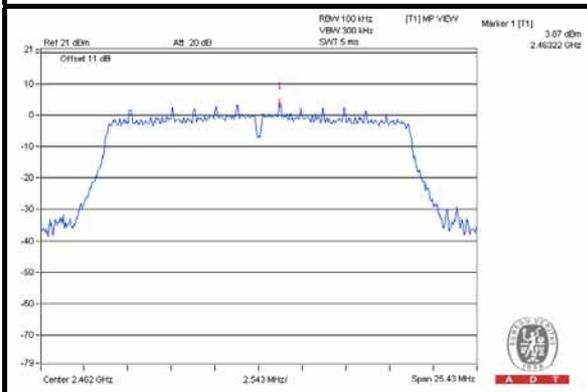

CH 1 Band edge

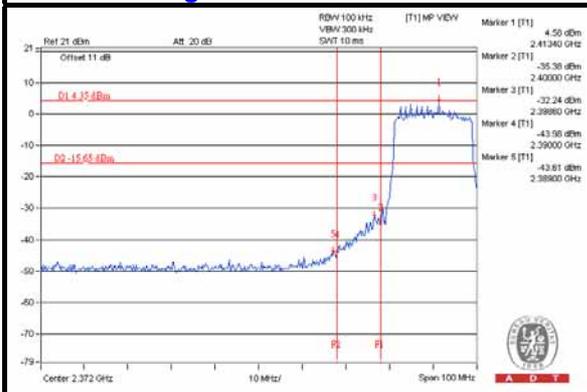

CH 11 Band edge


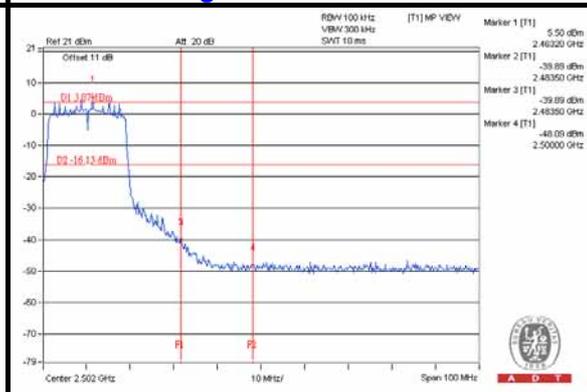






A D T

Chain (1)



CH 1

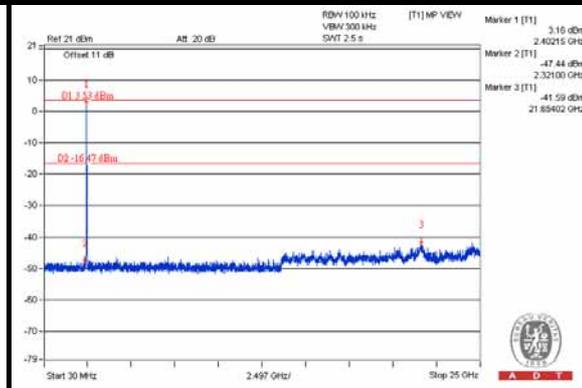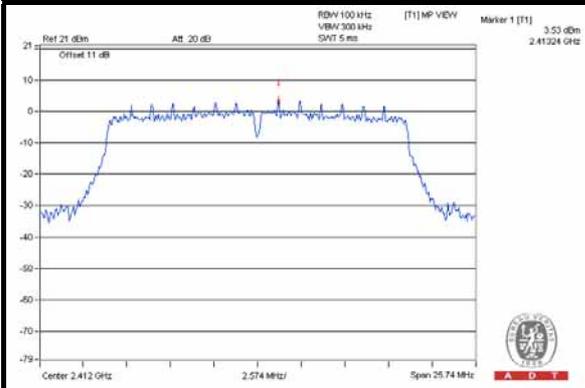


CH 6

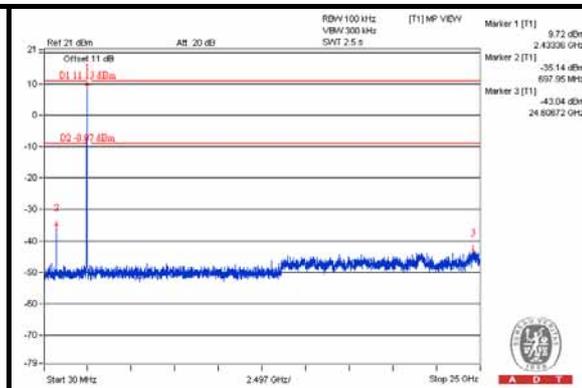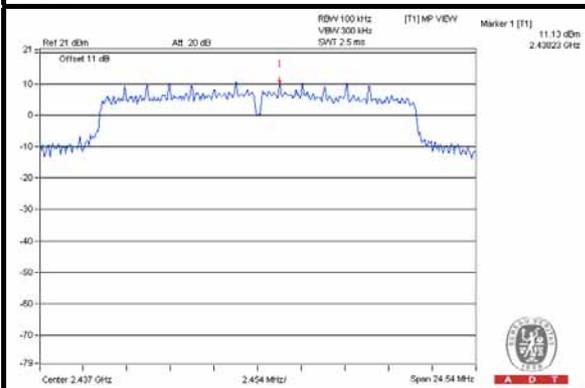


CH 11

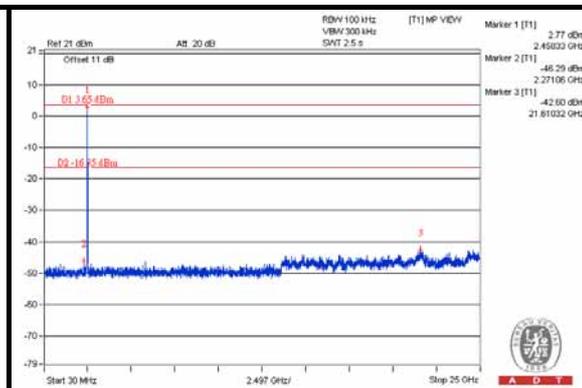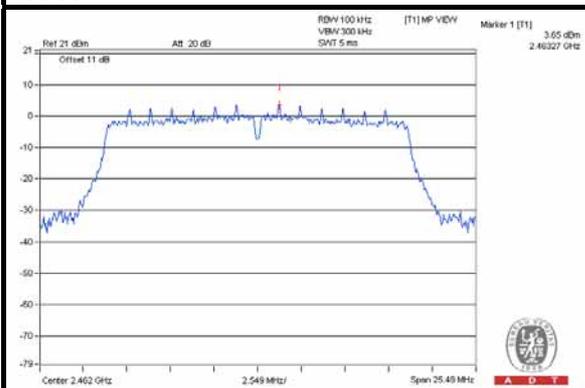

CH 1 Band edge

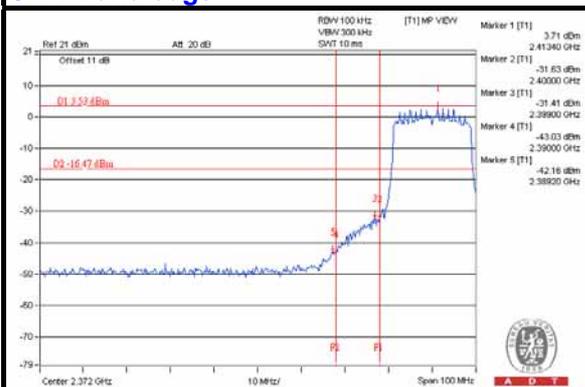

CH 11 Band edge

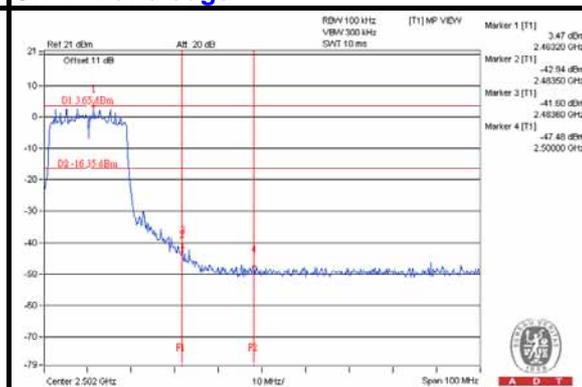



A D T

5. PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).





A D T

6. INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26052943

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.



A D T

7. APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No modifications were made to the EUT by the lab during the test.

--- END ---