



RADIO TEST REPORT

Test Report No. : 11653099H-C

Applicant : Sony Interactive Entertainment Inc.
Type of Equipment : Wireless communication module
Model No. : AW-CB262
FCC ID : AK8M16DAM2
Test regulation : FCC Part 15 Subpart E: 2016
Class II Permissive Change
*Except for DFS test
(Radiated Spurious Emission test only)
Test Result : Complied

1. This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
2. The results in this report apply only to the sample tested.
3. This sample tested is in compliance with the above regulation.
4. The test results in this report are traceable to the national or international standards.
5. This test report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.
6. This test report covers Radio technical requirements. It does not cover administrative issues such as Manual or non-Radio test related Requirements. (if applicable)

Date of test: February 19 to 25, 2017

Representative test engineer:

T. Shimada

Takumi Shimada

Engineer

Consumer Technology Division

Approved by:

Takayuki S.

Takayuki Shimada

Engineer

Consumer Technology Division



NVLAP LAB CODE: 200572-0

This laboratory is accredited by the NVLAP LAB CODE 200572-0, U.S.A. The tests reported herein have been performed in accordance with its terms of accreditation.

*As for the range of Accreditation in NVLAP, you may refer to the WEB address,
http://japan.ul.com/resources/emc_accredited/

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

13-EM-F0429

CONTENTS	PAGE
SECTION 1: Customer information.....	4
SECTION 2: Equipment under test (E.U.T.).....	4
SECTION 3: Test specification, procedures & results.....	7
SECTION 4: Operation of E.U.T. during testing.....	9
SECTION 5: Radiated Spurious Emission and Band Edge Compliance	11
APPENDIX 1: Test data	13
Radiated Spurious Emission	13
APPENDIX 2: Test instruments	70
APPENDIX 3: Photographs of test setup	71
Radiated Spurious Emission	71
Worst Case Position	72
Test Configuration and peripherals	75

SECTION 1: Customer information

Company Name	Sony Interactive Entertainment Inc.
Brand Name	SONY
Address	1-7-1 Konan, Minato-ku, Tokyo, 108-0075 Japan
Telephone Number	+81-50-3807-5639
Facsimile Number	+81-50-3807-9594
Contact Person	Kiyoto Sasaki

SECTION 2: Equipment under test (E.U.T.)

2.1 Identification of E.U.T.

Type of Equipment	Wireless communication module
Model No	AW-CB262
Serial No	Refer to Clause 4.2
Country of Manufacture	China/Japan
Receipt Date of Sample	February 9, 2017
Condition of EUT	Production prototype (Not for Sale: This sample is equivalent to mass-produced items.)
Modification of EUT	No modification by the test lab.

2.2 Product Description

AW-CB262 is the Wireless communication module.

Product Specification

Clock frequency in the system (radio part)	40MHz
Operating Temperature	-10 - +85 deg. C
Power Supply	DC 3.3 V / DC 1.8 V
Size	20 x 18 x 3.0mm , 55pin LGA

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radio Specification

WLAN (IEEE802.11b/g/n-20)

Equipment Type	Transceiver
Frequency of Operation	2412 MHz - 2462 MHz
Type of Modulation	DSSS, OFDM
Bandwidth & Channel spacing	Less than 20 MHz & 5 MHz
Method of frequency generation	Synthesizer
Power Supply (inner)	DC 3.3 V / DC 1.8 V / DC 1.1 V
Antenna Type	PIFA (Antenna port WA for 2.4 GHz), IFA (Antenna port WB for 2.4 GHz)
Antenna Gain: G _{ANT}	5.6 dBi (Antenna port WA for 2.4 GHz), 4.2 dBi (Antenna port WB for 2.4 GHz)
Directional Gain *1)	7.93 dBi

WLAN (IEEE802.11a/11n-20/11ac-20/11n-40/11ac-40/11ac-80)

Equipment Type	Transceiver
Frequency of Operation	W52: 5180 MHz - 5240 MHz W53: 5260 MHz - 5320 MHz W56: 5500 MHz - 5700 MHz W58: 5745 MHz - 5825 MHz
Type of Modulation	OFDM
Bandwidth & Channel spacing	Less than 20 MHz / 40 MHz / 80 MHz & 20 MHz / 40 MHz / 80 MHz
Method of frequency generation	Synthesizer
Power Supply (inner)	DC 3.3 V / DC 1.8 V / DC 1.1 V
Antenna Type	PIFA (Antenna port WA for 5 GHz / Antenna port WC for 5 GHz)
Antenna Gain: G _{ANT}	5.0 dBi (Antenna port WA for 5 GHz) 3.5 dBi (Antenna port WC for 5 GHz)
Directional Gain *1)	7.29 dBi

Bluetooth (BDR/EDR)

Equipment Type	Transceiver
Frequency of Operation	2402 MHz - 2480 MHz
Type of Modulation	FHSS (GFSK, $\pi/4$ DQPSK, 8DPSK)
Bandwidth & Channel spacing	79 MHz & 1 MHz
Method of frequency generation	Synthesizer
Power Supply (inner)	DC 3.3 V / DC 1.8 V / DC 1.1 V
Antenna Type	PIFA (Antenna port WC for 2.4 GHz)
Antenna Gain	6.4 dBi (Antenna port WC for 2.4 GHz)

Bluetooth (Low Energy)

Equipment Type	Transceiver
Frequency of Operation	2402 MHz - 2480 MHz
Type of Modulation	GFSK
Bandwidth & Channel spacing	1 MHz & 2 MHz
Method of frequency generation	Synthesizer
Power Supply (inner)	DC 3.3 V / DC 1.8 V / DC 1.1 V
Antenna Type	PIFA (Antenna port WC for 2.4 GHz)
Antenna Gain	6.4 dBi (Antenna port WC for 2.4 GHz)

*1) Directional antenna gain = $10 \log \left(\frac{G_{ANT1}}{(10^{-20} + 10^{-20})^2 / 2} \right)$

*This test report applies to WLAN (5 GHz band).

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

<Contents of the change from original model>

Test Report Number of original model is 11240438H-C-R1 (issued by UL Japan, Inc.).

Specification was changed from the original model as follows:

Antenna of the EUT was modified.

The radio specification is identical to the original.

Therefore only Radiated Spurious Emission test were performed in this report.

Additionally, only the information of modified antenna is described in this report.

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

SECTION 3: Test specification, procedures & results

3.1 Test Specification

Test Specification : FCC Part 15 Subpart E
FCC Part 15 final revised on November 14, 2016 and effective December 14, 2016

Title : FCC 47CFR Part15 Radio Frequency Device Subpart E
Unlicensed National Information Infrastructure Devices
Section 15.407 General technical requirements

* Also the EUT complies with FCC Part 15 Subpart B.

3.2 Procedures and results

Item	Test Procedure	Specification	Worst margin	Results	Remarks
Spurious Emission Restricted Band Edge	FCC: ANSI C63.10-2013 KDB Publication Number 789033	FCC: 15.407 (b), 15.205 and 15.209	4.1 dB 5350.000 MHz, AV, Vert.	Complied	Conducted (< 30 MHz) / Radiated (> 30 MHz) *1)
	IC: -	IC: RSS-247 6.2.1 (2) 6.2.2 (2) 6.2.3 (2) 6.2.4 (2)			

Note: UL Japan, Inc.'s EMI Work Procedures No. 13-EM-W0420 and 13-EM-W0422.

*1) Radiated test was selected over 30 MHz based on section FCC 15.407 (b) and KDB 789033 D02 G.3.b).

* In case any questions arise about test procedure, ANSI C63.10: 2013 is also referred.

FCC Part 15.31 (e)

The EUT has the power supply regulator. However one of the input voltages to RF part doesn't go through the regulator. The stable voltage will be supplied by the end product, which will be required to have a power supply regulator. Therefore, the EUT complies with the requirement.

FCC Part 15.203/212 Antenna requirement

The EUT has unique coupling/antenna connectors (U.FL) for antenna ports WA and WC and also has a pattern antenna (Antenna port WB) that is not removable from the EUT.

Therefore the equipment complies with the requirement of 15.203/212.

3.3 Addition to standard

No addition, exclusion nor deviation has been made from the standard.

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

3.4 Uncertainty

EMI

The following uncertainties have been calculated to provide a confidence level of 95 % using a coverage factor $k=2$.
Ise EMC Lab.

Polarity	Radiated emission (Below 1GHz)			
	(3 m*) (+/-)		(10 m*) (+/-)	
	30 MHz - 200 MHz	200 MHz - 1000 MHz	30 MHz - 200 MHz	200 MHz - 1000 MHz
Horizontal	5.0 dB	5.3 dB	5.0 dB	5.0 dB
Vertical	4.7 dB	5.9 dB	5.0 dB	5.1 dB

Radiated emission (Above 1GHz)				
(3 m*) (+/-)		(1 m*) (+/-)		(10 m*) (+/-)
1 GHz - 6GHz	6 GHz - 18GHz	10 GHz - 26.5 GHz	26.5 GHz - 40GHz	1 GHz - 18 GHz
5.2 dB	5.4 dB	5.5 dB	5.5 dB	5.4 dB

*Measurement distance

Radiated emission test

The data listed in this report meets the limits unless the uncertainty is taken into consideration.

3.5 Test Location

UL Japan, Inc. Ise EMC Lab. *NVLAP Lab. code: 200572-0
4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN
Telephone: +81 596 24 8999, Facsimile: +81 596 24 8124

Test site	IC Registration Number	Width x Depth x Height (m)	Size of reference ground plane (m) / horizontal conducting plane	Other rooms	Maximum measurement distance
No.1 semi-anechoic chamber	2973C-1	19.2 x 11.2 x 7.7	7.0 x 6.0	No.1 Power source room	10 m
No.2 semi-anechoic chamber	2973C-2	7.5 x 5.8 x 5.2	4.0 x 4.0	-	3 m
No.3 semi-anechoic chamber	2973C-3	12.0 x 8.5 x 5.9	6.8 x 5.75	No.3 Preparation room	3 m
No.3 shielded room	-	4.0 x 6.0 x 2.7	N/A	-	-
No.4 semi-anechoic chamber	2973C-4	12.0 x 8.5 x 5.9	6.8 x 5.75	No.4 Preparation room	3 m
No.4 shielded room	-	4.0 x 6.0 x 2.7	N/A	-	-
No.5 semi-anechoic chamber	-	6.0 x 6.0 x 3.9	6.0 x 6.0	-	-
No.6 shielded room	-	4.0 x 4.5 x 2.7	4.0 x 4.5	-	-
No.6 measurement room	-	4.75 x 5.4 x 3.0	4.75 x 4.15	-	-
No.7 shielded room	-	4.7 x 7.5 x 2.7	4.7 x 7.5	-	-
No.8 measurement room	-	3.1 x 5.0 x 2.7	N/A	-	-
No.9 measurement room	-	8.8 x 4.6 x 2.8	2.4 x 2.4	-	-
No.11 measurement room	-	6.2 x 4.7 x 3.0	4.8 x 4.6	-	-

* Size of vertical conducting plane (for Conducted Emission test) : 2.0 x 2.0 m for No.1, No.2, No.3, and No.4 semi-anechoic chambers and No.3 and No.4 shielded rooms.

3.6 Test data, Test instruments, and Test set up

Refer to APPENDIX.

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN
Telephone : +81 596 24 8999
Facsimile : +81 596 24 8124

SECTION 4: Operation of E.U.T. during testing

4.1 Operating Mode(s)

Test operating mode was determined as follows according to “Section 1 of 6 802.11 a/b/g/n testing - Managing Complex Regulatory Approvals -” of TCB Council Workshop October 2009 and also was judged the necessity of 802.11ac mode by the pre-test.

Mode	Remarks*
IEEE 802.11a (11a)	6 Mbps, PN9
IEEE 802.11ac MIMO 20 MHz BW (11ac-20)	MCS 0 (1Tx), PN9
IEEE 802.11ac MIMO 40 MHz BW (11ac-40)	MCS 0 (1Tx), PN9
IEEE 802.11ac MIMO 80 MHz BW (11ac-80)	MCS 0 (1Tx), PN9
*The worst antenna and condition was determined based on the test result of Maximum Conducted Output Power.	
*The power value of the EUT was set for testing as follows (setting value might be different from product specification value); Power settings: 20 M band: 8 dBm 40 M band: 5 dBm 80 M band: 3 dBm Software: Opro_DOS_Labtool_Ver2.0.0.84 *This setting of software is the worst case. Any conditions under the normal use do not exceed the condition of setting. In addition, end users cannot change the settings of the output power of the product.	

*The details of Operation mode(s)

Test Item	Operating Mode	Tested Antenna port	Tested Frequency			
			Lower Band	Middle Band	Additional Band	Upper Band
Radiated Spurious Emission (Below 1 GHz)	11a Tx *1)	WA+WC	5180 MHz	-	-	-
Radiated Spurious Emission (Above 1 GHz)	11a Tx *2) 11ac-20 Tx	WA+WC	5180 MHz	5260 MHz 5320 MHz	5500 MHz 5580 MHz 5700 MHz	5745 MHz 5785 MHz 5825 MHz
	11ac-40 Tx *3)	WA+WC	5190 MHz	5270 MHz 5310 MHz	5510 MHz 5550 MHz 5670 MHz	5755 MHz 5795 MHz
	11ac-80 Tx	WA+WC	5210 MHz	5290 MHz	5530 MHz 5610 MHz	5775 MHz
*1) The mode was tested as a representative, because it had the highest power at antenna terminal test. *2) Since 11a and 11n-20 have the same modulation method and no differences in transmitting specification, test was performed on the representative mode that had the highest peak output power *3) Since 11n-40 and 11ac-40 have the same modulation method and no differences in transmitting specification, test was performed on the representative mode that had the highest peak output power.						

*Simultaneously transmission

Test Item	Operating Mode *1)	Tested Antenna port	Tested Frequency			
			Lower Band	Middle Band	Additional Band	Upper Band
Radiated Spurious Emission	Hopping on 3DH5 + 11ac-80	WA+WC	-	5290	-	-
*1) The mode was tested as a representative, because it had the worst margin of 5GHz at radiated emission test.						

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

4.2 Configuration and peripherals

This page has been submitted for a separate exhibit.

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

SECTION 5: Radiated Spurious Emission and Band Edge Compliance

Test Procedure

< Below 1GHz >

EUT was placed on a urethane platform of nominal size, 0.5 m by 1.0 m, raised 0.8 m above the conducting ground plane. The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with a ground plane.

< Above 1GHz >

EUT was placed on a urethane platform of nominal size, 0.5 m by 0.5 m, raised 1.5 m above the conducting ground plane.

The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with absorbent materials lined on a ground plane.

The height of the measuring antenna varied between 1 and 4 m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field strength.

The measurements were performed for both vertical and horizontal antenna polarization with the Test Receiver, or the Spectrum Analyzer.

The measurements were made with the following detector function of the test receiver and the Spectrum analyzer (in linear mode).

The test was made with the detector (RBW/VBW) in the following table.

When using Spectrum analyzer, the test was made with adjusting span to zero by using peak hold.

< Below 1GHz >

The result also satisfied with the general limits specified in section 15.209 (a).

< Above 1GHz >

Inside of restricted bands (Section 15.205):

Apply to limit in the Section 15.209 (a).

Outside of the restricted bands:

Apply to limit 68.2 dBuV/m, 3 m (-27 dBm e.i.r.p. *) in the Section 15.407 (b) (1) (2) (3).

For W58 Bandedge

-27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge in the section 15.407(b)(4)(i).

Restricted band edge:

Apply to limit in the Section 15.209 (a).

Since this limit is severer than the limit of the inside of restricted bands.

*Electric field strength to e.i.r.p. conversion:

$$E = \frac{1000000\sqrt{30P}}{3} \text{ (uV/m)} \quad : P \text{ is the e.i.r.p. (Watts)}$$

Test Antennas are used as below;

Frequency	30 MHz to 200 MHz	200 MHz to 1 GHz	Above 1 GHz
Antenna Type	Biconical	Logperiodic	Horn

Frequency	Below 1 GHz	Above 1 GHz	
Instrument used	Test Receiver	Spectrum Analyzer	
Detector	QP	Peak	Average
IF Bandwidth	BW: 120 kHz	RBW: 1 MHz VBW: 3 MHz	Method AD *1) RBW: 1 MHz VBW: 3 MHz Detector: Power Averaging (RMS) Trace: ≥ 100 traces If duty cycle was less than 98%, a duty factor was added to the results. Integration Method: <u>13.3.1</u> RBW: 100 kHz VBW: 300 kHz Span: 2 MHz Band Power: 1 MHz Detector: Power Averaging (RMS) Trace: 100 traces
Test Distance	3 m	3 m (below 1 GHz), 3 m*2) (1 GHz – 10GHz), 1 m*3) (10 GHz – 40 GHz)	

*1) The test method was also referred to KDB 789033 D02 General UNII Test Procedures New Rules v01r03 "Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices Part 15, Subpart E".

*2) Distance Factor: $20 \times \log (3.65 \text{ m}/3.0 \text{ m}) = 1.71 \text{ dB}$

*3) Distance Factor: $20 \times \log (1.0 \text{ m}/3.0 \text{ m}) = -9.5 \text{ dB}$

- The carrier level and noise levels were confirmed at each position of X, Y and Z axes of EUT (Antenna and Module) to see the position of maximum noise, and the test was made at the position that has the maximum noise.

The test results and limit are rounded off to one decimal place, so some differences might be observed.

Measurement range : 30 MHz-40 GHz
Test data : APPENDIX
Test result : Pass

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

APPENDIX 1: Test data

Radiated Spurious Emission

Test place Ise EMC Lab. No.2 Semi Anechoic Chamber
Report No. 11653099H
Date February 19, 2017 February 24, 2017 February 24, 2017 February 25, 2017
Temperature / Humidity 23deg. C / 29 % RH 23deg. C / 32 % RH 23deg. C / 32 % RH 24 deg. C / 25 % RH
Engineer Takumi Shimada Takumi Shimada Yuta Moriya Tomoki Matsui
(1 GHz-10 GHz) (10 GHz-18 GHz) (18 GHz-40 GHz) (Below 1 GHz)
Mode Tx 11a 5180 MHz

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	37.600	QP	25.3	14.9	6.8	28.2	-	18.8	40.0	21.2	
Hori	49.147	QP	25.4	11.1	7.0	28.1	-	15.4	40.0	24.6	
Hori	88.000	QP	24.6	8.0	7.3	28.0	-	11.9	40.0	28.1	
Hori	103.000	QP	26.3	10.5	7.5	27.9	-	16.4	43.5	27.1	
Hori	112.100	QP	26.5	11.8	7.5	27.9	-	17.9	43.5	25.6	
Hori	368.560	QP	29.4	15.1	9.3	27.6	-	26.2	46.0	19.8	
Hori	5150.000	PK	46.1	32.0	5.4	33.7	-	49.8	73.9	24.1	
Hori	10360.000	PK	43.8	38.7	-2.5	34.3	-	45.7	73.9	28.2	Floor noise
Hori	15540.000	PK	44.1	39.1	-1.0	33.0	-	49.2	73.9	24.7	Floor noise
Hori	5150.000	AV	35.3	32.0	5.4	33.7	-	39.0	53.9	14.9	
Hori	10360.000	AV	35.0	38.7	-2.5	34.3	-	36.9	53.9	17.0	Floor noise
Hori	15540.000	AV	35.5	39.1	-1.0	33.0	-	40.6	53.9	13.3	Floor noise
Vert	37.600	QP	25.4	14.9	6.8	28.2	-	18.9	40.0	21.1	
Vert	49.147	QP	28.8	11.1	7.0	28.1	-	18.8	40.0	21.2	
Vert	88.000	QP	28.4	8.0	7.3	28.0	-	15.7	40.0	24.3	
Vert	103.000	QP	25.1	10.5	7.5	27.9	-	15.2	43.5	28.3	
Vert	110.900	QP	25.0	11.6	7.5	27.9	-	16.2	43.5	27.3	
Vert	368.560	QP	25.3	15.1	9.3	27.6	-	22.1	46.0	23.9	
Vert	5150.000	PK	46.7	32.0	5.4	33.7	-	50.4	73.9	23.5	
Vert	10360.000	PK	42.8	38.7	-2.5	34.3	-	44.7	73.9	29.2	Floor noise
Vert	15540.000	PK	44.3	39.1	-1.0	33.0	-	49.4	73.9	24.5	Floor noise
Vert	5150.000	AV	37.4	32.0	5.4	33.7	-	41.1	53.9	12.8	
Vert	10360.000	AV	33.8	38.7	-2.5	34.3	-	35.7	53.9	18.2	Floor noise
Vert	15540.000	AV	35.6	39.1	-1.0	33.0	-	40.7	53.9	13.2	Floor noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz $20\log(3.65\text{ m} / 3.0\text{ m}) = 1.71\text{ dB}$
10 GHz - 40 GHz $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$

UL Japan, Inc.

Ise EMC Lab.



4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission

Test place : Ise EMC Lab. No2 Semi Anechoic Chamber
Report No. : 11653099H
Date : February 19, 2017
Temperature / Humidity : 23deg. C / 29 % RH
Engineer : Takumi Shimada
Mode : Tx 11a 5180 MHz

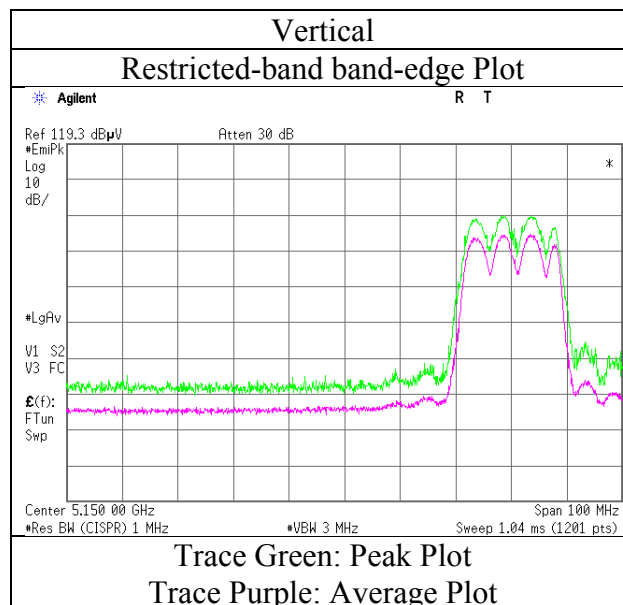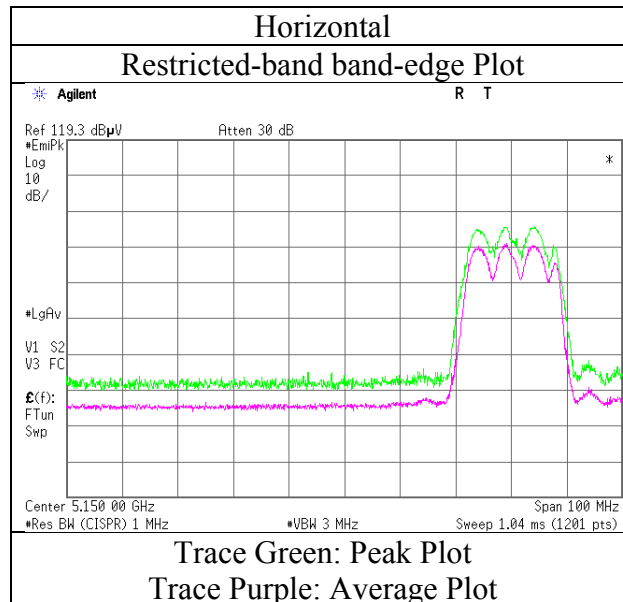

* Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place	Ise EMC Lab. No.2 Semi Anechoic Chamber		
Report No.	11653099H		
Date	February 19, 2017	February 24, 2017	February 24, 2017
Temperature / Humidity	23deg. C / 29 % RH	23deg. C / 32 % RH	23deg. C / 32 % RH
Engineer	Takumi Shimada	Takumi Shimada	Yuta Moriya
	(1 GHz-10 GHz)	(10 GHz-18 GHz)	(18 GHz-40 GHz)
Mode	Tx 11a 5260 MHz		

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	10520.000	PK	42.7	38.7	-2.4	34.1	-	44.9	73.9	29.0	Floor noise
Hori.	15780.000	PK	43.8	38.4	-0.9	33.1	-	48.2	73.9	25.7	Floor noise
Hori.	10520.000	AV	34.9	38.7	-2.4	34.1	-	37.1	53.9	16.8	Floor noise
Hori.	15780.000	AV	35.8	38.4	-0.9	33.1	-	40.2	53.9	13.7	Floor noise
Vert.	10520.000	PK	42.5	38.7	-2.4	34.1	-	44.7	73.9	29.2	Floor noise
Vert.	15780.000	PK	44.2	38.4	-0.9	33.1	-	48.6	73.9	25.3	Floor noise
Vert.	10520.000	AV	34.9	38.7	-2.4	34.1	-	37.1	53.9	16.8	Floor noise
Vert.	15780.000	AV	35.9	38.4	-0.9	33.1	-	40.3	53.9	13.6	Floor noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz 20log (3.65 m / 3.0 m) = 1.71 dB
 10 GHz - 40 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission

Test place	Ise EMC Lab. No2 Semi Anechoic Chamber		
Report No.	11653099H		
Date	February 19, 2017	February 24, 2017	February 24, 2017
Temperature / Humidity	23deg. C / 29 % RH	23deg. C / 32 % RH	23deg. C / 32 % RH
Engineer	Takumi Shimada (1 GHz-10 GHz)	Takumi Shimada (10 GHz-18 GHz)	Yuta Moriya (18 GHz-40 GHz)
Mode	Tx 11a 5320 MHz		

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	5350.000	PK	57.8	32.0	5.5	33.7	-	61.6	73.9	12.3	
Hori	10640.000	PK	43.3	39.0	-2.3	34.1	-	45.9	73.9	28.0	Floor noise
Hori	15960.000	PK	44.0	37.9	-0.8	33.2	-	47.9	73.9	26.0	Floor noise
Hori	5350.000	AV	37.3	32.0	5.5	33.7	-	41.1	53.9	12.8	
Hori	10640.000	AV	34.9	39.0	-2.3	34.1	-	37.5	53.9	16.4	Floor noise
Hori	15960.000	AV	35.8	37.9	-0.8	33.2	-	39.7	53.9	14.2	Floor noise
Vert	5350.000	PK	57.6	32.0	5.5	33.7	-	61.4	73.9	12.5	
Vert	10640.000	PK	42.6	39.0	-2.3	34.1	-	45.2	73.9	28.7	Floor noise
Vert	15960.000	PK	44.1	37.9	-0.8	33.2	-	48.0	73.9	25.9	Floor noise
Vert	5350.000	AV	38.5	32.0	5.5	33.7	-	42.3	53.9	11.6	
Vert	10640.000	AV	34.3	39.0	-2.3	34.1	-	36.9	53.9	17.0	Floor noise
Vert	15960.000	AV	36.1	37.9	-0.8	33.2	-	40.0	53.9	13.9	Floor noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor:	1 GHz - 10 GHz	$20\log(3.65 \text{ m} / 3.0 \text{ m}) = 1.71 \text{ dB}$
	10 GHz - 40 GHz	$20\log(1.0 \text{ m} / 3.0 \text{ m}) = -9.5 \text{ dB}$

UL Japan, Inc.

Ise EMC Lab.



4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission

Test place : Ise EMC Lab. No2 Semi Anechoic Chamber
Report No. : 11653099H
Date : February 19, 2017
Temperature / Humidity : 23deg. C / 29 % RH
Engineer : Takumi Shimada
Mode : Tx 11a 5320 MHz

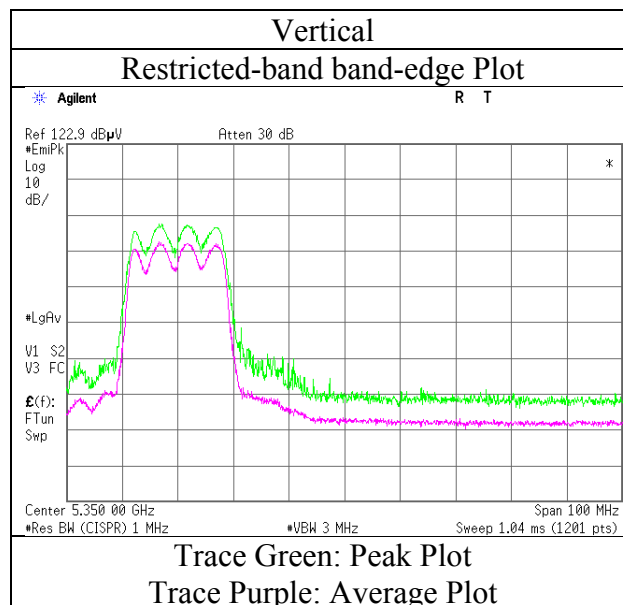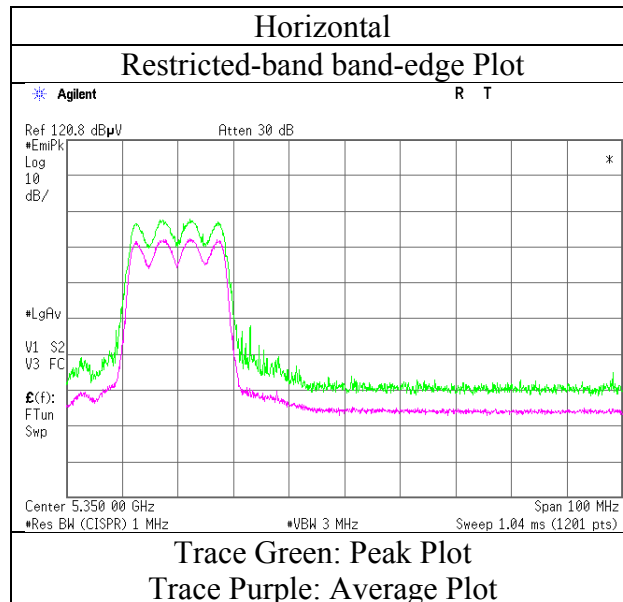

* Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place	Ise EMC Lab. No2 Semi Anechoic Chamber		
Report No.	11653099H		
Date	February 19, 2017	February 24, 2017	February 24, 2017
Temperature / Humidity	23deg. C / 29 % RH	23deg. C / 32 % RH	23deg. C / 32 % RH
Engineer	Takumi Shimada (1 GHz-10 GHz)	Takumi Shimada (10 GHz-18 GHz)	Yuta Moriya (18 GHz-40 GHz)
Mode	Tx 11a 5500 MHz		

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	5470.000	PK	48.9	32.0	5.5	33.6	-	52.8	73.9	21.1	
Hori.	11000.000	PK	43.2	39.8	-2.2	33.8	-	47.0	73.9	26.9	Floor noise
Hori.	16500.000	PK	43.8	39.6	-0.8	32.9	-	49.7	73.9	24.2	Floor noise
Hori.	5470.000	AV	37.0	32.0	5.5	33.6	-	40.9	53.9	13.0	
Hori.	11000.000	AV	34.4	39.8	-2.2	33.8	-	38.2	53.9	15.7	Floor noise
Hori.	16500.000	AV	35.8	39.6	-0.8	32.9	-	41.7	53.9	12.2	Floor noise
Vert.	5470.000	PK	49.3	32.0	5.5	33.6	-	53.2	73.9	20.7	
Vert.	11000.000	PK	42.3	39.8	-2.2	33.8	-	46.1	73.9	27.8	Floor noise
Vert.	16500.000	PK	43.7	39.6	-0.8	32.9	-	49.6	73.9	24.3	Floor noise
Vert.	5470.000	AV	36.9	32.0	5.5	33.6	-	40.8	53.9	13.1	
Vert.	11000.000	AV	34.3	39.8	-2.2	33.8	-	38.1	53.9	15.8	Floor noise
Vert.	16500.000	AV	35.8	39.6	-0.8	32.9	-	41.7	53.9	12.2	Floor noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz $20\log(3.65\text{ m} / 3.0\text{ m}) = 1.71\text{ dB}$
 10 GHz - 40 GHz $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$

UL Japan, Inc.

Ise EMC Lab.



4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission

Test place	Ise EMC Lab. No2 Semi Anechoic Chamber
Report No.	11653099H
Date	February 19, 2017
Temperature / Humidity	23deg. C / 29 % RH
Engineer	Takumi Shimada
Mode	Tx 11a 5500 MHz

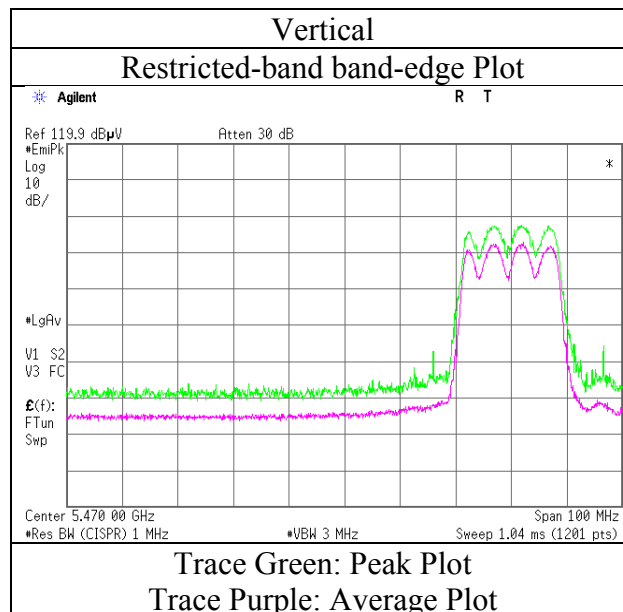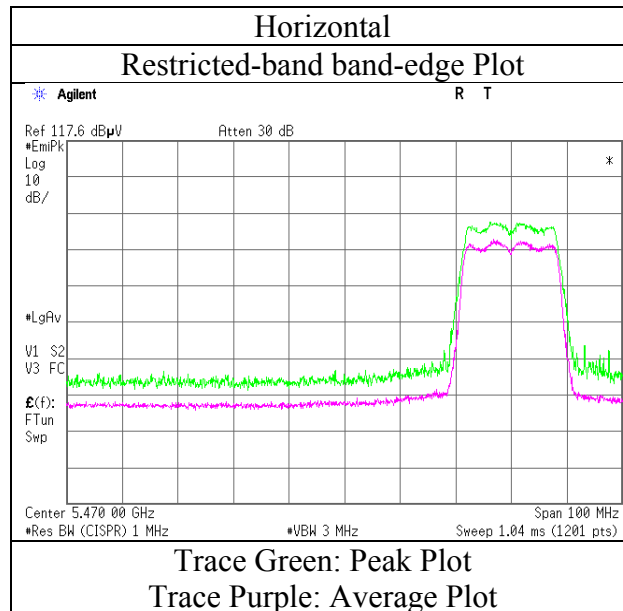

* Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place	Ise EMC Lab. No2 Semi Anechoic Chamber		
Report No.	11653099H		
Date	February 19, 2017	February 24, 2017	February 24, 2017
Temperature / Humidity	23deg. C / 29 % RH	23deg. C / 32 % RH	23deg. C / 32 % RH
Engineer	Takumi Shimada (1 GHz-10 GHz)	Takumi Shimada (10 GHz-18 GHz)	Yuta Moriya (18 GHz-40 GHz)
Mode	Tx 11a 5580 MHz		

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	11160.000	PK	42.9	39.9	-2.2	33.7	-	46.9	73.9	27.0	Floor noise
Hori.	16740.000	PK	43.7	40.5	-0.6	32.8	-	50.8	73.9	23.1	Floor noise
Hori.	11160.000	AV	34.0	39.9	-2.2	33.7	-	38.0	53.9	15.9	Floor noise
Hori.	16740.000	AV	35.4	40.5	-0.6	32.8	-	42.5	53.9	11.4	Floor noise
Vert.	11160.000	PK	42.6	39.9	-2.2	33.7	-	46.6	73.9	27.3	Floor noise
Vert.	16740.000	PK	43.5	40.5	-0.6	32.8	-	50.6	73.9	23.3	Floor noise
Vert.	11160.000	AV	34.0	39.9	-2.2	33.7	-	38.0	53.9	15.9	Floor noise
Vert.	16740.000	AV	35.3	40.5	-0.6	32.8	-	42.4	53.9	11.5	Floor noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz $20\log(3.65\text{ m} / 3.0\text{ m}) = 1.71\text{ dB}$
 10 GHz - 40 GHz $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission

Test place	Ise EMC Lab. No2 Semi Anechoic Chamber		
Report No.	11653099H		
Date	February 19, 2017	February 24, 2017	February 24, 2017
Temperature / Humidity	23deg. C / 29 % RH	23deg. C / 32 % RH	23deg. C / 32 % RH
Engineer	Takumi Shimada (1 GHz-10 GHz)	Takumi Shimada (10 GHz-18 GHz)	Yuta Moriya (18 GHz-40 GHz)
Mode	Tx 11a 5700 MHz		

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	5725.000	PK	59.5	32.3	5.6	33.7	-	63.7	73.9	10.2	
Hori.	11400.000	PK	42.6	40.2	-1.9	33.7	-	47.2	73.9	26.7	Floor noise
Hori.	17100.000	PK	43.5	41.7	-0.5	32.6	-	52.1	73.9	21.8	Floor noise
Hori.	5725.000	AV	40.0	32.3	5.6	33.7	-	44.2	53.9	9.7	
Hori.	11400.000	AV	34.4	40.2	-1.9	33.7	-	39.0	53.9	14.9	Floor noise
Hori.	17100.000	AV	34.8	41.7	-0.5	32.6	-	43.4	53.9	10.5	Floor noise
Vert.	5725.000	PK	58.1	32.3	5.6	33.7	-	62.3	73.9	11.6	
Vert.	11400.000	PK	42.9	40.2	-1.9	33.7	-	47.5	73.9	26.4	Floor noise
Vert.	17100.000	PK	43.9	41.7	-0.5	32.6	-	52.5	73.9	21.4	Floor noise
Vert.	5725.000	AV	40.6	32.3	5.6	33.7	-	44.8	53.9	9.1	
Vert.	11400.000	AV	34.5	40.2	-1.9	33.7	-	39.1	53.9	14.8	Floor noise
Vert.	17100.000	AV	35.1	41.7	-0.5	32.6	-	43.7	53.9	10.2	Floor noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz $20\log(3.65 \text{ m} / 3.0 \text{ m}) = 1.71 \text{ dB}$
 10 GHz - 40 GHz $20\log(1.0 \text{ m} / 3.0 \text{ m}) = -9.5 \text{ dB}$

UL Japan, Inc.

Ise EMC Lab.



4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission

Test place Ise EMC Lab. No2 Semi Anechoic Chamber
Report No. 11653099H
Date February 19, 2017
Temperature / Humidity 23deg. C / 29 % RH
Engineer Takumi Shimada
Mode Tx 11a 5700 MHz

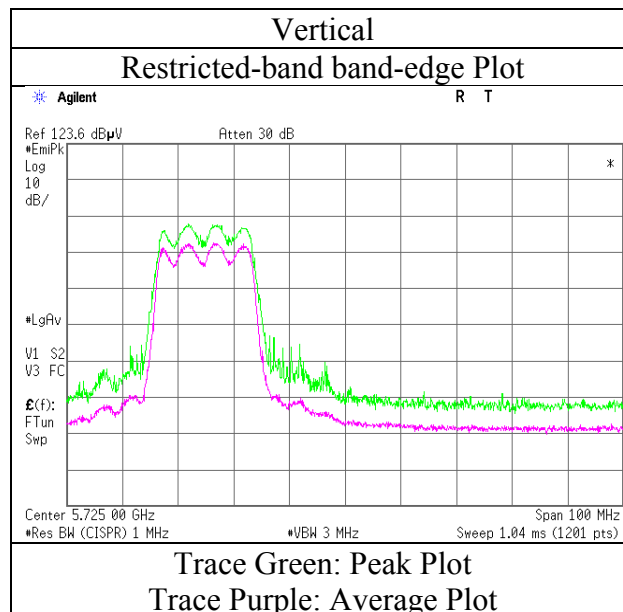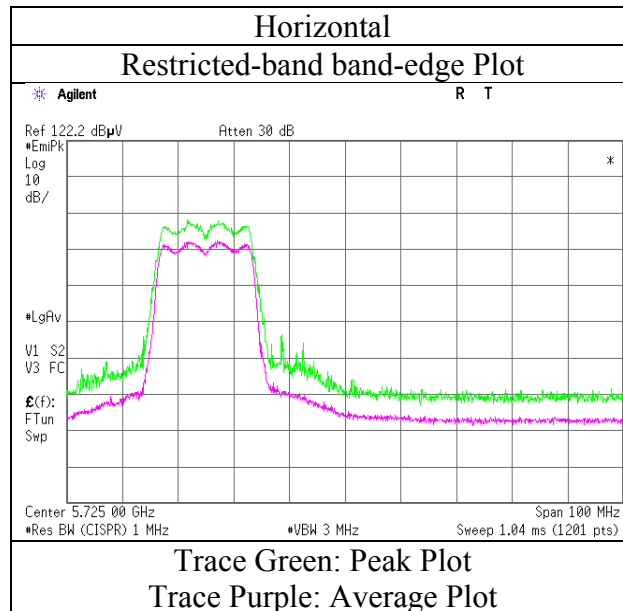

* Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place : Ise EMC Lab. No.2 Semi Anechoic Chamber
Report No. : 11653099H
Date : February 20, 2017 February 24, 2017 February 24, 2017
Temperature / Humidity : 24deg. C / 30 % RH 23deg. C / 32 % RH 23deg. C / 32 % RH
Engineer : Takumi Shimada Takumi Shimada Yuta Moriya
 (1 GHz-10 GHz) (10 GHz-18 GHz) (18 GHz-40 GHz)
Mode : Tx 11a 5745 MHz

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	5650.000	PK	42.1	32.2	5.6	33.6	-	46.3	68.2	21.9	
Hori.	5700.000	PK	43.7	32.3	5.6	33.7	-	47.9	105.2	57.3	
Hori.	5715.000	PK	49.4	32.3	5.6	33.7	-	53.6	109.4	55.8	
Hori.	5720.000	PK	52.2	32.3	5.6	33.7	-	56.4	110.8	54.4	
Hori.	5725.000	PK	59.3	32.3	5.6	33.7	-	63.5	122.2	58.7	
Hori.	11490.000	PK	42.7	40.3	-1.9	33.7	-	47.4	73.9	26.5	Floor noise
Hori.	17235.000	PK	43.5	42.1	-0.5	32.6	-	52.5	73.9	21.4	Floor noise
Hori.	11490.000	AV	34.6	40.3	-1.9	33.7	-	39.3	53.9	14.6	Floor noise
Hori.	17235.000	AV	34.9	42.1	-0.5	32.6	-	43.9	53.9	10.0	Floor noise
Vert.	5650.000	PK	42.3	32.2	5.6	33.6	-	46.5	68.2	21.7	
Vert.	5700.000	PK	45.3	32.3	5.6	33.7	-	49.5	105.2	55.7	
Vert.	5715.000	PK	50.0	32.3	5.6	33.7	-	54.2	109.4	55.2	
Vert.	5720.000	PK	51.2	32.3	5.6	33.7	-	55.4	110.8	55.4	
Vert.	5725.000	PK	56.8	32.3	5.6	33.7	-	61.0	122.2	61.2	
Vert.	11490.000	PK	42.3	40.3	-1.9	33.7	-	47.0	73.9	26.9	Floor noise
Vert.	17235.000	PK	43.1	42.1	-0.5	32.6	-	52.1	73.9	21.8	Floor noise
Vert.	11490.000	AV	34.4	40.3	-1.9	33.7	-	39.1	53.9	14.8	Floor noise
Vert.	17235.000	AV	34.8	42.1	-0.5	32.6	-	43.8	53.9	10.1	Floor noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz 20log (3.65 m / 3.0 m) = 1.71 dB
 10 GHz - 40 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

UL Japan, Inc.

Ise EMC Lab.



4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission

Test place	Ise EMC Lab. No.2 Semi Anechoic Chamber
Report No.	11653099H
Date	February 20, 2017
Temperature / Humidity	24deg. C / 30 % RH
Engineer	Takumi Shimada
Mode	Tx 11a 5745 MHz

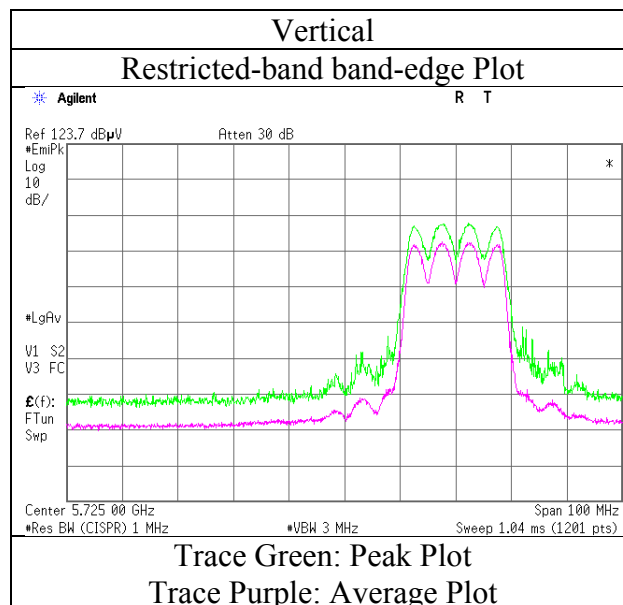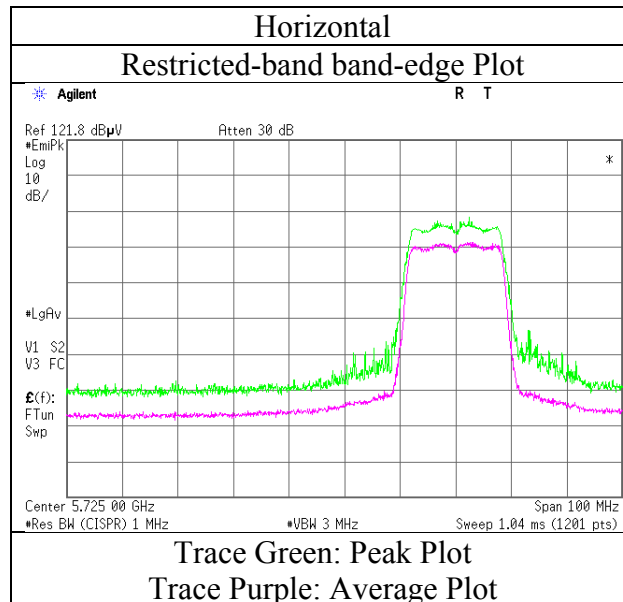

* Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place	Ise EMC Lab. No.2 Semi Anechoic Chamber		
Report No.	11653099H		
Date	February 20, 2017	February 24, 2017	February 24, 2017
Temperature / Humidity	24deg. C / 30 % RH	23deg. C / 32 % RH	23deg. C / 32 % RH
Engineer	Takumi Shimada (1 GHz-10 GHz)	Takumi Shimada (10 GHz-18 GHz)	Yuta Moriya (18 GHz-40 GHz)
Mode	Tx 11a 5785 MHz		

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	11570.000	PK	41.6	40.3	-1.9	33.7	-	46.3	73.9	27.6	Floor noise
Hori.	17355.000	PK	44.0	42.5	-0.5	32.6	-	53.4	73.9	20.5	Floor noise
Hori.	11570.000	AV	33.7	40.3	-1.9	33.7	-	38.4	53.9	15.5	Floor noise
Hori.	17355.000	AV	35.3	42.5	-0.5	32.6	-	44.7	53.9	9.2	Floor noise
Vert.	11570.000	PK	42.4	40.3	-1.9	33.7	-	47.1	73.9	26.8	Floor noise
Vert.	17355.000	PK	43.5	42.5	-0.5	32.6	-	52.9	73.9	21.0	Floor noise
Vert.	11570.000	AV	33.9	40.3	-1.9	33.7	-	38.6	53.9	15.3	Floor noise
Vert.	17355.000	AV	35.2	42.5	-0.5	32.6	-	44.6	53.9	9.3	Floor noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz $20\log(3.65\text{ m} / 3.0\text{ m}) = 1.71\text{ dB}$
 10 GHz - 40 GHz $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission

Test place	Ise EMC Lab. No.2 Semi Anechoic Chamber		
Report No.	11653099H		
Date	February 20, 2017	February 24, 2017	February 24, 2017
Temperature / Humidity	24deg. C / 30 % RH	23deg. C / 32 % RH	23deg. C / 32 % RH
Engineer	Takumi Shimada (1 GHz-10 GHz)	Takumi Shimada (10 GHz-18 GHz)	Yuta Moriya (18 GHz-40 GHz)
Mode	Tx 11a 5825 MHz		

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	5850.000	PK	50.3	32.5	5.7	33.7	-	54.8	122.2	67.4	
Hori.	5855.000	PK	47.1	32.6	5.7	33.7	-	51.7	110.8	59.1	
Hori.	5860.000	PK	46.6	32.6	5.7	33.7	-	51.2	109.4	58.2	
Hori.	5875.000	PK	43.1	32.6	5.7	33.7	-	47.7	105.2	57.5	
Hori.	5925.000	PK	42.4	32.7	5.7	33.7	-	47.1	68.2	21.1	
Hori.	11650.000	PK	42.1	40.3	-1.7	33.7	-	47.0	73.9	26.9	Floor noise
Hori.	17475.000	PK	44.2	42.8	-0.4	32.5	-	54.1	73.9	19.8	Floor noise
Hori.	11650.000	AV	33.9	40.3	-1.7	33.7	-	38.8	53.9	15.1	Floor noise
Hori.	17475.000	AV	35.1	42.8	-0.4	32.5	-	45.0	53.9	8.9	Floor noise
Vert.	5850.000	PK	48.6	32.5	5.7	33.7	-	53.1	122.2	69.1	
Vert.	5855.000	PK	47.7	32.6	5.7	33.7	-	52.3	110.8	58.5	
Vert.	5860.000	PK	46.6	32.6	5.7	33.7	-	51.2	109.4	58.2	
Vert.	5875.000	PK	43.1	32.6	5.7	33.7	-	47.7	105.2	57.5	
Vert.	5925.000	PK	42.0	32.7	5.7	33.7	-	46.7	68.2	21.5	
Vert.	11650.000	PK	42.6	40.3	-1.7	33.7	-	47.5	73.9	26.4	Floor noise
Vert.	17475.000	PK	43.6	42.8	-0.4	32.5	-	53.5	73.9	20.4	Floor noise
Vert.	11650.000	AV	34.2	40.3	-1.7	33.7	-	39.1	53.9	14.8	Floor noise
Vert.	17475.000	AV	35.0	42.8	-0.4	32.5	-	44.9	53.9	9.0	Floor noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz 20log (3.65 m / 3.0 m) = 1.71 dB
 10 GHz - 40 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

UL Japan, Inc.

Ise EMC Lab.



4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission

Test place Ise EMC Lab. No.2 Semi Anechoic Chamber
Report No. 11653099H
Date February 20, 2017
Temperature / Humidity 24deg. C / 30 % RH
Engineer Takumi Shimada
Mode Tx 11a 5825 MHz

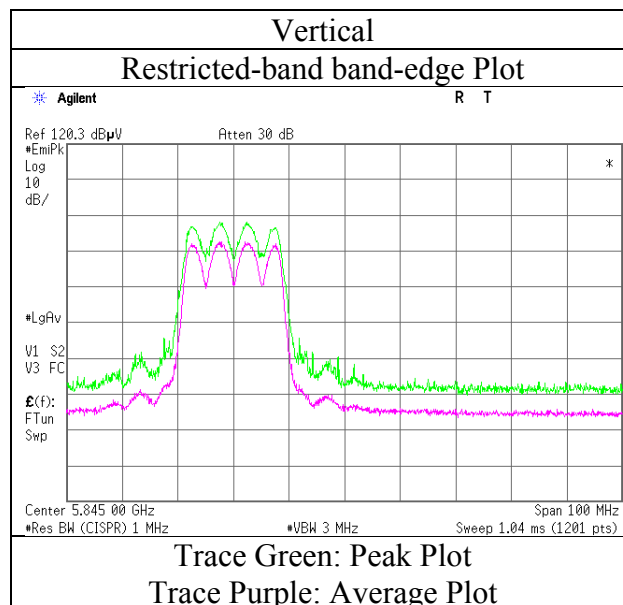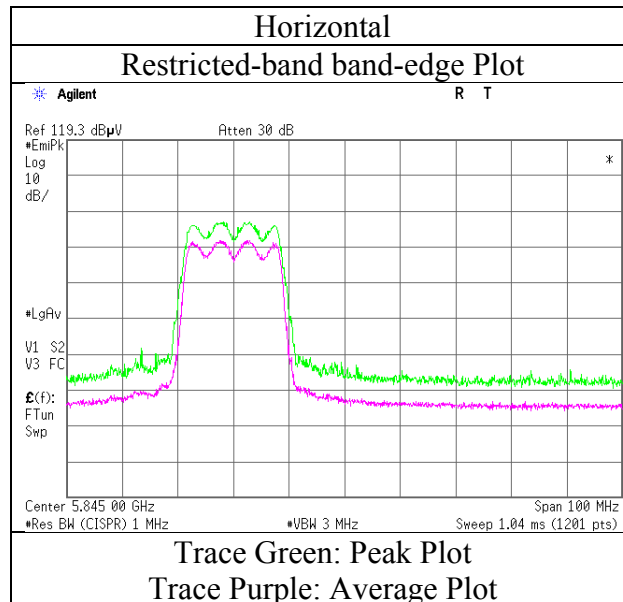

* Final result of restricted band edge was shown in tabular data.

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission

Test place	Ise EMC Lab. No.2 Semi Anechoic Chamber		
Report No.	11653099H		
Date	February 20, 2017	February 24, 2017	February 24, 2017
Temperature / Humidity	24deg. C / 30 % RH	23deg. C / 32 % RH	23deg. C / 32 % RH
Engineer	Takumi Shimada (1 GHz-10 GHz)	Takumi Shimada (10 GHz-18 GHz)	Yuta Moriya (18 GHz-40 GHz)
Mode	Tx 11ac-20 5180 MHz		

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	5150.000	PK	46.3	32.0	5.4	33.7	-	50.0	73.9	23.9	
Hori.	10360.000	PK	43.5	38.7	-2.5	34.3	-	45.4	73.9	28.5	Floor noise
Hori.	15540.000	PK	44.2	39.1	-1.0	33.0	-	49.3	73.9	24.6	Floor noise
Hori.	5150.000	AV	37.1	32.0	5.4	33.7	-	40.8	53.9	13.1	
Hori.	10360.000	AV	34.6	38.7	-2.5	34.3	-	36.5	53.9	17.4	Floor noise
Hori.	15540.000	AV	35.3	39.1	-1.0	33.0	-	40.4	53.9	13.5	Floor noise
Vert.	5150.000	PK	47.7	32.0	5.4	33.7	-	51.4	73.9	22.5	
Vert.	10360.000	PK	42.9	38.7	-2.5	34.3	-	44.8	73.9	29.1	Floor noise
Vert.	15540.000	PK	44.1	39.1	-1.0	33.0	-	49.2	73.9	24.7	Floor noise
Vert.	5150.000	AV	38.8	32.0	5.4	33.7	-	42.5	53.9	11.4	
Vert.	10360.000	AV	33.9	38.7	-2.5	34.3	-	35.8	53.9	18.1	Floor noise
Vert.	15540.000	AV	35.0	39.1	-1.0	33.0	-	40.1	53.9	13.8	Floor noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz $20\log(3.65\text{ m} / 3.0\text{ m}) = 1.71\text{ dB}$
 10 GHz - 40 GHz $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$

UL Japan, Inc.

Ise EMC Lab.



4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission

Test place : Ise EMC Lab. No.2 Semi Anechoic Chamber
Report No. : 11653099H
Date : February 20, 2017
Temperature / Humidity : 24deg. C / 30 % RH
Engineer : Takumi Shimada
Mode : Tx 11ac-20 5180 MHz

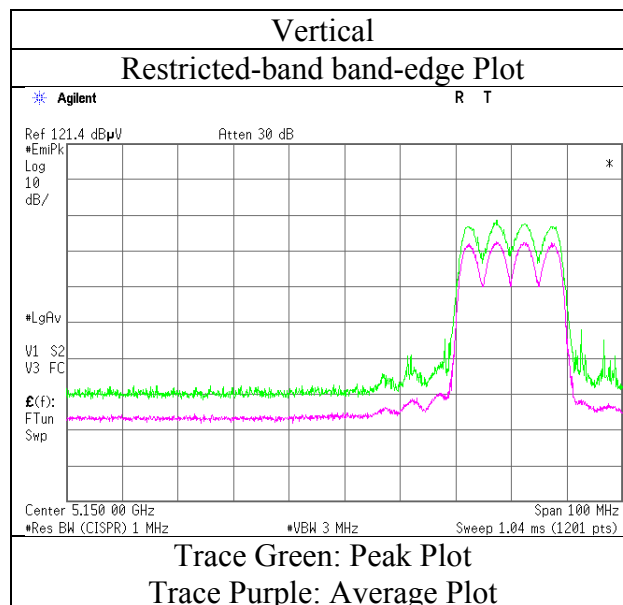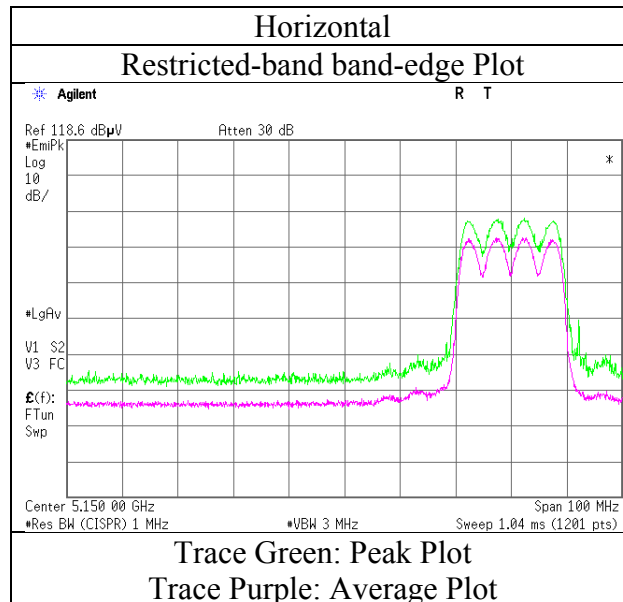

* Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place	Ise EMC Lab. No.2 Semi Anechoic Chamber		
Report No.	11653099H		
Date	February 20, 2017	February 24, 2017	February 24, 2017
Temperature / Humidity	24deg. C / 30 % RH	23deg. C / 32 % RH	23deg. C / 32 % RH
Engineer	Takumi Shimada (1 GHz-10 GHz)	Takumi Shimada (10 GHz-18 GHz)	Yuta Moriya (18 GHz-40 GHz)
Mode	Tx 11ac-20 5260 MHz		

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	10520.000	PK	42.9	38.7	-2.4	34.1	-	45.1	73.9	28.8	Floor noise
Hori.	15780.000	PK	43.6	38.4	-0.9	33.1	-	48.0	73.9	25.9	Floor noise
Hori.	10520.000	AV	34.8	38.7	-2.4	34.1	-	37.0	53.9	16.9	Floor noise
Hori.	15780.000	AV	35.5	38.4	-0.9	33.1	-	39.9	53.9	14.0	Floor noise
Vert.	10520.000	PK	43.0	38.7	-2.4	34.1	-	45.2	73.9	28.7	Floor noise
Vert.	15780.000	PK	44.3	38.4	-0.9	33.1	-	48.7	73.9	25.2	Floor noise
Vert.	10520.000	AV	34.9	38.7	-2.4	34.1	-	37.1	53.9	16.8	Floor noise
Vert.	15780.000	AV	35.8	38.4	-0.9	33.1	-	40.2	53.9	13.7	Floor noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz $20\log(3.65\text{ m} / 3.0\text{ m}) = 1.71\text{ dB}$
 10 GHz - 40 GHz $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission

Test place	Ise EMC Lab. No.2 Semi Anechoic Chamber		
Report No.	11653099H		
Date	February 20, 2017	February 24, 2017	February 24, 2017
Temperature / Humidity	24deg. C / 30 % RH	23deg. C / 32 % RH	23deg. C / 32 % RH
Engineer	Takumi Shimada (1 GHz-10 GHz)	Takumi Shimada (10 GHz-18 GHz)	Yuta Moriya (18 GHz-40 GHz)
Mode	Tx 11ac-20 5320 MHz		

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	5350.000	PK	56.4	32.0	5.5	33.7	-	60.2	73.9	13.7	
Hori.	10640.000	PK	43.0	39.0	-2.3	34.1	-	45.6	73.9	28.3	Floor noise
Hori.	15960.000	PK	43.9	37.9	-0.8	33.2	-	47.8	73.9	26.1	Floor noise
Hori.	5350.000	AV	40.0	32.0	5.5	33.7	-	43.8	53.9	10.1	
Hori.	10640.000	AV	34.5	39.0	-2.3	34.1	-	37.1	53.9	16.8	Floor noise
Hori.	15960.000	AV	35.7	37.9	-0.8	33.2	-	39.6	53.9	14.3	Floor noise
Vert.	5350.000	PK	54.6	32.0	5.5	33.7	-	58.4	73.9	15.5	
Vert.	10640.000	PK	42.8	39.0	-2.3	34.1	-	45.4	73.9	28.5	Floor noise
Vert.	15960.000	PK	44.1	37.9	-0.8	33.2	-	48.0	73.9	25.9	Floor noise
Vert.	5350.000	AV	39.5	32.0	5.5	33.7	-	43.3	53.9	10.6	
Vert.	10640.000	AV	34.4	39.0	-2.3	34.1	-	37.0	53.9	16.9	Floor noise
Vert.	15960.000	AV	36.0	37.9	-0.8	33.2	-	39.9	53.9	14.0	Floor noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz $20\log(3.65\text{ m} / 3.0\text{ m}) = 1.71\text{ dB}$
 10 GHz - 40 GHz $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$

UL Japan, Inc.

Ise EMC Lab.



4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission

Test place : Ise EMC Lab. No.2 Semi Anechoic Chamber
Report No. : 11653099H
Date : February 20, 2017
Temperature / Humidity : 24deg. C / 30 % RH
Engineer : Takumi Shimada
Mode : Tx 11ac-20 5320 MHz

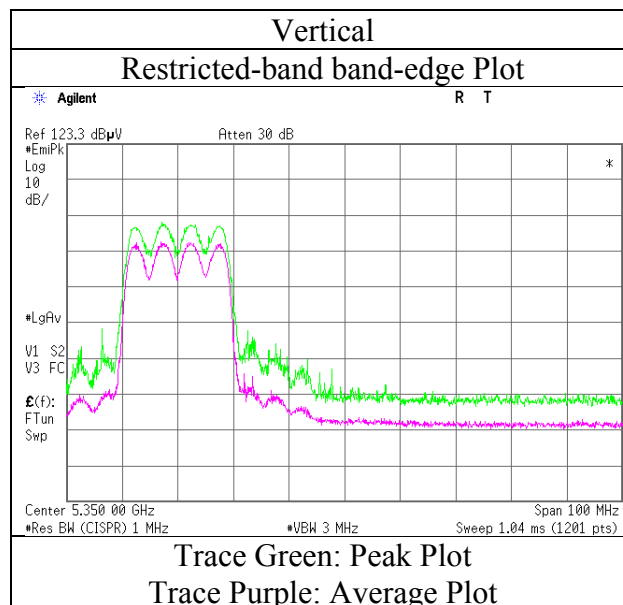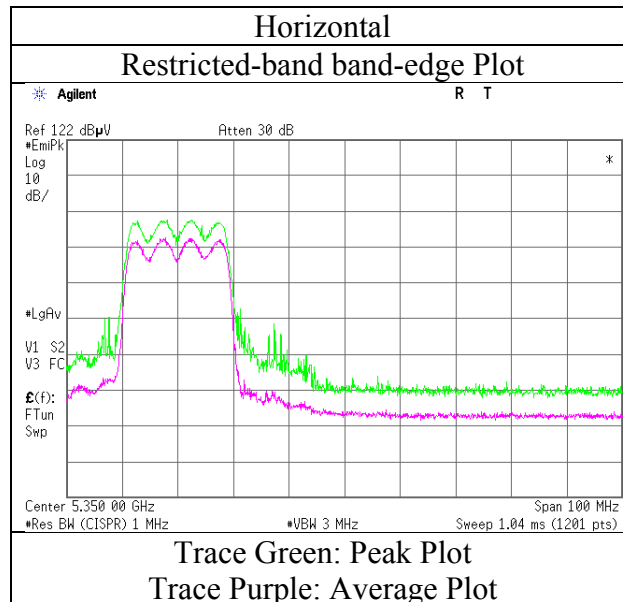

* Final result of restricted band edge was shown in tabular data.

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission

Test place	Ise EMC Lab. No.2 Semi Anechoic Chamber		
Report No.	11653099H		
Date	February 20, 2017	February 24, 2017	February 24, 2017
Temperature / Humidity	24deg. C / 30 % RH	23deg. C / 32 % RH	23deg. C / 32 % RH
Engineer	Takumi Shimada (1 GHz-10 GHz)	Takumi Shimada (10 GHz-18 GHz)	Yuta Moriya (18 GHz-40 GHz)
Mode	Tx 11ac-20 5500 MHz		

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	5470.000	PK	51.0	32.0	5.5	33.6	-	54.9	73.9	19.0	
Hori.	11000.000	PK	43.0	39.8	-2.2	33.8	-	46.8	73.9	27.1	Floor noise
Hori.	16500.000	PK	43.9	39.6	-0.8	32.9	-	49.8	73.9	24.1	Floor noise
Hori.	5470.000	AV	39.5	32.0	5.5	33.6	-	43.4	53.9	10.5	
Hori.	11000.000	AV	34.3	39.8	-2.2	33.8	-	38.1	53.9	15.8	Floor noise
Hori.	16500.000	AV	36.0	39.6	-0.8	32.9	-	41.9	53.9	12.0	Floor noise
Vert.	5470.000	PK	51.1	32.0	5.5	33.6	-	55.0	73.9	18.9	
Vert.	11000.000	PK	42.5	39.8	-2.2	33.8	-	46.3	73.9	27.6	Floor noise
Vert.	16500.000	PK	43.7	39.6	-0.8	32.9	-	49.6	73.9	24.3	Floor noise
Vert.	5470.000	AV	42.1	32.0	5.5	33.6	-	46.0	53.9	7.9	
Vert.	11000.000	AV	34.0	39.8	-2.2	33.8	-	37.8	53.9	16.1	Floor noise
Vert.	16500.000	AV	35.9	39.6	-0.8	32.9	-	41.8	53.9	12.1	Floor noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz $20\log(3.65\text{ m} / 3.0\text{ m}) = 1.71\text{ dB}$
 10 GHz - 40 GHz $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$

UL Japan, Inc.

Ise EMC Lab.



4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission

Test place : Ise EMC Lab. No.2 Semi Anechoic Chamber
Report No. : 11653099H
Date : February 20, 2017
Temperature / Humidity : 24deg. C / 30 % RH
Engineer : Takumi Shimada
Mode : Tx 11ac-20 5500 MHz

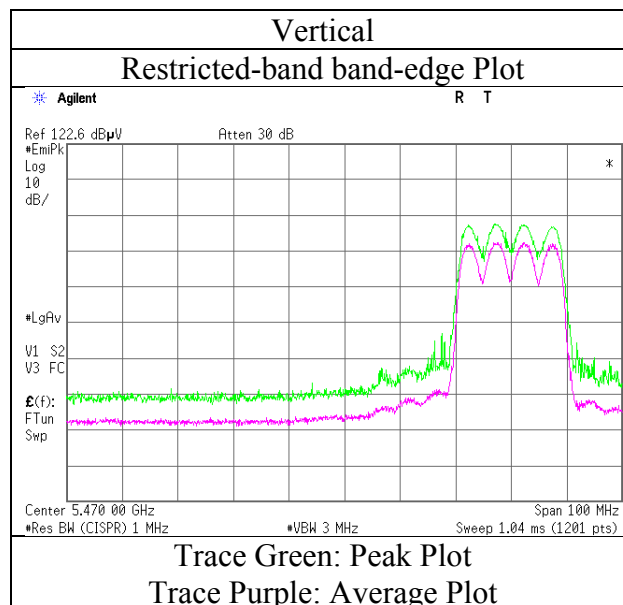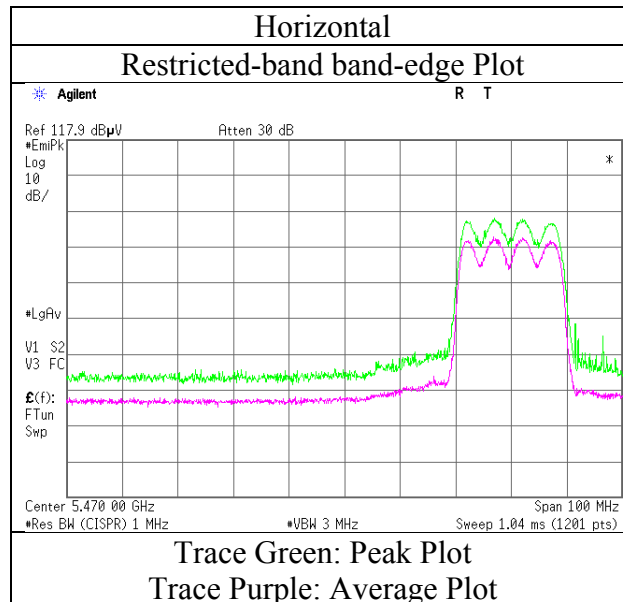

* Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place	Ise EMC Lab. No.2 Semi Anechoic Chamber		
Report No.	11653099H		
Date	February 20, 2017	February 24, 2017	February 24, 2017
Temperature / Humidity	24deg. C / 30 % RH	23deg. C / 32 % RH	23deg. C / 32 % RH
Engineer	Takumi Shimada (1 GHz-10 GHz)	Takumi Shimada (10 GHz-18 GHz)	Yuta Moriya (18 GHz-40 GHz)
Mode	Tx 11ac-20 5580 MHz		

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	11160.000	PK	42.7	39.9	-2.2	33.7	-	46.7	73.9	27.2	Floor noise
Hori.	16740.000	PK	43.9	40.5	-0.6	32.8	-	51.0	73.9	22.9	Floor noise
Hori.	11160.000	AV	33.9	39.9	-2.2	33.7	-	37.9	53.9	16.0	Floor noise
Hori.	16740.000	AV	35.6	40.5	-0.6	32.8	-	42.7	53.9	11.2	Floor noise
Vert.	11160.000	PK	43.0	39.9	-2.2	33.7	-	47.0	73.9	26.9	Floor noise
Vert.	16740.000	PK	44.0	40.5	-0.6	32.8	-	51.1	73.9	22.8	Floor noise
Vert.	11160.000	AV	34.2	39.9	-2.2	33.7	-	38.2	53.9	15.7	Floor noise
Vert.	16740.000	AV	35.7	40.5	-0.6	32.8	-	42.8	53.9	11.1	Floor noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz $20\log(3.65\text{ m} / 3.0\text{ m}) = 1.71\text{ dB}$
 10 GHz - 40 GHz $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission

Test place	Ise EMC Lab. No.2 Semi Anechoic Chamber		
Report No.	11653099H		
Date	February 20, 2017	February 24, 2017	February 24, 2017
Temperature / Humidity	24deg. C / 30 % RH	23deg. C / 32 % RH	23deg. C / 32 % RH
Engineer	Takumi Shimada (1 GHz-10 GHz)	Takumi Shimada (10 GHz-18 GHz)	Yuta Moriya (18 GHz-40 GHz)
Mode	Tx 11ac-20 5700 MHz		

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	5725.000	PK	58.0	32.3	5.6	33.7	-	62.2	73.9	11.7	
Hori.	11400.000	PK	42.5	40.2	-1.9	33.7	-	47.1	73.9	26.8	Floor noise
Hori.	17100.000	PK	43.6	41.7	-0.5	32.6	-	52.2	73.9	21.7	Floor noise
Hori.	5725.000	AV	43.5	32.3	5.6	33.7	-	47.7	53.9	6.2	
Hori.	11400.000	AV	33.9	40.2	-1.9	33.7	-	38.5	53.9	15.4	Floor noise
Hori.	17100.000	AV	34.8	41.7	-0.5	32.6	-	43.4	53.9	10.5	Floor noise
Vert.	5725.000	PK	55.4	32.3	5.6	33.7	-	59.6	73.9	14.3	
Vert.	11400.000	PK	42.9	40.2	-1.9	33.7	-	47.5	73.9	26.4	Floor noise
Vert.	17100.000	PK	44.0	41.7	-0.5	32.6	-	52.6	73.9	21.3	Floor noise
Vert.	5725.000	AV	42.9	32.3	5.6	33.7	-	47.1	53.9	6.8	
Vert.	11400.000	AV	34.1	40.2	-1.9	33.7	-	38.7	53.9	15.2	Floor noise
Vert.	17100.000	AV	35.2	41.7	-0.5	32.6	-	43.8	53.9	10.1	Floor noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz $20\log(3.65\text{ m} / 3.0\text{ m}) = 1.71\text{ dB}$
 10 GHz - 40 GHz $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$

UL Japan, Inc.

Ise EMC Lab.



4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission

Test place Ise EMC Lab. No.2 Semi Anechoic Chamber
Report No. 11653099H
Date February 20, 2017
Temperature / Humidity 24deg. C / 30 % RH
Engineer Takumi Shimada
Mode Tx 11ac-20 5700 MHz

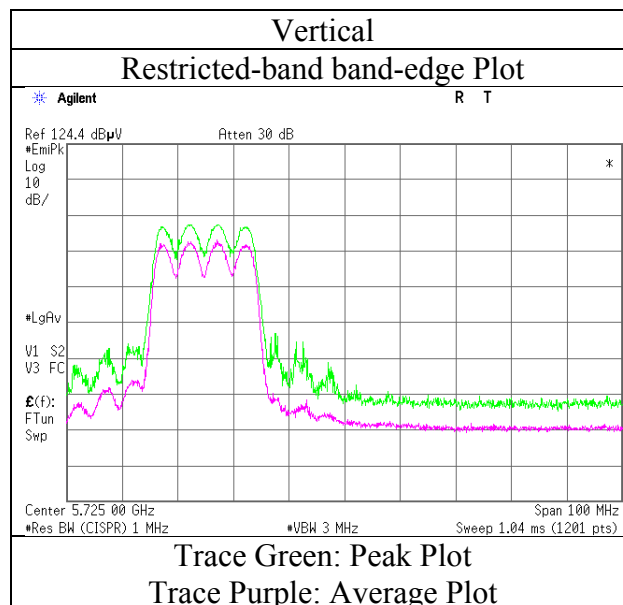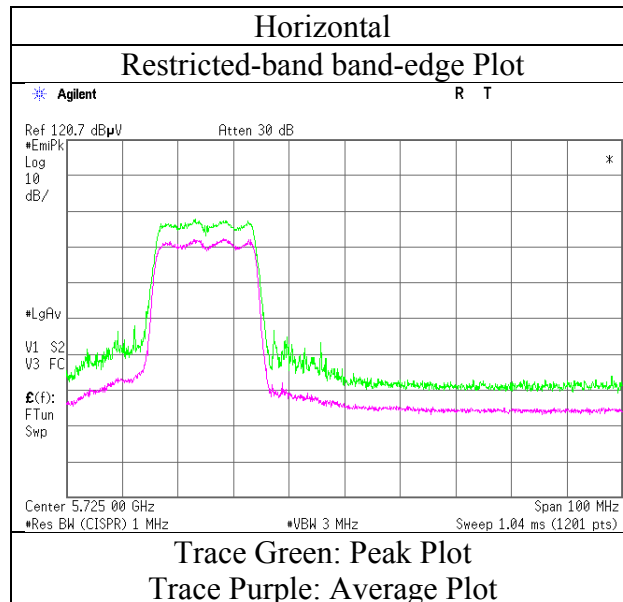

* Final result of restricted band edge was shown in tabular data.

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission

Test place	Ise EMC Lab. No.2 Semi Anechoic Chamber		
Report No.	11653099H		
Date	February 20, 2017	February 24, 2017	February 24, 2017
Temperature / Humidity	24deg. C / 30 % RH	23deg. C / 32 % RH	23deg. C / 32 % RH
Engineer	Takumi Shimada (1 GHz-10 GHz)	Takumi Shimada (10 GHz-18 GHz)	Yuta Moriya (18 GHz-40 GHz)
Mode	Tx 11ac-20 5745 MHz		

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	5650.000	PK	42.5	32.2	5.6	33.6	-	46.7	68.2	21.5	
Hori.	5700.000	PK	43.6	32.3	5.6	33.7	-	47.8	105.2	57.4	
Hori.	5715.000	PK	52.8	32.3	5.6	33.7	-	57.0	109.4	52.4	
Hori.	5720.000	PK	54.6	32.3	5.6	33.7	-	58.8	110.8	52.0	
Hori.	5725.000	PK	59.0	32.3	5.6	33.7	-	63.2	122.2	59.0	
Hori.	11490.000	PK	42.6	40.3	-1.9	33.7	-	47.3	73.9	26.6	Floor noise
Hori.	17235.000	PK	43.6	42.1	-0.5	32.6	-	52.6	73.9	21.3	Floor noise
Hori.	11490.000	AV	34.7	40.3	-1.9	33.7	-	39.4	53.9	14.5	Floor noise
Hori.	17235.000	AV	35.0	42.1	-0.5	32.6	-	44.0	53.9	9.9	Floor noise
Vert.	5650.000	PK	43.5	32.2	5.6	33.6	-	47.7	68.2	20.5	
Vert.	5700.000	PK	45.6	32.3	5.6	33.7	-	49.8	105.2	55.4	
Vert.	5715.000	PK	52.9	32.3	5.6	33.7	-	57.1	109.4	52.3	
Vert.	5720.000	PK	54.8	32.3	5.6	33.7	-	59.0	110.8	51.8	
Vert.	5725.000	PK	57.4	32.3	5.6	33.7	-	61.6	122.2	60.6	
Vert.	11490.000	PK	42.3	40.3	-1.9	33.7	-	47.0	73.9	26.9	Floor noise
Vert.	17235.000	PK	43.4	42.1	-0.5	32.6	-	52.4	73.9	21.5	Floor noise
Vert.	11490.000	AV	34.6	40.3	-1.9	33.7	-	39.3	53.9	14.6	Floor noise
Vert.	17235.000	AV	34.9	42.1	-0.5	32.6	-	43.9	53.9	10.0	Floor noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz 20log (3.65 m / 3.0 m) = 1.71 dB
 10 GHz - 40 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

UL Japan, Inc.

Ise EMC Lab.



4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission

Test place	Ise EMC Lab. No.2 Semi Anechoic Chamber
Report No.	11653099H
Date	February 20, 2017
Temperature / Humidity	24deg. C / 30 % RH
Engineer	Takumi Shimada
Mode	Tx 11ac-20 5745 MHz

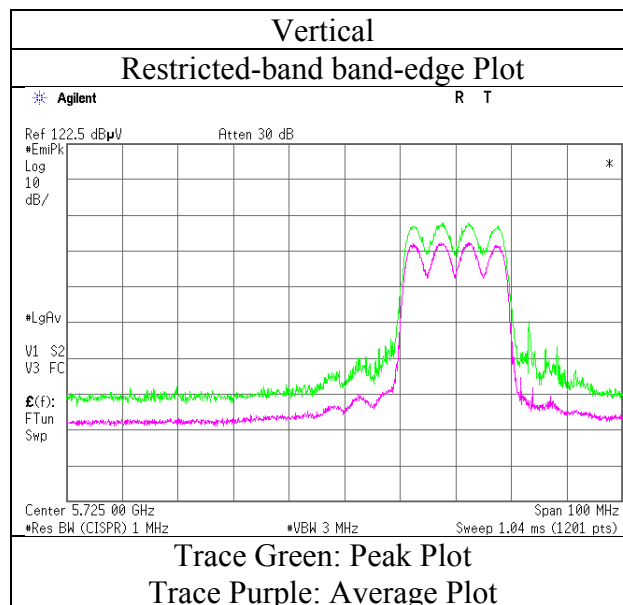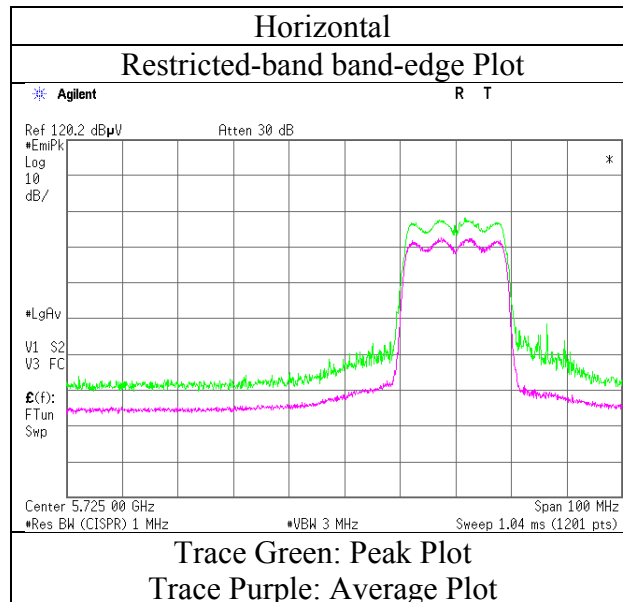

* Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place	Ise EMC Lab. No.2 Semi Anechoic Chamber		
Report No.	11653099H		
Date	February 20, 2017	February 24, 2017	February 24, 2017
Temperature / Humidity	24deg. C / 30 % RH	23deg. C / 32 % RH	23deg. C / 32 % RH
Engineer	Takumi Shimada (1 GHz-10 GHz)	Takumi Shimada (10 GHz-18 GHz)	Yuta Moriya (18 GHz-40 GHz)
Mode	Tx 11ac-20 5785 MHz		

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	11570.000	PK	41.7	40.3	-1.9	33.7	-	46.4	73.9	27.5	Floor noise
Hori.	17355.000	PK	44.1	42.5	-0.5	32.6	-	53.5	73.9	20.4	Floor noise
Hori.	11570.000	AV	33.9	40.3	-1.9	33.7	-	38.6	53.9	15.3	Floor noise
Hori.	17355.000	AV	35.2	42.5	-0.5	32.6	-	44.6	53.9	9.3	Floor noise
Vert.	11570.000	PK	42.3	40.3	-1.9	33.7	-	47.0	73.9	26.9	Floor noise
Vert.	17355.000	PK	43.7	42.5	-0.5	32.6	-	53.1	73.9	20.8	Floor noise
Vert.	11570.000	AV	34.0	40.3	-1.9	33.7	-	38.7	53.9	15.2	Floor noise
Vert.	17355.000	AV	34.9	42.5	-0.5	32.6	-	44.3	53.9	9.6	Floor noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz $20\log(3.65\text{ m} / 3.0\text{ m}) = 1.71\text{ dB}$
 10 GHz - 40 GHz $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission

Test place : Ise EMC Lab. No.2 Semi Anechoic Chamber
Report No. : 11653099H
Date : February 20, 2017 February 24, 2017 February 24, 2017
Temperature / Humidity : 24deg. C / 30 % RH 23deg. C / 32 % RH 23deg. C / 32 % RH
Engineer : Takumi Shimada Takumi Shimada Yuta Moriya
(1 GHz-10 GHz) (10 GHz-18 GHz) (18 GHz-40 GHz)
Mode : Tx 11ac-20 5825 MHz

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	5850.000	PK	50.2	32.5	5.7	33.7	-	54.7	122.2	67.5	
Hori.	5855.000	PK	47.8	32.6	5.7	33.7	-	52.4	110.8	58.4	
Hori.	5860.000	PK	46.5	32.6	5.7	33.7	-	51.1	109.4	58.3	
Hori.	5875.000	PK	42.9	32.6	5.7	33.7	-	47.5	105.2	57.7	
Hori.	5925.000	PK	42.4	32.7	5.7	33.7	-	47.1	68.2	21.1	
Hori.	11650.000	PK	42.8	40.3	-1.7	33.7	-	47.7	73.9	26.2	Floor noise
Hori.	17475.000	PK	44.0	42.8	-0.4	32.5	-	53.9	73.9	20.0	Floor noise
Hori.	11650.000	AV	33.7	40.3	-1.7	33.7	-	38.6	53.9	15.3	Floor noise
Hori.	17475.000	AV	34.9	42.8	-0.4	32.5	-	44.8	53.9	9.1	Floor noise
Vert.	5850.000	PK	51.1	32.5	5.7	33.7	-	55.6	122.2	66.6	
Vert.	5855.000	PK	48.7	32.6	5.7	33.7	-	53.3	110.8	57.5	
Vert.	5860.000	PK	47.7	32.6	5.7	33.7	-	52.3	109.4	57.1	
Vert.	5875.000	PK	43.2	32.6	5.7	33.7	-	47.8	105.2	57.4	
Vert.	5925.000	PK	42.3	32.7	5.7	33.7	-	47.0	68.2	21.2	
Vert.	11650.000	PK	42.8	40.3	-1.7	33.7	-	47.7	73.9	26.2	Floor noise
Vert.	17475.000	PK	44.1	42.8	-0.4	32.5	-	54.0	73.9	19.9	Floor noise
Vert.	11650.000	AV	34.0	40.3	-1.7	33.7	-	38.9	53.9	15.0	Floor noise
Vert.	17475.000	AV	35.1	42.8	-0.4	32.5	-	45.0	53.9	8.9	Floor noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz 20log (3.65 m / 3.0 m) = 1.71 dB
 10 GHz - 40 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

UL Japan, Inc.

Ise EMC Lab.



4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission

Test place Ise EMC Lab. No.2 Semi Anechoic Chamber
Report No. 11653099H
Date February 20, 2017
Temperature / Humidity 24deg. C / 30 % RH
Engineer Takumi Shimada
Mode Tx 11ac-20 5825 MHz

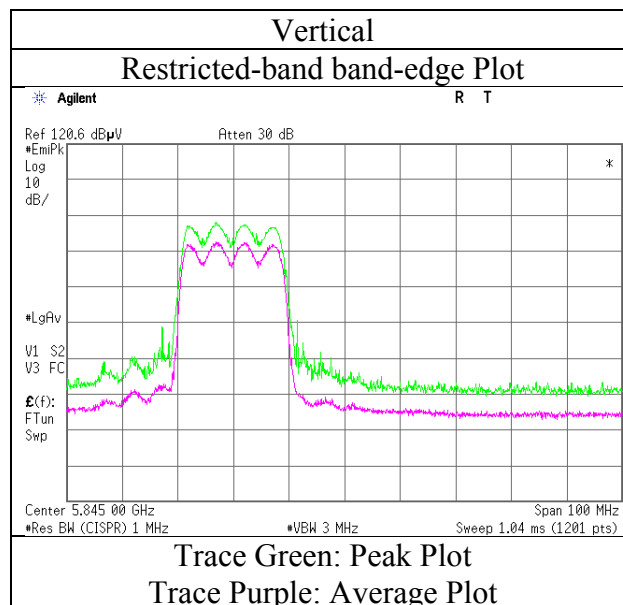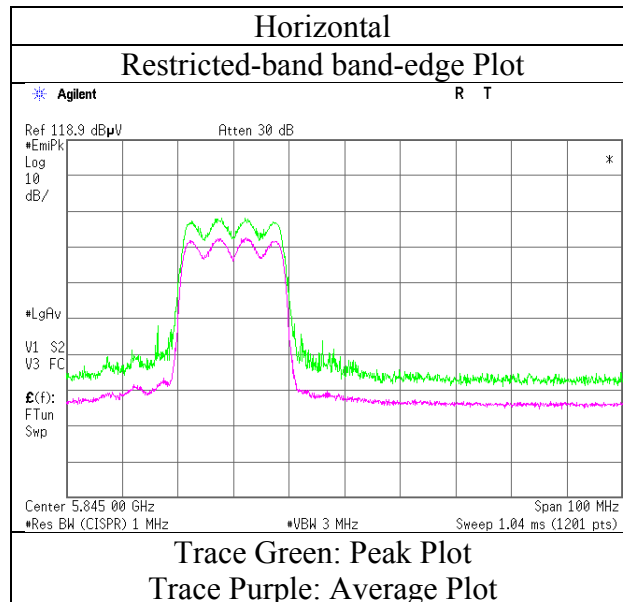

* Final result of restricted band edge was shown in tabular data.

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission

Test place	Ise EMC Lab. No.2 Semi Anechoic Chamber		
Report No.	11653099H		
Date	February 20, 2017	February 24, 2017	February 24, 2017
Temperature / Humidity	24deg. C / 30 % RH	23deg. C / 32 % RH	23deg. C / 32 % RH
Engineer	Takumi Shimada (1 GHz-10 GHz)	Takumi Shimada (10 GHz-18 GHz)	Yuta Moriya (18 GHz-40 GHz)
Mode	Tx 11ac-40 5190 MHz		

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	5150.000	PK	48.8	32.0	5.4	33.7	-	52.5	73.9	21.4	
Hori.	10380.000	PK	43.8	38.7	-2.5	34.3	-	45.7	73.9	28.2	Floor noise
Hori.	15570.000	PK	44.3	39.0	-0.9	33.0	-	49.4	73.9	24.5	Floor noise
Hori.	5150.000	AV	38.2	32.0	5.4	33.7	-	41.9	53.9	12.0	
Hori.	10380.000	AV	34.2	38.7	-2.5	34.3	-	36.1	53.9	17.8	Floor noise
Hori.	15570.000	AV	35.8	39.0	-0.9	33.0	-	40.9	53.9	13.0	Floor noise
Vert.	5150.000	PK	50.5	32.0	5.4	33.7	-	54.2	73.9	19.7	
Vert.	10380.000	PK	43.7	38.7	-2.5	34.3	-	45.6	73.9	28.3	Floor noise
Vert.	15570.000	PK	39.9	39.0	-0.9	33.0	-	45.0	73.9	28.9	Floor noise
Vert.	5150.000	AV	38.2	32.0	5.4	33.7	-	41.9	53.9	12.0	
Vert.	10380.000	AV	34.1	38.7	-2.5	34.3	-	36.0	53.9	17.9	Floor noise
Vert.	15570.000	AV	35.4	39.0	-0.9	33.0	-	40.5	53.9	13.4	Floor noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz 20log (3.65 m / 3.0 m) = 1.71 dB
 10 GHz - 40 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

UL Japan, Inc.

Ise EMC Lab.



4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission

Test place	Ise EMC Lab. No.2 Semi Anechoic Chamber
Report No.	11653099H
Date	February 20, 2017
Temperature / Humidity	24deg. C / 30 % RH
Engineer	Takumi Shimada
Mode	Tx 11ac-40 5190 MHz

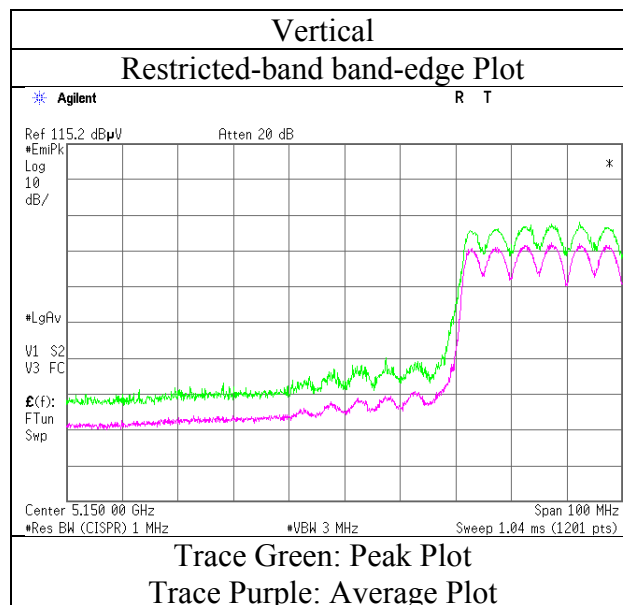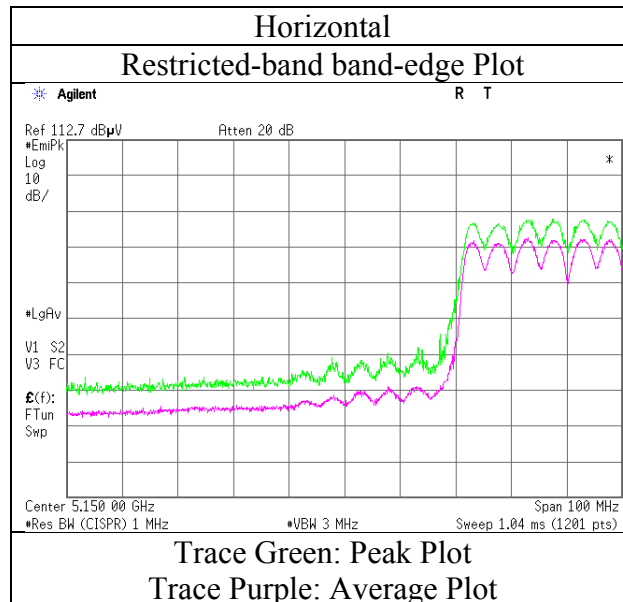

* Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place	Ise EMC Lab. No.2 Semi Anechoic Chamber		
Report No.	11653099H		
Date	February 20, 2017	February 24, 2017	February 24, 2017
Temperature / Humidity	24deg. C / 30 % RH	23deg. C / 32 % RH	23deg. C / 32 % RH
Engineer	Takumi Shimada	Takumi Shimada	Yuta Moriya
	(1 GHz-10 GHz)	(10 GHz-18 GHz)	(18 GHz-40 GHz)
Mode	Tx 11ac-40 5270 MHz		

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	10540.000	PK	43.9	38.8	-2.4	34.1	-	46.2	73.9	27.7	Floor noise
Hori.	15810.000	PK	44.6	38.4	-0.9	33.1	-	49.0	73.9	24.9	Floor noise
Hori.	10540.000	AV	34.8	38.8	-2.4	34.1	-	37.1	53.9	16.8	Floor noise
Hori.	15810.000	AV	36.0	38.4	-0.9	33.1	-	40.4	53.9	13.5	Floor noise
Vert.	10540.000	PK	43.1	38.8	-2.4	34.1	-	45.4	73.9	28.5	Floor noise
Vert.	15810.000	PK	44.3	38.4	-0.9	33.1	-	48.7	73.9	25.2	Floor noise
Vert.	10540.000	AV	34.9	38.8	-2.4	34.1	-	37.2	53.9	16.7	Floor noise
Vert.	15810.000	AV	35.9	38.4	-0.9	33.1	-	40.3	53.9	13.6	Floor noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz 20log (3.65 m / 3.0 m) = 1.71 dB
 10 GHz - 40 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission

Test place	Ise EMC Lab. No.2 Semi Anechoic Chamber		
Report No.	11653099H		
Date	February 20, 2017	February 24, 2017	February 24, 2017
Temperature / Humidity	24deg. C / 30 % RH	23deg. C / 32 % RH	23deg. C / 32 % RH
Engineer	Takumi Shimada (1 GHz-10 GHz)	Takumi Shimada (10 GHz-18 GHz)	Yuta Moriya (18 GHz-40 GHz)
Mode	Tx 11ac-40 5310 MHz		

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	5350.000	PK	56.5	32.0	5.5	33.7	-	60.3	73.9	13.6	
Hori	10620.000	PK	43.1	38.9	-2.3	34.1	-	45.6	73.9	28.3	Floor noise
Hori	15930.000	PK	44.3	38.0	-0.9	33.2	-	48.2	73.9	25.7	Floor noise
Hori	5350.000	AV	41.6	32.0	5.5	33.7	-	45.4	53.9	8.5	
Hori	10620.000	AV	34.8	38.9	-2.3	34.1	-	37.3	53.9	16.6	Floor noise
Hori	15930.000	AV	35.3	38.0	-0.9	33.2	-	39.2	53.9	14.7	Floor noise
Vert	5350.000	PK	56.0	32.0	5.5	33.7	-	59.8	73.9	14.1	
Vert	10620.000	PK	42.8	38.9	-2.3	34.1	-	45.3	73.9	28.6	Floor noise
Vert	15930.000	PK	44.4	38.0	-0.9	33.2	-	48.3	73.9	25.6	Floor noise
Vert	5350.000	AV	40.2	32.0	5.5	33.7	-	44.0	53.9	9.9	
Vert	10620.000	AV	34.7	38.9	-2.3	34.1	-	37.2	53.9	16.7	Floor noise
Vert	15930.000	AV	36.2	38.0	-0.9	33.2	-	40.1	53.9	13.8	Floor noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz 20log (3.65 m / 3.0 m) = 1.71 dB
 10 GHz - 40 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

UL Japan, Inc.

Ise EMC Lab.



4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission

Test place : Ise EMC Lab. No.2 Semi Anechoic Chamber
Report No. : 11653099H
Date : February 20, 2017
Temperature / Humidity : 24deg. C / 30 % RH
Engineer : Takumi Shimada
Mode : Tx 11ac-40 5310 MHz

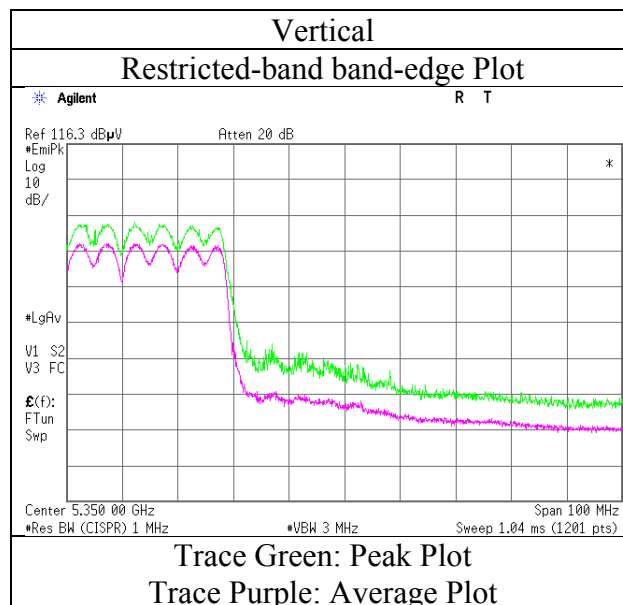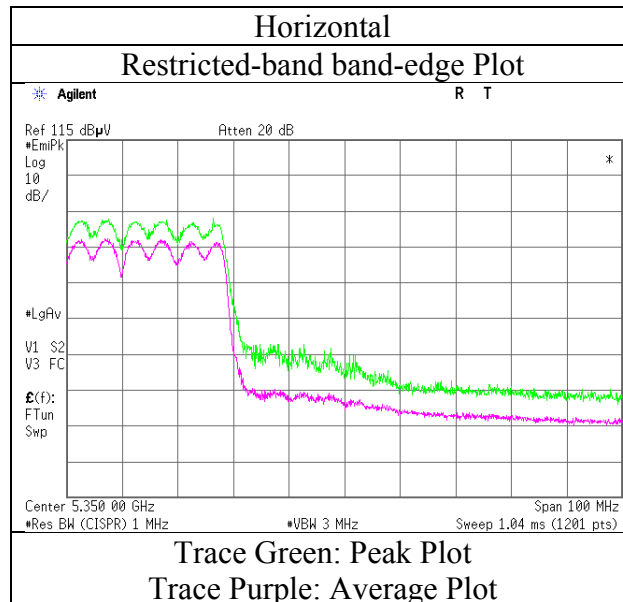

* Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place	Ise EMC Lab. No.2 Semi Anechoic Chamber		
Report No.	11653099H		
Date	February 21, 2017	February 24, 2017	February 24, 2017
Temperature / Humidity	25deg. C / 29 % RH	23deg. C / 32 % RH	23deg. C / 32 % RH
Engineer	Takumi Shimada (1 GHz-10 GHz)	Takumi Shimada (10 GHz-18 GHz)	Yuta Moriya (18 GHz-40 GHz)
Mode	Tx 11ac-40 5510 MHz		

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	5470.000	PK	51.4	32.0	5.5	33.6	-	55.3	73.9	18.6	
Hori.	11020.000	PK	43.1	39.8	-2.2	33.8	-	46.9	73.9	27.0	Floor noise
Hori.	16530.000	PK	44.1	39.7	-0.8	32.9	-	50.1	73.9	23.8	Floor noise
Hori.	5470.000	AV	38.8	32.0	5.5	33.6	-	42.7	53.9	11.2	
Hori.	11020.000	AV	34.2	39.8	-2.2	33.8	-	38.0	53.9	15.9	Floor noise
Hori.	16530.000	AV	36.0	39.7	-0.8	32.9	-	42.0	53.9	11.9	Floor noise
Vert.	5470.000	PK	52.3	32.0	5.5	33.6	-	56.2	73.9	17.7	
Vert.	11020.000	PK	42.8	39.8	-2.2	33.8	-	46.6	73.9	27.3	Floor noise
Vert.	16530.000	PK	44.0	39.7	-0.8	32.9	-	50.0	73.9	23.9	Floor noise
Vert.	5470.000	AV	40.6	32.0	5.5	33.6	-	44.5	53.9	9.4	
Vert.	11020.000	AV	34.0	39.8	-2.2	33.8	-	37.8	53.9	16.1	Floor noise
Vert.	16530.000	AV	35.8	39.7	-0.8	32.9	-	41.8	53.9	12.1	Floor noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz 20log (3.65 m / 3.0 m) = 1.71 dB
 10 GHz - 40 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

UL Japan, Inc.

Ise EMC Lab.



4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission

Test place	Ise EMC Lab. No.2 Semi Anechoic Chamber
Report No.	11653099H
Date	February 21, 2017
Temperature / Humidity	25deg. C / 29 % RH
Engineer	Takumi Shimada
Mode	Tx 11ac-40 5510 MHz

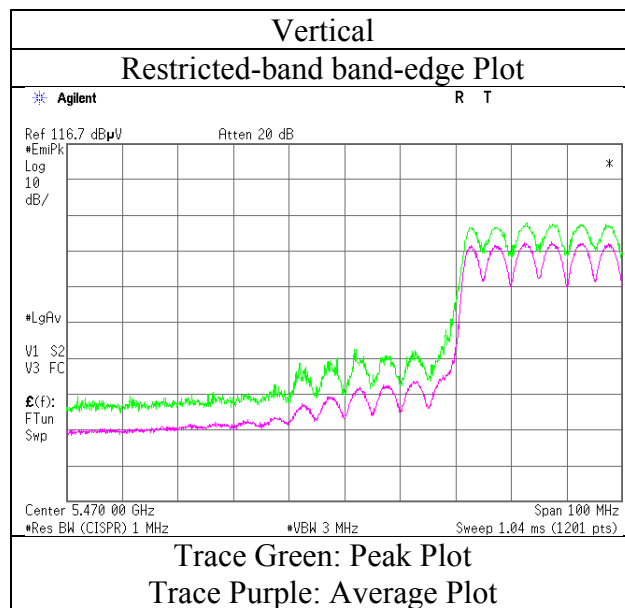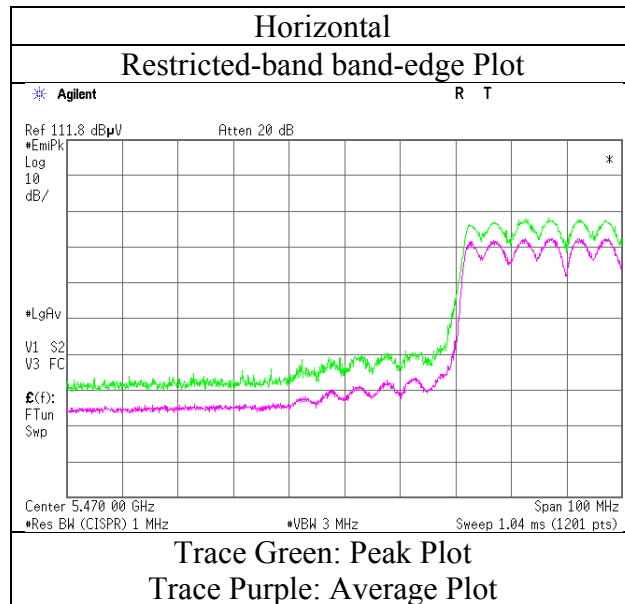

* Final result of restricted band edge was shown in tabular data.

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission

Test place	Ise EMC Lab. No.2 Semi Anechoic Chamber		
Report No.	11653099H		
Date	February 21, 2017	February 24, 2017	February 24, 2017
Temperature / Humidity	25deg. C / 29 % RH	23deg. C / 32 % RH	23deg. C / 32 % RH
Engineer	Takumi Shimada	Takumi Shimada	Yuta Moriya
	(1 GHz-10 GHz)	(10 GHz-18 GHz)	(18 GHz-40 GHz)
Mode	Tx 11ac-40 5550 MHz		

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	11100.000	PK	43.0	39.9	-2.2	33.8	-	46.9	73.9	27.0	Floor noise
Hori.	16650.000	PK	43.9	40.1	-0.6	32.9	-	50.5	73.9	23.4	Floor noise
Hori.	11100.000	AV	34.1	39.9	-2.2	33.8	-	38.0	53.9	15.9	Floor noise
Hori.	16650.000	AV	35.7	40.1	-0.6	32.9	-	42.3	53.9	11.6	Floor noise
Vert.	11100.000	PK	42.7	39.9	-2.2	33.8	-	46.6	73.9	27.3	Floor noise
Vert.	16650.000	PK	44.1	40.1	-0.6	32.9	-	50.7	73.9	23.2	Floor noise
Vert.	11100.000	AV	33.9	39.9	-2.2	33.8	-	37.8	53.9	16.1	Floor noise
Vert.	16650.000	AV	35.9	40.1	-0.6	32.9	-	42.5	53.9	11.4	Floor noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz 20log (3.65 m / 3.0 m) = 1.71 dB
 10 GHz - 40 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission

Test place	Ise EMC Lab. No.2 Semi Anechoic Chamber		
Report No.	11653099H		
Date	February 21, 2017	February 24, 2017	February 24, 2017
Temperature / Humidity	25deg. C / 29 % RH	23deg. C / 32 % RH	23deg. C / 32 % RH
Engineer	Takumi Shimada (1 GHz-10 GHz)	Takumi Shimada (10 GHz-18 GHz)	Yuta Moriya (18 GHz-40 GHz)
Mode	Tx 11ac-40 5670 MHz		

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	5725.000	PK	45.1	32.3	5.6	33.7	-	49.3	73.9	24.6	
Hori.	11340.000	PK	43.0	40.1	-2.0	33.7	-	47.4	73.9	26.5	Floor noise
Hori.	17010.000	PK	44.0	41.4	-0.5	32.6	-	52.3	73.9	21.6	Floor noise
Hori.	5725.000	AV	37.3	32.3	5.6	33.7	-	41.5	53.9	12.4	
Hori.	11340.000	AV	34.1	40.1	-2.0	33.7	-	38.5	53.9	15.4	Floor noise
Hori.	17010.000	AV	35.3	41.4	-0.5	32.6	-	43.6	53.9	10.3	Floor noise
Vert.	5725.000	PK	47.3	32.3	5.6	33.7	-	51.5	73.9	22.4	
Vert.	11340.000	PK	42.6	40.1	-2.0	33.7	-	47.0	73.9	26.9	Floor noise
Vert.	17010.000	PK	44.1	41.4	-0.5	32.6	-	52.4	73.9	21.5	Floor noise
Vert.	5725.000	AV	38.1	32.3	5.6	33.7	-	42.3	53.9	11.6	
Vert.	11340.000	AV	34.0	40.1	-2.0	33.7	-	38.4	53.9	15.5	Floor noise
Vert.	17010.000	AV	35.4	41.4	-0.5	32.6	-	43.7	53.9	10.2	Floor noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz $20\log(3.65\text{ m} / 3.0\text{ m}) = 1.71\text{ dB}$
 10 GHz - 40 GHz $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$

UL Japan, Inc.

Ise EMC Lab.



4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission

Test place Ise EMC Lab. No.2 Semi Anechoic Chamber
Report No. 11653099H
Date February 21, 2017
Temperature / Humidity 25deg. C / 29 % RH
Engineer Takumi Shimada
Mode Tx 11ac-40 5670 MHz

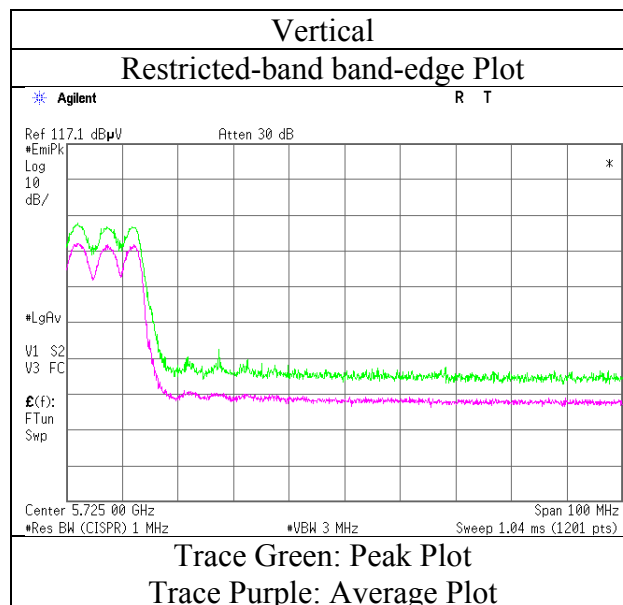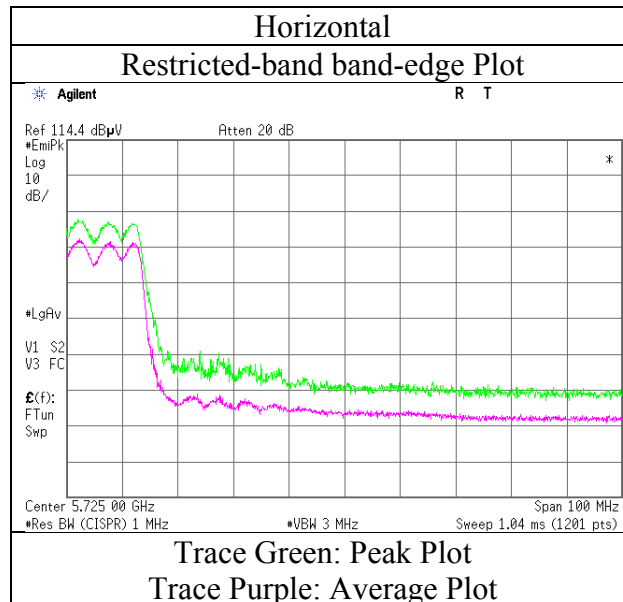

* Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place : Ise EMC Lab. No.2 Semi Anechoic Chamber
Report No. : 11653099H
Date : February 21, 2017 February 24, 2017 February 24, 2017
Temperature / Humidity : 25deg. C / 29 % RH 23deg. C / 32 % RH 23deg. C / 32 % RH
Engineer : Takumi Shimada Takumi Shimada Yuta Moriya
(1 GHz-10 GHz) (10 GHz-18 GHz) (18 GHz-40 GHz)
Mode : Tx 11ac-40 5755 MHz

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	5650.000	PK	41.7	32.2	5.6	33.6	-	45.9	68.2	22.3	
Hori.	5700.000	PK	45.2	32.3	5.6	33.7	-	49.4	105.2	55.8	
Hori.	5715.000	PK	51.6	32.3	5.6	33.7	-	55.8	109.4	53.6	
Hori.	5720.000	PK	54.6	32.3	5.6	33.7	-	58.8	110.8	52.0	
Hori.	5725.000	PK	55.6	32.3	5.6	33.7	-	59.8	122.2	62.4	
Hori.	11510.000	PK	42.9	40.3	-1.9	33.7	-	47.6	73.9	26.3	Floor noise
Hori.	17265.000	PK	44.5	42.2	-0.5	32.6	-	53.6	73.9	20.3	Floor noise
Hori.	11510.000	AV	34.6	40.3	-1.9	33.7	-	39.3	53.9	14.6	Floor noise
Hori.	17265.000	AV	35.4	42.2	-0.5	32.6	-	44.5	53.9	9.4	Floor noise
Vert.	5650.000	PK	42.2	32.2	5.6	33.6	-	46.4	68.2	21.8	
Vert.	5700.000	PK	47.0	32.3	5.6	33.7	-	51.2	105.2	54.0	
Vert.	5715.000	PK	53.7	32.3	5.6	33.7	-	57.9	109.4	51.5	
Vert.	5720.000	PK	54.6	32.3	5.6	33.7	-	58.8	110.8	52.0	
Vert.	5725.000	PK	55.6	32.3	5.6	33.7	-	59.8	122.2	62.4	
Vert.	11510.000	PK	42.8	40.3	-1.9	33.7	-	47.5	73.9	26.4	Floor noise
Vert.	17265.000	PK	43.9	42.2	-0.5	32.6	-	53.0	73.9	20.9	Floor noise
Vert.	11510.000	AV	34.2	40.3	-1.9	33.7	-	38.9	53.9	15.0	Floor noise
Vert.	17265.000	AV	34.9	42.2	-0.5	32.6	-	44.0	53.9	9.9	Floor noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz 20log (3.65 m / 3.0 m) = 1.71 dB
 10 GHz - 40 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

UL Japan, Inc.

Ise EMC Lab.



4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission

Test place	Ise EMC Lab. No.2 Semi Anechoic Chamber
Report No.	11653099H
Date	February 21, 2017
Temperature / Humidity	25deg. C / 29 % RH
Engineer	Takumi Shimada
Mode	Tx 11ac-40 5755 MHz

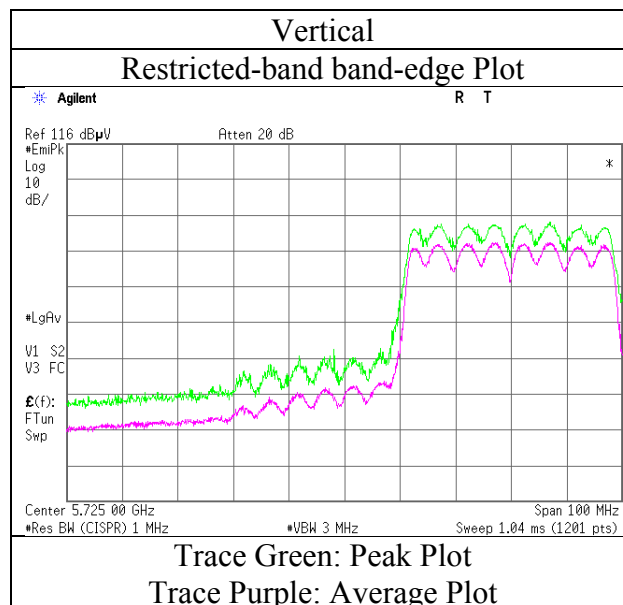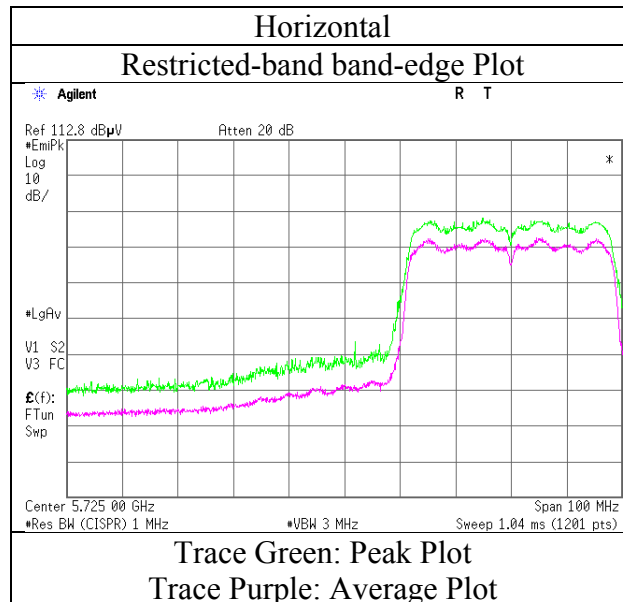

* Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place : Ise EMC Lab. No.2 Semi Anechoic Chamber
Report No. : 11653099H
Date : February 21, 2017 February 24, 2017 February 24, 2017
Temperature / Humidity : 25deg. C / 29 % RH 23deg. C / 32 % RH 23deg. C / 32 % RH
Engineer : Takumi Shimada Takumi Shimada Yuta Moriya
(1 GHz-10 GHz) (10 GHz-18 GHz) (18 GHz-40 GHz)
Mode : Tx 11ac-40 5795 MHz

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	5850.000	PK	48.6	32.5	5.7	33.7	-	53.1	122.2	69.1	
Hori.	5855.000	PK	46.1	32.6	5.7	33.7	-	50.7	110.8	60.1	
Hori.	5860.000	PK	44.8	32.6	5.7	33.7	-	49.4	109.4	60.0	
Hori.	5875.000	PK	42.2	32.6	5.7	33.7	-	46.8	105.2	58.4	
Hori.	5925.000	PK	42.7	32.7	5.7	33.7	-	47.4	68.2	20.8	
Hori.	11590.000	PK	43.1	40.3	-1.9	33.7	-	47.8	73.9	26.1	Floor noise
Hori.	17385.000	PK	44.8	42.6	-0.4	32.6	-	54.4	73.9	19.5	Floor noise
Hori.	11590.000	AV	34.3	40.3	-1.9	33.7	-	39.0	53.9	14.9	Floor noise
Hori.	17385.000	AV	36.0	42.6	-0.4	32.6	-	45.6	53.9	8.3	Floor noise
Vert.	5850.000	PK	47.1	32.5	5.7	33.7	-	51.6	122.2	70.6	
Vert.	5855.000	PK	45.7	32.6	5.7	33.7	-	50.3	110.8	60.5	
Vert.	5860.000	PK	44.2	32.6	5.7	33.7	-	48.8	109.4	60.6	
Vert.	5875.000	PK	42.5	32.6	5.7	33.7	-	47.1	105.2	58.1	
Vert.	5925.000	PK	41.6	32.7	5.7	33.7	-	46.3	68.2	21.9	
Vert.	11590.000	PK	42.8	40.3	-1.9	33.7	-	47.5	73.9	26.4	Floor noise
Vert.	17385.000	PK	44.0	42.6	-0.4	32.6	-	53.6	73.9	20.3	Floor noise
Vert.	11590.000	AV	34.1	40.3	-1.9	33.7	-	38.8	53.9	15.1	Floor noise
Vert.	17385.000	AV	35.7	42.6	-0.4	32.6	-	45.3	53.9	8.6	Floor noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz $20\log(3.65\text{ m} / 3.0\text{ m}) = 1.71\text{ dB}$
 10 GHz - 40 GHz $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$

UL Japan, Inc.

Ise EMC Lab.



4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission

Test place Ise EMC Lab. No.2 Semi Anechoic Chamber
Report No. 11653099H
Date February 21, 2017
Temperature / Humidity 25deg. C / 29 % RH
Engineer Takumi Shimada
Mode Tx 11ac-40 5795 MHz

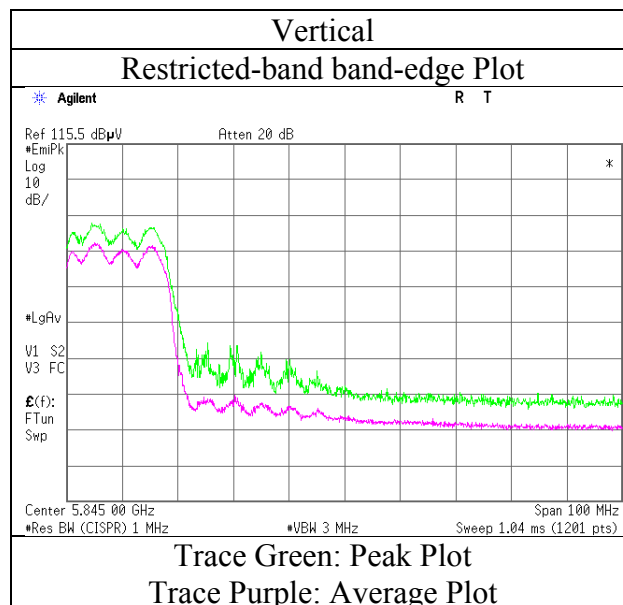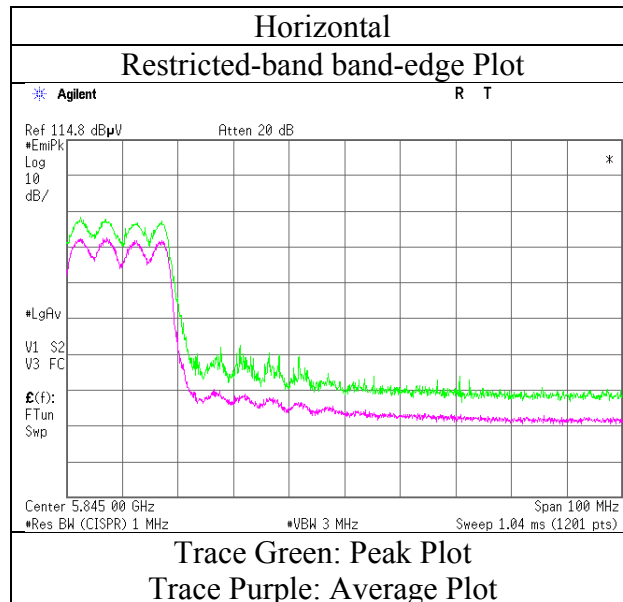

* Final result of restricted band edge was shown in tabular data.

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission

Test place	Ise EMC Lab. No.2 Semi Anechoic Chamber		
Report No.	11653099H		
Date	February 23, 2017	February 24, 2017	February 24, 2017
Temperature / Humidity	22deg. C / 30 % RH	23deg. C / 32 % RH	23deg. C / 32 % RH
Engineer	Yuta Moriya (1 GHz-10 GHz)	Takumi Shimada (10 GHz-18 GHz)	Yuta Moriya (18 GHz-40 GHz)
Mode	Tx 11ac-80 5210 MHz		

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	5139.936	PK	53.1	31.6	5.4	33.8	-	56.3	73.9	17.6	
Hori.	5150.000	PK	50.9	31.6	5.4	33.7	-	54.2	73.9	19.7	
Hori.	10420.000	PK	43.3	38.7	-2.5	34.2	-	45.3	73.9	28.6	Floor noise
Hori.	15630.000	PK	44.5	38.9	-0.9	33.0	-	49.5	73.9	24.4	Floor noise
Hori.	5139.936	AV	40.1	31.6	5.4	33.8	0.1	43.4	53.9	10.5	*1)
Hori.	5150.000	AV	39.4	31.6	5.4	33.7	0.1	42.8	53.9	11.1	*1)
Hori.	10420.000	AV	34.6	38.7	-2.5	34.2	-	36.6	53.9	17.3	Floor noise
Hori.	15630.000	AV	36.0	38.9	-0.9	33.0	-	41.0	53.9	12.9	Floor noise
Vert.	5139.936	PK	56.6	31.6	5.4	33.8	-	59.8	73.9	14.1	
Vert.	5150.000	PK	54.4	31.6	5.4	33.7	-	57.7	73.9	16.2	
Vert.	10420.000	PK	43.0	38.7	-2.5	34.2	-	45.0	73.9	28.9	Floor noise
Vert.	15630.000	PK	44.2	38.9	-0.9	33.0	-	49.2	73.9	24.7	Floor noise
Vert.	5139.936	AV	44.5	31.6	5.4	33.8	0.1	47.8	53.9	6.1	*1)
Vert.	5150.000	AV	44.0	31.6	5.4	33.7	0.1	47.4	53.9	6.5	*1)
Vert.	10420.000	AV	34.1	38.7	-2.5	34.2	-	36.1	53.9	17.8	Floor noise
Vert.	15630.000	AV	35.5	38.9	-0.9	33.0	-	40.5	53.9	13.4	Floor noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz 20log (3.65 m / 3.0 m) = 1.71 dB
 10 GHz - 40 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

*1) Not Out of Band emission(Leakage Power)

UL Japan, Inc.

Ise EMC Lab.



4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission

Test place : Ise EMC Lab. No.2 Semi Anechoic Chamber
Report No. : 11653099H
Date : February 23, 2017
Temperature / Humidity : 22deg. C / 30 % RH
Engineer : Yuta Moriya
Mode : Tx 11ac-80 5210 MHz

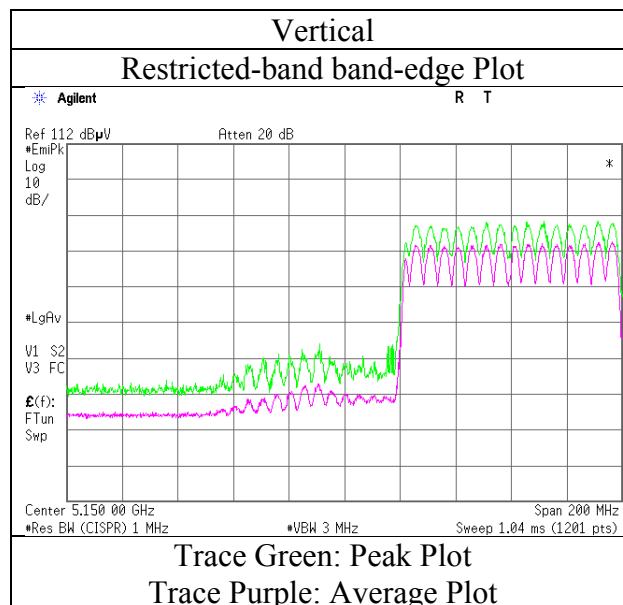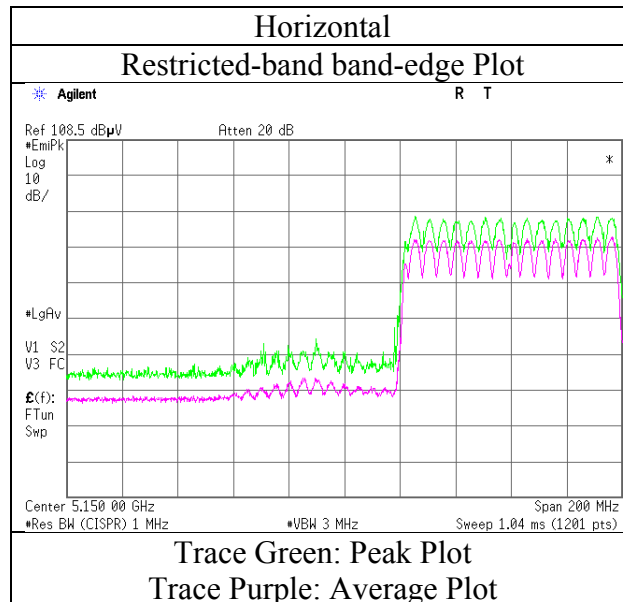

* Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place	Ise EMC Lab. No.2 Semi Anechoic Chamber		
Report No.	11653099H		
Date	February 23, 2017	February 24, 2017	February 24, 2017
Temperature / Humidity	22deg. C / 30 % RH	23deg. C / 32 % RH	23deg. C / 32 % RH
Engineer	Yuta Moriya (1 GHz-10 GHz)	Takumi Shimada (10 GHz-18 GHz)	Yuta Moriya (18 GHz-40 GHz)
Mode	Tx 11ac-80 5290 MHz		

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	5350.000	PK	56.9	31.6	5.5	33.7	-	60.3	73.9	13.6	
Hori.	10580.000	PK	43.2	38.9	-2.3	34.1	-	45.7	73.9	28.2	Floor noise
Hori.	15870.000	PK	43.9	38.2	-0.9	33.2	-	48.0	73.9	25.9	Floor noise
Hori.	5350.000	AV	44.1	31.6	5.5	33.7	0.1	47.6	53.9	6.3	*1),*2)
Hori.	10580.000	AV	34.2	38.9	-2.3	34.1	-	36.7	53.9	17.2	Floor noise
Hori.	15870.000	AV	35.6	38.2	-0.9	33.2	-	39.7	53.9	14.2	Floor noise
Vert.	5350.000	PK	59.4	31.6	5.5	33.7	-	62.8	73.9	11.1	
Vert.	10580.000	PK	42.8	38.9	-2.3	34.1	-	45.3	73.9	28.6	Floor noise
Vert.	15870.000	PK	44.3	38.2	-0.9	33.2	-	48.4	73.9	25.5	Floor noise
Vert.	5350.000	AV	46.3	31.6	5.5	33.7	0.1	49.8	53.9	4.1	*1),*2)
Vert.	10580.000	AV	33.6	38.9	-2.3	34.1	-	36.1	53.9	17.8	Floor noise
Vert.	15870.000	AV	36.3	38.2	-0.9	33.2	-	40.4	53.9	13.5	Floor noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz $20\log(3.65\text{ m} / 3.0\text{ m}) = 1.71\text{ dB}$
 10 GHz - 40 GHz $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$

*1) Not Out of Band emission(Leakage Power)

*2) Integration method

UL Japan, Inc.

Ise EMC Lab.



4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission

Test place : Ise EMC Lab. No.2 Semi Anechoic Chamber
Report No. : 11653099H
Date : February 23, 2017
Temperature / Humidity : 22deg. C / 30 % RH
Engineer : Yuta Moriya
Mode : Tx 11ac-80 5290 MHz

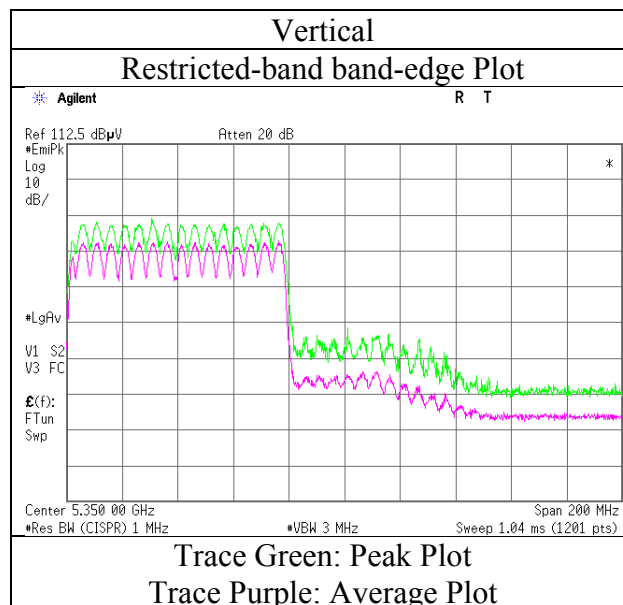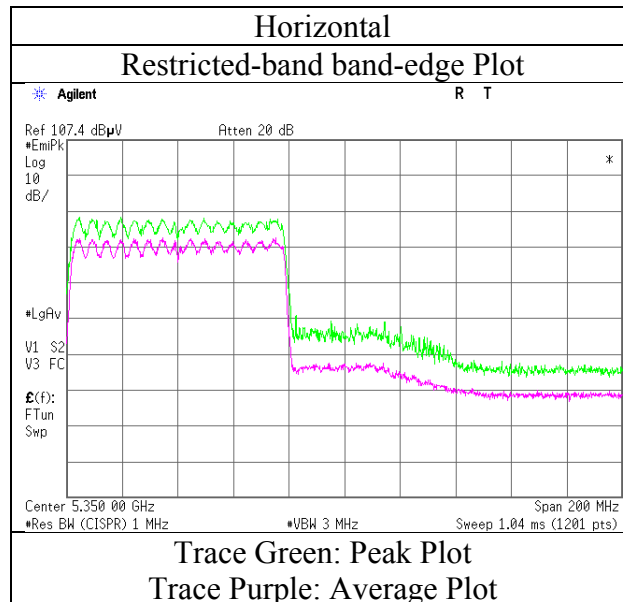

* Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place	Ise EMC Lab. No.2 Semi Anechoic Chamber		
Report No.	11653099H		
Date	February 23, 2017	February 24, 2017	February 24, 2017
Temperature / Humidity	22deg. C / 30 % RH	23deg. C / 32 % RH	23deg. C / 32 % RH
Engineer	Yuta Moriya (1 GHz-10 GHz)	Takumi Shimada (10 GHz-18 GHz)	Yuta Moriya (18 GHz-40 GHz)
Mode	Tx 11ac-80 5530 MHz		

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	5460.000	PK	51.6	31.7	5.5	33.6	-	55.2	73.9	18.7	
Hori.	5470.000	PK	48.7	31.7	5.5	33.6	-	52.3	73.9	21.6	
Hori.	11060.000	PK	43.5	39.8	-2.2	33.8	-	47.3	73.9	26.6	Floor noise
Hori.	16590.000	PK	44.6	39.9	-0.7	32.9	-	50.9	73.9	23.0	Floor noise
Hori.	5460.000	AV	42.3	31.7	5.5	33.6	0.1	46.0	53.9	7.9	*1)
Hori.	5470.000	AV	39.3	31.7	5.5	33.6	0.1	43.0	53.9	10.9	*1)
Hori.	11060.000	AV	33.8	39.8	-2.2	33.8	-	37.6	53.9	16.3	Floor noise
Hori.	16590.000	AV	36.0	39.9	-0.7	32.9	-	42.3	53.9	11.6	Floor noise
Vert.	5460.000	PK	56.4	31.7	5.5	33.6	-	60.0	73.9	13.9	
Vert.	5470.000	PK	52.1	31.7	5.5	33.6	-	55.7	73.9	18.2	
Vert.	11060.000	PK	43.6	39.8	-2.2	33.8	-	47.4	73.9	26.5	Floor noise
Vert.	16590.000	PK	44.5	39.9	-0.7	32.9	-	50.8	73.9	23.1	Floor noise
Vert.	5460.000	AV	45.9	31.7	5.5	33.6	0.1	49.6	53.9	4.3	*1)
Vert.	5470.000	AV	42.8	31.7	5.5	33.6	0.1	46.5	53.9	7.4	*1)
Vert.	11060.000	AV	34.7	39.8	-2.2	33.8	-	38.5	53.9	15.4	Floor noise
Vert.	16590.000	AV	35.7	39.9	-0.7	32.9	-	42.0	53.9	11.9	Floor noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz $20\log(3.65\text{ m} / 3.0\text{ m}) = 1.71\text{ dB}$
 10 GHz - 40 GHz $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$

*1) Not Out of Band emission(Leakage Power)

UL Japan, Inc.

Ise EMC Lab.



4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission

Test place : Ise EMC Lab. No.2 Semi Anechoic Chamber
Report No. : 11653099H
Date : February 23, 2017
Temperature / Humidity : 22deg. C / 30 % RH
Engineer : Yuta Moriya
Mode : Tx 11ac-80 5530 MHz

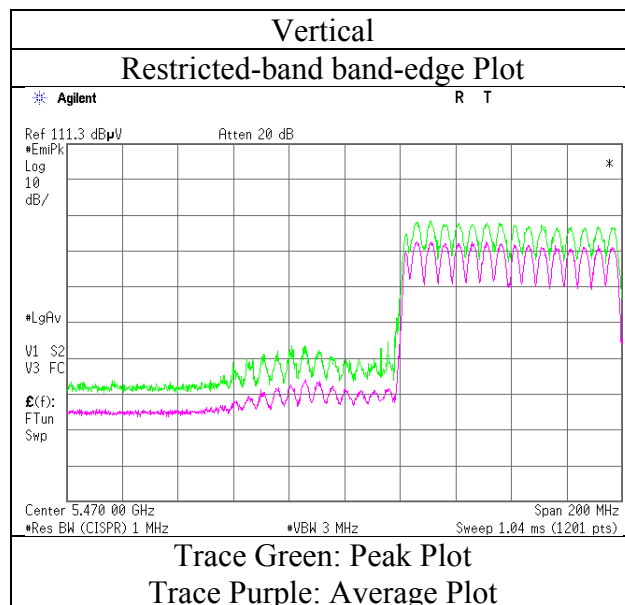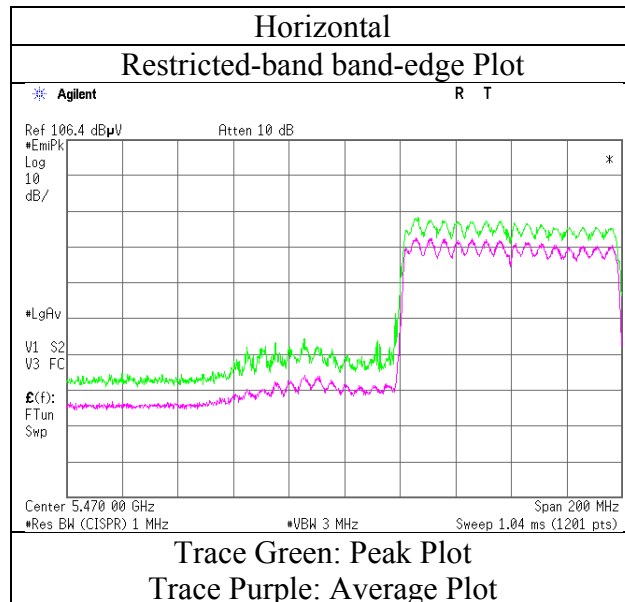

* Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place	Ise EMC Lab. No.2 Semi Anechoic Chamber		
Report No.	11653099H		
Date	February 23, 2017	February 24, 2017	February 24, 2017
Temperature / Humidity	22deg. C / 30 % RH	23deg. C / 32 % RH	23deg. C / 32 % RH
Engineer	Yuta Moriya (1 GHz-10 GHz)	Takumi Shimada (10 GHz-18 GHz)	Yuta Moriya (18 GHz-40 GHz)
Mode	Tx 11ac-80 5610 MHz		

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	5725.000	PK	42.2	32.2	5.6	33.7	-	46.3	73.9	27.6	
Hori.	11220.000	PK	43.0	40.0	-2.1	33.7	-	47.2	73.9	26.7	Floor noise
Hori.	16830.000	PK	44.3	40.8	-0.6	32.7	-	51.8	73.9	22.1	Floor noise
Hori.	5725.000	AV	34.1	32.2	5.6	33.7	0.1	38.3	53.9	15.6	*1)
Hori.	11220.000	AV	34.5	40.0	-2.1	33.7	-	38.7	53.9	15.2	Floor noise
Hori.	16830.000	AV	35.4	40.8	-0.6	32.7	-	42.9	53.9	11.0	Floor noise
Vert.	5725.000	PK	41.6	32.2	5.6	33.7	-	45.7	73.9	28.2	
Vert.	11220.000	PK	43.1	40.0	-2.1	33.7	-	47.3	73.9	26.6	Floor noise
Vert.	16830.000	PK	44.5	40.8	-0.6	32.7	-	52.0	73.9	21.9	Floor noise
Vert.	5725.000	AV	34.4	32.2	5.6	33.7	0.1	38.6	53.9	15.3	*1)
Vert.	11220.000	AV	34.8	40.0	-2.1	33.7	-	39.0	53.9	14.9	Floor noise
Vert.	16830.000	AV	35.9	40.8	-0.6	32.7	-	43.4	53.9	10.5	Floor noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz $20\log(3.65\text{ m} / 3.0\text{ m}) = 1.71\text{ dB}$
 10 GHz - 40 GHz $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$

*1) Not Out of Band emission(Leakage Power)

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN



Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission

Test place
Report No.
Date
Temperature / Humidity
Engineer
Mode

Ise EMC Lab. No.2 Semi Anechoic Chamber
11653099H
February 23, 2017
22deg. C / 30 % RH
Yuta Moriya
Tx 11ac-80 5610 MHz

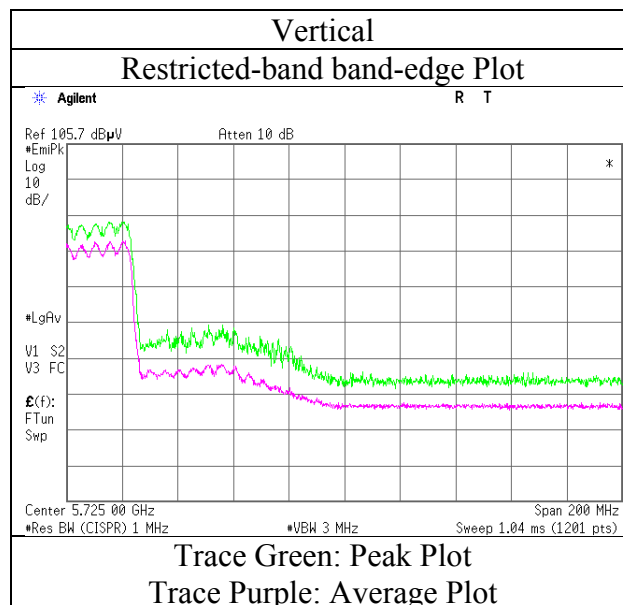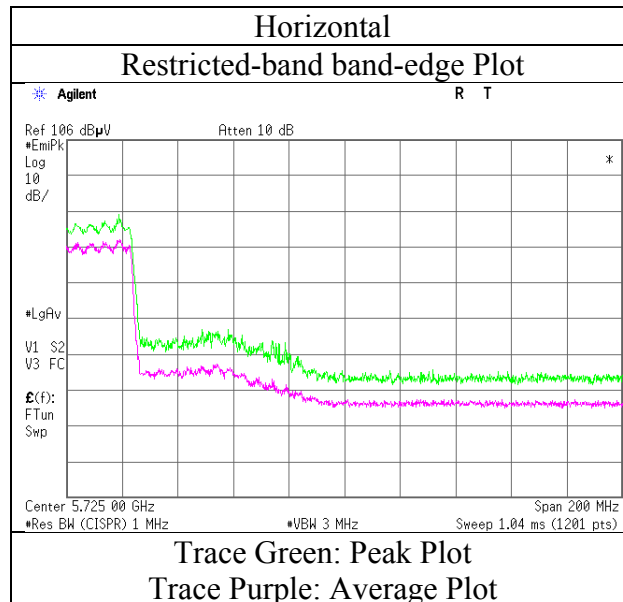

* Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place	Ise EMC Lab. No.2 Semi Anechoic Chamber		
Report No.	11653099H		
Date	February 23, 2017	February 24, 2017	February 24, 2017
Temperature / Humidity	22deg. C / 30 % RH	23deg. C / 32 % RH	23deg. C / 32 % RH
Engineer	Yuta Moriya (1 GHz-10 GHz)	Takumi Shimada (10 GHz-18 GHz)	Yuta Moriya (18 GHz-40 GHz)
Mode	Tx 11ac-80 5775 MHz		

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	5650.000	PK	40.7	32.0	5.6	33.6	-	44.7	68.2	23.5	
Hori.	5700.000	PK	53.2	32.1	5.6	33.7	-	57.2	105.2	48.0	
Hori.	5715.000	PK	55.0	32.1	5.6	33.7	-	59.0	109.4	50.4	
Hori.	5720.000	PK	55.6	32.2	5.6	33.7	-	59.7	110.8	51.1	
Hori.	5725.000	PK	56.4	32.2	5.6	33.7	-	60.5	122.2	61.7	
Hori.	5850.000	PK	51.0	32.4	5.7	33.7	-	55.4	122.2	66.8	
Hori.	5855.000	PK	50.6	32.5	5.7	33.7	-	55.1	110.8	55.7	
Hori.	5860.000	PK	49.5	32.5	5.7	33.7	-	54.0	109.4	55.4	
Hori.	5875.000	PK	45.9	32.5	5.7	33.7	-	50.4	105.2	54.8	
Hori.	5925.000	PK	40.5	32.6	5.7	33.7	-	45.1	68.2	23.1	
Hori.	11550.000	PK	43.2	40.3	-1.9	33.7	-	47.9	73.9	26.0	Floor noise
Hori.	17325.000	PK	44.6	42.4	-0.5	32.6	-	53.9	73.9	20.0	Floor noise
Hori.	11550.000	AV	34.3	40.3	-1.9	33.7	-	39.0	53.9	14.9	Floor noise
Hori.	17325.000	AV	35.2	42.4	-0.5	32.6	-	44.5	53.9	9.4	Floor noise
Vert.	5650.000	PK	41.9	32.0	5.6	33.6	-	45.9	68.2	22.3	
Vert.	5700.000	PK	56.8	32.1	5.6	33.7	-	60.8	105.2	44.4	
Vert.	5715.000	PK	58.0	32.1	5.6	33.7	-	62.0	109.4	47.4	
Vert.	5720.000	PK	59.1	32.2	5.6	33.7	-	63.2	110.8	47.6	
Vert.	5725.000	PK	59.5	32.2	5.6	33.7	-	63.6	122.2	58.6	
Vert.	5850.000	PK	55.7	32.4	5.7	33.7	-	60.1	122.2	62.1	
Vert.	5855.000	PK	54.9	32.5	5.7	33.7	-	59.4	110.8	51.4	
Vert.	5860.000	PK	53.5	32.5	5.7	33.7	-	58.0	109.4	51.4	
Vert.	5875.000	PK	49.8	32.5	5.7	33.7	-	54.3	105.2	50.9	
Vert.	5925.000	PK	41.8	32.6	5.7	33.7	-	46.4	68.2	21.8	
Vert.	11550.000	PK	42.7	40.3	-1.9	33.7	-	47.4	73.9	26.5	Floor noise
Vert.	17325.000	PK	44.9	42.4	-0.5	32.6	-	54.2	73.9	19.7	Floor noise
Vert.	11550.000	AV	33.9	40.3	-1.9	33.7	-	38.6	53.9	15.3	Floor noise
Vert.	17325.000	AV	35.7	42.4	-0.5	32.6	-	45.0	53.9	8.9	Floor noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz $20\log(3.65\text{ m} / 3.0\text{ m}) = 1.71\text{ dB}$
 10 GHz - 40 GHz $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$

UL Japan, Inc.

Ise EMC Lab.


4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission



Test place	Ise EMC Lab. No.2 Semi Anechoic Chamber
Report No.	11653099H
Date	February 23, 2017
Temperature / Humidity	22deg. C / 30 % RH
Engineer	Yuta Moriya
Mode	Tx 11ac-80 5775 MHz

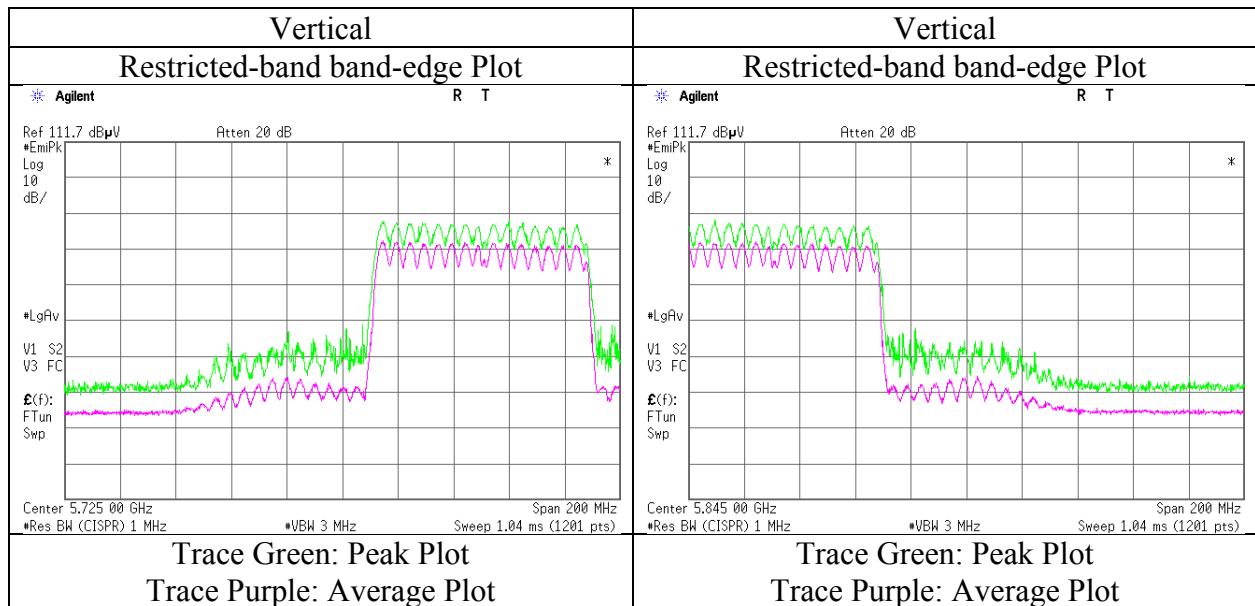

* Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission **(Plot data, Worst case)**

Test place	Ise EMC Lab. No.2 Semi Anechoic Chamber			
Report No.	11653099H			
Date	February 19, 2017	February 24, 2017	February 24, 2017	February 25, 2017
Temperature / Humidity	23deg. C / 29 % RH	23deg. C / 32 % RH	23deg. C / 32 % RH	24 deg. C / 25 % RH
Engineer	Takumi Shimada (1 GHz-10 GHz)	Takumi Shimada (10 GHz-18 GHz)	Yuta Moriya (18 GHz-40 GHz)	Tomoki Matsui (Below 1 GHz)
Mode	Tx 11a 5180 MHz			

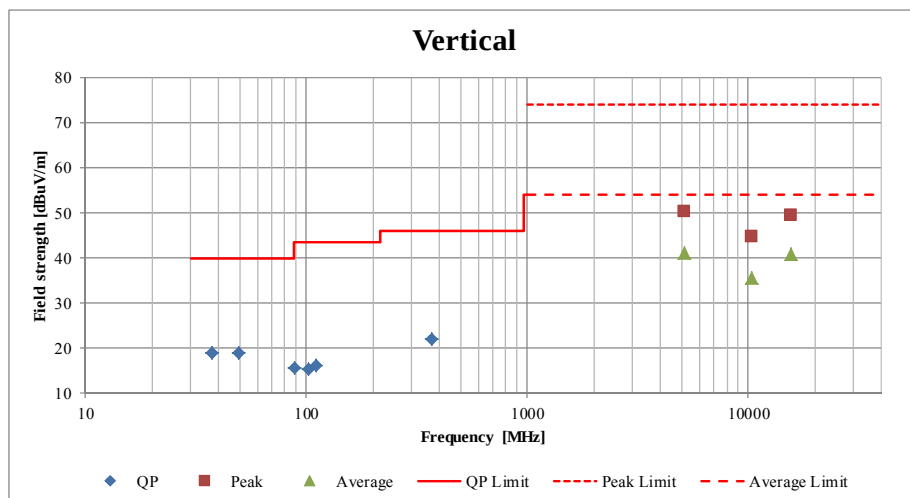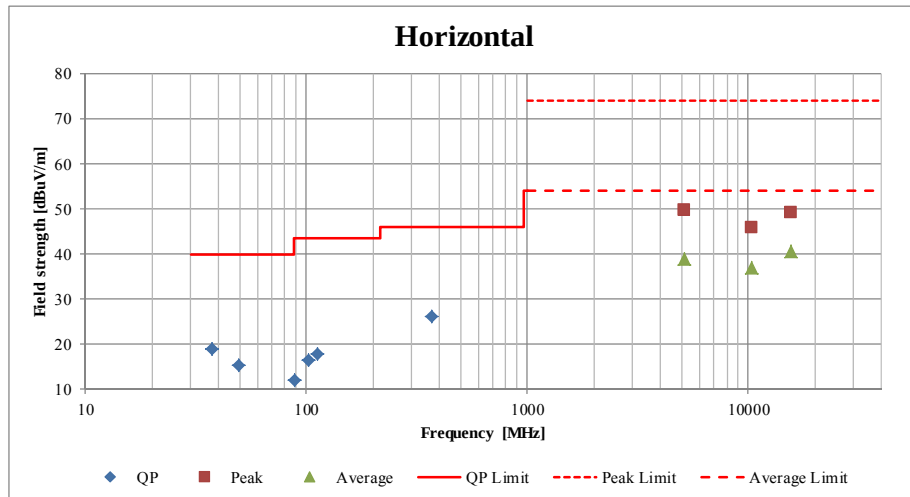

*These plots data contains sufficient number to show the trend of characteristic features for EUT.

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission

Test place : Ise EMC Lab. No.2 Semi Anechoic Chamber
Report No. : 11653099H
Date : February 23, 2017 February 24, 2017 February 24, 2017 February 25, 2017
Temperature / Humidity : 22deg. C / 30 % RH 23deg. C / 32 % RH 23deg. C / 32 % RH 24 deg. C / 25 % RH
Engineer : Yuta Moriya Takumi Shimada Yuta Moriya Tomoki Matsui
: (1 GHz-10 GHz) (10 GHz-18 GHz) (18 GHz-40 GHz) (Below 1 GHz)
Mode : Tx, Hopping On, 3DH5 and 11ac-80 5290MHz

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	37.600	QP	25.3	14.9	6.8	28.2	-	18.8	40.0	21.2	
Hori	49.147	QP	25.5	11.1	7.0	28.1	-	15.5	40.0	24.5	
Hori	88.000	QP	25.4	8.0	7.3	28.0	-	12.7	40.0	27.3	
Hori	105.000	QP	27.6	10.8	7.5	27.9	-	18.0	43.5	25.5	
Hori	114.238	QP	27.9	12.1	7.6	27.9	-	19.7	43.5	23.8	
Hori	368.560	QP	29.5	15.1	9.3	27.6	-	26.3	46.0	19.7	
Hori.	5350.000	PK	56.1	31.6	5.5	33.7	-	59.5	73.9	14.4	
Hori.	10580.000	PK	43.1	38.9	-2.3	34.1	-	45.6	73.9	28.3	Floor noise
Hori.	15870.000	PK	44.3	38.2	-0.9	33.2	-	48.4	73.9	25.5	Floor noise
Hori.	5350.000	AV	43.7	31.6	5.5	33.7	0.1	47.2	53.9	6.7	*1),*2)
Hori.	10580.000	AV	34.1	38.9	-2.3	34.1	-	36.6	53.9	17.3	Floor noise
Hori.	15870.000	AV	35.1	38.2	-0.9	33.2	-	39.2	53.9	14.7	Floor noise
Vert	37.600	QP	35.3	14.9	6.8	28.2	-	28.8	40.0	11.2	
Vert	50.000	QP	32.9	10.8	7.0	28.1	-	22.6	40.0	17.4	
Vert	88.000	QP	29.7	8.0	7.3	28.0	-	17.0	40.0	23.0	
Vert	100.000	QP	30.0	10.1	7.4	28.0	-	19.5	43.5	24.0	
Vert	110.900	QP	28.1	11.6	7.5	27.9	-	19.3	43.5	24.2	
Vert	499.832	QP	32.9	17.6	9.7	28.1	-	32.1	46.0	13.9	
Vert.	5350.000	PK	58.2	31.6	5.5	33.7	-	61.6	73.9	12.3	
Vert.	10580.000	PK	43.6	38.9	-2.3	34.1	-	46.1	73.9	27.8	Floor noise
Vert.	15870.000	PK	44.9	38.2	-0.9	33.2	-	49.0	73.9	24.9	Floor noise
Vert.	5350.000	AV	45.7	31.6	5.5	33.7	0.1	49.2	53.9	4.7	*1),*2)
Vert.	10580.000	AV	34.4	38.9	-2.3	34.1	-	36.9	53.9	17.0	Floor noise
Vert.	15870.000	AV	36.0	38.2	-0.9	33.2	-	40.1	53.9	13.8	Floor noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz $20\log(3.65\text{ m} / 3.0\text{ m}) = 1.71\text{ dB}$
 10 GHz - 40 GHz $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$

*1) Not Out of Band emission(Leakage Power)

*2) Integration method

UL Japan, Inc.

Ise EMC Lab.


4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Burst rate confirmation

Test place : Ise EMC Lab. No.2 Semi Anechoic Chamber
Report No. : 11653099H
Date : February 19, 2017
Temperature / Humidity : 23deg. C / 29 % RH
Engineer : Takumi Shimada
Mode : Tx

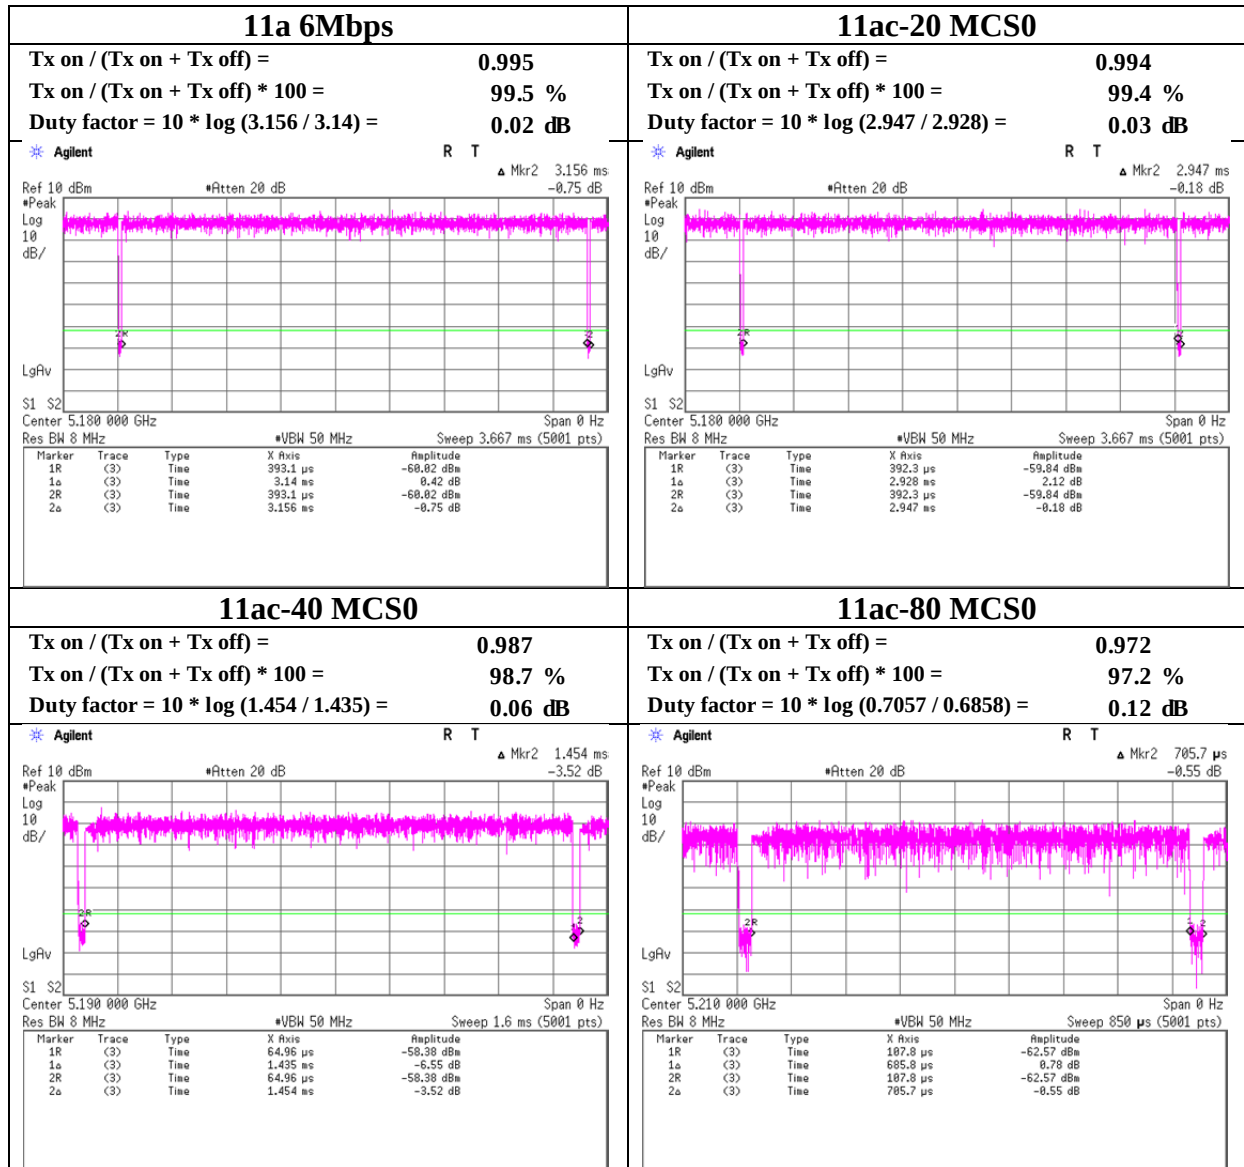

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

APPENDIX 2: Test instruments

Test equipment

Control No.	Instrument	Manufacturer	Model No	Serial No	Test Item	Calibration Date * Interval(month)
MAEC-02	Semi Anechoic Chamber(NSA)	TDK	Semi Anechoic Chamber 3m	DA-06902	RE	2016/08/02 * 12
MOS-22	Thermo-Hygrometer	Custom	CTH-201	0003	RE	2016/12/13 * 12
MJM-14	Measure	KOMELON	KMC-36	-	RE	-
MRENT-126	Spectrum Analyzer	KEYSIGHT	E4440A	MY46185516	RE	2016/07/01 * 12
MHA-06	Horn Antenna 1-18GHz	Schwarzbeck	BBHA9120D	254	RE	2016/02/29 * 12
MCC-216	Microwave Cable	Junkosha	MWX221	1604S253(1 m) / 1608S087(5 m)	RE	2016/08/29 * 12
MPA-10	Pre Amplifier	Agilent	8449B	3008A02142	RE	2017/01/16 * 12
MMM-01	Digital Tester	Fluke	FLUKE 26-3	78030611	RE	2016/08/23 * 12
MHA-21	Horn Antenna 1-18GHz	Schwarzbeck	BBHA9120D	9120D-557	RE	2016/09/28 * 12
MHA-17	Horn Antenna 15-40GHz	Schwarzbeck	BBHA9170	BBHA9170307	RE	2016/06/24 * 12
MHF-16	High Pass Filter 7-20GHz	TOKIMEC	TF37NCCA	7001	RE	2016/09/19 * 12
MSA-03	Spectrum Analyzer	Agilent	E4448A	MY44020357	RE	2016/05/19 * 12
MPA-22	Pre Amplifier	MITEQ, Inc	AMF-6F-2600400-3 3-8P / AMF-4F-2600400-3 3-8P	1871355 /1871328	RE	2016/09/06 * 12
MHA-29	Horn Antenna 26.5-40GHz	ETS LINDGREN	3160-10	00152399	RE	2016/09/28 * 12
MCC-55	Microwave Cable	Suhner	SUCOFLEX101	2874(1m) / 2877(5m)	RE	2016/03/28 * 12
MTR-03	Test Receiver	Rohde & Schwarz	ESCI	100300	RE	2016/10/21 * 12
MBA-08	Biconical Antenna	Schwarzbeck	VHA9103B	08031	RE	2016/09/29 * 12
MLA-21	Logperiodic Antenna(200-1000MHz)	Schwarzbeck	VUSLP9111B	911B-190	RE	2017/01/05 * 12
MCC-12	Coaxial Cable	Fujikura/Agilent	-	-	RE	2016/02/08 * 12
MAT-07	Attenuator(6dB)	Weinschel Corp	2	BK7970	RE	2016/11/28 * 12
MPA-09	Pre Amplifier	Agilent	8447D	2944A10845	RE	2016/09/13 * 12

The expiration date of the calibration is the end of the expired month.

All equipment is calibrated with valid calibrations. Each measurement data is traceable to the national or international standards.

As for some calibrations performed after the tested dates, those test equipment have been controlled by means of an unbroken chains of calibrations.

Test Item: RE: Radiated Emission

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124