



RADIO TEST REPORT

Test Report No. 14173126H-B

Customer	Sony Interactive Entertainment Inc.
Description of EUT	Wireless communication module
Model Number of EUT	J20H104
FCC ID	AK8M21DFD1
Test Regulation	FCC Part 15 Subpart C: 2021
Test Result	Complied (Refer to SECTION 3)
Issue Date	March 11, 2022
Remarks	Bluetooth (BR / EDR) parts

Representative Test Engineer

Junya Okuno
Engineer

Approved By

Takayuki Shimada
Leader



CERTIFICATE 5107.02

- ☐ The testing in which "Non-accreditation" is displayed is outside the accreditation scopes in UL Japan, Inc.
☒ There is no testing item of "Non-accreditation".

Report Cover Page - Form-ULID-003532 (DCS:13-EM-F0429) Issue# 20.0

ANNOUNCEMENT

- This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
- The results in this report apply only to the sample tested.
- This sample tested is in compliance with the limits of the above regulation.
- The test results in this test report are traceable to the national or international standards.
- This test report must not be used by the customer to claim product certification, approval, or endorsement by the A2LA accreditation body.
- This test report covers Radio technical requirements.
It does not cover administrative issues such as Manual or non-Radio test related Requirements. (if applicable)
- The all test items in this test report are conducted by UL Japan, Inc. Ise EMC Lab.
- The opinions and the interpretations to the result of the description in this report are outside scopes where UL Japan, Inc. has been accredited.
- The information provided from the applicant for this report is identified in Section 1.
- For test report(s) referred in this report, the latest version (including any revisions) is always referred.

REVISION HISTORY

Original Test Report No.: 14173126H-B

Revision	Test Report No.	Date	Page Revised Contents
- (Original)	14173126H-B	March 11, 2022	-

Reference: Abbreviations (Including words undescribed in this report)

A2LA	The American Association for Laboratory Accreditation	ICES	Interference-Causing Equipment Standard
AC	Alternating Current	IEC	International Electrotechnical Commission
AFH	Adaptive Frequency Hopping	IEEE	Institute of Electrical and Electronics Engineers
AM	Amplitude Modulation	IF	Intermediate Frequency
Amp, AMP	Amplifier	ILAC	International Laboratory Accreditation Conference
ANSI	American National Standards Institute	ISED	Innovation, Science and Economic Development Canada
Ant, ANT	Antenna	ISO	International Organization for Standardization
AP	Access Point	JAB	Japan Accreditation Board
ASK	Amplitude Shift Keying	LAN	Local Area Network
Atten., ATT	Attenuator	LIMS	Laboratory Information Management System
AV	Average	MCS	Modulation and Coding Scheme
BPSK	Binary Phase-Shift Keying	MRA	Mutual Recognition Arrangement
BR	Bluetooth Basic Rate	N/A	Not Applicable
BT	Bluetooth	NIST	National Institute of Standards and Technology
BT LE	Bluetooth Low Energy	NS	No signal detect.
BW	BandWidth	NSA	Normalized Site Attenuation
Cal Int	Calibration Interval	NVLAP	National Voluntary Laboratory Accreditation Program
CCK	Complementary Code Keying	OBW	Occupied Band Width
Ch., CH	Channel	OFDM	Orthogonal Frequency Division Multiplexing
CISPR	Comite International Special des Perturbations Radioelectriques	P/M	Power meter
CW	Continuous Wave	PCB	Printed Circuit Board
DBPSK	Differential BPSK	PER	Packet Error Rate
DC	Direct Current	PHY	Physical Layer
D-factor	Distance factor	PK	Peak
DFS	Dynamic Frequency Selection	PN	Pseudo random Noise
DQPSK	Differential QPSK	PRBS	Pseudo-Random Bit Sequence
DSSS	Direct Sequence Spread Spectrum	PSD	Power Spectral Density
EDR	Enhanced Data Rate	QAM	Quadrature Amplitude Modulation
EIRP, e.i.r.p.	Equivalent Isotropically Radiated Power	QP	Quasi-Peak
EMC	ElectroMagnetic Compatibility	QPSK	Quadri-Phase Shift Keying
EMI	ElectroMagnetic Interference	RBW	Resolution Band Width
EN	European Norm	RDS	Radio Data System
ERP, e.r.p.	Effective Radiated Power	RE	Radio Equipment
EU	European Union	RF	Radio Frequency
EUT	Equipment Under Test	RMS	Root Mean Square
Fac.	Factor	RSS	Radio Standards Specifications
FCC	Federal Communications Commission	Rx	Receiving
FHSS	Frequency Hopping Spread Spectrum	SA, S/A	Spectrum Analyzer
FM	Frequency Modulation	SG	Signal Generator
Freq.	Frequency	SVSWR	Site-Voltage Standing Wave Ratio
FSK	Frequency Shift Keying	TR	Test Receiver
GFSK	Gaussian Frequency-Shift Keying	Tx	Transmitting
GNSS	Global Navigation Satellite System	VBW	Video BandWidth
GPS	Global Positioning System	Vert.	Vertical
Hori.	Horizontal	WLAN	Wireless LAN

CONTENTS	PAGE
SECTION 1: Customer Information	5
SECTION 2: Equipment Under Test (EUT).....	5
SECTION 3: Test Specification, Procedures & Results.....	8
SECTION 4: Operation of EUT during testing.....	11
SECTION 5: Conducted Emission.....	13
SECTION 6: Radiated Spurious Emission	14
SECTION 7: Antenna Terminal Conducted Tests.....	16
APPENDIX 1: Test data	17
Conducted Emission	17
20dB Bandwidth, 99%Occupied Bandwidth and Carrier Frequency Separation	19
Number of Hopping Frequency	25
Dwell time.....	28
Maximum Peak Output Power.....	33
Average Output Power.....	34
Burst Rate Confirmation	35
Radiated Spurious Emission	37
Conducted Spurious Emission	60
Conducted Emission Band Edge compliance	72
APPENDIX 2: Test Instruments	76
APPENDIX 3: Photographs of test setup	78
Conducted Emission	78
Radiated Spurious Emission	79
Worst Case Position	81
Antenna Terminal Conducted Tests.....	83
Test Configuration and peripherals.....	84

SECTION 1: Customer Information

Company Name	Sony Interactive Entertainment Inc.
Brand Name	SONY
Address	1-7-1 Konan, Minato-ku, Tokyo, 108-0075 Japan
Telephone Number	+81-50-3807-5639
Contact Person	Miho Nakamura

The information provided from the customer is as follows;

- Customer, Description of EUT, Model Number of EUT, FCC ID on the cover and other relevant pages
 - Operating/Test Mode(s) (Mode(s)) on all the relevant pages
 - SECTION 1: Customer Information
 - SECTION 2: Equipment Under Test (EUT) other than the Receipt Date and Test Date
 - SECTION 4: Operation of EUT during testing
- * The laboratory is exempted from liability of any test results affected from the above information in SECTION 2 and 4.

SECTION 2: Equipment Under Test (EUT)

2.1 Identification of EUT

Description	Wireless communication module
Model Number	J20H104
Serial Number	Refer to SECTION 4.2
Condition	Production prototype (Not for Sale: This sample is equivalent to mass-produced items.)
Modification	No Modification by the test lab
Receipt Date	January 17, 2022
Test Date	January 18 to February 15, 2022

2.2 Product Description

General Specification

Rating	DC 3.3 V
--------	----------

Radio Specification

WLAN (IEEE802.11b/11g/11n-20/11ax-20)

Equipment Type	Transceiver	
Frequency of Operation	2412 MHz to 2462 MHz	
Type of Modulation	DSSS, OFDM	
	OFDMA (IEEE802.11ax only)	20 MHz: 26/52/106/242-tone RU
Bandwidth & Channel spacing	Less than 20 MHz & 5 MHz	
Method of frequency generation	Synthesizer	
Antenna Type	PIFA	
Antenna Gain: G_{ANT}	Antenna 1: 5.0 dBi Antenna 2: 5.0 dBi	
Directional Gain *1)	8.01 dBi	
Maximum clock frequency	640 MHz	

WLAN (IEEE802.11a/11n-20/11ac-20/11ax-20/11n-40/11ac-40/11ax-40/11ac-80/11ax-80)

Equipment Type	Transceiver	
Frequency of Operation	20 M Band: 5180 MHz to 5240 MHz 5260 MHz to 5320 MHz 5500 MHz to 5720 MHz 5745 MHz to 5825 MHz	
	40 M Band: 5190 MHz to 5230 MHz 5270 MHz to 5310 MHz 5510 MHz to 5710 MHz 5755 MHz to 5795 MHz	
	80 M Band: 5210 MHz 5290 MHz 5530 MHz to 5690 MHz 5775 MHz	
Type of Modulation	OFDM	
	OFDMA (IEEE802.11ax only)	20 MHz: 26/52/106/242-tone RU
		40 MHz: 26/52/106/242/484-tone RU 80 MHz: 26/52/106/242/484/996-tone RU
Bandwidth & Channel spacing	Less than 20 MHz / 40 MHz / 80 MHz & 20 MHz / 40 MHz / 80 MHz	
Method of frequency generation	Synthesizer	
Antenna Type	PIFA	
Antenna Gain: G_{ANT}	Antenna 1: 6.4 dBi Antenna 3: 5.0 dBi	
Directional Gain *1)	8.74 dBi	
Maximum clock frequency	640 MHz	

BT1: Bluetooth (BR / EDR / Low Energy)

Equipment Type	Transceiver
Frequency of Operation	2402 MHz to 2480 MHz
Type of Modulation	BT: FHSS (GFSK, $\pi/4$ DQPSK, 8DPSK) BT LE: GFSK
Bandwidth / Channel spacing	BT: 79 MHz / 1 MHz BT LE: 1 MHz & 2 MHz / 2 MHz
Method of frequency generation	Synthesizer
Antenna Type	PIFA
Antenna Gain	Antenna 3: 5.8 dBi
Maximum clock frequency	640 MHz

BT2: Bluetooth (BR / EDR / Low Energy)

Equipment Type	Transceiver
Frequency of Operation	2402 MHz to 2480 MHz
Type of Modulation	BT: FHSS (GFSK, $\pi/4$ DQPSK, 8DPSK) BT LE: GFSK
Bandwidth / Channel spacing	BT: 79 MHz / 1 MHz BT LE: 1 MHz & 2 MHz / 2 MHz
Method of frequency generation	Synthesizer
Antenna Type	PIFA
Antenna Gain	Antenna 4: 5.8 dBi
Maximum clock frequency	640 MHz

*1) Directional antenna gain = $10 \log \left(\frac{G_{ANT1}}{(10^{20} + 10^{20})^2 / 2} \right)$

*This test report applies to Bluetooth (BR/EDR) part.

SECTION 3: Test Specification, Procedures & Results

3.1 Test Specification

Test Specification	FCC Part 15 Subpart C FCC Part 15 final revised on May 3, 2021 and effective July 2, 2021
Title	FCC 47 CFR Part 15 Radio Frequency Device Subpart C Intentional Radiators Section 15.207 Conducted limits Section 15.247 Operation within the bands 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz

3.2 Procedures and Results

Item	Test Procedure	Specification	Worst Margin	Results	Remarks
Conducted Emission	FCC: ANSI C63.10-2013 6. Standard test methods ISED: RSS-Gen 8.8	FCC: Section 15.207 ISED: RSS-Gen 8.8	29.11 dB 0.67280 MHz, AV, N	Complied a)	-
Carrier Frequency Separation	FCC: KDB 558074 D01 15.247 Meas Guidance v05r02 ISED: -	FCC: Section 15.247(a)(1) ISED: RSS-247 5.1 (b)	See data.	Complied b)	Conducted
20dB Bandwidth	FCC: KDB 558074 D01 15.247 Meas Guidance v05r02 ISED: -	FCC: Section 15.247(a)(1) ISED: RSS-247 5.1 (a)		Complied b)	Conducted
Number of Hopping Frequency	FCC: KDB 558074 D01 15.247 Meas Guidance v05r02 ISED: -	FCC: Section 15.247(a)(1)(iii) ISED: RSS-247 5.1 (d)		Complied c)	Conducted
Dwell time	FCC: KDB 558074 D01 15.247 Meas Guidance v05r02 ISED: -	FCC: Section 15.247(a)(1)(iii) ISED: RSS-247 5.1 (d)		Complied d)	Conducted
Maximum Peak Output Power	FCC: KDB 558074 D01 15.247 Meas Guidance v05r02 ISED: RSS-Gen 6.12	FCC: Section 15.247(a)(b)(1) ISED: RSS-247 5.4 (b)		Complied e)	Conducted
Spurious Emission & Band Edge Compliance	FCC: KDB 558074 D01 15.247 Meas Guidance v05r02 ISED: RSS-Gen 6.13	FCC: Section 15.247(d) ISED: RSS-247 5.5 RSS-Gen 8.9 RSS-Gen 8.10	16.5 dB 2390.0 MHz Vertical, AV	Complied f) / g)	Conducted/ Radiated (above 30 MHz) *1)

Note: UL Japan, Inc.'s EMI Work Procedures: Work Instructions-ULID-003591 and Work Instructions-ULID-003593.

* In case any questions arise about test procedure, ANSI C63.10: 2013 is also referred.

*1) Radiated test was selected over 30 MHz based on section 15.247(d).

a) Refer to APPENDIX 1 (data of Conducted Emission)

b) Refer to APPENDIX 1 (data of 20dB Bandwidth, 99%Occupied Bandwidth and Carrier Frequency Separation)

c) Refer to APPENDIX 1 (data of Number of Hopping Frequency)

d) Refer to APPENDIX 1 (data of Dwell time)

e) Refer to APPENDIX 1 (data of Maximum Peak Output Power)

f) Refer to APPENDIX 1 (data of Conducted Spurious Emission)

g) Refer to APPENDIX 1 (data of Radiated Spurious Emission)

Symbols:

Complied The data of this test item has enough margin, more than the measurement uncertainty.

Complied# The data of this test item meets the limits unless the measurement uncertainty is taken into consideration

FCC Part 15.31 (e)

The stable voltage will be supplied by the end product, which will be required to have a power supply regulator. Therefore, the EUT complies with the requirement.

FCC Part 15.203/212 Antenna requirement

The EUT has a unique coupling/antenna connector (U.FL).

Therefore, the equipment complies with the antenna requirement of Section 15.203.

3.3 Addition to Standard

Item	Test Procedure	Specification	Worst Margin	Results	Remarks
99% Occupied Bandwidth	ISED: RSS-Gen 6.7	ISED: -	N/A	- a)	Conducted
a) Refer to APPENDIX 1 (data of 20dB Bandwidth, 99%Occupied Bandwidth and Carrier Frequency Separation)					

Other than above, no addition, exclusion nor deviation has been made from the standard.

3.4 Uncertainty

There is no applicable rule of uncertainty in this applied standard. Therefore, the results are derived depending on whether or not laboratory uncertainty is applied.

The following uncertainties have been calculated to provide a confidence level of 95 % using a coverage factor $k=2$.

Conducted emission

Using Item	Frequency range	Uncertainty (+/-)
AMN (LISN)	0.009 MHz to 0.15 MHz	3.7 dB
	0.15 MHz to 30 MHz	3.3 dB

Radiated emission

Measurement distance	Frequency range		Uncertainty (+/-)
3 m	9 kHz to 30 MHz		3.2 dB
10 m			3.0 dB
3 m	30 MHz to 200 MHz	Horizontal	4.8 dB
		Vertical	5.0 dB
	200 MHz to 1000 MHz	Horizontal	5.1 dB
		Vertical	6.2 dB
10 m	30 MHz to 200 MHz	Horizontal	4.8 dB
		Vertical	4.8 dB
	200 MHz to 1000 MHz	Horizontal	5.0 dB
		Vertical	5.0 dB
3 m	1 GHz to 6 GHz		4.9 dB
	6 GHz to 18 GHz		5.2 dB
1 m	10 GHz to 26.5 GHz		5.4 dB
	26.5 GHz to 40 GHz		5.4 dB
10 m	1 GHz to 18 GHz		5.4 dB

Antenna Terminal test

Test Item	Uncertainty (+/-)
20 dB Bandwidth / 99 % Occupied Bandwidth	0.96 %
Maximum Peak Output Power / Average Output Power	1.5 dB
Carrier Frequency Separation	0.42 %
Dwell time / Burst rate	0.10 %
Conducted Spurious Emission	2.7 dB

3.5 Test Location

UL Japan, Inc. Ise EMC Lab.

*A2LA Certificate Number: 5107.02 / FCC Test Firm Registration Number: 884919

ISED Lab Company Number: 2973C / CAB identifier: JP0002

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8999, Facsimile: +81 596 24 8124

Test site	Width x Depth x Height (m)	Size of reference ground plane (m) / horizontal conducting plane	Other rooms	Maximum measurement distance
No.1 semi-anechoic chamber	19.2 x 11.2 x 7.7	7.0 x 6.0	No.1 Power source room	10 m
No.2 semi-anechoic chamber	7.5 x 5.8 x 5.2	4.0 x 4.0	-	3 m
No.3 semi-anechoic chamber	12.0 x 8.5 x 5.9	6.8 x 5.75	No.3 Preparation room	3 m
No.3 shielded room	4.0 x 6.0 x 2.7	N/A	-	-
No.4 semi-anechoic chamber	12.0 x 8.5 x 5.9	6.8 x 5.75	No.4 Preparation room	3 m
No.4 shielded room	4.0 x 6.0 x 2.7	N/A	-	-
No.5 semi-anechoic chamber	6.0 x 6.0 x 3.9	6.0 x 6.0	-	-
No.5 measurement room	6.4 x 6.4 x 3.0	6.4 x 6.4	-	-
No.6 shielded room	4.0 x 4.5 x 2.7	4.0 x 4.5	-	-
No.6 measurement room	4.75 x 5.4 x 3.0	4.75 x 4.15	-	-
No.7 shielded room	4.7 x 7.5 x 2.7	4.7 x 7.5	-	-
No.8 measurement room	3.1 x 5.0 x 2.7	3.1 x 5.0	-	-
No.9 measurement room	8.8 x 4.6 x 2.8	2.4 x 2.4	-	-
No.10 shielded room	3.8 x 2.8 x 2.8	3.8 x 2.8	-	-
No.11 measurement room	4.0 x 3.4 x 2.5	N/A	-	-
No.12 measurement room	2.6 x 3.4 x 2.5	N/A	-	-
Large Chamber	16.9 x 22.1 x 10.17	16.9 x 22.1	-	10 m
Small Chamber	5.3 x 6.69 x 3.59	5.3 x 6.69	-	-

* Size of vertical conducting plane (for Conducted Emission test) : 2.0 x 2.0 m for No.1, No.2, No.3, and No.4 semi-anechoic chambers and No.3 and No.4 shielded rooms.

3.6 Test Data, Test Instruments, and Test Set Up

Refer to APPENDIX.

SECTION 4: Operation of EUT during testing

4.1 Operating Mode(s)

Mode	Remarks*
Bluetooth (BT)	BR / EDR, Payload: PRBS9
*EUT has the power settings by the software as follows; Power Setting: 2.0 dBm Software: MT_TEST_Tool_Ver6.5 (Date: January 14, 2022, Storage location: Driven by connected PC) *This setting of software is the worst case. Any conditions under the normal use do not exceed the condition of setting. In addition, end users cannot change the settings of the output power of the product.	

Details of Operating Mode(s)

Test Item	Mode	Hopping	Tested Antenna	Tested Frequency
Conducted Emission, Radiated Spurious Emission (Below 1 GHz)	Tx 3DH5 *1)	Off	Antenna 3 (BT1)	2402 MHz
			Antenna 4 (BT2)	2480 MHz
Radiated Spurious Emission (Above 1 GHz), 20dB Bandwidth	Tx DH5 Tx 3DH5	Off	Antenna 3 (BT1)	2402 MHz
			Antenna 4 (BT2)	2441 MHz 2480 MHz
Carrier Frequency Separation	Tx DH5 Tx 3DH5	On	Antenna 3 (BT1)	2402 MHz
			Antenna 4 (BT2)	2441 MHz 2480 MHz
Number of Hopping Frequency	Tx DH5 Tx 3DH5	On	Antenna 3 (BT1) Antenna 4 (BT2)	-
Dwell time	Tx DH1, DH3, DH5 Tx 3DH1, 3DH3, 3DH5	On	Antenna 3 (BT1) Antenna 4 (BT2)	-
Maximum Peak Output Power	Tx DH5 Tx 2DH5 Tx 3DH5	Off	Antenna 3 (BT1)	2402 MHz
			Antenna 4 (BT2)	2441 MHz 2480 MHz
Band Edge Compliance (Conducted)	Tx DH5 Tx 3DH5	On	Antenna 3 (BT1)	2402 MHz
		Off	Antenna 4 (BT2)	2480 MHz
99% Occupied Bandwidth	Tx DH5 Tx 3DH5	On	Antenna 3 (BT1)	2402 MHz
		Off	Antenna 4 (BT2)	2441 MHz 2480 MHz
*As a result of preliminary test, the formal test was performed with the above modes, which had the maximum payload length (except Dwell time test)				
*2DH mode (2Mb/s EDR: pi/4DQPSK) was excluded for other tests than power measurement by using 3DH mode (3 Mb/s EDR: 8DPSK) as a representative.				
*It is considered that the non-tested packet type (e.g. inquiry) can be omitted as it is complied with above all the test items based on Bluetooth Core specification.				
*1) Conducted emissions and Spurious emissions for frequencies below 1 GHz were limited to the channel that had the highest power during the antenna terminal test, as preliminary testing indicated that changing the operating frequency had no significant impact on the emissions in those frequency bands.				

Simultaneous transmission (Only Antenna 3 simultaneously transmits BT1 and WLAN 5 GHz band on a single antenna.)

Test Item	Mode *1)	Antenna type
Radiated Spurious Emission	Tx DH5 2480 MHz + Tx 11ax-20 (OFDM) 5500 MHz	Antenna 3 (BT1)
*1) The test was conducted on representative mode, the worst mode at Spurious emission test for BT and the mode had the highest power at Antenna terminal conducted test for WLAN 5 GHz band.		

4.2 Configuration and Peripherals

This page has been submitted for a separate exhibit.

SECTION 5: Conducted Emission

Test Procedure and Conditions

EUT was placed on a urethane platform of nominal size, 1.0 m by 1.5 m, raised 0.8 m above the conducting ground plane. The rear of tabletop was located 40 cm to the vertical conducting plane. The rear of EUT, including peripherals aligned and flushed with rear of tabletop. All other surfaces of tabletop were at least 80 cm from any other grounded conducting surface. EUT was located 80 cm from a Line Impedance Stabilization Network (LISN) / Artificial mains Network (AMN) and excess AC cable was bundled in center.

For the tests on EUT with other peripherals (as a whole system)

I/O cables that were connected to the peripherals were bundled in center. They were folded back and forth forming a bundle 30 cm to 40 cm long and were hanged at a 40 cm height to the ground plane. All unused 50 ohm connectors of the LISN (AMN) were resistivity terminated in 50 ohm when not connected to the measuring equipment.


The AC Mains Terminal Continuous disturbance Voltage has been measured with the EUT in a Semi Anechoic Chamber. The EUT was connected to a LISN (AMN).

An overview sweep with peak detection has been performed.

The test results and limit are rounded off to one decimal place, so some differences might be observed.

Detector	: QP and CISPR AV
Measurement Range	: 0.15 MHz to 30 MHz
Test Data	: APPENDIX
Test Result	: Pass

Figure 1: Test Setup

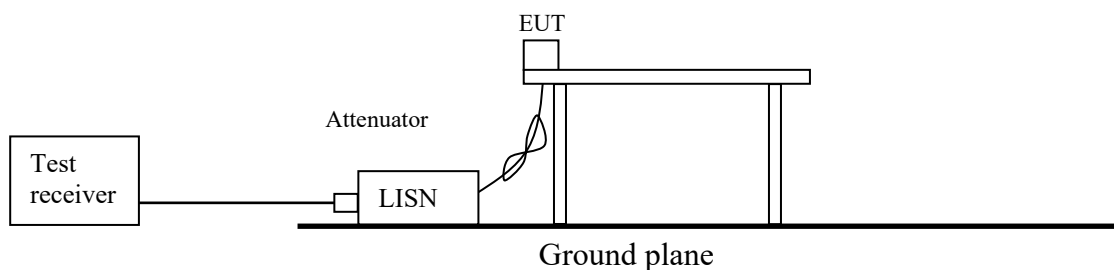

SECTION 6: Radiated Spurious Emission

Test Procedure

[For below 1 GHz]

EUT was placed on a urethane platform of nominal size, 0.5 m by 1.0 m, raised 0.8 m above the conducting ground plane. The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with a ground plane.

[For above 1 GHz]

EUT was placed on a urethane platform of nominal size, 0.5 m by 1.0 m, raised 1.5 m above the conducting ground plane. The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with absorbent materials lined on a ground plane.

The height of the measuring antenna varied between 1 m and 4 m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field strength.

Test antenna was aimed at the EUT for receiving the maximum signal and always kept within the illumination area of the 3 dB beamwidth of the antenna.

The measurements were performed for both vertical and horizontal antenna polarization with the Test Receiver, or the Spectrum Analyzer.

The measurements were made with the following detector function of the test receiver and the Spectrum analyzer (in linear mode).

The test was made with the detector (RBW/VBW) in the following table.

When using Spectrum analyzer, the test was made with adjusting span to zero by using peak hold.

Test Antennas are used as below;

Frequency	30 MHz to 200 MHz	200 MHz to 1 GHz	Above 1 GHz
Antenna Type	Biconical	Logperiodic	Horn

In any 100 kHz bandwidth outside the restricted band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator confirmed 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on a radiated measurement.


20 dBc was applied to the frequency over the limit of FCC 15.209 / Table 4 of RSS-Gen 8.9 (ISED) and outside the restricted band of FCC15.205 / Table 6 of RSS-Gen 8.10 (ISED).

Frequency	Below 1 GHz	Above 1 GHz		20 dBc
Instrument used	Test Receiver	Spectrum Analyzer		Spectrum Analyzer
Detector	QP	PK	AV *1)	PK
IF Bandwidth	BW 120 kHz	RBW: 1 MHz VBW: 3 MHz	RBW: 1 MHz VBW: 3 MHz Detector: Power Averaging (RMS) Trace: 100 traces Duty factor was added to the results.	RBW: 100 kHz VBW: 300 kHz

*1) Average Power Measurement was performed based on KDB 558074 D01 15.247 Meas Guidance v05r02.


Figure 2: Test Setup

Below 1 GHz

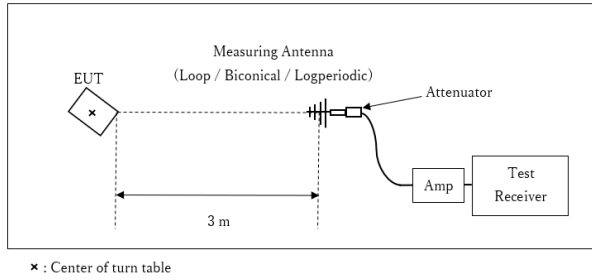

Test Distance: 3 m

1 GHz to 10 GHz

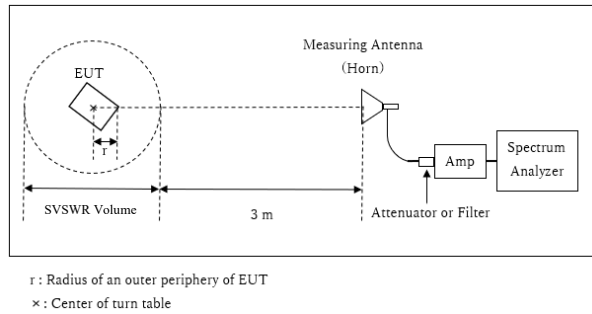

[Other than Simultaneous transmission]

Distance Factor: $20 \times \log (3.95 \text{ m} / 3.0 \text{ m}) = 2.39 \text{ dB}$

* Test Distance: $(3 + \text{SVSWR Volume} / 2) - r = 3.95 \text{ m}$

SVSWR Volume : 2.0 m

r = 0.05 m

[Simultaneous transmission]

Distance Factor: $20 \times \log (3.9 \text{ m} / 3.0 \text{ m}) = 2.28 \text{ dB}$


* Test Distance: $(3 + \text{SVSWR Volume} / 2) - r = 3.9 \text{ m}$

SVSWR Volume : 2.0 m

r = 0.1 m

(SVSWR Volume has been calibrated based on CISPR 16-1-4.)

10 GHz to 26.5 GHz

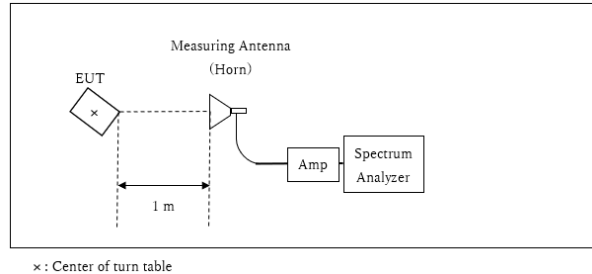

Distance Factor: $20 \times \log (1.0 \text{ m} / 3.0 \text{ m}) = -9.5 \text{ dB}$

* Test Distance: 1 m

- The carrier level and noise levels were confirmed at each position of X, Y and Z axes of EUT to see the position of maximum noise, and the test was made at the position that has the maximum noise.

The test results and limit are rounded off to one decimal place, so some differences might be observed.

Measurement Range : 30 MHz to 26.5 GHz
Test Data : APPENDIX
Test Result : Pass

SECTION 7: Antenna Terminal Conducted Tests

Test Procedure

The tests were made with below setting connected to the antenna port.

Test	Span	RBW	VBW	Sweep time	Detector	Trace	Instrument Used
20dB Bandwidth	3 MHz	30 kHz	100 kHz	Auto	Peak	Max Hold	Spectrum Analyzer
99% Occupied Bandwidth *1)	Enough width to display emission skirts	1 to 5 % of OBW	Three times of RBW	Auto	Peak	Max Hold	Spectrum Analyzer
Maximum Peak Output Power	-	-	-	Auto	Peak Average *2)	-	Power Meter (Sensor: 50MHz BW)
Carrier Frequency Separation	3 MHz	30 kHz	100 kHz	Auto	Peak	Max Hold	Spectrum Analyzer
Number of Hopping Frequency	30 MHz	100 kHz	300 kHz	Auto	Peak	Max Hold	Spectrum Analyzer
Dwell Time	Zero Span	100 kHz, 1 MHz	300 kHz, 3 MHz	As necessary capture the entire dwell time per hopping channel	Peak	Clear Write	Spectrum Analyzer
Conducted Spurious Emission *3) *4)	9 kHz to 150 kHz	200 Hz	620 Hz	Auto	Peak	Max Hold	Spectrum Analyzer
	150 kHz to 30 MHz	9.1 kHz	27 kHz				
	30 MHz to 25 GHz	100 kHz	300 kHz				
Conducted Spurious Emission Band Edge compliance	10 MHz	100 kHz	300 kHz	Auto	Peak	Max Hold	Spectrum Analyzer

*1) Peak hold was applied as Worst-case measurement.

*2) Reference data

*3) In the frequency range below 30MHz, RBW was narrowed to separate the noise contents.

Then, wide-band noise near the limit was checked separately, however the noise was low enough as shown in the chart.

(9 kHz - 150 kHz: RBW = 200 Hz, 150 kHz - 30 MHz: RBW = 9.1 kHz).

*4) The limits in CFR 47, Part 15, Subpart C, paragraph 15.209(a), are identical to those in RSS-Gen section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using the free space impedance of 377 Ohms. For example, the measurement at frequency 9 kHz resulted in a level of 45.5 dBuV/m, which is equivalent to $45.5 - 51.5 = -6.0$ dBuA/m, which has the same margin, 3 dB, to the corresponding RSS-Gen Table 6 limit as it has to 15.209(a) limit.

The test results and limit are rounded off to two decimals place, so some differences might be observed.

The equipment and cables were not used for factor 0 dB of the data sheets.


Test Data : APPENDIX
Test Result : Pass

APPENDIX 1: Test data

Conducted Emission (BT1)

Test place Ise EMC Lab, No.3 Semi Anechoic Chamber
Date February 15, 2022
Temperature / Humidity 20 deg. C / 40 % RH
Engineer Junya Okuno
Mode Tx, Hopping Off, 3DH5 2402 MHz

Limit : FCC_Part 15 Subpart C(15.207)

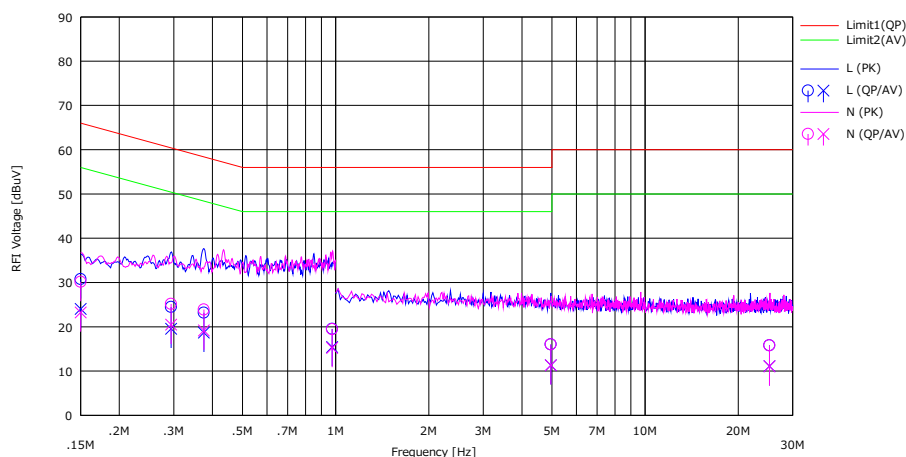


No.	Freq. [MHz]	Reading		LISN [dB]	LOSS [dB]	Results		Limit		Margin		Phase	Comment
		<QP> [dBuV]	<AV> [dBuV]			<QP> [dBuV]	<AV> [dBuV]	<QP> [dBuV]	<AV> [dBuV]	<QP> [dB]	<AV> [dB]		
1	0.15000	17.50	10.80	0.06	13.18	30.74	24.04	66.00	56.00	35.26	31.96	L	
2	0.29394	11.20	6.30	0.05	13.20	24.45	19.55	60.41	50.41	35.96	30.86	L	
3	0.37503	9.90	5.40	0.05	13.21	23.16	18.66	58.39	48.39	35.23	29.73	L	
4	0.97500	6.20	2.10	0.06	13.26	19.52	15.42	56.00	46.00	36.48	30.58	L	
5	4.95828	2.40	-2.30	0.13	13.48	16.01	11.31	56.00	46.00	39.99	34.69	L	
6	25.24100	1.30	-3.40	0.51	13.98	15.79	11.09	60.00	50.00	44.21	38.91	L	
7	0.15000	16.90	10.00	0.06	13.18	30.14	23.24	66.00	56.00	35.86	32.76	N	
8	0.29394	11.90	7.20	0.06	13.20	25.16	20.46	60.41	50.41	35.25	29.95	N	
9	0.37503	10.60	5.90	0.06	13.21	23.87	19.17	58.39	48.39	34.52	29.22	N	
10	0.97500	6.10	1.90	0.07	13.26	19.43	15.23	56.00	46.00	36.57	30.77	N	
11	4.95828	2.40	-2.30	0.13	13.48	16.01	11.31	56.00	46.00	39.99	34.69	N	
12	25.24100	1.30	-3.40	0.48	13.98	15.76	11.06	60.00	50.00	44.24	38.94	N	

CHART: WITH FACTOR Peak hold data. CALCULATION : RESULT = READING + LISN + LOSS (CABLE + ATT)
Except for the above table: adequate margin data below the limits.

Conducted Emission (BT2)

Test place Ise EMC Lab. No.3 Semi Anechoic Chamber
Date February 15, 2022
Temperature / Humidity 20 deg. C / 40 % RH
Engineer Junya Okuno
Mode Tx, Hopping Off, 3DH5 2480 MHz

Limit : FCC_Part 15 Subpart C(15.207)

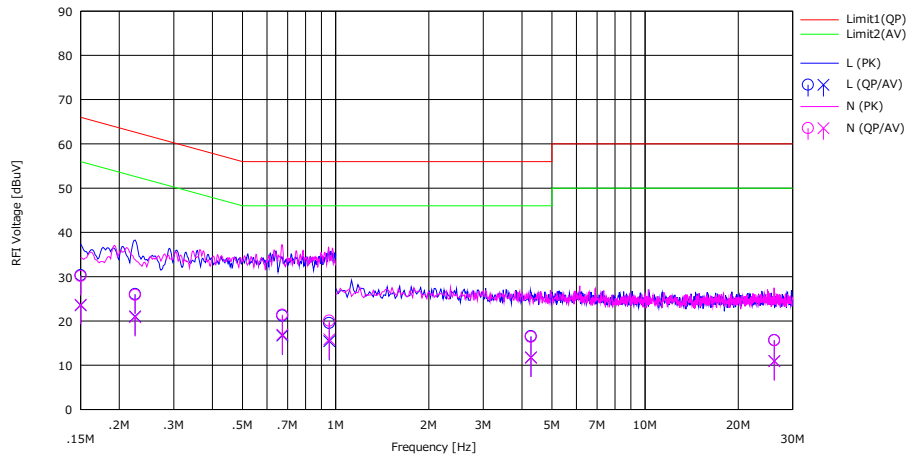

No.	Freq. [MHz]	Reading		USN [dB]	LOSS [dB]	Results		Limit		Margin		Phase	Comment
		(QP) [dBuV]	(AV) [dBuV]			(QP) [dBuV]	(AV) [dBuV]	(QP) [dBuV]	(AV) [dBuV]	(QP) [dB]	(AV) [dB]		
1	0.15000	17.10	10.30	0.06	13.18	30.34	23.54	66.00	56.00	35.66	32.46	L	
2	0.22501	12.80	7.80	0.05	13.19	26.04	21.04	62.63	52.63	36.59	31.59	L	
3	0.67280	7.90	3.40	0.05	13.23	21.18	16.68	56.00	46.00	34.82	29.32	L	
4	0.95351	6.20	2.10	0.06	13.26	19.52	15.42	56.00	46.00	36.48	30.58	L	
5	4.27690	3.00	-1.80	0.11	13.45	16.56	11.76	56.00	46.00	39.44	34.24	L	
6	26.17730	1.10	-3.60	0.53	14.00	15.63	10.93	60.00	50.00	44.37	39.07	L	
7	0.15000	16.90	10.40	0.06	13.18	30.14	23.64	66.00	56.00	35.86	32.36	N	
8	0.22501	12.60	7.60	0.07	13.19	25.86	20.86	62.63	52.63	36.77	31.77	N	
9	0.67280	8.10	3.60	0.06	13.23	21.39	16.89	56.00	46.00	34.61	29.11	N	
10	0.95351	6.70	2.50	0.07	13.26	20.03	15.83	56.00	46.00	35.97	30.17	N	
11	4.27690	2.80	-1.90	0.12	13.45	16.37	11.67	56.00	46.00	39.63	34.33	N	
12	26.17730	1.10	-3.60	0.50	14.00	15.60	10.90	60.00	50.00	44.40	39.10	N	

CHART: WITH FACTOR Peak hold data. CALCULATION : RESULT = READING + LISN + LOSS (CABLE + ATT)
Except for the above table: adequate margin data below the limits.

20dB Bandwidth, 99% Occupied Bandwidth and Carrier Frequency Separation

Test place	Ise EMC Lab. No.8 Measurement Room
Date	January 20, 2022
Temperature / Humidity	19 deg. C / 31 % RH
Engineer	Ken Fujita
Mode	Tx, Hopping Off, Tx, Hopping On

BT1

Mode	Freq. [MHz]	20dB Bandwidth [MHz]	99% Occupied Bandwidth [kHz]	Carrier Frequency Separation [MHz]	Limit for Carrier Frequency separation [MHz]
DH5	2402.0	0.817	738.441	1.000	≥ 0.545
DH5	2441.0	0.841	743.964	1.000	≥ 0.561
DH5	2480.0	0.846	745.693	1.000	≥ 0.564
DH5	Hopping On	-	78615.000	-	-
3DH5	2402.0	1.319	1186.100	1.000	≥ 0.879
3DH5	2441.0	1.316	1184.600	1.000	≥ 0.877
3DH5	2480.0	1.313	1186.100	1.000	≥ 0.875
3DH5	Hopping On	-	78698.200	-	-


BT2

Mode	Freq. [MHz]	20dB Bandwidth [MHz]	99% Occupied Bandwidth [kHz]	Carrier Frequency Separation [MHz]	Limit for Carrier Frequency separation [MHz]
DH5	2402.0	0.841	748.486	1.000	≥ 0.561
DH5	2441.0	0.844	744.171	1.000	≥ 0.563
DH5	2480.0	0.840	739.886	1.000	≥ 0.560
DH5	Hopping On	-	78611.000	-	-
3DH5	2402.0	1.318	1184.400	1.000	≥ 0.879
3DH5	2441.0	1.318	1186.600	1.000	≥ 0.879
3DH5	2480.0	1.320	1186.200	1.000	≥ 0.880
3DH5	Hopping On	-	78687.700	-	-


Limit: Two-thirds of 20dB Bandwidth or 25kHz (whichever is greater).

No limit applies to 20dB Bandwidth.

20dB Bandwidth and 99% Occupied Bandwidth (BT1)

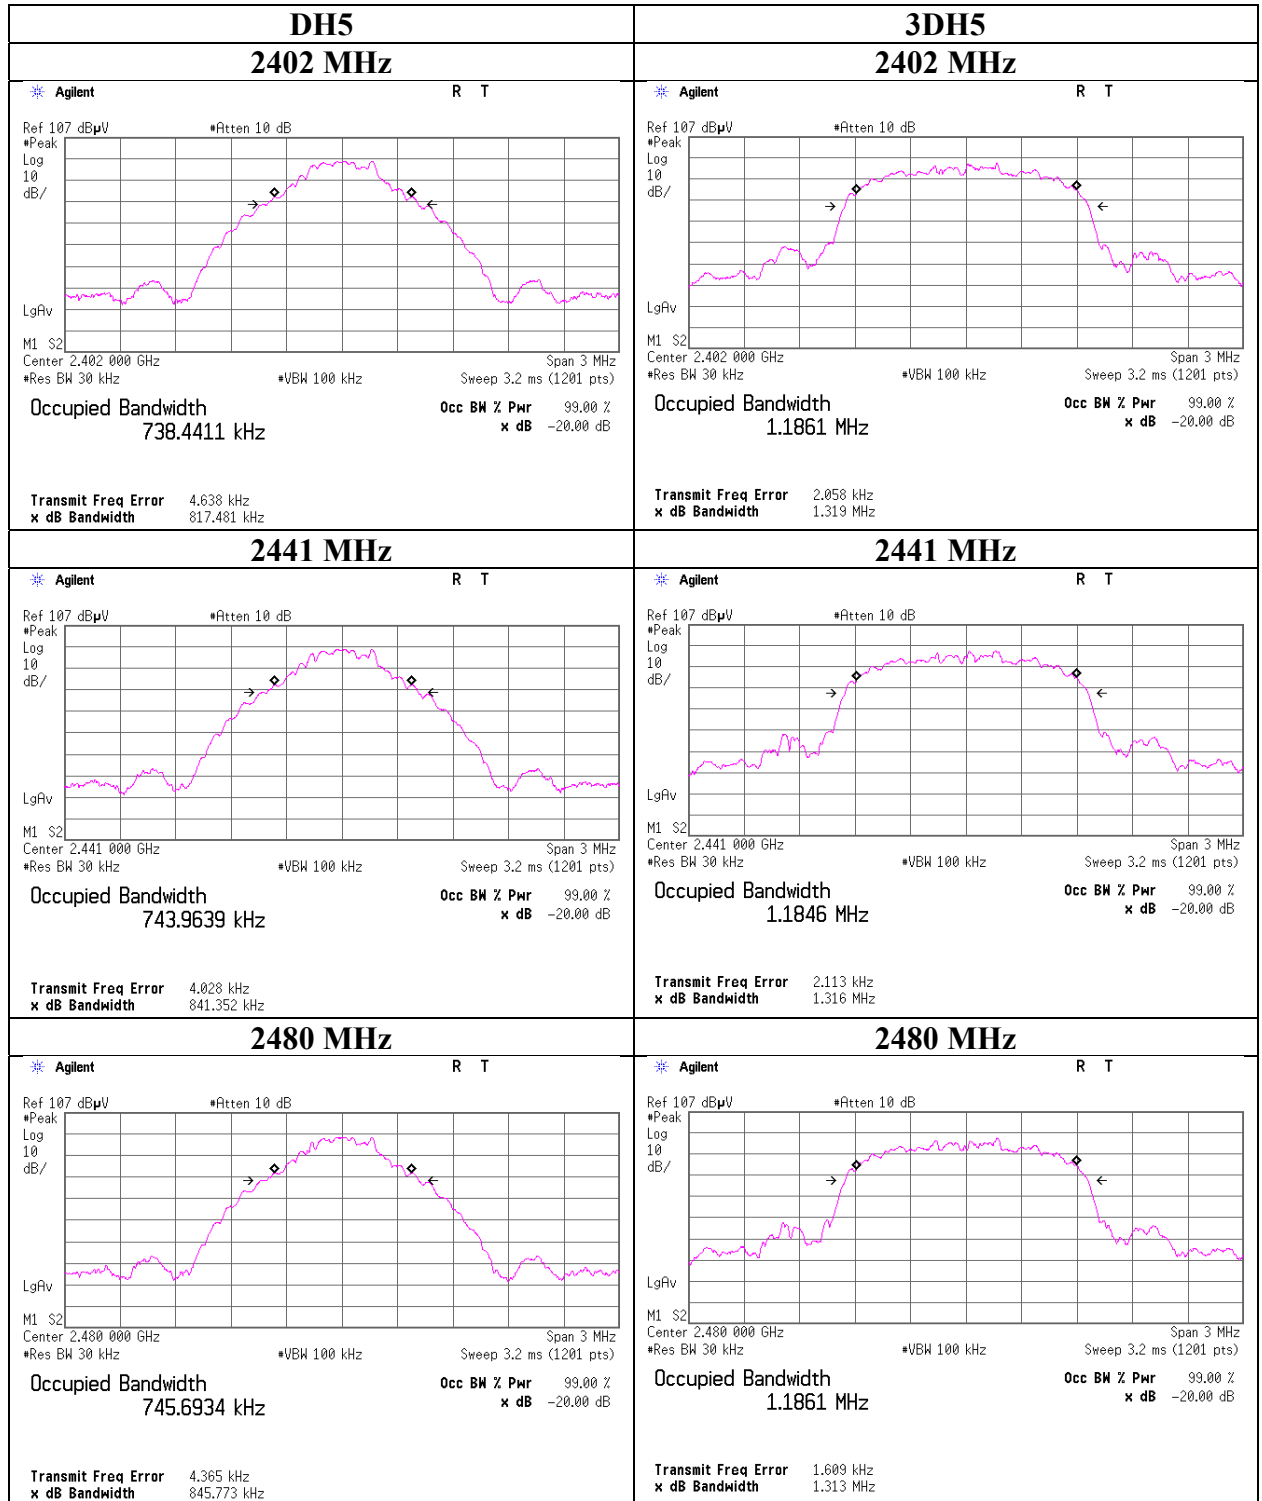


20dB Bandwidth and 99% Occupied Bandwidth (BT2)

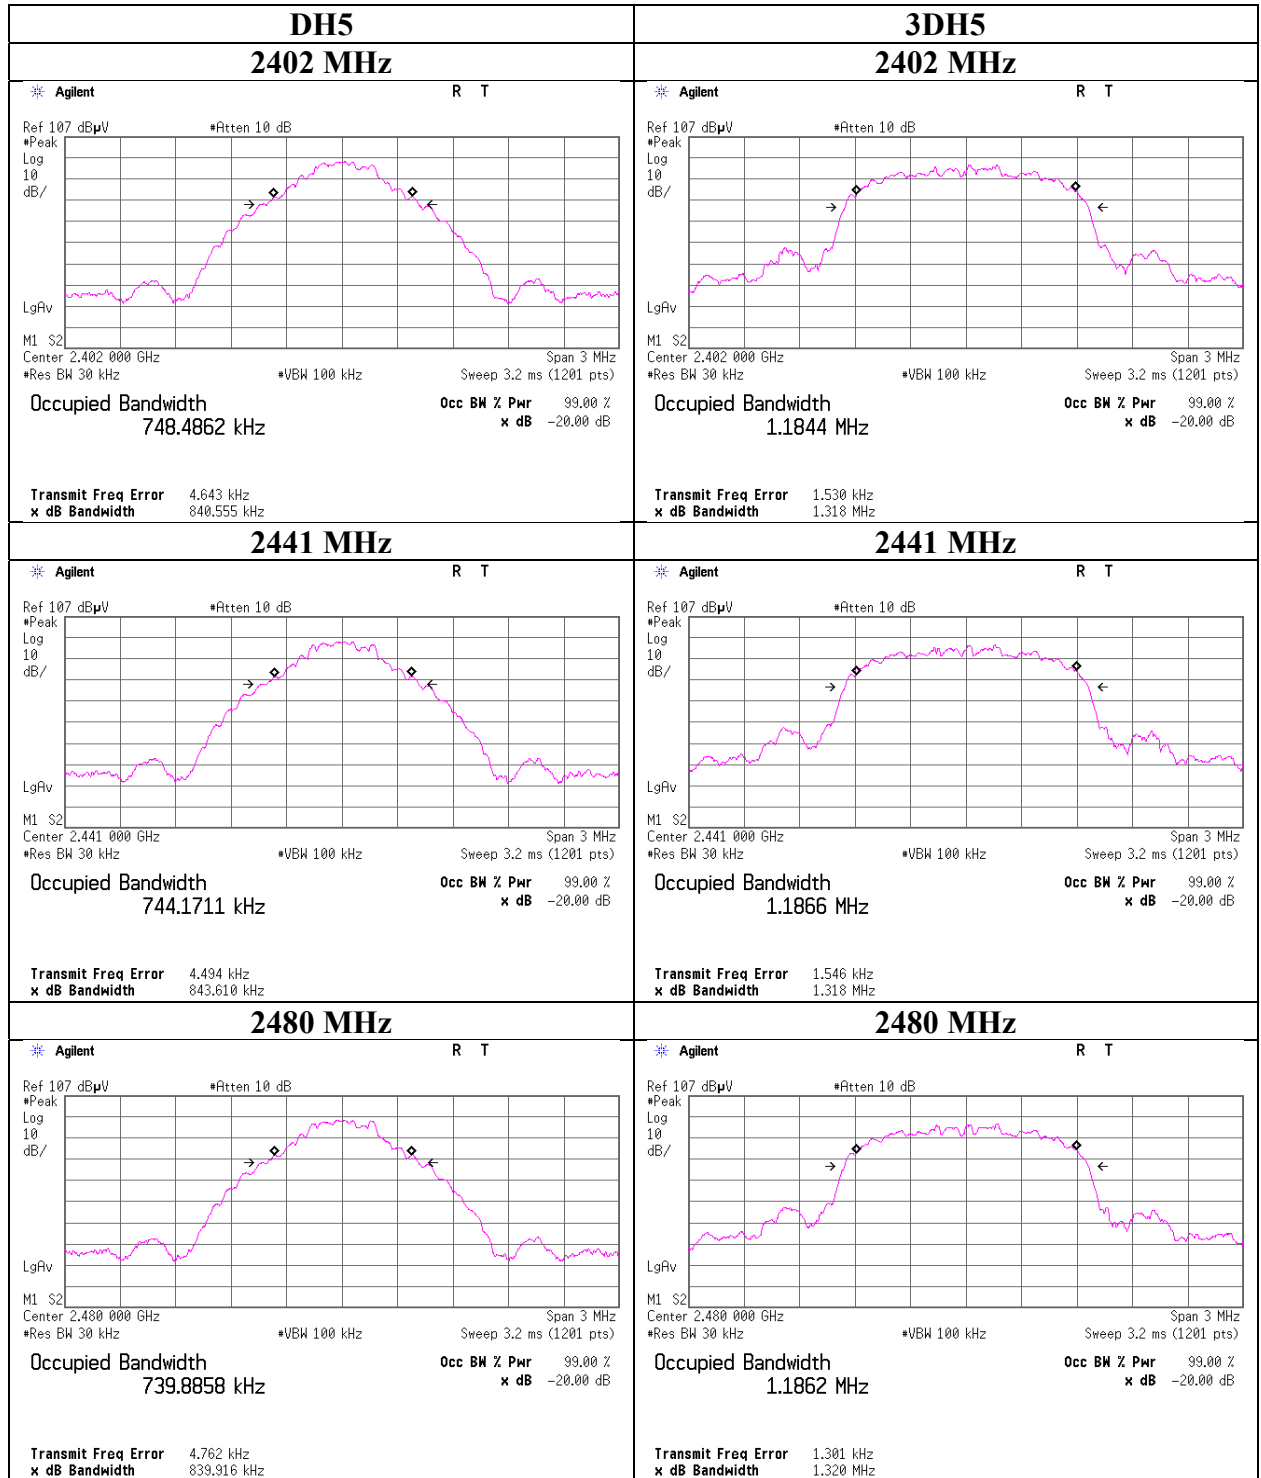


20dB Bandwidth and 99% Occupied Bandwidth


BT1

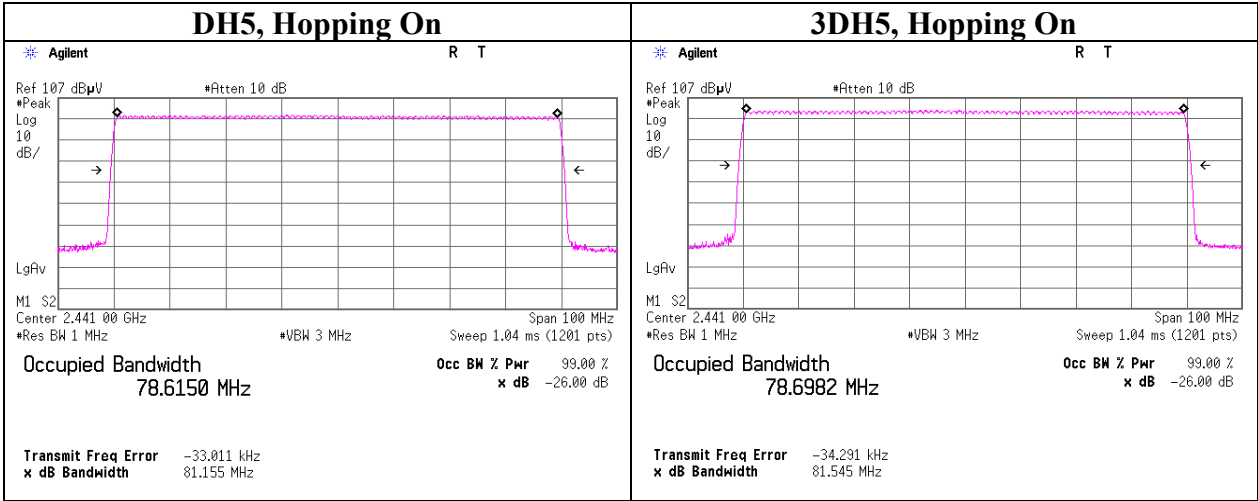


BT2

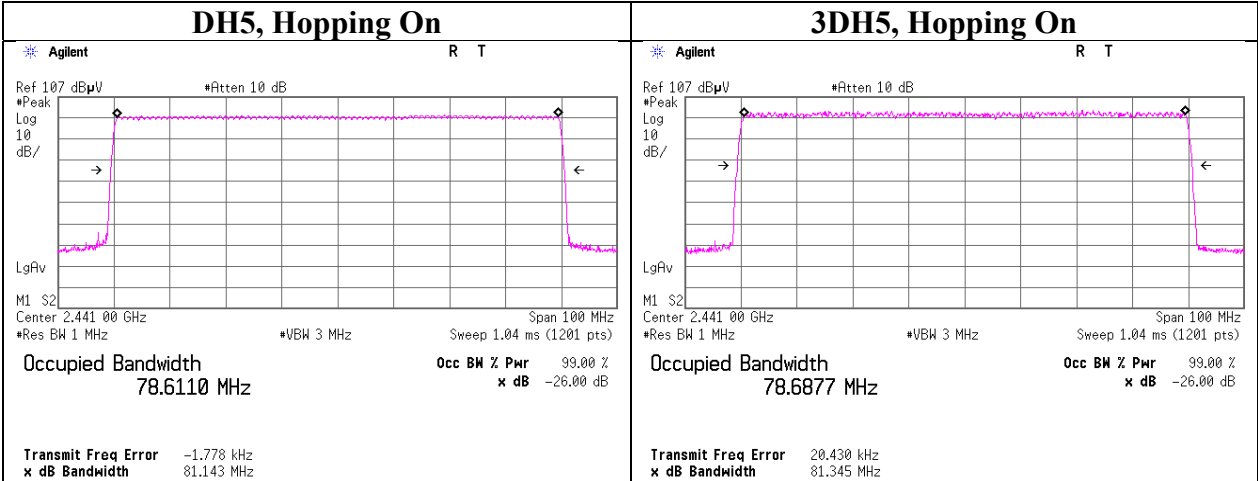

Carrier Frequency Separation
(BT1)

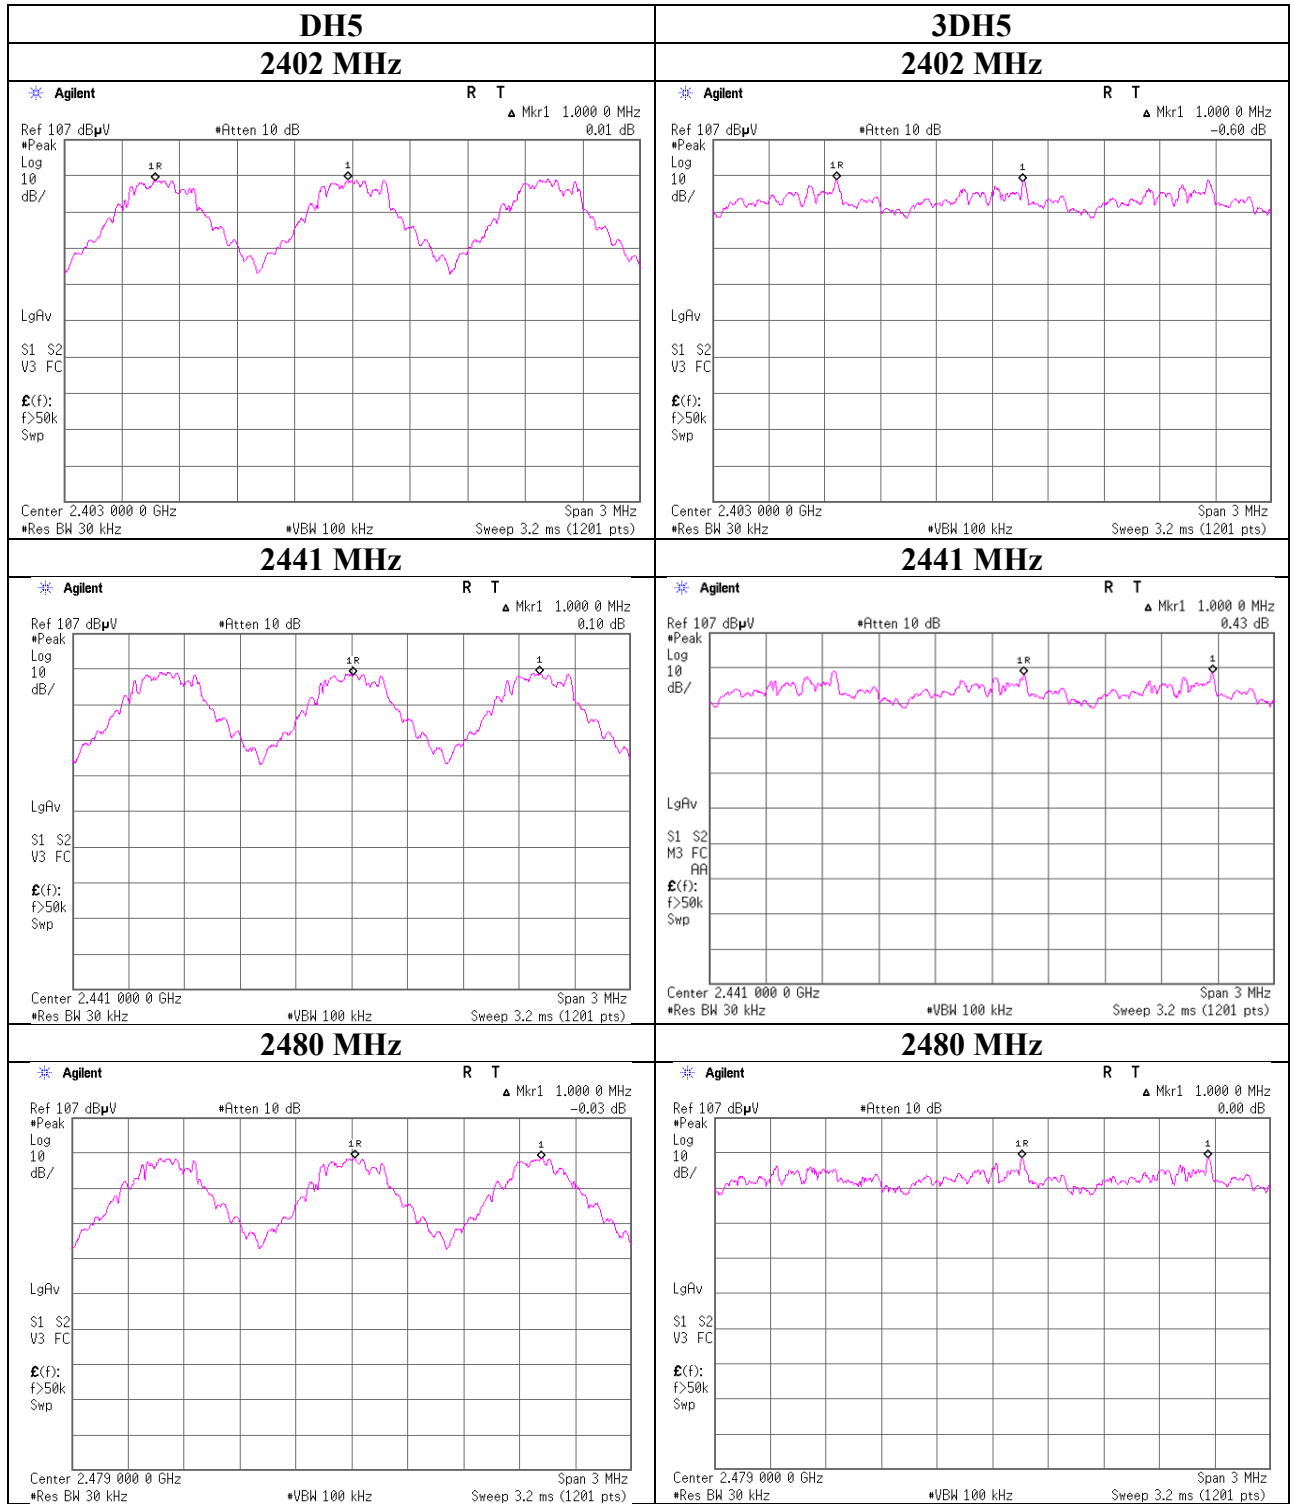

Carrier Frequency Separation
(BT2)

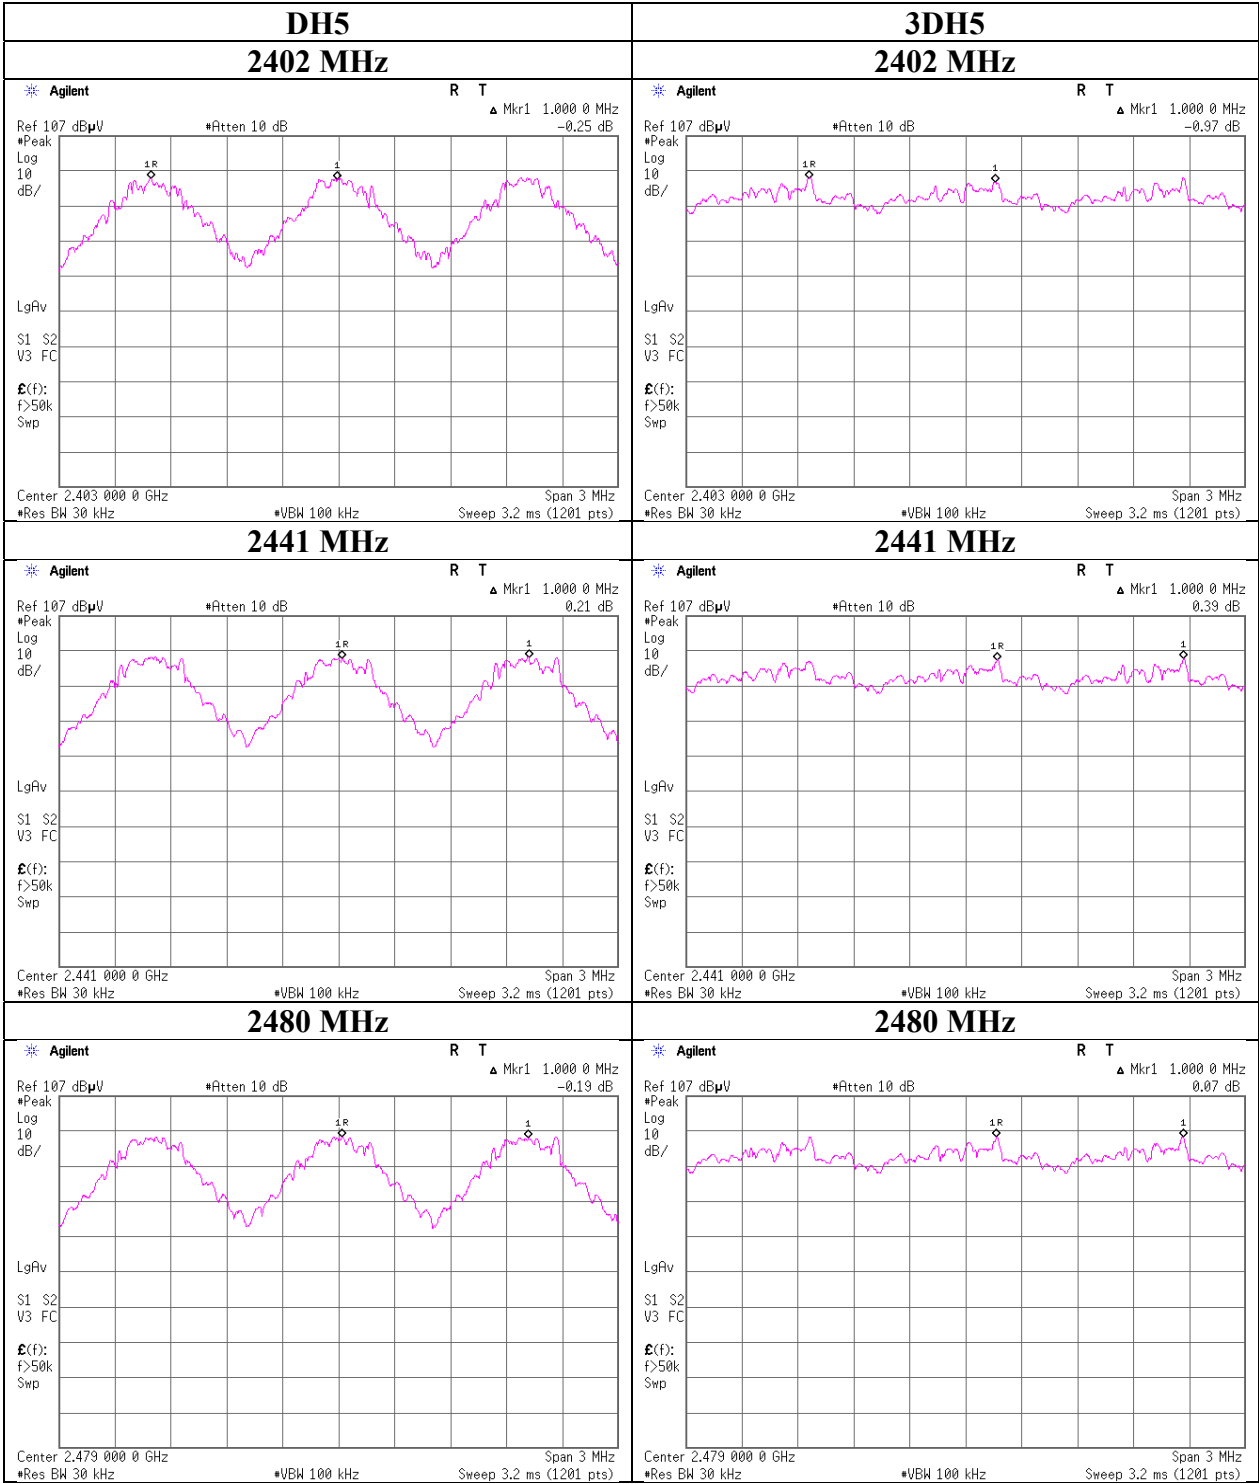

Number of Hopping Frequency

Test place	Ise EMC Lab. No.8 Measurement Room
Date	January 21, 2022
Temperature / Humidity	21 deg. C / 30 % RH
Engineer	Ken Fujita
Mode	Tx, Hopping On

BT1


Mode	Number of channel [channels]	Limit [channels]
DH5	79	≥ 15
3DH5	79	≥ 15

BT2


Mode	Number of channel [channels]	Limit [channels]
DH5	79	≥ 15
3DH5	79	≥ 15

Test was not performed at AFH mode whose number of hopping channel is 20 channels because this Bluetooth radio is in compliance of Bluetooth Specification.

Number of Hopping Frequency
(BT1)

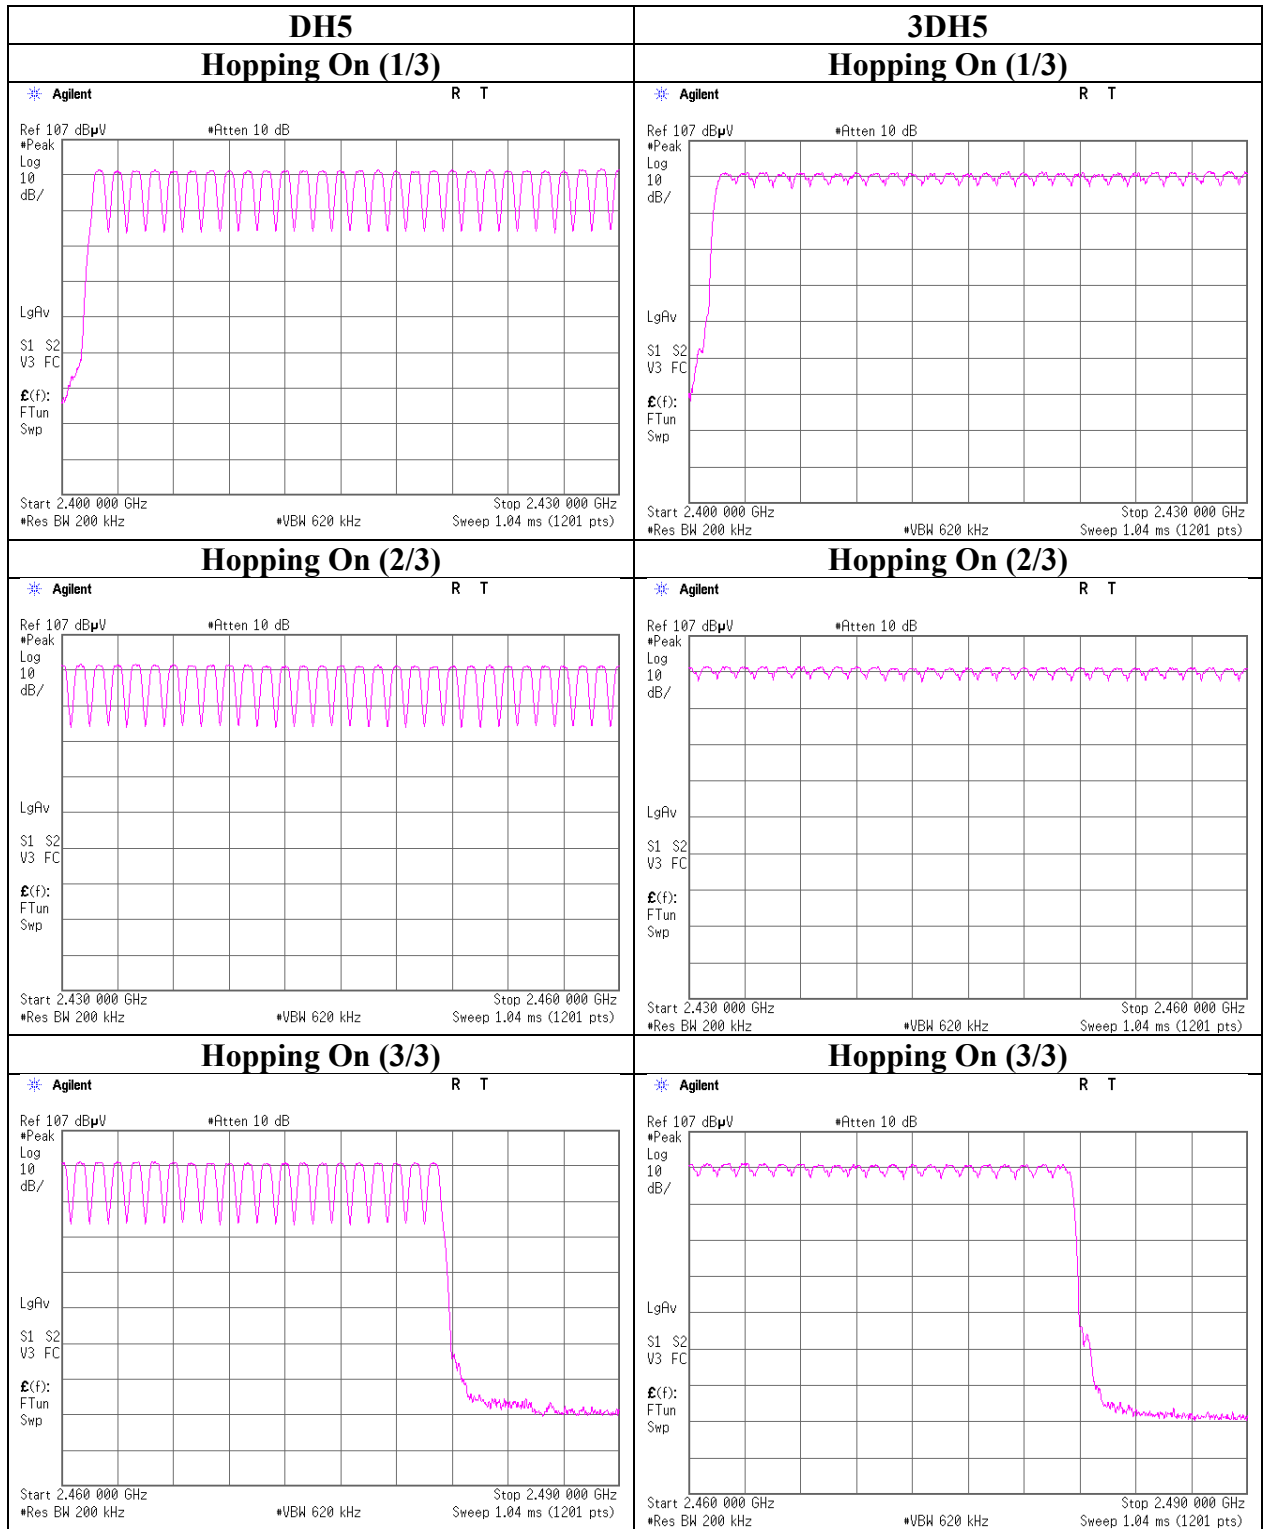

Number of Hopping Frequency
(BT2)

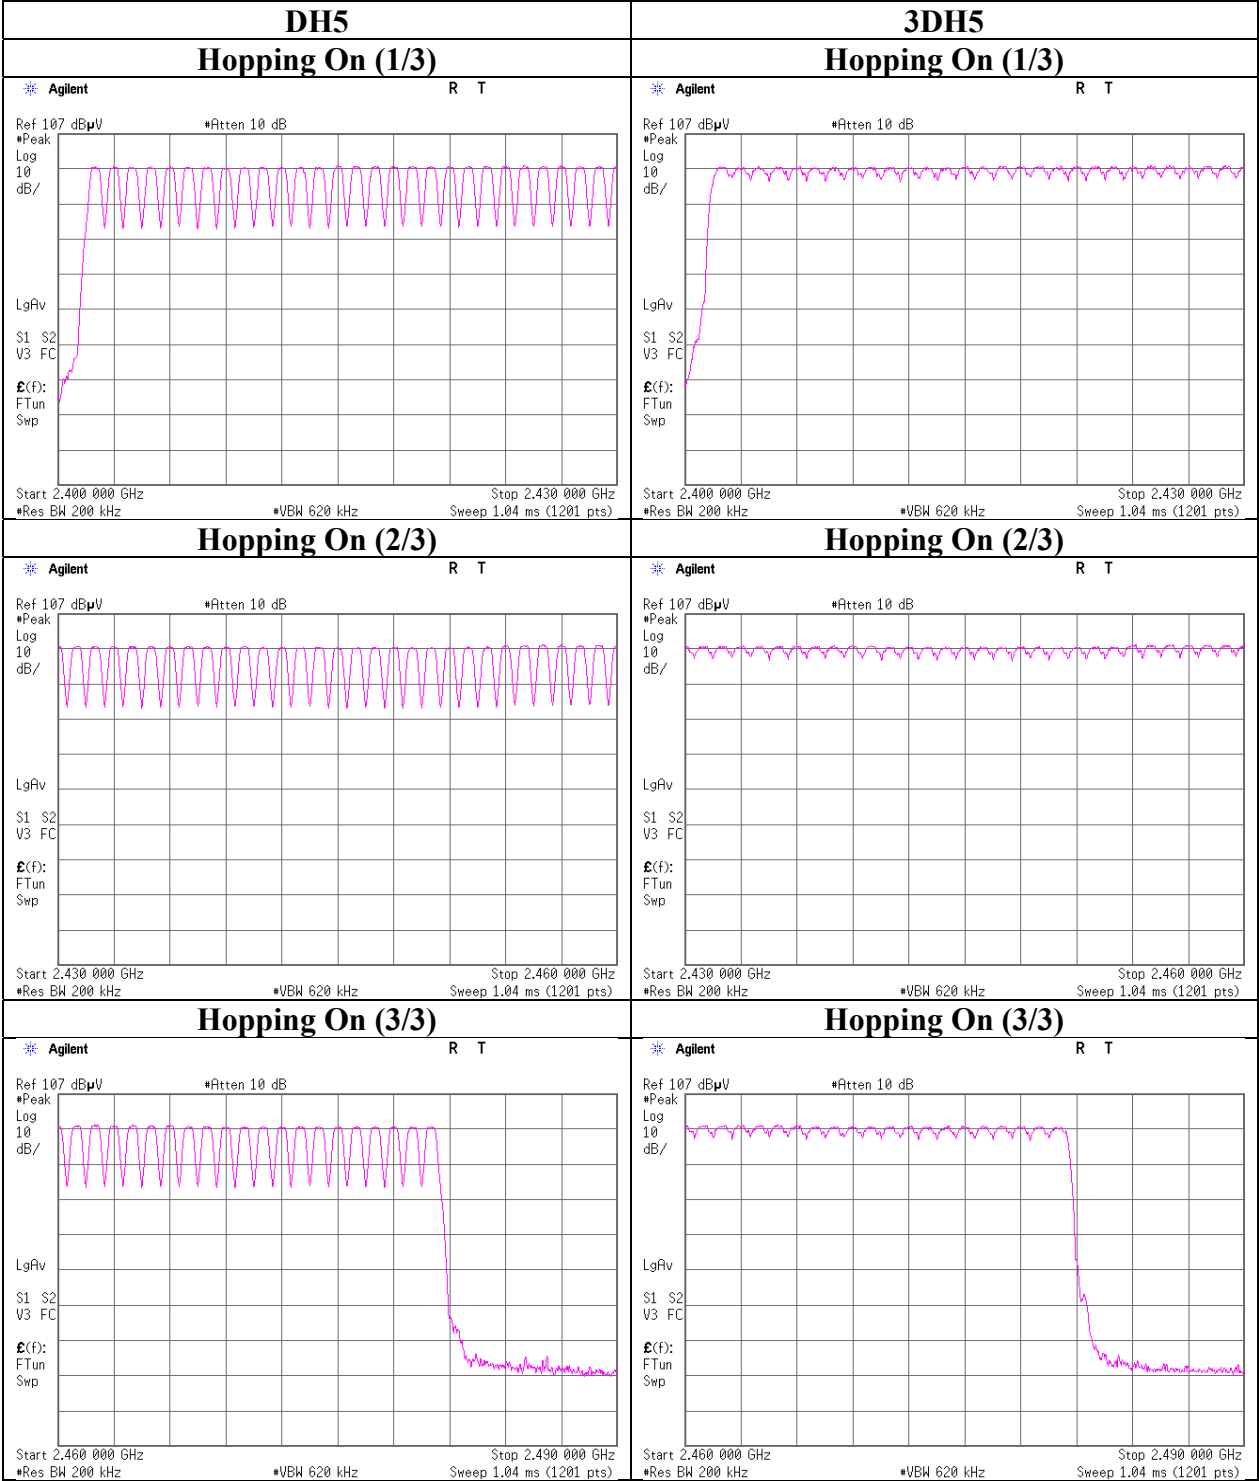

Dwell time

Test place	Ise EMC Lab. No.8 Measurement Room
Date	January 18, 2022
Temperature / Humidity	22 deg. C / 33 % RH
Engineer	Ken Fujita
Mode	Tx, Hopping On

BT1

Mode	Number of transmission in a 31.6(79 Hopping x 0.4) / 12.8 (32 Hopping x 0.4) second period	Length of transmission [msec]	Result [msec]	Limit [msec]
DH1	51.0 times / 5 sec. x 31.6 sec. = 323 times	0.391	126	400
DH3	28.0 times / 5 sec. x 31.6 sec. = 177 times	1.652	292	400
DH5	19.2 times / 5 sec. x 31.6 sec. = 122 times	2.903	354	400
3DH1	50.6 times / 5 sec. x 31.6 sec. = 320 times	0.397	127	400
3DH3	26.8 times / 5 sec. x 31.6 sec. = 170 times	1.654	281	400
3DH5	20.8 times / 5 sec. x 31.6 sec. = 132 times	2.900	383	400

BT2

Mode	Number of transmission in a 31.6(79 Hopping x 0.4) / 12.8 (32 Hopping x 0.4) second period	Length of transmission [msec]	Result [msec]	Limit [msec]
DH1	50.4 times / 5 sec. x 31.6 sec. = 319 times	0.390	125	400
DH3	28.2 times / 5 sec. x 31.6 sec. = 179 times	1.649	295	400
DH5	20.4 times / 5 sec. x 31.6 sec. = 129 times	2.900	374	400
3DH1	51.2 times / 5 sec. x 31.6 sec. = 324 times	0.397	129	400
3DH3	27.2 times / 5 sec. x 31.6 sec. = 172 times	1.652	284	400
3DH5	20.8 times / 5 sec. x 31.6 sec. = 132 times	2.913	385	400

Sample Calculation

Result = Number of transmission x Length of transmission

BT1

*Average data of 5 tests.(except Inquiry)

Mode	Sampling [times]					Average [times]
	1	2	3	4	5	
DH1	50	51	52	51	51	51
DH3	29	26	29	26	30	28
DH5	17	17	20	23	19	19.2
3DH1	50	51	51	50	51	50.6
3DH3	28	26	24	28	28	26.8
3DH5	23	19	19	24	19	20.8

BT2

*Average data of 5 tests.(except Inquiry)


Mode	Sampling [times]					Average [times]
	1	2	3	4	5	
DH1	50	50	51	50	51	50.4
DH3	29	26	28	31	27	28.2
DH5	19	22	21	21	19	20.4
3DH1	51	51	51	51	52	51.2
3DH3	25	28	28	25	30	27.2
3DH5	23	20	21	21	19	20.8

Sample Calculation


Average = Summation (Sampling 1 to 5) / 5

This device complies with the Bluetooth protocol for FHSS operation, employing a pseudo random channel selection and hopping rate to ensure that the occupancy time in $N \times 0.4s$, where N is the number of channels being used in the hopping sequence ($20 \leq N \leq 79$), is always less than $0.4s$ regardless of packet size. This is confirmed in the test report for $N = 79$.


Dwell time
(BT1)

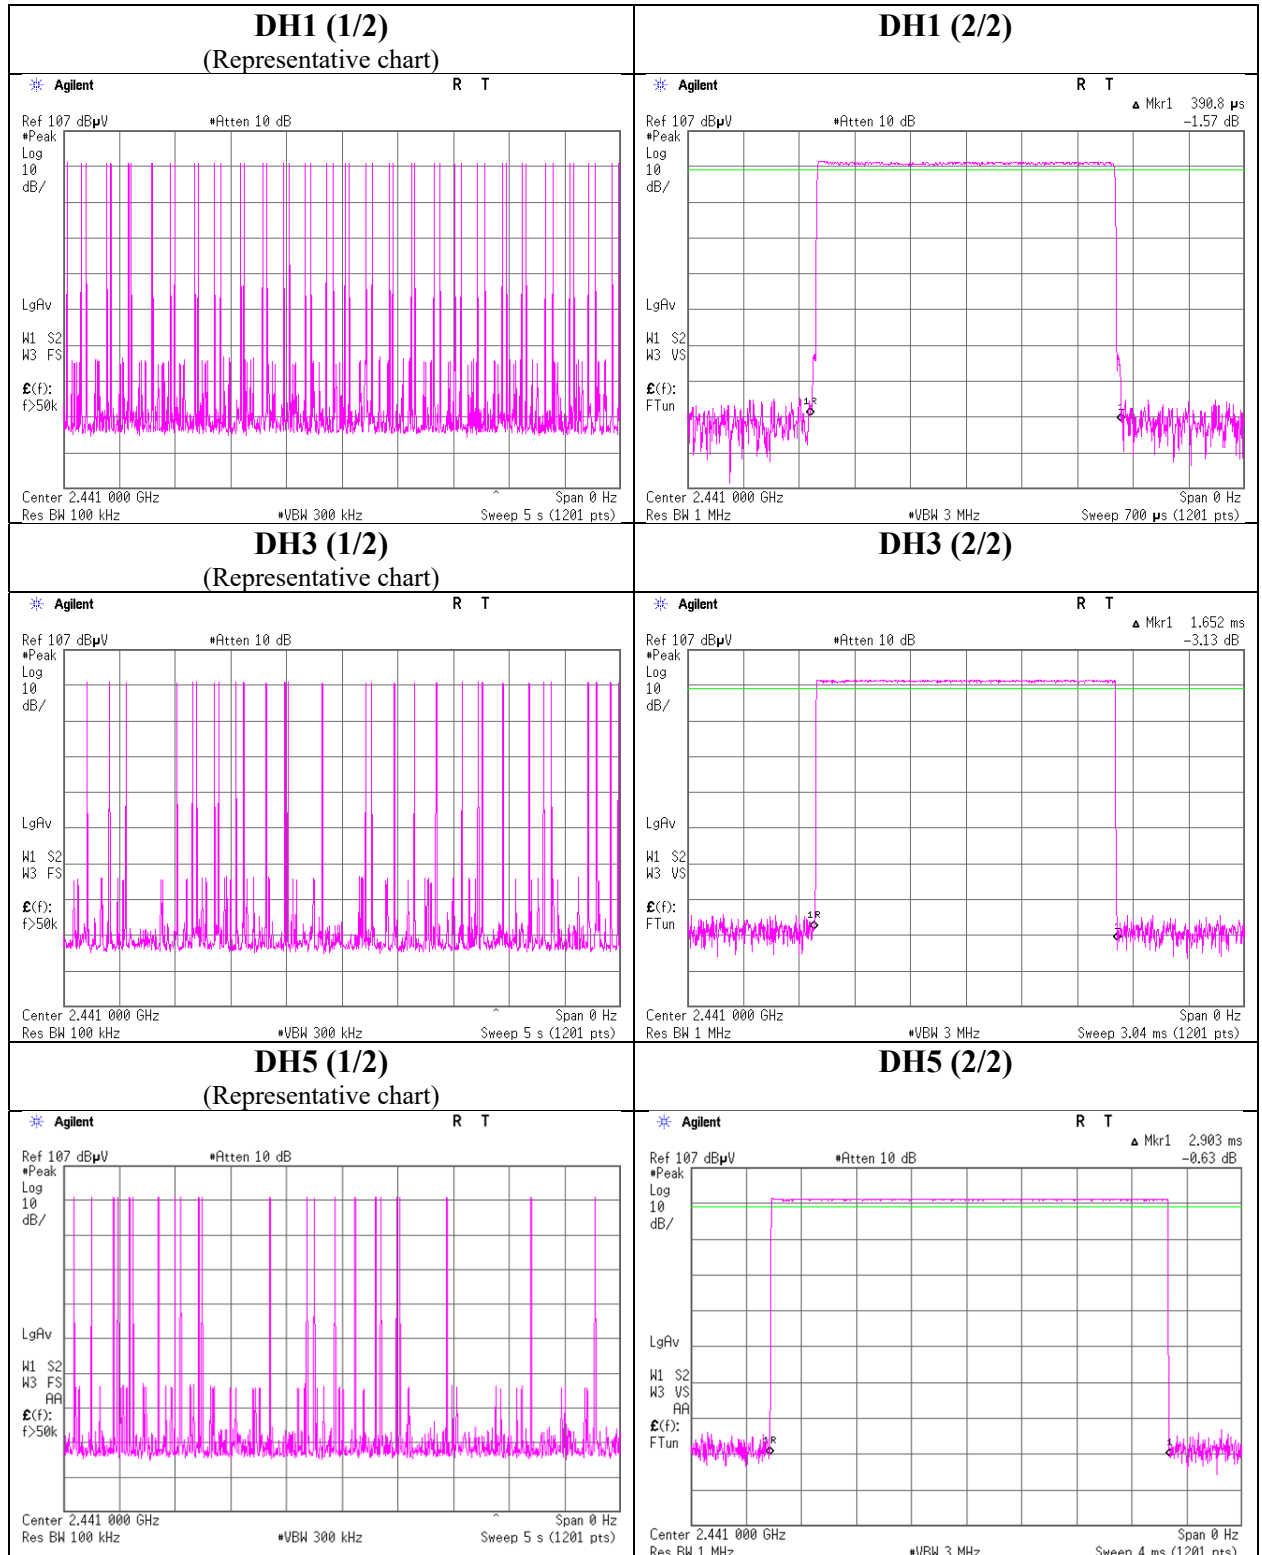


Dwell time
(BT1)

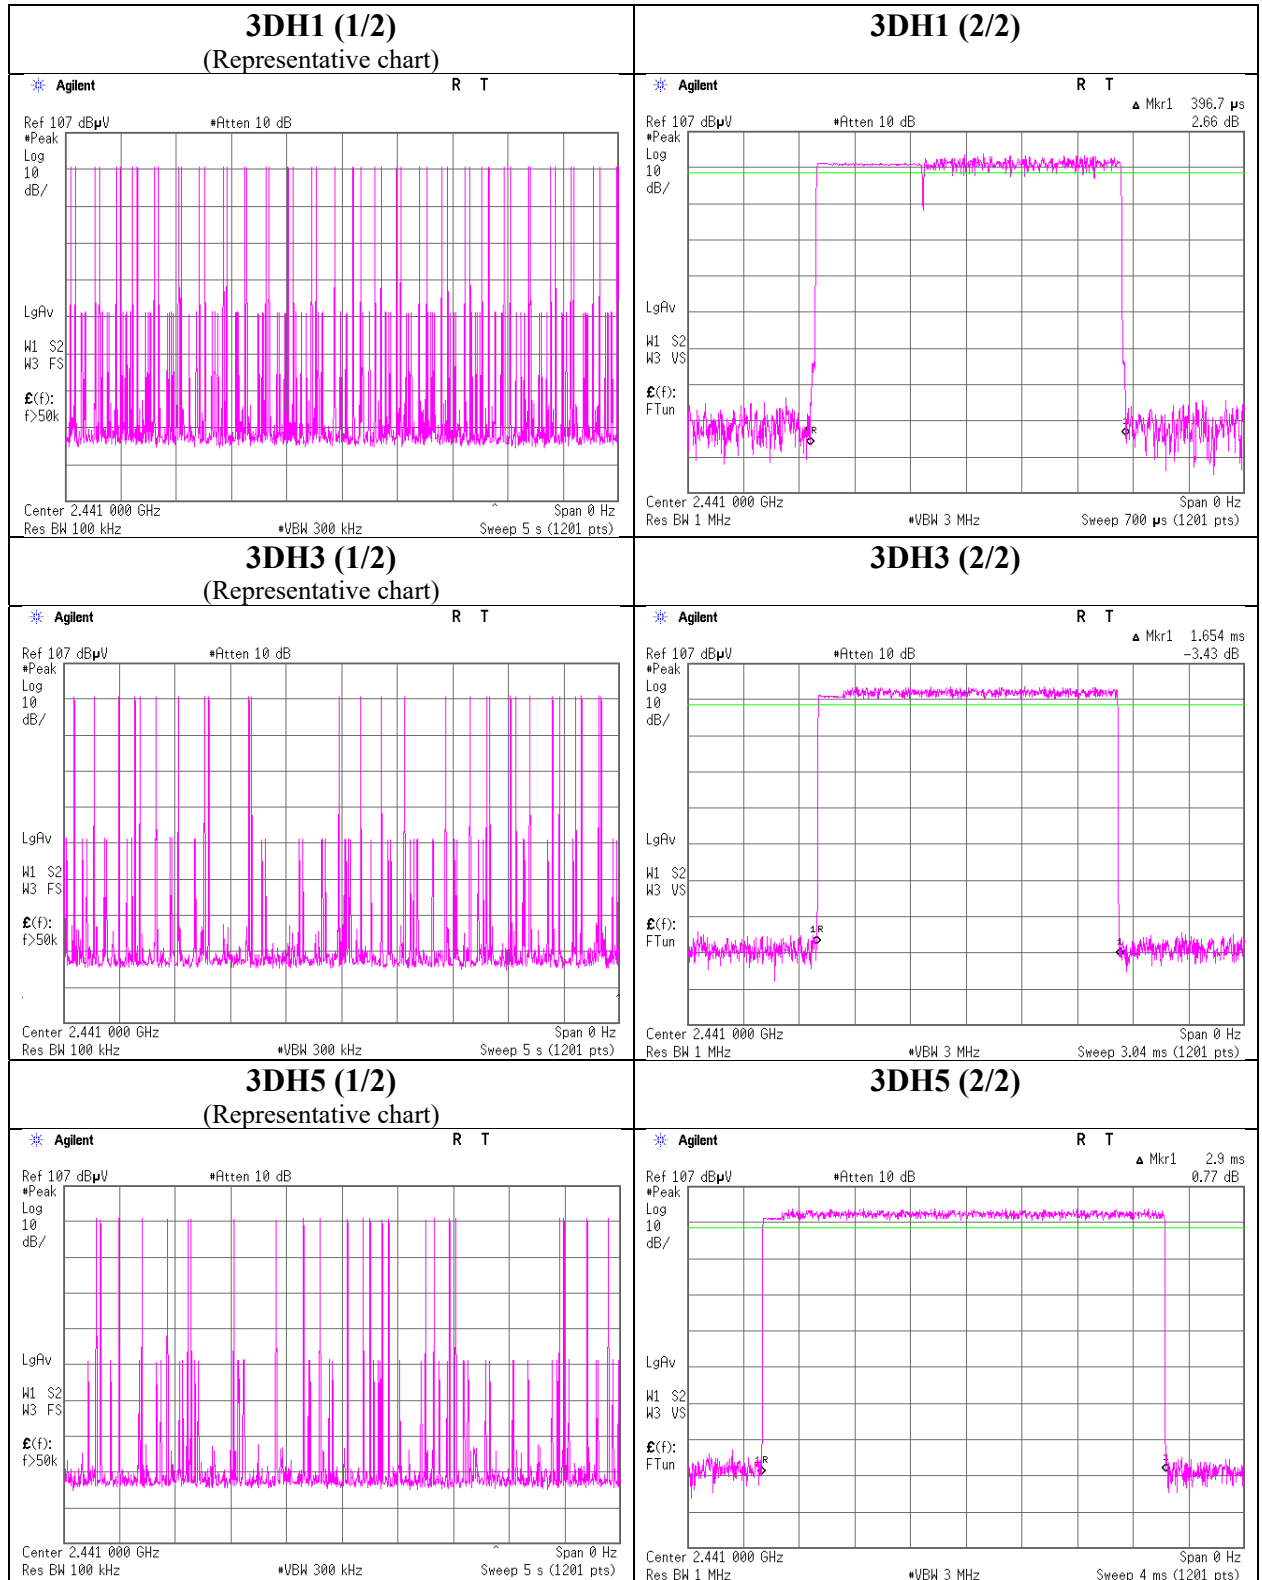

Dwell time
(BT2)

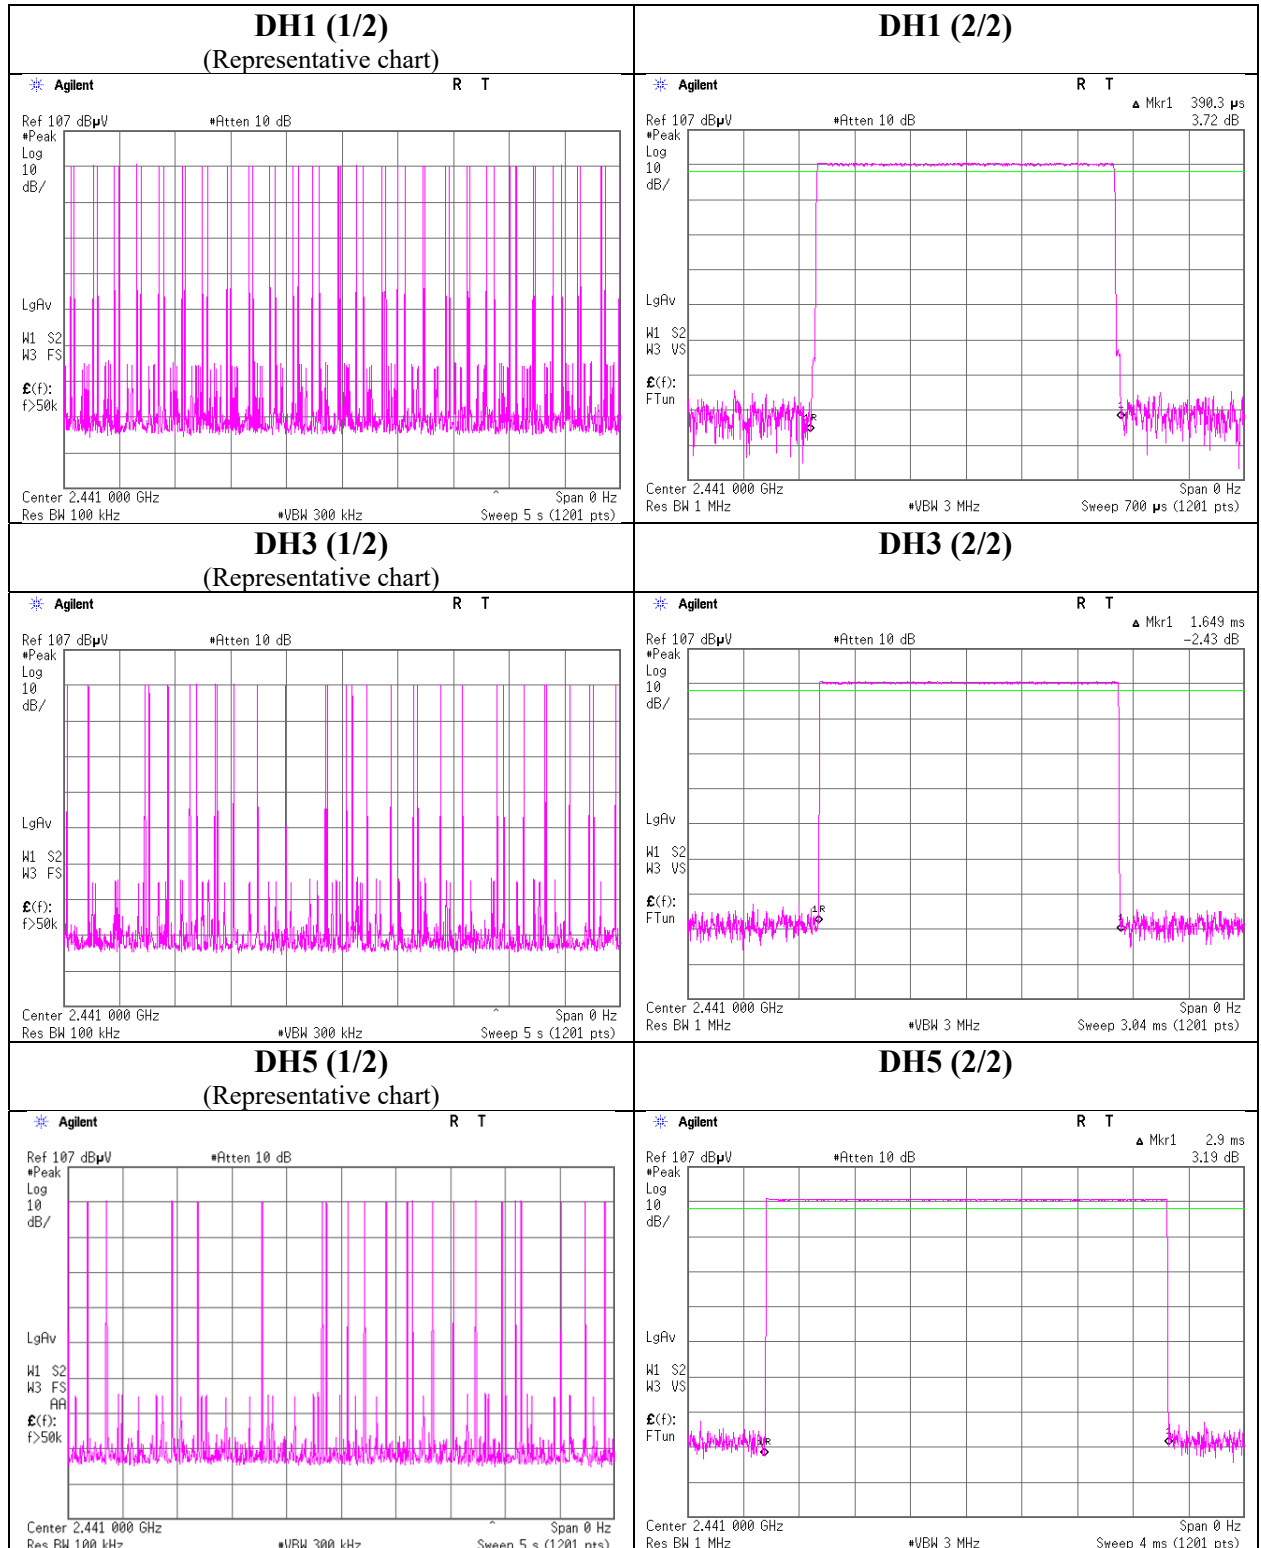

Dwell time (BT2)

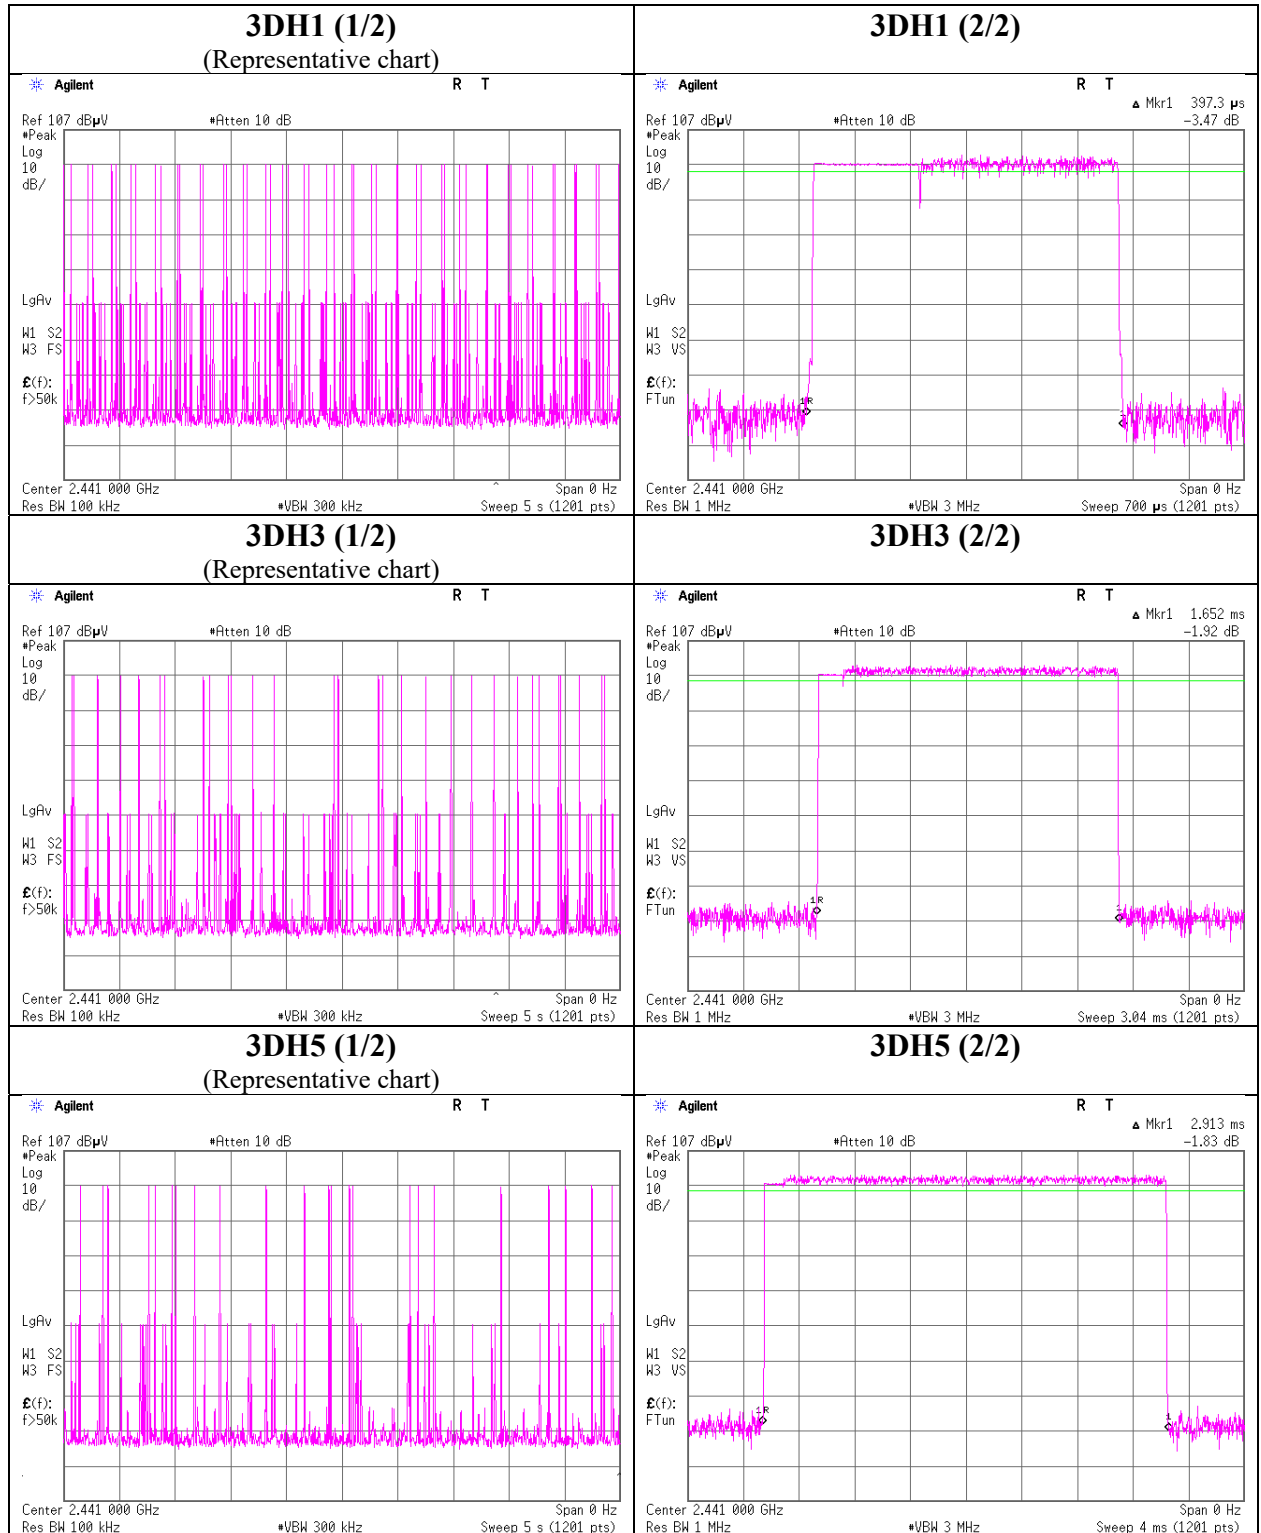

Maximum Peak Output Power

Test place Ise EMC Lab. No.8 Measurement Room
Date January 18, 2022
Temperature / Humidity 22 deg. C / 33 % RH
Engineer Ken Fujita
Mode Tx, Hopping Off

BT1					Conducted Power					e.i.r.p. for RSS-247					
Mode	Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Result		Limit		Margin	Antenna Gain [dBi]	Result		Limit		Margin
					[dBm]	[mW]	[dBm]	[mW]			[dBm]	[mW]	[dBm]	[mW]	
DH5	2402.0	-8.77	0.65	10.04	1.92	1.56	20.96	125	19.04	5.80	7.72	5.92	36.02	4000	28.30
DH5	2441.0	-8.78	0.65	10.04	1.91	1.55	20.96	125	19.05	5.80	7.71	5.90	36.02	4000	28.31
DH5	2480.0	-8.98	0.65	10.04	1.71	1.48	20.96	125	19.25	5.80	7.51	5.64	36.02	4000	28.51
2DH5	2402.0	-6.33	0.65	10.04	4.36	2.73	20.96	125	16.60	5.80	10.16	10.38	36.02	4000	25.86
2DH5	2441.0	-6.34	0.65	10.04	4.35	2.72	20.96	125	16.61	5.80	10.15	10.35	36.02	4000	25.87
2DH5	2480.0	-6.48	0.65	10.04	4.21	2.64	20.96	125	16.75	5.80	10.01	10.02	36.02	4000	26.01
3DH5	2402.0	-5.85	0.65	10.04	4.84	3.05	20.96	125	16.12	5.80	10.64	11.59	36.02	4000	25.38
3DH5	2441.0	-5.89	0.65	10.04	4.80	3.02	20.96	125	16.16	5.80	10.60	11.48	36.02	4000	25.42
3DH5	2480.0	-6.11	0.65	10.04	4.58	2.87	20.96	125	16.38	5.80	10.38	10.91	36.02	4000	25.64

BT2					Conducted Power					e.i.r.p. for RSS-247					
Mode	Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Result		Limit		Margin	Antenna Gain [dBi]	Result		Limit		Margin
					[dBm]	[mW]	[dBm]	[mW]			[dBm]	[mW]	[dBm]	[mW]	
DH5	2402.0	-9.14	0.60	10.04	1.50	1.41	20.96	125	19.46	5.80	7.30	5.37	36.02	4000	28.72
DH5	2441.0	-9.26	0.60	10.04	1.38	1.37	20.96	125	19.58	5.80	7.18	5.22	36.02	4000	28.84
DH5	2480.0	-9.01	0.60	10.04	1.63	1.46	20.96	125	19.33	5.80	7.43	5.53	36.02	4000	28.59
2DH5	2402.0	-6.87	0.60	10.04	3.77	2.38	20.96	125	17.19	5.80	9.57	9.06	36.02	4000	26.45
2DH5	2441.0	-6.80	0.60	10.04	3.84	2.42	20.96	125	17.12	5.80	9.64	9.20	36.02	4000	26.38
2DH5	2480.0	-6.69	0.60	10.04	3.95	2.48	20.96	125	17.01	5.80	9.75	9.44	36.02	4000	26.27
3DH5	2402.0	-6.34	0.60	10.04	4.30	2.69	20.96	125	16.66	5.80	10.10	10.23	36.02	4000	25.92
3DH5	2441.0	-6.40	0.60	10.04	4.24	2.65	20.96	125	16.72	5.80	10.04	10.09	36.02	4000	25.98
3DH5	2480.0	-6.23	0.60	10.04	4.41	2.76	20.96	125	16.55	5.80	10.21	10.50	36.02	4000	25.81

Sample Calculation:

Result = Reading + Cable Loss (including the cable(s) customer supplied) + Attenuator Loss

e.i.r.p. Result = Conducted Power Result + Antenna Gain

Test was not performed at AFH mode, because the decrease of number of channel (min: 20ch) at AFH mode does not influence on the output power and bandwidth of the EUT.

As this device had AFH mode and frequency separation could not meet the requirement of over 20dB BW without 2/3 relaxation, 125mW power limit was applied to it.

Average Output Power (Reference data for RF Exposure)

Test place	Ise EMC Lab. No.8 Measurement Room
Date	January 18, 2022
Temperature / Humidity	22 deg. C / 33 % RH
Engineer	Ken Fujita
Mode	Tx, Hopping Off

BT1

Mode	Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Result (Time average)	
					[dBm]	[mW]
DH5	2402.0	-10.35	0.65	10.04	0.34	1.08
DH5	2441.0	-10.43	0.65	10.04	0.26	1.06
DH5	2480.0	-10.81	0.65	10.04	-0.12	0.97
2DH5	2402.0	-10.27	0.65	10.04	0.42	1.10
2DH5	2441.0	-10.31	0.65	10.04	0.38	1.09
2DH5	2480.0	-10.62	0.65	10.04	0.07	1.02
3DH5	2402.0	-10.26	0.65	10.04	0.43	1.10
3DH5	2441.0	-10.32	0.65	10.04	0.37	1.09
3DH5	2480.0	-10.65	0.65	10.04	0.04	1.01

BT2



Mode	Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Result (Time average)	
					[dBm]	[mW]
DH5	2402.0	-10.70	0.60	10.04	-0.06	0.99
DH5	2441.0	-10.81	0.60	10.04	-0.17	0.96
DH5	2480.0	-10.84	0.60	10.04	-0.20	0.95
2DH5	2402.0	-10.72	0.60	10.04	-0.08	0.98
2DH5	2441.0	-10.78	0.60	10.04	-0.14	0.97
2DH5	2480.0	-10.82	0.60	10.04	-0.18	0.96
3DH5	2402.0	-10.88	0.60	10.04	-0.24	0.95
3DH5	2441.0	-10.91	0.60	10.04	-0.27	0.94
3DH5	2480.0	-10.94	0.60	10.04	-0.30	0.93

Sample Calculation:

Result (Time average) = Reading + Cable Loss (including the cable(s) customer supplied) + Attenuator Loss



Burst Rate Confirmation (BT1)

Test place	Ise EMC Lab. No.8 Measurement Room
Date	January 18, 2022
Temperature / Humidity	22 deg. C / 33 % RH
Engineer	Ken Fujita
Mode	Tx, Hopping Off

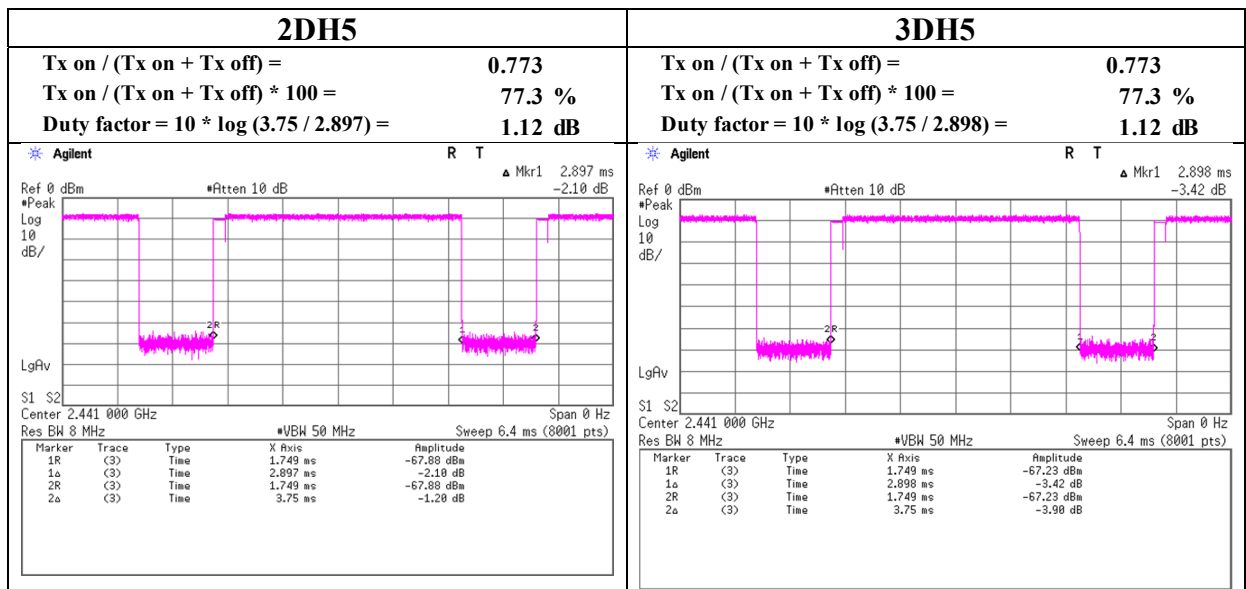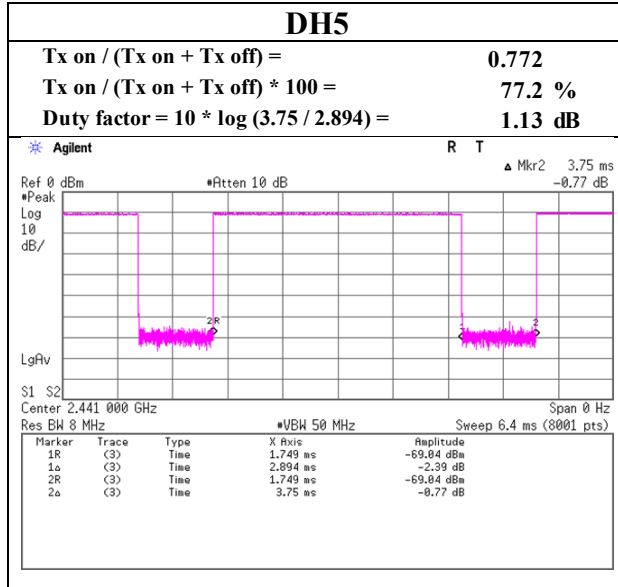

Burst Rate Confirmation (BT2)

Test place	Ise EMC Lab. No.8 Measurement Room
Date	January 18, 2022
Temperature / Humidity	22 deg. C / 33 % RH
Engineer	Ken Fujita
Mode	Tx, Hopping Off

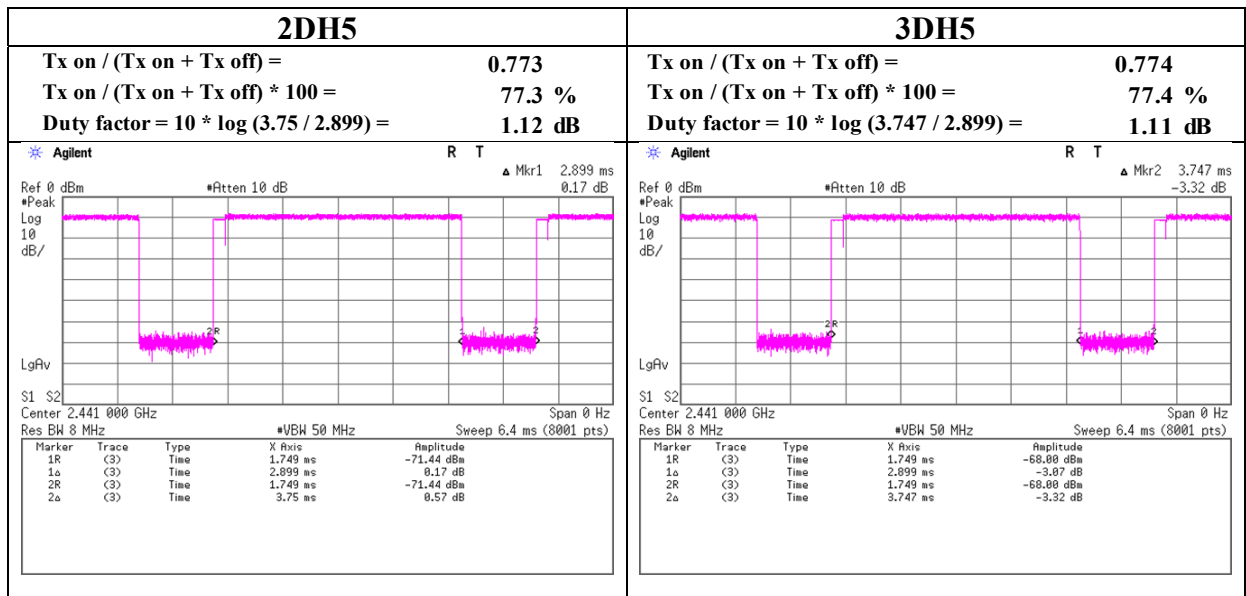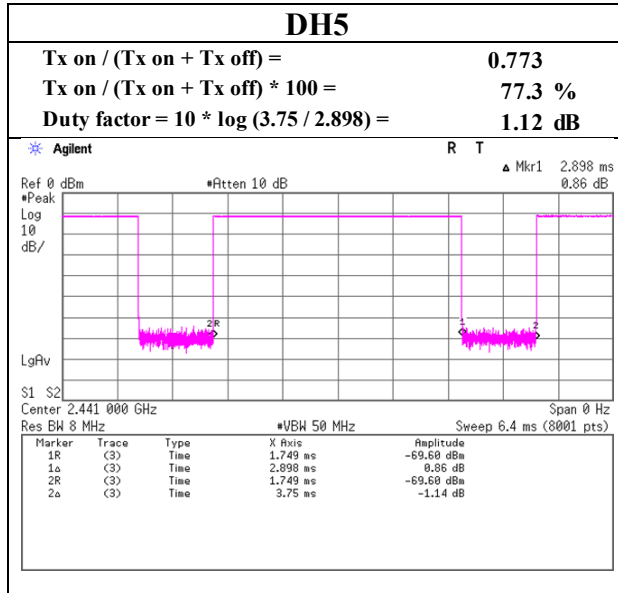

Radiated Spurious Emission (BT1)

Test place	Ise EMC Lab.	
Semi Anechoic Chamber	No.3	No.3
Date	January 25, 2022	February 3, 2022
Temperature / Humidity	20 deg. C / 37 % RH	21 deg. C / 33 % RH
Engineer	Hiroki Numata	Hiroki Numata
	(1 GHz - 10 GHz)	(10 GHz - 26.5 GHz)
Mode	Tx, Hopping Off, DH5 2402 MHz	

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	2294.8	43.8	33.3	28.0	5.4	32.6	1.1	44.6	35.3	73.9	53.9	29.3	18.6	*2)
Hori.	2350.4	45.0	33.4	27.7	5.5	32.6	-	45.6	33.9	73.9	53.9	28.3	20.0	
Hori.	2390.0	48.6	34.2	27.6	5.5	32.6	1.1	49.1	35.8	73.9	53.9	24.8	18.1	*1)
Hori.	4804.0	40.3	32.2	31.5	7.8	31.7	-	48.0	39.8	73.9	53.9	26.0	14.1	Floor noise
Hori.	7206.0	42.5	33.5	35.7	9.4	32.6	-	54.9	46.0	73.9	53.9	19.0	7.9	Floor noise
Hori.	9608.0	42.4	32.3	38.7	9.8	33.0	-	57.9	47.8	73.9	53.9	16.0	6.1	Floor noise
Vert.	2294.8	49.2	34.8	28.0	5.4	32.6	1.1	50.0	36.7	73.9	53.9	23.9	17.2	*2)
Vert.	2350.4	47.5	34.0	27.7	5.5	32.6	-	48.1	34.6	73.9	53.9	25.8	19.4	
Vert.	2390.0	49.1	34.3	27.6	5.5	32.6	1.1	49.6	36.0	73.9	53.9	24.3	17.9	*1)
Vert.	4804.0	40.3	31.8	31.5	7.8	31.7	-	47.9	39.5	73.9	53.9	26.0	14.5	Floor noise
Vert.	7206.0	42.2	33.5	35.7	9.4	32.6	-	54.6	45.9	73.9	53.9	19.3	8.0	Floor noise
Vert.	9608.0	43.0	32.2	38.7	9.8	33.0	-	58.5	47.7	73.9	53.9	15.4	6.2	Floor noise

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

*1) Not Out of Band emission(Leakage Power)

*2) Noise synchronized with duty of carrier frequency

20dBc Data Sheet



Polarity	Frequency	Reading (PK)	Ant Factor	Loss	Gain	Result	Limit	Margin	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dB/m]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
Hori.	2402.0	97.8	27.5	5.5	32.6	98.3	-	-	Carrier
Hori.	2400.0	36.3	27.5	5.5	32.6	36.7	78.3	41.6	
Vert.	2402.0	95.1	27.5	5.5	32.6	95.6	-	-	Carrier
Vert.	2400.0	37.1	27.5	5.5	32.6	37.6	75.6	38.0	

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Distance factor:
1 GHz - 10 GHz 20log (3.95 m / 3.0 m) = 2.39 dB
10 GHz - 26.5 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission **(Reference Plot for band-edge)** **(BT1)**

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	January 25, 2022
Temperature / Humidity	20 deg. C / 37 % RH
Engineer	Hiroki Numata
	(1 GHz - 10 GHz)
Mode	Tx, Hopping Off, DH5 2402 MHz

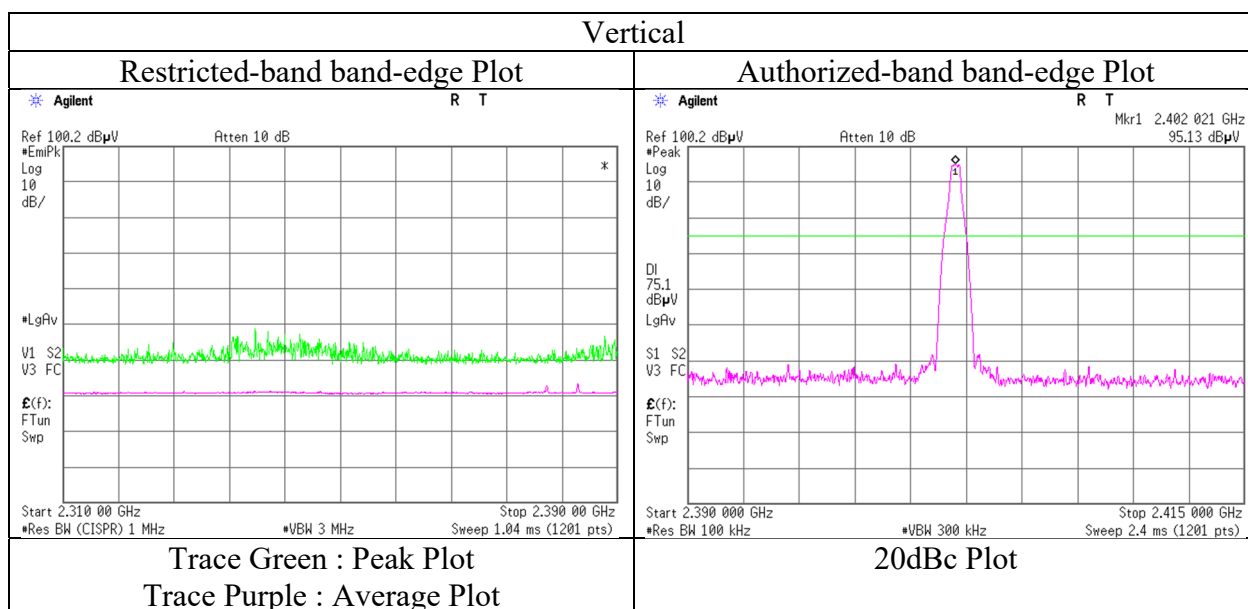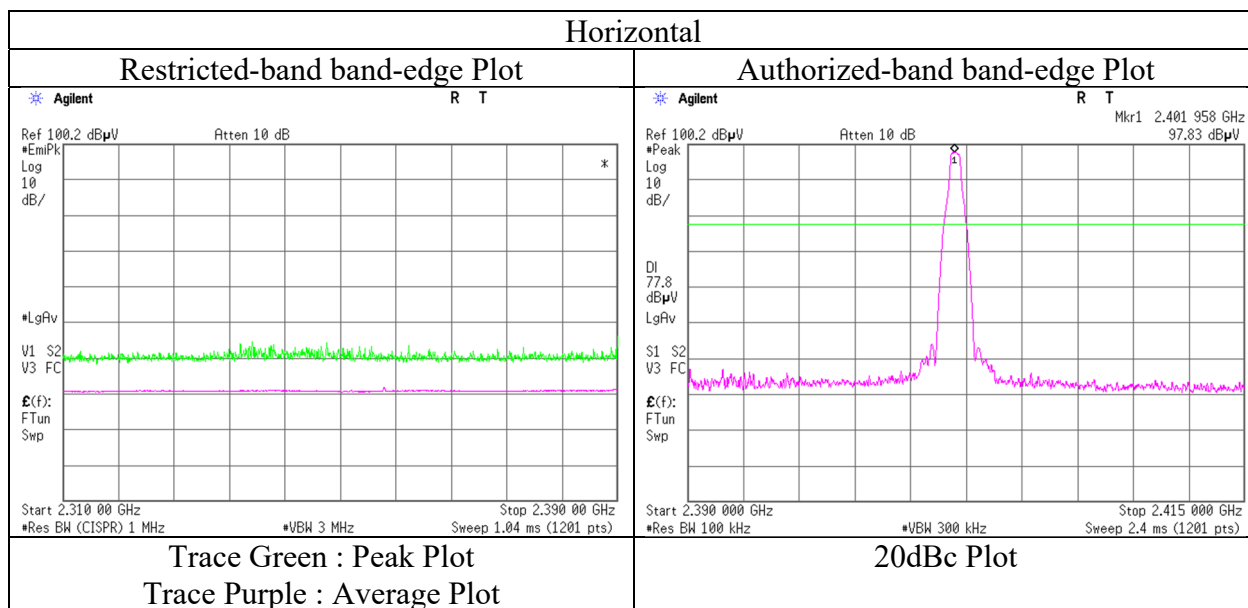

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission (BT1)

Test place	Ise EMC Lab.	
Semi Anechoic Chamber	No.3	No.3
Date	January 25, 2022	February 3, 2022
Temperature / Humidity	20 deg. C / 37 % RH	21 deg. C / 33 % RH
Engineer	Hiroki Numata	Hiroki Numata
	(1 GHz - 10 GHz)	(10 GHz - 26.5 GHz)
Mode	Tx, Hopping Off, DH5 2441 MHz	

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	4882.0	40.2	31.7	31.6	7.8	31.6	-	47.9	39.5	73.9	53.9	26.0	14.4	Floor noise
Hori.	7323.0	41.2	33.4	35.9	9.3	32.7	-	53.8	46.0	73.9	53.9	20.1	7.9	Floor noise
Hori.	9764.0	41.6	31.5	39.2	9.9	33.1	-	57.6	47.5	73.9	53.9	16.4	6.5	Floor noise
Vert.	4882.0	40.5	32.4	31.6	7.8	31.6	-	48.2	40.2	73.9	53.9	25.7	13.7	Floor noise
Vert.	7323.0	41.8	33.2	35.9	9.3	32.7	-	54.4	45.8	73.9	53.9	19.5	8.1	Floor noise
Vert.	9764.0	42.0	31.7	39.2	9.9	33.1	-	58.0	47.7	73.9	53.9	15.9	6.2	Floor noise

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

Distance factor: 1 GHz - 10 GHz $20\log(3.95\text{ m} / 3.0\text{ m}) = 2.39\text{ dB}$
 10 GHz - 26.5 GHz $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$

Radiated Spurious Emission (BT1)

Test place	Ise EMC Lab.	No.3
Semi Anechoic Chamber	No.3	No.3
Date	January 25, 2022	February 3, 2022
Temperature / Humidity	20 deg. C / 37 % RH	21 deg. C / 33 % RH
Engineer	Hiroki Numata	Hiroki Numata
	(1 GHz - 10 GHz)	(10 GHz - 26.5 GHz)
Mode	Tx, Hopping Off, DH5 2480 MHz	

Polarity [Hori/Vert]	Frequency [MHz]	Reading (QP / PK) [dBuV]	Reading (AV) [dBuV]	Ant. Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result (QP / PK) [dBuV/m]	Result (AV) [dBuV/m]	Limit (QP / PK) [dBuV/m]	Limit (AV) [dBuV/m]	Margin (QP / PK) [dB]	Margin (AV) [dB]	Remark
Hori.	2483.5	43.5	34.4	27.4	5.6	32.5	1.1	44.0	36.0	73.9	53.9	29.9	17.9	*1)
Hori.	4960.0	39.6	32.1	31.7	7.8	31.6	-	47.5	40.0	73.9	53.9	26.4	13.9	Floor noise
Hori.	7440.0	42.0	33.9	36.1	9.3	32.7	-	54.7	46.7	73.9	53.9	19.2	7.2	Floor noise
Hori.	9920.0	41.3	32.0	39.1	9.9	33.2	-	57.2	47.9	73.9	53.9	16.8	6.1	Floor noise
Vert.	2483.5	49.1	35.1	27.4	5.6	32.5	1.1	49.6	36.7	73.9	53.9	24.3	17.2	*1)
Vert.	4960.0	40.0	31.9	31.7	7.8	31.6	-	47.9	39.8	73.9	53.9	26.0	14.1	Floor noise
Vert.	7440.0	42.3	33.3	36.1	9.3	32.7	-	55.0	46.0	73.9	53.9	18.9	7.9	Floor noise
Vert.	9920.0	41.7	31.5	39.1	9.9	33.2	-	57.6	47.4	73.9	53.9	16.3	6.6	Floor noise

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).



*QP detector was used up to 1GHz.

*1) Not Out of Band emission(Leakage Power)

Distance factor:	1 GHz - 10 GHz	20log (3.95 m / 3.0 m) = 2.39 dB
	10 GHz - 26.5 GHz	20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission **(Reference Plot for band-edge** **(BT1)**

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	January 25, 2022
Temperature / Humidity	20 deg. C / 37 % RH
Engineer	Hiroki Numata
	(1 GHz - 10 GHz)
Mode	Tx, Hopping Off, DH5 2480 MHz

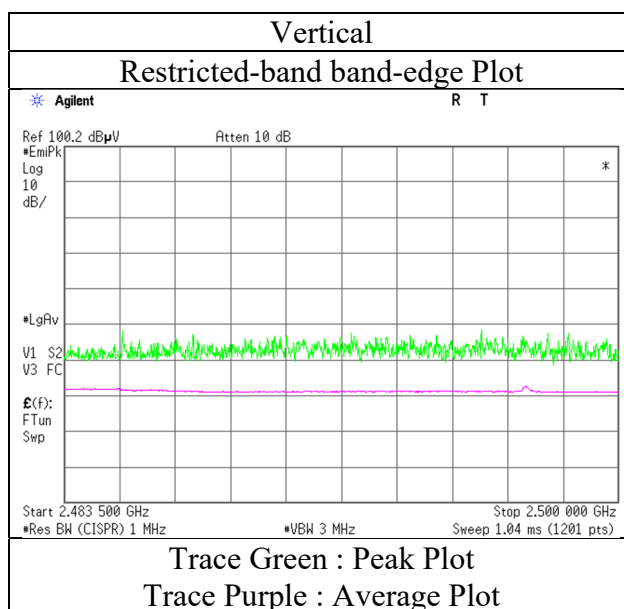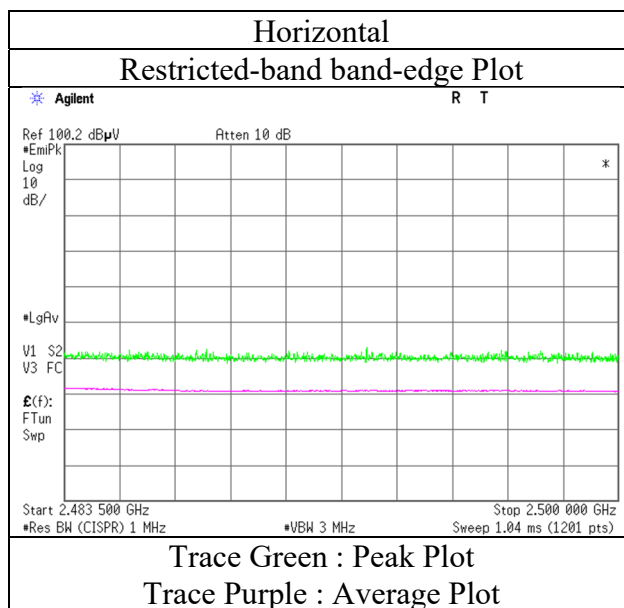

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions. Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission
(BT1)

Test place Ise EMC Lab.
Semi Anechoic Chamber No.3
Date January 25, 2022 February 3, 2022 February 9, 2022
Temperature / Humidity 20 deg. C / 37 % RH 21 deg. C / 33 % RH 20 deg. C / 42 % RH
Engineer Hiroki Numata Hiroki Numata Junki Nagatomi
 (1 GHz - 10 GHz) (10 GHz - 26.5 GHz) (Below 1 GHz)
Mode Tx, Hopping Off, 3DH5 2402 MHz

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	32.0	22.5	-	18.0	7.1	32.3	-	15.4	-	40.0	-	24.6	-	
Hori.	64.2	22.6	-	7.0	7.6	32.3	-	5.0	-	40.0	-	35.0	-	
Hori.	75.2	27.3	-	6.5	7.8	32.3	-	9.4	-	40.0	-	30.7	-	
Hori.	86.2	22.8	-	7.9	8.0	32.3	-	6.4	-	40.0	-	33.6	-	
Hori.	377.5	30.1	-	15.3	10.6	32.1	-	23.9	-	46.0	-	22.1	-	
Hori.	615.5	27.1	-	19.5	12.1	32.1	-	26.6	-	46.0	-	19.4	-	
Hori.	2350.4	43.2	33.4	27.7	5.5	32.6	-	43.8	34.0	73.9	53.9	30.1	19.9	
Hori.	2390.0	46.7	33.8	27.6	5.5	32.6	1.1	47.1	35.4	73.9	53.9	26.8	18.5	*1)
Hori.	4804.0	40.8	32.3	31.5	7.8	31.7	-	48.4	39.9	73.9	53.9	25.5	14.0	Floor noise
Hori.	7206.0	41.8	33.8	35.7	9.4	32.6	-	54.3	46.2	73.9	53.9	19.6	7.7	Floor noise
Hori.	9608.0	42.0	32.3	38.7	9.8	33.0	-	57.5	47.8	73.9	53.9	16.4	6.1	Floor noise
Vert.	32.1	22.5	-	18.0	7.1	32.3	-	15.4	-	40.0	-	24.6	-	
Vert.	63.3	25.3	-	7.2	7.6	32.3	-	7.8	-	40.0	-	32.2	-	
Vert.	75.4	35.2	-	6.5	7.8	32.3	-	17.3	-	40.0	-	22.7	-	
Vert.	86.2	25.4	-	7.9	8.0	32.3	-	9.0	-	40.0	-	31.0	-	
Vert.	378.3	25.1	-	15.3	10.6	32.1	-	18.9	-	46.0	-	27.1	-	
Vert.	616.6	27.4	-	19.5	12.1	32.1	-	26.9	-	46.0	-	19.1	-	
Vert.	2350.4	52.2	34.7	27.7	5.5	32.6	-	52.8	35.3	73.9	53.9	21.1	18.6	
Vert.	2390.0	46.3	33.8	27.6	5.5	32.6	1.1	46.8	35.4	73.9	53.9	27.1	18.5	*1)
Vert.	4804.0	41.6	32.4	31.5	7.8	31.7	-	49.2	40.0	73.9	53.9	24.7	13.9	Floor noise
Vert.	7206.0	43.8	34.1	35.7	9.4	32.6	-	56.3	46.6	73.9	53.9	17.7	7.3	Floor noise
Vert.	9608.0	44.1	32.3	38.7	9.8	33.0	-	59.6	47.8	73.9	53.9	14.3	6.1	Floor noise

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

*1) Not Out of Band emission(Leakage Power)

20dBc Data Sheet

Polarity	Frequency	Reading (PK)	Ant Factor	Loss	Gain	Result	Limit	Margin	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dB/m]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
Hori.	2402.0	96.0	27.5	5.5	32.6	96.4	-	-	Carrier
Hori.	2400.0	36.4	27.5	5.5	32.6	36.8	76.4	39.6	
Vert.	2402.0	96.1	27.5	5.5	32.6	96.5	-	-	Carrier
Vert.	2400.0	38.1	27.5	5.5	32.6	38.6	76.5	37.9	



Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Distance factor: 1 GHz - 10 GHz 20log(3.95 m / 3.0 m) = 2.39 dB

10 GHz - 26.5 GHz 20log(1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission **(Reference Plot for band-edge** **(BT1)**

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	January 25, 2022
Temperature / Humidity	20 deg. C / 37 % RH
Engineer	Hiroki Numata
	(1 GHz - 10 GHz)
Mode	Tx, Hopping Off, 3DH5 2402 MHz

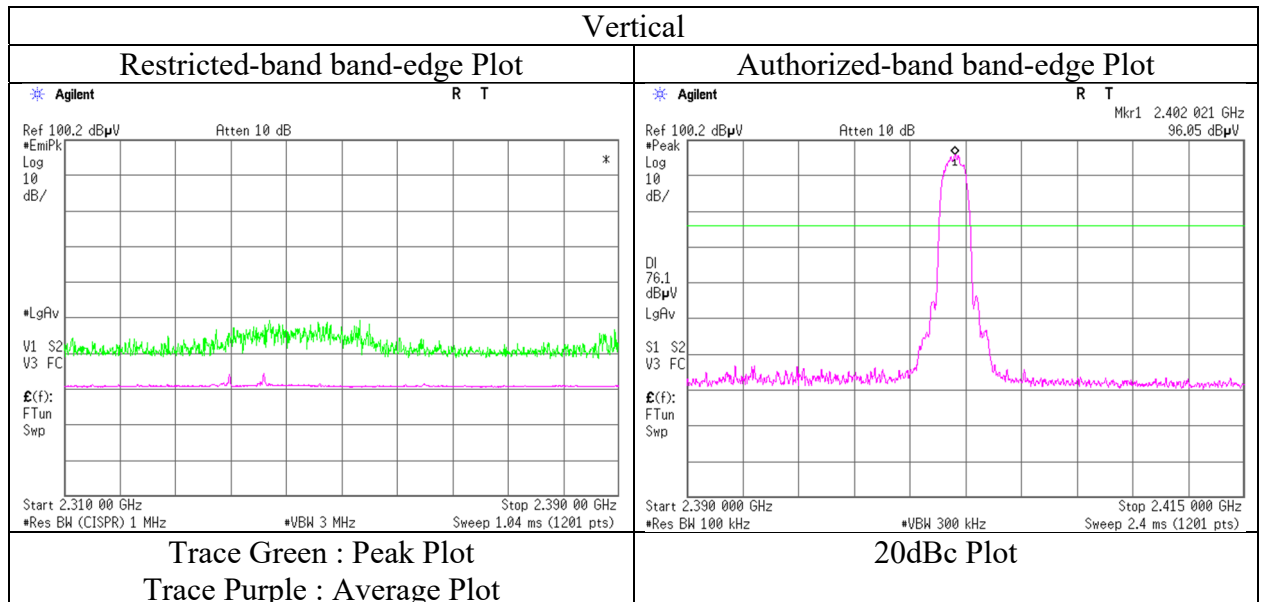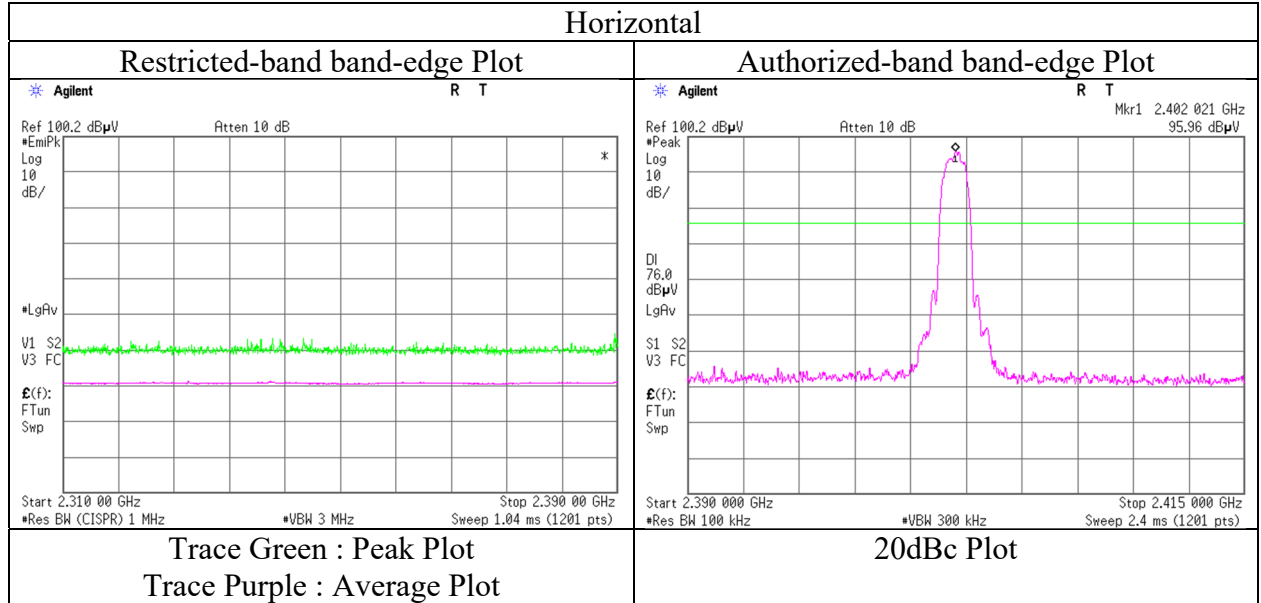

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission (BT1)

Test place	Ise EMC Lab.	
Semi Anechoic Chamber	No.3	No.3
Date	January 25, 2022	February 3, 2022
Temperature / Humidity	20 deg. C / 37 % RH	21 deg. C / 33 % RH
Engineer	Hiroki Numata	Hiroki Numata
	(1 GHz - 10 GHz)	(10 GHz - 26.5 GHz)
Mode	Tx, Hopping Off, 3DH5 2441 MHz	

Polarity [Hori/Vert]	Frequency [MHz]	Reading (QP / PK) [dBuV]	Reading (AV) [dBuV]	Ant. Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result (QP / PK) [dBuV/m]	Result (AV) [dBuV/m]	Limit (QP / PK) [dBuV/m]	Limit (AV) [dBuV/m]	Margin (QP / PK) [dB]	Margin (AV) [dB]	Remark
Hori.	4882.0	40.0	31.9	31.6	7.8	31.6	-	47.7	39.6	73.9	53.9	26.2	14.3	Floor noise
Hori.	7323.0	43.0	33.0	35.9	9.3	32.7	-	55.6	45.6	73.9	53.9	18.3	8.3	Floor noise
Hori.	9764.0	41.8	31.7	39.2	9.9	33.1	-	57.8	47.6	73.9	53.9	16.1	6.3	Floor noise
Vert.	4882.0	40.3	32.3	31.6	7.8	31.6	-	48.1	40.0	73.9	53.9	25.8	13.9	Floor noise
Vert.	7323.0	41.7	33.0	35.9	9.3	32.7	-	54.3	45.6	73.9	53.9	19.6	8.3	Floor noise
Vert.	9764.0	41.9	31.7	39.2	9.9	33.1	-	57.9	47.6	73.9	53.9	16.0	6.3	Floor noise

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

Distance factor:	1 GHz - 10 GHz	20log (3.95 m / 3.0 m) = 2.39 dB
	10 GHz - 26.5 GHz	20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission (BT1)

Test place	Ise EMC Lab.	
Semi Anechoic Chamber	No.3	No.3
Date	January 25, 2022	February 3, 2022
Temperature / Humidity	20 deg. C / 37 % RH	21 deg. C / 33 % RH
Engineer	Hiroki Numata	Hiroki Numata
	(1 GHz - 10 GHz)	(10 GHz - 26.5 GHz)
Mode	Tx, Hopping Off, 3DH5 2480 MHz	

Polarity [Hori/Vert]	Frequency [MHz]	Reading (QP / PK) [dBuV]	Reading (AV) [dBuV]	Ant. Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result (QP / PK) [dBuV/m]	Result (AV) [dBuV/m]	Limit (QP / PK) [dBuV/m]	Limit (AV) [dBuV/m]	Margin (QP / PK) [dB]	Margin (AV) [dB]	Remark
Hori.	2483.5	43.0	34.3	27.4	5.6	32.5	1.1	43.5	35.9	73.9	53.9	30.5	18.0	*1)
Hori.	2490.0	43.7	32.8	27.5	5.6	32.5	1.1	44.2	34.4	73.9	53.9	29.7	19.5	*2)
Hori.	4960.0	40.3	32.2	31.7	7.8	31.6	-	48.2	40.1	73.9	53.9	25.7	13.8	Floor noise
Hori.	7440.0	41.2	34.0	36.1	9.3	32.7	-	54.0	46.8	73.9	53.9	19.9	7.1	Floor noise
Hori.	9920.0	42.0	31.9	39.1	9.9	33.2	-	57.8	47.8	73.9	53.9	16.1	6.1	Floor noise
Vert.	2483.5	46.4	34.3	27.4	5.6	32.5	1.1	46.9	35.9	73.9	53.9	27.0	18.0	*1)
Vert.	2490.0	49.7	35.1	27.5	5.6	32.5	1.1	50.2	36.7	73.9	53.9	23.7	17.2	*2)
Vert.	4960.0	40.3	32.2	31.7	7.8	31.6	-	48.2	40.1	73.9	53.9	25.7	13.8	Floor noise
Vert.	7440.0	41.2	34.0	36.1	9.3	32.7	-	54.0	46.8	73.9	53.9	19.9	7.1	Floor noise
Vert.	9920.0	42.0	31.9	39.1	9.9	33.2	-	57.8	47.8	73.9	53.9	16.1	6.1	Floor noise

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.



*1) Not Out of Band emission(Leakage Power)

*2) Noise synchronized with duty of carrier frequency

Distance factor: 1 GHz - 10 GHz $20\log(3.95\text{ m} / 3.0\text{ m}) = 2.39\text{ dB}$
 10 GHz - 26.5 GHz $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$

Radiated Spurious Emission **(Reference Plot for band-edge** **(BT1)**

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	January 25, 2022
Temperature / Humidity	20 deg. C / 37 % RH
Engineer	Hiroki Numata
	(1 GHz - 10 GHz)
Mode	Tx, Hopping Off, 3DH5 2480 MHz

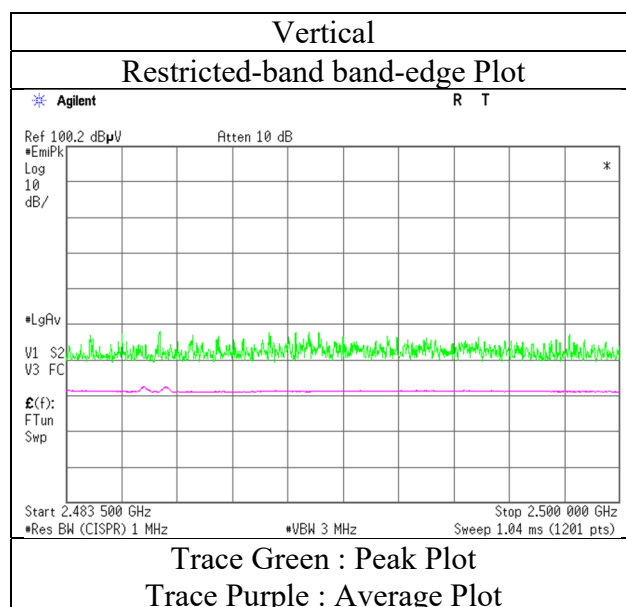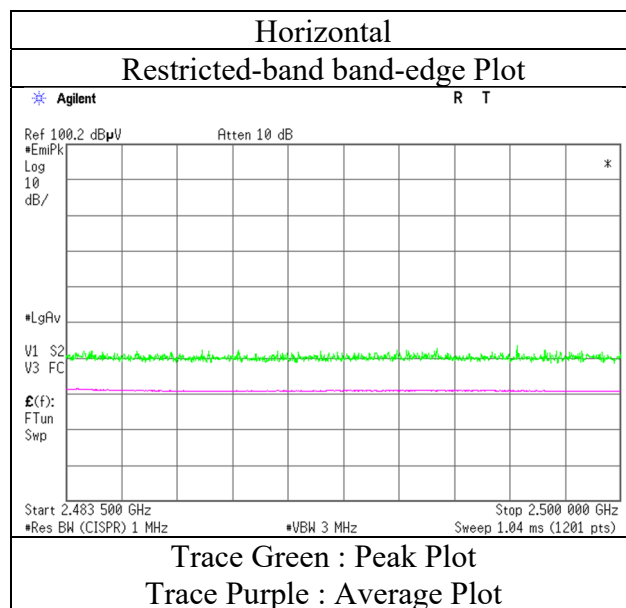

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions. Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission (BT2)

Test place	Ise EMC Lab.	
Semi Anechoic Chamber	No.3	No.3
Date	January 25, 2022	February 3, 2022
Temperature / Humidity	22 deg. C / 32 % RH	21 deg. C / 33 % RH
Engineer	Nachi Konegawa	Hiroki Numata
	(1 GHz - 10 GHz)	(10 GHz - 26.5 GHz)
Mode	Tx, Hopping Off, DH5 2402 MHz	

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	2340.9	46.6	34.3	27.8	5.5	32.6	-	47.2	34.9	73.9	53.9	26.7	19.0	
Hori.	2390.0	45.0	33.8	27.6	5.5	32.6	1.1	45.5	35.4	73.9	53.9	28.4	18.5	*1)
Hori.	4804.0	41.8	32.2	31.5	7.8	31.7	-	49.4	39.9	73.9	53.9	24.5	14.1	Floor noise
Hori.	7206.0	42.5	33.8	35.7	9.4	32.6	-	54.9	46.2	73.9	53.9	19.0	7.7	Floor noise
Hori.	9608.0	42.9	32.3	38.7	9.8	33.0	-	58.4	47.8	73.9	53.9	15.5	6.1	Floor noise
Vert.	2340.9	54.3	36.5	27.8	5.5	32.6	-	54.9	37.2	73.9	53.9	19.0	16.7	
Vert.	2390.0	51.5	35.8	27.6	5.5	32.6	1.1	52.0	37.4	73.9	53.9	21.9	16.5	*1)
Vert.	4804.0	40.8	32.6	31.5	7.8	31.7	-	48.4	40.3	73.9	53.9	25.5	13.6	Floor noise
Vert.	7206.0	42.5	34.0	35.7	9.4	32.6	-	55.0	46.4	73.9	53.9	19.0	7.5	Floor noise
Vert.	9608.0	43.3	32.4	38.7	9.8	33.0	-	58.8	47.9	73.9	53.9	15.1	6.0	Floor noise

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

*1) Not Out of Band emission(Leakage Power)

20dBc Data Sheet



Polarity	Frequency	Reading (PK)	Ant Factor	Loss	Gain	Result	Limit	Margin	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dB/m]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
Hori.	2402.0	94.5	27.5	5.5	32.6	94.9	-	-	Carrier
Hori.	2400.0	35.6	27.5	5.5	32.6	36.0	74.9	38.9	
Vert.	2402.0	95.4	27.5	5.5	32.6	95.9	-	-	Carrier
Vert.	2400.0	38.3	27.5	5.5	32.6	38.7	75.9	37.1	

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Distance factor: 1 GHz - 10 GHz 20log (3.95 m / 3.0 m) = 2.39 dB
 10 GHz - 26.5 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission
(Reference Plot for band-edge
(BT2)

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	January 25, 2022
Temperature / Humidity	22 deg. C / 32 % RH
Engineer	Nachi Konegawa
	(1 GHz - 10 GHz)
Mode	Tx, Hopping Off, DH5 2402 MHz

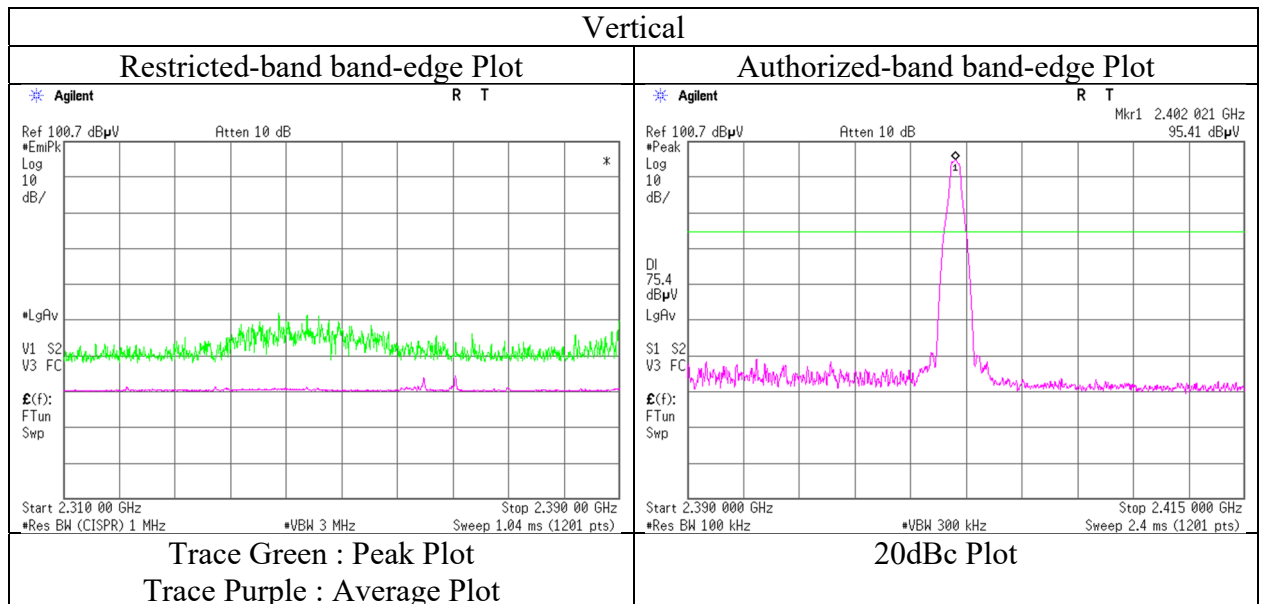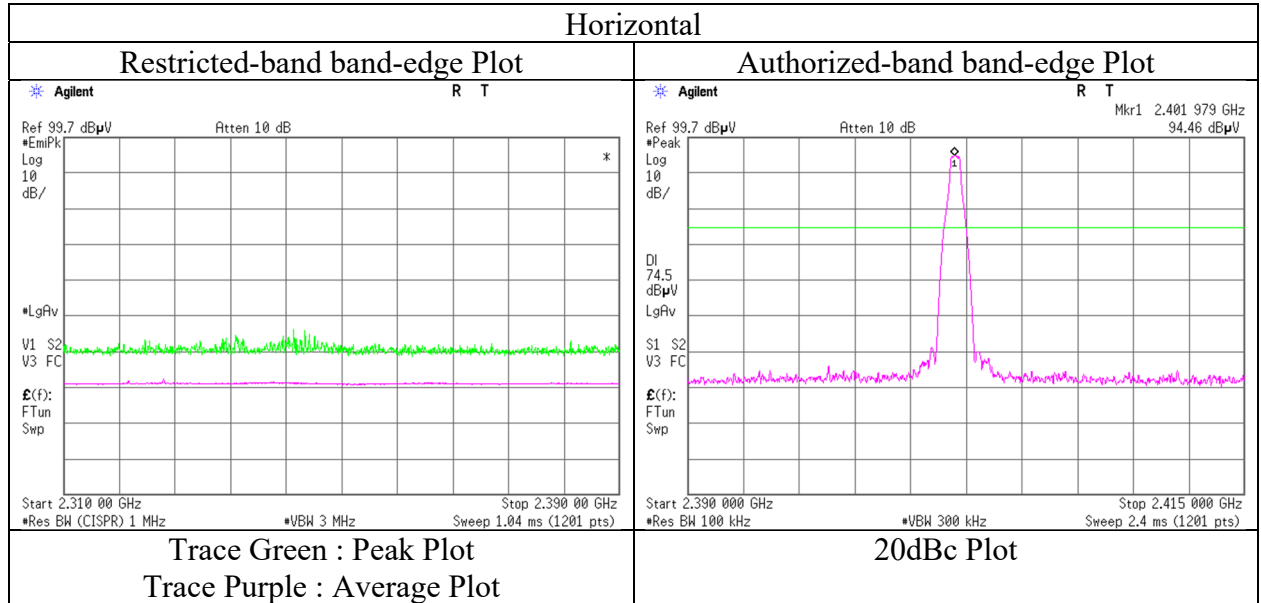

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission (BT2)

Test place	Ise EMC Lab.	
Semi Anechoic Chamber	No.3	No.3
Date	January 25, 2022	February 3, 2022
Temperature / Humidity	22 deg. C / 32 % RH	21 deg. C / 33 % RH
Engineer	Nachi Konegawa	Hiroki Numata
	(1 GHz - 10 GHz)	(10 GHz - 26.5 GHz)
Mode	Tx, Hopping Off, DH5 2441 MHz	

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	4882.0	40.9	32.3	31.6	7.8	31.6	-	48.6	40.1	73.9	53.9	25.3	13.9	Floor noise
Hori.	7323.0	42.6	33.7	35.9	9.3	32.7	-	55.2	46.3	73.9	53.9	18.7	7.6	Floor noise
Hori.	9764.0	42.3	31.4	39.2	9.9	33.1	-	58.2	47.4	73.9	53.9	15.7	6.6	Floor noise
Vert.	4882.0	41.0	32.4	31.6	7.8	31.6	-	48.8	40.1	73.9	53.9	25.1	13.8	Floor noise
Vert.	7323.0	42.6	33.9	35.9	9.3	32.7	-	55.2	46.5	73.9	53.9	18.7	7.4	Floor noise
Vert.	9764.0	42.9	31.5	39.2	9.9	33.1	-	58.8	47.5	73.9	53.9	15.1	6.5	Floor noise

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

Distance factor:	1 GHz - 10 GHz	20log (3.95 m / 3.0 m) = 2.39 dB
	10 GHz - 26.5 GHz	20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission (BT2)

Test place	Ise EMC Lab.	
Semi Anechoic Chamber	No.3	No.3
Date	January 25, 2022	February 3, 2022
Temperature / Humidity	22 deg. C / 32 % RH	21 deg. C / 33 % RH
Engineer	Nachi Konegawa	Hiroki Numata
	(1 GHz - 10 GHz)	(10 GHz - 26.5 GHz)
Mode	Tx, Hopping Off, DH5 2480 MHz	

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	2483.5	42.3	34.0	27.4	5.6	32.5	1.1	42.8	35.6	73.9	53.9	31.1	18.3	*1)
Hori.	4960.0	40.5	32.2	31.7	7.8	31.6	-	48.4	40.1	73.9	53.9	25.5	13.8	Floor noise
Hori.	7440.0	42.7	34.1	36.1	9.3	32.7	-	55.4	46.9	73.9	53.9	18.5	7.1	Floor noise
Hori.	9920.0	43.5	32.0	39.1	9.9	33.2	-	59.4	47.9	73.9	53.9	14.5	6.0	Floor noise
Vert.	2483.5	44.1	34.1	27.4	5.6	32.5	1.1	44.5	35.6	73.9	53.9	29.4	18.3	*1)
Vert.	4960.0	40.9	32.1	31.7	7.8	31.6	-	48.8	40.0	73.9	53.9	25.1	13.9	Floor noise
Vert.	7440.0	42.6	33.7	36.1	9.3	32.7	-	55.3	46.4	73.9	53.9	18.6	7.5	Floor noise
Vert.	9920.0	42.4	31.9	39.1	9.9	33.2	-	58.3	47.8	73.9	53.9	15.6	6.1	Floor noise

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).



*QP detector was used up to 1 GHz.

*1) Not Out of Band emission(Leakage Power)

Distance factor:	1 GHz - 10 GHz	20log (3.95 m / 3.0 m) = 2.39 dB
	10 GHz - 26.5 GHz	20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission (Reference Plot for band-edge) (BT2)

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	January 25, 2022
Temperature / Humidity	22 deg. C / 32 % RH
Engineer	Nachi Konegawa
	(1 GHz - 10 GHz)
Mode	Tx, Hopping Off, DH5 2480 MHz

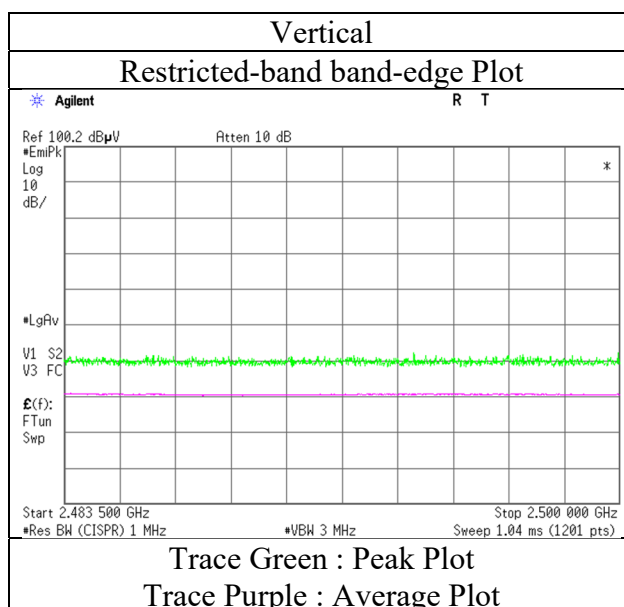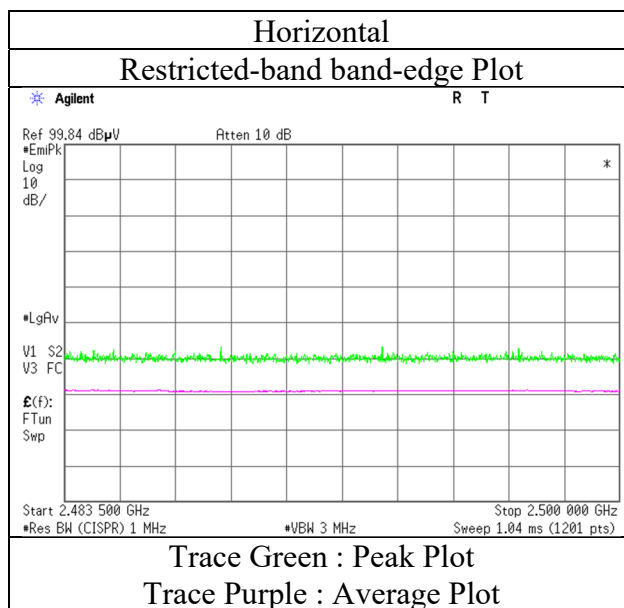

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions. Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission (BT2)

Test place	Ise EMC Lab.	
Semi Anechoic Chamber	No.3	No.3
Date	January 25, 2022	February 3, 2022
Temperature / Humidity	22 deg. C / 32 % RH	21 deg. C / 33 % RH
Engineer	Nachi Konegawa	Hiroki Numata
	(1 GHz - 10 GHz)	(10 GHz - 26.5 GHz)
Mode	Tx, Hopping Off, 3DH5 2402 MHz	

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	2346.1	43.9	33.8	27.7	5.5	32.6	-	44.5	34.4	73.9	53.9	29.4	19.5	
Hori.	2390.0	43.2	33.6	27.6	5.5	32.6	1.1	43.7	35.3	73.9	53.9	30.2	18.7	*1)
Hori.	4804.0	40.8	32.5	31.5	7.8	31.7	-	48.4	40.1	73.9	53.9	25.5	13.8	Floor noise
Hori.	7206.0	42.2	33.9	35.7	9.4	32.6	-	54.6	46.4	73.9	53.9	19.3	7.5	Floor noise
Hori.	9608.0	43.0	32.3	38.7	9.8	33.0	-	58.5	47.8	73.9	53.9	15.4	6.1	Floor noise
Vert.	2346.1	52.1	35.5	27.7	5.5	32.6	-	52.7	36.1	73.9	53.9	21.2	17.8	
Vert.	2390.0	50.3	35.2	27.6	5.5	32.6	1.1	50.8	36.8	73.9	53.9	23.1	17.1	*1)
Vert.	4804.0	41.5	32.4	31.5	7.8	31.7	-	49.1	40.0	73.9	53.9	24.8	13.9	Floor noise
Vert.	7206.0	42.2	34.2	35.7	9.4	32.6	-	54.7	46.7	73.9	53.9	19.2	7.2	Floor noise
Vert.	9608.0	42.8	32.2	38.7	9.8	33.0	-	58.3	47.7	73.9	53.9	15.6	6.2	Floor noise

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

*1) Not Out of Band emission(Leakage Power)

20dBc Data Sheet



Polarity	Frequency	Reading (PK)	Ant Factor	Loss	Gain	Result	Limit	Margin	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dB/m]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
Hori.	2402.0	96.1	27.5	5.5	32.6	96.5	-	-	Carrier
Hori.	2400.0	34.3	27.5	5.5	32.6	34.7	76.5	41.8	
Vert.	2402.0	95.8	27.5	5.5	32.6	96.2	-	-	Carrier
Vert.	2400.0	38.6	27.5	5.5	32.6	39.1	76.2	37.1	

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Distance factor: 1 GHz - 10 GHz 20log(3.95 m / 3.0 m) = 2.39 dB
 10 GHz - 26.5 GHz 20log(1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission
(Reference Plot for band-edge
(BT2)

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	January 25, 2022
Temperature / Humidity	22 deg. C / 32 % RH
Engineer	Nachi Konegawa
	(1 GHz - 10 GHz)
Mode	Tx, Hopping Off, 3DH5 2402 MHz

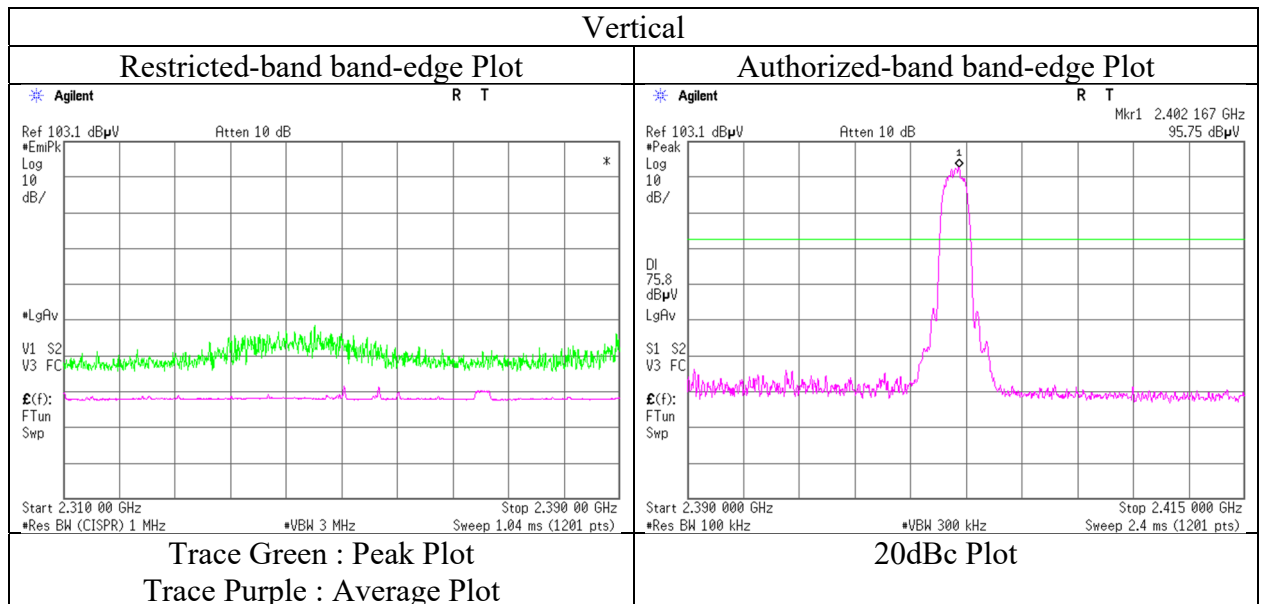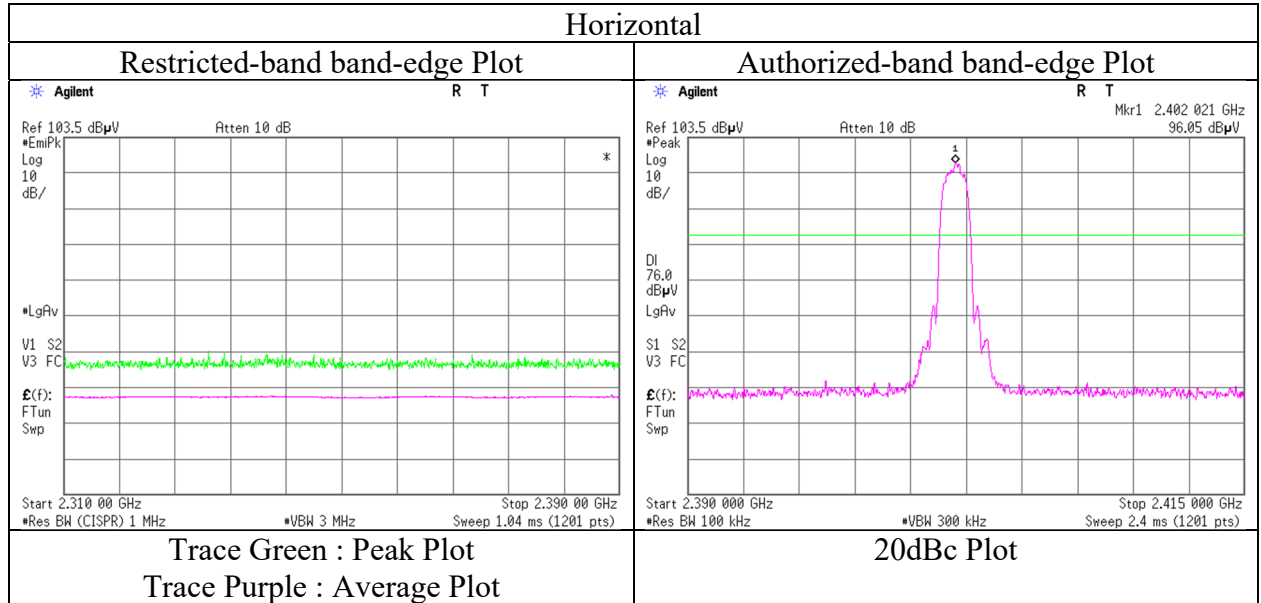

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission (BT2)

Test place	Ise EMC Lab.	No.3
Semi Anechoic Chamber	No.3	No.3
Date	January 25, 2022	February 3, 2022
Temperature / Humidity	22 deg. C / 32 % RH	21 deg. C / 33 % RH
Engineer	Nachi Konegawa	Hiroki Numata
	(1 GHz - 10 GHz)	(10 GHz - 26.5 GHz)
Mode	Tx, Hopping Off, 3DH5 2441 MHz	

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	4882.0	32.3	-	31.6	7.8	31.6	-	40.1	-	73.9	-	33.8	-	Floor noise
Hori.	7323.0	33.9	-	35.9	9.3	32.7	-	46.5	-	73.9	-	27.4	-	Floor noise
Hori.	9764.0	31.8	-	39.2	9.9	33.1	-	47.8	-	73.9	-	26.1	-	Floor noise
Vert.	4882.0	32.2	-	31.6	7.8	31.6	-	40.0	-	73.9	-	33.9	-	Floor noise
Vert.	7323.0	34.0	-	35.9	9.3	32.7	-	46.6	-	73.9	-	27.3	-	Floor noise
Vert.	9764.0	31.6	-	39.2	9.9	33.1	-	47.6	-	73.9	-	26.3	-	Floor noise

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

Distance factor:	1 GHz - 10 GHz	20log (3.95 m / 3.0 m) = 2.39 dB
	10 GHz - 26.5 GHz	20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission (BT2)

Test place	Ise EMC Lab.		
Semi Anechoic Chamber	No.3	No.3	No.3
Date	January 25, 2022	February 3, 2022	February 9, 2022
Temperature / Humidity	22 deg. C / 32 % RH	21 deg. C / 33 % RH	20 deg. C / 42 % RH
Engineer	Nachi Konegawa	Hiroki Numata	Junki Nagatomi
	(1 GHz - 10 GHz)	(10 GHz - 26.5 GHz)	(Below 1 GHz)
Mode	Tx, Hopping Off, 3DH5 2480 MHz		

Polarity [Hori/Vert]	Frequency [MHz]	Reading (QP / PK) [dBuV]	Reading (AV) [dBuV]	Ant. Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result (QP / PK) [dBuV/m]	Result (AV) [dBuV/m]	Limit (QP / PK) [dBuV/m]	Limit (AV) [dBuV/m]	Margin (QP / PK) [dB]	Margin (AV) [dB]	Remark
Hori.	32.0	22.5	-	18.0	7.1	32.3	-	15.4	-	40.0	-	24.6	-	
Hori.	64.3	22.6	-	7.0	7.7	32.3	-	4.9	-	40.0	-	35.1	-	
Hori.	75.2	26.4	-	6.5	7.8	32.3	-	8.5	-	40.0	-	31.6	-	
Hori.	86.5	22.6	-	7.9	8.0	32.3	-	6.2	-	40.0	-	33.8	-	
Hori.	379.1	30.8	-	15.3	10.6	32.1	-	24.6	-	46.0	-	21.4	-	
Hori.	621.0	26.7	-	19.5	12.1	32.1	-	26.2	-	46.0	-	19.8	-	
Hori.	2483.5	42.8	33.9	27.4	5.6	32.5	1.1	43.3	35.5	73.9	53.9	30.6	18.5	*1)
Hori.	2492.9	42.7	33.8	27.5	5.6	32.5	1.1	43.2	35.4	73.9	53.9	30.7	18.5	*2)
Hori.	4960.0	40.6	32.1	31.7	7.8	31.6	-	48.6	40.0	73.9	53.9	25.4	13.9	Floor noise
Hori.	7440.0	42.5	33.9	36.1	9.3	32.7	-	55.3	46.6	73.9	53.9	18.6	7.3	Floor noise
Hori.	9920.0	42.0	31.8	39.1	9.9	33.2	-	57.9	47.6	73.9	53.9	16.0	6.3	Floor noise
Vert.	32.0	22.5	-	18.0	7.1	32.3	-	15.4	-	40.0	-	24.6	-	
Vert.	64.2	24.6	-	7.0	7.6	32.3	-	7.0	-	40.0	-	33.0	-	
Vert.	75.2	34.5	-	6.5	7.8	32.3	-	16.6	-	40.0	-	23.5	-	
Vert.	86.5	25.1	-	7.9	8.0	32.3	-	8.7	-	40.0	-	31.3	-	
Vert.	381.8	25.3	-	15.4	10.6	32.1	-	19.2	-	46.0	-	26.8	-	
Vert.	621.0	28.5	-	19.5	12.1	32.1	-	28.0	-	46.0	-	18.0	-	
Vert.	2483.5	46.8	34.3	27.4	5.6	32.5	1.1	47.3	35.9	73.9	53.9	26.7	18.0	*1)
Vert.	2492.9	50.1	35.3	27.5	5.6	32.5	1.1	50.6	36.9	73.9	53.9	23.3	17.0	*2)
Vert.	4960.0	40.4	32.4	31.7	7.8	31.6	-	48.4	40.4	73.9	53.9	25.6	13.5	Floor noise
Vert.	7440.0	42.9	33.8	36.1	9.3	32.7	-	55.6	46.5	73.9	53.9	18.3	7.4	Floor noise
Vert.	9920.0	42.1	31.7	39.1	9.9	33.2	-	58.0	47.6	73.9	53.9	15.9	6.3	Floor noise

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

*1) Not Out of Band emission(Leakage Power)



*2) Noise synchronized with duty of carrier frequency

Distance factor: 1 GHz - 10 GHz 20log (3.95 m / 3.0 m) = 2.39 dB
 10 GHz - 26.5 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission
(Reference Plot for band-edge
(BT2)

Test place
Semi Anechoic Chamber
Date
Temperature / Humidity
Engineer
Mode

Ise EMC Lab.
No.3
January 25, 2022
22 deg. C / 32 % RH
Nachi Konegawa
(1 GHz - 10 GHz)
Tx, Hopping Off, 3DH5 2480 MHz

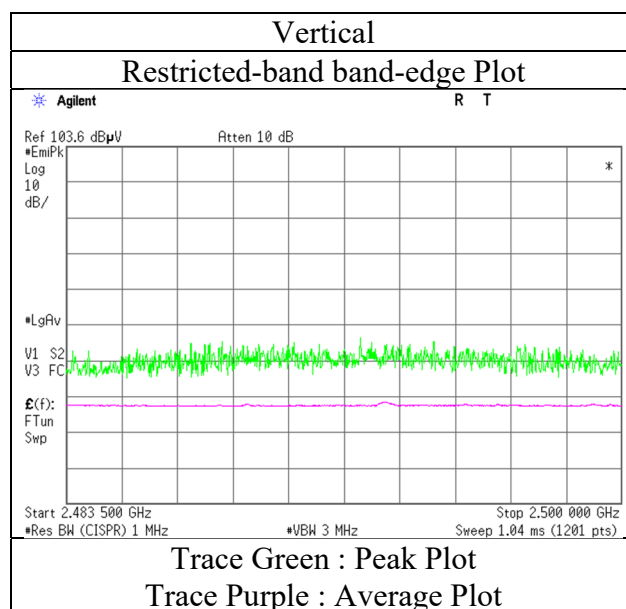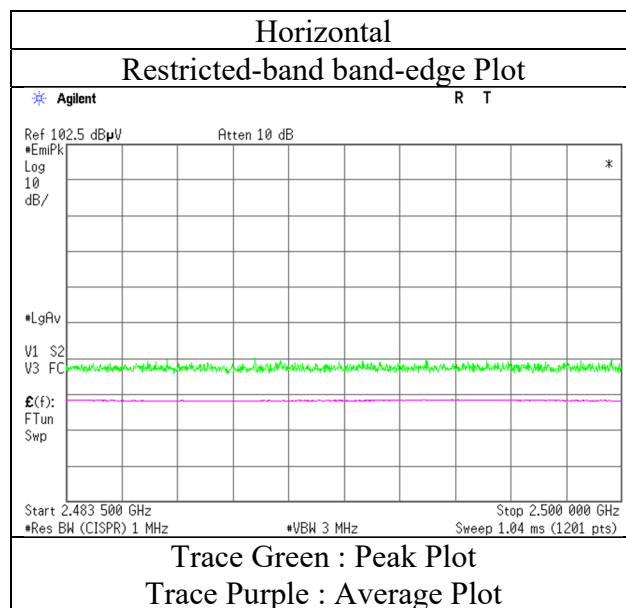

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission (BT1)

Test place	Ise EMC Lab.		
Semi Anechoic Chamber	No.3	No.3	No.3
Date	February 7, 2022	February 8, 2022	February 10, 2022
Temperature / Humidity	19 deg. C / 30 % RH	20 deg. C / 32 % RH	18 deg. C / 37 % RH
Engineer	Yuichiro Yamazaki	Yuichiro Yamazaki	Yuichiro Yamazaki
	(1 GHz - 10 GHz)	(10 GHz - 26.5 GHz)	(Below 1 GHz)
Mode	Tx, Hopping Off, DH5 2480 MHz + 11ax-20 (OFDM) 5500 MHz		

Polarity [Hori/Vert]	Frequency [MHz]	Reading (QP / PK) [dBuV]	Reading (AV) [dBuV]	Ant. Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result (QP / PK) [dBuV/m]	Result (AV) [dBuV/m]	Limit (QP / PK) [dBuV/m]	Limit (AV) [dBuV/m]	Margin (QP / PK) [dB]	Margin (AV) [dB]	Remark
Hori.	75.0	40.7	-	6.5	7.8	32.3	-	22.7	-	40.0	-	17.3	-	
Hori.	210.5	34.5	-	11.7	9.3	32.2	-	23.3	-	43.5	-	20.2	-	
Hori.	375.3	38.9	-	15.3	10.6	32.1	-	32.6	-	46.0	-	13.4	-	
Hori.	617.8	35.6	-	19.5	12.1	32.1	-	35.1	-	46.0	-	10.9	-	
Hori.	806.6	33.2	-	21.0	13.1	31.5	-	35.8	-	46.0	-	10.2	-	
Hori.	959.3	31.6	-	22.2	13.9	30.7	-	37.0	-	46.0	-	9.0	-	
Hori.	2483.5	44.0	35.6	27.4	5.4	32.5	1.1	44.4	37.0	73.9	53.9	29.6	16.9	*1)
Hori.	4960.0	39.8	32.4	31.7	7.7	31.6	-	47.7	40.2	73.9	53.9	26.3	13.7	Floor noise
Hori.	7440.0	41.8	33.9	36.1	9.2	32.7	-	54.4	46.5	73.9	53.9	19.5	7.4	Floor noise
Hori.	9920.0	42.0	33.7	39.1	9.8	33.2	-	57.7	49.5	73.9	53.9	16.2	4.4	Floor noise
Vert.	75.0	51.9	-	6.5	7.8	32.3	-	33.9	-	40.0	-	6.1	-	
Vert.	183.4	32.7	-	16.3	9.0	32.2	-	25.8	-	43.5	-	17.7	-	
Vert.	375.3	35.9	-	15.3	10.6	32.1	-	29.6	-	46.0	-	16.4	-	
Vert.	617.7	39.8	-	19.5	12.1	32.1	-	39.3	-	46.0	-	6.7	-	
Vert.	806.7	36.5	-	21.0	13.1	31.5	-	39.1	-	46.0	-	6.9	-	
Vert.	959.5	30.1	-	22.2	13.9	30.7	-	35.5	-	46.0	-	10.5	-	
Vert.	2483.5	45.5	35.1	27.4	5.4	32.5	1.1	45.9	36.6	73.9	53.9	28.1	17.3	*1)
Vert.	4960.0	40.5	31.3	31.7	7.7	31.6	-	48.3	39.1	73.9	53.9	25.6	14.8	Floor noise
Vert.	7440.0	42.2	32.9	36.1	9.2	32.7	-	54.8	45.5	73.9	53.9	19.1	8.4	Floor noise
Vert.	9920.0	41.4	32.6	39.1	9.8	33.2	-	57.2	48.3	73.9	53.9	16.7	5.6	Floor noise

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).



*QP detector was used up to 1GHz.

*1) Not Out of Band emission(Leakage Power)

Distance factor: 1 GHz - 10 GHz 20log (3.9 m / 3.0 m) = 2.28 dB
 10 GHz - 26.5 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission
(Reference Plot for band-edge
(BT1)



Test place Ise EMC Lab.
Semi Anechoic Chamber No.3
Date February 7, 2022
Temperature / Humidity 19 deg. C / 30 % RH
Engineer Yuichiro Yamazaki
 (1 GHz - 10 GHz)
Mode Tx, Hopping Off, DH5 2480 MHz + 11ax-20 (OFDM) 5500 MHz

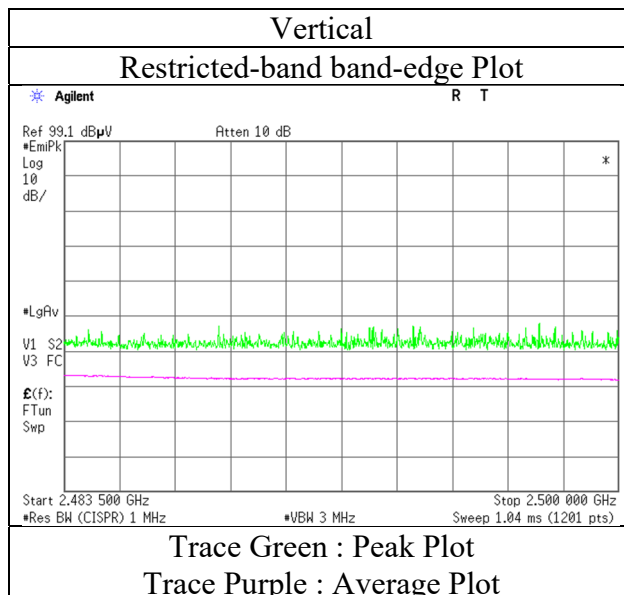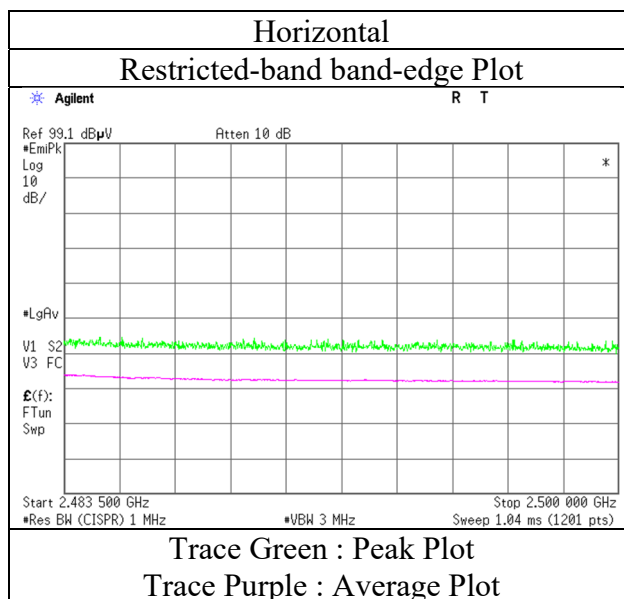

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission (Plot data, Worst case mode for Maximum Peak Output Power) (BT1)

Test place	Ise EMC Lab.	No.3	No.3
Semi Anechoic Chamber	No.3	No.3	No.3
Date	January 25, 2022	February 3, 2022	February 9, 2022
Temperature / Humidity	20 deg. C / 37 % RH	21 deg. C / 33 % RH	20 deg. C / 42 % RH
Engineer	Hiroki Numata	Hiroki Numata	Junki Nagatomi
	(1 GHz - 10 GHz)	(10 GHz - 26.5 GHz)	(Below 1 GHz)
Mode	Tx, Hopping Off, 3DH5 2402 MHz		

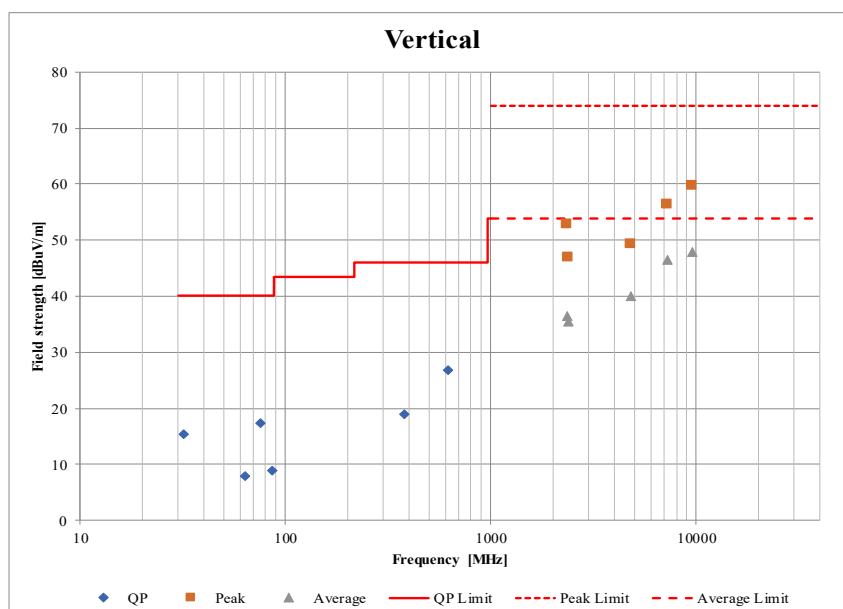
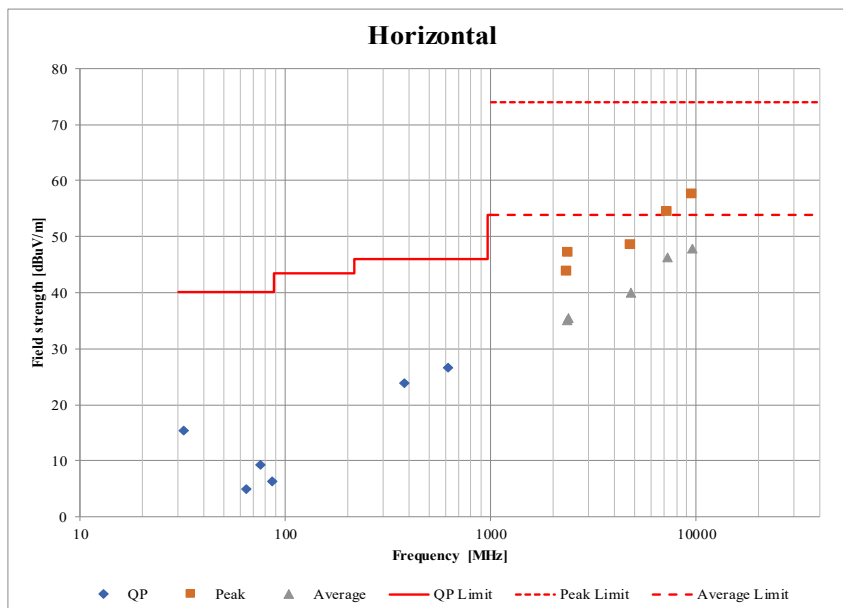


*These plots data contains sufficient number to show the trend of characteristic features for EUT.

Conducted Spurious Emission
(BT1)

Test place
Date
Temperature / Humidity
Engineer
Mode

Ise EMC Lab. No.8 Measurement Room
January 21, 2022
21 deg. C / 30 % RH
Ken Fujita
Tx, Hopping Off, DH5

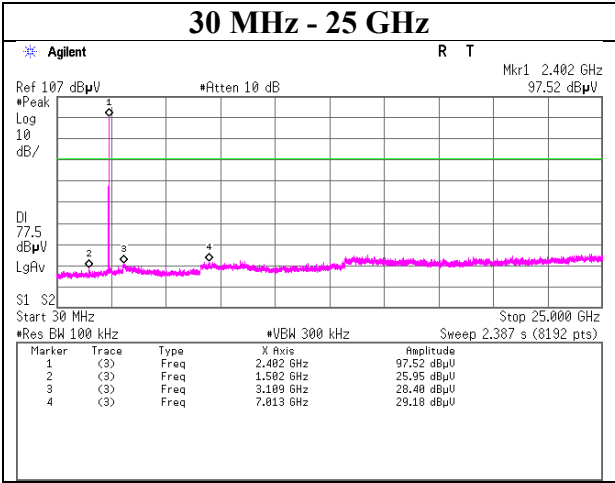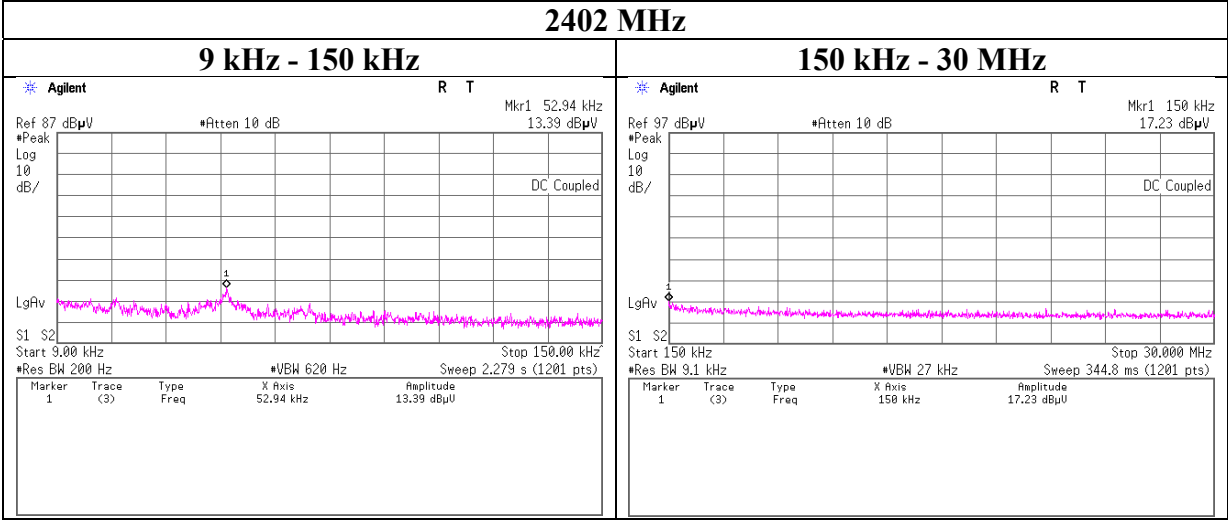

Conducted Spurious Emission

(BT1)

Test place

Ise EMC Lab. No.8 Measurement Room

Date

January 21, 2022

Temperature / Humidity



21 deg. C / 30 % RH

Engineer

Ken Fujita

Mode



Tx, Hopping Off, DH5

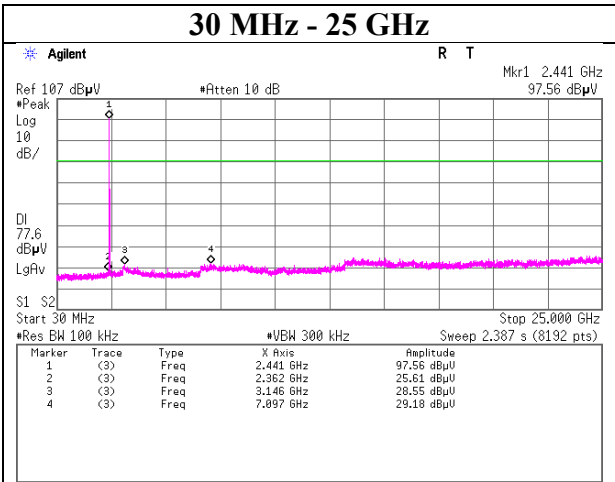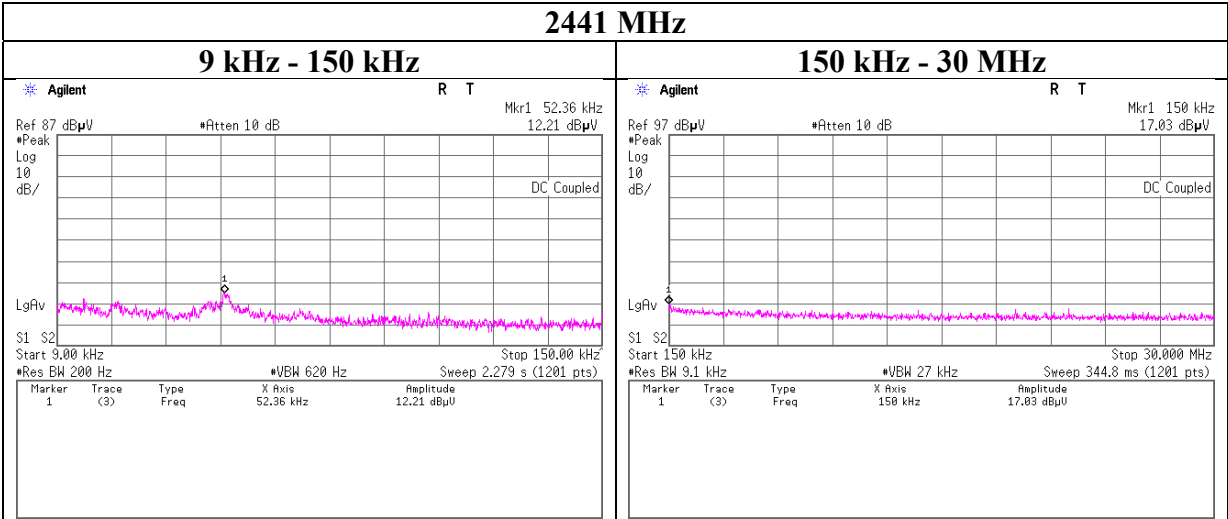

Conducted Spurious Emission
(BT1)

Test place
Date
Temperature / Humidity
Engineer
Mode

Ise EMC Lab. No.8 Measurement Room
January 21, 2022
21 deg. C / 30 % RH
Ken Fujita
Tx, Hopping Off, DH5

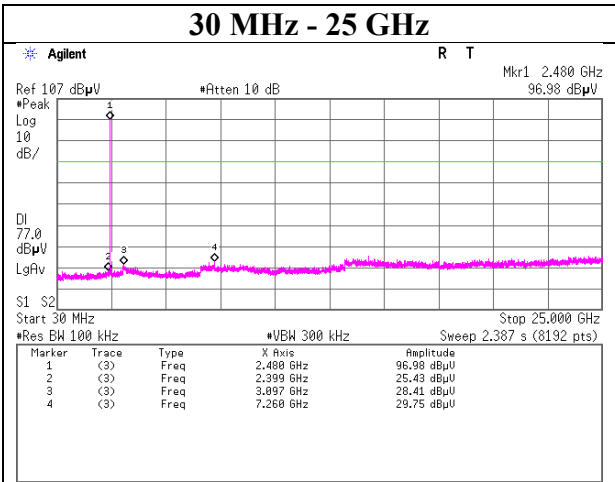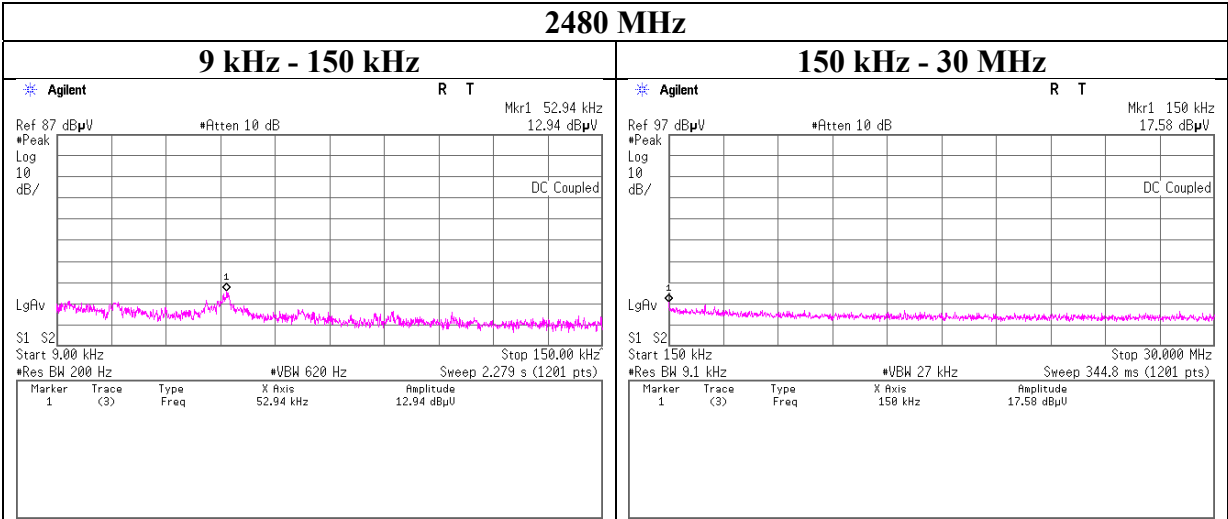

Conducted Spurious Emission

(BT1)

Test place

Ise EMC Lab. No.8 Measurement Room

Date

January 21, 2022

Temperature / Humidity



21 deg. C / 30 % RH

Engineer

Ken Fujita

Mode

Tx, Hopping Off, 3DH5

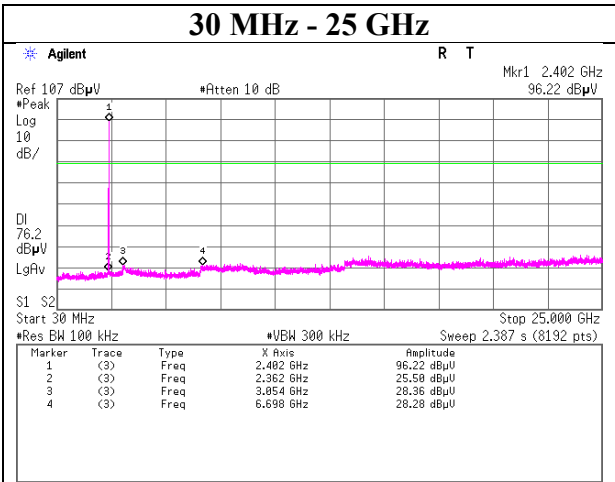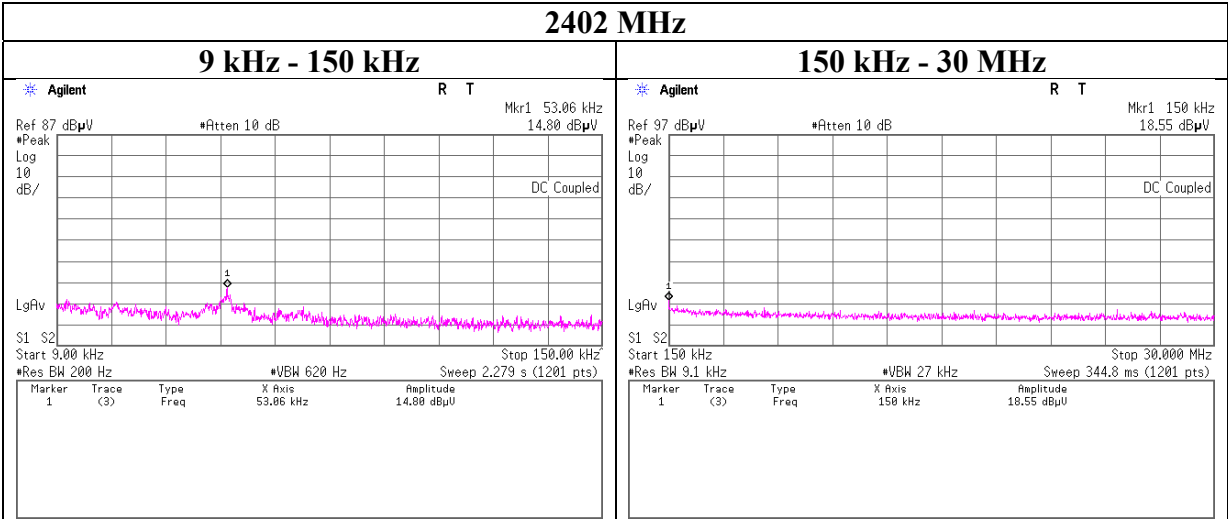

Conducted Spurious Emission

(BT1)

Test place

Ise EMC Lab. No.8 Measurement Room

Date

January 21, 2022

Temperature / Humidity



21 deg. C / 30 % RH

Engineer

Ken Fujita

Mode

Tx, Hopping Off, 3DH5

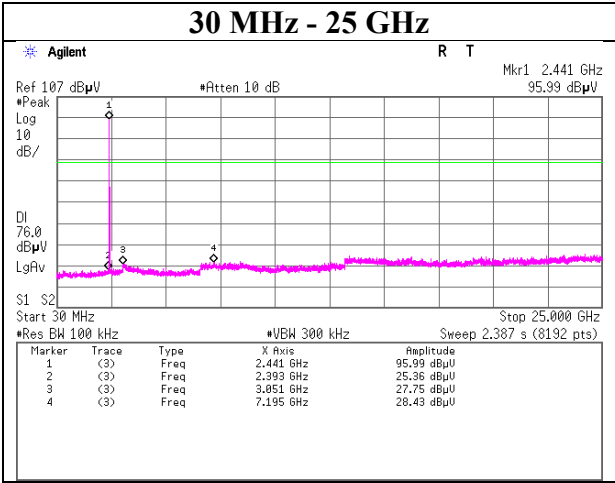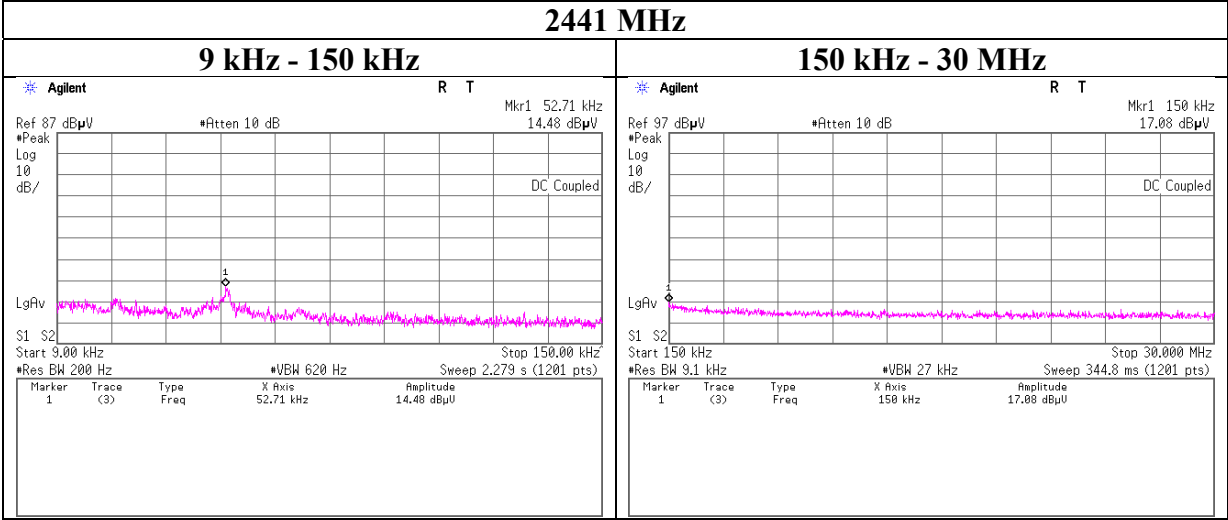

Conducted Spurious Emission

(BT1)

Test place

Ise EMC Lab. No.8 Measurement Room

Date

January 21, 2022

Temperature / Humidity



21 deg. C / 30 % RH

Engineer

Ken Fujita

Mode

Tx, Hopping Off, 3DH5

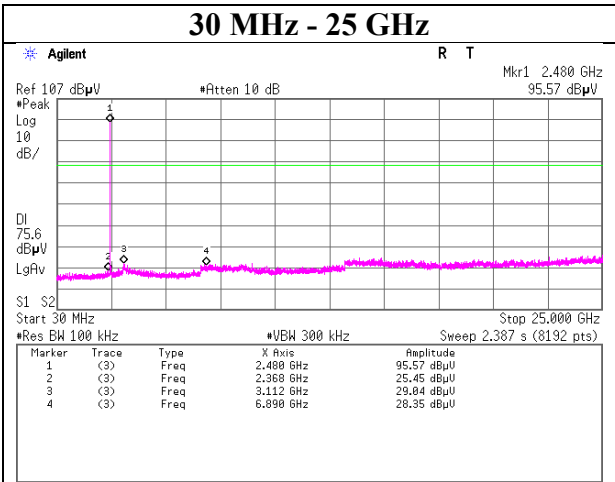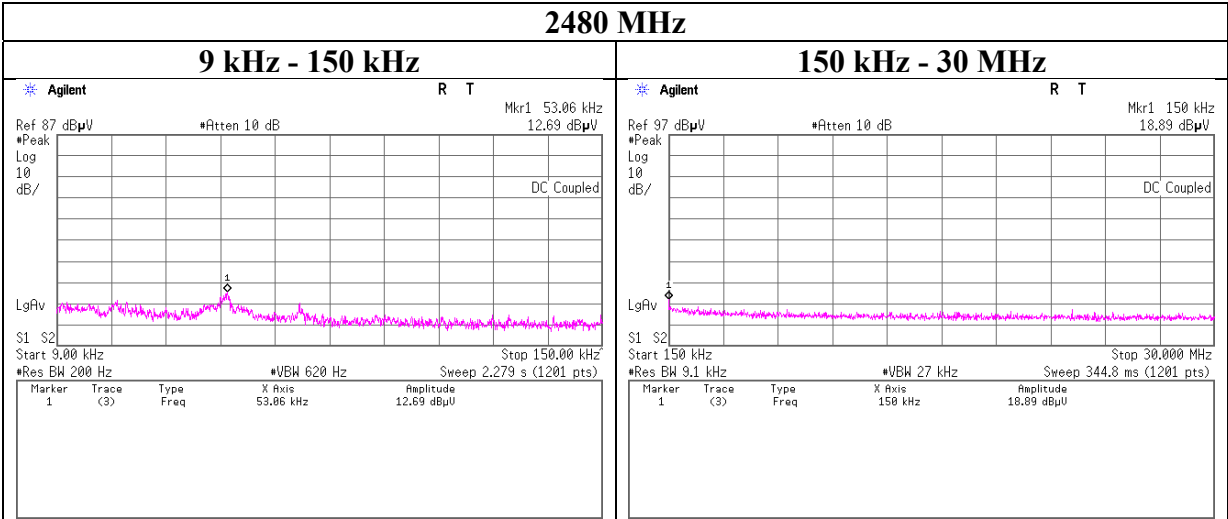

Conducted Spurious Emission

(BT2)

Test place

Ise EMC Lab. No.8 Measurement Room

Date

January 21, 2022

Temperature / Humidity


21 deg. C / 30 % RH

Engineer

Ken Fujita

Mode

Tx, Hopping Off, DH5

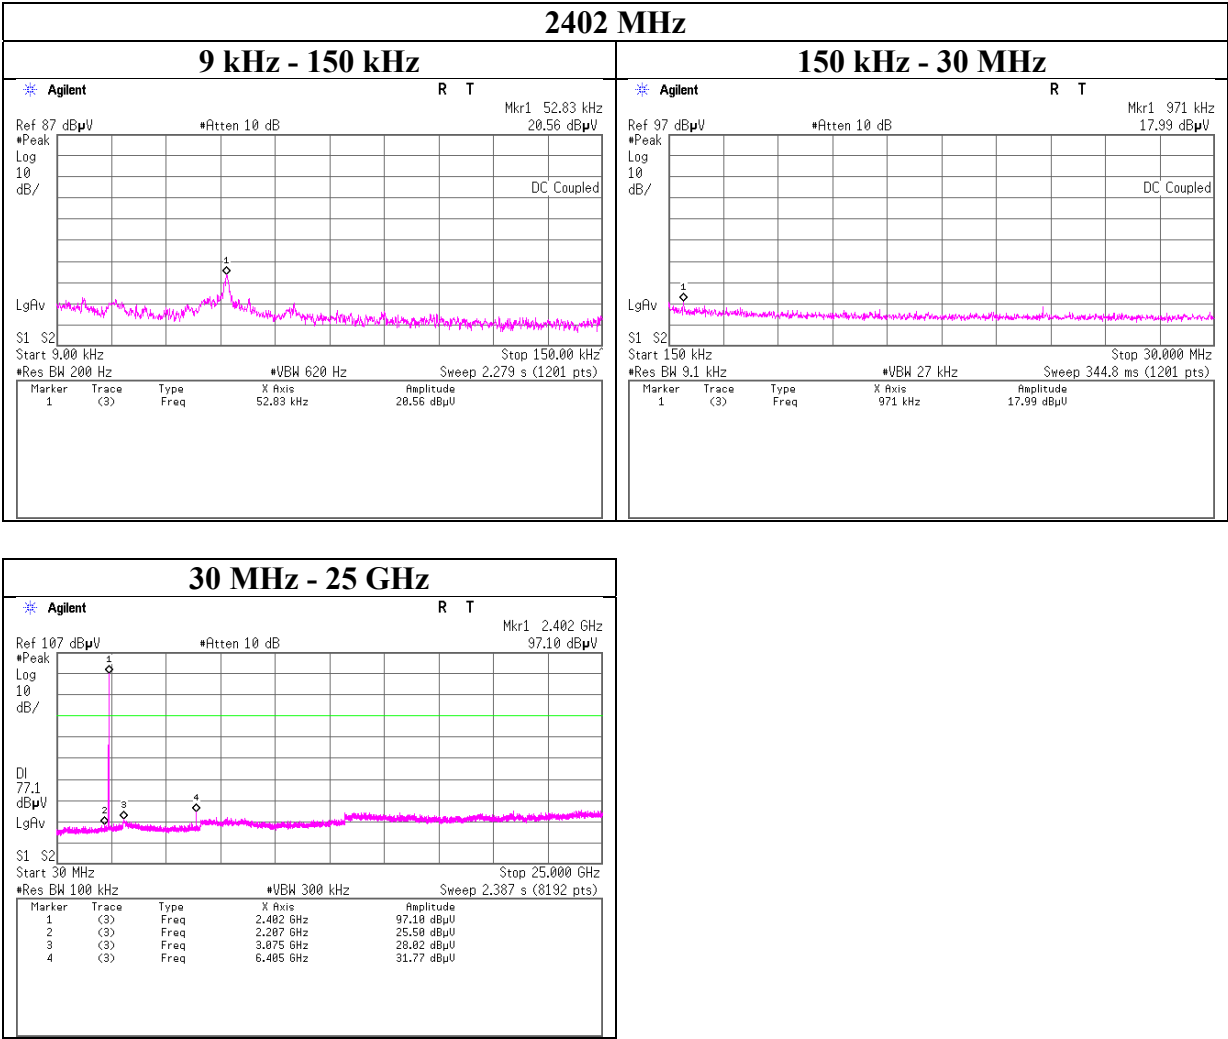

30 MHz - 25 GHz

Agilent

R T

Mkr1 2.402 GHz

97.10 dBμV

Ref 107 dBμV

#Atten 10 dB

#Peak

Log

10

dB/

DI

77.1

dBμV

LgRv

S1 S2

Start 30 MHz

Stop 25.000 GHz

#Res BW 100 kHz



#VBW 300 kHz

Sweep 2.387 s (8192 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(3)	Freq	2.402 GHz	97.10 dBμV
2	(3)	Freq	2.207 GHz	25.50 dBμV
3	(3)	Freq	3.075 GHz	28.02 dBμV
4	(3)	Freq	6.405 GHz	31.77 dBμV



Conducted Spurious Emission (BT2)

Test place	Ise EMC Lab. No.8 Measurement Room
Date	January 21, 2022
Temperature / Humidity	21 deg. C / 30 % RH
Engineer	Ken Fujita
Mode	Tx, Hopping Off, DH5

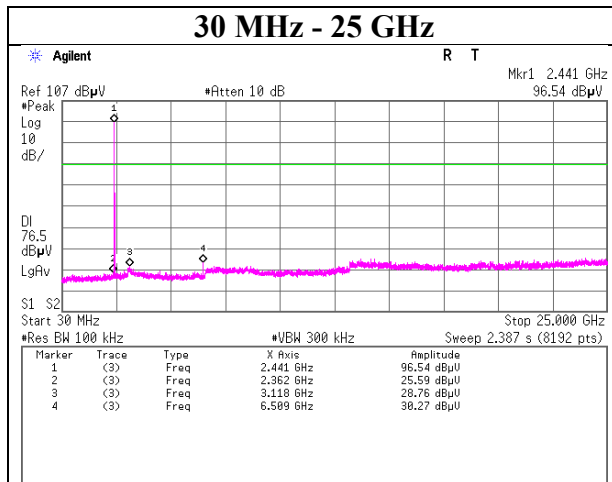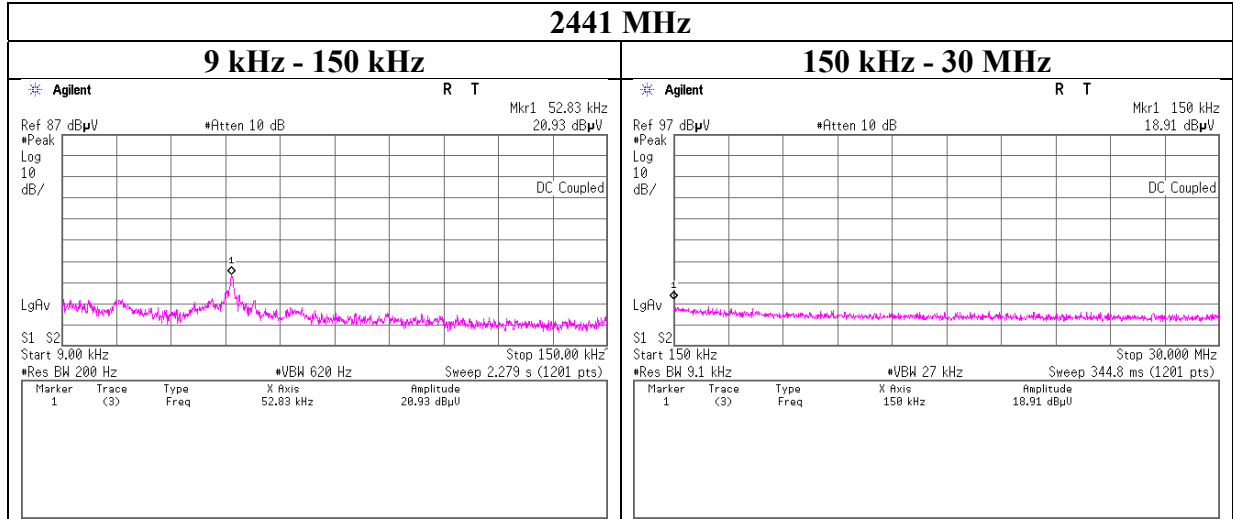

Conducted Spurious Emission (BT2)

Test place	Ise EMC Lab. No.8 Measurement Room
Date	January 21, 2022
Temperature / Humidity	21 deg. C / 30 % RH
Engineer	Ken Fujita
Mode	Tx, Hopping Off, DH5

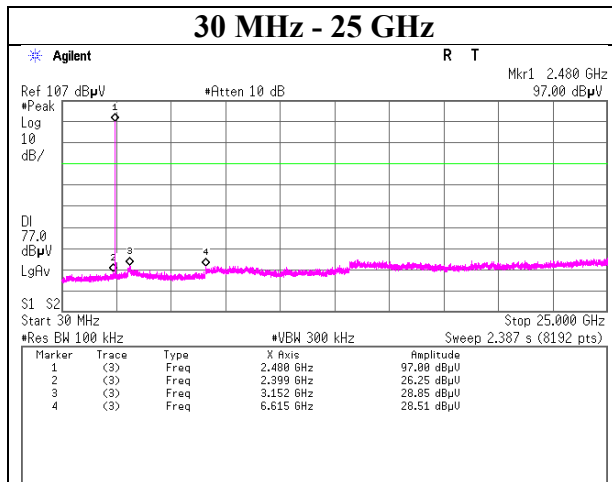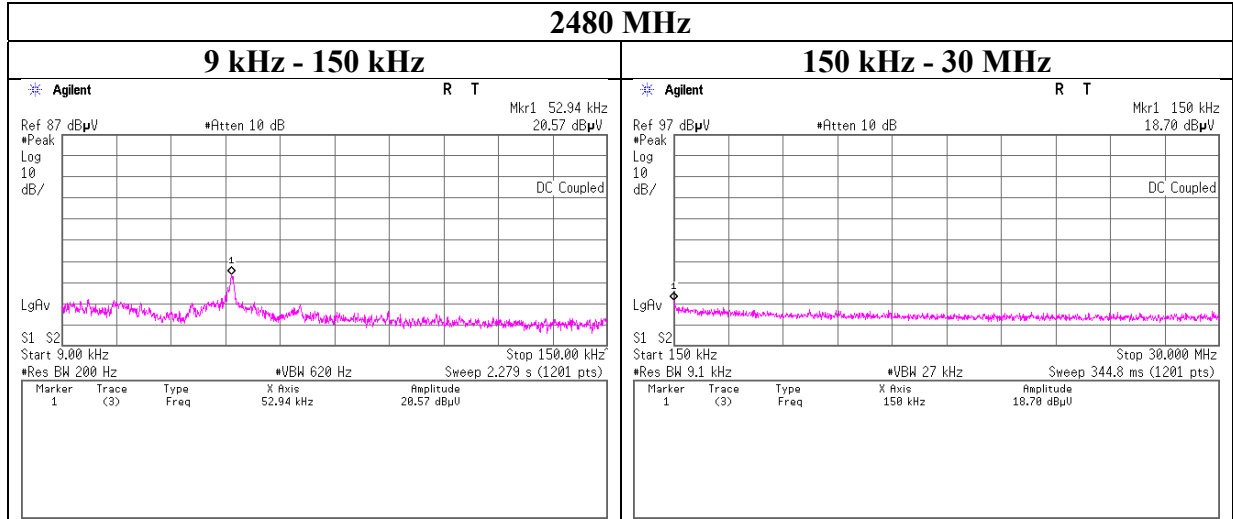

Conducted Spurious Emission

(BT2)

Test place

Ise EMC Lab. No.8 Measurement Room

Date

January 21, 2022

Temperature / Humidity


21 deg. C / 30 % RH

Engineer

Ken Fujita

Mode

Tx, Hopping Off, 3DH5

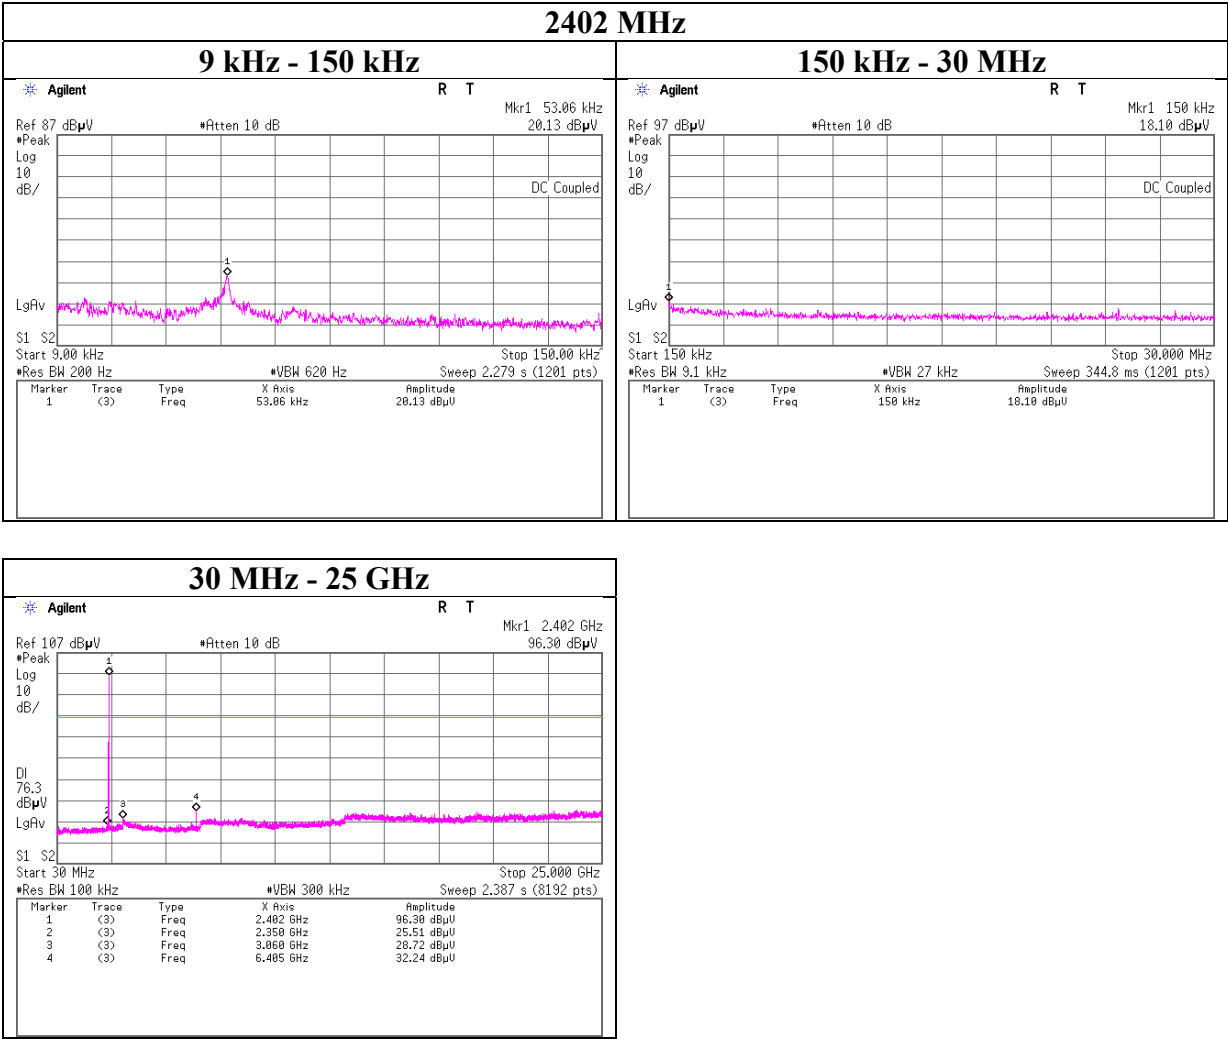

30 MHz - 25 GHz

Agilent

R T

Mkr1 2.402 GHz

96.30 dBμV

Ref 107 dBμV

#Atten 10 dB

#Peak

Log

10

dB/

DI

76.3

dBμV

LgRv

S1 S2

Start 30 MHz

Stop 25.000 GHz

#Res BW 100 kHz

#VBW 300 kHz

Sweep 2.387 s (8192 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(3)	Freq	2.402 GHz	96.30 dBμV
2	(3)	Freq	2.350 GHz	25.51 dBμV
3	(3)	Freq	3.060 GHz	28.72 dBμV
4	(3)	Freq	6.405 GHz	32.24 dBμV

Conducted Spurious Emission

(BT2)

Test place

Ise EMC Lab. No.8 Measurement Room

Date

January 21, 2022

Temperature / Humidity


21 deg. C / 30 % RH

Engineer

Ken Fujita

Mode

Tx, Hopping Off, 3DH5

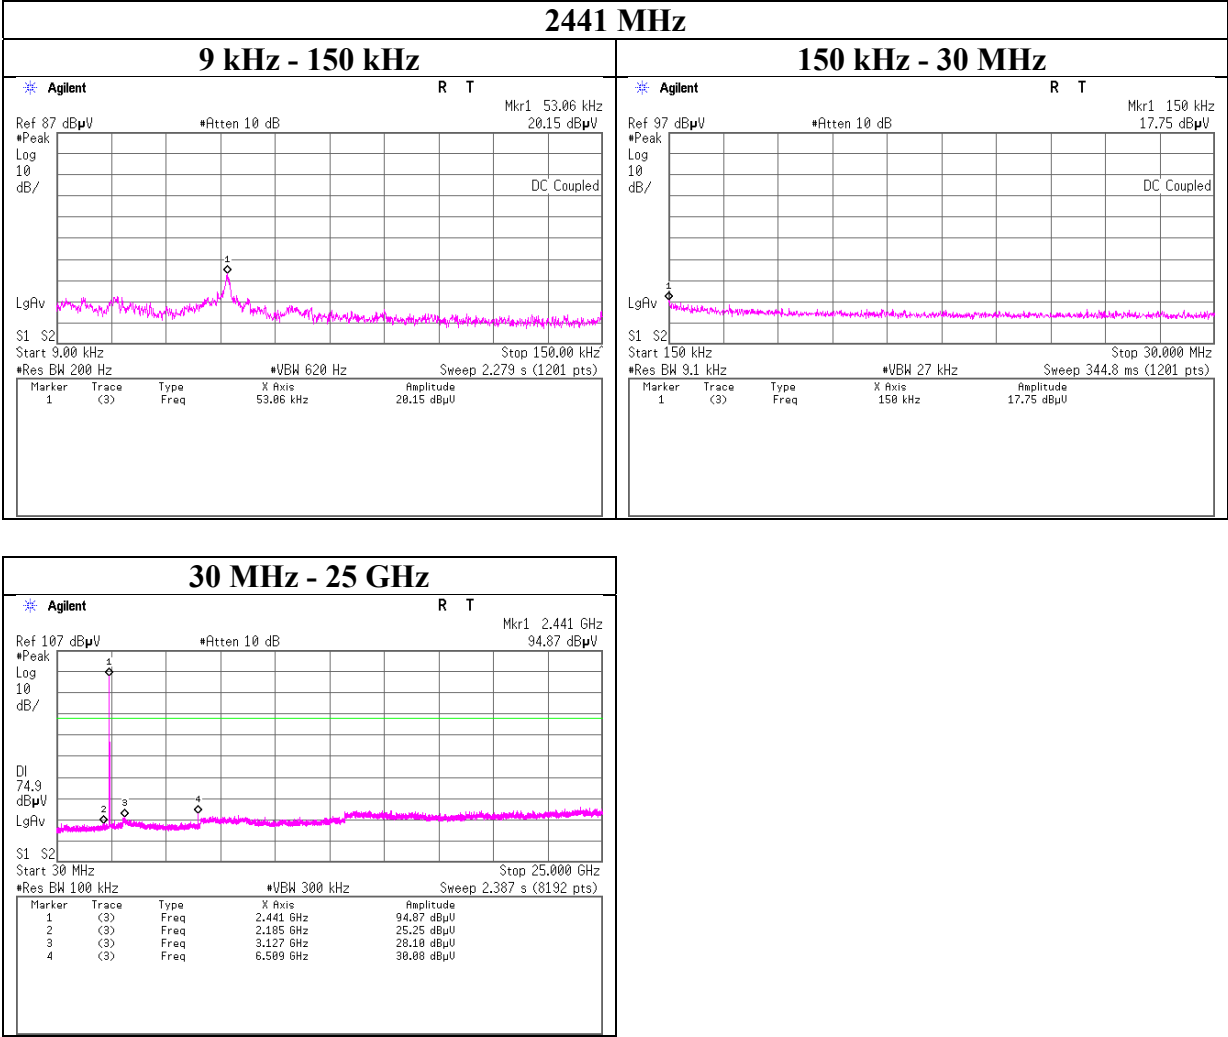

Conducted Spurious Emission

(BT2)

Test place

Ise EMC Lab. No.8 Measurement Room

Date

January 21, 2022

Temperature / Humidity



21 deg. C / 30 % RH

Engineer

Ken Fujita

Mode


Tx, Hopping Off, 3DH5

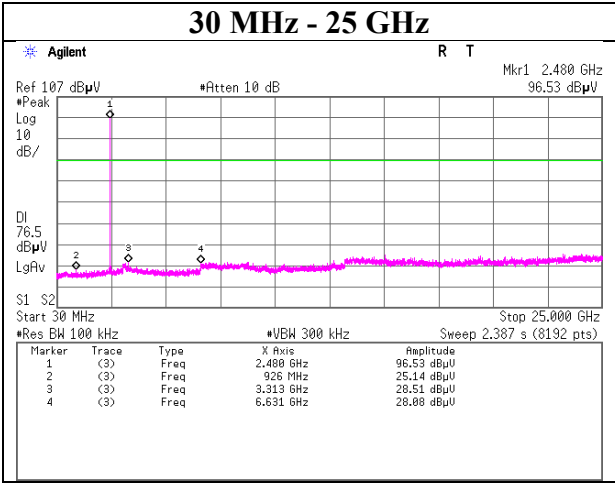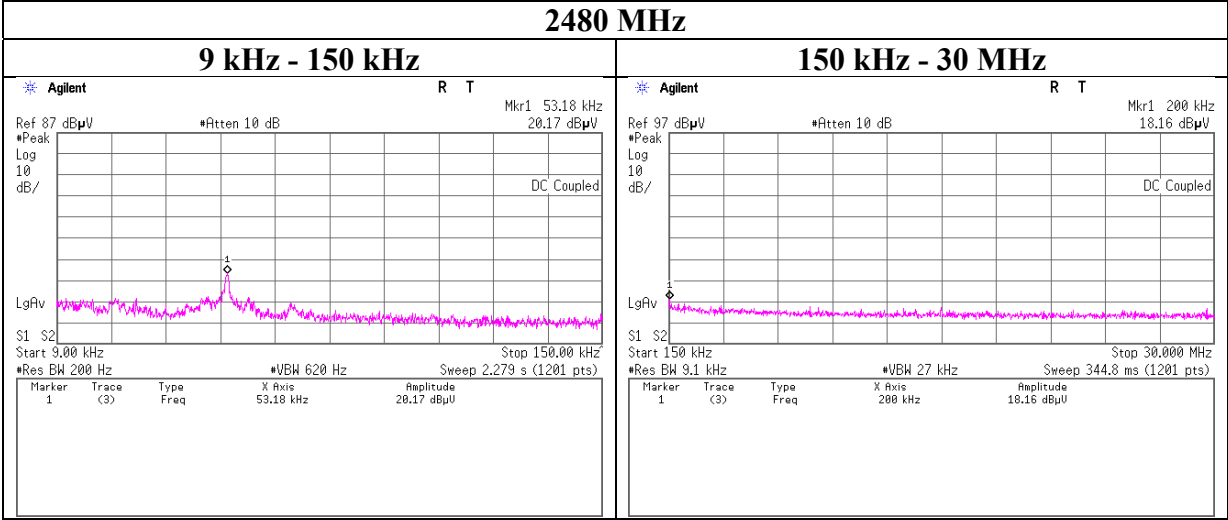


Conducted Emission Band Edge compliance (BT1)

Test place	Ise EMC Lab. No.8 Measurement Room
Date	January 21, 2022
Temperature / Humidity	21 deg. C / 30 % RH
Engineer	Ken Fujita
Mode	Tx DH5

Hopping On

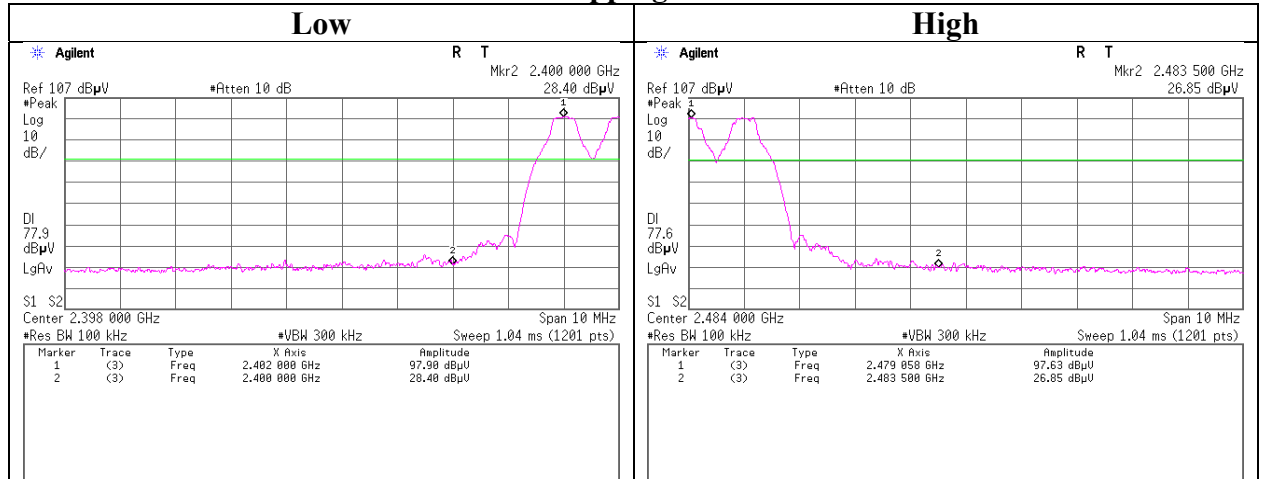


Hopping Off

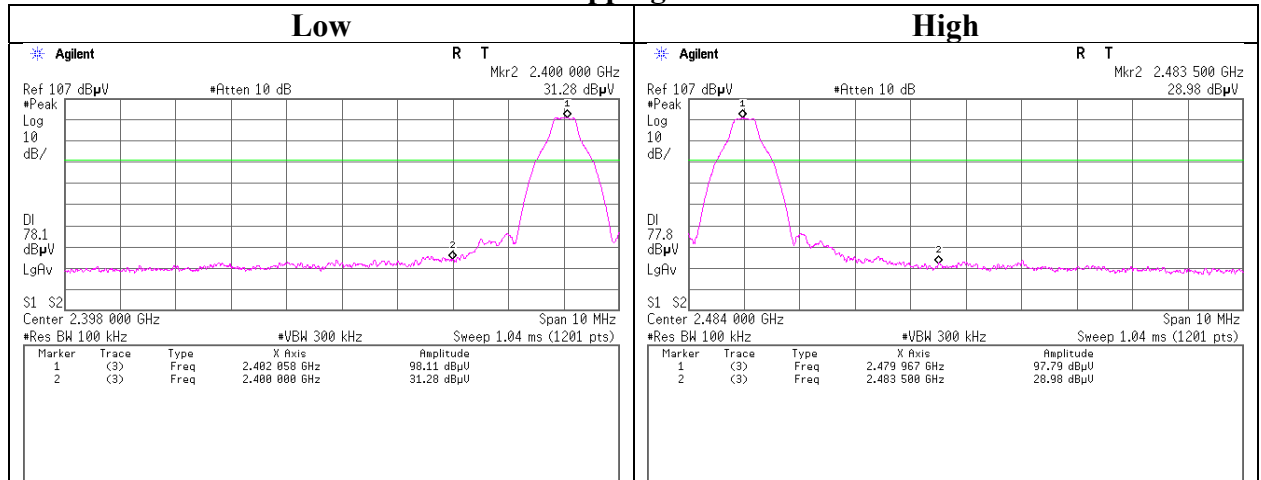


Conducted Emission Band Edge compliance (BT1)

Test place	Ise EMC Lab. No.8 Measurement Room
Date	January 21, 2022
Temperature / Humidity	21 deg. C / 30 % RH
Engineer	Ken Fujita
Mode	Tx 3DH5

Hopping On

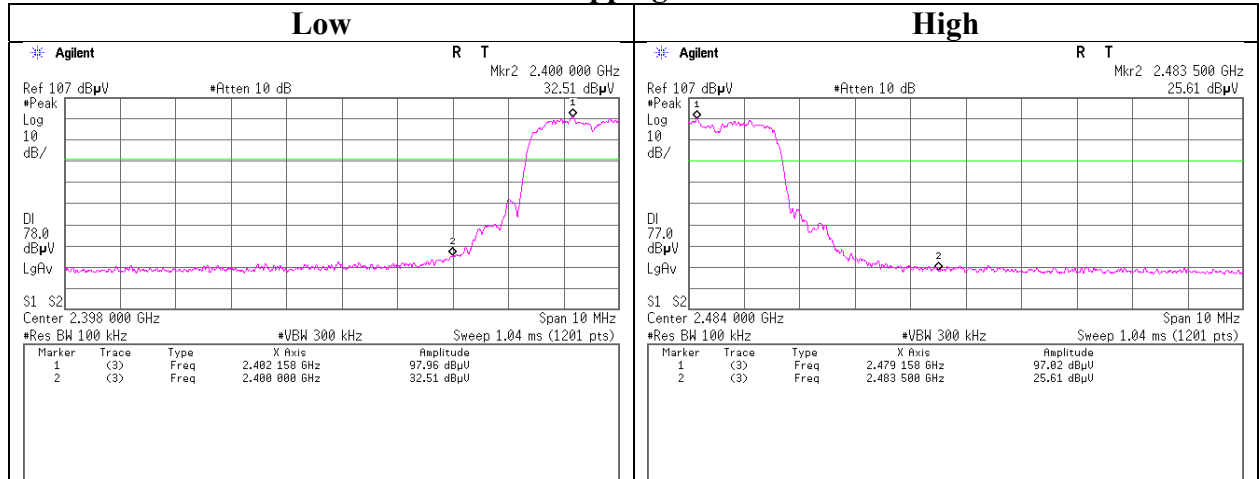


Hopping Off

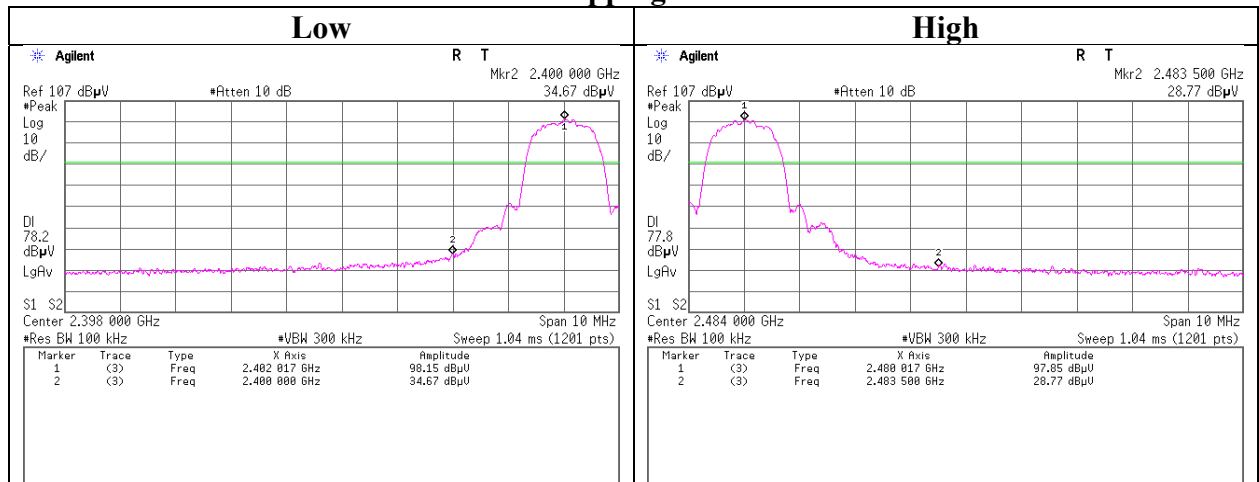


Conducted Emission Band Edge compliance (BT2)

Test place	Ise EMC Lab. No.8 Measurement Room
Date	January 21, 2022
Temperature / Humidity	21 deg. C / 30 % RH
Engineer	Ken Fujita
Mode	Tx DH5

Hopping On

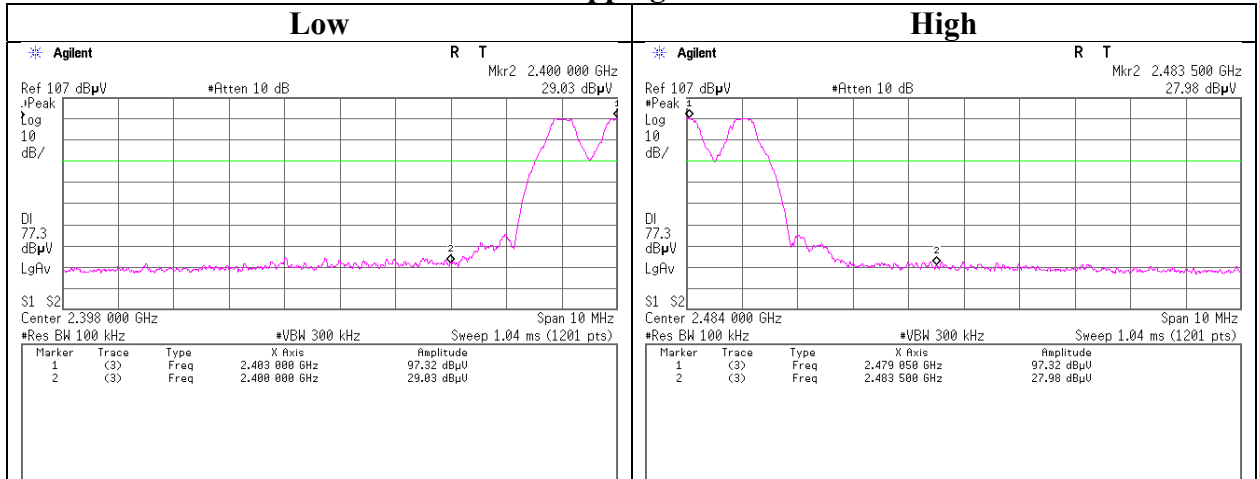


Hopping Off

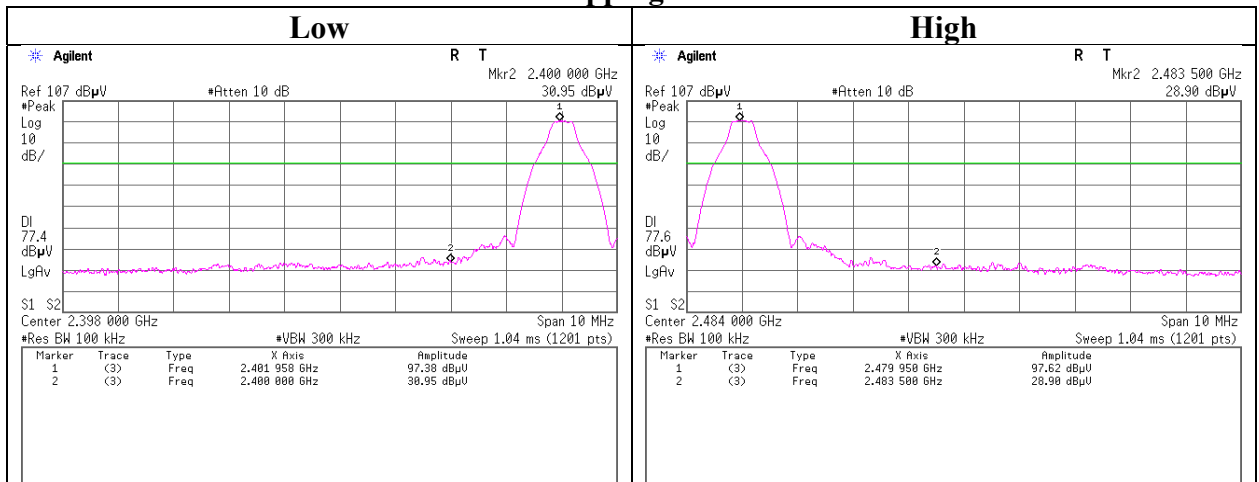


Conducted Emission Band Edge compliance (BT2)

Test place	Ise EMC Lab. No.8 Measurement Room
Date	January 21, 2022
Temperature / Humidity	21 deg. C / 30 % RH
Engineer	Ken Fujita
Mode	Tx 3DH5

Hopping On

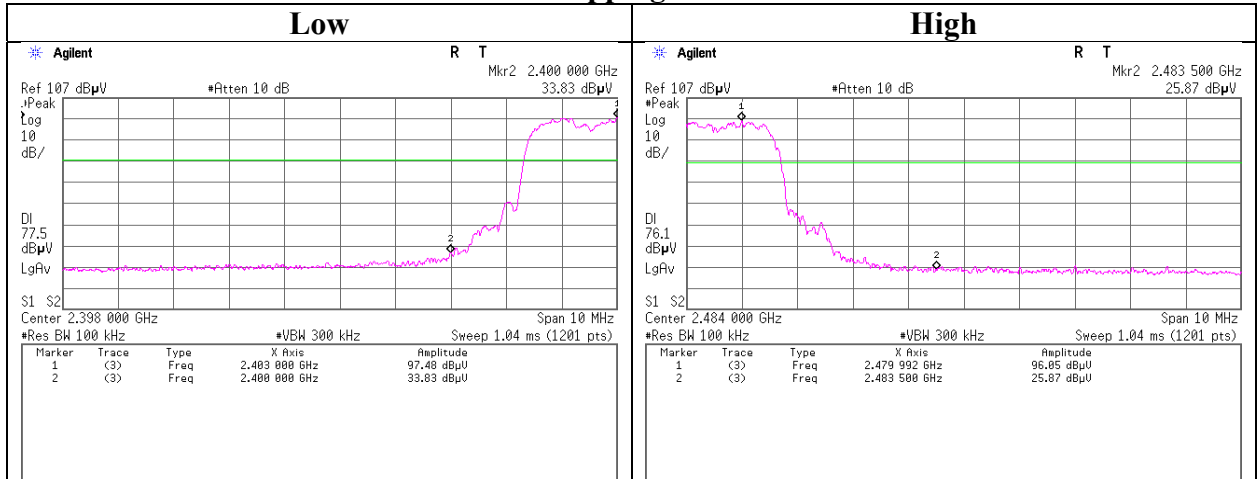

Hopping Off

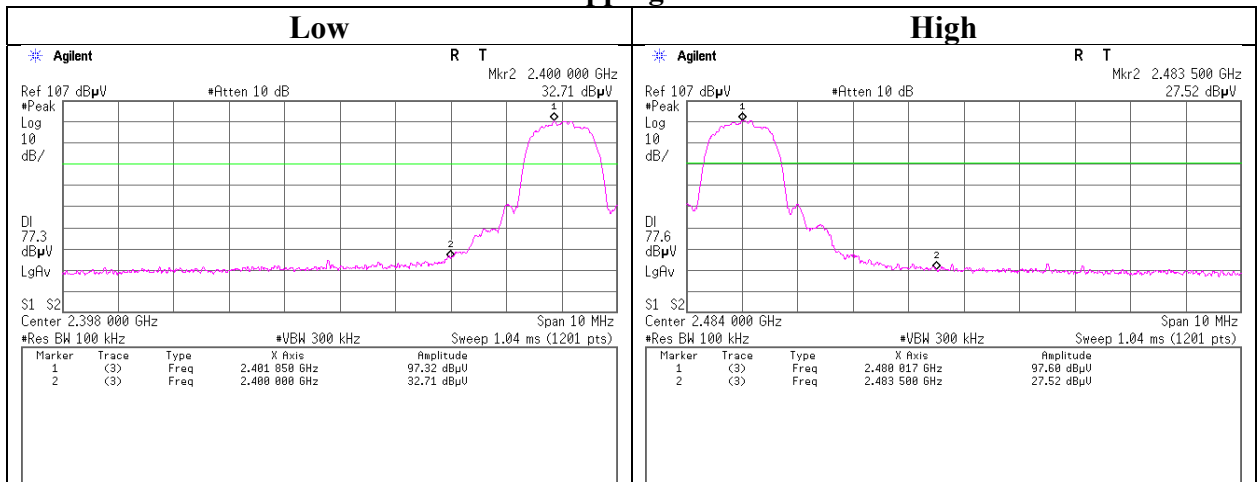

APPENDIX 2: Test Instruments

Test equipment (1/2)

Test Item	Local ID	LIMS ID	Description	Manufacturer	Model	Serial	Last Calibration Date	Cal Int
CE	MAEC-03	142008	AC3_Semi Anechoic Chamber(NSA)	TDK	Semi Anechoic Chamber 3m	DA-10005	05/22/2020	24
CE	MOS-13	141554	Thermo-Hygrometer	CUSTOM. Inc	CTH-201	1301	01/10/2022	12
CE	MMM-08	141532	DIGITAL HiTESTER	HIOKI E.E. CORPORATION	3805	51201197	01/16/2022	12
CE	MJM-16	142183	Measure	KOMELON	KMC-36	-	-	-
CE	COTS-MEMI-02	178648	EMI measurement program	TSJ (Techno Science Japan)	TEPTO-DV	-	-	-
CE	MLS-24	141358	LISN(AMN)	Schwarzbeck Mess-Elektronik OHG	NSLK8127	8127-730	07/18/2021	12
CE	MTR-03	141942	Test Receiver	Rohde & Schwarz	ESCI	100300	08/05/2021	12
CE	MAT-67	141248	Attenuator	JFW Industries, Inc.	50FP-013H2 N	-	12/17/2021	12
CE	MCC-112	141216	Coaxial cable	Fujikura/Suhner/TSJ	5D-2W/SFM14/sucoform141-PE/421-010/RFM-E321(SW)	-/00640	07/19/2021	12
CE	MSA-16	141903	Spectrum Analyzer	Keysight Technologies Inc	E4440A	MY46186390	01/07/2022	12
RE	MAEC-03	142008	AC3_Semi Anechoic Chamber(NSA)	TDK	Semi Anechoic Chamber 3m	DA-10005	05/22/2020	24
RE	MOS-13	141554	Thermo-Hygrometer	CUSTOM. Inc	CTH-201	1301	01/10/2022	12
RE	MMM-08	141532	DIGITAL HiTESTER	HIOKI E.E. CORPORATION	3805	51201197	01/16/2022	12
RE	MJM-16	142183	Measure	KOMELON	KMC-36	-	-	-
RE	COTS-MEMI-02	178648	EMI measurement program	TSJ (Techno Science Japan)	TEPTO-DV	-	-	-
RE	MAEC-03-SVSWR	142013	AC3_Semi Anechoic Chamber(SVSWR)	TDK	Semi Anechoic Chamber 3m	DA-10005	04/01/2021	24
RE	MSA-03	141884	Spectrum Analyzer	Keysight Technologies Inc	E4448A	MY44020357	03/10/2021	12
RE	MHA-20	141507	Horn Antenna 1-18GHz	Schwarzbeck Mess-Elektronik OHG	BBHA9120D	258	11/09/2021	12
RE	MPA-11	141580	MicroWave System Amplifier	Keysight Technologies Inc	83017A	MY39500779	03/03/2021	12
RE	MCC-231	177964	Microwave Cable	Junkosha INC.	MMX221	1901S329(1m)/1902S579(5m)	03/04/2021	12
RE	MHF-25	141232	High Pass Filter 3.5-18.0GHz	UL Japan	HPF SELECTOR	001	09/30/2021	12
RE	MHA-16	141513	Horn Antenna 15-40GHz	Schwarzbeck Mess-Elektronik OHG	BBHA9170	BBHA9170306	06/07/2021	12
RE	MHF-22	141293	High Pass Filter 7-20GHz	TOKIMEC	TF37NCCB	602	02/18/2021	12
RE	MCC-177	141226	Microwave Cable	Junkosha	MMX221-00500DMSDMS	1502S304	03/01/2021	12
RE	MTR-03	141942	Test Receiver	Rohde & Schwarz	ESCI	100300	08/05/2021	12
RE	MAT-95	142314	Attenuator	Pasternack Enterprises	PE7390-6	D/C 1504	06/09/2021	12
RE	MBA-08	141427	Biconical Antenna	Schwarzbeck Mess-Elektronik OHG	VHA9103B+BBA9106	08031	07/10/2021	12
RE	MCC-51	141323	Coaxial cable	UL Japan	-	-	07/19/2021	12
RE	MLA-22	141266	Logperiodic Antenna (200-1000MHz)	Schwarzbeck Mess-Elektronik OHG	VUSLP9111B	9111B-191	08/21/2021	12
RE	MPA-13	141582	Pre Amplifier	SONOMA INSTRUMENT	310	260834	02/18/2021	12

Test equipment (2/2)

Test Item	Local ID	LIMS ID	Description	Manufacturer	Model	Serial	Last Calibration Date	Cal Int
AT	MRENT-130	141855	Spectrum Analyzer	Keysight Technologies Inc	E4440A	MY46187750	11/28/2021	12
AT	MPM-16	141812	Power Meter	Keysight Technologies Inc	8990B	MY51000271	08/11/2021	12
AT	MPSE-23	141835	Power sensor	Keysight Technologies Inc	N1923A	MY54070004	08/11/2021	12
AT	MAT-58	141334	Attenuator(10dB)	Suhner	6810.19.A	-	12/08/2021	12
AT	MOS-28	141567	Thermo-Hygrometer	CUSTOM. Inc	CTH-201	0008	01/10/2022	12
AT	MAT-23	141361	Attenuator(10dB) 1-18GHz	Orient Microwave	BX10-0476-00	-	04/07/2021	12
AT	MAT-26	141244	Attenuator(10dB)	Weinschel - API Technologies Corp	WA8-10-34	A198	02/24/2021	12
AT	MTA-36	142820	Terminator	Baumer	50ΩSMA	-	-	-
AT	MTA-38	142821	Terminator	OMC	BL01-6118-00 (50Ω SMA)	-	-	-
AT	MTA-39	141929	Terminator	OMC	BL01-6118-00 (50Ω SMA)	-	09/30/2021	12

*Hyphens for Last Calibration Date and Cal Int (month) are instruments that Calibration is not required (e.g. software), or instruments checked in advance before use.

The expiration date of the calibration is the end of the expired month.

As for some calibrations performed after the tested dates, those test equipment have been controlled by means of an unbroken chains of calibrations.

All equipment is calibrated with valid calibrations. Each measurement data is traceable to the national or international standards.

Test item: CE: Conducted Emission
 RE: Radiated Emission
 AT: Antenna Terminal Conducted