



CTK Co., Ltd.
The First Leader of Global Regulatory Certification

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-624-9501

www.e-ctk.com

TEST REPORT

FCC Standards : FCC 47CFR part 15 subpart C

Test Report No. : CTK-2014-00759
Date of Issue : 2014-06-30
FCC ID : AK8MDRAS800BT
Model/Type No. : MDR-AS800BT
Kind of Product : Wireless stereo headset
Applicant : Sony Corporation
Applicant Address : 1-7-1 Konan, Minato-ku, Tokyo 108-0075, Japan
Manufacturer : Sony Corporation
Manufacturer Address : 1-7-1 Konan, Minato-ku, Tokyo 108-0075, Japan
Contact Person : Kazunaga Kinjo / Product safety manager
Telephone : +81-50-3750-7634
Received Date : 2014-04-30
Test period : Start : 2014-05-13 End : 2014-06-30

The test results presented in this report relate only to the object tested.

Tested by

Won-Jae, Hwang
Test Engineer
Date: 2014-06-30

Reviewed by

Young-Joon, Park
Technical Manager
Date: 2014-06-30



CTK Co., Ltd.
The First Leader of Global Regulatory Certification

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-624-9501

www.e-ctk.com

REPORT REVISION HISTORY

Date	Revision	Page No
2014-06-30	Issued (CTK-2014-00759)	All

This report shall not be reproduced except in full, without the written approval of CTK Co., Ltd. This document may be altered or revised by CTK Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by CTK Co., Ltd. will constitute fraud and shall nullify the document.



CTK Co., Ltd.
The Prime Leader of Global Regulatory Compliance

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-624-9501

www.e-ctk.com

TABLE OF CONTENTS

REPORT REVISION HISTORY	2
1.0 General Product Description	4
1.1 Tested Frequency.....	4
1.2 Tested Mode.....	4
1.3 Device Modifications.....	5
1.4 Peripheral Devices	5
1.5 Calibration Details of Equipment Used for Measurement	5
1.6 Test Facility.....	5
1.7 Laboratory Accreditations and Listings.....	6
2.0 Summary of tests	7
2.1 Transmitter Requirements.....	8
2.1.1 Carrier Frequency Separation	8
2.1.2 Number of Hopping Frequencies	10
2.1.4 Time of Occupancy (Dwell Time).....	19
2.1.5 Maximum peak Conducted Output Power	25
2.1.6 Band-edge	30
2.1.7 Field Strength of Emissions	41
2.1.8 AC Conducted Emissions.....	57
APPENDIX A – Test Equipment Used For Tests	62



1.0 General Product Description

Basic Model/Type No.	MDR-AS800BT
Serial number	Prototype
EUT condition	Pre-production, not damaged
Antenna type	PCB Pattern antenna Gain 3.307 dBi
Frequency Range	2402 MHz - 2480 MHz
RF power	1.710 dBm Peak Conducted (GFSK) 3.850 dBm Peak Conducted (8-DPSK)
Number of channels	79
Channel Spacing	1 MHz
Channel Access Protocol	Frequency Hopping
Type of Modulation	GFSK(1 Mbps), DQPSK(2 Mbps), 8-DPSK(3 Mbps)
Power Source	DC 3.7 V (Lithium Ion Rechargeable Battery)

1.1 Tested Frequency

	LOW	MID	HIGH
Frequency (MHz)	2402	2441	2480

1.2 Tested Mode

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

Tested Ch	Modulation Technology	Modulation Type	Packet Type
Low, Mid, High	FHSS	GFSK	DH 5
Low, Mid, High	FHSS	8-DPSK	3DH 5



1.3 Device Modifications

The following modifications was applied by the applicant:

Not applicable

1.4 Peripheral Devices

Device	Manufacturer	Model No.	Serial No.
Note Computer	DELL INC.	Inspiron 6400	-
Switching Adapter2	DDongguang Lite Power 2nd Plant	LA65NS0-00	-

1.5 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less. All test equipment calibrations are traceable to the Korea Research Institute of Standards and Science (KRISS), therefore, all test data recorded in this report is traceable to KRISS.

1.6 Test Facility

The measurement facility is located at (Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea. The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.



CTK Co., Ltd.
The Prime Leader of Global Regulatory Compliance

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-624-9501

www.e-ctk.com

1.7 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Logo
USA	FCC	3 m & 10 m SAC and Conducted Test Site to perform FCC Part 15/18 measurements	 805871
JAPAN	VCCI	3 m & 10 m SAC and Conducted Test Site	 R-948, C-986, T-1843
KOREA	KCC	EMI (10 m SAC and Conducted Test Site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and Interruptions)	 No. 51, KR0025
International	KOLAS	EMC	



CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-624-9501

www.e-ctk.com

2.0 Summary of tests

FCC Part Section(s)	Parameter	Limit	Test Condition	Status (note 1)
15.247(a)	Carrier Frequency Separation	> 25 kHz	Conducted	C
15.247(a)	Number of Hopping Frequencies	> 15 hops		C
15.247(a)	20 dB Bandwidth	NA		C
15.247	Dwell Time	< 0.4 seconds		C
15.247(b)	Transmitter Output Power	< 0.125 Watts		C
15.247(d)	Conducted Spurious emission	> 20 dBc		C
15.247(d)	Band Edge	> 20 dBc		C
15.209	Field Strength of Harmonics	15.209(a)	Radiated	C
15.207	AC Conducted Emissions	15.207(a)	Line Conducted	C

Note 1: C=Complies NC=Not Complies NT=Not Tested NA=Not Applicable

Note 2: The data in this test report are traceable to the national or international standards.

The sample was tested according to the following specification:

- FCC Part 15.247, ANSI C63.4-2003

The tests were performed according to the method of measurements prescribed in DA 00-705.

2.1 Transmitter Requirements

2.1.1 Carrier Frequency Separation

Test Location

RF Test Room

Test Procedures

The carrier frequency separation was measured with a spectrum analyzer connected to the antenna terminal, while EUT has its hopping function enabled. After the trace being stable, the reading value between the peaks of the adjacent channels using the marker-delta function was recorded as the measurement results.

The spectrum analyzer is set to:

Span = 5 MHz (wide enough to capture the peaks of two adjacent channels)

RBW = 30 kHz ($\geq 1\%$ of the span) Sweep = auto

VBW = 300 kHz (\geq RBW) Detector function = peak

Trace = max hold




Figure 1 : Measurement setup for the carrier frequency separation

Limit

§15.247(a)(1) Frequency hopping system operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-third of 20dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Test Results

Test mode : GFSK, CFG PKT Packet Type : 15 Packet Size : 339(DH5)

Channel	Adjacent Hopping Channel Separation (kHz)	Two-third of 20dB bandwidth (kHz)	Minimum Bandwidth (kHz)	Result
2441MHz	980	533.3	25	Complies

Test mode : 8-DPSK, CFG PKT Packet Type : 31 Packet Size : 1021(3DH5)

Channel	Adjacent Hopping Channel Separation (kHz)	Two-third of 20dB bandwidth (kHz)	Minimum Bandwidth (kHz)	Result
2441MHz	1005	850.7	25	Complies

See next pages for actual measured spectrum plots.



CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance

CTK Co., Ltd.


(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-624-9501


www.e-ctk.com

Carrier Frequency Separation

Data Rate : GFSK

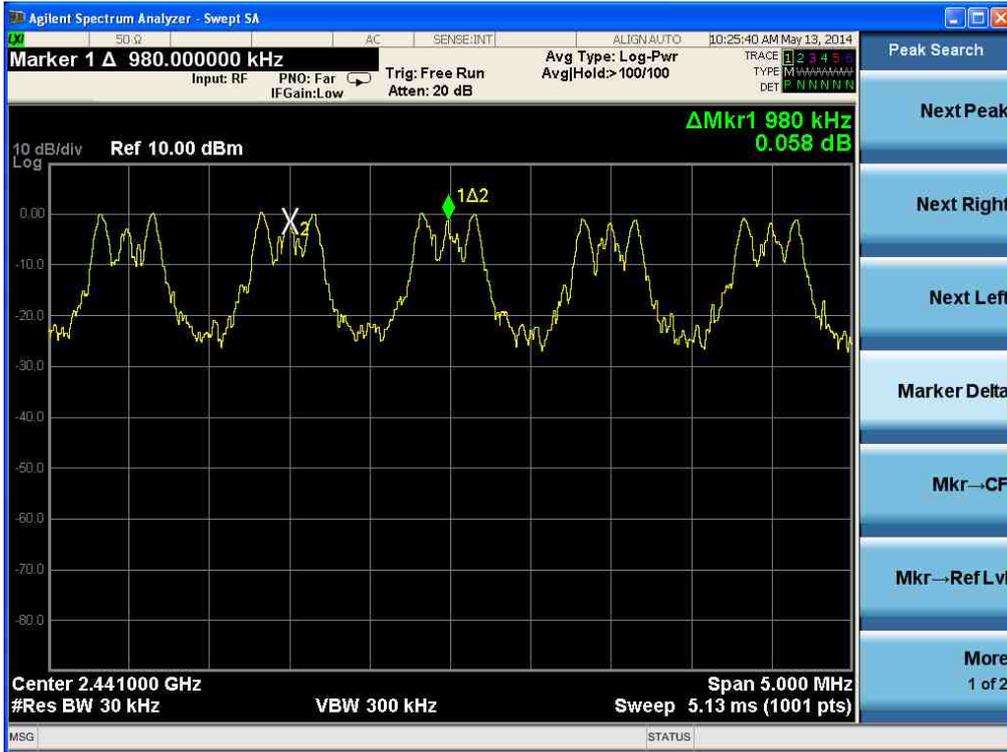

Data Rate : 8-DPSK

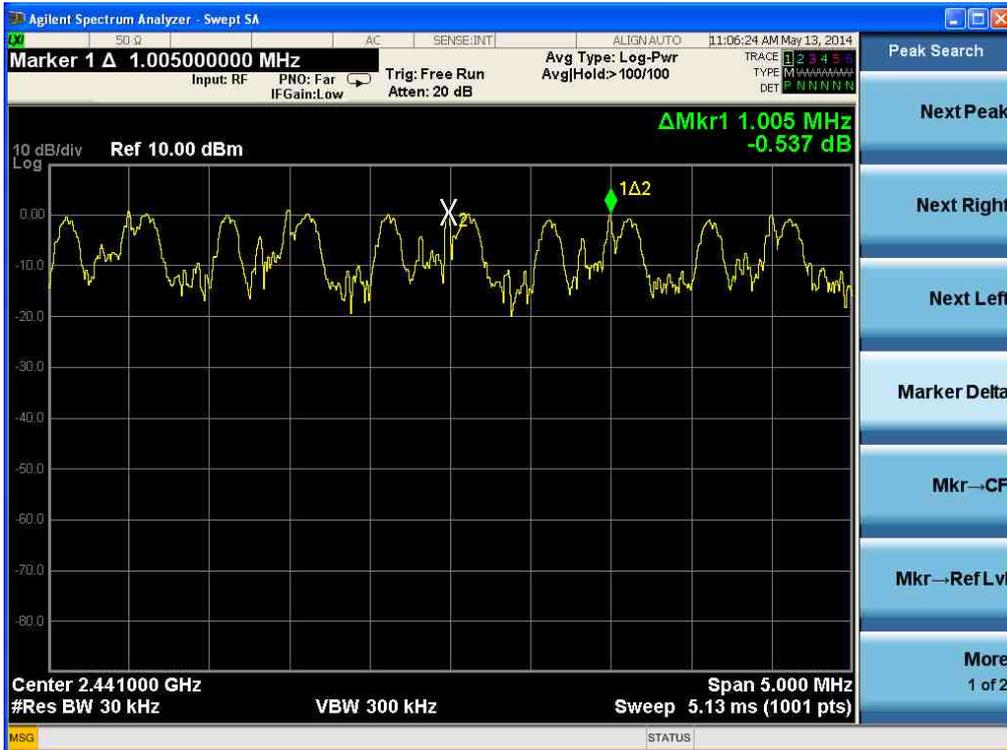



CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-624-9501

www.e-ctk.com

Number of Hopping Frequencies(GFSK)



2.1.3 20 dB bandwidth

Test Location

RF Test Room

Test Procedures

The bandwidth at 20 dB below the highest inband spectral density was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function disabled at the highest, middle and the lowest available channels. After the trace being stable, Use the marker-to peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 20 dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is the 20 dB bandwidth of the emission.

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

Span = 3 MHz (approximately 2 or 3 times of the 20 dB bandwidth)


RBW = 30 kHz ($\geq 1\%$ of the span)

Sweep = auto

VBW = 30 kHz (\geq RBW)

Detector function = peak

Trace = max hold

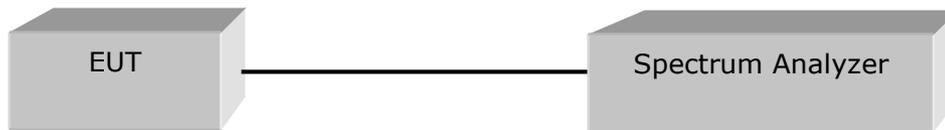

Limit

Limit : N/A



Test Results (20 dB bandwidth)

Test mode : GFSK, CFG PKT Packet Type : 15 Packet Size : 339(DH5)

Frequency (MHz)	Channel Number.	Measured Bandwidth (MHz)	Result
2402	0	0.781	Complies
2441	39	0.745	Complies
2480	78	0.800	Complies

Test mode : 8-DPSK, CFG PKT Packet Type : 31 Packet Size : 1021(3DH5)

Frequency (MHz)	Channel Number.	Measured Bandwidth (MHz)	Result
2402	0	1.269	Complies
2441	39	1.276	Complies
2480	78	1.270	Complies

Test Results (Occupied Bandwidth)

Test mode : GFSK, CFG PKT Packet Type : 15 Packet Size : 339(DH5)

Frequency (MHz)	Channel Number.	Measured Bandwidth (MHz)	Result
2402	0	0.739	Complies
2441	39	0.731	Complies
2480	78	0.749	Complies

Test mode : 8-DPSK, CFG PKT Packet Type : 31 Packet Size : 1021(3DH5)

Frequency (MHz)	Channel Number.	Measured Bandwidth (MHz)	Result
2402	0	1.171	Complies
2441	39	1.175	Complies
2480	78	1.170	Complies

See next pages for actual measured spectrum plots.



CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea
Tel: +82-31-339-9970 Fax: +82-31-624-9501
www.e-ctk.com

20 dB Bandwidth, Occupied Bandwidth - GFSK





CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-624-9501

www.e-ctk.com

CTK Co., Ltd.
The First Leader of Global Regulatory Compliance





CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance


CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-624-9501

www.e-ctk.com

20 dB Bandwidth, Occupied Bandwidth - 8-DPSK

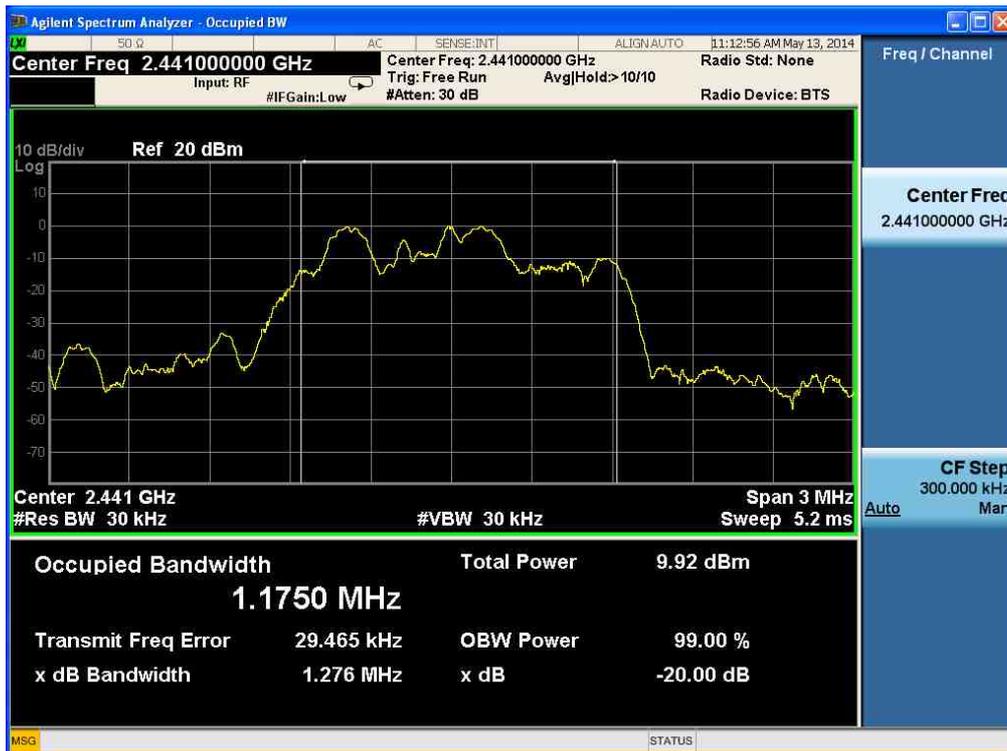




CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-624-9501

www.e-ctk.com

CTK Co., Ltd.
The First Leader of Global Regulatory Compliance

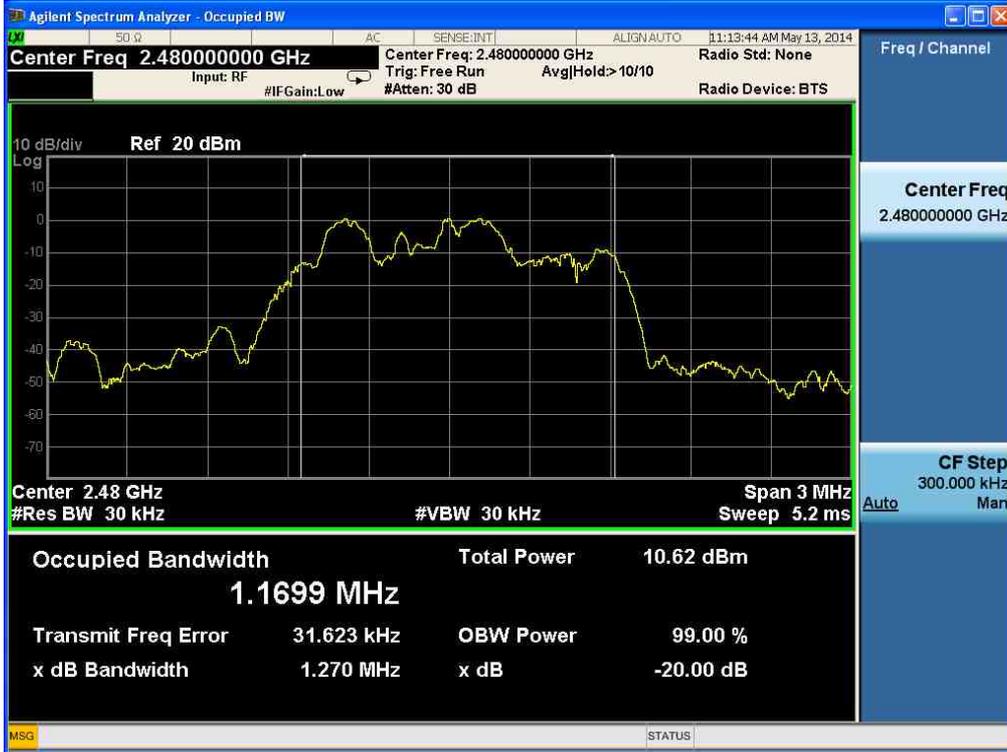

2.1.4 Time of Occupancy (Dwell Time)

Test Location

RF Test Room

Test Procedures

The dwell time was measured with a spectrum analyzer connected to the antenna terminal, while EUT has its hopping function enabled.

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in test setup without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
3. Adjust the center frequency of spectrum analyzer on any frequency be measured and set spectrum analyzer to zero span mode. And then, set RBW and VBW of spectrum analyzer to proper value.
4. Measure the time duration of one transmission on the measured frequency. And then plot the result with time difference of this time duration.
5. Repeat above procedures until all frequencies measured were complete.
6. The MDR-AS800BT has 3 type of payload, DH1, DH3, DH5. The hopping rate is 1600 per second.

The spectrum analyzer is set to:

Center frequency = the highest, middle, and the lowest channels

Span = zero


RBW = 1 MHz

Trace = max hold

VBW = 1 MHz (\geq RBW)

Detector function = peak

Sweep = as necessary to capture the entire dwell time per hopping channel

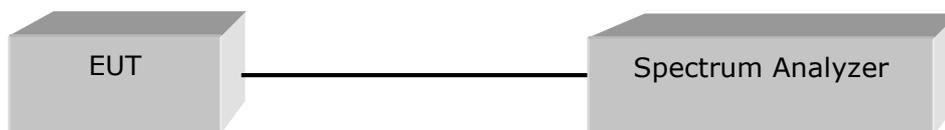

Limit

§15.247(a)(1)(iii) For frequency hopping system operating in 2400-2483.5 MHz band, the average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.



Test Results

Time of occupancy on the TX channel in 31.6 sec = time domain slot length × hop rate ÷ number of hop per channel × 31.6

Test mode : GFSK

Channel Frequency (MHz)	Packet Type	Dwell Time (ms)	Test Results	
			Time of occupancy on the TX channel in 31.6sec (ms)	Result
2441	DH 1	0.390	124.8	Complies
	DH 3	1.620	259.2	Complies
	DH 5	2.890	308.3	Complies

DH1 Dwell time = $0.390 \text{ ms} \times (1600 \div 2) \div 79 \times 31.6 = 124.8 \text{ ms}$

DH3 Dwell time = $1.620 \text{ ms} \times (1600 \div 4) \div 79 \times 31.6 = 259.2 \text{ ms}$

DH5 Dwell time = $2.890 \text{ ms} \times (1600 \div 6) \div 79 \times 31.6 = 308.3 \text{ ms}$

Test mode : 8-DPSK

Channel Frequency (MHz)	Packet Type	Dwell Time (ms)	Test Results	
			Time of occupancy on the TX channel in 31.6sec (ms)	Result
2441	3DH 1	0.390	124.8	Complies
	3DH 3	1.650	264.0	Complies
	3DH 5	2.880	307.2	Complies

3DH1 Dwell time = $0.390 \text{ ms} \times (1600 \div 2) \div 79 \times 31.6 = 124.8 \text{ ms}$

3DH3 Dwell time = $1.650 \text{ ms} \times (1600 \div 4) \div 79 \times 31.6 = 264.0 \text{ ms}$

3DH5 Dwell time = $2.880 \text{ ms} \times (1600 \div 6) \div 79 \times 31.6 = 307.2 \text{ ms}$

See next pages for actual measured spectrum plots.



CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance


CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea


Tel: +82-31-339-9970 Fax: +82-31-624-9501

www.e-ctk.com

Time of Occupancy for PACKET Type DH1(GFSK)

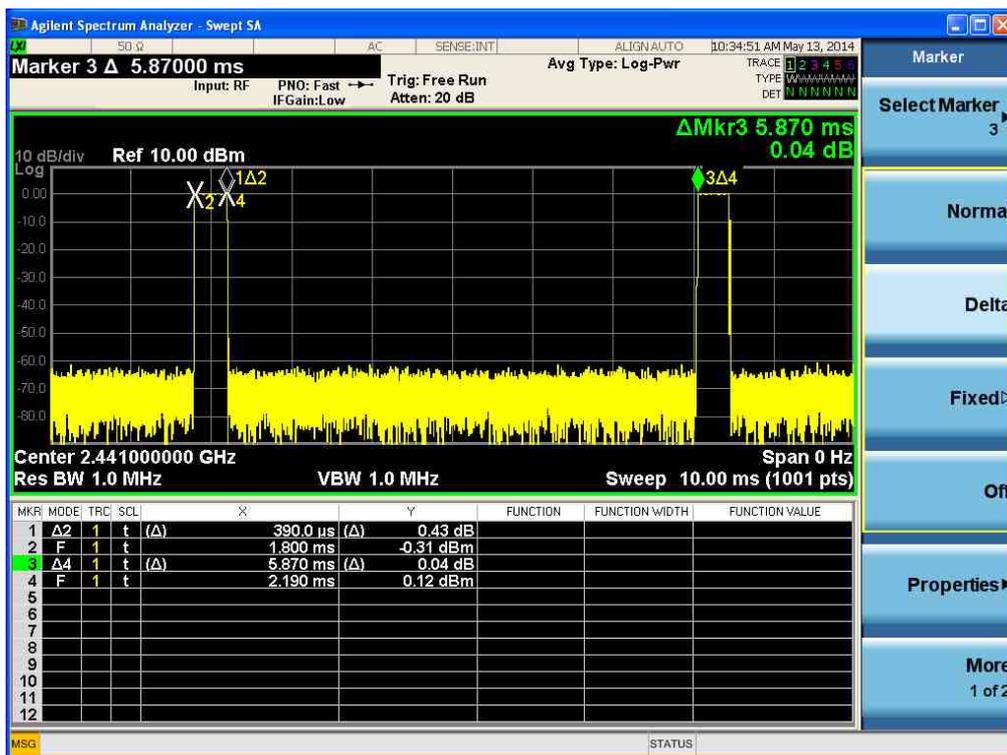

Time of Occupancy for PACKET Type DH3(GFSK)

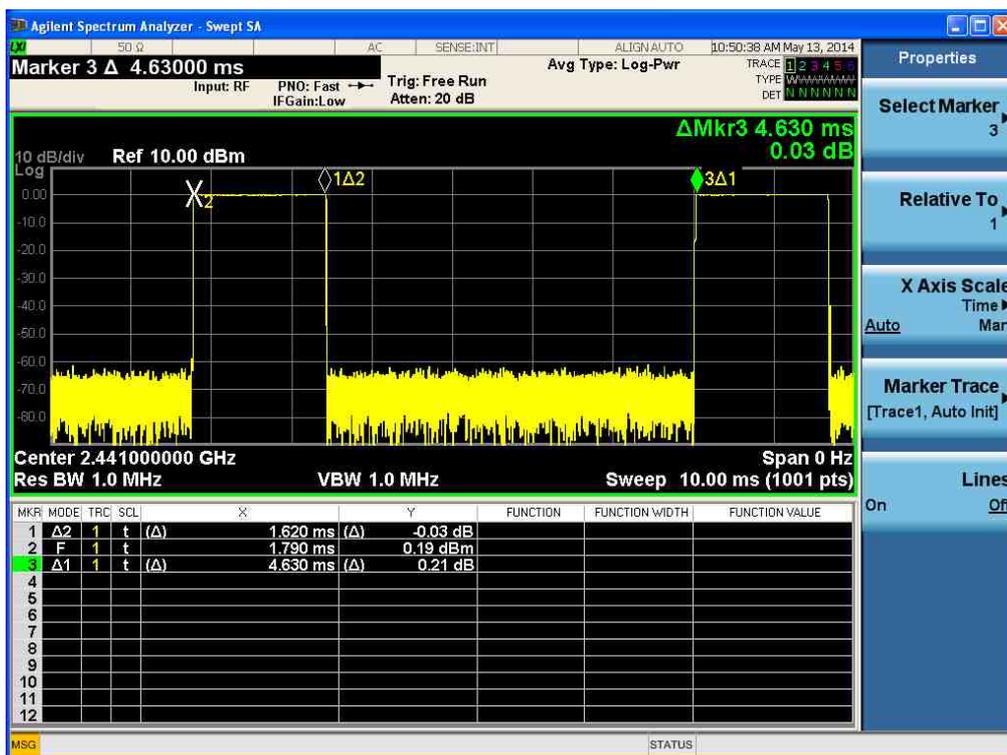



CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance


CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-624-9501

www.e-ctk.com

Time of Occupancy for PACKET Type DH5(GFSK)

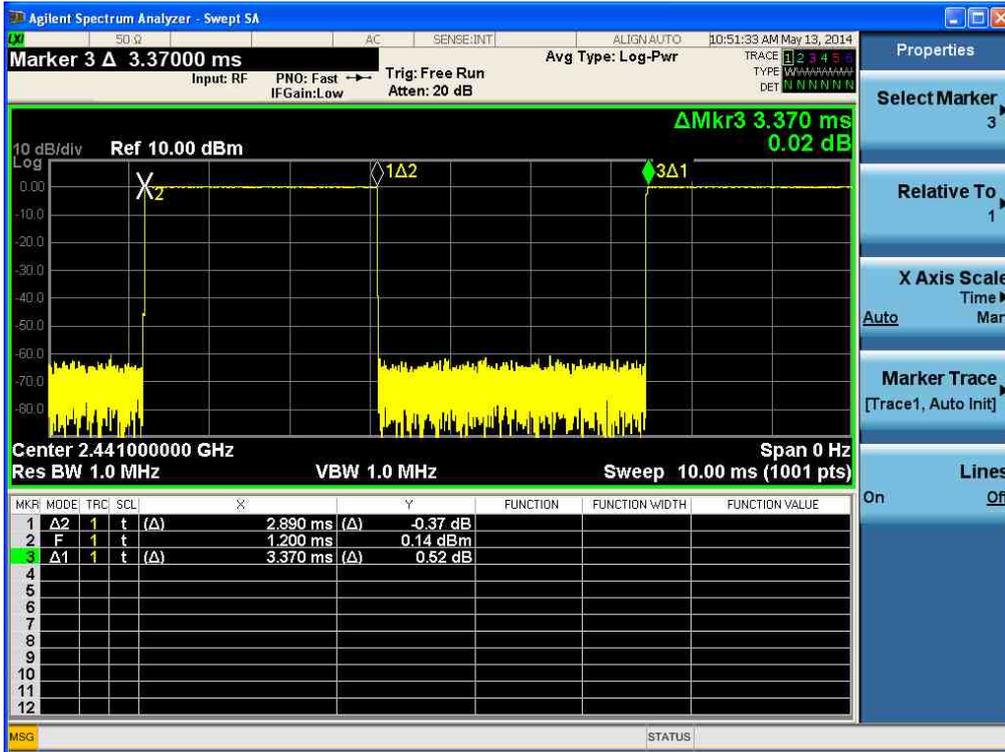




CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance


CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea
Tel: +82-31-339-9970 Fax: +82-31-624-9501
www.e-ctk.com

Time of Occupancy for PACKET Type 3DH1(8-DPSK)

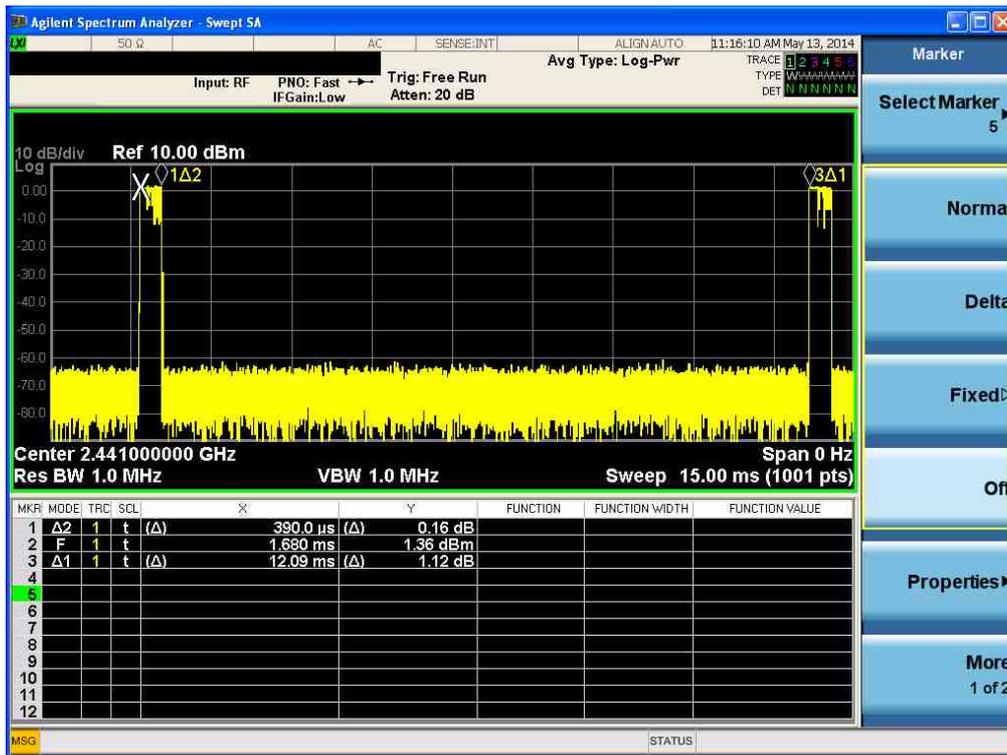

Time of Occupancy for PACKET Type 3DH3(8-DPSK)

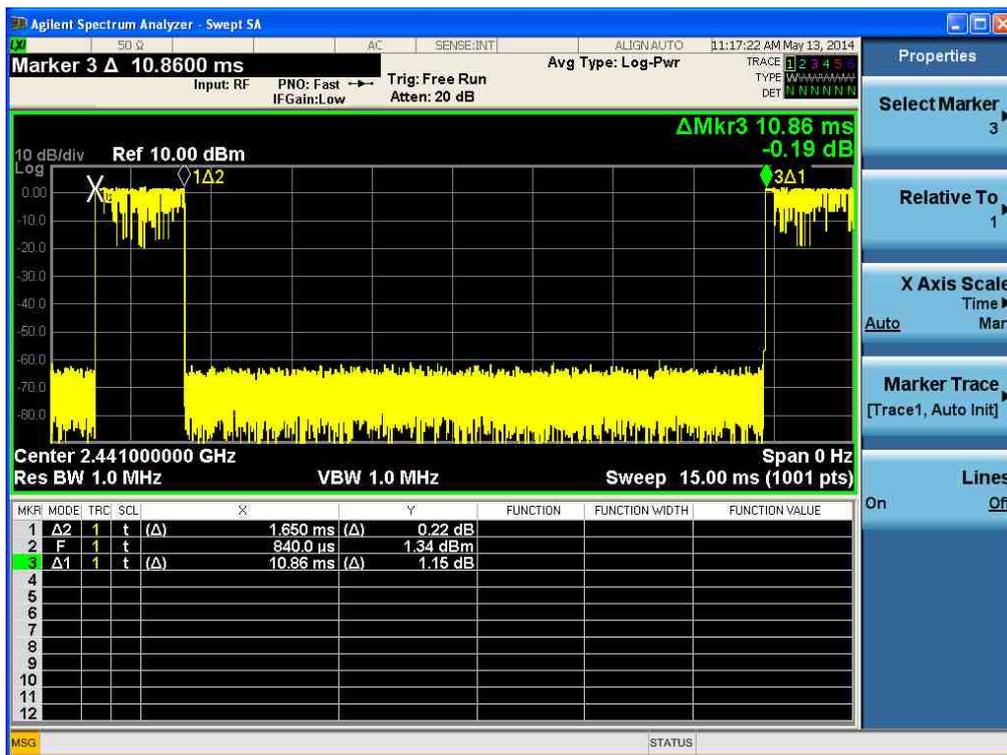




CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea
Tel: +82-31-339-9970 Fax: +82-31-624-9501
www.e-ctk.com

Time of Occupancy for PACKET Type 3DH5(8-DPSK)

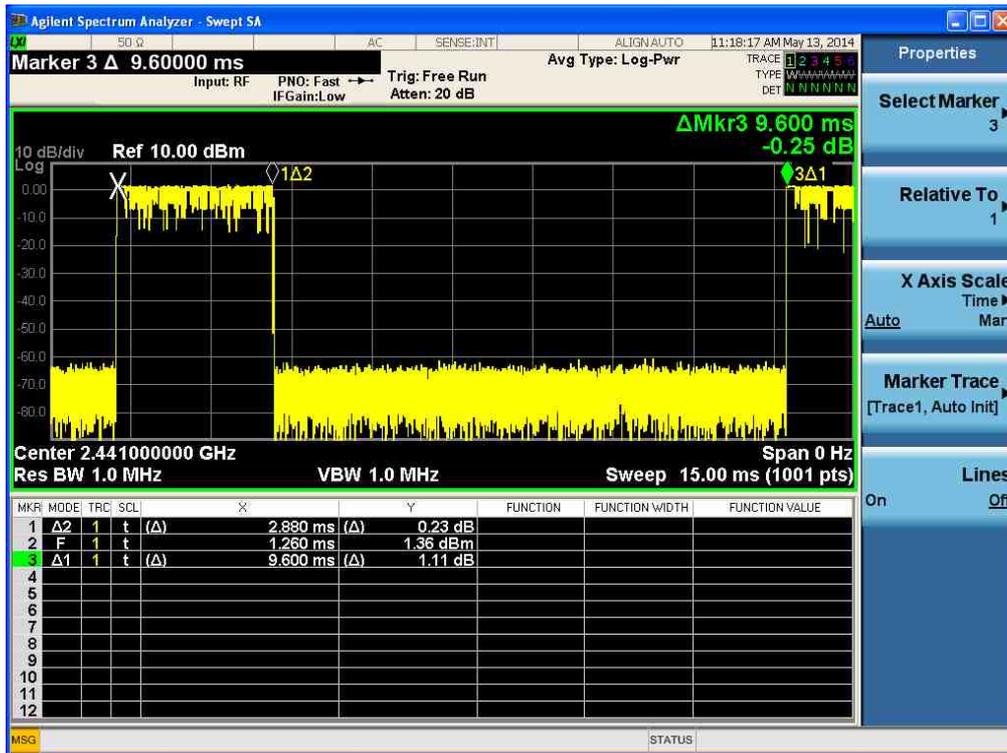

2.1.5 Maximum peak Conducted Output Power

Test Location

RF Test Room

Test Procedures

The maximum peak conducted output power was measured with a spectrum analyzer connected to the antenna terminal, while EUT has its hopping function disabled at the highest, middle and the lowest available channels.

The spectrum analyzer is set to:

Center frequency = the highest, middle, and the lowest channels

Span = 5 MHz (approximately 5 times of the 20 dB bandwidth)


RBW = 1 MHz (greater than the 20 dB bandwidth of the emission being measured)

VBW = 1 MHz (\geq RBW)

Detector function = peak

Trace = max hold

Sweep = auto

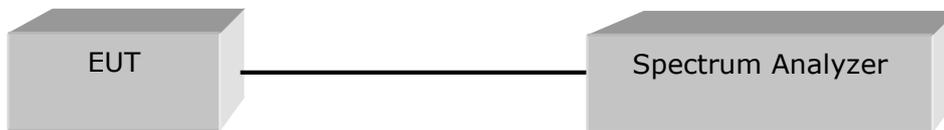

Limit

§5.247(b)(1) The Maximum Peak Output Power Measurement is 0.125 Watts for frequency hopping system operating in 2400-2483.5 MHz employing at least 15 Hopping channels.

Test Results

Test mode : GFSK, CFG PKT Packet Type : 15 Packet Size : 339(DH5)

Frequency (MHz)	Channel No.	Peak output power(dBm)	Peak output power(mW)	Result
2402	0	-0.597	0.872	Complies
2441	39	1.078	1.282	Complies
2480	78	1.710	1.483	Complies

Test mode : 8-DPSK, CFG PKT Packet Type : 31 Packet Size : 1021(3DH5)

Frequency (MHz)	Channel No.	Peak output power(dBm)	Peak output power(mW)	Result
2402	0	1.540	1.426	Complies
2441	39	3.078	2.031	Complies
2480	78	3.850	2.427	Complies

See next pages for actual measured spectrum plots.




CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea
Tel: +82-31-339-9970 Fax: +82-31-624-9501
www.e-ctk.com

Maximum peak Conducted Output Power - GFSK

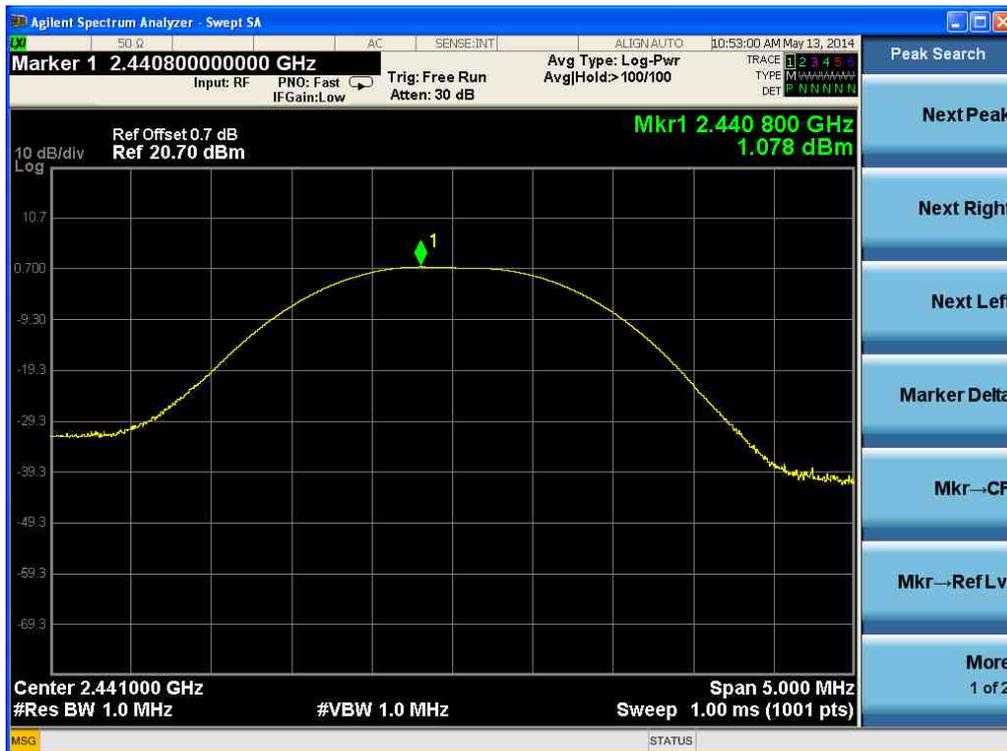



CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-624-9501

www.e-ctk.com





CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-624-9501

www.e-ctk.com

Maximum peak Conducted Output Power - 8-DPSK





CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-624-9501

www.e-ctk.com



2.1.6 Band-edge

Test Location

RF Test Room

Test Procedures

The bandwidth at 20 dB down from the highest inband spectral density was measured with a spectrum analyzer connected to the antenna terminal, while EUT has its hopping function disabled at the highest, middle and the lowest available channels.

The spectrum analyzer is set to:

Center frequency = the highest, middle, and the lowest channels

RBW = 100 kHz


VBW = 100 kHz (\geq RBW)

Span = 10 MHz

Trace = max hold

Detector function = peak

Sweep = auto

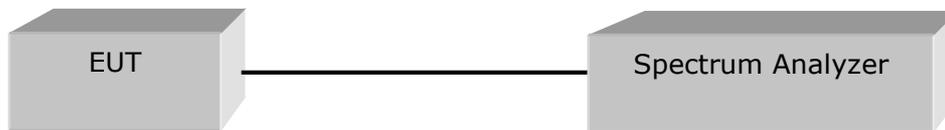

Limit

> 20 dBc

Test Results

All conducted emission in any 100 kHz bandwidth outside of the spectrum band was at least 20 dB lower than the highest level of the inband spectral density. Therefore the applying equipment meets the requirement.

See next pages for actual measured spectrum plots.



CTK Co., Ltd.
The First Leader of Global Regulatory Compliance

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea
Tel: +82-31-339-9970 Fax: +82-31-624-9501
www.e-ctk.com

Band - edge (with Hopping) - GFSK






CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea
Tel: +82-31-339-9970 Fax: +82-31-624-9501
www.e-ctk.com

Band – edge (without Hopping) - GFSK

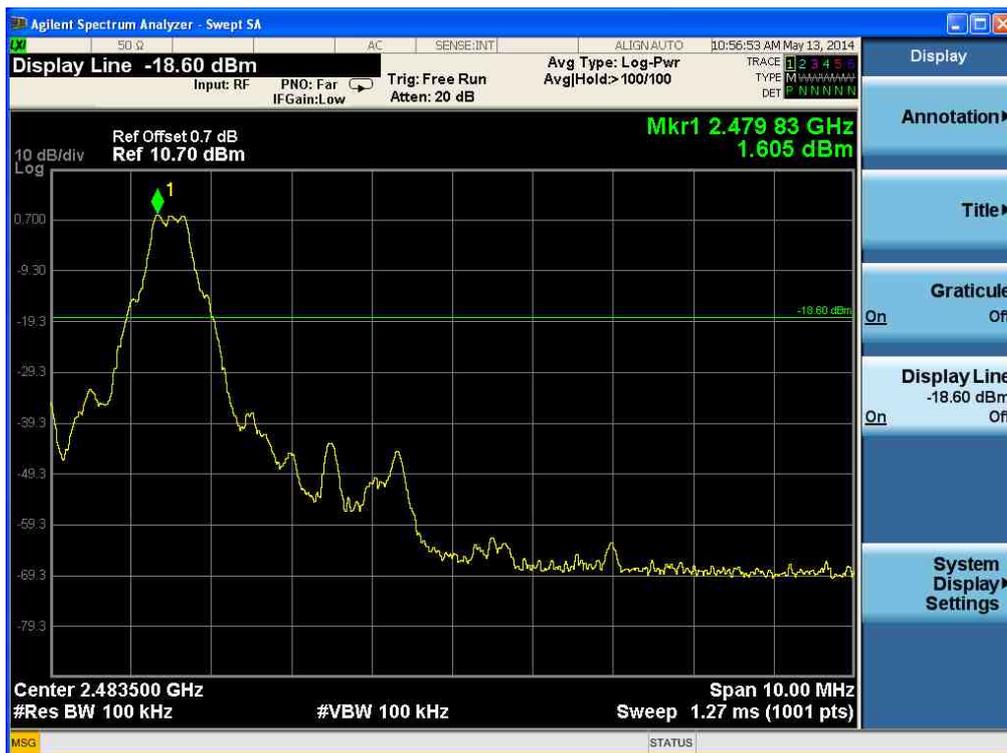




CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea
Tel: +82-31-339-9970 Fax: +82-31-624-9501
www.e-ctk.com

Band - edge (with Hopping) - 8-DPSK

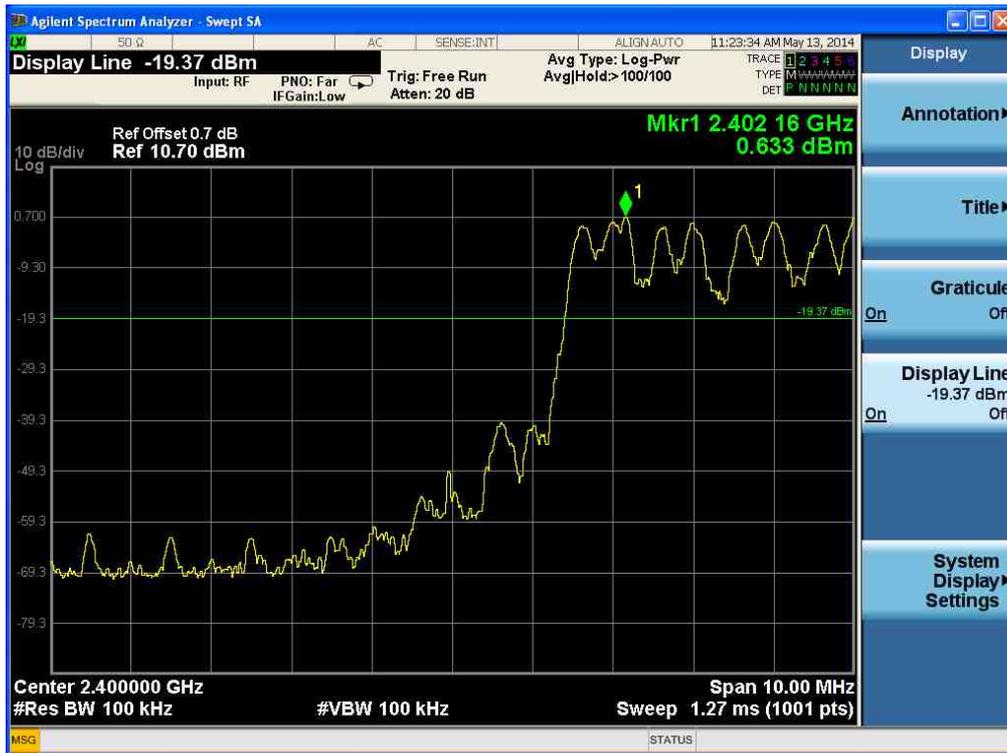



CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-624-9501

www.e-ctk.com

Band – edge (without Hopping) - 8-DPSK





CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-624-9501

www.e-ctk.com

Band - edge (at 20 dB blow) - Low channel Frequency Range = 30 MHz ~ 10th harmonic (GFSK : Worst-Case)





CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-624-9501

www.e-ctk.com

Band – edge (at 20 dB blow) – Mid channel Frequency Range = 30 MHz ~ 10th harmonic (GFSK : Worst-Case)





CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance


CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-624-9501

www.e-ctk.com

Band – edge (at 20 dB blow) – High channel Frequency Range = 30 MHz ~ 10th harmonic (GFSK : Worst-Case)

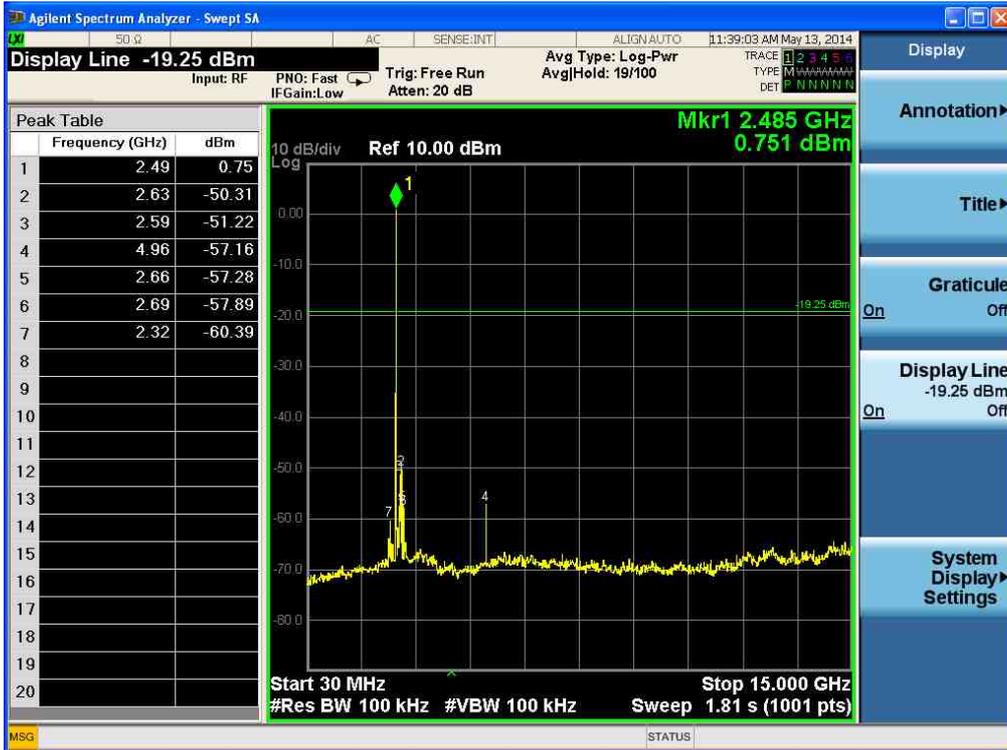



CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance


CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-624-9501

www.e-ctk.com

Band - edge (at 20 dB blow) - Low channel Frequency Range = 30 MHz ~ 10th harmonic (8-DPSK : Worst-Case)

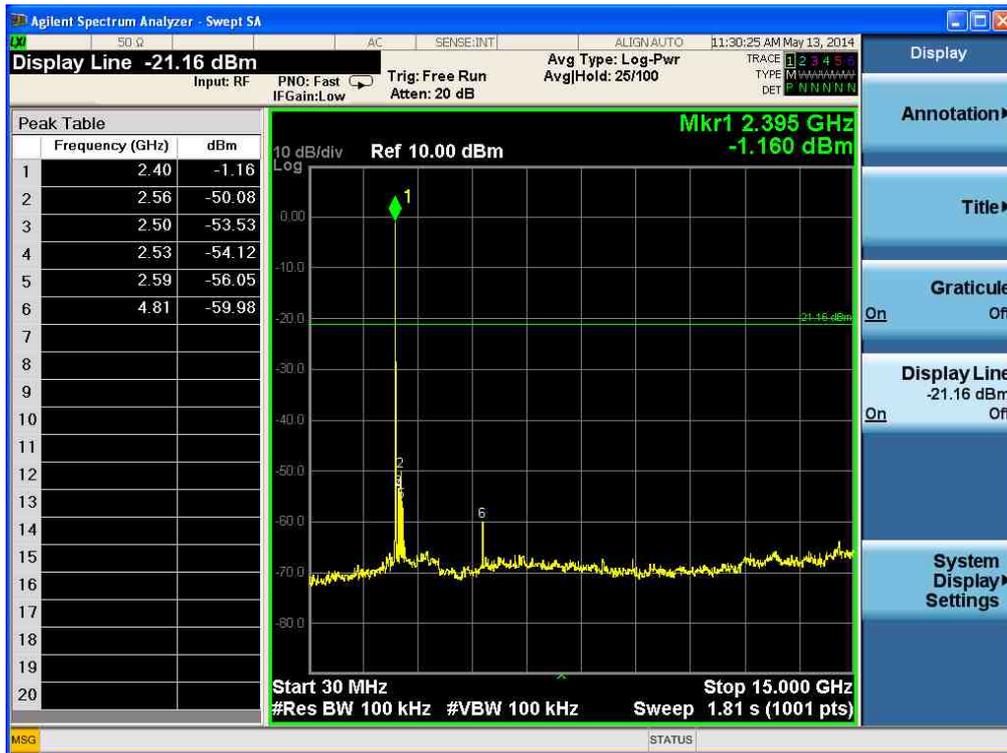



CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-624-9501

www.e-ctk.com

Band – edge (at 20 dB blow) – Mid channel Frequency Range = 30 MHz ~ 10th harmonic (8-DPSK : Worst-Case)





CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-624-9501

www.e-ctk.com

Band – edge (at 20 dB blow) – High channel Frequency Range = 30 MHz ~ 10th harmonic (8-DPSK : Worst-Case)





2.1.7 Field Strength of Emissions

Test Location

- 10 m SAC (test distance : 10 m, 3 m)
 3 m SAC (test distance : 3 m)

Test Procedures

- 1) In the frequency range of 9 kHz to 30 MHz, magnetic field is measured with Loop Antenna. The Test Antenna is positioned with its plane vertical at 1m distance from the EUT. The center of the Loop Test Antenna is 1m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.
- 2) In the frequency range above 30 MHz, Bi-Log Test Antenna(30 MHz to 1 GHz) and Horn Test Antenna(above 1 GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is carried from 1m to 4m above the ground to determine the maximum value of the field strength. The emissions levels at both horizontal and vertical polarizations should be tested.

The spectrum analyzer is set to:

Frequency Range = 9 kHz ~ 25 GHz (2.4 GHz 10th harmonic)

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz, 9 kHz for $f < 30$ MHz

VBW \geq RBW

Sweep = auto

Limit

- 15.209(a)

Frequency(MHz)	Field Strength uV/m@3m	Field Strength dBuV/m@3m	Measurement Distance (meters)
0.009-0.490	2400/F(kHz)	-	300
0.490-1.705	24000/F(kHz)	-	30
1.705-30	30	-	30
30-88	100**	40	3
88-216	150**	43.5	3
216-960	200**	46	3
Above 960	500	54	3


** Except as provided in 15.209(g).fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72MHz, 76-88MHz, 174-216MHz, 470-806MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g.15.231 and 15.241.

Note :


- 1) For above 1 GHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit.
- 2) For above 1 GHz, limit field strength of harmonics : 54 dBuV/m@3m (AV) and 74 dBuV/m@3m (PK)

Test Setup:


1) For field strength of emissions from 9 kHz to 30 MHz

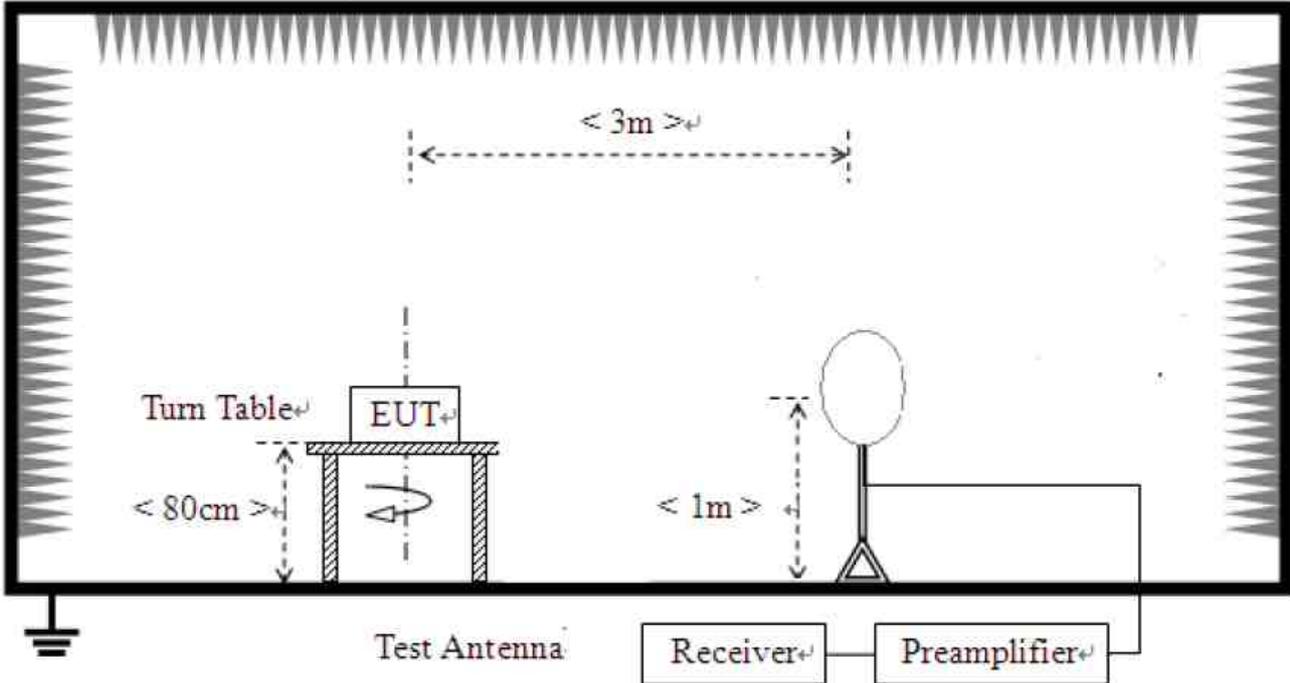

2) For field strength of emissions from 30 MHz to 1 GHz

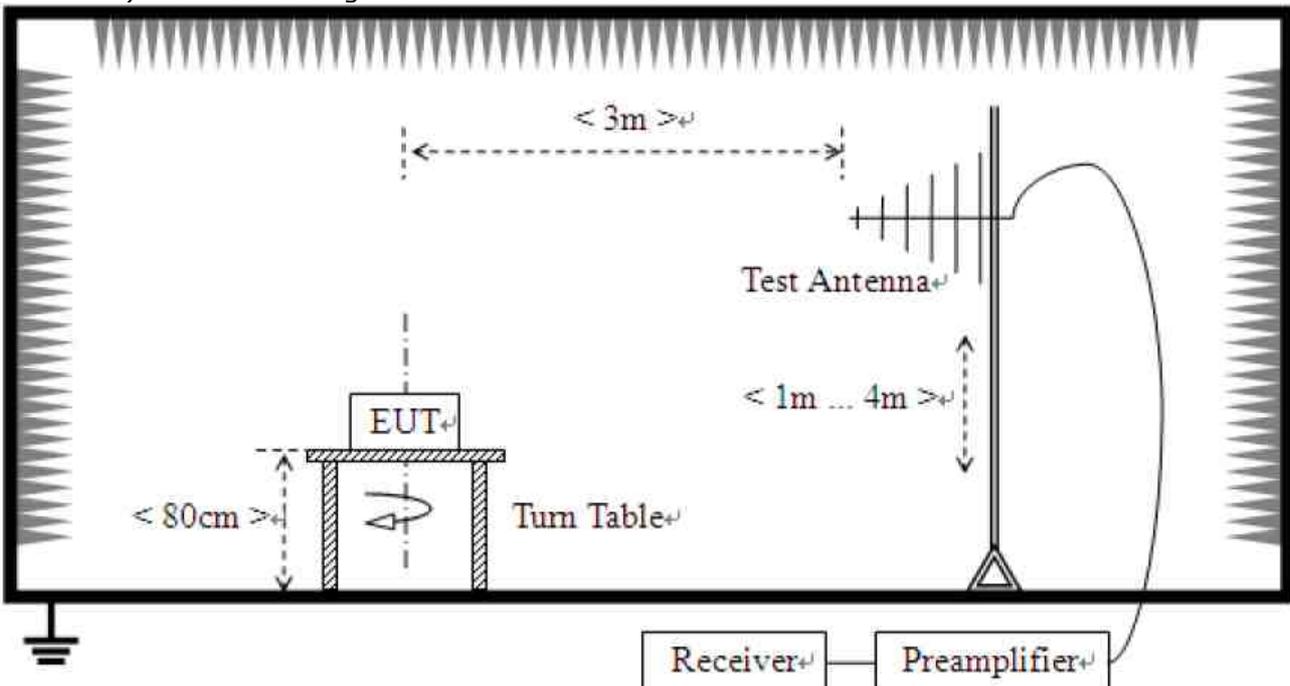

3) For field strength of emissions above 1 GHz

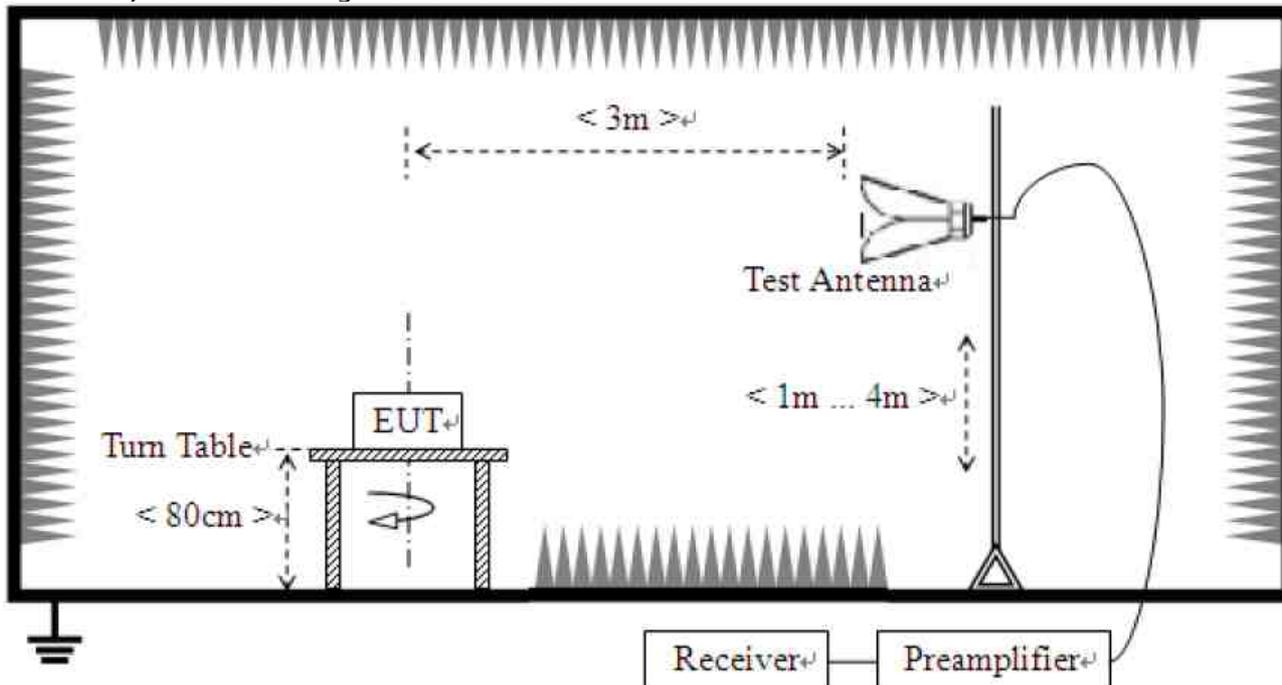

Test Results

1) 9 kHz to 30 MHz

Test mode : GFSK, CFG PKT Packet Type : 15 Packet Size : 339(DH5)

Test mode : 8-DPSK, CFG PKT Packet Type : 31 Packet Size : 1021(3DH5)

EUT	Wireless stereo headset	Measurement Detail	
Model	MDR-AS800BT	Frequency Range	9 kHz - 30 MHz
Test mode	GFSK, 8-DPSK	Detector function	Quasi-Peak

The requirements are:

Complies

Frequency (MHz)	Measured Data (dBuV/m)	Margin (dB)	Remark
-	-	-	See note

Note :

The amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log(\text{specific distance} / \text{test distance})$ (dB)



2) 30 MHz to 1 GHz

Test mode : GFSK, CFG PKT Packet Type : 15 Packet Size : 339(DH5)


EUT	Wireless stereo headset	Measurement Detail	
Model	MDR-AS800BT	Frequency Range	Below 1000MHz
Channel	Low	Detector function	Quasi-Peak / Peak

The requirements are:

Complies

Frequency (MHz)	Measured Data (dBUV/m)	Margin (dB)	Remark
35.941	17.1	22.9	Quasi-Peak

Test Data

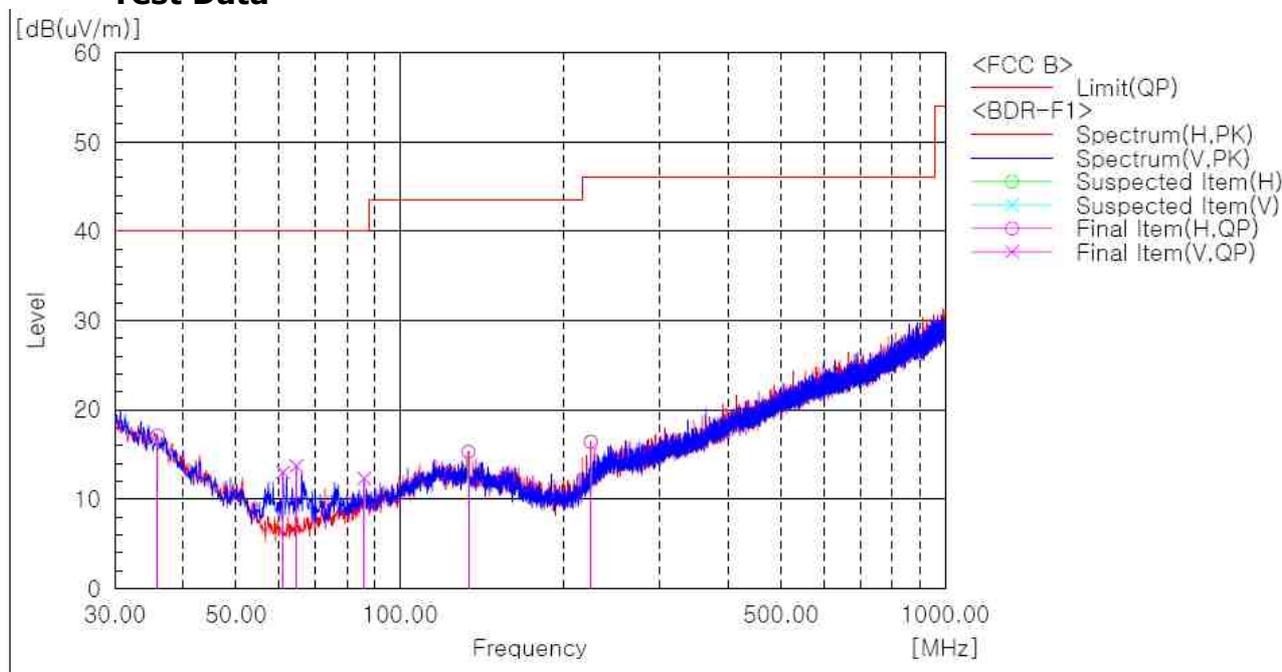

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]
1	35.941	H	26.1	-9.0	17.1	40.0	22.9	400.0	290.0
2	133.548	H	27.4	-12.1	15.3	43.5	28.2	100.0	281.0
3	64.556	V	32.3	-18.6	13.7	40.0	26.3	292.0	290.0
4	61.040	V	31.7	-18.7	13.0	40.0	27.0	195.0	0.0
5	86.018	V	28.0	-15.7	12.3	40.0	27.7	100.0	0.0
6	224.000	H	28.4	-12.0	16.4	46.0	29.6	208.0	290.0

Remark :

1. The field strength of spurious emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in stand-up position(Z axis) and the worst case was recorded.



CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-624-9501

www.e-ctk.com

CTK Co., Ltd.

The Power Leader of Global Regulatory Compliance

Test mode : GFSK, CFG PKT Packet Type : 15 Packet Size : 339(DH5)


EUT	Wireless stereo headset	Measurement Detail	
Model	MDR-AS800BT	Frequency Range	Below 1000MHz
Channel	Mid	Detector function	Quasi-Peak / Peak

The requirements are:

Complies

Frequency (MHz)	Measured Data (dBuV/m)	Margin (dB)	Remark
838.131	27.7	18.3	Quasi-Peak

Test Data

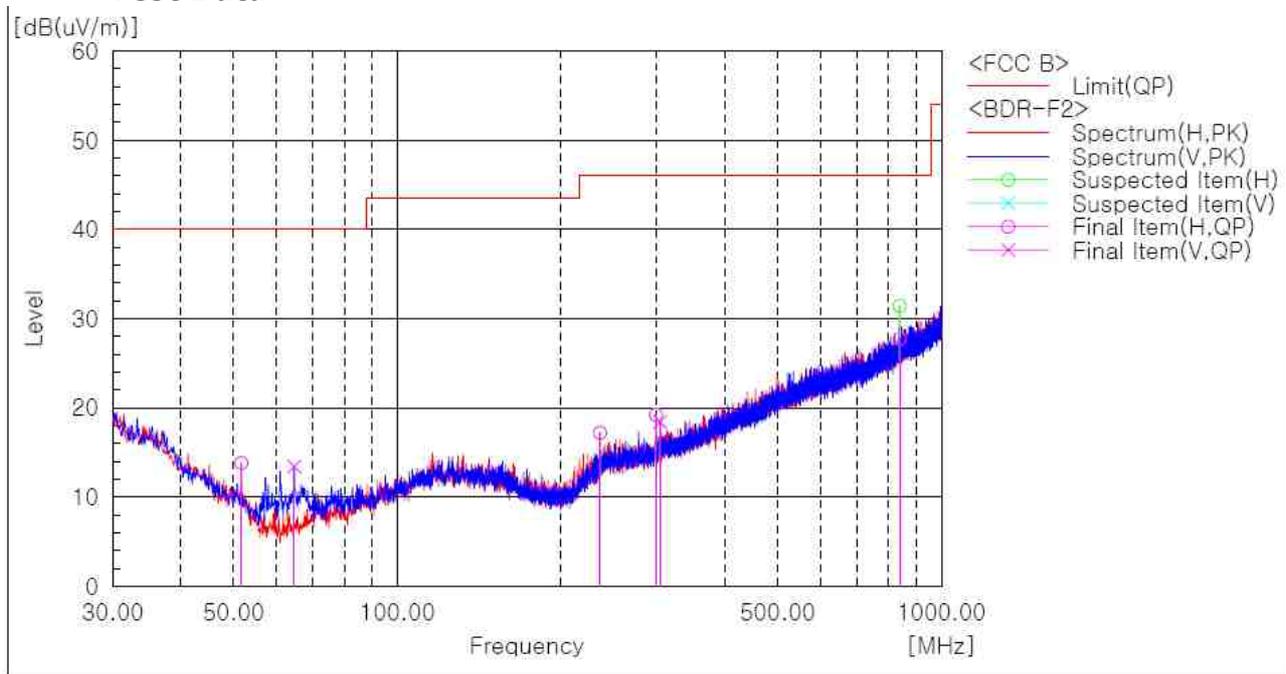

Final Result

No.	Frequency [MHz]	(P)	Reading [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]
1	838.131	H	24.2	3.5	27.7	46.0	18.3	304.0	0.0
2	51.704	H	29.6	-15.8	13.8	40.0	26.2	304.0	145.0
3	64.678	V	31.9	-18.5	13.4	40.0	26.6	100.0	29.0
4	304.146	V	27.1	-8.7	18.4	46.0	27.6	292.0	28.0
5	298.933	H	28.1	-8.9	19.2	46.0	26.8	400.0	104.0
6	236.004	H	27.8	-10.6	17.2	46.0	28.8	100.0	278.0

Remark :

1. The field strength of spurious emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in stand-up position(Z axis) and the worst case was recorded.



CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-624-9501

www.e-ctk.com

CTK Co., Ltd.

The Prime Leader of Global Regulatory Compliance

Test mode : GFSK, CFG PKT Packet Type : 15 Packet Size : 339(DH5)


EUT	Wireless stereo headset	Measurement Detail	
Model	MDR-AS800BT	Frequency Range	Below 1000MHz
Channel	High	Detector function	Quasi-Peak / Peak

The requirements are:

Complies

Frequency (MHz)	Measured Data (dBuV/m)	Margin (dB)	Remark
831.463	29.8	16.2	Quasi-Peak

Test Data

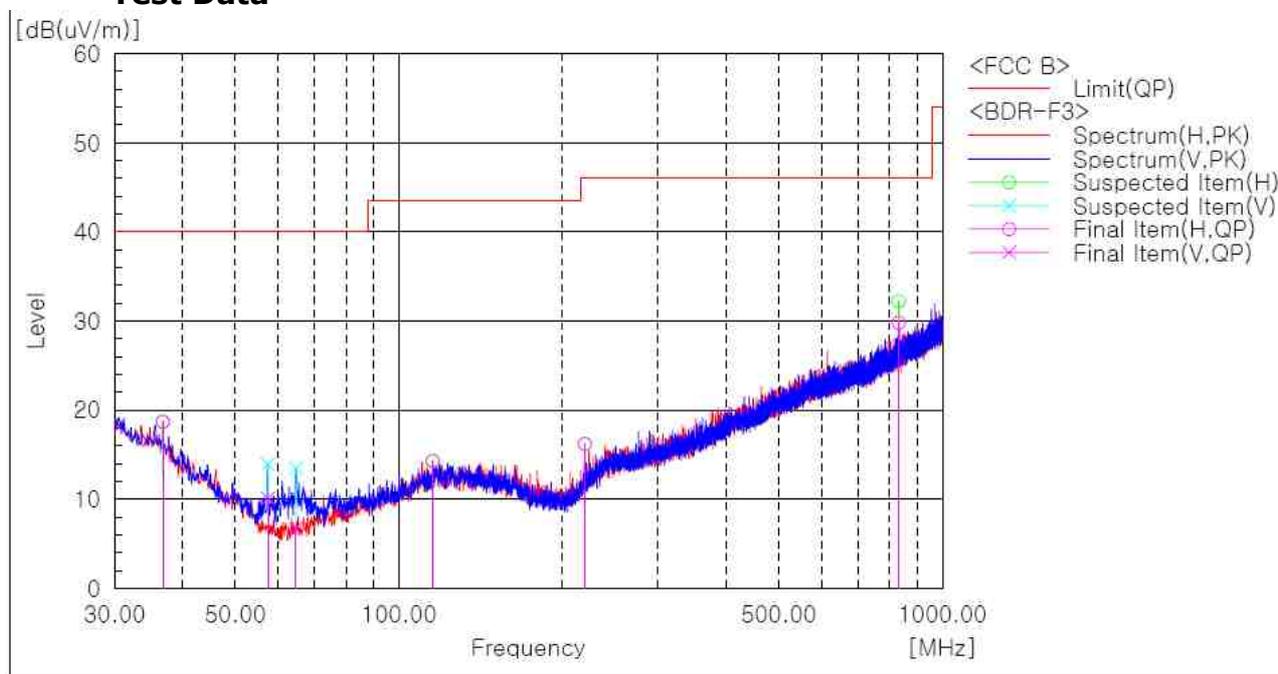

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]
1	57.403	V	28.5	-18.4	10.1	40.0	29.9	100.0	179.0
2	64.678	V	25.2	-18.5	6.7	40.0	33.3	194.0	0.0
3	219.999	H	28.6	-12.4	16.2	46.0	29.8	206.0	0.0
4	36.790	H	28.2	-9.5	18.7	40.0	21.3	100.0	93.0
5	831.463	H	26.4	3.4	29.8	46.0	16.2	306.0	294.0
6	115.481	H	26.6	-12.3	14.3	43.5	29.2	400.0	28.0

Remark :

1. The field strength of spurious emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in stand-up position(Z axis) and the worst case was recorded.



Test mode : 8-DPSK, CFG PKT Packet Type : 31 Packet Size : 1021(3DH5)


EUT	Wireless stereo headset	Measurement Detail	
Model	MDR-AS800BT	Frequency Range	Below 1000MHz
Channel	Low	Detector function	Quasi-Peak / Peak

The requirements are:

Complies

Frequency (MHz)	Measured Data (dBuV/m)	Margin (dB)	Remark
380.291	21.0	25.0	Quasi-Peak

Test Data

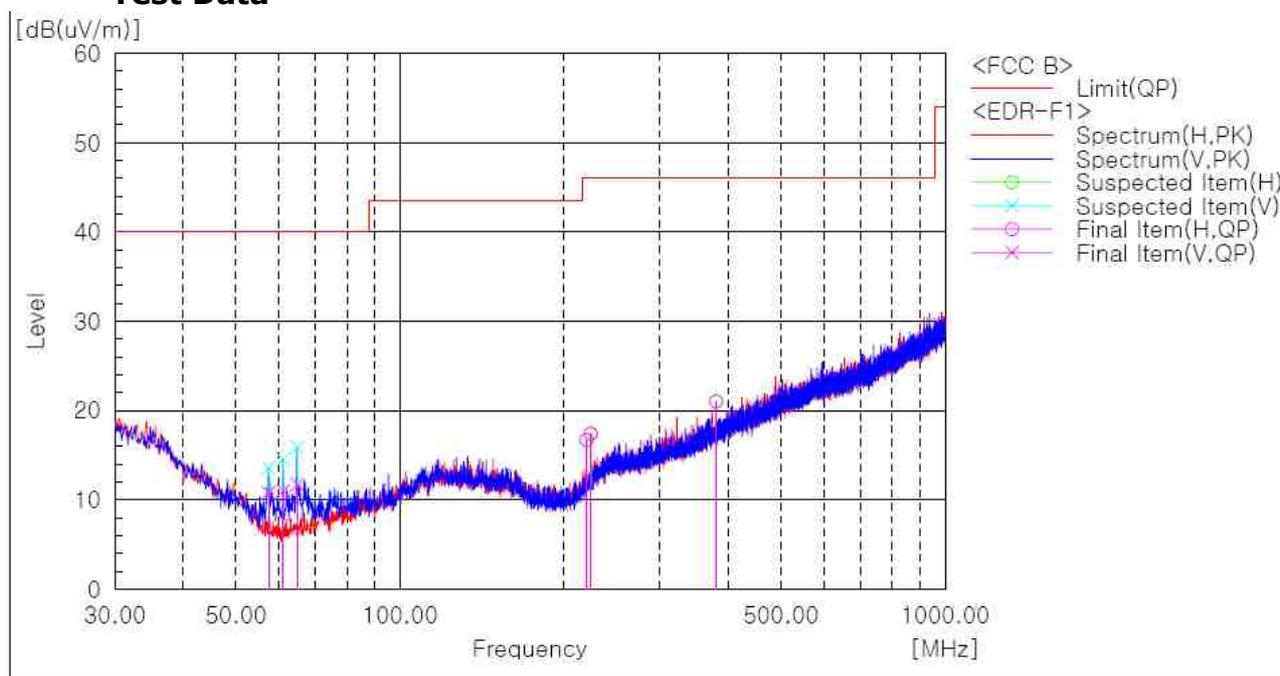

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]
1	64.799	V	30.2	-18.5	11.7	40.0	28.3	196.0	331.0
2	61.040	V	29.7	-18.7	11.0	40.0	29.0	100.0	104.0
3	57.403	V	29.2	-18.4	10.8	40.0	29.2	196.0	183.0
4	224.000	H	29.4	-12.0	17.4	46.0	28.6	208.0	290.0
5	219.999	H	29.1	-12.4	16.7	46.0	29.3	100.0	203.0
6	380.291	H	27.3	-6.3	21.0	46.0	25.0	100.0	315.0

Remark :

1. The field strength of spurious emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in stand-up position(Z axis) and the worst case was recorded.



Test mode : 8-DPSK, CFG PKT Packet Type : 31 Packet Size : 1021(3DH5)


EUT	Wireless stereo headset	Measurement Detail	
Model	MDR-AS800BT	Frequency Range	Below 1000MHz
Channel	Mid	Detector function	Quasi-Peak / Peak

The requirements are:

Complies

Frequency (MHz)	Measured Data (dBuV/m)	Margin (dB)	Remark
38.609	19.0	21.0	Quasi-Peak

Test Data

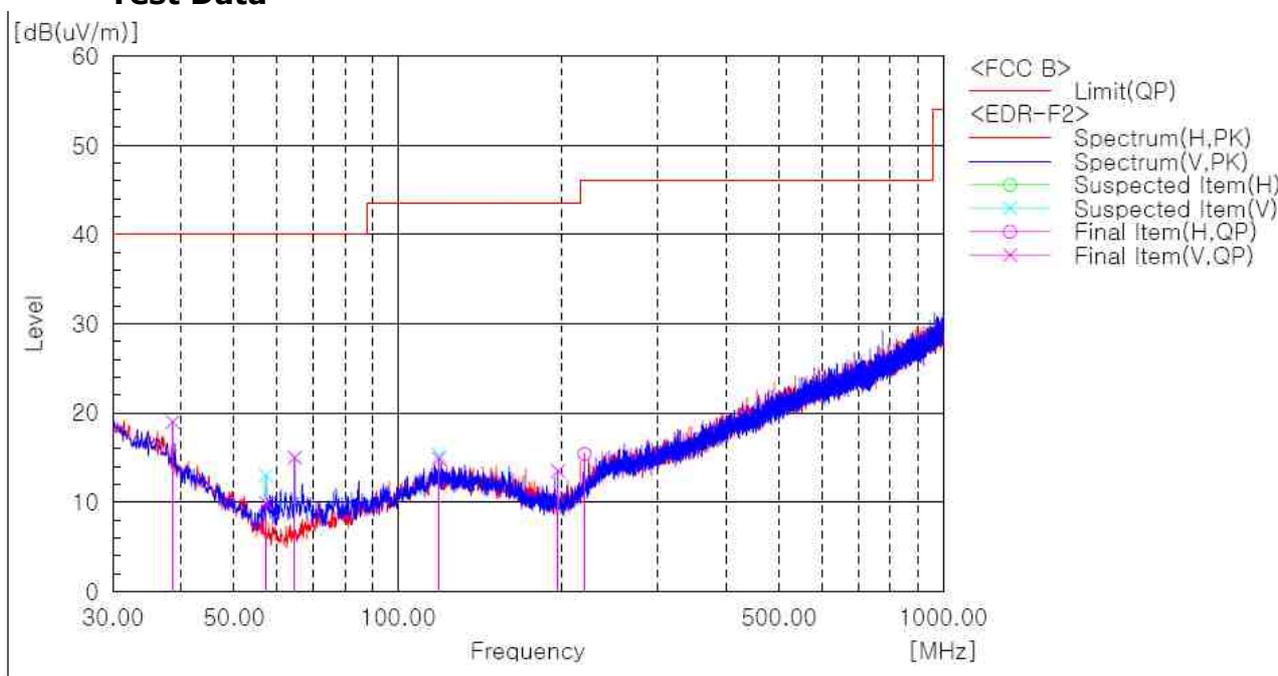

Final Result

No.	Frequency [MHz]	(P)	Reading [dB(uV)]	c.f. [dB(1/m)]	Result [dB(uV/m)]	Limit [dB(uV/m)]	Margin [dB]	Height [cm]	Angle [deg]
1	38.609	V	29.4	-10.4	19.0	40.0	21.0	292.0	215.0
2	64.678	V	33.5	-18.5	15.0	40.0	25.0	196.0	293.0
3	57.281	V	28.2	-18.3	9.9	40.0	30.1	196.0	70.0
4	118.876	V	27.0	-12.1	14.9	43.5	28.6	100.0	290.0
5	219.999	H	27.8	-12.4	15.4	46.0	30.6	100.0	203.0
6	196.598	V	27.8	-14.3	13.5	43.5	30.0	100.0	253.0

Remark :

1. The field strength of spurious emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in stand-up position(Z axis) and the worst case was recorded.



Test mode : 8-DPSK, CFG PKT Packet Type : 31 Packet Size : 1021(3DH5)


EUT	Wireless stereo headset	Measurement Detail	
Model	MDR-AS800BT	Frequency Range	Below 1000MHz
Channel	High	Detector function	Quasi-Peak / Peak

The requirements are:

Complies

Frequency (MHz)	Measured Data (dBuV/m)	Margin (dB)	Remark
623.034	26.6	19.4	Quasi-Peak

Test Data

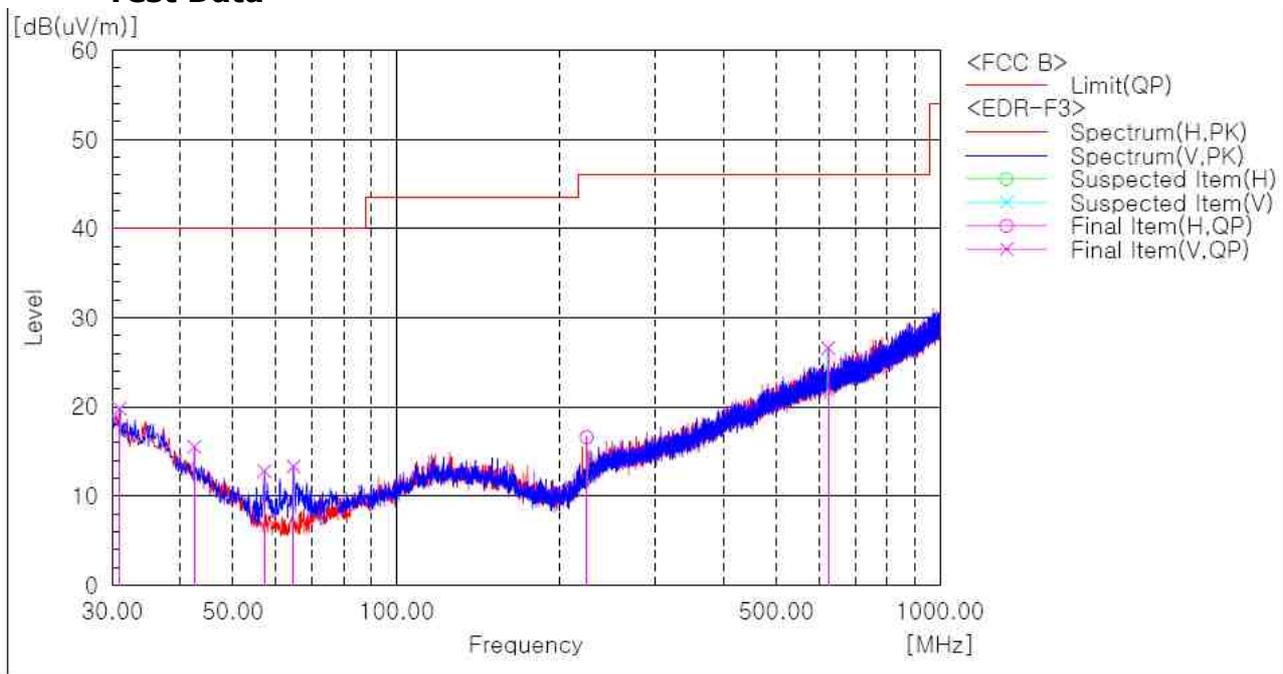

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]
1	42.489	V	27.9	-12.4	15.5	40.0	24.5	400.0	278.0
2	64.678	V	31.8	-18.5	13.3	40.0	26.7	100.0	104.0
3	57.160	V	31.1	-18.3	12.8	40.0	27.2	100.0	179.0
4	224.000	H	28.6	-12.0	16.6	46.0	29.4	100.0	240.0
5	623.034	V	26.9	-0.3	26.6	46.0	19.4	292.0	0.0
6	30.970	V	26.8	-7.0	19.8	40.0	20.2	292.0	141.0

Remark :

1. The field strength of spurious emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in stand-up position(Z axis) and the worst case was recorded.



CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-624-9501

www.e-ctk.com

3) above 1 GHz

Test mode : GFSK, CFG PKT Packet Type : 15 Packet Size : 339(DH5)

EUT	Wireless stereo headset	Measurement Detail	
Model	MDR-AS800BT	Frequency Range	1-25GHz
		Detector function	Average / Peak

Remarks

We have tested three mode (X, Y, Z). The worst mode (Z axis) for final test.

The requirements are:

Complies

Frequency (MHz)	Measured Data (dBuV/m)	Margin (dB)	Remark
4960	49.91	4.09	Average

Test Data

Ch.0(Low Channel)

Frequency [MHz]	Reading [dBuV/m]		Pol.	Correction Factor [dB]		Limits [dBuV/m]		Result [dBuV/m]		Margin [dB]	
	AV	Peak		Ant	CL+Amp	AV	Peak	AV	Peak	AV	Peak
4804.00	35.50	46.20	H	34.00	-21.12	54.00	74.00	48.38	59.08	5.62	14.92
4804.00	31.90	44.00	V	34.00	-21.12	54.00	74.00	44.78	56.88	9.22	17.12
3002.00	28.81	43.65	H	32.70	-22.44	54.00	74.00	39.07	53.91	14.93	20.09
3002.00	27.95	43.05	V	32.70	-22.44	54.00	74.00	38.21	53.31	15.79	20.69
1502.60	28.81	43.50	H	28.20	-25.71	54.00	74.00	31.30	45.99	22.70	28.01
1502.60	27.95	43.05	V	28.20	-25.71	54.00	74.00	30.44	45.54	23.56	28.46

Ch.39(Mid Channel)

Frequency [MHz]	Reading [dBuV/m]		Pol.	Correction Factor [dB]		Limits [dBuV/m]		Result [dBuV/m]		Margin [dB]	
	AV	Peak		Ant	CL+Amp	AV	Peak	AV	Peak	AV	Peak
4882.00	36.00	46.80	H	34.00	-21.12	54.00	74.00	48.88	59.68	5.12	14.32
4882.00	31.90	44.00	V	34.00	-21.12	54.00	74.00	44.78	56.88	9.22	17.12
4234.50	27.20	42.50	H	33.30	-21.49	54.00	74.00	39.01	54.31	14.99	19.69
4234.50	27.50	42.30	V	33.30	-21.49	54.00	74.00	39.31	54.11	14.69	19.89
1104.90	27.40	43.20	H	28.40	-27.20	54.00	74.00	28.60	44.40	25.40	29.60
1104.90	27.95	43.50	V	28.40	-27.20	54.00	74.00	29.15	44.70	24.85	29.30



CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-624-9501

www.e-ctk.com

CTK Co., Ltd.
The First Leader of Global Regulatory Compliance

Ch.78(High Channel)

Frequency [MHz]	Reading [dBuV/m]		Pol.	Correction Factor [dB]		Limits [dBuV/m]		Result [dBuV/m]		Margin [dB]	
	AV	Peak		Ant	CL+Amp	AV / Peak	AV / Peak	AV / Peak	AV / Peak		
4960.00	37.10	47.50	H	34.00	-21.19	54.00	74.00	49.91	60.31	4.09	13.69
4960.00	29.50	43.90	V	34.00	-21.19	54.00	74.00	42.31	56.71	11.69	17.29
3557.50	25.60	43.50	H	32.70	-22.14	54.00	74.00	36.16	54.06	17.84	19.94
3557.50	24.00	42.90	V	32.70	-22.14	54.00	74.00	34.56	53.46	19.44	20.54
1624.00	26.50	42.50	H	28.67	-25.31	54.00	74.00	29.86	45.86	24.14	28.14
1624.00	26.00	42.10	V	28.67	-25.31	54.00	74.00	29.36	45.46	24.64	28.54

Restricted band edge test data

Measured frequency range : 2310-2390 MHz

Frequency [MHz]	Reading [dBuV/m]		Pol.	Correction Factor [dB]		Limits [dBuV/m]		Result [dBuV/m]		Margin [dB]	
	AV	Peak		Ant	CL+Amp	AV / Peak	AV / Peak	AV / Peak	AV / Peak		
2320.64	25.40	41.98	H	31.90	-23.89	54.00	74.00	33.41	49.99	20.59	24.01
2320.64	25.20	41.90	V	31.90	-23.89	54.00	74.00	33.21	49.91	20.79	24.09

Measured frequency range :2483.5-2500 MHz

Frequency [MHz]	Reading [dBuV/m]		Pol.	Correction Factor [dB]		Limits [dBuV/m]		Result [dBuV/m]		Margin [dB]	
	AV	Peak		Ant	CL+Amp	AV / Peak	AV / Peak	AV / Peak	AV / Peak		
2483.50	28.10	41.10	H	32.00	-23.82	54.00	74.00	36.28	49.28	17.72	24.72
2483.50	27.40	42.00	V	32.00	-23.82	54.00	74.00	35.58	50.18	18.42	23.82



CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea
Tel: +82-31-339-9970 Fax: +82-31-624-9501
www.e-ctk.com

Test mode : 8-DPSK, CFG PKT Packet Type : 31 Packet Size : 1021(3DH5)

EUT	Wireless stereo headset	Measurement Detail	
Model	MDR-AS800BT	Frequency Range	1-25GHz
		Detector function	Average / Peak

Remarks

We have tested three mode (X, Y, Z). The worst mode (Z axis) for final test.

The requirements are:

Complies

Frequency (MHz)	Measured Data (dBuV/m)	Margin (dB)	Remark
4960	45.01	8.99	Average

Test Data

Ch.0(Low Channel)

Frequency [MHz]	Reading [dBuV/m]		Pol.	Correction Factor [dB]		Limits [dBuV/m]		Result [dBuV/m]		Margin [dB]	
	AV	Peak		Ant	CL+Amp	AV / Peak	AV / Peak	AV / Peak	AV / Peak		
4239.00	24.70	43.20	H	33.30	-21.49	54.00	74.00	36.51	55.01	17.49	18.99
4239.00	23.50	42.40	V	33.30	-21.49	54.00	74.00	35.31	54.21	18.69	19.79
3264.50	25.30	42.50	H	32.80	-21.96	54.00	74.00	36.14	53.34	17.86	20.66
3264.50	24.90	40.60	V	32.80	-21.96	54.00	74.00	35.74	51.44	18.26	22.56
1262.10	26.50	43.50	H	28.40	-26.49	54.00	74.00	28.42	45.42	25.59	28.59
1262.10	26.10	42.00	V	28.40	-26.49	54.00	74.00	28.02	43.92	25.99	30.09

Ch.39(Mid Channel)

Frequency [MHz]	Reading [dBuV/m]		Pol.	Correction Factor [dB]		Limits [dBuV/m]		Result [dBuV/m]		Margin [dB]	
	AV	Peak		Ant	CL+Amp	AV / Peak	AV / Peak	AV / Peak	AV / Peak		
4882.00	31.70	47.40	H	34.00	-21.12	54.00	74.00	44.58	60.28	9.42	13.72
4882.00	29.90	44.20	V	34.00	-21.12	54.00	74.00	42.78	57.08	11.22	16.92
3652.50	27.80	44.60	H	32.83	-21.85	54.00	74.00	38.78	55.58	15.22	18.42
3652.50	25.50	41.20	V	32.83	-21.85	54.00	74.00	36.48	52.18	17.52	21.82
3005.00	27.00	43.60	H	32.70	-22.44	54.00	74.00	37.26	53.86	16.74	20.14
3005.00	26.20	40.40	V	32.70	-22.44	54.00	74.00	36.46	50.66	17.54	23.34

Ch.78(High Channel)

Frequency [MHz]	Reading [dBuV/m]		Pol.	Correction Factor [dB]		Limits [dBuV/m]		Result [dBuV/m]		Margin [dB]	
	AV	Peak		Ant	CL+Amp	AV / Peak	AV / Peak	AV / Peak	AV / Peak		
4960.00	32.20	47.80	H	34.00	-21.19	54.00	74.00	45.01	60.61	8.99	13.39
4960.00	30.40	44.50	V	34.00	-21.19	54.00	74.00	43.21	57.31	10.79	16.69
2269.50	25.20	42.50	H	31.80	-23.99	54.00	74.00	33.01	50.31	20.99	23.69
2269.50	23.80	40.20	V	31.80	-23.99	54.00	74.00	31.61	48.01	22.39	25.99
1282.80	28.50	43.40	H	28.40	-26.49	54.00	74.00	30.42	45.32	23.59	28.69
1282.80	26.90	40.60	V	28.40	-26.49	54.00	74.00	28.82	42.52	25.19	31.49



CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-624-9501

www.e-ctk.com

CTK Co., Ltd.

The Prime Leader of Global Regulatory Certification

Restricted band edge test data

Measured frequency range : 2310-2390 MHz

Frequency [MHz]	Reading [dBuV/m]		Pol.	Correction Factor [dB]		Limits [dBuV/m]		Result [dBuV/m]		Margin [dB]	
	AV/Peak			Ant	CL+Amp	AV / Peak		AV / Peak		AV / Peak	
2385.13	26.05	42.32	H	31.90	-23.89	54.00	74.00	34.06	50.33	19.94	23.67
2385.13	25.52	40.31	V	31.90	-23.89	54.00	74.00	33.53	48.32	20.47	25.68

Measured frequency range : 2483.5-2500 MHz

Frequency [MHz]	Reading [dBuV/m]		Pol.	Correction Factor [dB]		Limits [dBuV/m]		Result [dBuV/m]		Margin [dB]	
	AV/Peak			Ant	CL+Amp	AV / Peak		AV / Peak		AV / Peak	
2483.50	27.50	41.90	H	32.00	-23.82	54.00	74.00	35.68	50.08	18.32	23.92
2483.50	25.40	39.50	V	32.00	-23.82	54.00	74.00	33.58	47.68	20.42	26.32



CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-624-9501

www.e-ctk.com

Test Results

1) 9 kHz to 30 MHz

Test mode : Receiver

EUT	Wireless stereo headset	Measurement Detail	
Model	MDR-AS800BT	Frequency Range	9 kHz - 30 MHz
Test mode	Receiver	Detector function	Quasi-Peak

The requirements are:

Complies

Frequency (MHz)	Measured Data (dBuV/m)	Margin (dB)	Remark
-	-	-	See note

Note :

The amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log(\text{specific distance} / \text{test distance})$ (dB)



2) 30 MHz to 1 GHz

Test mode : Receiver


EUT	Wireless stereo headset	Measurement Detail	
Model	MDR-AS800BT	Frequency Range	Below 1000MHz
Test mode	Receiver	Detector function	Quasi-Peak / Peak

The requirements are:

Complies

Frequency (MHz)	Measured Data (dBuV/m)	Margin (dB)	Remark
48.309	17.2	22.8	Quasi-Peak

Test Data

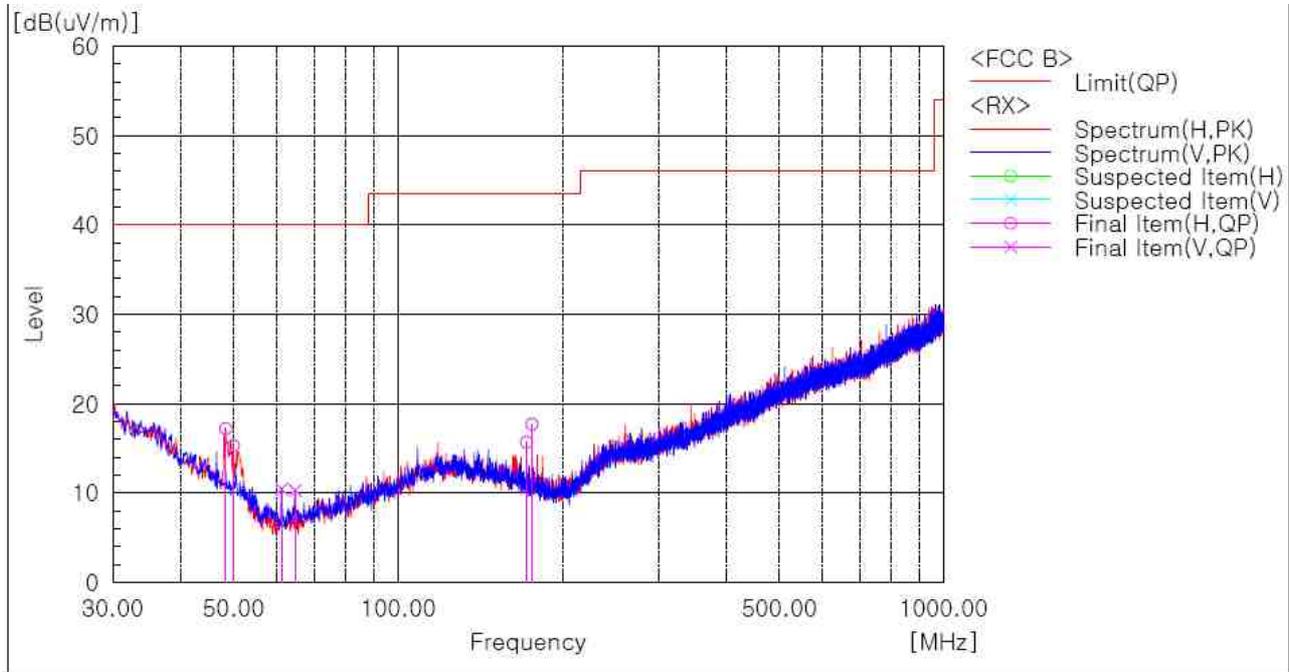

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]
1	48.309	H	31.7	-14.5	17.2	40.0	22.8	400.0	204.0
2	49.885	H	30.3	-15.0	15.3	40.0	24.7	400.0	130.0
3	175.985	H	31.8	-14.1	17.7	43.5	25.8	195.0	0.0
4	171.984	H	29.7	-14.0	15.7	43.5	27.8	100.0	290.0
5	61.161	V	29.2	-18.7	10.5	40.0	29.5	205.0	253.0
6	64.678	V	28.8	-18.5	10.3	40.0	29.7	100.0	130.0

Remark :

1. The field strength of spurious emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in stand-up position(Z axis) and the worst case was recorded.



CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-624-9501

www.e-ctk.com

3) above 1 GHz

Test mode : Receiver

EUT	Wireless stereo headset	Measurement Detail	
Model	MDR-AS800BT	Frequency Range	1-25GHz
		Detector function	Average / Peak

Remarks

We have tested three mode (X, Y, Z). The worst mode (Z axis) for final test.

The requirements are:

Complies

Frequency (MHz)	Measured Data (dBuV/m)	Margin (dB)	Remark
No emissions were detected at a level greater than 20dB below limit.			

Test Data

Ch.0(Low Channel)

Frequency [MHz]	Reading [dBuV/m] AV/Peak	Pol.	Correction Factor [dB]		Limits [dBuV/m] AV / Peak	Result [dBuV/m] AV / Peak	Margin [dB] AV / Peak
			Ant	CL+Amp			
No emissions were detected at a level greater than 20dB below limit.							

Ch.39(Mid Channel)

Frequency [MHz]	Reading [dBuV/m] AV/Peak	Pol.	Correction Factor [dB]		Limits [dBuV/m] AV / Peak	Result [dBuV/m] AV / Peak	Margin [dB] AV / Peak
			Ant	CL+Amp			
No emissions were detected at a level greater than 20dB below limit.							

Ch.78(High Channel)

Frequency [MHz]	Reading [dBuV/m] AV/Peak	Pol.	Correction Factor [dB]		Limits [dBuV/m] AV / Peak	Result [dBuV/m] AV / Peak	Margin [dB] AV / Peak
			Ant	CL+Amp			
No emissions were detected at a level greater than 20dB below limit.							

Restricted band edge test data

Measured frequency range : 2310-2390 MHz

Frequency [MHz]	Reading [dBuV/m] AV/Peak	Pol.	Correction Factor [dB]		Limits [dBuV/m] AV / Peak	Result [dBuV/m] AV / Peak	Margin [dB] AV / Peak
			Ant	CL+Amp			
No emissions were detected at a level greater than 20dB below limit.							

Measured frequency range : 2483.5-2500 MHz

Frequency [MHz]	Reading [dBuV/m] AV/Peak	Pol.	Correction Factor [dB]		Limits [dBuV/m] AV / Peak	Result [dBuV/m] AV / Peak	Margin [dB] AV / Peak
			Ant	CL+Amp			
No emissions were detected at a level greater than 20dB below limit.							



2.1.8 AC Conducted Emissions

Test Location

Shielded Room

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Procedures

The EUT was placed on a non-metallic table 0.8m above the metallic, grounded floor and 0.4m from the reference ground plane wall. The distance to other metallic surfaces was at least 0.8m.

Amplitude measurements were performed with a quasi-peak detector and an average detector.

Limit

- 15.207(a)

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56*	56 to 46*
0.5 ~ 5	56	46
5 ~ 30	60	50

* Decreases with the logarithm of the frequency.

Test Results

The requirements are:

Complies

Test mode : USB Charge, AC Adaptor Charge

Frequency (MHz)	Measured Data (dBuV/m)	Margin (dB)	Remark
0.15	60.1	5.9	Quasi-Peak



CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea


Tel: +82-31-339-9970 Fax: +82-31-624-9501

www.e-ctk.com

Test Data(USB Charge Mode)

[HOT]

CISPR 22 Class B_L1

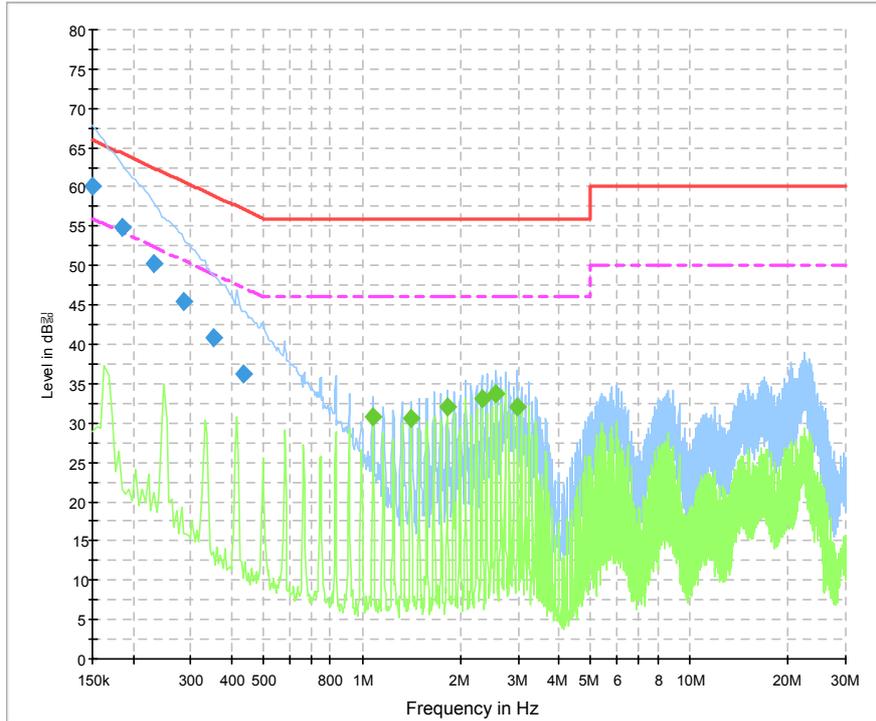

Final Result 1

Frequency (MHz)	QuasiPeak (dBuV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.150000	60.1	1000.0	9.000	On	L1	10.0	5.9	66.0
0.186000	54.9	1000.0	9.000	On	L1	10.1	9.3	64.2
0.231000	50.3	1000.0	9.000	On	L1	9.9	12.1	62.4
0.285000	45.4	1000.0	9.000	On	L1	10.0	15.2	60.7
0.352500	40.8	1000.0	9.000	On	L1	10.1	18.1	58.9
0.433500	36.3	1000.0	9.000	On	L1	10.1	20.9	57.2

Final Result 2

Frequency (MHz)	CAverage (dBuV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
1.077000	30.9	1000.0	9.000	On	L1	9.9	15.1	46.0
1.410000	30.5	1000.0	9.000	On	L1	9.9	15.5	46.0
1.824000	32.1	1000.0	9.000	On	L1	9.9	13.9	46.0
2.323500	33.1	1000.0	9.000	On	L1	9.8	12.9	46.0
2.571000	33.6	1000.0	9.000	On	L1	9.8	12.4	46.0
2.985000	32.1	1000.0	9.000	On	L1	9.8	13.9	46.0



CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance

CTK Co., Ltd.


(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-624-9501

www.e-ctk.com

[NEUTRAL]

CISPR 22 Class B_N

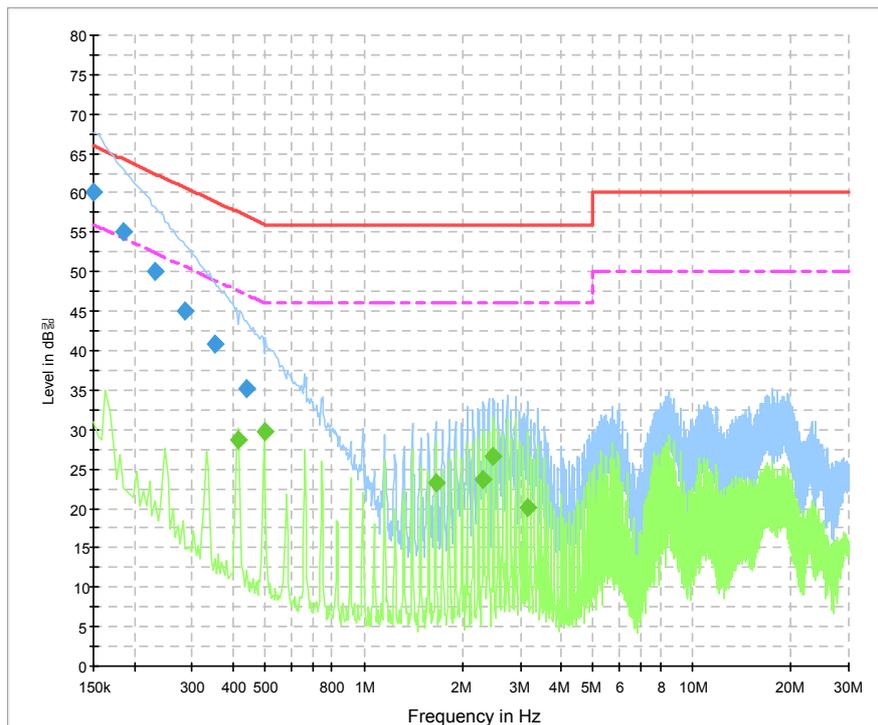

Final Result 1

Frequency (MHz)	QuasiPeak (dBuV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.150000	60.1	1000.0	9.000	On	N	9.7	5.9	66.0
0.186000	55.0	1000.0	9.000	On	N	10.1	9.2	64.2
0.231000	50.1	1000.0	9.000	On	N	10.0	12.3	62.4
0.285000	45.0	1000.0	9.000	On	N	10.1	15.7	60.7
0.352500	40.7	1000.0	9.000	On	N	10.1	18.2	58.9
0.438000	35.2	1000.0	9.000	On	N	10.2	21.9	57.1

Final Result 2

Frequency (MHz)	CAverage (dBuV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.415500	28.8	1000.0	9.000	On	N	10.1	18.8	47.5
0.496500	29.7	1000.0	9.000	On	N	10.2	16.3	46.1
1.653000	23.3	1000.0	9.000	On	N	9.9	22.7	46.0
2.314500	23.6	1000.0	9.000	On	N	9.9	22.4	46.0
2.481000	26.5	1000.0	9.000	On	N	9.9	19.5	46.0
3.142500	20.1	1000.0	9.000	On	N	9.9	25.9	46.0



CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance


CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea
Tel: +82-31-339-9970 Fax: +82-31-624-9501
www.e-ctk.com

Test Data (AC Adaptor Charge Mode)

[HOT]

CISPR 22 Class B_L1

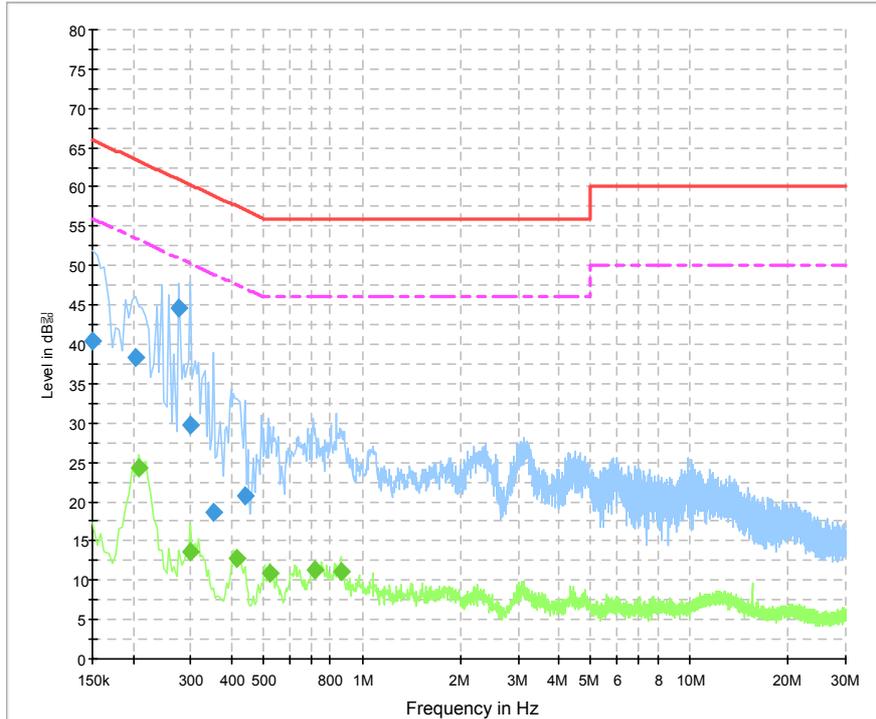

Final Result 1

Frequency (MHz)	QuasiPeak (dBuV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.150000	40.4	1000.0	9.000	On	L1	10.0	25.6	66.0
0.204000	38.3	1000.0	9.000	On	L1	9.9	25.2	63.4
0.276000	44.7	1000.0	9.000	On	L1	10.0	16.3	60.9
0.298500	29.8	1000.0	9.000	On	L1	10.0	30.5	60.3
0.352500	18.6	1000.0	9.000	On	L1	10.1	40.3	58.9
0.438000	20.7	1000.0	9.000	On	L1	10.1	36.4	57.1

Final Result 2

Frequency (MHz)	CAverage (dBuV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.208500	24.4	1000.0	9.000	On	L1	9.9	28.9	53.3
0.298500	13.6	1000.0	9.000	On	L1	10.0	36.6	50.3
0.415500	12.8	1000.0	9.000	On	L1	10.1	34.7	47.5
0.523500	10.8	1000.0	9.000	On	L1	10.2	35.2	46.0
0.712500	11.2	1000.0	9.000	On	L1	10.0	34.8	46.0
0.861000	11.2	1000.0	9.000	On	L1	10.0	34.8	46.0



CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance

CTK Co., Ltd.


(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-624-9501

www.e-ctk.com

[NEUTRAL]

CISPR 22 Class B_N

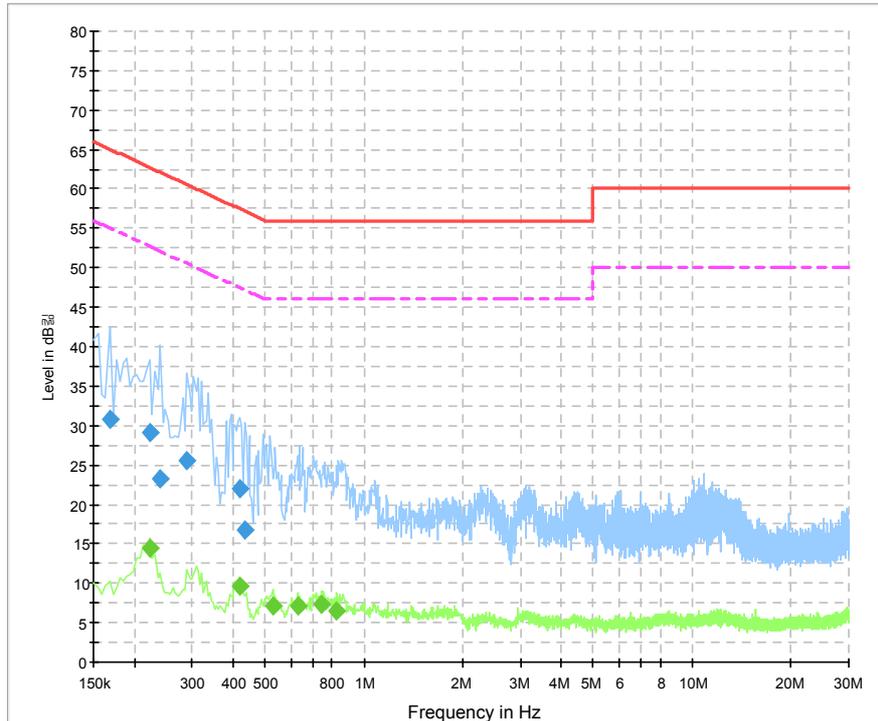

Final Result 1

Frequency (MHz)	QuasiPeak (dBuV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.168000	30.9	1000.0	9.000	On	N	10.1	34.2	65.1
0.222000	29.1	1000.0	9.000	On	N	10.0	33.7	62.7
0.240000	23.3	1000.0	9.000	On	N	10.0	38.8	62.1
0.289500	25.5	1000.0	9.000	On	N	10.1	35.0	60.5
0.420000	21.9	1000.0	9.000	On	N	10.1	35.5	57.4
0.433500	16.7	1000.0	9.000	On	N	10.2	40.4	57.2

Final Result 2

Frequency (MHz)	CAverage (dBuV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.222000	14.5	1000.0	9.000	On	N	10.0	38.2	52.7
0.420000	9.6	1000.0	9.000	On	N	10.1	37.8	47.4
0.528000	7.2	1000.0	9.000	On	N	10.2	38.8	46.0
0.627000	7.0	1000.0	9.000	On	N	10.1	39.0	46.0
0.744000	7.2	1000.0	9.000	On	N	10.0	38.8	46.0
0.825000	6.4	1000.0	9.000	On	N	10.0	39.6	46.0



APPENDIX A – Test Equipment Used For Tests

	Name of Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	Signal Analyzer	Agilent	N9020A	MY48011598	2013-11-08	2014-11-08
2	Spectrum Analyzer	Rohde & Schwarz	FSP-30	100994	2013-11-08	2014-11-08
3	EMI Test Receiver	Rohde & Schwarz	ESCI7	100814	2013-12-06	2014-12-06
4	EMI Test Receiver	Rohde & Schwarz	ESCI7	100816	2013-12-06	2014-12-06
5	Active Loop Antenna	SCHWARZBECK	FMZB 1513	1513-126	2014-05-19	2016-05-19
6	Attenuator	HP	8498A	1801A06913	2013-11-12	2014-11-12
7	EPM Series Power Meter	HP	E4418A	GB38272734	2013-11-08	2014-11-08
8	Power Sensor	HP	8487A	3318A03524	2014-05-15	2015-05-15
9	Audio Analyzer	HP	8903B	2747A03432	2013-11-08	2014-11-08
10	ESG-D Series Signal Generator	Agilent	E4432B	US40054094	2013-11-08	2014-11-08
11	SYNTHESIZED SWEEPER	HP	8341B	2819A01563	2013-11-08	2014-11-08
12	Attenuator	HP	8494A	3308A33351	2013-11-12	2014-11-12
13	Temp&Humi Chamber	Kunpoong	JT-TH-556-1	9QE5-002	2014-01-16	2015-01-16
14	DC POWER SUPPLY	Agilent	E3632A	MY40011638	2013-11-08	2014-11-08
15	Horn Antenna	ETS-Lindgren	3115	00078895	2013-02-28	2015-02-28
16	Horn Antenna	ETS-Lindgren	3115	00078894	2013-05-13	2015-05-13
17	Horn Antenna	ETS-Lindgren	3116	00062916	2013-03-20	2015-03-20
18	Horn Antenna	ETS-Lindgren	3116	00062504	2013-05-27	2015-05-27
19	Horn Antenna	ETS-Lindgren	3117	00154525	2013-07-03	2015-07-03
20	OPT H64 AMPLIFIER	HP	8447F	3113A06814	2014-03-20	2015-03-20
21	PREAMPLIFIER	Agilent	8449B	3008A02307	2013-11-08	2014-11-08
22	Radio Communication Tester	Rohde & Schwarz	CMU200	106765	2014-02-06	2015-02-06
23	LISN	Rohde & Schwarz	ENV216	101235	2013-08-02	2014-08-02
24	LISN	Rohde & Schwarz	ENV216	101236	2013-08-02	2014-08-02
25	LISN	Rohde & Schwarz	ENV216	101151	2013-11-08	2014-11-08
26	DC POWER SUPPLY	Agilent	E3632A	MY40011638	2013-11-08	2014-11-08
27	EMI Test Receiver	Rohde & Schwarz	ESCI3	100032	2014-02-04	2015-02-04
28	6dB Attenuator	R&S	DNF	272.4110.50	2013-11-12	2014-11-12
29	AMPLIFIER	Sonoma Instrument Co.	310	291721	2014-02-06	2015-02-26
30	EMI Test Receiver	Rohde & Schwarz	ESU40	100336	2014-05-15	2015-05-15
31	Signal Generator	Rohde & Schwarz	SMBV100A	258008	2013-09-07	2014-09-07
32	Bilog Antenna	Schaffner	CBL6111C	2551	2014-05-08	2016-05-08