

# EMI TEST REPORT

Test Report No. : 21EE0013-YW-1

---

**Applicant:** Sony Corporation

**Type of Equipment:** Handy Reader/Writer

**Model No.:** MLU-200

**Test standard:** FCC Part 15 Subpart C

**FCC ID:** AK8MLU200

**Test Result:** Complies

1. This test report shall not be reproduced in full or partial, without the written approval of A-Pex International Co., Ltd.
2. The results in this report apply only to the sample tested.


**Date of test:** January 18, and 22, 2001      **Issued date:** February 8, 2001

**Tested by:**



Naoki Sakamoto  
EMC section

**Approved by:**



Kazuhiro Kitahara  
Section Manager of EMC section

Form Version No. 2

---

**A-pex International Co., Ltd.**  
**YOKOWA LAB.**

108 Yokowa-cho, Ise-shi, Mie-ken 516-1106 JAPAN

Telephone: int +81 596 39 1485

Facsimile: int +81 596 39 0232

MF060b(12.15.00)

**CONTENTS**

	<b>PAGE</b>
<b>SECTION 1: Client information</b>	<b>3</b>
<b>SECTION 2: Equipment under test (E.U.T.)</b>	<b>3</b>
<b>SECTION 3: Test specification, methods &amp; procedures</b>	<b>4</b>
<b>SECTION 4: Operation of E.U.T. during testing</b>	<b>5</b>
<b>SECTION 5: Summary of test results</b>	<b>8</b>
<b>SECTION 6: Test instruments</b>	<b>12</b>
<b>SECTION 7: Radiated emission</b>	<b>13</b>
<b>SECTION 8: Conducted emission</b>	<b>14</b>
<b>APPENDIX 1: Photographs of test setup</b>	<b>15</b>
<b>APPENDIX 2: Data of EMI test</b>	<b>17</b>

---

**A-pex International Co., Ltd.**  
**YOKOWA LAB.**

108 Yokowa-cho, Ise-shi, Mie-ken 516-1106 JAPAN

Telephone: int +81 596 39 1485

Facsimile: int +81 596 39 0232

## **SECTION 1: Applicant information**

Company Name : Sony Corporation  
Company Trade Name : SONY  
Address : 4-14-1, Asahi-cho, Atsugi-shi, Kanagawa-ken, 243-0014 Japan  
Telephone Number : +81-46-230-5602  
Facsimile Number : +81-46-230-6354  
Contact Person : H.Komoriya

## **SECTION 2: Equipment under test (E.U.T.)**

### **2.1 Identification of E.U.T.**

Unique Type Identification : Handy Reader / Writer  
Model No. : MLU-200  
Serial No. : 1001  
Rating : DC 3.6V  
Country of Manufacture : Japan  
Receipt Date of Sample : January 16 , 2001

### **2.2 Product Description**

#### **2.2 Product Description**

Model:MLU-200 (referred to as the EUT in this report) is Handy Reader/Writer of Personal computer system.

The specification is as follows;

Data reading/writing without physical contact with the memory label.

Anticollison is realized for the data transmission between MLU-200 and the memory labels.

Transmission frequency : 13.56MHz  
Modulation : ASK  
Operation frequency : 18.432MHz and 48.000MHz

---

**A-pex International Co., Ltd.**

**YOKOWA LAB.**

108 Yokowa-cho, Ise-shi, Mie-ken 516-1106 JAPAN

Telephone: int +81 596 39 1485

Facsimile: int +81 596 39 0232

### **SECTION 3: Test specification, methods & procedures**

#### **3.1 Test Specification**

Test Specification : FCC Part 15 Subpart C  
Title : FCC 47CFR Part15 Radio Frequency Device  
Subpart C Intentional Radiators  
§ 15.225 Operation within the Band 13.553 - 13.567 MHz

#### **3.2 Methods & Procedures**

No.	Item	Test Procedure	Specification	Remarks
1	Electric Field Strength of Fundamental Emission	FCC/ANSI C63.4:1992	§ 15.225(a)	-
2	Electric Field Strength of Spurious Emission	FCC/ANSI C63.4:1992	§ 15.225(b)	-
3	Frequency Tolerance	FCC/ANSI C63.4:1992	§ 15.225(c)	-
4	Conducted Emission	FCC/ANSI C63.4:1992	§ 15.207(a)	

---

**A-pex International Co., Ltd.**  
**YOKOWA LAB.**

108 Yokowa-cho, Ise-shi, Mie-ken 516-1106 JAPAN

Telephone: int +81 596 39 1485

Facsimile: int +81 596 39 0232

## **SECTION 4: Operation of E.U.T. during testing**

### **4.1 Operating Modes**

The EUT exercise program used during radiated testing was designed to exercise the various system components in a manner similar to typical use.

The sequence is used

Radiated Emission : Continuously read/write mode(Radio transmission)


Conducted Emission: Communication mode(The data are communicating between MLT-200.)

**Justification:** The system was configured in typical fashion (as a customer would normally use it) for testing.


### **4.2 Configuration and peripherals**

#### **Radiated Emission**

##### Front View

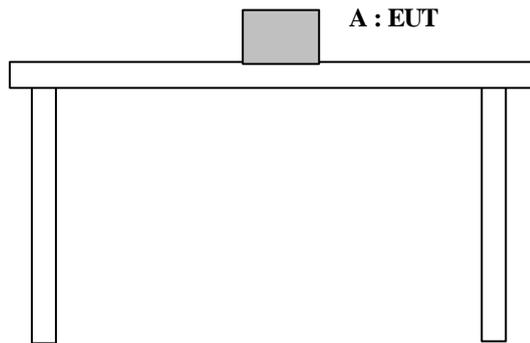

##### Top View

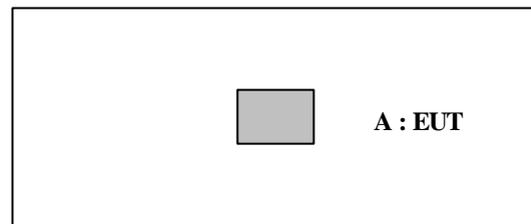

---

**A-pex International Co., Ltd.**  
**YOKOWA LAB.**


108 Yokowa-cho, Ise-shi, Mie-ken 516-1106 JAPAN

Telephone: int +81 596 39 1485


Facsimile: int +81 596 39 0232

## Conducted Emission

### Front View

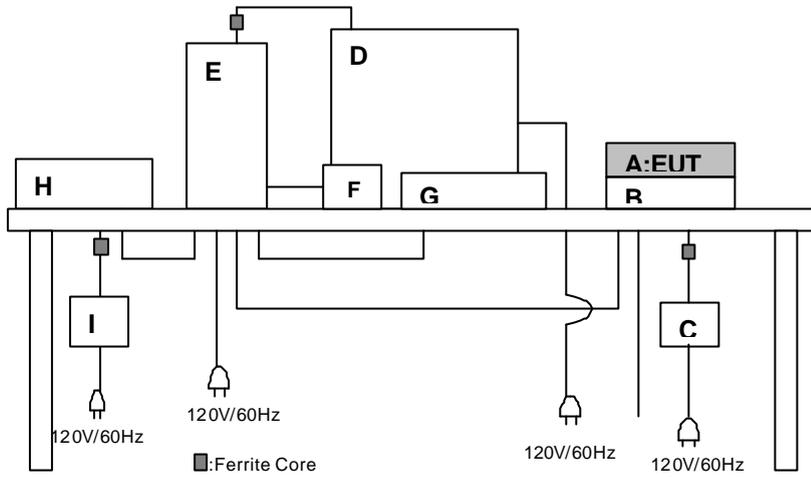

### Top View

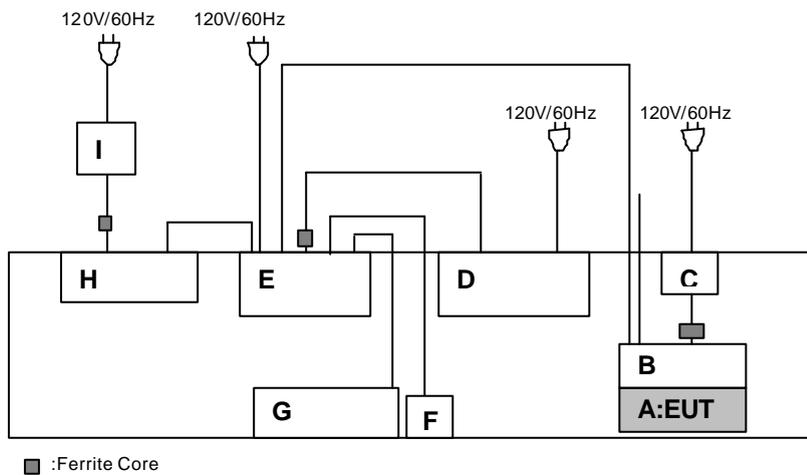

\*Cabling was taken into consideration and test data was taken under worst case conditions.

---

**A-pex International Co., Ltd.**  
**YOKOWA LAB.**

108 Yokowa-cho, Ise-shi, Mie-ken 516-1106 JAPAN

Telephone: int +81 596 39 1485

Facsimile: int +81 596 39 0232

**Description of EUT and Support equipment**

No.	Item	Model number	Serial number	Manufacturer	Remark
A	Handy Reader/Writer	MLU-200	1001	Sony Corporation	EUT
B	Terminal	MLT-200	-	Sony Corporation	-
C	Power Supply	SWA0902W	1001	TAMURA Corporation	-
D	Color Graphic Display	GDM-17SE1	2100506	Sony Corporation	-
E	Personal Computer	GXMT 5166	S36M9	DELL Computer Corporation	-
F	Mouse	Mouse Port Compatible Mouse 219	02023610	Microsoft	-
G	Keyboard	SK-1000REW	M960493442	DELL Computer Corporation	-
H	Printer	DESKJET 815C C6411C	MY9BH1B0F3	Hewlett Packard	-
I	AC Power Adapter	C6409-60014	B9M09B	Hewlett Packard	-

**List of cables used**

No.	Name	Length (m)	Shield	Backshell Material
	RS-232C cable	2.0	Y	-
	Printer cable	3.0	Y	-
	Monitor cable	1.5	Y	-
	AC power cable	2.0	N	-
	DC power cable	1.5	N	-
	USB cable	0.8	Y	-
	AC power cable	1.8	N	-
	DC power cable	2.0	N	-
	Mouse cable	1.9	Y	-
	Keyboard cable	1.9	Y	-

---

**A-pex International Co., Ltd.**
**YOKOWA LAB.**

108 Yokowa-cho, Ise-shi, Mie-ken 516-1106 JAPAN

Telephone: int +81 596 39 1485

Facsimile: int +81 596 39 0232

**SECTION 5: Summary of test results****5.1 Test results**

No.	Item	Test Procedure	Specification	Remarks	Result
1	Electric Field Strength of Fundamental and Spurious Emissions(9kHz – 30MHz)	FCC/ANSI C63.4:1992	FCC Part15 Subpart C § 15.225(a),(b)	10m	Complies
2	Electric Field Strength of Spurious Emission (30MHz – 1000MHz)	FCC/ANSI C63.4:1992	FCC Part15 Subpart C § 15.225(b)	3m	Complies
3	Frequency Tolerance	FCC/ANSI C63.4:1992	FCC Part15 Subpart C § 15.225(c)	-	Complies
4	Conducted Emission	FCC/ANSI C63.4:1992	FCC Part15 Subpart C § 15.207(a)	-	Complies

**A-PEX INTERNATIONAL hereby confirms that E.U.T., in the configuration tested, complies with the specifications FCC Part15 Subpart C.**

**5.1.1 Electric Field Strength Measurement of Fundamental Frequency**

The following table lists frequency at which emissions were measured using a Quasi-Peak detector and at a test distance of 10m

Frequency (MHz)	Ant. Receiver Reading (dB μ V)	Correction Factor (dB)	Field Strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
13.56	36.7	-1.3	35.4	99.0	63.6

Note: The limit was calculated using the square of an inverse linear distance extrapolation factor (40dB/decade) .i.e  $40\log_{10}(d1/d2)$ .

30m Fundamental Emission Limit (10,000 μ V/m) =  $20\log_{10}(10,000) = 80.0\text{dB } \mu\text{ V/m}$

10m Fundamental Emission Limit =  $80\text{dB } \mu\text{ V/m} + 40\log_{10}(30/10) = 99.0\text{dB } \mu\text{ V/m}$

**Field strength calculation**

The field strength is calculated by adding the Antenna Factor, Cable Factor and Antenna Pad, and subtracting the Amplifier Gain from the measured reading. The sample calculation is as follows :

$$FS = RA + AF + CF + AT - AG$$

where FS = Field Strength

RA = Receiver Amplitude

AF = Antenna Factor

CF = Cable Factor

AT = Antenna Pad

AG = Amplifier Gain

Assume a receiver reading of 36.7 dB μ V is obtained. The antenna Factor of 20.2 dB, Cable Factor of 0.7 dB and Antenna Pad of 6.0 dB is added. The Amplifier Gain of 28.2 dB is subtracted, giving a field strength of 35.4 dB μ V/m.

$$FS = 36.7 + 20.2 + 0.7 + 6.0 - 28.2 = 35.4 \text{ dB } \mu\text{ V/m}$$

**A-pex International Co., Ltd.**

**YOKOWA LAB.**

108 Yokowa-cho, Ise-shi, Mie-ken 516-1106 JAPAN

Telephone: int +81 596 39 1485

Facsimile: int +81 596 39 0232

### 5.1.2 Electric Field Strength of Spurious Emission

The initial step in collecting radiated data was a spectrum analyzer peak scan of the measurement range (9kHz-1000MHz).

The final data was reported in the worst-case emissions.

The following table lists frequency at which emissions were measured using a Quasi-Peak detector.

Test distance : 10m(9kHz – 30MHz)

Test distance : 3m(30MHz – 1000MHz)

The minimum margin to the limit is as follows :

Frequency (MHz)	Ant. Pol.	Receiver Reading (dB $\mu$ V)	Correction Factor (dB)	Field Strength (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
393.23	Ver	39.1	-2.0	37.1	46.0	8.9

### Field strength calculation

The field strength is calculated by adding the Antenna Factor, Cable Factor and Antenna Pad, and subtracting the Amplifier Gain from the measured reading. The sample calculation is as follows :

$$FS = RA + AF + CF + AT - AG$$

where FS = Field Strength  
RA = Receiver Amplitude  
AF = Antenna Factor  
CF = Cable Factor  
AT = Antenna Pad  
AG = Amplifier Gain

Assume a receiver reading of 39.1 dB  $\mu$  V is obtained. The antenna Factor of 15.6 dB, Cable Factor of 4.2 dB and Antenna Pad of 5.9 dB is added. The Amplifier Gain of 27.7 dB is subtracted, giving a field strength of 37.1 dB  $\mu$  V/m.

$$FS = 39.1 + 15.6 + 4.2 + 5.9 - 27.7 = 37.1 \text{ dB } \mu \text{ V/m}$$

---

**A-pex International Co., Ltd.**  
**YOKOWA LAB.**

108 Yokowa-cho, Ise-shi, Mie-ken 516-1106 JAPAN

Telephone: int +81 596 39 1485

Facsimile: int +81 596 39 0232

### 5.1.3 Frequency Tolerance

Measurements were performed to determine the frequency stability of the fundamental emission from the EUT when subjected to a variation in ambient temperature and a variation of supply voltage.

#### 5.1.3.1 Variation of Ambient Temperature

The ambient temperature was varied from -20 to +50 . During the test, the fundamental frequency of the EUT shall be maintained within  $\pm 0.01\%$  of the operating frequency.

Frequency Error Limit: 13.56MHz :  $\pm 0.01\%$ (1.356kHz)  
Lower frq Limit =13.55864MHz / Upper frq Limit = 13.56136MHz

Temperature( )	0 minuts	2 minuts	5 minuts	10 minuts	Result
-20	-306Hz	-259Hz	-205Hz	-133Hz	Complied
+50	-302Hz	-223Hz	- 188Hz	- 125Hz	Complied

#### 5.1.3.2 Variation of Supply Voltage

Battery full charge

### 5.1.4 Data of conducted emission test

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range (450kHz-30MHz).

The final data represents worst-case emissions.

Frequency (MHz)	Line (N/L1)	Measured (dB $\mu$ V)	LISN Factor(dB)	Result (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB $\mu$ V)
0.6945	N	41.2	0.8	42.0	48.0	6.0

\* All readings are quasi-peak mode.

\* LISN Factor = include Cable loss

## 5.2 Uncertainty

### Radiated Emission Test

The measurement uncertainty (with a 95% confidence level) for this test was  $\pm 3.3\text{dB}$ .

The data listed in this test report may exceed the test limit because it does not have enough margin (more than 3.3dB).

The data listed in this test report has enough margin, more than 3.3dB.

### Conducted Emission Test

The measurement uncertainty (with a 95% confidence level) for this test was  $\pm 2.0\text{dB}$ .

The data listed in this test report may exceed the test limit because it does not have enough margin (more than 2.0dB).

The data listed in this test report has enough margin, more than 2.0dB.

## 5.3 Test equipment used

See SECTION 6: TEST EQUIPMENT USED

## 5.4 Test Location

A-PEX International Co.,Ltd. Yokowa No.3 test site  
108 Yokowa-cho, Ise-shi, Mie-ken 516-1106 Japan  
Telephone number : +81-596-39-1485  
Facsimile number : +81-596-39-0232

This site has been fully described in a report submitted to FCC office, and listed on September 12, 2000  
(Registration number: 90412).

\*NVLAP Lab. code : 200109-0

## 5.5 Test Configuration Photographs

See Appendix 1.

## 5.6 Data of EMI Test

See Appendix 2.

---

**A-pex International Co., Ltd.**  
**YOKOWA LAB.**

108 Yokowa-cho, Ise-shi, Mie-ken 516-1106 JAPAN  
Telephone: int +81 596 39 1485  
Facsimile: int +81 596 39 0232

## **SECTION 6: Test instruments**

### **EMI test instrument**

<b>Instrument</b>	<b>Mfr.</b>	<b>Model No.</b>	<b>Control No.</b>	<b>Calibration date / Interval</b>
Pre Amplifier	Hewlett Packard	8447D	AF-01	November 6, 2000 / 1 year
Biconical Antenna	Schwarzbeck	BBA9106	BA-03	April 29, 2000 / 1 year
Logperiodic Antenna	Schwarzbeck	UKLP9108-A	LA-06	April 30, 2000 / 1 year
LISN	Schwarzbeck	NSLK8127	LS-03	November 3, 2000 / 1 year
LISN	Rohde & Schwarz	ESH3-Z5	LS-04	November 3, 2000 / 1 year
Spectrum Analyzer	Hewlett Packard	8567A	SA-04	November 6, 2000 / 6 months
Test Receiver	Rohde & Schwarz	ESHS10	TR-05	August 18, 2000 / 1 year
Test Receiver	Rohde & Schwarz	ESVS10	TR-06	August 10, 2000 / 1 year
Universal Counter	Agilent	53131A	UC-01	October 1, 2001 / 1 year

\*All measurement equipment is traceable to national standard.

---

**A-pex International Co., Ltd.**

**YOKOWA LAB.**

108 Yokowa-cho, Ise-shi, Mie-ken 516-1106 JAPAN

Telephone: int +81 596 39 1485

Facsimile: int +81 596 39 0232

## SECTION 7 Radiated emission

### 7.1 Operating environment

The test was carried out in an open site.

Temperature : See data  
Humidity : See data

### 7.2 Test configuration


EUT was placed on a table of nominal size, 1m by 1.5m, raised 80cm above the conducting ground plane.

The rear of EUT, including peripherals was aligned and flush with rear of tabletop.

Test was made with the antenna positioned in both the horizontal and vertical planes of polarization.

The measurement antenna was varied in height above the conducting ground plane to obtain the maximum signal strength.

**Figure 1 Drawing of the test set-up**

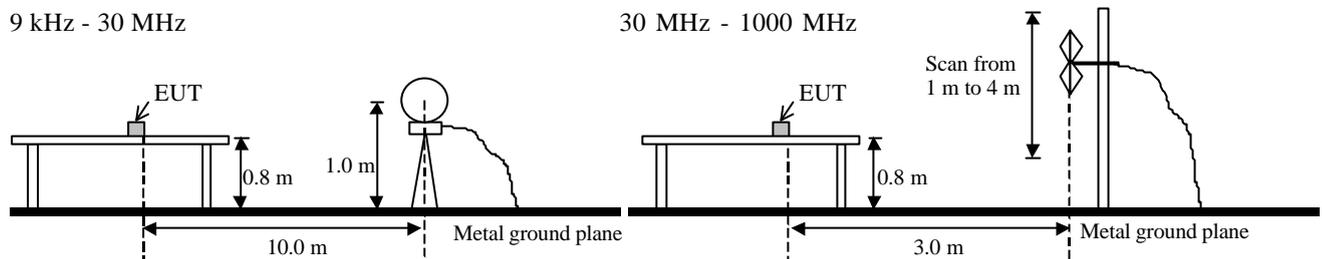

### 7.3 Test conditions

Frequency range : 9kHz-30MHz (Loop antenna) / 30MHz-300MHz (biconical antenna)  
/ 300MHz-1000MHz (Log-periodic antenna)  
Test distance : 10m(9kHz – 30MHz)  
: 3m(30MHz – 1000MHz)  
EUT position : Table top

### 7.4 Test procedure

The Radiated Electric Field Strength intensity has been measured on an open test site with a ground plane at a distance of 3m and 10m from the EUT to the antenna.

Pre check measurements were performed in a shielded room or used search coil for ambient noise at high-level, especially from 272MHz to 288MHz.

Measurements were performed with a quasi-peak detector.

The measuring antenna height was varied between 1m to 4m(30-1000MHz) and EUT was rotated a full revolution in order to obtain the maximum value of the electric field intensity.

The measurements were performed for both vertical and horizontal antenna polarization.

The EUT was put into operation at Read/write mode.

### 7.5 Results

Summary of the test results: Pass

Date: 2001-01-22 Tested by: Naoki Sakamoto

---

**A-pex International Co., Ltd.**  
**YOKOWA LAB.**

108 Yokowa-cho, Ise-shi, Mie-ken 516-1106 JAPAN

Telephone: int +81 596 39 1485

Facsimile: int +81 596 39 0232

## **SECTION 8: Conducted emission**

### **8.1 Operating environment**

The test was carried out in a shielded room (3.6 × 7.2 × 2.4m).


Temperature : See data  
Humidity : See data

### **8.2 Test configuration**

EUT was placed on a platform of nominal size, 1m by 1.5m, raised 80cm above the conducting ground plane. The rear of tabletop was located 40cm to the vertical conducting plane. The rear of EUT, including peripherals aligned and flush with rear of tabletop. All other surfaces of tabletop was at least 80cm from any other grounded conducting surface. Each EUT current-carrying power lead, except the ground (safety) lead, were individually connected through a LISN to the input power source. All unused 50 connectors of the LISN were resistively terminated in 50 when not connected to the measuring equipment.

A drawing of the set up is shown in fig. 1 and the photos of Appendix 1.

**Figure 1. Drawing of the test set-up**

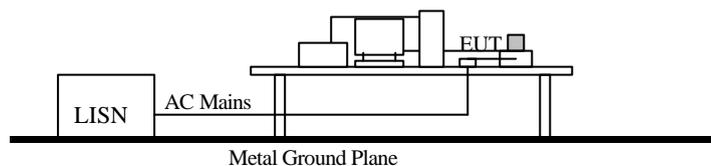

### **8.3 Test conditions**

Frequency range : 0.45MHz-30MHz  
EUT position : Table top

### **8.4 Test procedure**

The AC Mains Terminal Continuous disturbance Voltage has been measured with the EUT in a shielded room. The EUT was connected to a Line Impedance Stabilization Network (LISN). An overview sweep with peak detection has been performed. The measurements have been performed with a quasi-peak detector and if required, with an average detector. The EUT was put into operation at Communication mode.

### **8.5 Results**

Summary of the test results: Pass

Date: 2001-01-18                      Tested by: N. Sakamoto


---

**A-pex International Co., Ltd.**  
**YOKOWA LAB.**

108 Yokowa-cho, Ise-shi, Mie-ken 516-1106 JAPAN  
Telephone: int +81 596 39 1485  
Facsimile: int +81 596 39 0232

## **APPENDIX 1: Photographs of test setup**

### **Radiated emission**

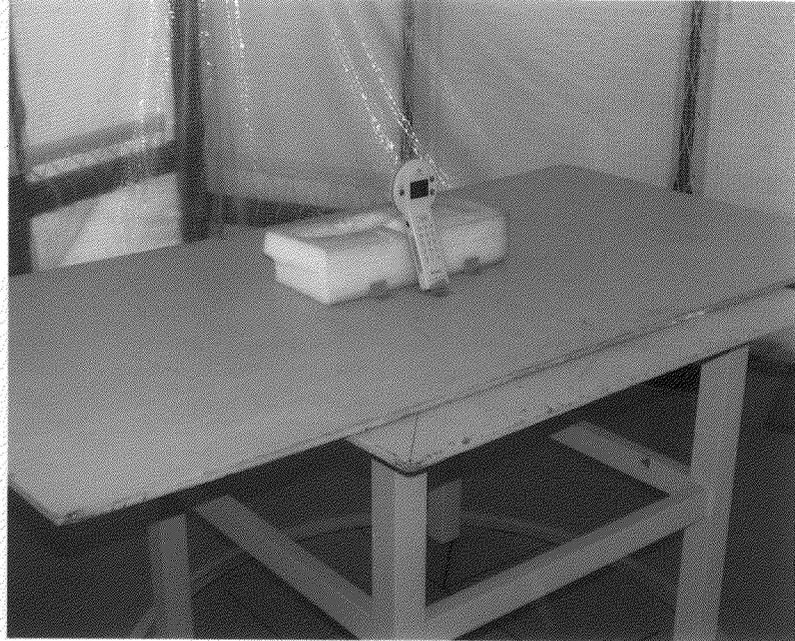

---

**A-pex International Co., Ltd.**

***YOKOWA LAB.***



108 Yokowa-cho, Ise-shi, Mie-ken 516-1106 JAPAN

Telephone: int +81 596 39 1485

Facsimile: int +81 596 39 0232

**Conducted emission**

---

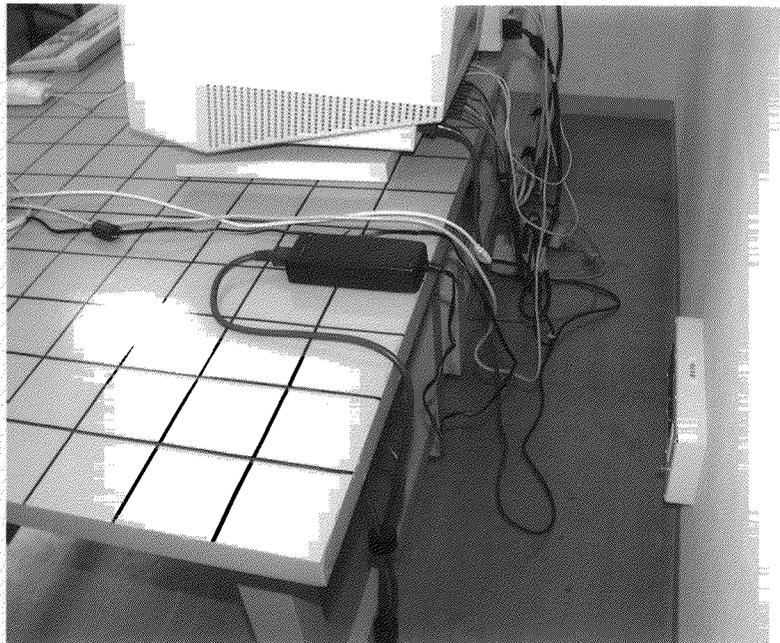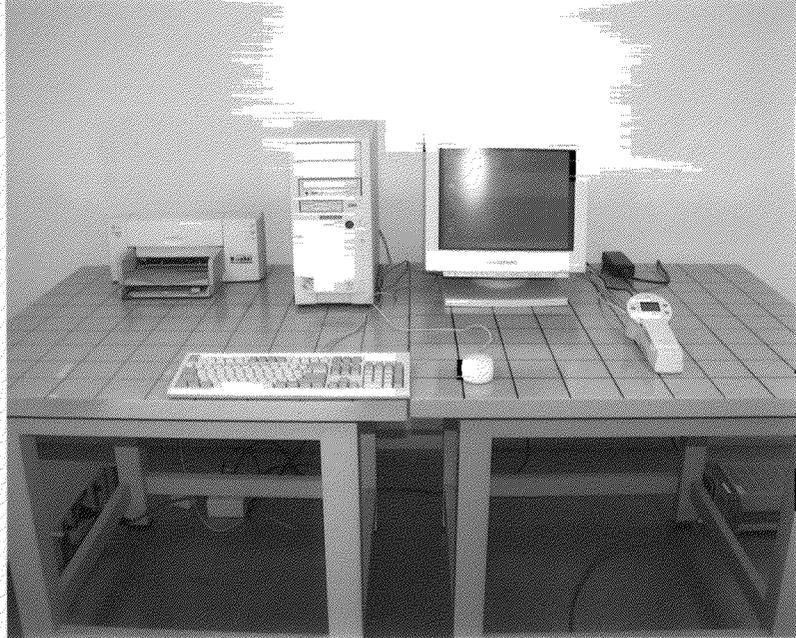

---

**A-pex International Co., Ltd.**

***YOKOWA LAB.***

108 Yokowa-cho, Ise-shi, Mie-ken 516-1106 JAPAN

Telephone: int +81 596 39 1485

Facsimile: int +81 596 39 0232

## **APPENDIX 2: Data of EMI test**

This section contains the following data

Radiated emission :	<u>A2- 1 and A2-2</u>
Carrier frequency Band width:	<u>A2- 3</u>
Conducted emission :	<u>A2- 4 and A2-7</u>

---

**A-pex International Co., Ltd.**  
**YOKOWA LAB.**

108 Yokowa-cho, Ise-shi, Mie-ken 516-1106 JAPAN

Telephone: int +81 596 39 1485

Facsimile: int +81 596 39 0232

# DATA OF RADIATION TEST

A-PEX INTERNATIONAL CO., LTD.  
YOKOWA NO. 3 OPEN SITE

COMPANY	: Sony Corporation	REPORT NO	: 21EE0013-YW-1
TRADE NAME	: SONY	REGULATION	: FCC Part 15 Subpart C.225
EQUIPMENT	: Handy Reader/Writer	TEST DISTANCE	: 10m
MODEL	: MLU-200	FCC ID	: AK8MLU200
POWER	: DC3.6V		
DESCRIPTION	: Read/Write mode		
REMARKS	: 9kHz - 30MHz		
DATE	: 01/22/2001		

ENGINEER : Naoki Sakamoto

No.	FREQ [MHz]	ANT TYPE	READING		ANT Factor [dB]	CABLE LOSS [dB]	ATTEN. [dB]	AMP GAIN [dB]	RESULT		LIMIT [dB μ V/m]	MARGIN	
			HOR [dB μ V]	VER [dB μ V]					HOR [dB μ V/m]	VER [dB μ V/m]		HOR [dB]	VER [dB]
1	13.56	BB	33.8	36.7	20.2	0.7	6.0	28.2	32.5	35.4	99.0	66.5	63.6
2	27.12	BB	25.2	25.3	21.2	0.9	6.0	28.3	25.0	25.1	48.5	23.5	23.4

SAMPLE CALCLATION : Reading + ANT.Factor + Cable Loss -AMP.Gain + ATTEN.

No1 : Carrier Limit = 80.0dBuV/m + 40log(30/10)

No2 : Spurious Limit = 29.5dBuV/m + 40log(30/10)

ALL other spurious emissions are more than 20dB below the limits.

# DATA OF RADIATION TEST

A-PEX INTERNATIONAL CO., LTD.  
YOKOWA No.3 OPEN TEST SITE  
Report No. : 21EE0013-YW-1

Applicant : Sony Corporation  
 Kind of Equipment : Handy Reader/Writer  
 Model No. : MLU-200 (FCC ID : AK8MLU200)  
 Serial No. :  
 Power : DC3.6V  
 Mode : Read/Write mode  
 Remarks : 30MHz - 1000MHz  
 Date : 1/22/2001  
 Test Distance : 3 m  
 Temperature : 18 °C  
 Humidity : 38 %  
 Regulation : FCC Part15B CLASS B

  
 \_\_\_\_\_  
 Engineer : Naoki Sakamoto

No.	FREQ. [MHz]	ANT TYPE	READING		ANT FACTOR [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	ATTEN. [dB]	RESULT		LIMITS		MARGIN	
			HOR [dB μ V]	VER					HOR [dB μ V/m]	VER	HOR [dB]	VER		
1.	40.69	BB	23.5	25.6	14.5	28.3	1.2	5.9	16.8	18.9	40.0	23.2	21.1	
2.	54.24	BB	27.9	30.0	9.8	28.2	1.3	6.0	16.8	18.9	40.0	23.2	21.1	
3.	67.80	BB	30.5	27.2	7.1	28.0	1.6	5.9	17.1	13.8	40.0	22.9	26.2	
4.	81.36	BB	35.5	34.2	6.6	27.8	1.7	5.9	21.9	20.6	40.0	18.1	19.4	
5.	94.93	BB	32.2	31.9	9.2	27.9	1.8	5.9	21.2	20.9	43.5	22.3	22.6	
6.	108.49	BB	27.8	26.1	11.6	28.1	2.0	5.9	19.2	17.5	43.5	24.3	26.0	
7.	122.05	BB	30.5	27.5	13.5	28.2	2.1	6.0	23.9	20.9	43.5	19.6	22.6	
8.	135.60	BB	31.8	27.7	14.4	28.0	2.3	5.9	26.4	22.3	43.5	17.1	21.2	
9.	176.27	BB	30.9	25.4	15.8	27.8	2.6	6.0	27.5	22.0	43.5	16.0	21.5	
10.	203.40	BB	32.4	27.0	16.5	28.0	2.8	5.9	29.6	24.2	43.5	13.9	19.3	
11.	325.45	BB	29.1	30.3	14.7	27.6	3.7	6.0	25.9	27.1	46.0	20.1	18.9	
12.	393.23	BB	28.7	39.1	15.6	27.7	4.2	5.9	26.7	37.1	46.0	19.3	8.9	
13.	420.36	BB	29.2	37.8	16.0	27.8	4.4	6.0	27.8	36.4	46.0	18.2	9.6	

CALCULATION: READING + ANT. FACTOR + CABLE LOSS - AMP. GAIN + ATTEN.

All other spurious emissions are more than 20dB below the limits.  
 ANT. TYPE: 30-300MHz Biconical, 300-1000MHz Logperiodic



# DATA OF CONDUCTION TEST

A-PEX INTERNATIONAL CO., LTD.  
YOKOWA No.3 OPEN TEST SITE  
Report No. : 21EE0013-YW-1

Applicant : Sony Corporation  
Kind of Equipment : Handy Reader/Writer  
Model No. : MLU-200  
Serial No. :  
Power : DC3.6V  
Mode : Communication mode  
Remarks : FCC ID : AK8MLU200  
Date : 1/18/2001  
Phase : Single Phase  
Temperature : 20 °C  
Humidity : 36 %  
Regulation : FCC Part15B CLASS B

  
Engineer : Naoki Sakamoto

No.	FREQ. [MHz]	READING (N)		READING (L1)		LISN FACTOR [dB]	CABLE LOSS [dB]	ATTEN. [dB]	RESULT		LIMITS		MARGIN	
		QP [dBuV]	AV	QP [dBuV]	AV				QP [dBuV]	AV	QP [dBuV]	AV	QP [dB]	AV
1.	0.6945	41.2	-	40.9	-	0.7	0.1	0.0	42.0	-	48.0	0.0	6.0	-
2.	0.8916	39.7	-	39.0	-	0.7	0.2	0.0	40.6	-	48.0	0.0	7.4	-
3.	1.2032	36.4	-	37.5	-	0.7	0.2	0.0	38.4	-	48.0	0.0	9.6	-
4.	1.2150	36.6	-	37.7	-	0.7	0.2	0.0	38.6	-	48.0	0.0	9.4	-
5.	2.0700	32.3	-	33.2	-	0.7	0.1	0.0	34.0	-	48.0	0.0	14.0	-
6.	6.1975	29.9	-	29.9	-	0.9	0.3	0.0	31.1	-	48.0	0.0	16.9	-
7.	13.6810	27.8	-	27.5	-	1.3	0.3	0.0	29.4	-	48.0	0.0	18.6	-

CALCULATION: READING + LISN FACTOR + CABLE LOSS + ATTEN.


All other spurious emissions are more than 20dB below the limits.

# DATA OF CONDUCTION TEST

A-PEX INTERNATIONAL CO., LTD.  
YOKOWA No.3 OPEN TEST SITE  
Report No. : 21EE0013-YW-1

Applicant : Sony Corporation  
Kind of Equipment : Handy Reader/Writer  
Model No. : MLU-200  
Serial No. :  
Power : DC3.6V  
Mode : Communication mode  
Remarks : FCC ID : AK8MLU200  
Date : 1/18/2001  
Phase : Single Phase  
Temperature : 20 °C  
Humidity : 36 %  
Regulation : FCC Part15B CLASS B

  
Engineer : Naoki Sakamoto

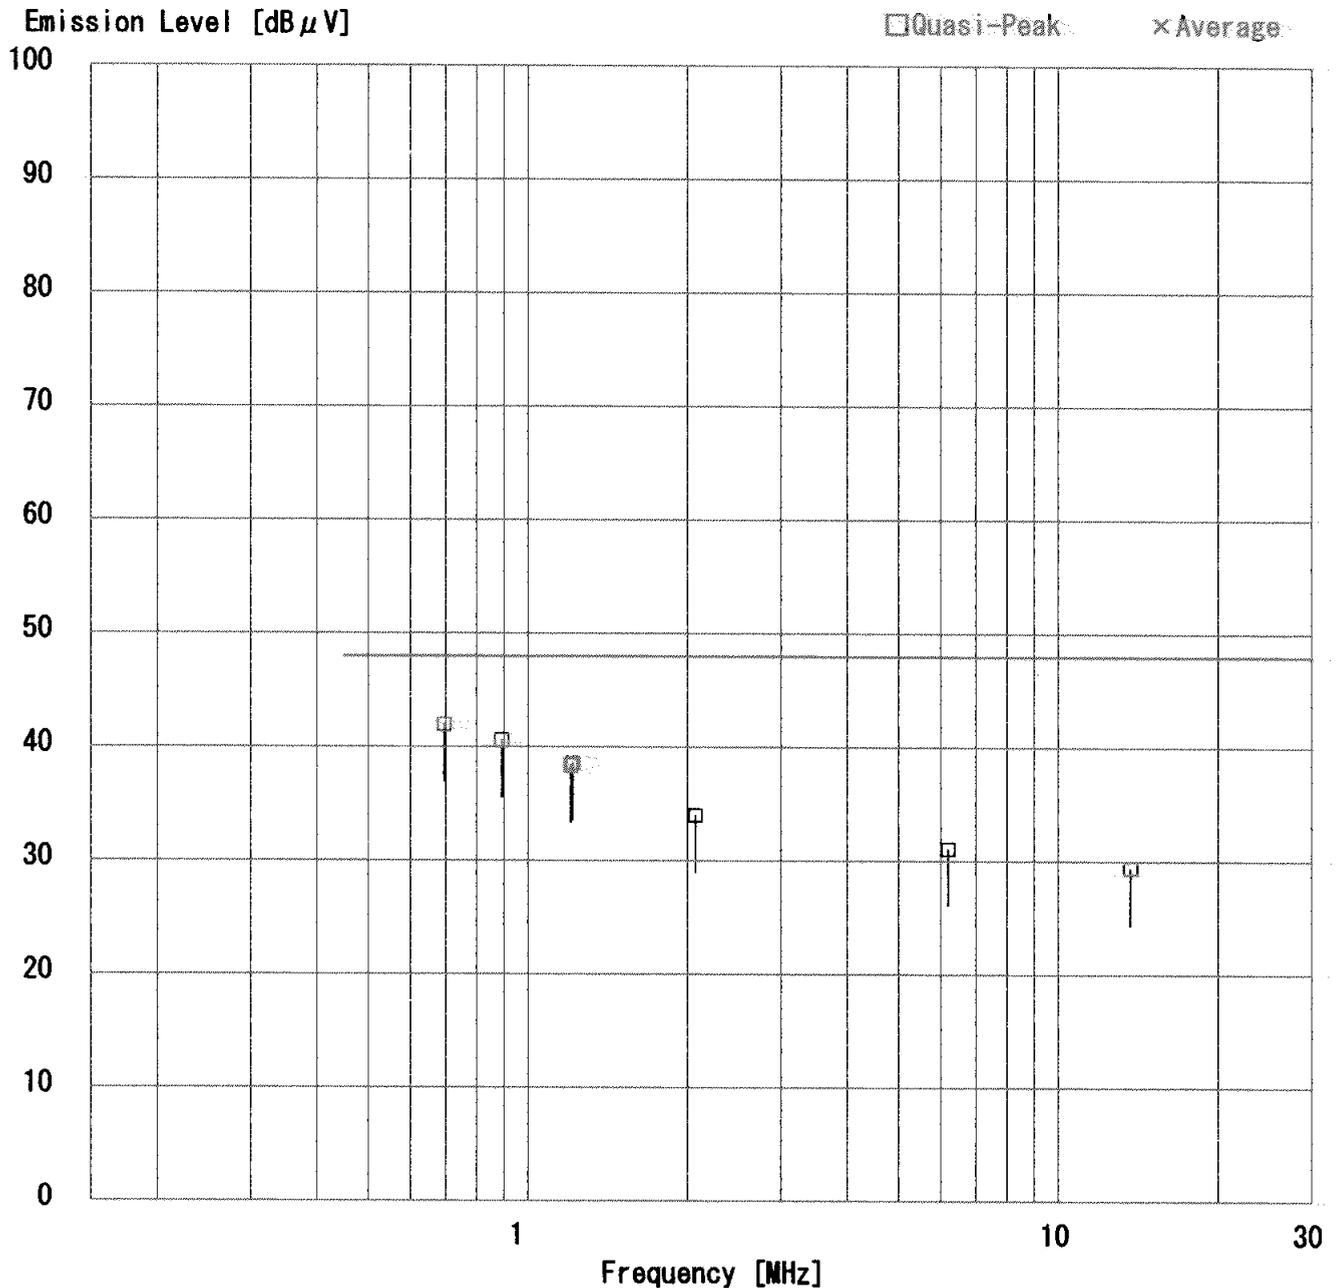

# DATA OF CONDUCTION TEST CHART


A-PEX INTERNATIONAL CO., LTD.  
YOKOWA No.3 OPEN TEST SITE  
Report No. : 21EE0013-YW-1

Applicant : Sony Corporation  
Kind of Equipment : Handy Reader/Writer  
Model No. : MLU-200  
Serial No. :  
Power : DC3.6V  
Mode : Communication Mode  
Remarks : FCC ID : AK8MLU200  
Date : 1/18/2001  
Phase : Single Phase  
Temperature : 20 °C  
Humidity : 36 %  
Regulation 1 : FCC Part15B CLASS B  
Regulation 2 : None

  
Engineer : Naoki Sakamoto


Emission Level [dB $\mu$ V]

PHASE:N

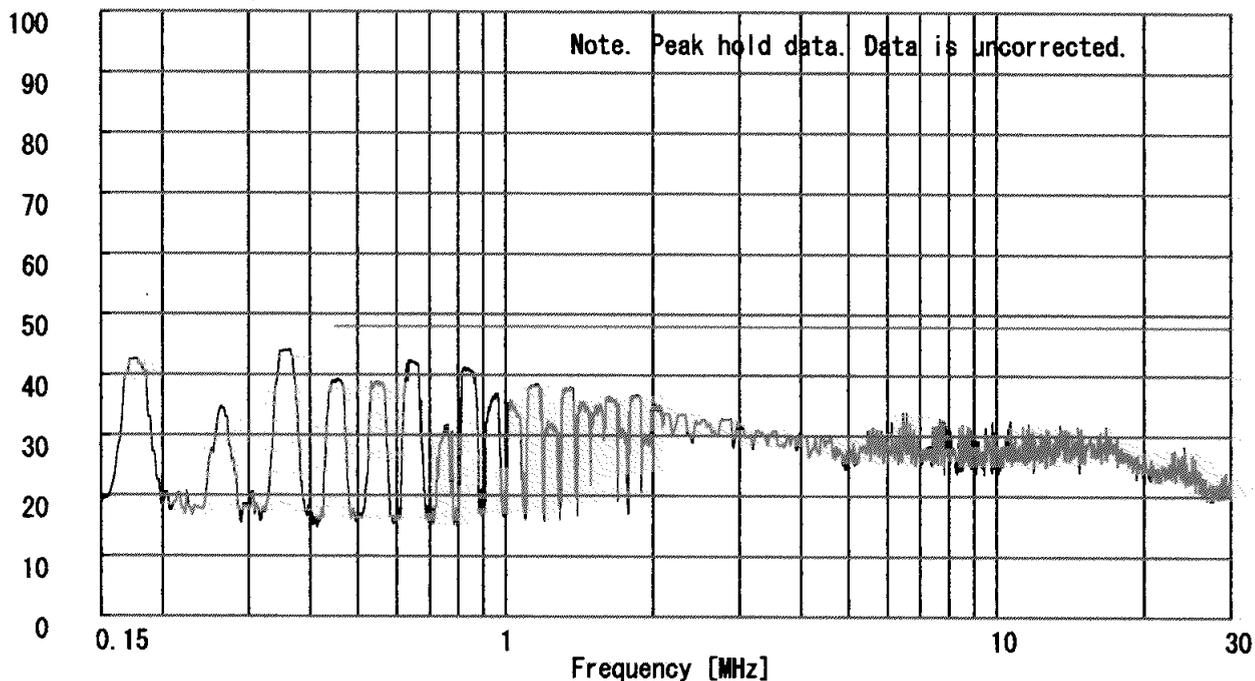

Emission Level [dB $\mu$ V]

PHASE:L1

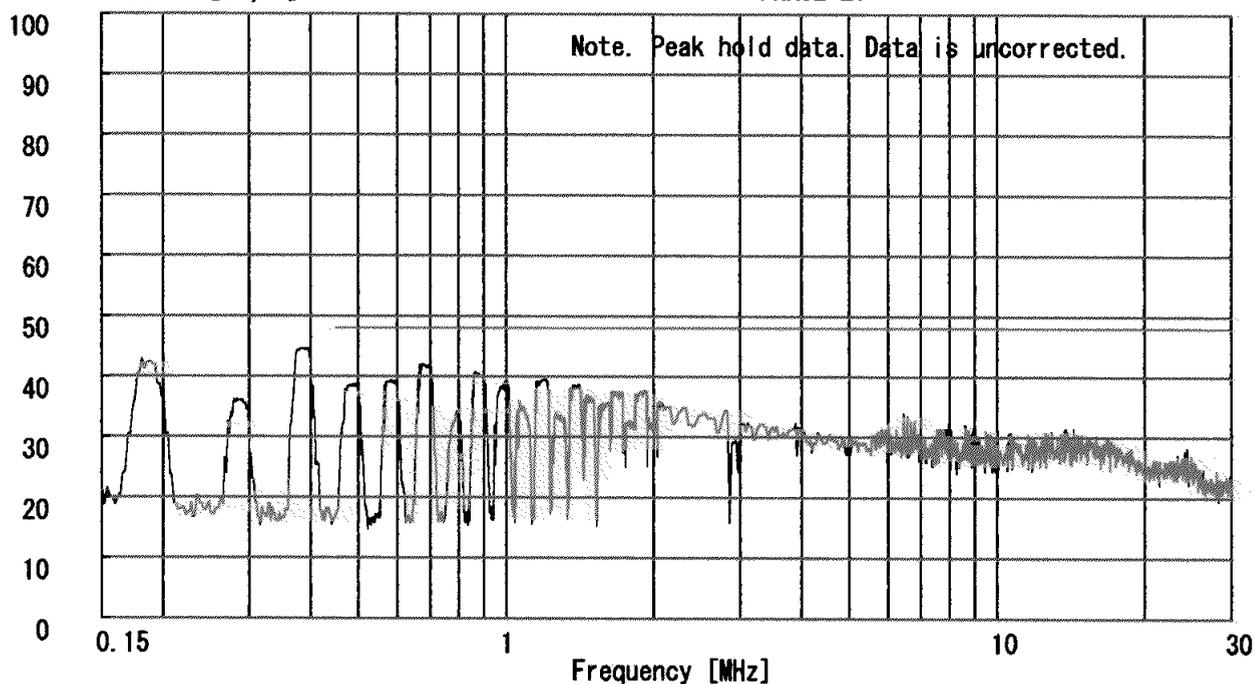

# DATA OF CONDUCTION TEST CHART

A-PEX INTERNATIONAL CO., LTD.

YOKOWA No.3 OPEN TEST SITE


Report No. : 21EE0013-YW-1

Applicant : Sony Corporation  
Kind of Equipment : Handy Reader/Writer  
Model No. : MLU-200  
Serial No. :  
Power : DC3.6V  
Mode : Standby  
Remarks : FCC ID : AK8MLU200  
Date : 1/18/2001  
Phase : Single Phase  
Temperature : 20 °C  
Humidity : 36 %  
Regulation 1 : FCC Part15B CLASS B  
Regulation 2 : None

Engineer : Naoki Sakamoto

Emission Level [dB $\mu$ V]

PHASE:N

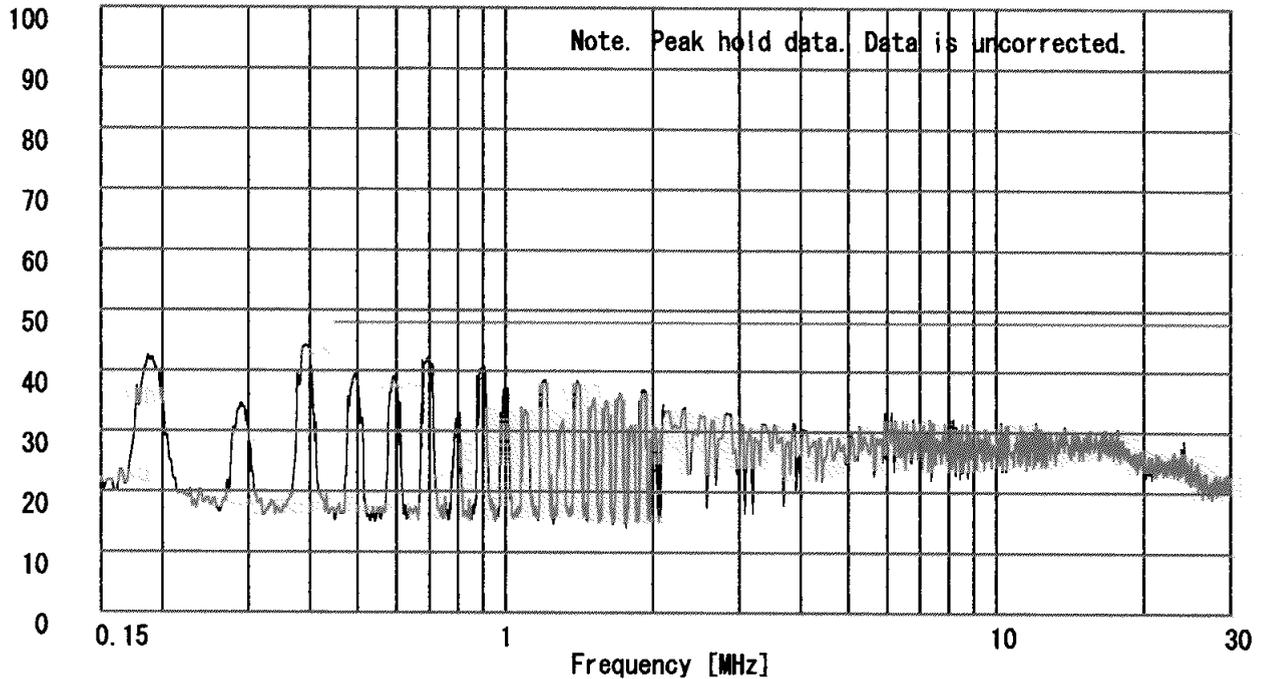

Emission Level [dB $\mu$ V]

PHASE:L1

