

Data of Conducted Disturbance Test

UL Japan, Inc.
YAMAKITA No.2 Shielded room
Report No. : 301E0012-YK-01-A

Applicant : Sony EMCS Corporation Kisarazu TEC
 Type of Equipment : Network Audio Component/Server
 Model No. : NAC-SV10i
 Serial No. : 31
 Power : AC120V/60Hz
 Mode : Audio Play by Wired LAN
 Remarks : -
 Date : 6/7/2010
 Phase : Single Phase
 Temperature : 26 °C
 Humidity : 54 %
 Limit : FCC Part15B CLASS B(CISPR Pub. 22)

Engineer : Minoru Nakatake

No.	FREQ. [MHz]	READING(N)		READING(L1)		LISN FACTOR	CABLE LOSS	ATTEN. [dB]	RESULT		LIMITS		MARGIN	
		QP [dB μ V]	AV	QP [dB μ V]	AV				QP [dB]	AV [dB μ V]	QP [dB μ V]	AV [dB μ V]	QP [dB]	AV [dB]
1.	0.1500	27.4	-	26.8	-	0.1	0.1	13.0	40.6	-	66.0	56.0	25.4	-
2.	0.2100	33.6	23.3	33.3	20.8	0.1	0.1	13.0	46.8	36.5	63.2	53.2	16.4	16.7
3.	0.3144	24.9	-	24.9	-	0.1	0.1	13.0	38.1	-	59.9	49.9	21.8	-
4.	3.1540	28.8	26.0	27.9	23.2	0.2	0.2	13.0	42.2	39.4	56.0	46.0	13.8	6.6
5.	3.2600	27.5	22.9	24.9	20.0	0.2	0.2	13.0	40.9	36.3	56.0	46.0	15.1	9.7
6.	3.4695	28.7	25.1	26.5	22.0	0.2	0.3	13.0	42.2	38.6	56.0	46.0	13.8	7.4

CALCULATION: READING + LISN FACTOR + CABLE LOSS + ATTEN.


■ LISN : KLS-01 (NSLK8126) ■ COAXIAL CABLE : KCC-33/34
 ■ EMI RECEIVER : KTR-02 (ESCS30)

Data of Conducted Disturbance Test

UL Japan, Inc.
YAMAKITA No.2 Shielded room
Report No. : 30IE0012-YK-01-A

Applicant : Sony EMCS Corporation Kisarazu TEC
Type of Equipment : Network Audio Component/Server
Model No. : NAC-SV10i
Serial No. : 31
Power : AC120V/60Hz
Mode : Audio Play by Wired LAN
Remarks : -
Date : 6/7/2010
Phase : Single Phase
Temperature : 26 °C
Humidity : 54 %
Limit : FCC Part15B CLASS B (CISPR Pub. 22)

Engineer : Minoru Nakatake

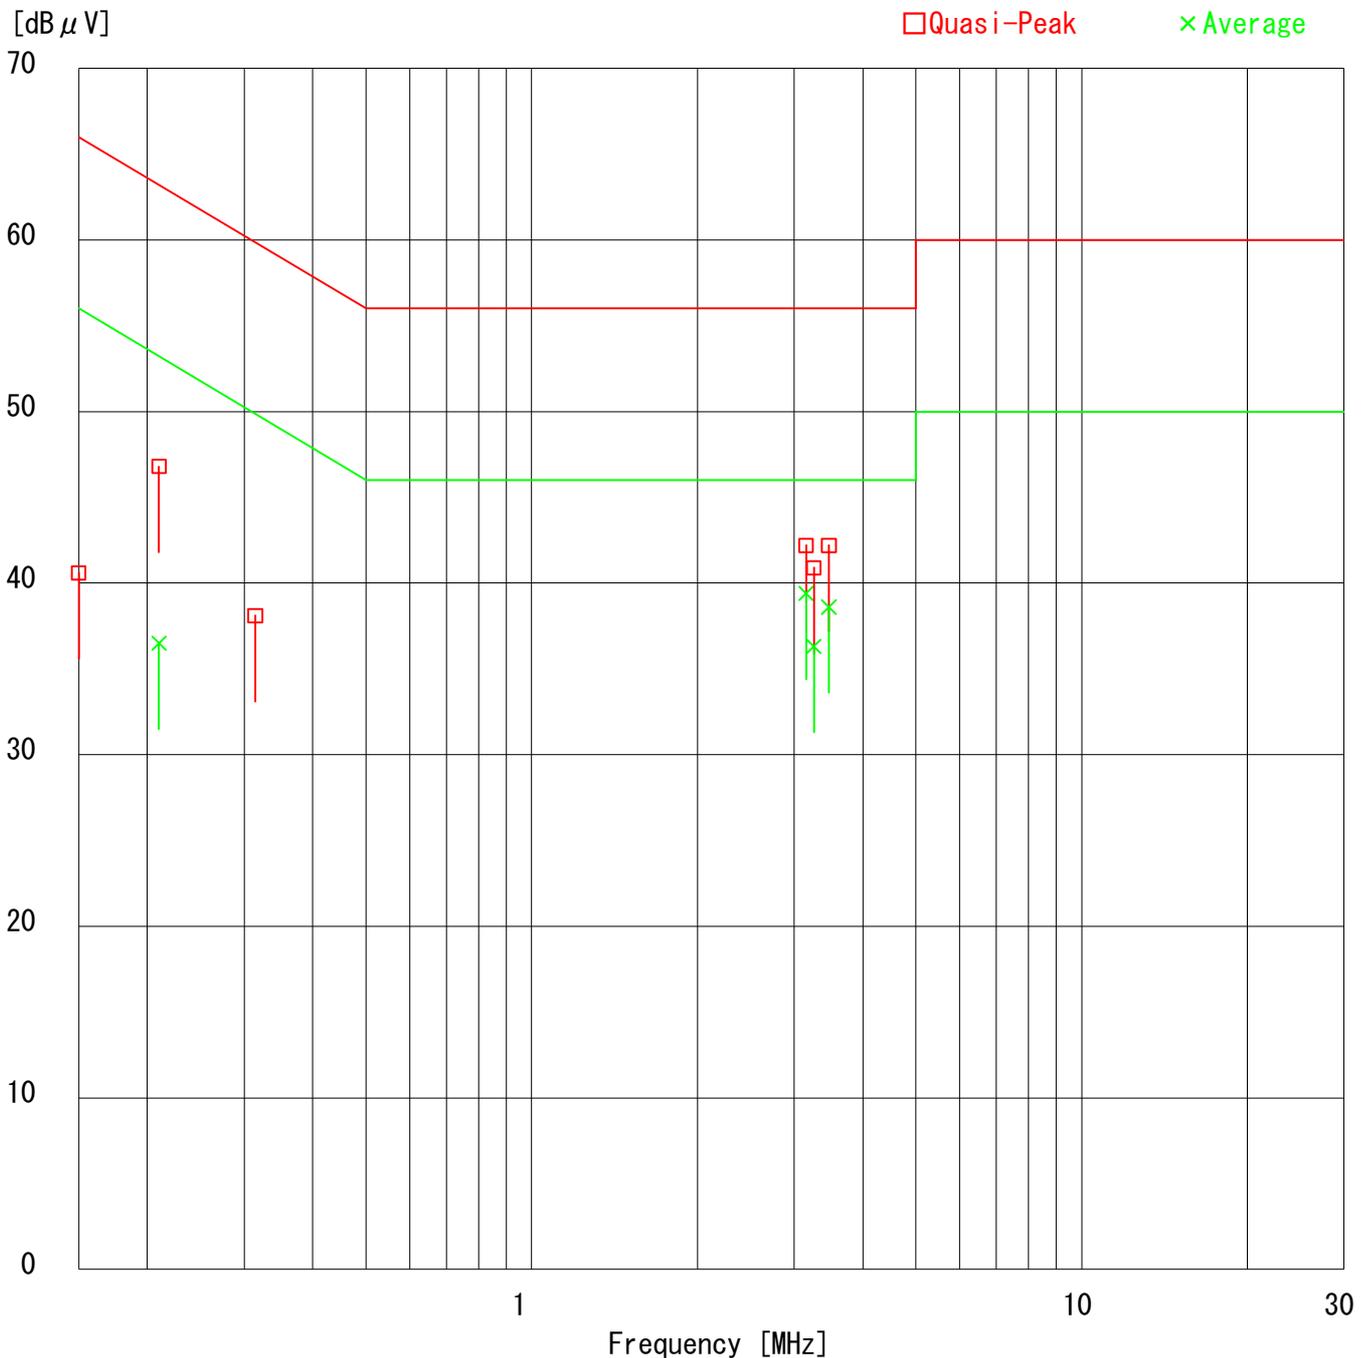

Data of Conducted Disturbance Test



UL Japan, Inc.

YAMAKITA No.2 Shielded room

Report No. : 301E0012-YK-01-A

Applicant : Sony EMCS Corporation Kisarazu TEC
Type of Equipment : Network Audio Component/Server
Model No. : NAC-SV10i
Serial No. : 31
Power : AC120V/60Hz
Mode : Audio Play by Wired LAN
Remarks : -
Date : 6/7/2010
Phase : Single Phase
Temperature : 26 °C
Humidity : 54 %
Limit 1 : FCC Part15B CLASS B(CISPR Pub. 22)
Limit 2 : None

Engineer : Minoru Nakatake

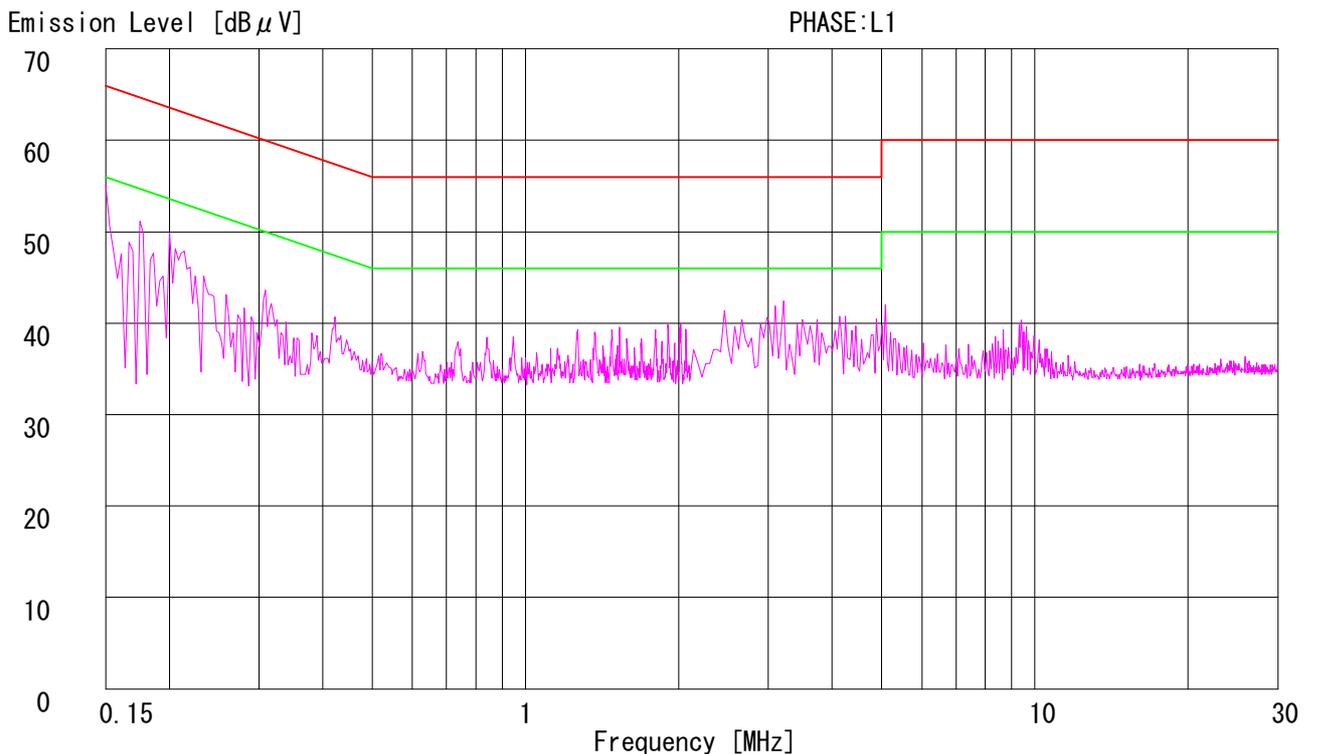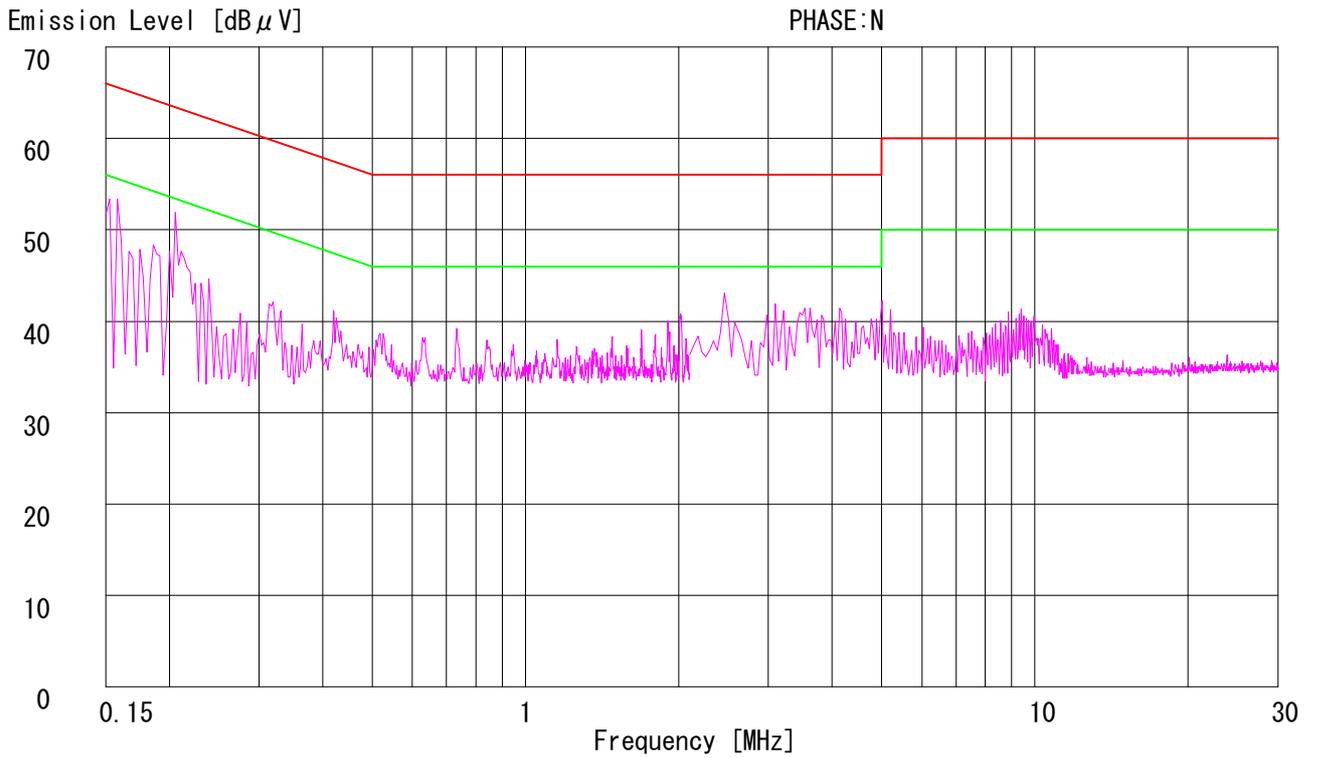

Data of Conducted Disturbance Test

UL Japan, Inc.
YAMAKITA No.2 Shielded room
Report No. : 301E0012-YK-01-A

Applicant : Sony EMCS Corporation Kisarazu TEC
 Type of Equipment : Network Audio Component/Server
 Model No. : NAC-SV10i
 Serial No. : 31
 Power : AC120V/60Hz
 Mode : Audio Play by iPod
 Remarks : -
 Date : 6/7/2010
 Phase : Single Phase
 Temperature : 26 °C
 Humidity : 54 %
 Limit : FCC Part15B CLASS B(CISPR Pub. 22)

Engineer : Minoru Nakatake

No.	FREQ. [MHz]	READING(N)		READING(L1)		LISN FACTOR [dB]	CABLE LOSS [dB]	ATTEN. [dB]	RESULT		LIMITS		MARGIN	
		QP [dB μV]	AV	QP [dB μV]	AV				QP [dB]	AV [dB μV]	QP [dB μV]	AV [dB μV]	QP [dB]	AV [dB]
1.	0.1500	27.4	-	27.8	-	0.1	0.1	13.0	41.0	-	66.0	56.0	25.0	-
2.	0.2102	33.9	23.2	32.8	20.5	0.1	0.1	13.0	47.1	36.4	63.2	53.2	16.1	16.8
3.	0.3147	25.0	-	24.8	-	0.1	0.1	13.0	38.2	-	59.8	49.8	21.6	-
4.	3.1535	28.9	25.8	28.0	23.3	0.2	0.2	13.0	42.3	39.2	56.0	46.0	13.7	6.8
5.	3.2592	28.1	23.3	25.8	20.2	0.2	0.2	13.0	41.5	36.7	56.0	46.0	14.5	9.3
6.	3.4688	27.8	24.3	25.4	20.8	0.2	0.3	13.0	41.3	37.8	56.0	46.0	14.7	8.2

CALCULATION: READING + LISN FACTOR + CABLE LOSS + ATTEN.


■ LISN : KLS-01 (NSLK8126) ■ COAXIAL CABLE : KCC-33/34
 ■ EMI RECEIVER : KTR-02 (ESCS30)

Data of Conducted Disturbance Test

UL Japan, Inc.
YAMAKITA No.2 Shielded room
Report No. : 30IE0012-YK-01-A

Applicant : Sony EMCS Corporation Kisarazu TEC
Type of Equipment : Network Audio Component/Server
Model No. : NAC-SV10i
Serial No. : 31
Power : AC120V/60Hz
Mode : Audio Play by iPod
Remarks : -
Date : 6/7/2010
Phase : Single Phase
Temperature : 26 °C
Humidity : 54 %
Limit : FCC Part15B CLASS B (CISPR Pub. 22)

Engineer : Minoru Nakatake

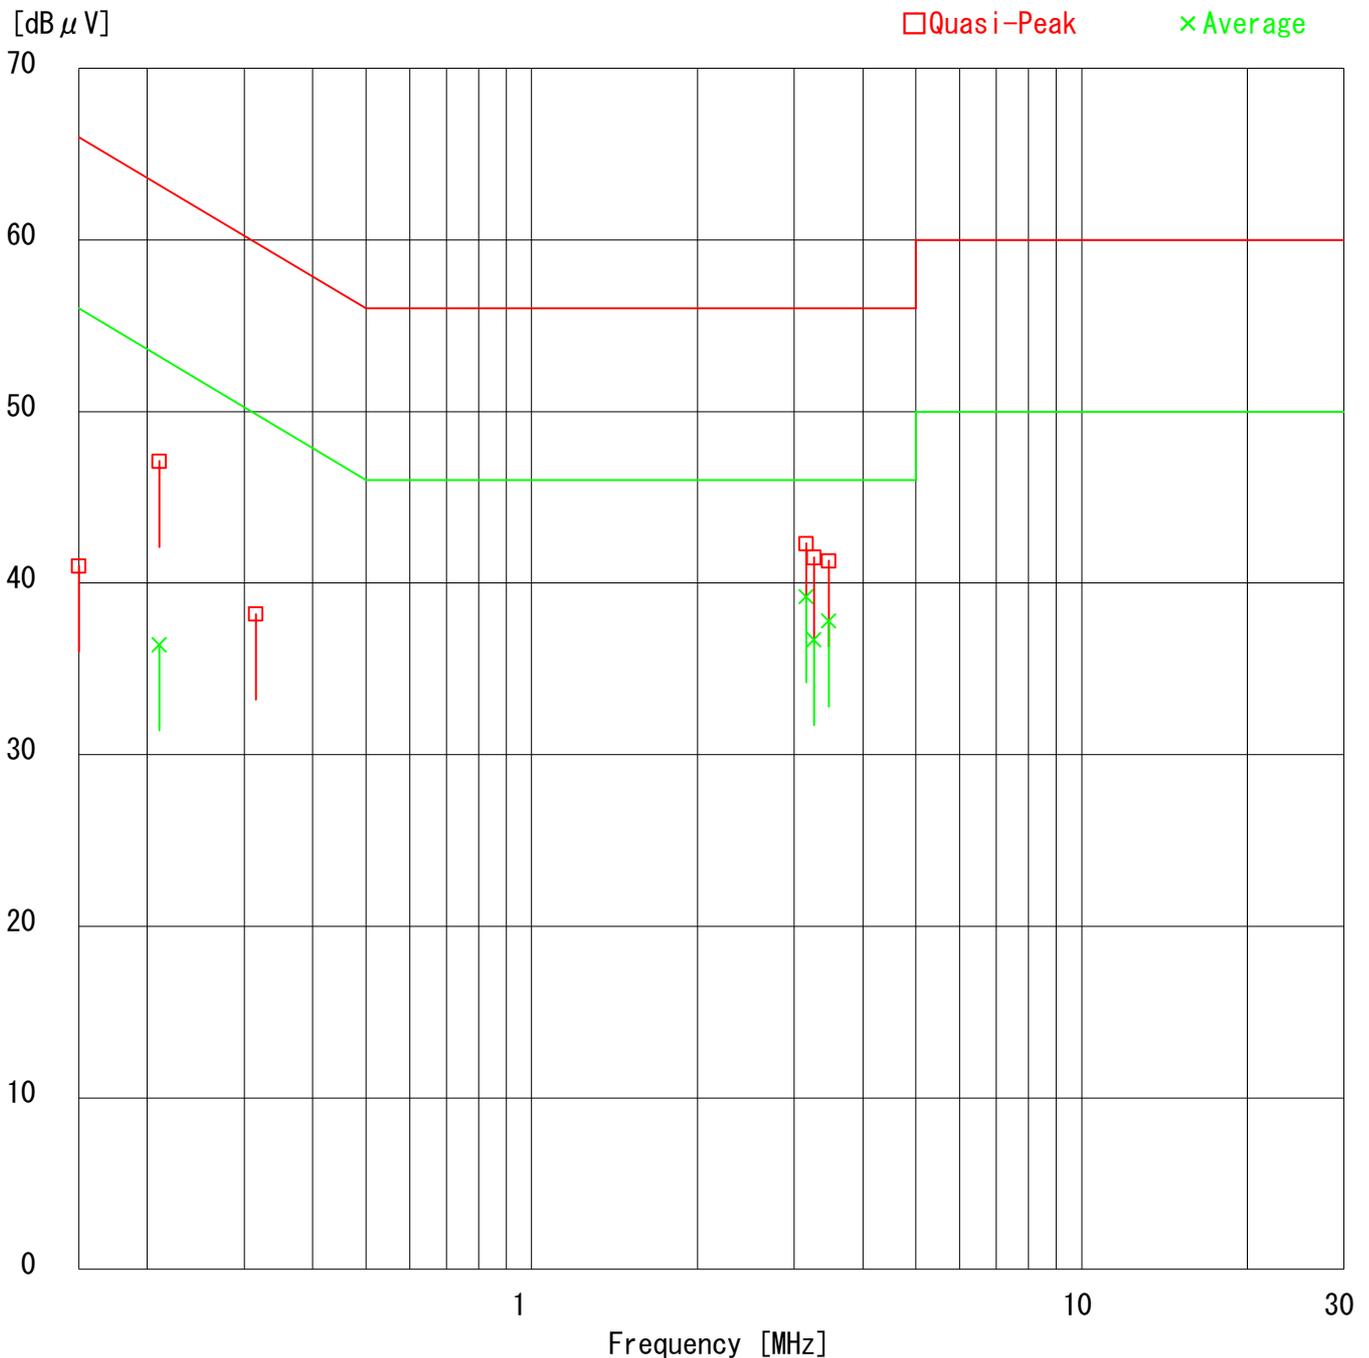

Data of Conducted Disturbance Test



UL Japan, Inc.

YAMAKITA No.2 Shielded room

Report No. : 301E0012-YK-01-A

Applicant : Sony EMCS Corporation Kisarazu TEC
Type of Equipment : Network Audio Component/Server
Model No. : NAC-SV10i
Serial No. : 31
Power : AC120V/60Hz
Mode : Audio Play by iPod
Remarks : -
Date : 6/7/2010
Phase : Single Phase
Temperature : 26 °C
Humidity : 54 %
Limit 1 : FCC Part15B CLASS B(CISPR Pub. 22)
Limit 2 : None

Engineer : Minoru Nakatake

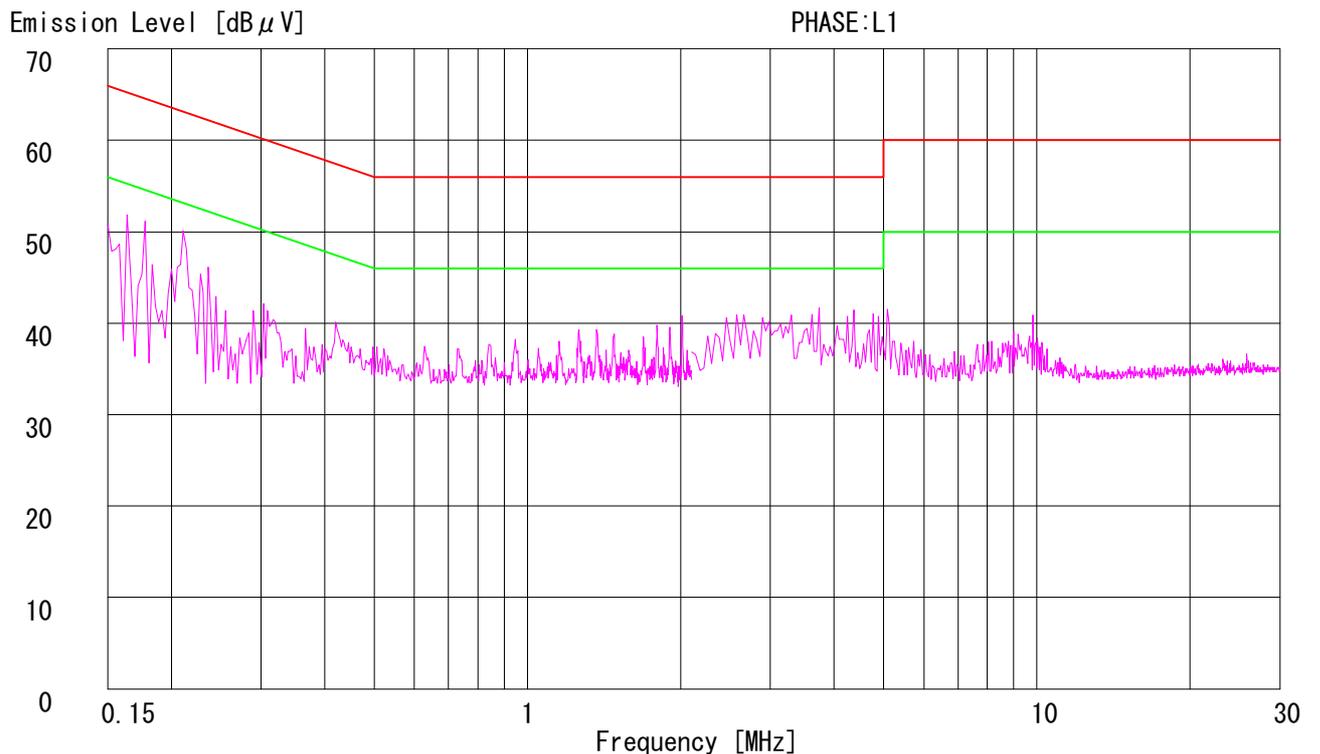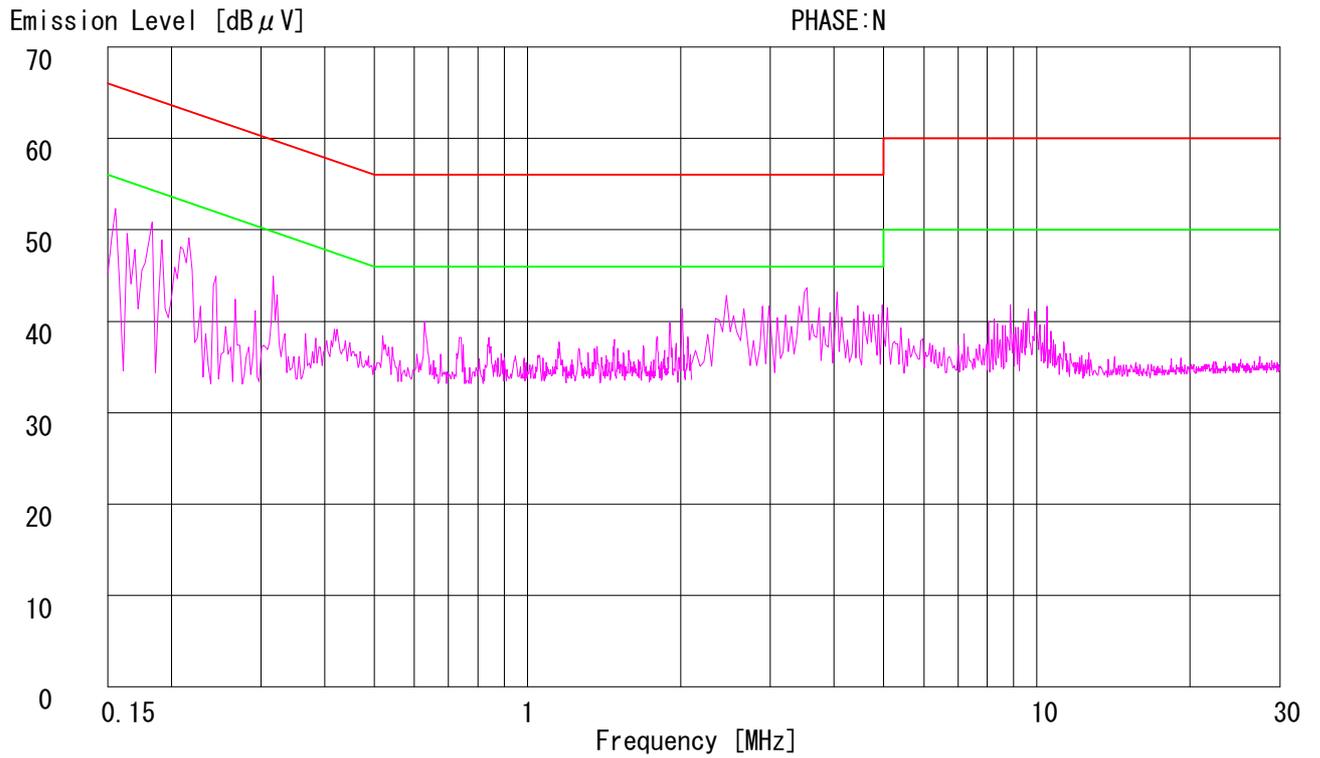

Data of Conducted Disturbance Test

UL Japan, Inc.
YAMAKITA No.2 Shielded room
Report No. : 301E0012-YK-01-A

Applicant : Sony EMCS Corporation Kisarazu TEC
 Type of Equipment : Network Audio Component/Server
 Model No. : NAC-SV10i
 Serial No. : 31
 Power : AC120V/60Hz
 Mode : Audio Play by Audio In source
 Remarks : -
 Date : 6/7/2010
 Phase : Single Phase
 Temperature : 26 °C
 Humidity : 54 %
 Limit : FCC Part15B CLASS B(CISPR Pub. 22)

Engineer : Minoru Nakatake

No.	FREQ. [MHz]	READING(N)		READING(L1)		LISN FACTOR	CABLE LOSS	ATTEN. [dB]	RESULT		LIMITS		MARGIN	
		QP [dB μ V]	AV	QP [dB μ V]	AV				QP [dB]	AV [dB μ V]	QP [dB μ V]	AV [dB μ V]	QP [dB]	AV [dB]
1.	0.1500	27.3	-	27.3	-	0.1	0.1	13.0	40.5	-	66.0	56.0	25.5	-
2.	0.2103	33.5	23.2	32.7	20.4	0.1	0.1	13.0	46.7	36.4	63.2	53.2	16.5	16.8
3.	0.3160	25.1	-	24.8	-	0.1	0.1	13.0	38.3	-	59.8	49.8	21.5	-
4.	2.4179	27.6	24.0	24.8	22.7	0.1	0.2	13.0	40.9	37.3	56.0	46.0	15.1	8.7
5.	3.1542	28.9	26.2	28.1	23.8	0.2	0.2	13.0	42.3	39.6	56.0	46.0	13.7	6.4
6.	3.2596	27.9	23.5	25.5	20.1	0.2	0.2	13.0	41.3	36.9	56.0	46.0	14.7	9.1

CALCULATION: READING + LISN FACTOR + CABLE LOSS + ATTEN.


■ LISN : KLS-01 (NSLK8126) ■ COAXIAL CABLE : KCC-33/34
 ■ EMI RECEIVER : KTR-02 (ESCS30)

Data of Conducted Disturbance Test

UL Japan, Inc.
YAMAKITA No.2 Shielded room
Report No. : 30IE0012-YK-01-A

Applicant : Sony EMCS Corporation Kisarazu TEC
Type of Equipment : Network Audio Component/Server
Model No. : NAC-SV10i
Serial No. : 31
Power : AC120V/60Hz
Mode : Audio Play by Audio In source
Remarks : -
Date : 6/7/2010
Phase : Single Phase
Temperature : 26 °C
Humidity : 54 %
Limit : FCC Part15B CLASS B (CISPR Pub. 22)

Engineer : Minoru Nakatake

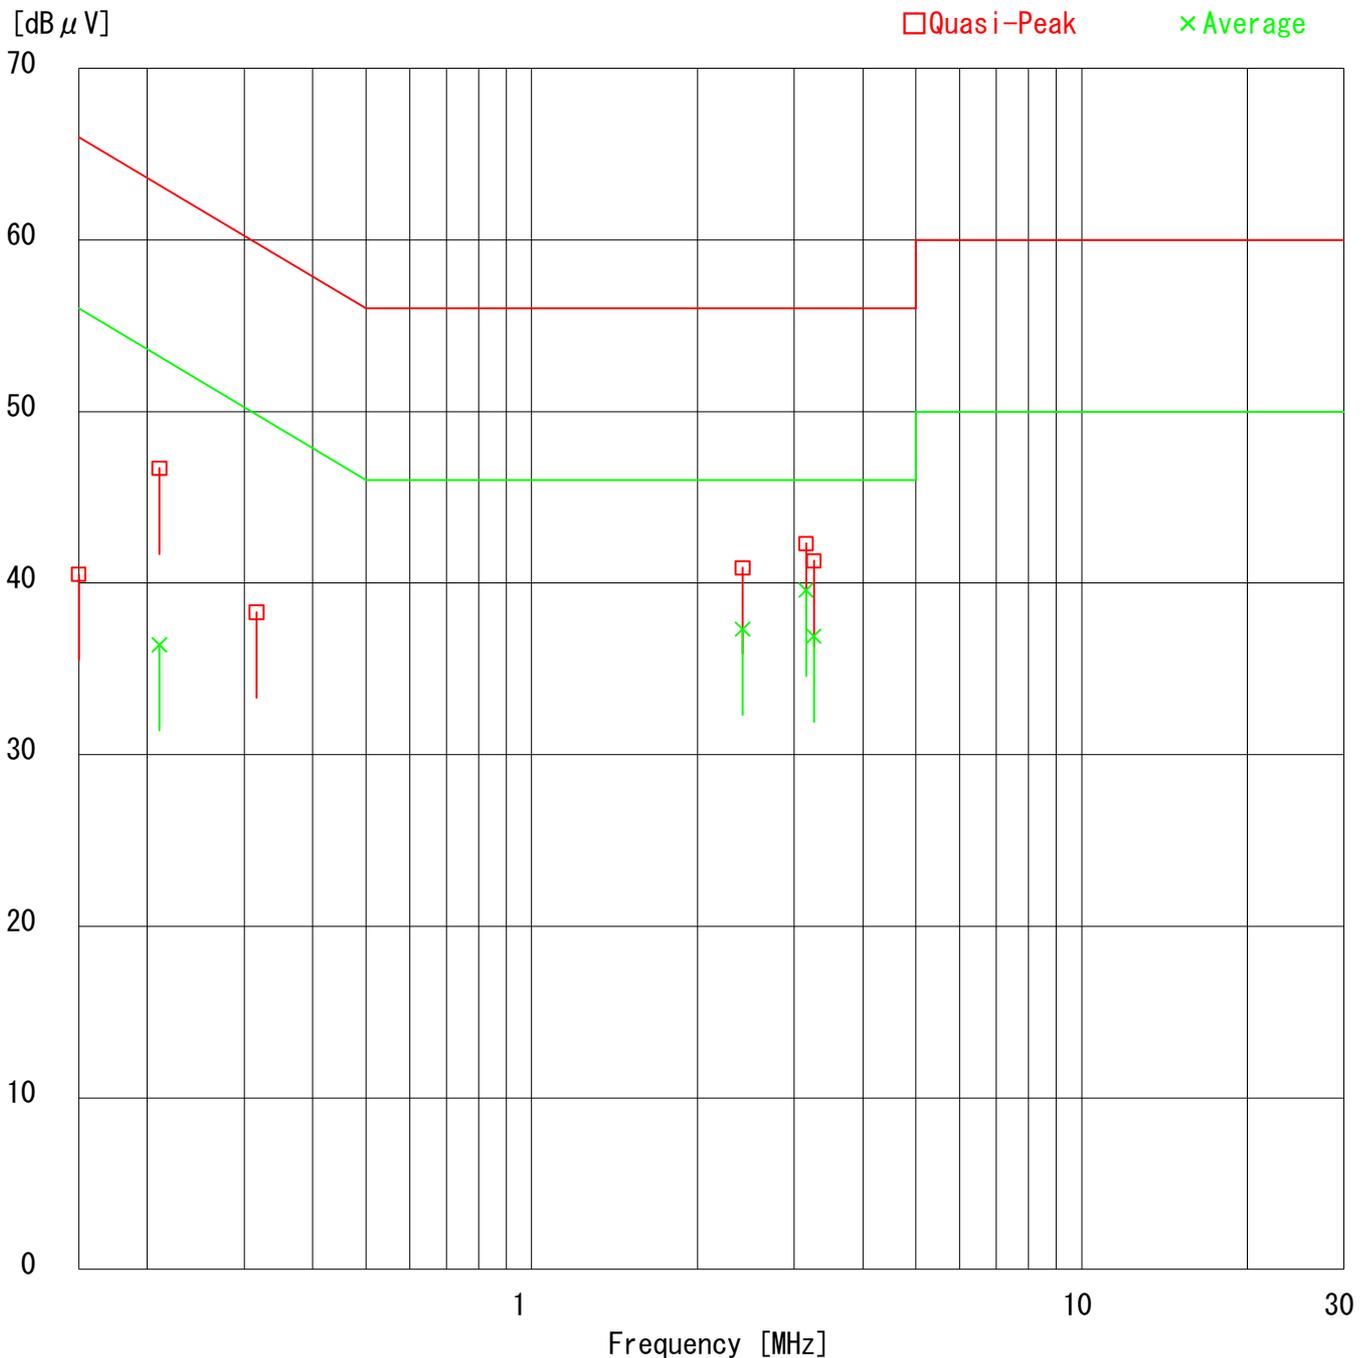

Data of Conducted Disturbance Test



UL Japan, Inc.

YAMAKITA No.2 Shielded room

Report No. : 301E0012-YK-01-A

Applicant : Sony EMCS Corporation Kisarazu TEC
Type of Equipment : Network Audio Component/Server
Model No. : NAC-SV10i
Serial No. : 31
Power : AC120V/60Hz
Mode : Audio Play by Audio In source
Remarks : -
Date : 6/7/2010
Phase : Single Phase
Temperature : 26 °C
Humidity : 54 %
Limit 1 : FCC Part15B CLASS B(CISPR Pub. 22)
Limit 2 : None

Engineer : Minoru Nakatake

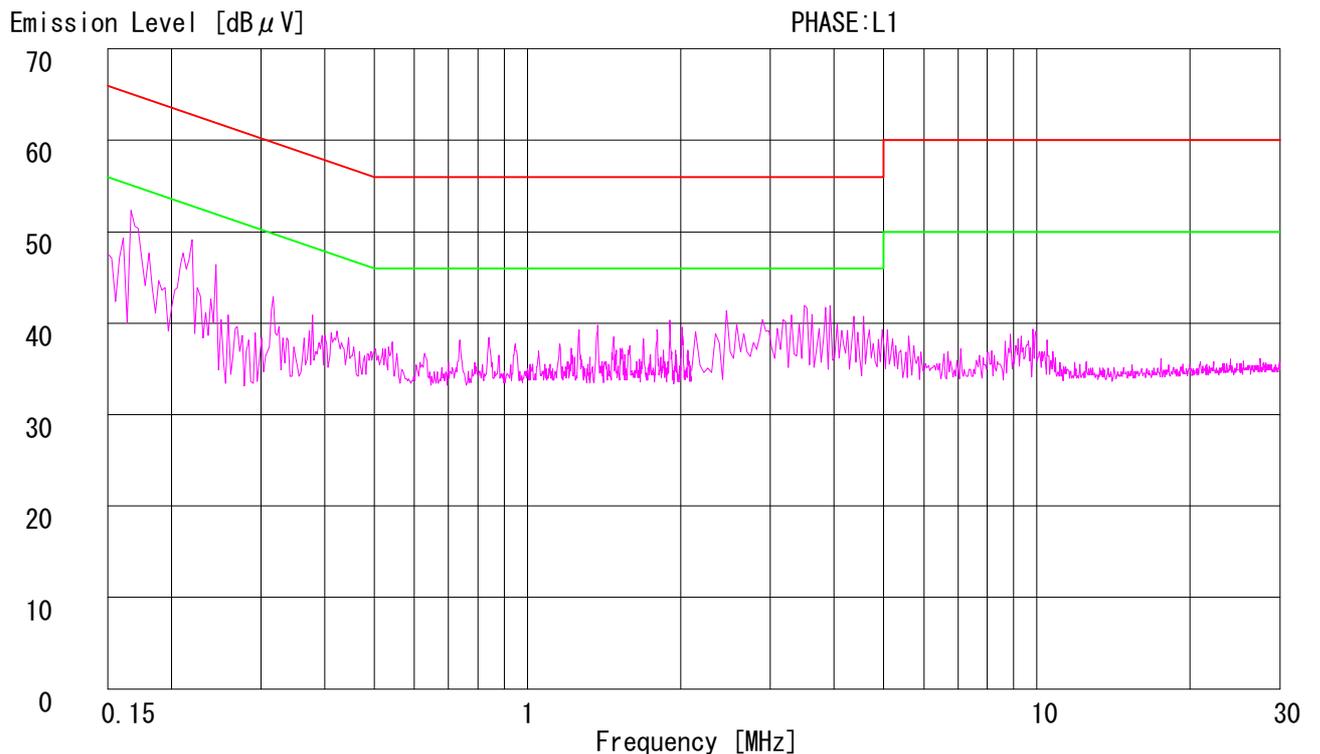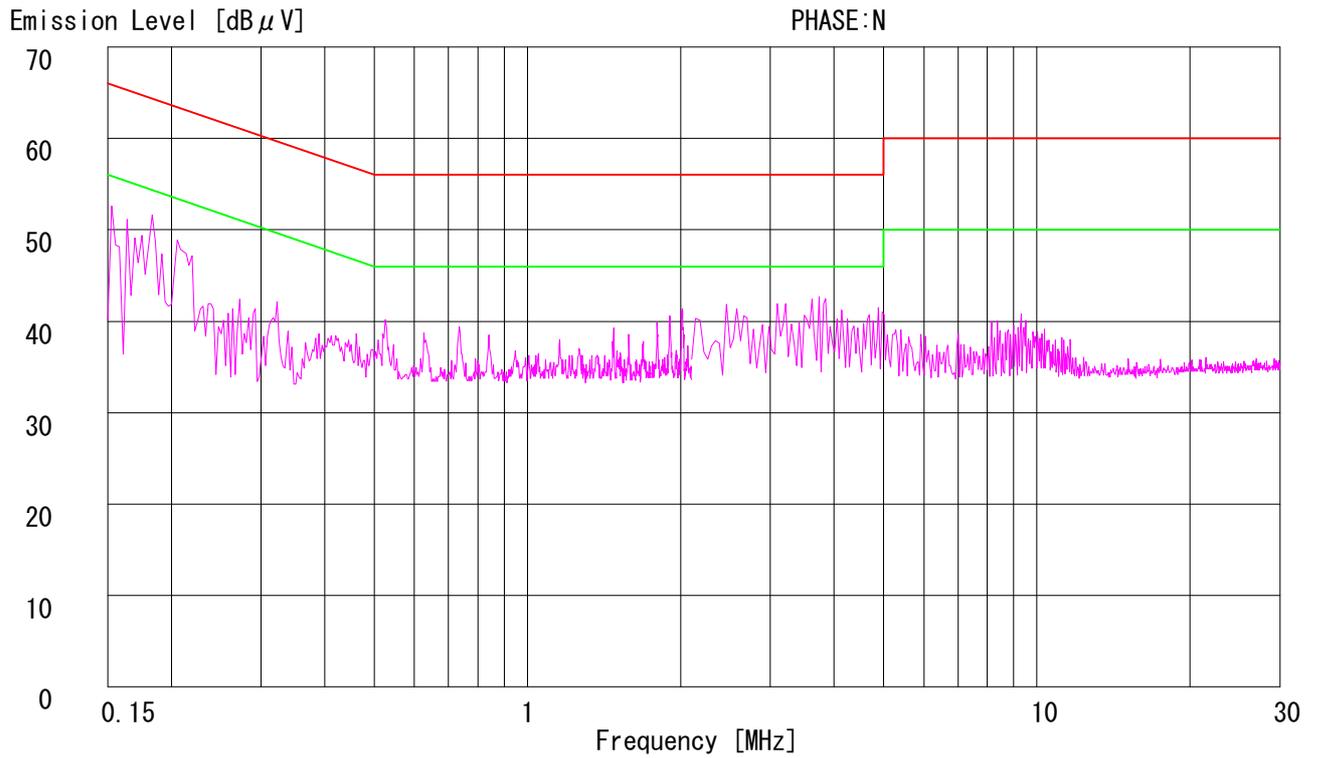

Data of Radiated Disturbance Test

UL Japan, Inc.
YAMAKITA No.1 Semi-anechoic chamber
Report No. : 30IE0012-YK-01-A

Applicant : Sony EMCS Corporation Kisarazu TEC
 Kind of Equipment : Network Audio Component/Server
 Model No. : NAC-SV10i
 Serial No. : 31
 Power : AC120V/60Hz
 Mode : Audio Play by Wired LAN
 Remarks : -
 Date : 6/7/2010
 Test Distance : 3 m
 Temperature : 23 °C
 Humidity : 57 %
 Regulation : FCC Part15B § 15. 109(a)

Engineer : Minoru Nakatake

No.	FREQ. [MHz]	ANT TYPE	READING		ANT FACTOR [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	ATTEN. [dB]	RESULT		LIMITS		MARGIN	
			HOR [dB μ V]	VER					HOR [dB μ V/m]	VER	HOR [dB]	VER		
1.	87.50	BB	47.8	47.4	7.8	28.5	2.0	6.1	35.2	34.8	40.0	4.8	5.2	
2.	98.80	BB	47.2	43.9	9.9	28.4	2.1	6.1	36.9	33.6	43.5	6.6	9.9	
3.	135.48	BB	37.7	45.9	14.1	28.3	2.5	6.1	32.1	40.3	43.5	11.4	3.2	
4.	169.35	BB	33.8	38.5	15.8	28.2	2.9	6.0	30.3	35.0	43.5	13.2	8.5	
5.	250.00	BB	35.7	40.2	17.6	27.7	3.6	6.0	35.2	39.7	46.0	10.8	6.3	
6.	960.00	BB	36.3	31.7	24.4	28.7	8.0	3.0	43.0	38.4	46.0	3.0	7.6	
7.	960.05	BB	41.9	36.5	24.4	28.7	8.0	3.0	48.6	43.2	54.0	5.4	10.8	
8.	999.99	BB	36.9	38.9	24.8	28.5	8.2	3.0	44.4	46.4	54.0	9.6	7.6	

CALCULATION: READING + ANT.FACTOR + CABLE LOSS - AMP.GAIN + ATTEN.
 Except for the above table : adequate margin data below the limits.

■ ANT : KBA-05 (<300MHz) / KLA-06 ■ AMP : KAF-05 ■ RECEIVER : MTR-06

Data of Radiated Disturbance Test


UL Japan, Inc.

YAMAKITA No.1 Semi-anechoic chamber

Report No. : 30IE0012-YK-01-A

Applicant : Sony EMCS Corporation Kisarazu TEC
Kind of Equipment : Network Audio Component/Server
Model No. : NAC-SV10i
Serial No. : 31
Power : AC120V/60Hz
Mode : Audio Play by Wired LAN
Remarks : -
Date : 6/7/2010
Test Distance : 3 m
Temperature : 23 °C
Humidity : 57 %
Regulation : FCC Part15B § 15. 109(a)

Engineer : Minoru Nakatake

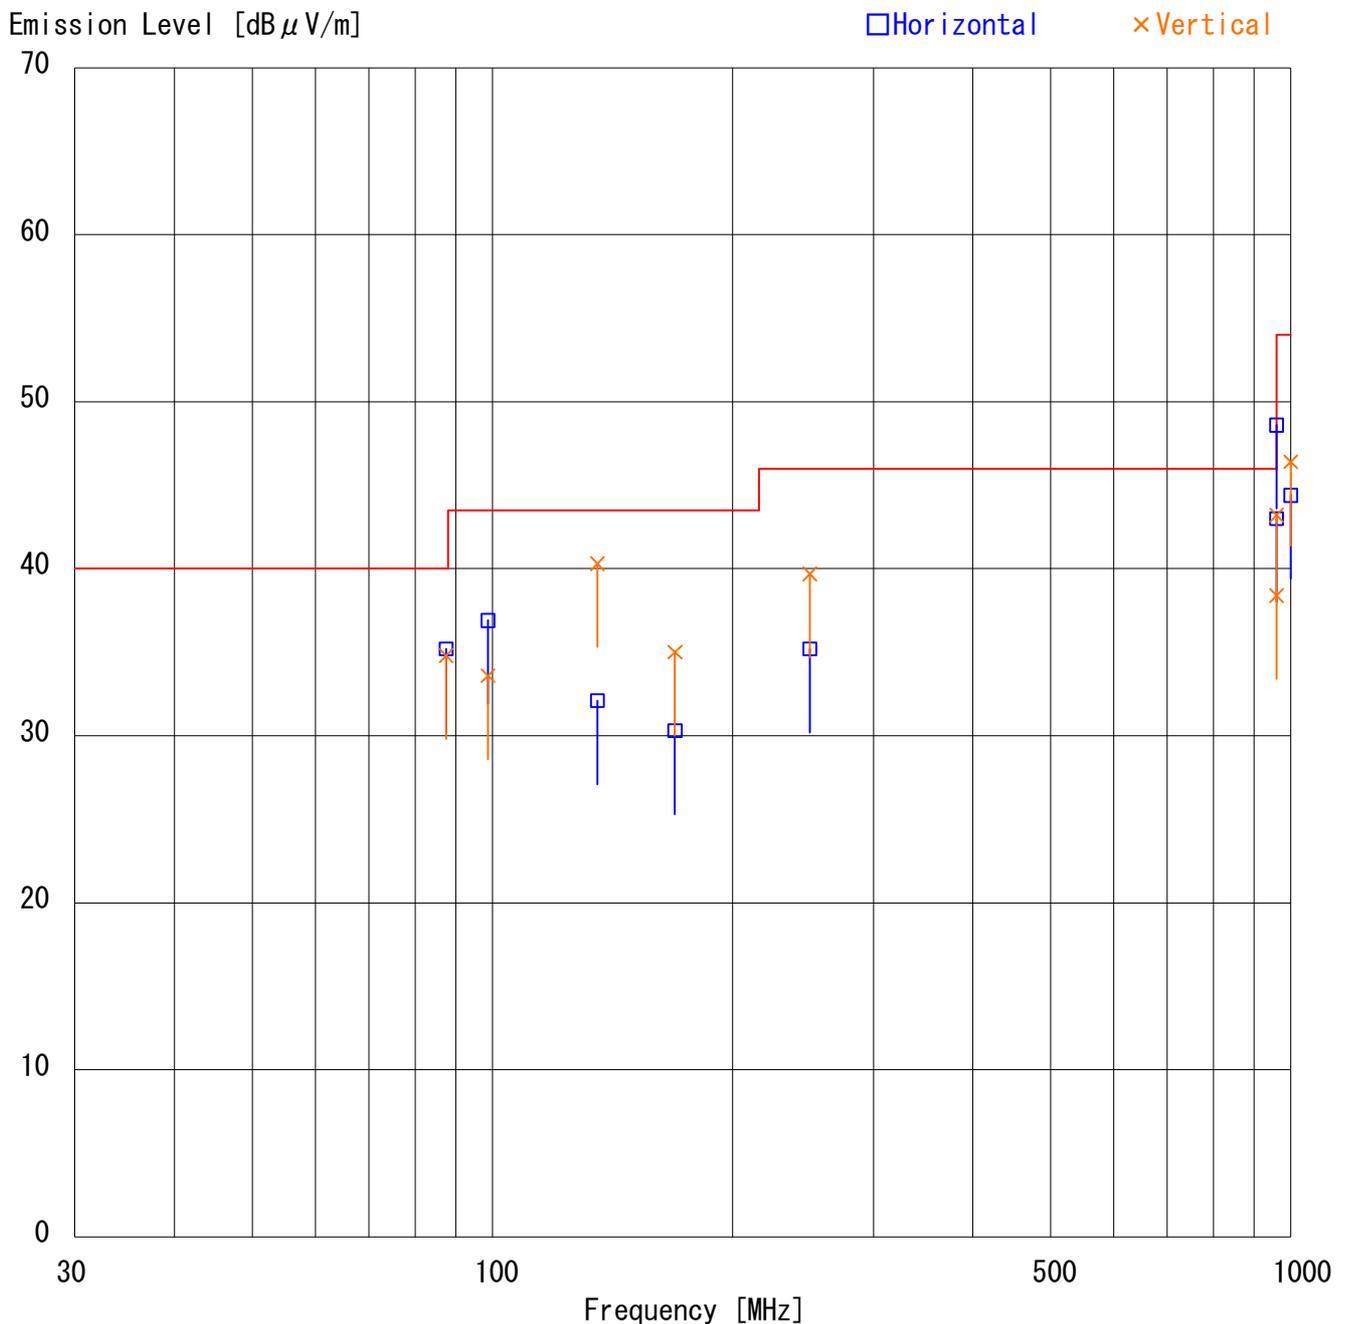

Data of Radiated Disturbance Test

UL Japan, Inc.
YAMAKITA No.1 Semi-anechoic chamber
Report No. : 30IE0012-YK-01-A

Applicant : Sony EMCS Corporation Kisarazu TEC
 Kind of Equipment : Network Audio Component/Server
 Model No. : NAC-SV10i
 Serial No. : 31
 Power : AC120V/60Hz
 Mode : Audio Play by Wired LAN
 Remarks : PK (RBW:1MHz, VBW:3MHz)
 Date : 6/7/2010
 Test Distance : 3 m
 Temperature : 23 °C
 Humidity : 57 %
 Regulation : FCC Part15B CLASS B (PK)

Engineer : Minoru Nakatake

No.	FREQ. [MHz]	ANT TYPE	READING		ANT FACTOR [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	ATTEN. [dB]	RESULT		LIMITS		MARGIN	
			HOR [dB μ V]	VER					HOR [dB μ V/m]	VER	HOR [dB]	VER		
1.	1124.91	BB	55.1	57.2	24.4	37.8	4.0	0.0	45.7	47.8	74.0	28.3	26.2	

CALCULATION: READING + ANT.FACTOR + CABLE LOSS - AMP.GAIN + ATTEN.
 Except for the above table : adequate margin data below the limits.

■ ANT:KHA-02 ■ CABLE:KCC-D14/D15 ■ AMP:KAF-02 ■ SPECTRUM ANALYZER:KSA-04

Data of Radiated Disturbance Test

UL Japan, Inc.
YAMAKITA No.1 Semi-anechoic chamber
Report No. : 301E0012-YK-01-A

Applicant : Sony EMCS Corporation Kisarazu TEC
 Kind of Equipment : Network Audio Component/Server
 Model No. : NAC-SV10i
 Serial No. : 31
 Power : AC120V/60Hz
 Mode : Audio Play by Wired LAN
 Remarks : AV (RBW:1MHz, VBW:10Hz)
 Date : 6/7/2010
 Test Distance : 3 m
 Temperature : 23 °C
 Humidity : 57 %
 Regulation : FCC Part15B § 15.109(a)

Engineer : Minoru Nakatake

No.	FREQ. [MHz]	ANT TYPE	READING		ANT FACTOR [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	ATTEN. [dB]	RESULT		LIMITS		MARGIN	
			HOR [dB μ V]	VER					HOR [dB μ V/m]	VER	HOR [dB]	VER		
1.	1124.91	BB	52.8	55.4	24.4	37.8	4.0	0.0	43.4	46.0	54.0	10.6	8.0	

CALCULATION: READING + ANT.FACTOR + CABLE LOSS - AMP.GAIN + ATTEN.
 Except for the above table : adequate margin data below the limits.

■ ANT:KHA-02 ■ CABLE:KCC-D14/D15 ■ AMP:KAF-02 ■ SPECTRUM ANALYZER:KSA-04

Data of Radiated Disturbance Test

UL Japan, Inc.

YAMAKITA No.1 Semi-anechoic chamber

Report No. : 301E0012-YK-01-A

Applicant : Sony EMCS Corporation Kisarazu TEC
 Kind of Equipment : Network Audio Component/Server
 Model No. : NAC-SV10i
 Serial No. : 31
 Power : AC120V/60Hz
 Mode : Audio Play by iPod
 Remarks : -
 Date : 6/1/2010
 Test Distance : 3 m
 Temperature : 21 °C
 Humidity : 62 %
 Regulation : FCC Part15B § 15. 109(a)

Engineer : Takahiro Suzuki

No.	FREQ. [MHz]	ANT TYPE	READING		ANT FACTOR [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	ATTEN. [dB]	RESULT		LIMITS [dB μ V/m]	MARGIN	
			HOR [dB μ V]	VER					HOR [dB μ V/m]	VER		HOR [dB]	VER
1.	87.50	BB	46.6	40.7	7.8	28.5	2.0	6.1	34.0	28.1	40.0	6.0	11.9
2.	95.97	BB	47.0	47.3	9.4	28.5	2.1	6.1	36.1	36.4	43.5	7.4	7.1
3.	124.19	BB	34.1	43.8	13.3	28.4	2.4	6.1	27.5	37.2	43.5	16.0	6.3
4.	127.02	BB	35.6	44.2	13.5	28.3	2.4	6.1	29.3	37.9	43.5	14.2	5.6
5.	163.71	BB	31.4	39.8	15.6	28.2	2.8	6.0	27.6	36.0	43.5	15.9	7.5
6.	250.01	BB	37.5	37.6	17.6	27.7	3.6	6.0	37.0	37.1	46.0	9.0	8.9
7.	875.01	BB	34.6	35.8	23.6	28.8	7.7	3.0	40.1	41.3	46.0	5.9	4.7
8.	960.00	BB	36.2	31.2	24.4	28.7	8.0	3.0	42.9	37.9	46.0	3.1	8.1
9.	960.05	BB	40.5	33.8	24.4	28.7	8.0	3.0	47.2	40.5	54.0	6.8	13.5
10.	999.99	BB	39.8	40.8	24.8	28.5	8.2	3.0	47.3	48.3	54.0	6.7	5.7

CALCULATION: READING + ANT.FACTOR + CABLE LOSS - AMP.GAIN + ATTEN.

Except for the above table : adequate margin data below the limits.

■ANT:KBA-05(<300MHz)/KLA-06 ■AMP:KAF-05 ■RECEIVER:MTR-06

** : enough margin compared to another polarized wave data.

Data of Radiated Disturbance Test


UL Japan, Inc.

YAMAKITA No.1 Semi-anechoic chamber

Report No. : 30IE0012-YK-01-A

Applicant : Sony EMCS Corporation Kisarazu TEC
Kind of Equipment : Network Audio Component/Server
Model No. : NAC-SV10i
Serial No. : 31
Power : AC120V/60Hz
Mode : Audio Play by iPod
Remarks : -
Date : 6/1/2010
Test Distance : 3 m
Temperature : 21 °C
Humidity : 62 %
Regulation : FCC Part15B § 15. 109(a)

Engineer : Takahiro Suzuki

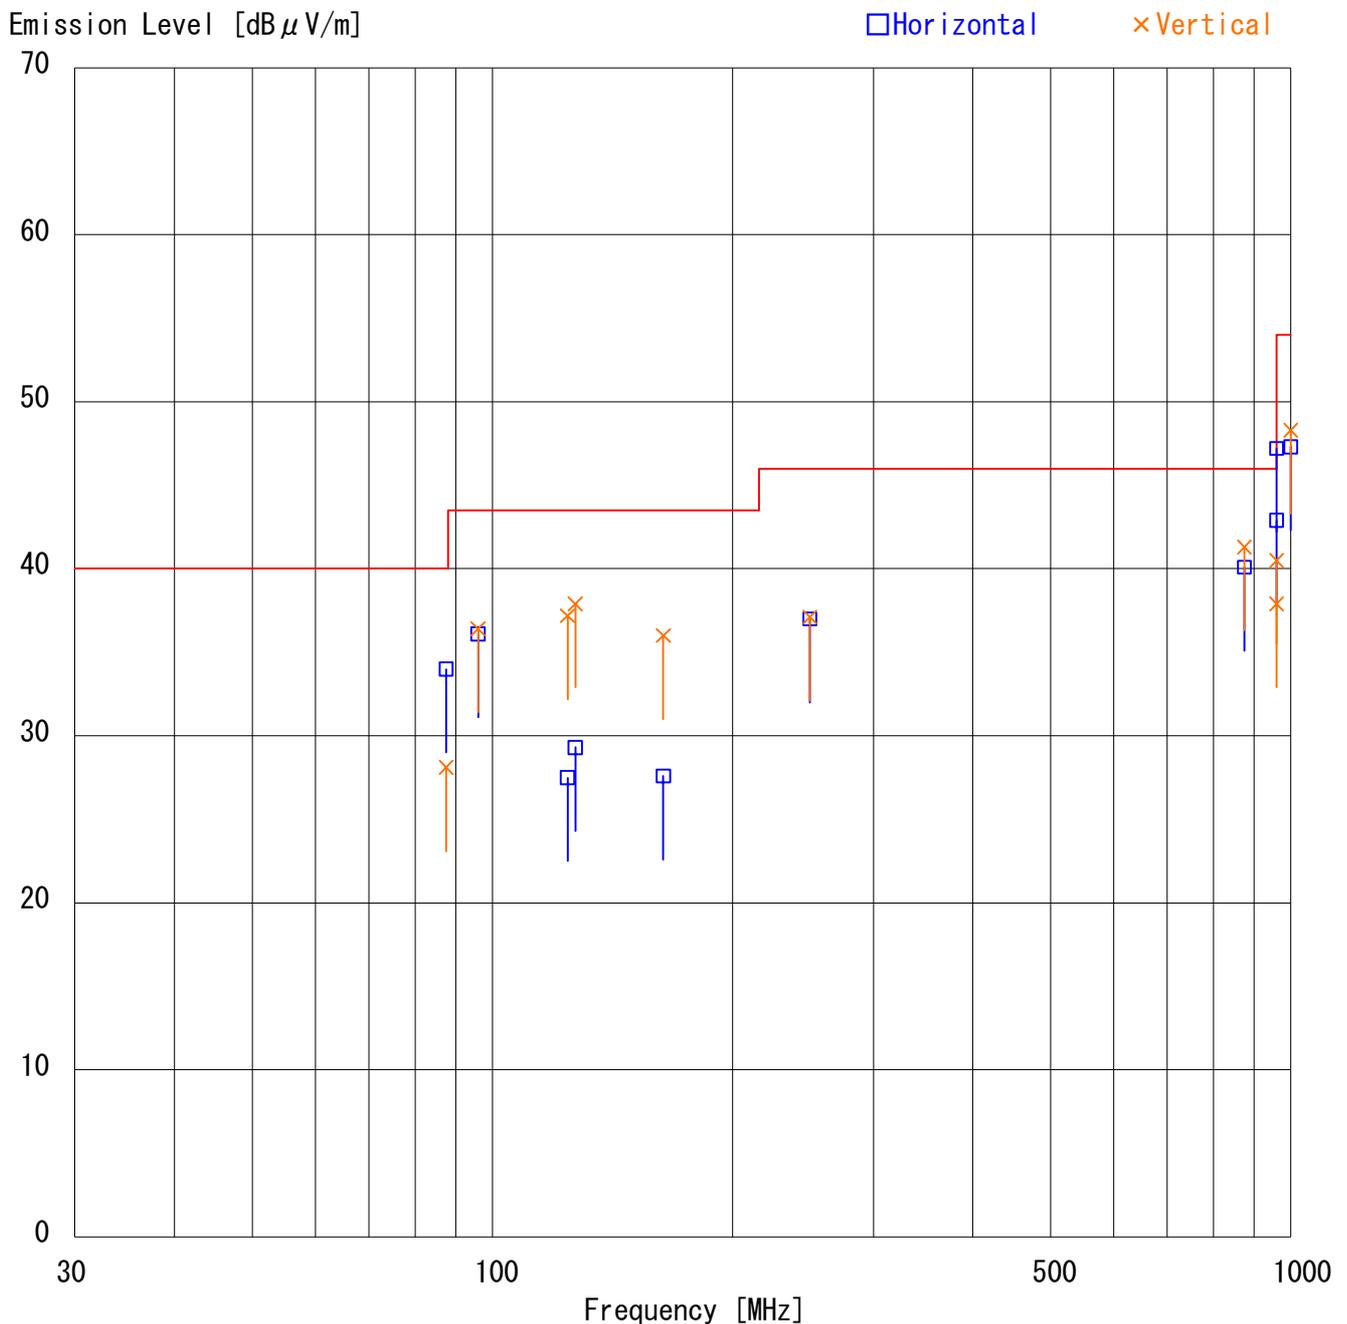

Data of Radiated Disturbance Test

UL Japan, Inc.
YAMAKITA No.1 Semi-anechoic chamber
Report No. : 301E0012-YK-01-A

Applicant : Sony EMCS Corporation Kisarazu TEC
 Kind of Equipment : Network Audio Component/Server
 Model No. : NAC-SV10i
 Serial No. : 31
 Power : AC120V/60Hz
 Mode : Audio Play by iPod
 Remarks : PK (RBW:1MHz, VBW:3MHz)
 Date : 6/7/2010
 Test Distance : 3 m
 Temperature : 23 °C
 Humidity : 57 %
 Regulation : FCC Part15B CLASS B (PK)

Engineer : Minoru Nakatake

No.	FREQ. [MHz]	ANT TYPE	READING		ANT FACTOR [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	ATTEN. [dB]	RESULT		LIMITS		MARGIN	
			HOR [dB μ V]	VER					HOR [dB μ V/m]	VER	HOR [dB]	VER		
1.	1124.91	BB	55.1	57.5	24.4	37.8	4.0	0.0	45.7	48.1	74.0	28.3	25.9	

CALCULATION: READING + ANT.FACTOR + CABLE LOSS - AMP.GAIN + ATTEN.
 Except for the above table : adequate margin data below the limits.

■ ANT:KHA-02 ■ CABLE:KCC-D14/D15 ■ AMP:KAF-02 ■ SPECTRUM ANALYZER:KSA-04

Data of Radiated Disturbance Test

UL Japan, Inc.
YAMAKITA No.1 Semi-anechoic chamber
Report No. : 30IE0012-YK-01-A

Applicant : Sony EMCS Corporation Kisarazu TEC
 Kind of Equipment : Network Audio Component/Server
 Model No. : NAC-SV10i
 Serial No. : 31
 Power : AC120V/60Hz
 Mode : Audio Play by iPod
 Remarks : AV (RBW:1MHz, VBW:10Hz)
 Date : 6/7/2010
 Test Distance : 3 m
 Temperature : 23 °C
 Humidity : 57 %
 Regulation : FCC Part15B § 15.109(a)

Engineer : Minoru Nakatake

No.	FREQ. [MHz]	ANT TYPE	READING		ANT FACTOR [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	ATTEN. [dB]	RESULT		LIMITS		MARGIN	
			HOR [dB μ V]	VER					HOR [dB μ V/m]	VER	HOR [dB]	VER		
1.	1124.91	BB	52.5	56.3	24.4	37.8	4.0	0.0	43.1	46.9	54.0	10.9	7.1	

CALCULATION: READING + ANT.FACTOR + CABLE LOSS - AMP.GAIN + ATTEN.
 Except for the above table : adequate margin data below the limits.

■ ANT:KHA-02 ■ CABLE:KCC-D14/D15 ■ AMP:KAF-02 ■ SPECTRUM ANALYZER:KSA-04

Data of Radiated Disturbance Test

UL Japan, Inc.
YAMAKITA No.1 Semi-anechoic chamber
Report No. : 30IE0012-YK-01-A

Applicant : Sony EMCS Corporation Kisarazu TEC
 Kind of Equipment : Network Audio Component/Server
 Model No. : NAC-SV10i
 Serial No. : 31
 Power : AC120V/60Hz
 Mode : Audio Play by Audio In source
 Remarks : -
 Date : 6/1/2010
 Test Distance : 3 m
 Temperature : 21 °C
 Humidity : 62 %
 Regulation : FCC Part15B § 15. 109(a)

Engineer : Takahiro Suzuki

No.	FREQ. [MHz]	ANT TYPE	READING		ANT FACTOR [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	ATTEN. [dB]	RESULT		LIMITS [dB μ V/m]	MARGIN	
			HOR [dB μ V]	VER					HOR [dB μ V/m]	VER		HOR [dB]	VER
1.	87.50	BB	46.5	40.5	7.8	28.5	2.0	6.1	33.9	27.9	40.0	6.1	12.1
2.	95.97	BB	46.8	46.8	9.4	28.5	2.1	6.1	35.9	35.9	43.5	7.6	7.6
3.	124.19	BB	34.3	44.4	13.3	28.4	2.4	6.1	27.7	37.8	43.5	15.8	5.7
4.	127.02	BB	35.7	44.5	13.5	28.3	2.4	6.1	29.4	38.2	43.5	14.1	5.3
5.	163.71	BB	31.6	39.5	15.6	28.2	2.8	6.0	27.8	35.7	43.5	15.7	7.8
6.	250.00	BB	37.4	37.3	17.6	27.7	3.6	6.0	36.9	36.8	46.0	9.1	9.2
7.	875.01	BB	34.9	35.2	23.6	28.8	7.7	3.0	40.4	40.7	46.0	5.6	5.3
8.	960.00	BB	36.1	31.0	24.4	28.7	8.0	3.0	42.8	37.7	46.0	3.2	8.3
9.	960.05	BB	40.7	33.3	24.4	28.7	8.0	3.0	47.4	40.0	54.0	6.6	14.0
10.	999.99	BB	39.6	40.3	24.8	28.5	8.2	3.0	47.1	47.8	54.0	6.9	6.2

CALCULATION: READING + ANT.FACTOR + CABLE LOSS - AMP.GAIN + ATTEN.
 Except for the above table : adequate margin data below the limits.

■ANT:KBA-05(<300MHz)/KLA-06 ■AMP:KAF-05 ■RECEIVER:MTR-06
 **: enough margin compared to another polarized wave data.

Data of Radiated Disturbance Test


UL Japan, Inc.

YAMAKITA No.1 Semi-anechoic chamber

Report No. : 30IE0012-YK-01-A

Applicant : Sony EMCS Corporation Kisarazu TEC
Kind of Equipment : Network Audio Component/Server
Model No. : NAC-SV10i
Serial No. : 31
Power : AC120V/60Hz
Mode : Audio Play by Audio In source
Remarks : -
Date : 6/1/2010
Test Distance : 3 m
Temperature : 21 °C
Humidity : 62 %
Regulation : FCC Part15B § 15. 109(a)

Engineer : Takahiro Suzuki

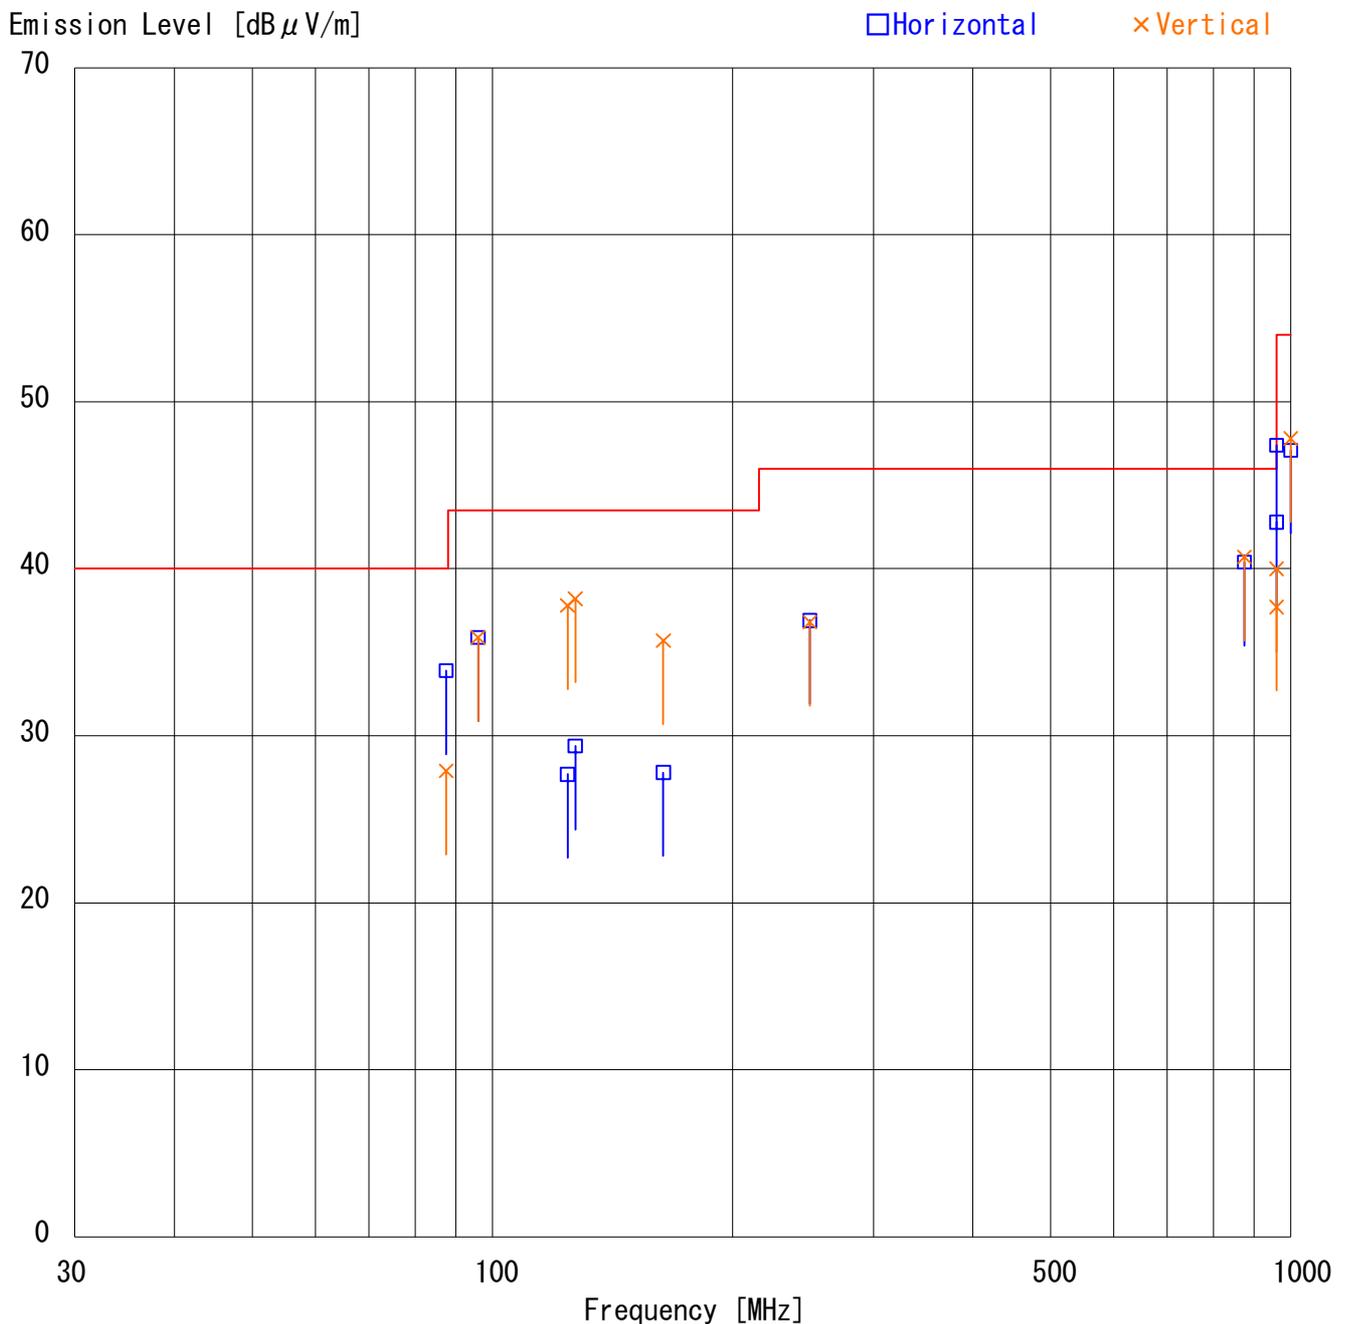

Data of Radiated Disturbance Test

UL Japan, Inc.
YAMAKITA No.1 Semi-anechoic chamber
Report No. : 301E0012-YK-01-A

Applicant : Sony EMCS Corporation Kisarazu TEC
 Kind of Equipment : Network Audio Component/Server
 Model No. : NAC-SV10i
 Serial No. : 31
 Power : AC120V/60Hz
 Mode : Audio Play by Audio In source
 Remarks : PK (RBW:1MHz, VBW:3MHz)
 Date : 6/7/2010
 Test Distance : 3 m
 Temperature : 23 °C Engineer : Minoru Nakatake
 Humidity : 57 %
 Regulation : FCC Part15B CLASS B (PK)

No.	FREQ. [MHz]	ANT TYPE	READING		ANT FACTOR [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	ATTEN. [dB]	RESULT		LIMITS		MARGIN	
			HOR [dB μ V]	VER					HOR [dB μ V/m]	VER	HOR [dB]	VER		
1.	1124.91	BB	54.6	57.1	24.4	37.8	4.0	0.0	45.2	47.7	74.0	28.8	26.3	

CALCULATION: READING + ANT.FACTOR + CABLE LOSS - AMP.GAIN + ATTEN.
 Except for the above table : adequate margin data below the limits.

■ ANT:KHA-02 ■ CABLE:KCC-D14/D15 ■ AMP:KAF-02 ■ SPECTRUM ANALYZER:KSA-04

Data of Radiated Disturbance Test

UL Japan, Inc.
YAMAKITA No.1 Semi-anechoic chamber
Report No. : 301E0012-YK-01-A

Applicant : Sony EMCS Corporation Kisarazu TEC
 Kind of Equipment : Network Audio Component/Server
 Model No. : NAC-SV10i
 Serial No. : 31
 Power : AC120V/60Hz
 Mode : Audio Play by Audio In source
 Remarks : AV (RBW:1MHz, VBW:10Hz)
 Date : 6/7/2010
 Test Distance : 3 m
 Temperature : 23 °C Engineer : Minoru Nakatake
 Humidity : 57 %
 Regulation : FCC Part15B § 15.109(a)

No.	FREQ. [MHz]	ANT TYPE	READING		ANT FACTOR [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	ATTEN. [dB]	RESULT		LIMITS		MARGIN	
			HOR [dB μ V]	VER [dB μ V]					HOR [dB μ V/m]	VER [dB μ V/m]	HOR [dB]	VER [dB]		
1.	1124.91	BB	52.7	55.7	24.4	37.8	4.0	0.0	43.3	46.3	54.0	10.7	7.7	

CALCULATION: READING + ANT.FACTOR + CABLE LOSS - AMP.GAIN + ATTEN.
 Except for the above table : adequate margin data below the limits.

■ ANT:KHA-02 ■ CABLE:KCC-D14/D15 ■ AMP:KAF-02 ■ SPECTRUM ANALYZER:KSA-04

APPENDIX 3 Test Instruments

EMI test equipment

Control No.	Instrument	Manufacturer	Model No	Serial No	Test Item	Calibration Date * Interval(month)
CUST-YA-CE	Conducted emission(software)	UL Japan	CE(Ver.2.0)	-	CE	-
KAT13-01	Attenuator	JFW	50FP-013-H2N	-	CE	2010/04/27 * 12
KLS-02	LISN(AMN)	Schwarzbeck	NSLK8127	8127344	CE(AE)	2009/08/18 * 12
KLS-01	LISN(AMN)	Schwarzbeck	NSLK8126	8126354	CE(EUT)	2010/02/25 * 12
KTM-01	Terminator	TME	CT-01BP	-	CE	2009/10/05 * 12
KCC-33/34/KRM-03	Coaxial Cable/RF Relay Matrix	Fujikura/Suhner/TSJ	5D-2W(12m)/S04272B(2m)/RFM-E421	-/01055	CE	2009/10/27 * 12
CUST-YA-RE	Radiated emission(software)	UL Japan	RE(Ver.2.0)	-	RE	-
KAEC-01	Anechoic Chamber	JSE	Semi 3m	1	RE	2008/08/22 * 36
KAF-05	Pre Amplifier	Agilent	8447D	2944A10150	RE	2010/03/29 * 12
KAT6-01	Attenuator	INMET	18N-6dB	-	RE	2010/03/29 * 12
KBA-05	Biconical Antenna	Schwarzbeck	BBA9106	2513	RE	2009/07/12 * 12
KAT3-08	Attenuator	JFW IND. INC.	50HF-003N	-	RE	2009/08/18 * 12
KLA-06	Logperiodic Antenna	Schwarzbeck	UKLP9140-A	125	RE	2009/06/13 * 12
KCC-30/31/32/34/37/KRM-03	Coaxial Cable/RF Relay Matrix	Fujikura/Suhner/TSJ	5D-2W/S04272B/RFM-E421	-/01055	RE	2009/10/27 * 12
KAF-02	Pre Amplifier	Hewlett Packard	8449B	3008A01268	RE	2010/04/23 * 12
KSA-04	Spectrum Analyzer	Advantest	R3271A	95060087	CE/RE	2010/01/12 * 12
KTR-02	Test Receiver	Rohde & Schwarz	ESCS30	830986/017	CE	2009/09/16 * 12
MTR-06	Test Receiver	Rohde & Schwarz	ESCS30	830245/011	RE	2009/11/18 * 12
KHA-02	Horn Antenna	Schwarzbeck	BBHA9120D	230	RE	2010/04/05 * 12
KCC-D14/D15	Coaxial cable	Suhner	SUCOFLEX 104(13m)/SUCOFLEX 104(0.6m)	232321/4 / 232365/4	RE	2009/12/17 * 12
KJM-07	Measure	KOMELON	KMC-36	-	CE/RE	-
KOS-01	Humidity Indicator	Custom	CTH-190	K-01	CE	2009/07/29 * 12
KOS-02	Humidity Indicator	Custom	CTH-190	K-02	RE	2009/07/23 * 12

The expiration date of the calibration is the end of the expired month .
As for some calibrations performed after the tested dates , those test equipment have been controlled by means of an unbroken chains of calibrations .

All equipment is calibrated with traceable calibrations . Each calibration is traceable to the national or international standards .

Test Item :

CE: Conducted emission.

RE: Radiated emission