
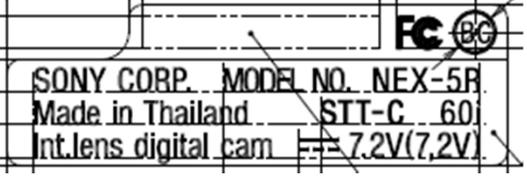
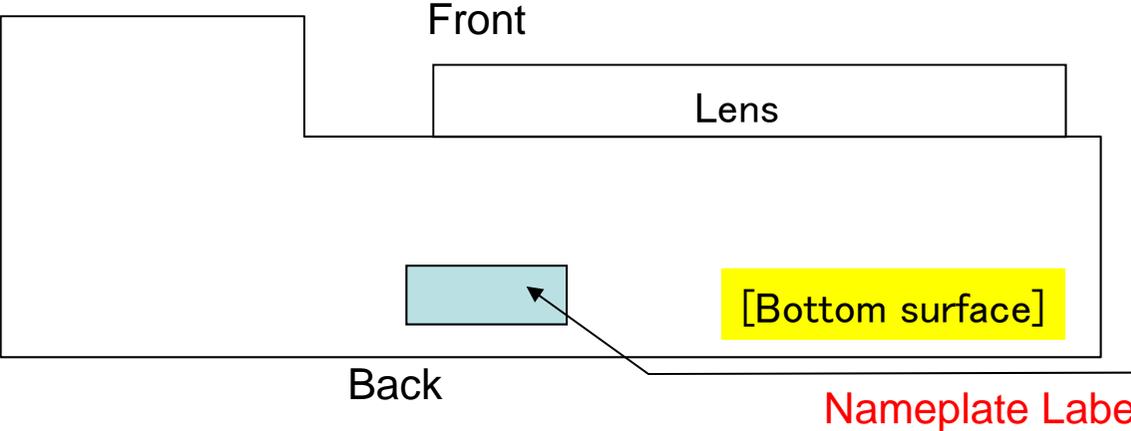



NEX-5R Label Position

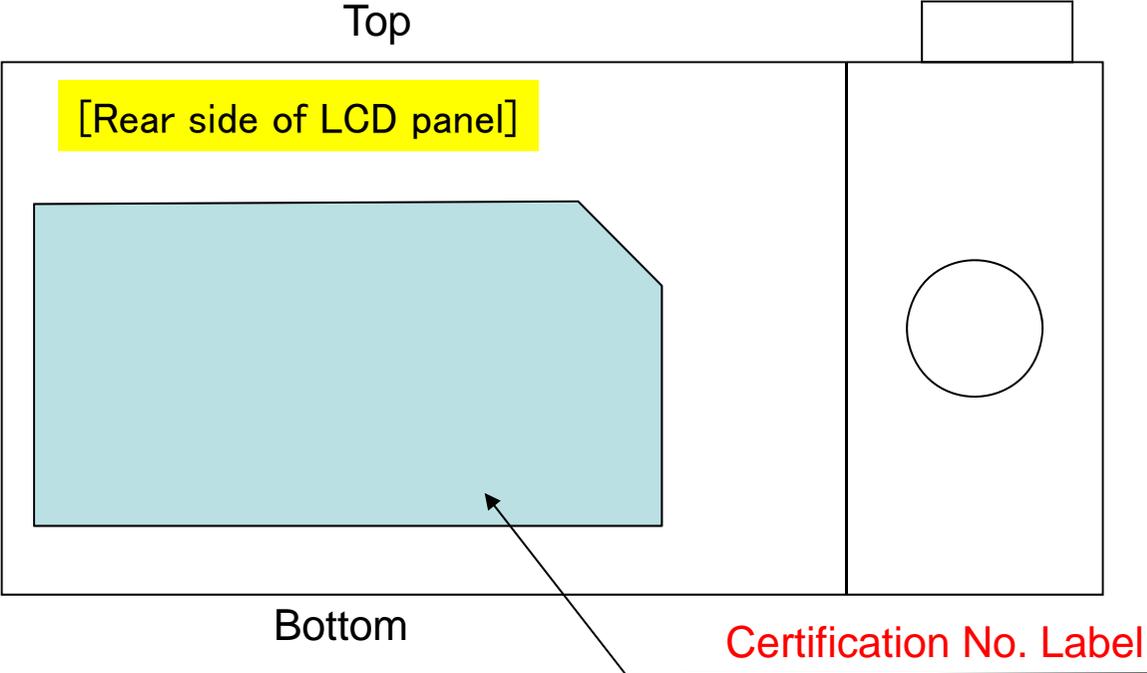

	DETAILS OF LABEL ラベル詳細			DETAILS OF PRINTING INK 印刷インク詳細			
	Laminate	Adhesive tape	BASE	Printing	Serial number	(K)	(K)
MANUFACTURER SANKO SANGYO							
MANUFACTURE		LINTEC Corporation	LINTEC Corporation	T&K TOKA Corporation	PILOT Corporation		
PLACE OF ORIGIN		JAPAN	JAPAN	JAPAN	JAPAN		
TYPE No.		A-300	MP100AC Mat Silver	UV161	GT		

記載文字 descriptive letters	字高 character height	タイプフェイス typeface
SONY CORP.	H=0.9	SONY ID TYPE HRC
MODEL NO.		
NEX-5R		
Made in Thailand		
STT-C		
60i	H=1.2	清刷参照
Int.lens digital cam		
■7.2V(7,2V)	H=0.8	SONY ID TYPE HRC
FC		
BC		

APPLICABLE SAFETY STANDARD	
UL60950-1 (UL969 PGDQ2)	
DETAILS OF MATERIAL	
MANUFACTURER	SANKO SANGYO CO LTD
TYPE NO.	SP-SM

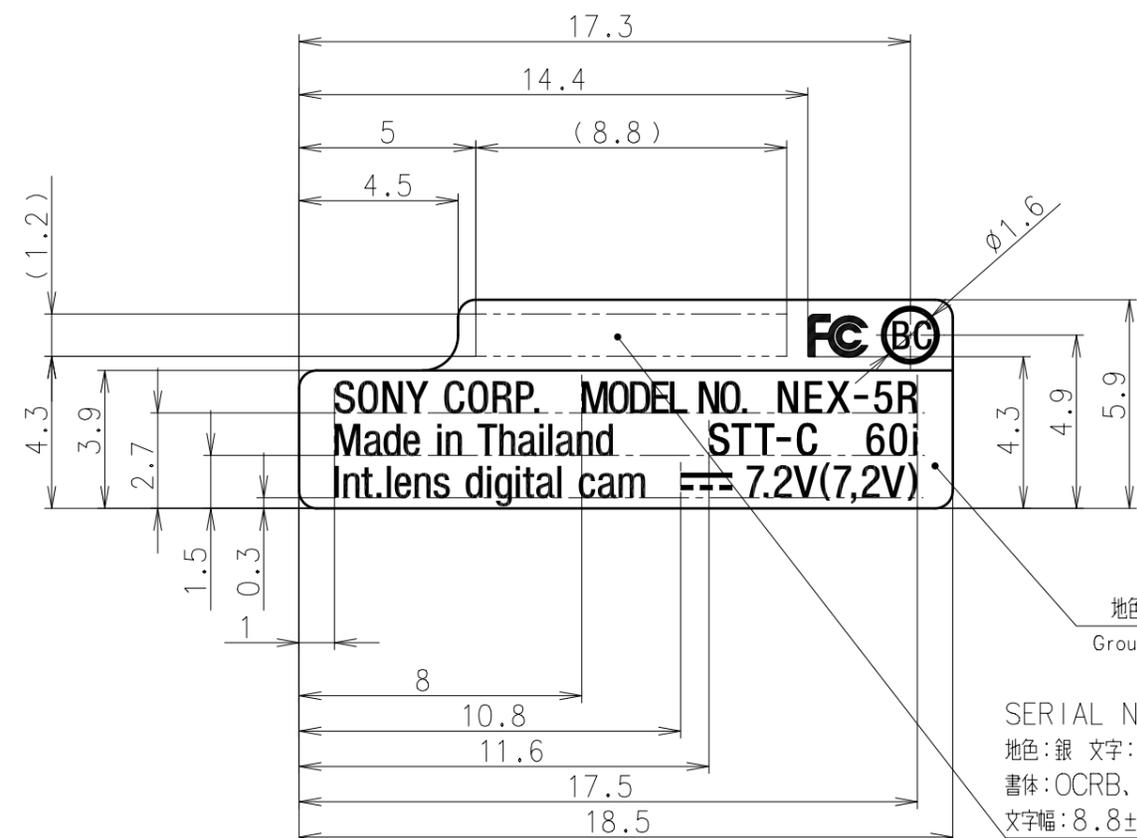

地色:黒
Ground color:Black

SERIAL NO. 印刷部 / Position of SERIAL NO.
地色:銀 文字:黒 / Ground color:Silver Letter:Black
書体:OCRB, 字高1.2 太字 / Typeface:OCRB, Character height:1.2, Bold face
文字幅:8.8±0.5(0000000の時) / Width of character:8.8±0.5


材料構成図

material configuration diagram



納入形態

derivery form

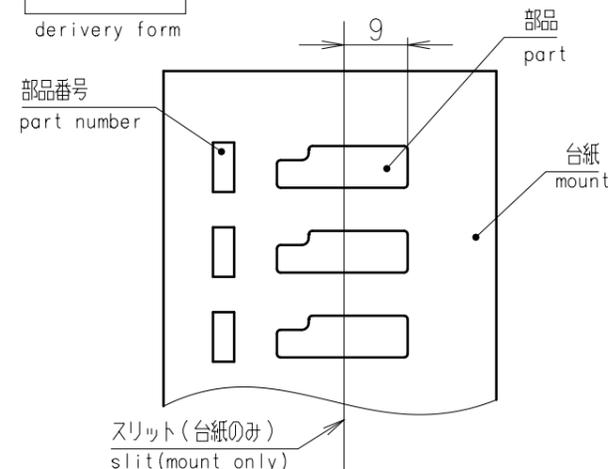

※文字は全て抜き文字(文字:銀)
Print color shall be in silver (blank) onblack background.

注1)品質特性:STM-1077「ソニー部品設計基準-機銘板」の第7項に定める各特性を満足すること。
note1)Quality character istics;Each character istic defined in Article 7 of Sony parts design Standard model number label must be satisfied in STM-1077.

- 版下は校正、承認を要す。
2)Block copy requires checking and approval.
- SERIAL NO. は連番で印刷のこと。数字は別途指示による。
3)Print serial numbers in sequence.Numbers will be separately instructed.
- 外形より文字かけ等なきこと。
4)Must be character applies.
- 台紙上に部品番号を明記のこと。(各シートごと)
5)It must be stated part number on mount.(Each sheet)
- 検定品と同時にサンプル20部(10枚1シート単位)を設計に提出のこと。
6)Sample 20 section must be submitted simultaneously with inspection. (One sheet for every 10 sheets.)
- 10枚貼りのシート状で納入のこと。
7)Delivery must be made in sheet,and one sheet for every 10 pcs.
- この部品にはSS-00259-01 に指定する物質を含んだ材料は、使用してはならない。
8)For this part,a ban is placed on the use of the materials that include the substances specified in SS-00259-01.
- 再生樹脂・被覆電線はグリーンパートナー認定取引先から調達すること。
9)Recycled resins and wire rods only from the business partners that Sony approves as Green Partners.
- UL969(PGDQ2)認可品を使用のこと。
10) Must be use UL969(PGDQ2) approved Label.
- ULレコグナイズドマーク、UL許認可コードNo.、登録会社名を最小梱包単位毎に表示すること。
11) UL recognized mark, UL code No. and registrational company name must be shown on minimum packing.



原寸大

△x				UNIT mm	TOLERANCE	USED ON	RANK
△x				ANGLE	±0.2		FAMILY
△x				SCALE		5:1	ORIGINAL MODEL
△x				MATERIAL (COLOR)		FINISH (COLOR)	
△x				PETP+AL+PSA(銀) 感圧性接着剤付 アルミ蒸着 ポリエステルフィルム		凸版印刷	
△x				TITLE/DESCRIPTION			
△x				(E) LABEL, MODEL NUMBER (758)			
HISTORY X COUNT SUFFIX REPL. ECN-NO. DATE REVISION SIGN.				TITLE/DESCRIPTION			
DRAWN BY 藤井 12.06.25				(J) 機銘板(758)			
PLANNED BY 藤井 12.06.25				PART NO. 4-440-320-01			
CHECKED BY 泉 12.06.25				SHEET 1/1			
APPROVED BY 岸 12.06.25				MODEL CX75820C3-UC2			
TENTATIVE PART NO. 0-529-872-01							

THIS DOCUMENT IS THE PROPRIETARY PROPERTY OF SONY. ITS USE IS AUTHORIZED ONLY FOR RESPONDING TO A REQUEST FOR QUOTATION, OR FOR THE PERFORMANCE OF WORK FOR SONY. ALL QUESTIONS MUST BE REFERRED TO THE LOCAL PURCHASING DEPARTMENT OF SONY. THE REPRODUCTION, DISTRIBUTION AND UTILIZATION OF THIS DOCUMENT AS WELL AS THE COMMUNICATION OF ITS CONTENTS TO OTHERS WITHOUT EXPRESS AUTHORIZATION IS PROHIBITED. OFFENDERS WILL BE HELD LIABLE FOR THE PAYMENT OF DAMAGES. ALL RIGHTS RESERVED IN THE EVENT OF THE GRANT OF A PATENT, UTILITY MODEL OR DESIGN. COPYRIGHT RESERVED.