

FCC RADIO TEST REPORT

according to

47 CFR FCC Part 15 Subpart C § 15.247

Equipment : Internet TV Box
Model No. : NSZ-GT1
Brand Name : Sony
Filing Type : New Application
Applicant : Sony Corporation
8-4 Shiomi, Kisarazu-shi, Chiba-ken 292-0834, Japan
FCC ID : AK8NSZGT1
Manufacturer : Hon Hai Precision Industry CO.,LTD.
2, Tzu-Yu ST, Tu-Cheng, Taipei hsien 236, Taiwan, R.O.C.
Received Date : May 04, 2010
Final Test Date : May 21, 2010

Statement

Test result included is only for the 802.11n 5G (5725 ~ 5850MHz)/ 2.4G of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.4-2003** and **47 CFR FCC Part 15 Subpart C**.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



SPORTON International Inc.

No. 52 Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.

Table of Contents

1 SUMMARY OF THE TEST RESULT 2

2 GENERAL INFORMATION..... 3

2.1 Product Details 3

2.2 Table for Filed Antenna 3

2.3 Table for Carrier Frequencies 4

2.4 Table for Test Modes 5

2.5 Table for Testing Locations 5

2.6 Table for Supporting Units..... 6

2.7 Table for Parameters of Test Software Setting 6

2.8 EUT Operation during Test 7

2.9 Test Configuration 7

3 TEST RESULT 9

3.1 AC Power Line Conducted Emissions Measurement..... 9

3.2 Maximum Conducted Output Power Measurement 13

3.3 Power Spectral Density Measurement 18

3.4 6dB Spectrum Bandwidth Measurement..... 31

3.5 Radiated Emissions Measurement..... 44

3.6 Band Edge and Fundamental Emissions Measurement 82

3.7 Antenna Requirements..... 95

4 LIST OF MEASURING EQUIPMENTS 96

5 TEST LOCATION..... 98

6 TAF CERTIFICATE OF ACCREDITATION 99

APPENDIX A. MAXIMUM PERMISSIBLE EXPOSURE..... A1 ~ A3

APPENDIX B. TEST PHOTOS B1 ~ B7

APPENDIX C. PHOTOGRAPHS OF EUT C1 ~ C25

CERTIFICATE OF COMPLIANCE

according to

47 CFR FCC Part 15 Subpart C § 15.247

Equipment : Internet TV Box
Model No. : NSZ-GT1
Brand Name : Sony
Applicant : Sony Corporation
8-4 Shiomi, Kisarazu-shi, Chiba-ken 292-0834, Japan

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on May 04, 2010 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.



Wayne Hsu / Vice Manager

SPORTON International Inc.

No. 52 Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.

1 SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart C				
Part	Rule Section	Description of Test	Result	Under Limit
3.1	15.207	AC Power Line Conducted Emissions	Complies	14.28 dB
3.2	15.247(b)(3)	Maximum Conducted Output Power	Complies	6.13 dB
3.3	15.247(e)	Power Spectral Density	Complies	9.22 dB
3.4	15.247(a)(2)	6dB Spectrum Bandwidth	Complies	-
3.5	15.247(d)	Radiated Emissions	Complies	3.48 dB
3.6	15.247(d)	Band Edge Emissions	Complies	6.06 dB
3.7	15.203	Antenna Requirements	Complies	-

Test Items	Uncertainty	Remark
AC Power Line Conducted Emissions	±2.3dB	Confidence levels of 95%
Maximum Peak Conducted Output Power	±0.8dB	Confidence levels of 95%
Power Spectral Density	±0.5dB	Confidence levels of 95%
6dB Spectrum Bandwidth	±8.5×10 ⁻⁸	Confidence levels of 95%
Radiated Emissions (9kHz~30MHz)	±0.8dB	Confidence levels of 95%
Radiated Emissions (30MHz~1000MHz)	±1.9dB	Confidence levels of 95%
Radiated / Band Edge Emissions (1GHz~18GHz)	±1.9dB	Confidence levels of 95%
Radiated Emissions (18GHz~40GHz)	±1.9dB	Confidence levels of 95%
Temperature	±0.7	Confidence levels of 95%
Humidity	±3.2%	Confidence levels of 95%
DC / AC Power Source	±1.4%	Confidence levels of 95%

2 GENERAL INFORMATION

2.1 Product Details

Only the radio detail of IEEE 802.11n is shown in this report. For more detailed features description, please refer to the manufacturer’s specifications or user’s manual.

Items	Description
Modulation	See the below table for IEEE 802.11n
Data Modulation	OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	See the below table for IEEE 802.11n
Frequency Range	5725 ~ 5850MHz / 2400 ~ 2483.5MHz
Channel Number	5G- 5 for 20MHz bandwidth ; 2 for 40MHz bandwidth 2.4G- 11 for 20MHz bandwidth
Channel Band Width (99%)	5G- 1TX- MCS 0 (20MHz) : 17.68 MHz ; MCS 0 (40MHz) : 36.32 MHz 2.4G- 1TX- MCS 0 (20MHz) : 17.72 MHz 5G- 2TX- MCS 8 (20MHz) : 17.68 MHz ; MCS 8 (40MHz) : 36.32 MHz 2.4G- 1TX- MCS 8 (20MHz) : 17.64 MHz
Conducted Output Power	5G- 1TX- MCS 0 (20MHz) : 22.01 dBm ; MCS 0 (40MHz) : 22.14 dBm 2.4G- 1TX- MCS 0 (20MHz) : 22.74 dBm 5G- 2TX- MCS 8 (20MHz) : 23.87 dBm ; MCS 8 (40MHz) : 23.41 dBm 2.4G- 1TX- MCS 8 (20MHz) : 22.97 dBm

2.2 Table for Filed Antenna

Antenna & Bandwidth

Antenna Mode	Single Chain		Two Chain	
	20 MHz	40 MHz	20 MHz	40 MHz
Bandwidth Mode				
802.11b	V	X	X	X
802.11g	V	X	X	X
802.11n(2.4GHz)	V	X	V	X
802.11a (5150~5250MHz)	V	X	X	X
802.11a (5250~5350MHz)	V	X	X	X
802.11a (5470~5725MHz)	V	X	X	X
802.11a (5725~5850MHzMHz)	V	X	X	X
802.11n (5150~5250MHz)	V	V	V	V
802.11n (5250~5350MHz)	V	V	V	V
802.11n (5470~5725MHz)	V	V	V	V
802.11n (5725~5850MHzMHz)	V	V	V	V

Ant.	Antenna Type	Connector	Gain (dBi)		Remark
			2.4G	5G	
A	PIFA Antenna	Hirose/Foxconn	0.66	4.80	TX / RX
B	PIFA Antenna	Hirose/Foxconn	2.29	1.99	TX / RX

Antenna: 2T2R Spatial Multiplexing MIMO configuration. IEEE 802.11n used two antennas are for signal transmitting and receiving.

IEEE 802.11n Modulation Scheme

MCS Index	Nss	Modulation	R	NBPS	NCBPS		NDBPS		Datarate(Mbps)			
					20MHz	40MHz	20MHz	40MHz	800nsGI		400nsGI	
									20MHz	40MHz	20MHz	40MHz
0	1	BPSK	1/2	1	52	108	26	54	6.5	13.5	7.200	15
1	1	QPSK	1/2	2	104	216	52	108	13.0	27.0	14.400	30
2	1	QPSK	3/4	2	104	216	78	162	19.5	40.5	21.700	45
3	1	16-QAM	1/2	4	208	432	104	216	26.0	54.0	28.900	60
4	1	16-QAM	3/4	4	208	432	156	324	39.0	81.0	43.300	90
5	1	64-QAM	2/3	6	312	648	208	432	52.0	108.0	57.800	120
6	1	64-QAM	3/4	6	312	648	234	486	58.5	121.5	65.000	135
7	1	64-QAM	5/6	6	312	648	260	540	65.0	135.0	72.200	150
8	2	BPSK	1/2	1	104	216	52	108	13.0	27.0	14.444	30
9	2	QPSK	1/2	2	208	432	104	216	26.0	54.0	28.889	60
10	2	QPSK	3/4	2	208	432	156	324	39.0	81.0	43.333	90
11	2	16-QAM	1/2	4	416	864	208	432	52.0	108.0	57.778	120
12	2	16-QAM	3/4	4	416	864	312	648	78.0	162.0	86.667	180
13	2	64-QAM	2/3	6	624	1296	416	864	104.0	216.0	115.556	240
14	2	64-QAM	3/4	6	624	1296	468	972	117.0	243.0	130.000	270
15	2	64-QAM	5/6	6	624	1296	520	1080	130.0	270.0	144.444	300

Symbol	Explanation
NSS	Number of spatial streams
R	Code rate
NBPS	Number of coded bits per single carrier
NCBPS	Number of coded bits per symbol
NDBPS	Number of data bits per symbol
GI	guard interval

2.3 Table for Carrier Frequencies

Frequency Allocation

For 802.11n (20MHz): Use Channel 149, 153, 157, 161, and 165.

For 802.11n (40MHz): Use Channel 151, 159.

Frequency Band	Channel No.	Frequency
5725~5850 MHz	149	5745 MHz
	151	5755 MHz
	153	5765 MHz
	157	5785 MHz
	159	5795 MHz
	161	5805 MHz
	165	5825 MHz

Frequency Allocation

For 802.11n (20MHz): Use Channel 1~Channel 11.

For 802.11n (40MHz): Use Channel 3~Channel 9.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
2400~2483.5MHz	1	2412 MHz	7	2442 MHz
	2	2417 MHz	8	2447 MHz
	3	2422 MHz	9	2452 MHz
	4	2427 MHz	10	2457 MHz
	5	2432 MHz	11	2462 MHz
	6	2437 MHz	-	-

2.4 Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on the entire possible Configuration for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel	Antenna
AC Power Line Conducted Emissions	Normal Mode	Auto	-	-
Maximum Conducted Output Power	MCS 0 (20MHz)	6.5 Mbps	5G-149/157/165 2.4G-1/6/11	B/A
	MCS 0 (40MHz)	13.5 Mbps	5G-151/159	B
	MCS 8 (20MHz)	13 Mbps	5G-149/157/165 2.4G-1/6/11	B/A/ A+B
	MCS 8 (40MHz)	27 Mbps	5G-151/159	B/A/ A+B
Power Spectral Density 6dB Spectrum Bandwidth	MCS 0 (20MHz)	6.5 Mbps	5G-149/157/165 2.4G-1/6/11	B/A
	MCS 0 (40MHz)	13.5 Mbps	5G-151/159	B
	MCS 8 (20MHz)	13 Mbps	5G-149/157/165 2.4G-1/6/11	A+B
	MCS 8 (40MHz)	27 Mbps	5G-151/159	A+B
Radiated Emissions Below 1GHz	Normal Mode	Auto	-	-
Radiated Emissions Above 1GHz Band Edge Emissions	MCS 0 (20MHz)	6.5 Mbps	5G-149/157/165 2.4G-1/6/11	B/A
	MCS 0 (40MHz)	13.5 Mbps	5G-151/159	A
	MCS 8 (20MHz)	13 Mbps	5G-149/157/165 2.4G-1/6/11	A+B
	MCS 8 (40MHz)	27 Mbps	5G-151/159	A+B

2.5 Table for Testing Locations

Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.
CO01-HY	Conduction	Hwa Ya	643075	IC 4086B
TH01-HY	OVEN Room	Hwa Ya	-	-
03CH03-HY	SAC	Hwa Ya	643075	IC 4086B

Semi Anechoic Chamber (SAC).

2.6 Table for Supporting Units

Support Unit	Brand	Model	FCC ID	Remark
LCD Monitor	DELL	2408WFPb	N/A	Conducted Radiated (Below 1GHz)
(USB) Mouse	Microsoft	1004	DoC	
Controller	-	-	-	
Notebook P.C. (Remote Workstation)	DELL	E5500	DoC	Radiated (Above 1 GHz)
Notebook P.C.	DELL	PP20L	DoC	
Test Fixture	-	-	-	

2.7 Table for Parameters of Test Software Setting

During testing, Channel & Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

For Single Chain:

Power Parameters of IEEE 802.11n-5G

Test Software Version	ART		
Frequency	5745 MHz	5785 MHz	5825 MHz
IEEE 802.11n(20MHz)	12	12	12
Frequency	5755 MHz	5795 MHz	-
IEEE 802.11n(40MHz)	12	12	-

Power Parameters of IEEE 802.11n-2.4G

Test Software Version	ART		
Frequency	2412 MHz	2437 MHz	2462 MHz
IEEE 802.11n(20MHz)	12	12	12

For Two Chain:

Power Parameters of IEEE 802.11n-5G Ant. A+Ant. B

Test Software Version	ART		
Frequency	5745 MHz	5785 MHz	5825 MHz
IEEE 802.11n(20MHz)	9	9	9
Frequency	5755 MHz	5795 MHz	-
IEEE 802.11n(40MHz)	9	9	-

Power Parameters of IEEE 802.11n-2.4G Ant. A+Ant. B

Test Software Version	ART		
Frequency	2412 MHz	2437 MHz	2462 MHz
IEEE 802.11n(20MHz)	9	9	9

2.8 EUT Operation during Test

An executive program, EMCTEST.EXE under WIN XP, which generates a complete line of continuously repeating “H” pattern was used as the test software.

The programs were executed as follows :

- a. Turn on the power of all equipment.
- b. The NB reads the test program "EMITEST" from the hard disk drive and runs it.
- c. The NB sends "H" messages to the panel and displays "H" patterns on the screen.
- f. The NB sends "H" messages to the internal hard disk, and the hard disk reads and writes the message.

At the same time, the following programs were executed:

Conducted:

-Executed "ping.exe" to link with the remote workstation to receive and transmit data by LAN and WLAN.


Radiated:

-Executed “ART” to keep transmitting signals at fixed frequency.


2.9 Test Configuration

2.9.1 Radiation Emissions Test Configuration

For radiated emissions 9kHz~1GHz

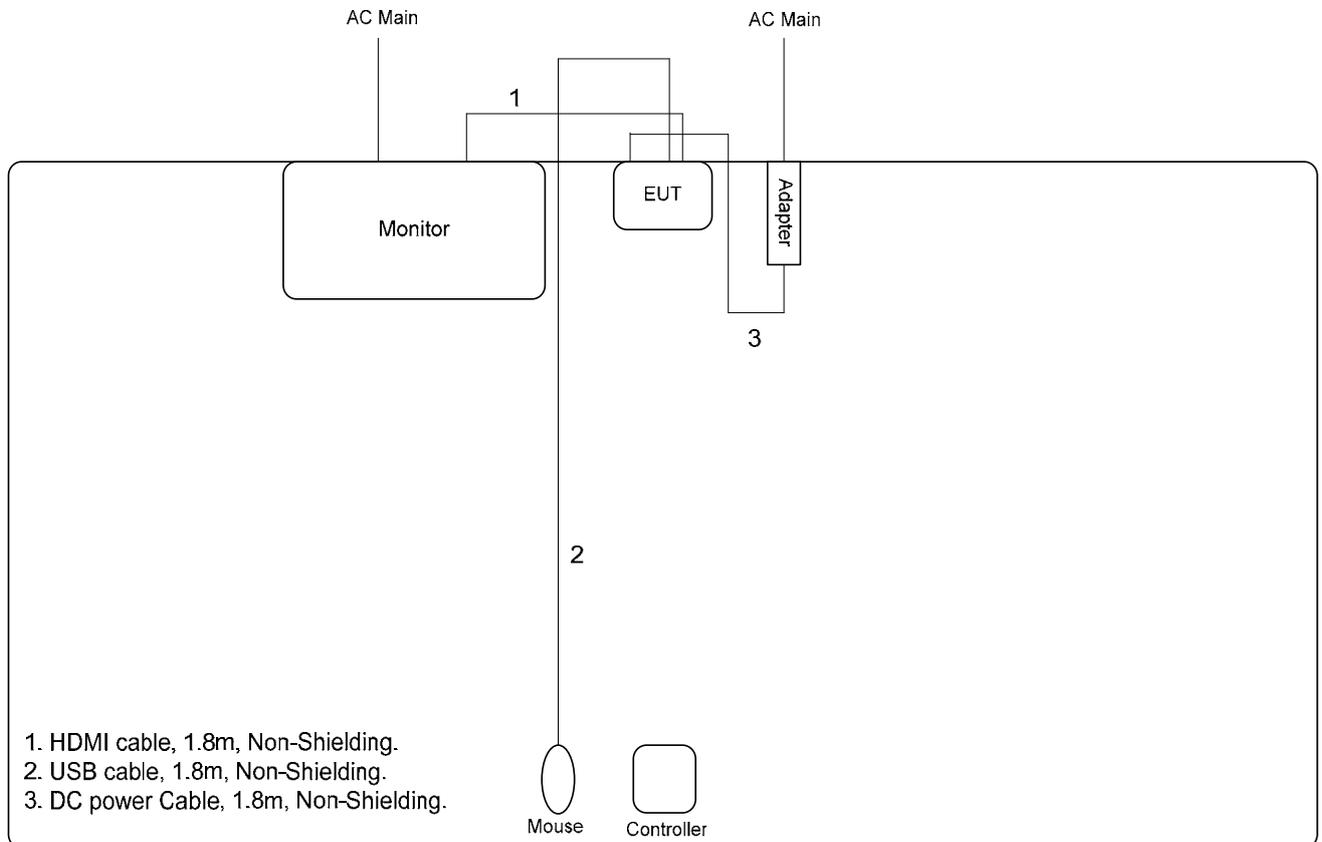

For radiated emissions above 1GHz

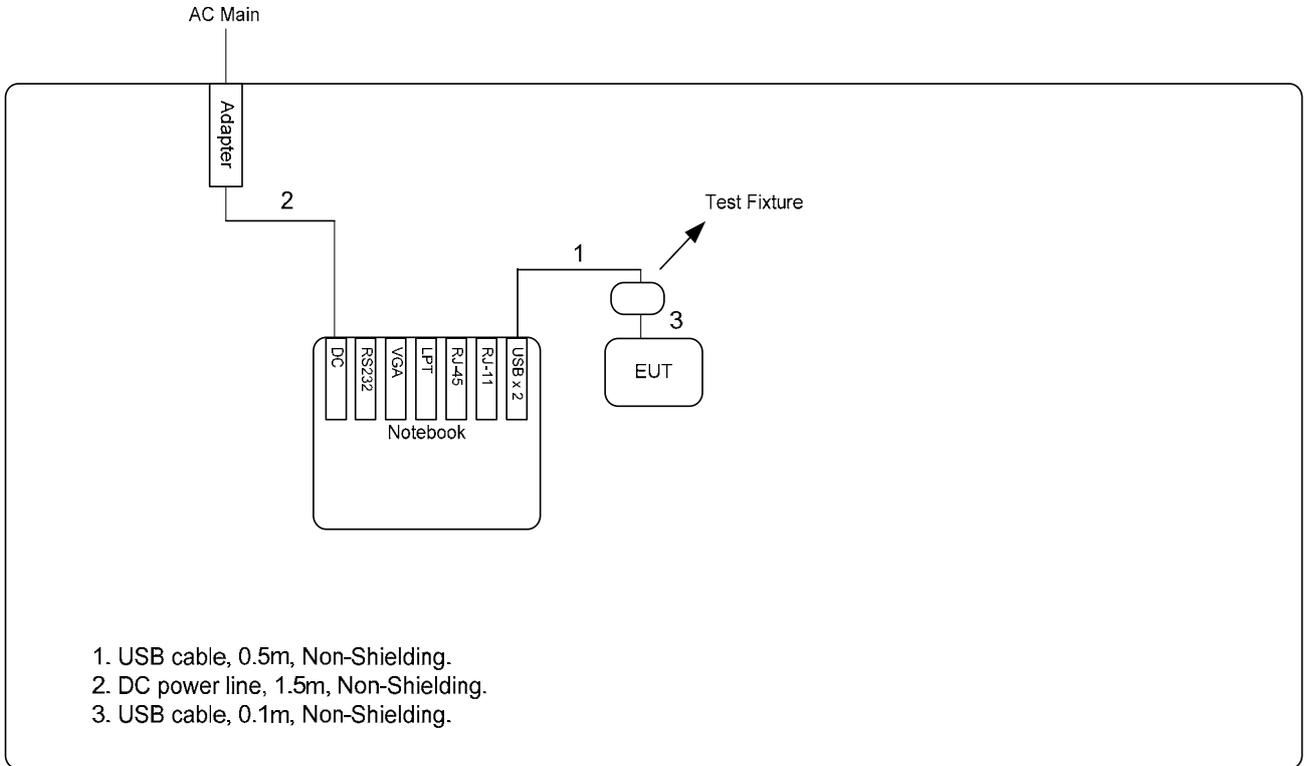

3 TEST RESULT

3.1 AC Power Line Conducted Emissions Measurement

3.1.1 Limit

For this product which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Class B

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

3.1.2 Measuring Instruments and Setting


Please refer to section 4 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

3.1.3 Test Procedures

1. The EUT warm up about 15 minutes then start test.
2. Configure the EUT according to ANSI C63.4. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
3. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
4. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
5. The frequency range from 150 KHz to 30 MHz was searched.
6. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
7. The measurement has to be done between each power line and ground at the power terminal.

3.1.4 Test Setup Layout

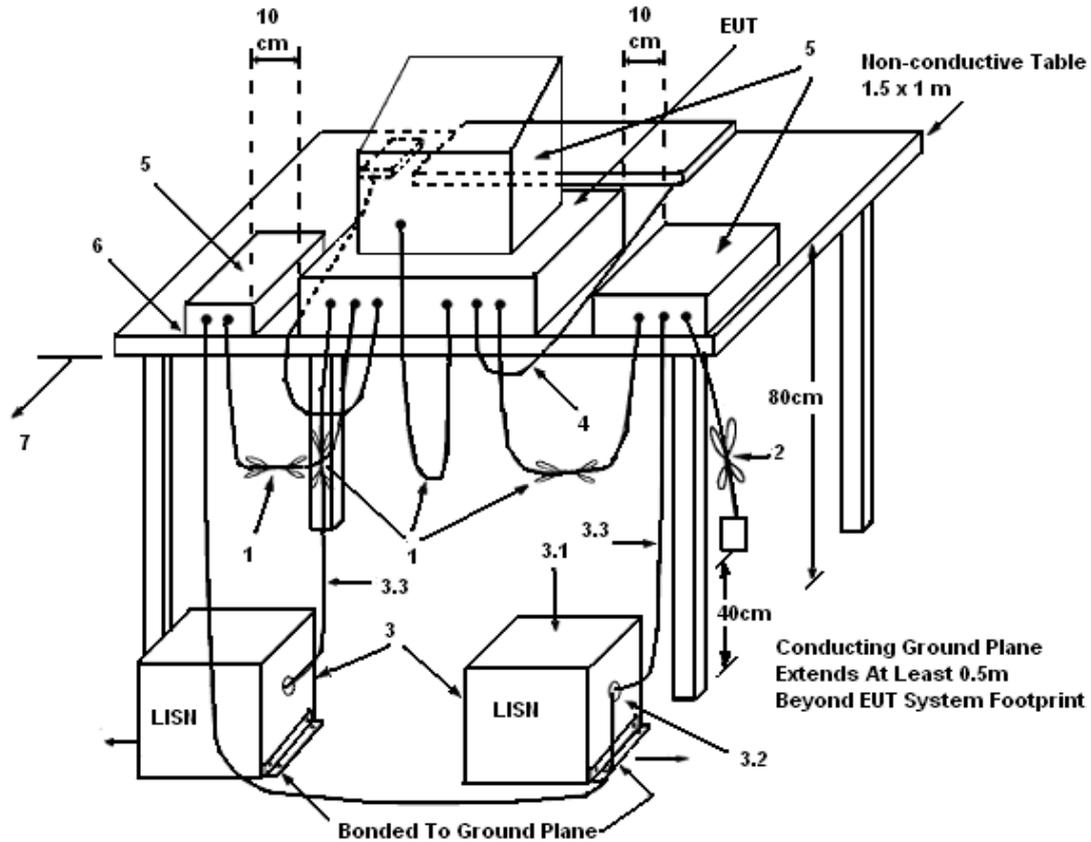

LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω. LISN can be placed on top of, or immediately beneath, reference ground plane.
- (3.1) All other equipment powered from additional LISN(s).
- (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
- (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

3.1.5 Test Deviation

There is no deviation with the original standard.


3.1.6 EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.

3.1.7 Results of AC Power Line Conducted Emissions Measurement


Final Test Date	May 20, 2010	Test Site No.	CO01-HY
Temperature	27.5	Humidity	48%
Test Engineer	Nicky	Configuration	Normal Mode

Line

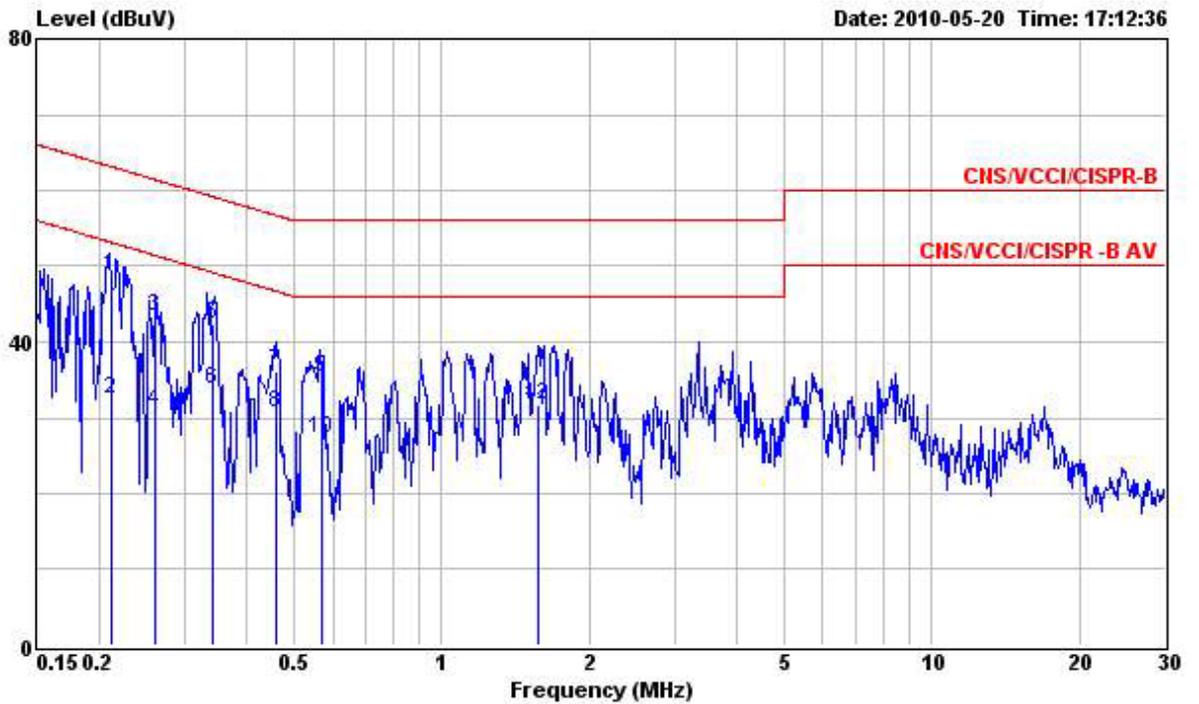

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.211	48.89	-14.28	63.17	48.75	0.08	0.06	QP
2	0.211	32.46	-20.71	53.17	32.32	0.08	0.06	Average
3	0.260	43.48	-17.95	61.43	43.34	0.08	0.06	QP
4	0.260	31.01	-20.42	51.43	30.87	0.08	0.06	Average
5	0.341	42.46	-16.71	59.17	42.30	0.09	0.07	QP
6	0.341	33.81	-15.36	49.17	33.65	0.09	0.07	Average
7	0.459	36.18	-20.53	56.71	36.01	0.09	0.08	QP
8	0.459	30.74	-15.97	46.71	30.57	0.09	0.08	Average
9	0.567	35.41	-20.59	56.00	35.21	0.10	0.10	QP
10	0.567	27.32	-18.68	46.00	27.12	0.10	0.10	Average
11	1.580	30.92	-25.08	56.00	30.67	0.12	0.13	QP
12	1.580	31.64	-14.36	46.00	31.39	0.12	0.13	Average

Neutral

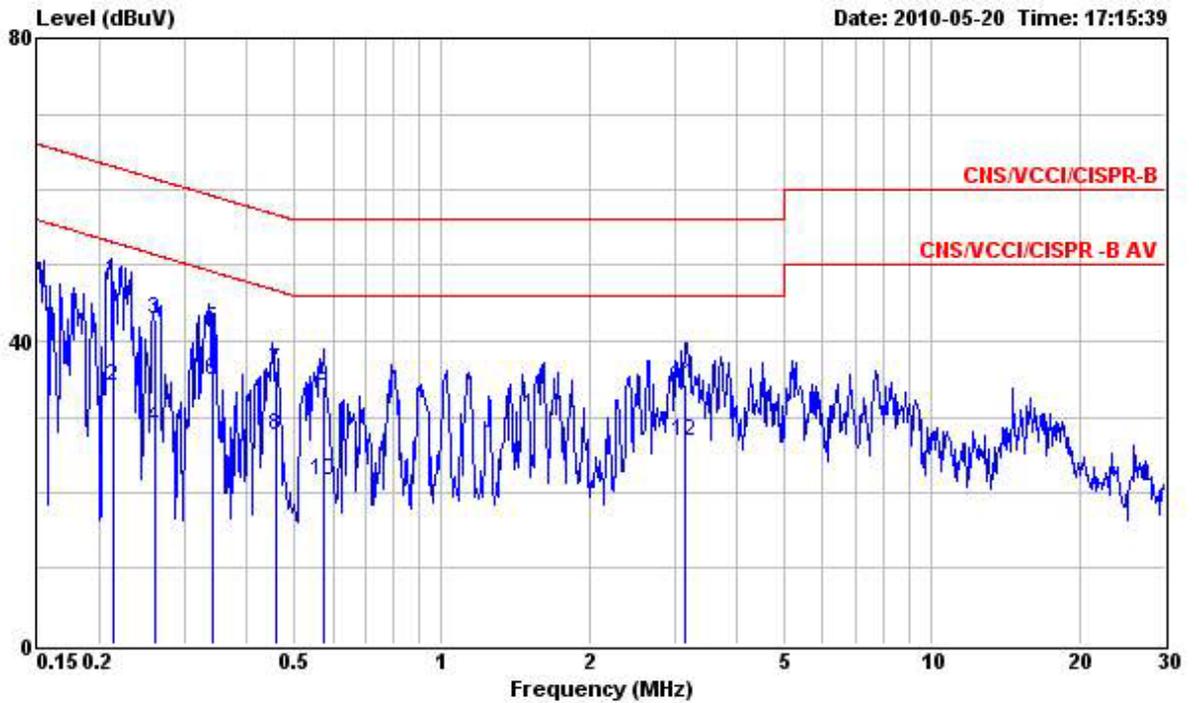

	Freq	Level	Over	Limit	Read	Probe	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.215	47.97	-15.05	63.02	47.85	0.06	0.06	QP
2	0.215	33.92	-19.10	53.02	33.80	0.06	0.06	Average
3	0.259	42.98	-18.48	61.46	42.86	0.06	0.06	QP
4	0.259	28.65	-22.81	51.46	28.53	0.06	0.06	Average
5	0.342	41.56	-17.60	59.16	41.42	0.07	0.07	QP
6	0.342	34.85	-14.31	49.16	34.71	0.07	0.07	Average
7	0.459	35.98	-20.73	56.71	35.83	0.07	0.08	QP
8	0.459	27.50	-19.21	46.71	27.35	0.07	0.08	Average
9	0.576	34.09	-21.91	56.00	33.91	0.08	0.10	QP
10	0.576	21.58	-24.42	46.00	21.40	0.08	0.10	Average
11	3.140	34.28	-21.72	56.00	34.02	0.13	0.13	QP
12	3.140	26.86	-19.14	46.00	26.60	0.13	0.13	Average

Note:

Level = Read Level + LISN Factor + Cable Loss.

3.2 Maximum Conducted Output Power Measurement

3.2.1 Limit

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. The limited has to be reduced by the amount in dB that the gain of the antenna exceed 6dBi. In case of point-to-multipoint antenna reduction operation, the limit has to be reduced by 1dB for every dB that the directional gain of the antenna exceeds 6dBi. Systems operating in the 5725-5850 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted output power.

3.2.2 Measuring Instruments and Setting


Please refer to section 4 of equipments list in this report. The following table is the setting of the power meter.

Power Meter Parameter	Setting
Attenuation	Auto
Span Frequency	0.135 s ~ 26 s
RB	1000 kHz
VB	3000 kHz
Detector	rms
Trace	Max Hold
Sweep Time	Auto

3.2.3 Test Procedures

1. The transmitter output (antenna port) was connected to the power meter.
2. Test was performed in accordance with Measurement of Digital Transmission Systems Operating under Section 15.247.
3. When measuring maximum conducted output power within multiple antenna systems, add every result of the values by mathematic formula.

3.2.4 Test Setup Layout

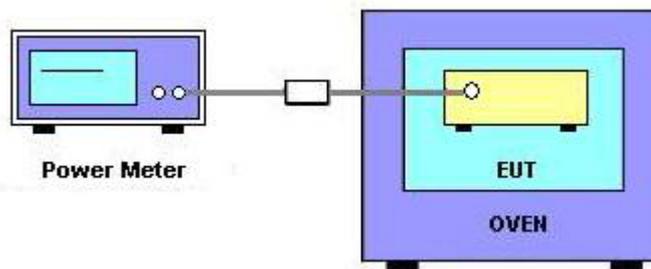

3.2.5 Test Deviation

There is no deviation with the original standard.

3.2.6 EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

3.2.7 Test Result of Maximum Conducted Output Power

Final Test Date	May 14, 2010	Test Site No.	TH01-HY
Temperature	22	Humidity	59%
Test Engineer	Sam	Configuration	802.11n

For Single Chain:

Configuration of IEEE 802.11n-5G (20MHz)

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
149	5745 MHz	22.01	30.00	Complies
157	5785 MHz	21.76	30.00	Complies
165	5825 MHz	21.86	30.00	Complies

Configuration of IEEE 802.11n-5G (40MHz)

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
151	5755 MHz	22.14	30.00	Complies
159	5795 MHz	22.06	30.00	Complies

Configuration of IEEE 802.11n-2.4G (20MHz)

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	21.75	30.00	Complies
6	2437 MHz	22.15	30.00	Complies
11	2462 MHz	22.74	30.00	Complies

For Two Chain:

Configuration of IEEE 802.11n-5G Ant. A (20MHz)

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
149	5745 MHz	20.67	30.00	Complies
157	5785 MHz	20.78	30.00	Complies
165	5825 MHz	21.06	30.00	Complies

Configuration of IEEE 802.11n-5G Ant. B (20MHz)

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
149	5745 MHz	20.77	30.00	Complies
157	5785 MHz	20.58	30.00	Complies
165	5825 MHz	20.66	30.00	Complies

Configuration of IEEE 802.11n-5G Ant. A+Ant. B (20MHz)

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
149	5745 MHz	23.73	30.00	Complies
157	5785 MHz	23.69	30.00	Complies
165	5825 MHz	23.87	30.00	Complies

Configuration of IEEE 802.11n-5G Ant. A (40MHz)

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
151	5755 MHz	20.66	30.00	Complies
159	5795 MHz	20.22	30.00	Complies

Configuration of IEEE 802.11n-5G Ant. B (40MHz)

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
151	5755 MHz	20.02	30.00	Complies
159	5795 MHz	20.58	30.00	Complies

Configuration of IEEE 802.11n-5G Ant. A+Ant. B (40MHz)

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
151	5755 MHz	23.36	30.00	Complies
159	5795 MHz	23.41	30.00	Complies

Configuration of IEEE 802.11n-2.4G Ant. A (20MHz)

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	19.51	30.00	Complies
6	2437 MHz	19.66	30.00	Complies
11	2462 MHz	19.62	30.00	Complies

Configuration of IEEE 802.11n-2.4G Ant. B (20MHz)

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	20.37	30.00	Complies
6	2437 MHz	19.89	30.00	Complies
11	2462 MHz	19.36	30.00	Complies

Configuration of IEEE 802.11n-2.4G Ant. A+Ant. B (20MHz)

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	22.97	30.00	Complies
6	2437 MHz	22.79	30.00	Complies
11	2462 MHz	22.50	30.00	Complies

3.3 Power Spectral Density Measurement

3.3.1 Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

3.3.2 Measuring Instruments and Setting


Please refer to section 4 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	1.5MHz
RB	3 kHz
VB	30 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	500s

3.3.3 Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. Set RBW of spectrum analyzer to 3kHz and VBW to 30kHz. Set Detector to Peak, Trace to Max Hold.
3. Mark the frequency with maximum peak power as the center of the display of the spectrum.
4. Set the span to 1.5MHz and the sweep time to 500s and record the maximum peak value.
5. Measuring multiple antennas, the connectors are required to link with Spectrum Analyzer through a combiner.

3.3.4 Test Setup Layout

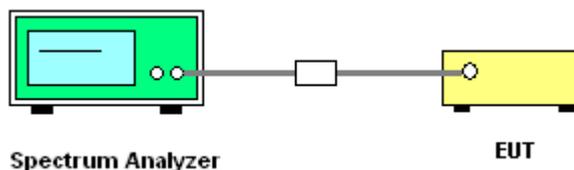

3.3.5 Test Deviation

There is no deviation with the original standard.

3.3.6 EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

3.3.7 Test Result of Power Spectral Density

Final Test Date	May 14, 2010	Test Site No.	TH01-HY
Temperature	22	Humidity	59%
Test Engineer	Sam	Configuration	802.11n

For Single Chain:

Configuration of IEEE 802.11n-5G (20MHz)

Channel	Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
149	5745 MHz	-7.84	8.00	Complies
157	5785 MHz	-1.22	8.00	Complies
165	5825 MHz	-1.60	8.00	Complies

Configuration of IEEE 802.11n-5G (40MHz)

Channel	Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
151	5755 MHz	-2.44	8.00	Complies
159	5795 MHz	-3.80	8.00	Complies

Configuration IEEE 802.11n-2.4G (20MHz)

Channel	Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	-4.72	8.00	Complies
7	2442 MHz	-4.62	8.00	Complies
13	2472 MHz	-3.92	8.00	Complies

For Two Chain:

Configuration of IEEE 802.11n-5G Ant. A+Ant. B (20MHz)

Channel	Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
149	5745 MHz	-5.66	8.00	Complies
157	5785 MHz	-4.75	8.00	Complies
165	5825 MHz	-3.62	8.00	Complies

Configuration of IEEE 802.11n-5G Ant. A+Ant. B (40MHz)


Channel	Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
151	5755 MHz	-6.66	8.00	Complies
159	5795 MHz	-7.33	8.00	Complies

Configuration of IEEE 802.11n-2.4G Ant. A+Ant. B (20MHz)

Channel	Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	-7.79	8.00	Complies
6	2437 MHz	-11.72	8.00	Complies
11	2462 MHz	-9.95	8.00	Complies


For Single Chain:

Power Density Plot on Configuration of IEEE 802.11n-5G (20MHz) / 5745 MHz

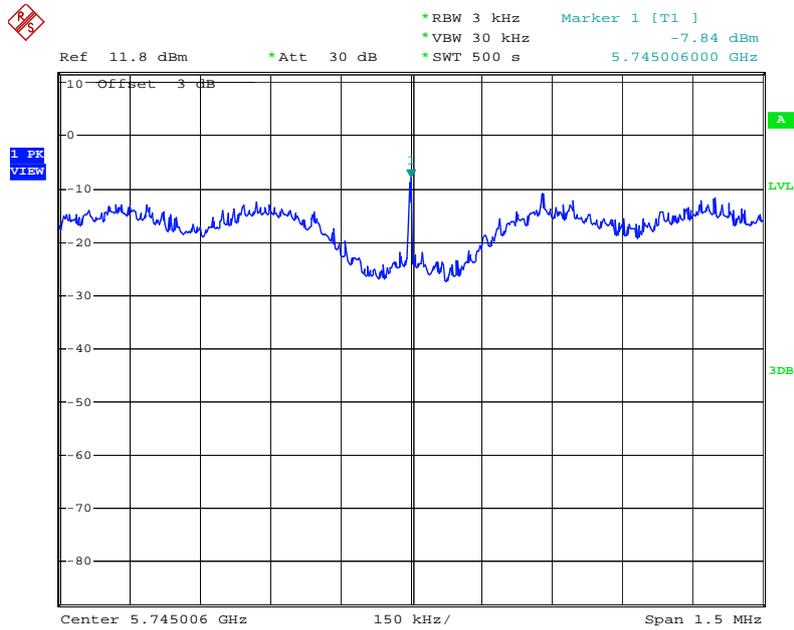


Date: 14.MAY.2010 08:07:55

Power Density Plot on Configuration of IEEE 802.11n-5G (20MHz) / 5785 MHz

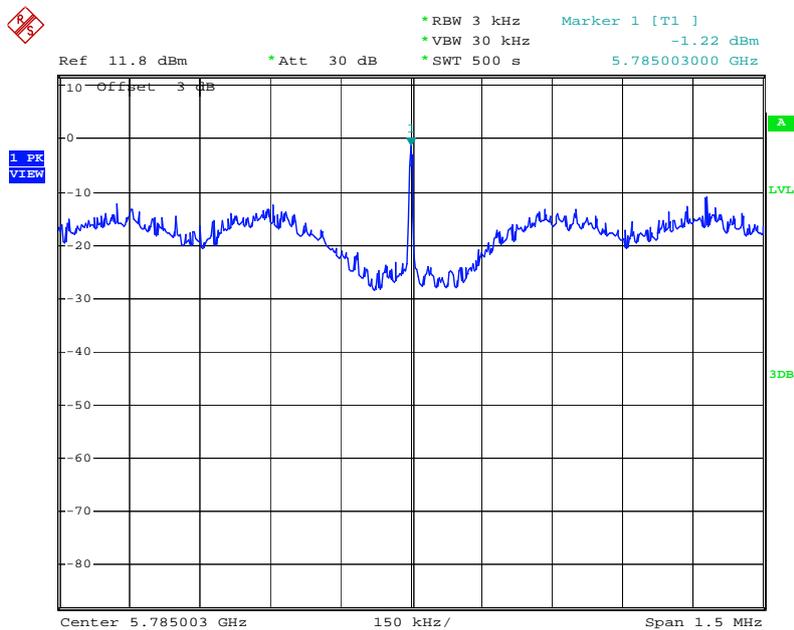


Date: 14.MAY.2010 08:08:37

Power Density Plot on Configuration of IEEE 802.11n-5G (20MHz) / 5825 MHz

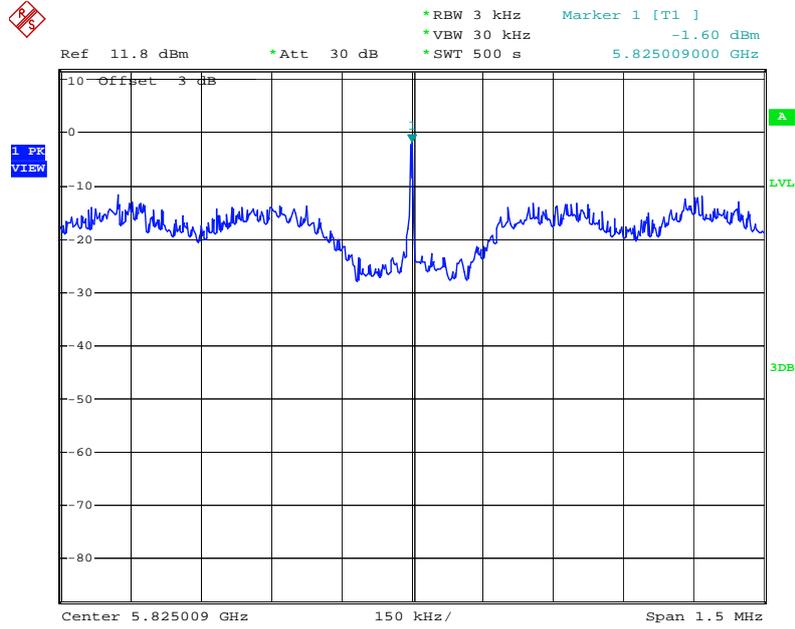


Date: 14.MAY.2010 08:12:06

Power Density Plot on Configuration of IEEE 802.11n-5G (40MHz) / 5755 MHz

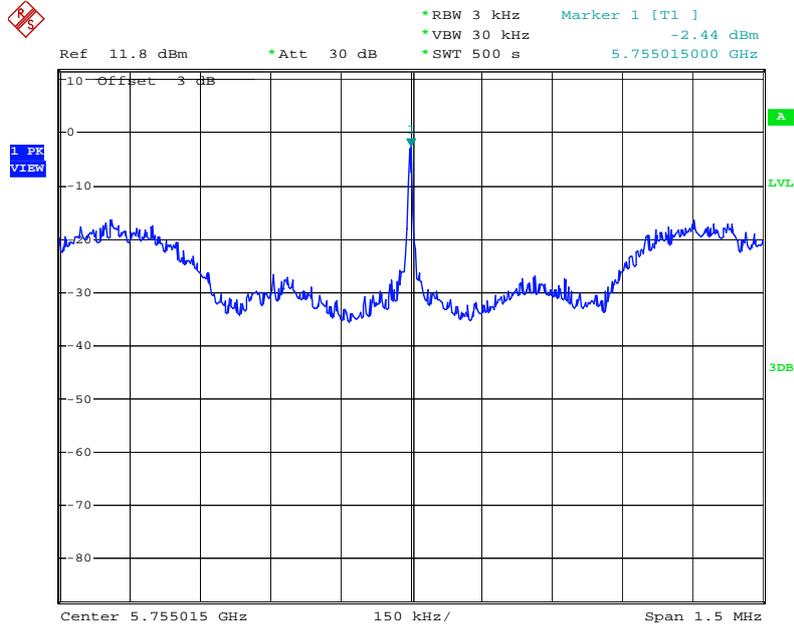


Date: 14.MAY.2010 08:24:46

Power Density Plot on Configuration of IEEE 802.11n-5G (40MHz) / 5795 MHz

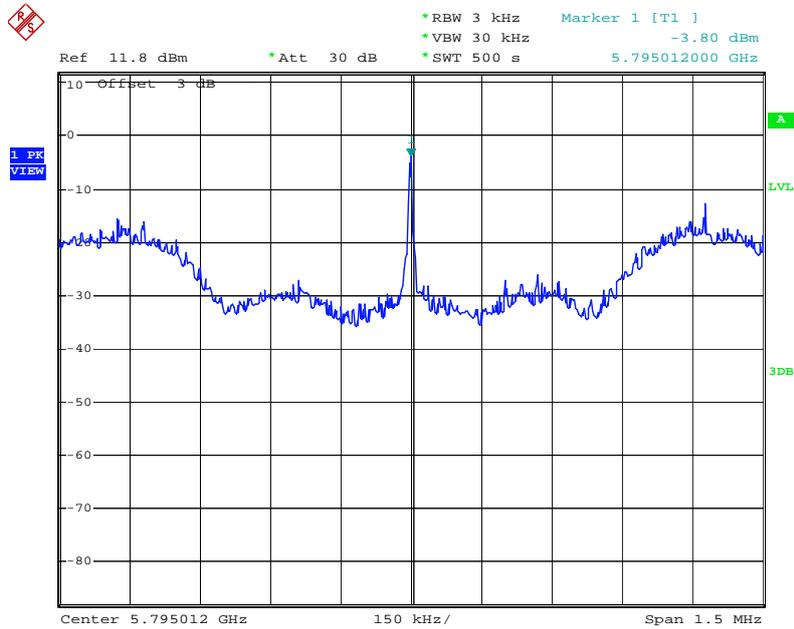


Date: 14.MAY.2010 08:25:41

Power Density Plot on Configuration of IEEE 802.11n-2.4G (20MHz) / 2412 MHz

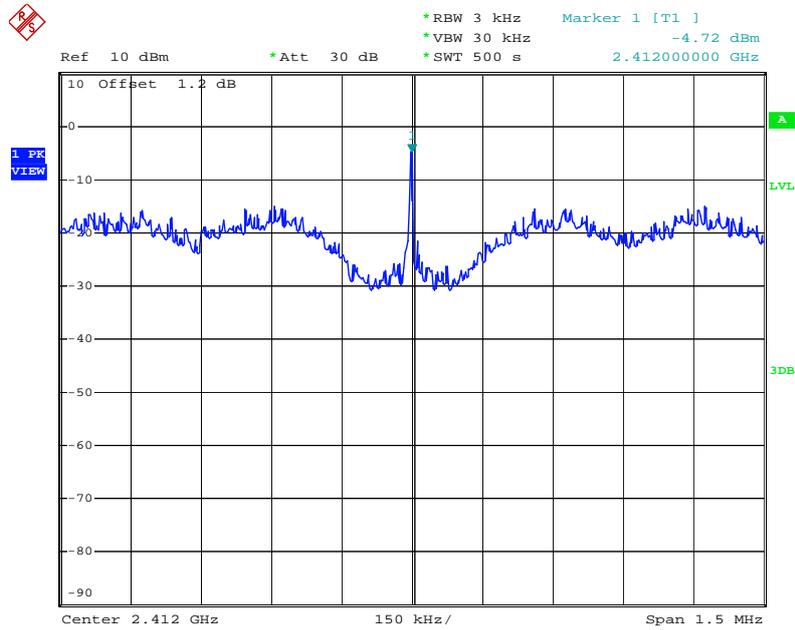


Date: 14.MAY.2010 07:50:00

Power Density Plot on Configuration of IEEE 802.11n-2.4G (20MHz) / 2437 MHz

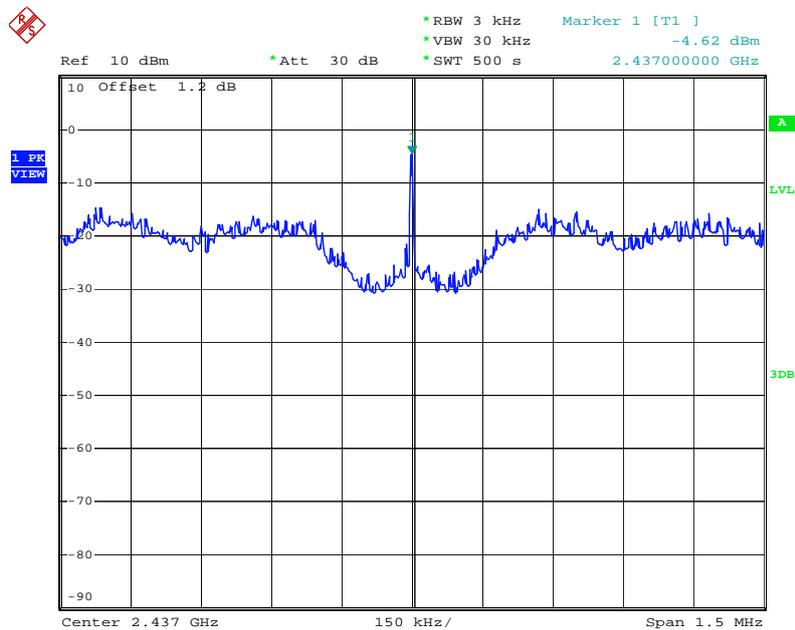

Date: 14.MAY.2010 07:50:29


Power Density Plot on Configuration of IEEE 802.11n-2.4G (20MHz) / 2462 MHz

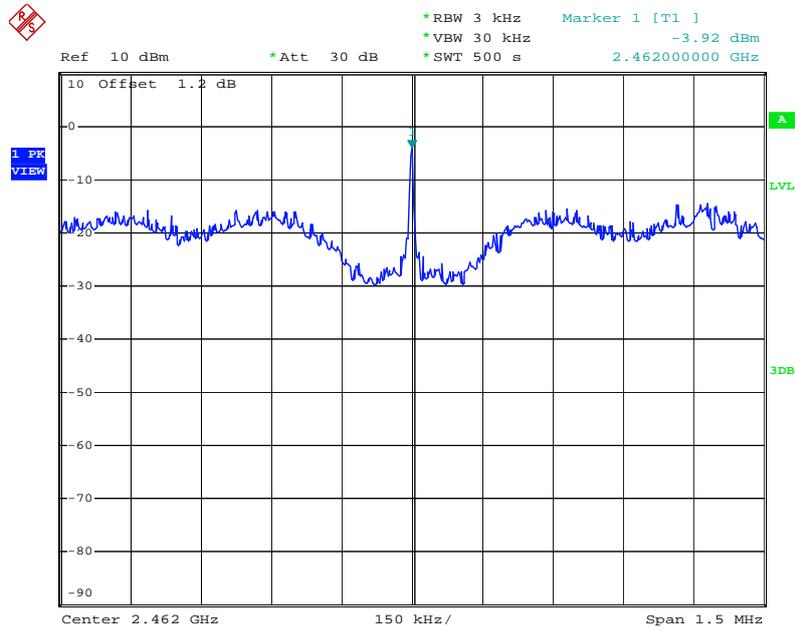

Date: 14.MAY.2010 07:54:42


For Two Chain:

Power Density Plot on Configuration of IEEE 802.11n-5G Ant. A+Ant. B (20MHz) / 5745 MHz

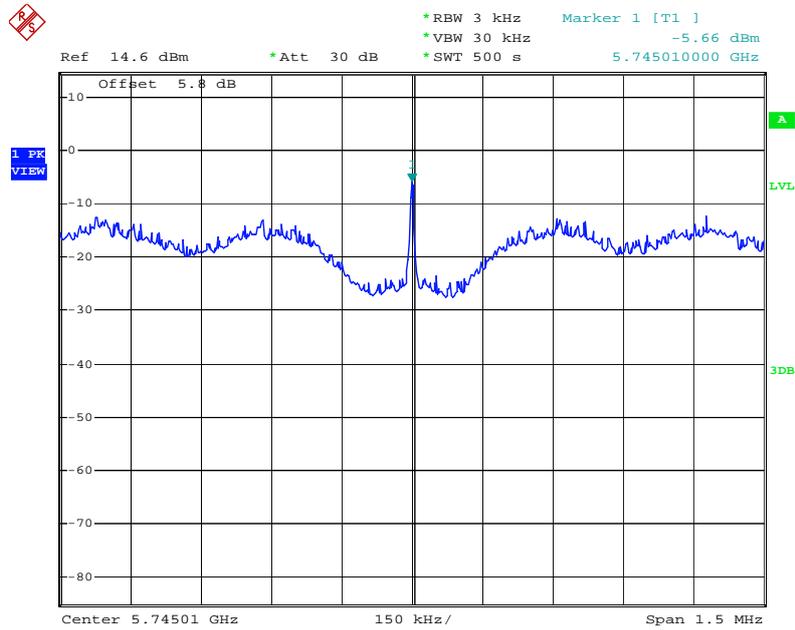


Date: 14.MAY.2010 13:05:02

Power Density Plot on Configuration of IEEE 802.11n-5G Ant. A+Ant. B (20MHz) / 5785 MHz

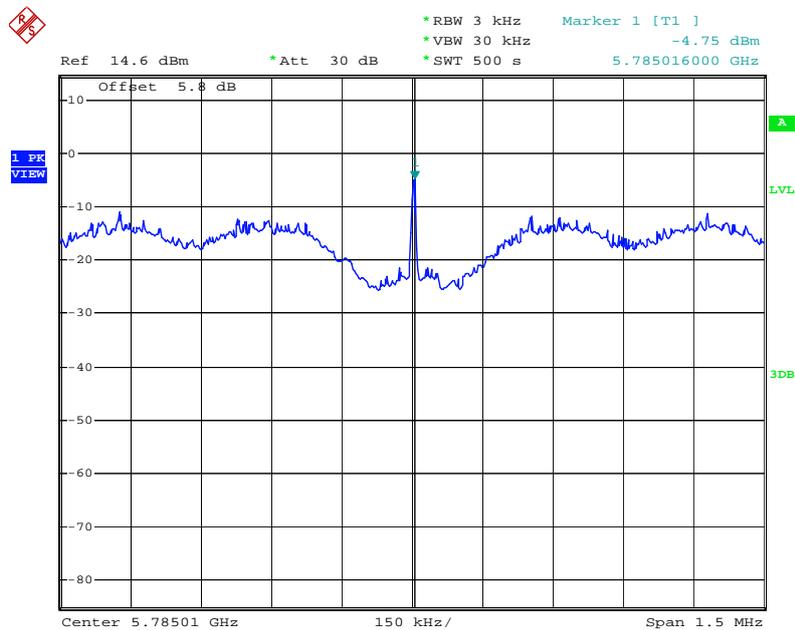


Date: 14.MAY.2010 13:20:38

Power Density Plot on Configuration of IEEE 802.11n-5G Ant. A+Ant. B (20MHz) / 5825 MHz

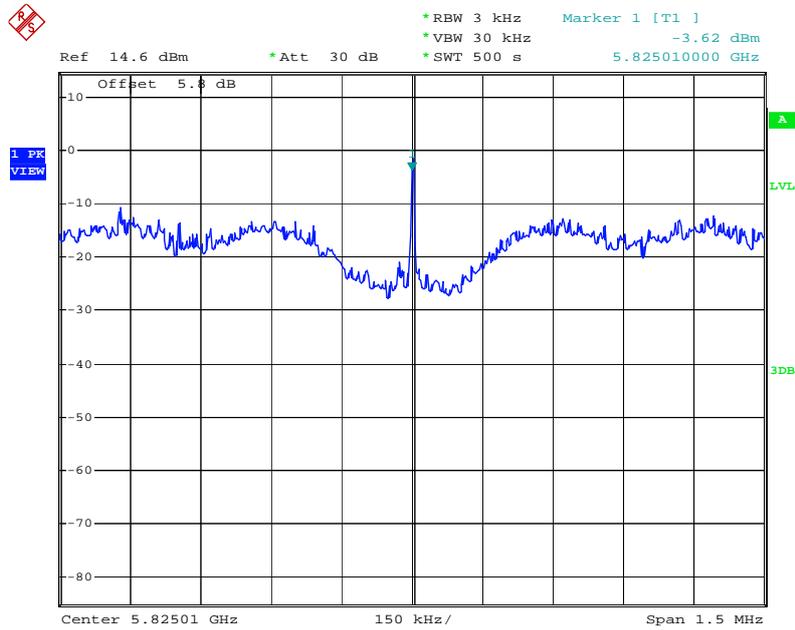


Date: 14.MAY.2010 13:28:29

Power Density Plot on Configuration of IEEE 802.11n-5G Ant. A+Ant. B (40MHz) / 5755 MHz

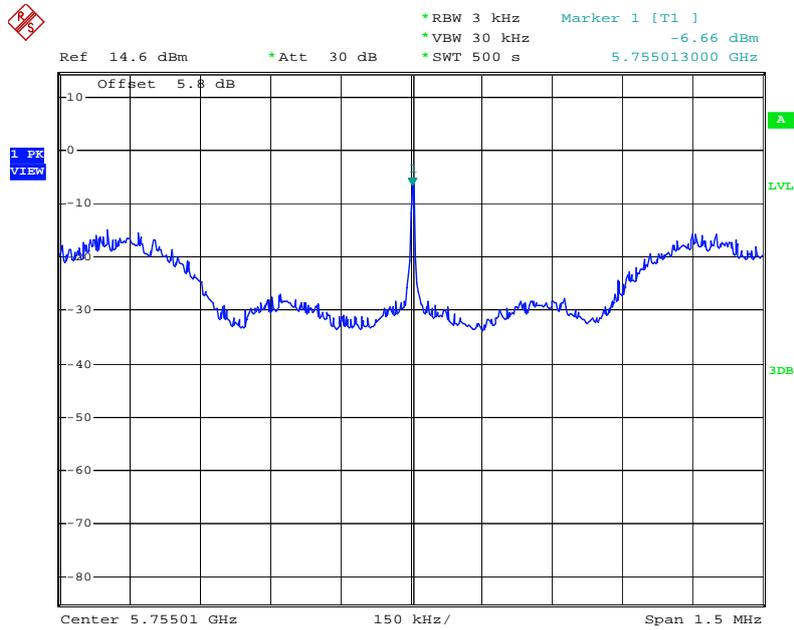


Date: 14.MAY.2010 13:48:46

Power Density Plot on Configuration of IEEE 802.11n-5G Ant. A+Ant. B (40MHz) / 5795 MHz

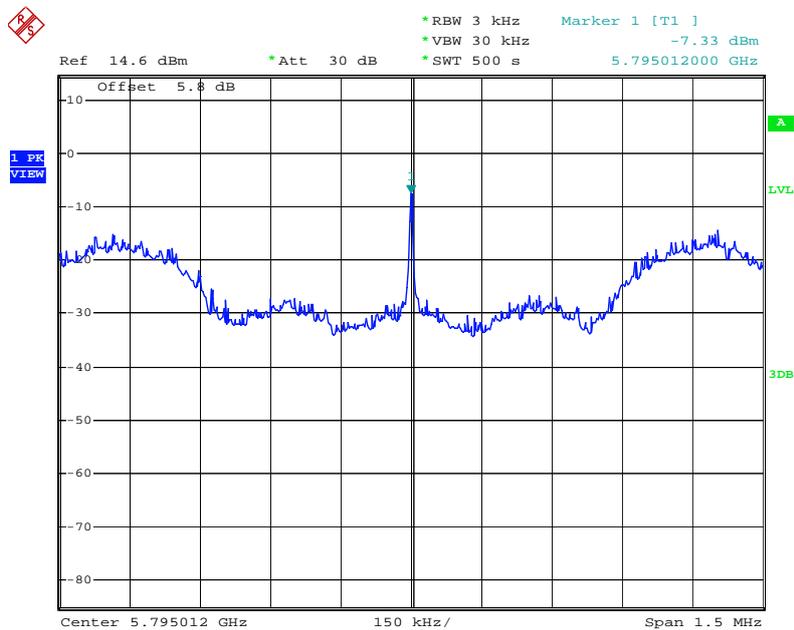


Date: 14.MAY.2010 13:57:06

Power Density Plot on Configuration of IEEE 802.11n-2.4G Ant. A+Ant. B (20MHz) / 2412 MHz

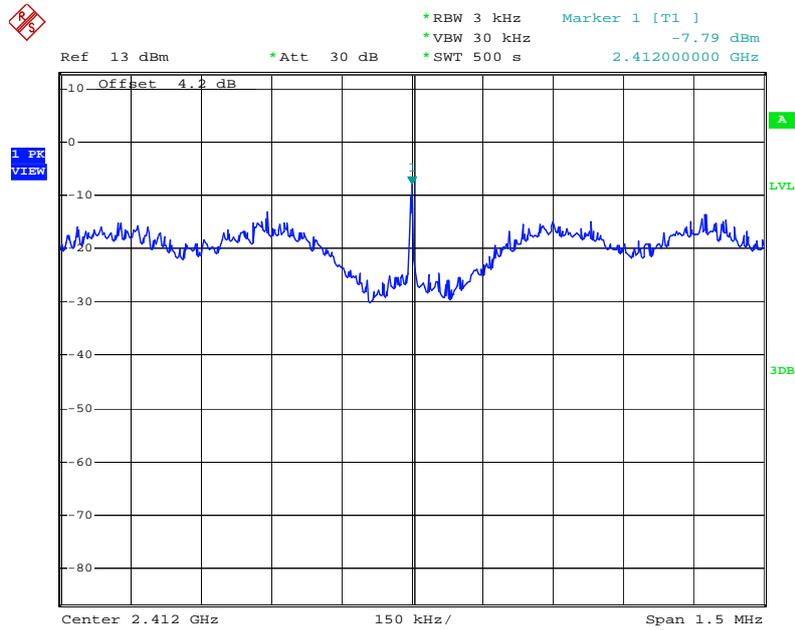


Date: 14.MAY.2010 11:51:52

Power Density Plot on Configuration of IEEE 802.11n-2.4G Ant. A+Ant. B (20MHz) / 2437 MHz

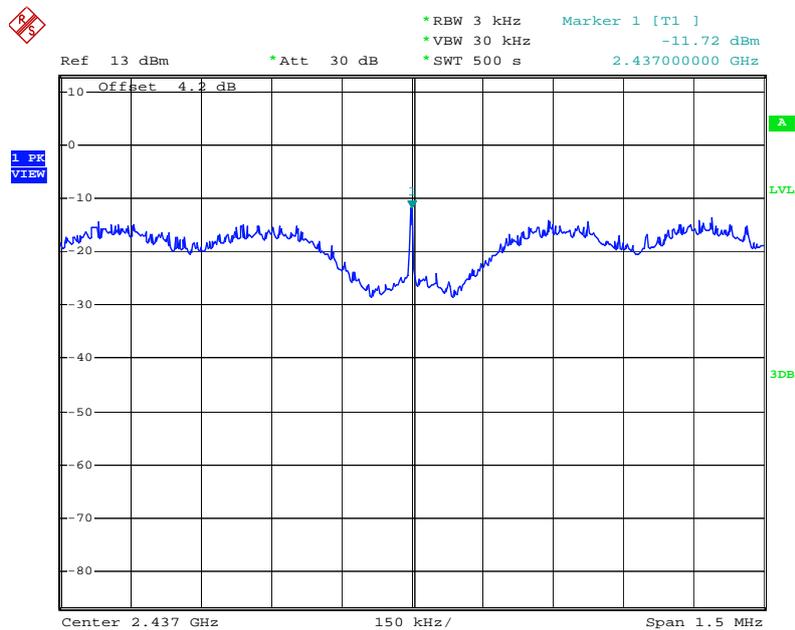

Date: 14.MAY.2010 11:59:09

Power Density Plot on Configuration of IEEE 802.11n-2.4G Ant. A+Ant. B (20MHz) / 2462 MHz

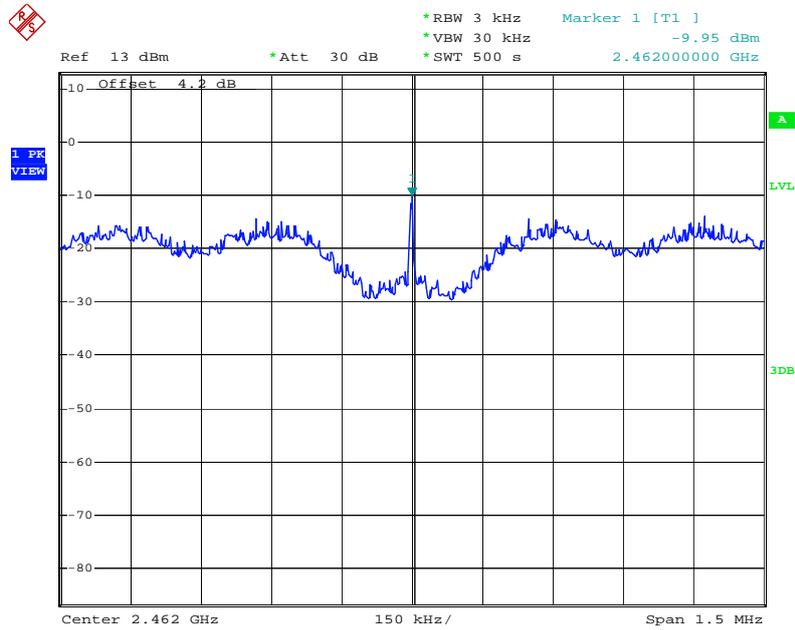

Date: 14.MAY.2010 12:06:13

3.4.7 Test Result of 6dB Spectrum Bandwidth

Final Test Date	May 14, 2010	Test Site No.	TH01-HY
Temperature	22	Humidity	59%
Test Engineer	Sam	Configuration	802.11n

For Single Chain:

Configuration of IEEE 802.11n-5G (20MHz)

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
149	5745 MHz	17.68	17.68	500	Complies
157	5785 MHz	17.64	17.68	500	Complies
165	5825 MHz	17.64	17.68	500	Complies

Configuration of IEEE 802.11n-5G (40MHz)

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
151	5755 MHz	36.32	36.32	500	Complies
159	5795 MHz	36.32	36.24	500	Complies

Configuration of IEEE 802.11n-2.4G (20MHz)

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	17.64	17.72	500	Complies
6	2437 MHz	17.64	17.72	500	Complies
11	2462 MHz	17.64	17.72	500	Complies

For Two Chain:

Configuration of IEEE 802.11n-5G Ant. A+Ant. B (20MHz)

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
149	5745 MHz	17.12	17.68	500	Complies
157	5785 MHz	17.56	17.68	500	Complies
165	5825 MHz	17.12	17.68	500	Complies

Configuration of IEEE 802.11n-5G Ant. A+Ant. B (40MHz)


Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
151	5755 MHz	36.32	36.32	500	Complies
159	5795 MHz	36.32	36.32	500	Complies

Configuration of IEEE 802.11n-2.4G Ant. A+Ant. B (20MHz)

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	17.32	17.60	500	Complies
6	2437 MHz	16.88	17.60	500	Complies
11	2462 MHz	17.24	17.64	500	Complies


For Single Chain:

6 dB Bandwidth Plot on Configuration of IEEE 802.11n-5G (20MHz) / 5745 MHz

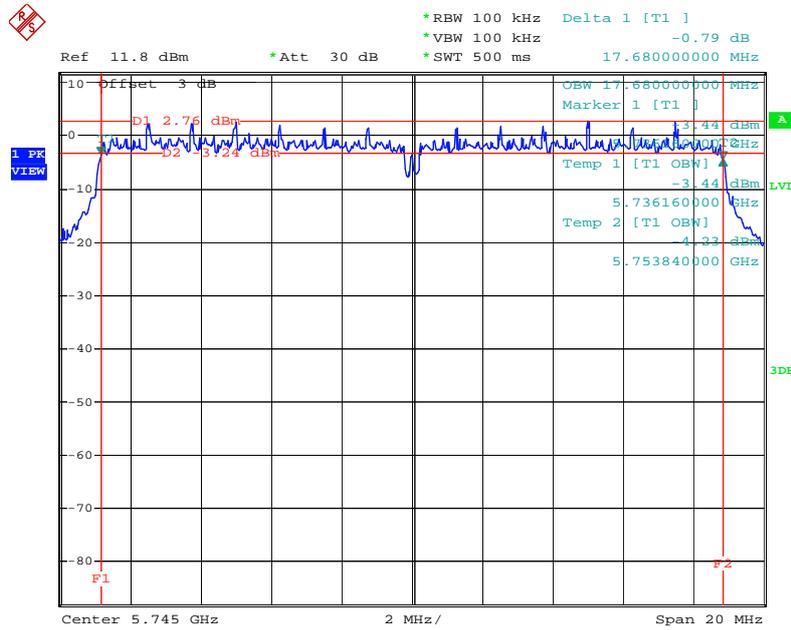


Date: 14.MAY.2010 08:05:56

6 dB Bandwidth Plot on Configuration of IEEE 802.11n-5G (20MHz) / 5785 MHz

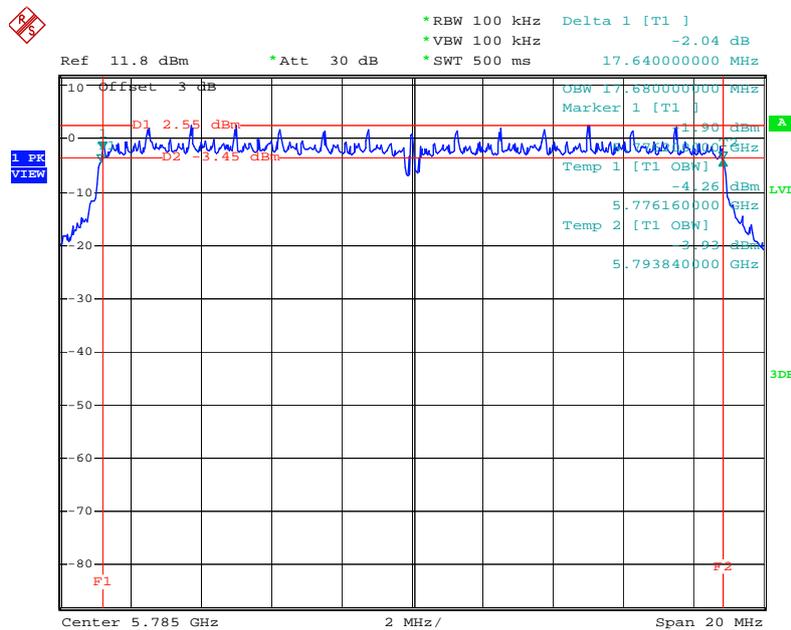


Date: 14.MAY.2010 08:09:34

6 dB Bandwidth Plot on Configuration of IEEE 802.11n-5G (20MHz) / 5825 MHz

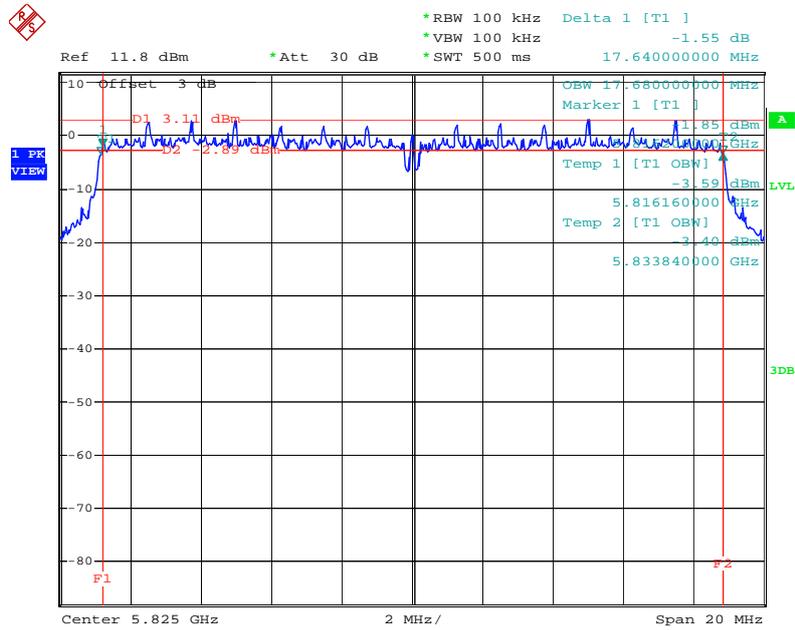


Date: 14.MAY.2010 08:10:39

6 dB Bandwidth Plot on Configuration of IEEE 802.11n-5G (40MHz) / 5755 MHz

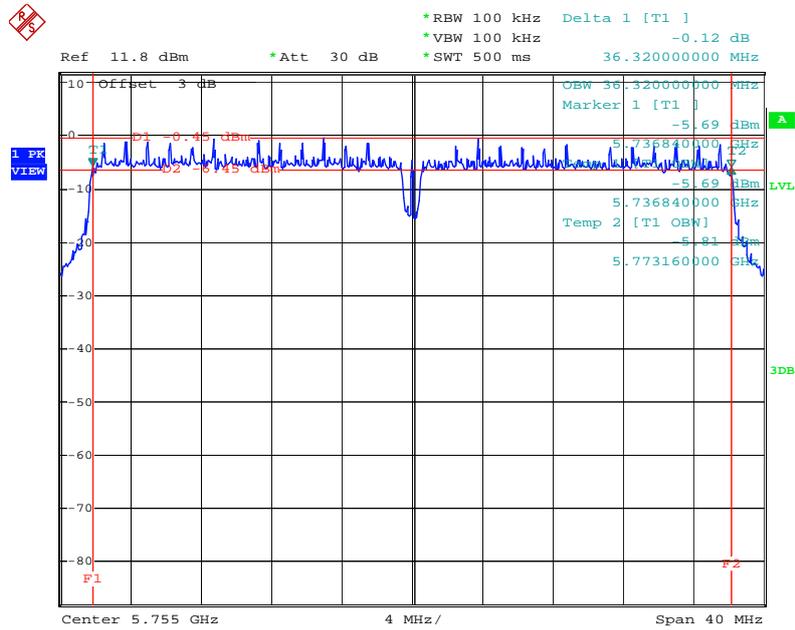


Date: 14.MAY.2010 08:23:27

6 dB Bandwidth Plot on Configuration of IEEE 802.11n-5G (40MHz) / 5795 MHz

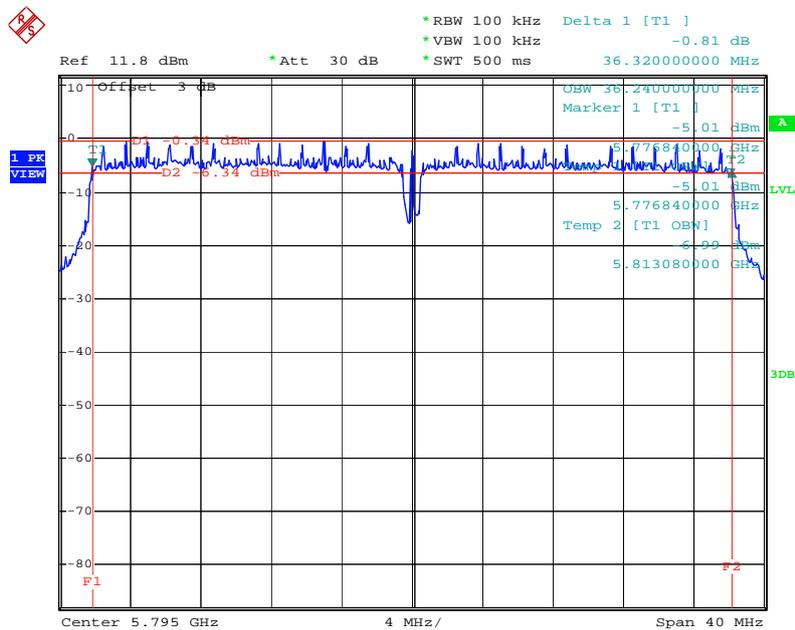


Date: 14.MAY.2010 08:26:36

6 dB Bandwidth Plot on Configuration of IEEE 802.11n-2.4G (20MHz) / 2412 MHz

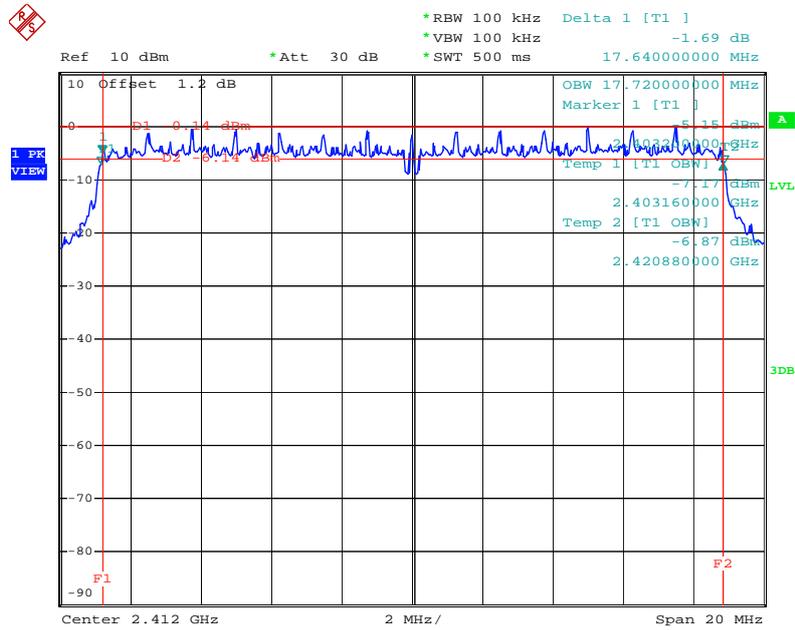

Date: 14.MAY.2010 07:48:33


6 dB Bandwidth Plot on Configuration of IEEE 802.11n-2.4G (20MHz) / 2437 MHz

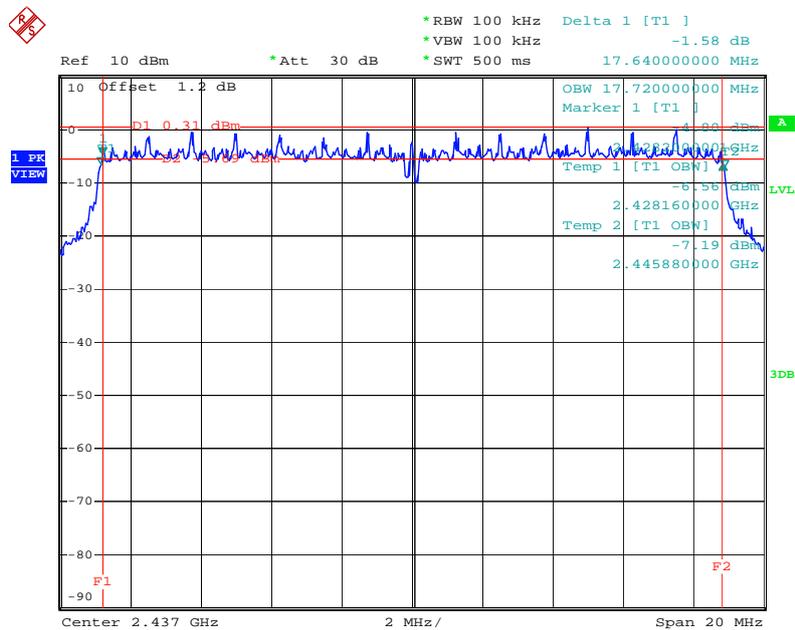

Date: 14.MAY.2010 07:51:25


For Two Chain:

6 dB Bandwidth Plot on Configuration of IEEE 802.11n-5G Ant. A+Ant. B (20MHz) / 5745 MHz

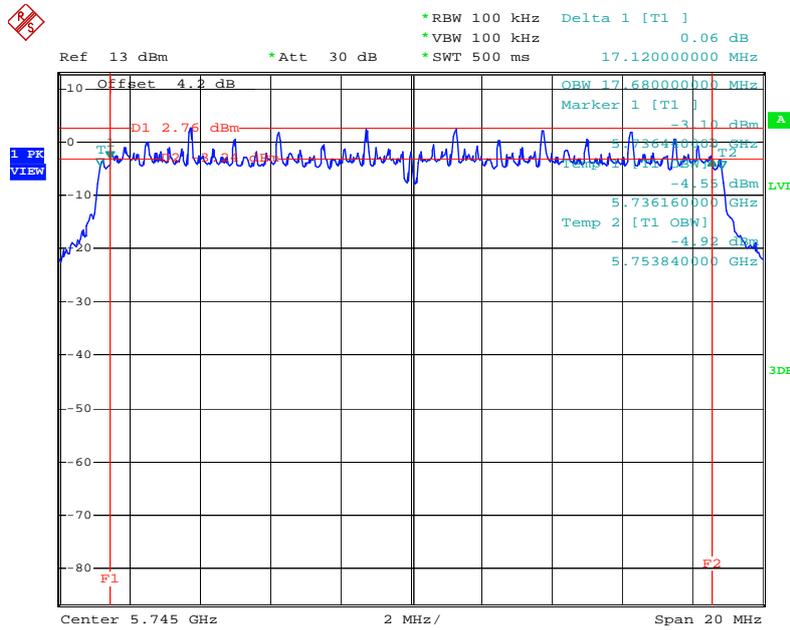


Date: 14.MAY.2010 12:43:59

6 dB Bandwidth Plot on Configuration of IEEE 802.11n-5G Ant. A+Ant. B (20MHz) / 5785 MHz

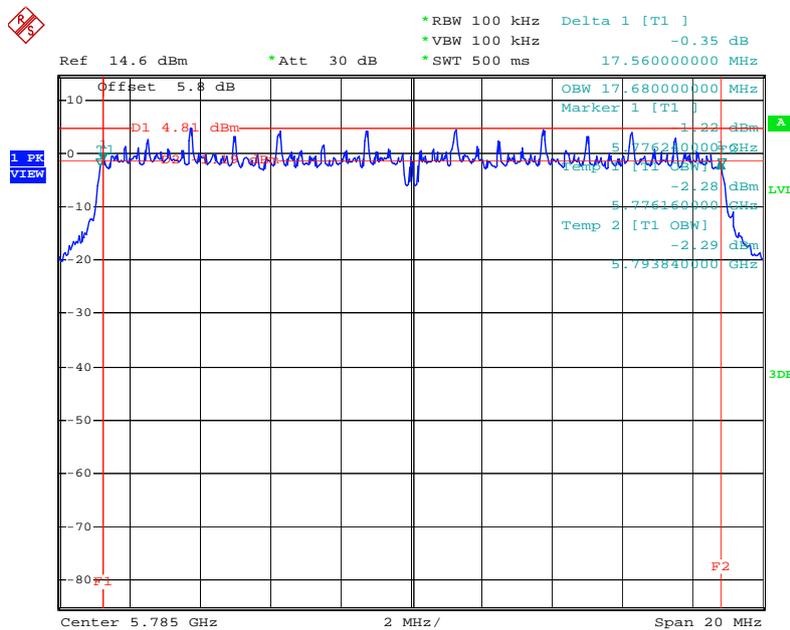


Date: 14.MAY.2010 13:16:43

6 dB Bandwidth Plot on Configuration of IEEE 802.11n-5G Ant. A+Ant. B (20MHz) / 5825 MHz

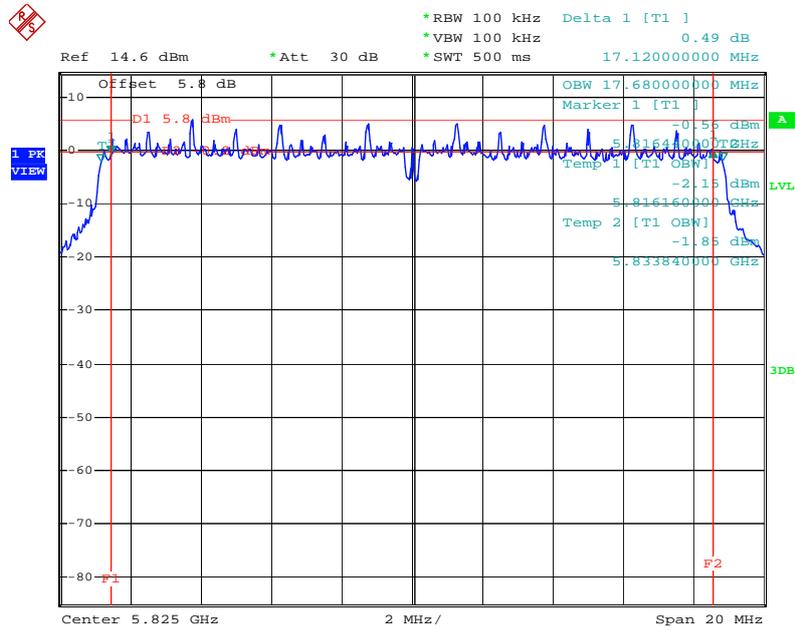


Date: 14.MAY.2010 13:23:40

6 dB Bandwidth Plot on Configuration of IEEE 802.11n-5G Ant. A+Ant. B (40MHz) / 5755 MHz

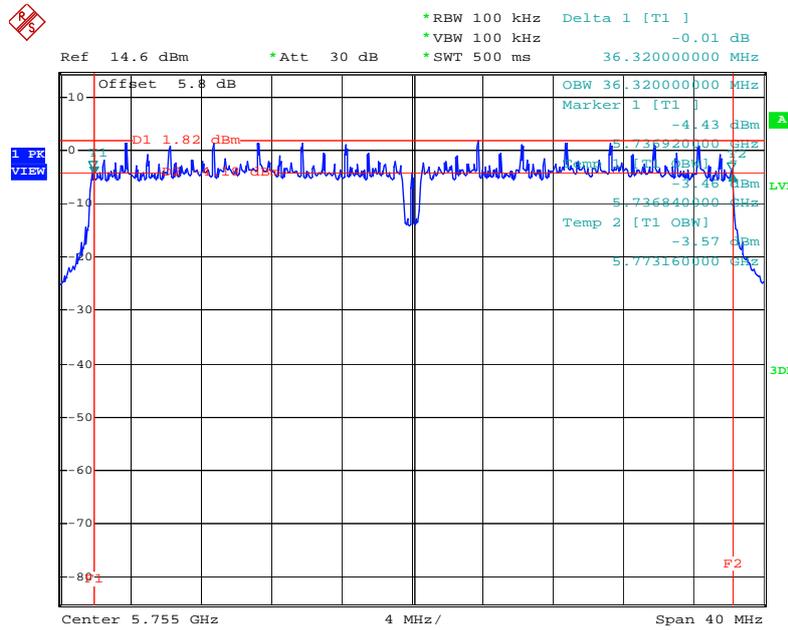


Date: 14.MAY.2010 13:44:46

6 dB Bandwidth Plot on Configuration of IEEE 802.11n-5G Ant. A+Ant. B (40MHz) / 5795 MHz

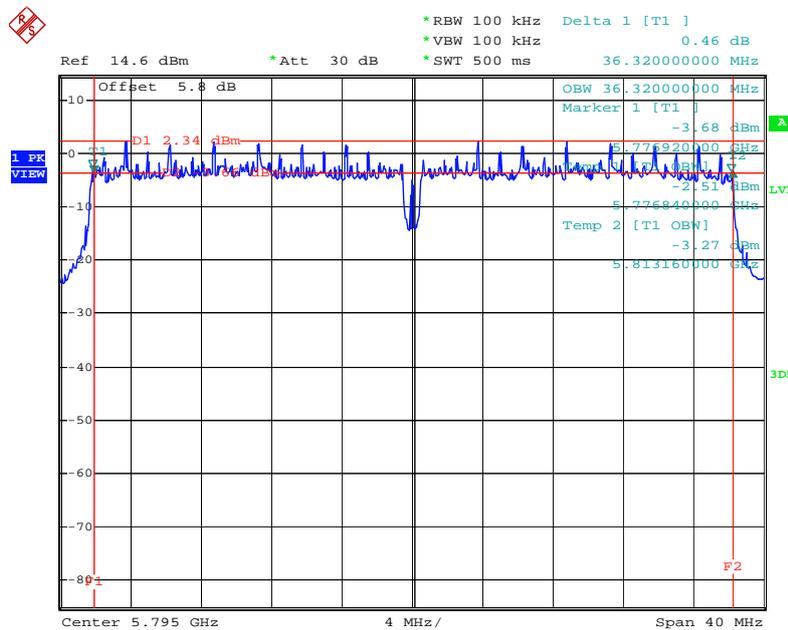


Date: 14.MAY.2010 13:53:33

6 dB Bandwidth Plot on Configuration of IEEE 802.11n-2.4G Ant. A+Ant. B (20MHz) / 2412 MHz

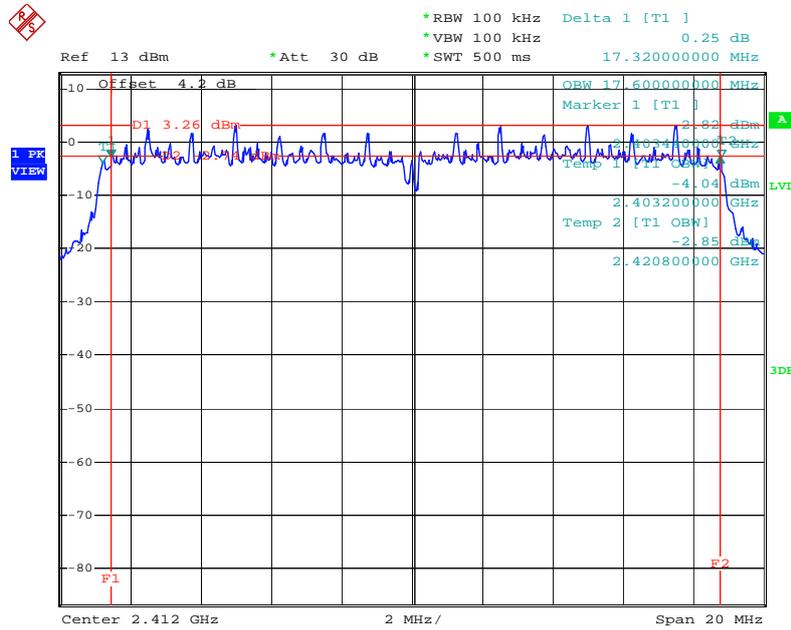


Date: 14.MAY.2010 11:24:19

6 dB Bandwidth Plot on Configuration of IEEE 802.11n-2.4G Ant. A+Ant. B (20MHz) / 2437 MHz

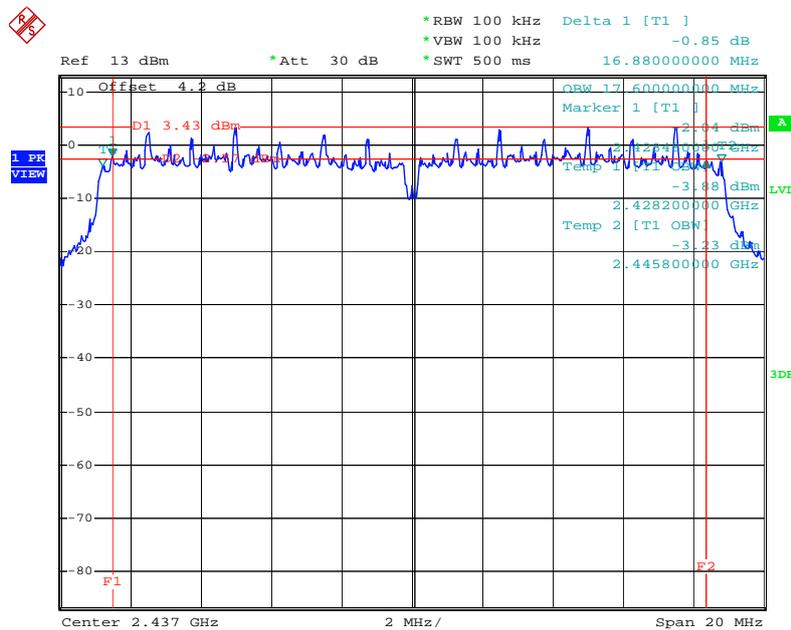

Date: 14.MAY.2010 11:15:39

6 dB Bandwidth Plot on Configuration of IEEE 802.11n-2.4G Ant. A+Ant. B (20MHz) / 2462 MHz

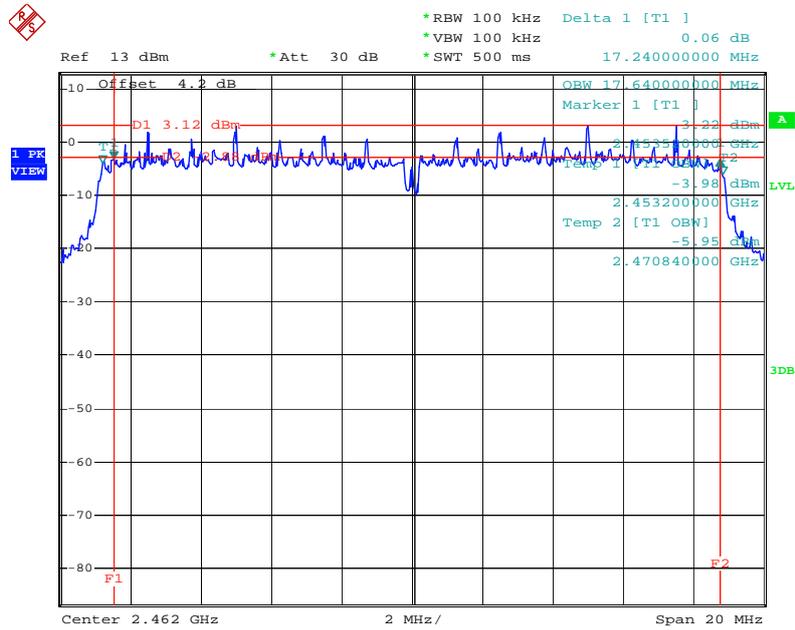

Date: 14.MAY.2010 10:47:52

3.5 Radiated Emissions Measurement

3.5.1 Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

3.5.2 Measuring Instruments and Setting

Please refer to section 4 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	1MHz / 1MHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

3.5.3 Test Procedures


1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

3.5.4 Test Setup Layout

For radiated emissions below 30MHz

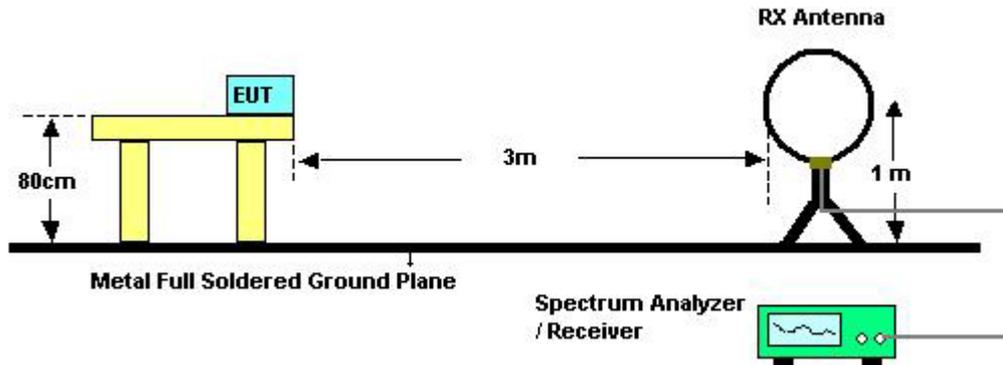

For radiated emissions above 30MHz

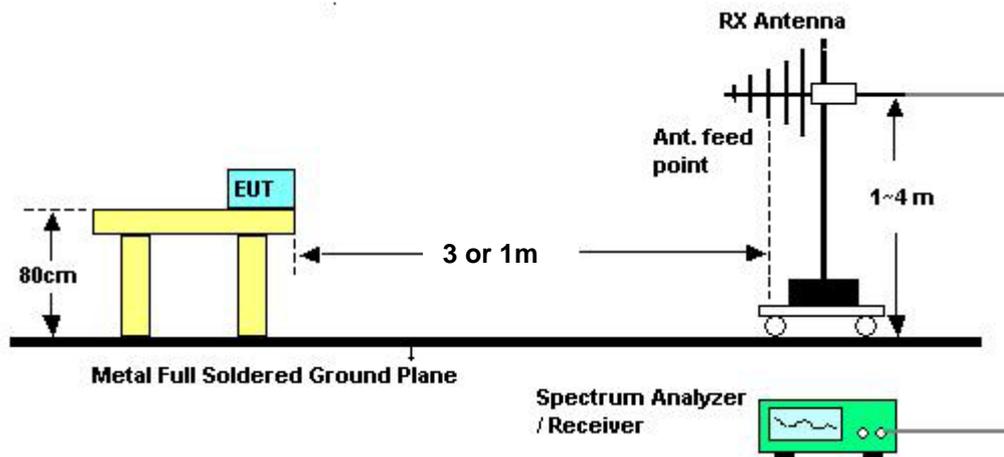

Above 10 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1m.

Distance extrapolation factor = $20 \log (\text{specific distance [3m]} / \text{test distance [1m]})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [9.54 dB].

3.5.5 Test Deviation

There is no deviation with the original standard.

3.5.6 EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

3.5.7 Results of Radiated Emissions (9kHz~30MHz)

Final Test Date	May 21,2010	Test Site No.	03CH03-HY
Temperature	24.6	Humidity	61%
Test Engineer	Eddie		

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

3.5.8 Results of Radiated Emissions (30MHz~1GHz)


Final Test Date	May 21,2010	Test Site No.	03CH03-HY
Temperature	24.6	Humidity	61%
Test Engineer	Eddie	Configurations	Normal Mode

Horizontal

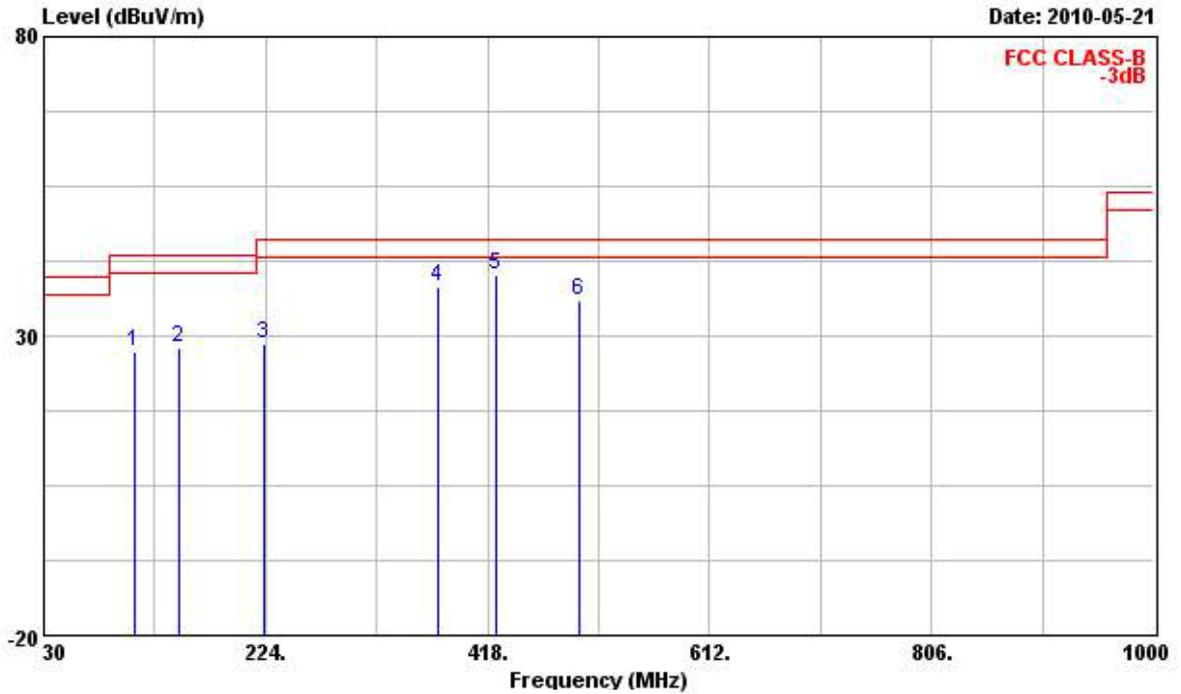

	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	109.540	27.28	-16.22	43.50	40.78	12.40	1.77	27.67	---	---	Peak
2	148.340	28.17	-15.33	43.50	43.29	10.60	2.08	27.79	---	---	Peak
3	222.060	28.83	-17.17	46.00	44.91	9.39	2.54	28.01	---	---	Peak
4	374.350	38.18	-7.82	46.00	47.76	15.62	3.37	28.57	---	---	Peak
5	424.790	40.06	-5.94	46.00	48.17	17.20	3.55	28.86	---	---	Peak
6	498.510	35.89	-10.11	46.00	42.98	18.09	3.91	29.09	---	---	Peak

Vertical

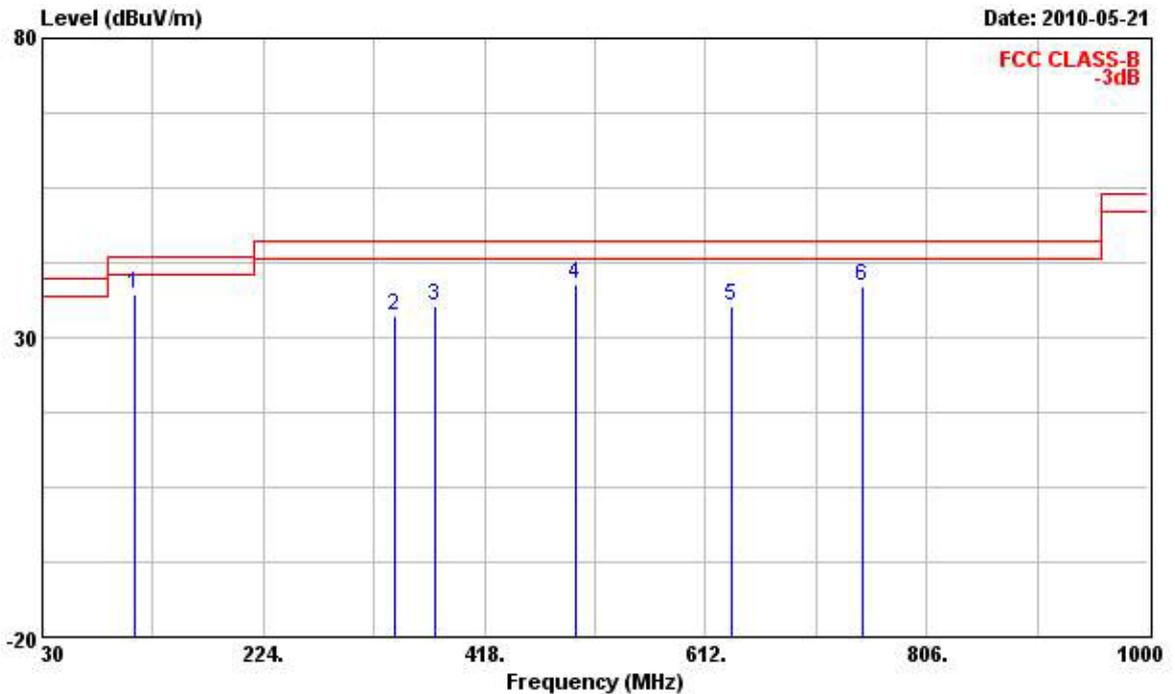

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	110.510	37.33	-6.17	43.50	50.79	12.42	1.78	27.67	---	---	Peak
2	339.430	33.49	-12.51	46.00	43.59	14.73	3.25	28.08	---	---	Peak
3	374.350	35.25	-10.75	46.00	44.83	15.62	3.37	28.57	---	---	Peak
4	498.510	38.84	-7.16	46.00	45.93	18.09	3.91	29.09	---	---	Peak
5	634.310	35.29	-10.71	46.00	40.59	19.53	4.60	29.43	---	---	Peak
6	749.740	38.51	-7.49	46.00	42.93	20.71	4.91	30.03	---	---	Peak

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).


Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

3.5.9 Results for Radiated Emissions (1GHz~10th Harmonic)

For Single Chain:

Final Test Date	May 07, 2010	Test Site No.	03CH03-HY
Temperature	24.6	Humidity	61%
Test Engineer	Eddie	Configuration	5G 802.11n Ch. 149 (20MHz)


Horizontal

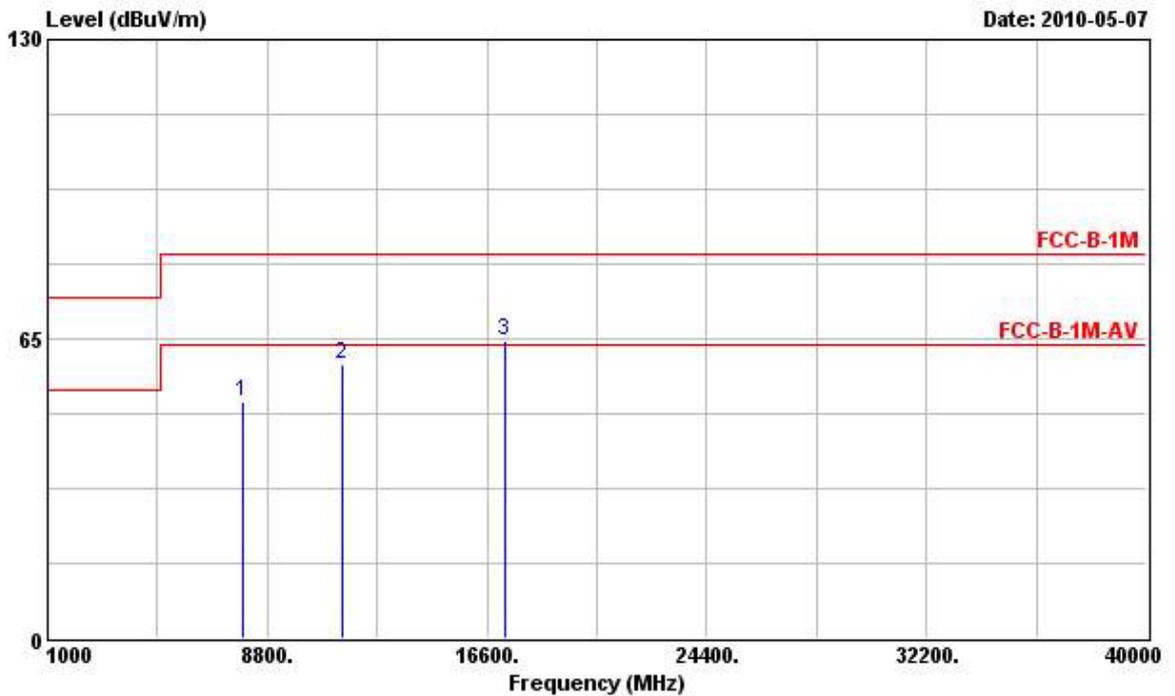

	Freq	Level	Over Limit	Limit Line	ReadAntenna	Cable	Preamp	Ant	Table	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg	
1	7949.000	51.48			41.25	37.75	4.68	32.20	100	360 Peak
2 @	11490.000	59.27	-4.27	63.54	44.02	39.68	6.78	31.21	100	360 PK
3	17235.000	64.67			44.50	43.26	7.80	30.90	100	360 Peak

Note: The items 1 and 3 are on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

Vertical

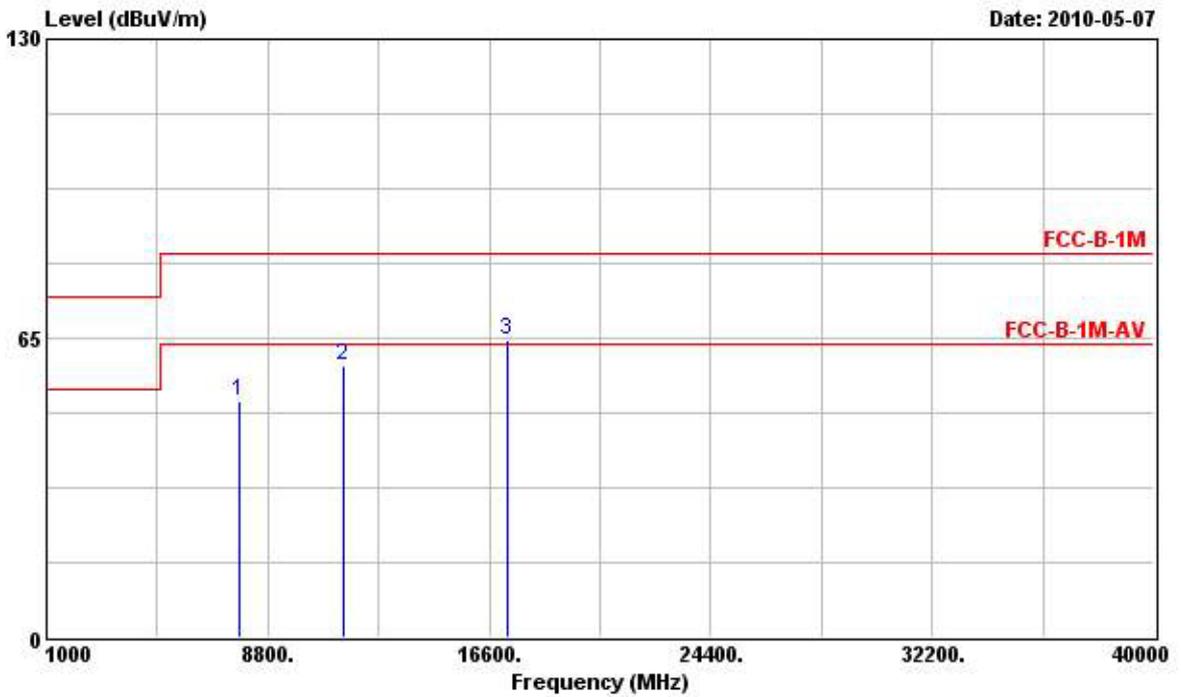


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	7806.000	51.51			41.40	37.60	4.64	32.13	100		0 Peak
2 @	11490.000	59.12	-4.42	63.54	43.87	39.68	6.78	31.21	100		0 PK
3	17235.000	64.60			44.43	43.26	7.80	30.90	100		0 Peak

Note: The items 1 and 3 are on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

Final Test Date	May 07, 2010	Test Site No.	03CH03-HY
Temperature	24.6	Humidity	61%
Test Engineer	Eddie	Configuration	5G 802.11n Ch. 157 (20MHz)


Horizontal

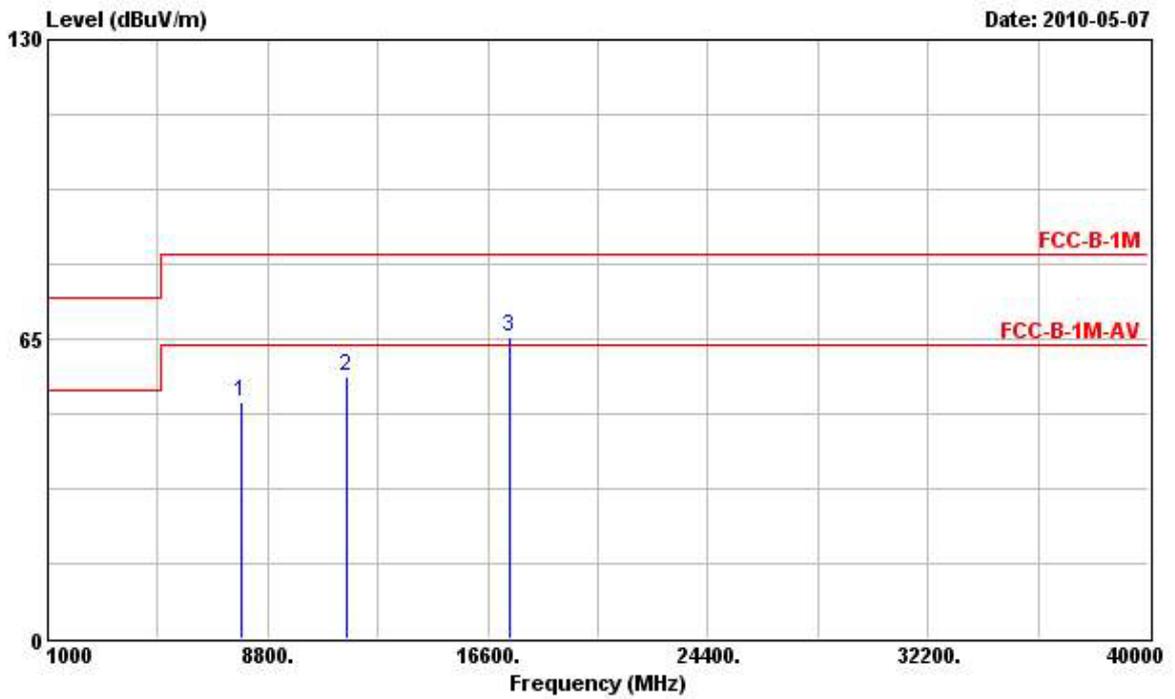

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	7884.000	51.35			41.16	37.68	4.67	32.17	100	10	Peak
2 @	11570.000	56.81	-6.73	63.54	41.80	39.63	6.68	31.30	100	10	PK
3	17355.000	65.56			44.40	44.24	7.82	30.90	100	10	Peak

Note: The items 1 and 3 are on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

Vertical

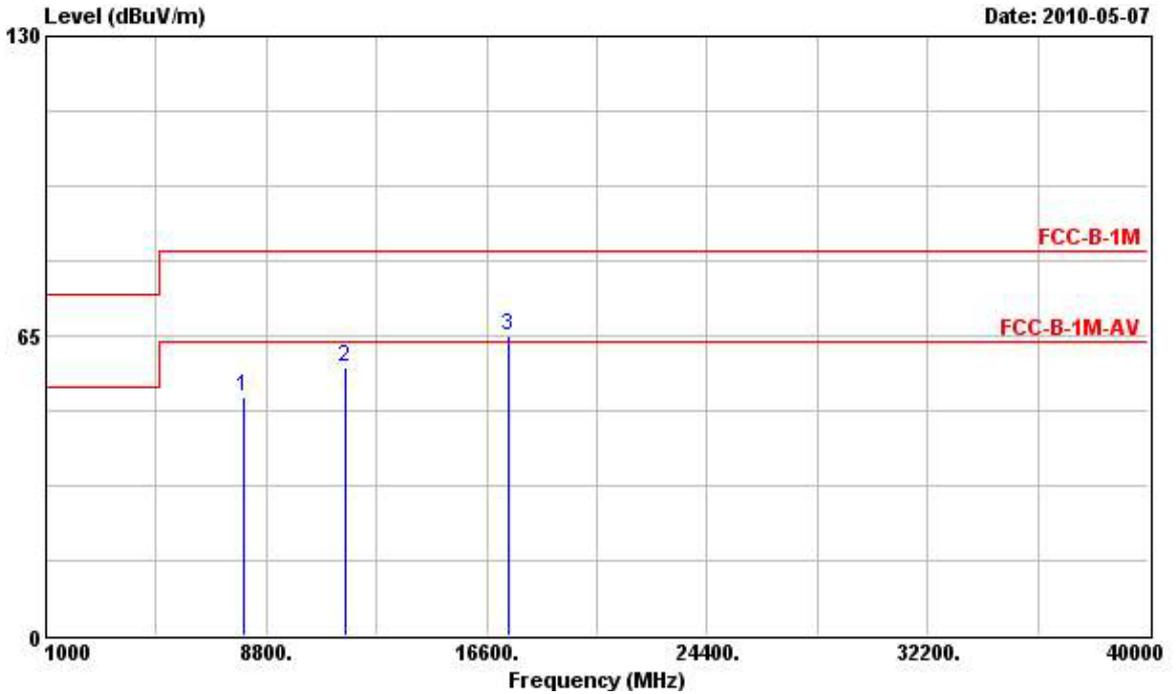


	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	8014.000	51.67			41.36	37.82	4.71	32.22	100	360	Peak
2 @	11570.000	58.31	-5.23	63.54	43.30	39.63	6.68	31.30	100	360	PK
3	17355.000	65.18			44.02	44.24	7.82	30.90	100	360	Peak

Note: The items 1 and 3 are on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

Final Test Date	May 07, 2010	Test Site No.	03CH03-HY
Temperature	24.6	Humidity	61%
Test Engineer	Eddie	Configuration	5G 802.11n Ch. 165 (20MHz)


Horizontal

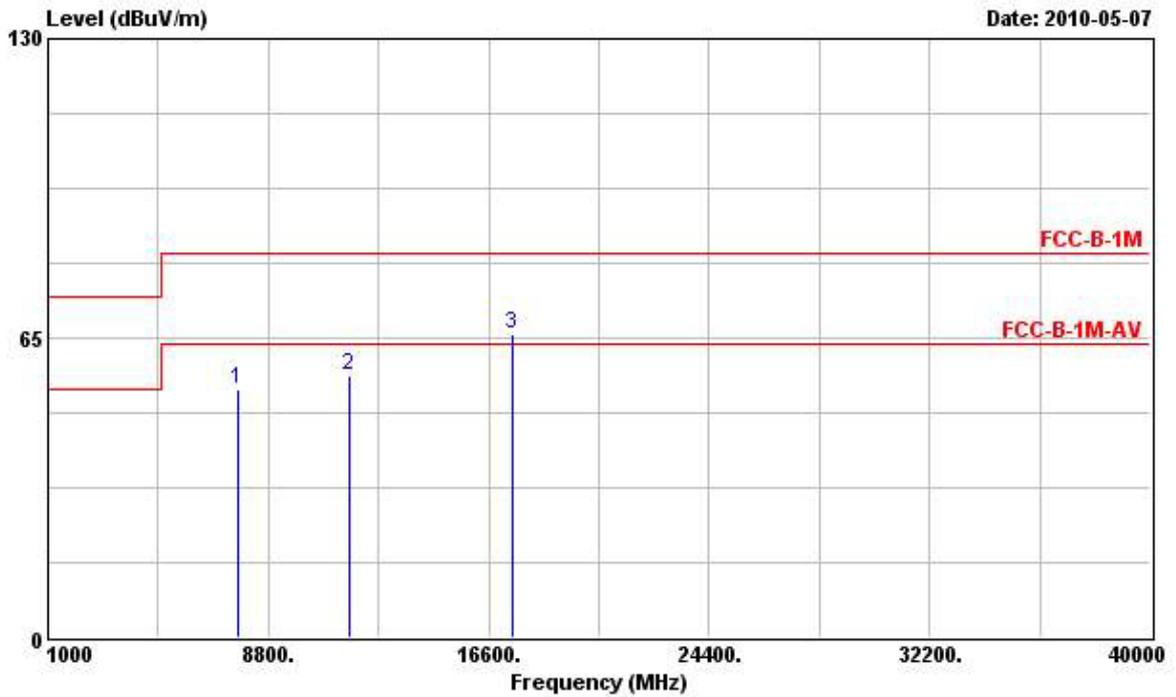

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	7754.000	53.83			43.78	37.55	4.61	32.11	100	360	Peak
2 @	11650.000	57.02	-6.52	63.54	42.32	39.56	6.57	31.44	100	360	PK
3	17475.000	65.78			43.62	45.22	7.84	30.90	100	360	Peak

Note: The items 1 and 3 are on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

Vertical

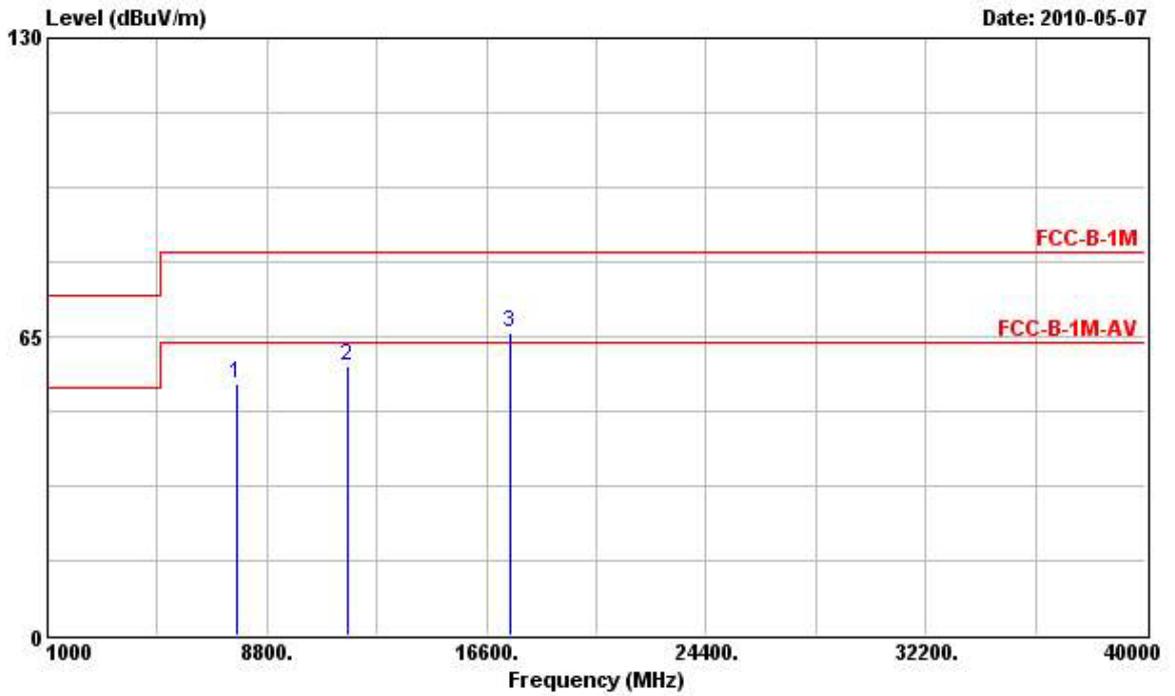


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	7754.000	54.84			44.79	37.55	4.61	32.11	100		0 Peak
2 @	11650.000	58.73	-4.81	63.54	44.03	39.56	6.57	31.44	100		0 PK
3	17475.000	66.01			43.85	45.22	7.84	30.90	100		0 Peak

Note: The items 1 and 3 are on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

Final Test Date	May 08, 2010	Test Site No.	03CH03-HY
Temperature	24.6	Humidity	61%
Test Engineer	Eddie	Configuration	5G 802.11n Ch. 151 (40MHz)


Horizontal

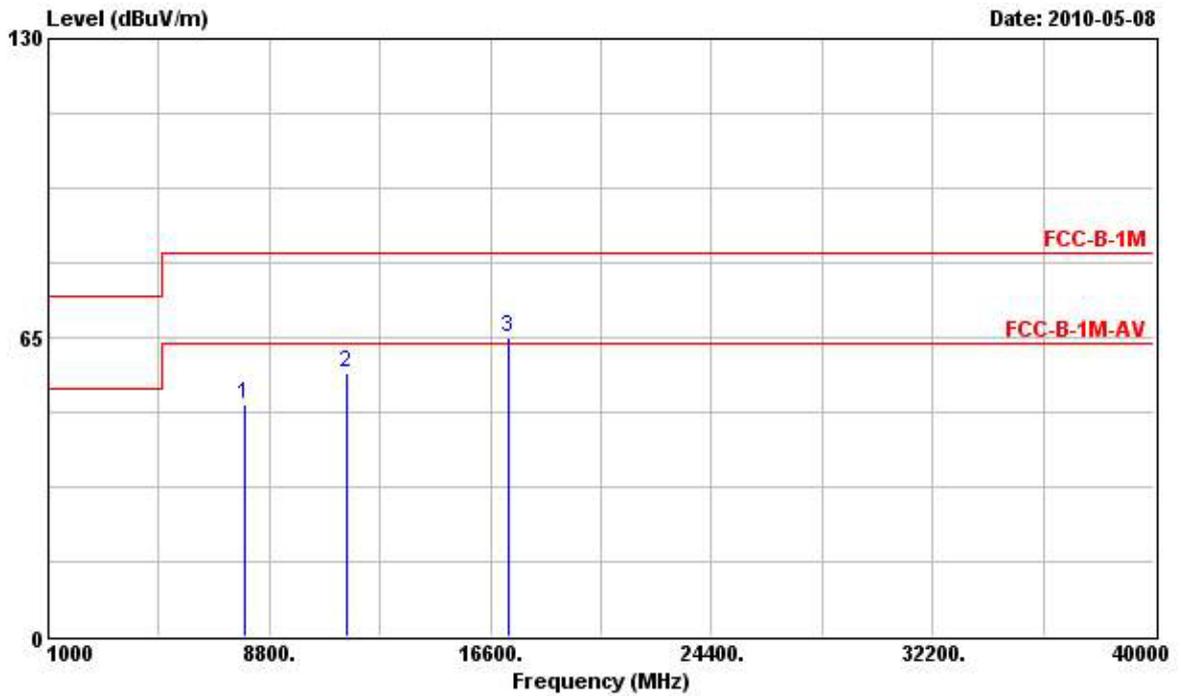

	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	7949.000	50.65			40.42	37.75	4.68	32.20	100	360	Peak
2 @	11510.000	57.41	-6.13	63.54	42.15	39.70	6.73	31.17	100	360	PK
3	17265.000	65.16			44.71	43.54	7.81	30.90	100	360	Peak

Note: The items 1 and 3 are on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

Vertical

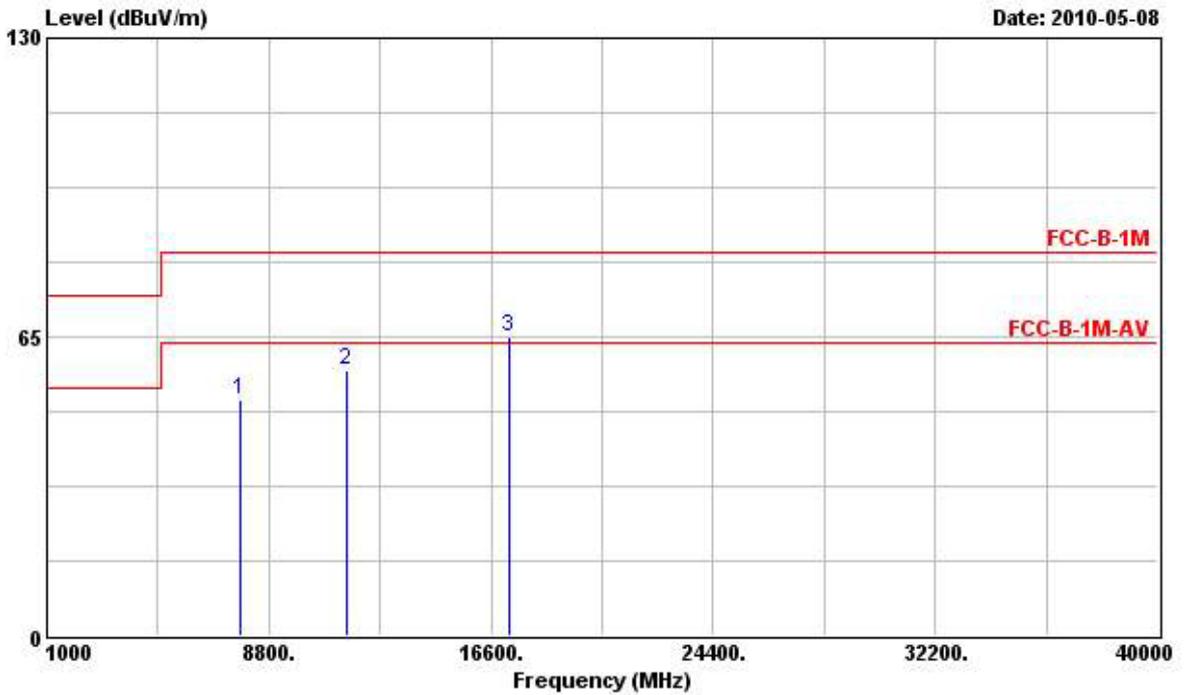


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	7806.000	51.39			41.28	37.60	4.64	32.13	100	115	Peak
2 @	11510.000	57.58	-5.96	63.54	42.32	39.70	6.73	31.17	100	115	PK
3	17265.000	64.93			44.48	43.54	7.81	30.90	100	115	Peak

Note: The items 1 and 3 are on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

Final Test Date	May 08, 2010	Test Site No.	03CH03-HY
Temperature	24.6	Humidity	61%
Test Engineer	Eddie	Configuration	5G 802.11n Ch. 159 (40MHz)


Horizontal

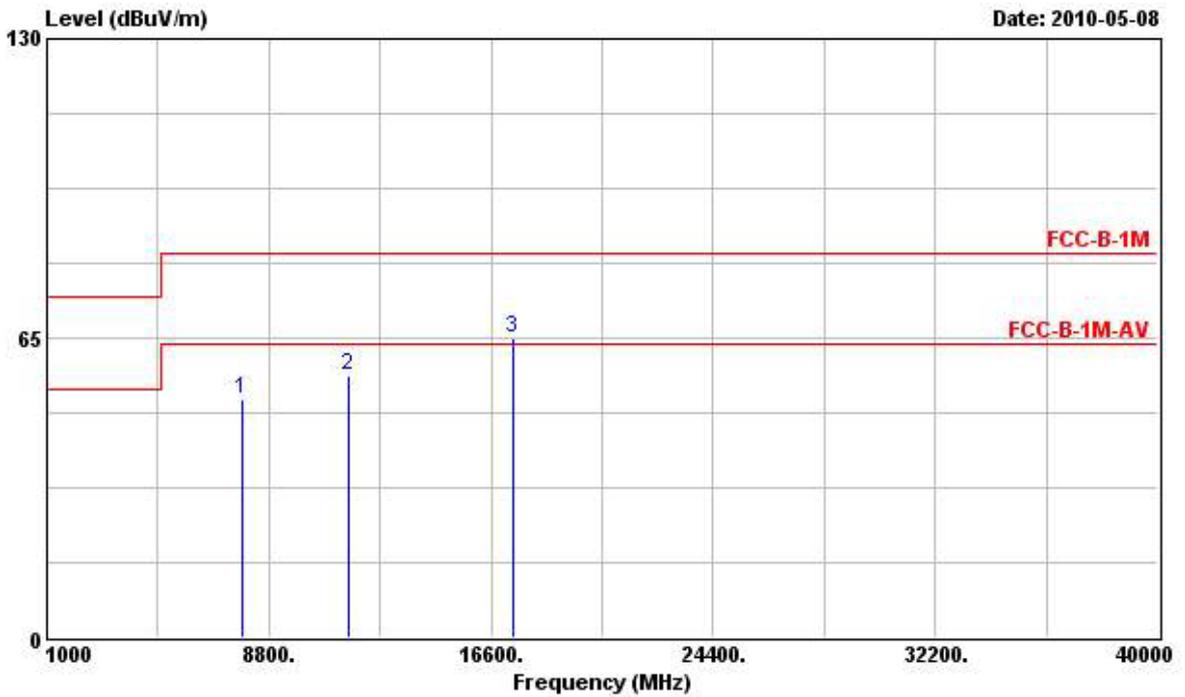

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	dB	cm	deg	
1	7884.000	51.58			41.39	37.68	4.67	32.17	100		0 Peak
2 @	11590.000	57.05	-6.49	63.54	42.11	39.61	6.62	31.30	100		0 PK
3	17385.000	64.86			43.41	44.52	7.83	30.90	100		0 Peak

Note: The items 1 and 3 are on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

Vertical

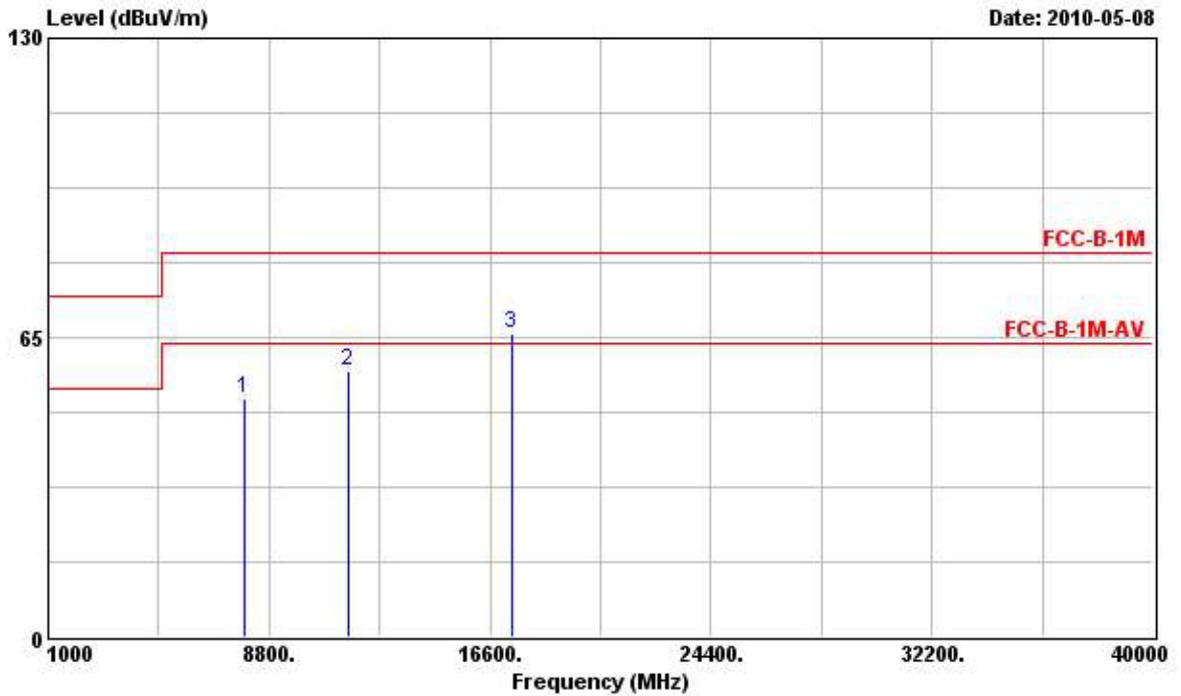


	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	7949.000	51.91			41.68	37.75	4.68	32.20	100	360	Peak
2 @	11590.000	57.55	-5.99	63.54	42.61	39.61	6.62	31.30	100	360	PK
3	17385.000	65.91			44.46	44.52	7.83	30.90	100	360	Peak

Note: The items 1 and 3 are on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

Final Test Date	May 04, 2010	Test Site No.	03CH03-HY
Temperature	24.6	Humidity	61%
Test Engineer	Eddie	Configuration	2.4G 802.11n Ch. 1 (20MHz)


Horizontal

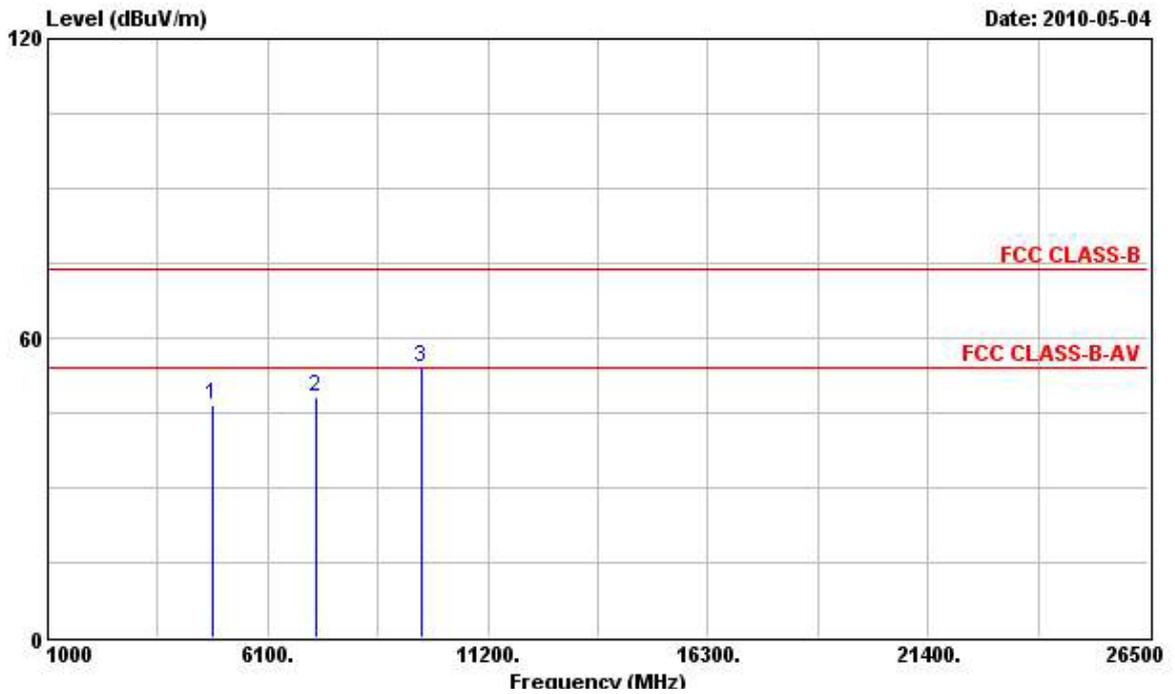

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	4824.000	46.41	-7.59	54.00	41.61	33.06	4.03	32.28	---	---	PK
2	7236.000	48.31			41.47	35.78	3.67	32.61	---	---	PEAK
3	9648.000	54.14			42.81	38.41	5.21	32.28	---	---	PEAK

Note: The items 2 and 3 are on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

Vertical

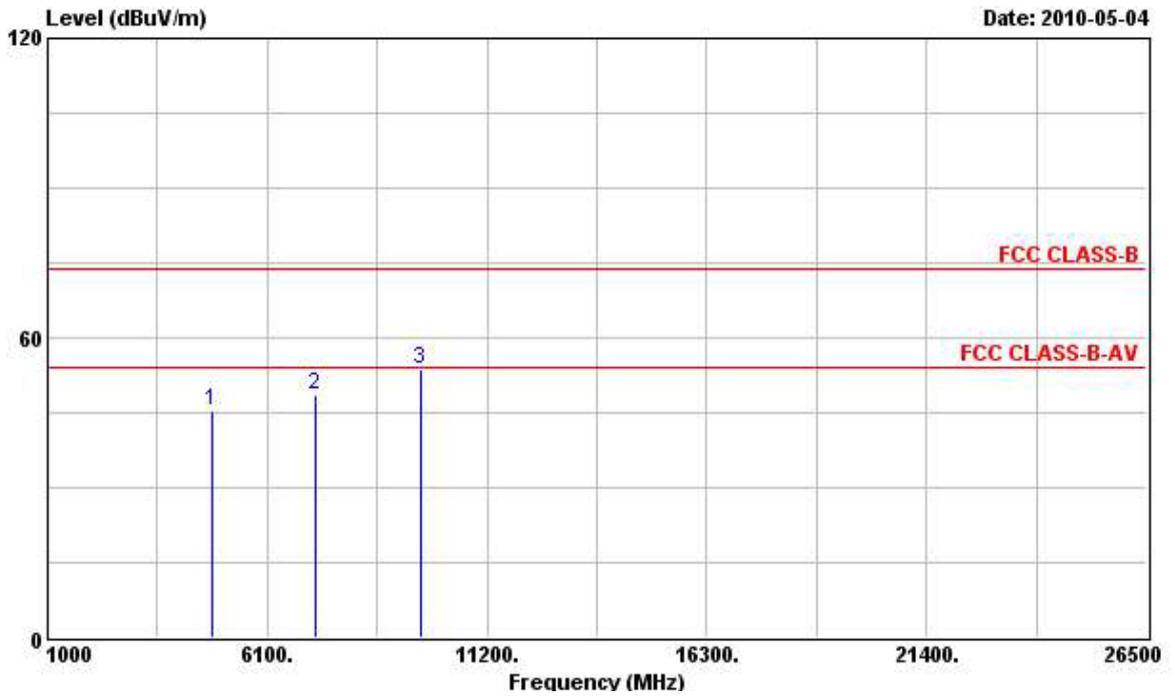


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	4824.000	45.45	-8.55	54.00	40.64	33.06	4.03	32.28	---	---	PK
2	7236.000	48.73			41.89	35.78	3.67	32.61	---	---	PEAK
3	9648.000	53.76			42.42	38.41	5.21	32.28	---	---	PEAK

Note: The items 2 and 3 are on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

Final Test Date	May 04, 2010	Test Site No.	03CH03-HY
Temperature	24.6	Humidity	61%
Test Engineer	Eddie	Configuration	2.4G 802.11n Ch. 6 (20MHz)


Horizontal

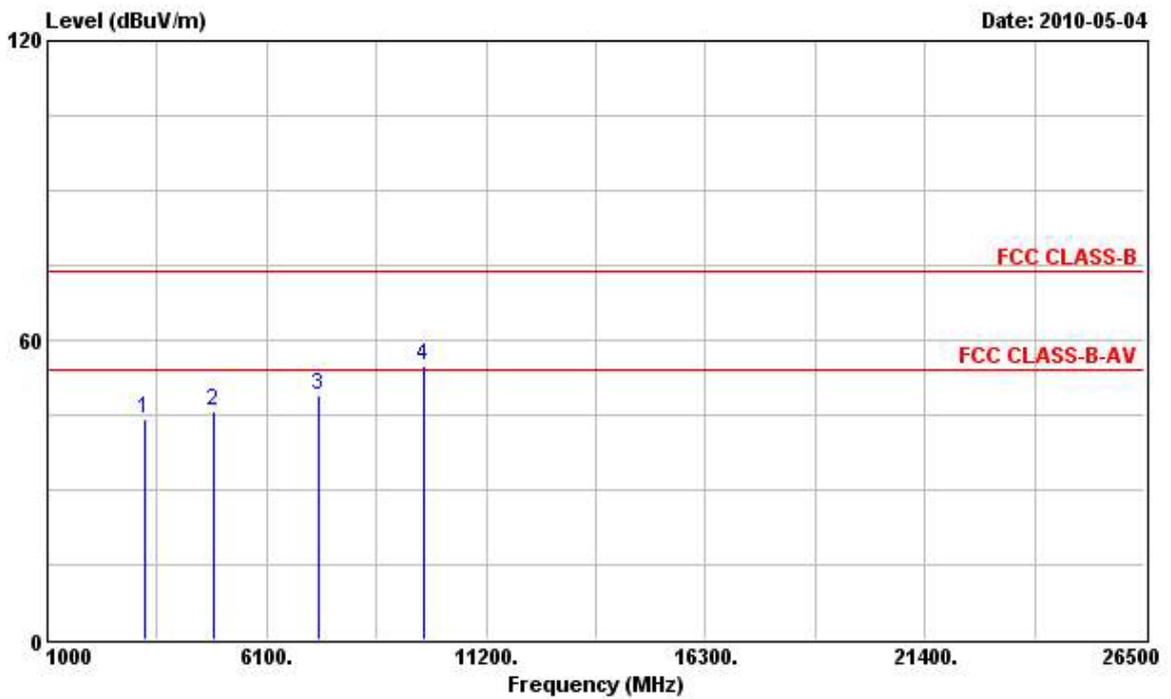

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	3248.000	44.11			43.40	30.58	2.48	32.36	---	---	PEAK
2	4878.000	45.92	-8.08	54.00	41.07	33.16	4.02	32.33	---	---	PK
3	7311.000	48.99	-5.01	54.00	41.62	35.94	3.91	32.48	---	---	PK
4	9744.000	54.79			43.23	38.58	5.31	32.33	---	---	PEAK

Note: The items 1 and 4 are on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

Vertical

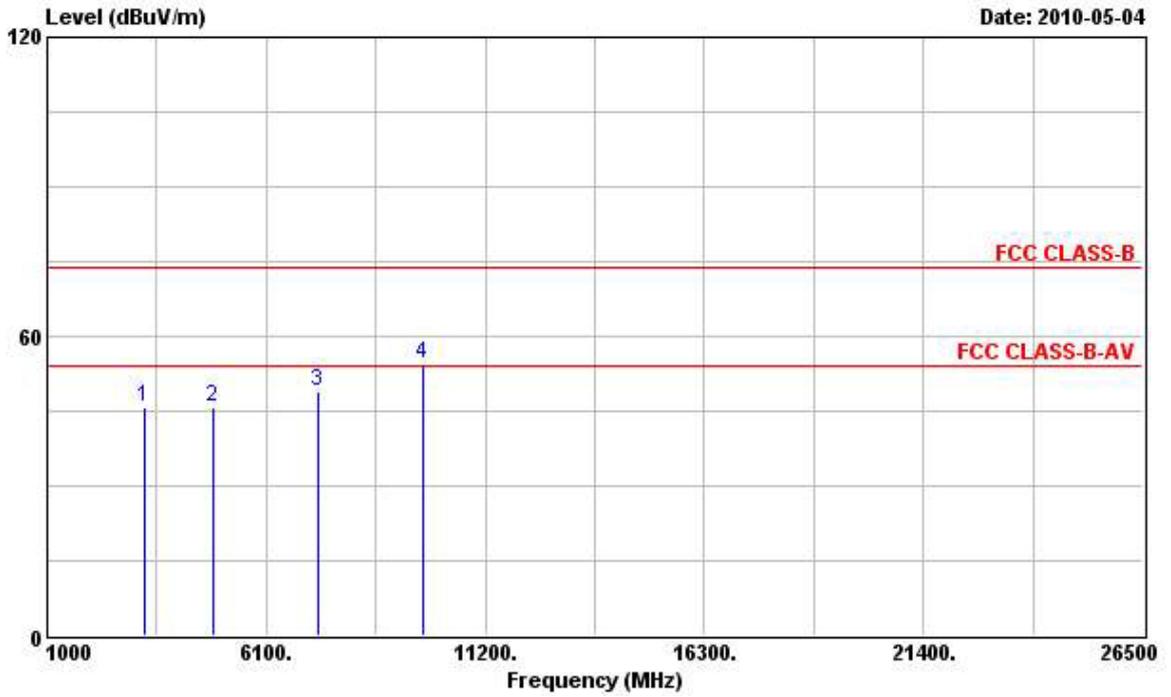


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	3248.000	45.92			45.21	30.58	2.48	32.36	---	---	PERK
2	4874.000	45.92	-8.08	54.00	41.07	33.16	4.02	32.33	---	---	PK
3	7311.000	48.93	-5.07	54.00	41.56	35.94	3.91	32.48	---	---	PK
4	9752.000	54.64			43.05	38.62	5.31	32.33	---	---	PERK

Note: The item 4 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

Final Test Date	May 04, 2010	Test Site No.	03CH03-HY
Temperature	24.6	Humidity	61%
Test Engineer	Eddie	Configuration	2.4G 802.11n Ch. 11 (20MHz)


Horizontal

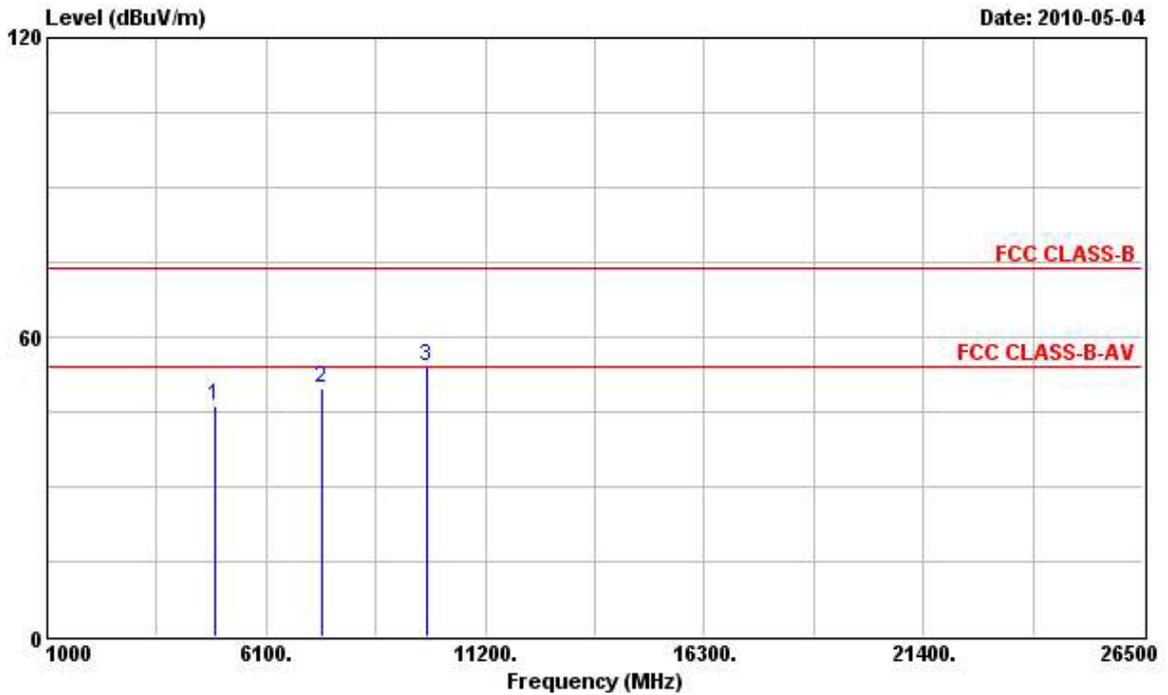

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	4924.000	46.31	-7.69	54.00	41.41	33.26	4.02	32.38	---	---	PK
2	7382.000	49.84	-4.16	54.00	41.88	36.11	4.16	32.30	---	---	PK
3	9848.000	54.14			42.27	38.79	5.47	32.38	---	---	PERK

Note: The item 3 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

Vertical

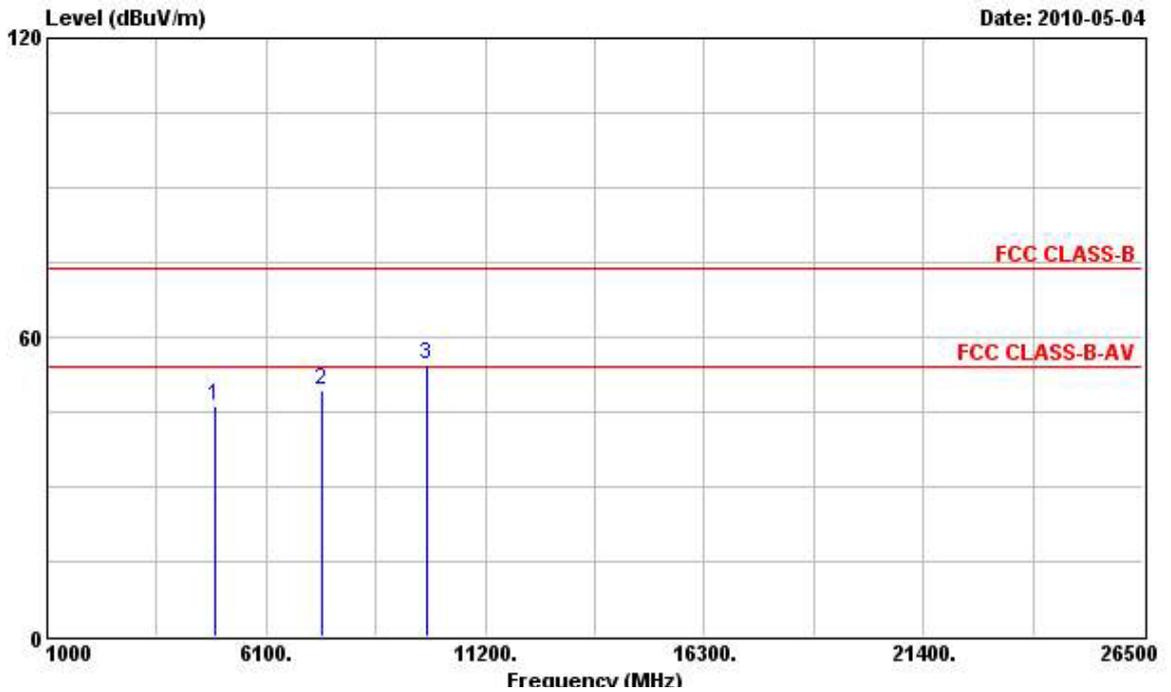


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	4928.000	46.31	-7.69	54.00	41.41	33.26	4.02	32.38	---	---	PK
2	7386.000	49.30	-4.70	54.00	41.30	36.15	4.16	32.30	---	---	PK
3	9844.000	54.57			42.70	38.79	5.47	32.38	---	---	PEAK

Note: The item 3 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

For Two Chain:

Final Test Date	May 10, 2010	Test Site No.	03CH03-HY
Temperature	24.6	Humidity	61%
Test Engineer	Eddie	Configuration	5G 802.11n Ch. 149 (20MHz)


Horizontal

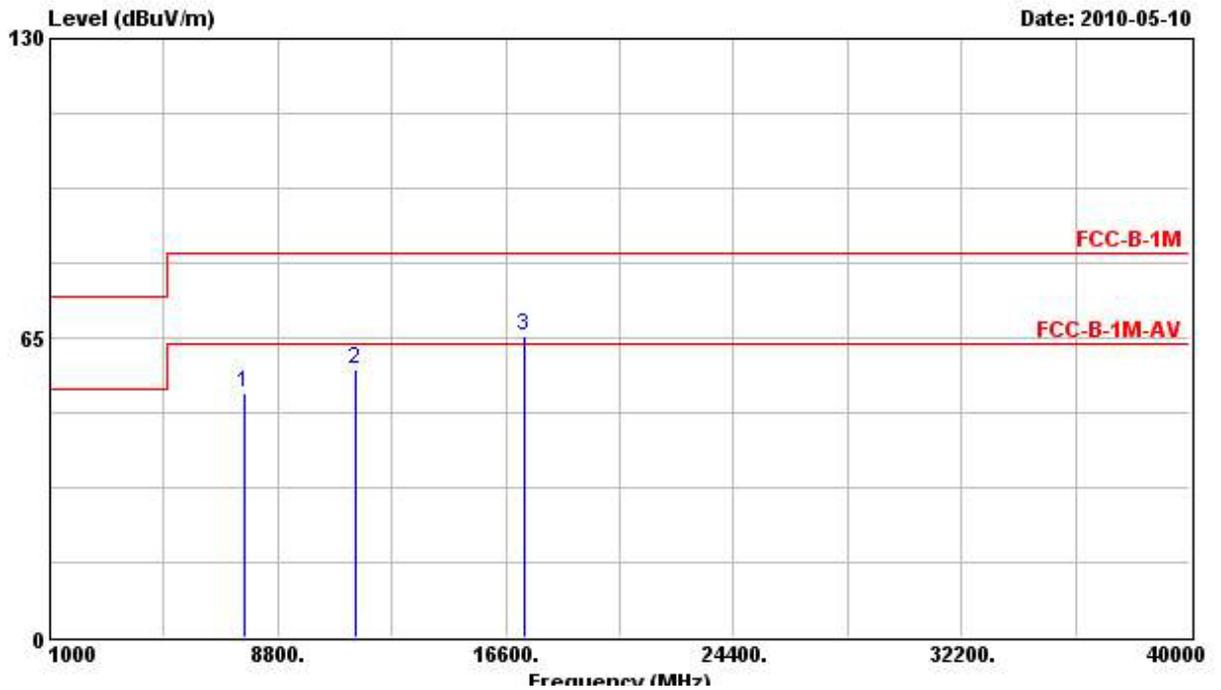

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBUV/m	dB	dBUV/m	dBUV	dB/m	dB	dB	cm	deg	
1	7660.000	53.22	-10.32	63.54	43.24	37.47	4.58	32.06	---	---	PK
2 @	11486.000	58.16	-5.38	63.54	42.92	39.68	6.78	31.21	---	---	PK
3	17235.000	65.49			45.33	43.26	7.80	30.90	---	---	PEAK

Note: The item 3 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

Vertical

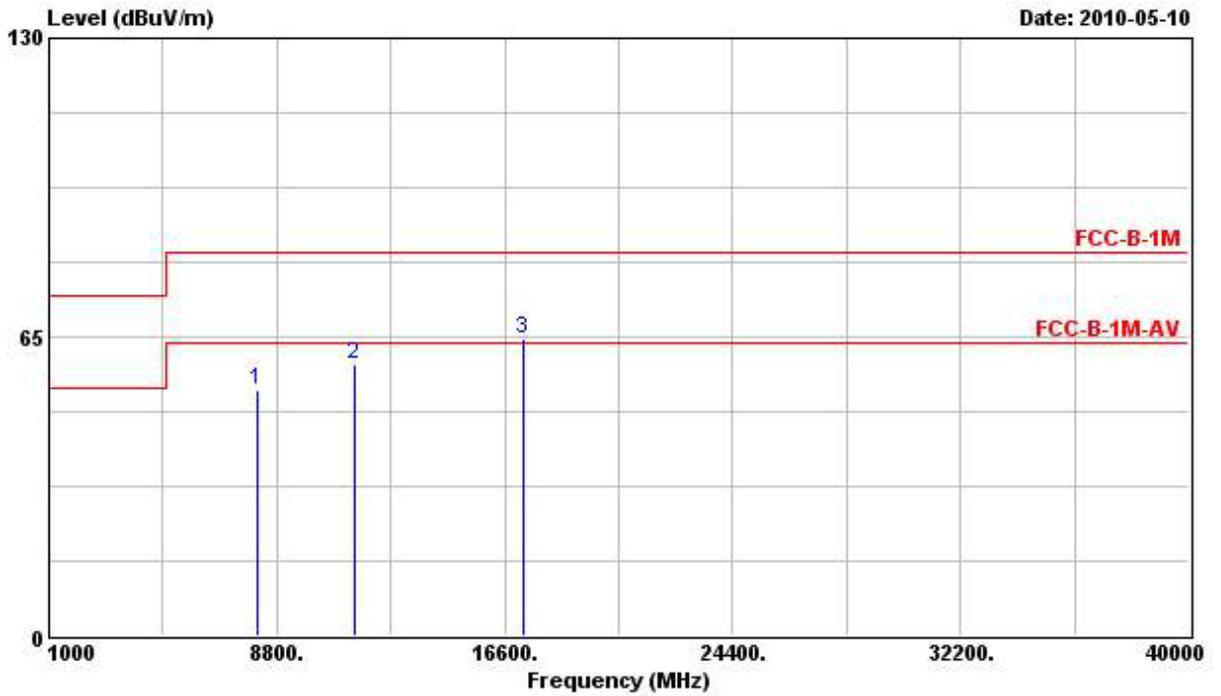


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	8152.000	53.44	-10.10	63.54	42.75	37.96	4.91	32.17	---	---	PK
2 @	11492.000	58.81	-4.73	63.54	43.56	39.68	6.78	31.21	---	---	PK
3	17237.000	64.39			44.22	43.26	7.80	30.90	---	---	PERK

Note: The item 3 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

Final Test Date	May 10, 2010	Test Site No.	03CH03-HY
Temperature	24.6	Humidity	61%
Test Engineer	Eddie	Configuration	5G 802.11n Ch. 157 (20MHz)


Horizontal

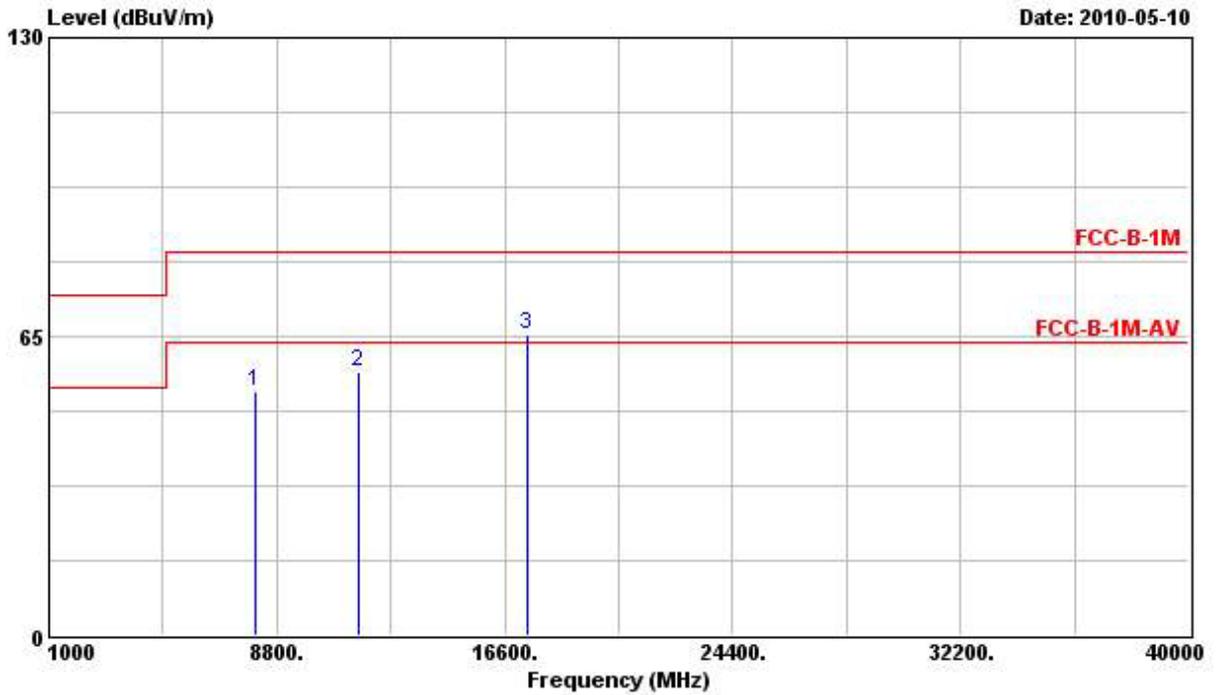

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	8076.000	53.03	-10.51	63.54	42.59	37.87	4.78	32.20	---	---	PK
2 @	11570.000	57.26	-6.28	63.54	42.25	39.63	6.68	31.30	---	---	PK
3	17353.000	65.48			44.32	44.24	7.82	30.90	---	---	PERK

Note: The item 3 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

Vertical

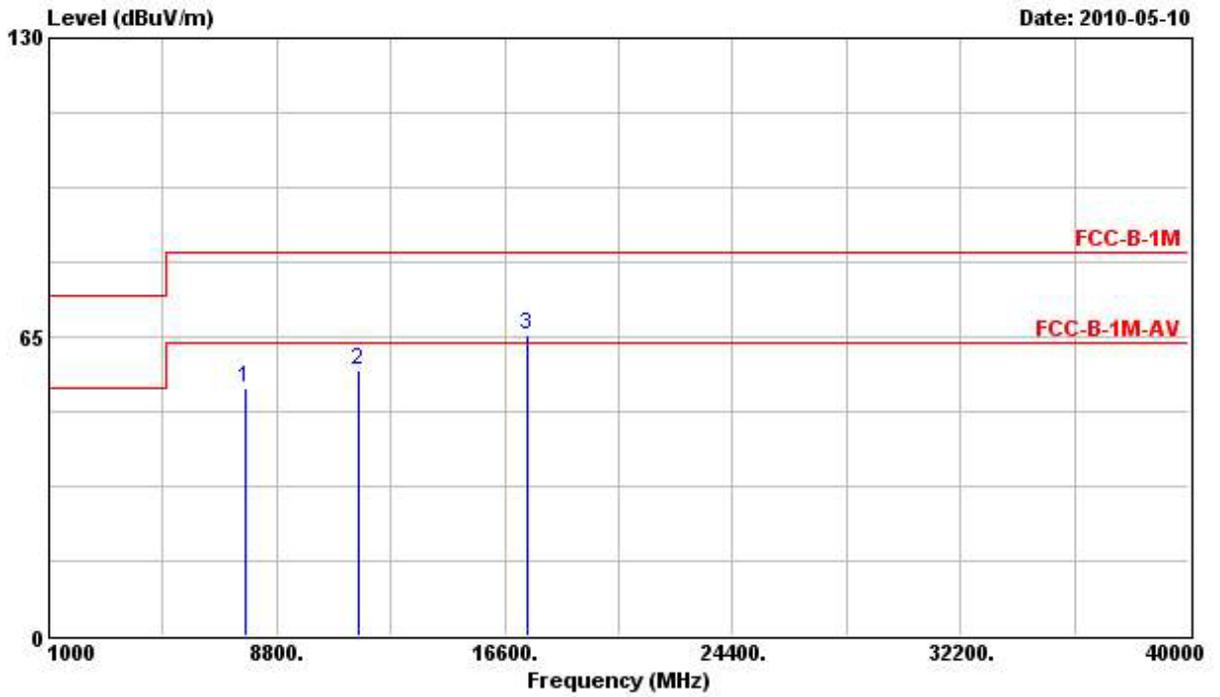


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	7712.000	53.94	-9.60	63.54	43.92	37.52	4.60	32.09	---	---	PK
2 @	11574.000	57.66	-5.88	63.54	42.65	39.63	6.68	31.30	---	---	PK
3	17353.000	65.44			44.28	44.24	7.82	30.90	---	---	PEAK

Note: The item 3 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

Final Test Date	May 10, 2010	Test Site No.	03CH03-HY
Temperature	24.6	Humidity	61%
Test Engineer	Eddie	Configuration	5G 802.11n Ch. 165 (20MHz)


Horizontal

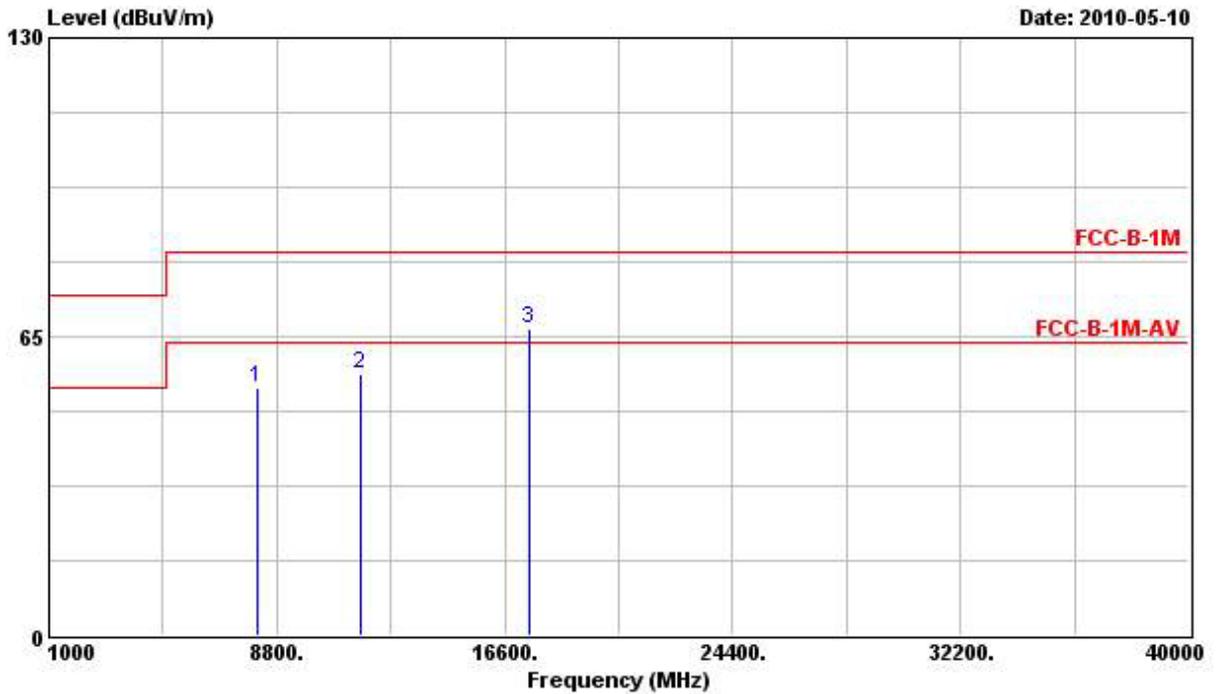

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	8120.000	53.94	-9.60	63.54	43.29	37.92	4.91	32.18	---	---	PK
2 @	11654.000	56.83	-6.71	63.54	42.15	39.54	6.57	31.44	---	---	PK
3	17475.000	66.77			44.61	45.22	7.84	30.90	---	---	PEAK

Note: The item 3 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

Vertical

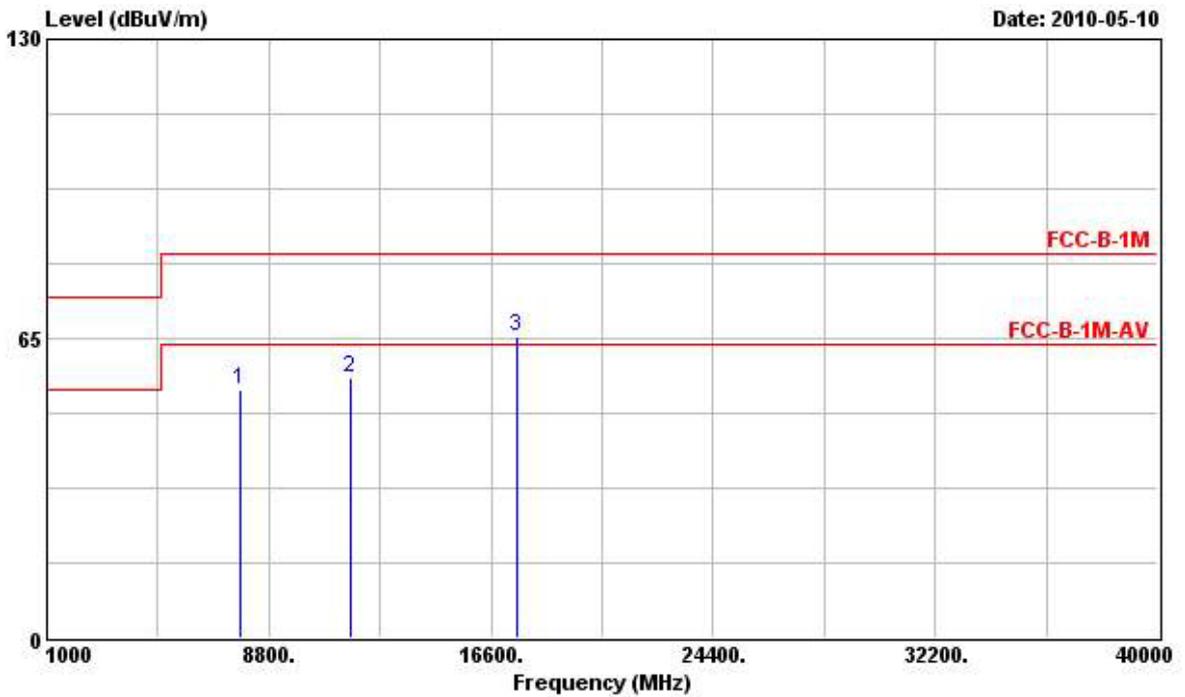


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	7768.000	53.75			43.66	37.57	4.63	32.11	---	---	PEAK
2 @	11652.000	56.53	-7.01	63.54	41.85	39.54	6.57	31.44	---	---	PK
3	17477.000	65.45			43.29	45.22	7.84	30.90	---	---	PEAK

Note: The items 1 and 3 are on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

Final Test Date	May 10, 2010	Test Site No.	03CH03-HY
Temperature	24.6	Humidity	61%
Test Engineer	Eddie	Configuration	5G 802.11n Ch. 151 (40MHz)


Horizontal

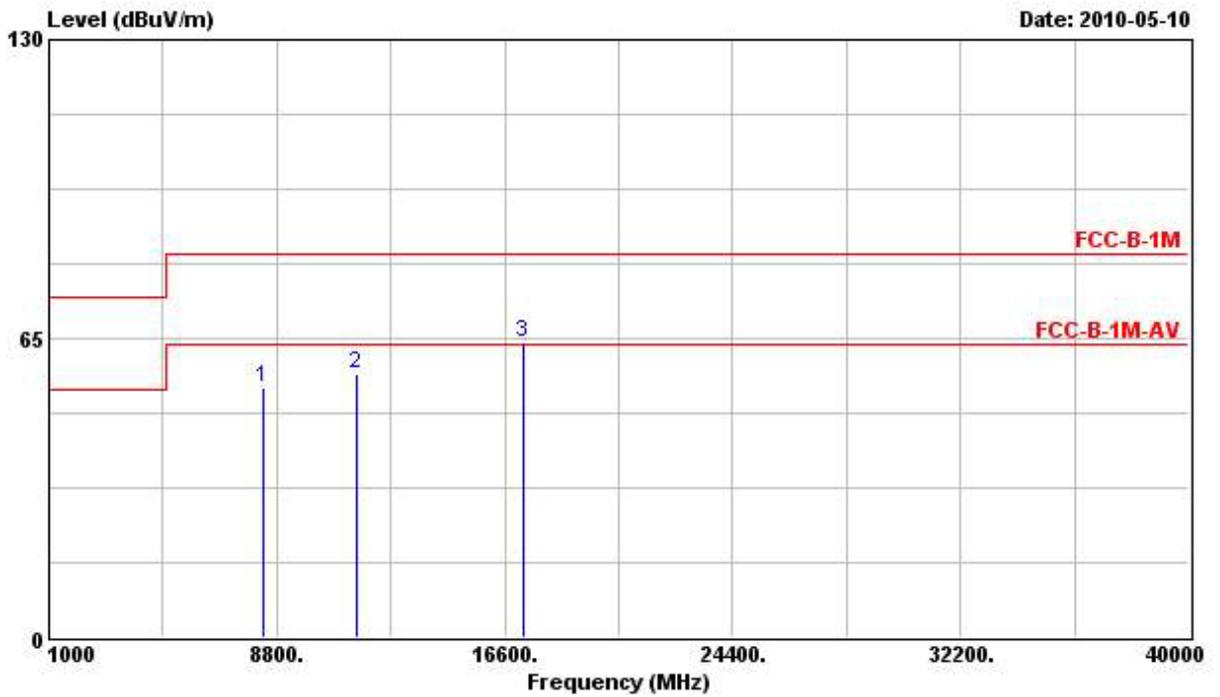

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	dB	cm	deg	
1	8332.000	54.28	-9.26	63.54	43.01	38.13	5.23	32.09	---	---	PK
2 @	11510.000	57.49	-6.05	63.54	42.22	39.70	6.73	31.17	---	---	PK
3	17263.000	64.29	-----	-----	43.84	43.54	7.81	30.90	---	---	Peak

Note: The item 3 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

Vertical

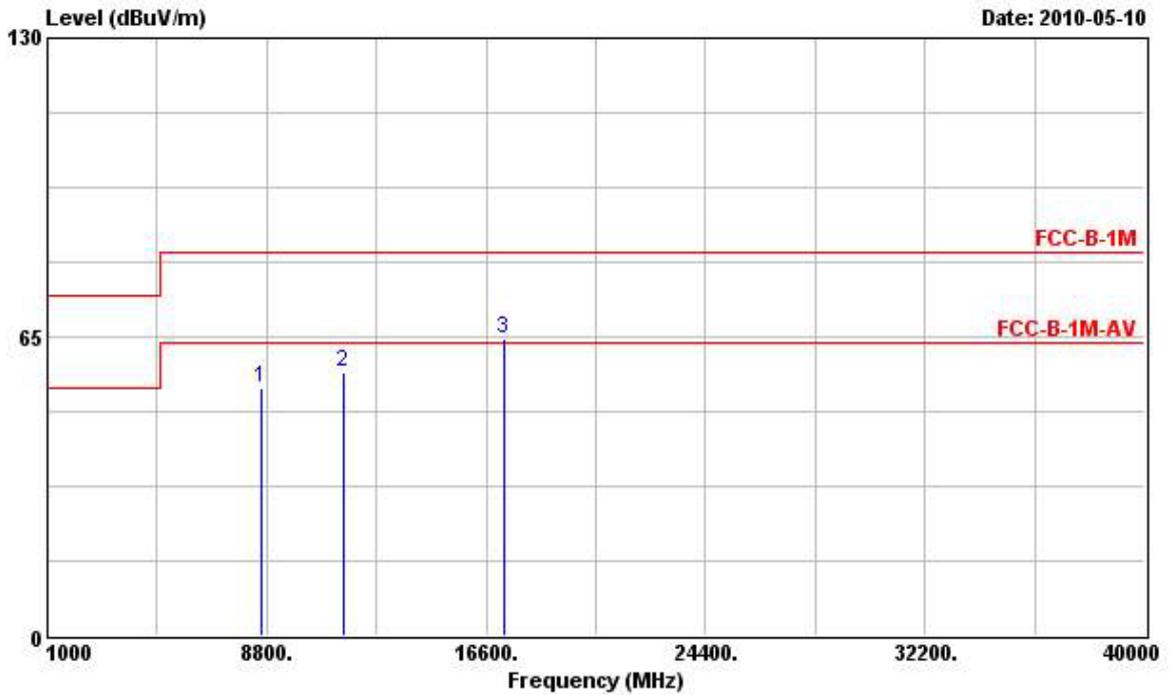


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	8640.000	53.81			42.32	38.38	5.21	32.10	---	---	PEAK
2 @	11506.000	57.39	-6.15	63.54	42.07	39.70	6.78	31.17	---	---	PK
3	17267.000	64.44			43.98	43.54	7.81	30.90	---	---	PEAK

Note: The items 1 and 3 are on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

Final Test Date	May 10, 2010	Test Site No.	03CH03-HY
Temperature	24.6	Humidity	61%
Test Engineer	Eddie	Configuration	5G 802.11n Ch. 159 (40MHz)


Horizontal

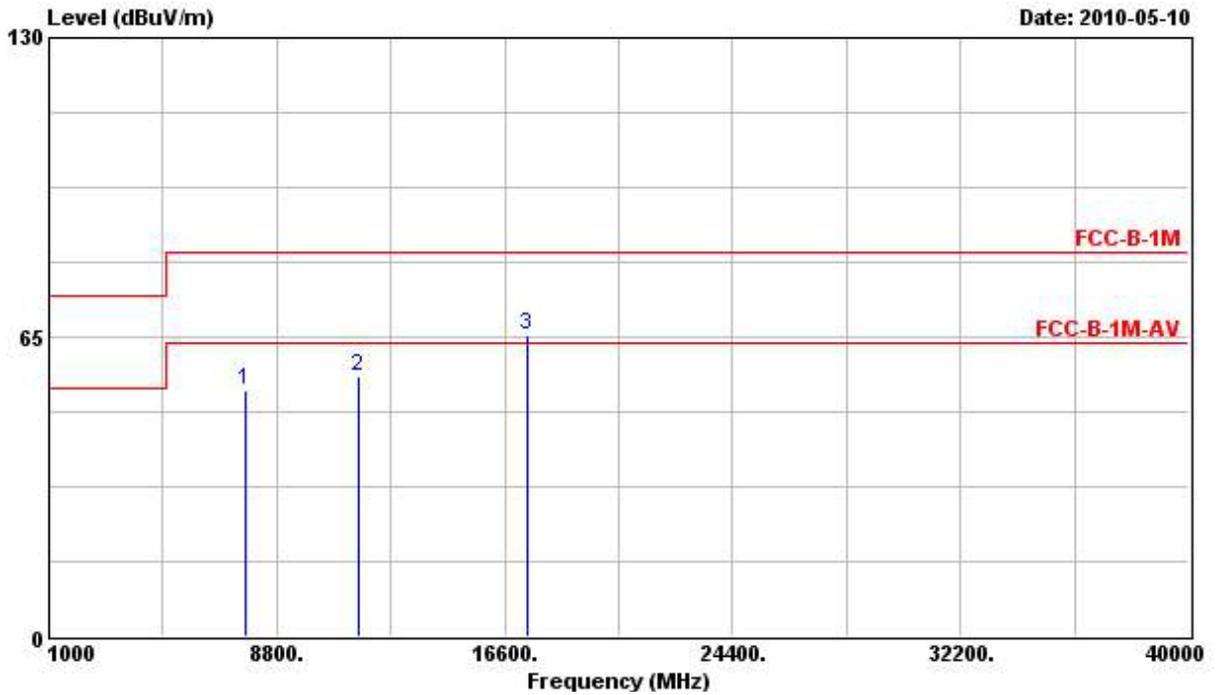

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	7724.000	53.36	-10.18	63.54	43.33	37.53	4.60	32.10	---	---	PK
2	11594.000	56.49	-7.05	63.54	41.55	39.61	6.62	31.30	---	---	PK
3	17385.000	65.62			44.18	44.52	7.83	30.90	---	---	PEAK

Note: The item 3 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

Vertical

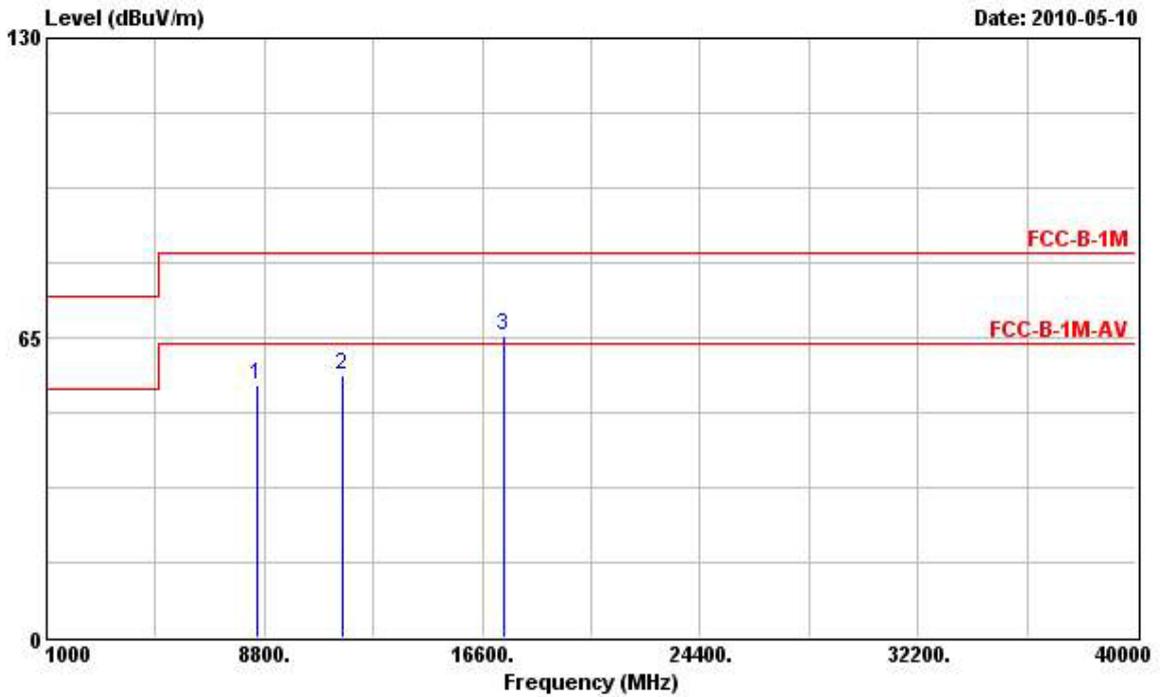


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	8516.000	54.76			43.08	38.31	5.42	32.04	---	---	PEAK
2	11590.000	56.93	-6.61	63.54	41.99	39.61	6.62	31.30	---	---	PK
3	17383.000	65.39			43.94	44.52	7.83	30.90	---	---	PEAK

Note: The items 1 and 3 are on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

Final Test Date	May 04, 2010	Test Site No.	03CH03-HY
Temperature	24.6	Humidity	61%
Test Engineer	Eddie	Configuration	2.4G 802.11n Ch. 1 (20MHz)


Horizontal

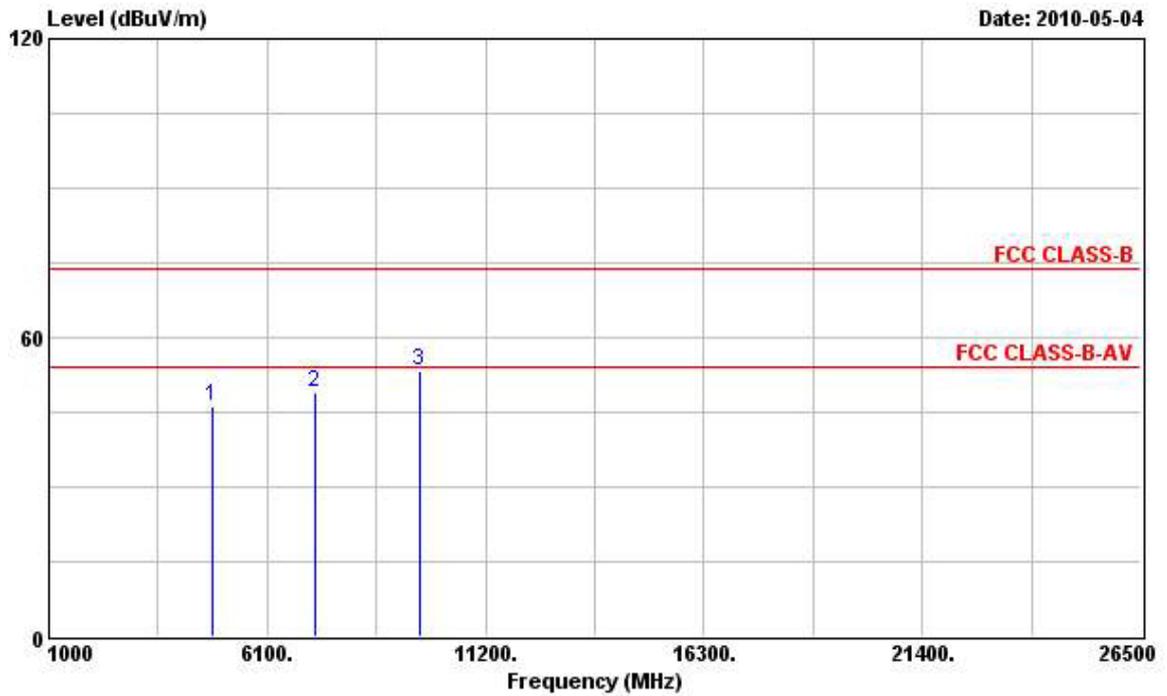

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	4824.000	46.30	-7.70	54.00	41.50	33.06	4.03	32.28	---	---	PK
2	7232.000	48.85			42.08	35.78	3.67	32.67	---	---	Peak
3	9648.000	53.16			41.82	38.41	5.21	32.28	---	---	PERK

Note: The items 2 and 3 are on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

Vertical

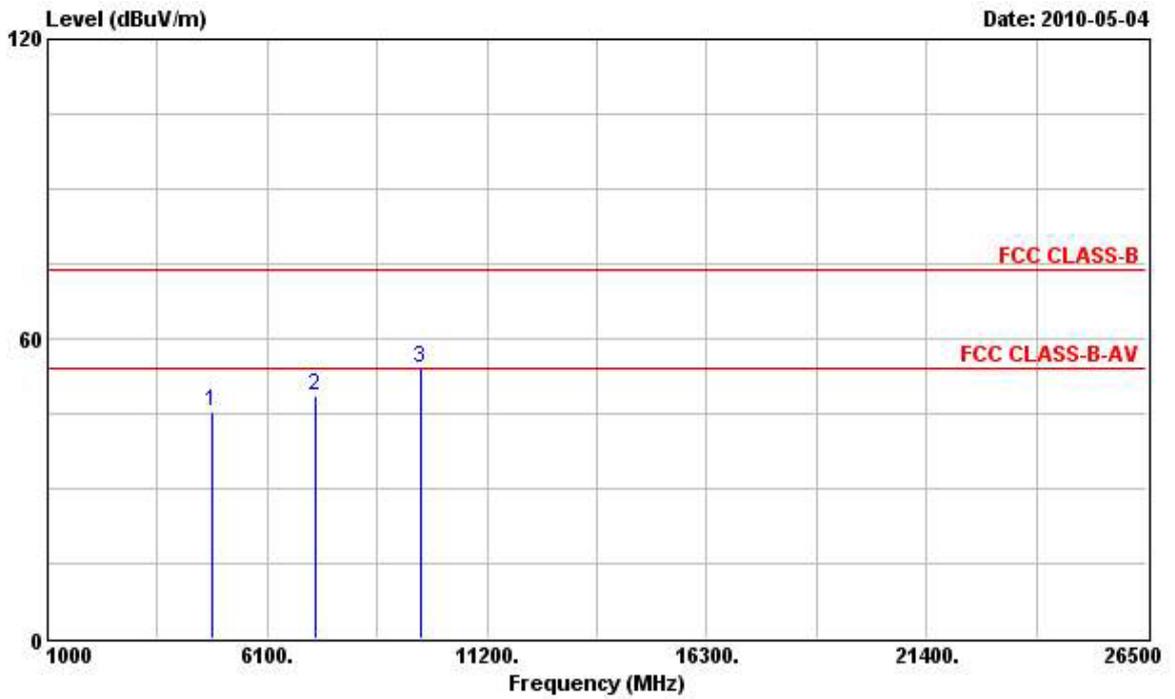


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	4824.000	45.38	-8.62	54.00	40.58	33.06	4.03	32.28	---	---	PK
2	7240.000	48.58			41.74	35.78	3.67	32.61	---	---	PEAK
3	9684.000	54.05			42.61	38.48	5.26	32.31	---	---	PEAK

Note: The items 2 and 3 are on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

Final Test Date	May 04, 2010	Test Site No.	03CH03-HY
Temperature	24.6	Humidity	61%
Test Engineer	Eddie	Configuration	2.4G 802.11n Ch. 6 (20MHz)


Horizontal

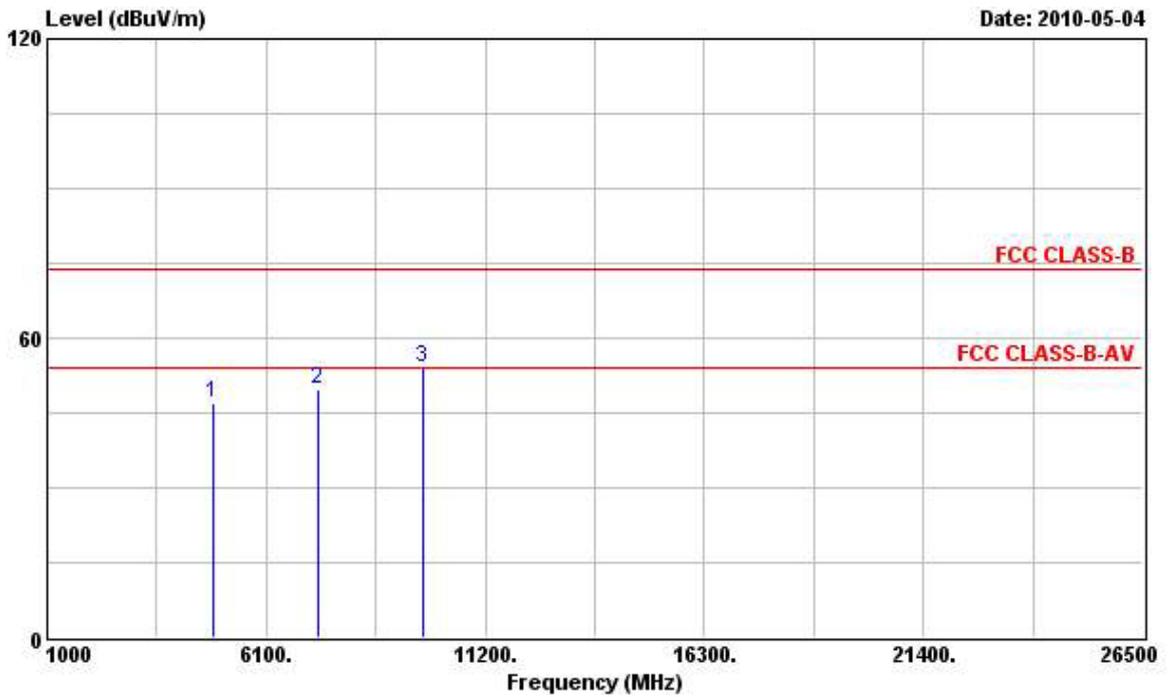

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	4878.000	47.08	-6.92	54.00	42.22	33.16	4.02	32.33	---	---	PK
2	7311.000	49.88	-4.12	54.00	42.51	35.94	3.91	32.48	---	---	PK
3	9748.000	53.89			42.30	38.62	5.31	32.33	---	---	PERK

Note: The item 3 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

Vertical

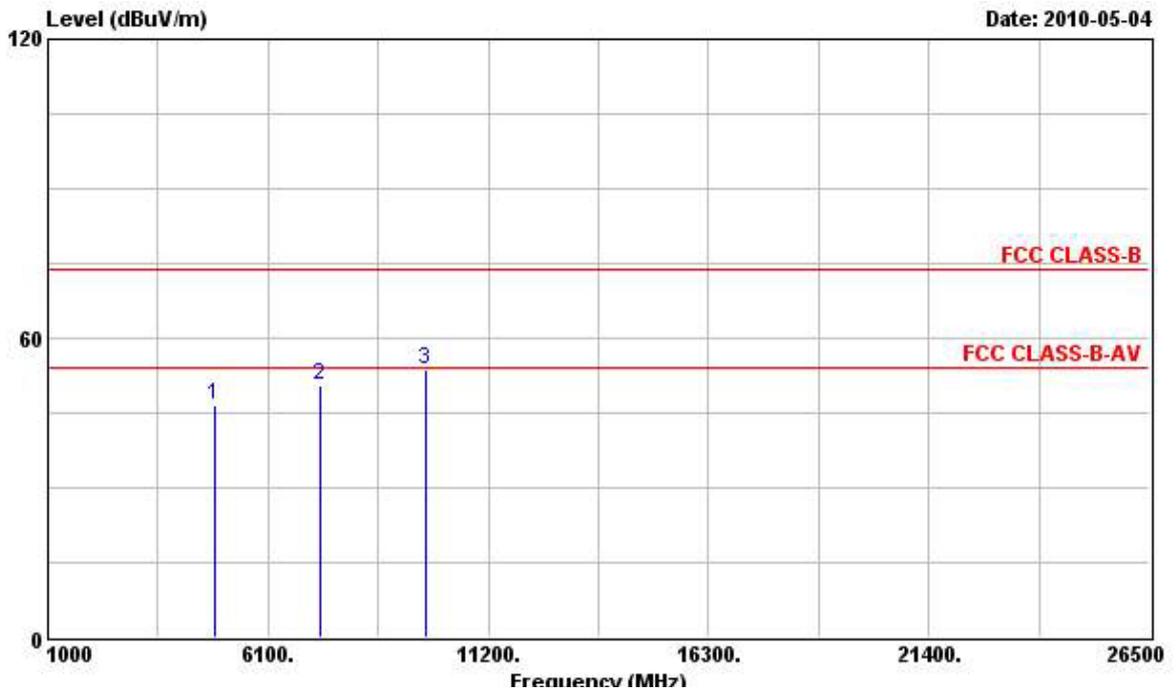


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	4874.000	46.64	-7.36	54.00	41.78	33.16	4.02	32.33	---	---	PK
2	7307.000	50.52	-3.48	54.00	43.14	35.94	3.91	32.48	---	---	PK
3	9752.000	53.85			42.25	38.62	5.31	32.33	---	---	PEAK

Note: The item 3 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

Final Test Date	May 04, 2010	Test Site No.	03CH03-HY
Temperature	24.6	Humidity	61%
Test Engineer	Eddie	Configuration	2.4G 802.11n Ch. 11 (20MHz)


Horizontal

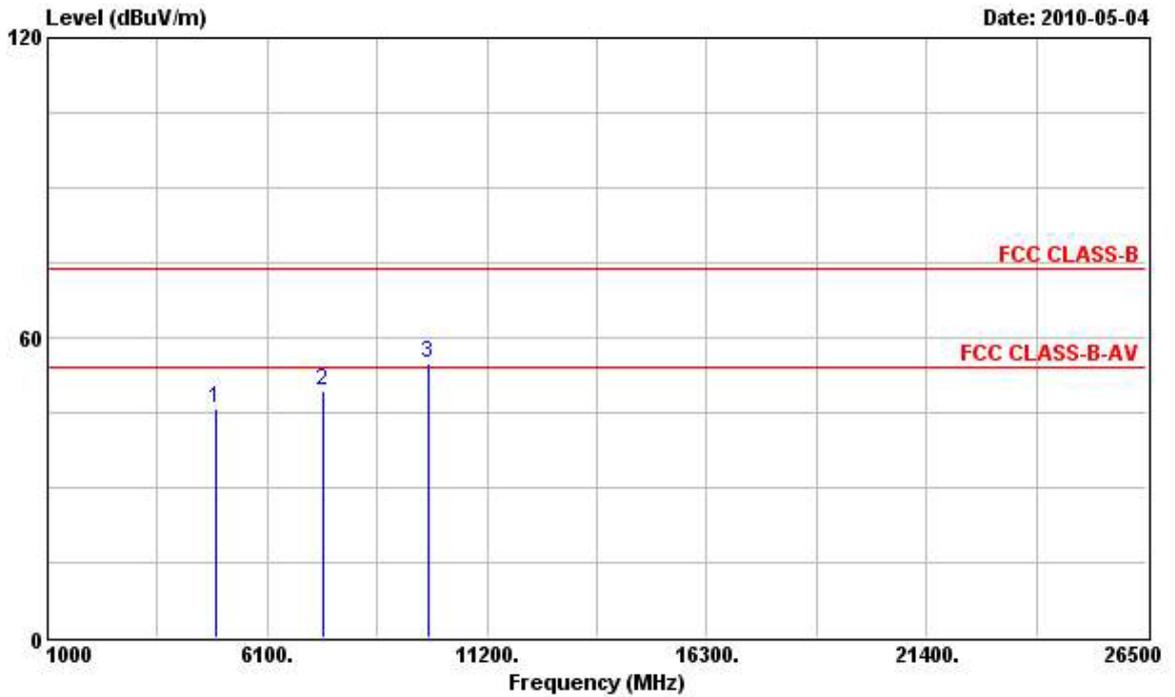

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	4920.000	45.67	-8.33	54.00	40.77	33.26	4.02	32.38	---	---	PK
2	7386.000	49.45	-4.55	54.00	41.45	36.15	4.16	32.30	---	---	PK
3	9844.000	54.68			42.81	38.79	5.47	32.38	---	---	PEAK

Note: The item 3 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

Vertical

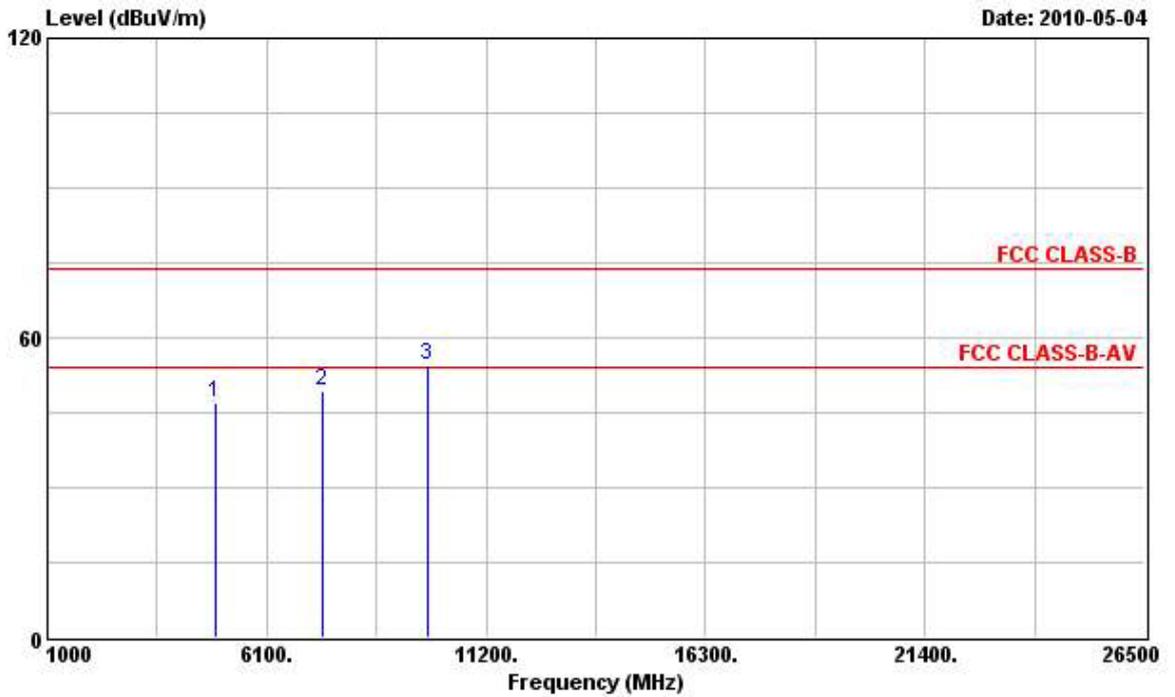

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	4928.000	46.82	-7.18	54.00	41.92	33.26	4.02	32.38	---	---	PK
2	7382.000	49.46	-4.54	54.00	41.50	36.11	4.16	32.30	---	---	PK
3	9852.000	54.60			42.70	38.82	5.47	32.38	---	---	PERK

Note: The item 3 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

3.6 Band Edge and Fundamental Emissions Measurement

3.6.1 Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

3.6.2 Measuring Instruments and Setting

Please refer to section 4 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	1MHz / 1MHz for Peak

3.6.3 Test Procedures

1. The test procedure is the same as section 3.5.3; only the frequency range investigated is limited to 100MHz around band edges.
2. In case the emission is fail due to the used RB/VB is too wide, marker-delta method of FCC Public Notice DA00-705 will be followed.

3.6.4 Test Setup Layout

This test setup layout is the same as that shown in section 3.5.4.

3.6.5 Test Deviation

There is no deviation with the original standard.

3.6.6 EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

3.6.7 Test Result of Band Edge and Fundamental Emissions

For Single Chain:

Final Test Date	May 05, 2010	Test Site No.	03CH03-HY
Temperature	24.6	Humidity	61%
Test Engineer	Eddie	Configuration	5G 802.11n Ch. 149, 157, 165 (20MHz)

Channel 149

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
2 @	5744.570	121.34			83.11	34.75	3.48	0.00	100	150	Peak
2 @	5737.780	109.80			71.57	34.75	3.48	0.00	100	150	Average

Channel 157

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	5724.990	72.59	-10.95	83.54	34.33	34.74	3.52	0.00	103	152	Peak
2 @	5777.350	120.94			82.74	34.76	3.44	0.00	103	152	Peak
1 @	5723.460	59.32	-4.22	63.54	21.06	34.74	3.52	0.00	103	152	Average
2 @	5777.860	110.43			72.23	34.76	3.44	0.00	103	152	Average

The item 2 is Fundamental Emissions.

Channel 165

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1 @	5818.250	119.82			81.66	34.76	3.40	0.00	100	153	Peak
2 @	5850.000	89.60	6.06	83.54	51.43	34.77	3.40	0.00	100	153	Peak
1 @	5817.590	108.75			70.59	34.76	3.40	0.00	100	153	Average
2 @	5850.000	69.50	5.96	63.54	31.33	34.77	3.40	0.00	100	153	Average

The item 1 is Fundamental Emissions.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Final Test Date	May 05, 2010	Test Site No.	03CH03-HY
Temperature	24.6	Humidity	61%
Test Engineer	Eddie	Configuration	5G 802.11n Ch. 151, 159 (40MHz)

Channel 151

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
2 @	5740.300	114.65			76.42	34.75	3.48	0.00	100	150	Peak
2 @	5739.100	103.45			65.22	34.75	3.48	0.00	100	150	Average

Channel 159

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1 @	5795.000	114.61			76.41	34.76	3.44	0.00	100	153	Peak
2	5851.800	75.03	-8.51	83.54	36.86	34.77	3.40	0.00	100	153	Peak
1 @	5786.200	102.93			64.73	34.76	3.44	0.00	100	153	Average
2 @	5850.000	58.58	-4.96	63.54	20.41	34.77	3.40	0.00	100	153	Average

The item 1 is Fundamental Emissions.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Final Test Date	May 04, 2010	Test Site No.	03CH03-HY
Temperature	24.6	Humidity	61%
Test Engineer	Eddie	Configuration	2.4G 802.11n Ch. 1, 6, 11 (20MHz)

Channel 1

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	2390.000	70.24	-3.76	74.00	39.76	28.29	2.19	0.00	104	299	Peak
2 @	2409.180	108.36			77.85	28.33	2.19	0.00	104	299	Peak
1	2390.000	51.34	-2.66	54.00	20.86	28.29	2.19	0.00	104	299	Average
2 @	2406.140	97.13			66.62	28.33	2.19	0.00	104	299	Average

The item 2 is Fundamental Emission:

Channel 6

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1 @	2434.450	109.23			78.65	28.36	2.22	0.00	100	360	Peak
1 @	2431.220	98.52			67.94	28.36	2.22	0.00	100	0	Average

The item 1 is Fundamental Emissions.

Channel 11

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
2	2483.500	71.19	-2.81	74.00	40.48	28.47	2.25	0.00	100	303	Peak
2 @	2483.500	51.56	-2.44	54.00	20.85	28.47	2.25	0.00	100	303	Average

The item 1 is Fundamental Emissions.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

For Two Chain:

Final Test Date	May 07, 2010	Test Site No.	03CH03-HY
Temperature	24.6	Humidity	61%
Test Engineer	Eddie	Configuration	5G 802.11n Ant. A+Ant. B Ch. 149, 157, 165 (20MHz)

Channel 149

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
2 @	5750.730	123.91			85.68	34.75	3.48	0.00	100	119	Peak
2 @	5751.570	111.46			73.23	34.75	3.48	0.00	100	119	Average

Channel 157

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	5708.670	73.29	-10.25	83.54	35.03	34.74	3.52	0.00	100	119	Peak
2 @	5778.030	123.92			85.72	34.76	3.44	0.00	100	119	Peak
3	5863.540	71.77	-11.77	83.54	33.63	34.77	3.36	0.00	100	119	Peak
1 @	5706.460	59.66	-3.88	63.54	21.40	34.74	3.52	0.00	100	119	Average
2 @	5790.950	111.77			73.57	34.76	3.44	0.00	100	119	Average
3 @	5850.000	58.56	-4.98	63.54	20.39	34.77	3.40	0.00	100	119	Average

The item 2 is Fundamental Emissions.

Channel 165

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1 @	5821.770	123.60			85.43	34.77	3.40	0.00	103	111	Peak
2 @	5850.970	84.23	0.69	83.54	46.06	34.77	3.40	0.00	103	111	Peak
1 @	5817.810	111.13			72.97	34.76	3.40	0.00	103	111	Average
2 @	5850.000	65.15	1.61	63.54	26.98	34.77	3.40	0.00	103	111	Average

The item 1 is Fundamental Emissions.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Final Test Date	May 07, 2010	Test Site No.	03CH03-HY
Temperature	24.6	Humidity	61%
Test Engineer	Eddie	Configuration	5G 802.11n Ant. A+ Ant. B Ch. 151, 159 (40MHz)

Channel 151

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1 @	5725.000	85.29			47.03	34.74	3.52	0.00	100	117	Peak
1 @	5725.000	63.95			25.69	34.74	3.52	0.00	100	117	Average

The item 1 is Fundamental Emissions.

Channel 159

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1 @	5800.300	119.12			80.92	34.76	3.44	0.00	100	116	Peak
1 @	5788.600	105.52			67.32	34.76	3.44	0.00	100	116	Average

The item 1 is Fundamental Emissions.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Final Test Date	May 04, 2010	Test Site No.	03CH03-HY
Temperature	24.6	Humidity	61%
Test Engineer	Eddie	Configuration	2.4G 802.11n Ant. A+ Ant. B Ch. 1, 6, 11(20MHz)

Channel 1

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1 @	2390.000	73.37	-0.63	74.00	42.89	28.29	2.19	0.00	104	299	Peak
2 @	2407.090	109.90			79.39	28.33	2.19	0.00	104	299	Peak
1 @	2390.000	51.86	-2.14	54.00	21.38	28.29	2.19	0.00	104	299	Average
2 @	2404.620	97.43			66.92	28.33	2.19	0.00	104	299	Average

The item 2 is Fundamental Emissions.

Channel 6

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1 @	2439.010	112.44			81.83	28.40	2.22	0.00	103	212	Peak
1 @	2438.250	100.02			69.41	28.40	2.22	0.00	103	212	Average

The item 1 is Fundamental Emissions.

Channel 11

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1 @	2467.890	108.89			78.21	28.43	2.25	0.00	103	214	Peak
1 @	2466.180	95.92			65.24	28.43	2.25	0.00	103	214	Average

The item 1 is Fundamental Emissions.

Note:


Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

For Single Chain Emission not in Restricted Band


Final Test Date	May 14, 2010	Test Site No.	TH01-HY
Temperature	22	Humidity	59%
Test Engineer	Sam	Configuration	802.11n

Low Band Edge Plot on Configuration of IEEE 802.11n-5G (20MHz) / 5745 MHz

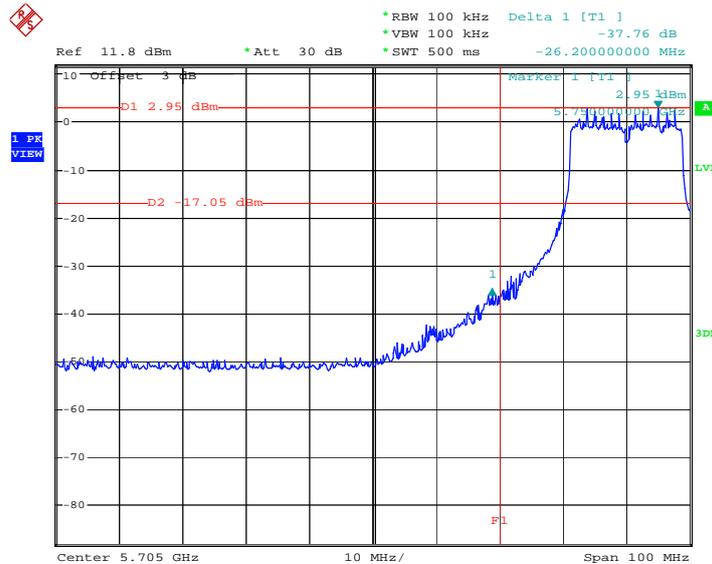


Date: 14.MAY.2010 08:06:55

High Band Edge Plot on Configuration of IEEE 802.11n-5G (20MHz) / 5825 MHz

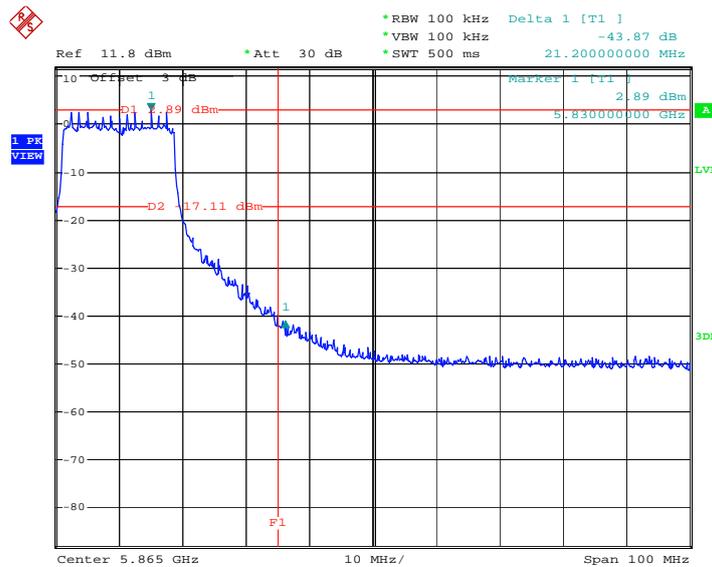


Date: 14.MAY.2010 08:11:37

Low Band Edge Plot on Configuration of IEEE 802.11n-5G (40MHz) / 5755 MHz

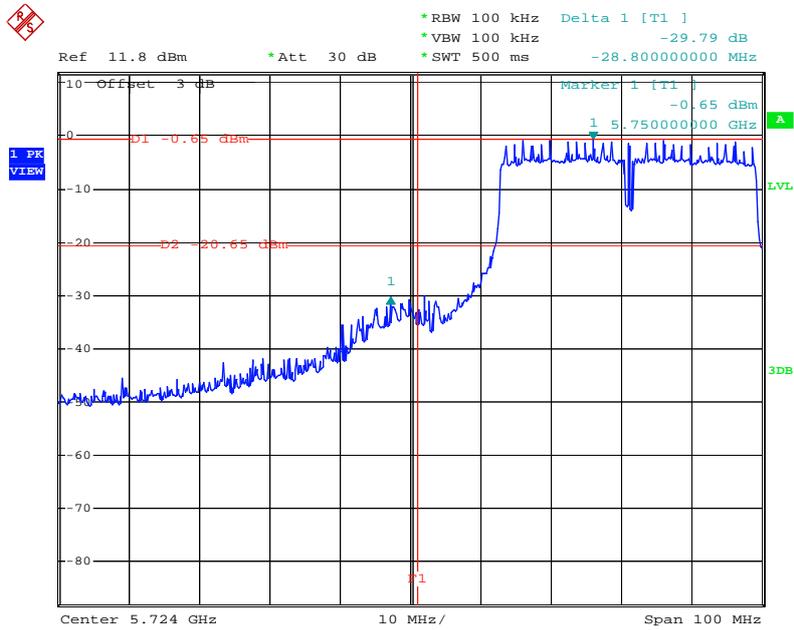


Date: 14.MAY.2010 08:24:08

High Band Edge Plot on Configuration of IEEE 802.11n-5G (40MHz) / 5795 MHz

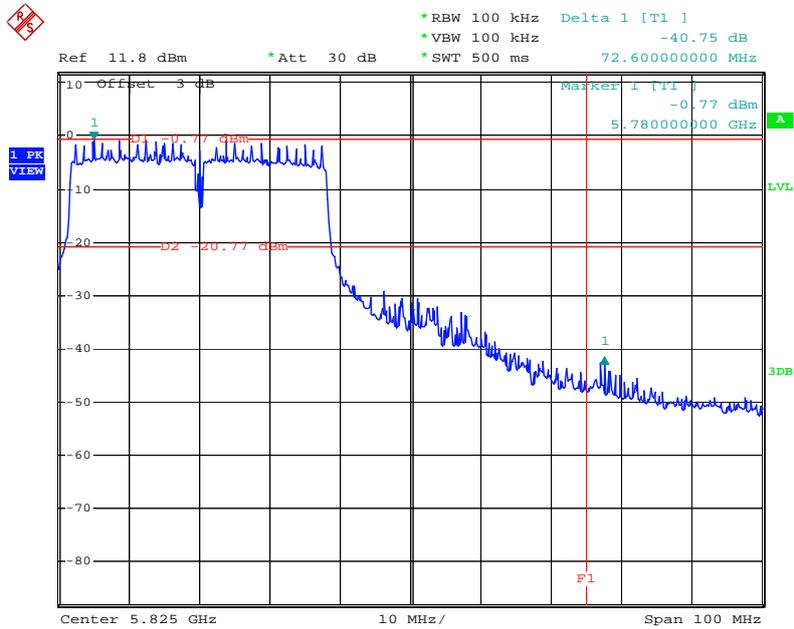


Date: 14.MAY.2010 08:27:14

Low Band Edge Plot on Configuration of IEEE 802.11n-2.4G (20MHz) / 2412 MHz

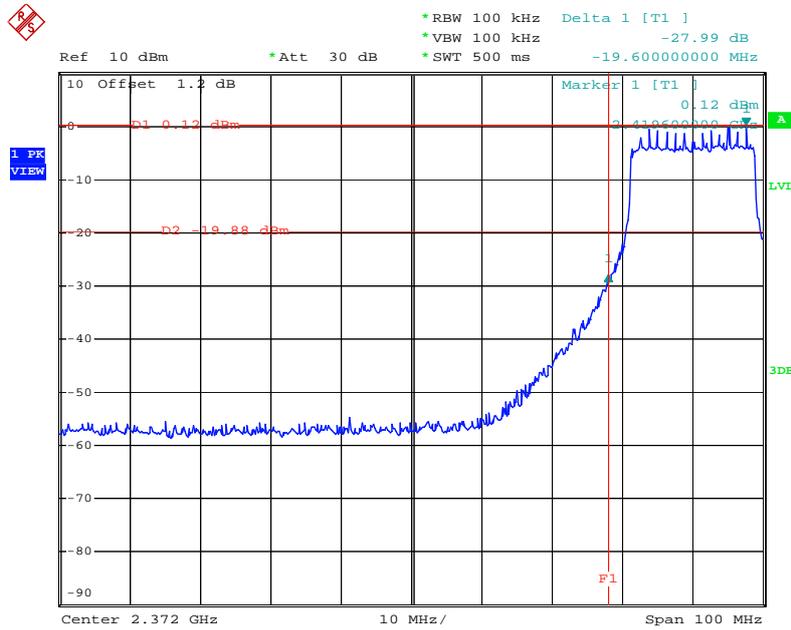

Date: 14.MAY.2010 07:49:26


High Band Edge Plot on Configuration of IEEE 802.11n-2.4G (20MHz) / 2462 MHz

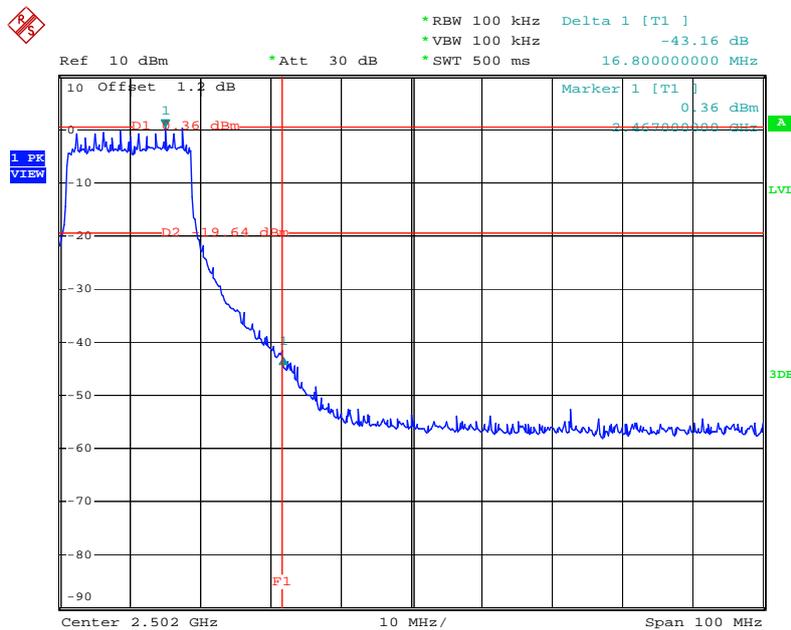

Date: 14.MAY.2010 07:53:19


For Two Chain Emission not in Restricted Band

Low Band Edge Plot on Configuration of IEEE 802.11n-5G Ant. A+Ant. B (20MHz) / 5745 MHz

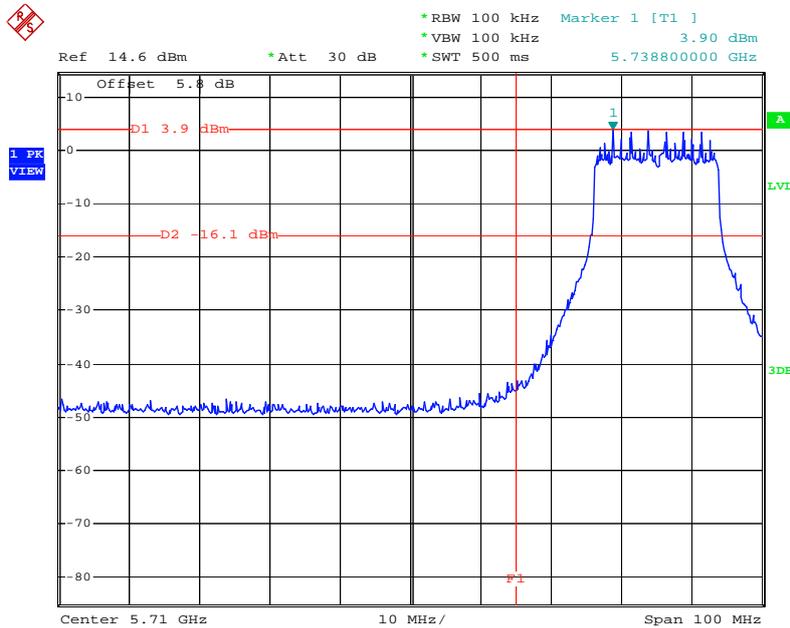


Date: 14.MAY.2010 13:11:31

High Band Edge Plot on Configuration of IEEE 802.11n-5G Ant. A+Ant. B (20MHz) / 5825 MHz

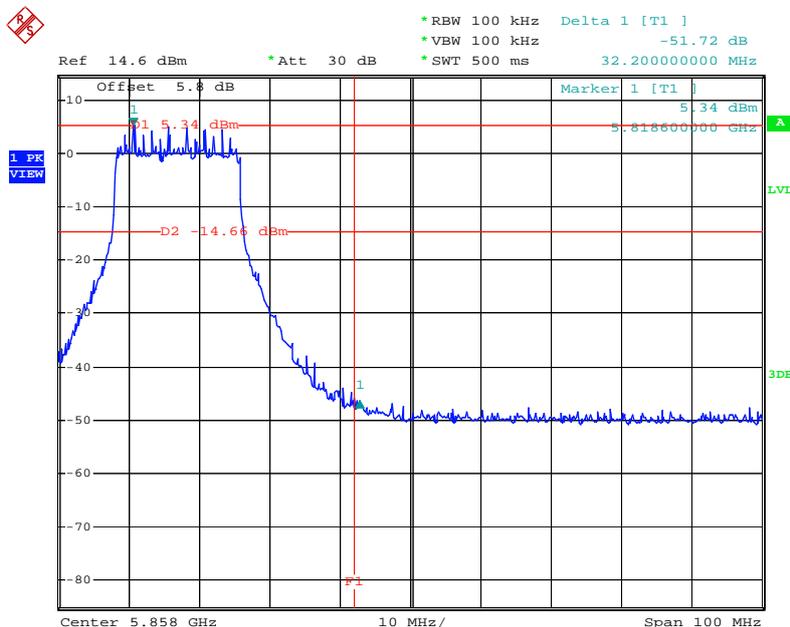


Date: 14.MAY.2010 13:26:48

Low Band Edge Plot on Configuration of IEEE 802.11n-5G Ant. A+Ant. B (40MHz) / 5755 MHz

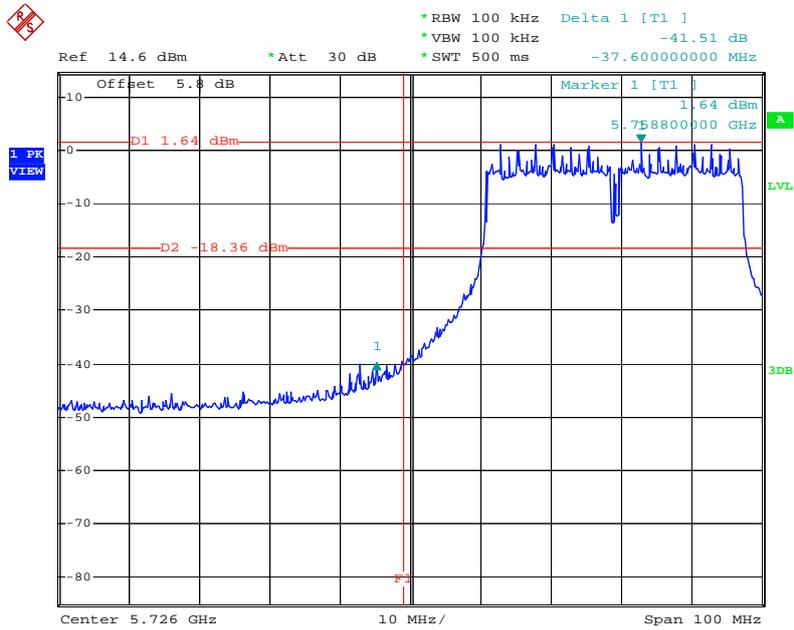


Date: 14.MAY.2010 14:08:01

High Band Edge Plot on Configuration of IEEE 802.11n-5G Ant. A+Ant. B (40MHz) / 5795 MHz

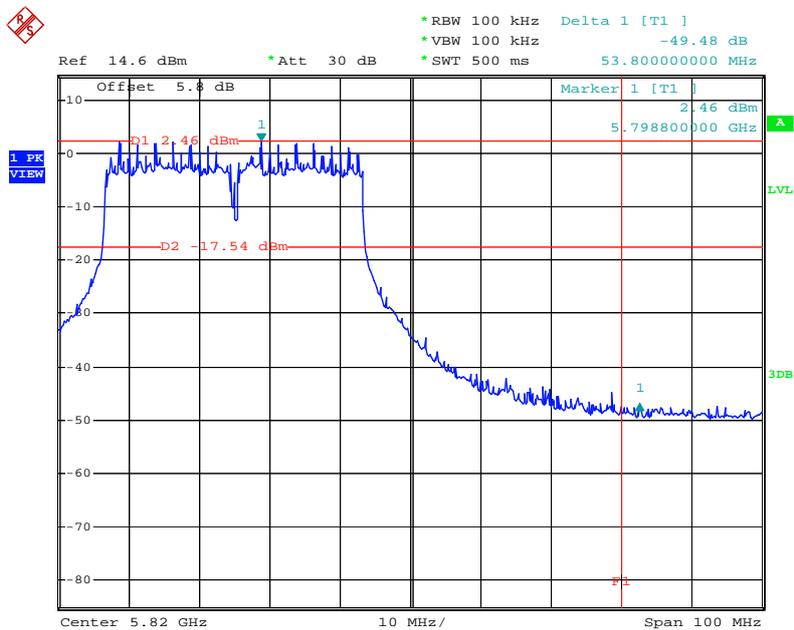


Date: 14.MAY.2010 13:55:37

Low Band Edge Plot on Configuration of IEEE 802.11n-2.4G Ant. A+Ant. B (20MHz) / 2412 MHz

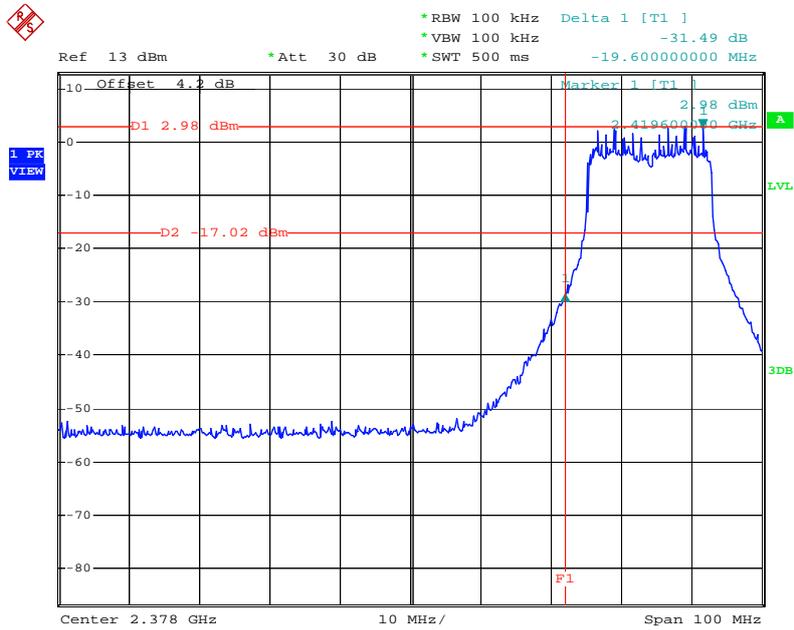

Date: 14.MAY.2010 11:47:39

High Band Edge Plot on Configuration of IEEE 802.11n-2.4G Ant. A+Ant. B (20MHz) / 2462 MHz

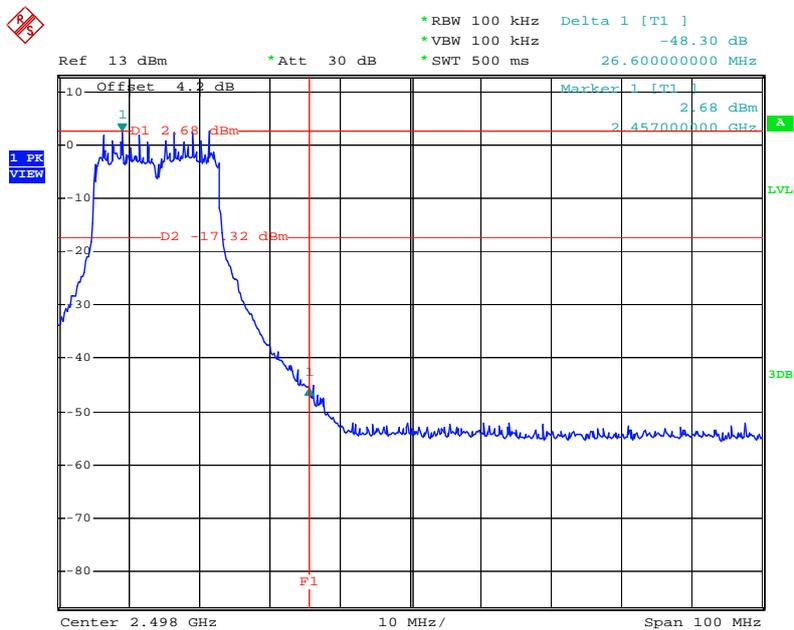

Date: 14.MAY.2010 12:03:11

3.7 Antenna Requirements

3.7.1 Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited.

3.7.2 Antenna Connector Construction

Please refer to section 2.2 in this test report; antenna connector complied with the requirements.

4 LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMC Receiver	R&S	ESCS 30	100132	9kHz – 2.75GHz	Sep. 01, 2009	Conduction (CO01-HY)
LISN	MessTec	NNB-2/16Z	2001/004	9kHz – 30MHz	Jan. 19, 2010	Conduction (CO01-HY)
LISN (Support Unit)	MessTec	NNB-2/16Z	2001/009	9kHz – 30MHz	Mar. 01, 2010	Conduction (CO01-HY)
EMI Filter	LINDGREN	LRE-2060	1004	< 450Hz	N/A	Conduction (CO01-HY)
EMI Filter	LINDGREN	N6006	201052	0 – 60Hz	N/A	Conduction (CO01-HY)
RF Cable-CON	HUBER+SUHNER	RG213/U	07611832010001	9kHz – 30MHz	May 04, 2010	Conduction (CO01-HY)
Isolation Transformer	Erika Fiedler OHG	D-65396 Walluf	58	45MHz-2.15GHz	N/A	Conduction (CO01-HY)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Spectrum Analyzer	R&S	FSU26.5	100015	20Hz ~ 26.5GHz	Oct. 29, 2009	Conducted (TH01-HY)
Power Sensor	Anritsu	MA2411B	0917017	300MHz~40GHz	Dec. 03, 2009	Conducted (TH01-HY)
Power Meter	Anritsu	ML2495A	0949003	300MHz~40GHz	Dec. 03, 2009	Conducted (TH01-HY)
Power Sensor	R&S	NRV-Z32	100057	30MHz ~ 6GHz	Jul. 31, 2009	Conducted (TH01-HY)
Temp. and Humidity Chamber	Giant Force	GTH-225-20-S	MAB0103-001	N/A	Aug. 06, 2009	Conducted (TH01-HY)
RF CABLE-1m	Jye Bao	RG142	CB034-1m	20MHz ~ 7GHz	Dec. 01, 2009	Conducted (TH01-HY)
RF CABLE-2m	Jye Bao	RG142	CB035-2m	20MHz ~ 1GHz	Dec. 01, 2009	Conducted (TH01-HY)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
AC Power Source	HPC	HPA-500W	HPA-9100024	AC 0 ~ 300V	Jul. 12, 2009*	Conducted (TH01-HY)

Note: Calibration Interval of instruments listed above is two year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30 MHz - 1 GHz 3m	Jun. 07, 2009	Radiation (03CH03-HY)
Amplifier	SCHAFFNER	COA9231A	18667	9 kHz - 2 GHz	Jan. 24, 2010	Radiation (03CH03-HY)
Amplifier	Agilent	8449B	3008A02120	1 GHz - 26.5 GHz	Jul. 21, 2009	Radiation (03CH03-HY)
Spectrum Analyzer	R&S	FSP40	100004	9 kHz - 40 GHz	Oct. 03, 2009	Radiation (03CH03-HY)
Bilog Antenna	SCHAFFNER	CBL 6112D	22237	30 MHz – 1 GHz	Sep. 26, 2009	Radiation (03CH03-HY)
Horn Antenna	EMCO	3115	6741	1GHz ~ 18GHz	Apr. 28, 2010	Radiation (03CH03-HY)
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA9170154	15 GHz - 40 GHz	Jan.11, 2010	Radiation (03CH03-HY)
RF Cable-R03m	Jye Bao	RG142	CB021	30 MHz - 1 GHz	Jan. 05, 2010	Radiation (03CH03-HY)
RF Cable-HIGH	SUHNER	SUCOFLEX 106	03CH03-HY	1 GHz - 40 GHz	Jan. 05, 2010	Radiation (03CH03-HY)
Turn Table	HD	DS 420	420/650/00	0 – 360 degree	N/A	Radiation (03CH03-HY)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Amplifier	MITEQ	AMF-6F-260400	9121372	26.5 GHz - 40 GHz	Apr. 06, 2009*	Radiation (03CH03-HY)
Loop Antenna	R&S	HFH2-Z2	860004/001	9 kHz - 30 MHz	Jul. 28, 2008*	Radiation (03CH03-HY)

Note: Calibration Interval of instruments listed above is two year.

5 TEST LOCATION

SHIJR	ADD : 6Fl., No. 106, Sec. 1, Shintai 5th Rd., Shijr City, Taipei, Taiwan 221, R.O.C. TEL : 886-2-2696-2468 FAX : 886-2-2696-2255
HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 886-3-327-3456 FAX : 886-3-318-0055
LINKOU	ADD : No. 30-2, Dingfu Tsuen, Linkou Shiang, Taipei, Taiwan 244, R.O.C TEL : 886-2-2601-1640 FAX : 886-2-2601-1695
DUNGHU	ADD : No. 3, Lane 238, Kangle St., Neihu Chiu, Taipei, Taiwan 114, R.O.C. TEL : 886-2-2631-4739 FAX : 886-2-2631-9740
JUNGHE	ADD : 7Fl., No. 758, Jungjeng Rd., Junghe City, Taipei, Taiwan 235, R.O.C. TEL : 886-2-8227-2020 FAX : 886-2-8227-2626
NEIHU	ADD : 4Fl., No. 339, Hsin Hu 2 nd Rd., Taipei 114, Taiwan, R.O.C. TEL : 886-2-2794-8886 FAX : 886-2-2794-9777
JHUBEI	ADD : No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085

6 TAF CERTIFICATE OF ACCREDITATION



Certificate No. : L1190-100107

財團法人全國認證基金會
Taiwan Accreditation Foundation

Certificate of Accreditation

This is to certify that

Sporton International Inc.
EMC & Wireless Communications Laboratory
No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien,
Taiwan, R.O.C.

is accredited in respect of laboratory

Accreditation Criteria	: ISO/IEC 17025:2005
Accreditation Number	: 1190
Originally Accredited	: December 15, 2003
Effective Period	: January 10, 2010 to January 09, 2013
Accredited Scope	: Testing Field, see described in the Appendix
Specific Accreditation Program	: Accreditation Program for Designated Testing Laboratory for Commodities Inspection Accreditation Program for Telecommunication Equipment Testing Laboratory Accreditation Program for BSMI Mutual Recognition Arrangement with Foreign Authorities



Jay-San Chen
President, Taiwan Accreditation Foundation
Date : January 07, 2010

P1, total 21 pages