

FCC RADIO TEST REPORT

according to

47 CFR FCC Part 15 Subpart E § 15.407

Equipment : Internet TV Box
Model No. : NSZ-GT1
Brand Name : Sony
Filing Type : New Application
Applicant : Sony Corporation
8-4 Shiomi, Kisarazu-shi, Chiba-ken 292-0834, Japan
FCC ID : AK8NSZGT1
Manufacturer : Hon Hai Precision Industry CO.,LTD.
2, Tzu-Yu ST, Tu-Cheng, Taipei hsien 236, Taiwan, R.O.C.
Received Date : May 05, 2010
Final Test Date : May 21, 2010

Statement

Test result included is only for the 802.11a/n (5150~5350MHz; 5470~5725MHz) of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.4-2003** and **47 CFR FCC Part 15 Subpart E**.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



SPORTON International Inc.

No. 52 Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.

Table of Contents

1 SUMMARY OF THE TEST RESULT 2

2 GENERAL INFORMATION..... 3

2.1 Product Details 3

2.2 Table for Filed Antenna 3

2.3 Table for Carrier Frequencies 5

2.4 Table for Test Modes 6

2.5 Table for Testing Locations 6

2.6 Table for Supporting Units..... 7

2.7 Table for Parameters of Test Software Setting 7

2.8 EUT Operation during Test 8

2.9 Test Configuration 9

3 TEST RESULT 11

3.1 AC Power Line Conducted Emissions Measurement..... 11

3.2 99% Occupied Bandwidth Measurement 15

3.3 Maximum Conducted Output Power Measurement 41

3.4 Power Spectral Density Measurement 78

3.5 Peak Excursion Measurement 104

3.6 Radiated Emissions Measurement..... 130

3.7 Band Edge and Fundamental Emissions Measurement 218

3.8 Frequency Stability Measurement..... 234

3.9 Antenna Requirements..... 237

4 LIST OF MEASURING EQUIPMENTS 238

5 TEST LOCATION..... 240

6 TAF CERTIFICATE OF ACCREDITATION 241

APPENDIX A. MAXIMUM PERMISSIBLE EXPOSURE..... A1 ~ A3

APPENDIX B. TEST PHOTOS B1 ~ B7

APPENDIX C. PHOTOGRAPHS OF EUT C1 ~ C25

CERTIFICATE OF COMPLIANCE

according to

47 CFR FCC Part 15 Subpart E § 15.407

Equipment : Internet TV Box
Model No. : NSZ-GT1
Brand Name : Sony
Applicant : Sony Corporation
8-4 Shiomi, Kisarazu-shi, Chiba-ken 292-0834, Japan

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on May 05, 2010 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.


Wayne Hsu / Vice Manager

SPORTON International Inc.

No. 52 Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.

1 SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart E				
Part	Rule Section	Description of Test	Result	Under Limit
3.1	15.207	AC Power Line Conducted Emissions	Complies	14.28 dB
3.2	15.407(a)	26dB Spectrum Bandwidth	Complies	-
3.3	15.407(a)	Maximum Conducted Output Power	Complies	2.62 dB
3.4	15.407(a)	Power Spectral Density	Complies	0.88 dB
3.5	15.407(a)	Peak Excursion	Complies	1.89 dB
3.6	15.407(b)	Radiated Emissions	Complies	3.13 dB
3.7	15.407(b)	Band Edge Emissions	Complies	1.01 dB
3.8	15.407(g)	Frequency Stability	Complies	-
3.9	15.203	Antenna Requirements	Complies	-

Test Items	Uncertainty	Remark
AC Power Line Conducted Emissions	±2.3dB	Confidence levels of 95%
Maximum Conducted Output Power	±0.5dB	Confidence levels of 95%
Power Spectral Density	±0.5dB	Confidence levels of 95%
Peak Excursion	±0.5dB	Confidence levels of 95%
26dB Spectrum Bandwidth / Frequency Stability	±8.5×10 ⁻⁸	Confidence levels of 95%
Radiated Emissions (9kHz~30MHz)	±0.8dB	Confidence levels of 95%
Radiated Emissions (30MHz~1000MHz)	±1.9dB	Confidence levels of 95%
Radiated / Band Edge Emissions (1GHz~18GHz)	±1.9dB	Confidence levels of 95%
Radiated Emissions (18GHz~40GHz)	±1.9dB	Confidence levels of 95%
Temperature	±0.7	Confidence levels of 95%
Humidity	±3.2%	Confidence levels of 95%
DC / AC Power Source	±1.4%	Confidence levels of 95%

2 GENERAL INFORMATION

2.1 Product Details

Only the radio detail of IEEE 802.11a/n is shown in this report. For more detailed features description, please refer to the manufacturer's specifications or user's manual.

Items	Description
Modulation	See the below table for IEEE 802.11n
Data Modulation	OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	See the below table for IEEE 802.11n
Frequency Range	5150~5350MHz; 5470~5725MHz
Channel Band Width (99%)	1TX-802.11a Band 1: 17.40 MHz; Band 2~Band 3: 17.30 MHz 1TX-802.11n MCS 0 (20MHz) Band 1: 17.40 MHz; Band 2~Band 3: 17.30 MHz (40MHz) Band 1~Band 3: 36.60 MHz 2TX-802.11n MCS 8 (20MHz) Band 1~Band 3: 18.30 MHz (40MHz) Band 1: 36.60 MHz; Band 2: 36.40 MHz; Band 3: 36.60 MHz
Conducted Output Power	1TX-802.11a Band 1: 12.20 dBm ; Band 2: 12.17 dBm ; Band 3: 12.37 dBm 1TX-802.11n MCS 0 (20MHz) Band 1: 12.28 dBm ; Band 2: 12.32 dBm ; Band 3: 12.23 dBm (40MHz) Band 1: 11.70 dBm ; Band 2: 12.27 dBm ; Band 3: 12.81 dBm 2TX-802.11n MCS 8 (20MHz) Band 1: 13.85 dBm ; Band 2: 13.32 dBm ; Band 3: 14.28 dBm (40MHz) Band 1: 14.38 dBm ; Band 2: 14.43 dBm ; Band 3: 14.27 dBm

2.2 Table for Filed Antenna

Antenna & Bandwidth

Antenna Mode	Single Chain		Two Chain	
	20 MHz	40 MHz	20 MHz	40 MHz
Bandwidth Mode				
802.11b	V	X	X	X
802.11g	V	X	X	X
802.11n(2.4GHz)	V	X	V	X
802.11a (5150~5250MHz)	V	X	X	X
802.11a (5250~5350MHz)	V	X	X	X
802.11a (5470~5725MHz)	V	X	X	X
802.11a (5725~5850MHzMHz)	V	X	X	X
802.11n (5150~5250MHz)	V	V	V	V
802.11n (5250~5350MHz)	V	V	V	V
802.11n (5470~5725MHz)	V	V	V	V
802.11n (5725~5850MHzMHz)	V	V	V	V

Ant.	Antenna Type	Connector	Gain (dBi)		Remark
			2.4G	5G	
A	PIFA Antenna	Hirose/Foxconn	0.66	4.80	TX / RX
B	PIFA Antenna	Hirose/Foxconn	2.29	1.99	TX / RX

Antenna: 2T2R Spatial Multiplexing MIMO configuration. IEEE 802.11n used two antennas are for signal transmitting and receiving.

IEEE 802.11n Modulation Scheme

MCS Index	Nss	Modulation	R	NBPSC	NCBPS		NDBPS		Datarate(Mbps)			
					20MHz	40MHz	20MHz	40MHz	800nsGI		400nsGI	
									20MHz	40MHz	20MHz	40MHz
0	1	BPSK	1/2	1	52	108	26	54	6.5	13.5	7.200	15
1	1	QPSK	1/2	2	104	216	52	108	13.0	27.0	14.400	30
2	1	QPSK	3/4	2	104	216	78	162	19.5	40.5	21.700	45
3	1	16-QAM	1/2	4	208	432	104	216	26.0	54.0	28.900	60
4	1	16-QAM	3/4	4	208	432	156	324	39.0	81.0	43.300	90
5	1	64-QAM	2/3	6	312	648	208	432	52.0	108.0	57.800	120
6	1	64-QAM	3/4	6	312	648	234	486	58.5	121.5	65.000	135
7	1	64-QAM	5/6	6	312	648	260	540	65.0	135.0	72.200	150
8	2	BPSK	1/2	1	104	216	52	108	13.0	27.0	14.444	30
9	2	QPSK	1/2	2	208	432	104	216	26.0	54.0	28.889	60
10	2	QPSK	3/4	2	208	432	156	324	39.0	81.0	43.333	90
11	2	16-QAM	1/2	4	416	864	208	432	52.0	108.0	57.778	120
12	2	16-QAM	3/4	4	416	864	312	648	78.0	162.0	86.667	180
13	2	64-QAM	2/3	6	624	1296	416	864	104.0	216.0	115.556	240
14	2	64-QAM	3/4	6	624	1296	468	972	117.0	243.0	130.000	270
15	2	64-QAM	5/6	6	624	1296	520	1080	130.0	270.0	144.444	300

Symbol	Explanation
NSS	Number of spatial streams
R	Code rate
NBPSC	Number of coded bits per single carrier
NCBPS	Number of coded bits per symbol
NDBPS	Number of data bits per symbol
GI	guard interval

2.3 Table for Carrier Frequencies

Frequency Allocation

For 802.11a, 802.11n (20MHz): Use channel 36, 40, 44, 48, 52, 56, 60, 64, 100, 104, 108, 112, 116, 120, 124, 128, 132, 136 and 140.

For 802.11n (40MHz): Use channel 38, 46, 54, 62, 102, 110, 118, 126 and 134.

Frequency Band	Channel No.	Frequency
5150~5250 MHz Band 1	36	5180 MHz
	38	5190 MHz
	40	5200 MHz
	44	5220 MHz
	46	5230 MHz
	48	5240 MHz

Frequency Band	Channel No.	Frequency
5250~5350 MHz Band 2	52	5260 MHz
	54	5270 MHz
	56	5280 MHz
	60	5300 MHz
	62	5310 MHz
	64	5320 MHz

Frequency Band	Channel No.		Frequency	
5470~5725 MHz Band 3	100	5500 MHz	120	5600 MHz
	102	5510 MHz	124	5620 MHz
	104	5520 MHz	126	5630 MHz
	108	5540 MHz	128	5640 MHz
	110	5550 MHz	132	5660 MHz
	112	5560 MHz	134	5670 MHz
	116	5580 MHz	136	5680 MHz
	118	5590 MHz	140	5700 MHz

2.4 Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on the entire possible Configuration for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel	Antenna
AC Power Conducted Emission	Normal Mode	Auto	-	-
Max. Conducted Output Power	11a Band 1~3/BPSK	6Mbps	36/40/48/52/56	B
	11n Band 1~3/BPSK MCS 0 (20MHz)	6.5Mbps	/64/100/116/140	
	11n Band 1~3/BPSK MCS 0 (40MHz)	13.5Mbps	38/46/54/62/102/110/134	
	11n Band 1~3/BPSK MCS 8 (20MHz)	13Mbps	36/40/48/52/56	A/B /A+B
	11n Band 1~3/BPSK MCS 8 (40MHz)	27Mbps	/64/100/116/140	
26dB Spectrum Bandwidth 99% Occupied Bandwidth Measurement Power Spectral Density Peak Excursion	11a Band 1~3/BPSK	6Mbps	36/40/48/52/56	B
	11n Band 1~3/BPSK MCS 0 (20MHz)	6.5Mbps	/64/100/116/140	
	11n Band 1~3/BPSK MCS 0 (40MHz)	13.5Mbps	38/46/54/62/102/110/134	
	11n Band 1~3/BPSK MCS 8 (20MHz)	13Mbps	36/40/48/52/56	A+B
	11n Band 1~3/BPSK MCS 8 (40MHz)	27Mbps	/64/100/116/140	
Radiated Emission Below 1GHz	Normal Mode	Auto	-	-
Radiated Emission Above 1GHz Band Edge Emission	11a Band 1~3/BPSK	6Mbps	36/40/48/52/56	B
	11n Band 1~3/BPSK MCS 0 (20MHz)	6.5Mbps	/64/100/116/140	
	11n Band 1~3/BPSK MCS 0 (40MHz)	13.5Mbps	38/46/54/62/102/110/134	B
	11n Band 1~3/BPSK MCS 8 (20MHz)	13Mbps	36/40/48/52/56	A+B
	11n Band 1~3/BPSK MCS 8 (40MHz)	27Mbps	/64/100/116/140	
Frequency Stability	11a/n BPSK MCS 0 (20MHz)	6Mbps	64	B
	11n BPSK MCS 8 (40MHz)	27Mbps	102	A+B

2.5 Table for Testing Locations

Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.
CO01-HY	Conduction	Hwa Ya	643075	IC 4086B
TH01-HY	OVEN Room	Hwa Ya	-	-
03CH03-HY	SAC	Hwa Ya	643075	IC 4086B

Semi Anechoic Chamber (SAC).

2.6 Table for Supporting Units

Support Unit	Brand	Model	FCC ID	Remark
LCD Monitor	DELL	2408WFPb	N/A	Conducted Radiated (Below 1GHz)
(USB) Mouse Controller	Microsoft -	1004 -	DoC -	
Notebook P.C. (Remote Workstation)	DELL	E5500	DoC	
Notebook P.C.	DELL	PP20L	DoC	Radiated (Above 1 GHz)
Test Fixture	-	-	-	

2.7 Table for Parameters of Test Software Setting

During testing, Channel & Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

For Single Chain:

Power Parameters of IEEE 802.11a

Test Software Version	ART		
Frequency	5180 MHz	5200 MHz	5240 MHz
IEEE 802.11a	9	9	9
Frequency	5260 MHz	5280 MHz	5320 MHz
IEEE 802.11a	9	9	9
Frequency	5500 MHz	5580 MHz	5700 MHz
IEEE 802.11a	9	9	9

Power Parameters of IEEE 802.11n (20MHz)

Test Software Version	ART		
Frequency	5180 MHz	5200 MHz	5240 MHz
IEEE 802.11n	9	9	9
Frequency	5260 MHz	5280 MHz	5320 MHz
IEEE 802.11n	9	9	9
Frequency	5500 MHz	5580 MHz	5700 MHz
IEEE 802.11n	9	9	9

Power Parameters of IEEE 802.11n (40MHz)

Test Software Version	ART		
Frequency	5190 MHz	5230 MHz	5270 MHz
IEEE 802.11n	9	9	9
Frequency	5310 MHz	5510 MHz	5550 MHz
IEEE 802.11n	9	9	9
Frequency	5670 MHz		
IEEE 802.11n	9		

For Two Chain:

Power Parameters of IEEE 802.11n Ant. A+Ant. B (20MHz)

Test Software Version	ART		
Frequency	5180 MHz	5200 MHz	5240 MHz
IEEE 802.11n	7	7	7
Frequency	5260 MHz	5280 MHz	5320 MHz
IEEE 802.11n	7	7	7
Frequency	5500 MHz	5580 MHz	5700 MHz
IEEE 802.11n	7	7	7

Power Parameters of IEEE 802.11n Ant. A+Ant. B (40MHz)

Test Software Version	ART		
Frequency	5190 MHz	5230 MHz	5270 MHz
IEEE 802.11n	7	7	7
Frequency	5310 MHz	5510 MHz	5550 MHz
IEEE 802.11n	7	7	7
Frequency	5670 MHz		
IEEE 802.11n	7		

2.8 EUT Operation during Test

An executive program, EMCTEST.EXE under WIN XP, which generates a complete line of continuously repeating "H" pattern was used as the test software.

The programs were executed as follows :

- a. Turn on the power of all equipment.
- b. The NB reads the test program "EMITEST" from the hard disk drive and runs it.
- c. The NB sends "H" messages to the panel and displays "H" patterns on the screen.
- f. The NB sends "H" messages to the internal hard disk, and the hard disk reads and writes the message.

At the same time, the following programs were executed:

Conducted:

-Executed "ping.exe" to link with the remote workstation to receive and transmit data by LAN and WLAN.


Radiated:

-Executed "ART" to keep transmitting signals at fixed frequency.


2.9 Test Configuration

2.9.1 Radiation Emissions Test Configuration

For radiated emissions 9kHz~1GHz

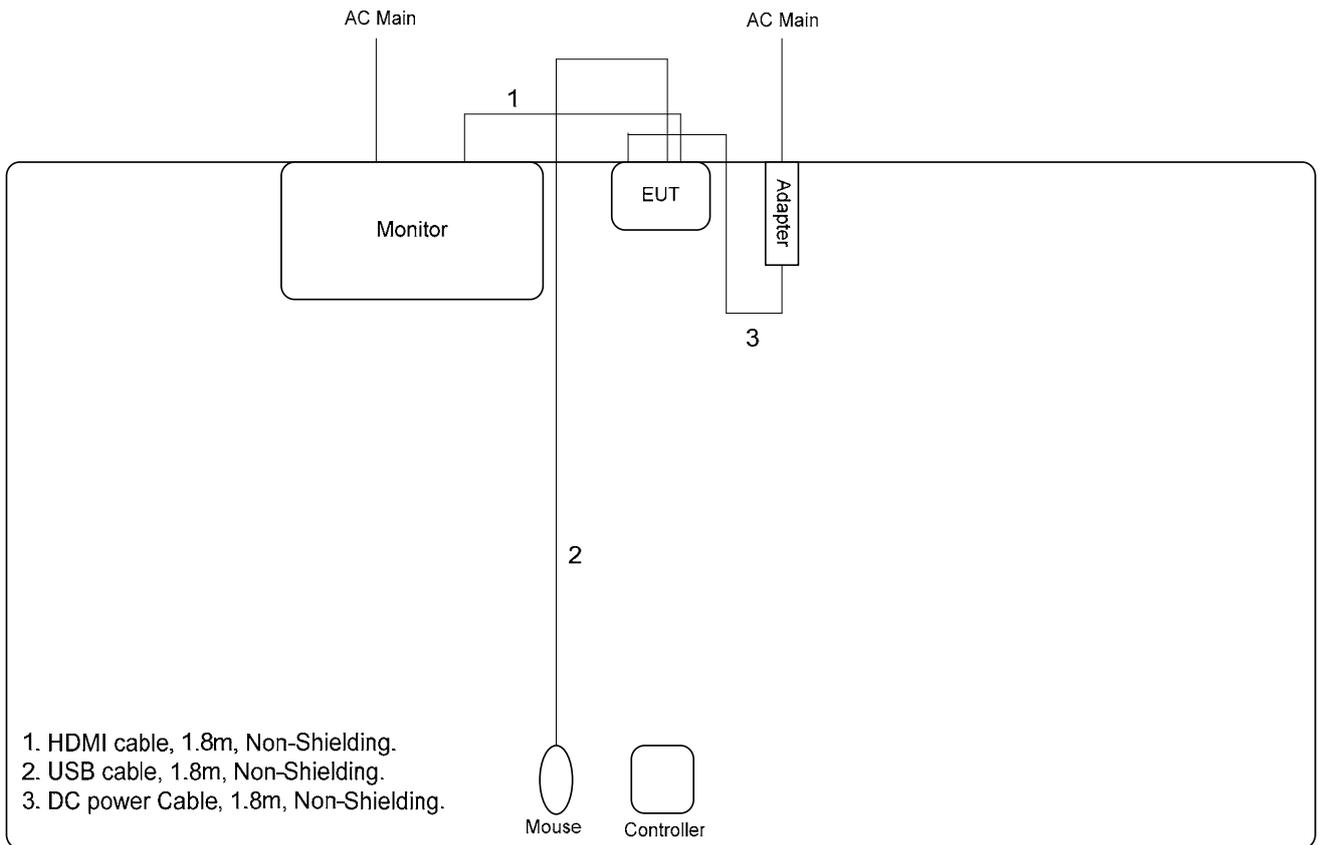

For radiated emissions above 1GHz

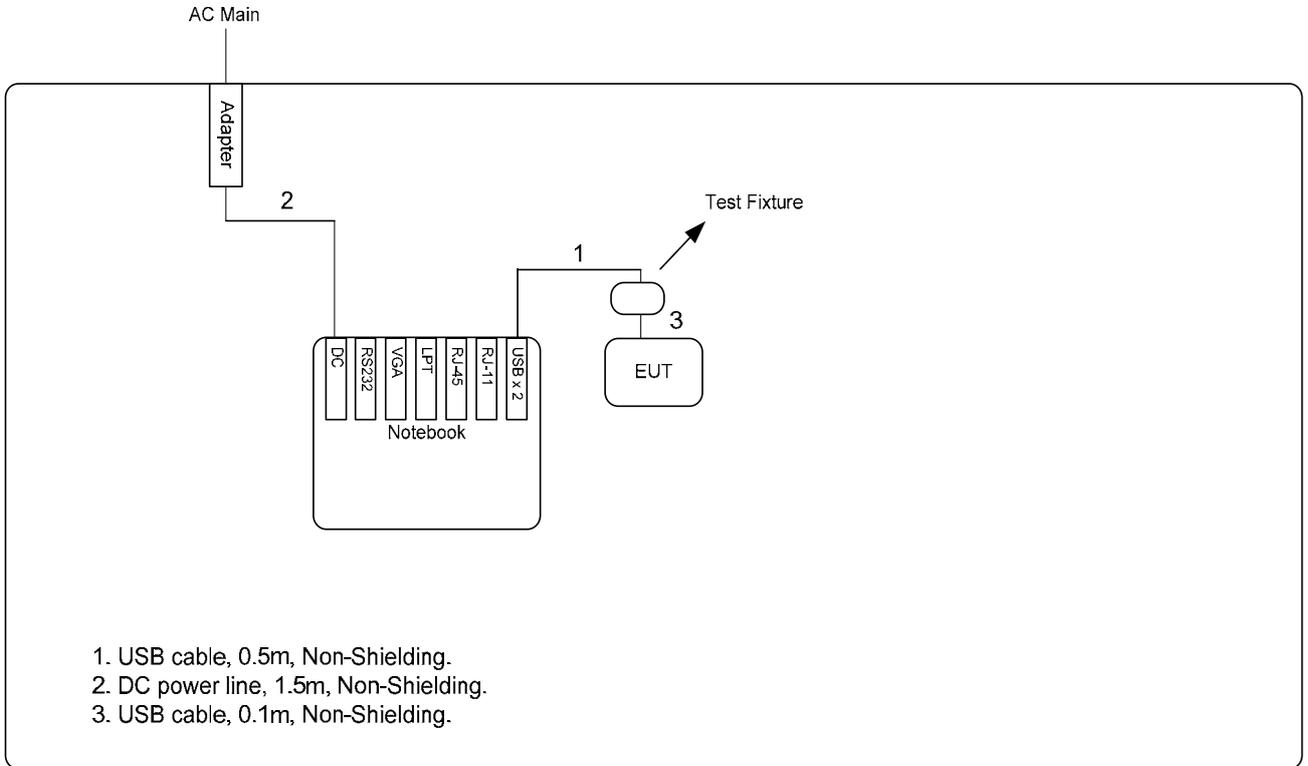

3 TEST RESULT

3.1 AC Power Line Conducted Emissions Measurement

3.1.1 Limit

For this product that is designed to connect to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Class B

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

3.1.2 Measuring Instruments and Setting


Please refer to section 4 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

3.1.3 Test Procedures

1. The EUT warm up about 15 minutes then start test.
2. Configure the EUT according to ANSI C63.4. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
3. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
4. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
5. The frequency range from 150 KHz to 30 MHz was searched.
6. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
7. The measurement has to be done between each power line and ground at the power terminal.

3.1.4 Test Setup Layout

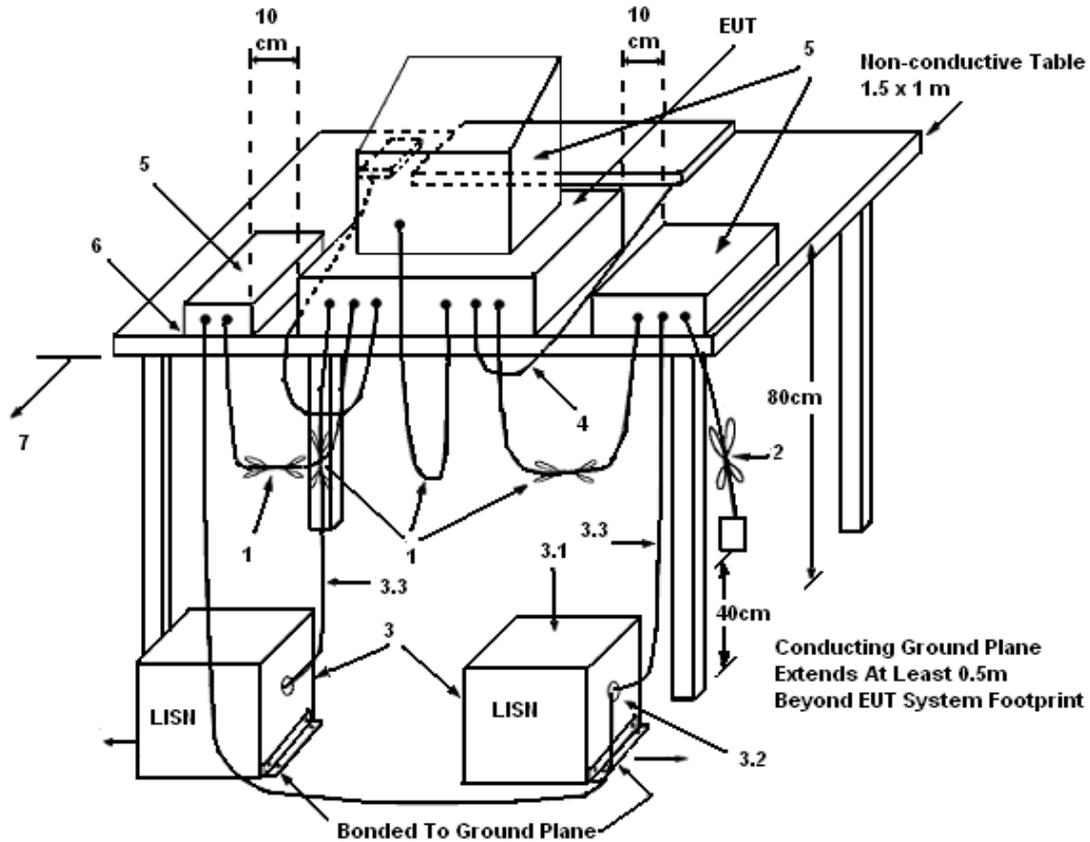

LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω. LISN can be placed on top of, or immediately beneath, reference ground plane.
- (3.1) All other equipment powered from additional LISN(s).
- (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
- (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

3.1.5 Test Deviation

There is no deviation with the original standard.


3.1.6 EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.

3.1.7 Results of AC Power Line Conducted Emissions Measurement


Final Test Date	May 20, 2010	Test Site No.	CO01-HY
Temperature	27.5	Humidity	48%
Test Engineer	Nicky	Configuration	Normal Mode

Line

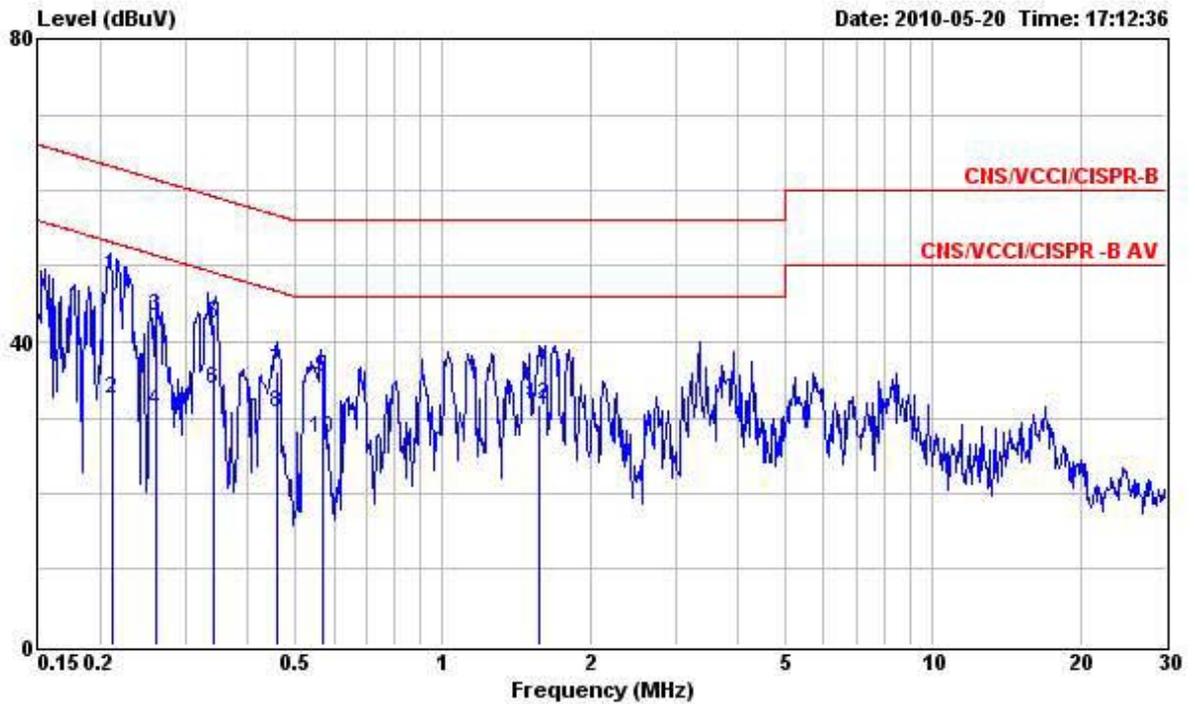

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.211	48.89	-14.28	63.17	48.75	0.08	0.06	QP
2	0.211	32.46	-20.71	53.17	32.32	0.08	0.06	Average
3	0.260	43.48	-17.95	61.43	43.34	0.08	0.06	QP
4	0.260	31.01	-20.42	51.43	30.87	0.08	0.06	Average
5	0.341	42.46	-16.71	59.17	42.30	0.09	0.07	QP
6	0.341	33.81	-15.36	49.17	33.65	0.09	0.07	Average
7	0.459	36.18	-20.53	56.71	36.01	0.09	0.08	QP
8	0.459	30.74	-15.97	46.71	30.57	0.09	0.08	Average
9	0.567	35.41	-20.59	56.00	35.21	0.10	0.10	QP
10	0.567	27.32	-18.68	46.00	27.12	0.10	0.10	Average
11	1.580	30.92	-25.08	56.00	30.67	0.12	0.13	QP
12	1.580	31.64	-14.36	46.00	31.39	0.12	0.13	Average

Neutral

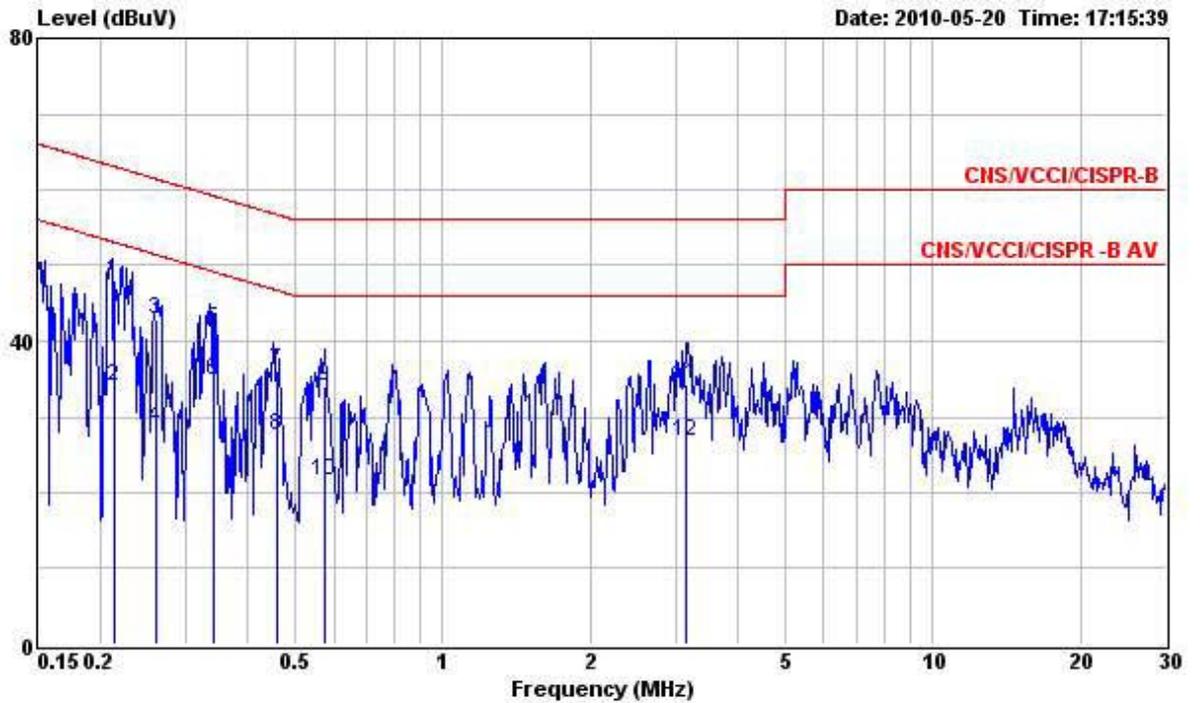

	Freq	Level	Over	Limit	Read	Probe	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.215	47.97	-15.05	63.02	47.85	0.06	0.06	QP
2	0.215	33.92	-19.10	53.02	33.80	0.06	0.06	Average
3	0.259	42.98	-18.48	61.46	42.86	0.06	0.06	QP
4	0.259	28.65	-22.81	51.46	28.53	0.06	0.06	Average
5	0.342	41.56	-17.60	59.16	41.42	0.07	0.07	QP
6	0.342	34.85	-14.31	49.16	34.71	0.07	0.07	Average
7	0.459	35.98	-20.73	56.71	35.83	0.07	0.08	QP
8	0.459	27.50	-19.21	46.71	27.35	0.07	0.08	Average
9	0.576	34.09	-21.91	56.00	33.91	0.08	0.10	QP
10	0.576	21.58	-24.42	46.00	21.40	0.08	0.10	Average
11	3.140	34.28	-21.72	56.00	34.02	0.13	0.13	QP
12	3.140	26.86	-19.14	46.00	26.60	0.13	0.13	Average

Note:

Level = Read Level + LISN Factor + Cable Loss.

3.2 99% Occupied Bandwidth Measurement

3.2.1 Limit

No restriction limits. But resolution bandwidth within band edge measurement is 1% of the 99% occupied bandwidth.

3.2.2 Measuring Instruments and Setting


Please refer to section 4 of equipments list in this report. The following table is the setting of the power meter.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 26dB Bandwidth
RB	300 kHz
VB	1000 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

3.2.3 Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer in peak hold mode.
2. The resolution bandwidth of 300 kHz and the video bandwidth of 1000 kHz were used.
3. Measured the spectrum width with power higher than 26dB below carrier.
4. Measuring multiple antennas, the connectors are required to link with Spectrum Analyzer through a combiner.

3.2.4 Test Setup Layout

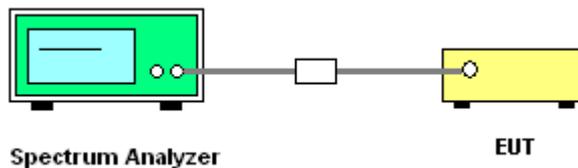

3.2.5 Test Deviation

There is no deviation with the original standard.

3.2.6 EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

3.2.7 Test Result of 99% Occupied Bandwidth

Final Test Date	May 14, 2010	Test Site No.	TH01-HY
Temperature	22	Humidity	59%
Test Engineer	Sam	Configuration	802.11a/n

For Single Chain:

Configuration of IEEE 802.11a

Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
36	5180 MHz	25.40	17.30
40	5200 MHz	25.70	17.40
48	5240 MHz	25.60	17.20
52	5260 MHz	25.20	17.30
56	5280 MHz	25.20	17.30
64	5320 MHz	25.10	17.30
100	5500 MHz	24.90	17.20
116	5580 MHz	24.60	17.30
140	5700 MHz	24.30	17.20

Configuration IEEE 802.11n (20MHz)

Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
36	5180 MHz	25.30	17.30
40	5200 MHz	25.70	17.40
48	5240 MHz	24.70	17.30
52	5260 MHz	25.20	17.30
56	5280 MHz	25.30	17.30
64	5320 MHz	24.90	17.30
100	5500 MHz	25.50	17.30
116	5580 MHz	25.10	17.30
140	5700 MHz	24.70	17.20

Configuration IEEE 802.11n (40MHz)

Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
38	5190 MHz	48.20	36.60
46	5230 MHz	47.00	36.60
54	5270 MHz	48.40	36.60
62	5310 MHz	48.40	36.60
102	5510 MHz	47.40	36.60
110	5550 MHz	48.60	36.60
134	5670 MHz	48.20	36.60

For Two Chain:

Configuration IEEE 802.11n Ant. A+Ant. B (20MHz)


Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
36	5180 MHz	25.30	18.30
40	5200 MHz	24.80	18.30
48	5240 MHz	25.20	18.30
52	5260 MHz	25.50	18.20
56	5280 MHz	24.60	18.30
64	5320 MHz	25.10	18.20
100	5500 MHz	25.20	18.20
116	5580 MHz	24.80	18.30
140	5700 MHz	25.20	18.20

Configuration IEEE 802.11n Ant. A+Ant. B (40MHz)

Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
38	5190 MHz	47.40	36.60
46	5230 MHz	45.40	36.60
54	5270 MHz	45.00	36.40
62	5310 MHz	46.60	36.40
102	5510 MHz	45.60	36.60
110	5550 MHz	45.60	36.40
134	5670 MHz	45.80	36.40


For Single Chain:

26 dB Bandwidth Plot on Configuration IEEE 802.11a / 5180 MHz

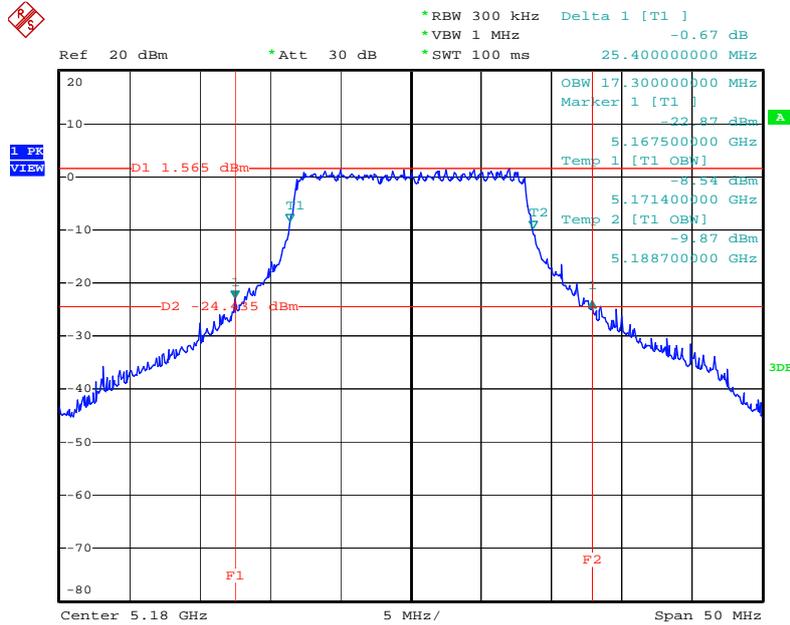


Date: 14.MAY.2010 20:18:38

26 dB Bandwidth Plot on Configuration IEEE 802.11a / 5200 MHz

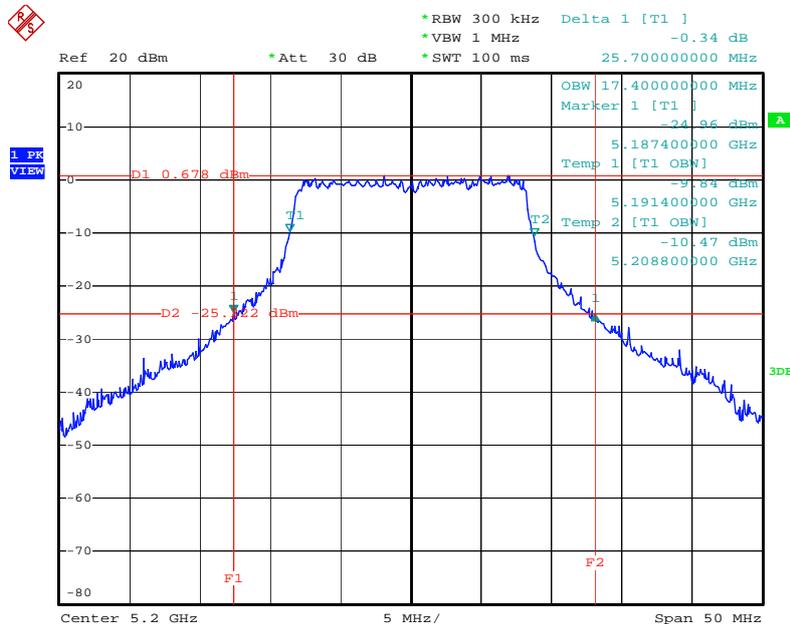


Date: 14.MAY.2010 20:20:06

26 dB Bandwidth Plot on Configuration IEEE 802.11a / 5240 MHz

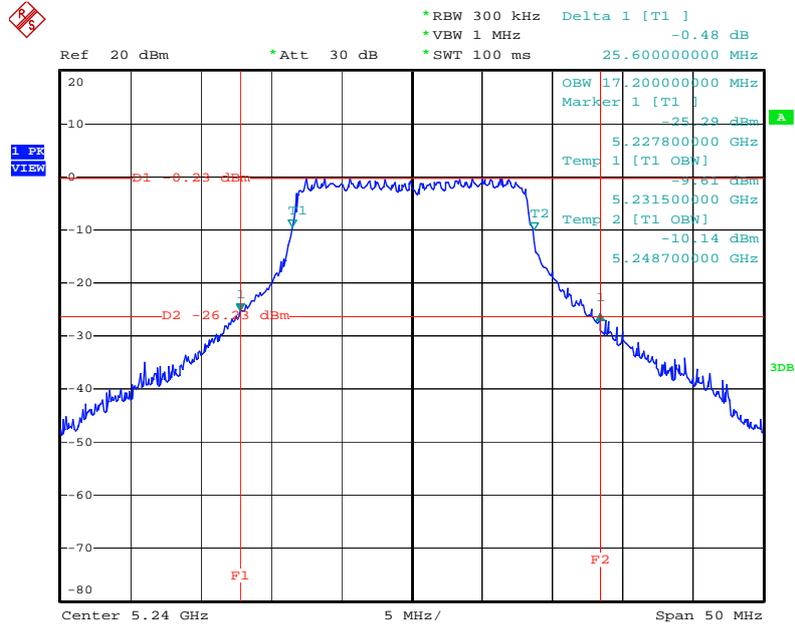


Date: 14.MAY.2010 20:21:40

26 dB Bandwidth Plot on Configuration IEEE 802.11a / 5260 MHz

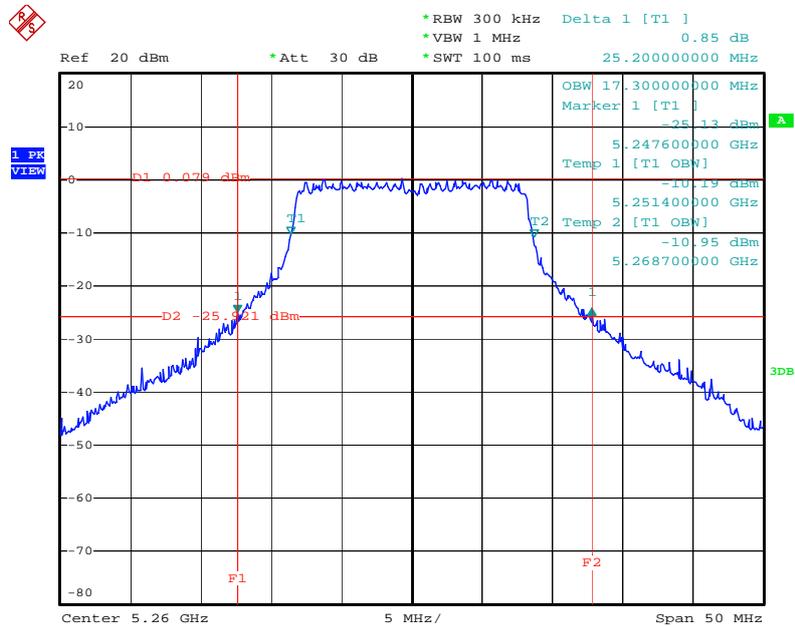


Date: 14.MAY.2010 20:23:10

26 dB Bandwidth Plot on Configuration IEEE 802.11a / 5280 MHz

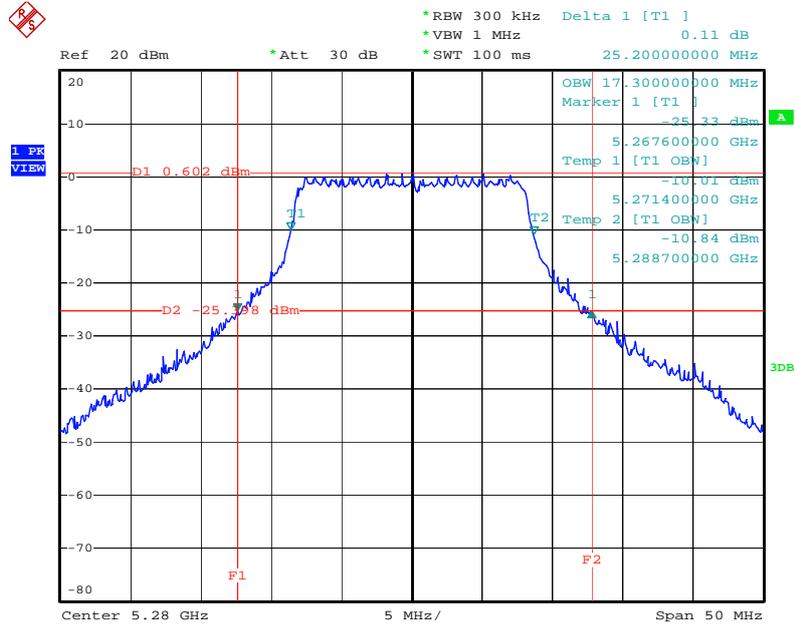


Date: 14.MAY.2010 20:24:41

26 dB Bandwidth Plot on Configuration IEEE 802.11a / 5320 MHz

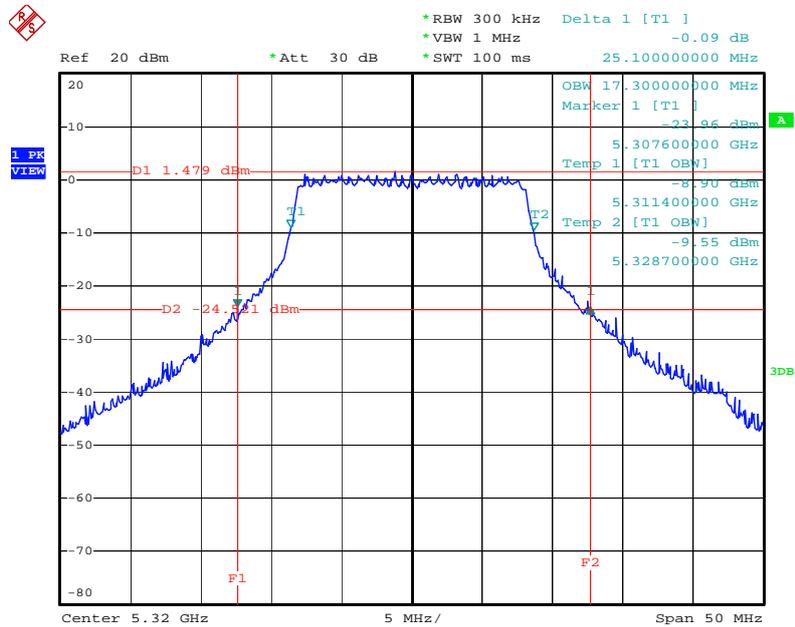


Date: 14.MAY.2010 20:26:14

26 dB Bandwidth Plot on Configuration IEEE 802.11a / 5500 MHz

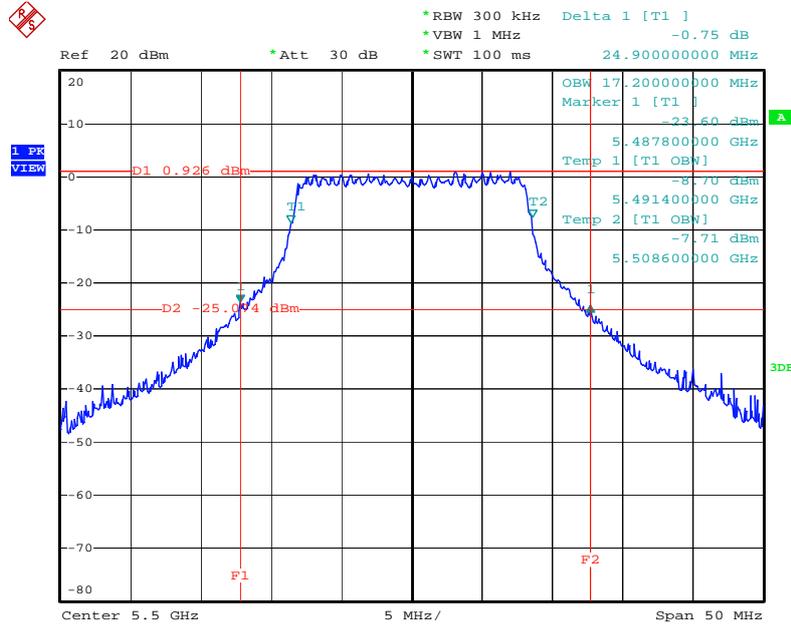


Date: 14.MAY.2010 20:28:27

26 dB Bandwidth Plot on Configuration IEEE 802.11a / 5580 MHz

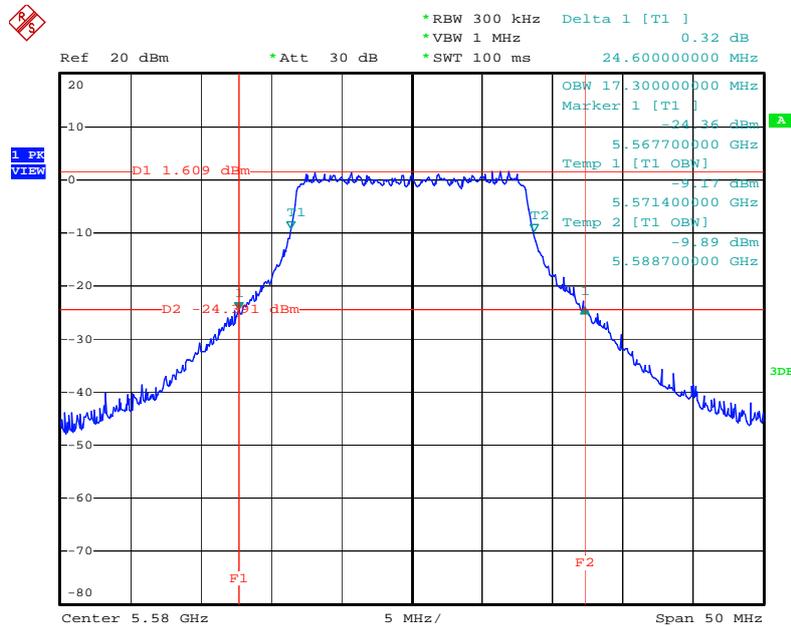


Date: 14.MAY.2010 20:30:13

26 dB Bandwidth Plot on Configuration IEEE 802.11a / 5700 MHz

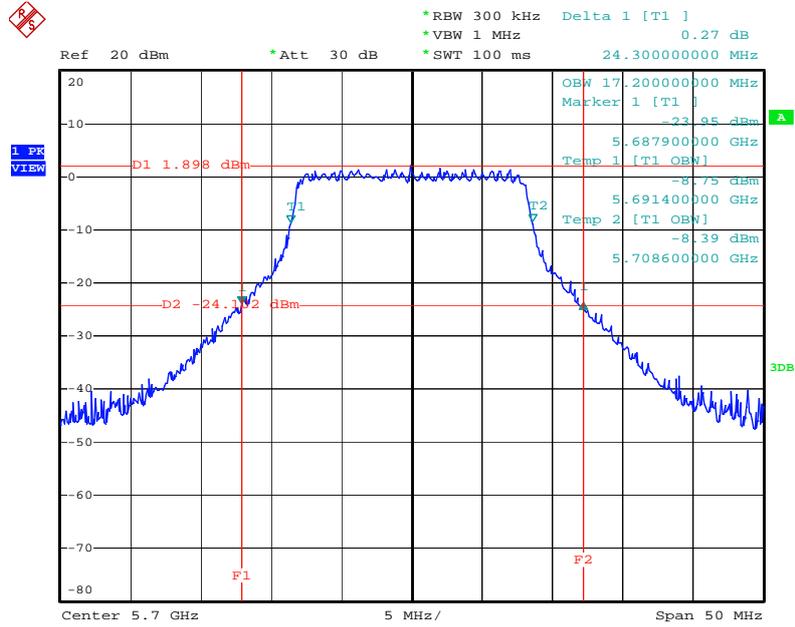


Date: 14.MAY.2010 20:31:51

26 dB Bandwidth Plot on Configuration IEEE 802.11n (20MHz)/ 5180 MHz

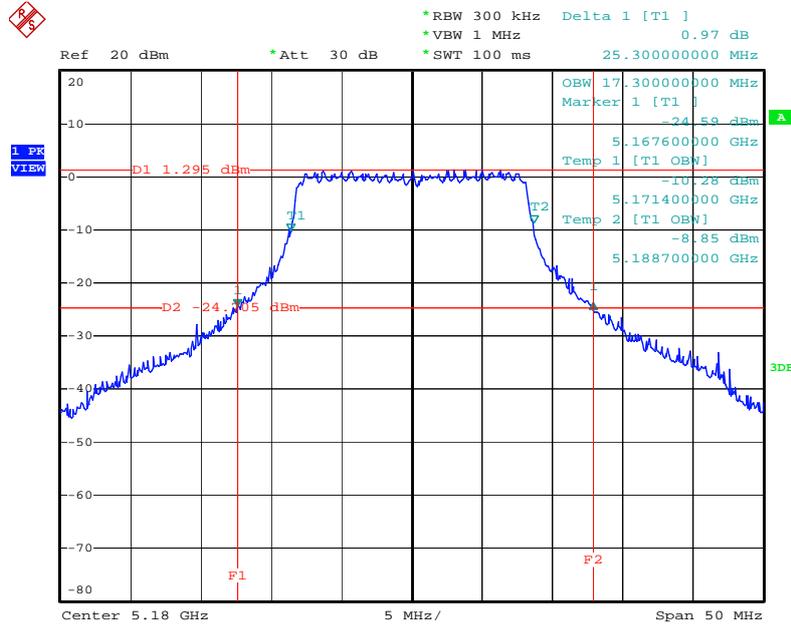


Date: 14.MAY.2010 14:30:56

26 dB Bandwidth Plot on Configuration IEEE 802.11n (20MHz) / 5200 MHz

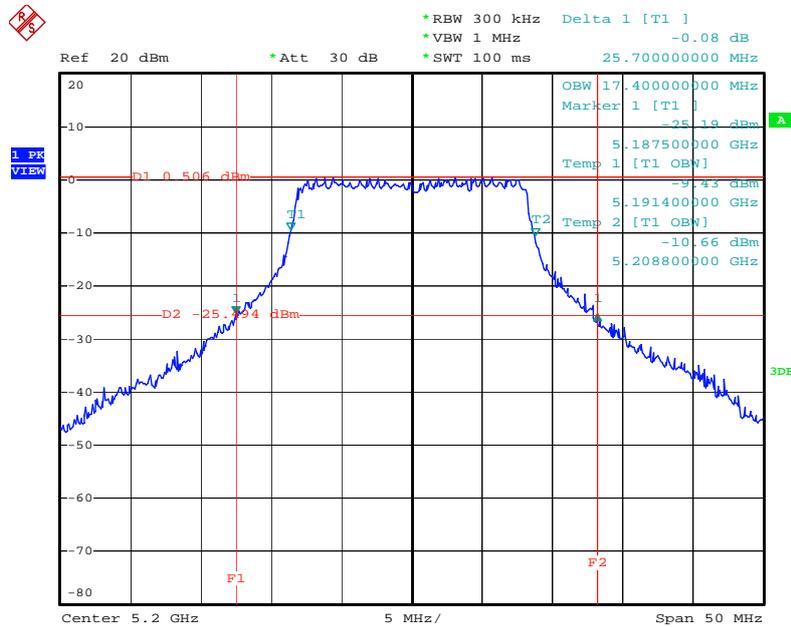


Date: 14.MAY.2010 14:34:49

26 dB Bandwidth Plot on Configuration IEEE 802.11n (20MHz)/ 5240 MHz

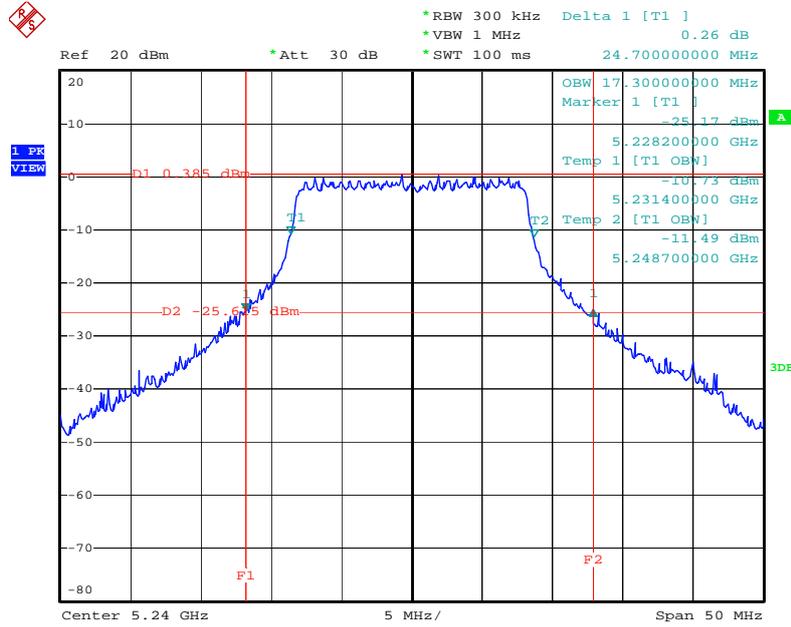


Date: 14.MAY.2010 14:36:36

26 dB Bandwidth Plot on Configuration IEEE 802.11n (20MHz)/ 5260 MHz

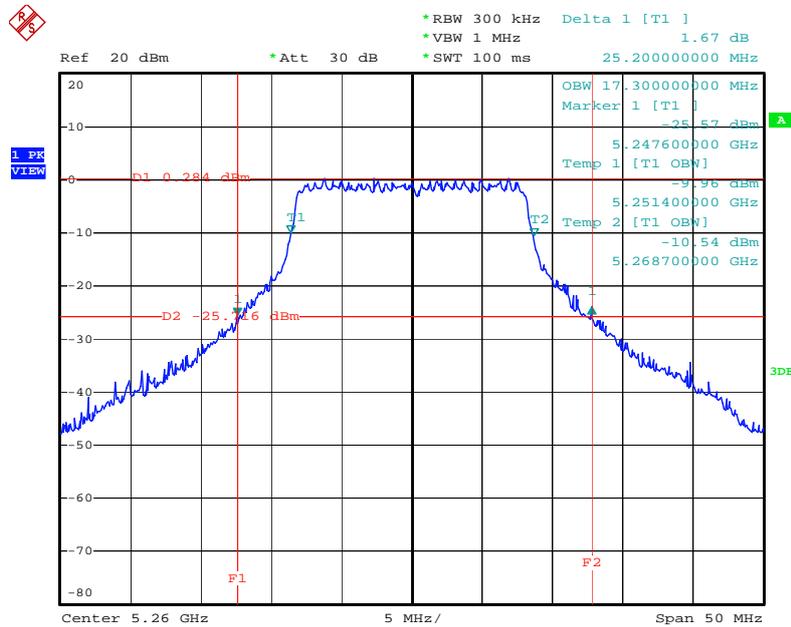


Date: 14.MAY.2010 14:39:39

26 dB Bandwidth Plot on Configuration IEEE 802.11n (20MHz) / 5280 MHz

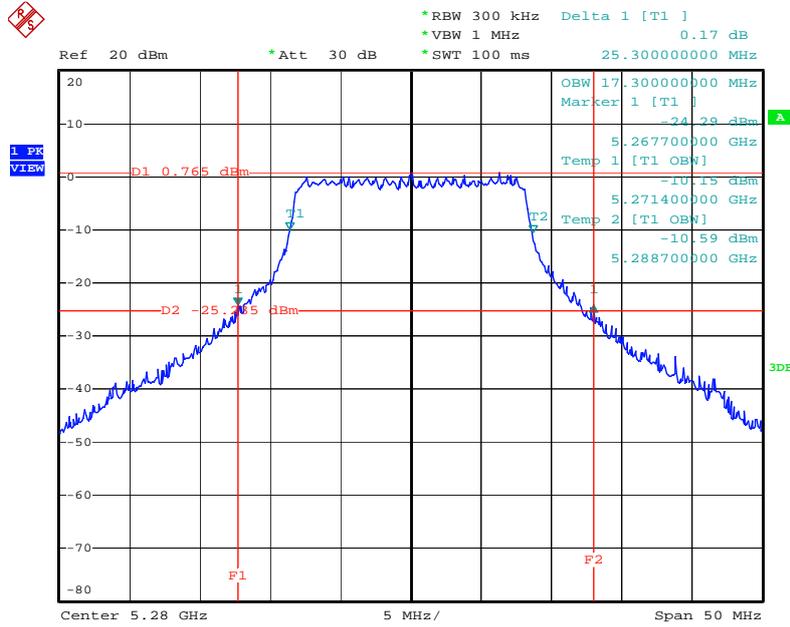


Date: 14.MAY.2010 14:41:37

26 dB Bandwidth Plot on Configuration IEEE 802.11n (20MHz) / 5320 MHz

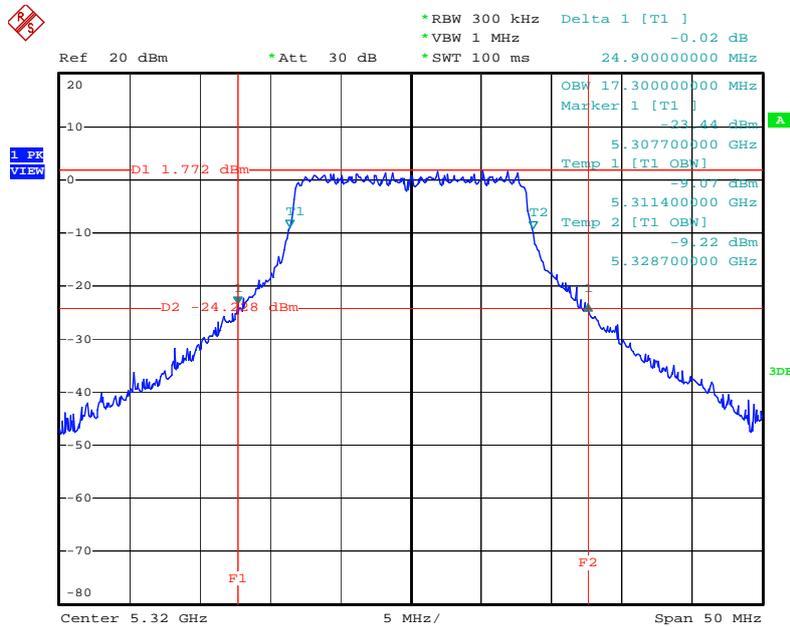


Date: 14.MAY.2010 14:45:02

26 dB Bandwidth Plot on Configuration IEEE 802.11n (20MHz)/ 5500 MHz

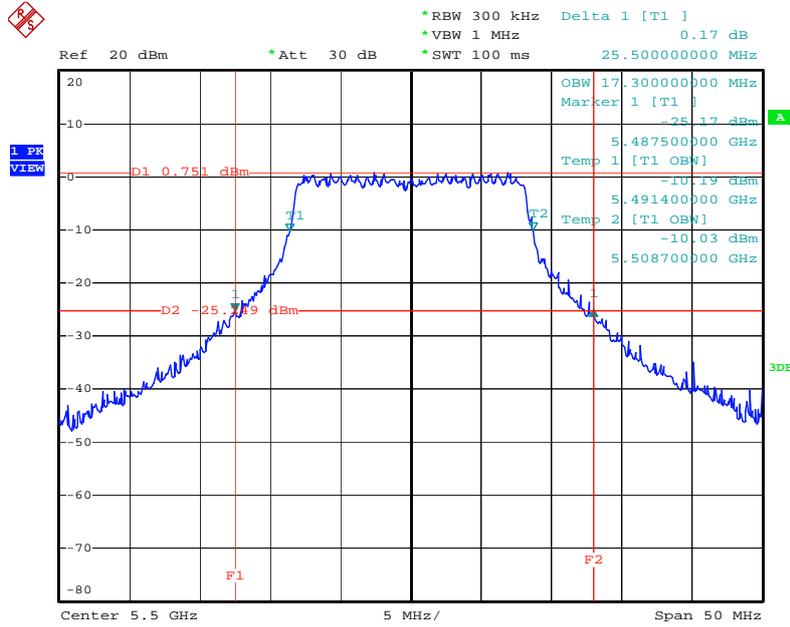


Date: 14.MAY.2010 14:48:27

26 dB Bandwidth Plot on Configuration IEEE 802.11n (20MHz) / 5580 MHz

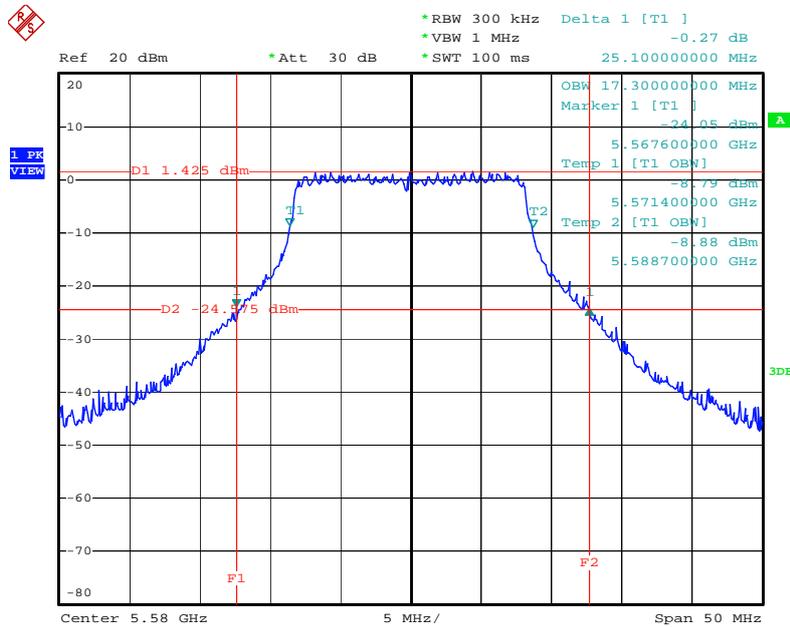


Date: 14.MAY.2010 14:51:16

26 dB Bandwidth Plot on Configuration IEEE 802.11n (20MHz)/ 5700 MHz

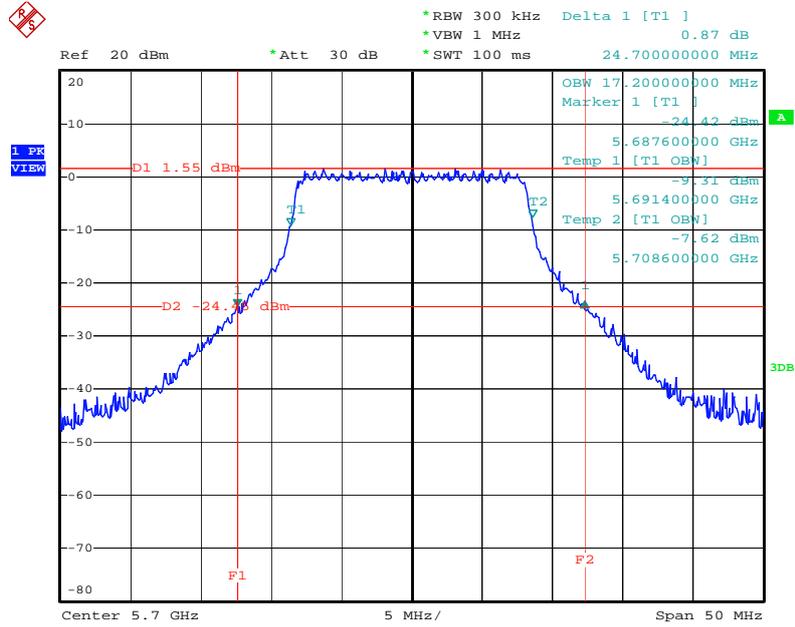


Date: 14.MAY.2010 14:55:53

26 dB Bandwidth Plot on Configuration IEEE 802.11n (40MHz)/ 5190 MHz

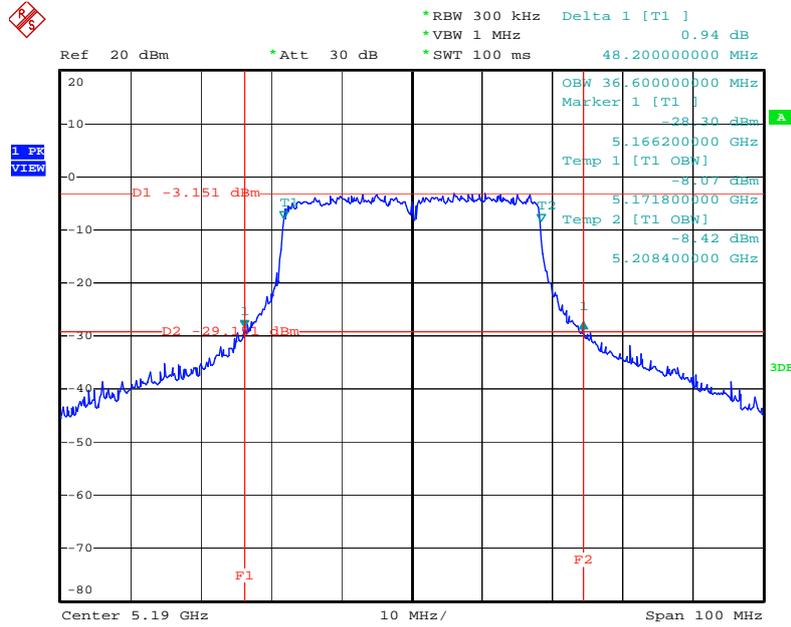


Date: 14.MAY.2010 16:17:45

26 dB Bandwidth Plot on Configuration IEEE 802.11n (40MHz) / 5230 MHz

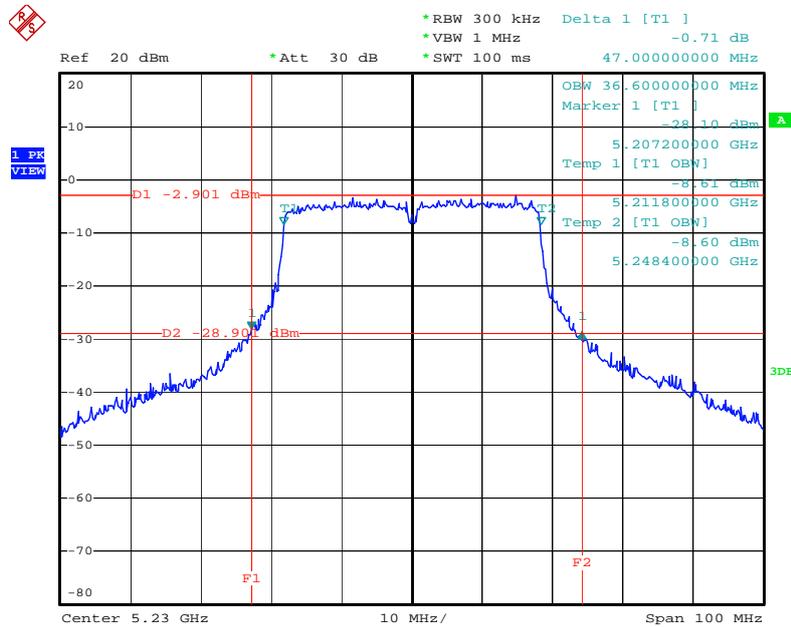


Date: 14.MAY.2010 16:20:38

26 dB Bandwidth Plot on Configuration IEEE 802.11n (40MHz)/ 5270 MHz

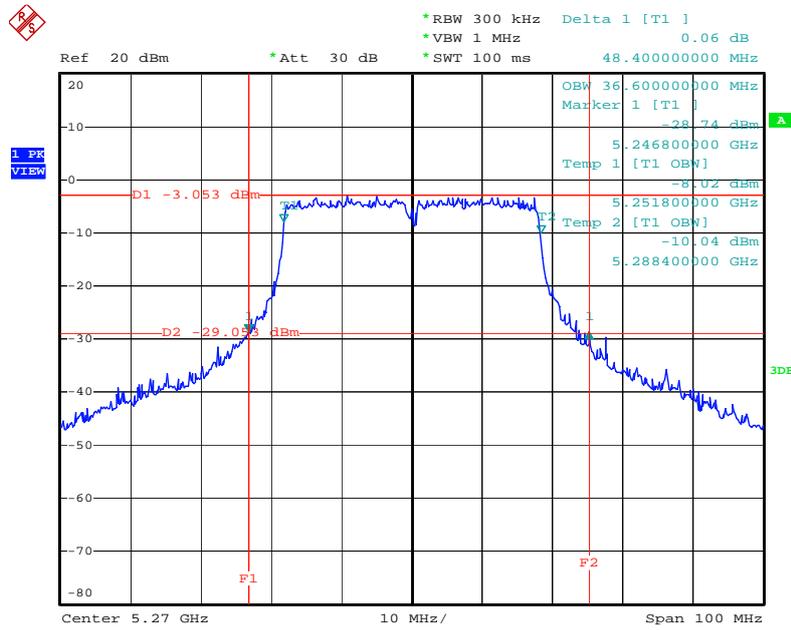


Date: 14.MAY.2010 16:22:22

26 dB Bandwidth Plot on Configuration IEEE 802.11n (40MHz) / 5310 MHz

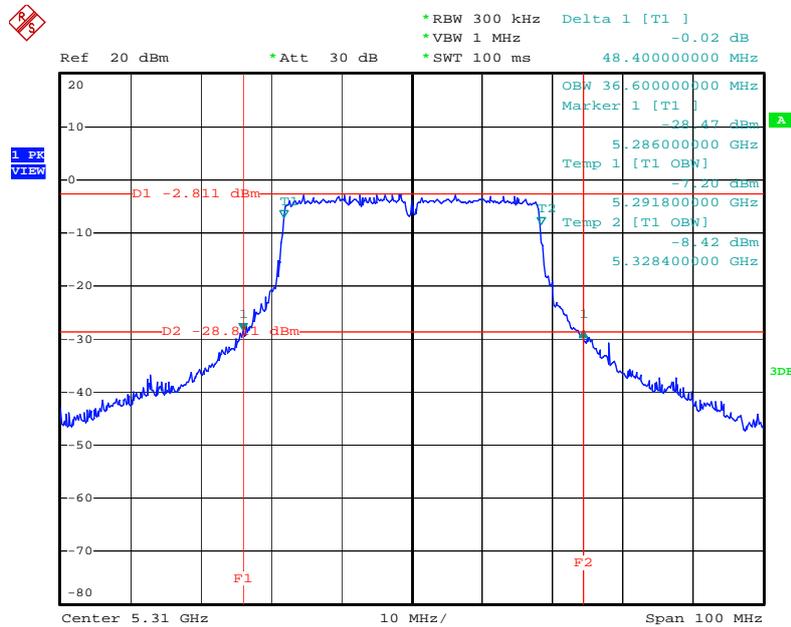


Date: 14.MAY.2010 16:23:55

26 dB Bandwidth Plot on Configuration IEEE 802.11n (40MHz)/ 5510 MHz

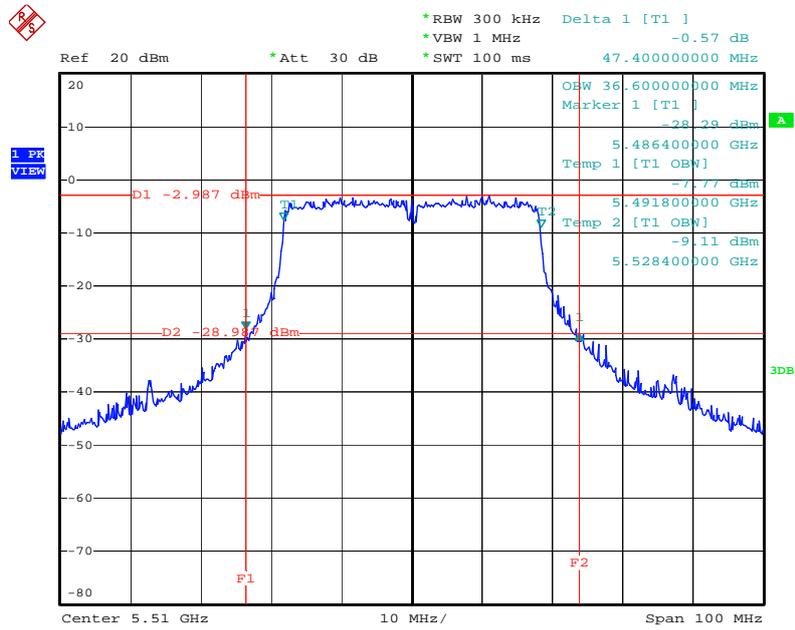


Date: 14.MAY.2010 16:25:26

26 dB Bandwidth Plot on Configuration IEEE 802.11n (40MHz) / 5550 MHz

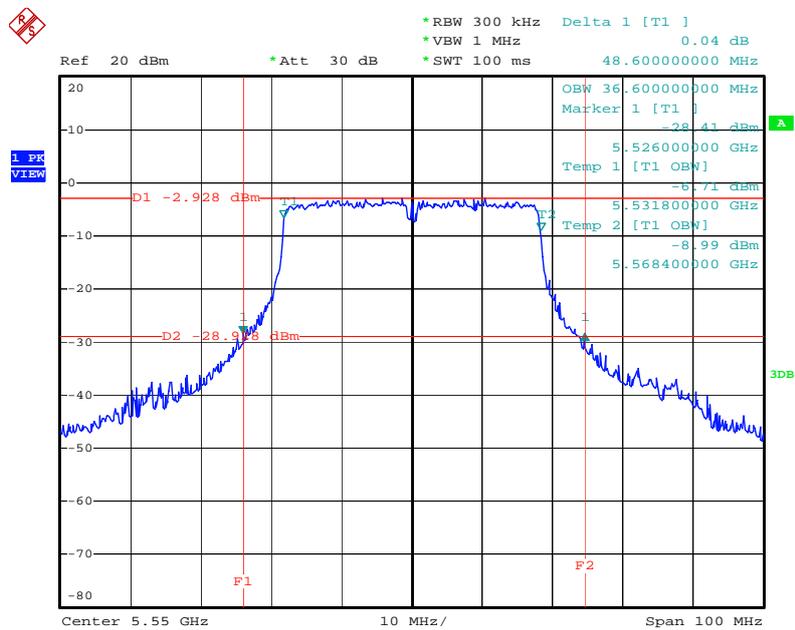

Date: 14.MAY.2010 16:27:09


26 dB Bandwidth Plot on Configuration IEEE 802.11n (40MHz) / 5670 MHz

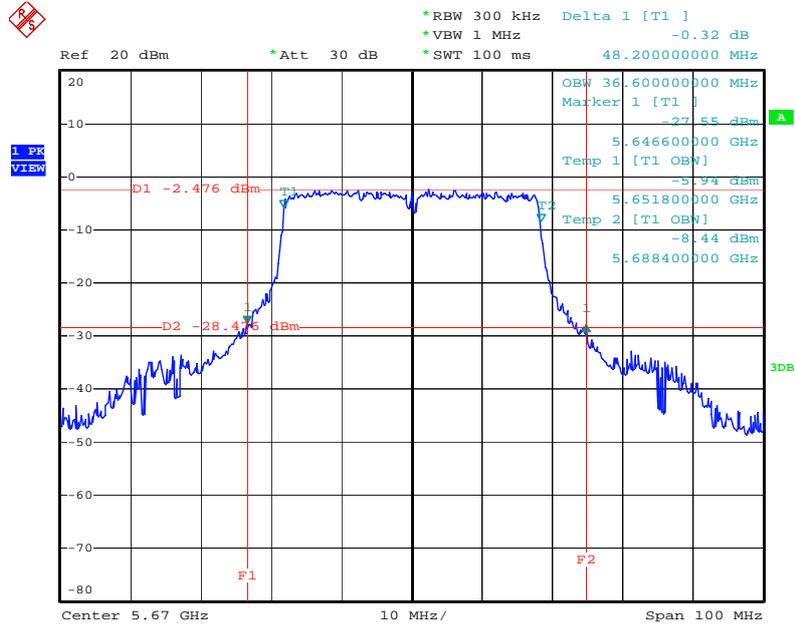

Date: 14.MAY.2010 16:28:45


For Two Chain:

26 dB Bandwidth Plot on Configuration IEEE 802.11n Ant. A+Ant. B (20MHz)/ 5180 MHz

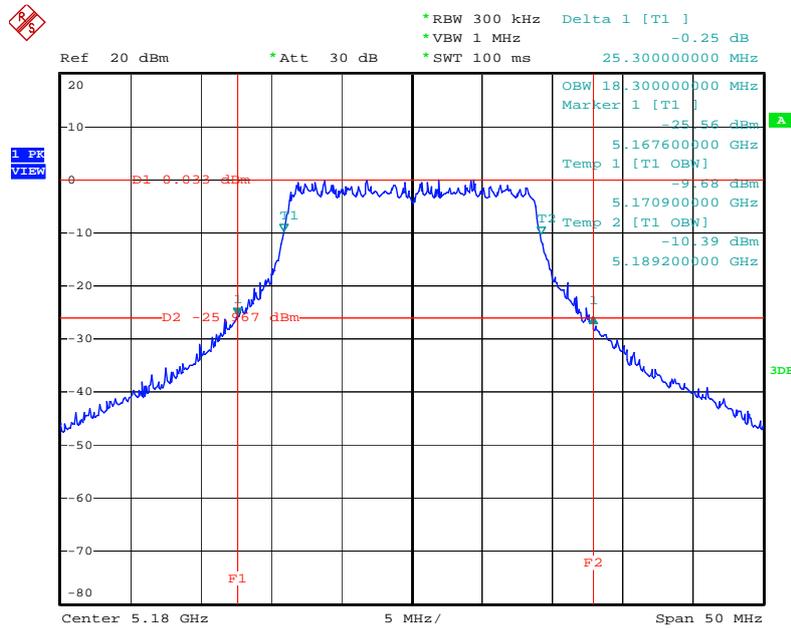


Date: 14.MAY.2010 18:54:55

26 dB Bandwidth Plot on Configuration IEEE 802.11n Ant. A+Ant. B (20MHz) / 5200 MHz

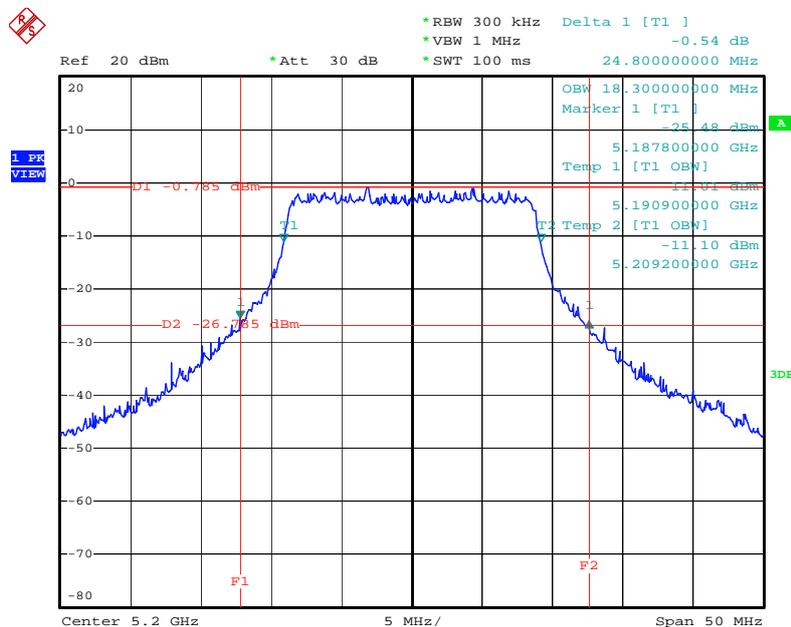


Date: 14.MAY.2010 18:56:39

26 dB Bandwidth Plot on Configuration IEEE 802.11n Ant. A+Ant. B (20MHz) / 5240 MHz

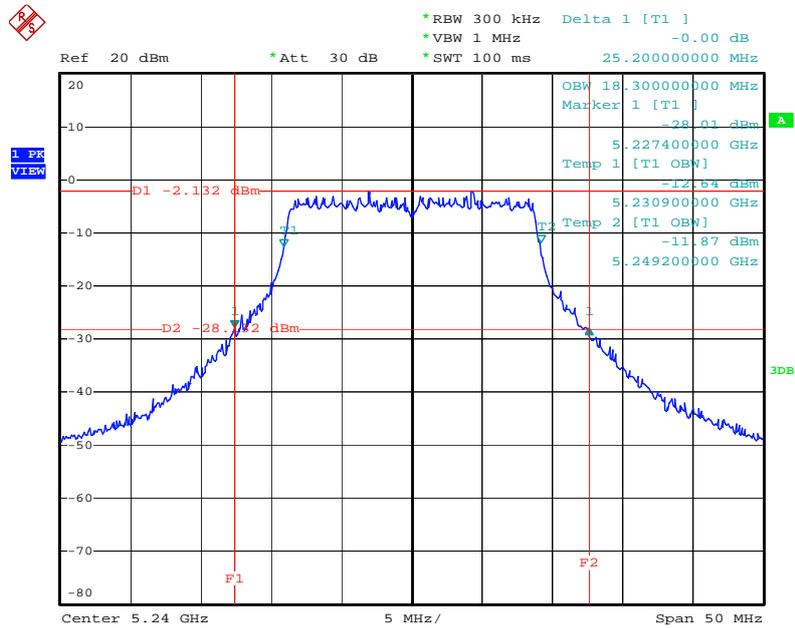


Date: 14.MAY.2010 18:58:09

26 dB Bandwidth Plot on Configuration IEEE 802.11n Ant. A+Ant. B (20MHz)/ 5260 MHz

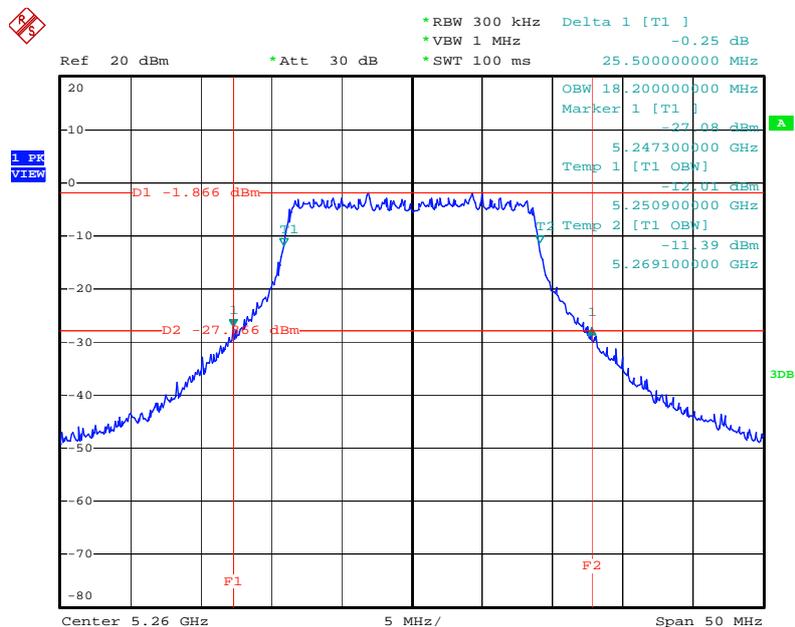


Date: 14.MAY.2010 18:59:48

26 dB Bandwidth Plot on Configuration IEEE 802.11n Ant. A+Ant. B (20MHz) / 5280 MHz

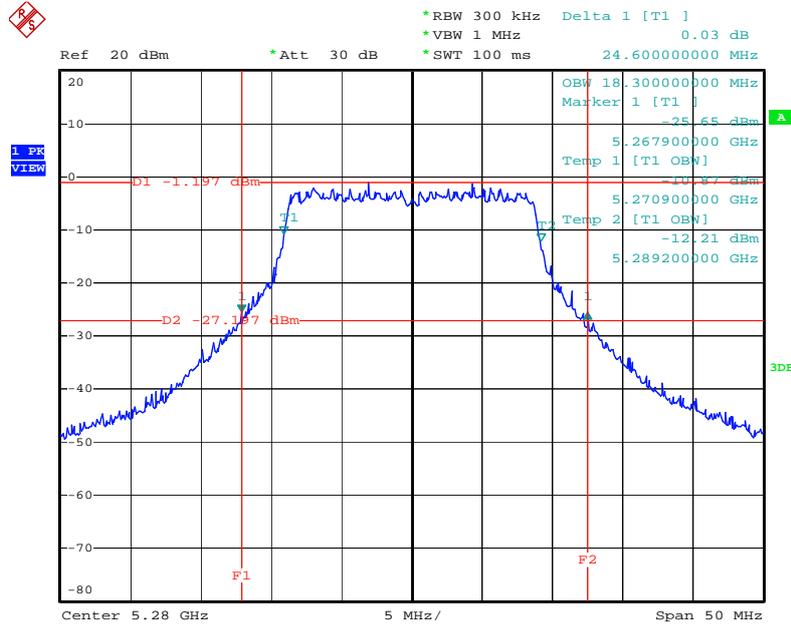


Date: 14.MAY.2010 19:01:14

26 dB Bandwidth Plot on Configuration IEEE 802.11n Ant. A+Ant. B (20MHz) / 5320 MHz

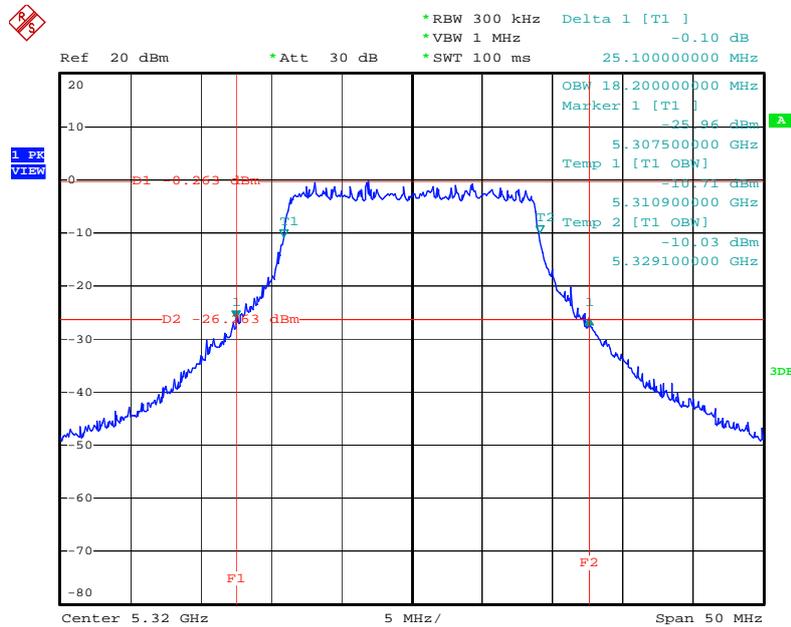


Date: 14.MAY.2010 19:02:49

26 dB Bandwidth Plot on Configuration IEEE 802.11n Ant. A+Ant. B (20MHz)/ 5500 MHz

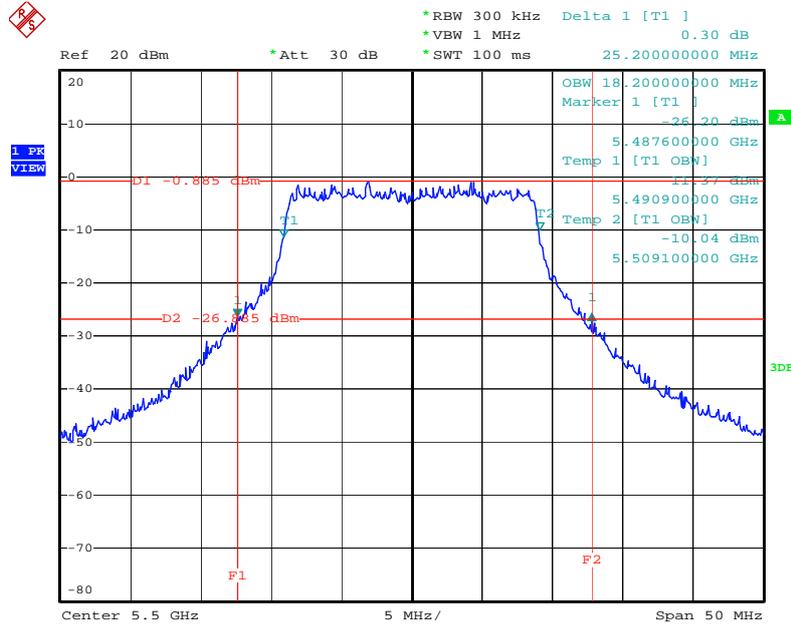


Date: 14.MAY.2010 19:04:25

26 dB Bandwidth Plot on Configuration IEEE 802.11n Ant. A+Ant. B (20MHz) / 5580 MHz

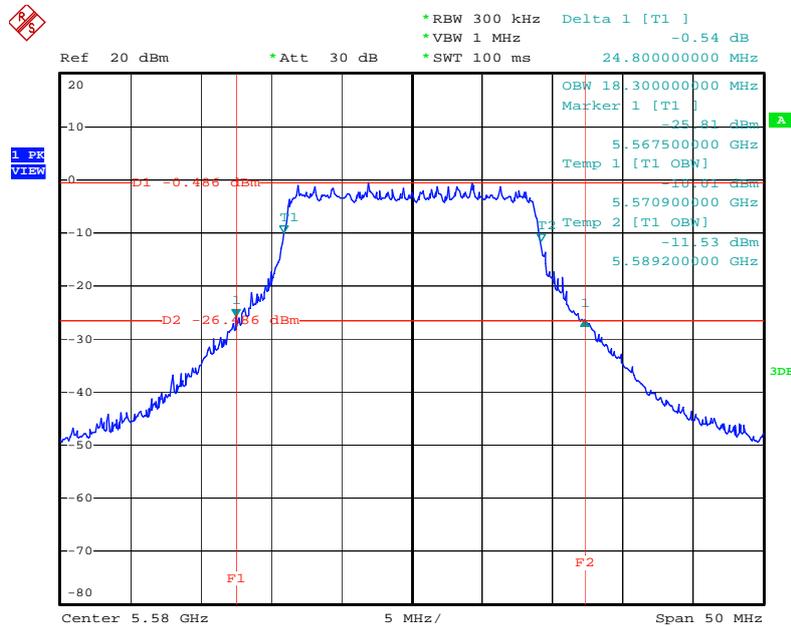


Date: 14.MAY.2010 19:06:37

26 dB Bandwidth Plot on Configuration IEEE 802.11n Ant. A+Ant. B (20MHz) / 5700 MHz

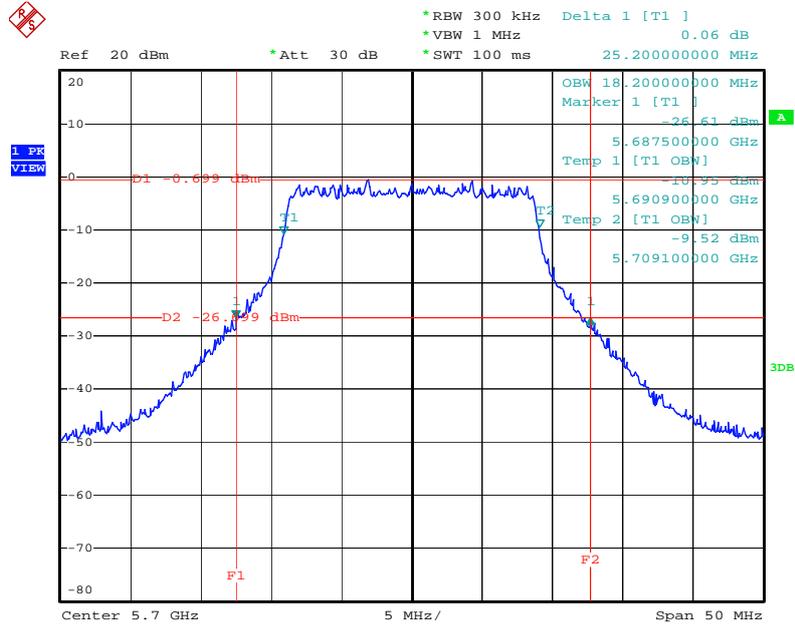


Date: 14.MAY.2010 19:08:05

26 dB Bandwidth Plot on Configuration IEEE 802.11n Ant. A+Ant. B (40MHz) / 5190 MHz

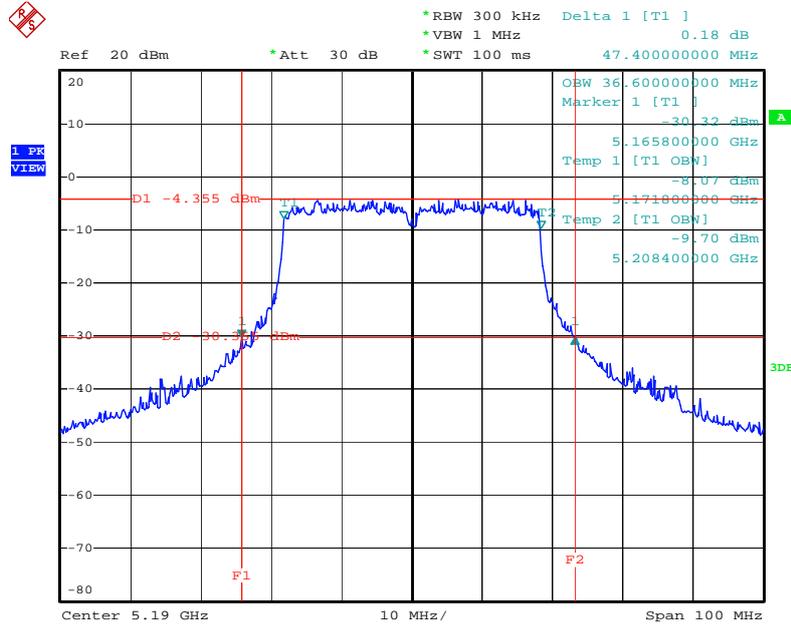


Date: 14.MAY.2010 19:15:32

26 dB Bandwidth Plot on Configuration IEEE 802.11n Ant. A+Ant. B (40MHz) / 5230 MHz

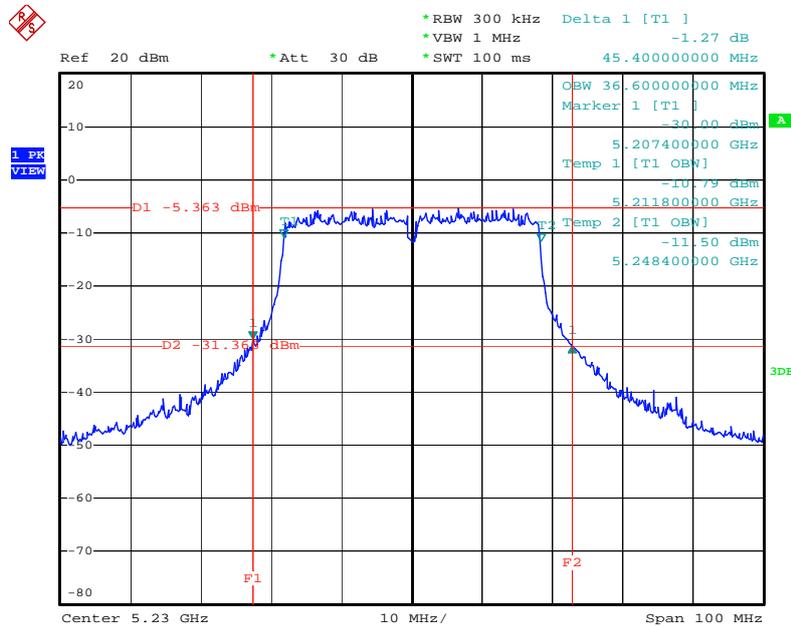


Date: 14.MAY.2010 19:17:24

26 dB Bandwidth Plot on Configuration IEEE 802.11n Ant. A+Ant. B (40MHz) / 5270 MHz

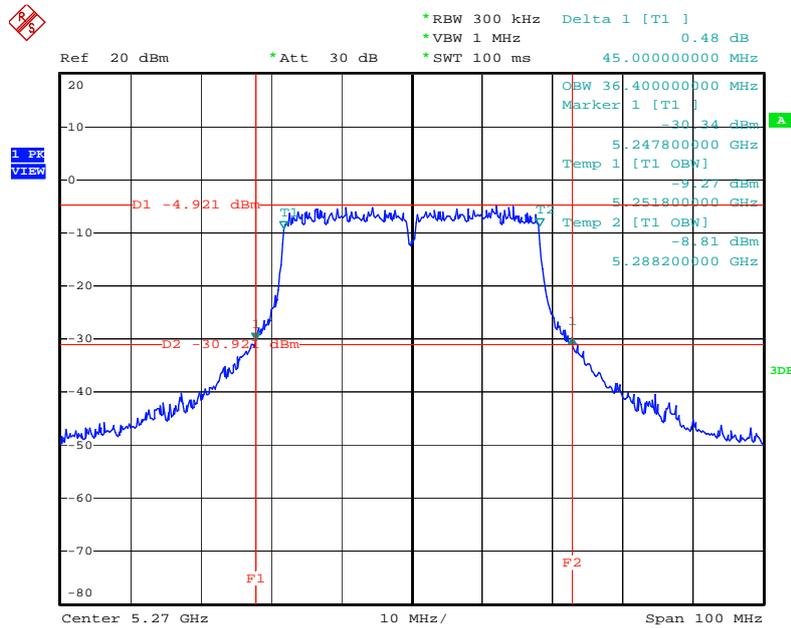


Date: 14.MAY.2010 19:19:51

26 dB Bandwidth Plot on Configuration IEEE 802.11n Ant. A+Ant. B (40MHz) / 5310 MHz

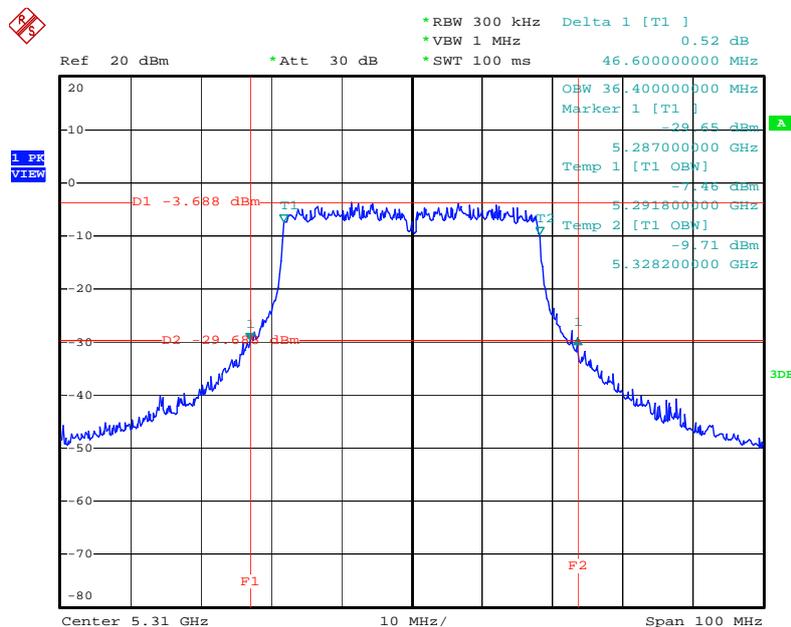


Date: 14.MAY.2010 19:21:49

26 dB Bandwidth Plot on Configuration IEEE 802.11n Ant. A+Ant. B (40MHz) / 5510 MHz

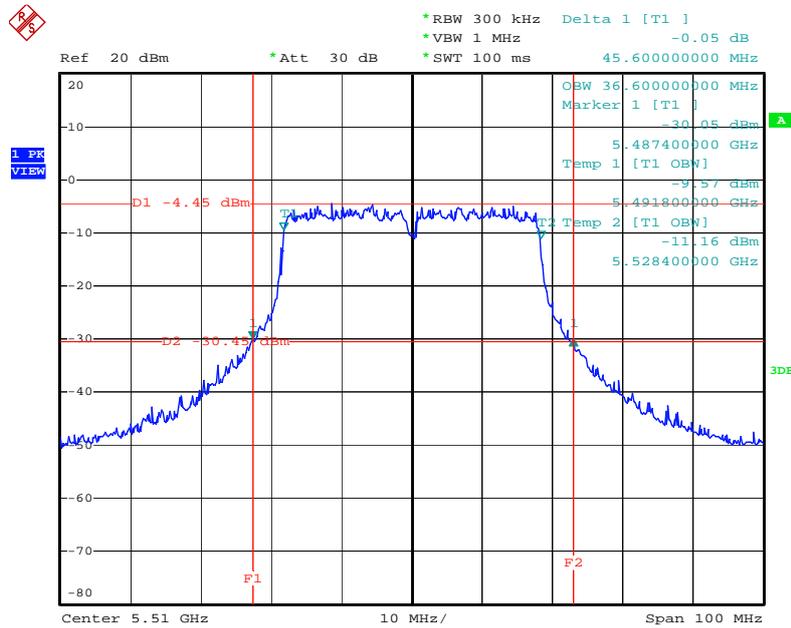


Date: 14.MAY.2010 19:23:32

26 dB Bandwidth Plot on Configuration IEEE 802.11n Ant. A+Ant. B (40MHz) / 5550 MHz

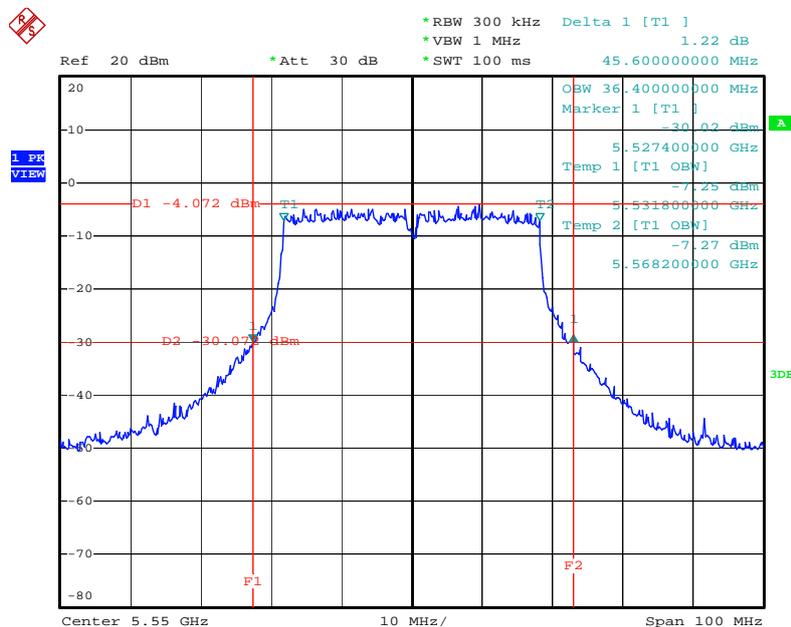

Date: 14.MAY.2010 19:25:21

26 dB Bandwidth Plot on Configuration IEEE 802.11n Ant. A+Ant. B (40MHz) / 5670 MHz

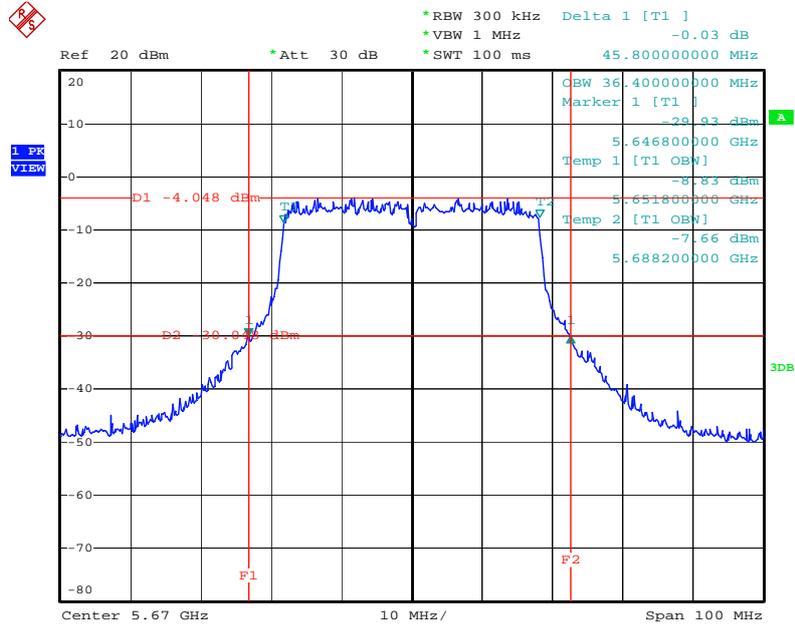

Date: 14.MAY.2010 19:27:01

3.3 Maximum Conducted Output Power Measurement

3.3.1 Limit

For the band 5.15~5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 50 mW (17dBm) or 4 dBm + 10log B, where B is the 26 dB emissions bandwidth in MHz. If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power and power density from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW (24dBm) or 11 dBm + 10log B. If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power and power density from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.825 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 1 W (30dBm) or 17 dBm + 10log B. If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power and power density from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain up to 23 dBi without any corresponding reduction in the transmitter peak output power and peak power spectral density. For fixed, point-to-point U-NII transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in peak transmitter power and peak power spectral density for each 1 dB of antenna gain in excess of 23 dBi would be required.


3.3.2 Measuring Instruments and Setting

Please refer to section 4 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RB	1000 kHz
VB	300 kHz
Detector	Sample
Trace	Max Hold
Sweep Time	60s

3.3.3 Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. Test was performed in accordance with method #3 of FCC Public Notice DA-02-2138.
3. When measuring maximum conducted output power within multiple antenna systems, add every result of the values by mathematic formula.

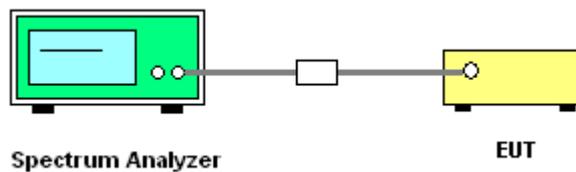3.3.4 Test Setup Layout**3.3.5 Test Deviation**

There is no deviation with the original standard.

3.3.6 EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

3.3.7 Test Result of Maximum Conducted Output Power

Final Test Date	May 14, 2010	Test Site No.	TH01-HY
Temperature	22	Humidity	59%
Test Engineer	Sam	Configuration	802.11a/n

For Single Chain:

Configuration of IEEE 802.11a

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
36	5180 MHz	12.20	17.00	Complies
40	5200 MHz	11.65	17.00	Complies
48	5240 MHz	10.49	17.00	Complies
52	5260 MHz	10.86	24.00	Complies
56	5280 MHz	11.13	24.00	Complies
64	5320 MHz	12.17	24.00	Complies
100	5500 MHz	11.70	24.00	Complies
116	5580 MHz	12.37	24.00	Complies
140	5700 MHz	12.31	24.00	Complies

Configuration IEEE 802.11n (20MHz)

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
36	5180 MHz	12.28	17.00	Complies
40	5200 MHz	11.46	17.00	Complies
48	5240 MHz	10.38	17.00	Complies
52	5260 MHz	10.94	24.00	Complies
56	5280 MHz	11.32	24.00	Complies
64	5320 MHz	12.32	24.00	Complies
100	5500 MHz	11.85	24.00	Complies
116	5580 MHz	12.23	24.00	Complies
140	5700 MHz	12.22	24.00	Complies

Configuration IEEE 802.11n (40MHz)

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
38	5190 MHz	11.70	17.00	Complies
46	5230 MHz	11.39	17.00	Complies
54	5270 MHz	11.84	24.00	Complies
62	5310 MHz	12.27	24.00	Complies
102	5510 MHz	11.64	24.00	Complies
110	5550 MHz	12.36	24.00	Complies
134	5670 MHz	12.81	24.00	Complies

For Two Chain:

Configuration IEEE 802.11n Ant. A (20MHz)

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
36	5180 MHz	10.77	17.00	Complies
40	5200 MHz	10.10	17.00	Complies
48	5240 MHz	9.12	17.00	Complies
52	5260 MHz	10.01	24.00	Complies
56	5280 MHz	9.87	24.00	Complies
64	5320 MHz	10.95	24.00	Complies
100	5500 MHz	10.66	24.00	Complies
116	5580 MHz	11.37	24.00	Complies
140	5700 MHz	11.48	24.00	Complies

Configuration IEEE 802.11n Ant. B (20MHz)

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
36	5180 MHz	10.90	17.00	Complies
40	5200 MHz	10.86	17.00	Complies
48	5240 MHz	10.43	17.00	Complies
52	5260 MHz	10.47	24.00	Complies
56	5280 MHz	10.71	24.00	Complies
64	5320 MHz	9.38	24.00	Complies
100	5500 MHz	9.33	24.00	Complies
116	5580 MHz	11.16	24.00	Complies
140	5700 MHz	10.70	24.00	Complies

Configuration IEEE 802.11n Ant. A+Ant. B (20MHz)

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
36	5180 MHz	13.85	17.00	Complies
40	5200 MHz	13.51	17.00	Complies
48	5240 MHz	12.83	17.00	Complies
52	5260 MHz	13.26	24.00	Complies
56	5280 MHz	13.32	24.00	Complies
64	5320 MHz	13.25	24.00	Complies
100	5500 MHz	13.06	24.00	Complies
116	5580 MHz	14.28	24.00	Complies
140	5700 MHz	14.12	24.00	Complies

Configuration IEEE 802.11n Ant. A (40MHz)

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
38	5190 MHz	11.68	17.00	Complies
46	5230 MHz	11.51	17.00	Complies
54	5270 MHz	11.94	24.00	Complies
62	5310 MHz	10.59	24.00	Complies
102	5510 MHz	10.18	24.00	Complies
110	5550 MHz	9.72	24.00	Complies
134	5670 MHz	11.16	24.00	Complies

Configuration IEEE 802.11n Ant. B (40MHz)


Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
38	5190 MHz	10.53	17.00	Complies
46	5230 MHz	11.22	17.00	Complies
54	5270 MHz	10.83	24.00	Complies
62	5310 MHz	11.66	24.00	Complies
102	5510 MHz	11.37	24.00	Complies
110	5550 MHz	10.69	24.00	Complies
134	5670 MHz	11.36	24.00	Complies

Configuration IEEE 802.11n Ant. A+Ant. B (40MHz)

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
38	5190 MHz	14.15	17.00	Complies
46	5230 MHz	14.38	17.00	Complies
54	5270 MHz	14.43	24.00	Complies
62	5310 MHz	14.17	24.00	Complies
102	5510 MHz	13.83	24.00	Complies
110	5550 MHz	13.24	24.00	Complies
134	5670 MHz	14.27	24.00	Complies


For Single Chain:

Channel Output Power Plot on Configuration IEEE 802.11a / 5180 MHz

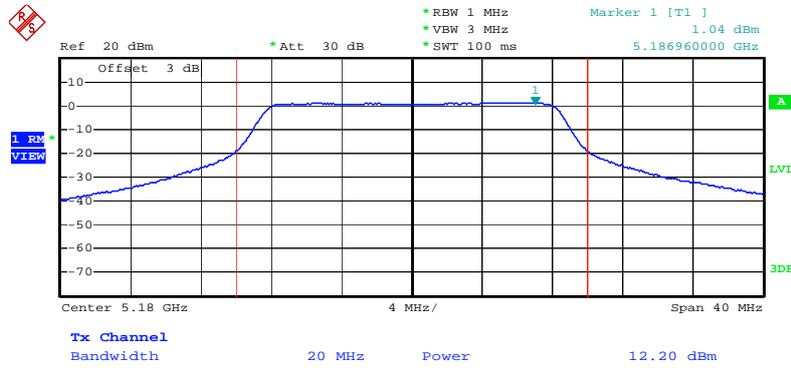


Date: 14.MAY.2010 20:18:09

Channel Output Power Plot on Configuration IEEE 802.11a / 5200 MHz

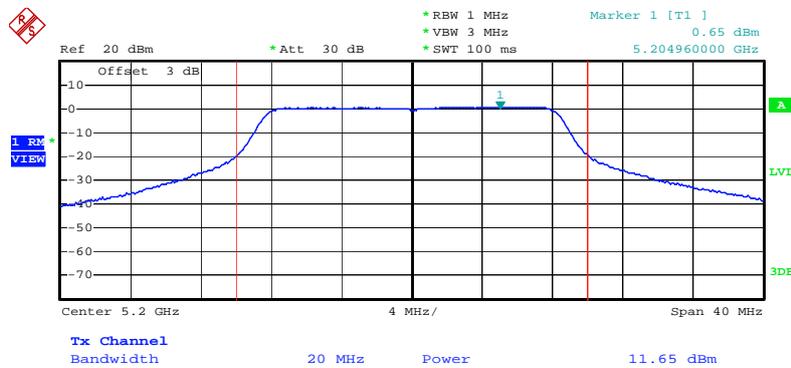


Date: 14.MAY.2010 20:19:37

Channel Output Power Plot on Configuration IEEE 802.11a / 5240 MHz

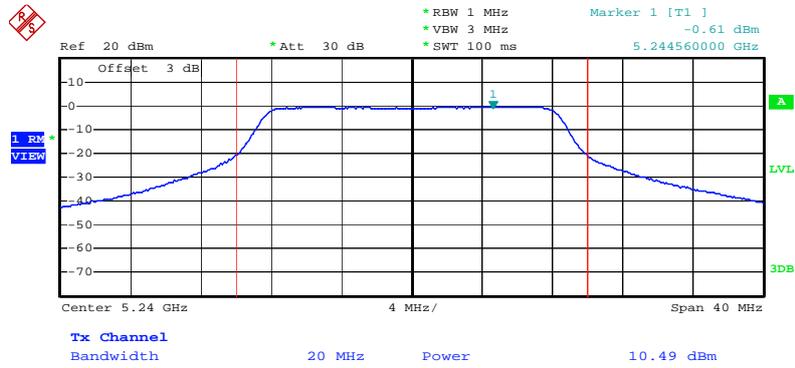


Date: 14.MAY.2010 20:21:11

Channel Output Power Plot on Configuration IEEE 802.11a / 5260 MHz

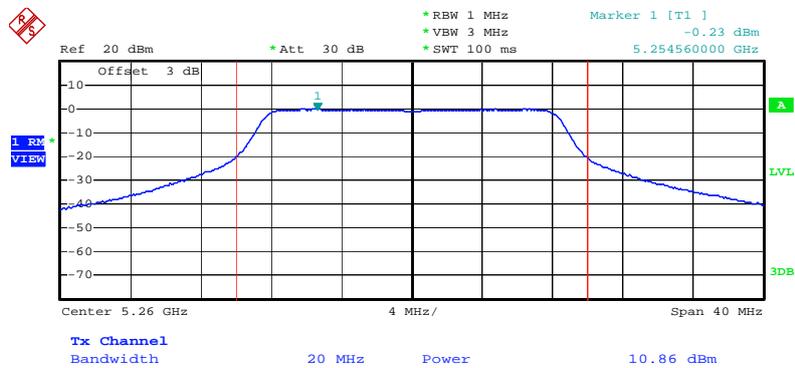


Date: 14.MAY.2010 20:22:41

Channel Output Power Plot on Configuration IEEE 802.11a / 5280 MHz

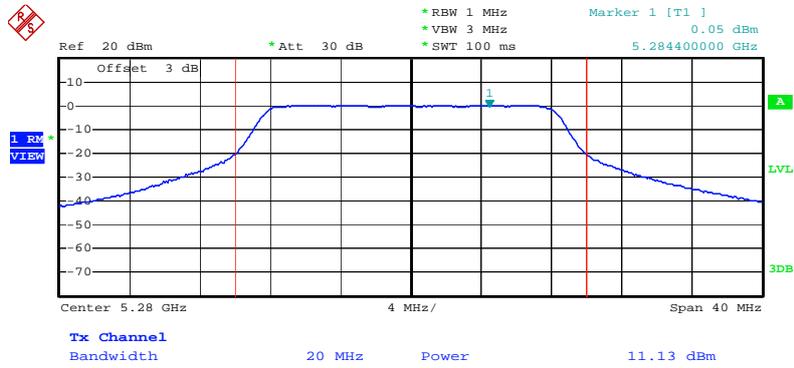


Date: 14.MAY.2010 20:24:13

Channel Output Power Plot on Configuration IEEE 802.11a / 5320 MHz

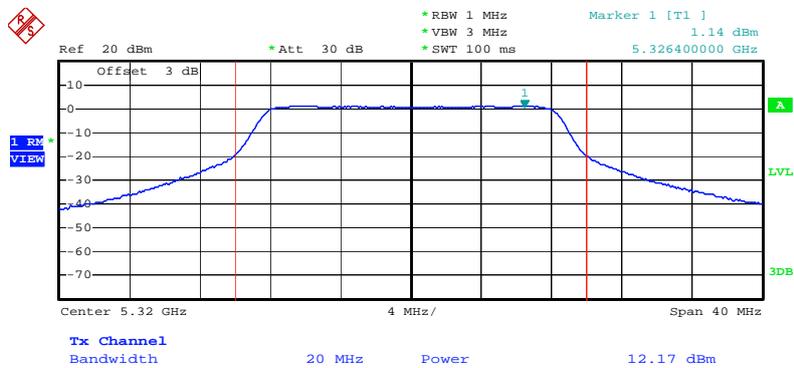


Date: 14.MAY.2010 20:25:46

Channel Output Power Plot on Configuration IEEE 802.11a / 5500 MHz

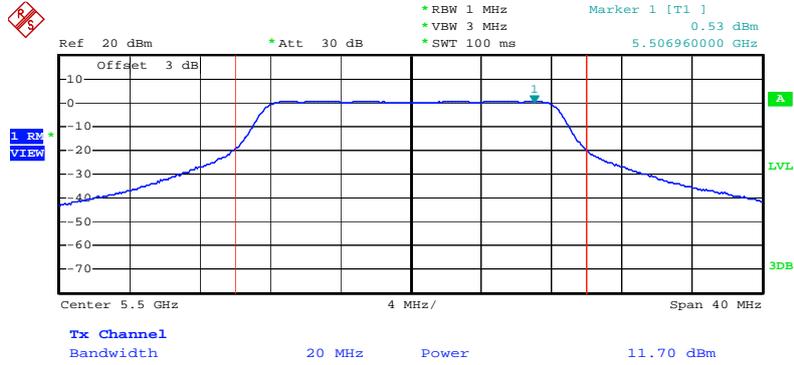


Date: 14.MAY.2010 20:27:59

Channel Output Power Plot on Configuration IEEE 802.11a / 5580 MHz

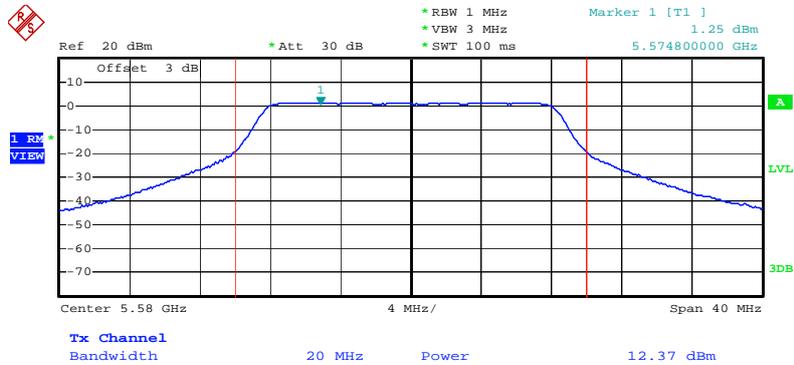


Date: 14.MAY.2010 20:29:45

Channel Output Power Plot on Configuration IEEE 802.11a / 5700 MHz

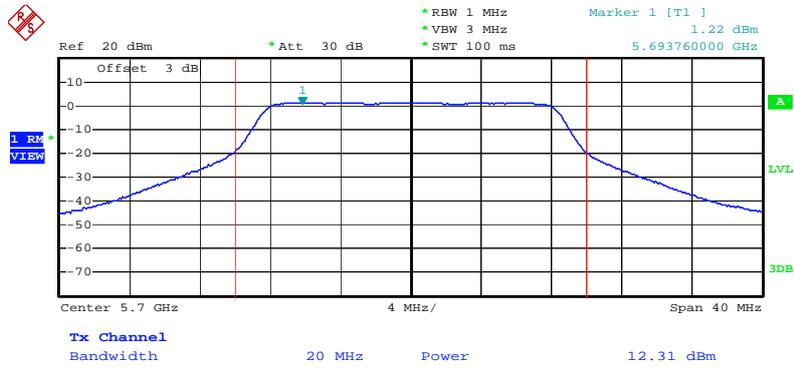


Date: 14.MAY.2010 20:31:23

Channel Output Power Plot on Configuration IEEE 802.11n (20MHz) / 5180 MHz

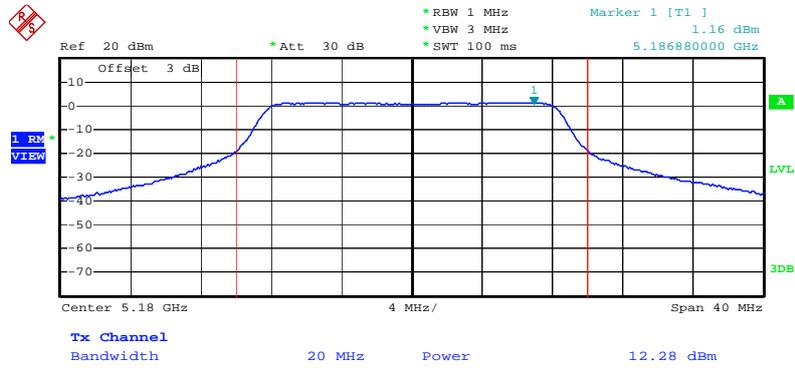


Date: 14.MAY.2010 14:30:28

Channel Output Power Plot on Configuration IEEE 802.11n (20MHz) / 5200 MHz

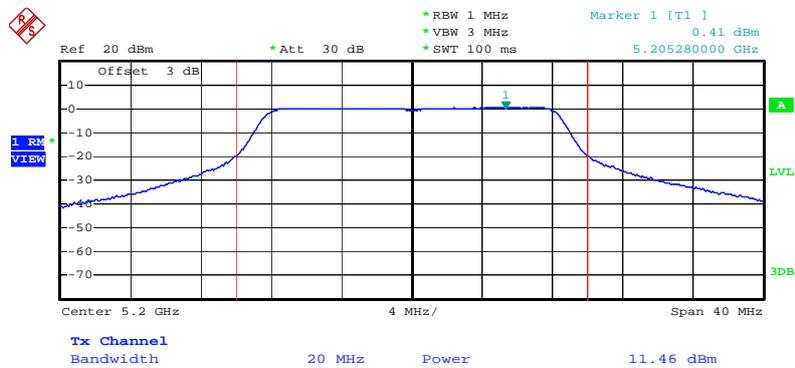


Date: 14.MAY.2010 14:34:21

Channel Output Power Plot on Configuration IEEE 802.11n (20MHz) / 5240 MHz

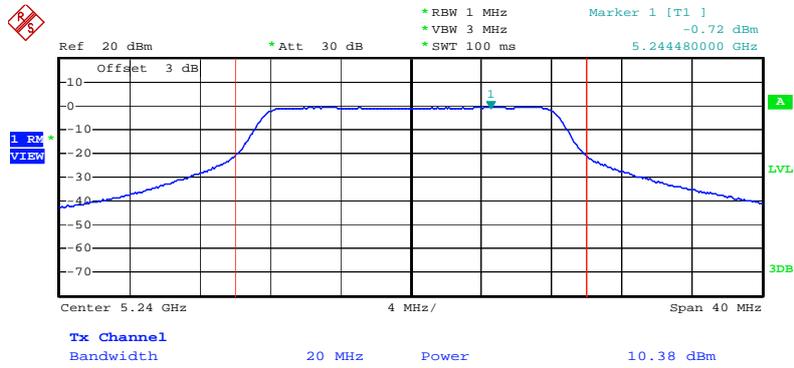


Date: 14.MAY.2010 14:36:07

Channel Output Power Plot on Configuration IEEE 802.11n (20MHz) / 5260 MHz

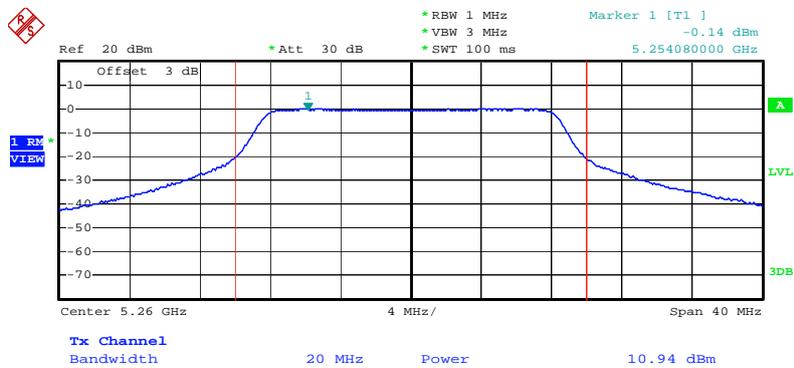


Date: 14.MAY.2010 14:39:10

Channel Output Power Plot on Configuration IEEE 802.11n (20MHz) / 5280 MHz

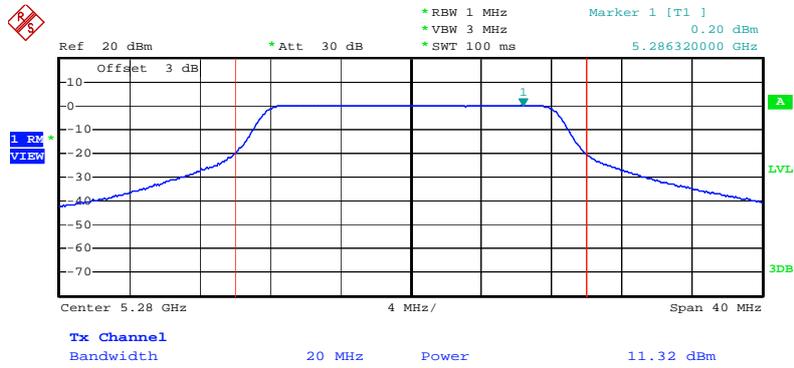


Date: 14.MAY.2010 14:41:09

Channel Output Power Plot on Configuration IEEE 802.11n (20MHz) / 5320 MHz

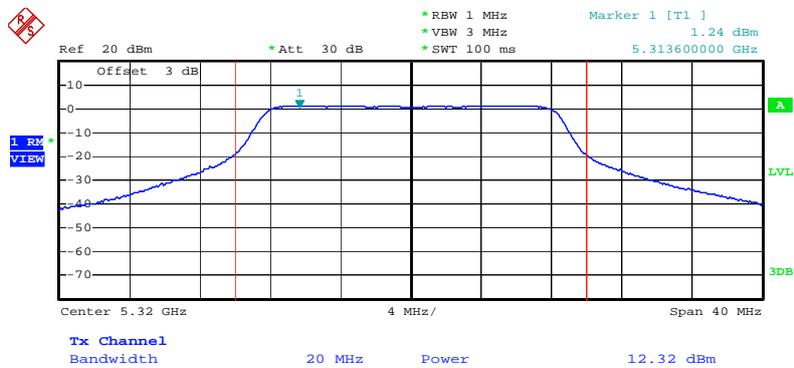


Date: 14.MAY.2010 14:44:34

Channel Output Power Plot on Configuration IEEE 802.11n (20MHz) / 5500 MHz

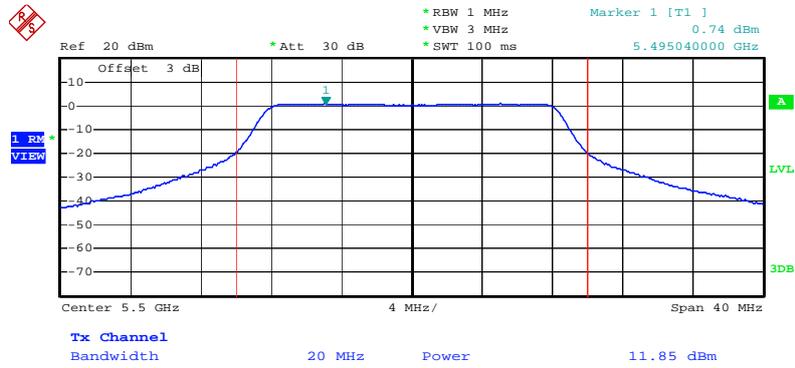


Date: 14.MAY.2010 14:47:59

Channel Output Power Plot on Configuration IEEE 802.11n (20MHz) / 5580 MHz

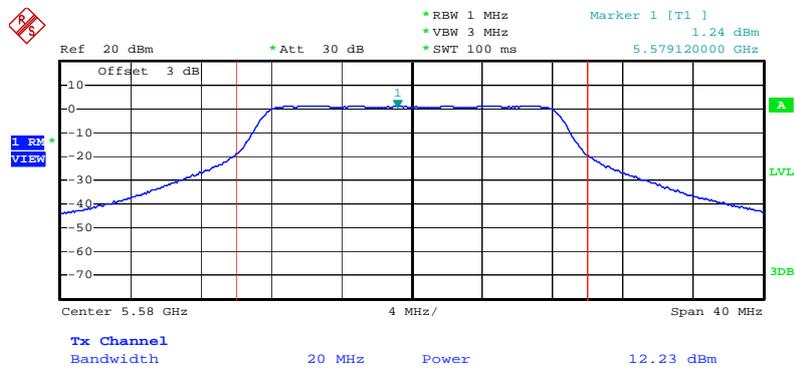


Date: 14.MAY.2010 14:50:44

Channel Output Power Plot on Configuration IEEE 802.11n (20MHz) / 5700 MHz

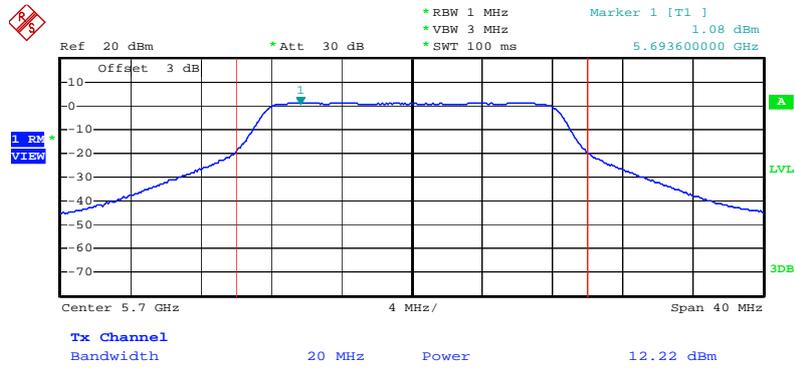


Date: 14.MAY.2010 14:55:25

Channel Output Power Plot on Configuration IEEE 802.11n (40MHz) / 5190 MHz

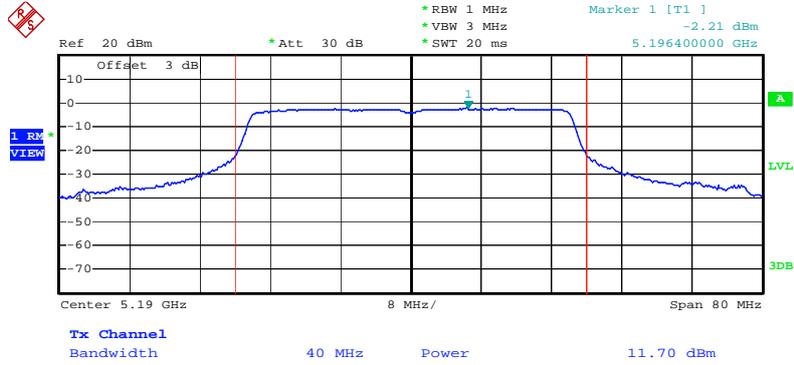


Date: 14.MAY.2010 16:17:16

Channel Output Power Plot on Configuration IEEE 802.11n (40MHz) / 5230 MHz

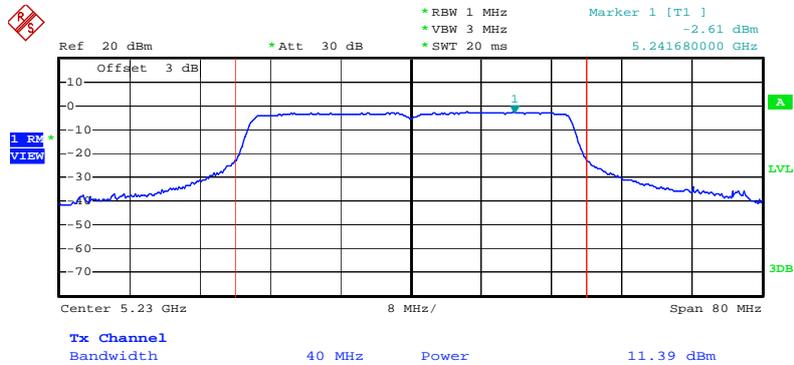


Date: 14.MAY.2010 16:20:10

Channel Output Power Plot on Configuration IEEE 802.11n (40MHz) / 5270 MHz

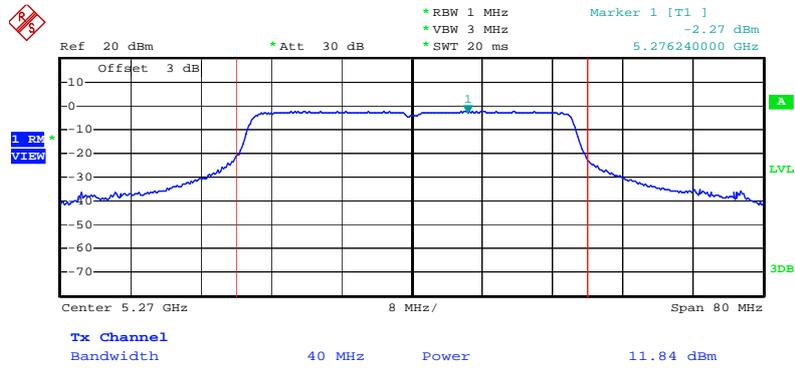


Date: 14.MAY.2010 16:21:53

Channel Output Power Plot on Configuration IEEE 802.11n (40MHz) / 5310 MHz

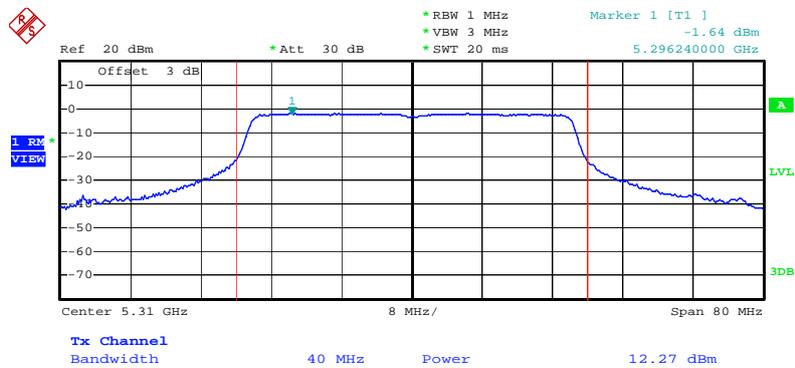


Date: 14.MAY.2010 16:23:27

Channel Output Power Plot on Configuration IEEE 802.11n (40MHz) / 5510 MHz

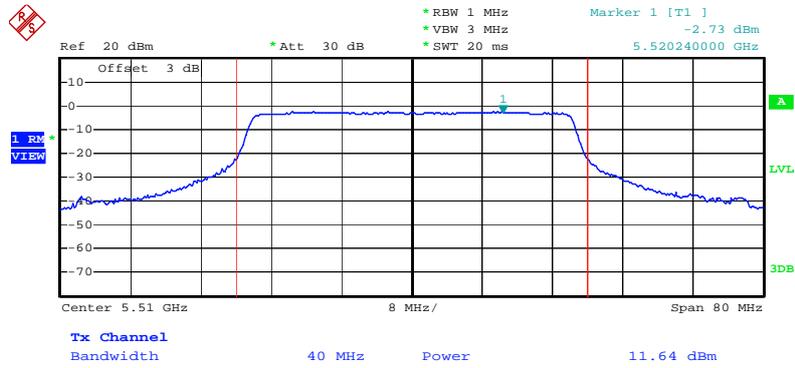


Date: 14.MAY.2010 16:24:58

Channel Output Power Plot on Configuration IEEE 802.11n (40MHz) / 5550 MHz

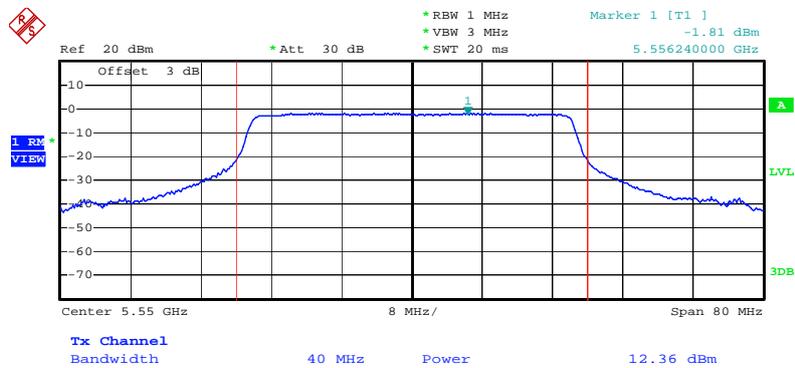

Date: 14.MAY.2010 16:26:40


Channel Output Power Plot on Configuration IEEE 802.11n (40MHz) / 5670 MHz

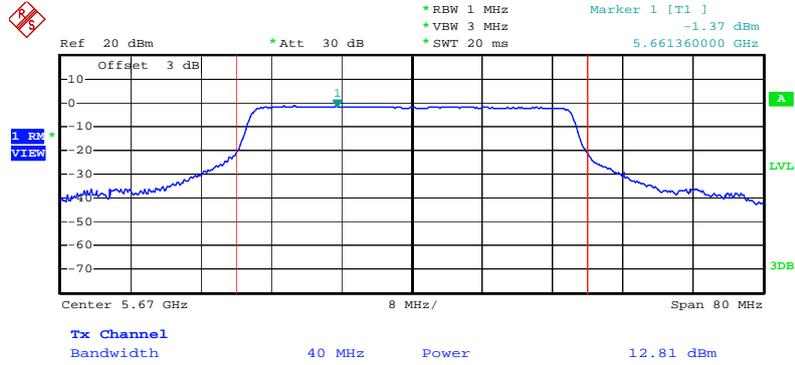

Date: 14.MAY.2010 16:28:16


For Two Chain:

Channel Output Power Plot on Configuration IEEE 802.11n Ant. A (20MHz) / 5180 MHz

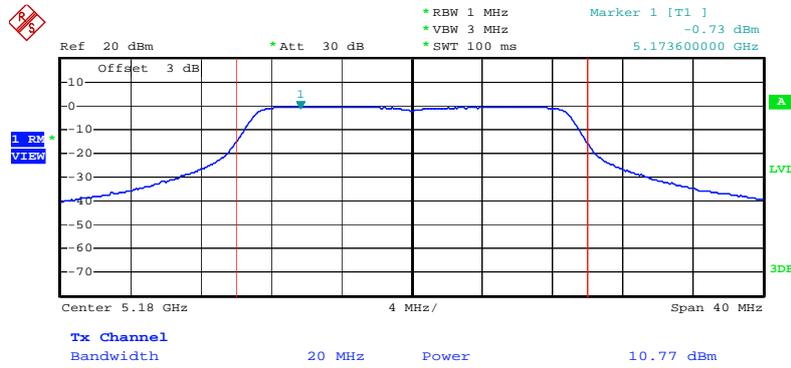


Date: 14.MAY.2010 18:06:34

Channel Output Power Plot on Configuration IEEE 802.11n Ant. A (20MHz) / 5200 MHz

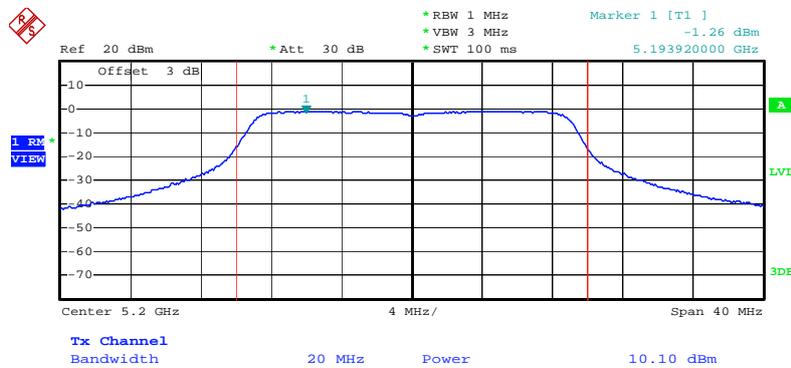


Date: 14.MAY.2010 18:07:17

Channel Output Power Plot on Configuration IEEE 802.11n Ant. A (20MHz) / 5240 MHz

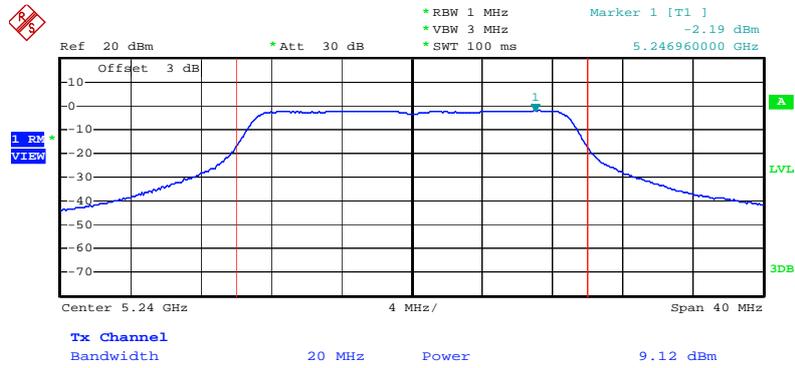


Date: 14.MAY.2010 18:08:26

Channel Output Power Plot on Configuration IEEE 802.11n Ant. A (20MHz) / 5260 MHz

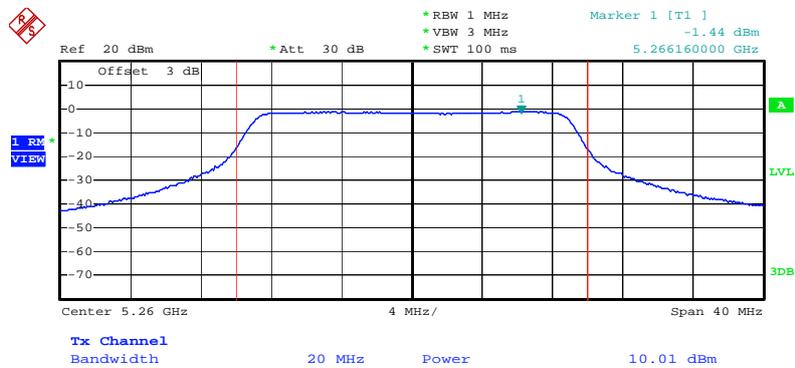


Date: 14.MAY.2010 18:09:16

Channel Output Power Plot on Configuration IEEE 802.11n Ant. A (20MHz) / 5280 MHz

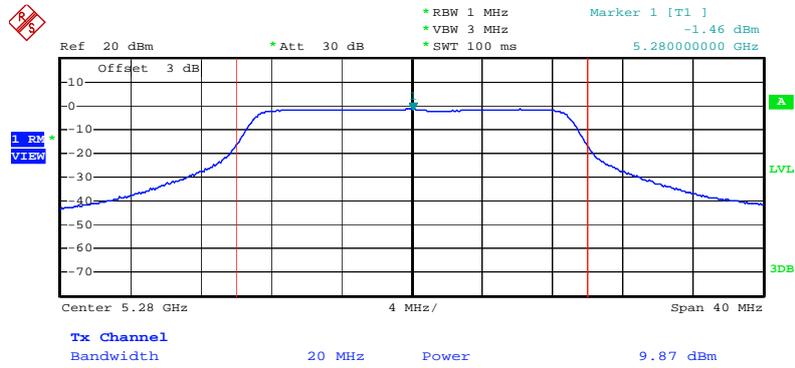


Date: 14.MAY.2010 18:11:06

Channel Output Power Plot on Configuration IEEE 802.11n Ant. A (20MHz) / 5320 MHz

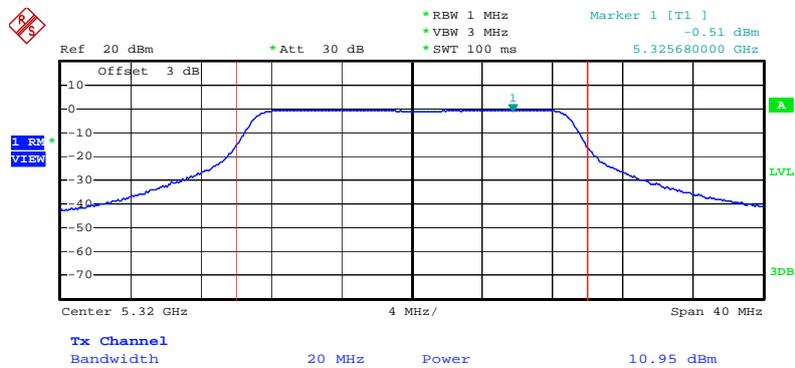


Date: 14.MAY.2010 18:12:09

Channel Output Power Plot on Configuration IEEE 802.11n Ant. A (20MHz) / 5500 MHz

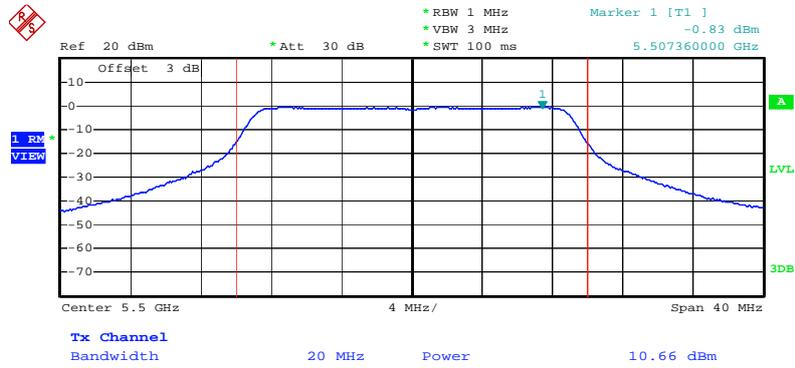


Date: 14.MAY.2010 18:13:48

Channel Output Power Plot on Configuration IEEE 802.11n Ant. A (20MHz) / 5580 MHz

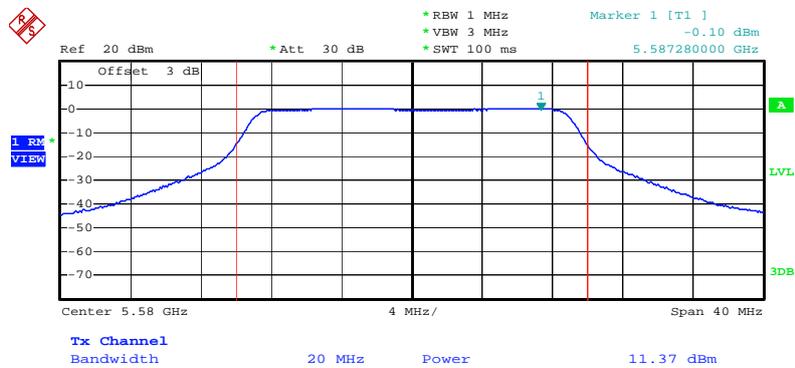


Date: 14.MAY.2010 18:14:31

Channel Output Power Plot on Configuration IEEE 802.11n Ant. A (20MHz) / 5700 MHz

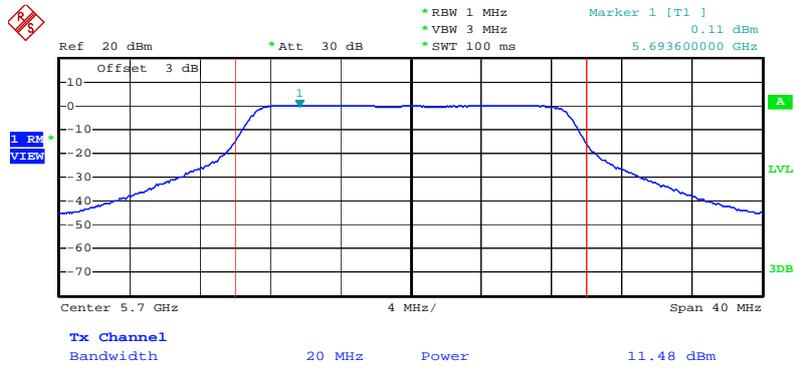


Date: 14.MAY.2010 18:15:23

Channel Output Power Plot on Configuration IEEE 802.11n Ant. B (20MHz) / 5180 MHz

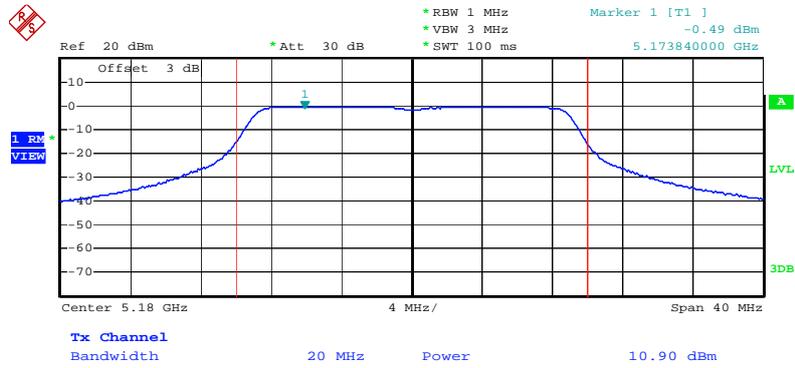


Date: 14.MAY.2010 18:05:51

Channel Output Power Plot on Configuration IEEE 802.11n Ant. B (20MHz) / 5200 MHz

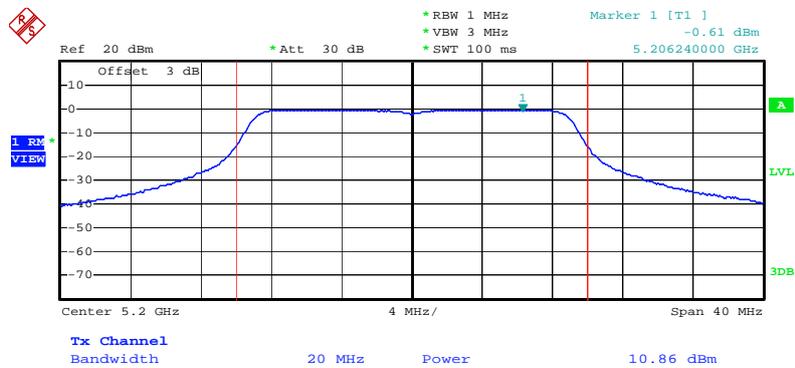


Date: 14.MAY.2010 18:04:43

Channel Output Power Plot on Configuration IEEE 802.11n Ant. B (20MHz) / 5240 MHz

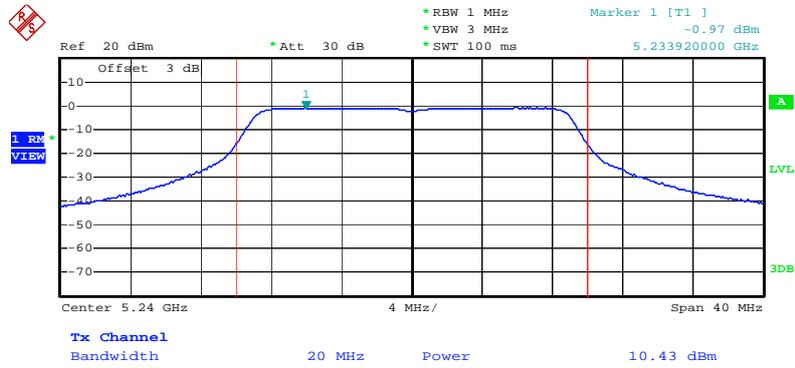


Date: 14.MAY.2010 18:03:52

Channel Output Power Plot on Configuration IEEE 802.11n Ant. B (20MHz) / 5260 MHz

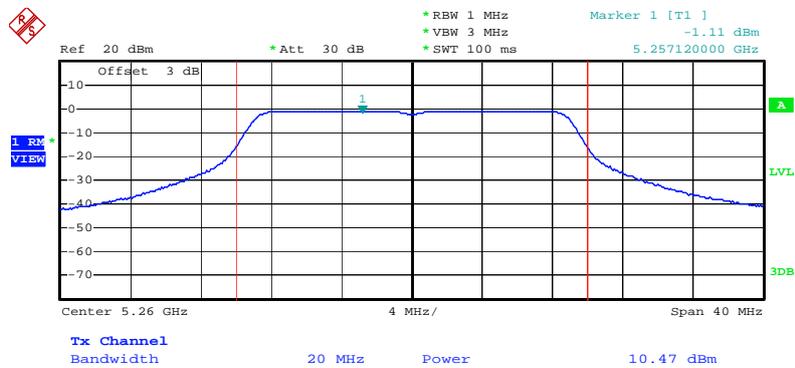


Date: 14.MAY.2010 18:03:18

Channel Output Power Plot on Configuration IEEE 802.11n Ant. B (20MHz) / 5280 MHz

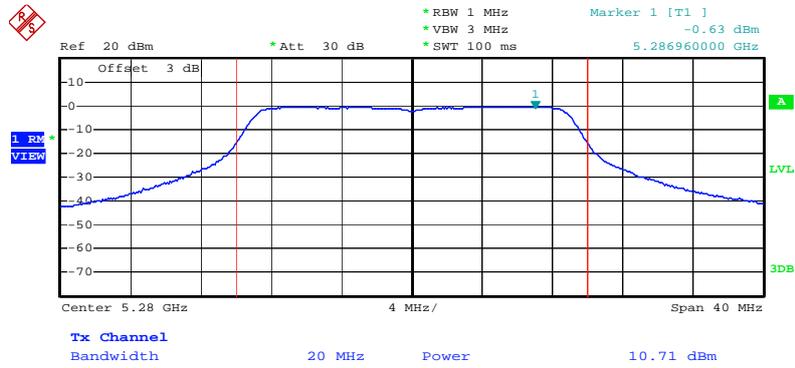


Date: 14.MAY.2010 18:02:40

Channel Output Power Plot on Configuration IEEE 802.11n Ant. B (20MHz) / 5320 MHz

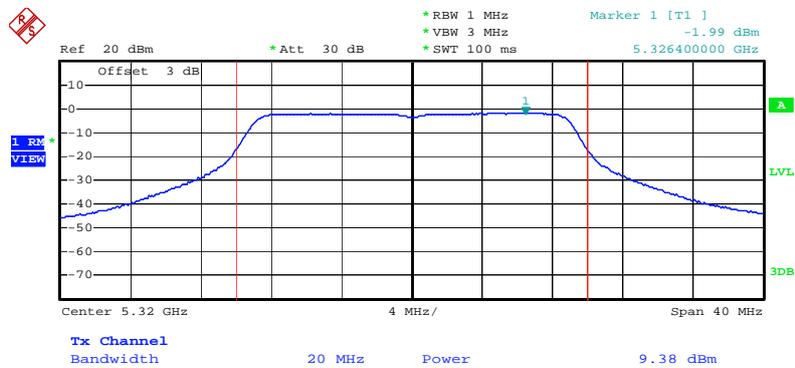


Date: 14.MAY.2010 18:00:53

Channel Output Power Plot on Configuration IEEE 802.11n Ant. B (20MHz) / 5500 MHz

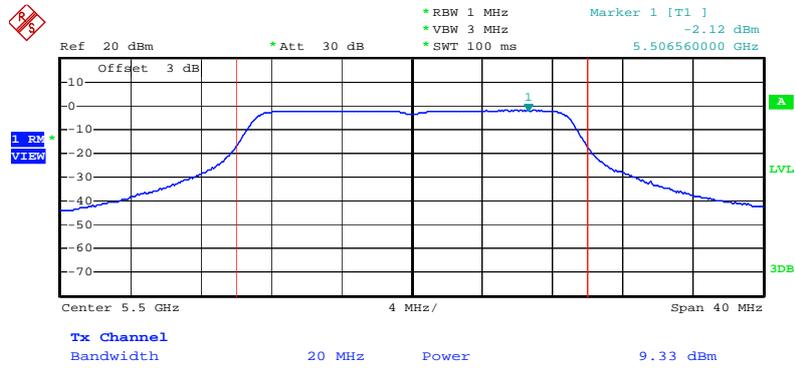

Date: 14.MAY.2010 18:30:46

Channel Output Power Plot on Configuration IEEE 802.11n Ant. B (20MHz) / 5580 MHz

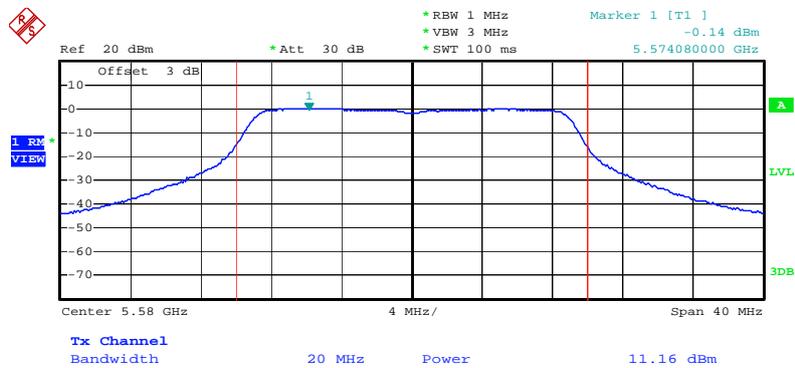


Date: 14.MAY.2010 17:59:10

Channel Output Power Plot on Configuration IEEE 802.11n Ant. B (20MHz) / 5700 MHz




Date: 14.MAY.2010 17:57:59

Channel Output Power Plot on Configuration IEEE 802.11n Ant. A (40MHz) / 5190 MHz

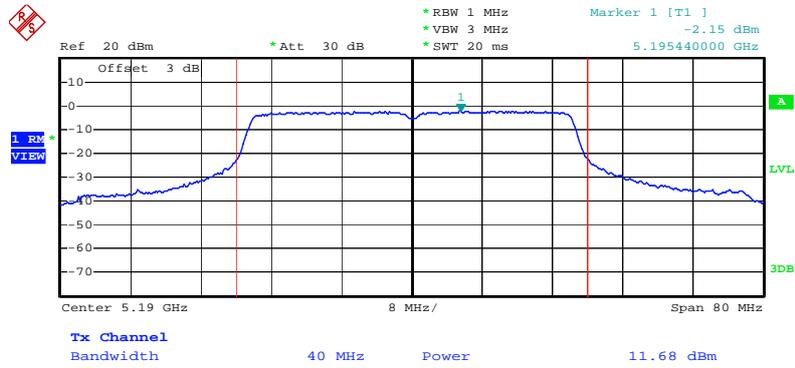


Date: 14.MAY.2010 17:45:55

Channel Output Power Plot on Configuration IEEE 802.11n Ant. A (40MHz) / 5230 MHz

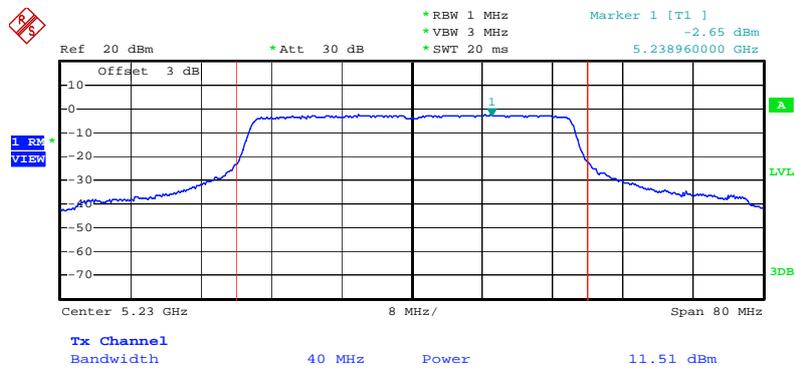


Date: 14.MAY.2010 17:44:19

Channel Output Power Plot on Configuration IEEE 802.11n Ant. A (40MHz) / 5270 MHz

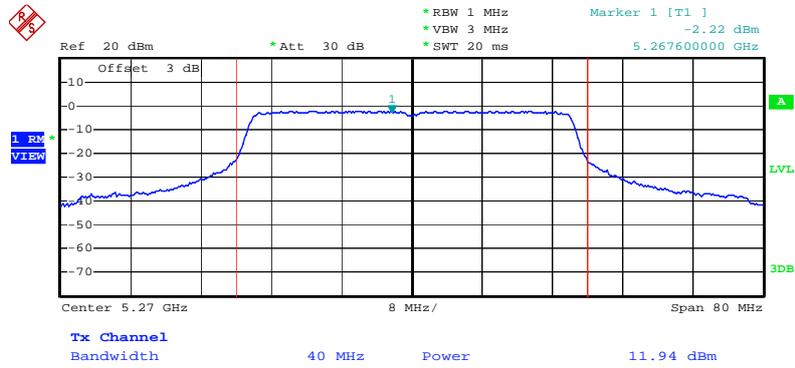


Date: 14.MAY.2010 17:38:53

Channel Output Power Plot on Configuration IEEE 802.11n Ant. A (40MHz) / 5310 MHz

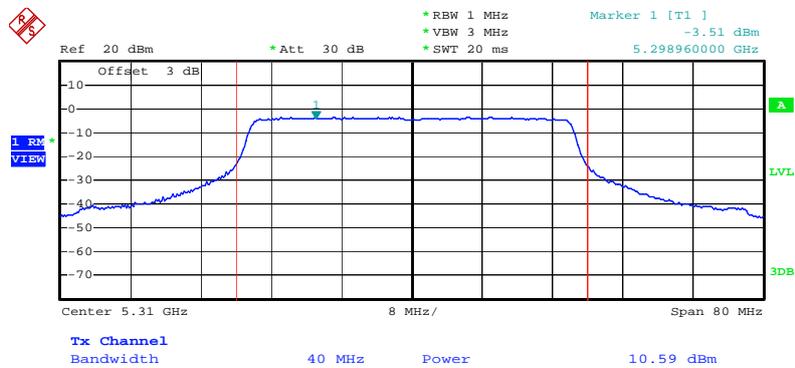


Date: 14.MAY.2010 17:36:35

Channel Output Power Plot on Configuration IEEE 802.11n Ant. A (40MHz) / 5510 MHz

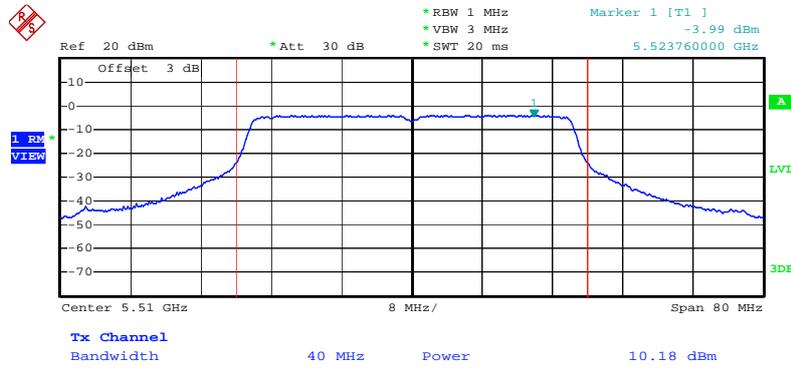


Date: 14.MAY.2010 17:35:30

Channel Output Power Plot on Configuration IEEE 802.11n Ant. A (40MHz) / 5550 MHz

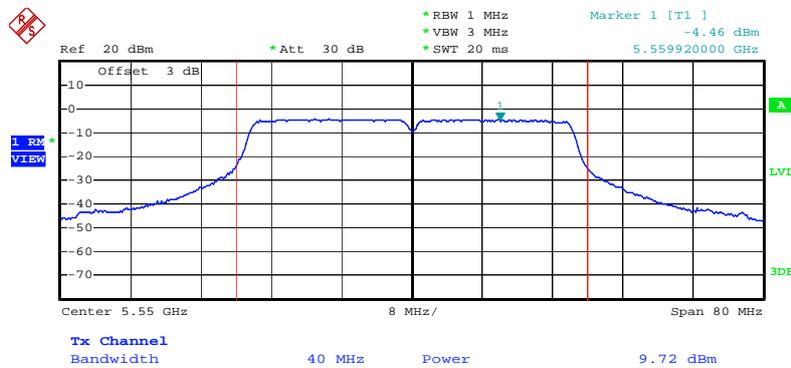


Date: 14.MAY.2010 18:33:31

Channel Output Power Plot on Configuration IEEE 802.11n Ant. A (40MHz) / 5670 MHz

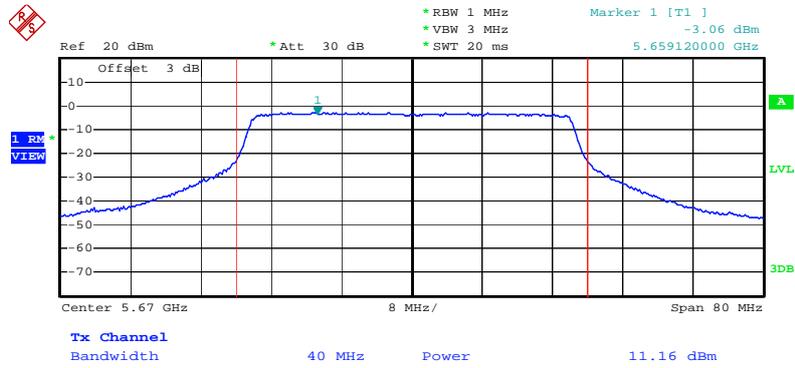


Date: 14.MAY.2010 17:25:21

Channel Output Power Plot on Configuration IEEE 802.11n Ant. B (40MHz) / 5190 MHz

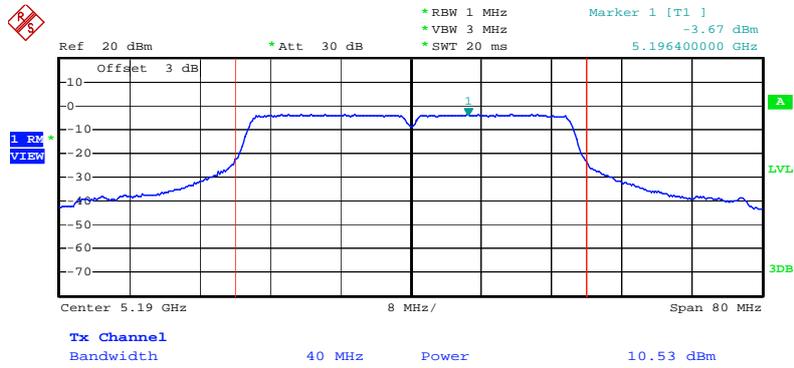


Date: 14.MAY.2010 17:47:03

Channel Output Power Plot on Configuration IEEE 802.11n Ant. B (40MHz) / 5230 MHz

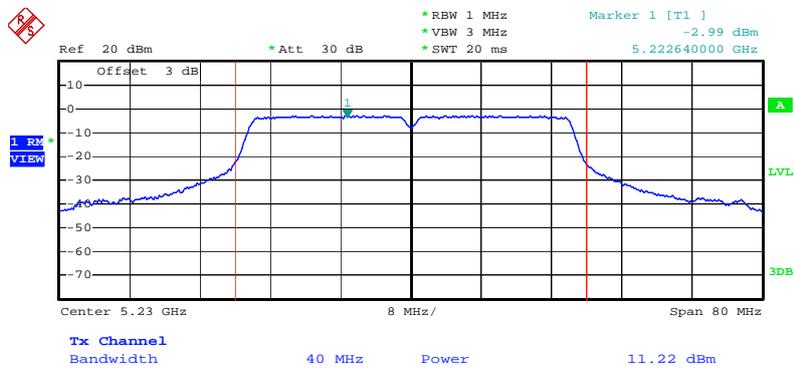


Date: 14.MAY.2010 17:48:31

Channel Output Power Plot on Configuration IEEE 802.11n Ant. B (40MHz) / 5270 MHz

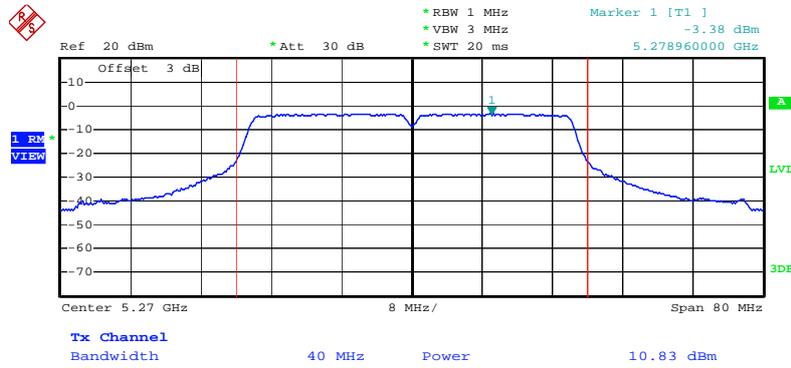


Date: 14.MAY.2010 17:49:32

Channel Output Power Plot on Configuration IEEE 802.11n Ant. B (40MHz) / 5310 MHz

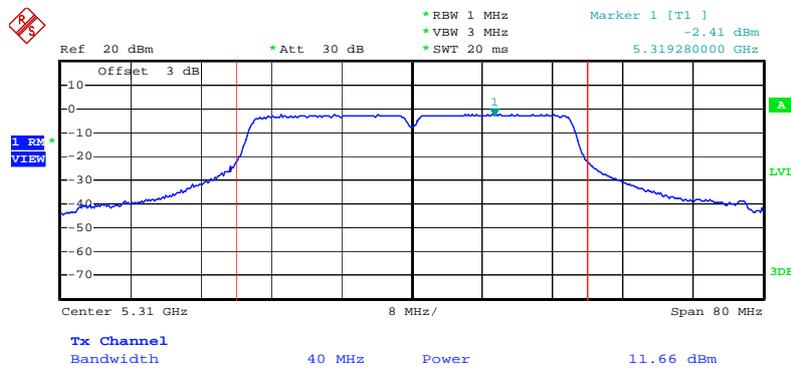


Date: 14.MAY.2010 17:50:21

Channel Output Power Plot on Configuration IEEE 802.11n Ant. B (40MHz) / 5510 MHz

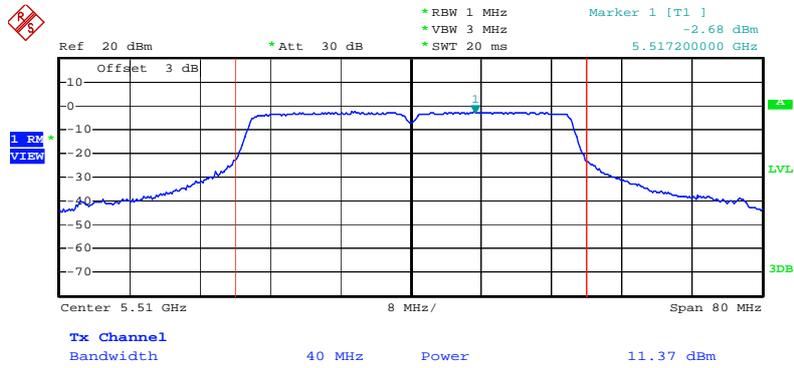


Date: 14.MAY.2010 17:51:14

Channel Output Power Plot on Configuration IEEE 802.11n Ant. B (40MHz) / 5550 MHz

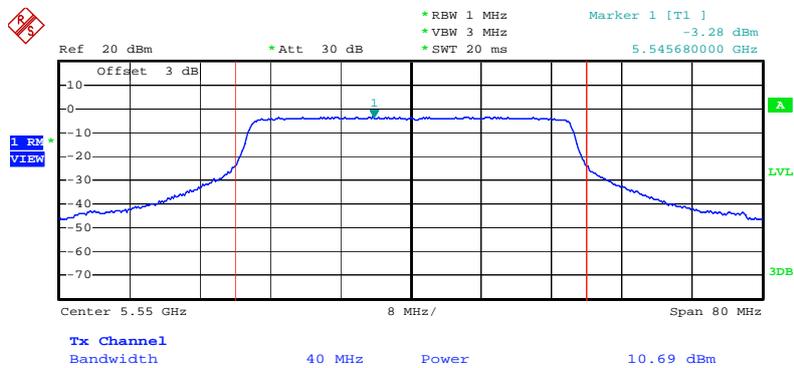

Date: 14.MAY.2010 18:39:53

Channel Output Power Plot on Configuration IEEE 802.11n Ant. B (40MHz) / 5670 MHz

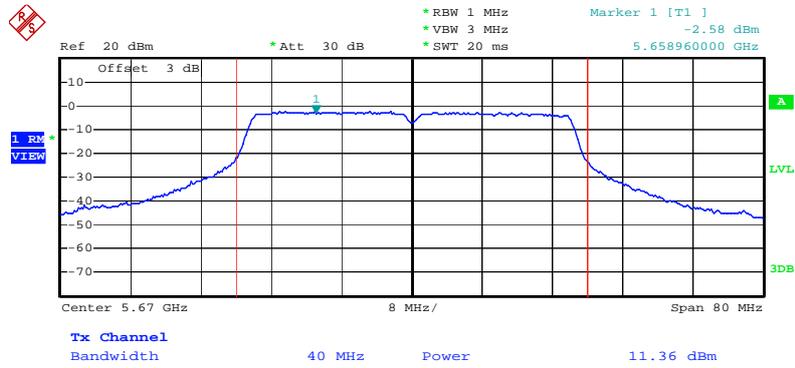

Date: 14.MAY.2010 17:55:36

3.4 Power Spectral Density Measurement

3.4.1 Limit

The power spectral density is defined as the highest level of power in dBm per MHz generated by the transmitter within the power envelope. The following table is power spectral density limits and decrease power density limit rule refer to section 3.3.1.

Frequency Range	Power Spectral Density limit (dBm/MHz)
5.15~5.25 GHz	4
5.25-5.35 GHz	11
5.725-5.825	17

3.4.2 Measuring Instruments and Setting


Please refer to section 4 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RB	1000 kHz
VB	3000 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

3.4.3 Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. Set RBW of spectrum analyzer to 1000kHz and VBW to 3000kHz. Set Detector to Peak, Trace to Max Hold. Mark the frequency with maximum peak power as the center of the display of the spectrum.
3. Measuring multiple antennas, the connectors are required to link with Spectrum Analyzer through a combiner.

3.4.4 Test Setup Layout

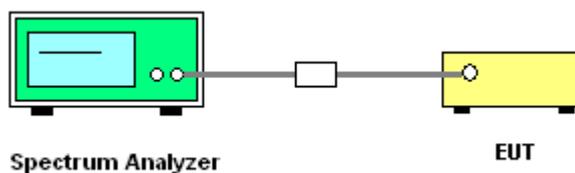

3.4.5 Test Deviation

There is no deviation with the original standard.

3.4.6 EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

3.4.7 Test Result of Power Spectral Density

Final Test Date	May 14, 2010	Test Site No.	TH01-HY
Temperature	22	Humidity	59%
Test Engineer	Sam	Configuration	802.11a/n

For Single Chain:

Configuration of IEEE 802.11a

Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
5180 MHz	1.84	4.00	Complies
5200 MHz	1.10	4.00	Complies
5240 MHz	0.02	4.00	Complies
5260 MHz	0.24	11.00	Complies
5280 MHz	0.55	11.00	Complies
5320 MHz	1.62	11.00	Complies
5500 MHz	1.08	11.00	Complies
5580 MHz	1.58	11.00	Complies
5700 MHz	1.62	11.00	Complies

Configuration IEEE 802.11n (20MHz)

Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
5180 MHz	1.61	4.00	Complies
5200 MHz	1.06	4.00	Complies
5240 MHz	0.23	4.00	Complies
5260 MHz	0.44	11.00	Complies
5280 MHz	0.76	11.00	Complies
5320 MHz	1.70	11.00	Complies
5500 MHz	1.18	11.00	Complies
5580 MHz	1.93	11.00	Complies
5700 MHz	1.49	11.00	Complies

Configuration IEEE 802.11n (40MHz)

Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
5190 MHz	-2.07	4.00	Complies
5230 MHz	-2.60	4.00	Complies
5270 MHz	-2.54	11.00	Complies
5310 MHz	-1.79	11.00	Complies
5510 MHz	-2.80	11.00	Complies
5550 MHz	-2.09	11.00	Complies
5670 MHz	-1.19	11.00	Complies

For Two Chain:

Configuration IEEE 802.11n Ant. A+Ant. B (20MHz)


Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
5180 MHz	3.12	4.00	Complies
5200 MHz	2.48	4.00	Complies
5240 MHz	0.47	4.00	Complies
5260 MHz	1.44	11.00	Complies
5280 MHz	2.35	11.00	Complies
5320 MHz	2.67	11.00	Complies
5500 MHz	2.00	11.00	Complies
5580 MHz	2.83	11.00	Complies
5700 MHz	2.40	11.00	Complies

Configuration IEEE 802.11n Ant. A+Ant. B (40MHz)

Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
5190 MHz	-0.44	4.00	Complies
5230 MHz	-1.61	4.00	Complies
5270 MHz	-1.24	11.00	Complies
5310 MHz	-0.54	11.00	Complies
5510 MHz	-1.24	11.00	Complies
5550 MHz	-0.58	11.00	Complies
5670 MHz	-0.27	11.00	Complies


For Single Chain:

Power Density Plot on Configuration IEEE 802.11a / 5180 MHz

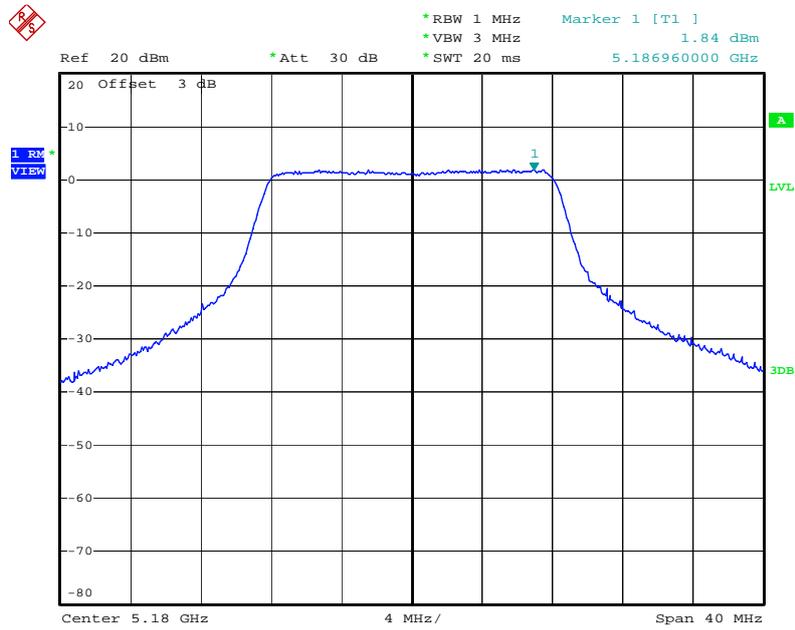


Date: 14.MAY.2010 20:18:23

Power Density Plot on Configuration IEEE 802.11a / 5200 MHz

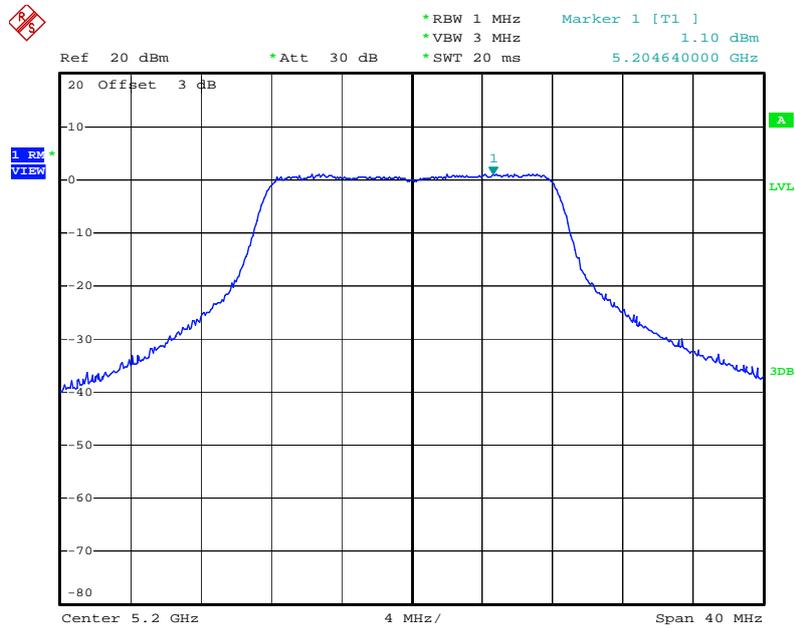


Date: 14.MAY.2010 20:19:51

Power Density Plot on Configuration IEEE 802.11a / 5240 MHz

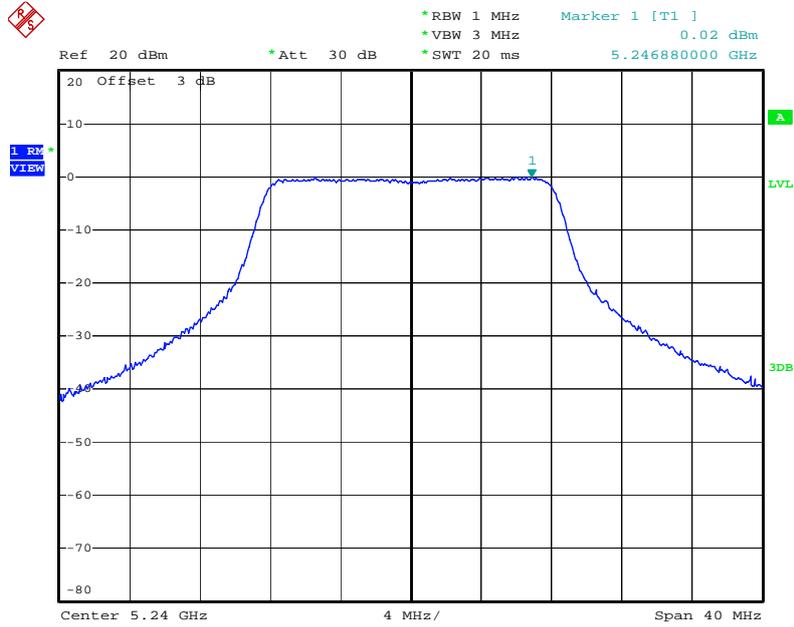


Date: 14.MAY.2010 20:21:24

Power Density Plot on Configuration IEEE 802.11a / 5260 MHz

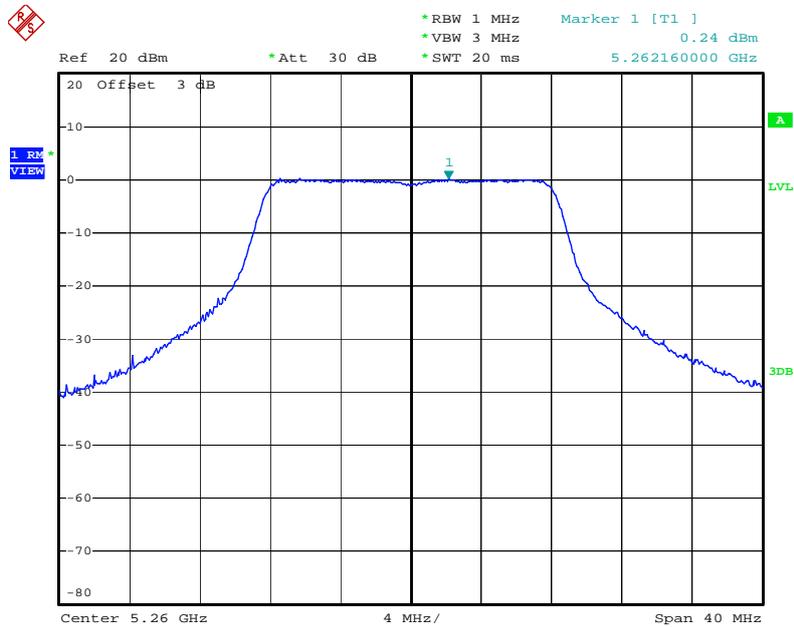


Date: 14.MAY.2010 20:22:56

Power Density Plot on Configuration IEEE 802.11a / 5280 MHz

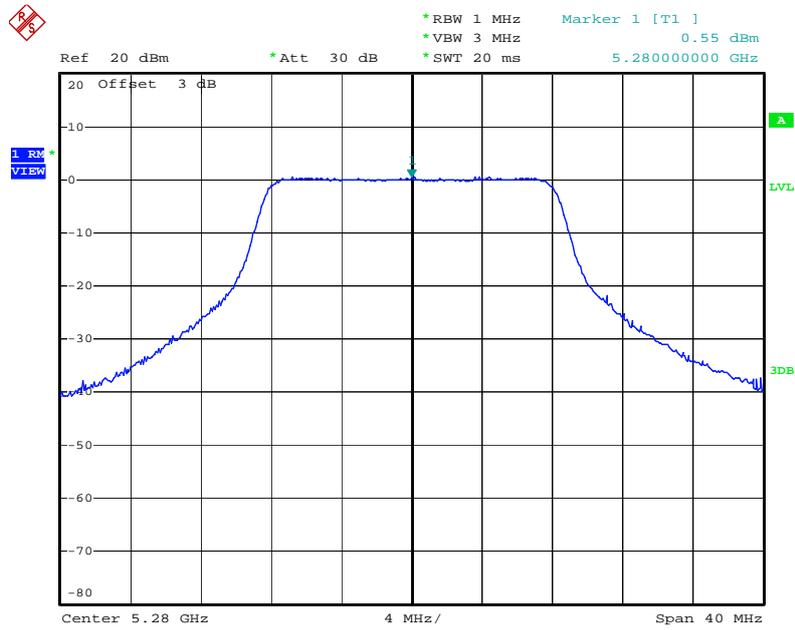


Date: 14.MAY.2010 20:24:26

Power Density Plot on Configuration IEEE 802.11a / 5320 MHz

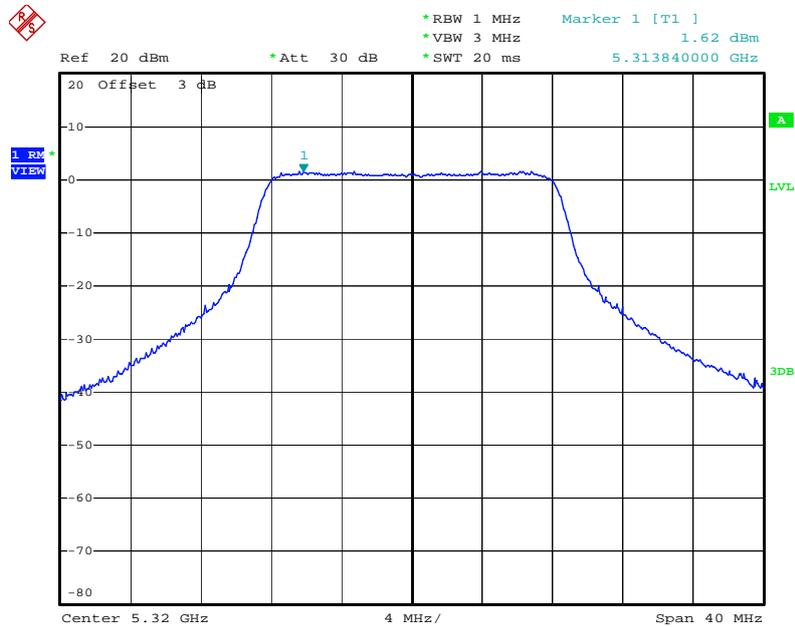


Date: 14.MAY.2010 20:26:00

Power Density Plot on Configuration IEEE 802.11a / 5500 MHz

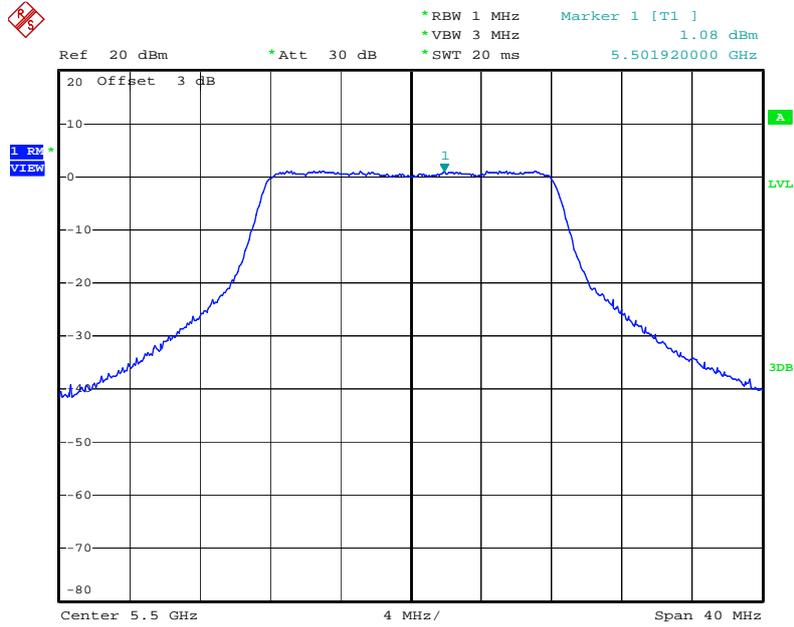


Date: 14.MAY.2010 20:28:12

Power Density Plot on Configuration IEEE 802.11a / 5580 MHz

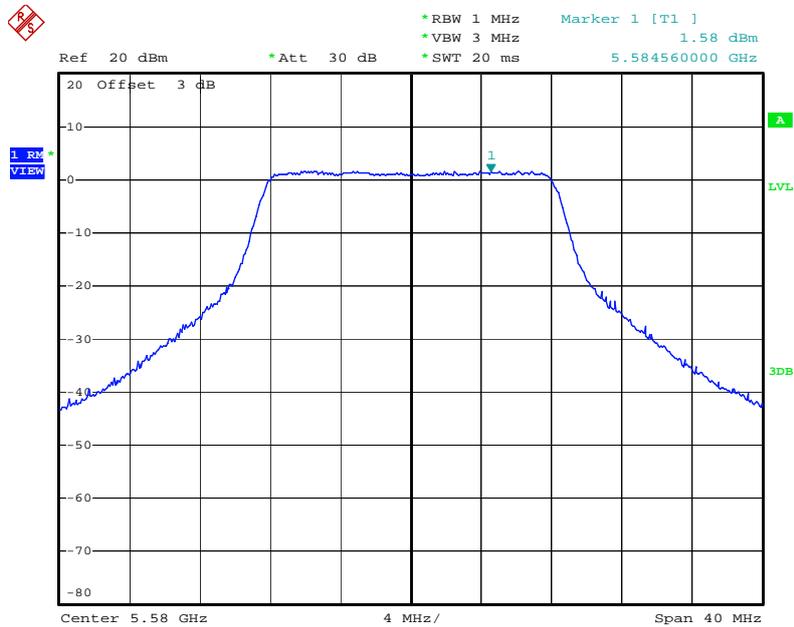


Date: 14.MAY.2010 20:29:58

Power Density Plot on Configuration IEEE 802.11a / 5700 MHz

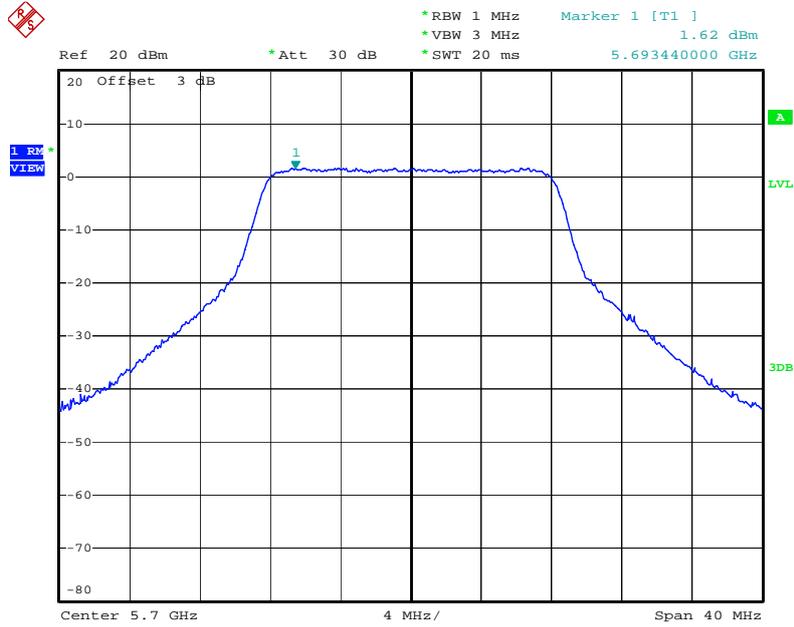


Date: 14.MAY.2010 20:31:36

Power Density Plot on Configuration IEEE 802.11n (20MHz) / 5180 MHz

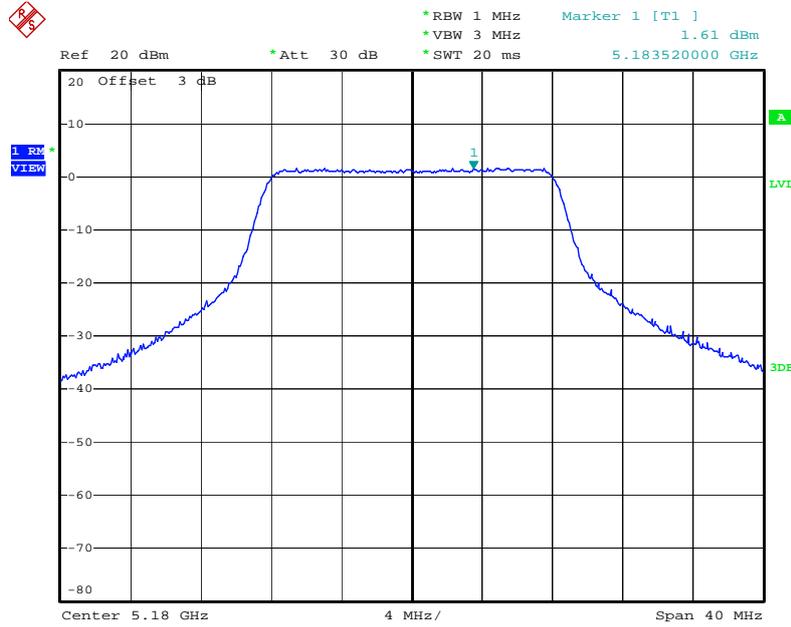


Date: 14.MAY.2010 14:30:41

Power Density Plot on Configuration IEEE 802.11n (20MHz) / 5200 MHz

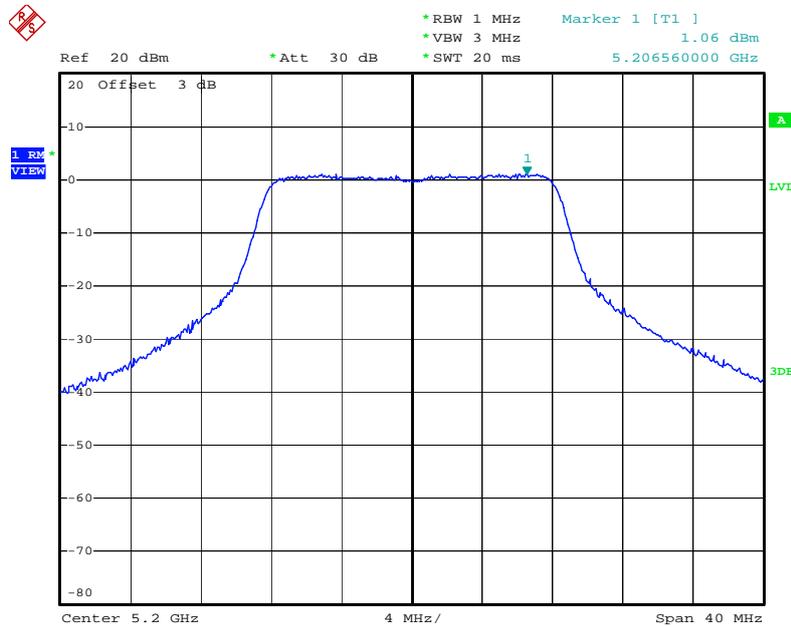


Date: 14.MAY.2010 14:34:34

Power Density Plot on Configuration IEEE 802.11n (20MHz) / 5240 MHz

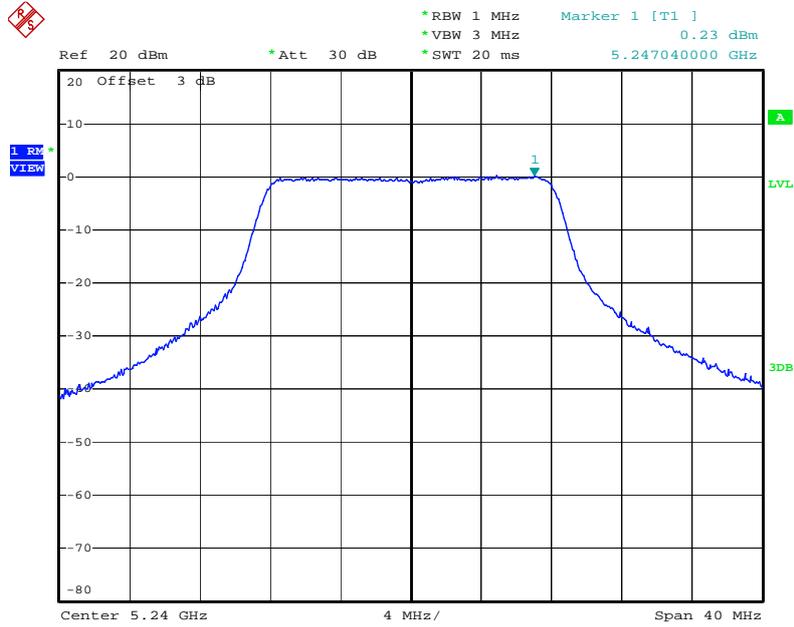


Date: 14.MAY.2010 14:36:21

Power Density Plot on Configuration IEEE 802.11n (20MHz) / 5260 MHz

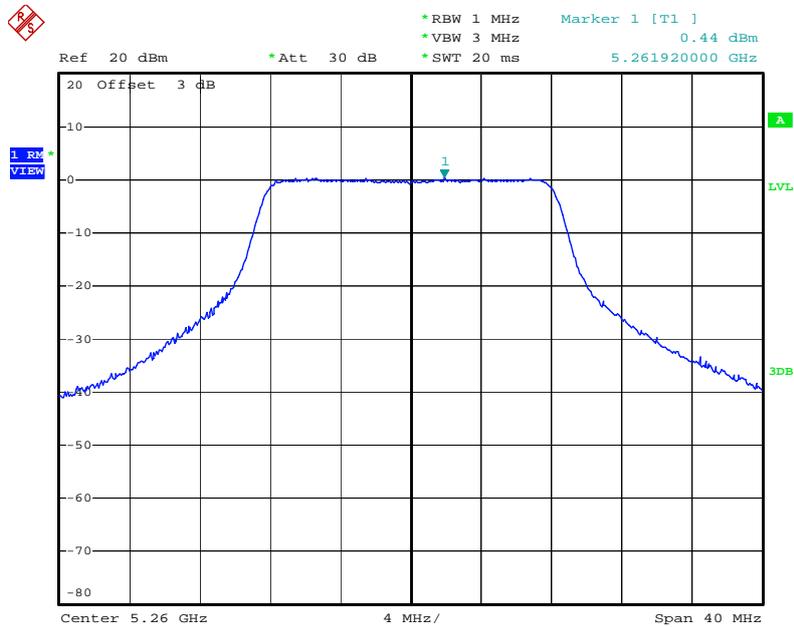


Date: 14.MAY.2010 14:39:24

Power Density Plot on Configuration IEEE 802.11n (20MHz) / 5280 MHz

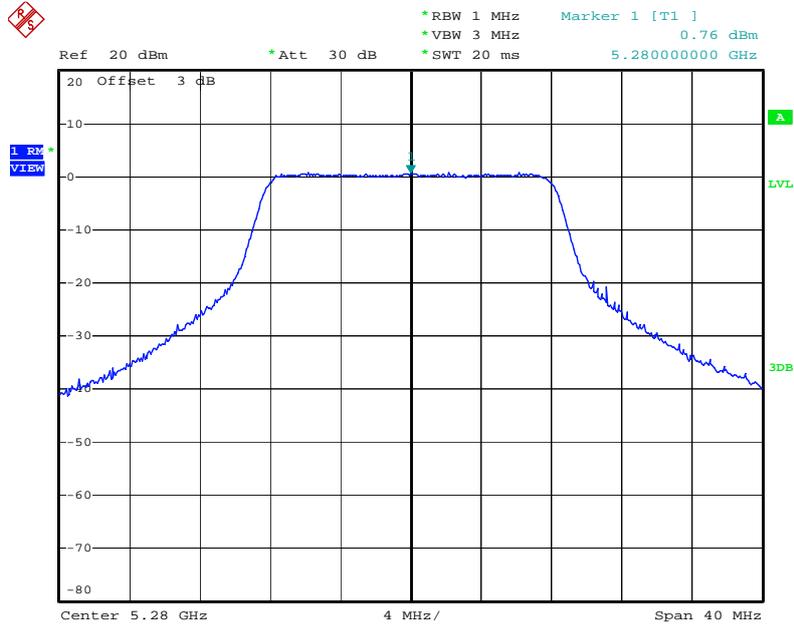


Date: 14.MAY.2010 14:41:22

Power Density Plot on Configuration IEEE 802.11n (20MHz) / 5320 MHz

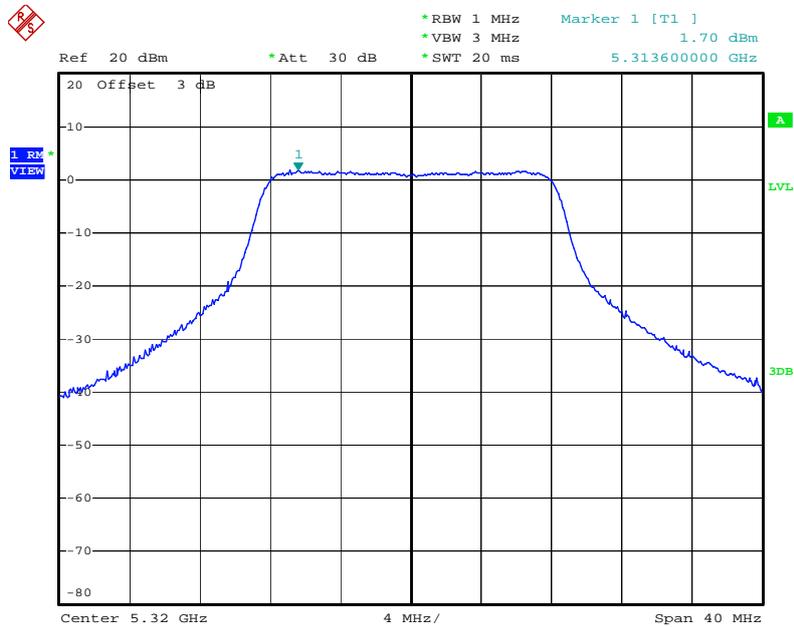


Date: 14.MAY.2010 14:44:47

Power Density Plot on Configuration IEEE 802.11n (20MHz) / 5500 MHz

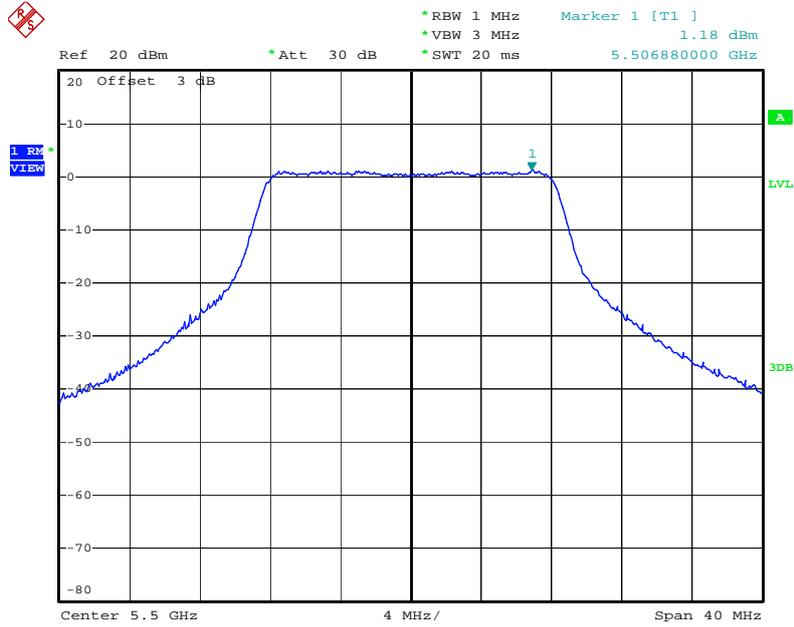


Date: 14.MAY.2010 14:48:12

Power Density Plot on Configuration IEEE 802.11n (20MHz) / 5580 MHz

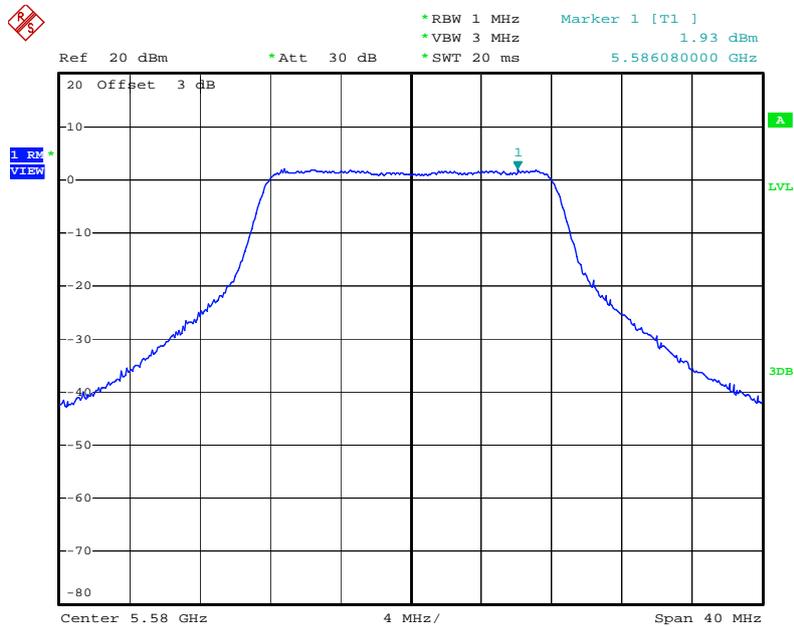


Date: 14.MAY.2010 14:50:57

Power Density Plot on Configuration IEEE 802.11n (20MHz) / 5700 MHz

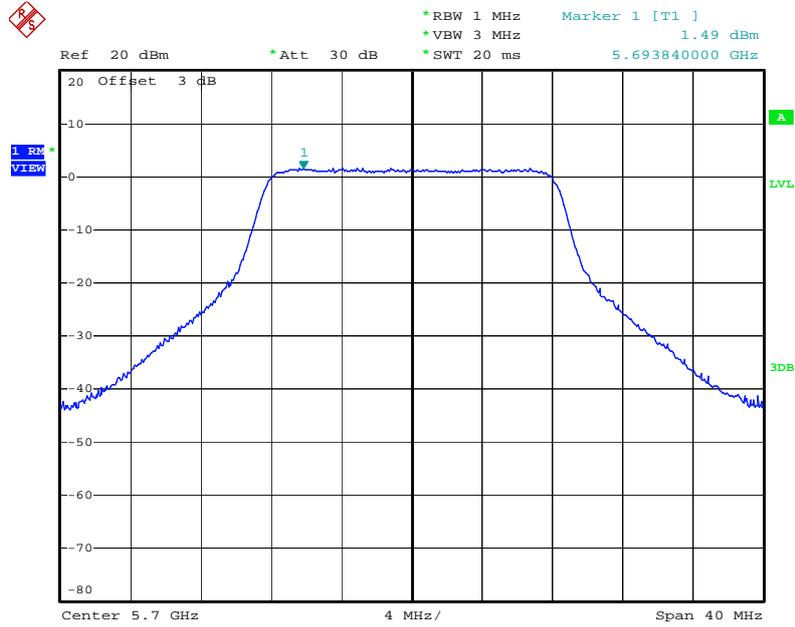


Date: 14.MAY.2010 14:55:38

Power Density Plot on Configuration IEEE 802.11n (40MHz) / 5190 MHz

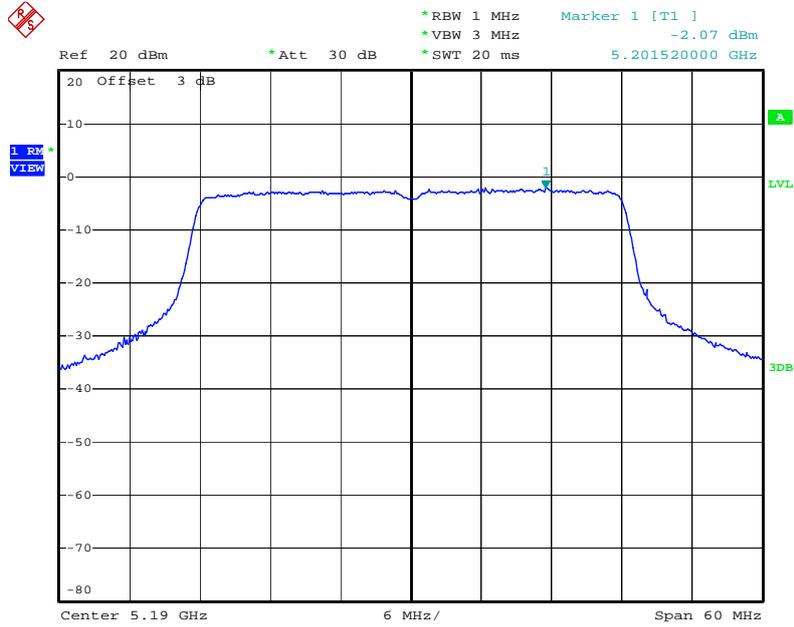


Date: 14.MAY.2010 16:17:30

Power Density Plot on Configuration IEEE 802.11n (40MHz) / 5230 MHz

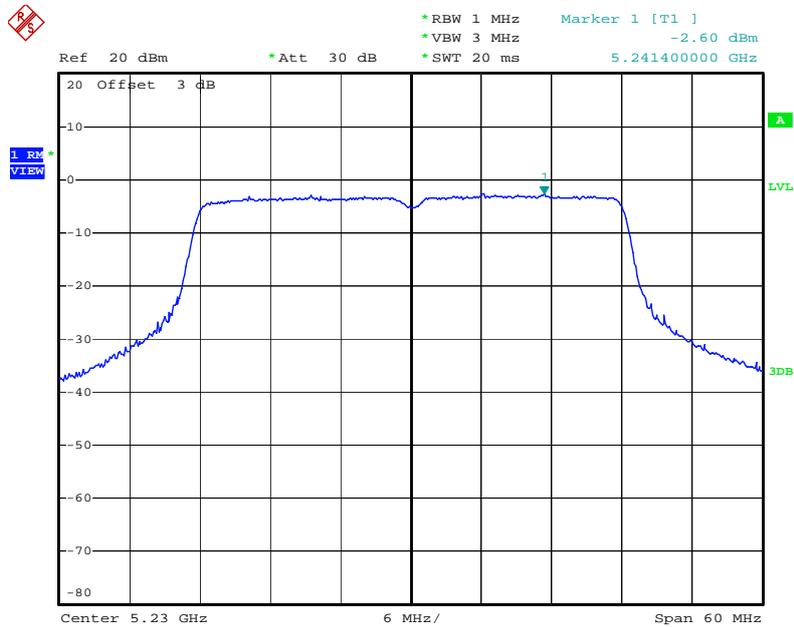


Date: 14.MAY.2010 16:20:23

Power Density Plot on Configuration IEEE 802.11n (40MHz) / 5270 MHz

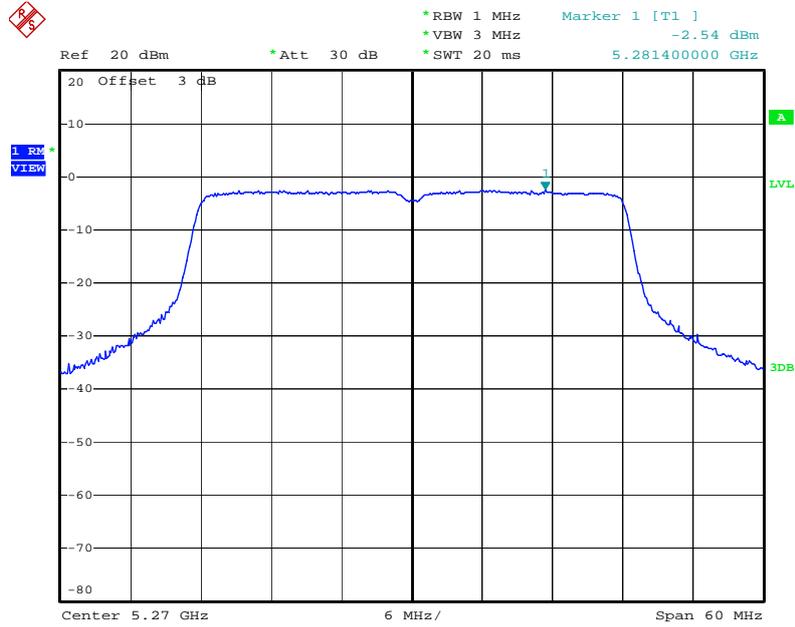


Date: 14.MAY.2010 16:22:07

Power Density Plot on Configuration IEEE 802.11n (40MHz) / 5310 MHz

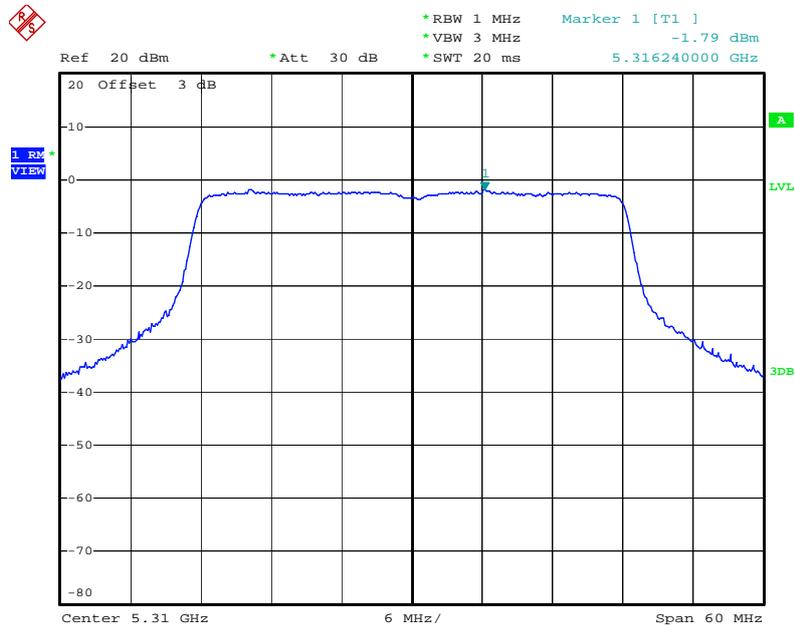


Date: 14.MAY.2010 16:23:40

Power Density Plot on Configuration IEEE 802.11n (40MHz) / 5510 MHz

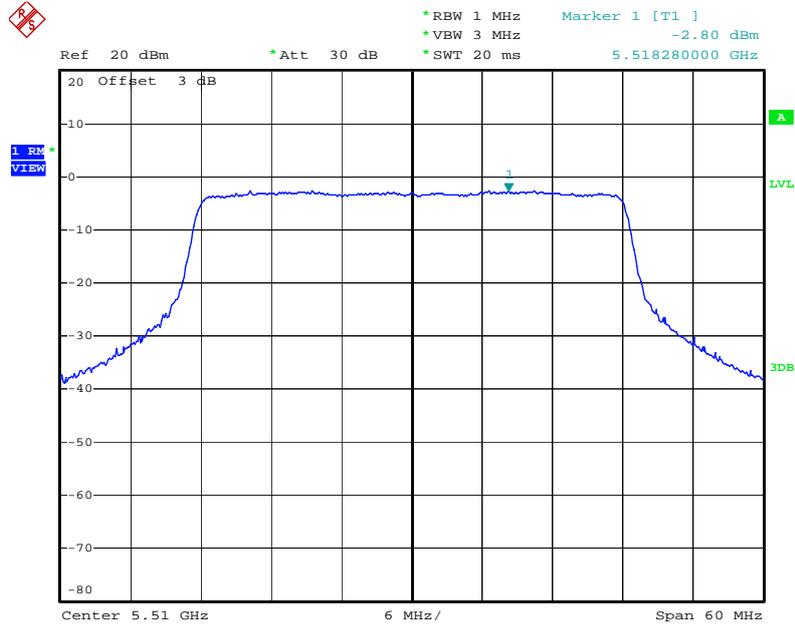


Date: 14.MAY.2010 16:25:11

Power Density Plot on Configuration IEEE 802.11n (40MHz) / 5550 MHz

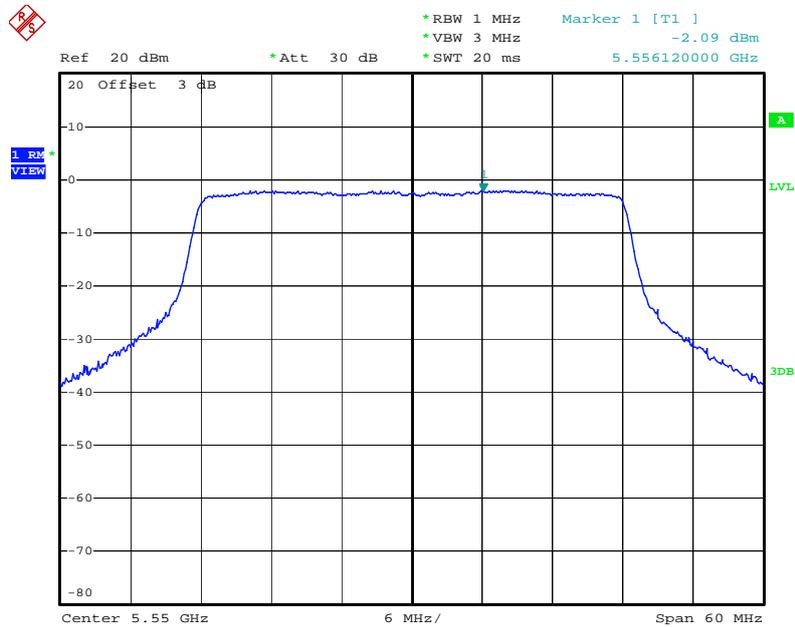

Date: 14.MAY.2010 16:26:54


Power Density Plot on Configuration IEEE 802.11n (40MHz) / 5670 MHz

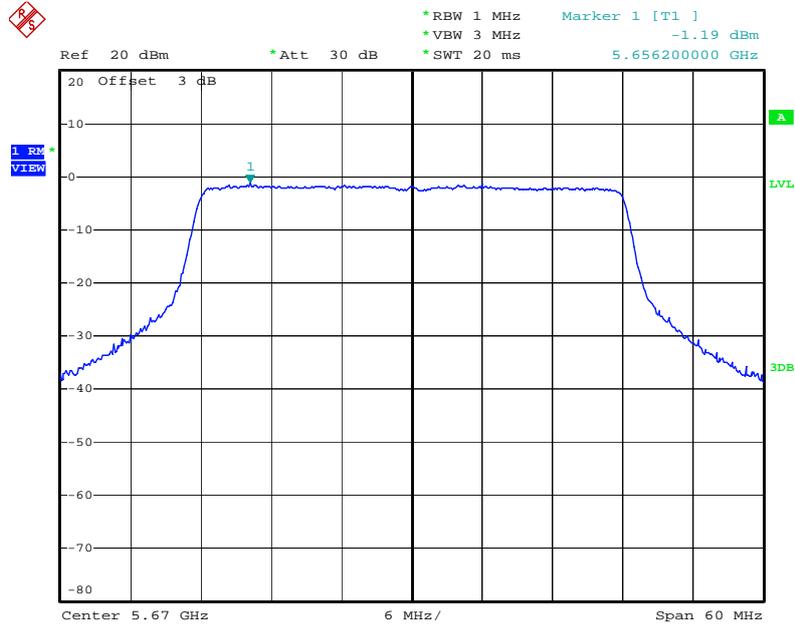

Date: 14.MAY.2010 16:28:30


For Two Chain:

Power Density Plot on Configuration IEEE 802.11n Ant. A+Ant. B (20MHz) / 5180 MHz

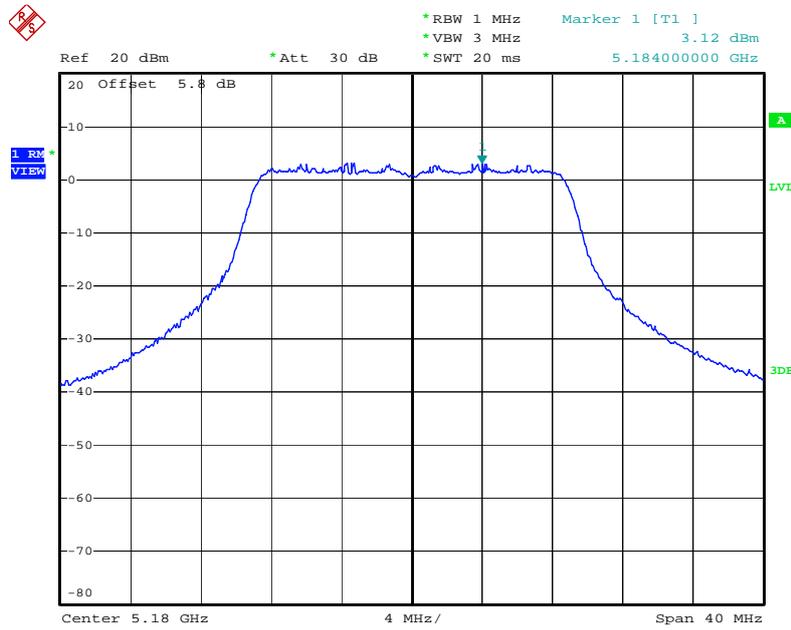


Date: 14.MAY.2010 18:54:40

Power Density Plot on Configuration IEEE 802.11n Ant. A+Ant. B (20MHz) / 5200 MHz

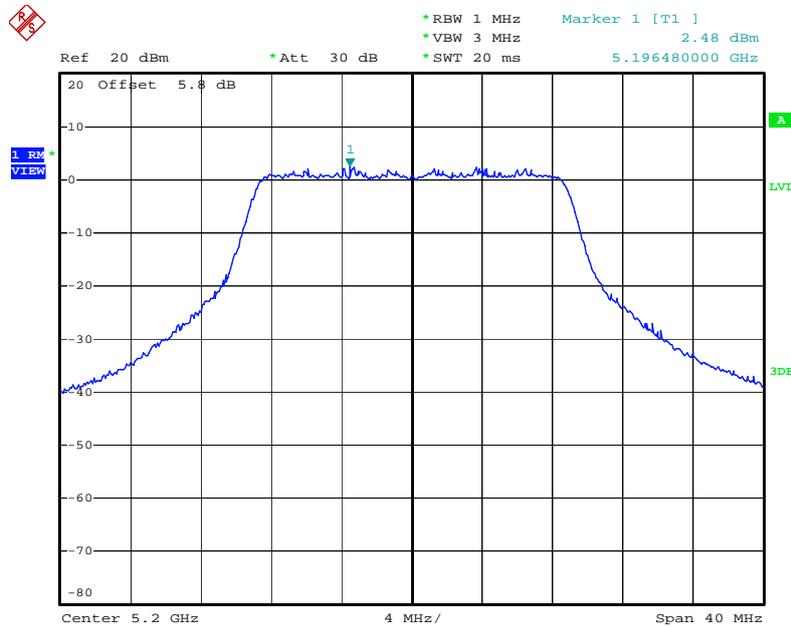


Date: 14.MAY.2010 18:56:24

Power Density Plot on Configuration IEEE 802.11n Ant. A+Ant. B (20MHz) / 5240 MHz

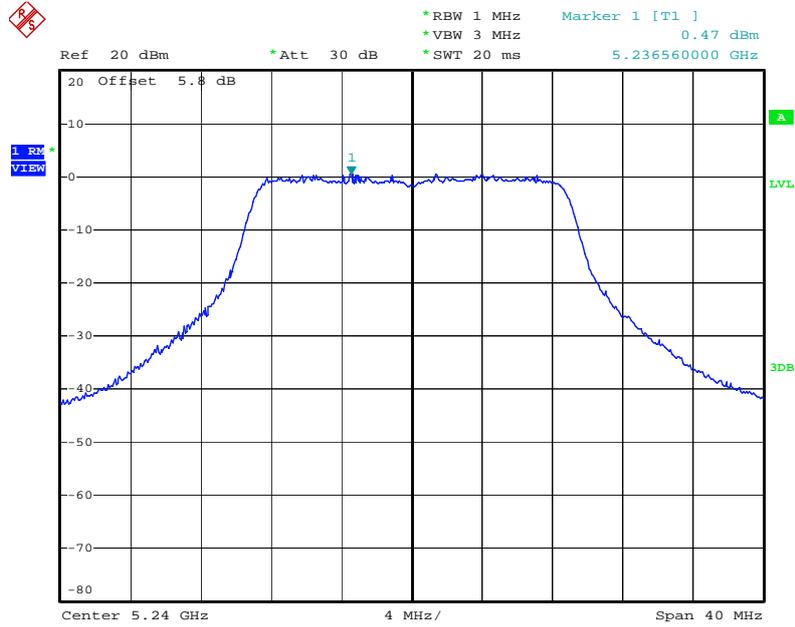


Date: 14.MAY.2010 18:57:54

Power Density Plot on Configuration IEEE 802.11n Ant. A+Ant. B (20MHz) / 5260 MHz

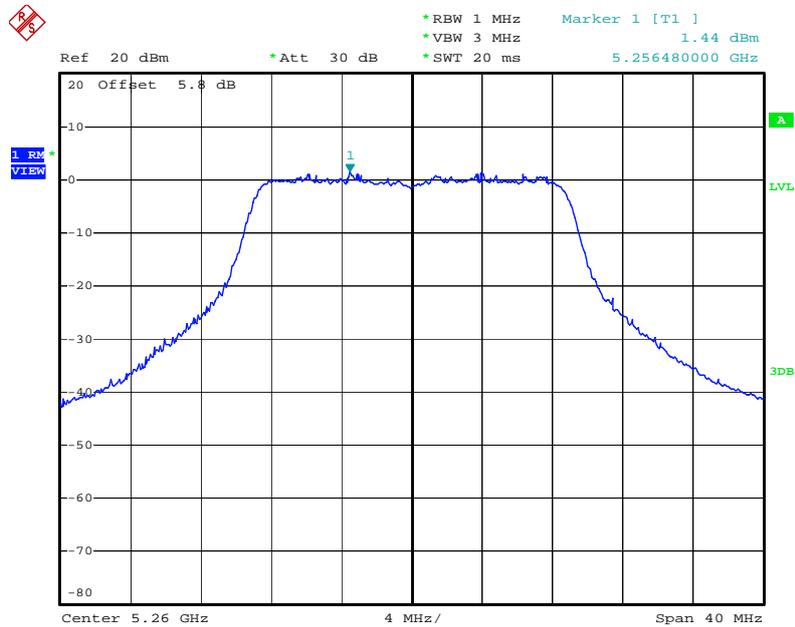


Date: 14.MAY.2010 18:59:33

Power Density Plot on Configuration IEEE 802.11n Ant. A+Ant. B (20MHz) / 5280 MHz

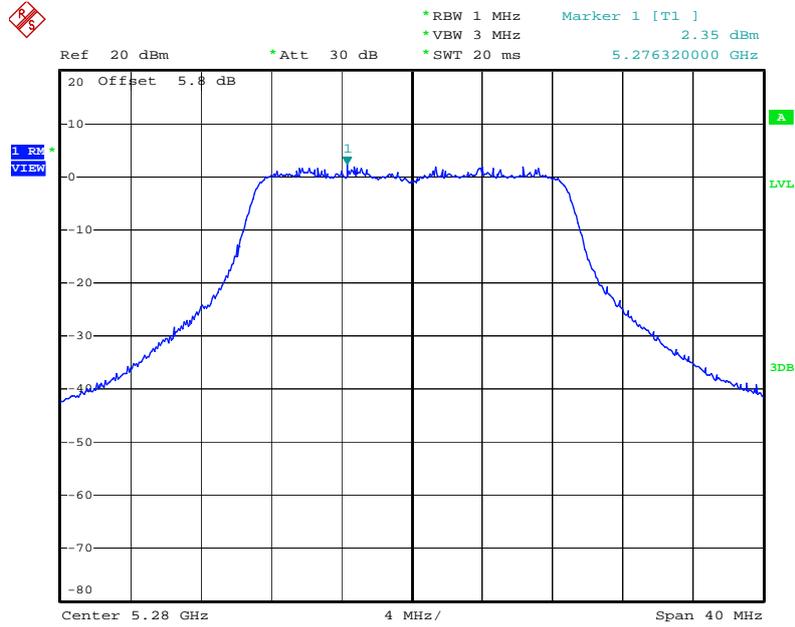


Date: 14.MAY.2010 19:00:59

Power Density Plot on Configuration IEEE 802.11n Ant. A+Ant. B (20MHz) / 5320 MHz

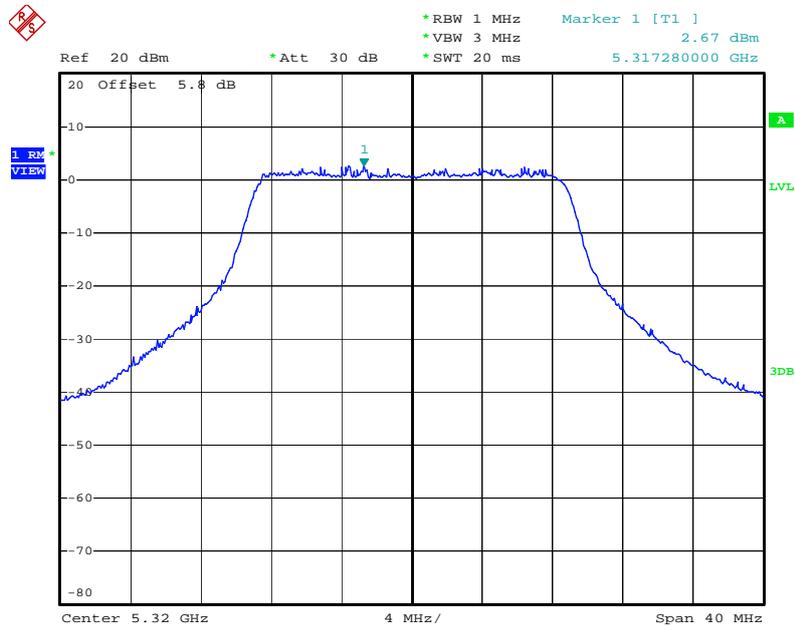


Date: 14.MAY.2010 19:02:35

Power Density Plot on Configuration IEEE 802.11n Ant. A+Ant. B (20MHz) / 5500 MHz

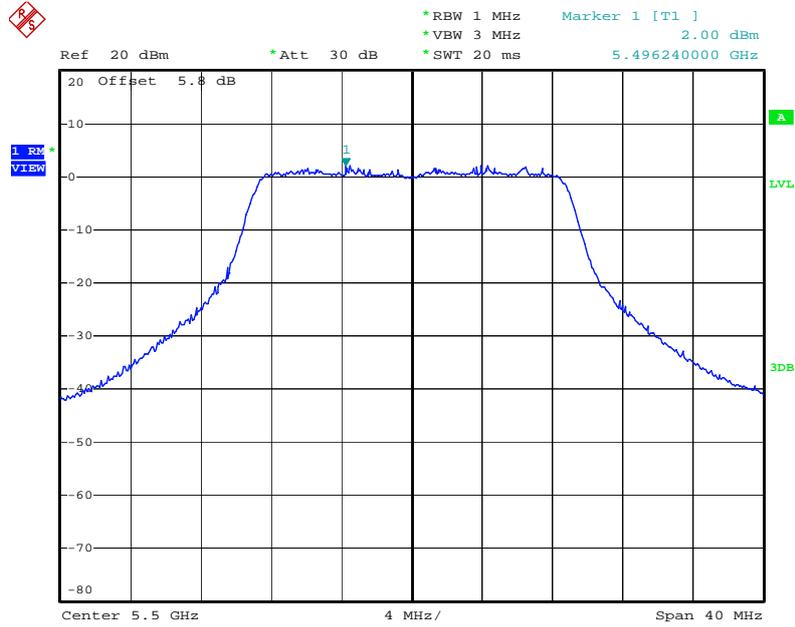


Date: 14.MAY.2010 19:04:10

Power Density Plot on Configuration IEEE 802.11n Ant. A+Ant. B (20MHz) / 5580 MHz

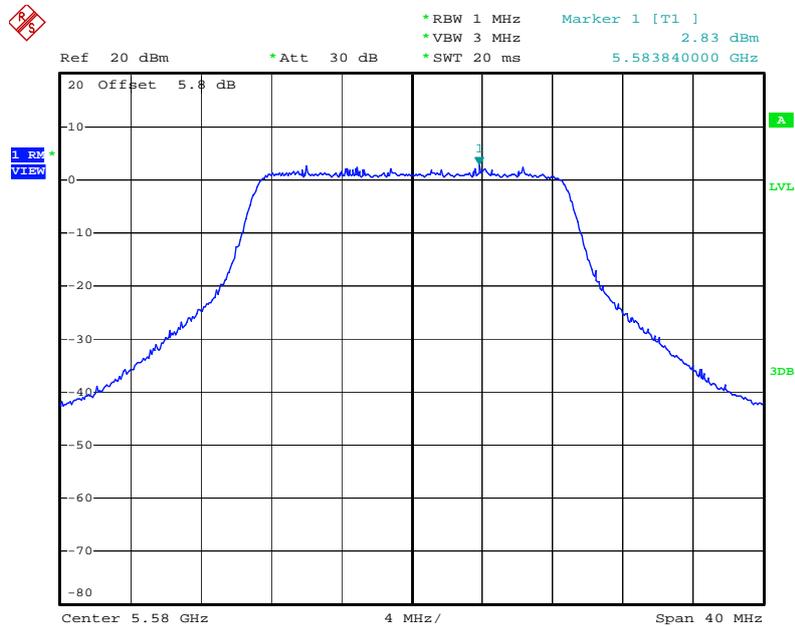


Date: 14.MAY.2010 19:06:22

Power Density Plot on Configuration IEEE 802.11n Ant. A+Ant. B (20MHz) / 5700 MHz

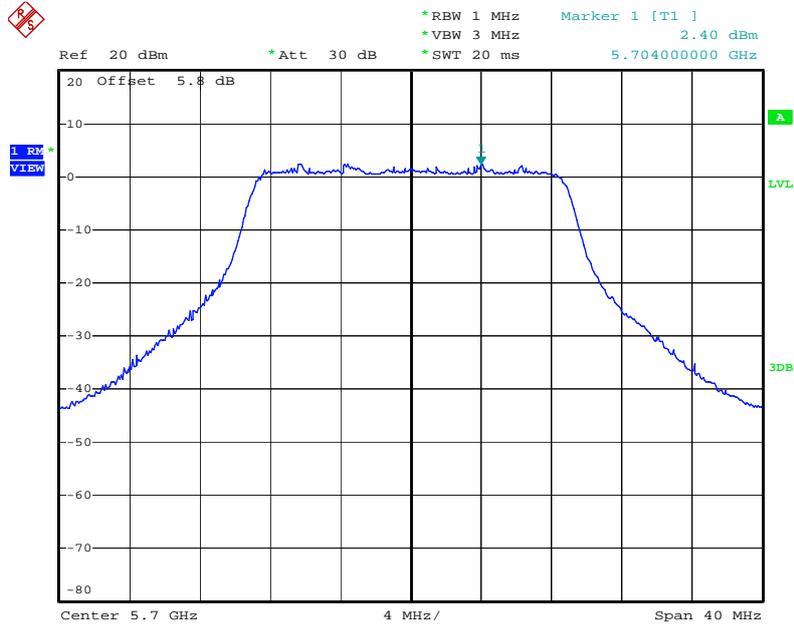


Date: 14.MAY.2010 19:07:50

Power Density Plot on Configuration IEEE 802.11n Ant. A+Ant. B (40MHz) / 5190 MHz

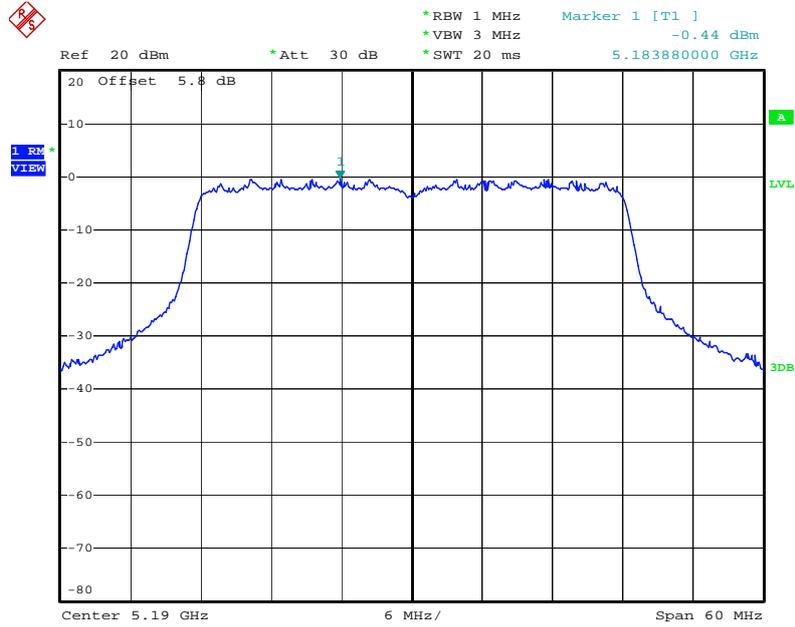


Date: 14.MAY.2010 19:15:17

Power Density Plot on Configuration IEEE 802.11n Ant. A+Ant. B (40MHz) / 5230 MHz

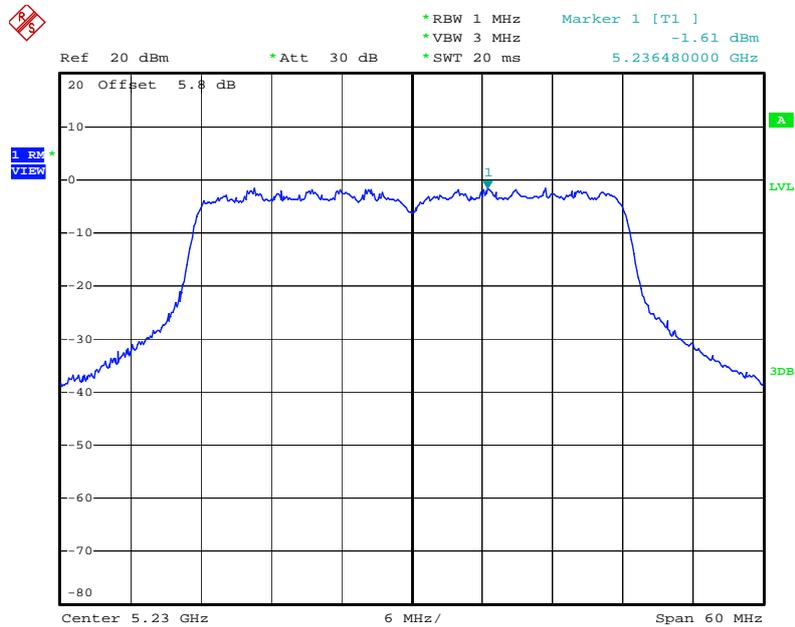


Date: 14.MAY.2010 19:17:09

Power Density Plot on Configuration IEEE 802.11n Ant. A+Ant. B (40MHz) / 5270 MHz

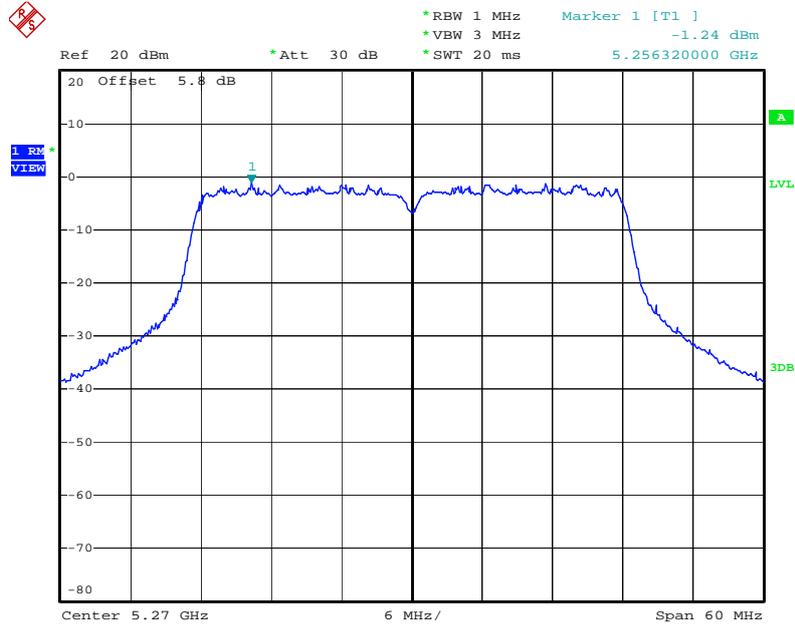


Date: 14.MAY.2010 19:19:36

Power Density Plot on Configuration IEEE 802.11n Ant. A+Ant. B (40MHz) / 5310 MHz

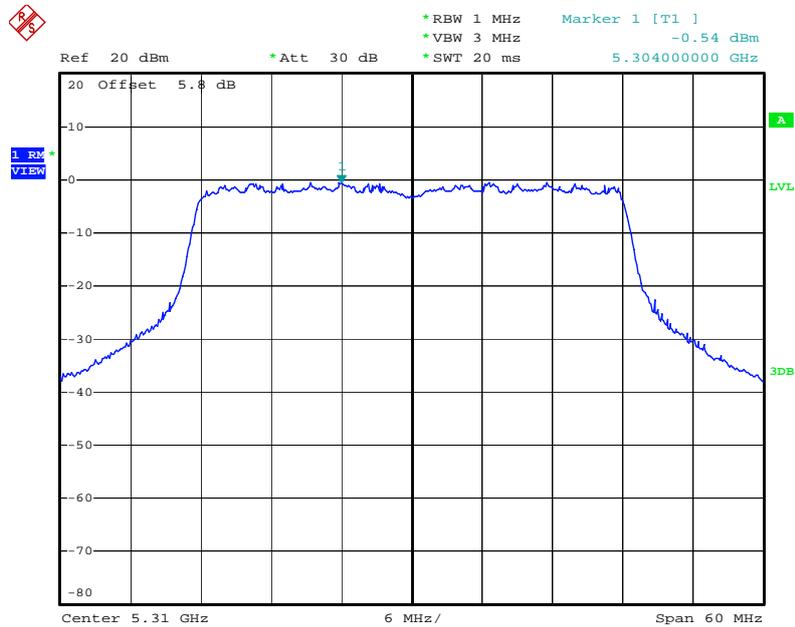


Date: 14.MAY.2010 19:21:34

Power Density Plot on Configuration IEEE 802.11n Ant. A+Ant. B (40MHz) / 5510 MHz

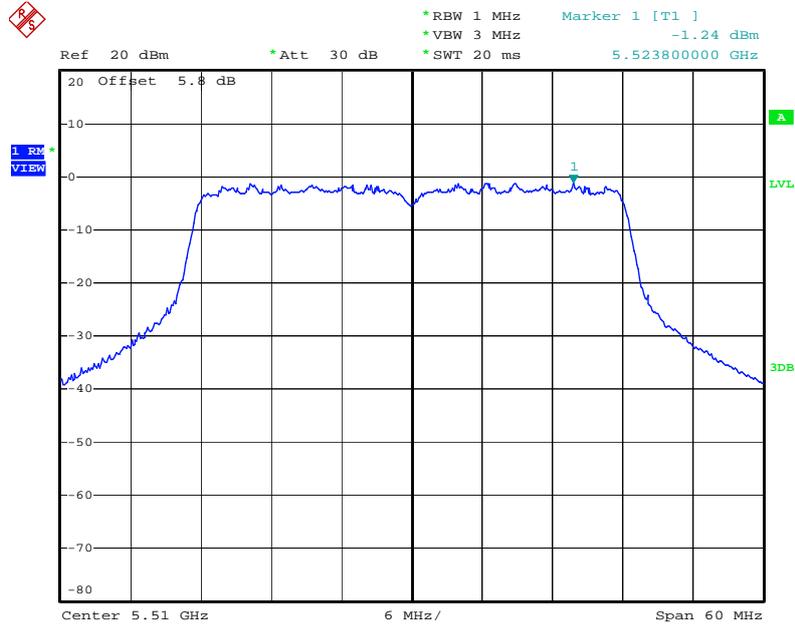


Date: 14.MAY.2010 19:23:18

Power Density Plot on Configuration IEEE 802.11n Ant. A+Ant. B (40MHz) / 5550 MHz

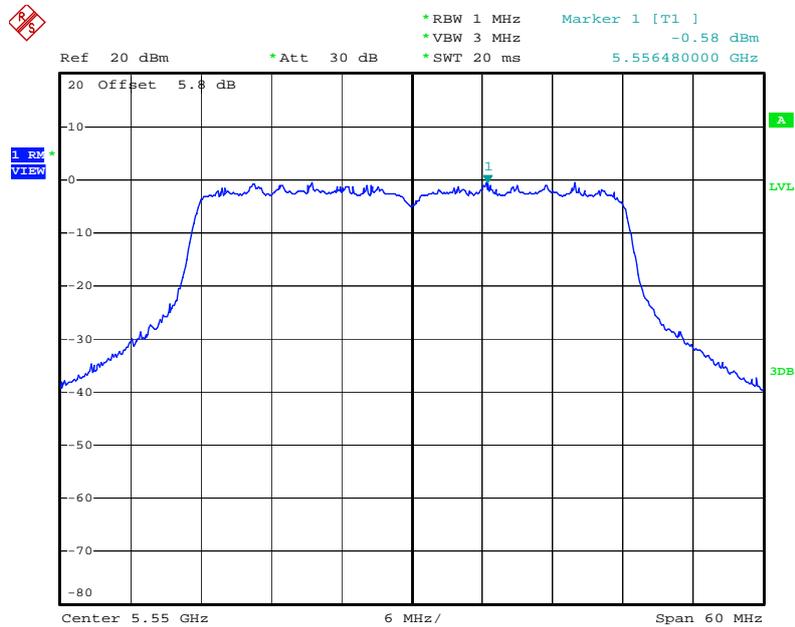

Date: 14.MAY.2010 19:25:06

Power Density Plot on Configuration IEEE 802.11n Ant. A+Ant. B (40MHz) / 5670 MHz

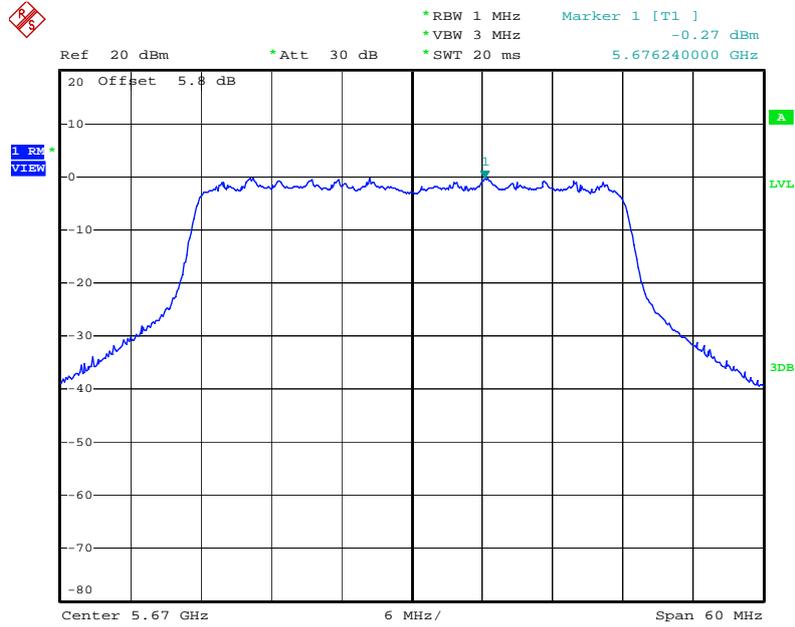

Date: 14.MAY.2010 19:26:46

3.5 Peak Excursion Measurement

3.5.1 Limit

The ratio of the peak excursion of the modulation envelope (measured using a peak hold function) to the maximum conducted output power (measured as specified above) shall not exceed 13 dB across any 1 MHz bandwidth or the emissions bandwidth whichever is less.

3.5.2 Measuring Instruments and Setting


Please refer to section 4 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RB	1000 kHz (Peak Trace) / 1000 kHz (Average Trace)
VB	3000 kHz (Peak Trace) / 300 kHz (Average Trace)
Detector	Peak (Peak Trace) / Sample (Average Trace)
Trace	Max Hold
Sweep Time	60s

3.5.3 Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. Set the spectrum analyzer span to view the entire emissions bandwidth. The largest difference between the following two traces (Peak Trace and Average Trace) must be ≤ 13 dB for all frequencies across the emissions bandwidth. Submit a plot.
3. Peak Trace: Set RBW = 1 MHz, VBW ≥ 3 MHz with peak detector and max-hold settings.
4. Average Trace: Method #3—video averaging with max hold—and sum power across the band. Set span to encompass the entire emissions bandwidth (EBW) of the signal. Set sweep trigger to “free run”. Set RBW = 1 MHz. Set VBW $\geq 1/T$ (IEEE 802.11a VBW = 300kHz $\geq 1/4\mu$ s). Use sample detector mode if bin width (i.e., span/number of points in spectrum) < 0.5 RBW. Otherwise use peak detector mode. Set max hold. Allow max hold to run for 60 seconds.
5. Measuring multiple antennas, the connectors are required to link with Spectrum Analyzer through a combiner.

3.5.4 Test Setup Layout

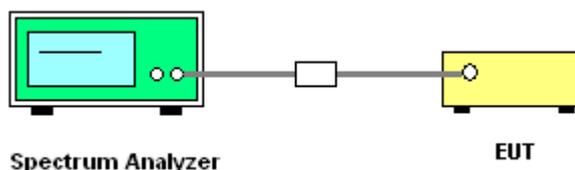

3.5.5 Test Deviation

There is no deviation with the original standard.

3.5.6 EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

3.5.7 Test Result of Peak Excursion

Final Test Date	May 14, 2010	Test Site No.	TH01-HY
Temperature	22	Humidity	59%
Test Engineer	Sam	Configuration	802.11a/n

For Single Chain:

Configuration of IEEE 802.11a

Frequency	Peak Excursion (dB)	Max. Limit (dB)	Result
5180 MHz	10.65	13	Complies
5200 MHz	9.71	13	Complies
5240 MHz	10.36	13	Complies
5260 MHz	10.69	13	Complies
5280 MHz	10.54	13	Complies
5320 MHz	10.11	13	Complies
5500 MHz	10.96	13	Complies
5580 MHz	11.11	13	Complies
5700 MHz	10.37	13	Complies

Configuration IEEE 802.11n (20MHz)

Frequency	Peak Excursion (dB)	Max. Limit (dB)	Result
5180 MHz	10.89	13	Complies
5200 MHz	10.57	13	Complies
5240 MHz	10.20	13	Complies
5260 MHz	10.70	13	Complies
5280 MHz	10.42	13	Complies
5320 MHz	10.81	13	Complies
5500 MHz	10.50	13	Complies
5580 MHz	10.76	13	Complies
5700 MHz	10.81	13	Complies

Configuration IEEE 802.11n (40MHz)

Frequency	Peak Excursion (dB)	Max. Limit (dB)	Result
5190 MHz	9.99	13	Complies
5230 MHz	9.96	13	Complies
5270 MHz	9.67	13	Complies
5310 MHz	10.96	13	Complies
5510 MHz	9.96	13	Complies
5550 MHz	9.77	13	Complies
5670 MHz	10.72	13	Complies

For Two Chain:

Configuration IEEE 802.11n Ant. A+Ant. B (20MHz)


Frequency	Peak Excursion (dB)	Max. Limit (dB)	Result
5180 MHz	10.55	13	Complies
5200 MHz	10.36	13	Complies
5240 MHz	10.42	13	Complies
5260 MHz	10.49	13	Complies
5280 MHz	10.44	13	Complies
5320 MHz	10.90	13	Complies
5500 MHz	10.49	13	Complies
5580 MHz	10.14	13	Complies
5700 MHz	10.05	13	Complies

Configuration IEEE 802.11n Ant. A+Ant. B (40MHz)

Frequency	Peak Excursion (dB)	Max. Limit (dB)	Result
5190 MHz	10.33	13	Complies
5230 MHz	10.27	13	Complies
5270 MHz	10.20	13	Complies
5310 MHz	10.33	13	Complies
5510 MHz	10.73	13	Complies
5550 MHz	9.99	13	Complies
5670 MHz	11.09	13	Complies


For Single Chain:

Peak Excursion Plot on Configuration IEEE 802.11a / 5180 MHz

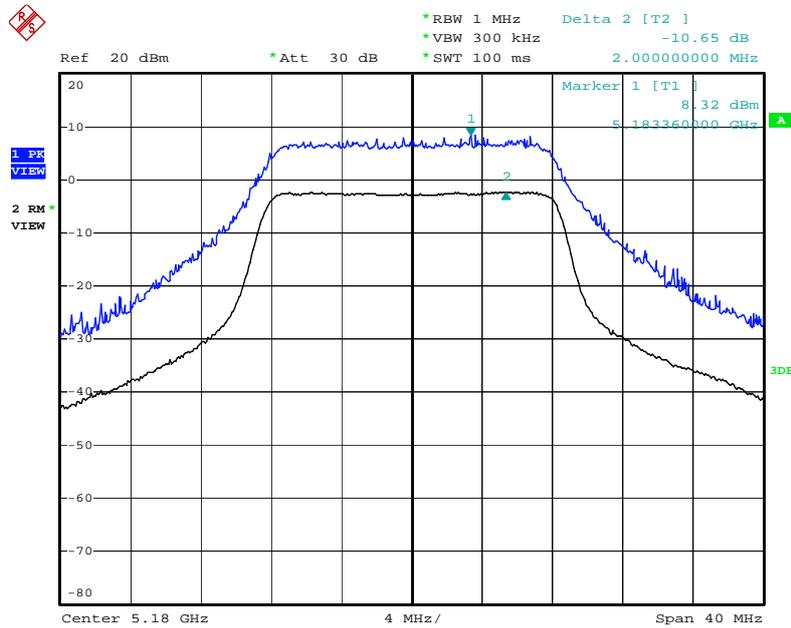


Date: 14.MAY.2010 20:18:57

Peak Excursion Plot on Configuration IEEE 802.11a / 5200 MHz

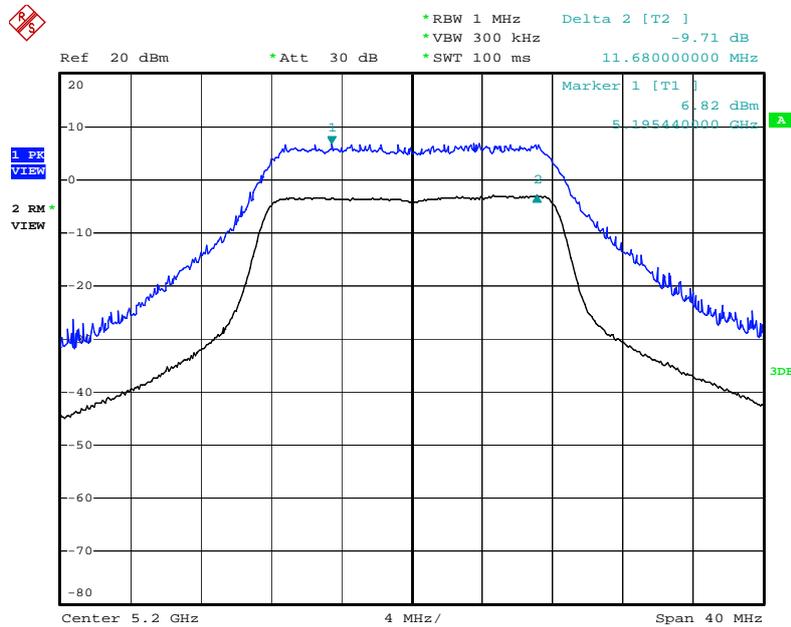


Date: 14.MAY.2010 20:20:25

Peak Excursion Plot on Configuration IEEE 802.11a / 5240 MHz

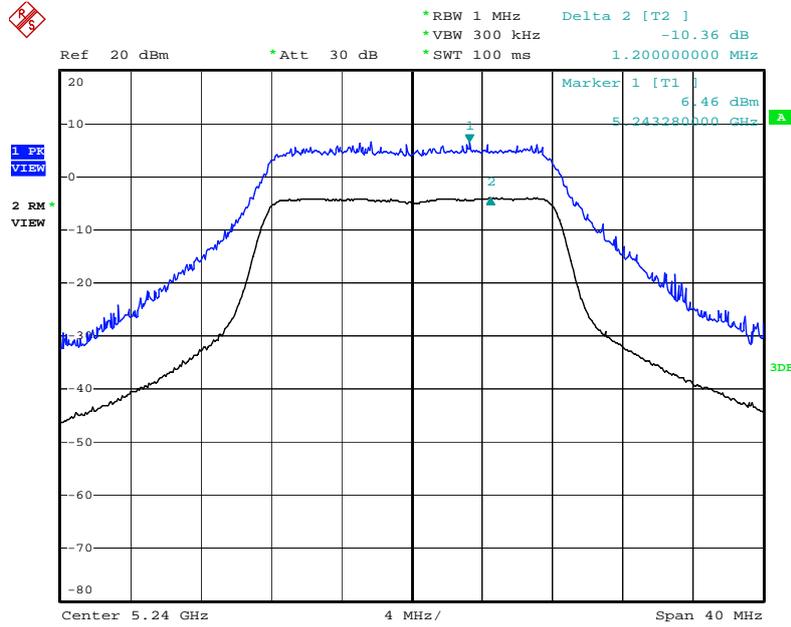


Date: 14.MAY.2010 20:21:59

Peak Excursion Plot on Configuration IEEE 802.11a / 5260 MHz

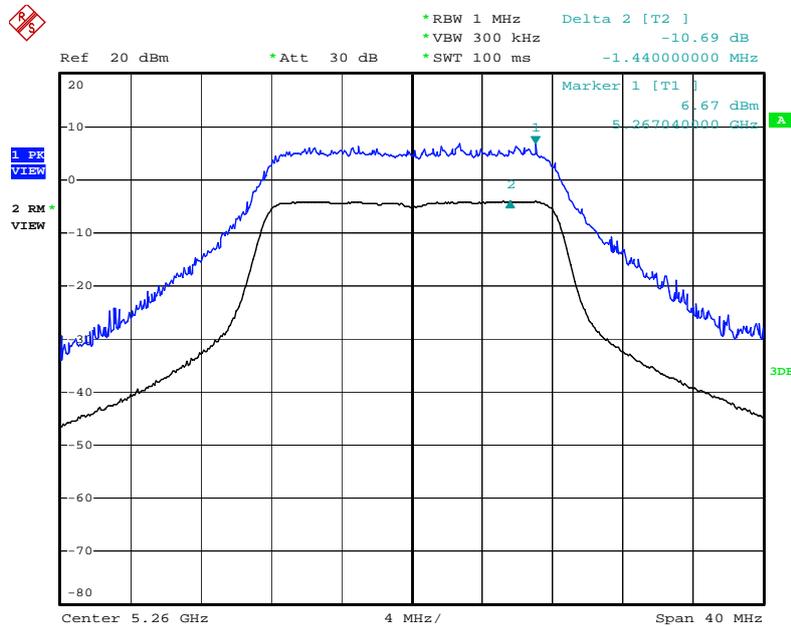


Date: 14.MAY.2010 20:23:30

Peak Excursion Plot on Configuration IEEE 802.11a / 5280 MHz

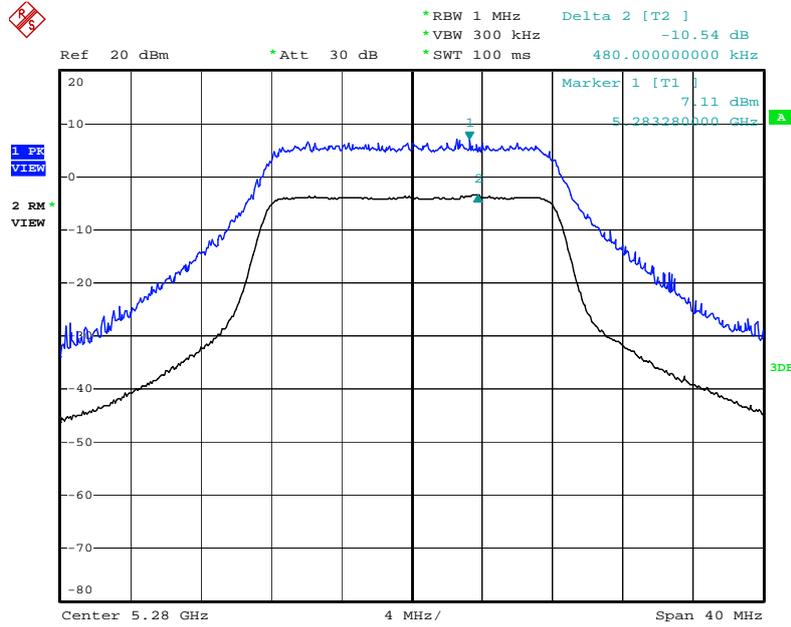


Date: 14.MAY.2010 20:25:00

Peak Excursion Plot on Configuration IEEE 802.11a / 5320 MHz

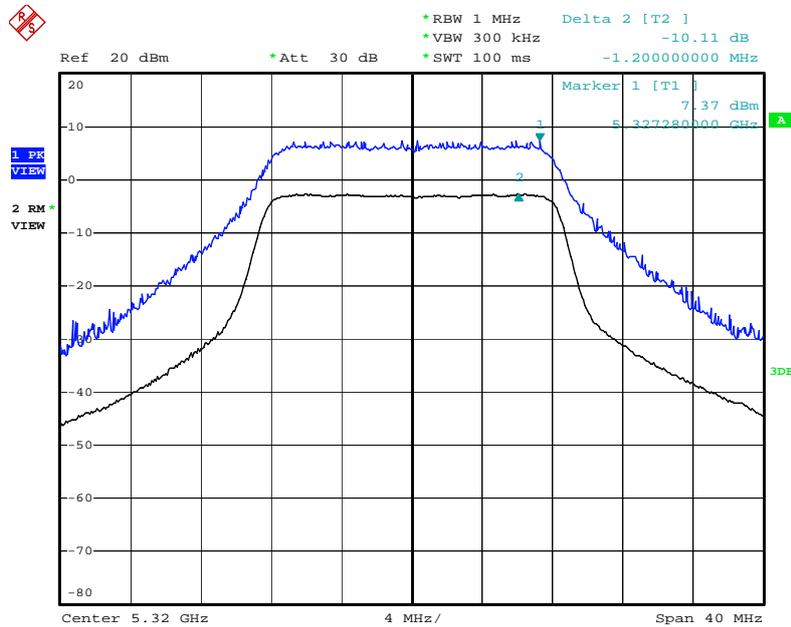


Date: 14.MAY.2010 20:26:34

Peak Excursion Plot on Configuration IEEE 802.11a / 5500 MHz

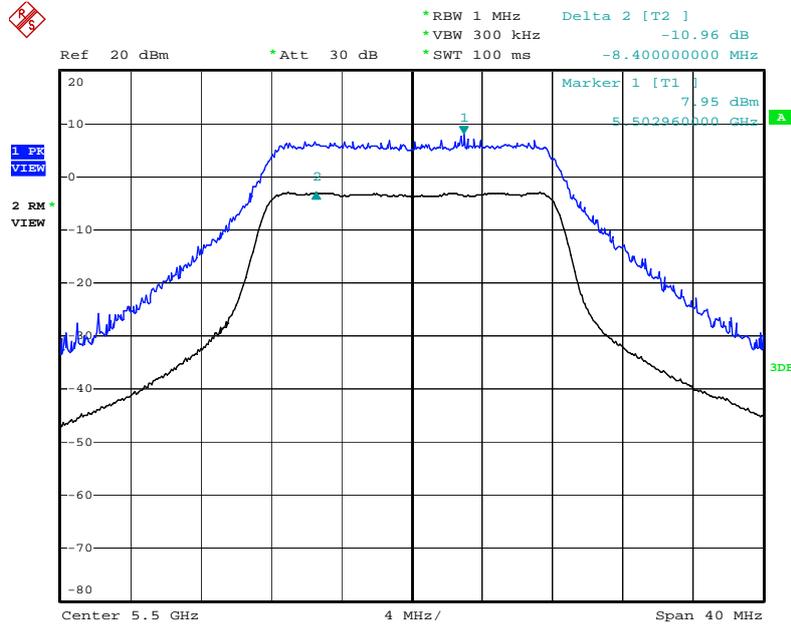


Date: 14.MAY.2010 20:28:46

Peak Excursion Plot on Configuration IEEE 802.11a / 5580 MHz

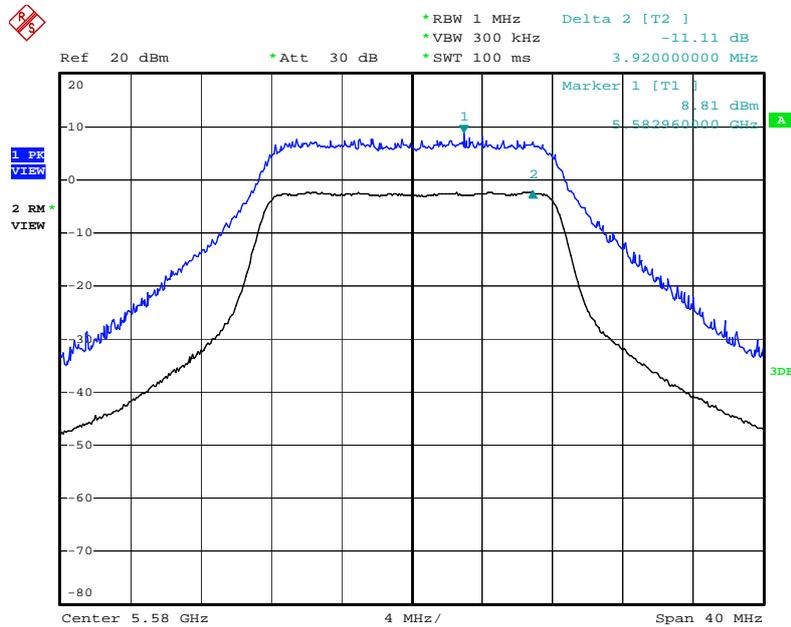


Date: 14.MAY.2010 20:30:33

Peak Excursion Plot on Configuration IEEE 802.11a / 5700 MHz

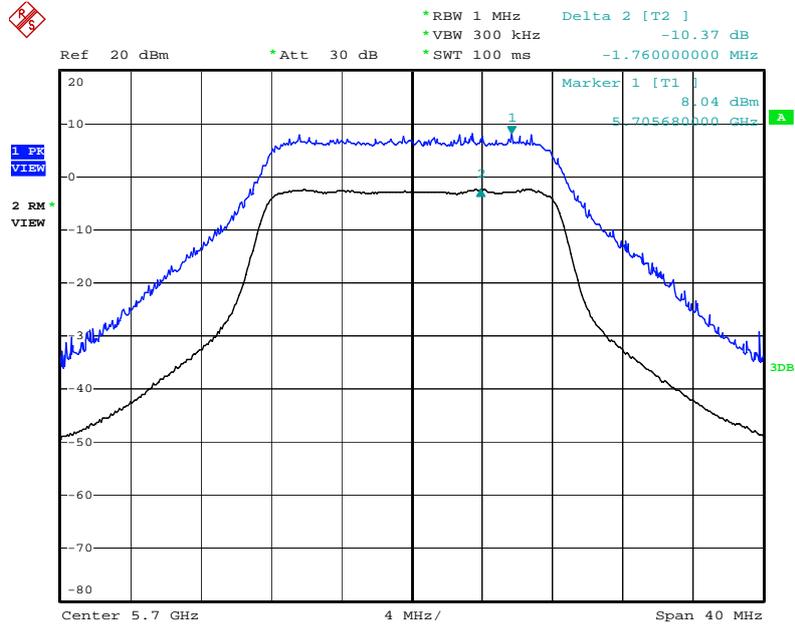


Date: 14.MAY.2010 20:32:10

Peak Excursion Plot on Configuration IEEE 802.11n (20MHz) / 5180 MHz

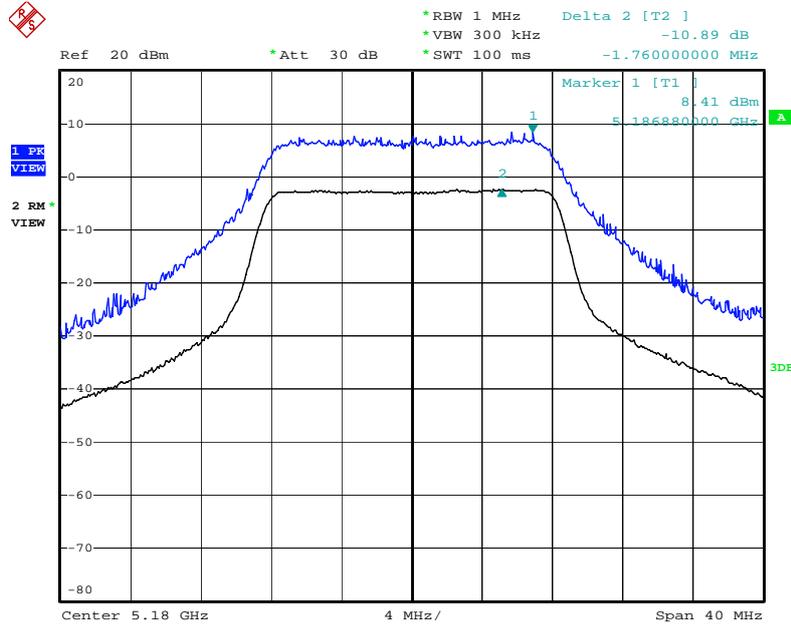


Date: 14.MAY.2010 14:31:15

Peak Excursion Plot on Configuration IEEE 802.11n (20MHz) / 5200 MHz

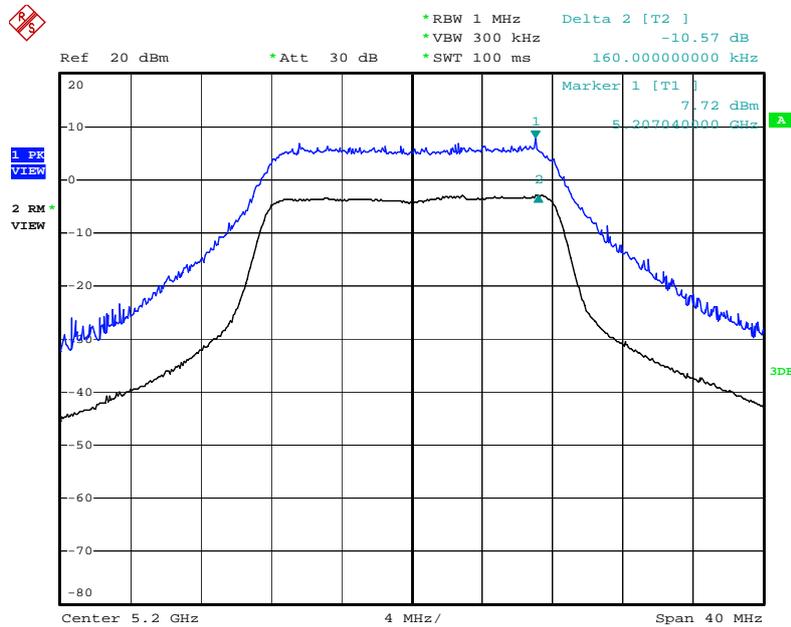


Date: 14.MAY.2010 14:35:08

Peak Excursion Plot on Configuration IEEE 802.11n (20MHz) / 5240 MHz

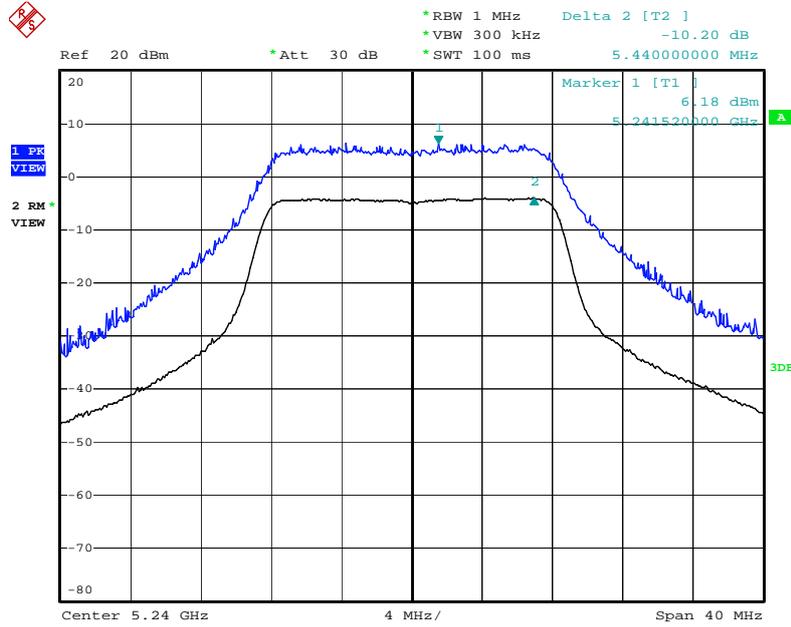


Date: 14.MAY.2010 14:36:56

Peak Excursion Plot on Configuration IEEE 802.11n (20MHz) / 5260 MHz

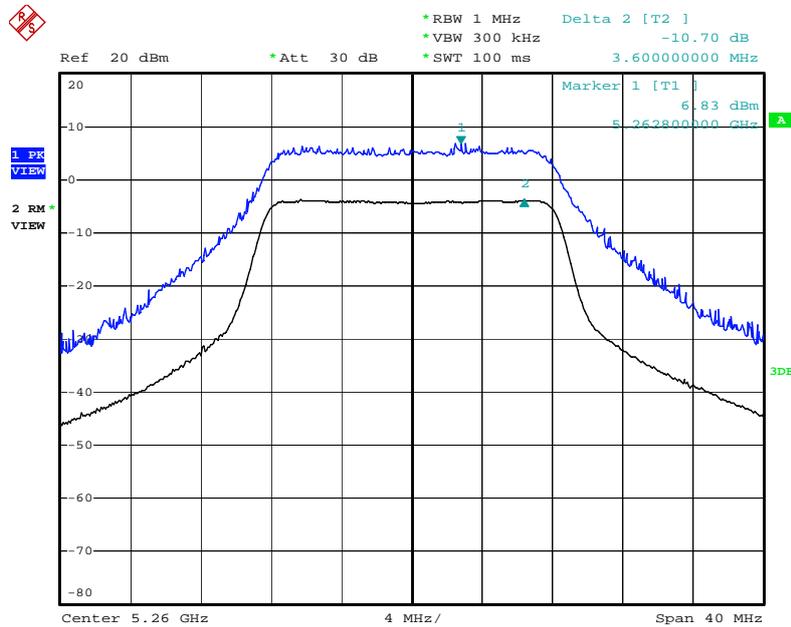


Date: 14.MAY.2010 14:39:58

Peak Excursion Plot on Configuration IEEE 802.11n (20MHz) / 5280 MHz

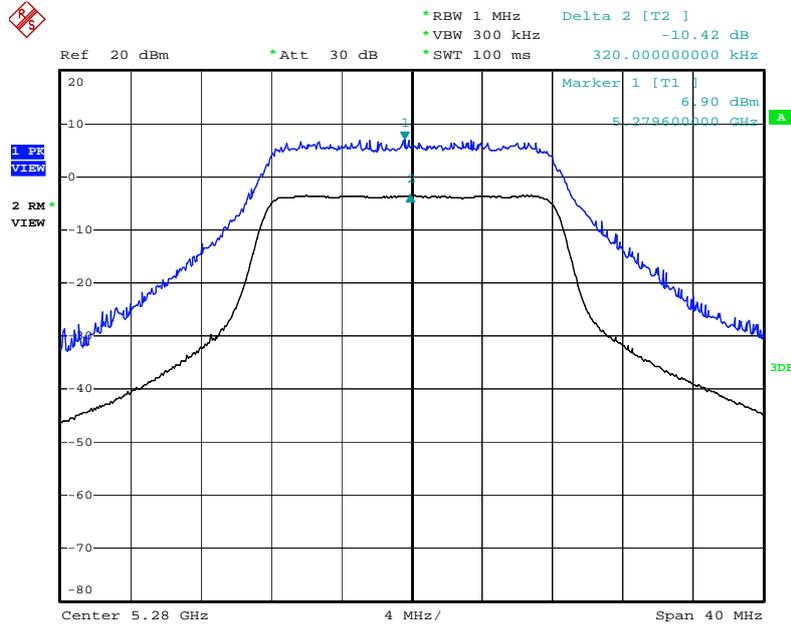


Date: 14.MAY.2010 14:41:56

Peak Excursion Plot on Configuration IEEE 802.11n (20MHz) / 5320 MHz

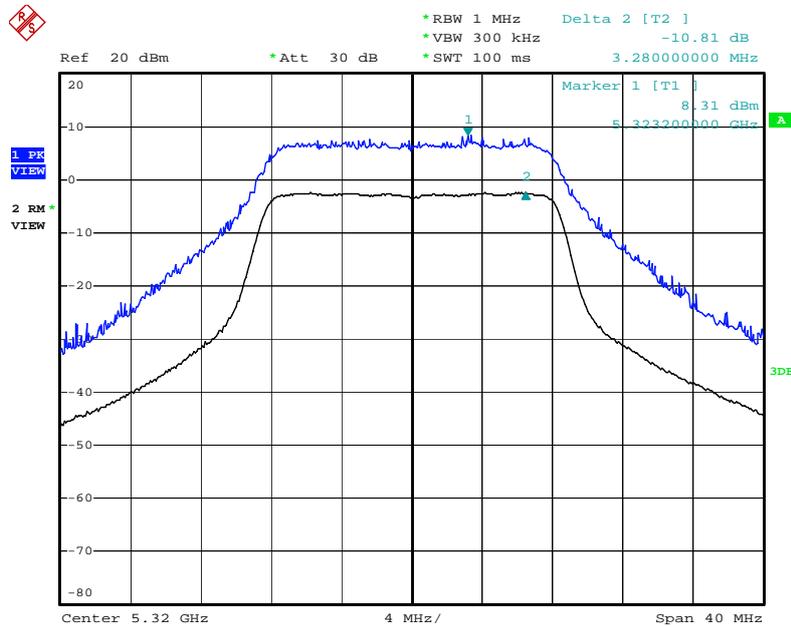


Date: 14.MAY.2010 14:45:21

Peak Excursion Plot on Configuration IEEE 802.11n (20MHz) / 5500 MHz

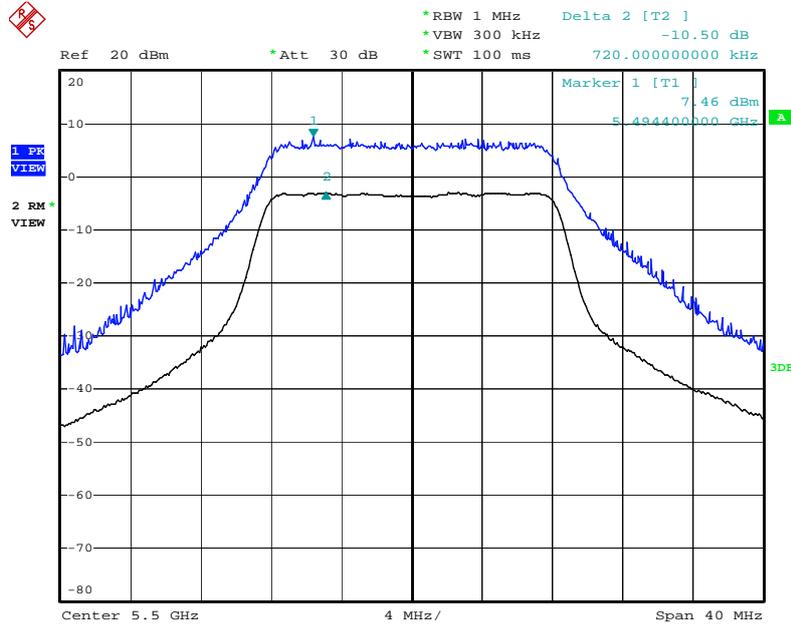


Date: 14.MAY.2010 14:48:46

Peak Excursion Plot on Configuration IEEE 802.11n (20MHz) / 5580 MHz

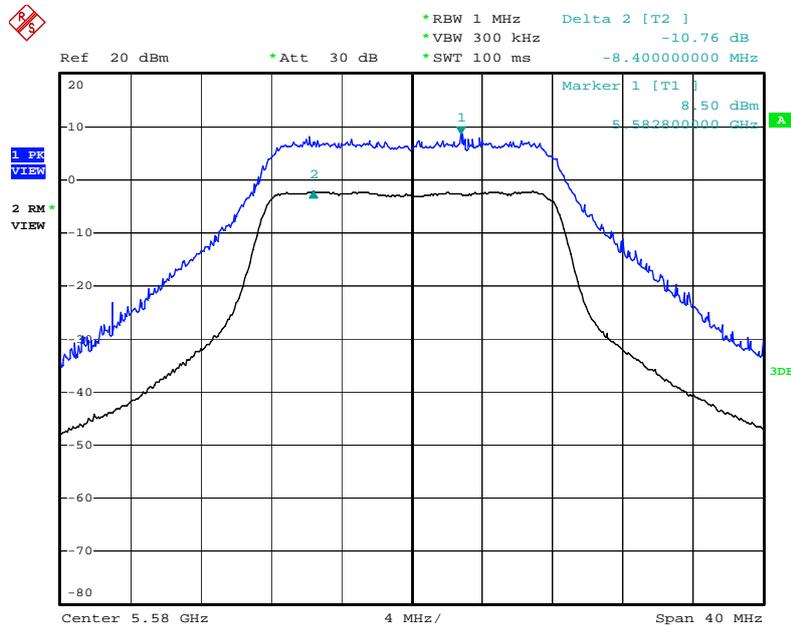


Date: 14.MAY.2010 14:51:35

Peak Excursion Plot on Configuration IEEE 802.11n (20MHz) / 5700 MHz

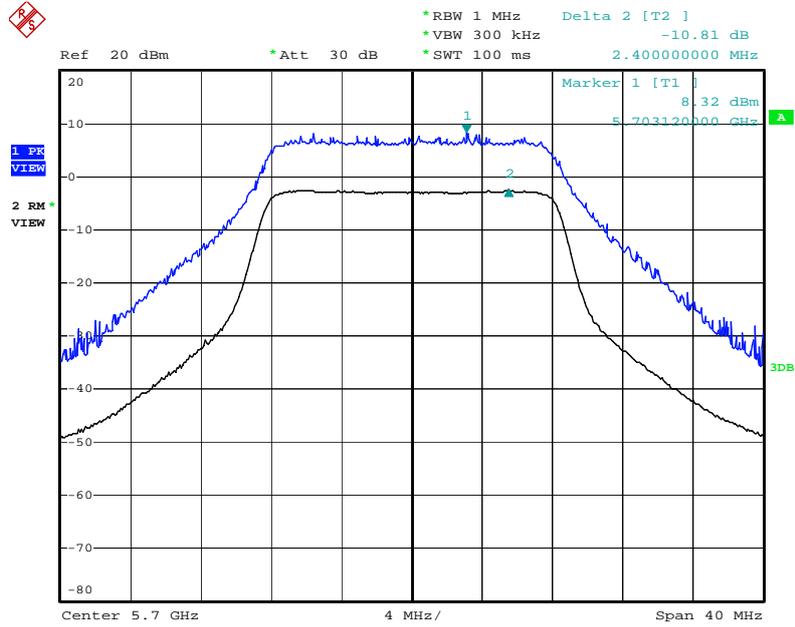


Date: 14.MAY.2010 14:56:12

Peak Excursion Plot on Configuration IEEE 802.11n (40MHz) / 5190 MHz

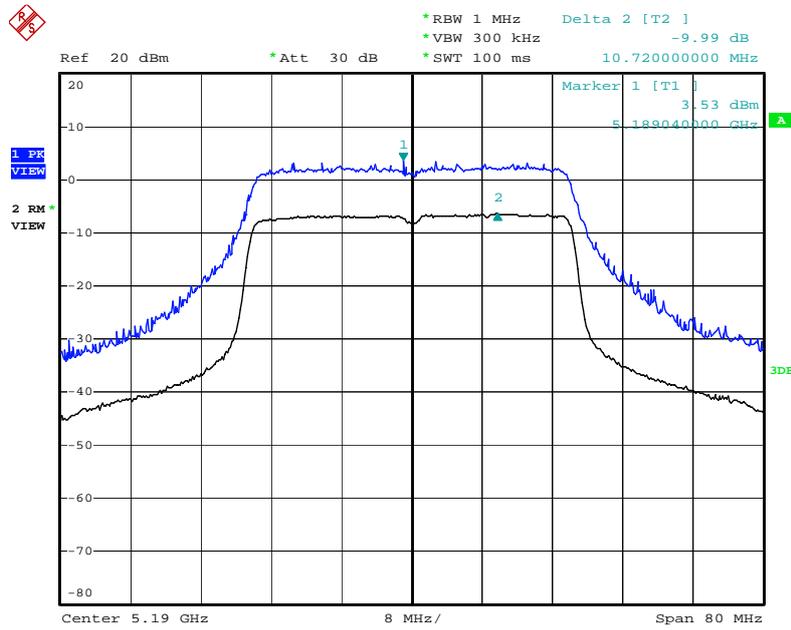


Date: 14.MAY.2010 16:18:04

Peak Excursion Plot on Configuration IEEE 802.11n (40MHz) / 5230 MHz

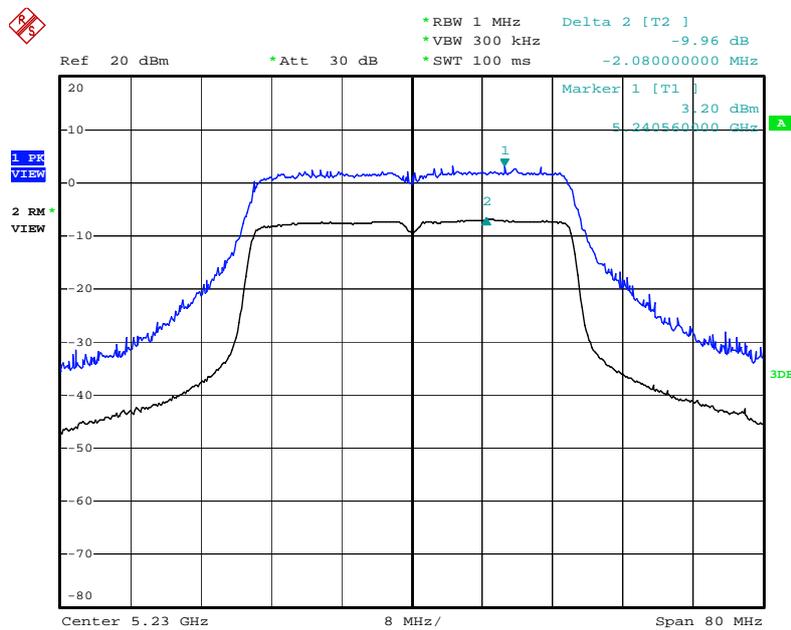


Date: 14.MAY.2010 16:20:59

Peak Excursion Plot on Configuration IEEE 802.11n (40MHz) / 5270 MHz

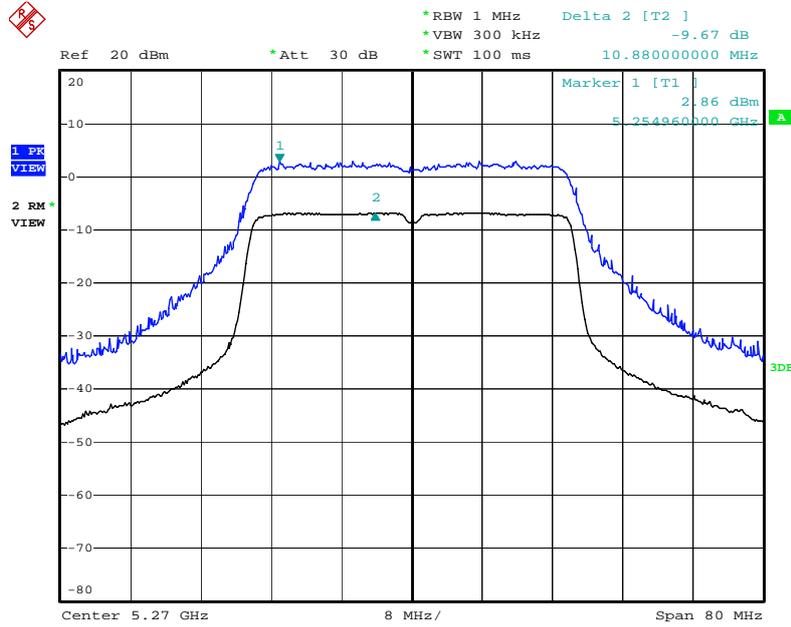


Date: 14.MAY.2010 16:22:42

Peak Excursion Plot on Configuration IEEE 802.11n (40MHz) / 5310 MHz

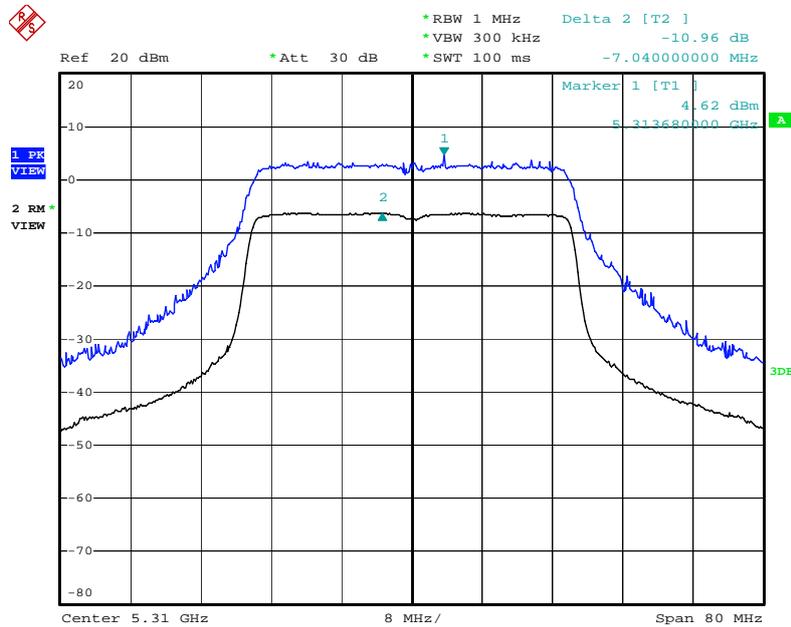


Date: 14.MAY.2010 16:24:15

Peak Excursion Plot on Configuration IEEE 802.11n (40MHz) / 5510 MHz

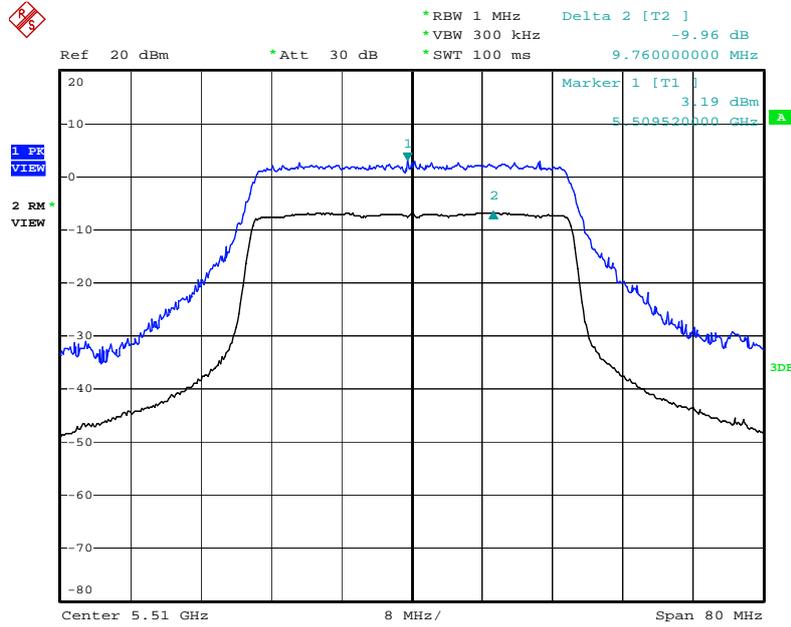


Date: 14.MAY.2010 16:25:45

Peak Excursion Plot on Configuration IEEE 802.11n (40MHz) / 5550 MHz

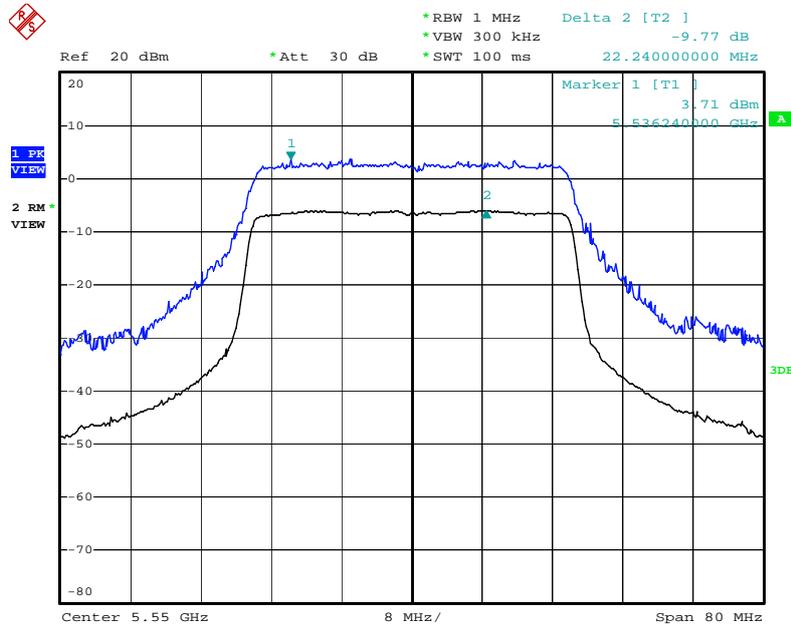

Date: 14.MAY.2010 16:27:28


Peak Excursion Plot on Configuration IEEE 802.11n (40MHz) / 5670 MHz

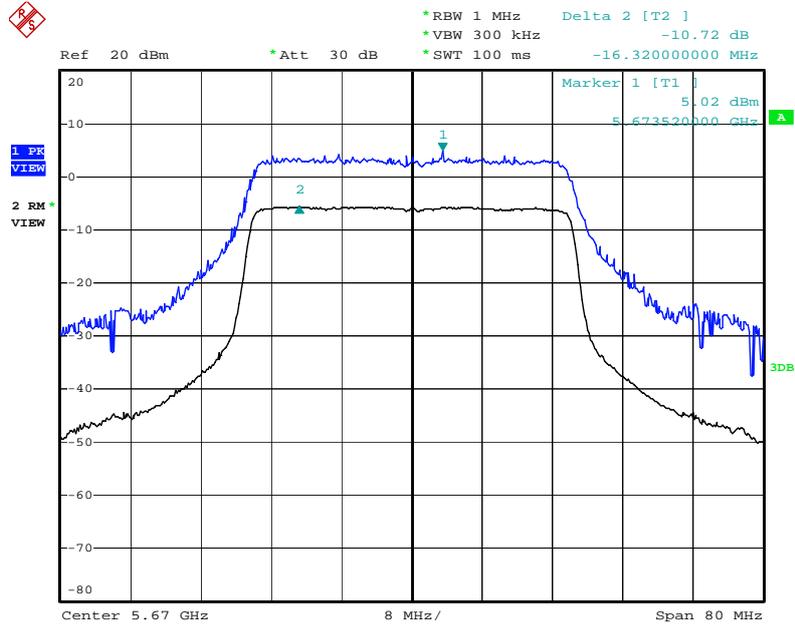

Date: 14.MAY.2010 16:29:04


For Two Chain:

Peak Excursion Plot on Configuration IEEE 802.11n Ant. A+Ant. B (20MHz) / 5180 MHz

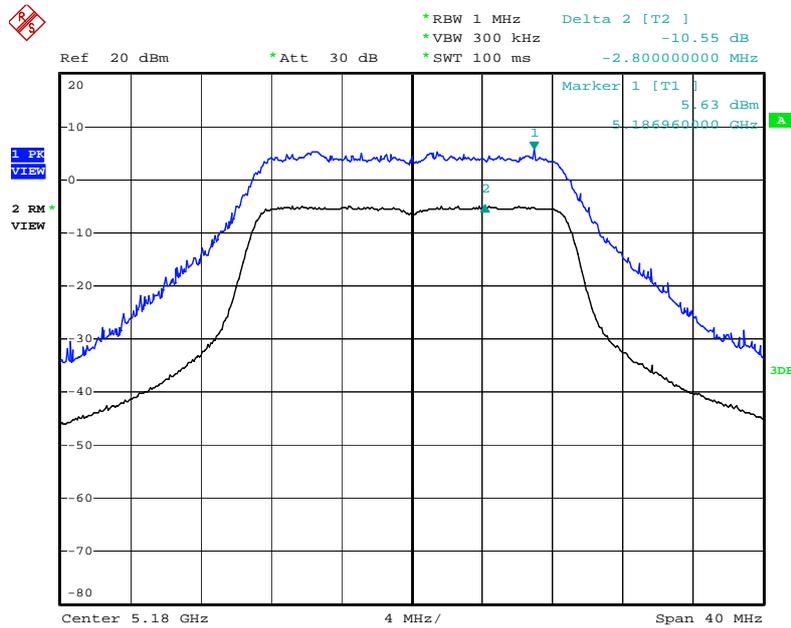


Date: 14.MAY.2010 18:55:14

Peak Excursion Plot on Configuration IEEE 802.11n Ant. A+Ant. B (20MHz) / 5200 MHz

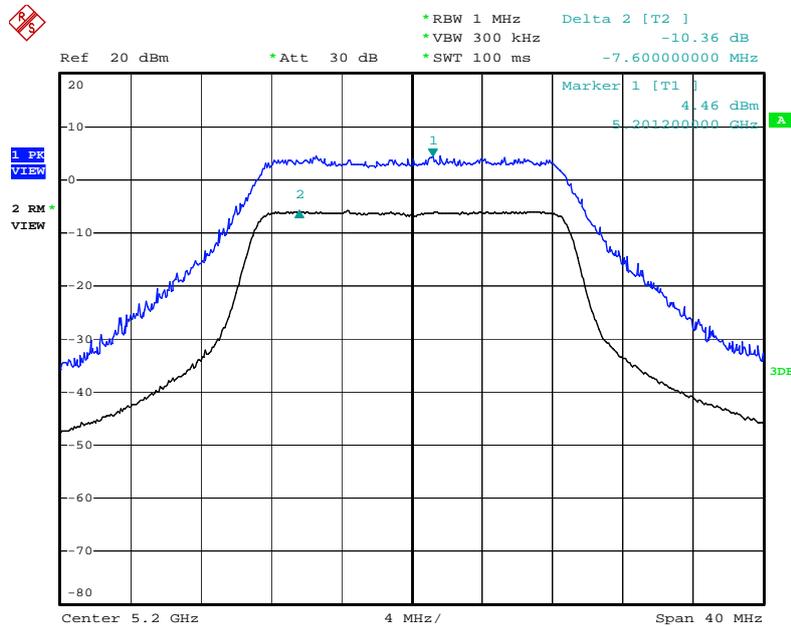


Date: 14.MAY.2010 18:56:58

Peak Excursion Plot on Configuration IEEE 802.11n Ant. A+Ant. B (20MHz) / 5240 MHz

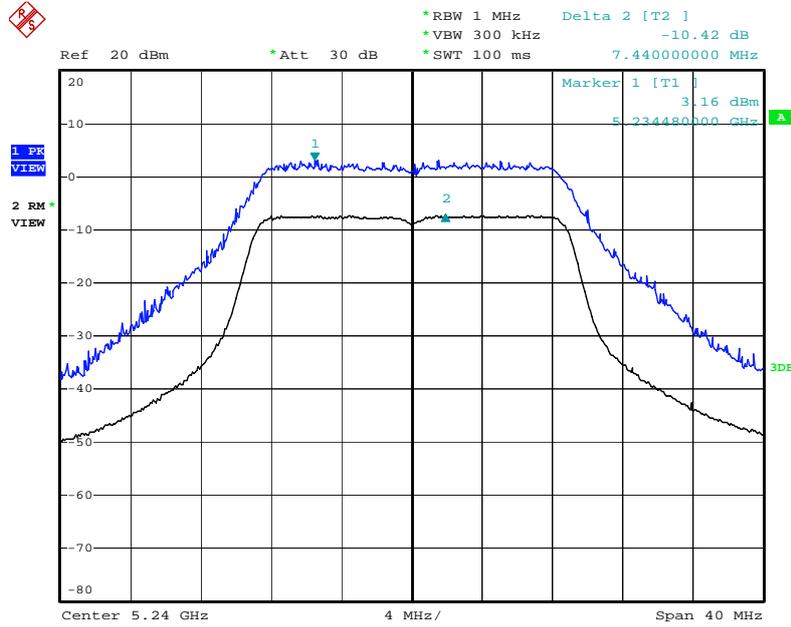


Date: 14.MAY.2010 18:58:28

Peak Excursion Plot on Configuration IEEE 802.11n Ant. A+Ant. B (20MHz) / 5260 MHz

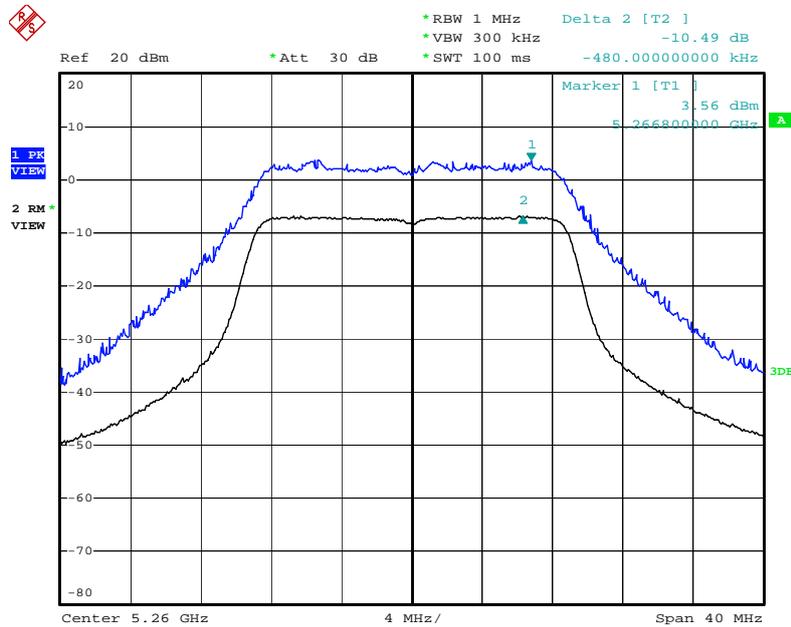


Date: 14.MAY.2010 19:00:07

Peak Excursion Plot on Configuration IEEE 802.11n Ant. A+Ant. B (20MHz) / 5280 MHz

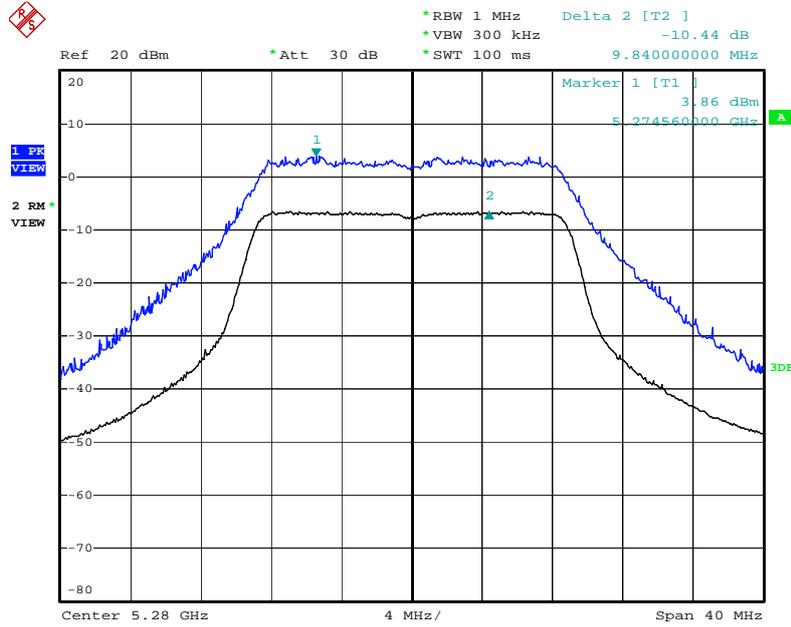


Date: 14.MAY.2010 19:01:34

Peak Excursion Plot on Configuration IEEE 802.11n Ant. A+Ant. B (20MHz) / 5320 MHz

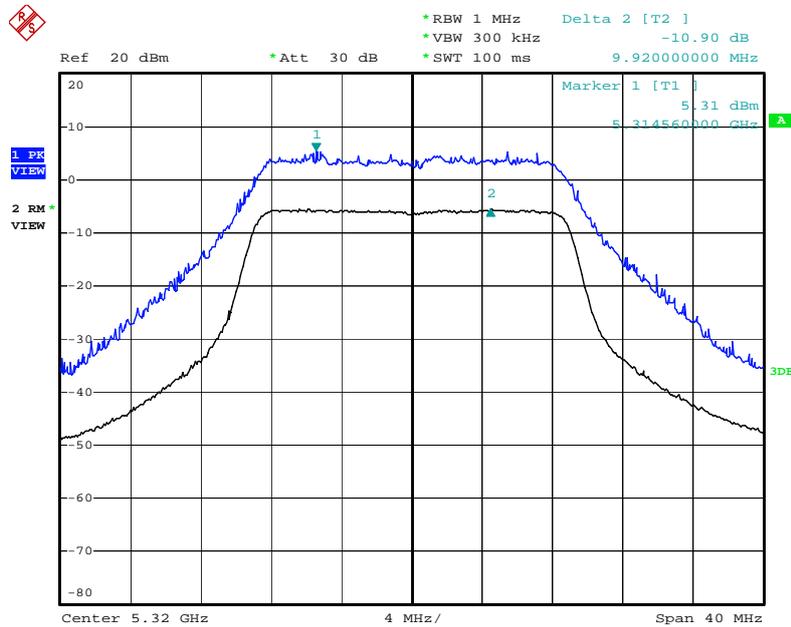


Date: 14.MAY.2010 19:03:09

Peak Excursion Plot on Configuration IEEE 802.11n Ant. A+Ant. B (20MHz) / 5500 MHz

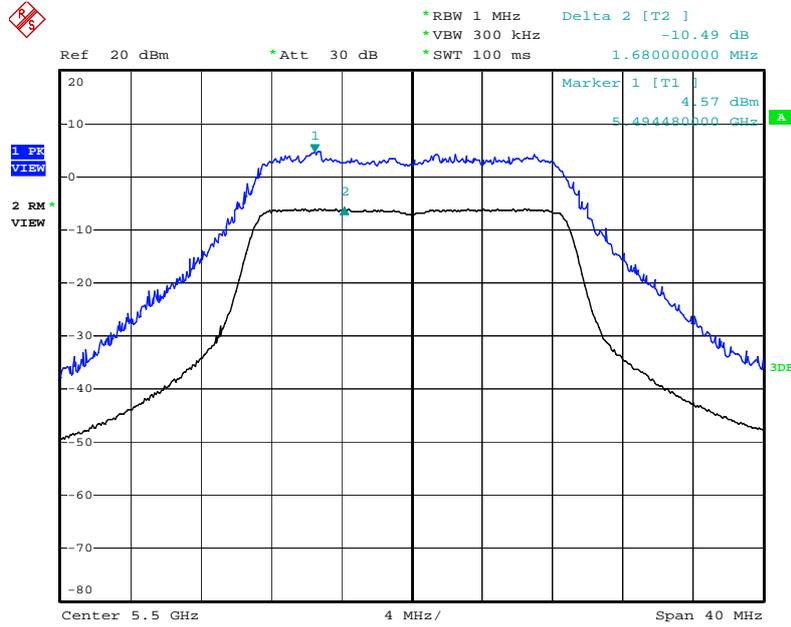


Date: 14.MAY.2010 19:04:44

Peak Excursion Plot on Configuration IEEE 802.11n Ant. A+Ant. B (20MHz) / 5580 MHz

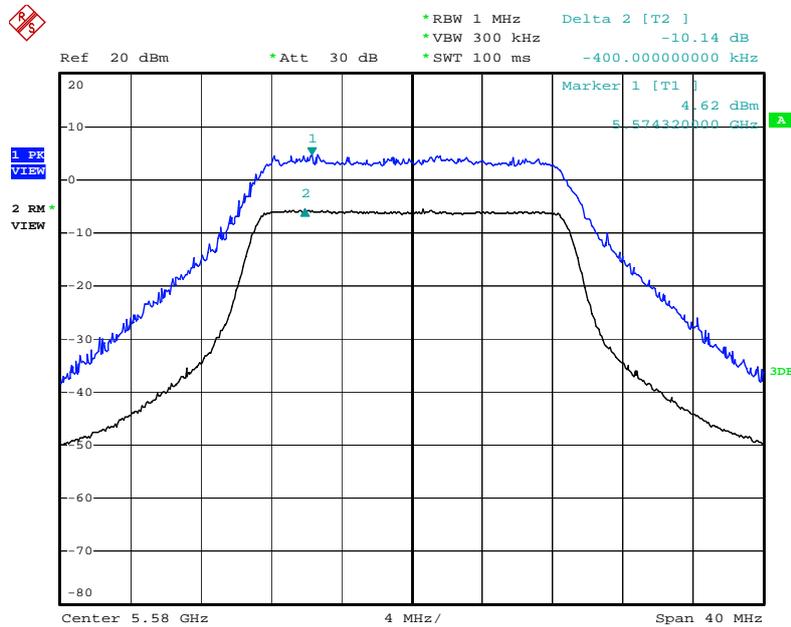


Date: 14.MAY.2010 19:06:57

Peak Excursion Plot on Configuration IEEE 802.11n Ant. A+Ant. B (20MHz) / 5700 MHz

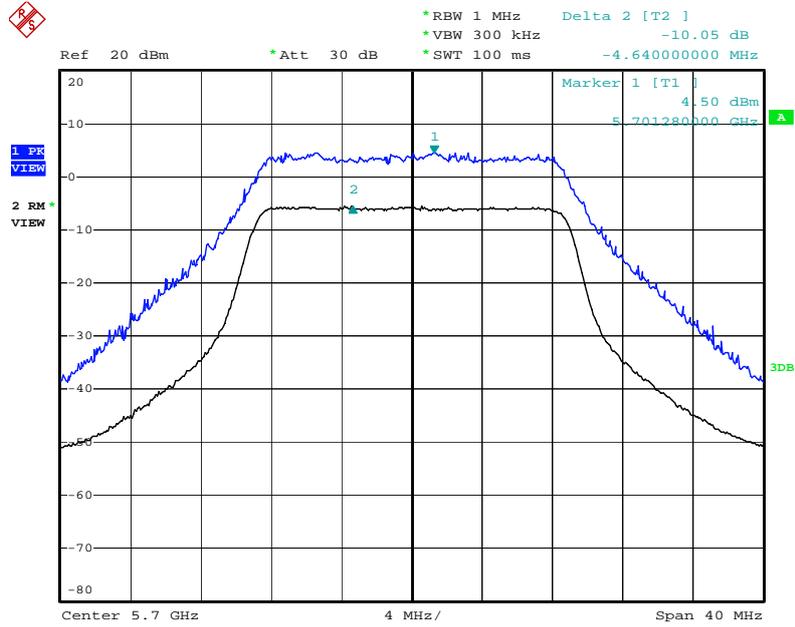


Date: 14.MAY.2010 19:08:24

Peak Excursion Plot on Configuration IEEE 802.11n Ant. A+Ant. B (40MHz) / 5190 MHz

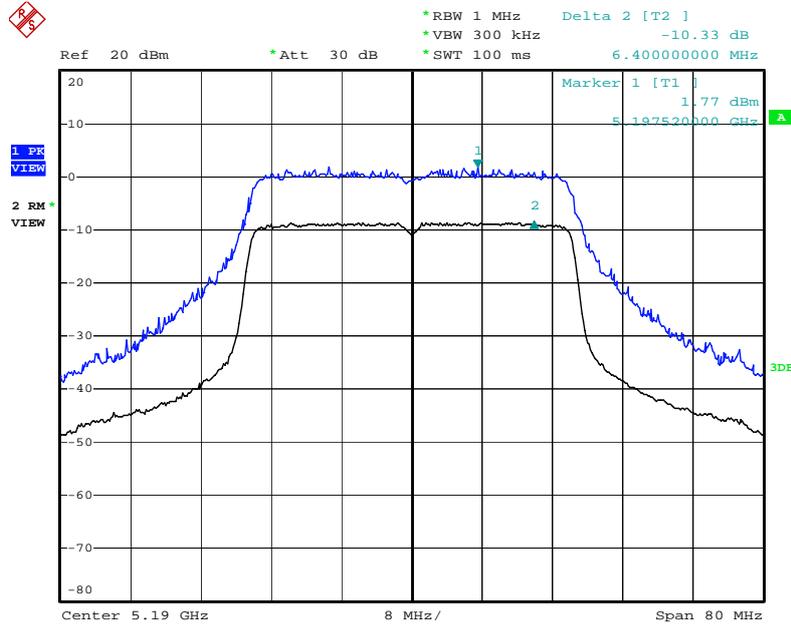


Date: 14.MAY.2010 19:15:51

Peak Excursion Plot on Configuration IEEE 802.11n Ant. A+Ant. B (40MHz) / 5230 MHz

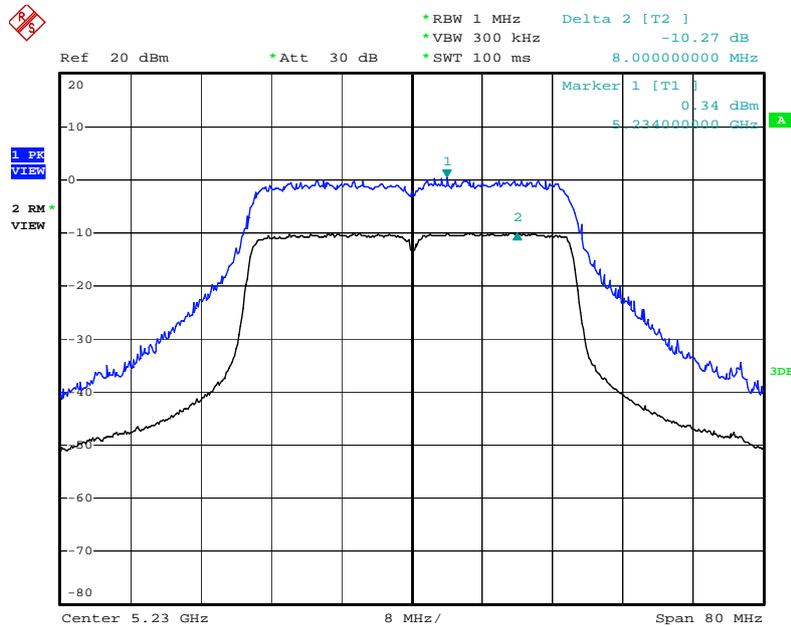


Date: 14.MAY.2010 19:17:43

Peak Excursion Plot on Configuration IEEE 802.11n Ant. A+Ant. B (40MHz) / 5270 MHz

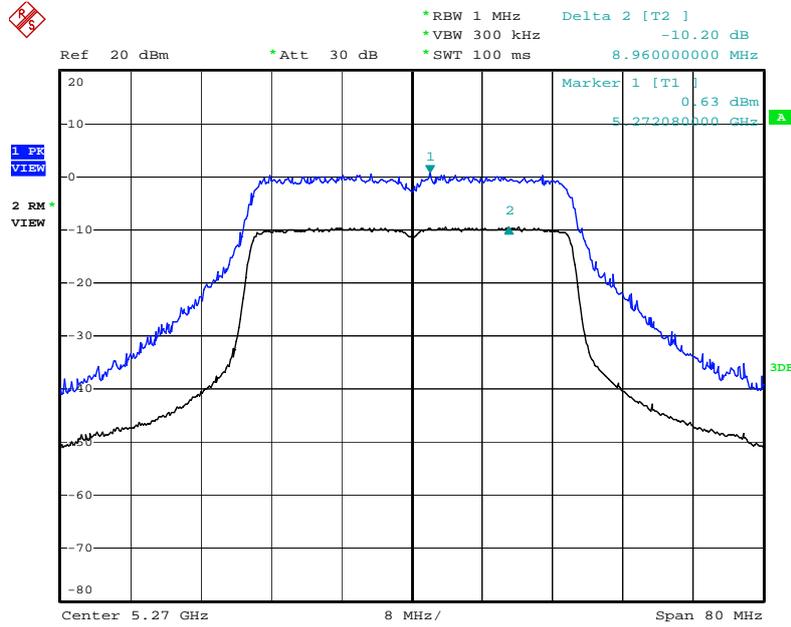


Date: 14.MAY.2010 19:20:10

Peak Excursion Plot on Configuration IEEE 802.11n Ant. A+Ant. B (40MHz) / 5310 MHz

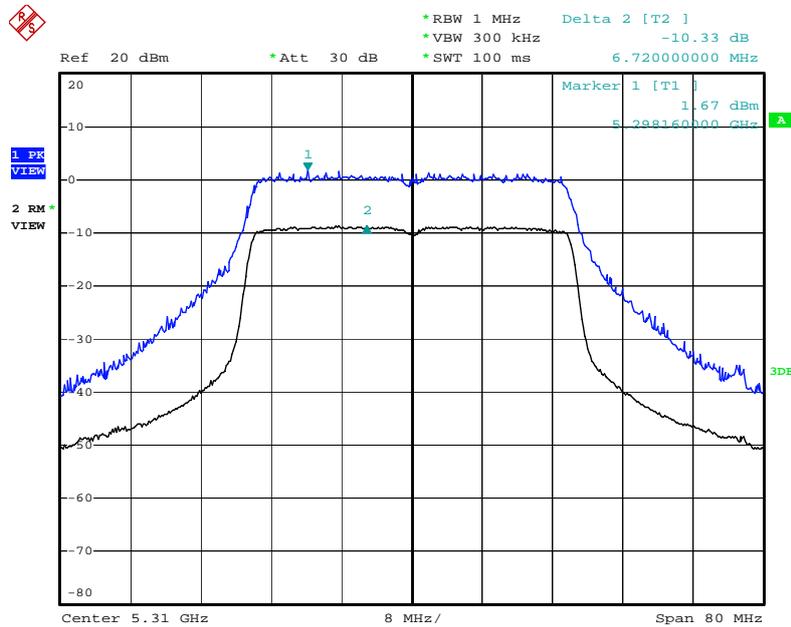


Date: 14.MAY.2010 19:22:08

Peak Excursion Plot on Configuration IEEE 802.11n Ant. A+Ant. B (40MHz) / 5510 MHz

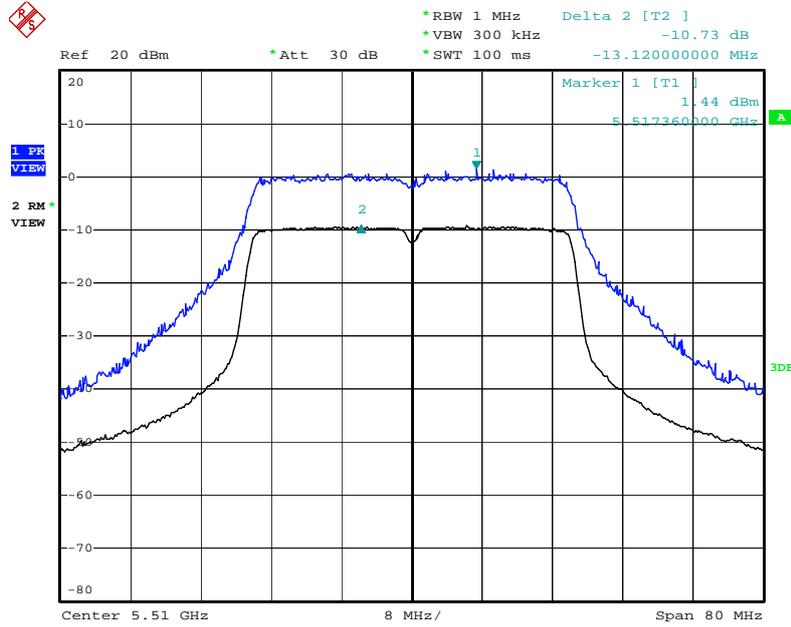


Date: 14.MAY.2010 19:23:52

Peak Excursion Plot on Configuration IEEE 802.11n Ant. A+Ant. B (40MHz) / 5550 MHz

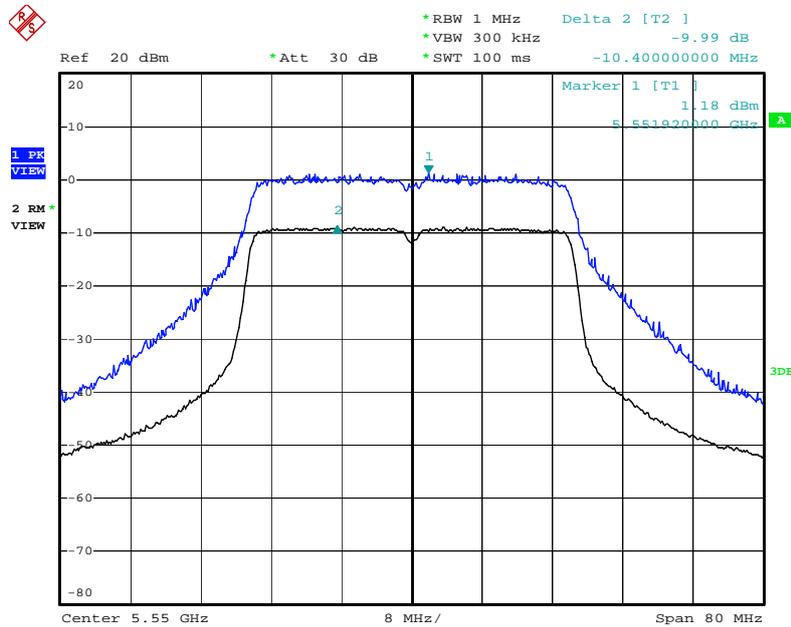

Date: 14.MAY.2010 19:25:40

Peak Excursion Plot on Configuration IEEE 802.11n Ant. A+Ant. B (40MHz) / 5670 MHz

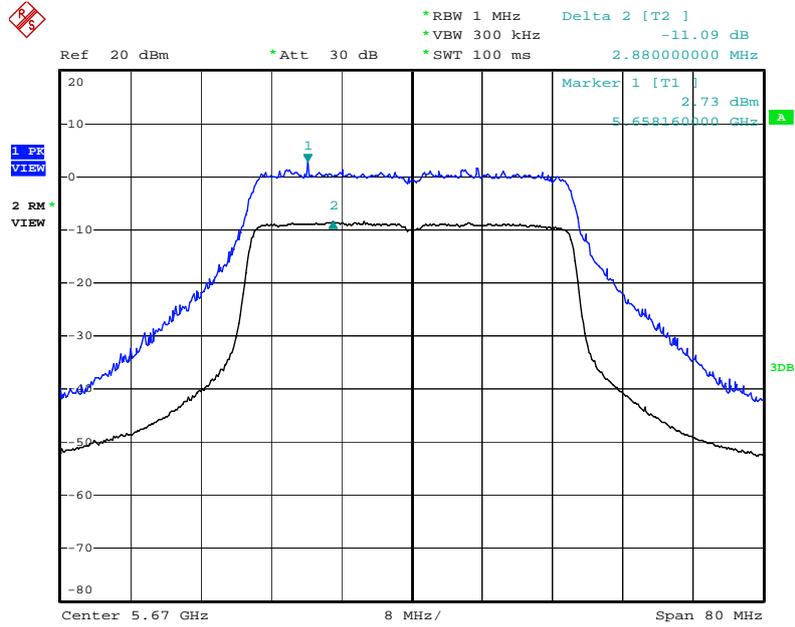

Date: 14.MAY.2010 19:27:20

3.6 Radiated Emissions Measurement

3.6.1 Limit

For transmitters operating in the 5.15-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz (68.3dBuV/m at 3m). For transmitters operating in the 5.47-5.725 GHz band: all emissions outside of the 5.47-5.725 GHz band shall not exceed an EIRP of -27 dBm/MHz (68.3dBuV/m at 3m). For transmitters operating in the 5.725-5.825 GHz band: all emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an EIRP of -17 dBm/MHz (78.3dBuV/m at 3m); for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an EIRP of -27 dBm/MHz (68.3dBuV/m at 3m). In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

3.6.2 Measuring Instruments and Setting

Please refer to section 4 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	40 GHz
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	1MHz / 1MHz z for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

3.6.3 Test Procedures


1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

3.6.4 Test Setup Layout

For radiated emissions below 30MHz

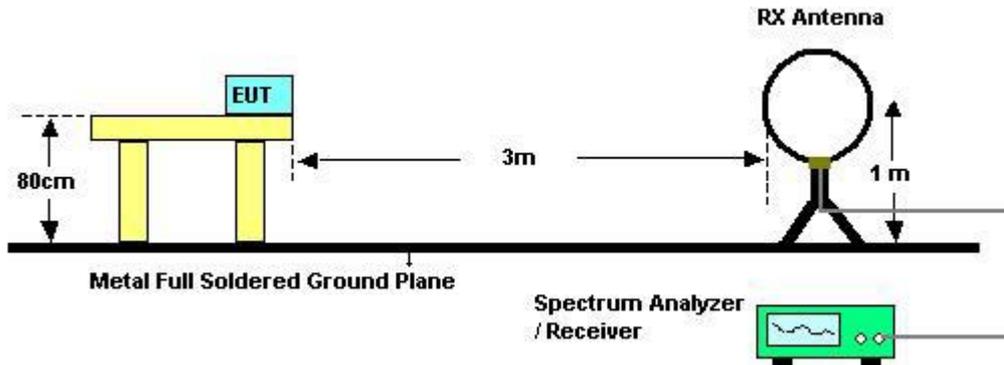

For radiated emissions above 30MHz

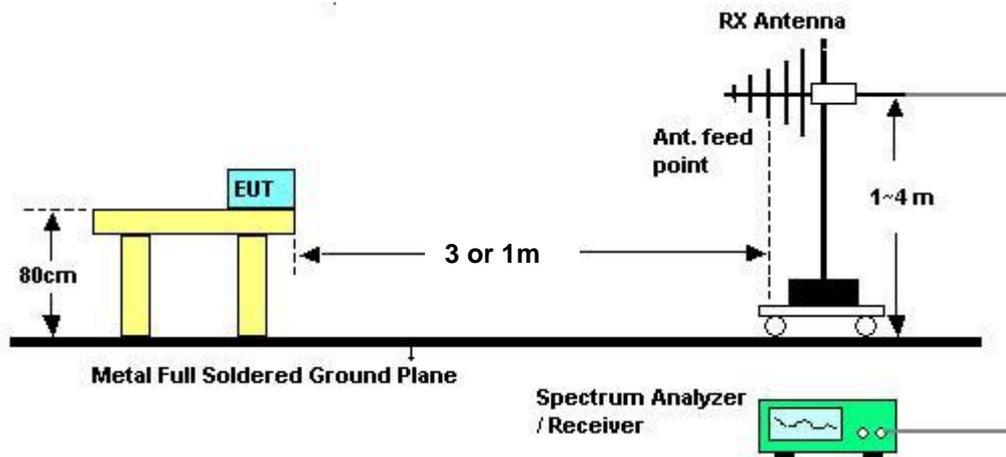

Above 5GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1m.

Distance extrapolation factor = $20 \log(\text{specific distance [3m]} / \text{test distance [1m]})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [9.54 dB].

3.6.5 Test Deviation

There is no deviation with the original standard.

3.6.6 EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

3.6.7 Results of Radiated Emissions (9kHz~30MHz)

Final Test Date	May 21,2010	Test Site No.	03CH03-HY
Temperature	24.6	Humidity	61%
Test Engineer	Eddie		

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

3.6.8 Results of Radiated Emissions (30MHz~1GHz)


Final Test Date	May 21,2010	Test Site No.	03CH03-HY
Temperature	24.6	Humidity	61%
Test Engineer	Eddie	Configurations	Normal Mode

Horizontal

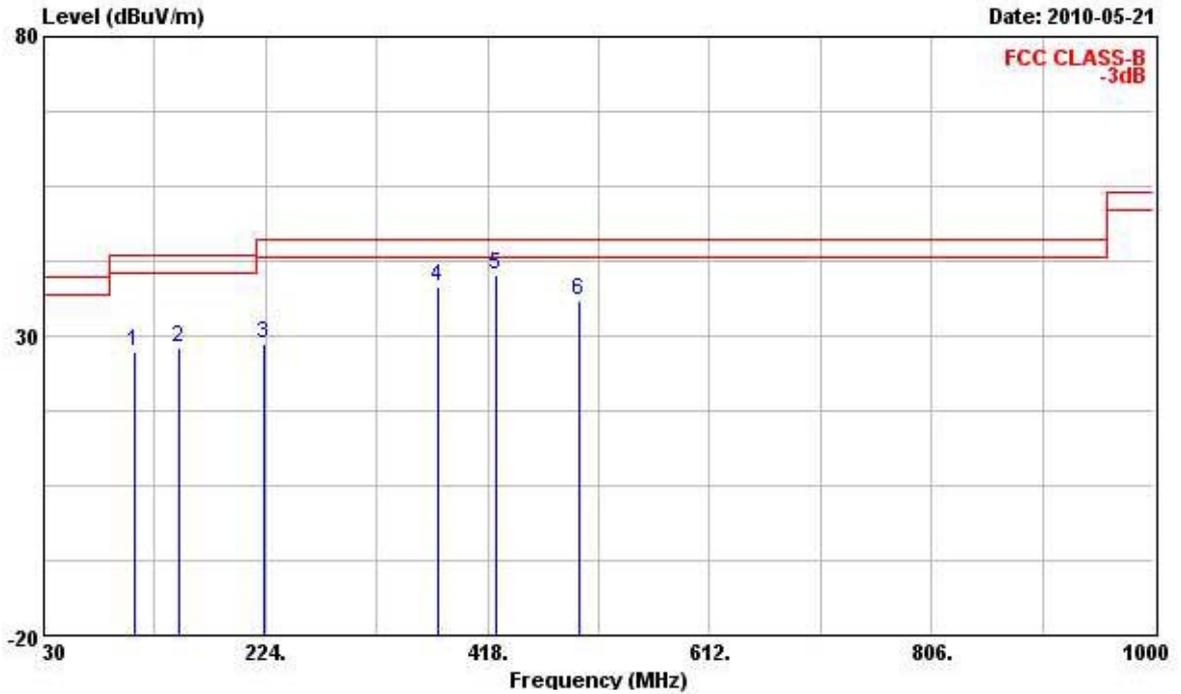

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	109.540	27.28	-16.22	43.50	40.78	12.40	1.77	27.67	---	---	Peak
2	148.340	28.17	-15.33	43.50	43.29	10.60	2.08	27.79	---	---	Peak
3	222.060	28.83	-17.17	46.00	44.91	9.39	2.54	28.01	---	---	Peak
4	374.350	38.18	-7.82	46.00	47.76	15.62	3.37	28.57	---	---	Peak
5	424.790	40.06	-5.94	46.00	48.17	17.20	3.55	28.86	---	---	Peak
6	498.510	35.89	-10.11	46.00	42.98	18.09	3.91	29.09	---	---	Peak

Vertical

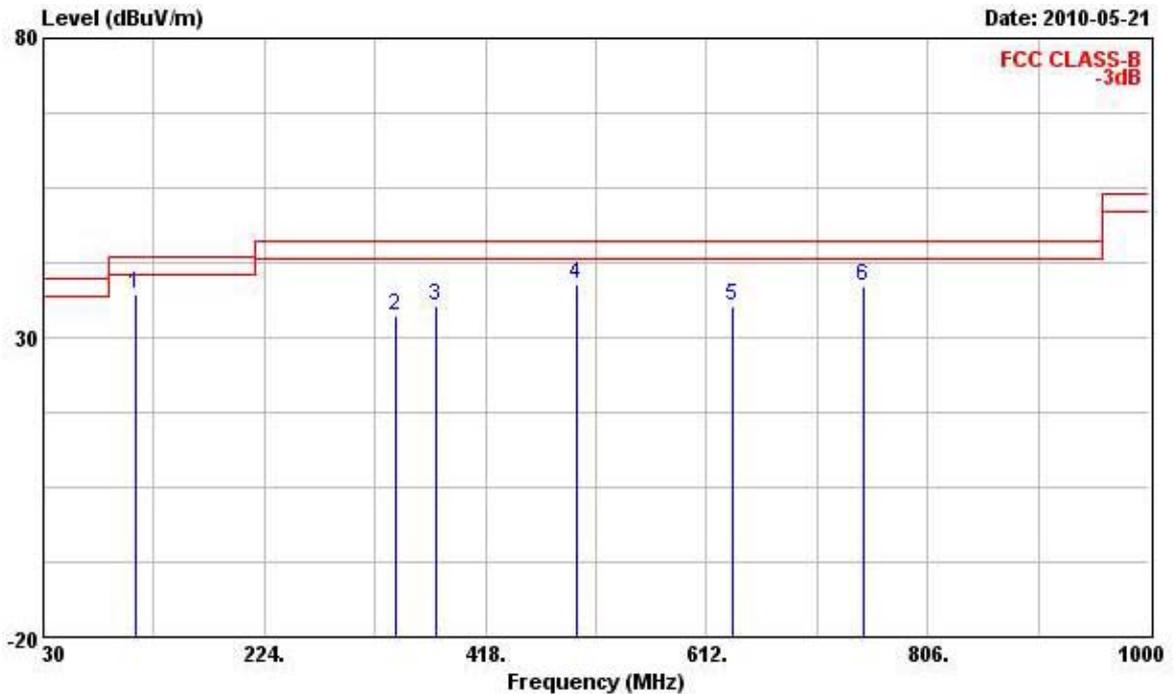

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	110.510	37.33	-6.17	43.50	50.79	12.42	1.78	27.67	---	---	Peak
2	339.430	33.49	-12.51	46.00	43.59	14.73	3.25	28.08	---	---	Peak
3	374.350	35.25	-10.75	46.00	44.83	15.62	3.37	28.57	---	---	Peak
4	498.510	38.84	-7.16	46.00	45.93	18.09	3.91	29.09	---	---	Peak
5	634.310	35.29	-10.71	46.00	40.59	19.53	4.60	29.43	---	---	Peak
6	749.740	38.51	-7.49	46.00	42.93	20.71	4.91	30.03	---	---	Peak

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).


Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

3.6.9 Results for Radiated Emissions (1GHz~40GHz)

For Single Chain:


Final Test Date	May 07, 2010	Test Site No.	03CH03-HY
Temperature	24.6	Humidity	61%
Test Engineer	Eddie	Configuration	802.11a Ch. 36

Horizontal

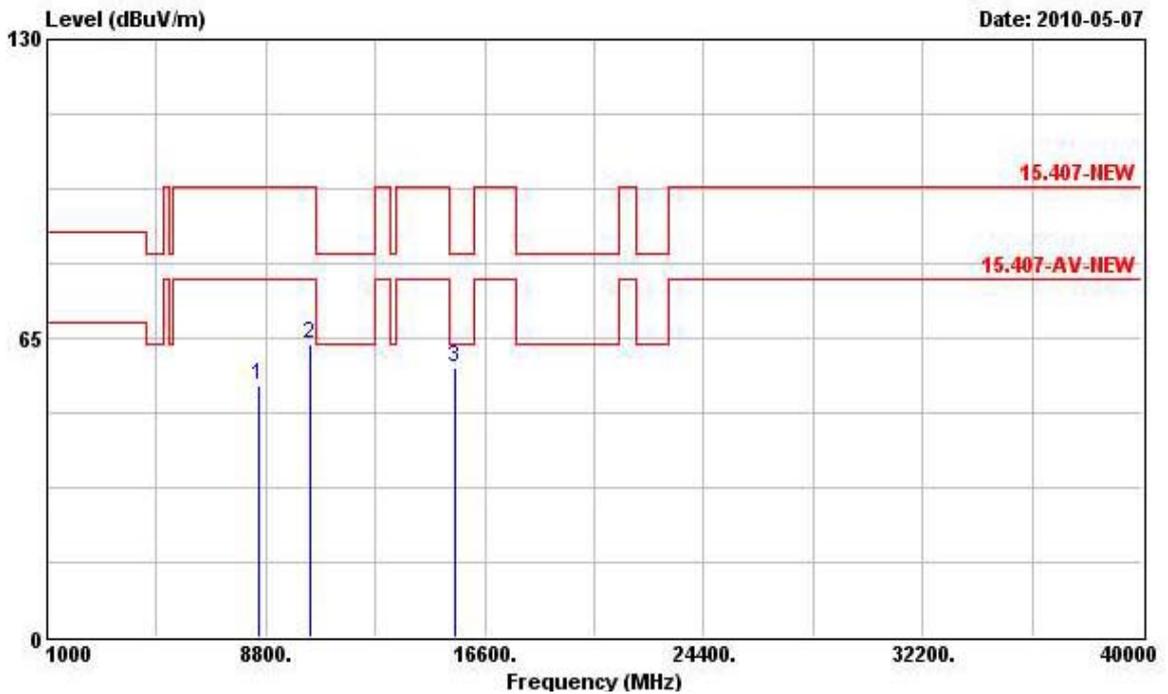

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	8572.000	54.65	-23.19	77.84	43.03	38.34	5.35	32.07	---	---	PK
2	10364.000	63.91	-13.93	77.84	50.31	39.33	6.09	31.82	---	---	PK
3 @	15540.000	58.51	-5.03	63.54	44.83	37.51	7.37	31.21	---	---	PK


Vertical

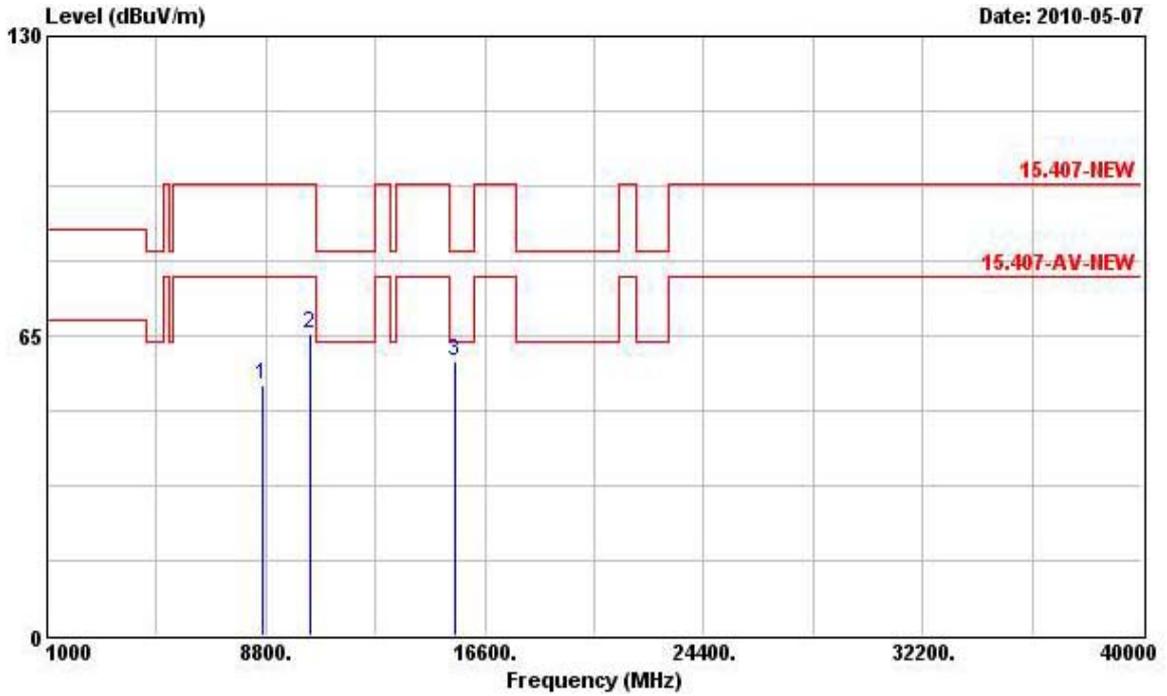

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	8700.000	54.36	-23.48	77.84	42.92	38.42	5.15	32.13	---	---	PK
2	10360.000	65.61	-12.23	77.84	52.01	39.33	6.09	31.82	---	---	PK
3 @	15544.000	59.40	-4.14	63.54	45.71	37.52	7.37	31.21	---	---	PK


Final Test Date	May 07, 2010	Test Site No.	03CH03-HY
Temperature	24.6	Humidity	61%
Test Engineer	Eddie	Configuration	802.11a Ch. 40

Horizontal

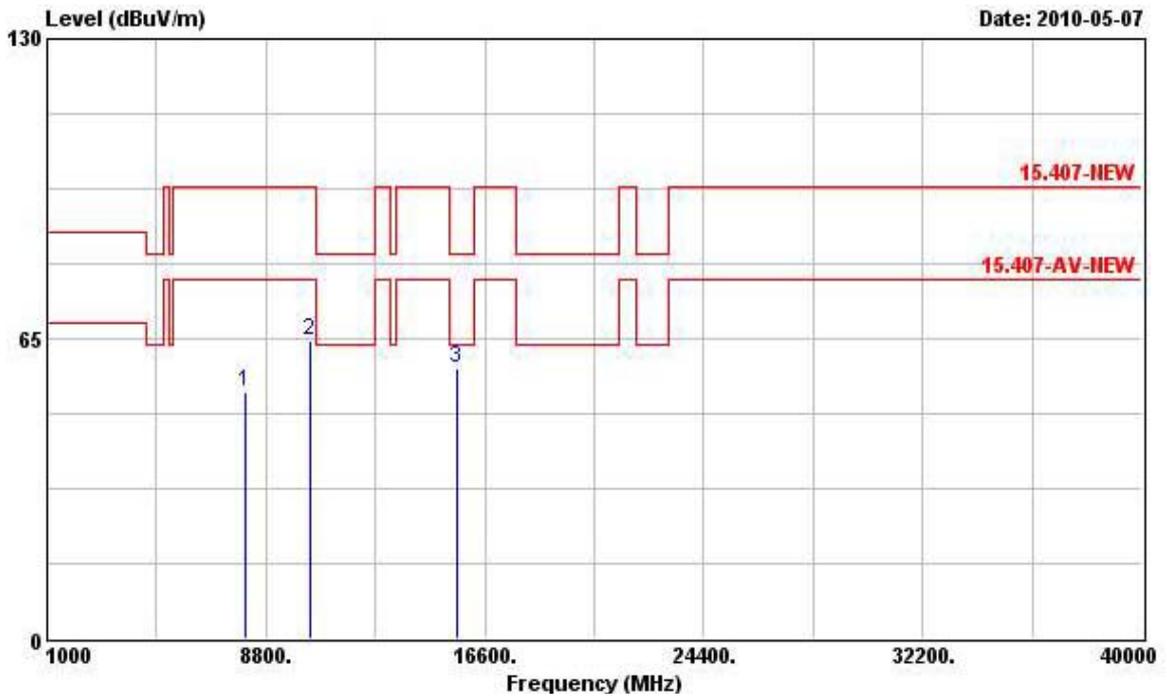

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	8088.000	53.65	-24.19	77.84	43.11	37.89	4.84	32.19	---	---	PK
2	10396.000	64.65	-13.19	77.84	50.97	39.32	6.14	31.78	---	---	PK
3	15596.000	58.66	-4.88	63.54	44.97	37.54	7.38	31.23	---	---	PK


Vertical

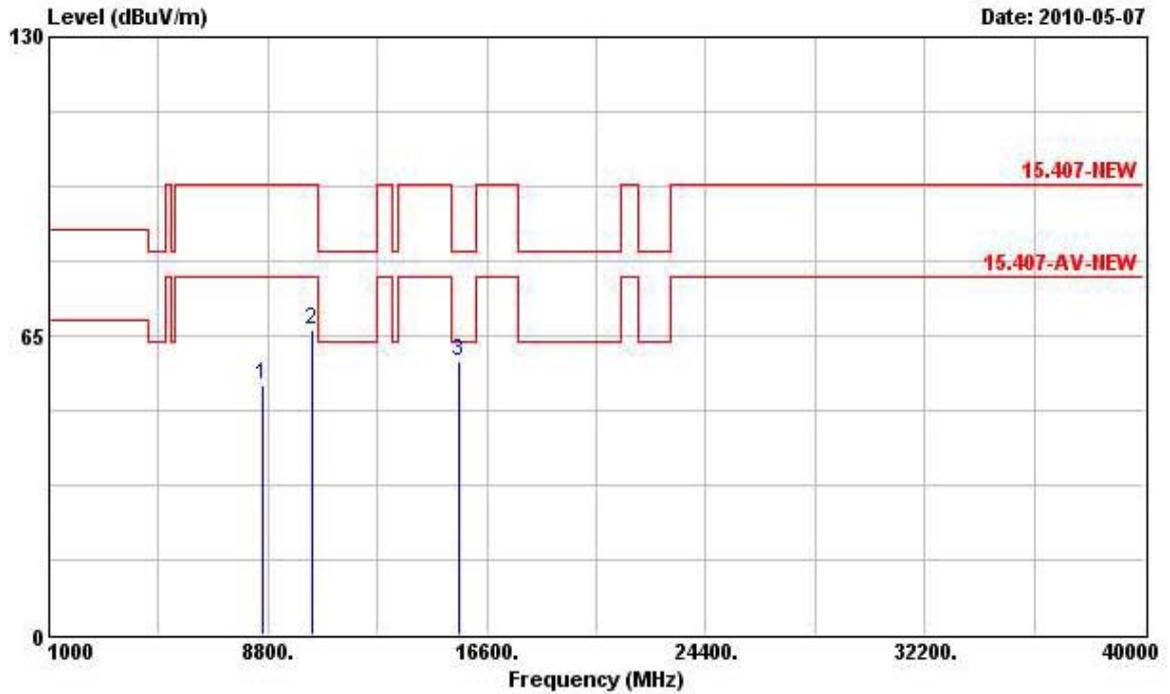

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	8600.000	54.40	-23.44	77.84	42.84	38.36	5.28	32.08	---	---	PK
2	10400.000	66.47	-11.37	77.84	52.75	39.32	6.14	31.73	---	---	PK
3 @	15604.000	59.32	-4.22	63.54	45.63	37.54	7.39	31.24	---	---	PK


Final Test Date	May 07, 2010	Test Site No.	03CH03-HY
Temperature	24.6	Humidity	61%
Test Engineer	Eddie	Configuration	802.11a Ch. 48

Horizontal

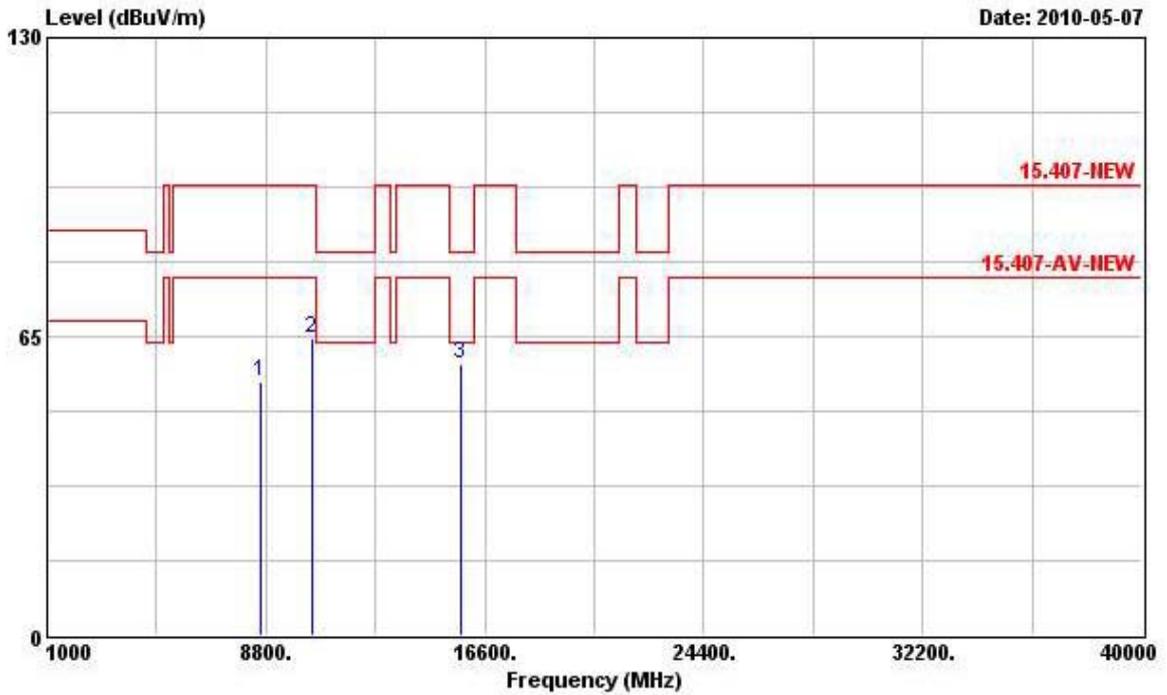

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	dB	cm	deg	
1	8604.000	54.95	-22.89	77.84	43.39	38.36	5.28	32.08	---	---	PK
2	10476.000	64.58	-13.26	77.84	50.64	39.31	6.23	31.60	---	---	PK
3 @	15720.000	58.92	-4.62	63.54	45.21	37.59	7.41	31.29	---	---	PK


Vertical

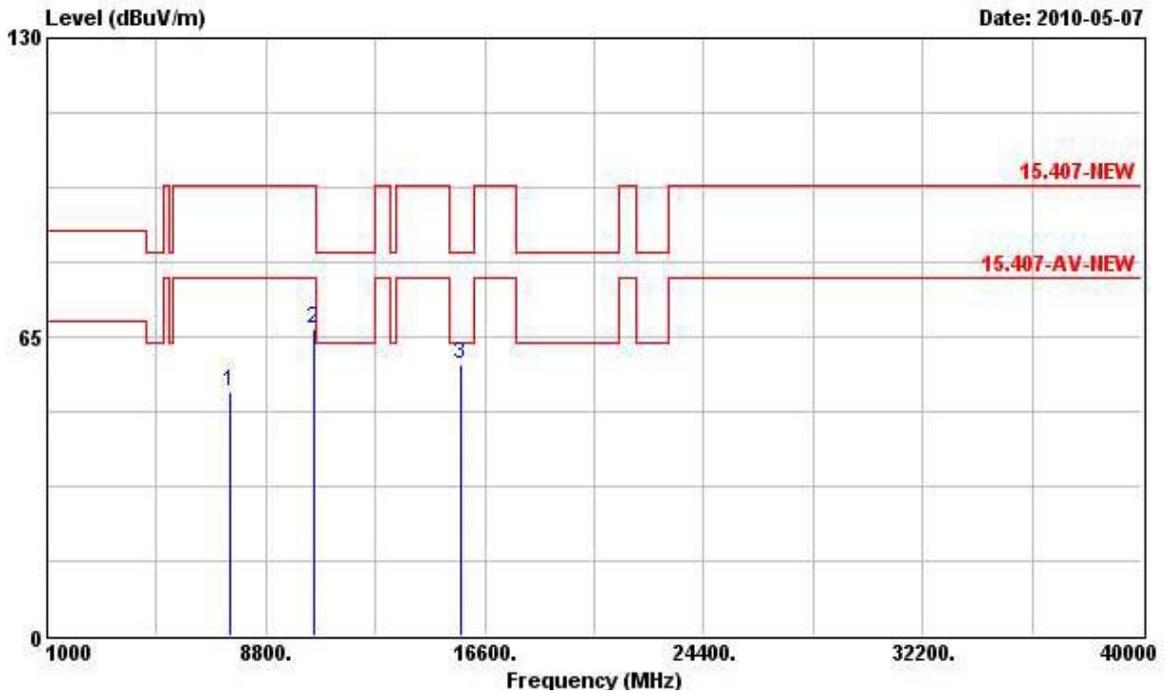

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	7556.000	53.07	-24.77	77.84	43.19	37.37	4.54	32.02	---	---	PK
2	10484.000	66.78	-11.06	77.84	52.84	39.30	6.23	31.60	---	---	PK
3 @	15720.000	58.99	-4.55	63.54	45.28	37.59	7.41	31.29	---	---	PK


Final Test Date	May 07, 2010	Test Site No.	03CH03-HY
Temperature	24.6	Humidity	61%
Test Engineer	Eddie	Configuration	802.11a Ch. 52

Horizontal

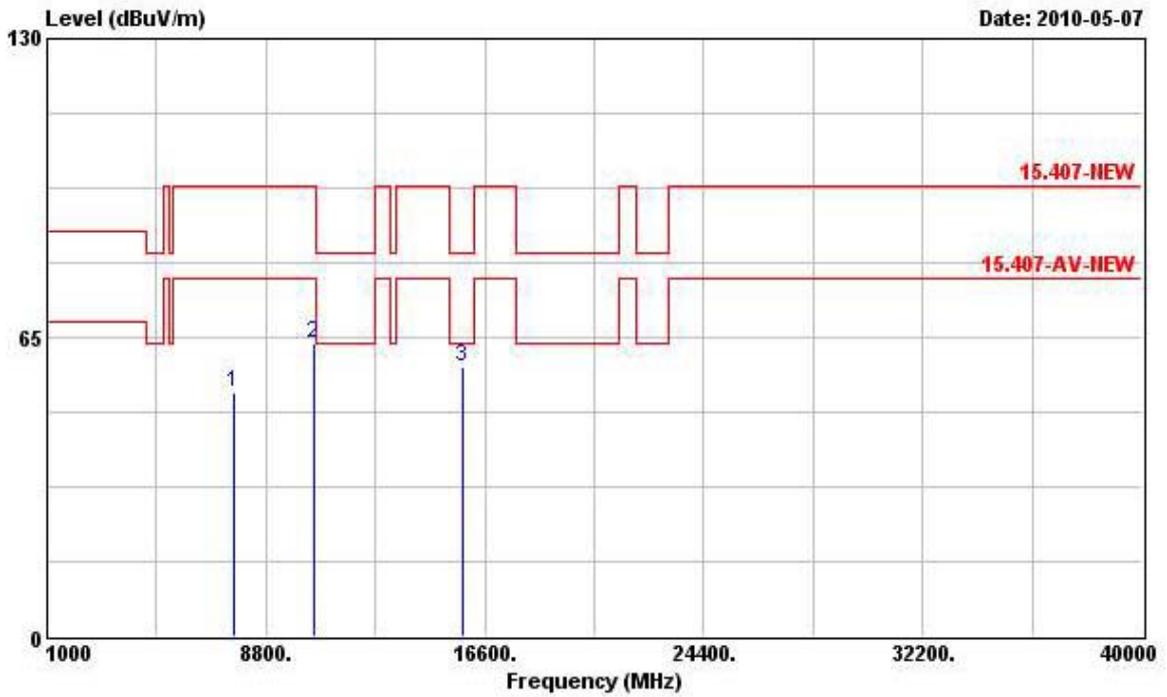

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	dB	cm	deg	
1	7692.000	52.89	-24.95	77.84	42.86	37.50	4.60	32.07	---	---	PK
2	10512.000	63.84	-14.00	77.84	49.83	39.29	6.28	31.55	---	---	PK
3 @	15784.000	58.40	-5.14	63.54	44.68	37.62	7.42	31.32	---	---	PK


Vertical

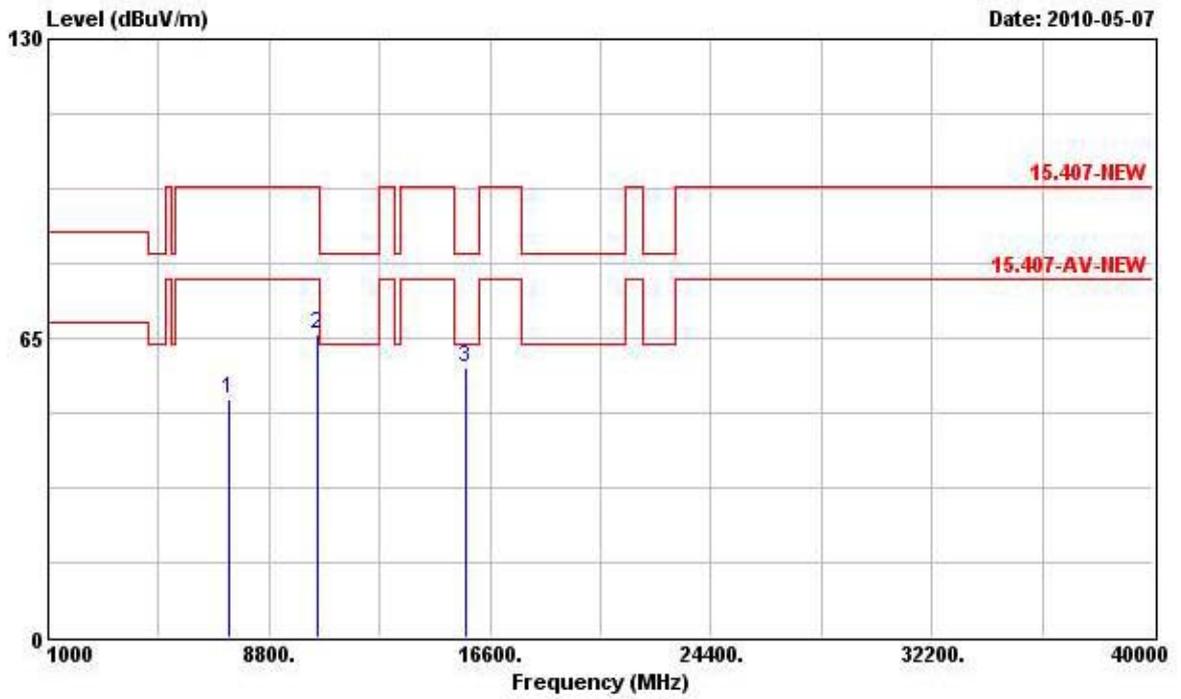

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	7372.000	51.95	-25.89	77.84	43.20	37.01	4.03	32.30	---	---	PK
2	10516.000	65.87	-11.97	77.84	51.86	39.29	6.28	31.55	---	---	PK
3 @	15776.000	58.60	-4.94	63.54	44.88	37.61	7.42	31.31	---	---	PK


Final Test Date	May 07, 2010	Test Site No.	03CH03-HY
Temperature	24.6	Humidity	61%
Test Engineer	Eddie	Configuration	802.11a Ch. 56

Horizontal

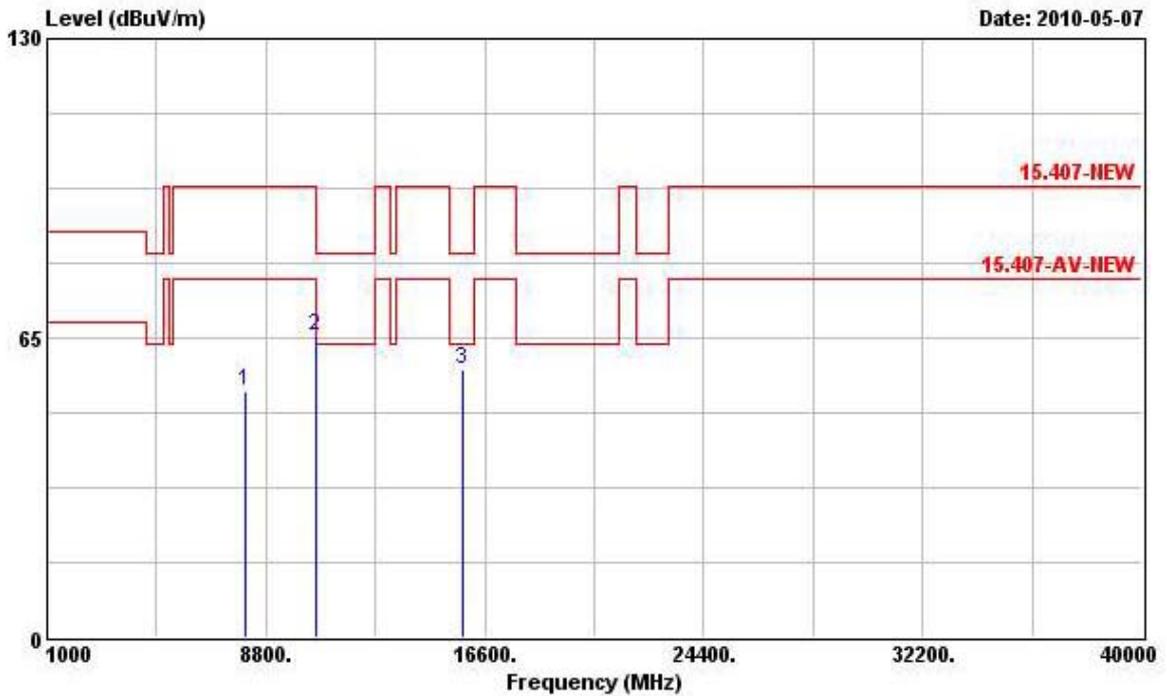

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	dB	cm	deg	
1	8060.000	53.61	-24.23	77.84	43.19	37.85	4.78	32.20	---	---	PK
2	10572.000	65.61	-12.23	77.84	51.65	39.26	6.30	31.60	---	---	PK
3 @	15840.000	58.21	-5.33	63.54	44.48	37.64	7.43	31.35	---	---	PK


Vertical

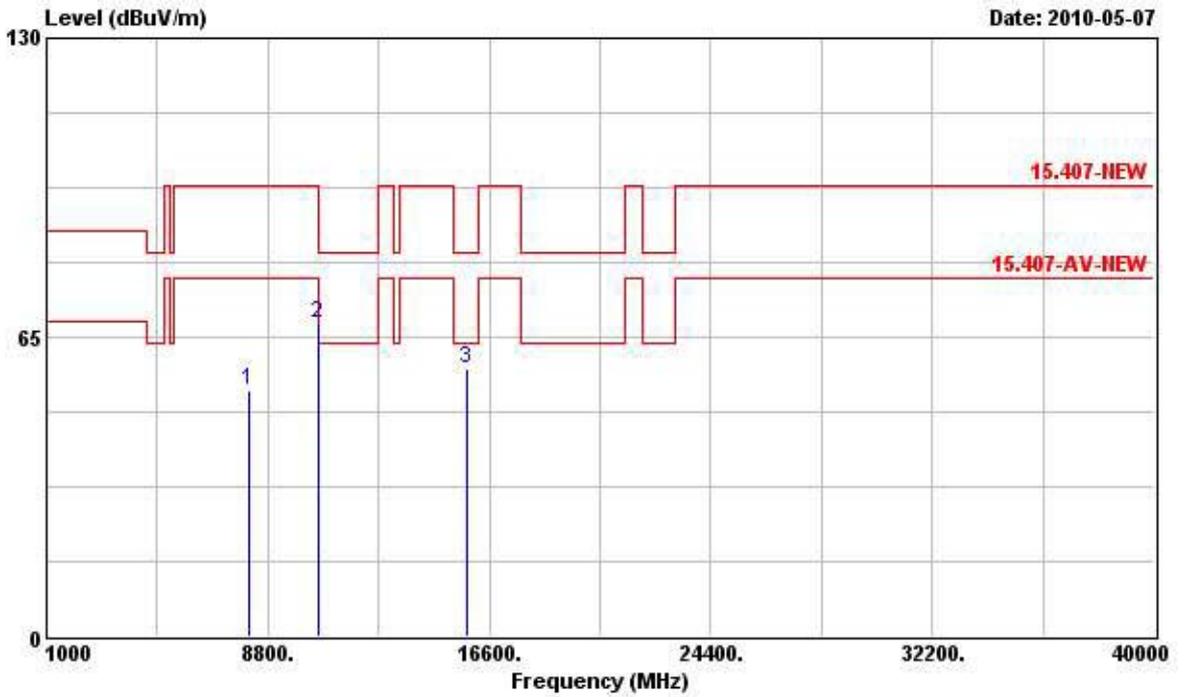

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	8112.000	53.51	-24.33	77.84	42.95	37.90	4.84	32.18	---	---	PK
2	10564.000	67.97	-9.87	77.84	54.01	39.26	6.30	31.60	---	---	PK
3 @	15840.000	58.11	-5.43	63.54	44.38	37.64	7.43	31.35	---	---	PK


Final Test Date	May 07, 2010	Test Site No.	03CH03-HY
Temperature	24.6	Humidity	61%
Test Engineer	Eddie	Configuration	802.11a Ch. 64

Horizontal

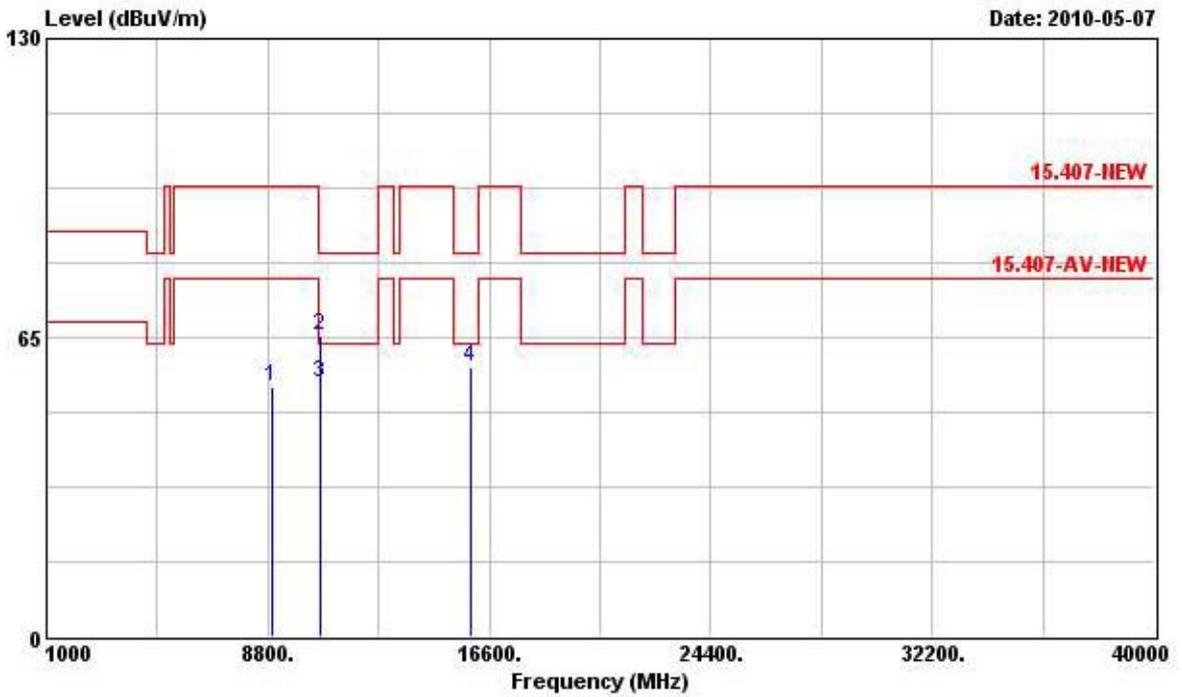

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	8972.000	54.31	-23.53	77.84	43.32	38.58	4.67	32.26	---	---	PK
2	10640.000	65.35	-18.19	83.54	51.47	39.22	6.34	31.68	---	---	PEAK
3	10640.000	55.08	-8.46	63.54	41.20	39.22	6.34	31.68	---	---	Average
4	15956.000	58.58	-4.96	63.54	44.84	37.69	7.46	31.40	---	---	PK


Vertical

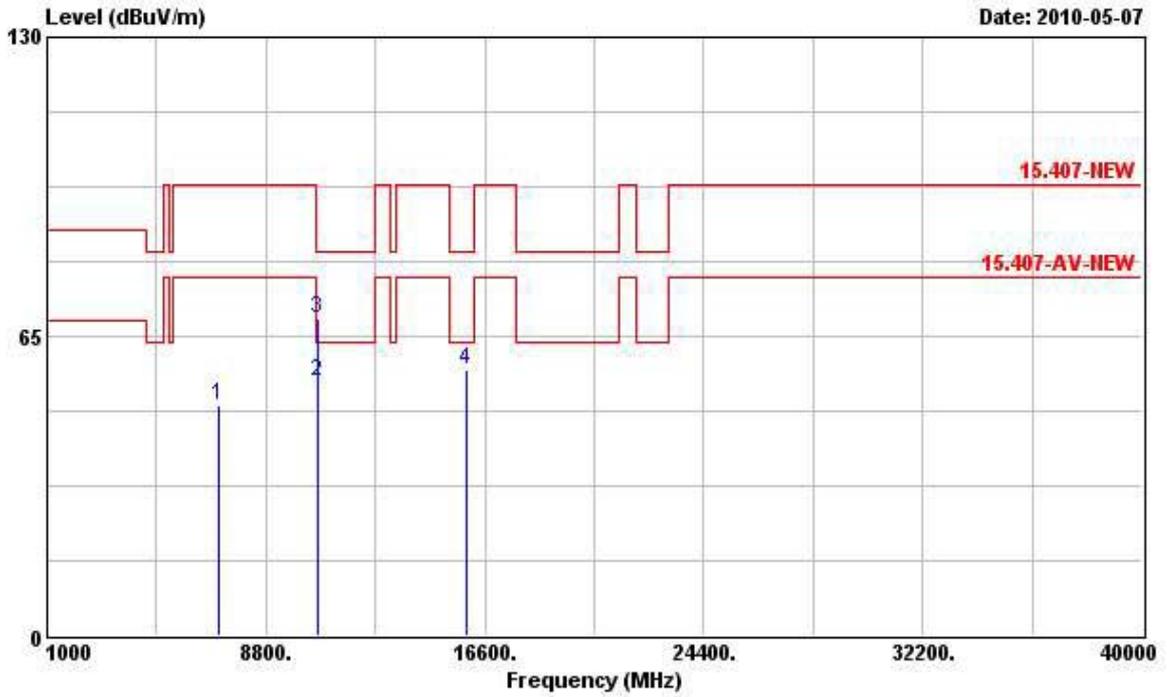

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	7092.000	50.15	-27.69	77.84	43.63	36.31	3.18	32.97	---	---	PK
2	10641.000	55.04	-8.50	63.54	41.16	39.22	6.34	31.68	---	---	AVERAGE
3	10641.000	68.68	-14.86	83.54	54.80	39.22	6.34	31.68	---	---	Peak
4	15956.000	57.81	-5.73	63.54	44.07	37.69	7.46	31.40	---	---	PK


Final Test Date	May 07, 2010	Test Site No.	03CH03-HY
Temperature	24.6	Humidity	61%
Test Engineer	Eddie	Configuration	802.11a Ch. 100

Horizontal

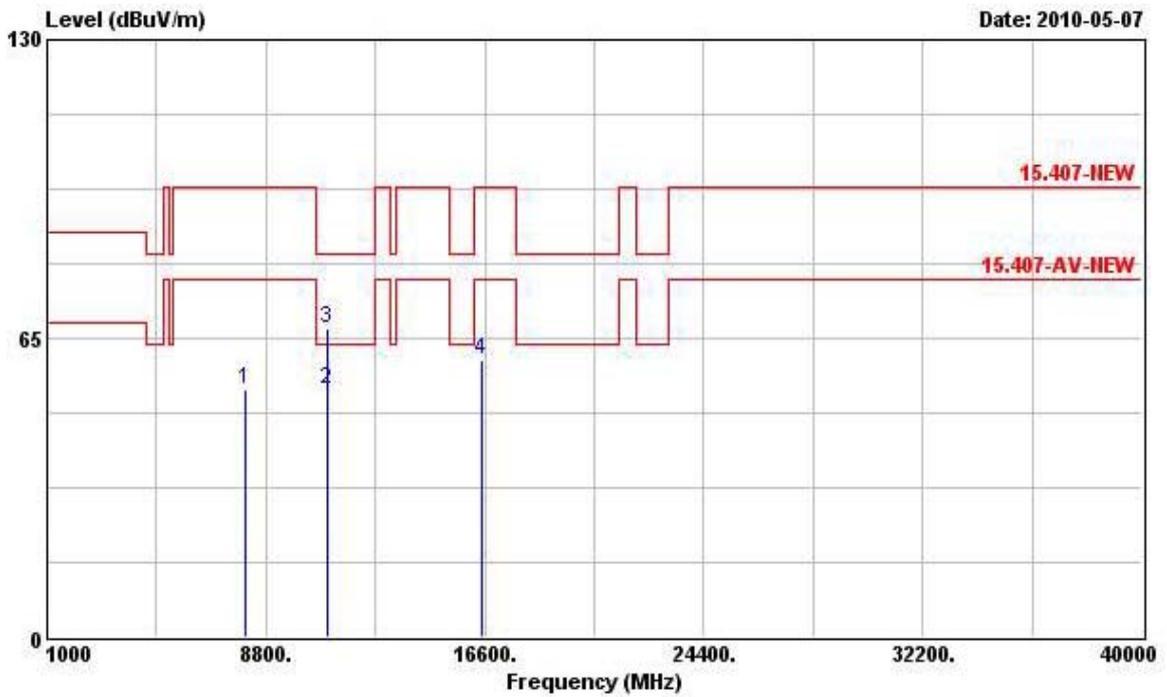

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	dB	cm	deg	
1	8092.000	53.81	-24.03	77.84	43.27	37.89	4.84	32.19	---	---	PK
2	11000.100	53.75	-9.79	63.54	40.25	39.00	6.55	32.05	---	---	AVERAGE
3	11000.100	67.25	-16.29	83.54	53.75	39.00	6.55	32.05	---	---	Peak
4	16496.000	60.11	-17.73	77.84	44.83	39.00	7.52	31.23	---	---	PK


Vertical

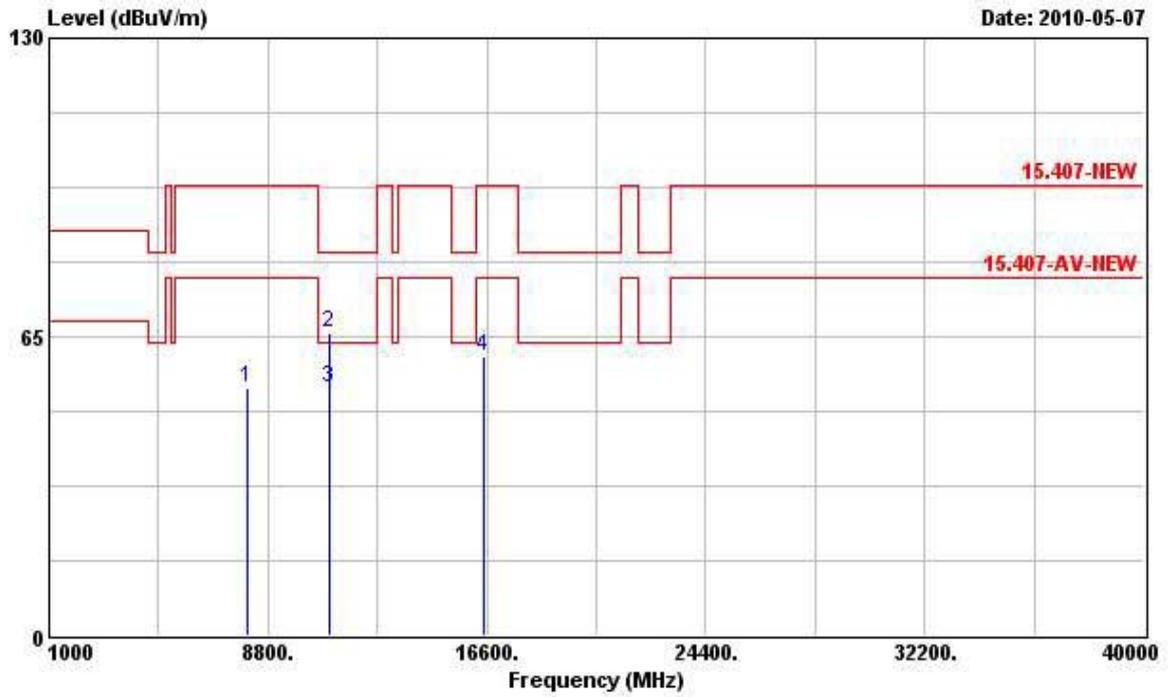

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	8100.000	53.72	-24.12	77.84	43.17	37.90	4.84	32.19	---	---	PK
2	11000.000	65.81	-17.73	83.54	52.31	39.00	6.55	32.05	---	---	PERK
3	11000.000	53.74	-9.80	63.54	40.24	39.00	6.55	32.05	---	---	Average
4	16504.000	60.73	-17.11	77.84	45.45	39.00	7.52	31.23	---	---	PK


Final Test Date	May 07, 2010	Test Site No.	03CH03-HY
Temperature	24.6	Humidity	61%
Test Engineer	Eddie	Configuration	802.11a Ch. 116

Horizontal

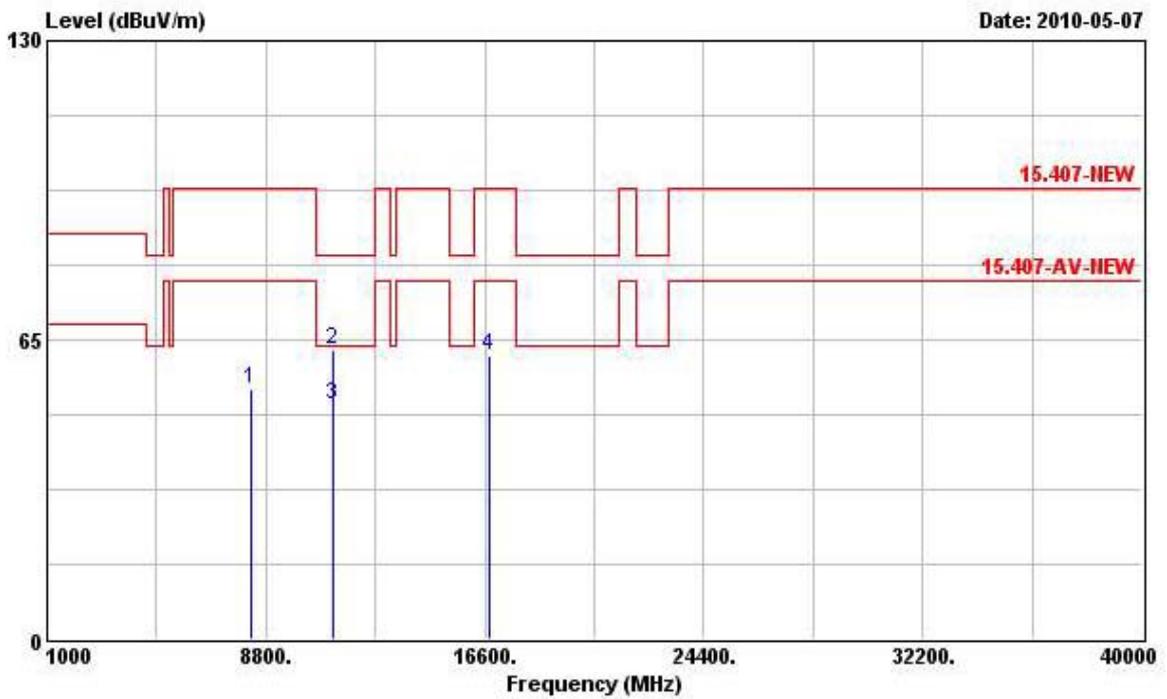

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	dB	cm	deg	
1	8276.000	54.18	-23.66	77.84	43.06	38.08	5.16	32.12	---	---	PK
2	11160.000	62.65	-20.89	83.54	48.56	39.23	6.64	31.78	---	---	Peak
3	11160.000	50.75	-12.79	63.54	36.66	39.23	6.64	31.78	---	---	Average
4	16740.000	61.74	-16.10	77.84	45.05	40.11	7.65	31.07	---	---	PK


Vertical

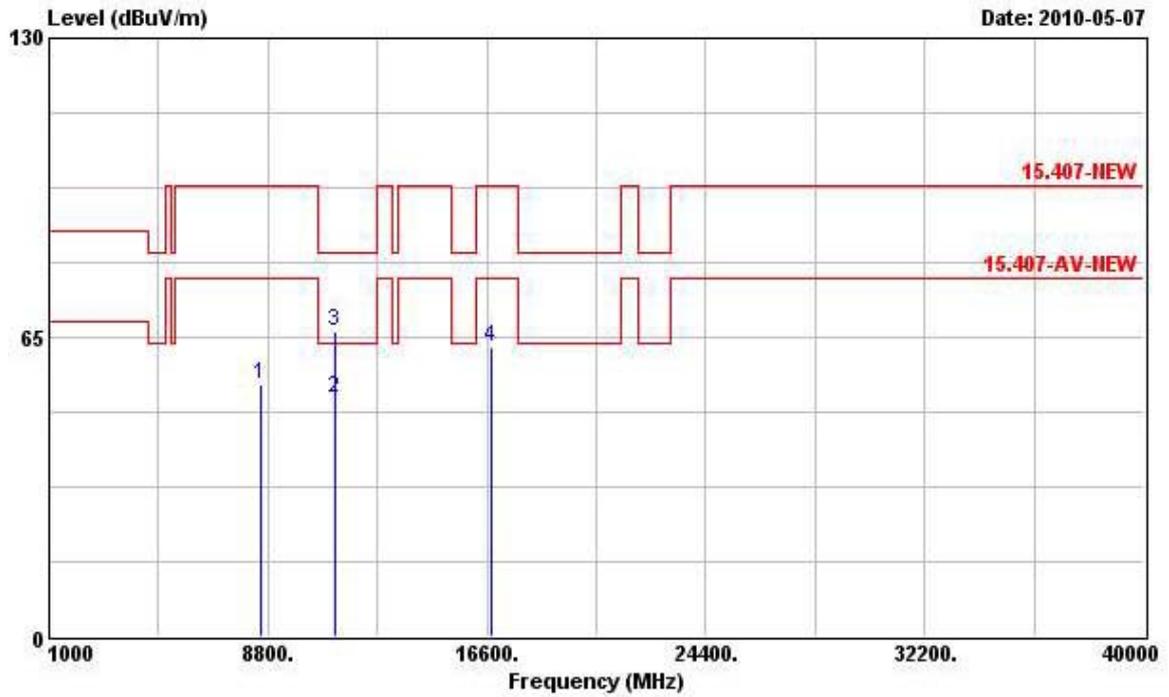

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	8560.000	54.53	-23.31	77.84	42.89	38.34	5.35	32.05	---	---	PK
2	11159.000	51.63	-11.91	63.54	37.54	39.23	6.64	31.78	---	---	AVERAGE
3	11159.000	66.43	-17.11	83.54	52.34	39.23	6.64	31.78	---	---	Peak
4	16736.000	62.83	-15.01	77.84	46.14	40.11	7.65	31.07	---	---	PK


Final Test Date	May 07, 2010	Test Site No.	03CH03-HY
Temperature	24.6	Humidity	61%
Test Engineer	Eddie	Configuration	802.11a Ch. 140

Horizontal

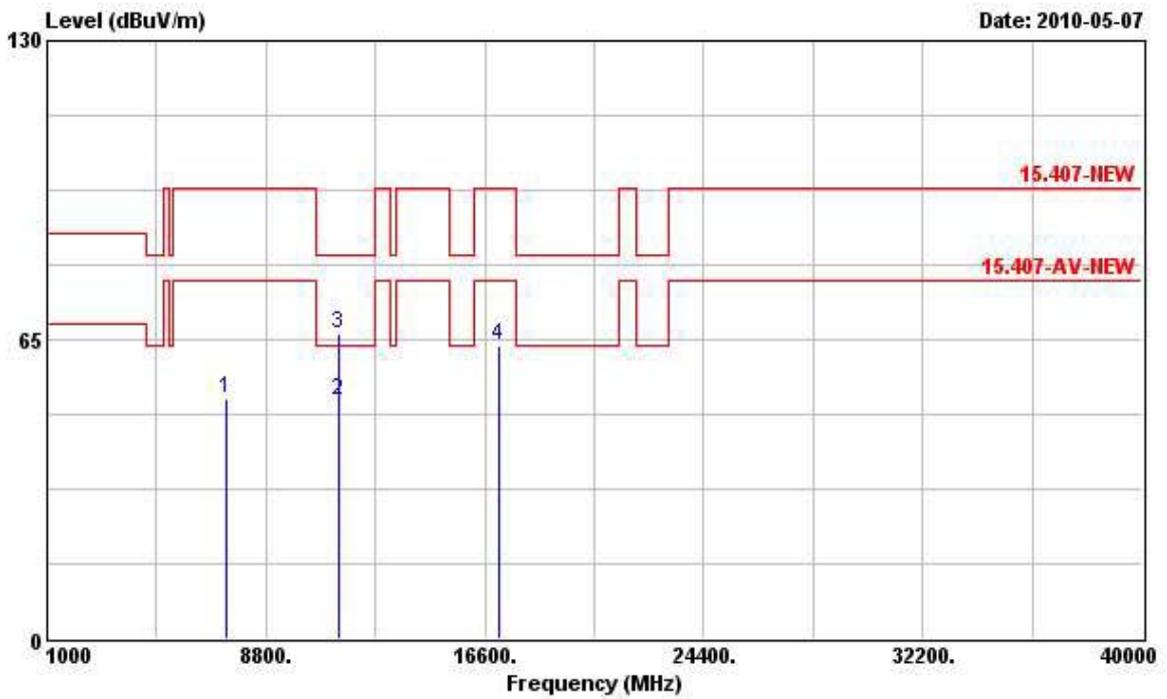

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	dB	cm	deg	
1	7392.000	52.13	-25.71	77.84	43.16	37.05	4.16	32.24	---	---	PK
2	11399.600	51.73	-11.81	63.54	36.77	39.56	6.75	31.34	---	---	AVERAGE
3	11399.600	66.37	-17.17	83.54	51.41	39.56	6.75	31.34	---	---	Peak
4	17100.000	63.67	-14.17	77.84	44.64	42.14	7.79	30.90	---	---	PK


Vertical

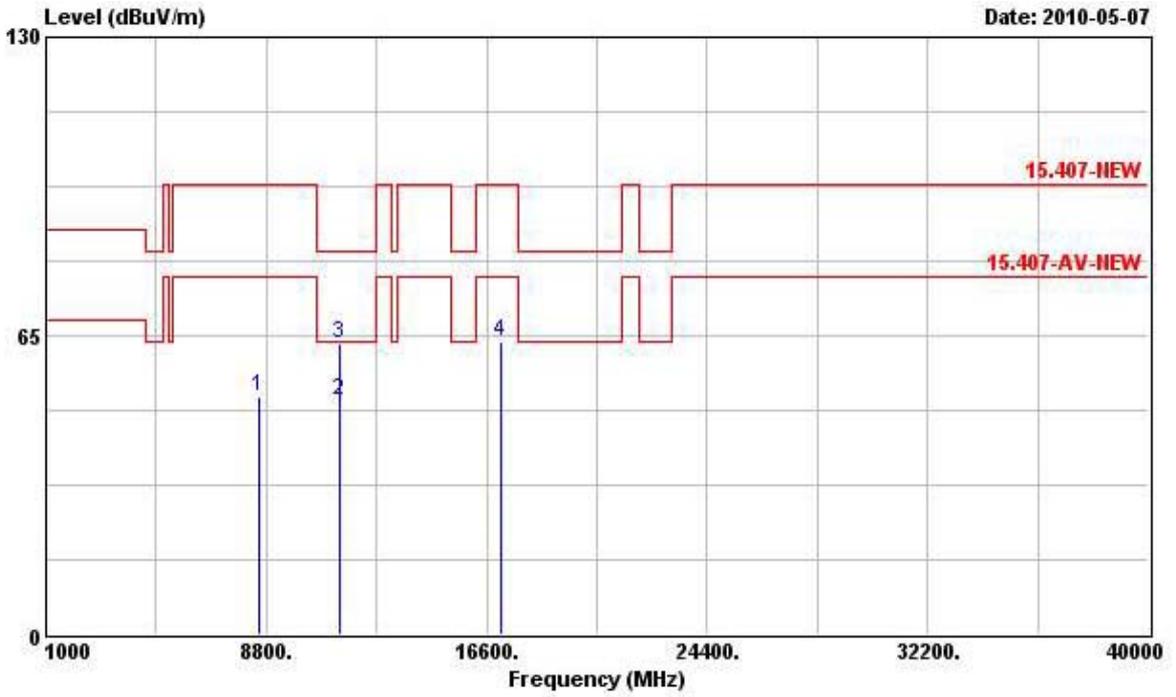

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	8560.000	51.70	-26.14	77.84	40.06	38.34	5.35	32.05	---	---	PK
2	11396.000	50.79	-12.75	63.54	35.83	39.56	6.75	31.34	---	---	Average
3	11396.000	63.49	-20.05	83.54	48.53	39.56	6.75	31.34	---	---	Peak
4	17100.000	63.73	-14.11	77.84	44.70	42.14	7.79	30.90	---	---	PK


Final Test Date	May 07, 2010	Test Site No.	03CH03-HY
Temperature	24.6	Humidity	61%
Test Engineer	Eddie	Configuration	802.11n Ch. 36 (20MHz)

Horizontal

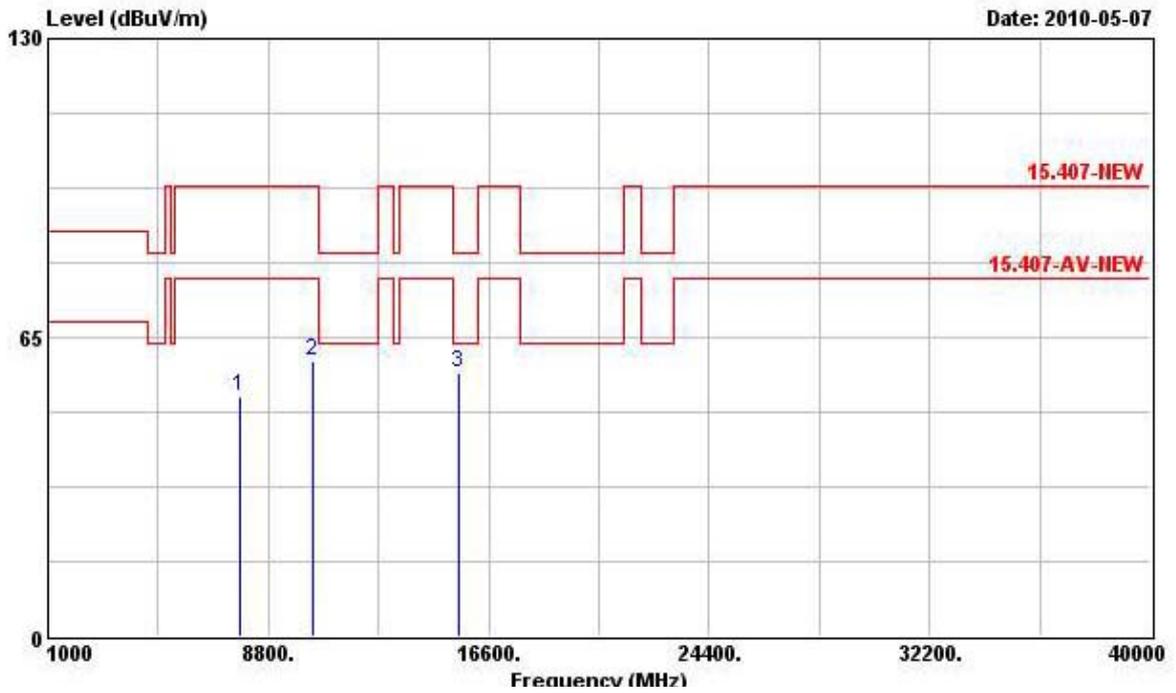

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	dB	cm	deg	
1	7781.000	52.35	-25.49	77.84	42.26	37.58	4.63	32.12	100	248	PK
2	10360.000	60.00	-17.84	77.84	46.41	39.33	6.09	31.82	100	248	PK
3 @	15540.000	57.44	-6.10	63.54	43.76	37.51	7.37	31.21	100	248	PK


Vertical

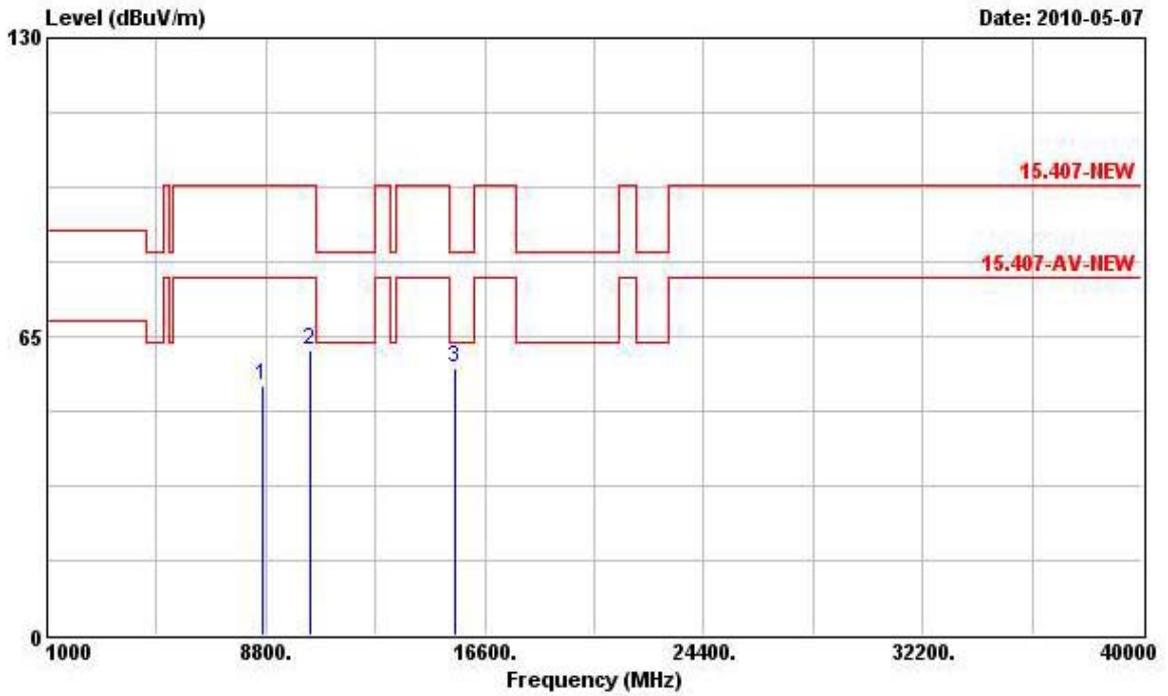

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	8650.000	54.24	-23.60	77.84	42.74	38.39	5.21	32.10	100	0	PK
2	10366.000	62.17	-15.67	77.84	48.58	39.33	6.09	31.82	100	0	PK
3 @	15540.000	58.30	-5.24	63.54	44.62	37.51	7.37	31.21	100	0	PK


Final Test Date	May 07, 2010	Test Site No.	03CH03-HY
Temperature	24.6	Humidity	61%
Test Engineer	Eddie	Configuration	802.11n Ch. 40 (20MHz)

Horizontal

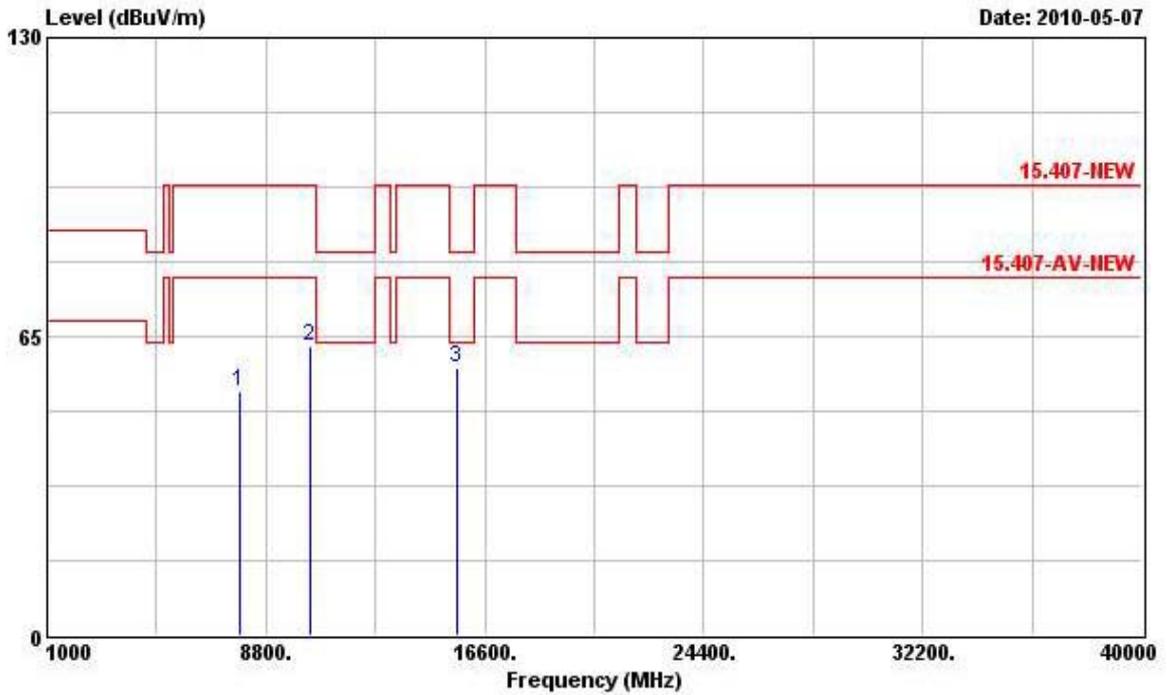

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	dB	cm	deg	
1	7869.000	53.05	-24.79	77.84	42.88	37.67	4.65	32.15	100		0 PK
2	10400.000	62.68	-15.16	77.84	48.96	39.32	6.14	31.73	100		0 PK
3	15600.000	58.02	-5.52	63.54	44.34	37.54	7.38	31.24	100		0 PK


Vertical

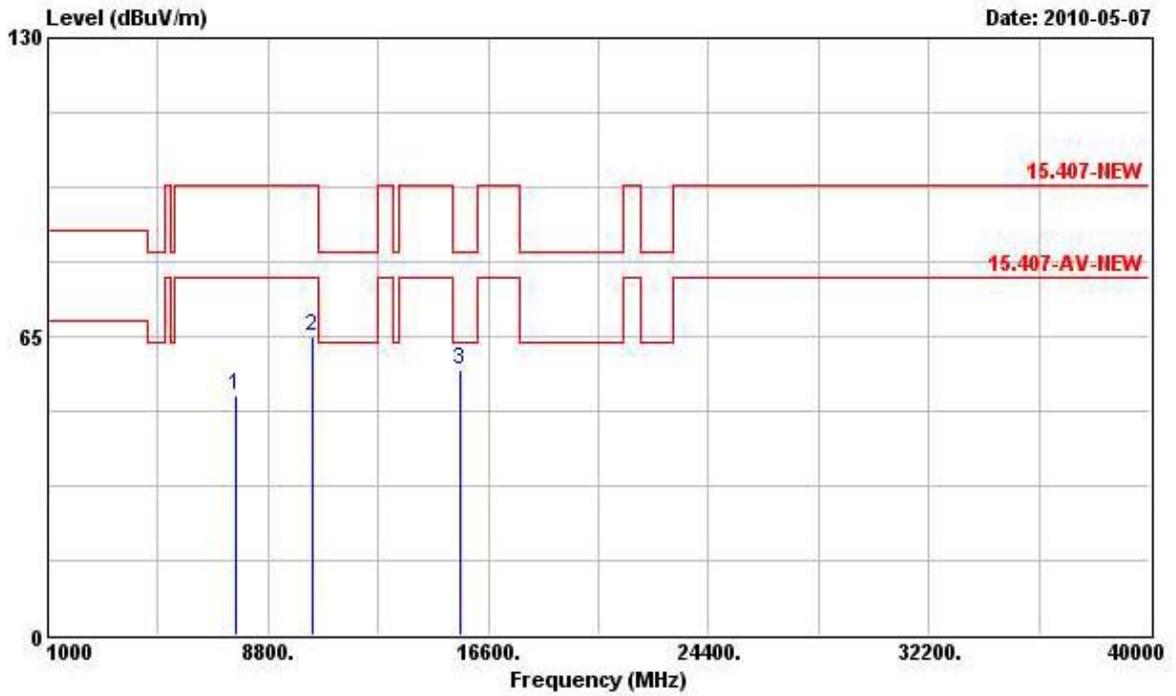

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	7638.000	52.18	-25.66	77.84	42.23	37.43	4.57	32.05	100	360	PK
2	10400.000	64.84	-13.00	77.84	51.12	39.32	6.14	31.73	100	360	PK
3 @	15600.000	57.78	-5.76	63.54	44.10	37.54	7.38	31.24	100	360	PK


Final Test Date	May 07, 2010	Test Site No.	03CH03-HY
Temperature	24.6	Humidity	61%
Test Engineer	Eddie	Configuration	802.11n Ch. 48 (20MHz)

Horizontal

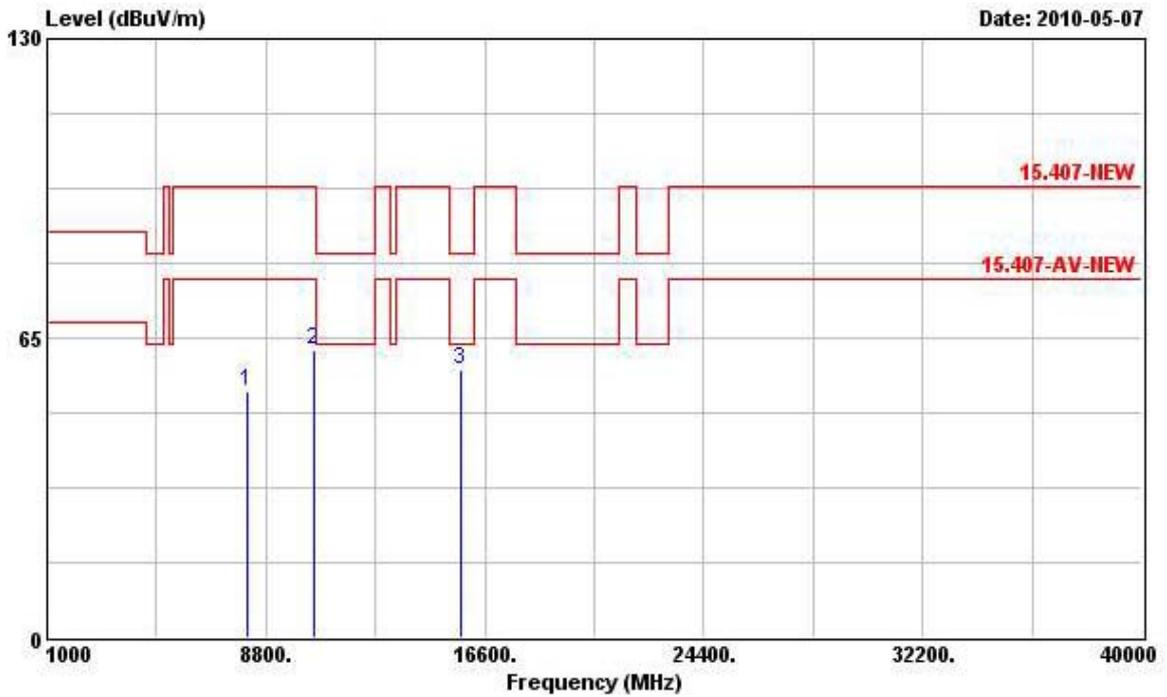

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	8122.000	53.54	-24.30	77.84	42.90	37.92	4.91	32.18	100	360	PK
2	10480.000	62.32	-15.52	77.84	48.38	39.30	6.23	31.60	100	360	PK
3 @	15720.000	57.96	-5.58	63.54	44.25	37.59	7.41	31.29	100	360	PK


Vertical

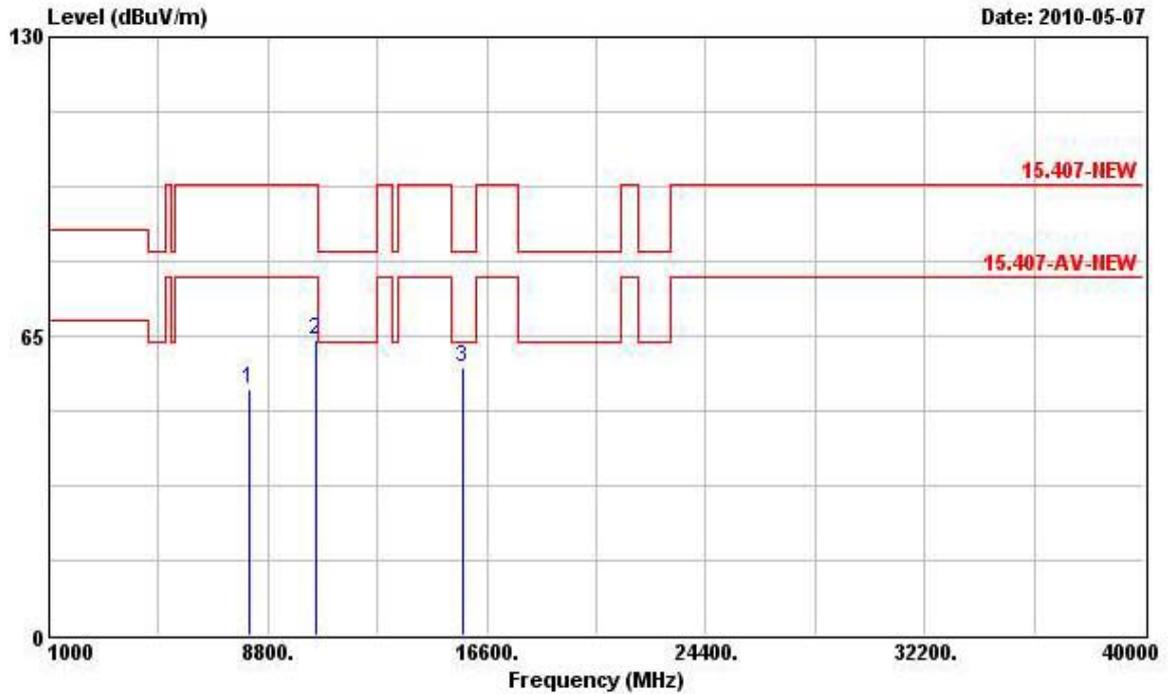

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	8122.000	53.38	-24.46	77.84	42.74	37.92	4.91	32.18	100		0 PK
2	10480.000	64.33	-13.51	77.84	50.39	39.30	6.23	31.60	100		0 PK
3 @	15720.000	57.98	-5.56	63.54	44.27	37.59	7.41	31.29	100		0 PK


Final Test Date	May 07, 2010	Test Site No.	03CH03-HY
Temperature	24.6	Humidity	61%
Test Engineer	Eddie	Configuration	802.11n Ch. 52 (20MHz)

Horizontal

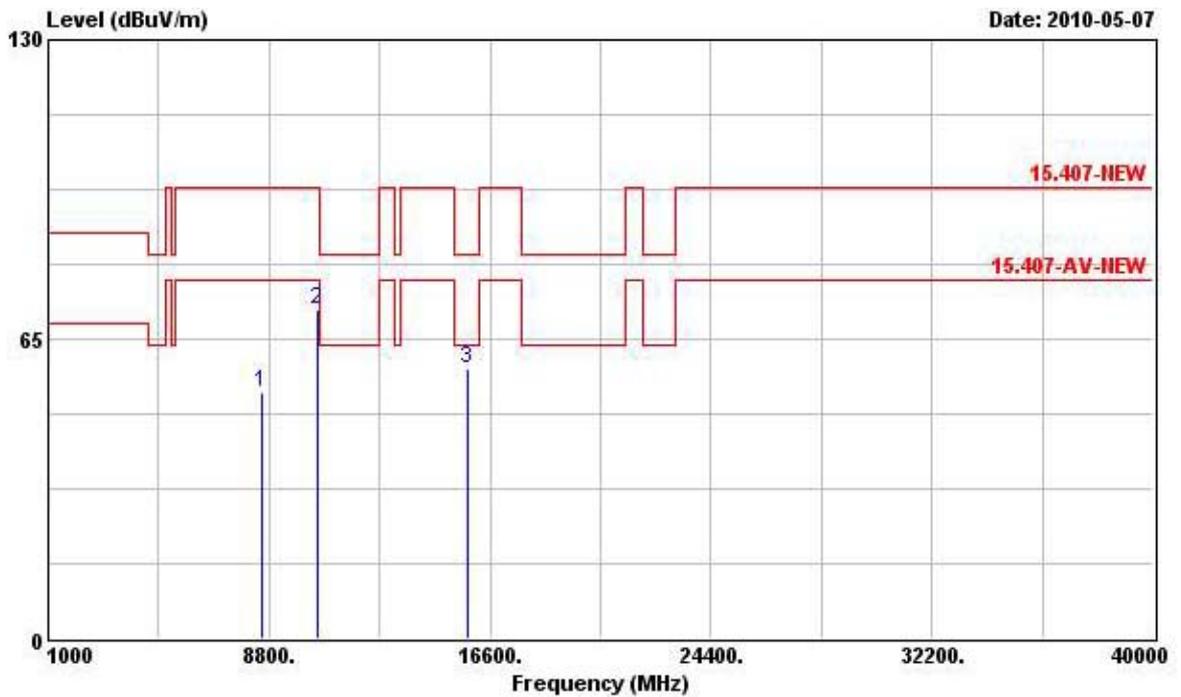

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	8562.000	53.50	-24.34	77.84	41.88	38.34	5.35	32.07	100	0	PK
2	10520.000	71.23	-6.61	77.84	57.21	39.29	6.28	31.55	100	0	PK
3	15780.000	58.62	-4.92	63.54	44.91	37.61	7.42	31.32	100	0	PK


Vertical

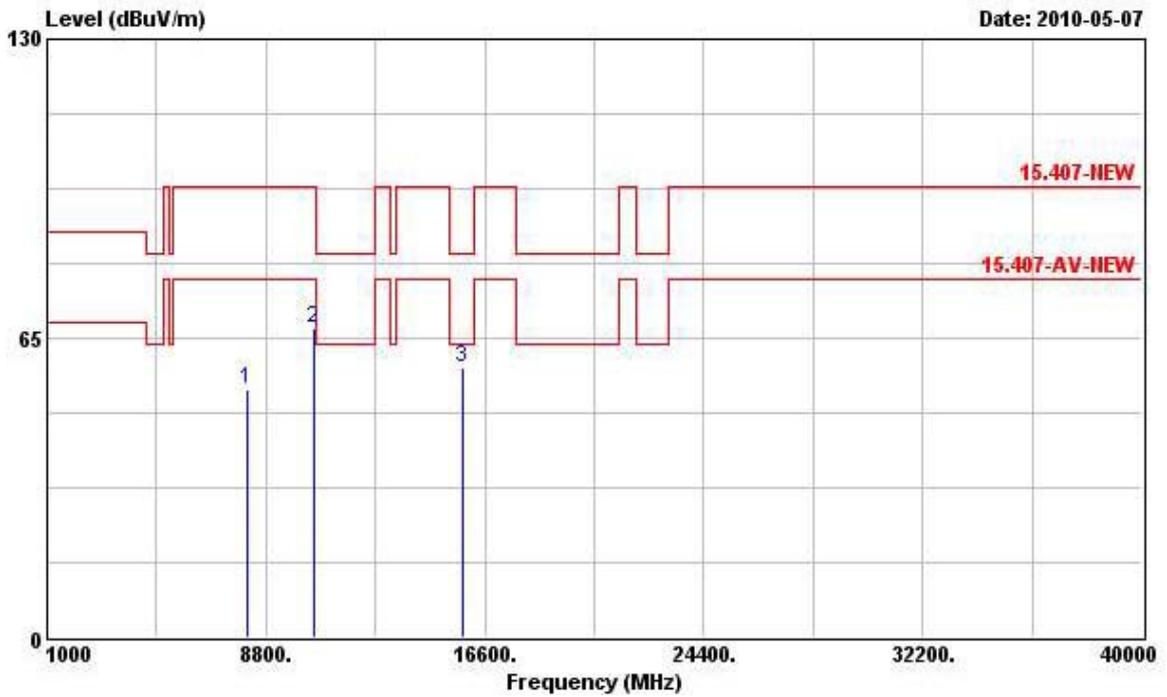

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamplifier Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	8166.000	53.76	-24.08	77.84	42.98	37.97	4.97	32.16	100	360	PK
2	10520.000	67.35	-10.49	77.84	53.33	39.29	6.28	31.55	100	360	PK
3 @	15780.000	58.68	-4.86	63.54	44.97	37.61	7.42	31.32	100	360	PK


Final Test Date	May 07, 2010	Test Site No.	03CH03-HY
Temperature	24.6	Humidity	61%
Test Engineer	Eddie	Configuration	802.11n Ch. 56 (20MHz)

Horizontal

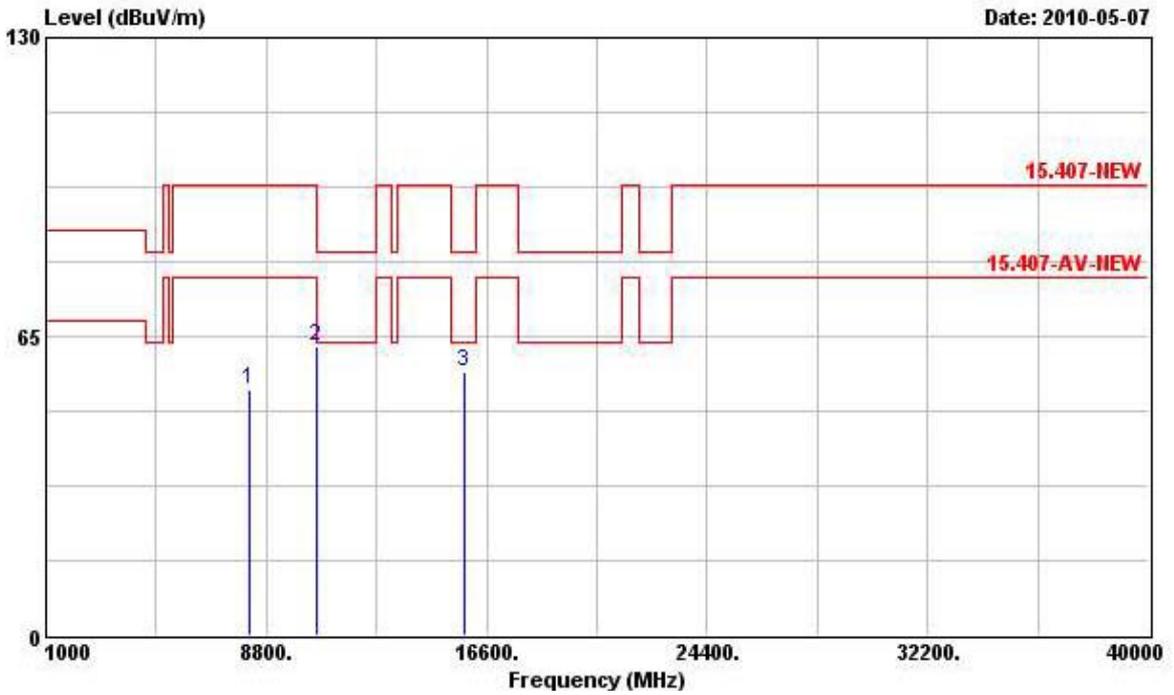

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	8221.000	53.52	-24.32	77.84	42.60	38.02	5.03	32.14	100	360	PK
2	10560.000	62.72	-15.12	77.84	48.75	39.27	6.30	31.60	100	360	PK
3 @	15840.000	57.47	-6.07	63.54	43.74	37.64	7.43	31.35	100	360	PK


Vertical

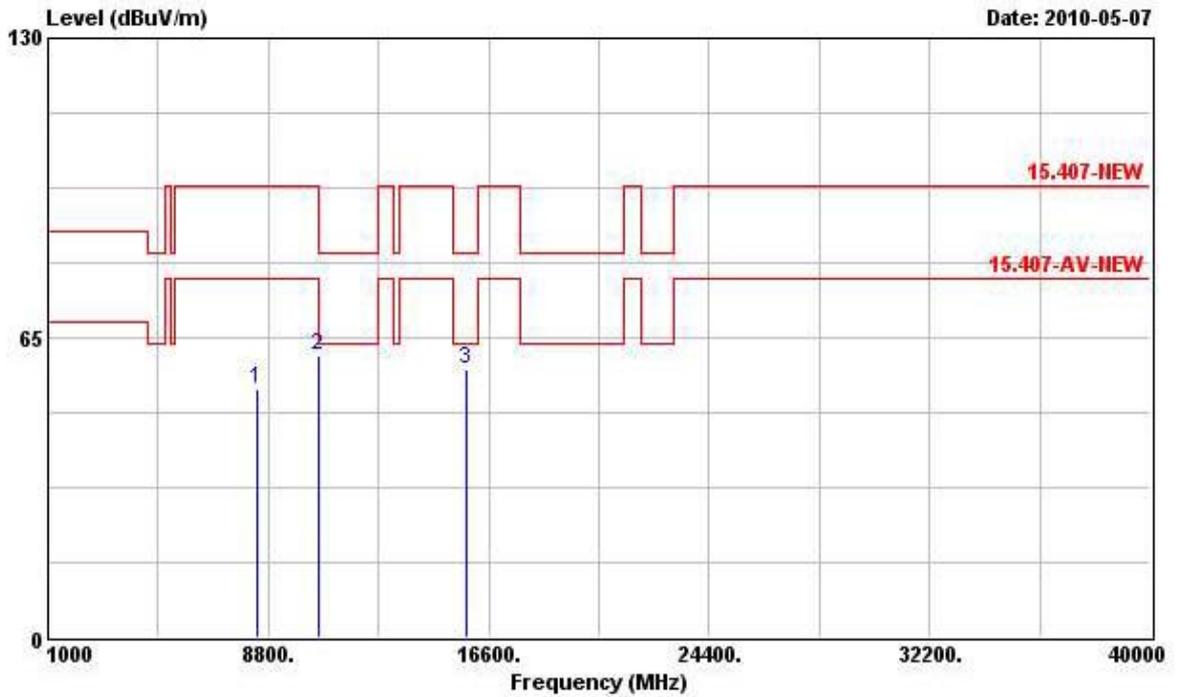

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	8397.000	53.72	-24.12	77.84	42.24	38.20	5.36	32.07	100	0	PK
2	10560.000	61.07	-16.77	77.84	47.10	39.27	6.30	31.60	100	0	PK
3 @	15840.000	58.08	-5.46	63.54	44.35	37.64	7.43	31.35	100	0	PK


Final Test Date	May 07, 2010	Test Site No.	03CH03-HY
Temperature	24.6	Humidity	61%
Test Engineer	Eddie	Configuration	802.11n Ch. 64 (20MHz)

Horizontal

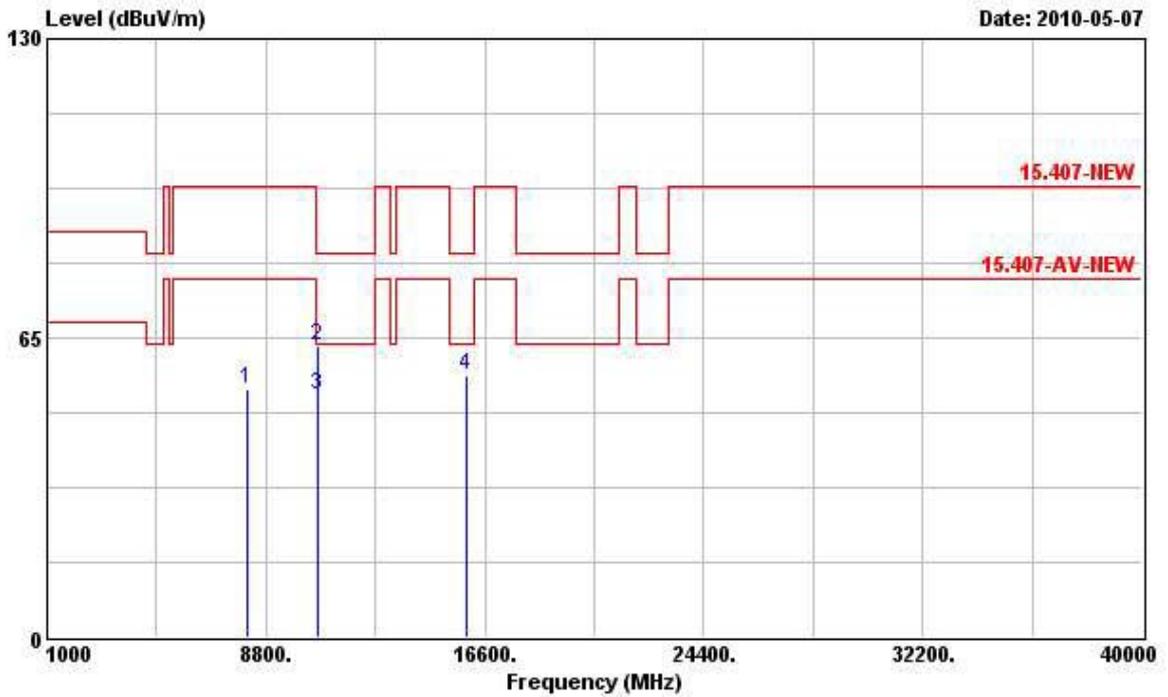

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	8133.000	53.69	-24.15	77.84	43.02	37.94	4.91	32.17	100		0 PK
2	10640.000	63.45	-20.09	83.54	49.57	39.22	6.34	31.68	100		0 Peak
3	10640.000	52.47	-11.07	63.54	38.59	39.22	6.34	31.68	100		0 Average
4	15960.000	57.06	-6.48	63.54	43.32	37.69	7.46	31.40	100		0 PK


Vertical

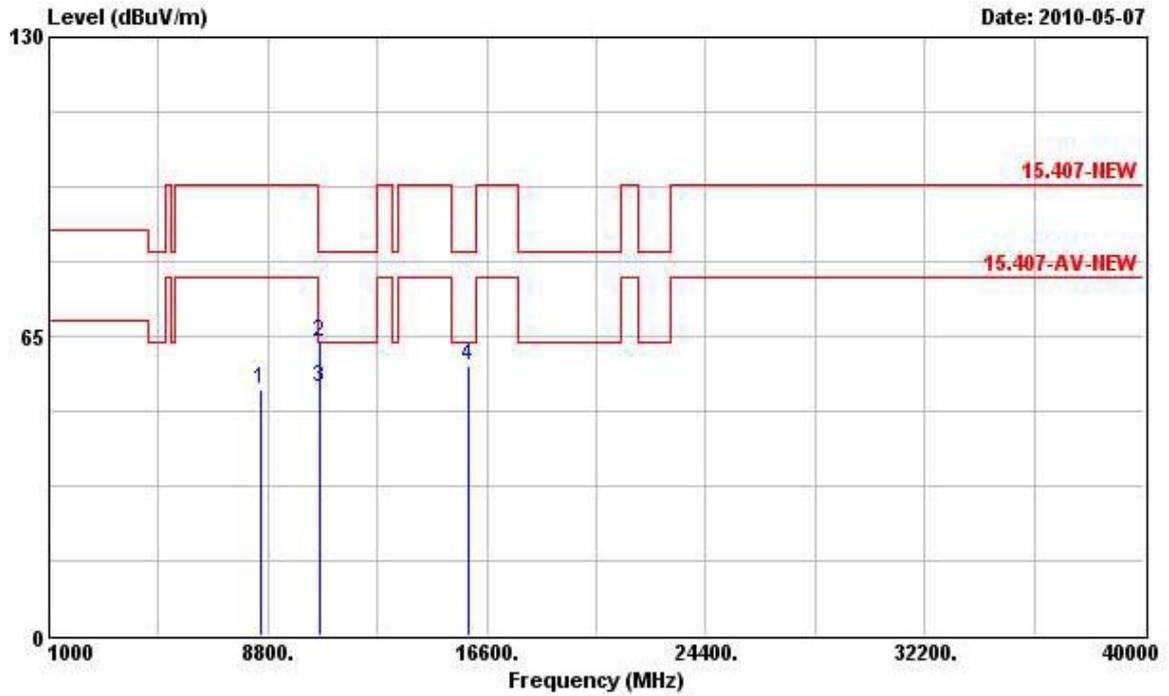

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	8573.000	53.32	-24.52	77.84	41.70	38.34	5.35	32.07	100	360	Average
2	10640.000	63.81	-19.73	83.54	49.93	39.22	6.34	31.68	100	360	Peak
3	10640.000	54.00	-9.54	63.54	40.12	39.22	6.34	31.68	100	360	Average
4 @	15960.000	58.39	-5.15	63.54	44.65	37.69	7.46	31.40	100	360	Average

Final Test Date	May 07, 2010	Test Site No.	03CH03-HY
Temperature	24.6	Humidity	61%
Test Engineer	Eddie	Configuration	802.11n Ch. 100 (20MHz)

Horizontal

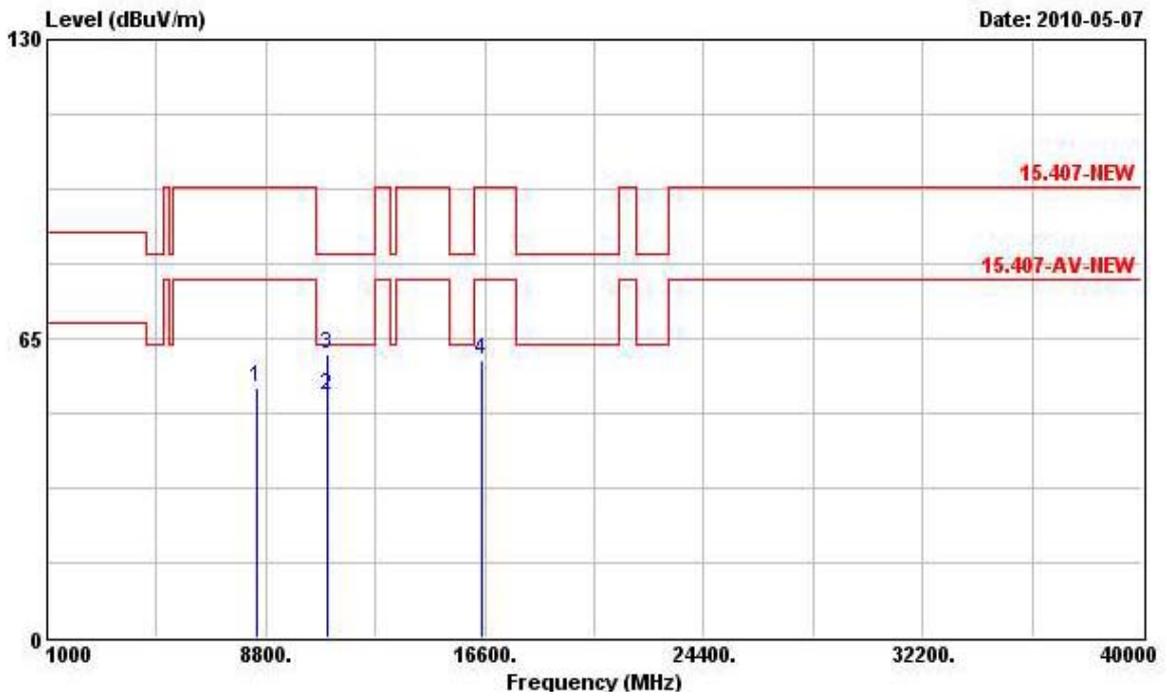

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	8443.000	54.43	-23.41	77.84	42.81	38.25	5.42	32.05	100	0	PK
2	11000.000	52.77	-10.77	63.54	39.27	39.00	6.55	32.05	100	0	Average
3	11000.000	61.52	-22.02	83.54	48.02	39.00	6.55	32.05	100	0	Peak
4	16500.000	60.26	-17.58	77.84	44.97	39.00	7.52	31.23	100	0	PK