





label
location

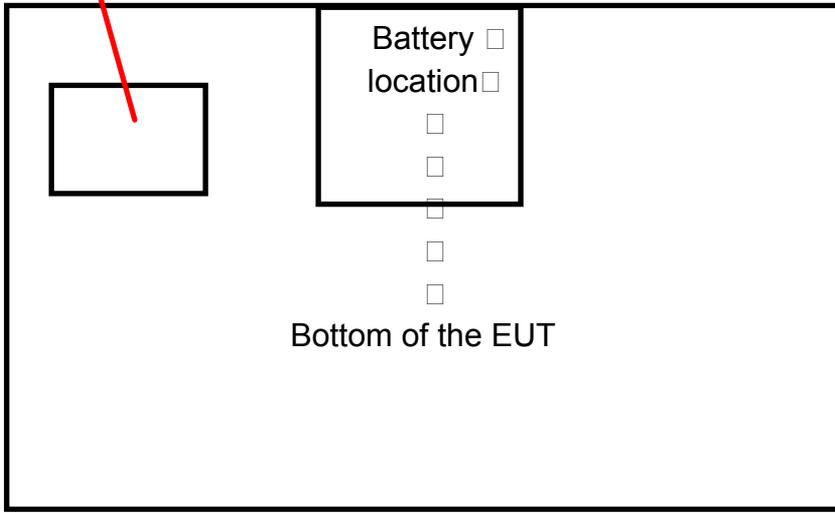

LETTER	H	TYPE FACE	LETTER COLOR
This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions. (1) This device may not cause harmful interference. (2) This device must accept any interference received, including interference that may cause undesired operation.		H=1.0	SONY ID TYPE HRC
4-126-046-□□		H=1.2	SONY ID TYPE HRE
FCC ID:AK8NVU74T		H=1.5	SONY ID TYPE HRC
SONY CORP.		H=3.0	Refer to clean proof
FC			

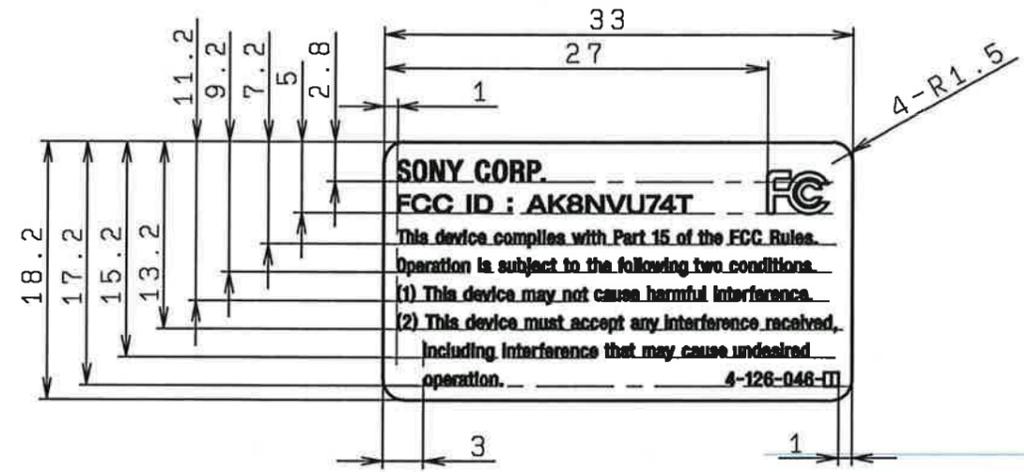

Suffix	Delivery Type	Remarks
-01	Sheet	Japan parts.
-11	Roller	Thailand parts.

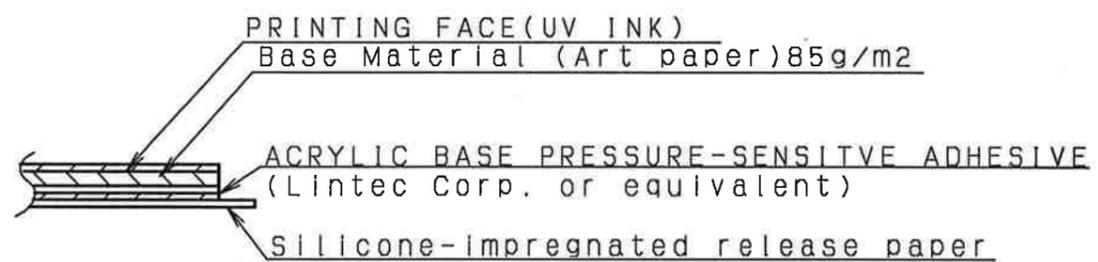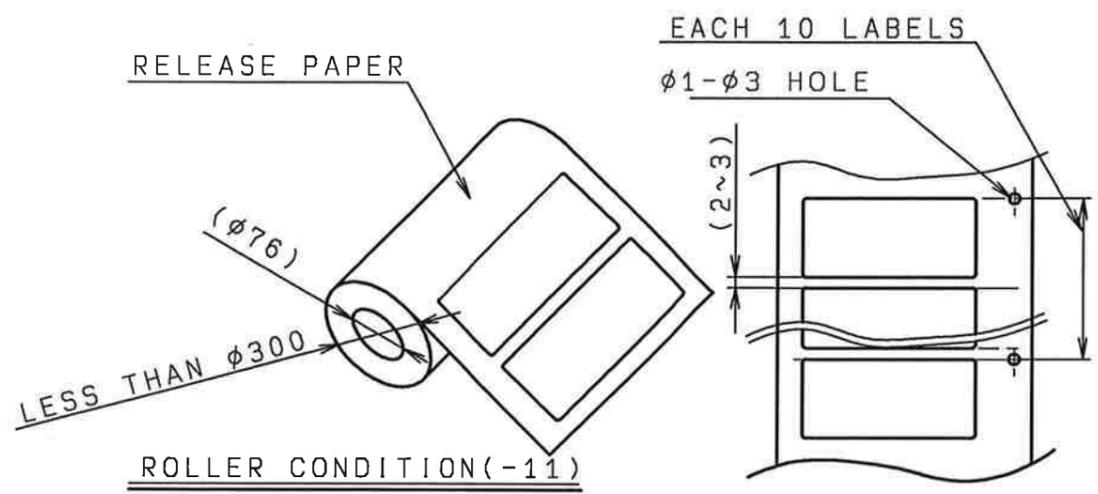

DETAILS OF MATERIAL

この部品には SS-00259-1 に指定する成形用樹脂・インキ・塗料・被覆電線はグリーンパートナー認定取引先から調達すること。
 This part should not contain any substances which are specified in SS-00259-1. Purchase Ink, paint, wire rods, and molding resins only from the business partners that Sony approves as Green Partners.

△x						UNIT mm	TOLERANCE	USED ON	RANK				
△x						ANGLE	±0.2		FAMILY				
△x						SCALE	2:1		ORIGINAL MODEL NV-U74T//Q(U)				
△x						MATERIAL (COLOR)	ABOVE		FINISH (COLOR) BASE BLACK LETTER WHITE				
△x						DESCRIPTION	(E) LABEL FCC(U74T)						
△x							(W) ラベルFCC(U74T)						
HISTORY X COUNT	SUFFIX REPL.	ECN-NO. DATE	REVISION	SIGN.		DRAWN BY	PLANNED BY	CHECKED BY	APPROVED BY	MODEL	PART NO.	PART NO.	SHEET
						AUG PND '08.08.06	AUG PND '08.08.06	FM	大塚	SJ-7979	0-925-503-ABOVE	4-126-046-ABOVE	1/1

- Note 1) 版下は校正、承認を要す。/BLOCK COPY SHOULD BE CORRECTED AND APPROVED.
 2) 版下は2倍寸で作成し、寸法公差は倍寸で±0.4 とする。/BLOCK COPY SHOULD BE DRAWN TWICE THE SIZE OF ACTUAL PARTS. TOLERANCE OF SIZE SHOULD BE ±0.4 .
 3) -01品の納入状態はシート状のこと。
 Delivery of -01 shall be in condition of sheet.
 4) 「ラベル品質特性：SS-00078の第7.1項に定める各特性を満足すること。
 Label Quality: All the specifications in Clause 7.1 in SS-00078 should be satisfied.
 5) 指定なきRは全てR1.5とする。/UNLESS OTHERWISE DESIGNATED RADIUS SHOULD BE R1.5