



## **EMI TEST REPORT**

JQA File No. : 400-70436

Model No. : NV-U83T

Type of Equipment : Car Portable Navigation System

Regulations Applied : CFR 47 FCC Rules and Regulations Part 15

FCC ID : AK8NVU83T

Applicant : Sony Corporation

Address : Shinagawa Technology Center, Shinagawa INTERCITY C Tower,  
2-15-3 Konan Minato-ku, Tokyo, 108-6201, Japan

Manufacturer : Sony Corporation

Address : Shinagawa Technology Center, Shinagawa INTERCITY C Tower,  
2-15-3 Konan Minato-ku, Tokyo, 108-6201, Japan

Received date of EUT : October 1, 2007

**Test Result : Passed**

Test results in this report are obtained in use of equipment that is traceable to National Institute of Advanced Industrial Science and Technology (AIST) of Japan and National Institute of Information and Communications Technology (NICT) of Japan.

The test results only respond to the tested sample. This report should not be reproduced except in full, without the written approval of JQA EMC Engineering Dept. Testing Div.

---

**TABLE OF CONTENTS**

	Page
<b>1 Documentation</b>	
1.1 Test Regulation	<u>4</u>
1.2 General Information	<u>4 - 5</u>
1.3 Test Condition	<u>6 - 12</u>
1.4 EUT Modifications / Deviation from Standard	<u>13</u>
1.5 Test results	<u>14 - 15</u>
1.6 Summary	<u>16</u>
1.7 Test Configuration / Operation of EUT	<u>17 - 18</u>
1.8 EUT Arrangement (Drawing)	<u>19</u>
1.9 Preliminary Test and Test-setup (Drawings)	<u>20 - 28</u>
1.10 EUT Arrangement (Photographs)	<u>29 - 34</u>

---

**2 Test Data**

2.1 Channel Separation	<u>35</u>
2.2 Minimum Hopping Channel	<u>36 - 37</u>
2.3 Occupied Bandwidth	<u>38 - 40</u>
2.4 Dwell Time	<u>41 - 43</u>
2.5 Peak Output Power (Conduction)	<u>44</u>
2.6 Peak Output Power (Radiation)	<u>45 (N/A)</u>
2.7 Peak Power Density (Conduction)	<u>45 - 47</u>
2.8 Peak Power Density (Radiation)	<u>48 (N/A)</u>
2.9 Spurious Emissions (Conduction)	<u>48 - 53</u>
2.10 Spurious Emissions (Radiation)	<u>54 - 67</u>
2.11 AC Power Line Conducted Emissions	<u>68</u>
2.12 RF Exposure Compliance	<u>69 (N/A)</u>
2.13 Spurious Emissions for Receiver (Radiation)	<u>69 - 73</u>
2.14 AC Power Line Conducted Emissions for Receiver	<u>74</u>

**3 Appendix**

Test instruments List	<u>75 - 78</u>
-----------------------	----------------

## **1. DOCUMENTATION**

### **1.1 TEST REGULATION**

FCC Rules and Regulations Part 15 Subpart B and C Radiated Spurious Emissions

#### **Test procedure :**

The tests were performed with reference to the FCC Public Notice DA 00-705, released March 30, 2000. The test set-up was made in accordance to the general provisions of ANSI C63.4-2003.

### **1.2 GENERAL INFORMATION**

#### **1.2.1 Test facility :**

JQA Safety & EMC Center EMC Engineering Department is recognized under ISO/IEC 17025 by NVLAP and VLAC.

- 1) Test Facility located at EMC Engineering Dept. Testing Div. :
  - No.A and B Anechoic Chambers(3 meters Site).
  - Shielded Enclosure.

Open Area Test Site Industry Canada No.: 2079-7

- 2) EMC Engineering Dept. Testing Div. is accredited under the National Voluntary Laboratory accreditation Program for satisfactory compliance established in title 15, Part 285 Code of Federal Regulations.  
NVLAP Lab Code : 200189-0 (Effective through : June 30, 2008)

**1.2.2 Description of the Equipment Under Test (EUT) :**

- |  |   |
|--|---|
| 1) Type of Equipment   | : Car Portable Navigation System                            |
| 2) Product Type  | : Pre-production  |
| 3) Category  | : Spread Spectrum Transmitter(FHSS)                         |
| 4) EUT Authorization   | : Certification   |
| 5) FCC ID  | : AK8NVU83T   |
| 6) Trade Name  | : SONY  |
| 7) Model No.   | : NV-U83T   |
| 8) Operating Frequency Range   | : 2402 MHz - 2480 MHz                                       |
| 9) Highest Frequency Used in the EUT   | : 2480 MHz  |
| 10) RF Output Power  | : -0.71 dBm(measured value)                                 |
| 11) Serial No.   | : None  |
| 12) Date of Manufacture  | : None  |
| 13) Power Rating   | : 5.0VDC (rechargeable battery)                             |
| The EUT was also operated with the DC Adaptor(Model:XA-DC3, Input:12/24VDC, Output:5.2VDC by Sony Corporation) and AC Adaptor(Model:XA-AC13, Input:100-240VAC 50/60Hz, Output:5.0VDC by Sony Corporation). |   |
| This operational condition is mentioned in specifications.   |   |
| 14) EUT Grounding  | : None  |
| 15) Antenna Type   | : Integral Internal antenna<br>(not accessible to the user) |
| 16) Antenna Gain   | : -5.6 dBi  |

**1.2.3 Definitions for symbols used in this test report :**

- indicates that the listed condition, standard or equipment is applicable for this report.
- \_\_\_ - indicates that the listed condition, standard or equipment is not applicable for this report.

### 1.3 TEST CONDITION

#### 1.3.1 The measurement of Channel Separation

x - was performed.  
\_\_\_ - was not applicable.

**Used test instruments :**

Type	Number of test instruments (Refer to Appendix)
Test Receiver	13
Spectrum Analyzer	N/A
Cable	48
Attenuator	80
Antenna	N/A

#### 1.3.2 The measurement of Minimum Hopping Channel

x - was performed.  
\_\_\_ - was not applicable.

**Used test instruments :**

Type	Number of test instruments (Refer to Appendix)
Test Receiver	13
Spectrum Analyzer	N/A
Cable	48
Attenuator	80
Antenna	N/A

#### 1.3.3 The measurement of Occupied Bandwidth

x - was performed.  
\_\_\_ - was not applicable.

**Used test instruments :**

Type	Number of test instruments (Refer to Appendix)
Test Receiver	13
Spectrum Analyzer	N/A
Cable	48
Attenuator	80
Antenna	N/A

**1.3.4 The measurement of Dwell Time**

  x   - was performed.  
     - was not applicable.

**Used test instruments :**

Type	Number of test instruments (Refer to Appendix)
Test Receiver	13
Spectrum Analyzer	N/A
Cable	48
Attenuator	80
Antenna	N/A

**1.3.5 The measurement of Peak Output Power and Density (Conduction)**

  x   - was performed.  
     - was not applicable.

**Used test instruments :**

Type	Number of test instruments (Refer to Appendix)
Test Receiver	13
Spectrum Analyzer	N/A
Cable	48
Attenuator	80
Antenna	N/A
Digitizing Oscilloscope	163
RF Detector	85
Signal Generator	60

**1.3.6 The measurement of Peak Output Power and Density (Radiation)**

- was performed in the following test site.  
 - was not applicable.

**Test location :**

Safety & EMC Center EMC Engineering Dept. Testing Div.  
21-25, Kinuta 1-chome, Setagaya-ku, Tokyo 157-8573, Japan

- No. A site (3 meters)  
 - No. B site (3 meters)

**Validation of Site Attenuation :**

- 1) Last Confirmed Date : N/A  
2) Interval : N/A

**Used test instruments :**

Type	Number of test instruments (Refer to Appendix)
Test Receiver	N/A
Spectrum Analyzer	N/A
Cable	N/A
Attenuator	N/A
Antenna	N/A
Power Meter	N/A
Power Sensor	N/A
Signal Generator	N/A

**1.3.7 The measurement of Spurious Emissions (Conduction)**

  x   - was performed.  
     - was not performed.

**Used test instruments :**

Type	Number of test instruments (Refer to Appendix)
Test Receiver	13
Spectrum Analyzer	N/A
Cable	48
Attenuator	80

**1.3.8 The measurement of Spurious Emissions (Radiation)(9 kHz - 30 MHz)**

  x   - was performed in the following test site.  
     - was not applicable.

**Test location :**

Safety & EMC Center EMC Engineering Dept. Testing Div.  
21-25, Kinuta 1-chome, Setagaya-ku, Tokyo 157-8573, Japan

  x   - Anechoic Chamber No. A (3 meters)  
     - Anechoic Chamber No. B (3 meters)

**Validation of Site Attenuation :**

1) Last Confirmed Date : N/A  
2) Interval : N/A

**Used test instruments :**

Type	Number of test instruments (Refer to Appendix)
Test Receiver	13
Cable	43
Antenna	21

**1.3.9 The measurement of Spurious Emissions (Radiation) (30 MHz - 1000 MHz)**

  x   - was performed in the following test site.  
      - was not applicable.

**Test location :**

Safety & EMC Center EMC Engineering Dept. Testing Div.  
21-25, Kinuta 1-chome, Setagaya-ku, Tokyo 157-8573, Japan

  x   - Anechoic Chamber No. A (3 meters)  
      - Anechoic Chamber No. B (3 meters)

**Validation of Site Attenuation :**

- 1) Last Confirmed Date :March, 2007
- 2) Interval :1 year

**Used test instruments :**

Type	Number of test instruments (Refer to Appendix)
Test Receiver	11
Cable	38
Antenna	26, 28
RF Amplifier	N/A

**1.3.10 The measurement of Spurious Emissions (Radiation) (Above 1000 MHz)**

  x   - was performed in the following test site.  
      - was not applicable.

**Test location :**

Safety & EMC Center EMC Engineering Dept. Testing Div.  
21-25, Kinuta 1-chome, Setagaya-ku, Tokyo 157-8573, Japan

  x   - No. A site (3 meters)  
      - No. B site (3 meters)

**Validation of Site Attenuation :**

- 1) Last Confirmed Date :March, 2007
- 2) Interval :1 year

**Used test instruments :**

Type	Number of test instruments (Refer to Appendix)
Test Receiver	13
Spectrum Analyzer	N/A
Cable	48, 50
Antenna	31, 32
RF Amplifier	57
Band Reject Filter	78
High Pass Filter	79

**1.3.11 The measurement of AC Power Line Conducted Emissions**

- was performed in the following test site.  
 - was not applicable.

**Test location :**

Safety & EMC Center EMC Engineering Dept. Testing Div.  
21-25, Kinuta 1-chome, Setagaya-ku, Tokyo 157-8573, Japan

- Shielded Enclosure  
 - Anechoic Chamber No. A (portable Type)

**Used test instruments :**

Type	Number of test instruments (Refer to Appendix)
Test Receiver	172
Spectrum Analyzer	19
Cable	40
AMN(for EUT)	33
AMN(for Peripheral)	N/A
Termination	N/A

**1.4 EUT MODIFICATION / Deviation from Standard****1.4.1 EUT MODIFICATION**

- No modifications were conducted by JQA to achieve compliance to Class B levels.  
 - To achieve compliance to Class B levels, the following changes were made by JQA during the compliance test.

The modifications will be implemented in all production models of this equipment.

Applicant :

Date :

Typed Name :

Position :

Signatory : \_\_\_\_\_

**1.4.2 Deviation from Standard:**

- No deviations from the standard described in clause 1.1.  
 - The following deviations were employed from the standard described in clause 1.1:

\_\_\_\_\_  
\_\_\_\_\_

### 1.5 TEST RESULTS

<b>Channel Separation</b> [§15.247(a)(1)]	<u>  x  </u> - Applicable	<u>    </u> - NOT Applicable
The requirements are	<u>  x  </u> - PASSED	<u>    </u> - NOT PASSED
<b>Remarks :</b>		
<b>Minimum Hopping Channel</b> [§15.247(a)(1)(iii)]	<u>  x  </u> - Applicable	<u>    </u> - NOT Applicable
The requirements are	<u>  x  </u> - PASSED	<u>    </u> - NOT PASSED
<b>Remarks:</b>		
<b>Occupied Bandwidth</b> [§15.247(a)(2)]	<u>  x  </u> - Applicable	<u>    </u> - NOT performed
The requirements are	<u>  x  </u> - PASSED	<u>    </u> - NOT PASSED
<b>Remarks:</b>		
<b>Dwell Time</b> [§15.247(a)(1)(iii)/(g)]	<u>  x  </u> - Applicable	<u>    </u> - NOT Applicable
The requirements are	<u>  x  </u> - PASSED	<u>    </u> - NOT PASSED
<b>Remarks:</b>		
<b>Peak Output Power (Conduction)</b> [§15.247(b)(3)]	<u>  x  </u> - Applicable	<u>    </u> - NOT Applicable
The requirements are	<u>  x  </u> - PASSED	<u>    </u> - NOT PASSED
<b>Remarks:</b>		
<b>Peak Output Power (Radiation)</b> [§15.247(b)(1)]	<u>    </u> - Applicable	<u>  x  </u> - NOT Applicable
The requirements are	<u>    </u> - PASSED	<u>    </u> - NOT PASSED
<b>Remarks:</b>		
<b>Peak Power Density (Conduction)</b> [§15.247(d)]	<u>  x  </u> - Applicable	<u>    </u> - NOT Applicable
The requirements are	<u>  x  </u> - PASSED	<u>    </u> - NOT PASSED
<b>Remarks:</b>		
<b>Peak Power Density (Radiation)</b> [§15.247(d)]	<u>    </u> - Applicable	<u>  x  </u> - NOT Applicable
The requirements are	<u>    </u> - PASSED	<u>    </u> - NOT PASSED
<b>Remarks:</b>		

---

<b>Spurious Emissions (Conduction)</b> [§15.247(c)]	<u>  x  </u> - Applicable	<u>    </u> - NOT performed
The requirements are	<u>  x  </u> - PASSED	<u>    </u> - NOT PASSED
<b>Remarks:</b>		
<b>Spurious Emissions (Radiation)</b> [§15.247(c), §15.35(b), §15.209(a)]	<u>  x  </u> - Applicable	<u>    </u> - NOT Applicable
The requirements are	<u>  x  </u> - PASSED	<u>    </u> - NOT PASSED
<b>Remarks:</b>		
<b>AC Power Line Conducted Emissions</b> [§15.207(a)], [7.2.2]	<u>  x  </u> - Applicable	<u>    </u> - NOT Applicable
The requirements are	<u>  x  </u> - PASSED	<u>    </u> - NOT PASSED
<b>Remarks:</b>		
<b>RF Exposure Compliance</b> [§15.247(b)(5)]	<u>    </u> - Applicable	<u>  x  </u> - NOT Applicable
The requirements are	<u>    </u> - PASSED	<u>    </u> - NOT PASSED
<b>Remarks:</b>		
<b>Spurious Emissions for Receiver</b> (Radiation)[§15.109(a)]	<u>  x  </u> - Applicable	<u>    </u> - NOT Applicable
The requirements are	<u>  x  </u> - PASSED	<u>    </u> - NOT PASSED
<b>Remarks:</b>		
<b>AC Power Line Conducted Emissions</b> for Receiver [§15.107(a)]	<u>  x  </u> - Applicable	<u>    </u> - NOT Applicable
The requirements are	<u>  x  </u> - PASSED	<u>    </u> - NOT PASSED
<b>Remarks:</b>		

**1.6 SUMMARY****General Remarks :**

The EUT was tested according to the requirements of FCC Rules and Regulations Part 15 Subpart B and Subpart C under the test configuration, as shown in clause 1.7 to 1.10.

The conclusion for the test items which are required by the applied regulation is indicated under the test result.

**Test Result :**

The "as received" sample;

- x   - fulfill the test requirements of the regulation mentioned on clause 1.1.
- fulfill the test requirements of the regulation mentioned on clause 1.1, but with certain qualifications.
- doesn't fulfill the test regulation mentioned on clause 1.1.


Begin of testing : October 11, 2007

End of testing : October 22, 2007

**- JAPAN QUALITY ASSURANCE ORGANIZATION -**

Approved by:

Issued by:



Eiichi Saegusa  
Manager  
Testing Division  
JQA EMC Engineering Dept.



Shigeru Osawa  
Assistant Manager  
Testing Division  
JQA EMC Engineering Dept.

## 1.7 TEST CONFIGURATION / OPERATION OF EUT

### 1.7.1 Test Configuration

The equipment under test (EUT) consists of :

Symbol	Item	Manufacturer	Model No.	FCC ID	Serial No.
A(*1)	Car Portable Navigation System	Sony Corporation	NV-U83T	AK8NVU83T	None
B	Rechargeable Battery	-	-	N/A	None
C	Cradle	Sony Corporation	NVA-CU5T	N/A	None
D	AC Adaptor	Sony Corporation	XA-AC13	N/A	None
E	DC Adaptor	Sony Corporation	XA-DC3	N/A	None

(\*1) The EUT was also operated with the DC Adaptor (Model:XA-DC3, Input:12/24VDC, Output:5.2VDC by Sony Corporation) and AC Adaptor (Model:XA-AC13, Input:100-240VAC 50/60Hz, Output:5.0VDC by Sony Corporation).

This operational condition is mentioned in specifications.

The measurement was carried out with the following support equipment connected :

Symbol	Item	Manufacturer	Model No.	FCC ID	Serial No.
	Regulated DC Power Supply	KIKUSUI ELECTRONICS CORP.	PAN 35-20A	None	None

Type of Cable :

Symbol	Description	Identification (Manufacturer etc.)	Connector Shielded YES / NO	Cable Shielded YES / NO	Ferrite Core	Length (m)
1	GPS Cable	-	NO	NO	NO	0.80
2	XA-AC13 AC Cable	-	NO	NO	NO	1.55
3	XA-AC13 DC Cable	-	NO	NO	NO	1.50
4	XA-DC3 DC Cable	-	NO	NO	NO	2.00
5	DC ext. Cable	-	NO	NO	NO	0.40

### 1.7.2 Operating condition

Power supply Voltage : 12.0VDC operate with DC Adaptor(Car Mode)  
120 VAC, 60 Hz operate with AC Adaptor(Home Mode)

The tests have been carried out the following mode.

- 1) TX mode ( 0ch: 2402 MHz)
- 2) TX mode (39ch: 2441 MHz)
- 3) TX mode (78ch: 2480 MHz)
- 4) RX mode

Used application to controlled : Blue Test(The detail is as follows.)

Transport type : BCSP

Serial port : com1

Baud rate : 115200

Frequency : 2402 MHz, 2441 MHz and 2480 MHz

CFG FREQ : DH1/1250, DH3/3750, DH5/6250


Power set of TX mode : 50

### 1.7.3 Generating and Operating frequency of EUT


32.768 kHz, 250 kHz, 600 kHz, 1 MHz, 1.5 MHz, 6 MHz, 12 MHz, 13 MHz, 16.369 MHz,  
19.5 MHz, 24.576 MHz, 26 MHz, 104 MHz, 520 MHz, and 2402 MHz to 2480 MHz

**1.8 EUT ARRANGEMENT (DRAWINGS)**

(1) Car Mode

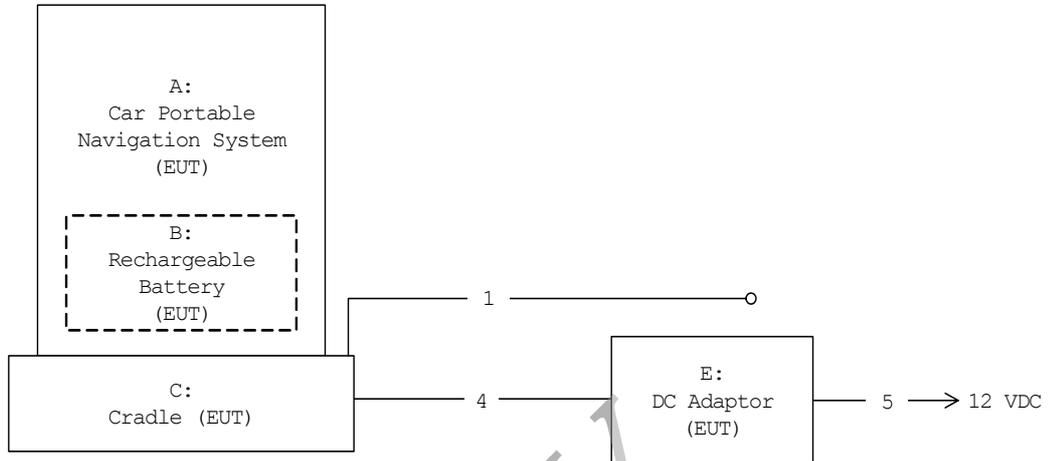

(2) Home Mode

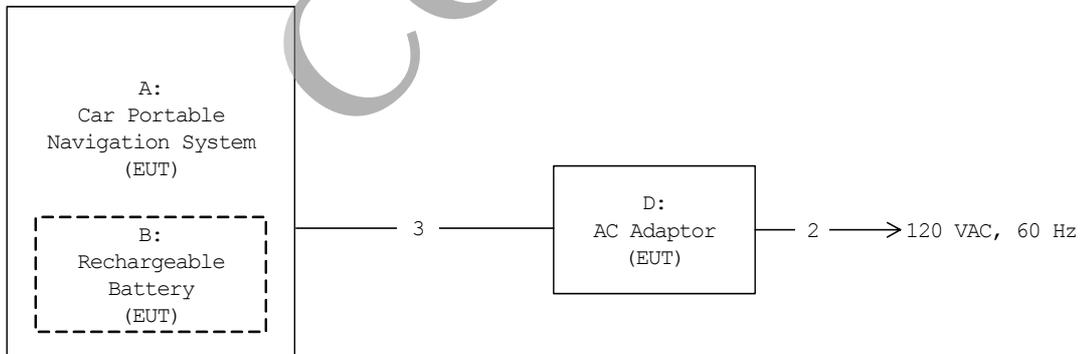

## 1.9 PRELIMINARY TEST AND TEST-SETUP (DRAWINGS)

### 1.9.1 Channel Separation

The EUT have its hopping function enabled.

Use the following spectrum analyzer settings:

Span = wide enough to capture the peaks of two adjacent channels

Resolution (or IF) Bandwidth (RBW)  $\geq$  1% of the span


Video (or Average) Bandwidth (VBW)  $\geq$  RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

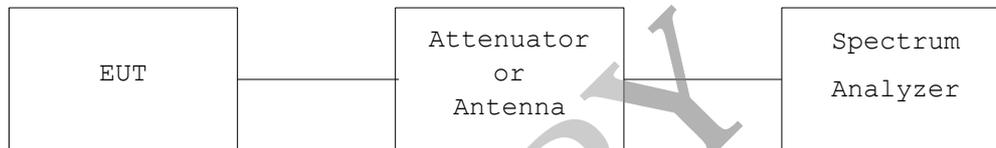

### 1.9.2 Minimum Hopping Channel

The EUT have its hopping function enabled.

Use the following spectrum analyzer settings:

Span = the frequency band of operation

RBW  $\geq$  1% of the span

VBW  $\geq$  RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize. It may prove necessary to break the span up to sections, in order to clearly show all of the hopping frequencies.

Measurement setup is same as sub-clause 1.9.1.

### 1.9.3 Occupied Bandwidth

Use the following spectrum analyzer settings:

Span = approximately 2 to 3 times the 6 dB or 20 dB bandwidth, centered on a channel

RBW  $\geq$  1% of the 6 dB or 20 dB bandwidth

VBW  $\geq$  RBW

Sweep = auto

Detector function = peak

Trace = max hold

The EUT should be transmitting at its maximum data rate. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 6 dB or 20 dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is the 6 dB or 20 dB bandwidth of the emission. If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation.

Measurement setup is same as sub-clause 1.9.1.

### 1.9.4 Dwell Time

The EUT must have its hopping function enabled.

Use the following spectrum analyzer settings:

Span = zero span, centered on a hopping channel

RBW  $\leq$  Channel Separation

VBW  $\geq$  RBW

Sweep = as necessary to capture the entire dwell time per hopping channel

Detector function = peak

Trace = max hold

If possible, use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation.

Measurement setup is same as sub-clause 1.9.1.

### 1.9.5 Peak Output Power (Conduction)

In case of conducted measurements, the transmitter shall be connected to the measuring equipment via a suitable attenuator. The measurement shall be performed using normal operation of the equipment with the test modulation applied.

The test procedure shall be as follows;

(step 1):

- using a suitable means, the output of the transmitter shall be coupled to a diode detector;
- the output of the diode detector shall be connected to the vertical channel of an oscilloscope;
- the combination of the diode detector and the oscilloscope shall be capable of faithfully reproducing the envelope peaks and the duty cycle of the transmitter output signal;
- The observed value shall be recorded as "A" (in dBm);

(step 2):

- the transmitter shall be replaced by a signal generator. The output frequency of the signal shall be made equal to the centre of the frequency range occupied by the transmitter;
- the signal generator shall be unmodulated. The output power of the signal generator shall be raised to a level such that the deviation of the Y-trace of the oscilloscope reaches level A, as indicated in step 1;
- The signal generator output level shall be recorded;

The measurement shall be repeated at the lowest, the middle, and the highest frequency of the stated frequency range.

**1.9.6 Peak Power Density (Conduction)**

Use the following spectrum analyzer settings:

Span = approximately 5 times the 20 dB bandwidth, centered on a channel

RBW = Specified Value

VBW ≥ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission.

Measurement setup is same as sub-clause 1.9.1.

**1.9.7 Peak Output Power and Peak Power Density (Radiation)**

The radiated power output and the field strength of the transmitter radiation were measured at the distance at 3 meters away from the transmitter under test which was placed on a turntable 0.8 meter in height. The receiving antenna was oriented for vertical polarization and raised or lowered through 1 to 4 meters until the maximum signal level was detected on the measuring instrument. The transmitter under test was rotated through 360° until the maximum signal was received. The measurement was repeated with the receiving antenna in the horizontal polarization.

The transmitter was removed and replaced with the antenna. The center of the antenna was placed approximately at the same location as the center of the transmitter. The antenna was fed with a signal generator, and the output level of the signal generator was adjusted to obtain the previously recorded maximum reading at the particular frequency and recorded. This procedure was repeated with the receiving antenna and the antenna in the orthogonal polarization.

The input power into the antenna was measured using the power meter. The level of the emissions in dBm(EIRP) were calculated from the following formula:

$$\text{Transmitter Power [dBm] (EIRP)} = (\text{Meter Reading of Power Meter}) + (\text{Antenna Gain [dBi]})$$

Use the following spectrum analyzer settings:

Span = approximately 5 times the 20 dB bandwidth, centered on a channel

RBW : Greater than the 20 dB bandwidth of the emission being measured  
or Specified Value

VBW ≥ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission.

### 1.9.8 Spurious Emission (Conduction)

#### Band-edge Compliance of RF Conducted Emissions

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products which fall outside of the authorized band of operation

RBW  $\geq$  1% of the span

VBW  $\geq$  RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize. Set the marker on the emission at the band edge, or on the highest modulation product outside of the band, if this level is greater than that at the band edge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission.

Now, using the same instrument settings, enable the hopping function of the EUT. Allow the trace to stabilize. Follow the same procedure listed above to determine if any spurious emissions caused by the hopping function also comply with the specified limit.

#### Spurious RF Conducted Emissions

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

RBW = 100 kHz

VBW  $\geq$  RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize. Set the marker on the peak of any spurious emission recorded. The level displayed must comply with the limit specified in this Section.


Measurement setup is same as sub-clause 1.9.1.

**1.9.9 Radiated Emission ( 9 kHz - 30 MHz ) :**

According to description of ANSI C63.4-2003 sec.13.1.4, the preliminary radiated emissions measurement were carried out. The preliminary radiated measurements were performed at the measurement distance that specified for compliance to determine the emission characteristics of the EUT.

The EUT configuration, cable configuration and mode of operation were determined for producing the maximum level of emissions. These configurations were used for the final radiated emissions measurements.

- Side View -

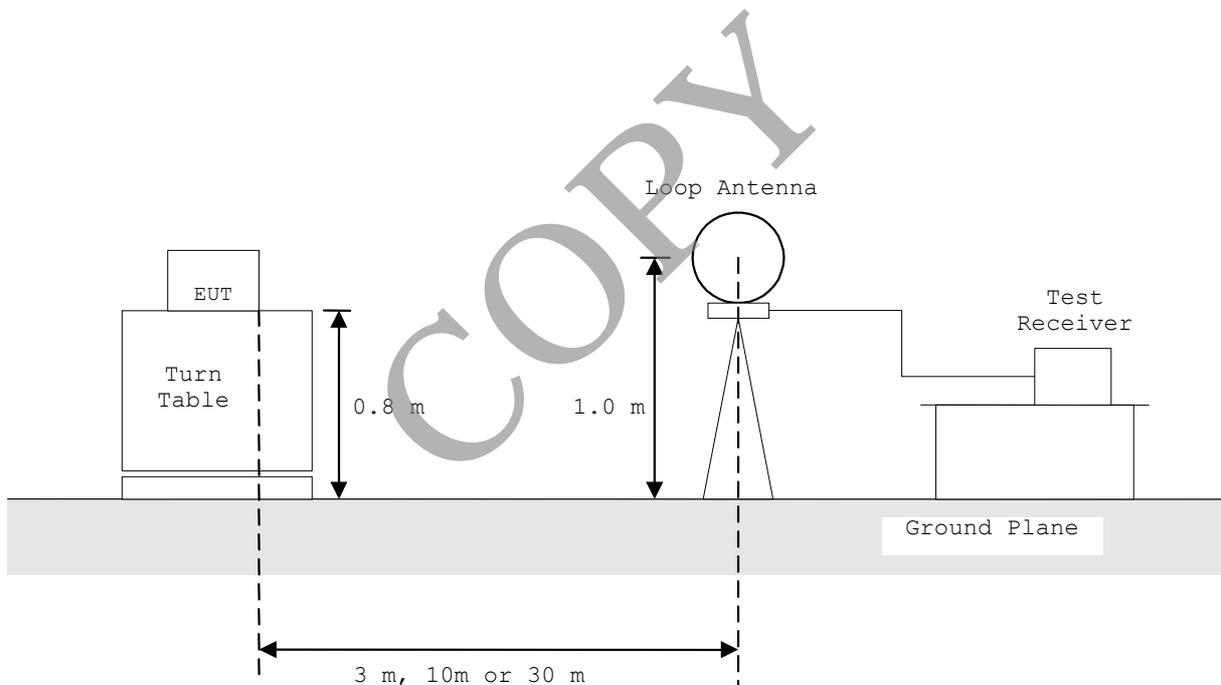


**1.9.10 Radiated Emission ( 30 MHz - 1000 MHz ) :**

According to description of ANSI C63.4-2003 sec.13.1.4, the preliminary radiated emissions measurement were carried out. The preliminary radiated measurements were performed at the measurement distance that specified for compliance to determine the emission characteristics of the EUT.

The EUT configuration (in X, Y and Z axis), cable configuration and mode of operation were determined for producing the maximum level of emissions. These configurations were used for the final radiated emissions measurements.

**Anechoic Chamber**

- Side View -

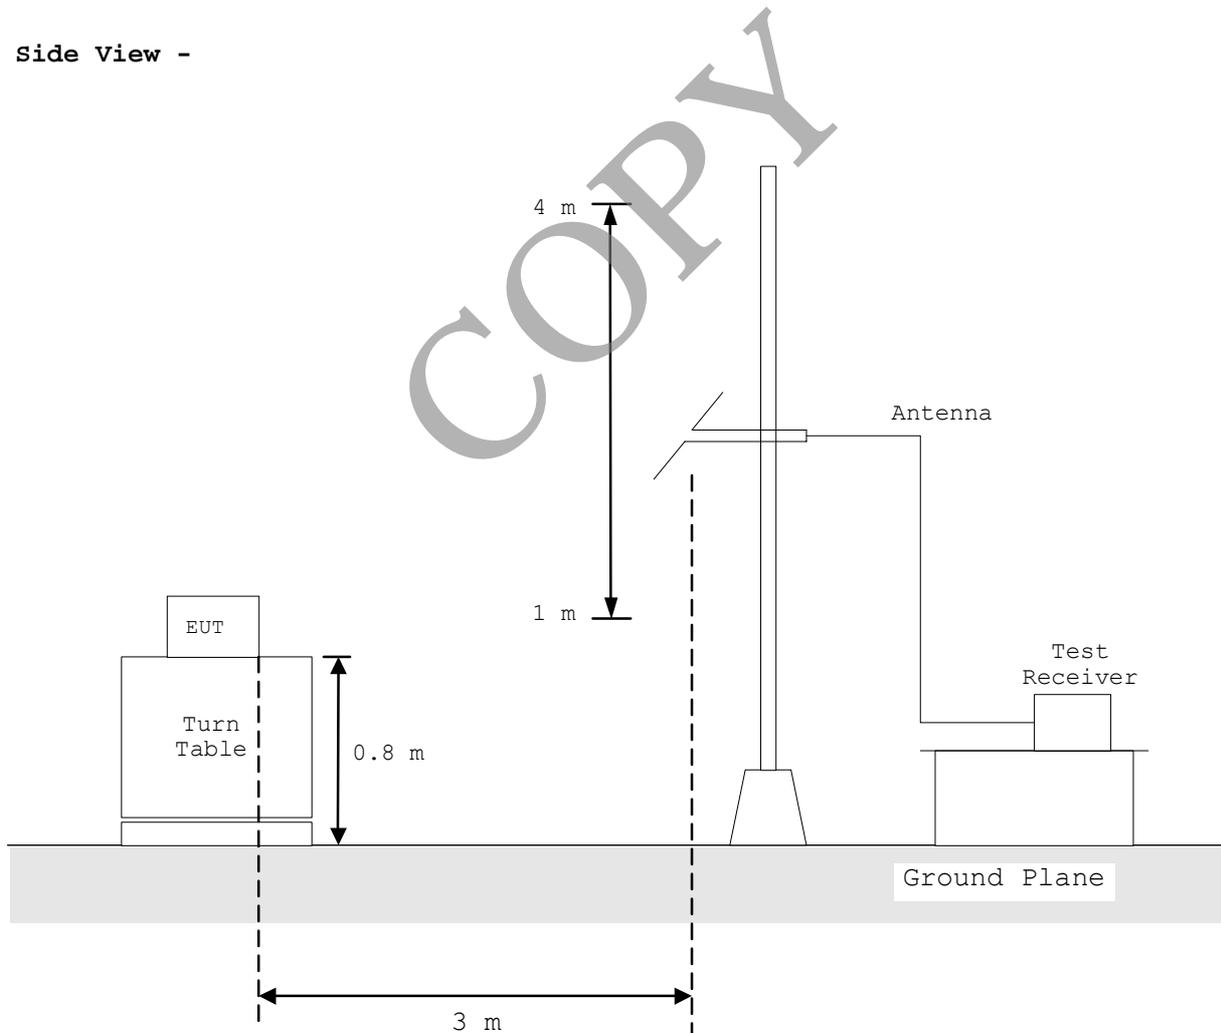


**1.9.11 Radiated Emission (Above 1 GHz) :**

According to description of ANSI C63.4-2003 sec.13.1.4, the preliminary radiated emissions measurements were carried out. The preliminary radiated measurements were performed at the measurement distance that specified for compliance to determine the emission characteristics of the EUT.

The EUT configuration (in X, Y and Z axis), cable configuration and mode of operation were determined for producing the maximum level of emissions. These configurations were used for the final radiated emissions measurements.

**Anechoic Chamber**

- Side View -

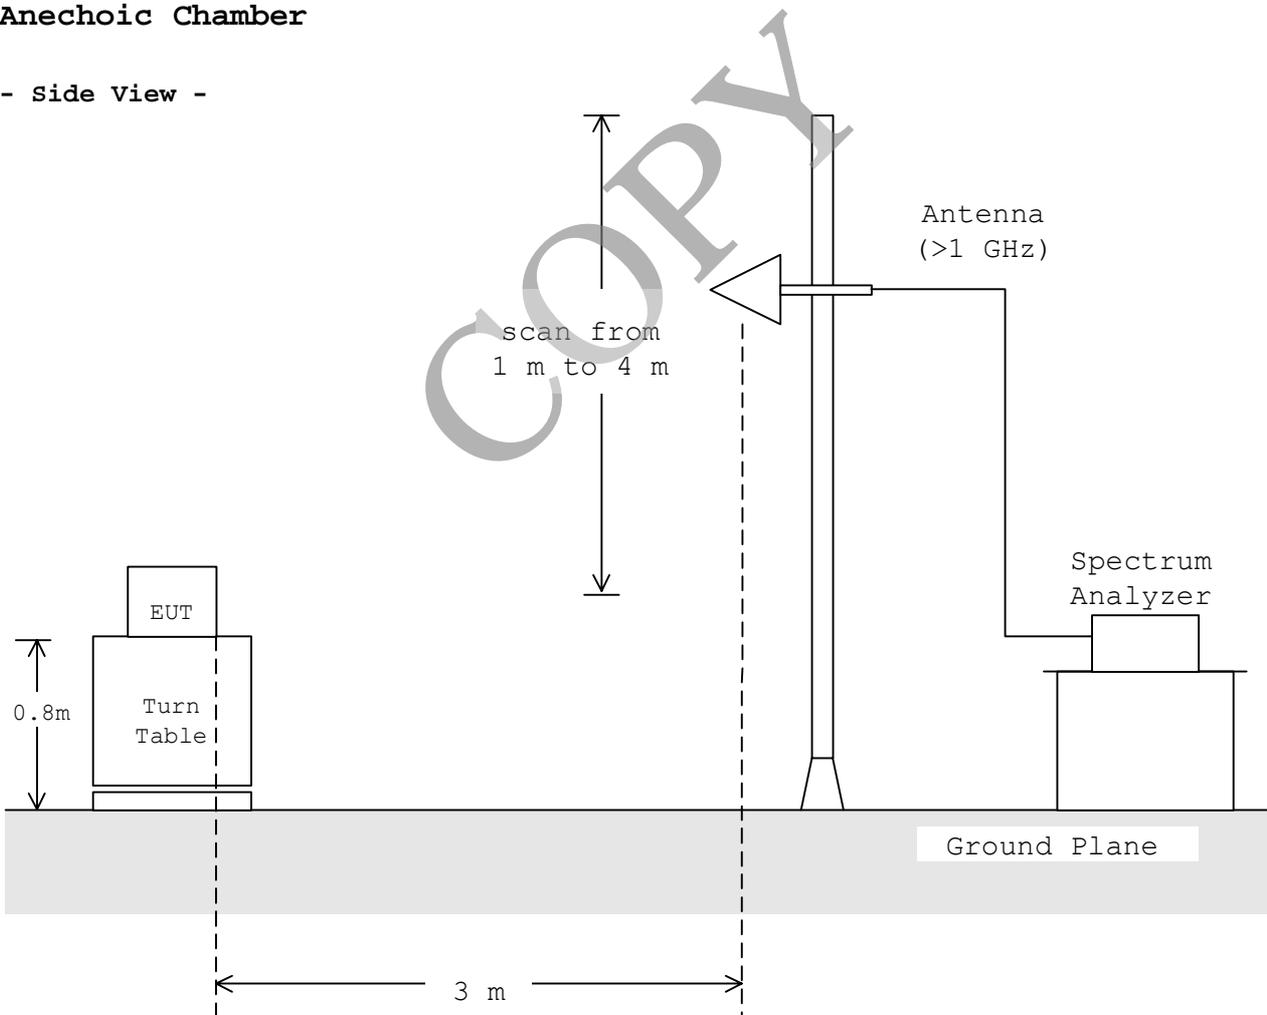


**1.9.12 AC Power Line Conducted Emission ( 150 kHz - 30 MHz ) :**

According to description of ANSI C63.4-2003 sec.13.1.3, the AC power line preliminary conducted emissions measurements were carried out. The preliminary conducted measurements were performed using the spectrum analyzer to observe the emission characteristics of the EUT. The EUT configuration, cable configuration and mode of operation were determined for producing the maximum level of emissions. These configurations were used for final AC power line conducted emissions measurements.

**Shielded Enclosure**

- Side View -

Vertical  
Ground  
Plane

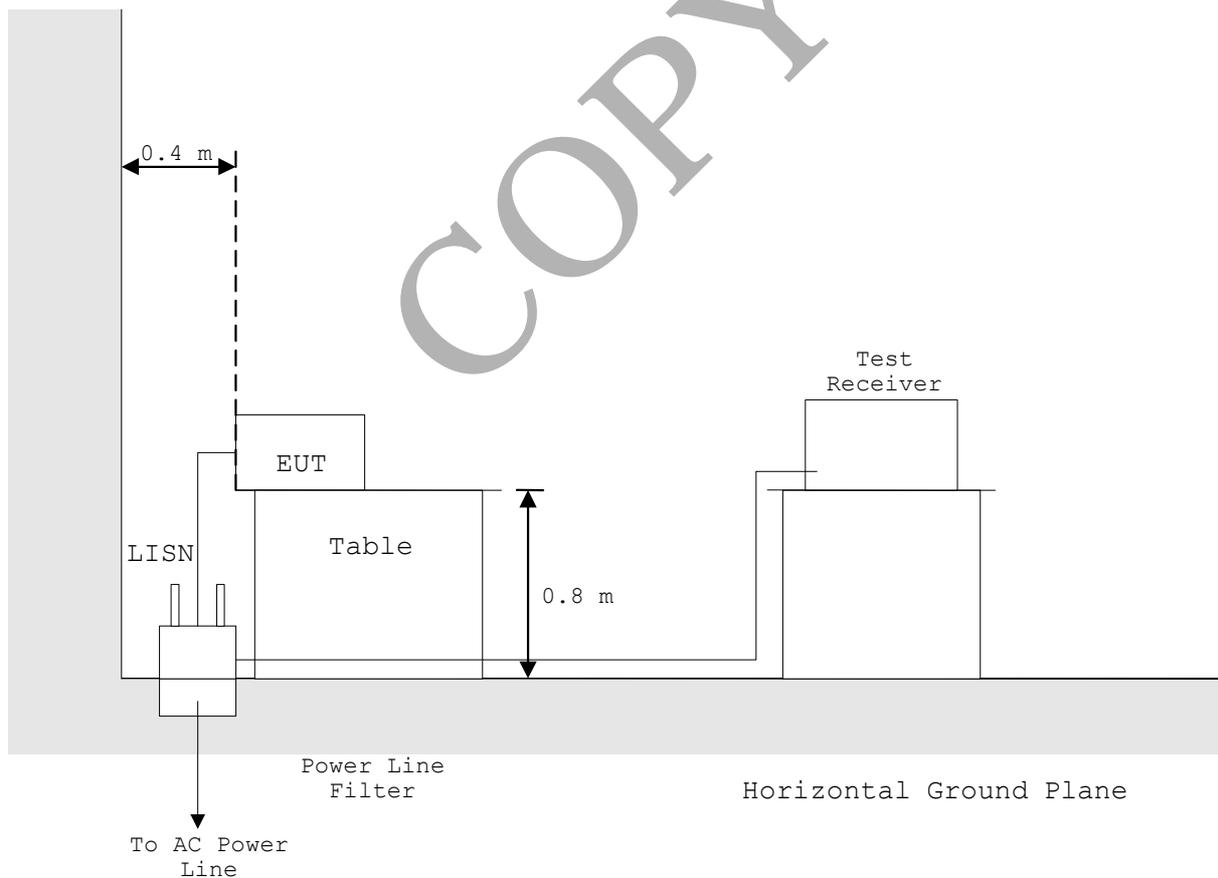

**1.10 TEST ARRANGEMENT (PHOTOGRAPHS)****PHOTOGRAPHS OF THE CONDUCTED TEST**

**PHOTOGRAPHS OF EUT CONFIGURATION FOR RADIATED EMISSIONS MEASUREMENT**

Photograph present configuration with maximum emission



- Front view (DC Adaptor operation X axis) -



- Rear view (DC Adaptor operation X axis) -

**PHOTOGRAPHS OF EUT CONFIGURATION FOR RADIATED EMISSIONS MEASUREMENT**

Photograph present configuration with maximum emission



- Right Side view (DC Adaptor operation X axis) -



- Left Side view (DC Adaptor operation X axis) -

**PHOTOGRAPHS OF EUT CONFIGURATION FOR RADIATED EMISSIONS MEASUREMENT**

Photograph present configuration with maximum emission



- Front view (AC Adaptor operation X axis) -



- Rear view (AC Adaptor operation X axis) -

**PHOTOGRAPHS OF EUT CONFIGURATION FOR RADIATED EMISSIONS MEASUREMENT**

Photograph present configuration with maximum emission



- Right Side view (DC Adaptor operation X axis) -



- Left Side view (DC Adaptor operation X axis) -

**PHOTOGRAPHS OF EUT CONFIGURATION FOR AC POWER LINE CONDUCTED EMISSION MEASUREMENT**

Photograph present configuration with maximum emission



- Front view -



- Side View -


## 2. TEST DATA

### 2.1 Channel Separation

Date : October 17, 2007  
 Temp.: 24 °C Humi.: 46 %


Mode of EUT : Hopping  
 Test Port : Temporary antenna connector

Channel Separation	Limit
(kHz)	
1004.008	25 kHz or 20 dB bandwidth of hopping channel

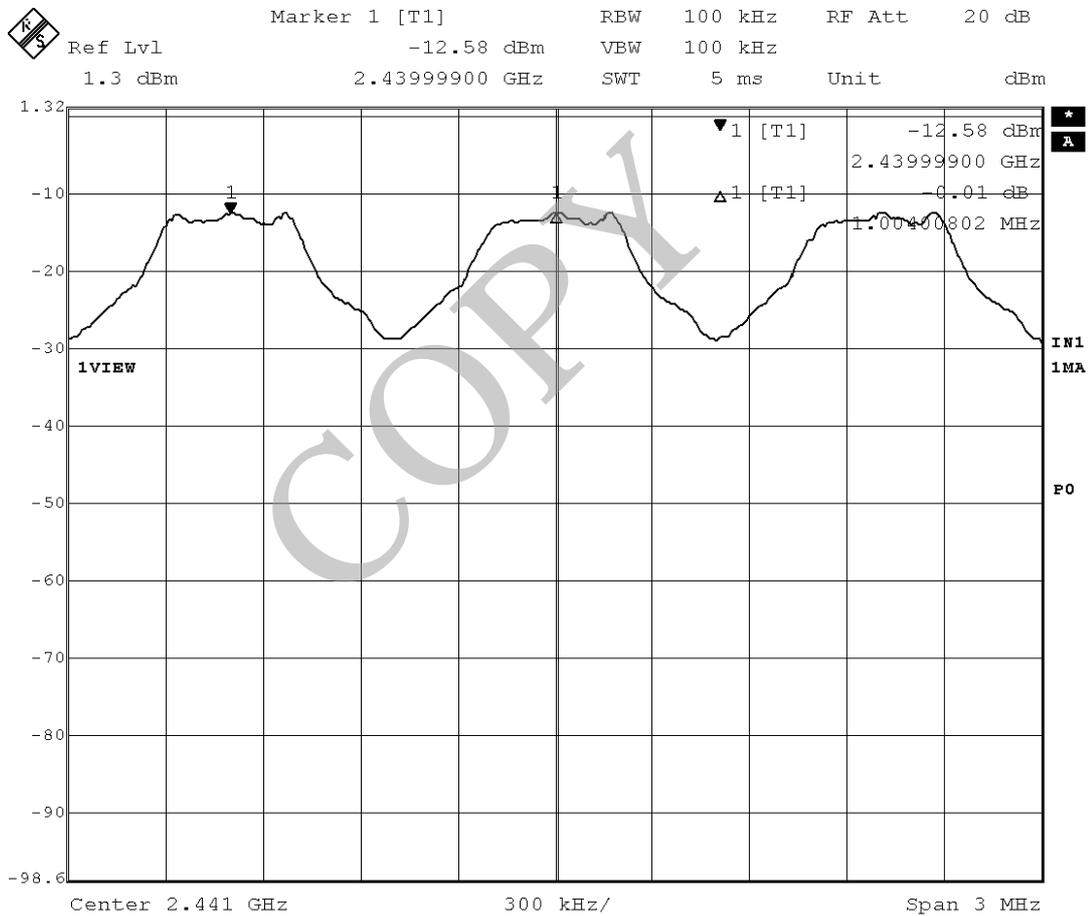

Tested by :   
 Katsunori Miura  
 Testing Engineer



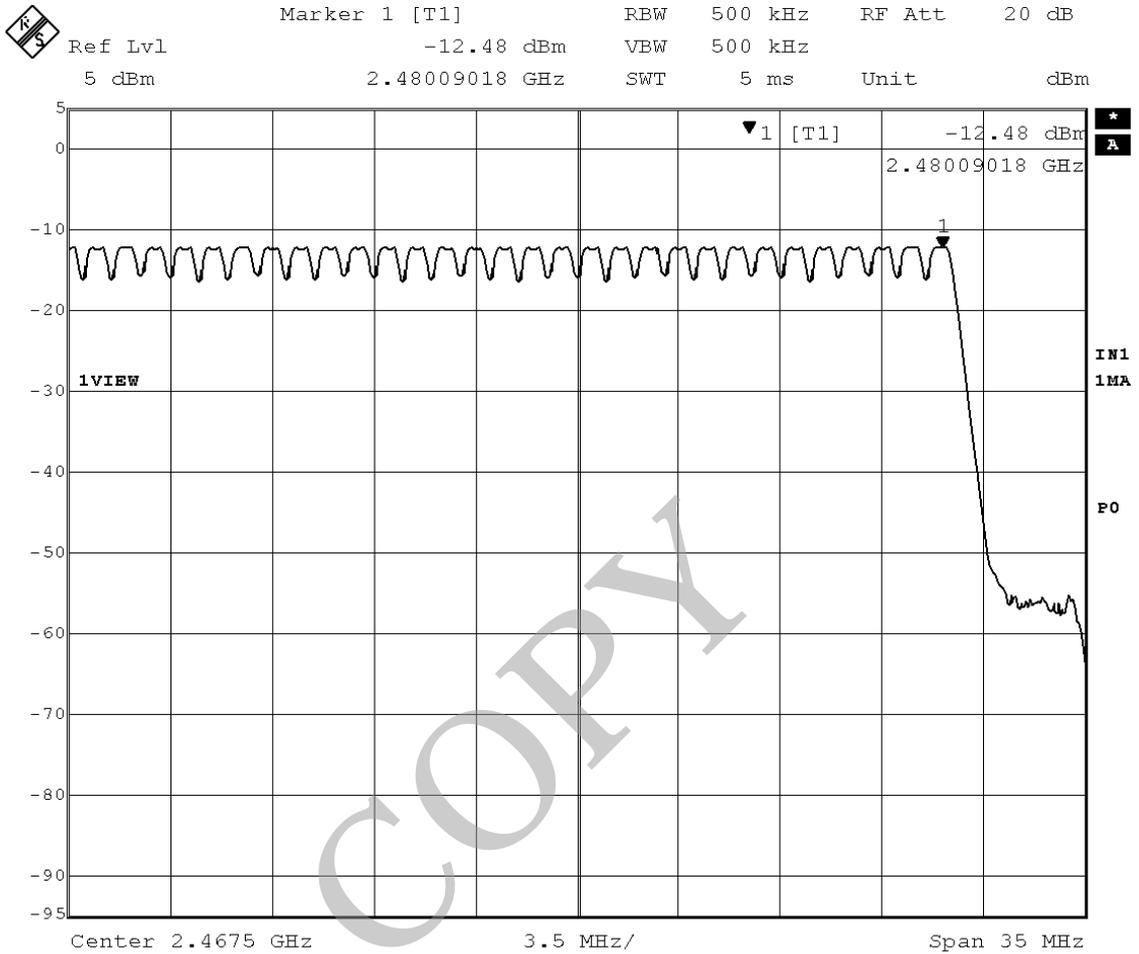


Tested by : *K. Miura*  
 Katsunori Miura  
 Testing Engineer

### 2.3 Occupied Bandwidth

Date : October 17, 2007  
 Temp.: 24 °C Humi.: 46 %


Mode of EUT : TX (0ch: 2402 MHz)  
 Test Port : Temporary antenna connector

Bandwidth (kHz)	Limit (kHz)
941.9	N/A

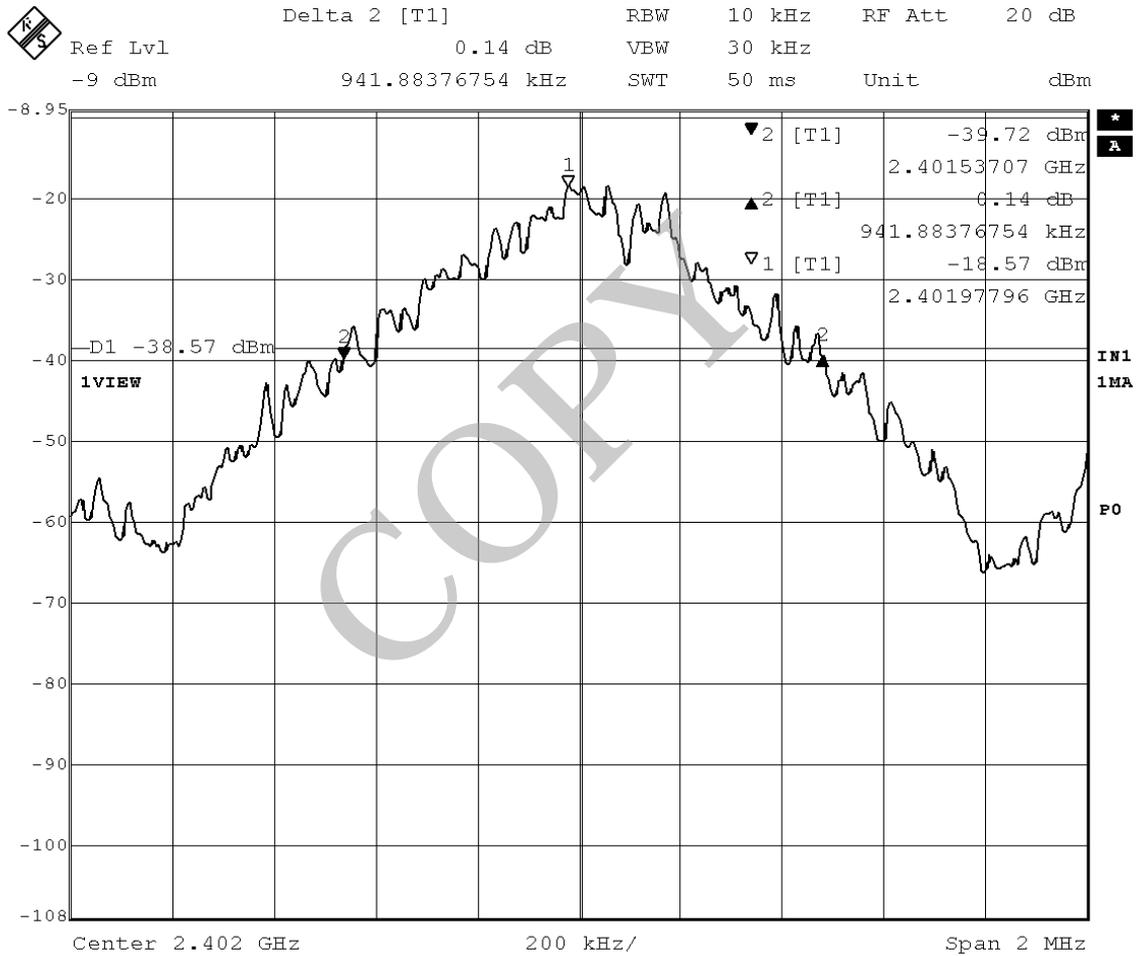


Mode of EUT : TX (39ch: 2441 MHz)  
 Test Port : Temporary antenna connector

Bandwidth (kHz)	Limit (kHz)
941.9	N/A

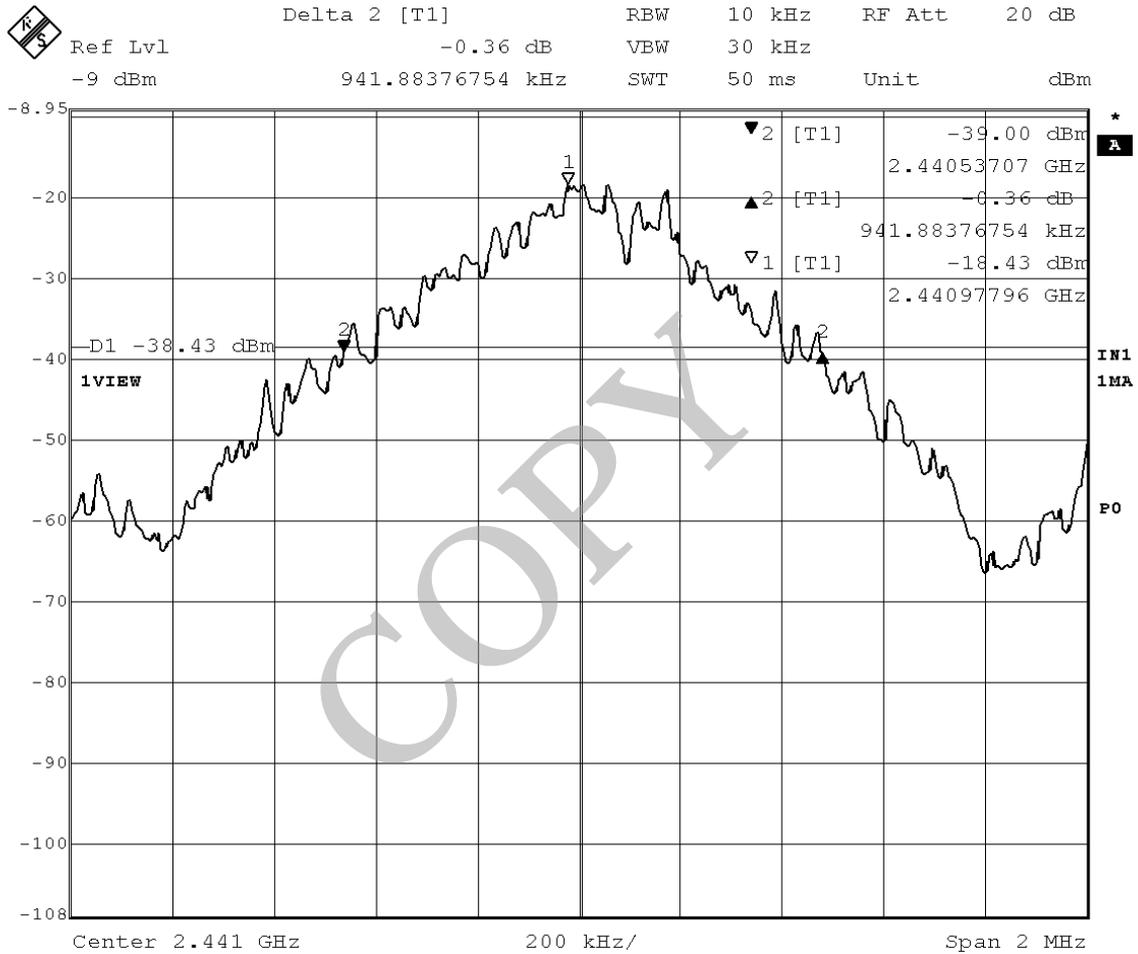

Mode of EUT : TX (78ch: 2480 MHz)  
 Test Port : Temporary antenna connector

Bandwidth (kHz)	Limit (kHz)
941.9	N/A

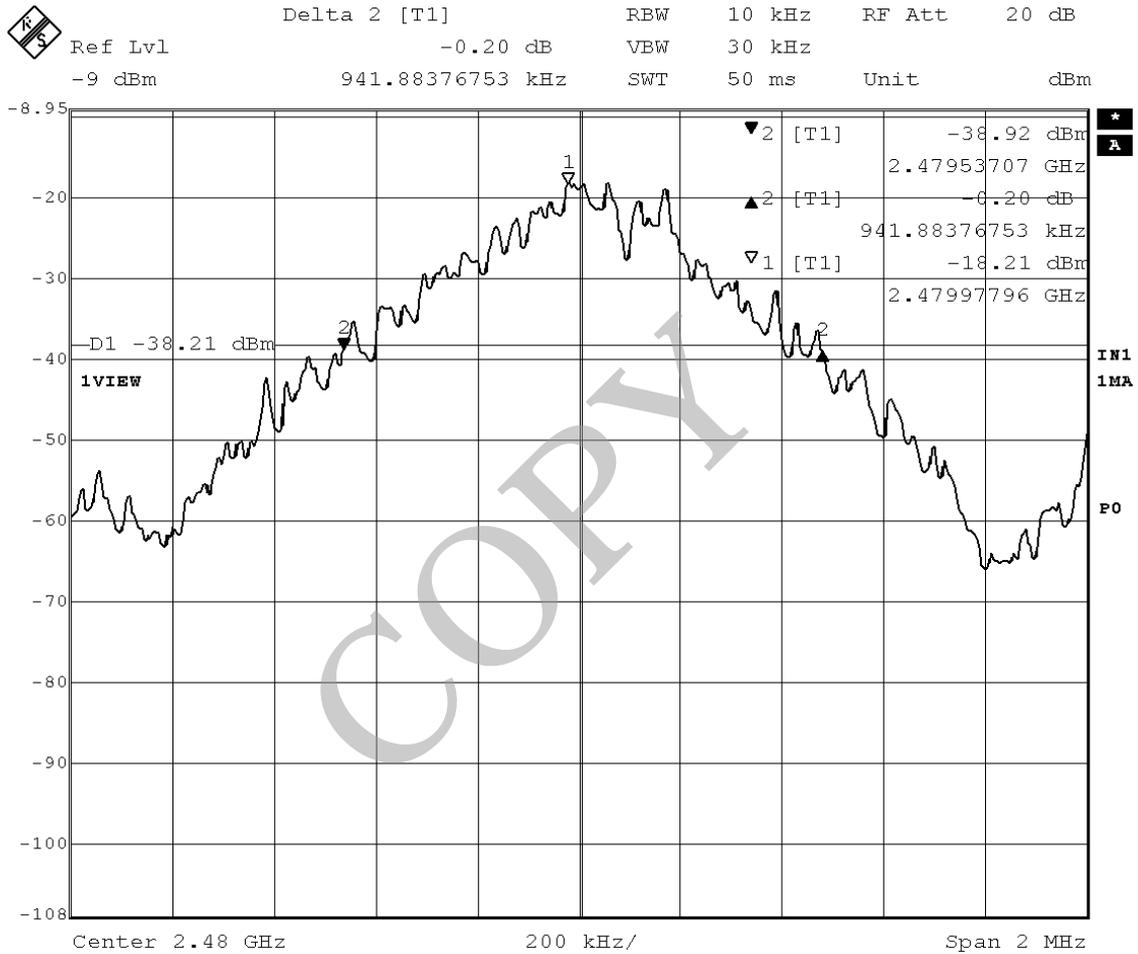

Tested by : *K. Miura*  
 Katsunori Miura  
 Testing Engineer


### 2.4 Dwell Time

Date : October 17, 2007  
 Temp.: 24 °C Humi.: 46 %

Mode of EUT : Hopping(DH1 packet)  
 Test Port : Temporary antenna connector

Dwell Time (ms)	Limit
134.8	400 ms per 31.6 s


Note : The system makes worst case 1600 hops per second or 1 time slot has a length of 625  $\mu$ s with 79 channels. A DH1 Packet need 1 time slot for transmitting and 1 time slot for receiving. Then the system makes worst case 800 hops per second with 79 channels. So the system has each channel 10.1266 times per second and so for 31.6 seconds the system have 320.0 times of appearance. Each tx-time per appearance is 0.4212 ms.  
 Dwell time = 320.0 \* 0.4212 = 134.8 ms

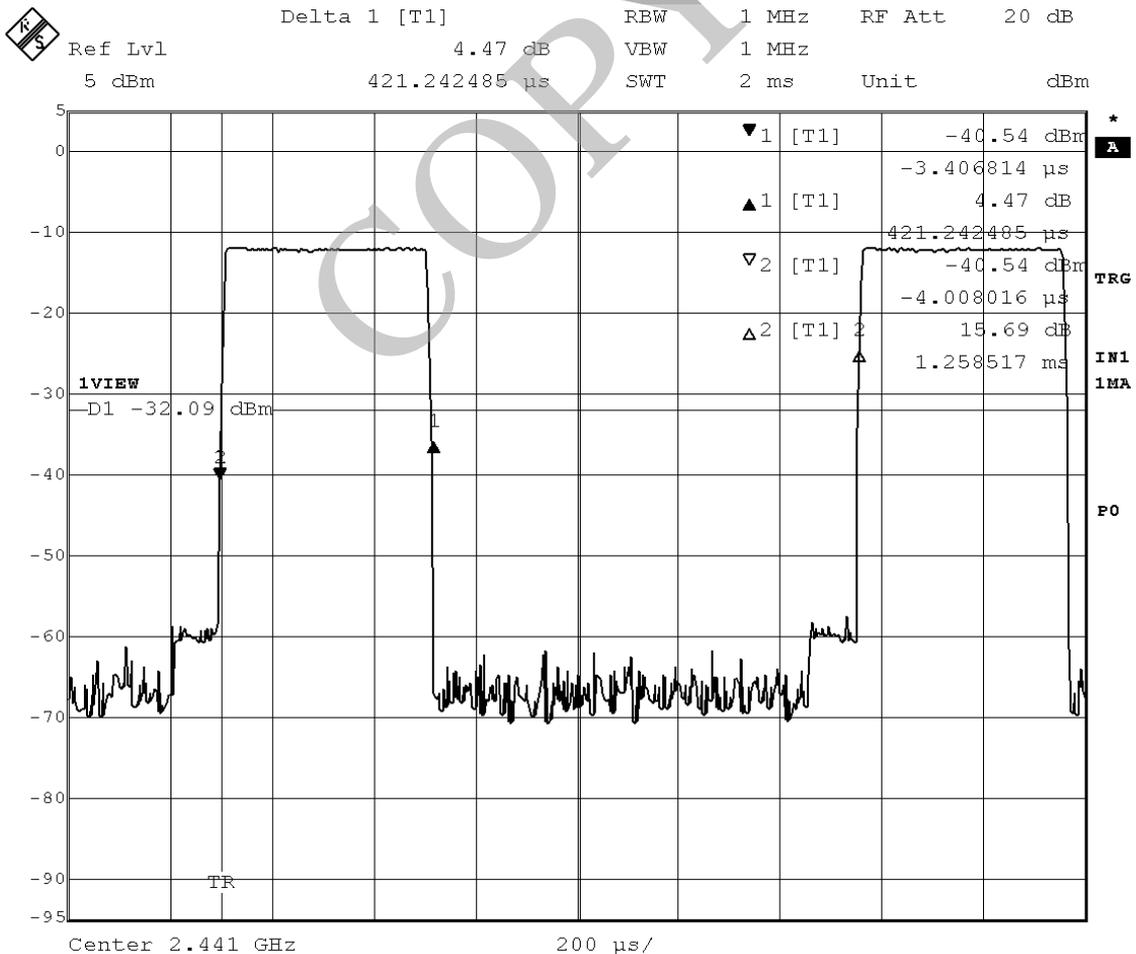

Mode of EUT : Hopping(DH3 packet)  
 Test Port : Temporary antenna connector

Dwell Time	Limit
(ms)	
268.6	400 ms per 31.6 s


Note : A DH3 Packet need 3 time slot for transmitting and 1 time slot for receiving.  
 Then the system makes worst case 400 hops per second with 79 channels. So the system have each channel 5.063 times per second and so for 31.6 seconds the system have 160.0 times of appearance.  
 Each tx-time per appearance is 1.679 ms.  
 Dwell time = 160.0 \* 1.679 = 268.6 ms

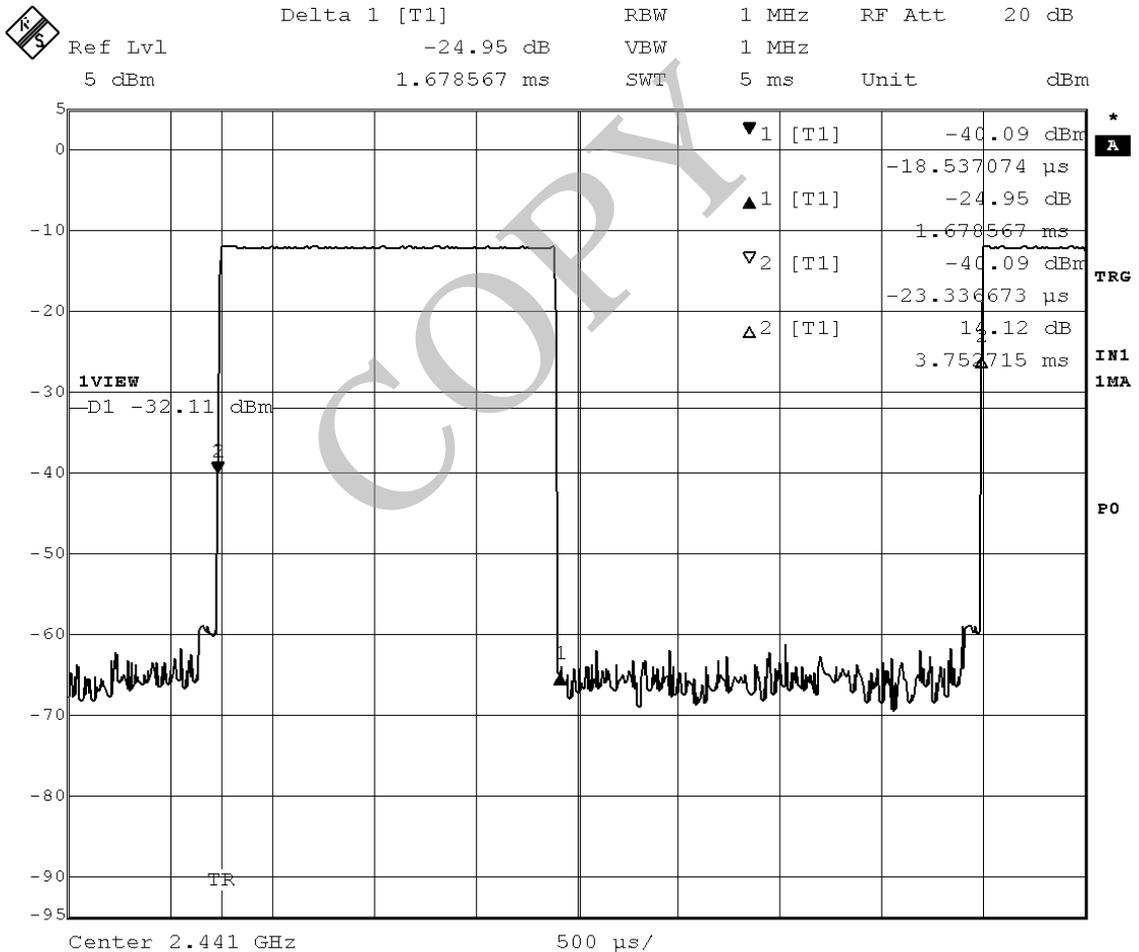

Mode of EUT : Hopping(DH5 packet)  
 Test Port : Temporary antenna connector

Dwell Time	Limit
(ms)	
315.5	400 ms per 31.6 s

Note : A DH5 Packet need 5 time slot for transmitting and 1 time slot for receiving.  
 Then the system makes worst case 266.667 hops per second with 79 channels.  
 So the system have each channel 3.3755 times per second and so for 31.6 seconds  
 the system have 106.7 times of appearance.  
 Each tx-time per appearance is 2.957 ms.  
 Dwell time = 106.7 \* 2.957 = 315.5 ms

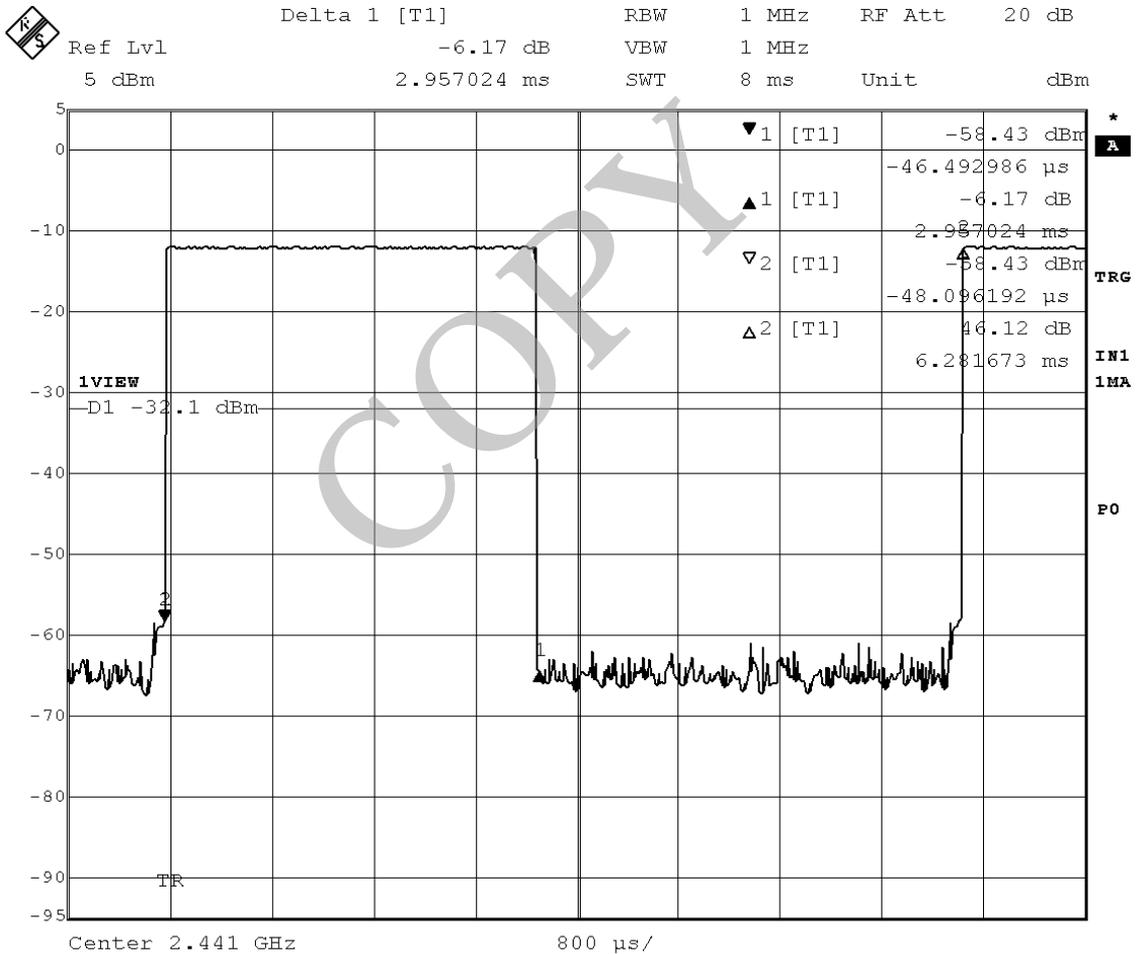

Tested by : *Katsunori Miura*  
 Katsunori Miura  
 Testing Engineer

**2.5 Peak Output Power (Conduction)**Date : October 17, 2007  
Temp.: 24 °C Humi.: 46 %

Test Port : Temporary antenna connector

## (1) Car Mode

Mode of EUT	Cable Loss (dB)	Att. Loss (dB)	Meter Reading (dBm)	Peak Power (dBm)	Limit (dBm)
TX (2402 MHz)	0.73	10.08	-11.80	-0.99	30
TX (2441 MHz)	0.73	10.08	-11.65	-0.84	30
TX (2480 MHz)	0.73	10.08	-11.52	-0.71	30

## (2) Home Mode

Mode of EUT	Cable Loss (dB)	Att. Loss (dB)	Meter Reading (dBm)	Peak Power (dBm)	Limit (dBm)
TX (2402 MHz)	0.73	10.08	-11.80	-0.99	30
TX (2441 MHz)	0.73	10.08	-11.65	-0.84	30
TX (2480 MHz)	0.73	10.08	-11.52	-0.71	30

Note : 1) Rated Supply Voltage : Flash Battery was used

2) A sample calculation was made at 2402 MHz.

$$CL + AL + MR = 0.73 + 10.08 + (-11.80) = -0.99 \text{ (dBm)}$$

CL : Cable Loss

AL : Attenuator Loss

MR : Meter Reading

3) Measuring Instruments Setting :

Detector Function	Resolution Bandwidth
Peak	1 MHz

Tested by :

  
 Katsunori Miura  
 Testing Engineer

**2.6 Peak Output Power (Radiation)  
 Not Applicable**


**2.7 Peak Power Density (Conduction)**

Date : October 17, 2007  
 Temp.: 24 °C Humi.: 46 %

Mode of EUT : TX (0ch: 2402 MHz)  
 Test Port : Temporary antenna connector

Cable Loss (dB)	Att. Loss (dB)	Meter Reading (dBm)	Peak Power (dBm)	Limit (dBm)
0.73	10.48	-24.27	-13.06	8


	Marker 1 [T1]	RBW	3 kHz	RF Att	20 dB
	Ref Lvl	-24.27 dBm	VBW	3 kHz	
	-8.7 dBm	2.40198747 GHz	SWT	180 s	Unit dBm

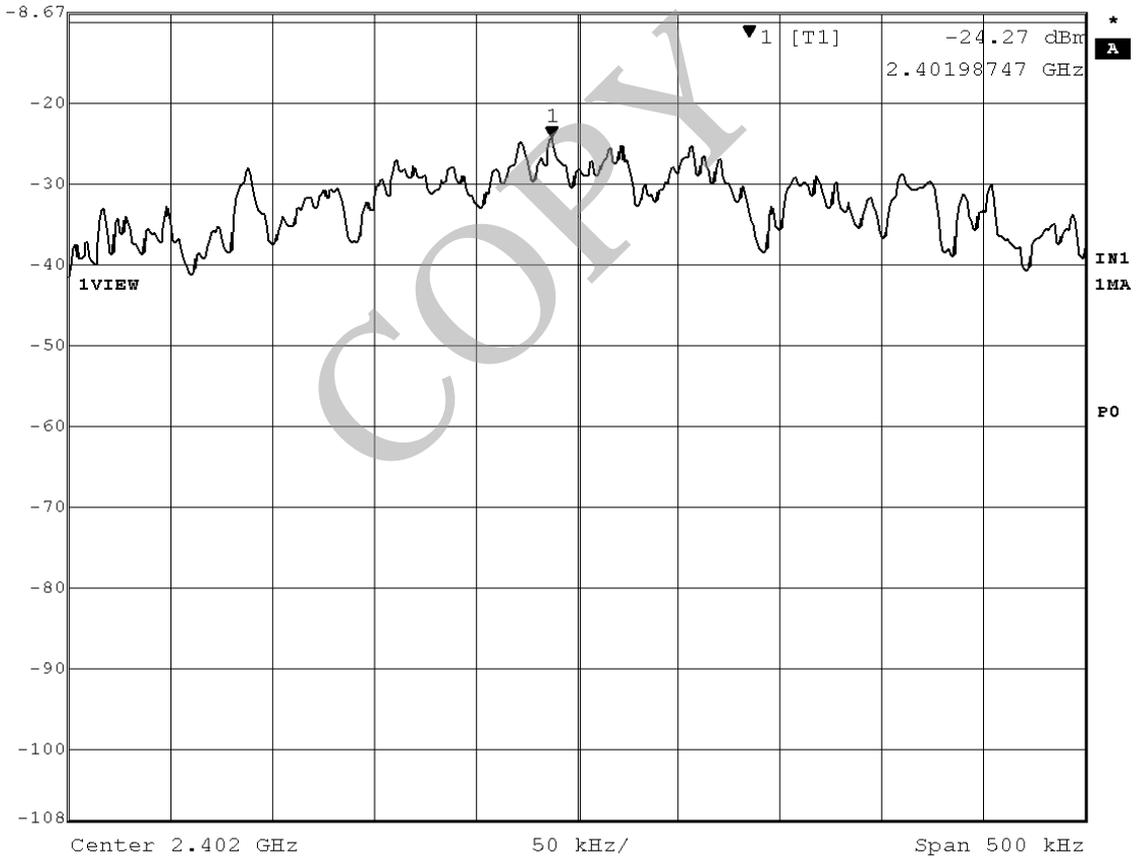

Mode of EUT : TX (39ch: 2441 MHz)  
 Test Port : Temporary antenna connector


Cable Loss (dB)	Att. Loss (dB)	Meter Reading (dBm)	Peak Power (dBm)	Limit (dBm)
0.73	10.48	-23.93	-12.72	8

	Marker 1 [T1]	RBW	3 kHz	RF Att	20 dB
Ref Lvl	-23.93 dBm	VBW	3 kHz		
-8.7 dBm	2.44098747 GHz	SWT	180 s	Unit	dBm

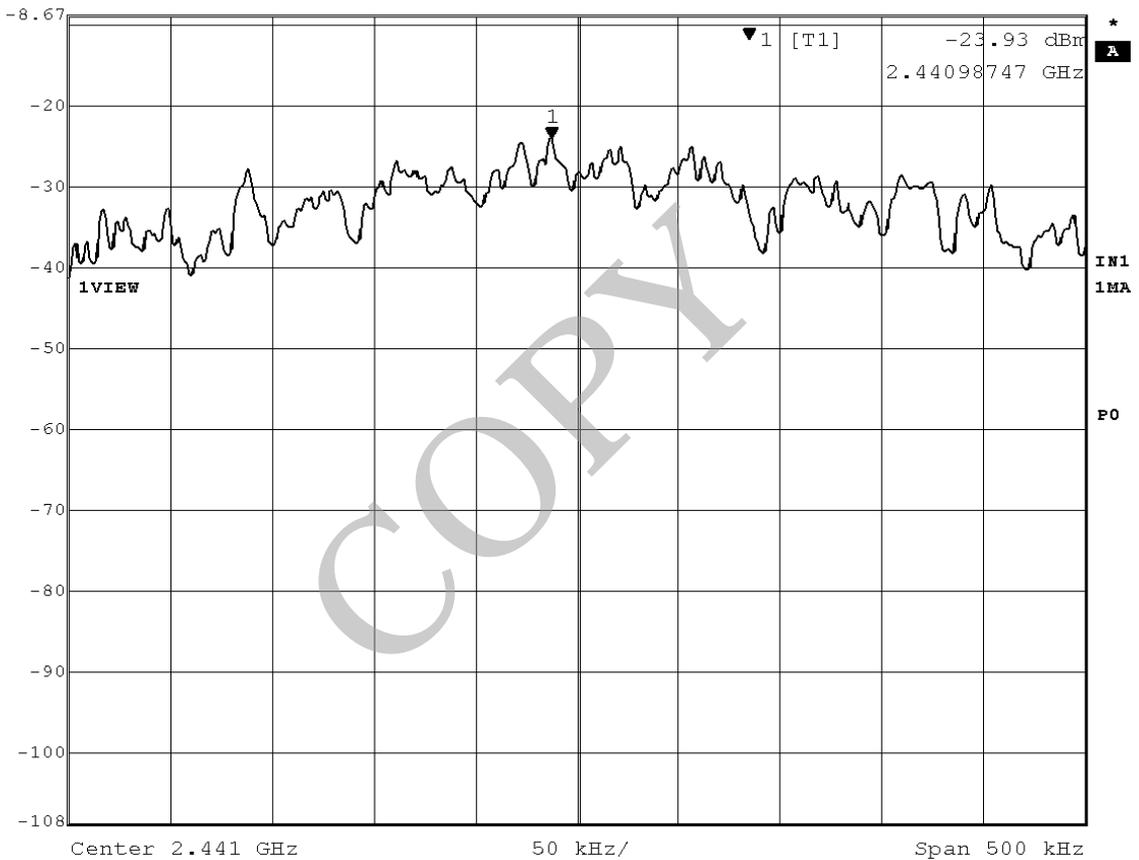

Mode of EUT : TX (78ch: 2480 MHz)  
 Test Port : Temporary antenna connector

Cable Loss (dB)	Att. Loss (dB)	Meter Reading (dBm)	Peak Power (dBm)	Limit (dBm)
0.73	10.48	-23.56	-12.35	8

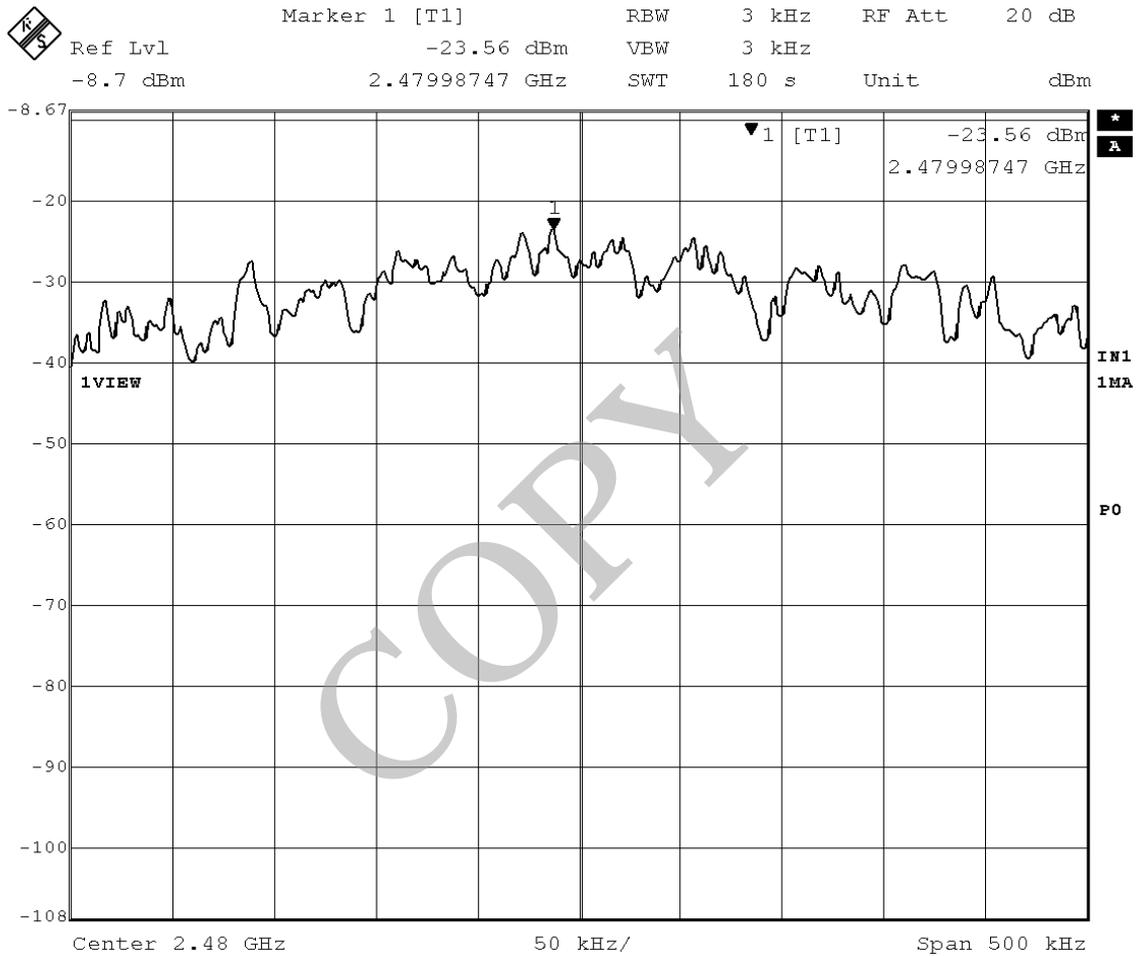

Note : 1) A sample calculation was made.  
 $CL + AL + MR = 0.73 + 10.48 + (-24.27) = -13.06 \text{ (dBm)}$   
 CL : Cable Loss  
 AL : Attenuator Loss  
 MR : Meter Reading

2) Measuring Instruments Setting :  
 Detector Function      Resolution Bandwidth  
                                  Peak                                      3 kHz

Tested by :   
 Katsunori Miura  
 Testing Engineer

## 2.8 Peak Power Density (Radiation)


Not Applicable

## 2.9 Spurious Emissions (Conduction)


Date : October 17, 2007  
 Temp.: 24 °C Humi.: 46 %

### 2.9.1 Band Edge Compliance

Mode of EUT : Hopping  
 Test Port : Temporary antenna connector

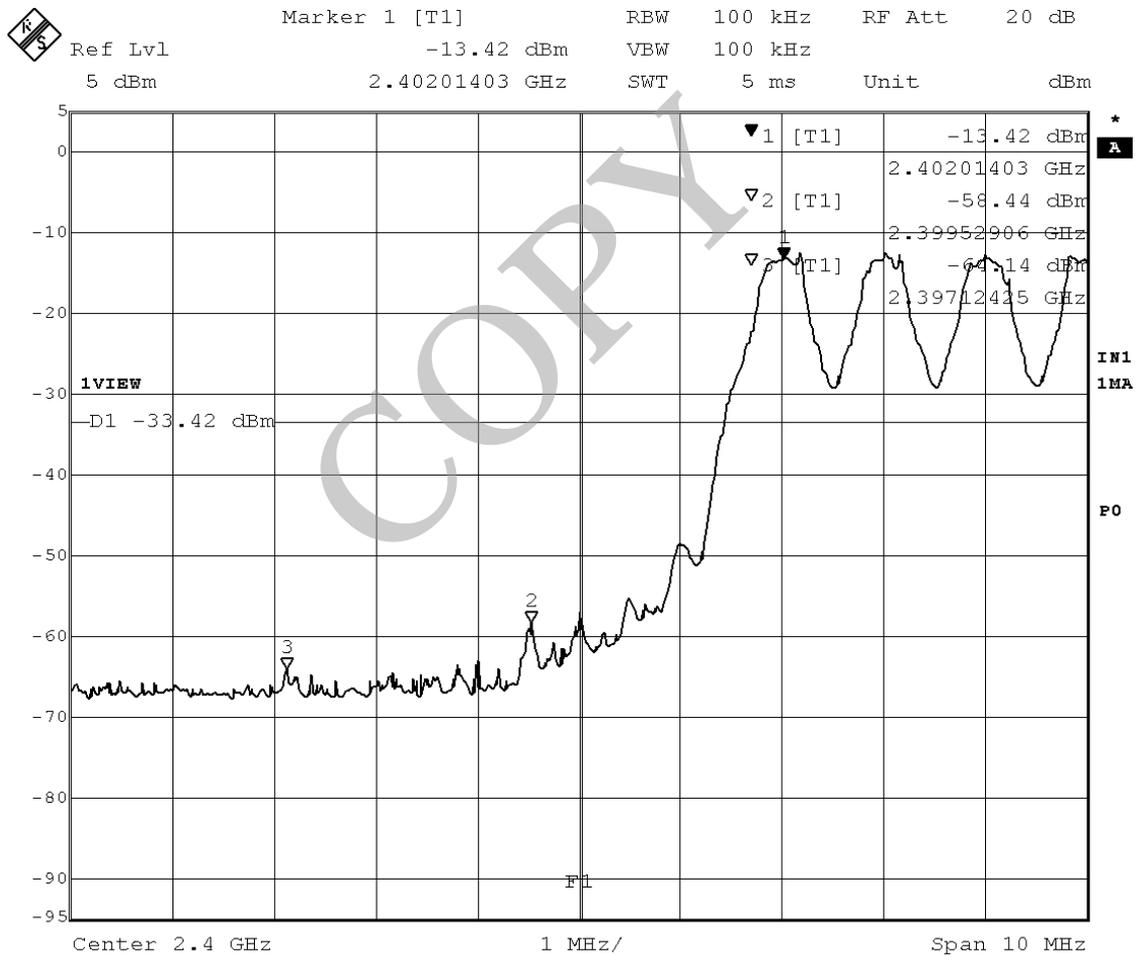

Mode of EUT : Hopping  
 Test Port : Temporary antenna connector

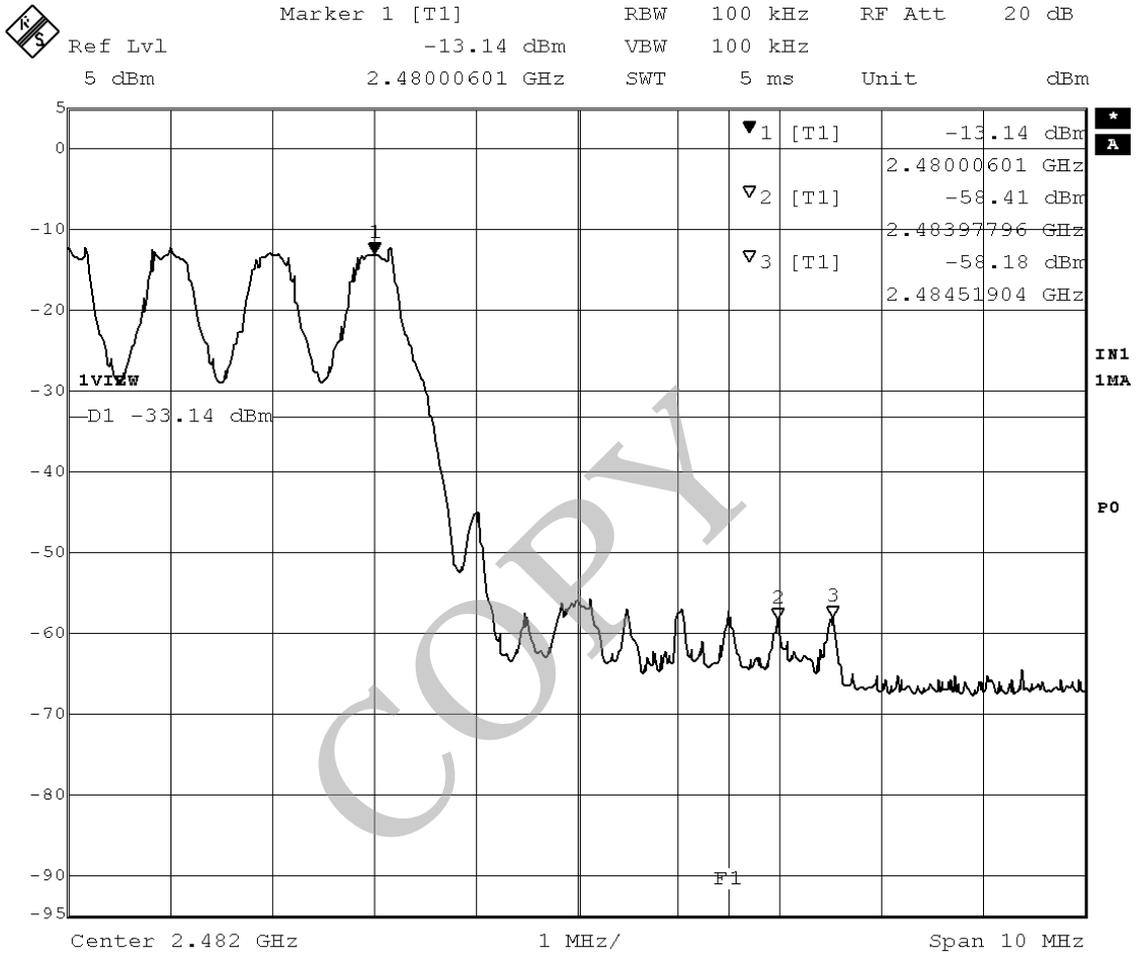


### 2.9.2 Other Spurious Emissions

Mode of EUT : TX (0ch: 2402 MHz)  
 Test Port : Temporary antenna connector

Measurement Frequency (MHz)	Cable Loss (dB)	Att. Loss (dB)	Meter Reading (dBm)	Peak Power (dBm)	Limit (dBm)
2402	0.73	10.48	-12.85	-1.64	--


No spurious emissions of the EUT in the range 20 dB below the limit.

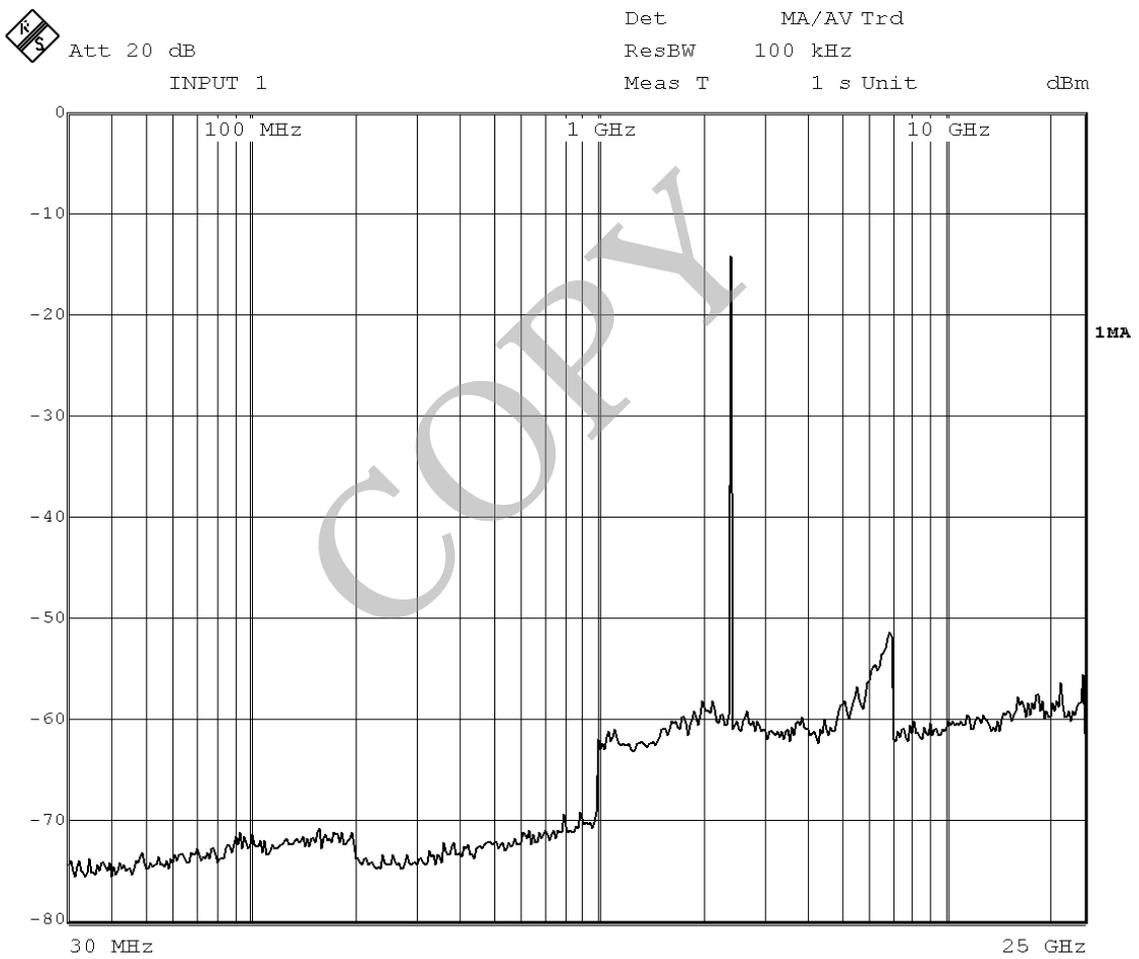

Mode of EUT : TX (39ch: 2441 MHz)  
 Test Port : Temporary antenna connector

Measurement Frequency (MHz)	Cable Loss (dB)	Att. Loss (dB)	Meter Reading (dBm)	Peak Power (dBm)	Limit (dBm)
2441	0.73	10.48	-12.53	-1.32	--


No spurious emissions of the EUT in the range 20 dB below the limit.

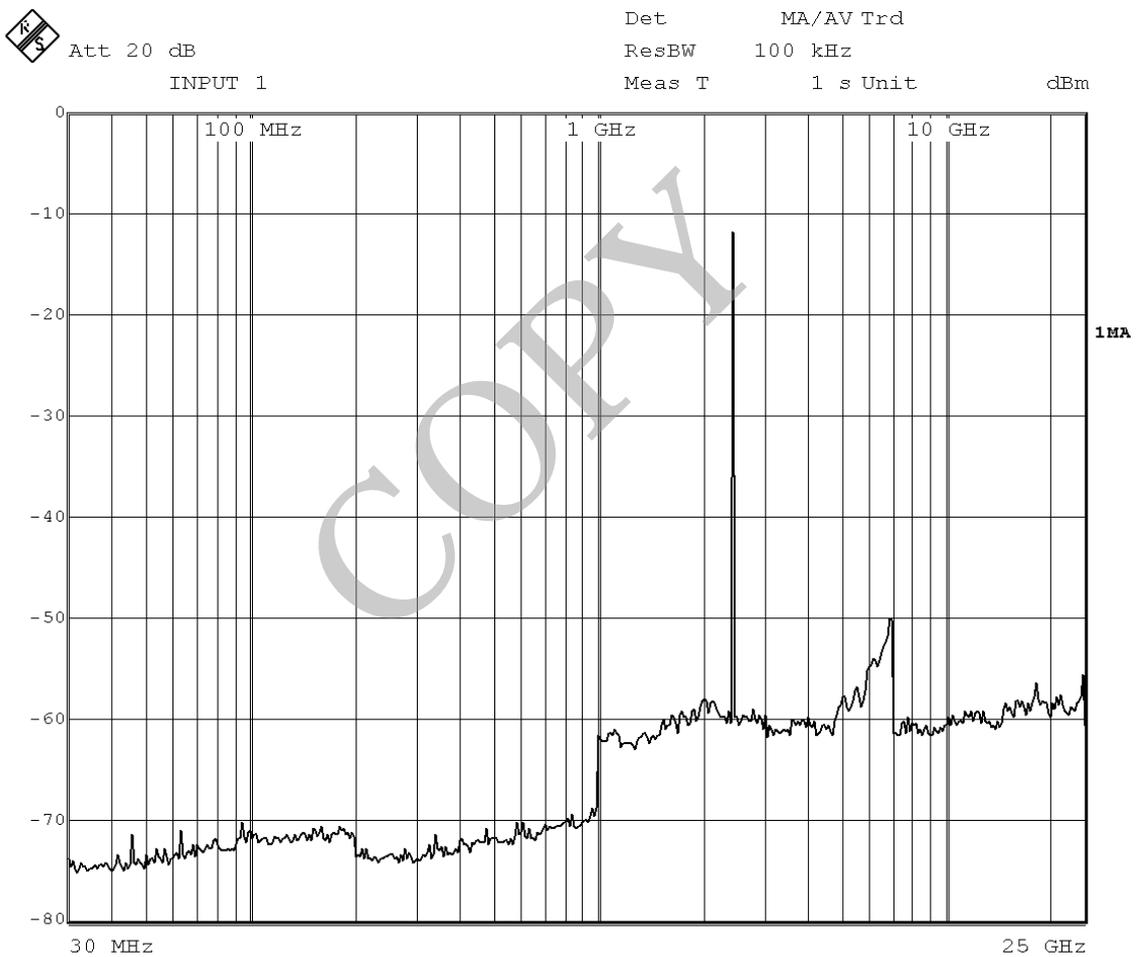

Mode of EUT : TX (78ch: 2480 MHz)  
 Test Port : Temporary antenna connector

Measurement Frequency (MHz)	Cable Loss (dB)	Att. Loss (dB)	Meter Reading (dBm)	Peak Power (dBm)	Limit (dBm)
2480	0.73	10.48	-12.38	-1.17	--

No spurious emissions of the EUT in the range 20 dB below the limit.

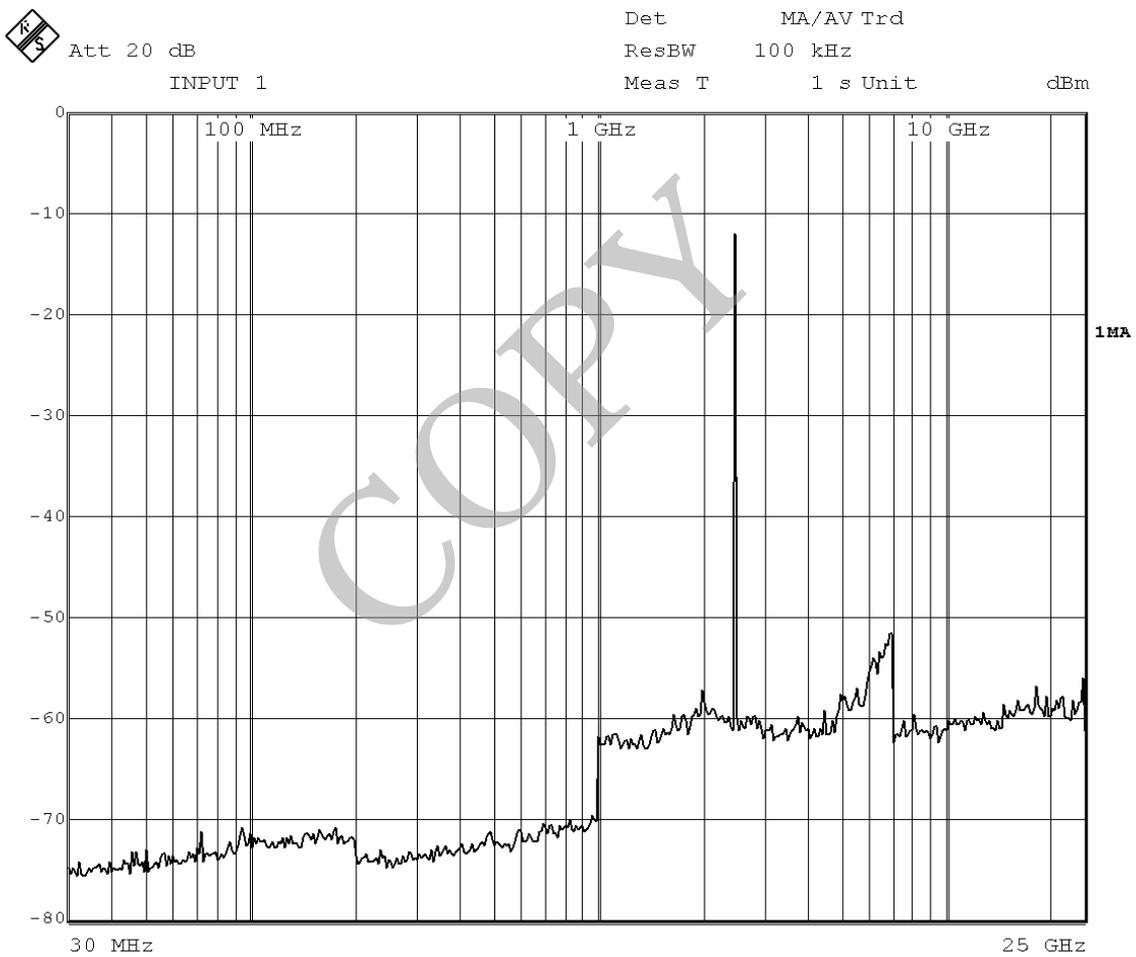

Note : 1) A sample calculation was made.

$$CL + AL + MR = 0.73 + 10.48 + (-12.85) = -1.64 \text{ (dBm)}$$

CL : Cable Loss


AL : Attenuator Loss

MR : Meter Reading

2) Measuring Instruments Setting :

Detector Function	Resolution Bandwidth
Peak	100 kHz

Tested by :

  
Katsunori Miura  
Testing Engineer

COPY


## 2.10 Spurious Emissions (Radiation)

### 2.10.1 Band Edge Compliance

Date : October 17, 2007  
 Temp.: 24 °C Humi.: 46 %


#### (1) Car Mode : DC Adaptor (Model: XA-DC3) Operation

Mode of EUT : Hopping  
 Test Port : Enclosure  
 Antenna Polarization: Horizontal

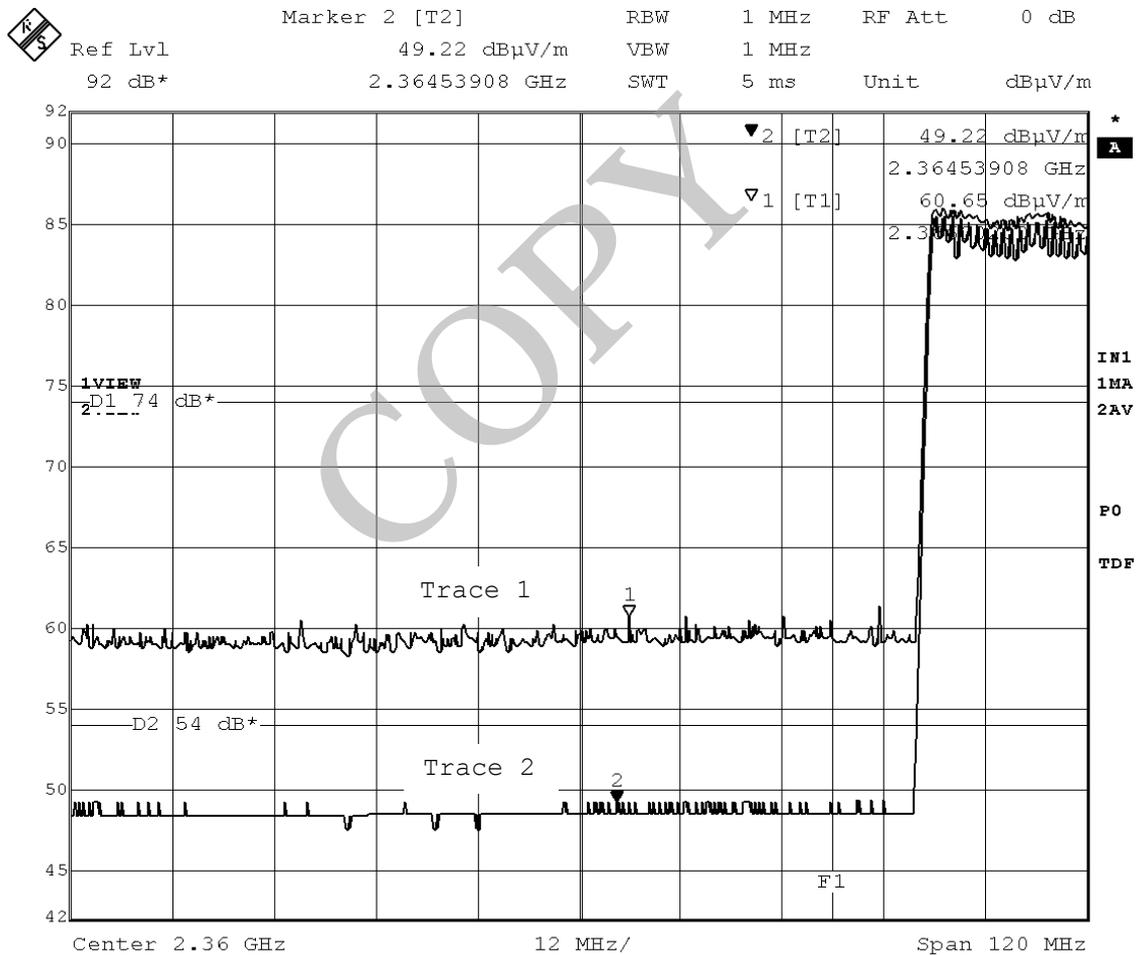


Note: The trace 1 is Peak detection. The trace 2 is Average detection.

Mode of EUT : Hopping  
 Test Port : Enclosure  
 Antenna Polarization: Vertical

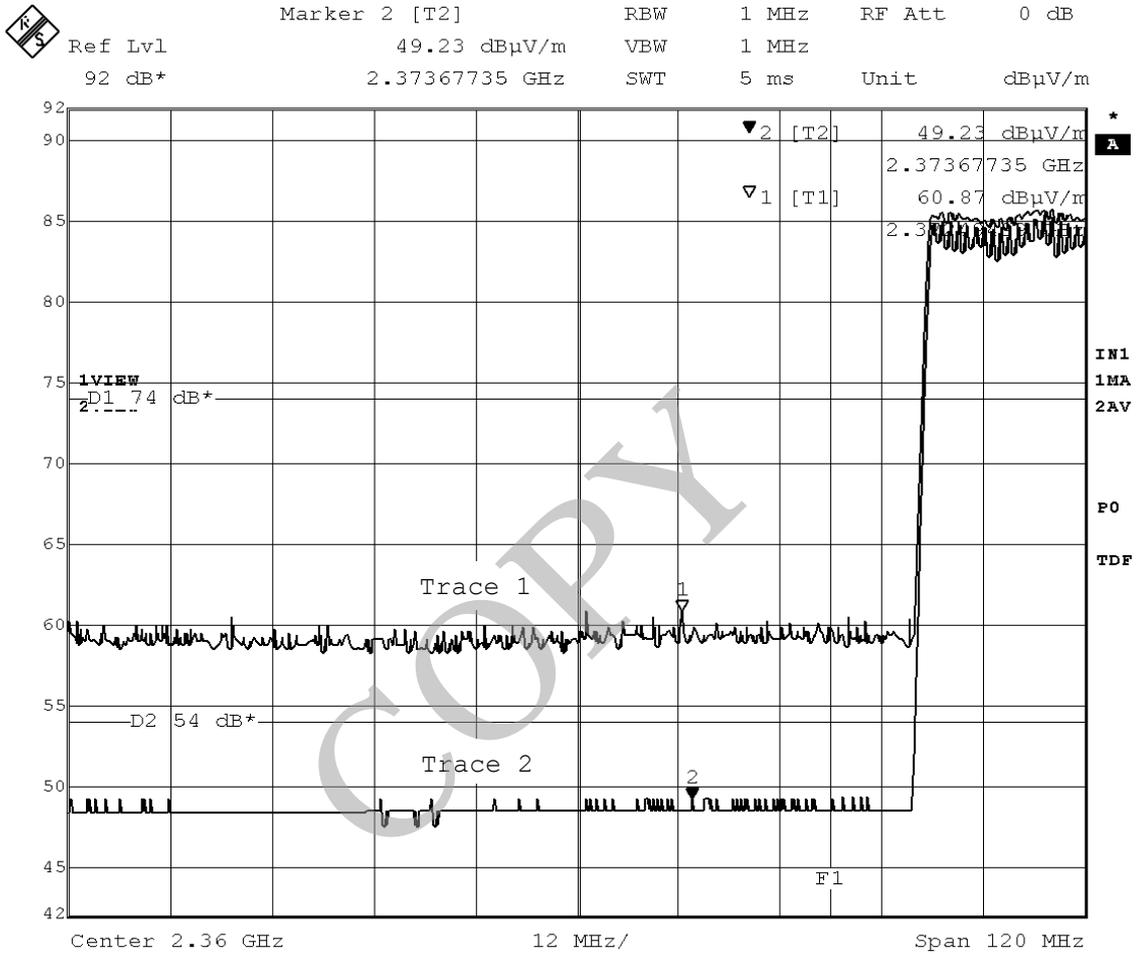


Note: The trace 1 is Peak detection. The trace 2 is Average detection.

Mode of EUT : Hopping  
 Test Port : Enclosure  
 Antenna Polarization: Horizontal

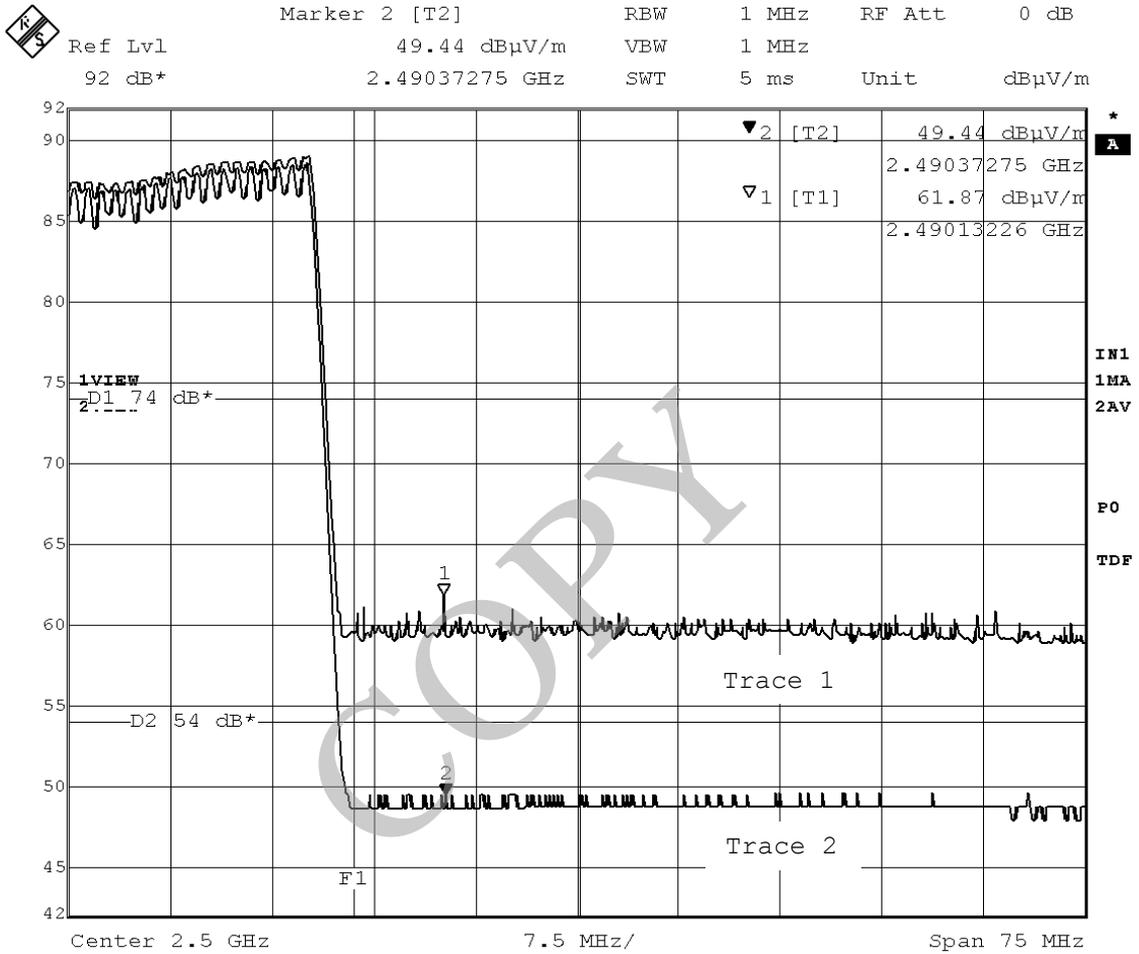

Note: The trace 1 is Peak detection. The trace 2 is Average detection.


Mode of EUT : Hopping  
 Test Port : Enclosure  
 Antenna Polarization: Vertical

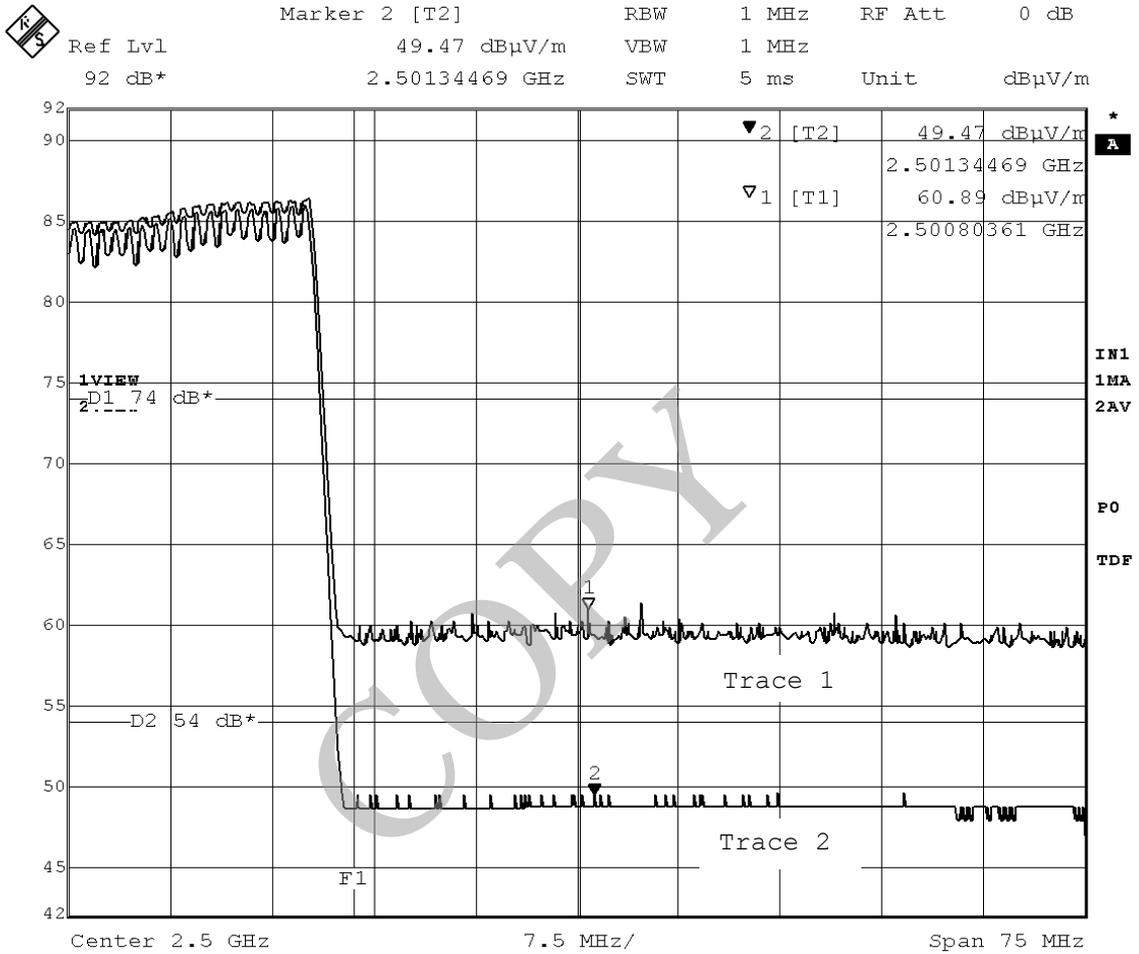

Note: The trace 1 is Peak detection. The trace 2 is Average detection.


**(2) Home Mode : AC Adaptor (Model: XA-AC13) Operation**

Mode of EUT : Hopping  
 Test Port : Enclosure  
 Antenna Polarization: Horizontal

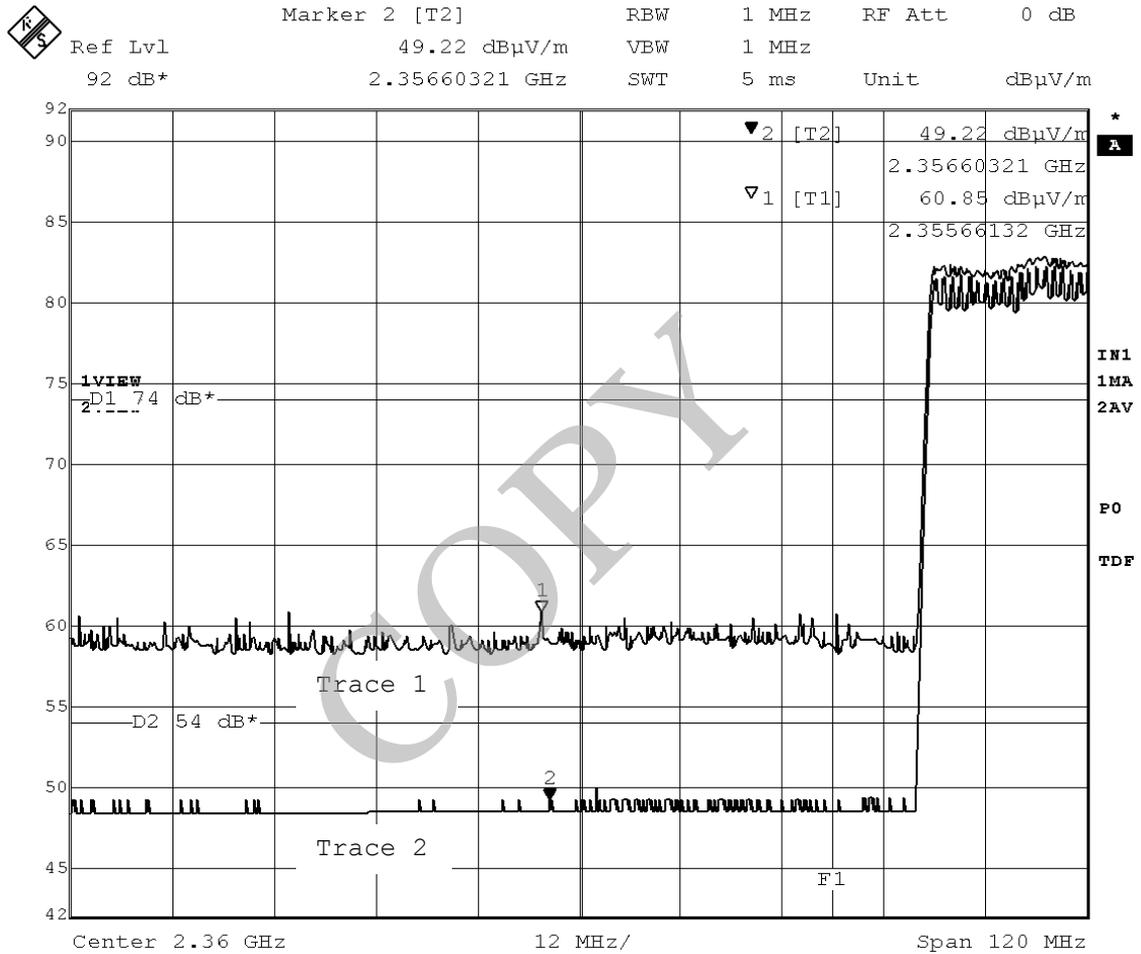


Note: The trace 1 is Peak detection. The trace 2 is Average detection.

Mode of EUT : Hopping  
 Test Port : Enclosure  
 Antenna Polarization: Vertical

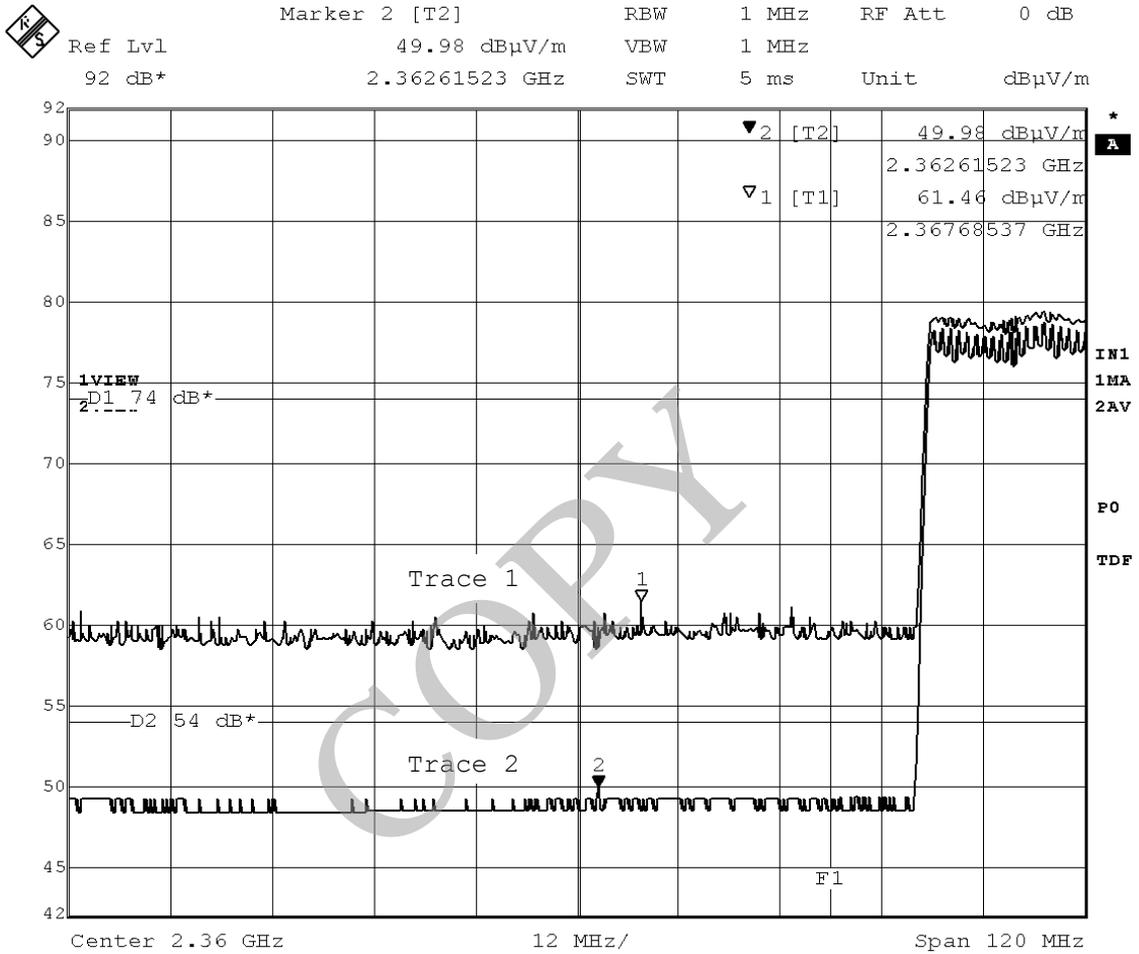


Note: The trace 1 is Peak detection. The trace 2 is Average detection.

Mode of EUT : Hopping  
 Test Port : Enclosure  
 Antenna Polarization: Horizontal

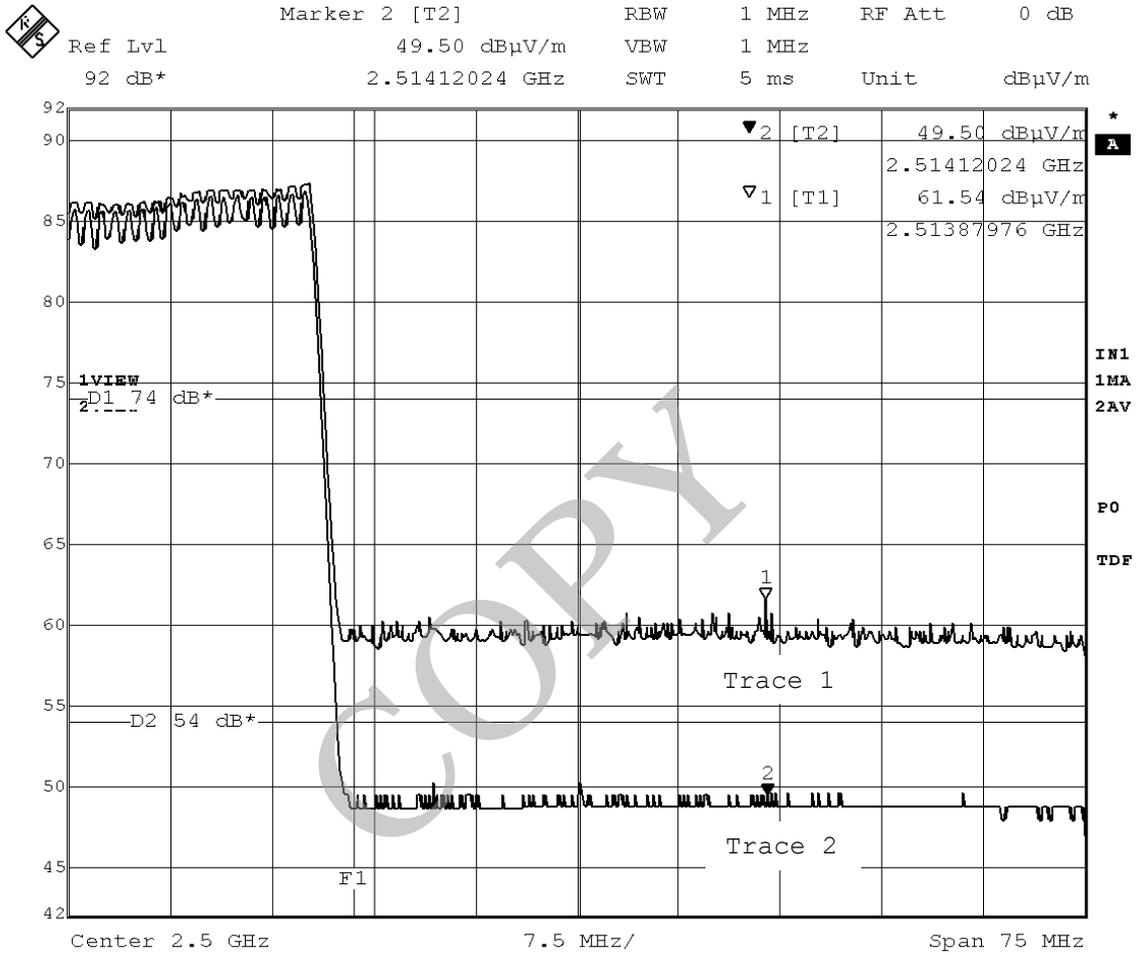

Note: The trace 1 is Peak detection. The trace 2 is Average detection.

Mode of EUT : Hopping  
 Test Port : Enclosure  
 Antenna Polarization: Vertical

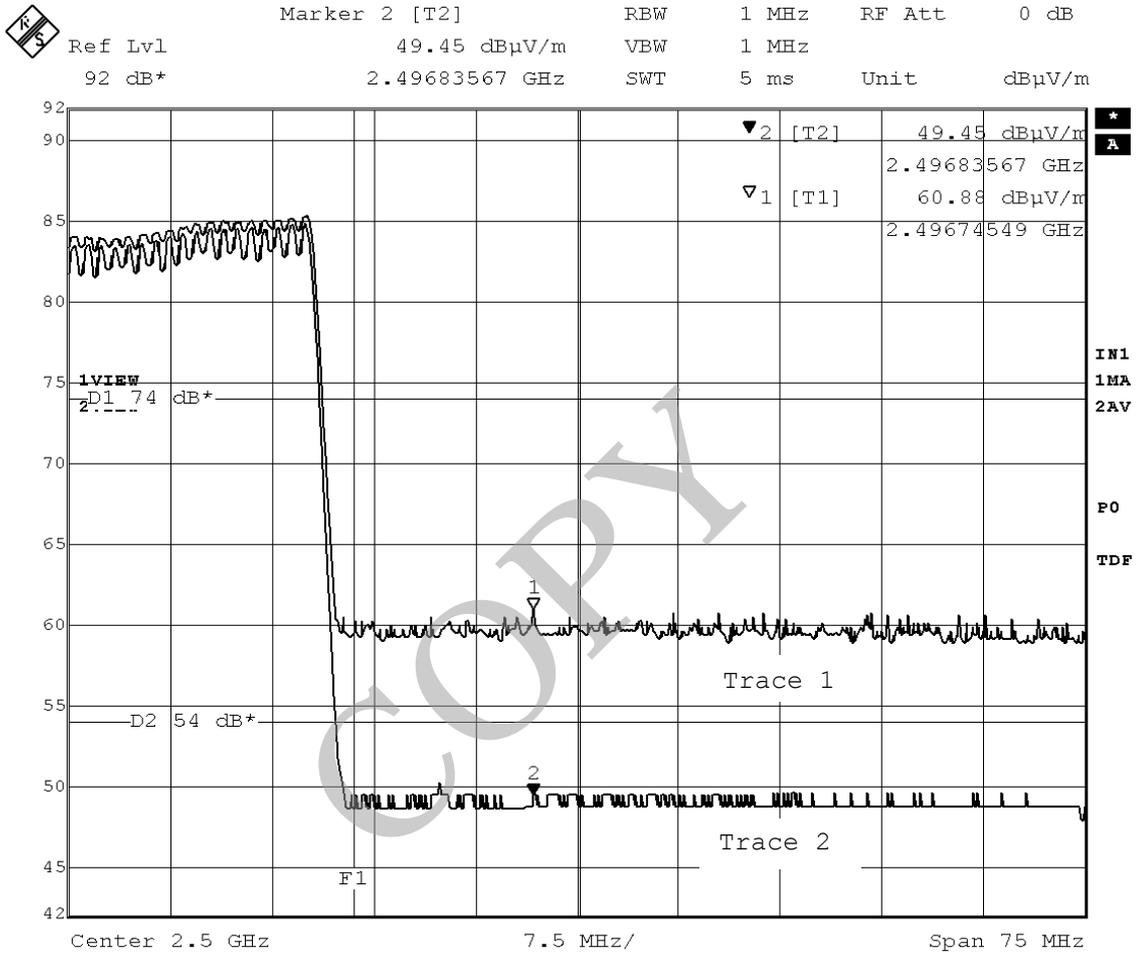

Note: The trace 1 is Peak detection. The trace 2 is Average detection.

**2.10.2 Other Spurious Emissions****2.10.2.1 Spurious Emissions in the frequency range from 9 kHz to 30 MHz****(1) Car Mode : DC Adaptor (Model: XA-DC3) Operation**Date : October 11, 2007  
Temp.: 26 °C Humi.: 41 %

Test Port : Enclosure

Mode of EUT : All modes have been investigated and the worst case mode for  
Channel (78ch: 2480 MHz) has been listed.

No spurious emissions in the range 20 dB below the limit.

**(2) Home Mode : AC Adaptor (Model: XA-AC13) Operation**Date : October 11, 2007  
Temp.: 26 °C Humi.: 41 %

Test Port : Enclosure

Mode of EUT : All modes have been investigated and the worst case mode for  
Channel (78ch: 2480 MHz) has been listed.

No spurious emissions in the range 20 dB below the limit.

**2.10.2.2 Spurious Emissions in the frequency range from 30 MHz to 1000 MHz**

**(1) Car Mode : DC Adaptor (Model: XA-DC3) Operation**

Date : October 11, 2007  
 Temp.: 26 °C Humi.: 41 %

Test Port : Enclosure

Mode of EUT : All modes have been investigated and the worst case mode for Channel (78ch: 2480 MHz) has been listed.

Frequency (MHz)	P-A Factor (dB)	Correction Factor (dB)	Polarization	Meter Reading (dBuV)			Limits (dBuV/m)		Emission Levels (dBuV/m)		Margins (dB)	
				QP	AV	Peak	QP/AV	Peak	QP/AV	Peak	QP/AV	Peak
78.01	0.0	10.3	H	9.4	-	-	40.0	-	19.7	-	20.3	-
95.35	0.0	13.2	V	9.4	-	-	43.5	-	22.6	-	20.9	-
130.01	0.0	18.1	H	12.7	-	-	43.5	-	30.8	-	12.7	-
147.35	0.0	19.1	H	9.1	-	-	43.5	-	28.2	-	15.3	-
182.01	0.0	20.7	V	11.1	-	-	43.5	-	31.8	-	11.7	-
268.70	0.0	22.8	H	7.7	-	-	46.0	-	30.5	-	15.5	-
286.32	0.0	23.8	H	1.1	-	-	46.0	-	24.9	-	21.1	-
295.06	0.0	24.3	V	7.7	-	-	46.0	-	32.0	-	14.0	-
303.34	0.0	18.9	H	12.9	-	-	46.0	-	31.8	-	14.2	-
320.68	0.0	19.0	H	12.6	-	-	46.0	-	31.6	-	14.4	-
390.01	0.0	21.1	H	13.9	-	-	46.0	-	35.0	-	11.0	-
407.06	0.0	21.6	H	11.0	-	-	46.0	-	32.6	-	13.4	-
424.96	0.0	22.0	H	10.1	-	-	46.0	-	32.1	-	13.9	-
441.72	0.0	22.3	H	5.5	-	-	46.0	-	27.8	-	18.2	-
476.95	0.0	22.9	H	8.0	-	-	46.0	-	30.9	-	15.1	-
494.00	0.0	23.3	H	14.7	-	-	46.0	-	38.0	-	8.0	-

**(2) Home Mode : AC Adaptor (Model: XA-AC13) Operation**

Date : October 15, 2007  
 Temp.: 27 °C Humi.: 43 %

Test Port : Enclosure

Mode of EUT : All modes have been investigated and the worst case mode for Channel (78ch: 2480 MHz) has been listed.

Frequency (MHz)	P-A Factor (dB)	Correction Factor (dB)	Polarization	Meter Reading (dBuV)			Limits (dBuV/m)		Emission Levels (dBuV/m)		Margins (dB)	
				QP	AV	Peak	QP/AV	Peak	QP/AV	Peak	QP/AV	Peak
36.29	0.0	19.8	V	10.0	-	-	40.0	-	29.8	-	10.2	-
78.01	0.0	10.3	V	14.7	-	-	40.0	-	25.0	-	15.0	-
95.35	0.0	13.2	V	8.9	-	-	43.5	-	22.1	-	21.4	-
147.35	0.0	19.1	H	8.6	-	-	43.5	-	27.7	-	15.8	-
295.14	0.0	24.3	V	7.1	-	-	46.0	-	31.4	-	14.6	-
320.03	0.0	19.0	V	3.5	-	-	46.0	-	22.5	-	23.5	-
390.03	0.0	21.1	H	0.7	-	-	46.0	-	21.8	-	24.2	-
407.35	0.0	21.6	H	1.1	-	-	46.0	-	22.7	-	23.3	-
494.01	0.0	23.3	V	1.9	-	-	46.0	-	25.2	-	20.8	-

Notes :

- 1) The spectrum was checked from 30 MHz to 1000 MHz.
- 2) The cable loss, amp. gain and antenna factor are included in the correction factor.
- 3) The symbol of "<" means "or less".
- 4) The symbol of ">" means "or greater".
- 5) A sample calculation (QP/AV) was made at 36.29 (MHz).  
 $PA + Cf + Mr = 0 + 19.8 + 10 = 29.8$  (dBuV/m)  
 PA = Peak to Average Factor (P-A Factor)  
 Cf = Correction Factor  
 Mr = Meter Reading
- 6) Measuring Instrument Setting :  

<u>Detector function</u>	<u>Resolution Bandwidth</u>	<u>Video Bandwidth</u>
Quasi-peak (QP)	120 kHz	-

### 2.10.2.3 Spurious Emissions in the frequency above 1000 MHz

#### (1) Car Mode : DC Adaptor (Model: XA-DC3) Operation

Date : October 12, 2007  
 Temp.: 26 °C Humi.: 42 %

Test Port : Enclosure

Mode of EUT : TX (0ch: 2402 MHz)

Frequency (GHz)	P-A Factor (dB)	Correction Factor (dB)	Polarization	Meter Reading (dBuV)		Limits (dBuV/m)		Emission Levels (dBuV/m)		Margins (dB)	
				AV	Peak	AV	Peak	AV	Peak	AV	Peak
1.6020	0.0	-0.3	H	30.8	42.9	54.0	74.0	30.5	42.6	23.5	31.4
3.1200	0.0	5.0	H	< 28.0	< 41.0	54.0	74.0	< 33.0	< 46.0	> 21.0	> 28.0
4.8040	0.0	8.4	H	33.5	44.8	54.0	74.0	41.9	53.2	12.1	20.8
7.2052	0.0	12.0	H	< 28.0	< 41.0	54.0	74.0	< 40.0	< 53.0	> 14.0	> 21.0
9.6084	0.0	14.8	H	< 28.0	< 41.0	54.0	74.0	< 42.8	< 55.8	> 11.2	> 18.2

Mode of EUT : TX (39ch: 2441 MHz)

Frequency (GHz)	P-A Factor (dB)	Correction Factor (dB)	Polarization	Meter Reading (dBuV)		Limits (dBuV/m)		Emission Levels (dBuV/m)		Margins (dB)	
				AV	Peak	AV	Peak	AV	Peak	AV	Peak
1.6280	0.0	-0.2	H	31.3	42.6	54.0	74.0	31.1	42.4	22.9	31.6
3.1200	0.0	5.0	H	< 28.0	< 41.0	54.0	74.0	< 33.0	< 46.0	> 21.0	> 28.0
4.8820	0.0	8.5	H	32.3	44.6	54.0	74.0	40.8	53.1	13.2	20.9
7.3228	0.0	12.1	H	< 28.0	< 41.0	54.0	74.0	< 40.1	< 53.1	> 13.9	> 20.9
9.7636	0.0	15.0	H	< 28.0	< 41.0	54.0	74.0	< 43.0	< 56.0	> 11.0	> 18.0

Mode of EUT : TX (78ch: 2480 MHz)

Frequency (GHz)	P-A Factor (dB)	Correction Factor (dB)	Polarization	Meter Reading (dBuV)		Limits (dBuV/m)		Emission Levels (dBuV/m)		Margins (dB)	
				AV	Peak	AV	Peak	AV	Peak	AV	Peak
1.6540	0.0	-0.1	H	34.8	43.8	54.0	74.0	34.7	43.7	19.3	30.3
3.1200	0.0	5.0	H	< 28.0	< 41.0	54.0	74.0	< 33.0	< 46.0	> 21.0	> 28.0
4.9600	0.0	8.6	H	31.5	44.0	54.0	74.0	40.1	52.6	13.9	21.4
7.4410	0.0	12.3	H	< 28.0	< 41.0	54.0	74.0	< 40.3	< 53.3	> 13.7	> 20.7
9.9200	0.0	15.2	H	< 28.0	< 41.0	54.0	74.0	< 43.2	< 56.2	> 10.8	> 17.8

**(2) Home Mode : AC Adaptor (Model: XA-AC13) Operation**

Date : October 16, 2006  
 Temp.: 26 °C Humi.: 42 %

Test Port : Enclosure

Mode of EUT : TX (0ch: 2402 MHz)

Frequency (GHz)	P-A Factor (dB)	Correction Factor (dB)	Polarization	Meter Reading (dBuV)		Limits (dBuV/m)		Emission Levels (dBuV/m)		Margins (dB)	
				AV	Peak	AV	Peak	AV	Peak	AV	Peak
1.6020	0.0	-1.1	H	30.3	42.4	54.0	74.0	29.2	41.3	24.8	32.7
4.8040	0.0	7.5	V	30.5	42.7	54.0	74.0	38.0	50.2	16.0	23.8
7.2067	0.0	11.0	H	< 28.0	< 41.0	54.0	74.0	< 39.0	< 52.0	> 15.0	> 22.0
9.6084	0.0	13.8	H	< 28.0	< 41.0	54.0	74.0	< 41.8	< 54.8	> 12.2	> 19.2

Mode of EUT : TX (39ch: 2441 MHz)

Frequency (GHz)	P-A Factor (dB)	Correction Factor (dB)	Polarization	Meter Reading (dBuV)		Limits (dBuV/m)		Emission Levels (dBuV/m)		Margins (dB)	
				AV	Peak	AV	Peak	AV	Peak	AV	Peak
1.6280	0.0	-0.2	H	30.1	41.7	54.0	74.0	29.9	41.5	24.1	32.5
4.8820	0.0	8.5	V	32.1	44.1	54.0	74.0	40.6	52.6	13.4	21.4
7.3236	0.0	12.1	H	< 28.0	< 41.0	54.0	74.0	< 40.1	< 53.1	> 13.9	> 20.9
9.7644	0.0	15.0	H	< 28.0	< 41.0	54.0	74.0	< 43.0	< 56.0	> 11.0	> 18.0

Mode of EUT : TX (78ch: 2480 MHz)


Frequency (GHz)	P-A Factor (dB)	Correction Factor (dB)	Polarization	Meter Reading (dBuV)		Limits (dBuV/m)		Emission Levels (dBuV/m)		Margins (dB)	
				AV	Peak	AV	Peak	AV	Peak	AV	Peak
1.6540	0.0	-0.1	H	30.1	42.5	54.0	74.0	30.0	42.4	24.0	31.6
4.9600	0.0	8.6	V	31.3	43.6	54.0	74.0	39.9	52.2	14.1	21.8
7.4392	0.0	12.3	H	< 28.0	< 41.0	54.0	74.0	< 40.3	< 53.3	> 13.7	> 20.7
9.9204	0.0	15.2	H	< 28.0	< 41.0	54.0	74.0	< 43.2	< 56.2	> 10.8	> 17.8

- Notes :
- 1) The spectrum was checked from 1.0 GHz to 26.5 GHz.
  - 2) The cable loss, amp. gain and antenna factor are included in the correction factor.
  - 3) The symbol of "<" means "or less".
  - 4) The symbol of ">" means "or greater".
  - 5) A sample calculation(Peak) was made at 1.602 (GHz).  
 $PA + Cf + Mr = 0 + -1.1 + 42.4 = 41.3$  (dBuV/m)  
PA = Peak to Average Factor(P-A Factor)  
Cf = Correction Factor  
Mr = Meter Reading

## 6) Measuring Instrument Setting :

<u>Detector function</u>	<u>Resolution Bandwidth</u>	<u>Video Bandwidth</u>
Average (AV)	1 MHz	10 Hz
Peak	1 MHz	1 MHz


Tested by :

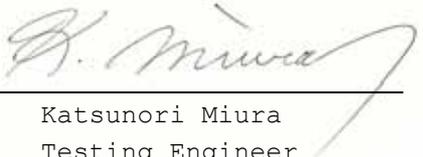  
Katsunori Miura  
Testing Engineer

### 2.11 AC Power Line Conducted Emissions

Date : October 22, 2007

Temp. : 24 Humi. : 41%

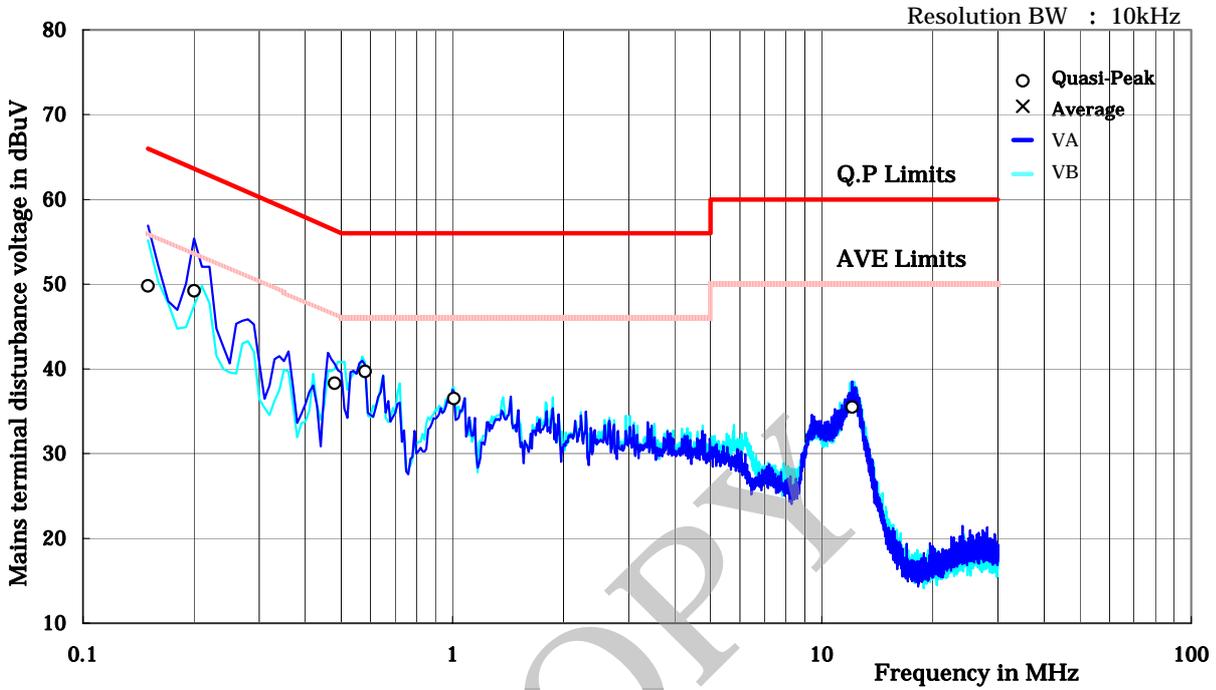

Freq. [MHz]	Correction Factor [dB]	Meter Reading [dBuV]				Limit [dBuV]		Result [dBuV]		Margin [dB]	
		QP	AV	QP	AV	QP	AV	QP	AV	QP	AV
0.15	0.30	49.5	-	49.0	-	66.0	56.0	49.8	-	16.2	-
0.20	0.20	49.0	-	44.5	-	63.6	53.6	49.2	-	14.4	-
0.48	0.10	37.5	-	38.2	-	56.3	46.3	38.3	-	18.0	-
0.58	0.10	38.6	-	39.6	-	56.0	46.0	39.7	-	16.3	-
1.01	0.10	35.5	-	36.4	-	56.0	46.0	36.5	-	19.5	-
12.09	0.40	35.1	-	35.0	-	60.0	50.0	35.5	-	24.5	-

- Note : 1) QP : CISPR Quasi-Peak ; AV : Average IF bandwidth : 9 kHz.  
 2) VA : One end & grounded ; VB : The other end & grounded  
 3) The symbol of '<' means 'or less' .  
 4) The symbol of '>' means 'or greater' .  
 5) The symbol of '-' means 'Not applicable' .  
 6) Factor includes an artificial mains network factor and a cable (4.0 m) loss.  
 7) A sample calculation was made at 0.15MHz  
 Factor + Meter Reading = 0.3 + 49.5 = 49.8

Tested by :   
 Katsunori Miura  
 Testing Engineer

**2.12 RF Exposure Compliance**

Not Applicable

**2.13 Spurious Emissions for Receiver (Radiation)**

**2.13.1 Spurious Emissions in the frequency range from 30 MHz to 1000 MHz**

**(1) Car Mode : DC Adaptor (Model: XA-DC3) Operation**

Date : October 11, 2007  
 Temp.: 26 °C Humi.: 41 %

Test Port : Enclosure

Mode of EUT : All modes have been investigated and the worst case mode for Channel (39ch: 2441 MHz) has been listed.

Frequency (MHz)	P-A Factor (dB)	Correction Factor (dB)	Polarization	Meter Reading (dBuV)			Limits (dBuV/m)		Emission Levels (dBuV/m)		Margins (dB)	
				QP	AV	Peak	QP/AV	Peak	QP/AV	Peak	QP/AV	Peak
78.01	0.0	10.3	H	9.4	-	-	40.0	-	19.7	-	20.3	-
95.35	0.0	13.2	V	9.4	-	-	43.5	-	22.6	-	20.9	-
130.01	0.0	18.1	H	12.7	-	-	43.5	-	30.8	-	12.7	-
147.35	0.0	19.1	H	9.1	-	-	43.5	-	28.2	-	15.3	-
182.01	0.0	20.7	V	11.1	-	-	43.5	-	31.8	-	11.7	-
268.70	0.0	22.8	H	7.7	-	-	46.0	-	30.5	-	15.5	-
286.32	0.0	23.8	H	1.1	-	-	46.0	-	24.9	-	21.1	-
295.06	0.0	24.3	V	7.7	-	-	46.0	-	32.0	-	14.0	-
303.34	0.0	18.9	H	12.9	-	-	46.0	-	31.8	-	14.2	-
320.68	0.0	19.0	H	12.6	-	-	46.0	-	31.6	-	14.4	-
390.01	0.0	21.1	H	13.9	-	-	46.0	-	35.0	-	11.0	-
407.06	0.0	21.6	H	11.0	-	-	46.0	-	32.6	-	13.4	-
424.96	0.0	22.0	H	10.1	-	-	46.0	-	32.1	-	13.9	-
441.72	0.0	22.3	H	5.5	-	-	46.0	-	27.8	-	18.2	-
476.95	0.0	22.9	H	8.0	-	-	46.0	-	30.9	-	15.1	-
494.00	0.0	23.3	H	14.7	-	-	46.0	-	38.0	-	8.0	-

**(2) Home Mode : AC Adaptor (Model: XA-AC13) Operation**

Date : October 15, 2007  
 Temp.: 27 °C Humi.: 43 %

Test Port : Enclosure

Mode of EUT : All modes have been investigated and the worst case mode for Channel (39ch: 2441 MHz) has been listed.

Frequency (MHz)	P-A Factor (dB)	Correction Factor (dB)	Polarization	Meter Reading (dBuV)			Limits (dBuV/m)		Emission Levels (dBuV/m)		Margins (dB)	
				QP	AV	Peak	QP/AV	Peak	QP/AV	Peak	QP/AV	Peak
36.29	0.0	19.8	V	10.0	-	-	40.0	-	29.8	-	10.2	-
78.01	0.0	10.3	V	14.7	-	-	40.0	-	25.0	-	15.0	-
95.35	0.0	13.2	V	8.9	-	-	43.5	-	22.1	-	21.4	-
147.35	0.0	19.1	H	8.6	-	-	43.5	-	27.7	-	15.8	-
295.14	0.0	24.3	V	7.1	-	-	46.0	-	31.4	-	14.6	-
320.03	0.0	19.0	V	3.5	-	-	46.0	-	22.5	-	23.5	-
390.03	0.0	21.1	H	0.7	-	-	46.0	-	21.8	-	24.2	-
407.35	0.0	21.6	H	1.1	-	-	46.0	-	22.7	-	23.3	-
494.01	0.0	23.3	V	1.9	-	-	46.0	-	25.2	-	20.8	-

Notes :

- 1) The spectrum was checked from 30 MHz to 1000 MHz.
- 2) The cable loss, amp. gain and antenna factor are included in the correction factor.
- 3) The symbol of "<" means "or less".
- 4) The symbol of ">" means "or greater".
- 5) A sample calculation (QP/AV) was made at 36.29 (MHz).  
 $PA + Cf + Mr = 0 + 19.8 + 10 = 29.8$  (dBuV/m)  
 PA = Peak to Average Factor (P-A Factor)  
 Cf = Correction Factor  
 Mr = Meter Reading
- 6) Measuring Instrument Setting :  

<u>Detector function</u>	<u>Resolution Bandwidth</u>	<u>Video Bandwidth</u>
Quasi-peak(QP)	120 kHz	-

### 2.13.2 Spurious Emissions in the frequency above 1000 MHz

#### (1) Car Mode : DC Adaptor (Model: XA-DC3) Operation

Date : October 11, 2007  
 Temp.: 26 °C Humi.: 41 %

Test Port : Enclosure

Mode of EUT : RX (0ch: 2402 MHz)

Frequency (GHz)	P-A Factor (dB)	Correction Factor (dB)	Polarization	Meter Reading (dBuV)		Limits (dBuV/m)		Emission Levels (dBuV/m)		Margins (dB)	
				AV	Peak	AV	Peak	AV	Peak	AV	Peak
1.5604	0.0	-1.2	H	< 28.0	< 41.0	54.0	74.0	< 26.8	< 39.8	> 27.2	> 34.2
1.6004	0.0	-1.1	H	32.6	43.7	54.0	74.0	31.5	42.6	22.5	31.4
2.4005	0.0	1.8	V	28.1	41.1	54.0	74.0	29.9	42.9	24.1	31.1
2.4960	0.0	2.1	V	< 28.0	< 41.0	54.0	74.0	< 30.1	< 43.1	> 23.9	> 30.9

Mode of EUT : RX (39ch: 2441 MHz)

Frequency (GHz)	P-A Factor (dB)	Correction Factor (dB)	Polarization	Meter Reading (dBuV)		Limits (dBuV/m)		Emission Levels (dBuV/m)		Margins (dB)	
				AV	Peak	AV	Peak	AV	Peak	AV	Peak
1.5604	0.0	-1.2	H	< 28.0	< 41.0	54.0	74.0	< 26.8	< 39.8	> 27.2	> 34.2
1.6263	0.0	-1.0	H	32.0	43.2	54.0	74.0	31.0	42.2	23.0	31.8
2.4395	0.0	1.9	V	29.7	41.6	54.0	74.0	31.6	43.5	22.4	30.5
2.4960	0.0	2.1	V	< 28.0	< 41.0	54.0	74.0	< 30.1	< 43.1	> 23.9	> 30.9

Mode of EUT : RX (78ch: 2480 MHz)

Frequency (GHz)	P-A Factor (dB)	Correction Factor (dB)	Polarization	Meter Reading (dBuV)		Limits (dBuV/m)		Emission Levels (dBuV/m)		Margins (dB)	
				AV	Peak	AV	Peak	AV	Peak	AV	Peak
1.5604	0.0	-1.2	H	< 28.0	< 41.0	54.0	74.0	< 26.8	< 39.8	> 27.2	> 34.2
1.6523	0.0	-0.9	H	34.4	43.2	54.0	74.0	33.5	42.3	20.5	31.7
2.4785	0.0	2.0	H	29.5	41.4	54.0	74.0	31.5	43.4	22.5	30.6
2.4960	0.0	2.1	H	< 28.0	< 41.0	54.0	74.0	< 30.1	< 43.1	> 23.9	> 30.9

**(2) Home Mode : AC Adaptor (Model: XA-AC13) Operation**

Date : October 16, 2007  
 Temp.: 26 °C Humi.: 38 %

Test Port : Enclosure

Mode of EUT : RX (0ch: 2402 MHz)

Frequency (GHz)	P-A Factor (dB)	Correction Factor (dB)	Polarization	Meter Reading (dBuV)		Limits (dBuV/m)		Emission Levels (dBuV/m)		Margins (dB)	
				AV	Peak	AV	Peak	AV	Peak	AV	Peak
1.2480	0.0	-2.6	V	28.2	41.5	54.0	74.0	25.6	38.9	28.4	35.1
1.6003	0.0	-1.1	H	30.8	42.7	54.0	74.0	29.7	41.6	24.3	32.4
2.4005	0.0	1.8	V	28.1	41.3	54.0	74.0	29.9	43.1	24.1	30.9

Mode of EUT : RX (39ch: 2441 MHz)

Frequency (GHz)	P-A Factor (dB)	Correction Factor (dB)	Polarization	Meter Reading (dBuV)		Limits (dBuV/m)		Emission Levels (dBuV/m)		Margins (dB)	
				AV	Peak	AV	Peak	AV	Peak	AV	Peak
1.2480	0.0	-2.6	V	28.1	41.3	54.0	74.0	25.5	38.7	28.5	35.3
1.6263	0.0	-1.0	H	30.0	42.0	54.0	74.0	29.0	41.0	25.0	33.0
2.4395	0.0	1.9	V	< 28.0	41.3	54.0	74.0	< 29.9	43.2 >	24.1	30.8

Mode of EUT : RX (78ch: 2480 MHz)


Frequency (GHz)	P-A Factor (dB)	Correction Factor (dB)	Polarization	Meter Reading (dBuV)		Limits (dBuV/m)		Emission Levels (dBuV/m)		Margins (dB)	
				AV	Peak	AV	Peak	AV	Peak	AV	Peak
1.2480	0.0	-2.6	V	28.2	41.7	54.0	74.0	25.6	39.1	28.4	34.9
1.6524	0.0	-0.9	H	30.1	41.7	54.0	74.0	29.2	40.8	24.8	33.2
2.4785	0.0	2.0	H	30.0	41.4	54.0	74.0	32.0	43.4	22.0	30.6

- Notes :
- 1) The spectrum was checked from 1.0 GHz to 26.5 GHz.
  - 2) The cable loss, amp. gain and antenna factor are included in the correction factor.
  - 3) The symbol of "<" means "or less".
  - 4) The symbol of ">" means "or greater".
  - 5) A sample calculation (Peak) was made at 1.248 (GHz).  
 $PA + Cf + Mr = 0 + -2.6 + 41.5 = 38.9$  (dBuV/m)  
PA = Peak to Average Factor (P-A Factor)  
Cf = Correction Factor  
Mr = Meter Reading

## 6) Measuring Instrument Setting :

<u>Detector function</u>	<u>Resolution Bandwidth</u>	<u>Video Bandwidth</u>
Average (AV)	1 MHz	10 Hz
Peak	1 MHz	1 MHz


Tested by :

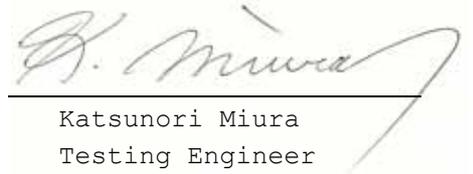  
Katsunori Miura  
Testing Engineer

### 2.14 AC Power Line Conducted Emissions for Receiver

Date : October 22, 2007

Temp. : 24 Humi. : 41%

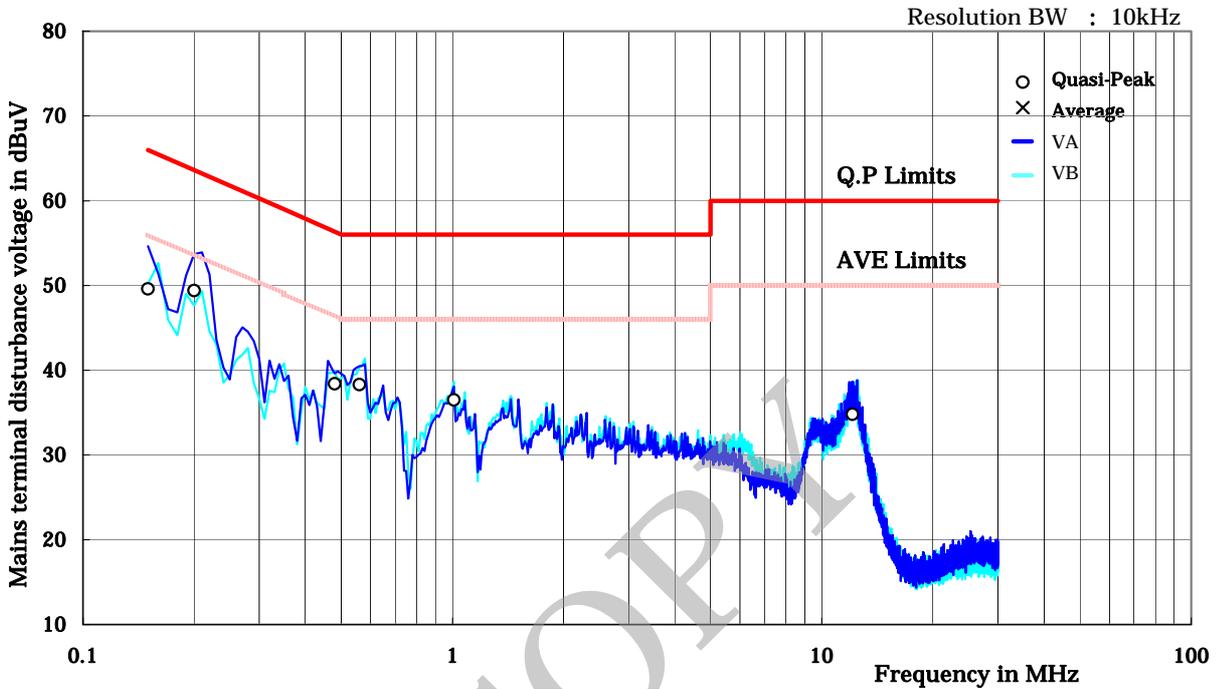

Freq. [MHz]	Correction Factor [dB]	Meter Reading [dBuV]				Limit [dBuV]		Result [dBuV]		Margin [dB]	
		VA QP	VA AV	VB QP	VB AV	QP	AV	QP	AV	QP	AV
0.15	0.30	49.3	-	49.0	-	66.0	56.0	49.6	-	16.4	-
0.20	0.20	49.2	-	44.7	-	63.6	53.6	49.4	-	14.2	-
0.48	0.10	37.6	-	38.3	-	56.3	46.3	38.4	-	17.9	-
0.56	0.10	37.5	-	38.2	-	56.0	46.0	38.3	-	17.7	-
1.01	0.10	35.5	-	36.4	-	56.0	46.0	36.5	-	19.5	-
12.10	0.40	34.4	-	34.4	-	60.0	50.0	34.8	-	25.2	-

- Note : 1) QP : CISPR Quasi-Peak ; AV : Average IF bandwidth : 9 kHz.  
 2) VA : One end & grounded ; VB : The other end & grounded  
 3) The symbol of '<' means 'or less' .  
 4) The symbol of '>' means 'or greater' .  
 5) The symbol of '-' means 'Not applicable' .  
 6) Factor includes an artificial mains network factor and a cable (4.0 m) loss.  
 7) A sample calculation was made at 0.15MHz  
 Factor + Meter Reading = 0.3 + 49.3 = 49.6

Tested by :

Katsunori Miura  
 Testing Engineer

# Appendix

## Test Instruments List

COPY

							26-Oct-2007
No	Type	Model	Manufacturer	Serial	ID	Last Cal.	Interval
<b><u>Test Facilities:</u></b>							
1	Anechoic Chamber A	-	TDK	-	800-01-502E0	Mar 2007	1 Year
2	Anechoic Chamber B	-	TDK	-	800-01-503E0	Mar 2007	1 Year
3	Shield Room A	-	TDK	-	800-01-501E0	-	-
4	Shield Room B	-	Ray Proof	-	800-01-010E0	-	-
5	Shield Room C	-	TDK	-	800-01-504E0	-	-
6	Shield Room D	-	Emerson	-	800-01-022E0	-	-
7	Shield Room E	-	TDK	-	800-01-505E0	-	-
<b><u>Measuring Instruments:</u></b>							
10	Test Receiver	ESHS10	Rohde & Schwarz	835871/004	119-01-505E0	Apr 2007	1 Year
11	Test Receiver	ESVS10	Rohde & Schwarz	826148/002	119-03-504E0	Apr 2007	1 Year
12	Test Receiver	ESVS10	Rohde & Schwarz	832699/001	119-03-506E0	Apr 2007	1 Year
13	Test Receiver	ESI26	Rohde & Schwarz	100043	119-04-511E0	Sep 2007	1 Year
14	Spectrum Analyzer	R3182	Advantest	120600581	122-02-521E0	Mar 2007	1 Year
17	Spectrum Analyzer	8566B	Hewlett Packard	2747A05855	122-02-517E0	Apr 2007	1 Year
18	RF Pre-selector	85685A	Hewlett Packard	2901A00933	122-02-519E0	Apr 2007	1 Year
19	Spectrum Analyzer	R3132	Advantest	120500072	122-02-520E0	Sep 2007	1 Year
20	Spectrum Analyzer	R3132	Advantest	150400998	122-02-523E0	Jul 2007	1 Year
65	Power Meter	436A	Hewlett Packard	1725A01930	100-02-501E0	Apr 2007	1 Year
66	Power Sensor	8482A	Hewlett Packard	1551A01013	100-02-501E0	Apr 2007	1 Year
67	Power Sensor	8485A	Hewlett Packard	2942A08969	100-04-021E0	Apr 2007	1 Year
68	FM Linear Detector	MS61A	Anritsu	M77486	123-02-008E0	Oct 2007	1 Year
69	Level Meter	ML422C	Anritsu	M87571	114-02-501E0	Jun 2007	1 Year
70	Measuring Amplifier	2636	B & K	1614851	082-01-502E0	May 2007	1 Year
75	Frequency Counter	53131A	Hewlett Packard	3546A11807	102-02-075E0	May 2007	1 Year
83	FFT Analyzer	R9211C	Advantest	02020253	122-02-506E0	Jun 2007	1 Year
84	Noise Meter	MN-446	Meguro	53030478	082-01-144E0	Apr 2007	1 Year
86	Peak Power Analyzer	8990A/84815A	Hewlett Packard	3220A00486/ 3227A00118	100-02-016E0	Apr 2007	1 Year
163	Digital Oscilloscope	54502A	Hewlett Packard	2934A05573	121-02-502E0	May 2007	1 Year
165	Multimeter	VOAC7413	Iwatsu Electric	0267973	114-02-502E0	Apr 2007	1 Year
172	Test Receiver	ESCI	Rohde & Schwarz	100408	119-04-512E0	Sep 2007	1 Year
<b><u>Antennas:</u></b>							
21	Loop Antenna	HFH2-Z2	Rohde & Schwarz	881058/62	119-05-033E0	Jun 2007	1 Year
22	Dipole Antenna	KBA-511	Kyoritsu	0-170-1	119-05-506E0	Oct 2007	1 Year
23	Dipole Antenna	KBA-511A	Kyoritsu	0-201-13	119-05-504E0	Oct 2007	1 Year
24	Dipole Antenna	KBA-611	Kyoritsu	0-147-14	119-05-507E0	Oct 2007	1 Year
25	Dipole Antenna	KBA-611	Kyoritsu	0-170-1	119-05-505E0	Oct 2007	1 Year
27	Biconical Antenna	BBA9106	Schwarzbeck	-	119-05-078E0	Nov 2006	1 Year
28	Log-periodic Antenna	UHALP9107	Schwarzbeck	-	119-05-079E0	Nov 2006	1 Year
31	Horn Antenna	3115	EMC Test Systems	6442	119-05-514E0	Jan 2006	2 Year
32	Horn Antenna	3116	EMC Test Systems	2547	119-05-515E0	May 2005	2 Year
167	Biconical Antenna	BBA9106	Schwarzbeck	VHA91032325	119-05-520E0	May 2007	1 Year
168	Log-periodic Antenna	UHALP9108A	Schwarzbeck	0666	119-05-521E0	May 2007	1 Year
169	Biconical Antenna	BBA9106	Schwarzbeck	VHA91032399	119-05-522E0	May 2007	1 Year
170	Log-periodic Antenna	UHALP9108A	Schwarzbeck	0724	119-05-523E0	May 2007	1 Year
198	Log-periodic Antenna	HL050	Rohde & Schwarz	100251	119-05-524E0	Jul 2007	1 Year

							26-Oct-2007
No	Type	Model	Manufacturer	Serial	ID	Last Cal.	Interval
<b><u>Cables:</u></b>							
38	RF Cable	5D-2W	Fujikura	-	155-21-001E0	Feb 2007	1 Year
39	RF Cable	5D-2W	Fujikura	-	155-21-002E0	Feb 2007	1 Year
40	RF Cable	3D-2W	Fujikura	-	155-21-005E0	Apr 2007	1 Year
41	RF Cable	3D-2W	Fujikura	-	155-21-006E0	Apr 2007	1 Year
42	RF Cable	3D-2W	Fujikura	-	155-21-007E0	Apr 2007	1 Year
43	RF Cable	RG213/U	Rohde & Schwarz	-	155-21-010E0	Apr 2007	1 Year
44	RF Cable(10m)	S 04272B	Suhner	-	155-21-011E0	May 2007	1 Year
45	RF Cable(1.5m 18GHz)	S 04272B	Suhner	-	155-21-012E0	May 2007	1 Year
46	RF Cable(1m 18GHz)	SUCOFLEX	Suhner	-	155-21-013E0	May 2007	1 Year
47	RF Cable(1m N)	S 04272B	Suhner	-	155-21-015E0	Jun 2007	1 Year
48	RF Cable(1m 26GHz)	SUCOFLEX 104E	Suhner	14543/4E	155-21-016E0	Dec 2006	1 Year
49	RF Cable(4m 26GHz)	SUCOFLEX	Suhner	190630	155-21-017E0	Dec 2006	1 Year
50	RF Cable(10m)	F130-S1S1-394	MEGA PHASE	10510	155-21-018E0	Dec 2006	1 Year
51	RF Cable(5m)	3D-2W	Fujikura	-	155-21-009E0	Apr 2007	1 Year
52	RF Cable(7m)	RG223/U	Suhner	-	155-21-021E0	May 2007	1 Year
195	RF Cable(10m)	F130-S1S1-394	MEGA PHASE	20051	155-21-020E0	Apr 2007	1 Year
<b><u>Networks:</u></b>							
33	LISN	KNW-407	Kyoritsu	8-833-6	149-04-052E0	Apr 2007	1 Year
34	LISN	KNW-407	Kyoritsu	8-855-2	149-04-055E0	Apr 2007	1 Year
35	LISN	KNW-407	Kyoritsu	8-1130-6	149-04-062E0	Apr 2007	1 Year
36	LISN	KNW-242C	Kyoritsu	8-837-13	149-04-054E0	Apr 2007	1 Year
37	Absorbing Clamp	MDS21	Luthi	03293	119-06-506E0	Aug 2007	1 Year
164	LISN	KNW-403D	Kyoritsu	8-1474-3	149-04-059E0	Apr 2007	1 Year
173	Pulse Limiter	ESH3-Z2	Rohde & Schwarz	-	156-01-501E0	Apr 2007	1 Year
174	Pulse Limiter	ESH3-Z2	Rohde & Schwarz	-	156-01-502E0	Apr 2007	1 Year
175	Pulse Limiter	ESH3-Z2	Rohde & Schwarz	-	156-01-503E0	Apr 2007	1 Year
194	High Impedance Probe	HP-2	JQA	001	149-06-503E0	Oct 2007	1 Year
<b><u>Amplifiers:</u></b>							
53	AF Amplifier	P-500L	Accuphase	BOY806	127-01-501E0	Feb 2007	1 Year
54	RF Amplifier	WJ-6882-814	Watkins-Johnson	0414	127-04-017E0	Jun 2007	1 Year
55	RF Amplifier	WJ-5315-556	Watkins-Johnson	106	127-04-006E0	Jun 2007	1 Year
56	RF Amplifier	WJ-5320-307	Watkins-Johnson	645	127-04-005E0	Jun 2007	1 Year
57	RF Amplifier	JS4-00102600- 28-5A	MITEQ	669167	127-04-502E0	Apr 2007	1 Year
<b><u>Generators:</u></b>							
58	Function Generator	3325B	Hewlett Packard	2847A03284	118-08-124E0	Jul 2007	1 Year
59	Function Generator	VP-7422A	Matsushita Communication	050351E122	118-08-503E0	Jul 2007	1 Year
60	Signal Generator	8664A	Hewlett Packard	3035A00140	118-03-014E0	May 2007	1 Year
61	Signal Generator	8664A	Hewlett Packard	3438A00756	118-04-502E0	May 2007	1 Year
62	Signal Generator	6061A	Gigatronics	5130593	118-04-024E0	Mar 2007	1 Year

---

26-Oct-2007

No	Type	Model	Manufacturer	Serial	ID	Last Cal.	Interval
<b>Others:</b>							
63	Termination(50)	-	Suhner	-	154-06-501E0	Jan 2007	1 Year
64	Termination(50)	-	Suhner	-	154-06-502E0	Jan 2007	1 Year
71	Microphone	4134	B & K	1253497	147-01-502E0	May 2007	1 Year
72	Preamplifier	2639	B & K	1268763	127-01-504E0	-	-
73	Pistonphone	4220	B & K	1165008	147-02-501E0	Mar 2007	1 Year
74	Artificial Mouth	4227	B & K	1274869	-	-	-
76	Oven	-	Ohnishi	-	023-02-018E0	-	-
77	DC Power Supply	6628A	Hewlett Packard	3224A00284	072-05-503E0	Jun 2007	1 Year
78	Band RejectFilter	BRM12294	Micro-tronics	003	149-01-501E0	Jan 2007	1 Year
79	High Pass Filter	F-100-4000-5-R	RLC Electronics	0149	149-01-502E0	Feb 2007	1 Year
80	Attenuator	43KC-10	Anritsu	-	148-03-506E0	Feb 2007	1 Year
81	Attenuator	43KC-20	Anritsu	-	148-03-507E0	Feb 2007	1 Year
82	Attenuator	355D	Hewlett Packard	219-10782	148-03-065E0	Apr 2007	1 Year
85	RF Detector	75KC-50	Anritsu	305002	100-02-506E0	Jul 2007	1 Year

COPY