




System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	10/17/2008 1:33:12 PM	DUT Battery Model/No:	
Filename:	lap_6.txt	Probe Serial Number:	L0116
Ambient Temperature:	21.7°C	Liquid Simulant:	2450
Device Under Test:	Sony	Relative Permittivity:	48.16
Relative Humidity:	45.6%	Conductivity:	1.884
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.6°C
Phantom Rotation:	180°	Max SAR X-axis Location:	-16.00 mm
DUT Position:	Lap	Max SAR Y-axis Location:	26.00 mm
Antenna Configuration:	Integral	Max E Field:	4.91 V/m
Test Frequency:	2437MHz	SAR 1g:	0.058 W/kg
Air Factors:	504 / 365 / 331	SAR 10g:	
Conversion Factors:	.635 / .635 / .635	SAR Start:	0.004 W/kg
Type of Modulation:		SAR End:	0.004 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-3.67 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	10/15/08
Input Power Level:	Set by power table	Extrapolation:	poly4

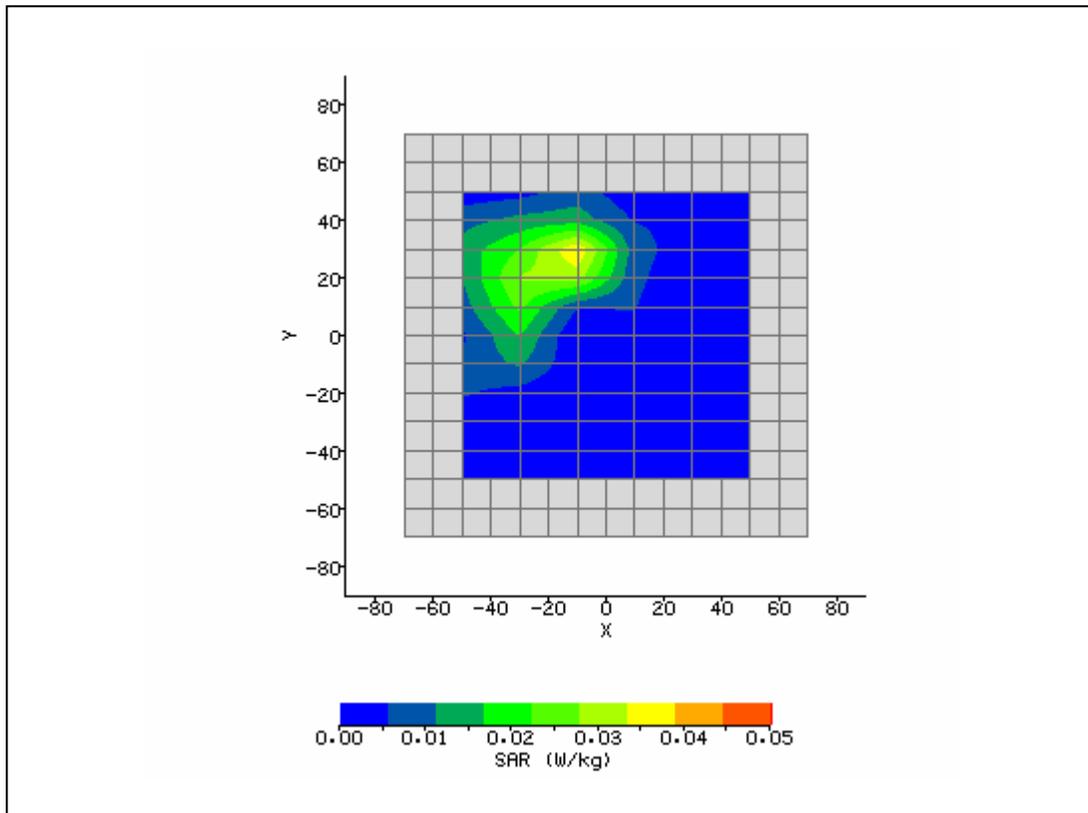


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	10/17/2008 2:05:05 PM	DUT Battery Model/No:	
Filename:	front_6.txt	Probe Serial Number:	L0116
Ambient Temperature:	21.7°C	Liquid Simulant:	2450
Device Under Test:	Sony	Relative Permittivity:	48.16
Relative Humidity:	45.6%	Conductivity:	1.884
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.6°C
Phantom Rotation:	180°	Max SAR X-axis Location:	50.00 mm
DUT Position:	Front	Max SAR Y-axis Location:	10.00 mm
Antenna Configuration:	Integral	Max E Field:	0.91 V/m
Test Frequency:	2437MHz	SAR 1g:	0.000 W/kg
Air Factors:	504 / 365 / 331	SAR 10g:	
Conversion Factors:	.635 / .635 / .635	SAR Start:	0.000 W/kg
Type of Modulation:		SAR End:	0.000 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	10/15/08
Input Power Level:	Set by power table	Extrapolation:	poly4

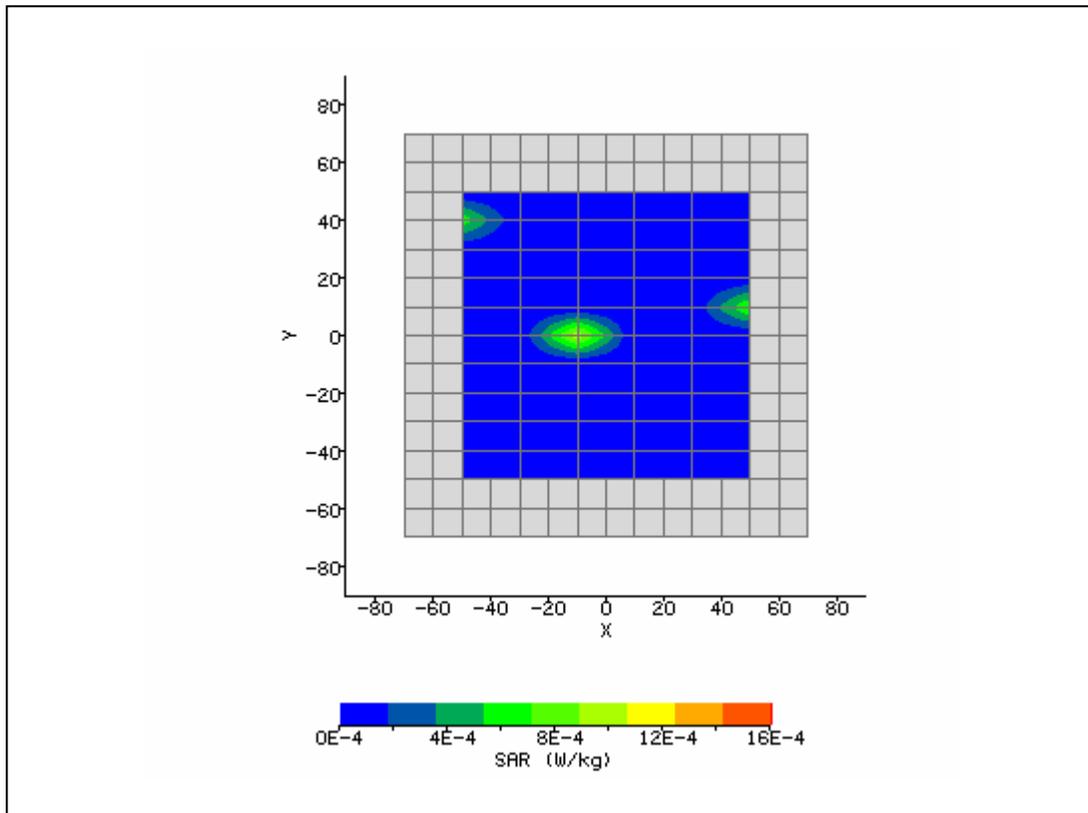

System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	10/17/2008 2:31:34 PM	DUT Battery Model/No:	
Filename:	lap_6.txt	Probe Serial Number:	L0116
Ambient Temperature:	21.7°C	Liquid Simulant:	2450
Device Under Test:	Sony	Relative Permittivity:	48.16
Relative Humidity:	45.6%	Conductivity:	1.884
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.6°C
Phantom Rotation:	180°	Max SAR X-axis Location:	-10.00 mm
DUT Position:	Lap	Max SAR Y-axis Location:	18.00 mm
Antenna Configuration:	Integral	Max E Field:	5.08 V/m
Test Frequency:	2437MHz	SAR 1g:	0.066 W/kg
Air Factors:	504 / 365 / 331	SAR 10g:	
Conversion Factors:	.635 / .635 / .635	SAR Start:	0.003 W/kg
Type of Modulation:		SAR End:	0.003 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-3.41 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	10/15/08
Input Power Level:	Set by power table	Extrapolation:	poly4

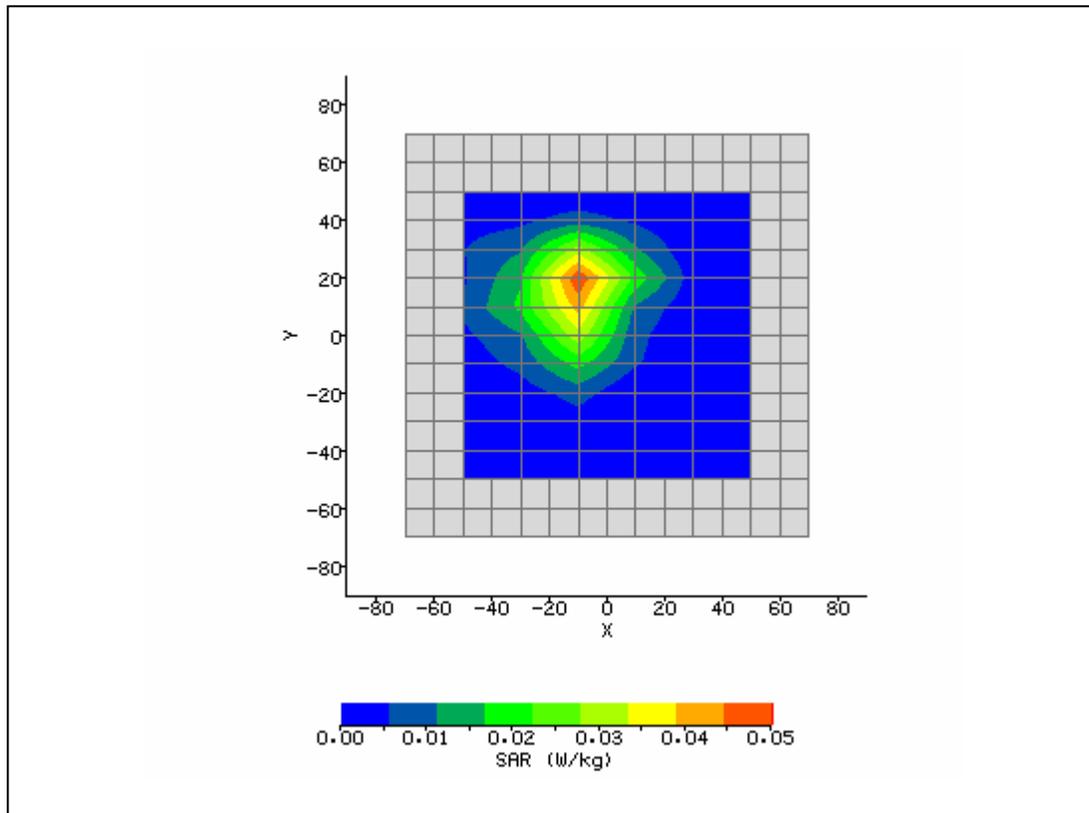

System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	10/17/2008 3:12:49 PM	DUT Battery Model/No:	
Filename:	front_6.txt	Probe Serial Number:	L0116
Ambient Temperature:	21.7°C	Liquid Simulant:	2450
Device Under Test:	Sony	Relative Permittivity:	48.16
Relative Humidity:	45.6%	Conductivity:	1.884
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.6°C
Phantom Rotation:	180°	Max SAR X-axis Location:	10.00 mm
DUT Position:	Front	Max SAR Y-axis Location:	30.00 mm
Antenna Configuration:	Integral	Max E Field:	0.74 V/m
Test Frequency:	2437MHz	SAR 1g:	0.000 W/kg
Air Factors:	504 / 365 / 331	SAR 10g:	
Conversion Factors:	.635 / .635 / .635	SAR Start:	0.000 W/kg
Type of Modulation:		SAR End:	0.000 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	%
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	10/15/08
Input Power Level:	Set by power table	Extrapolation:	poly4

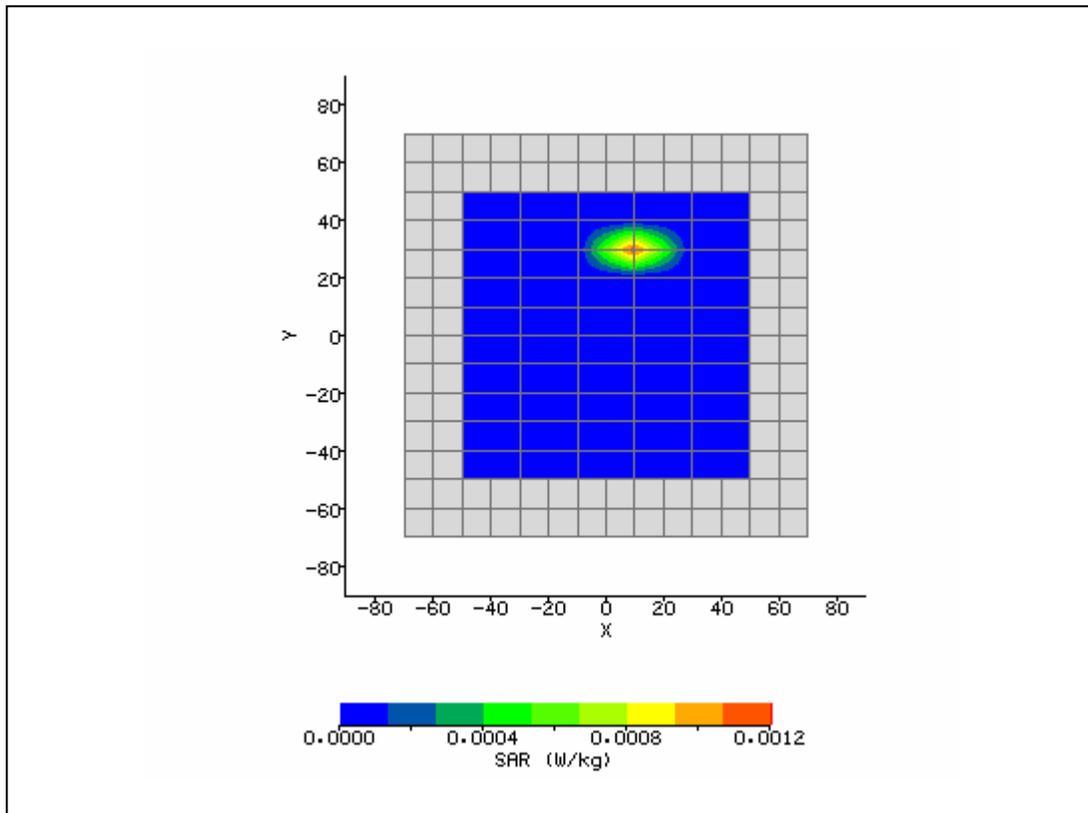

System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	10/17/2008 10:16:27 AM	DUT Battery Model/No:	
Filename:	right_tilt_384.txt	Probe Serial Number:	L0116
Ambient Temperature:	21.7°C	Liquid Simulant:	2450
Device Under Test:	System	Relative Permittivity:	39.96
Relative Humidity:	45.6%	Conductivity:	1.868
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.6°C
Phantom Rotation:	180°	Max SAR X-axis Location:	-12.00 mm
DUT Position:	10mm	Max SAR Y-axis Location:	9.60 mm
Antenna Configuration:	Dipole	Max E Field:	132.32 V/m
Test Frequency:	2450MHz	SAR 1g:	48.544 W/kg
Air Factors:	504 / 365 / 331	SAR 10g:	22.129 W/kg
Conversion Factors:	.569 / .569 / .569	SAR Start:	2.981 W/kg
Type of Modulation:		SAR End:	3.006 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.86 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	10/15/08
Input Power Level:	1W	Extrapolation:	poly4

