




| | | | |
|---|------------------------|------------------------------------|------------|
| System / software: | SARA2 / 2.54 VPM coloc | Input Power Drift: | |
| Date / Time: | 8/25/2009 3:45:06 PM | DUT Battery Model/No: | |
| Filename: | 1850_back_1ts.txt | Probe Serial Number: | M0024 |
| Ambient Temperature: | 22.0°C | Liquid Simulant: | 850 |
| Device Under Test: | Sony O3 | Relative Permittivity: | 54.04 |
| Relative Humidity: | 45% | Conductivity: | 1.012 |
| Phantom S/No: | Head04_37.csv | Liquid Temperature: | 22.0°C |
| Phantom Rotation: | 0° | Max SAR X-axis Location: | 38.00 mm |
| DUT Position: | Lap | Max SAR Y-axis Location: | 26.00 mm |
| Antenna Configuration: | Integral | Max E Field: | 5.08 V/m |
| Test Frequency: | 836.52MHz | SAR 1g: | 0.025 W/kg |
| Air Factors: | 2573 / 2262 / 2365 | SAR 10g: | |
| Conversion Factors: | .395 / .395 / .395 | SAR Start: | 0.002 W/kg |
| Type of Modulation: | | SAR End: | 0.002 W/kg |
| Modn. Duty Cycle: | | SAR Drift during Scan: | -4.46 % |
| Diode Compression Factors (V*200): | 20 / 20 / 20 | Probe battery last changed: | 08/19/09 |
| Input Power Level: | All bits up | Extrapolation: | poly4 |

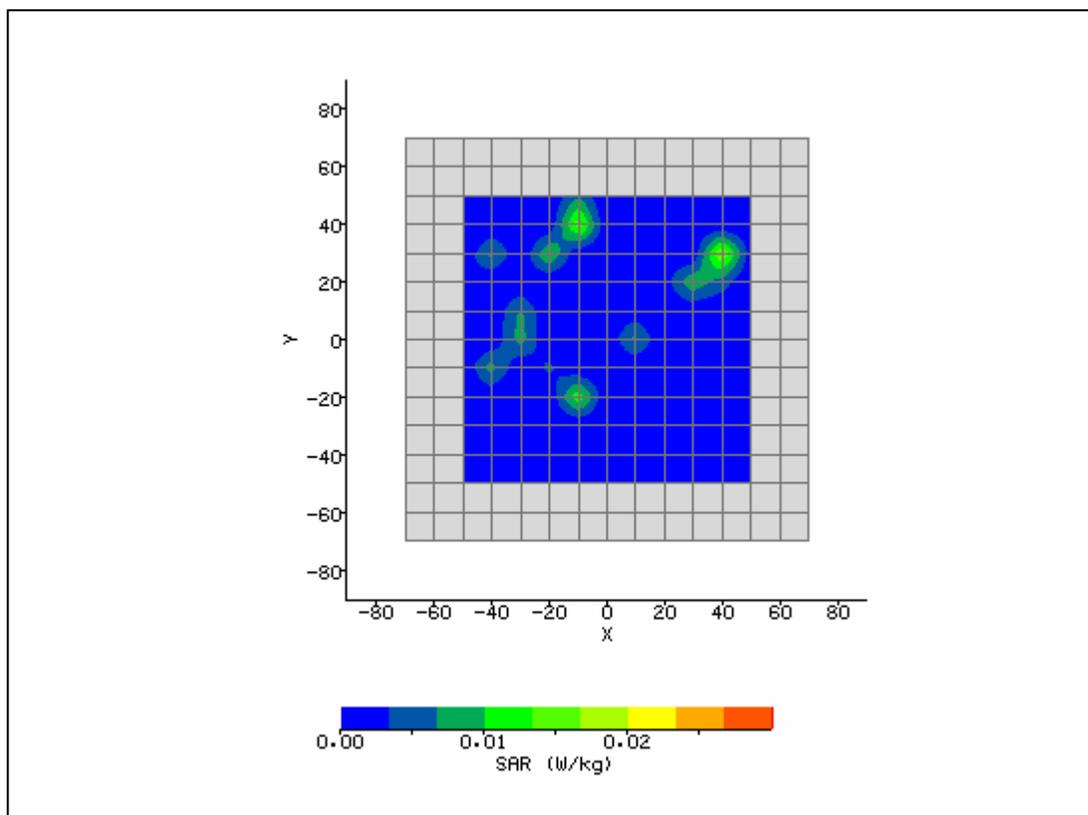


| | | | |
|---|---------------------------|------------------------------------|------------|
| System / software: | SARA2 / 2.54 VPM coloc | Input Power Drift: | |
| Date / Time: | 7/21/2009 3:37:16 PM | DUT Battery Model/No: | |
| Filename: | 1880_lap.txt | Probe Serial Number: | M0024 |
| Ambient Temperature: | 22.0°C | Liquid Simulant: | 1900 |
| Device Under Test: | PCG21111L | Relative Permittivity: | 52.97 |
| Relative Humidity: | 45% | Conductivity: | 1.513 |
| Phantom S/No: | Head04_37.csv | Liquid Temperature: | 22.0°C |
| Phantom Rotation: | 0° | Max SAR X-axis Location: | 25.83 mm |
| DUT Position: | Lap | Max SAR Y-axis Location: | 50.00 mm |
| Antenna Configuration: | Integral | Max E Field: | 5.68 V/m |
| Test Frequency: | 1880MHz | SAR 1g: | 0.022 W/kg |
| Air Factors: | 2573 / 2262 / 2365 | SAR 10g: | |
| Conversion Factors: | .476 / .476 / .476 | SAR Start: | 0.004 W/kg |
| Type of Modulation: | | SAR End: | 0.004 W/kg |
| Modn. Duty Cycle: | | SAR Drift during Scan: | 4.42 % |
| Diode Compression Factors (V*200): | 20 / 20 / 20 | Probe battery last changed: | 07/21/09 |
| Input Power Level: | Power control bits all up | Extrapolation: | poly4 |

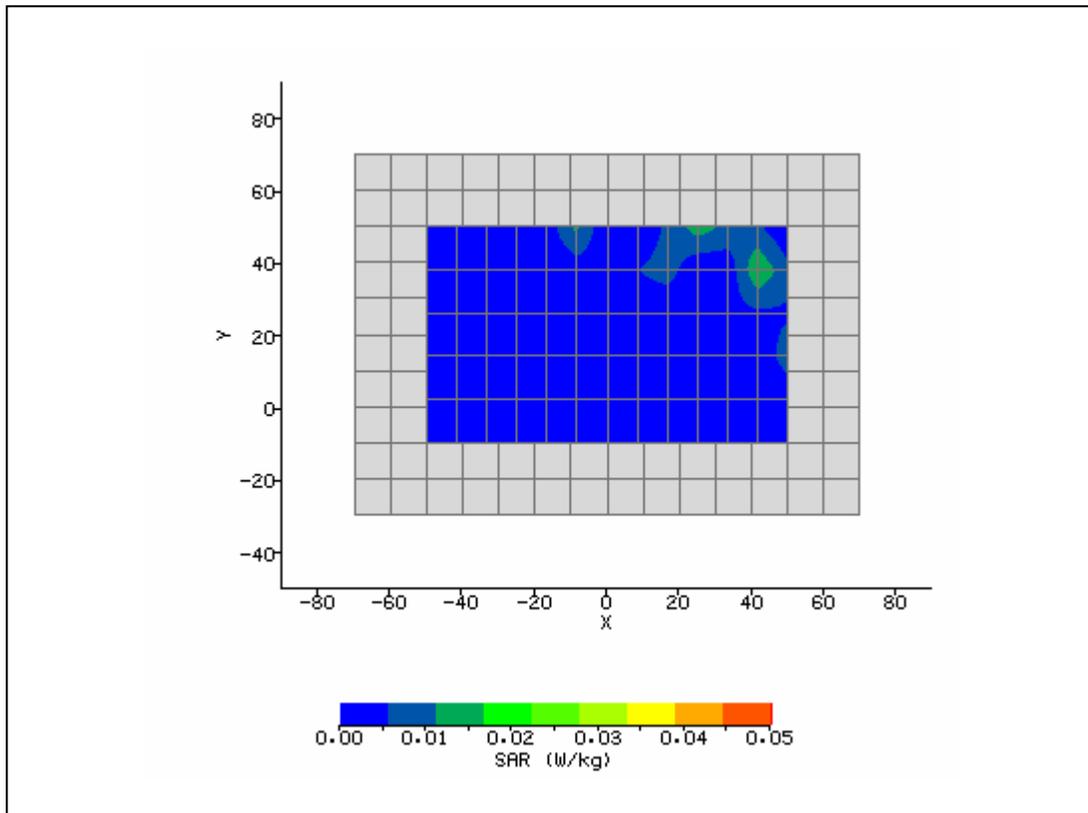


| | | | |
|---|---------------------------|------------------------------------|------------|
| System / software: | SARA2 / 2.54 VPM coloc | Input Power Drift: | |
| Date / Time: | 7/21/2009 10:02:39 AM | DUT Battery Model/No: | |
| Filename: | 2437_b_lap.txt | Probe Serial Number: | M0024 |
| Ambient Temperature: | 22.0°C | Liquid Simulant: | 2450 |
| Device Under Test: | PCG21111L | Relative Permittivity: | 49.33 |
| Relative Humidity: | 45% | Conductivity: | 1.958 |
| Phantom S/No: | Head04_37.csv | Liquid Temperature: | 22.0°C |
| Phantom Rotation: | 0° | Max SAR X-axis Location: | -50.00 mm |
| DUT Position: | Lap | Max SAR Y-axis Location: | 0.00 mm |
| Antenna Configuration: | Integral | Max E Field: | 2.87 V/m |
| Test Frequency: | 2437MHz | SAR 1g: | 0.002 W/kg |
| Air Factors: | 2573 / 2262 / 2365 | SAR 10g: | 0.000 W/kg |
| Conversion Factors: | .487 / .487 / .487 | SAR Start: | 0.000 W/kg |
| Type of Modulation: | | SAR End: | 0.000 W/kg |
| Modn. Duty Cycle: | | SAR Drift during Scan: | % |
| Diode Compression Factors (V*200): | 20 / 20 / 20 | Probe battery last changed: | 07/21/09 |
| Input Power Level: | Set by software | Extrapolation: | poly4 |

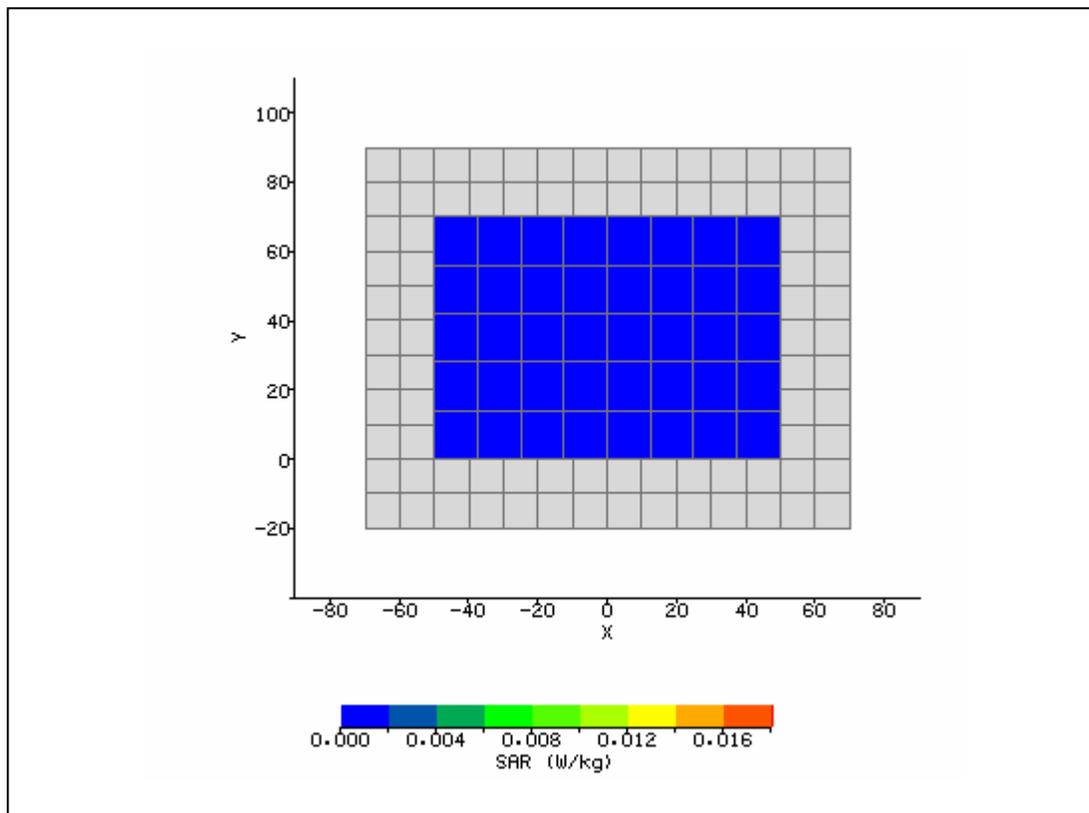


| | | | |
|---|------------------------|------------------------------------|------------|
| System / software: | SARA2 / 2.54 VPM coloc | Input Power Drift: | |
| Date / Time: | 7/21/2009 11:10:20 AM | DUT Battery Model/No: | |
| Filename: | 2437_n_h20_lap.txt | Probe Serial Number: | M0024 |
| Ambient Temperature: | 22.0°C | Liquid Simulant: | 2450 |
| Device Under Test: | PCG21111L | Relative Permittivity: | 49.33 |
| Relative Humidity: | 45% | Conductivity: | 1.958 |
| Phantom S/No: | Head04_37.csv | Liquid Temperature: | 22.0°C |
| Phantom Rotation: | 0° | Max SAR X-axis Location: | -20.00 mm |
| DUT Position: | Lap | Max SAR Y-axis Location: | -10.00 mm |
| Antenna Configuration: | Integral | Max E Field: | 2.07 V/m |
| Test Frequency: | 2437, n mode H20MHz | SAR 1g: | 0.002 W/kg |
| Air Factors: | 2573 / 2262 / 2365 | SAR 10g: | 0.000 W/kg |
| Conversion Factors: | .487 / .487 / .487 | SAR Start: | 0.000 W/kg |
| Type of Modulation: | | SAR End: | 0.000 W/kg |
| Modn. Duty Cycle: | | SAR Drift during Scan: | % |
| Diode Compression Factors (V*200): | 20 / 20 / 20 | Probe battery last changed: | 07/21/09 |
| Input Power Level: | Set by software | Extrapolation: | poly4 |

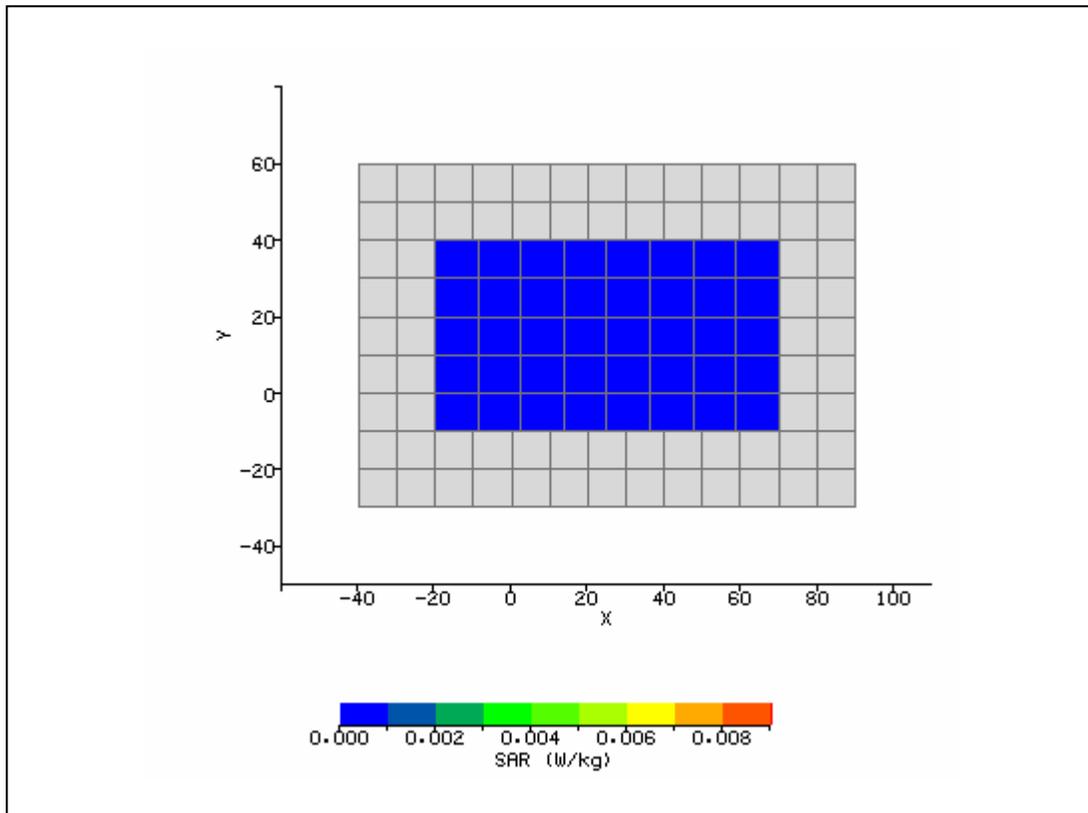

| | | | |
|---|------------------------|------------------------------------|------------|
| System / software: | SARA2 / 2.54 VPM coloc | Input Power Drift: | |
| Date / Time: | 8/25/2009 4:36:49 PM | DUT Battery Model/No: | |
| Filename: | 836_lap.txt | Probe Serial Number: | M0024 |
| Ambient Temperature: | 22.0°C | Liquid Simulant: | 850 |
| Device Under Test: | System | Relative Permittivity: | 54.07 |
| Relative Humidity: | 45% | Conductivity: | 1.012 |
| Phantom S/No: | Head04_37.csv | Liquid Temperature: | 22.0°C |
| Phantom Rotation: | 0° | Max SAR X-axis Location: | 0.83 mm |
| DUT Position: | 15mm | Max SAR Y-axis Location: | -8.00 mm |
| Antenna Configuration: | Dipole | Max E Field: | 95.69 V/m |
| Test Frequency: | 835MHz | SAR 1g: | 9.299 W/kg |
| Air Factors: | 2573 / 2262 / 2365 | SAR 10g: | 6.230 W/kg |
| Conversion Factors: | .395 / .395 / .395 | SAR Start: | 2.851 W/kg |
| Type of Modulation: | | SAR End: | 2.871 W/kg |
| Modn. Duty Cycle: | | SAR Drift during Scan: | 0.70 % |
| Diode Compression Factors (V*200): | 20 / 20 / 20 | Probe battery last changed: | 08/19/09 |
| Input Power Level: | 1W | Extrapolation: | poly4 |

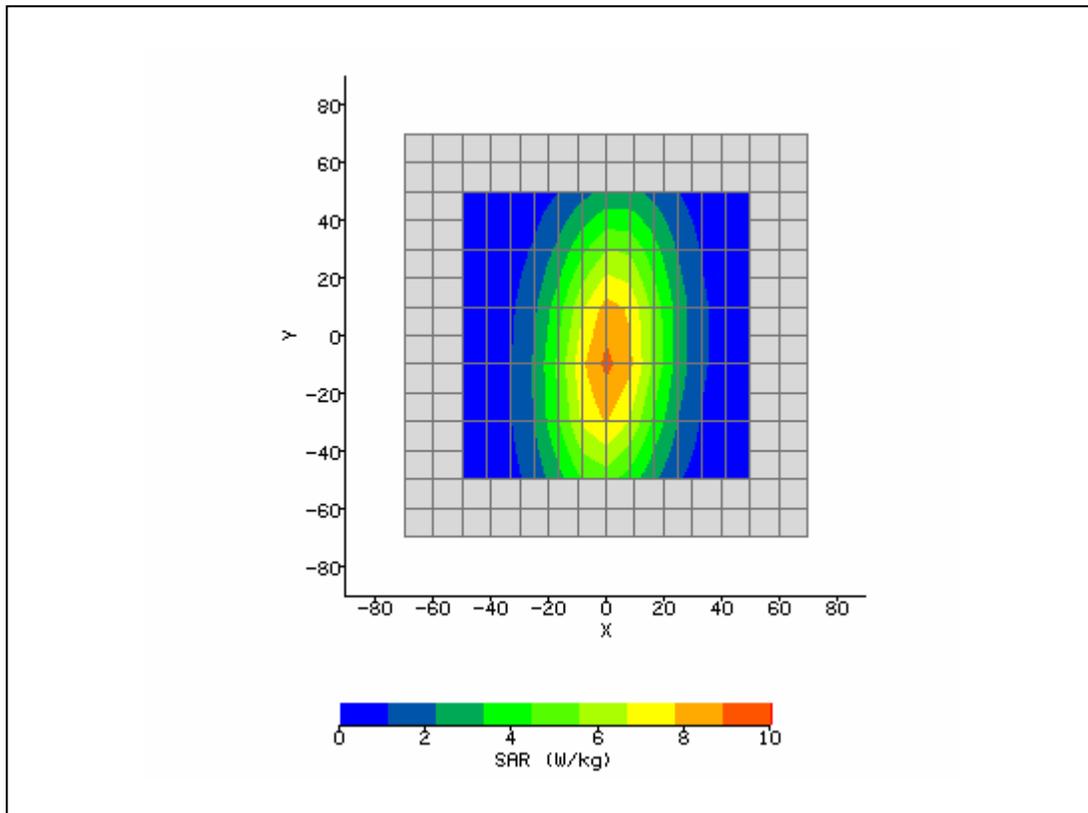

| | | | |
|---|------------------------|------------------------------------|-------------|
| System / software: | SARA2 / 2.54 VPM coloc | Input Power Drift: | |
| Date / Time: | 7/21/2009 10:11:45 AM | DUT Battery Model/No: | |
| System / software: | SARA2 / 2.54 VPM coloc | Input Power Drift: | |
| Date / Time: | 7/21/2009 1:02:31 PM | DUT Battery Model/No: | |
| Filename: | 2437_n_h20_lap.txt | Probe Serial Number: | M0024 |
| Ambient Temperature: | 22.0°C | Liquid Simulant: | 1900 |
| Device Under Test: | System | Relative Permittivity: | 52.97 |
| Relative Humidity: | 45% | Conductivity: | 1.513 |
| Phantom S/No: | Head04_37.csv | Liquid Temperature: | 22.0°C |
| Phantom Rotation: | 0° | Max SAR X-axis Location: | 2.40 mm |
| DUT Position: | 10mm | Max SAR Y-axis Location: | 1.20 mm |
| Antenna Configuration: | Dipole | Max E Field: | 155.13 V/m |
| Test Frequency: | 1880MHz | SAR 1g: | 42.657 W/kg |
| Air Factors: | 2573 / 2262 / 2365 | SAR 10g: | 22.042 W/kg |
| Conversion Factors: | .476 / .476 / .476 | SAR Start: | 6.858 W/kg |
| Type of Modulation: | | SAR End: | 7.106 W/kg |
| Modn. Duty Cycle: | | SAR Drift during Scan: | 3.63 % |
| Diode Compression Factors (V*200): | 20 / 20 / 20 | Probe battery last changed: | 07/21/09 |
| Input Power Level: | 1W | Extrapolation: | poly4 |

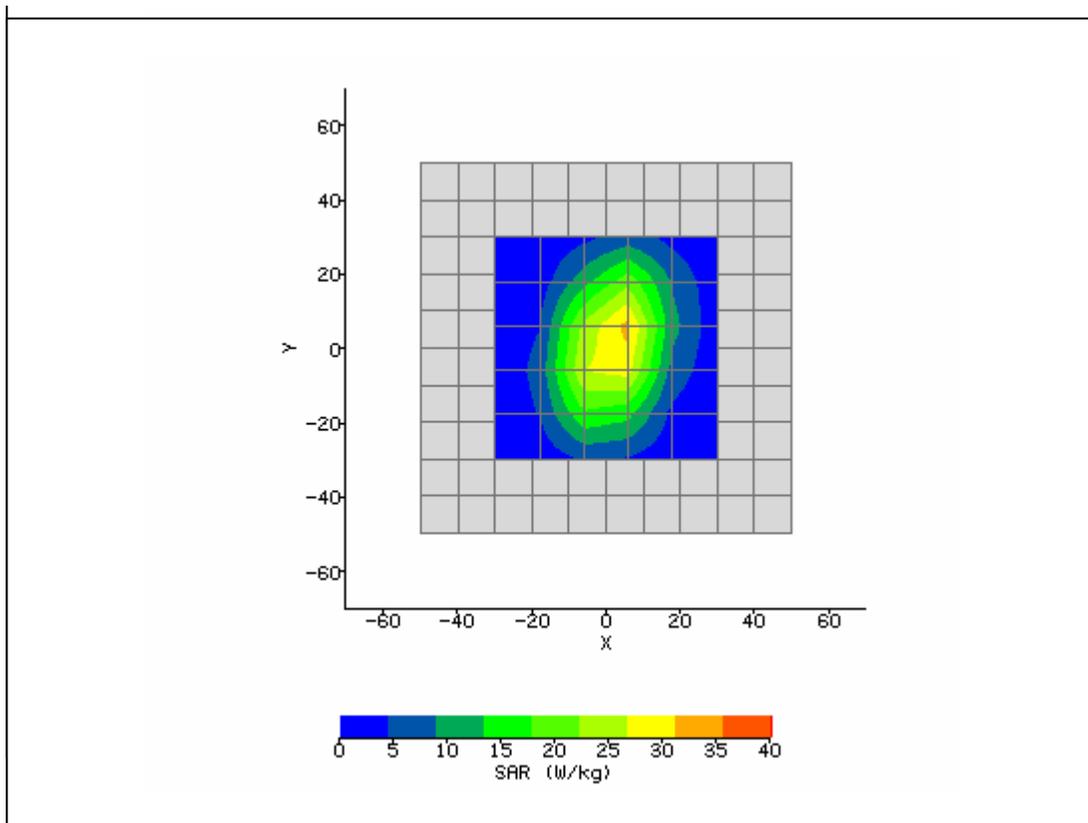

| | | | |
|---|------------------------|------------------------------------|-------------|
| System / software: | SARA2 / 2.54 VPM coloc | Input Power Drift: | |
| Date / Time: | 7/21/2009 8:42:36 AM | DUT Battery Model/No: | |
| Filename: | 1748_back0mm.txt | Probe Serial Number: | M0024 |
| Ambient Temperature: | 22.0°C | Liquid Simulant: | 2450 |
| Device Under Test: | System | Relative Permittivity: | 49.33 |
| Relative Humidity: | 45% | Conductivity: | 1.958 |
| Phantom S/No: | Head04_37.csv | Liquid Temperature: | 22.0°C |
| Phantom Rotation: | 0° | Max SAR X-axis Location: | -1.25 mm |
| DUT Position: | 10mm | Max SAR Y-axis Location: | -1.25 mm |
| Antenna Configuration: | Dipole | Max E Field: | 134.43 V/m |
| Test Frequency: | 2450MHz | SAR 1g: | 46.963 W/kg |
| Air Factors: | 2573 / 2262 / 2365 | SAR 10g: | 23.723 W/kg |
| Conversion Factors: | .487 / .487 / .487 | SAR Start: | 4.150 W/kg |
| Type of Modulation: | | SAR End: | 4.299 W/kg |
| Modn. Duty Cycle: | | SAR Drift during Scan: | 3.59 % |
| Diode Compression Factors (V*200): | 20 / 20 / 20 | Probe battery last changed: | 07/21/09 |
| Input Power Level: | 1W | Extrapolation: | poly4 |

