



FCC TEST REPORT (For BLUETOOTH)

REPORT NO.: RF991207D25D-2

MODEL NO.: PCG-41217L, PCG-4121CL

FCC ID: AK8PCG41217L

RECEIVED: Dec. 12, 2010

TESTED: Dec. 13 ~ 21, 2010

ISSUED: Dec. 24, 2010

APPLICANT: SONY Corporation

ADDRESS: 1-7-1 Konan Minato-ku Tokyo, 108-0075 Japan

ISSUED BY: Bureau Veritas Consumer Products Services (H.K.)
Ltd., Taoyuan Branch

LAB LOCATION: No. 47, 14th Ling, Chia Pau Tsuen, Lin Kou Hsiang,
Taipei Hsien, 244 Taiwan

This test report consists of 71 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by TAF or any government agencies. The test results in the report only apply to the tested sample.





TABLE OF CONTENTS

RELEASE CONTROL RECORD..... 4

1. CERTIFICATION 5

2. SUMMARY OF TEST RESULTS..... 6

2.1 MEASUREMENT UNCERTAINTY 7

3. GENERAL INFORMATION 8

3.1 GENERAL DESCRIPTION OF EUT..... 8

3.2 DESCRIPTION OF TEST MODES..... 11

3.2.1 CONFIGURATION OF SYSTEM UNDER TEST 12

3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL 13

3.2.3 GENERAL DESCRIPTION OF APPLIED STANDARDS 15

3.2.4 DESCRIPTION OF SUPPORT UNITS..... 15

4. TEST TYPES AND RESULTS 16

4.1 CONDUCTED EMISSION MEASUREMENT 16

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT..... 16

4.1.2 TEST INSTRUMENTS 17

4.1.3 TEST PROCEDURES..... 17

4.1.4 DEVIATION FROM TEST STANDARD 18

4.1.5 TEST SETUP 18

4.1.6 EUT OPERATING CONDITIONS..... 18

4.1.7 TEST RESULTS..... 19

4.2 RADIATED EMISSION MEASUREMENT 21

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT..... 21

4.2.2 TEST INSTRUMENTS 22

4.2.3 TEST PROCEDURES..... 23

4.2.4 DEVIATION FROM TEST STANDARD 23

4.2.5 TEST SETUP 24

4.2.6 EUT OPERATING CONDITIONS..... 24

4.2.7 TEST RESULTS..... 25

4.3 NUMBER OF HOPPING FREQUENCY USED 35

4.3.1 LIMIT OF HOPPING FREQUENCY USED 35

4.3.2 TEST INSTRUMENTS 35

4.3.3 TEST PROCEDURES..... 35

4.3.4 DEVIATION FROM TEST STANDARD 36

4.3.5 TEST SETUP 36

4.3.6 TEST RESULTS..... 36

4.4 DWELL TIME ON EACH CHANNEL 39

4.4.1 LIMIT OF DWELL TIME USED..... 39

4.4.2 TEST INSTRUMENTS 39

4.4.3 TEST PROCEDURES..... 39

4.4.4 DEVIATION FROM TEST STANDARD 39

4.4.5 TEST SETUP 40

4.4.6 TEST RESULTS..... 40

4.5 CHANNEL BANDWIDTH..... 48

4.5.1 LIMITS OF CHANNEL BANDWIDTH..... 48



| | | |
|-------|--|----|
| 4.5.2 | TEST INSTRUMENTS | 48 |
| 4.5.3 | TEST PROCEDURE | 48 |
| 4.5.4 | DEVIATION FROM TEST STANDARD | 49 |
| 4.5.5 | TEST SETUP | 49 |
| 4.5.6 | EUT OPERATING CONDITION | 49 |
| 4.5.7 | TEST RESULTS..... | 50 |
| 4.6 | HOPPING CHANNEL SEPARATION | 52 |
| 4.6.1 | LIMIT OF HOPPING CHANNEL SEPARATION | 52 |
| 4.6.2 | TEST INSTRUMENTS | 52 |
| 4.6.3 | TEST PROCEDURES..... | 52 |
| 4.6.4 | DEVIATION FROM TEST STANDARD | 53 |
| 4.6.5 | TEST SETUP | 53 |
| 4.6.6 | TEST RESULTS..... | 54 |
| 4.7 | MAXIMUM PEAK OUTPUT POWER | 56 |
| 4.7.1 | LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT | 56 |
| 4.7.2 | TEST INSTRUMENTS | 56 |
| 4.7.3 | TEST PROCEDURES..... | 56 |
| 4.7.4 | DEVIATION FROM TEST STANDARD | 56 |
| 4.7.5 | TEST SETUP | 57 |
| 4.7.6 | EUT OPERATING CONDITION | 57 |
| 4.7.7 | TEST RESULTS..... | 58 |
| 4.8 | BAND EDGES MEASUREMENT | 60 |
| 4.8.1 | LIMITS OF BAND EDGES MEASUREMENT | 60 |
| 4.8.2 | TEST INSTRUMENTS | 60 |
| 4.8.3 | TEST PROCEDURE | 60 |
| 4.8.4 | DEVIATION FROM TEST STANDARD | 60 |
| 4.8.5 | EUT OPERATING CONDITION | 60 |
| 4.8.6 | TEST RESULTS..... | 61 |
| 5. | PHOTOGRAPHS OF THE TEST CONFIGURATION..... | 69 |
| 6. | INFORMATION ON THE TESTING LABORATORIES | 70 |
| 7. | APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB..... | 71 |



RELEASE CONTROL RECORD

| ISSUE NO. | REASON FOR CHANGE | DATE ISSUED |
|------------------|-------------------|---------------|
| Original release | N/A | Dec. 24, 2010 |



A D T

1. CERTIFICATION

PRODUCT: Personal Computer
BRAND NAME: SONY
MODEL NO.: PCG-41217L, PCG-4121CL
APPLICANT: SONY Corporation
TESTED: Dec. 13 ~ 21, 2010
TEST SAMPLE: ENGINEERING SAMPLE
STANDARDS: FCC Part 15, Subpart C (Section 15.247),
ANSI C63.4-2003
ANSI C63.10-2009

The above equipment (Model: PCG-41217L) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Annie Chang , **DATE:** Dec. 24, 2010
(Annie Chang / Senior Specialist)

APPROVED BY : Ken Liu , **DATE:** Dec. 24, 2010
(Ken Liu / Manager)

2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

| APPLIED STANDARD: FCC Part 15, Subpart C | | | |
|--|---|--------|---|
| STANDARD SECTION | TEST TYPE AND LIMIT | RESULT | REMARK |
| 15.207 | AC Power Conducted Emission | PASS | Meets Class B Limit Minimum passing margin is -17.43dB at 0.220MHz |
| 15.247(a)(1)(iii) | Number of Hopping Frequency Used Spec.: At least 15 channels | PASS | Meet the requirement of limit. |
| 15.247(a)(1)(iii) | Dwell Time on Each Channel Spec.: Max. 0.4 second within 31.6 second | PASS | Meet the requirement of limit. |
| 15.247(a)(1) | 1. Hopping Channel Separation Spec. : Min. 25 kHz or 20 dB bandwidth, whichever is greater (see Note) 2. Spectrum Bandwidth of a Frequency Hopping Sequence Spread Spectrum System | PASS | Meet the requirement of limit. |
| 15.247(b) | Maximum Peak Output Power Spec.: max. 21dBm (see Note) | PASS | Meet the requirement of limit. |
| 15.247(d) | Transmitter Radiated Emissions Spec.: Table 15.209 | PASS | Meet the requirement of limit. Minimum passing margin is -2.9dB at 3306.00MHz. |
| 15.247(d) | Band Edge Measurement | PASS | Meet the requirement of limit. |
| 15.203 | Antenna Requirement | PASS | Antenna connector is Hirose U.FL not a standard connector. |

NOTE: If The Frequency Hopping System operating in 2400-2483.5MHz band and the output power less than 125mW. The hopping channel carrier frequencies separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of hopping channel whichever is greater.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

| MEASUREMENT | FREQUENCY | UNCERTAINTY |
|---------------------|----------------|-------------|
| Conducted emissions | 150kHz ~ 30MHz | 2.41 dB |
| Radiated emissions | 30MHz ~ 1GHz | 3.67 dB |
| | Above 1GHz | 2.89 dB |



3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

| | |
|------------------------------|---|
| PRODUCT | Personal Computer |
| MODEL NO. | PCG-41217L, PCG-4121CL |
| FCC ID | AK8PCG41217L |
| NOMINAL VOLTAGE | 19.5Vdc from AC adapter or 11.1Vdc from battery |
| MODULATION TYPE | GFSK, $\pi/4$ -DQPSK, 8DPSK |
| MODULATION TECHNOLOGY | FHSS |
| TRANSFER RATE | 1/2/3Mbps |
| OPERATING FREQUENCY | 2402 ~ 2480MHz |
| NUMBER OF CHANNEL | 79 |
| OUTPUT POWER | 1.9mW |
| ANTENNA TYPE | Refer to note below |
| ANTENNA CONNECTER | Refer to note below |
| DATA CABLE | NA |
| I/O PORTS | Refer to User's manual |
| ACCESSORY DEVICES | Refer to note below |

NOTE:

1. The EUT is a Personal Computer. The functions of EUT listed as below:

| Function | | Test Standard | Reference Report |
|--|---|--|------------------|
| WLAN IEEE802.11abgn + WiMax Mini-PCI Card (Brand: Intel, Model: 622ANXHMW) | WLAN 802.11an (5180~5320MHz, 5500~5700MHz) | FCC Part 15, Subpart E (Section 15.407) | RF991207D25D |
| | WLAN 802.11a (For DFS report) (5260~5320MHz, 5500~5700MHz) | | RF991207D25D-3 |
| | WLAN 802.11an (5745~5825 MHz) | FCC Part 15, Subpart C (Section 15.247) | RF991207D25D-1 |
| | WLAN 802.11bgn | | |
| | WiMax | FCC Part 27, Subpart C & M | RF991207D25D-5 |
| Bluetooth module (Brand: Foxconn, Model: T77H114) | | FCC Part 15, Subpart C (Section 15.247) | RF991207D25D-2 |

2. The EUT has several models, which are identical to each other except for the Topcover less of ODD differences only, as the following:

| Brand | Model No. | Topcover less of ODD |
|-------|------------|----------------------|
| SONY | PCG-41217L | Without |
| | PCG-4121CL | With |

During the test, the **model no.: PCG-41217L** was the worst case and only its test data was recorded in this report.

3. The case of EUT has two kinds of material: MG & CFRP. During the test, the **MG material case** was the worst case and only its test data was recorded in this report.

4. The following antennas were applied to the EUT:

| Type | Connector | Gain |
|------|-------------|-------|
| PIFA | Hirose U.FL | -0.01 |

5. The EUT consumes power from a power adapter/ battery and there are the following sources could be chosen:

| Power Source | Brand | Model No. | Spec. |
|--------------|--------|-------------|---|
| AC adapter 1 | NJRC | VGP-AC19V31 | AC Input: 100-240V, 1.5A, 50-60Hz DC Output: 19.5V, 4.7A Non-shielded AC 2Pin (0.8m) Non-shielded DC (1.8m) |
| AC adapter 2 | NJRC | VGP-AC19V32 | AC Input: 100-240V, 1.5A, 50-60Hz DC Output: 19.5V, 4.7A Non-shielded AC 3Pin (0.8m) Non-shielded DC (1.8m) |
| AC adapter 3 | Liteon | VGP-AC19V36 | AC Input: 100-240V, 1.5A, 50/60Hz DC Output: 19.5V, 4.7A Non-shielded AC 3Pin (0.8m) Non-shielded DC (1.8m) |
| AC adapter 4 | Delta | VGP-AC19V42 | AC Input: 100-240V, 1.5A 50-60Hz DC Output: 19.5V, 4.7A Non-shielded AC 3Pin (0.8m) Non-shielded DC (1.8m) |
| AC adapter 5 | Delta | VGP-AC19V51 | AC Input: 100-240V, 1.5A, 50/60Hz DC Output 1: 19.5Vdc 4.7A DC Output 2: 5Vdc 1.5A DC Output 3: 5Vdc 1.5A Non-shielded AC 3Pin (0.8m) Non-shielded DC (1.8m) |
| Battery | Sony | VGP-BPS24 | 11.1V, 4400mAh |

After pre-tested above AC adapters, the **AC Adapter 3** was the worst case, therefore, only its test data was recorded in this report.

6. For more detailed features description, please refer to the manufacturer's specifications or User's Manual.


3.2 DESCRIPTION OF TEST MODES

79 channels are provided to this EUT:


| CHANNEL | FREQ. (MHz) |
|---------|-------------|---------|-------------|---------|-------------|---------|-------------|
| 0 | 2402 | 20 | 2422 | 40 | 2442 | 60 | 2462 |
| 1 | 2403 | 21 | 2423 | 41 | 2443 | 61 | 2463 |
| 2 | 2404 | 22 | 2424 | 42 | 2444 | 62 | 2464 |
| 3 | 2405 | 23 | 2425 | 43 | 2445 | 63 | 2465 |
| 4 | 2406 | 24 | 2426 | 44 | 2446 | 64 | 2466 |
| 5 | 2407 | 25 | 2427 | 45 | 2447 | 65 | 2467 |
| 6 | 2408 | 26 | 2428 | 46 | 2448 | 66 | 2468 |
| 7 | 2409 | 27 | 2429 | 47 | 2449 | 67 | 2469 |
| 8 | 2410 | 28 | 2430 | 48 | 2450 | 68 | 2470 |
| 9 | 2411 | 29 | 2431 | 49 | 2451 | 69 | 2471 |
| 10 | 2412 | 30 | 2432 | 50 | 2452 | 70 | 2472 |
| 11 | 2413 | 31 | 2433 | 51 | 2453 | 71 | 2473 |
| 12 | 2414 | 32 | 2434 | 52 | 2454 | 72 | 2474 |
| 13 | 2415 | 33 | 2435 | 53 | 2455 | 73 | 2475 |
| 14 | 2416 | 34 | 2436 | 54 | 2456 | 74 | 2476 |
| 15 | 2417 | 35 | 2437 | 55 | 2457 | 75 | 2477 |
| 16 | 2418 | 36 | 2438 | 56 | 2458 | 76 | 2478 |
| 17 | 2419 | 37 | 2439 | 57 | 2459 | 77 | 2479 |
| 18 | 2420 | 38 | 2440 | 58 | 2460 | 78 | 2480 |
| 19 | 2421 | 39 | 2441 | 59 | 2461 | | |

3.2.1 CONFIGURATION OF SYSTEM UNDER TEST

Test Mode A:

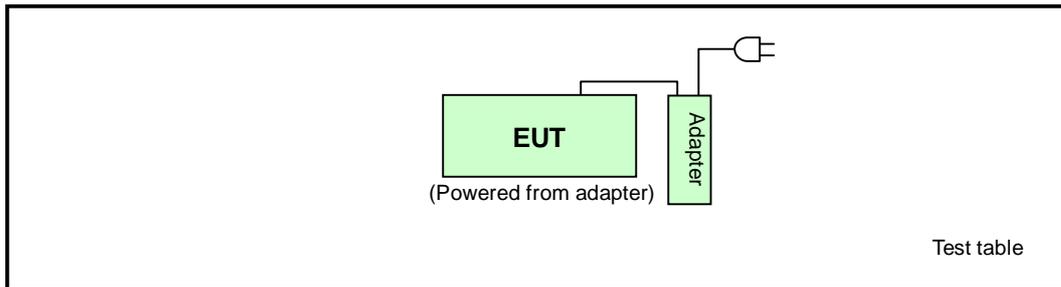

Test Mode B:

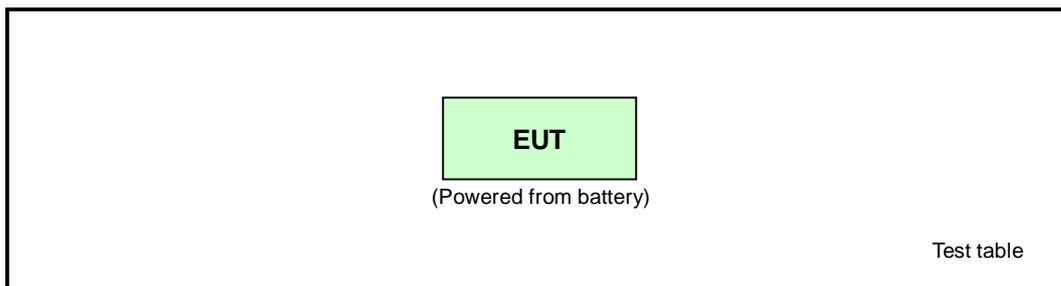

3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

| EUT CONFIGURE MODE | Applicable to | | | | Description |
|--------------------|---------------|-------|--------------------|------|--------------------------|
| | PLC | RE<1G | RE [≥] 1G | APCM | |
| A | √ | √ | √ | √ | EUT powered from adapter |
| B | Note | √ | - | - | EUT powered from battery |

Where **PLC**: Power Line Conducted Emission

RE<1G: Radiated Emission below 1GHz

RE[≥]1G: Radiated Emission above 1GHz

APCM: Antenna Port Conducted Measurement

NOTE: No need to concern of Conducted Emission due to the EUT is powered by battery.

POWER LINE CONDUCTED EMISSION TEST:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

| EUT CONFIGURE MODE | AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY | MODULATION TYPE | PACKET TYPE | DATE RATE |
|--------------------|-------------------|----------------|-----------------------|-----------------|-------------|-----------|
| A | 0 to 78 | 78 | FHSS | GFSK | DH5 | 1 |

RADIATED EMISSION TEST (BELOW 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, packet types data rate and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

| EUT CONFIGURE MODE | AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY | MODULATION TYPE | PACKET TYPE | DATE RATE |
|--------------------|-------------------|----------------|-----------------------|-----------------|-------------|-----------|
| A & B | 0 to 78 | 78 | FHSS | GFSK | DH5 | 1 |

RADIATED EMISSION TEST (ABOVE 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, packet types data rate and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

| EUT CONFIGURE MODE | AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY | MODULATION TYPE | PACKET TYPE | DATE RATE |
|--------------------|-------------------|----------------|-----------------------|-----------------|-------------|-----------|
| A | 0 to 78 | 0, 39, 78 | FHSS | GFSK | DH5 | 1 |
| A | 0 to 78 | 0, 39, 78 | FHSS | 8DPSK | DH5 | 3 |

BANDEDGE MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and packet types of the antenna and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

| EUT CONFIGURE MODE | AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY | MODULATION TYPE | PACKET TYPE | DATE RATE |
|--------------------|-------------------|----------------|-----------------------|-----------------|-------------|-----------|
| A | 0 to 78 | 0, 78 | FHSS | GFSK | DH5 | 1 |
| A | 0 to 78 | 0, 78 | FHSS | 8DPSK | DH5 | 3 |

ANTENNA PORT CONDUCTED MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and packet types of the antenna and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

| EUT CONFIGURE MODE | AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY | MODULATION TYPE | PACKET TYPE | DATE RATE |
|--------------------|-------------------|----------------|-----------------------|-----------------|-------------|-----------|
| A | 0 to 78 | 0, 39, 78 | FHSS | GFSK | DH5 | 1 |
| A | 0 to 78 | 0, 39, 78 | FHSS | 8DPSK | DH5 | 3 |

TEST CONDITION:

| APPLICABLE TO | EUT CONFIGURE MODE | ENVIRONMENTAL CONDITIONS | INPUT POWER | TESTED BY |
|--------------------|--------------------|---------------------------|--------------|--------------|
| PLC | A | 20deg. C, 78% RH, 1018hPa | 120Vac, 60Hz | Jamison Chan |
| RE<1G | A | 20deg. C, 76% RH, 1015hPa | 120Vac, 60Hz | Nick Chen |
| | B | 20deg. C, 76% RH, 1015hPa | 11.1Vdc | Nick Chen |
| RE ³ 1G | A | 21deg. C, 75% RH, 1012hPa | 120Vac, 60Hz | Nick Chen |
| APCM | A | 16deg. C, 80% RH, 1018hPa | 120Vac, 60Hz | Jun Wu |

3.2.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C. (15.247)

ANSI C63.4- 2003

ANSI C63.10-2009

All test items have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

3.2.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with its adapter or battery.

4. TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

| FREQUENCY OF EMISSION (MHz) | CONDUCTED LIMIT (dB μ V) | |
|-----------------------------|------------------------------|----------|
| | Quasi-peak | Average |
| 0.15 ~ 0.5 | 66 to 56 | 56 to 46 |
| 0.5 ~ 5 | 56 | 46 |
| 5 ~ 30 | 60 | 50 |

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | CALIBRATED DATE | CALIBRATED UNTIL |
|--|-----------------|--------------|-----------------|------------------|
| ROHDE & SCHWARZ Test Receiver | ESCS 30 | 100276 | Dec. 15, 2010 | Dec. 14, 2011 |
| ROHDE & SCHWARZ Artificial Mains Network (for EUT) | ESH3-Z5 | 100219 | Nov. 24, 2010 | Nov. 23, 2011 |
| LISN With Adapter (for EUT) | AD10 | C10Ada-001 | Nov. 24, 2010 | Nov. 23, 2011 |
| ROHDE & SCHWARZ Artificial Mains Network (for peripherals) | ESH3-Z5 | 100218 | Nov. 24, 2010 | Nov. 23, 2011 |
| Software | ADT_Cond_V7.3.7 | NA | NA | NA |
| Software | ADT_ISN_V7.3.7 | NA | NA | NA |
| RF cable (JYEBAO) | 5D-FB | Cable-C10.01 | Feb. 23, 2010 | Feb. 22, 2011 |
| SUHNER Terminator (For ROHDE & SCHWARZ LISN) | 65BNC-5001 | E1-010773 | Feb. 23, 2010 | Feb. 22, 2011 |

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in Shielded Room No. 10.
 3. The VCCI Site Registration No. C-1852.


4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) were not recorded.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

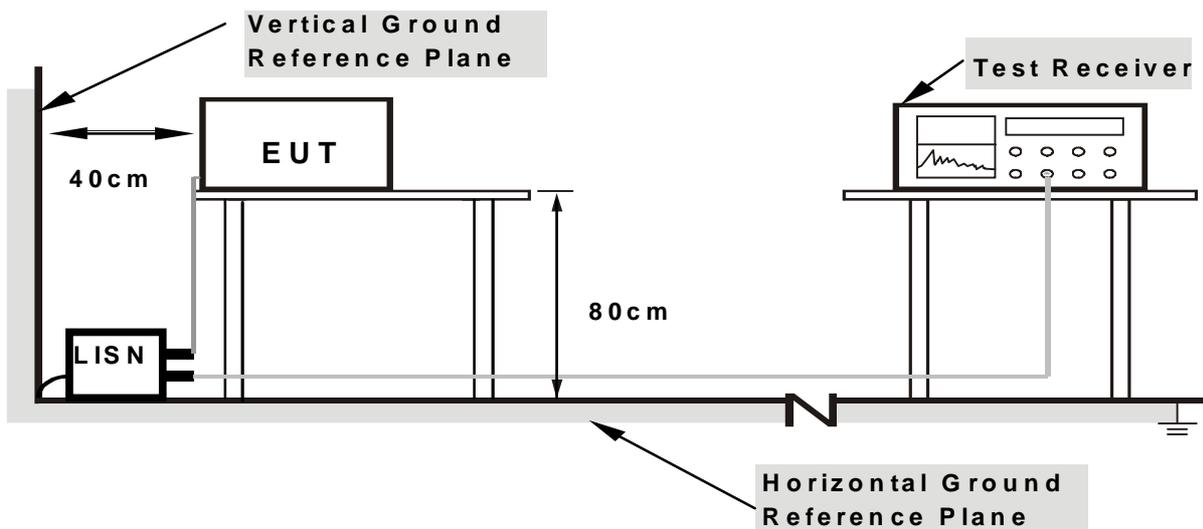

- Note:**
1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes support units.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.1.6 EUT OPERATING CONDITIONS


- a. Turn on the power of all equipment.
- b. EUT ran a test program (provided by manufacture) to enable it under transmitting condition at specific channel continuously.

4.1.7 TEST RESULTS

| | | | |
|------------------|------------|----------------------|--------|
| TEST MODE | A | 6dB BANDWIDTH | 9kHz |
| CHANNEL | Channel 78 | PHASE | Line 1 |

| No | Freq. [MHz] | Corr. Factor (dB) | Reading Value [dB (uV)] | | Emission Level [dB (uV)] | | Limit [dB (uV)] | | Margin (dB) | |
|----|----------------|-------------------------|----------------------------|-------|-----------------------------|-------|--------------------|--------------|----------------|--------|
| | | | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| | 1 | 0.162 | 0.19 | 40.57 | - | 40.76 | - | 65.38 | 55.38 | -24.62 |
| 2 | 0.220 | 0.20 | 45.18 | - | 45.38 | - | 62.81 | 52.81 | -17.43 | - |
| 3 | 0.334 | 0.26 | 36.59 | - | 36.85 | - | 59.36 | 49.36 | -22.51 | - |
| 4 | 0.556 | 0.30 | 35.46 | - | 35.76 | - | 56.00 | 46.00 | -20.24 | - |
| 5 | 0.963 | 0.31 | 32.06 | - | 32.37 | - | 56.00 | 46.00 | -23.63 | - |
| 6 | 15.258 | 1.05 | 30.16 | - | 31.21 | - | 60.00 | 50.00 | -28.79 | - |

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

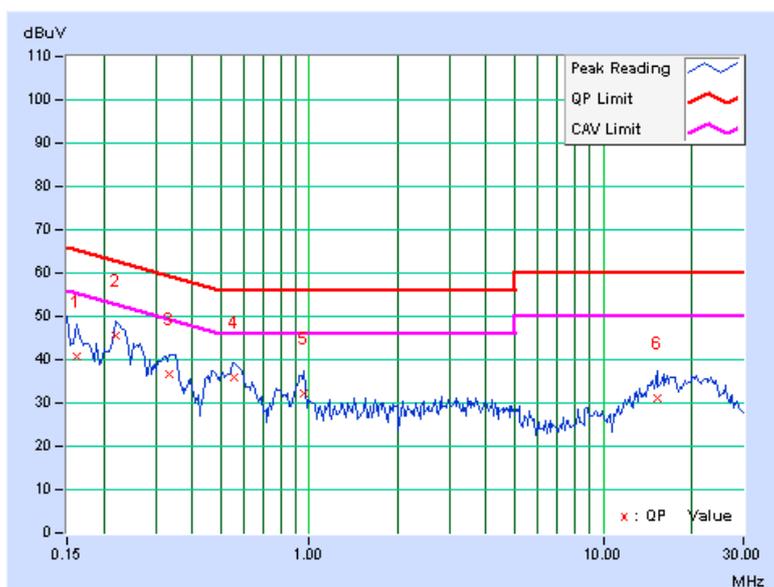




A D T

| | | | |
|------------------|------------|----------------------|--------|
| TEST MODE | A | 6dB BANDWIDTH | 9kHz |
| CHANNEL | Channel 78 | PHASE | Line 2 |

| No | Freq. [MHz] | Corr. Factor (dB) | Reading Value | | Emission Level | | Limit | | Margin | |
|----|----------------|-------------------------|---------------|-----|----------------|-----|-----------|-------|--------|-----|
| | | | [dB (uV)] | | [dB (uV)] | | [dB (uV)] | | (dB) | |
| | | | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.150 | 0.29 | 44.62 | - | 44.91 | - | 66.00 | 56.00 | -21.09 | - |
| 2 | 0.224 | 0.29 | 40.52 | - | 40.81 | - | 62.66 | 52.66 | -21.85 | - |
| 3 | 0.353 | 0.36 | 36.50 | - | 36.86 | - | 58.89 | 48.89 | -22.03 | - |
| 4 | 0.548 | 0.38 | 36.14 | - | 36.52 | - | 56.00 | 46.00 | -19.48 | - |
| 5 | 0.963 | 0.39 | 32.54 | - | 32.93 | - | 56.00 | 46.00 | -23.07 | - |
| 6 | 14.645 | 0.91 | 30.02 | - | 30.93 | - | 60.00 | 50.00 | -29.07 | - |

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

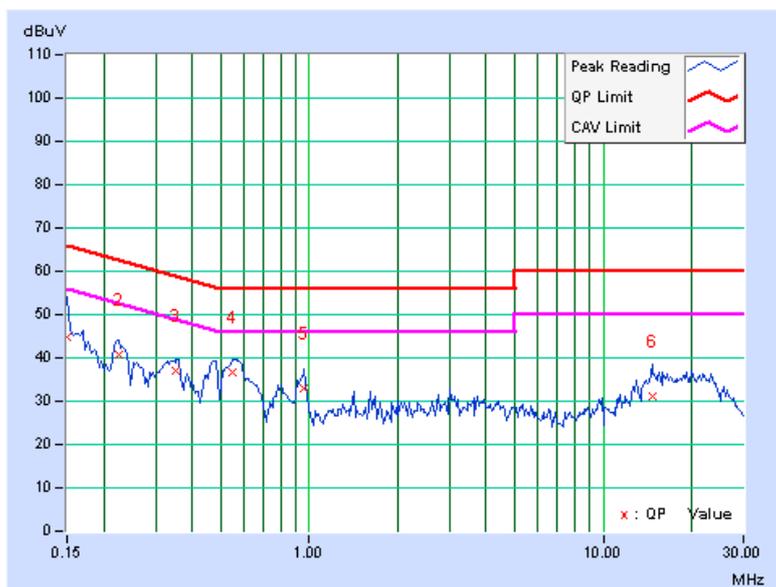

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

| FREQUENCIES (MHz) | FIELD STRENGTH (microvolts/meter) | MEASUREMENT DISTANCE (meters) |
|-------------------|-----------------------------------|-------------------------------|
| 0.009 ~ 0.490 | 2400/F(kHz) | 300 |
| 0.490 ~ 1.705 | 24000/F(kHz) | 30 |
| 1.705 ~ 30.0 | 30 | 30 |
| 30 ~ 88 | 100 | 3 |
| 88 ~ 216 | 150 | 3 |
| 216 ~ 960 | 200 | 3 |
| Above 960 | 500 | 3 |

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.2.2 TEST INSTRUMENTS

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | CALIBRATED DATE | CALIBRATED UNTIL |
|--|------------------------------|------------|-----------------|------------------|
| HP Preamplifier | 8447D | 2432A03504 | May 06, 2010 | May 05, 2011 |
| HP Preamplifier | 8449B | 3008A01924 | Jul. 14, 2010 | Jul. 13, 2011 |
| HP Preamplifier | 8449B | 3008A01292 | Jul. 14, 2010 | Jul. 13, 2011 |
| ROHDE & SCHWARZ TEST RECEIVER | ESU26 | 100005 | Jun. 10, 2010 | Jun. 09, 2011 |
| Schwarzbeck Antenna | VULB 9168 | 137 | Apr. 29, 2010 | Apr. 28, 2011 |
| Schwarzbeck Antenna | VHBA 9123 | 480 | Apr. 29, 2010 | Apr. 28, 2011 |
| ADT. Turn Table | TT100 | 0306 | NA | NA |
| ADT. Tower | AT100 | 0306 | NA | NA |
| Software | ADT_Radiated_V 7.6.15.9.2 | NA | NA | NA |
| SUHNER RF cable | SF102 | CABLE-CH6 | Aug. 20, 2010 | Aug. 19, 2011 |
| EMCO Horn Antenna | 3115 | 6714 | Oct. 26, 2010 | Oct. 25, 2011 |
| EMCO Horn Antenna | 3115 | 9312-4192 | Apr. 23, 2010 | Apr. 22, 2011 |
| Highpass filter Wainwright Instruments | WHK 3.1/18G-10SS | SN 8 | NA | NA |

- NOTE:** 1. The calibration interval of the above test instruments is 12/24 months. And the calibrations are traceable to NML/ROC and NIST/USA.
2. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
3. The test was performed in Chamber No. 6.
4. The Industry Canada Reference No. IC 7450E-6.
5. The FCC Site Registration No. is 447212.

4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation

4.2.5 TEST SETUP

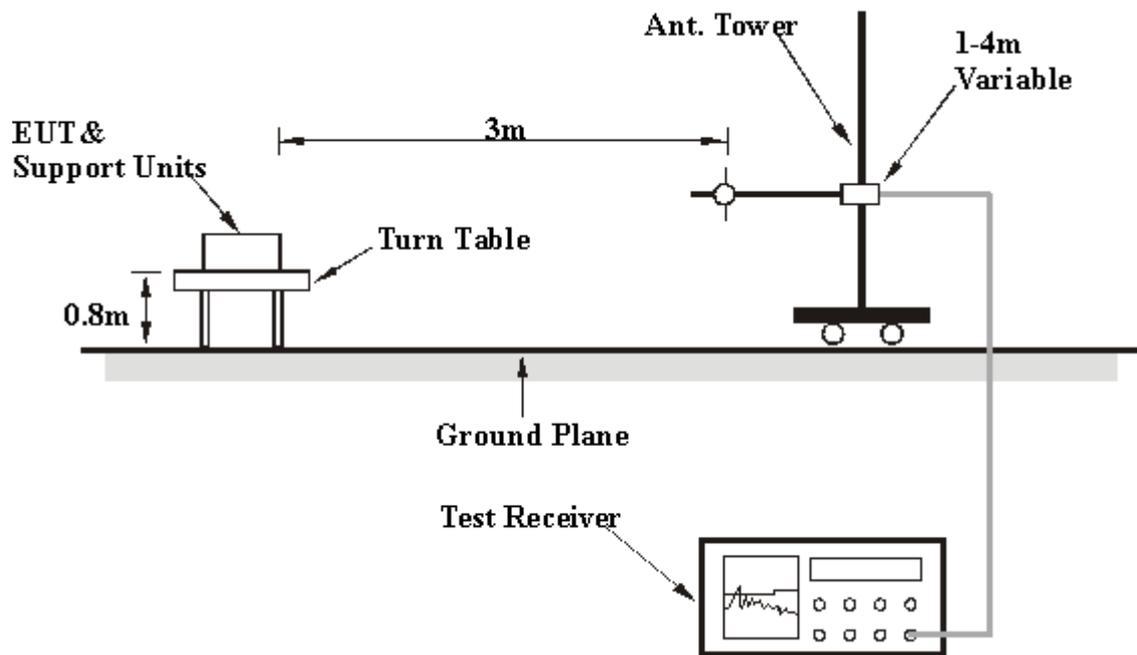

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.6 EUT OPERATING CONDITIONS

Same as item 4.1.6.



A D T

4.2.7 TEST RESULTS

GFSK MODULATION

| EUT TEST CONDITION | | MEASUREMENT DETAIL | |
|--------------------------|-----------------------------|--------------------|---------------------------|
| CHANNEL | Channel 0 | FREQUENCY RANGE | 1 ~ 25GHz |
| INPUT POWER | 120Vac, 60Hz | DETECTOR FUNCTION | Peak (PK) Average (AV) |
| ENVIRONMENTAL CONDITIONS | 21deg. C, 75% RH 1012hPa | TESTED BY | Nick Chen |
| TEST MODE | A | | |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 2390.00 | 59.2 PK | 74.0 | -14.8 | 1.00 H | 254 | 26.73 | 32.47 |
| 2 | 2390.00 | 46.9 AV | 54.0 | -7.1 | 1.00 H | 254 | 14.43 | 32.47 |
| 3 | 2400.00 | 35.2 PK | 74.0 | -38.8 | 1.00 H | 254 | 2.68 | 32.51 |
| 4 | 2400.00 | 5.1 AV | 54.0 | -48.9 | 1.00 H | 254 | -27.42 | 32.51 |
| 5 | *2402.00 | 92.6 PK | | | 1.00 H | 254 | 60.03 | 32.52 |
| 6 | *2402.00 | 62.5 AV | | | 1.00 H | 254 | 29.93 | 32.52 |
| 7 | 3202.00 | 50.6 PK | 74.0 | -23.4 | 1.12 H | 142 | 14.95 | 35.65 |
| 8 | 3202.00 | 43.8 AV | 54.0 | -10.2 | 1.12 H | 142 | 8.18 | 35.65 |
| 9 | 4804.00 | 54.6 PK | 74.0 | -19.4 | 1.63 H | 71 | 14.79 | 39.85 |
| 10 | 4804.00 | 24.5 AV | 54.0 | -29.5 | 1.63 H | 71 | -15.31 | 39.85 |

- REMARKS:**
- Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 - Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 - The other emission levels were very low against the limit.
 - Margin value = Emission level – Limit value.
 - * *: Fundamental frequency.
 - The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to: $20\log(3.125 / 100) = -30.1$ dB.
 - Average value = peak reading + 20log(duty cycle).

| EUT TEST CONDITION | | MEASUREMENT DETAIL | |
|--------------------------|-----------------------------|--------------------|---------------------------|
| CHANNEL | Channel 0 | FREQUENCY RANGE | 1 ~ 25GHz |
| INPUT POWER | 120Vac, 60Hz | DETECTOR FUNCTION | Peak (PK) Average (AV) |
| ENVIRONMENTAL CONDITIONS | 21deg. C, 75% RH 1012hPa | TESTED BY | Nick Chen |
| TEST MODE | A | | |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 2390.00 | 59.2 PK | 74.0 | -14.8 | 1.00 V | 255 | 26.75 | 32.47 |
| 2 | 2390.00 | 46.7 AV | 54.0 | -7.3 | 1.00 V | 255 | 14.26 | 32.47 |
| 3 | 2400.00 | 33.8 PK | 74.0 | -40.2 | 1.00 V | 255 | 1.26 | 32.51 |
| 4 | 2400.00 | 3.7 AV | 54.0 | -50.3 | 1.00 V | 255 | -28.84 | 32.51 |
| 5 | *2402.00 | 91.1 PK | | | 1.00 V | 255 | 58.61 | 32.52 |
| 6 | *2402.00 | 61.0 AV | | | 1.00 V | 255 | 28.51 | 32.52 |
| 7 | 3202.00 | 49.1 PK | 74.0 | -24.9 | 1.00 V | 96 | 13.49 | 35.65 |
| 8 | 3202.00 | 41.8 AV | 54.0 | -12.2 | 1.00 V | 96 | 6.14 | 35.65 |
| 9 | 4804.00 | 54.2 PK | 74.0 | -19.9 | 1.00 V | 28 | 14.30 | 39.85 |
| 10 | 4804.00 | 24.1 AV | 54.0 | -30.0 | 1.00 V | 28 | -15.80 | 39.85 |

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to: $20\log(3.125 / 100) = -30.1$ dB.
 7. Average value = peak reading + $20\log(\text{duty cycle})$.



A D T

| EUT TEST CONDITION | | MEASUREMENT DETAIL | |
|--------------------------|-----------------------------|--------------------|---------------------------|
| CHANNEL | Channel 39 | FREQUENCY RANGE | 1 ~ 25GHz |
| INPUT POWER | 120Vac, 60Hz | DETECTOR FUNCTION | Peak (PK) Average (AV) |
| ENVIRONMENTAL CONDITIONS | 21deg. C, 75% RH 1012hPa | TESTED BY | Nick Chen |
| TEST MODE | A | | |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | *2441.00 | 94.9 PK | | | 1.08 H | 314 | 62.24 | 32.66 |
| 2 | *2441.00 | 64.8 AV | | | 1.08 H | 314 | 32.14 | 32.66 |
| 3 | 3254.00 | 52.6 PK | 74.0 | -21.4 | 1.03 H | 112 | 16.83 | 35.77 |
| 4 | 3254.00 | 48.5 AV | 54.0 | -5.5 | 1.03 H | 112 | 12.68 | 35.77 |
| 5 | 4882.00 | 58.4 PK | 74.0 | -15.6 | 1.09 H | 58 | 18.29 | 40.11 |
| 6 | 4882.00 | 28.3 AV | 54.0 | -25.7 | 1.09 H | 58 | -11.81 | 40.11 |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | *2441.00 | 93.0 PK | | | 1.06 V | 155 | 60.37 | 32.66 |
| 2 | *2441.00 | 62.9 AV | | | 1.06 V | 155 | 30.27 | 32.66 |
| 3 | 3254.00 | 51.2 PK | 74.0 | -22.8 | 1.10 V | 89 | 15.40 | 35.77 |
| 4 | 3254.00 | 45.3 AV | 54.0 | -8.7 | 1.10 V | 89 | 9.53 | 35.77 |
| 5 | 4882.00 | 56.2 PK | 74.0 | -17.8 | 1.21 V | 341 | 16.05 | 40.11 |
| 6 | 4882.00 | 26.1 AV | 54.0 | -27.9 | 1.21 V | 341 | -14.05 | 40.11 |

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to: $20\log(3.125 / 100) = -30.1$ dB.
 7. Average value = peak reading + $20\log(\text{duty cycle})$.



A D T

| EUT TEST CONDITION | | MEASUREMENT DETAIL | |
|--------------------------|-----------------------------|--------------------|---------------------------|
| CHANNEL | Channel 78 | FREQUENCY RANGE | 1 ~ 25GHz |
| INPUT POWER | 120Vac, 60Hz | DETECTOR FUNCTION | Peak (PK) Average (AV) |
| ENVIRONMENTAL CONDITIONS | 21deg. C, 75% RH 1012hPa | TESTED BY | Nick Chen |
| TEST MODE | A | | |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | *2480.00 | 95.1 PK | | | 1.10 H | 112 | 62.32 | 32.80 |
| 2 | *2480.00 | 65.0 AV | | | 1.10 H | 112 | 32.22 | 32.80 |
| 3 | 2483.50 | 36.8 PK | 74.0 | -37.2 | 1.10 H | 112 | 4.02 | 32.81 |
| 4 | 2483.50 | 6.7 AV | 54.0 | -47.3 | 1.10 H | 112 | -26.08 | 32.81 |
| 5 | 3306.00 | 58.3 PK | 74.0 | -15.7 | 1.08 H | 136 | 22.41 | 35.88 |
| 6 | 3306.00 | 51.1 AV | 54.0 | -2.9 | 1.08 H | 136 | 15.18 | 35.88 |
| 7 | 4960.00 | 54.4 PK | 74.0 | -19.6 | 1.00 H | 59 | 14.07 | 40.34 |
| 8 | 4960.00 | 24.3 AV | 54.0 | -29.7 | 1.00 H | 59 | -16.03 | 40.34 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | *2480.00 | 94.3 PK | | | 1.00 V | 134 | 61.52 | 32.80 |
| 2 | *2480.00 | 64.2 AV | | | 1.00 V | 134 | 31.42 | 32.80 |
| 3 | 2483.50 | 36.0 PK | 74.0 | -38.0 | 1.00 V | 134 | 3.22 | 32.81 |
| 4 | 2483.50 | 5.9 AV | 54.0 | -48.1 | 1.00 V | 134 | -26.88 | 32.81 |
| 5 | 3306.00 | 54.8 PK | 74.0 | -19.2 | 1.03 V | 88 | 18.96 | 35.88 |
| 6 | 3306.00 | 47.7 AV | 54.0 | -6.3 | 1.03 V | 88 | 11.82 | 35.88 |
| 7 | 4960.00 | 53.6 PK | 74.0 | -20.4 | 1.00 V | 284 | 13.29 | 40.34 |
| 8 | 4960.00 | 23.5 AV | 54.0 | -30.5 | 1.00 V | 284 | -16.81 | 40.34 |

- REMARKS:**
- Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 - Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 - The other emission levels were very low against the limit.
 - Margin value = Emission level – Limit value.
 - * *: Fundamental frequency.
 - The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to: $20\log(3.125 / 100) = -30.1$ dB.
 - Average value = peak reading + 20log(duty cycle).

8DPSK MODULATION

| EUT TEST CONDITION | | MEASUREMENT DETAIL | |
|--------------------------|-----------------------------|--------------------|---------------------------|
| CHANNEL | Channel 0 | FREQUENCY RANGE | 1 ~ 25GHz |
| INPUT POWER | 120Vac, 60Hz | DETECTOR FUNCTION | Peak (PK) Average (AV) |
| ENVIRONMENTAL CONDITIONS | 21deg. C, 75% RH 1012hPa | TESTED BY | Nick Chen |
| TEST MODE | A | | |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 2390.00 | 59.4 PK | 74.0 | -14.6 | 1.10 H | 189 | 26.94 | 32.47 |
| 2 | 2390.00 | 46.5 AV | 54.0 | -7.5 | 1.10 H | 189 | 14.03 | 32.47 |
| 3 | 2400.00 | 38.9 PK | 74.0 | -35.1 | 1.10 H | 189 | 6.38 | 32.51 |
| 4 | 2400.00 | 8.8 AV | 54.0 | -45.2 | 1.10 H | 189 | -23.72 | 32.51 |
| 5 | *2402.00 | 96.0 PK | | | 1.10 H | 189 | 63.49 | 32.52 |
| 6 | *2402.00 | 65.9 AV | | | 1.10 H | 189 | 33.39 | 32.52 |
| 7 | 3202.00 | 49.4 PK | 74.0 | -24.6 | 1.08 H | 69 | 13.76 | 35.65 |
| 8 | 3202.00 | 42.1 AV | 54.0 | -11.9 | 1.08 H | 69 | 6.44 | 35.65 |
| 9 | 4804.00 | 55.7 PK | 74.0 | -18.3 | 1.22 H | 11 | 15.81 | 39.85 |
| 10 | 4804.00 | 25.6 AV | 54.0 | -28.4 | 1.22 H | 11 | -14.29 | 39.85 |

- REMARKS:**
- Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 - Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 - The other emission levels were very low against the limit.
 - Margin value = Emission level – Limit value.
 - * *: Fundamental frequency.
 - The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to: $20\log(3.125 / 100) = -30.1$ dB.
 - Average value = peak reading + $20\log(\text{duty cycle})$.



A D T

| EUT TEST CONDITION | | MEASUREMENT DETAIL | |
|--------------------------|-----------------------------|--------------------|---------------------------|
| CHANNEL | Channel 0 | FREQUENCY RANGE | 1 ~ 25GHz |
| INPUT POWER | 120Vac, 60Hz | DETECTOR FUNCTION | Peak (PK) Average (AV) |
| ENVIRONMENTAL CONDITIONS | 21deg. C, 75% RH 1012hPa | TESTED BY | Nick Chen |
| TEST MODE | A | | |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 2390.00 | 59.6 PK | 74.0 | -14.4 | 1.10 V | 159 | 27.15 | 32.47 |
| 2 | 2390.00 | 47.3 AV | 54.0 | -6.7 | 1.10 V | 159 | 14.81 | 32.47 |
| 3 | 2400.00 | 38.6 PK | 74.0 | -35.4 | 1.10 V | 159 | 6.11 | 32.51 |
| 4 | 2400.00 | 8.5 AV | 54.0 | -45.5 | 1.10 V | 159 | -23.99 | 32.51 |
| 5 | *2402.00 | 95.7 PK | | | 1.10 V | 159 | 63.22 | 32.52 |
| 6 | *2402.00 | 65.6 AV | | | 1.10 V | 159 | 33.12 | 32.52 |
| 7 | 3202.00 | 47.6 PK | 74.0 | -26.4 | 1.03 V | 224 | 11.97 | 35.65 |
| 8 | 3202.00 | 39.9 AV | 54.0 | -14.1 | 1.03 V | 224 | 4.26 | 35.65 |
| 9 | 4804.00 | 53.6 PK | 74.0 | -20.4 | 1.00 V | 121 | 13.78 | 39.85 |
| 10 | 4804.00 | 23.5 AV | 54.0 | -30.5 | 1.00 V | 121 | -16.32 | 39.85 |

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to: $20\log(3.125 / 100) = -30.1$ dB.
 7. Average value = peak reading + $20\log(\text{duty cycle})$.



A D T

| EUT TEST CONDITION | | MEASUREMENT DETAIL | |
|--------------------------|-----------------------------|--------------------|---------------------------|
| CHANNEL | Channel 39 | FREQUENCY RANGE | 1 ~ 25GHz |
| INPUT POWER | 120Vac, 60Hz | DETECTOR FUNCTION | Peak (PK) Average (AV) |
| ENVIRONMENTAL CONDITIONS | 21deg. C, 75% RH 1012hPa | TESTED BY | Nick Chen |
| TEST MODE | A | | |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | *2441.00 | 96.3 PK | | | 1.04 H | 117 | 63.67 | 32.66 |
| 2 | *2441.00 | 66.2 AV | | | 1.04 H | 117 | 33.57 | 32.66 |
| 3 | 3254.00 | 51.4 PK | 74.0 | -22.6 | 1.00 H | 56 | 15.58 | 35.77 |
| 4 | 3254.00 | 47.3 AV | 54.0 | -6.7 | 1.00 H | 56 | 11.55 | 35.77 |
| 5 | 4882.00 | 60.5 PK | 74.0 | -13.5 | 1.00 H | 332 | 20.39 | 40.11 |
| 6 | 4882.00 | 30.4 AV | 54.0 | -23.6 | 1.00 H | 332 | -9.71 | 40.11 |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | *2441.00 | 96.2 PK | | | 1.11 V | 193 | 63.49 | 32.66 |
| 2 | *2441.00 | 66.1 AV | | | 1.11 V | 193 | 33.39 | 32.66 |
| 3 | 3254.00 | 50.6 PK | 74.0 | -23.4 | 1.00 V | 128 | 14.80 | 35.77 |
| 4 | 3254.00 | 44.4 AV | 54.0 | -9.6 | 1.00 V | 128 | 8.59 | 35.77 |
| 5 | 4882.00 | 57.3 PK | 74.0 | -16.7 | 1.00 V | 154 | 17.17 | 40.11 |
| 6 | 4882.00 | 27.2 AV | 54.0 | -26.8 | 1.00 V | 154 | -12.93 | 40.11 |

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to: $20\log(3.125 / 100) = -30.1$ dB.
 7. Average value = peak reading + $20\log(\text{duty cycle})$.



A D T

| EUT TEST CONDITION | | MEASUREMENT DETAIL | |
|--------------------------|-----------------------------|--------------------|---------------------------|
| CHANNEL | Channel 78 | FREQUENCY RANGE | 1 ~ 25GHz |
| INPUT POWER | 120Vac, 60Hz | DETECTOR FUNCTION | Peak (PK) Average (AV) |
| ENVIRONMENTAL CONDITIONS | 21deg. C, 75% RH 1012hPa | TESTED BY | Nick Chen |
| TEST MODE | A | | |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | *2480.00 | 97.1 PK | | | 1.08 H | 155 | 64.30 | 32.80 |
| 2 | *2480.00 | 67.0 AV | | | 1.08 H | 155 | 34.20 | 32.80 |
| 3 | 2483.50 | 39.6 PK | 74.0 | -34.4 | 1.08 H | 155 | 6.77 | 32.81 |
| 4 | 2483.50 | 9.5 AV | 54.0 | -44.5 | 1.08 H | 155 | -23.33 | 32.81 |
| 5 | 3306.00 | 58.2 PK | 74.0 | -15.8 | 1.23 H | 187 | 22.35 | 35.88 |
| 6 | 3306.00 | 51.1 AV | 54.0 | -2.9 | 1.23 H | 187 | 15.17 | 35.88 |
| 7 | 4960.00 | 54.3 PK | 74.0 | -19.7 | 1.05 H | 174 | 13.92 | 40.34 |
| 8 | 4960.00 | 24.2 AV | 54.0 | -29.8 | 1.05 H | 174 | -16.18 | 40.34 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | *2480.00 | 96.4 PK | | | 1.05 V | 142 | 63.63 | 32.80 |
| 2 | *2480.00 | 66.3 AV | | | 1.05 V | 142 | 33.53 | 32.80 |
| 3 | 2483.50 | 38.9 PK | 74.0 | -35.1 | 1.05 V | 142 | 6.10 | 32.81 |
| 4 | 2483.50 | 8.8 AV | 54.0 | -45.2 | 1.05 V | 142 | -24.00 | 32.81 |
| 5 | 3306.00 | 54.8 PK | 74.0 | -19.2 | 1.32 V | 87 | 18.96 | 35.88 |
| 6 | 3306.00 | 46.9 AV | 54.0 | -7.1 | 1.32 V | 87 | 11.02 | 35.88 |
| 7 | 4960.00 | 53.8 PK | 74.0 | -20.2 | 1.00 V | 133 | 13.50 | 40.34 |
| 8 | 4960.00 | 23.7 AV | 54.0 | -30.3 | 1.00 V | 133 | -16.60 | 40.34 |

- REMARKS:**
- Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 - Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 - The other emission levels were very low against the limit.
 - Margin value = Emission level – Limit value.
 - * *: Fundamental frequency.
 - The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to: $20\log(3.125 / 100) = -30.1$ dB.
 - Average value = peak reading + 20log(duty cycle).

BELOW 1GHz WORST-CASE DATA : GFSK MODULATION

| EUT TEST CONDITION | | MEASUREMENT DETAIL | |
|--------------------------|-----------------------------|--------------------|---------------|
| CHANNEL | Channel 78 | FREQUENCY RANGE | Below 1000MHz |
| INPUT POWER | 120Vac, 60Hz | DETECTOR FUNCTION | Quasi-Peak |
| ENVIRONMENTAL CONDITIONS | 20deg. C, 76% RH 1015hPa | TESTED BY | Nick Chen |
| TEST MODE | A | | |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 99.95 | 31.4 QP | 43.5 | -12.1 | 1.09 H | 268 | 22.26 | 9.12 |
| 2 | 131.04 | 30.7 QP | 43.5 | -12.8 | 1.15 H | 280 | 17.22 | 13.49 |
| 3 | 183.89 | 30.7 QP | 43.5 | -12.8 | 1.07 H | 340 | 18.91 | 11.77 |
| 4 | 224.31 | 33.4 QP | 46.0 | -12.7 | 1.26 H | 133 | 21.07 | 12.28 |
| 5 | 364.21 | 37.1 QP | 46.0 | -8.9 | 1.02 H | 127 | 19.61 | 17.47 |
| 6 | 396.86 | 36.6 QP | 46.0 | -9.4 | 1.32 H | 148 | 18.27 | 18.33 |
| 7 | 423.29 | 34.3 QP | 46.0 | -11.7 | 1.05 H | 73 | 15.52 | 18.80 |
| 8 | 749.73 | 34.3 QP | 46.0 | -11.7 | 1.00 H | 157 | 8.76 | 25.53 |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 131.04 | 31.0 QP | 43.5 | -12.5 | 1.09 V | 259 | 17.49 | 13.49 |
| 2 | 173.01 | 34.0 QP | 43.5 | -9.5 | 1.11 V | 244 | 20.84 | 13.14 |
| 3 | 232.08 | 34.5 QP | 46.0 | -11.5 | 1.27 V | 256 | 21.78 | 12.71 |
| 4 | 371.99 | 32.6 QP | 46.0 | -13.4 | 1.32 V | 226 | 14.91 | 17.67 |
| 5 | 406.19 | 34.7 QP | 46.0 | -11.3 | 1.08 V | 178 | 16.15 | 18.51 |
| 6 | 457.48 | 33.8 QP | 46.0 | -12.2 | 1.31 V | 10 | 14.32 | 19.49 |
| 7 | 549.20 | 32.1 QP | 46.0 | -13.9 | 1.22 V | 349 | 10.03 | 22.11 |

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

| EUT TEST CONDITION | | MEASUREMENT DETAIL | |
|--------------------------|-----------------------------|--------------------|---------------|
| CHANNEL | Channel 78 | FREQUENCY RANGE | Below 1000MHz |
| INPUT POWER | 11.1Vdc | DETECTOR FUNCTION | Quasi-Peak |
| ENVIRONMENTAL CONDITIONS | 20deg. C, 76% RH 1015hPa | TESTED BY | Nick Chen |
| TEST MODE | B | | |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 99.95 | 30.7 QP | 43.5 | -12.8 | 1.08 H | 112 | 21.54 | 9.12 |
| 2 | 213.43 | 32.8 QP | 43.5 | -10.7 | 1.13 H | 127 | 21.10 | 11.68 |
| 3 | 384.42 | 37.8 QP | 46.0 | -8.2 | 1.07 H | 118 | 19.80 | 18.00 |
| 4 | 401.52 | 36.3 QP | 46.0 | -9.7 | 1.06 H | 67 | 17.87 | 18.44 |
| 5 | 667.34 | 33.0 QP | 46.0 | -13.0 | 1.18 H | 115 | 8.69 | 24.35 |
| 6 | 699.98 | 33.4 QP | 46.0 | -12.6 | 1.02 H | 121 | 8.53 | 24.84 |
| 7 | 740.40 | 33.5 QP | 46.0 | -12.5 | 1.00 H | 121 | 8.12 | 25.40 |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 135.71 | 30.2 QP | 43.5 | -13.3 | 1.08 V | 229 | 16.19 | 14.01 |
| 2 | 173.01 | 32.0 QP | 43.5 | -11.5 | 1.11 V | 172 | 18.87 | 13.14 |
| 3 | 252.29 | 35.0 QP | 46.0 | -11.0 | 1.32 V | 238 | 21.21 | 13.79 |
| 4 | 395.30 | 34.4 QP | 46.0 | -11.6 | 1.07 V | 232 | 16.08 | 18.29 |
| 5 | 462.15 | 33.0 QP | 46.0 | -13.0 | 1.29 V | 46 | 13.40 | 19.64 |
| 6 | 549.20 | 32.9 QP | 46.0 | -13.1 | 1.06 V | 106 | 10.82 | 22.11 |
| 7 | 575.62 | 34.6 QP | 46.0 | -11.4 | 1.17 V | 130 | 11.87 | 22.73 |
| 8 | 588.06 | 33.8 QP | 46.0 | -12.2 | 1.00 V | 133 | 10.76 | 23.02 |

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.



4.3 NUMBER OF HOPPING FREQUENCY USED

4.3.1 LIMIT OF HOPPING FREQUENCY USED

At least 15 channels frequencies, and should be equally spaced.

4.3.2 TEST INSTRUMENTS

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | CALIBRATED DATE | CALIBRATED UNTIL |
|----------------------------|-----------|------------|-----------------|------------------|
| SPECTRUM ANALYZER | FSP 40 | 100036 | Apr. 27, 2010 | Apr. 26, 2011 |

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.3.3 TEST PROCEDURES

- a. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- c. Set the SA on MaxHold Mode, and then keep the EUT in hopping mode. Record all the signals from each channel until each one has been recorded.
- d. Set the SA on View mode and then plot the result on SA screen.
- e. Repeat above procedures until all frequencies measured were complete.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation.

4.3.5 TEST SETUP

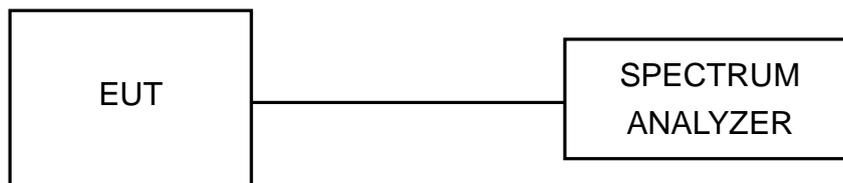



4.3.6 TEST RESULTS

There are 79 hopping frequencies in the hopping mode. Please refer to next two pages for the test result. On the plots, it shows that the hopping frequencies are equally spaced.



A D T



Mode A: FOR GFSK

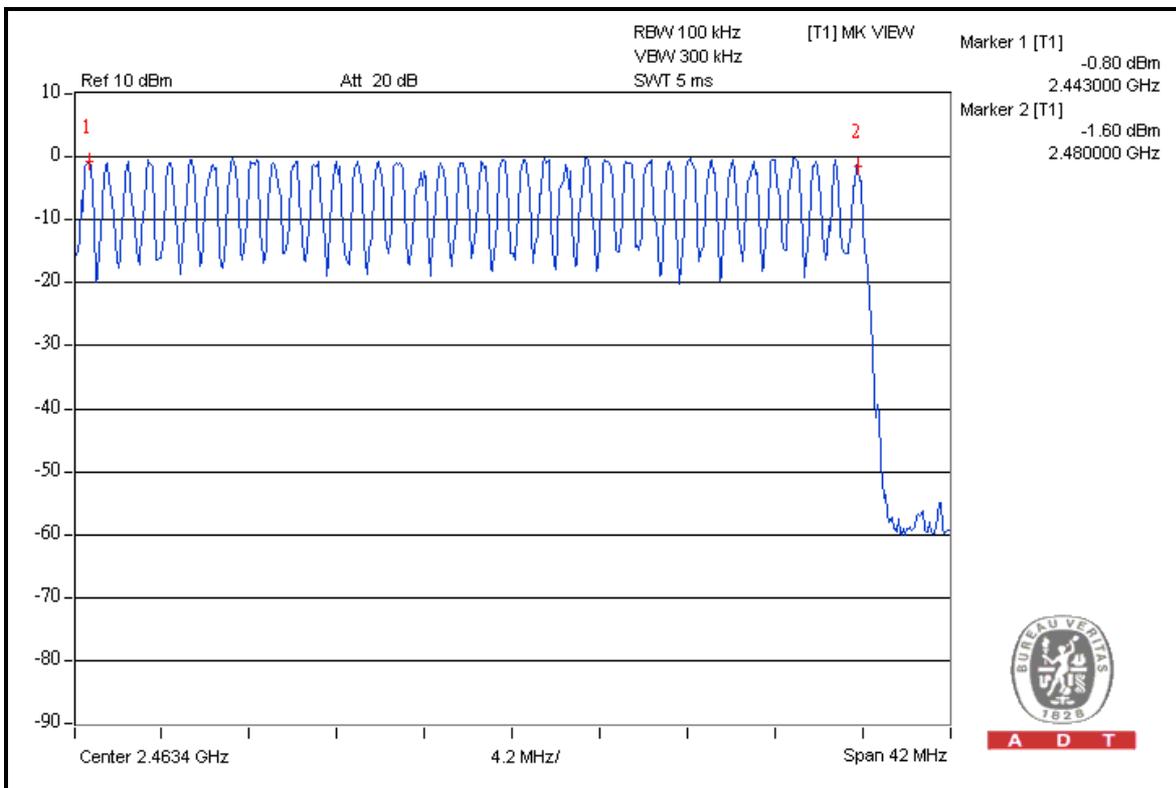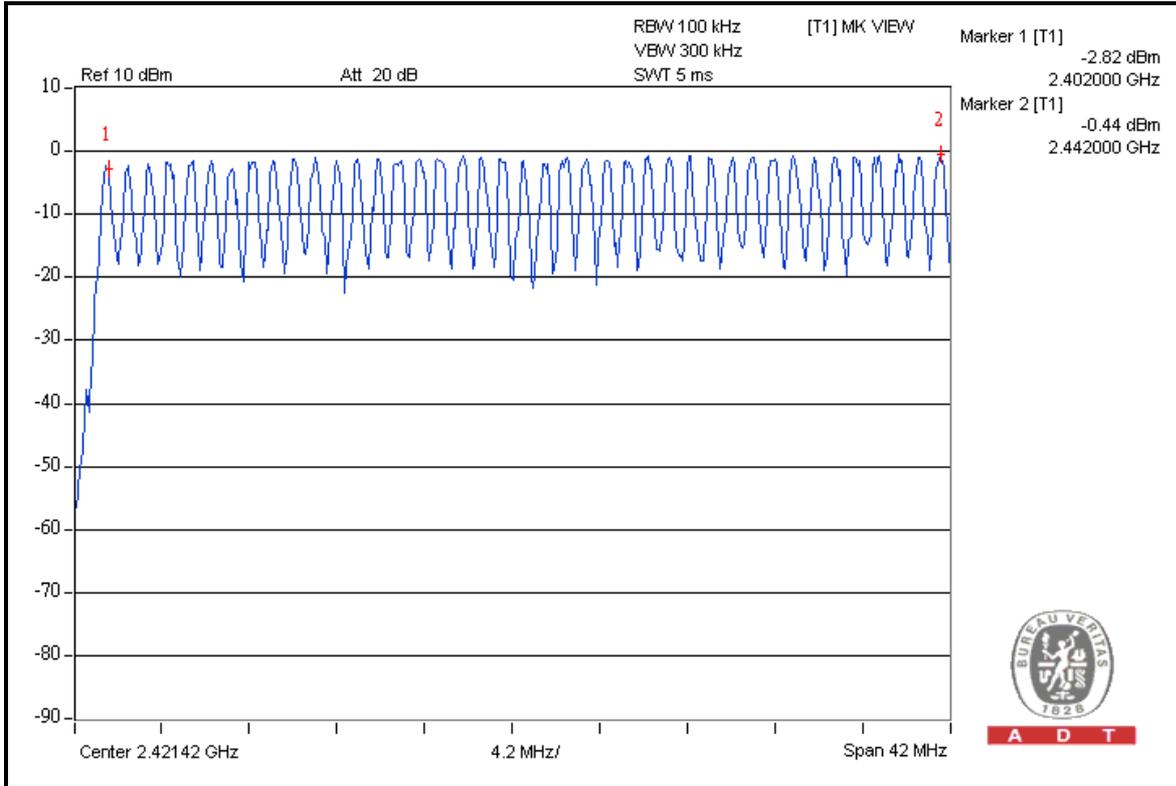



A D T

Mode A: FOR 8DPSK

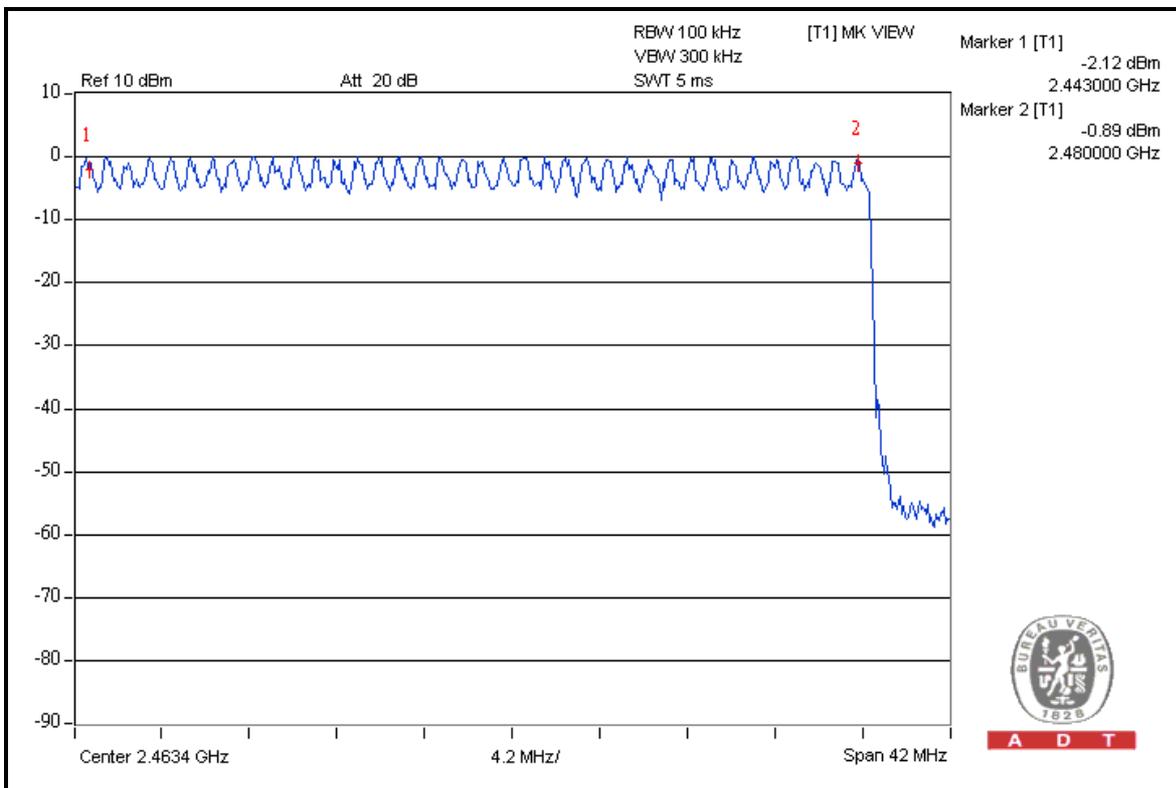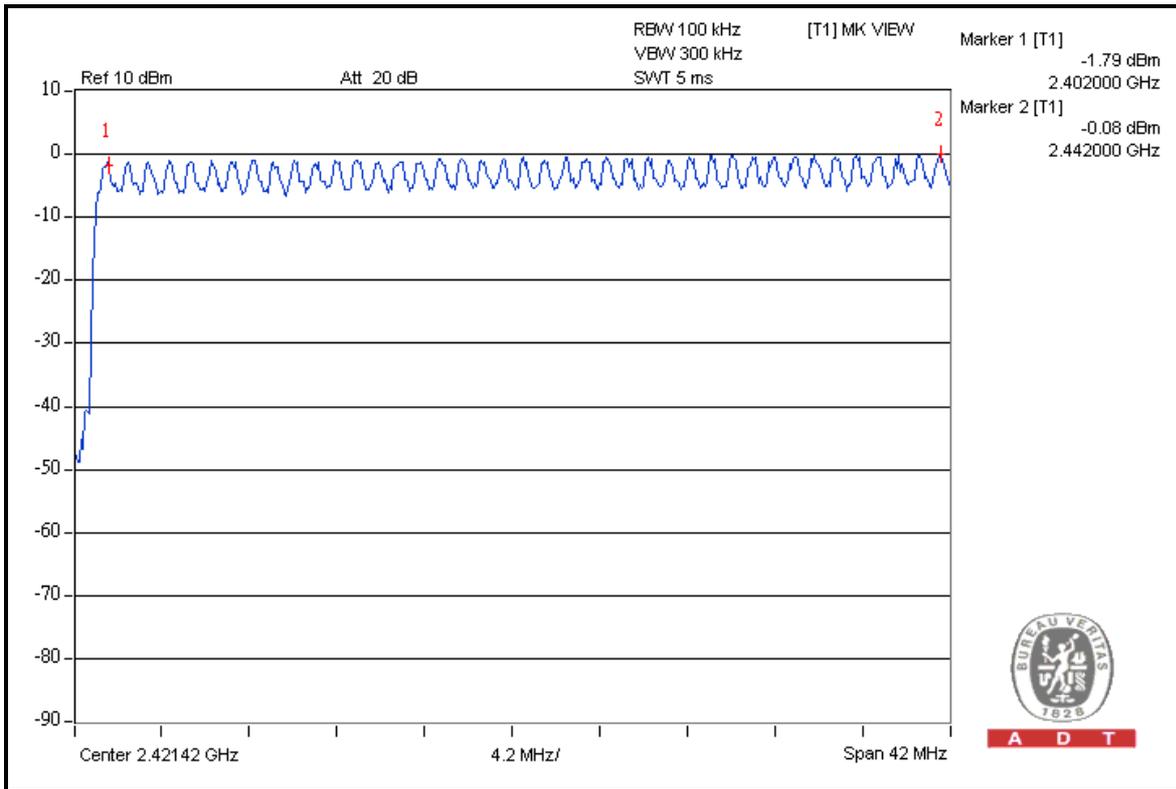



4.4 DWELL TIME ON EACH CHANNEL

4.4.1 LIMIT OF DWELL TIME USED

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

4.4.2 TEST INSTRUMENTS

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | CALIBRATED DATE | CALIBRATED UNTIL |
|----------------------------|-----------|------------|-----------------|------------------|
| SPECTRUM ANALYZER | FSP 40 | 100036 | Apr. 27, 2010 | Apr. 26, 2011 |

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.4.3 TEST PROCEDURES

- a. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- c. Adjust the center frequency of SA on any frequency be measured and set SA to zero span mode. And then, set RBW and VBW of spectrum analyzer to proper value.
- d. Measure the time duration of one transmission on the measured frequency. And then plot the result with time difference of this time duration.
- e. Repeat above procedures until all different time-slot modes have been completed.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation.

4.4.5 TEST SETUP

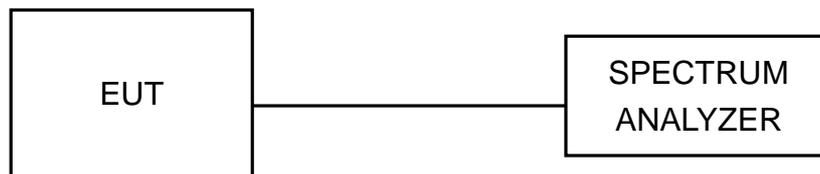

4.4.6 TEST RESULTS

Mode A: FOR GFSK



| Mode | Number of transmission in a 31.6 (79Hopping*0.4) | Length of transmission time (msec) | Result (msec) | Limit (msec) |
|------|--|------------------------------------|---------------|--------------|
| DH1 | 50 (times / 5 sec) *6.32=316.00 times | 0.492 | 155.4720 | 400 |
| DH3 | 27 (times / 5 sec) *6.32=170.64 times | 1.740 | 296.9136 | 400 |
| DH5 | 16 (times / 5 sec) *6.32=101.12 times | 3.030 | 306.3936 | 400 |

NOTE: Test plots of the transmitting time slot are shown on next 3 pages.



A D T



DH1

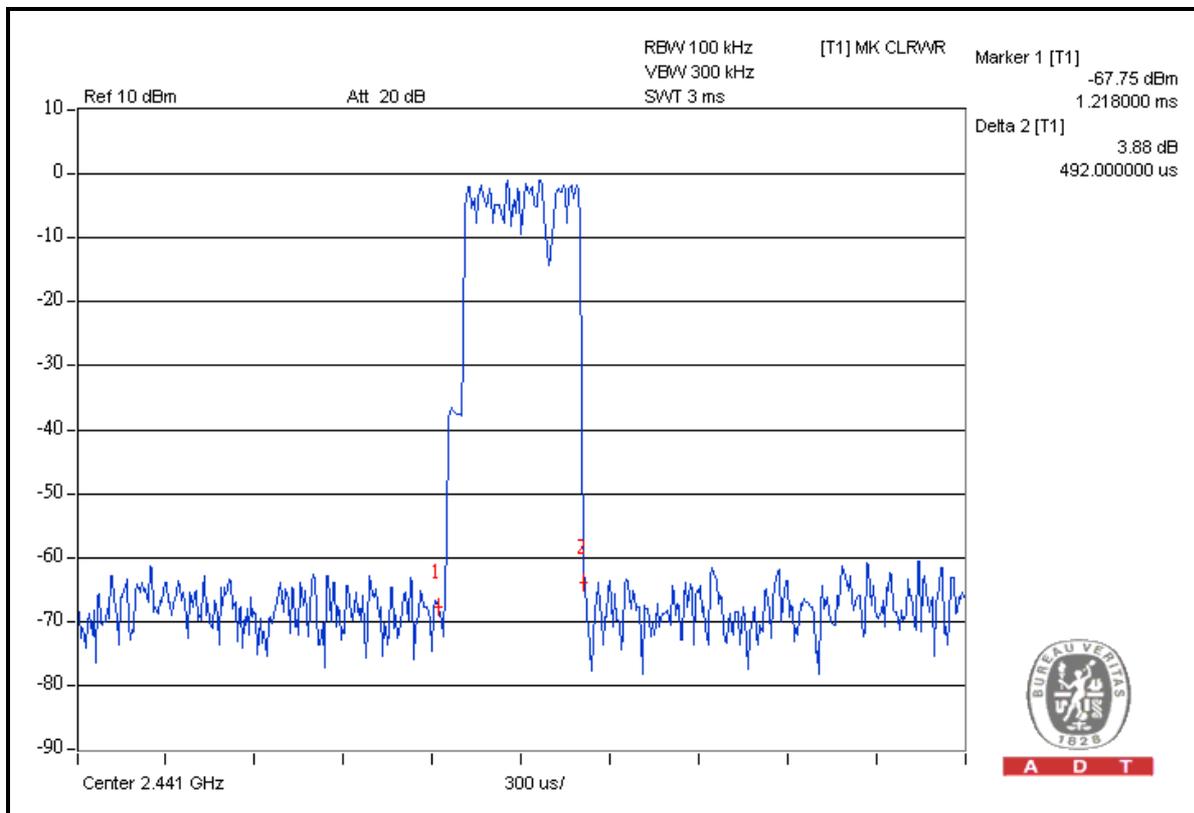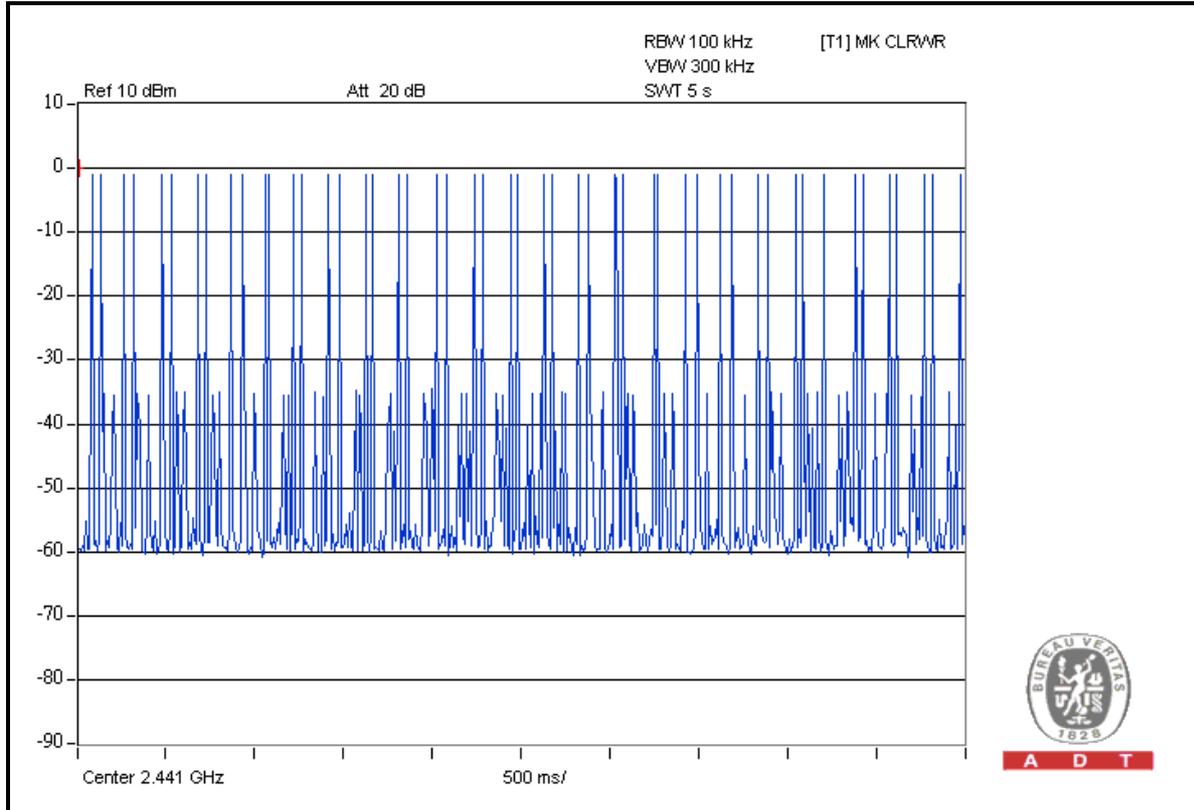



A D T



DH3

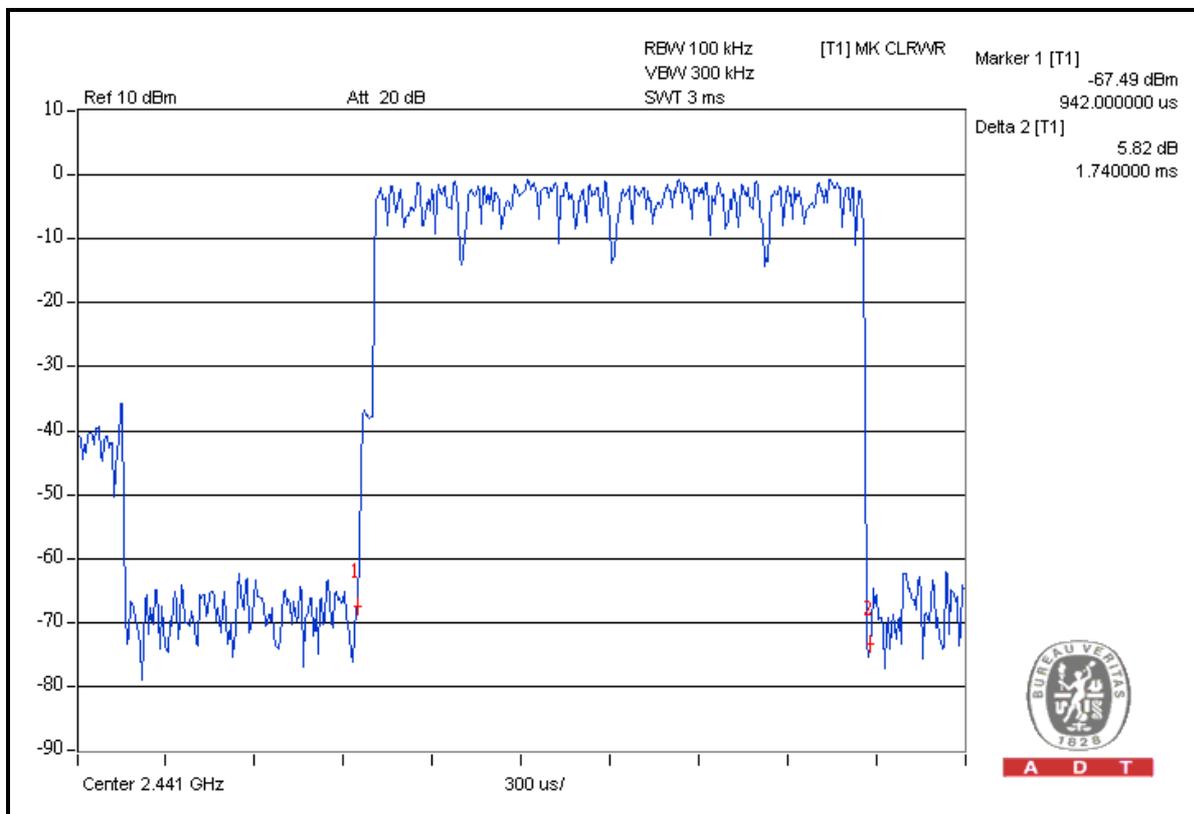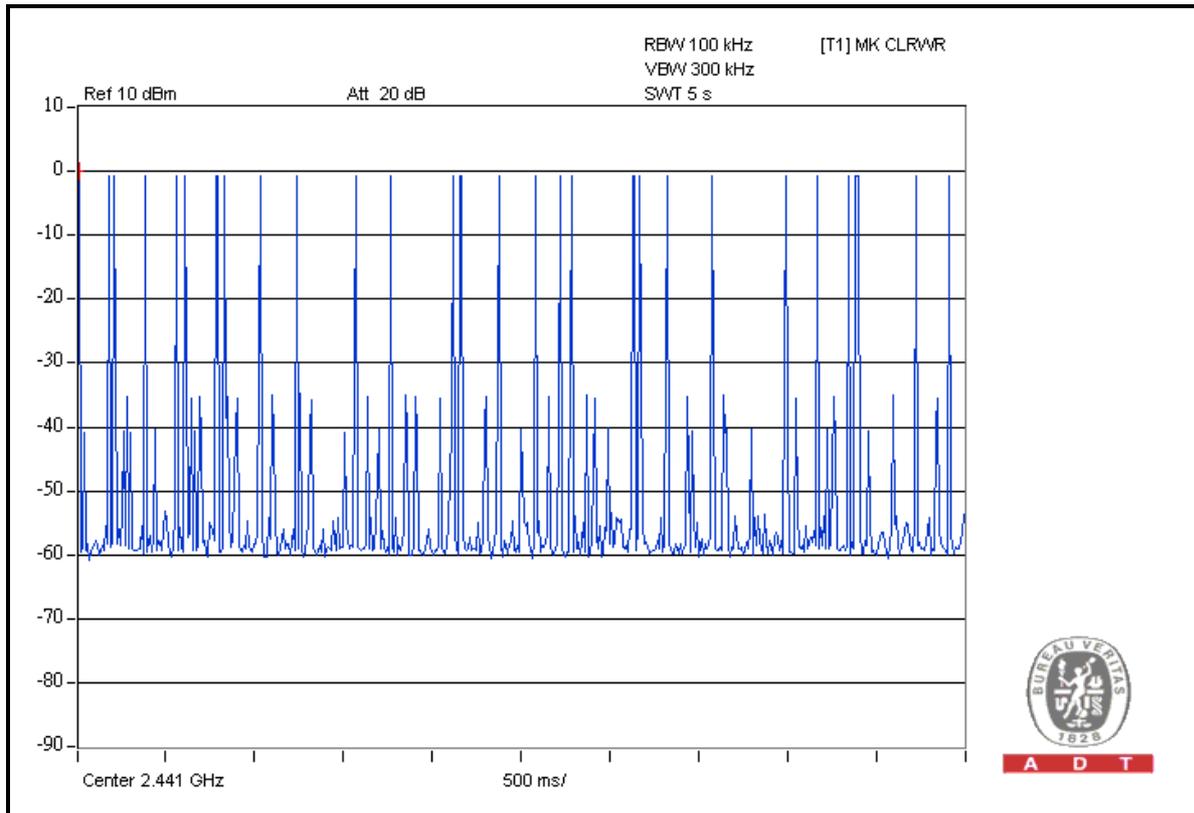



A D T

DH5

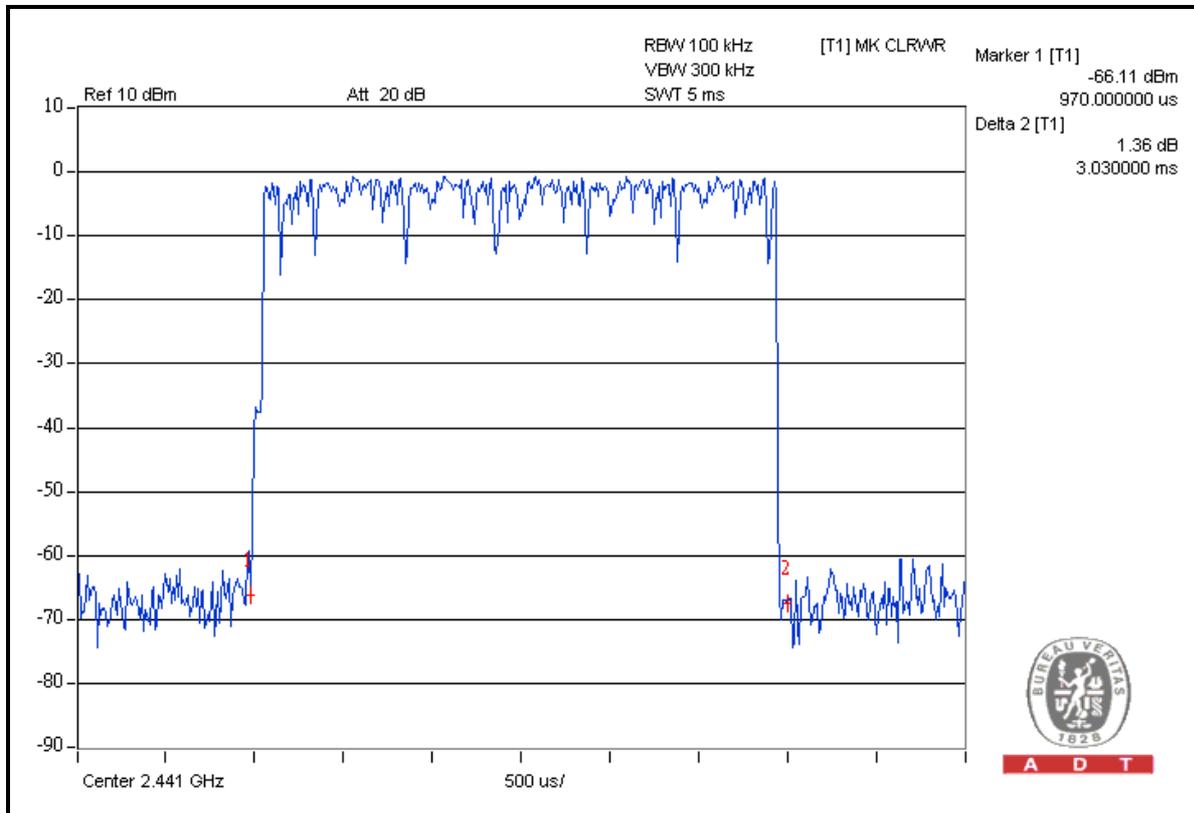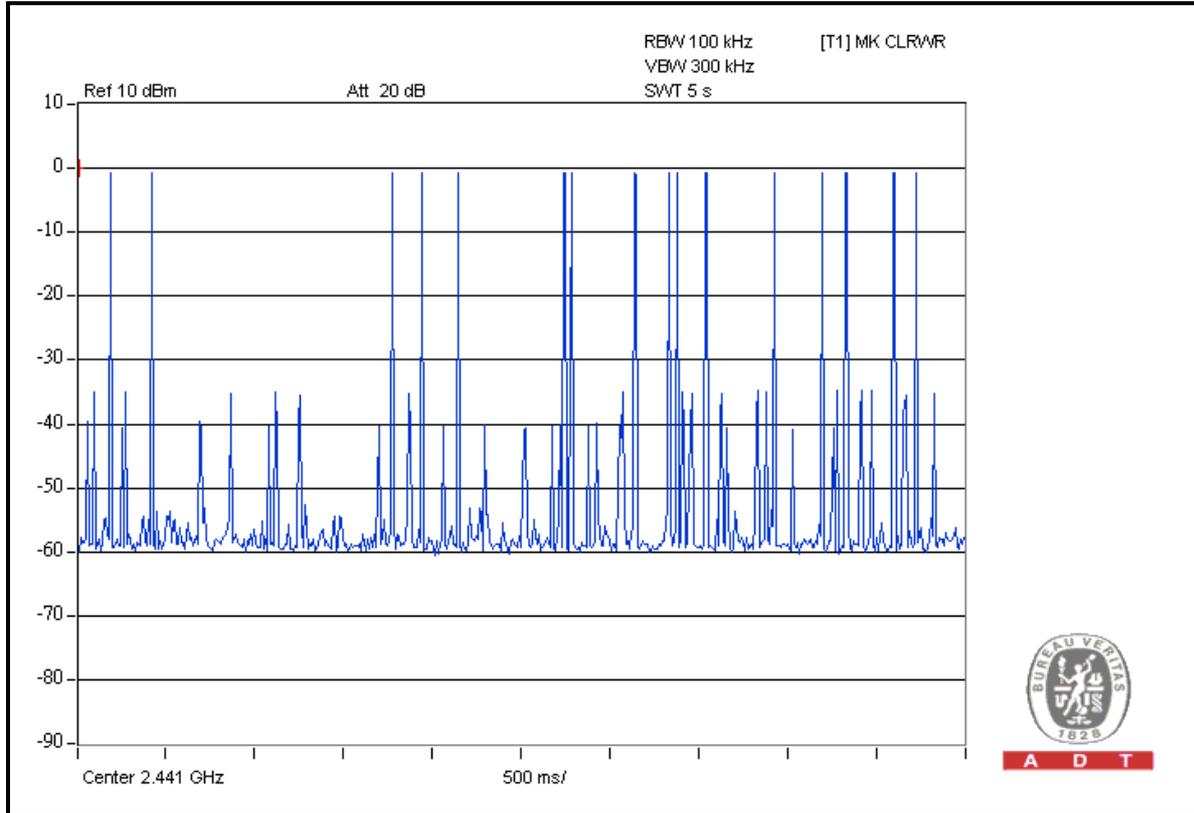

Mode A: FOR 8DPSK



| Mode | Number of transmission in a 31.6 (79Hopping*0.4) | Length of transmission time (msec) | Result (msec) | Limit (msec) |
|------|--|------------------------------------|---------------|--------------|
| DH1 | 50 (times / 5 sec) *6.32=316.00 times | 0.492 | 155.4720 | 400 |
| DH3 | 26 (times / 5 sec) *6.32=164.32 times | 1.590 | 261.2688 | 400 |
| DH5 | 18 (times / 5 sec) *6.32=113.76 times | 3.060 | 348.1056 | 400 |

NOTE: Test plots of the transmitting time slot are shown on next 3 pages.



A D T



DH1

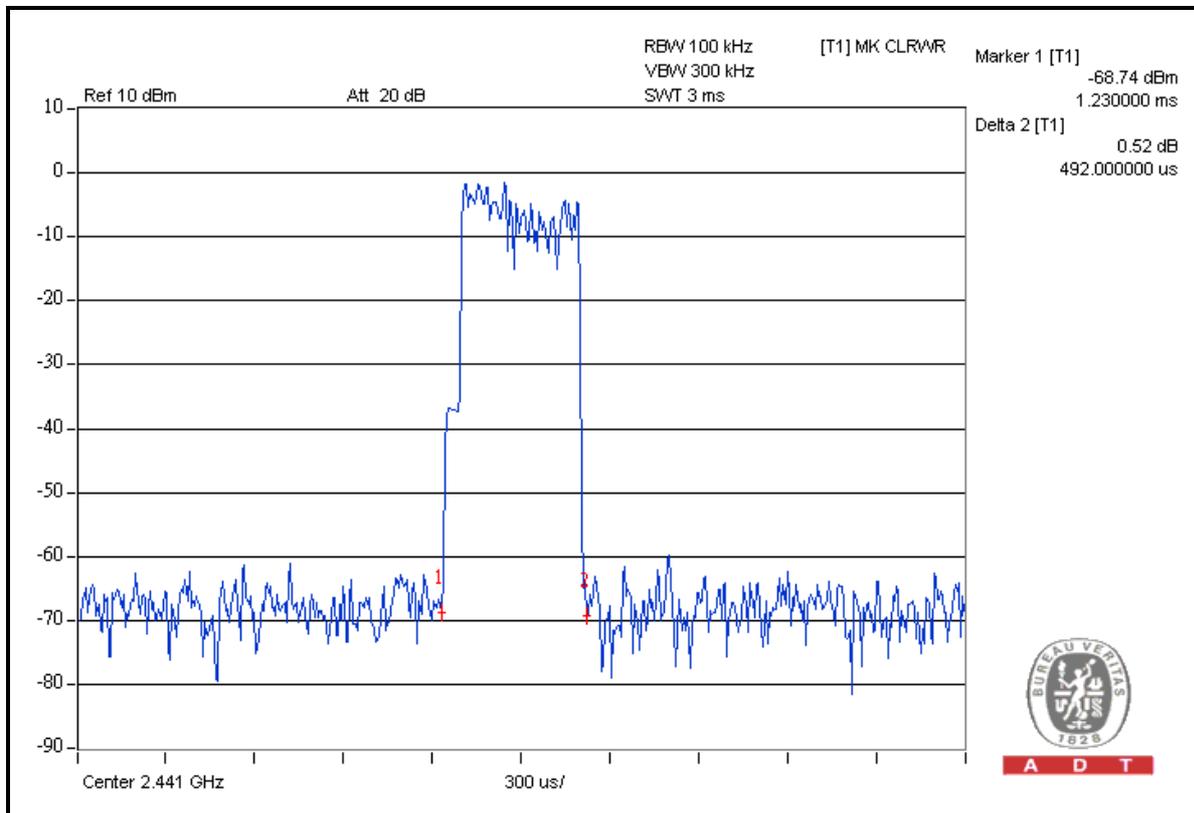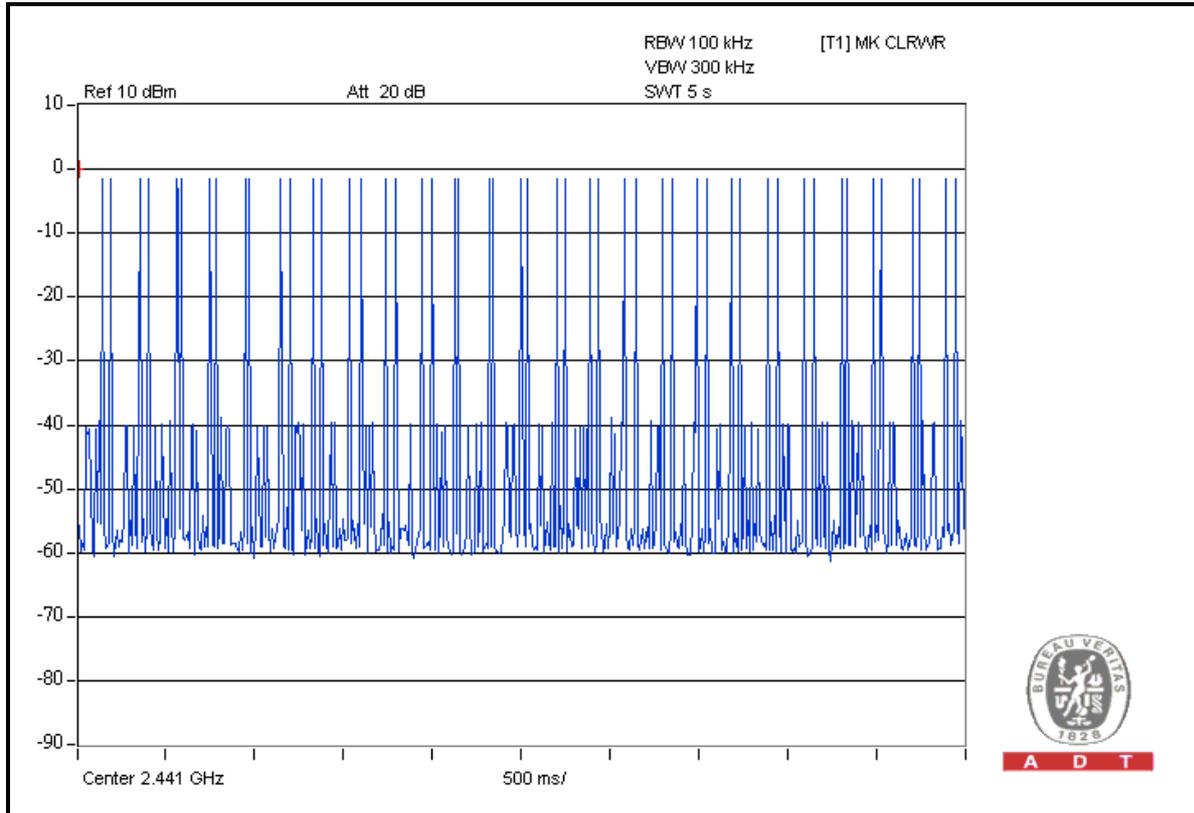



A D T



DH3

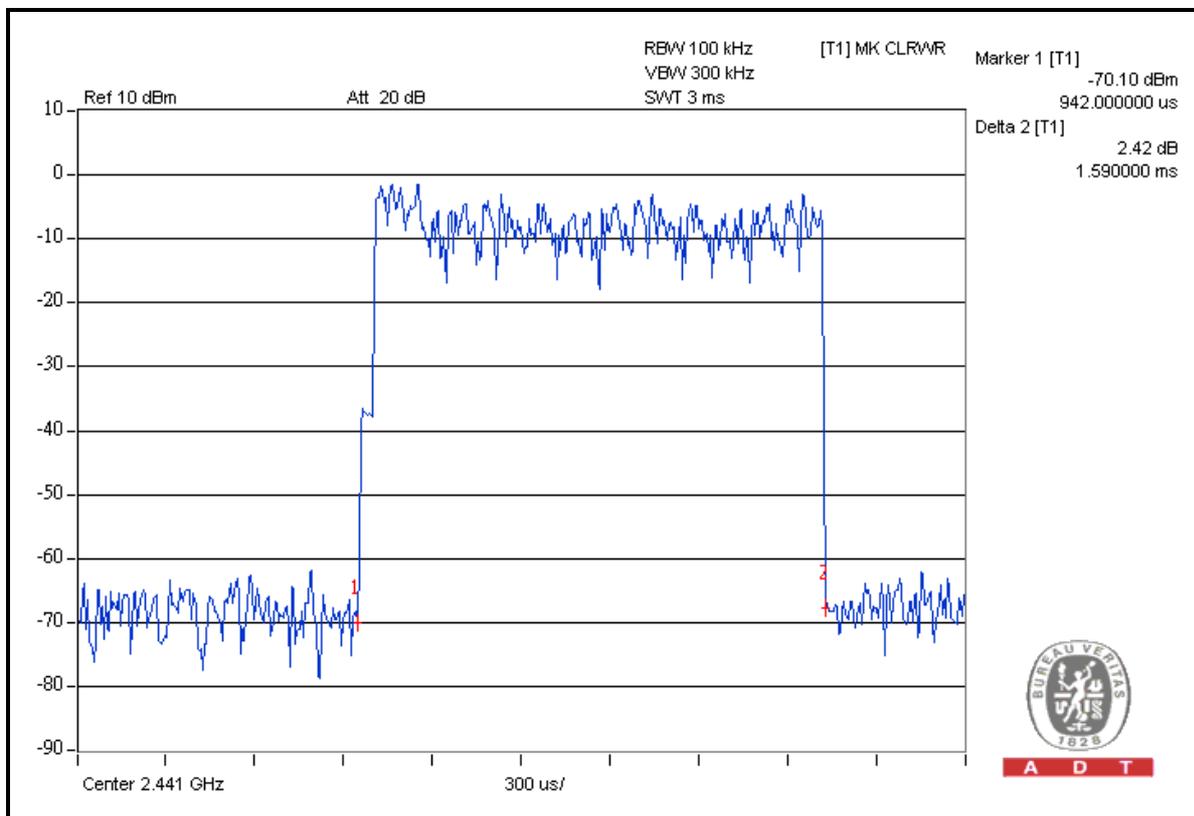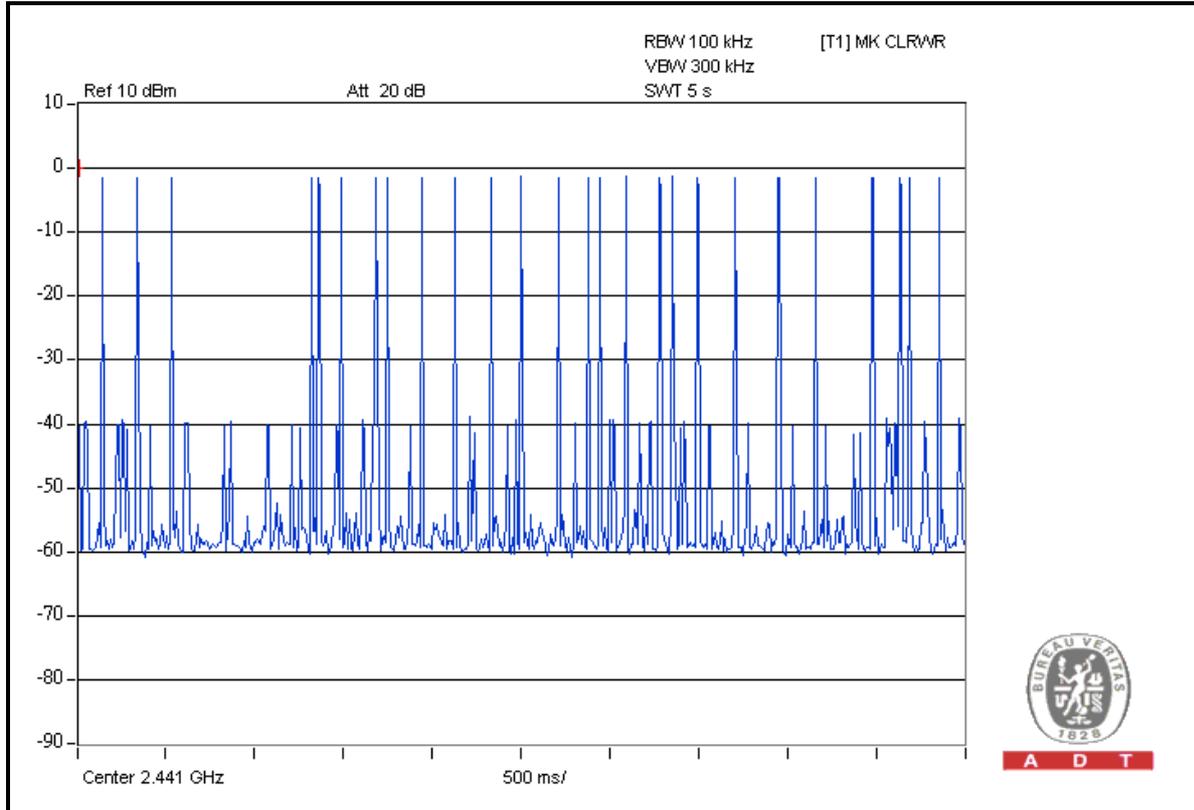



A D T

DH5

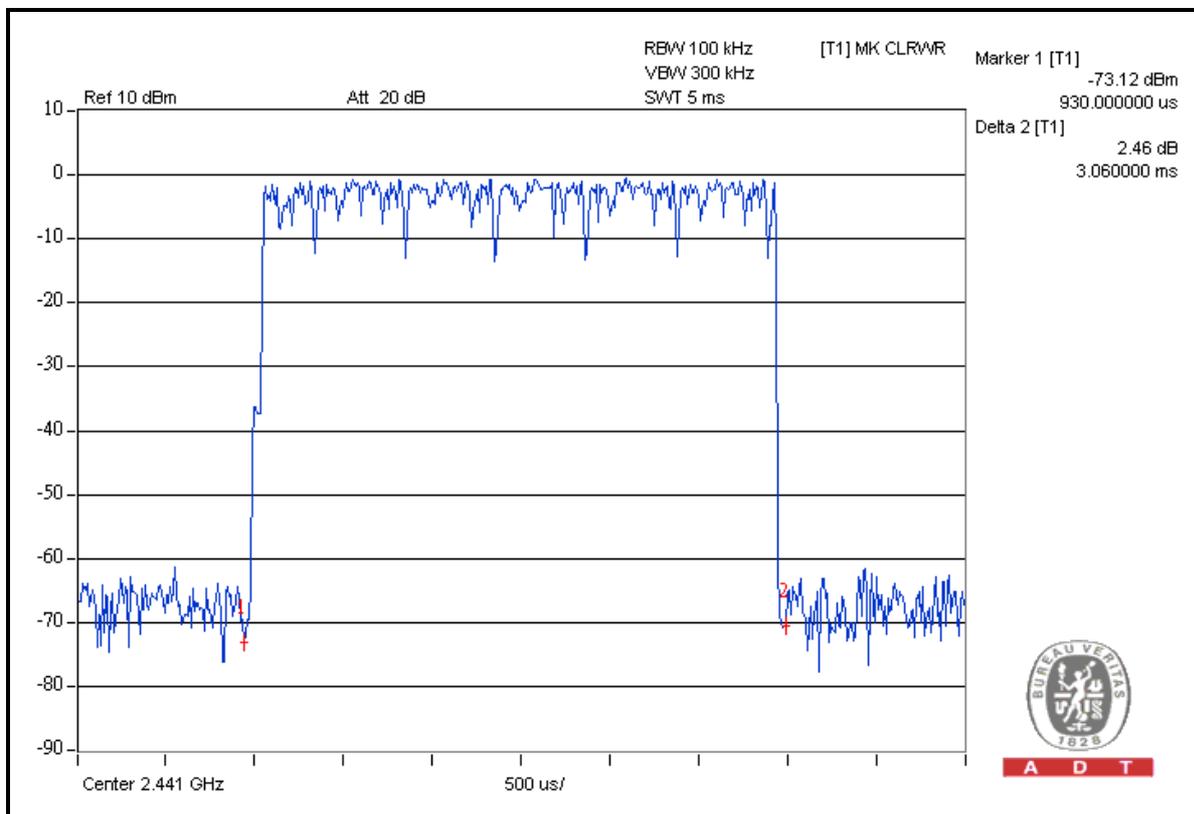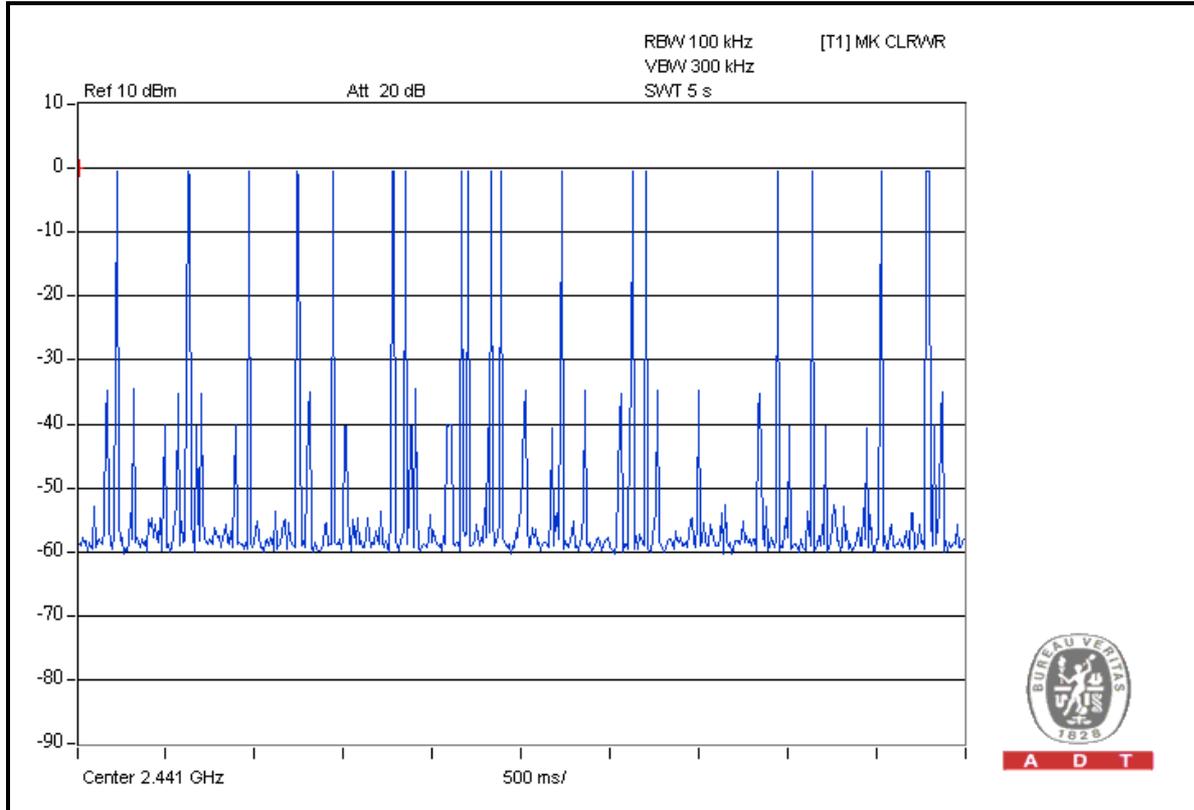

4.5 CHANNEL BANDWIDTH

4.5.1 LIMITS OF CHANNEL BANDWIDTH

For frequency hopping system operating in the 2400-2483.5MHz, If the 20dB bandwidth of hopping channel is greater than 25kHz, two-thirds 20dB bandwidth of hopping channel shall be a minimum limit for the hopping channel separation.

4.5.2 TEST INSTRUMENTS

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | CALIBRATED DATE | CALIBRATED UNTIL |
|----------------------------|-----------|------------|-----------------|------------------|
| SPECTRUM ANALYZER | FSP 40 | 100036 | Apr. 27, 2010 | Apr. 26, 2011 |

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.5.3 TEST PROCEDURE

- a. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- c. Measure the frequency difference of two frequencies that were attenuated 20dB from the reference level. Record the frequency difference as the emission bandwidth.
- d. Repeat above procedures until all frequencies measured were complete.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation.

4.5.5 TEST SETUP

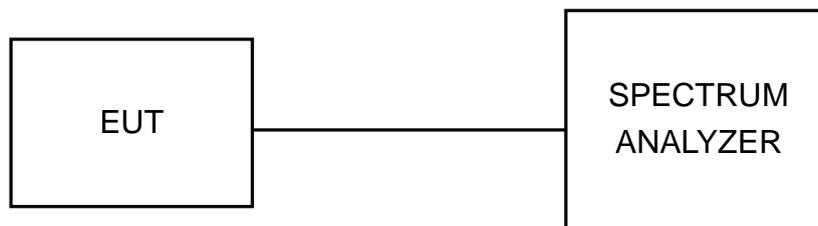

4.5.6 EUT OPERATING CONDITION

The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.




A D T

4.5.7 TEST RESULTS

Mode A: FOR GFSK

| CHANNEL | CHANNEL FREQUENCY (MHz) | 20dB BANDWIDTH (MHz) |
|---------|-------------------------|----------------------|
| 0 | 2402 | 0.96 |
| 39 | 2441 | 0.96 |
| 78 | 2480 | 0.96 |

CH 0

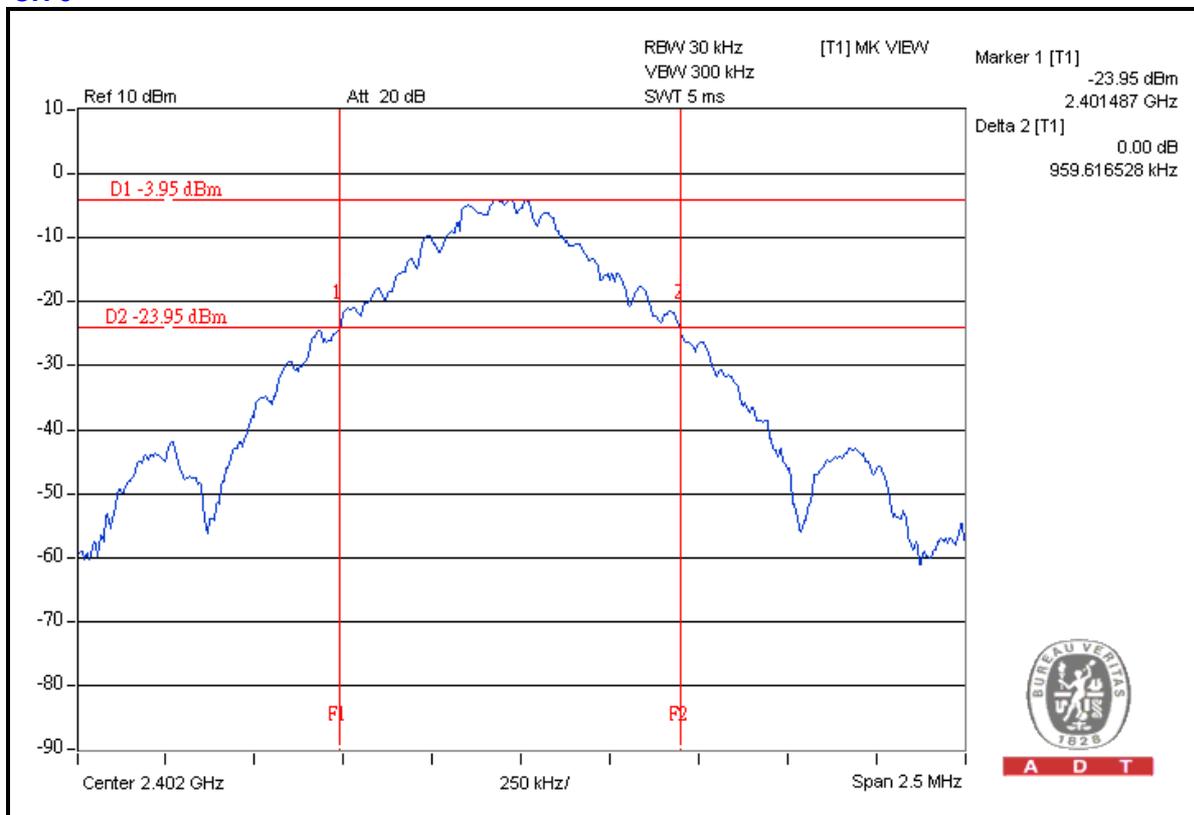

4.6 HOPPING CHANNEL SEPARATION

4.6.1 LIMIT OF HOPPING CHANNEL SEPARATION

At least 25kHz or two-third of 20dB hopping channel bandwidth (whichever is greater).

4.6.2 TEST INSTRUMENTS

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | CALIBRATED DATE | CALIBRATED UNTIL |
|----------------------------|-----------|------------|-----------------|------------------|
| SPECTRUM ANALYZER | FSP 40 | 100036 | Apr. 27, 2010 | Apr. 26, 2011 |

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.6.3 TEST PROCEDURES

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range.
3. By using the MaxHold function record the separation of two adjacent channels.
4. Measure the frequency difference of these two adjacent channels by SA MARK function. And then plot the result on SA screen.
5. Repeat above procedures until all frequencies measured were complete.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation.

4.6.5 TEST SETUP

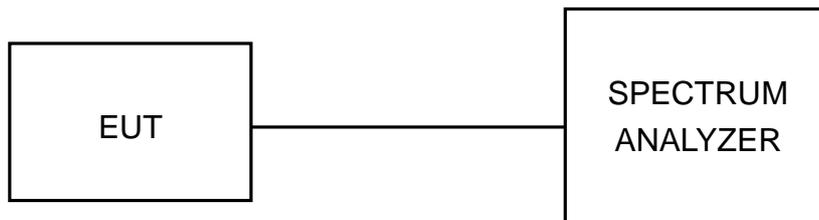




A D T

Mode A: FOR 8DPSK

| CHANNEL | FREQUENCY (MHz) | ADJACENT CHANNEL SEPARATION (MHz) | 20dB BANDWIDTH (MHz) | MINIMUM LIMIT (MHz) | PASS / FAIL |
|---------|-----------------|-----------------------------------|----------------------|---------------------|-------------|
| 0 | 2402 | 1.00 | 1.35 | 0.90 | PASS |
| 39 | 2441 | 1.01 | 1.35 | 0.90 | PASS |
| 78 | 2480 | 1.01 | 1.35 | 0.90 | PASS |

NOTE: The minimum limit is two-third 20dB bandwidth. Test results please refer to following three plots.

CH 78

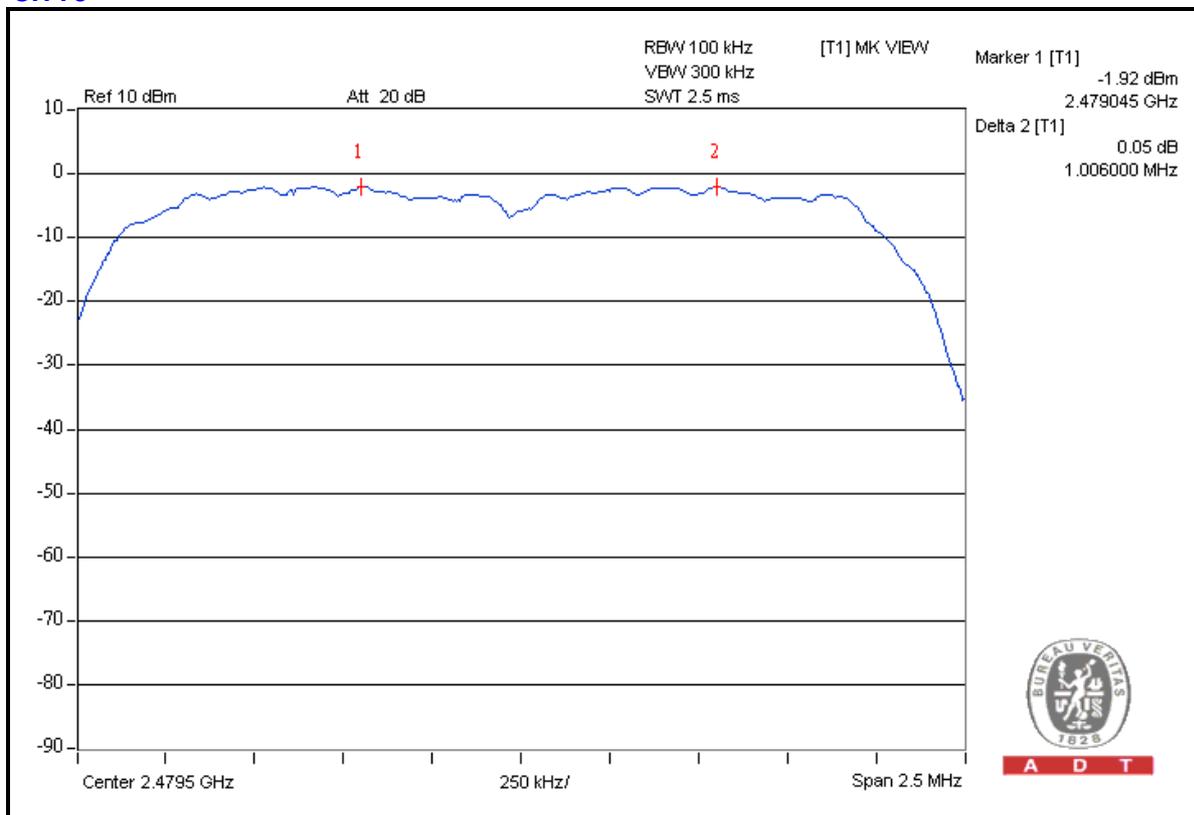

A D T

4.7 MAXIMUM PEAK OUTPUT POWER

4.7.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 125mW.

4.7.2 TEST INSTRUMENTS

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | CALIBRATED DATE | CALIBRATED UNTIL |
|----------------------------|-----------|------------|-----------------|------------------|
| SPECTRUM ANALYZER | FSP 40 | 100036 | Apr. 27, 2010 | Apr. 26, 2011 |

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.7.3 TEST PROCEDURES

- a. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- c. The center frequency of the spectrum analyzer is set to the fundamental frequency and using 3MHz RBW and 10 MHz VBW.
- d. Measure the captured power within the band and recording the plot.
- e. Repeat above procedures until all frequencies required were complete.


4.7.4 DEVIATION FROM TEST STANDARD

No deviation



A D T

4.7.5 TEST SETUP

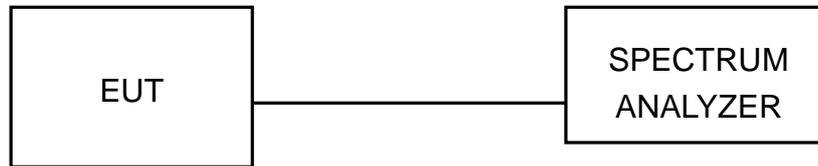

For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

4.7.6 EUT OPERATING CONDITION

The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.




A D T

4.7.7 TEST RESULTS

Mode A: FOR GFSK

| CHANNEL | CHANNEL FREQUENCY (MHz) | PEAK POWER OUTPUT (dBm) | PEAK POWER OUTPUT (mW) | PEAK POWER LIMIT (mW) | PASS/FAIL |
|---------|-------------------------|-------------------------|------------------------|-----------------------|-----------|
| 0 | 2402 | -1.1 | 0.8 | 125 | PASS |
| 39 | 2441 | 0.0 | 1.0 | 125 | PASS |
| 78 | 2480 | -0.2 | 1.0 | 125 | PASS |

CH 39

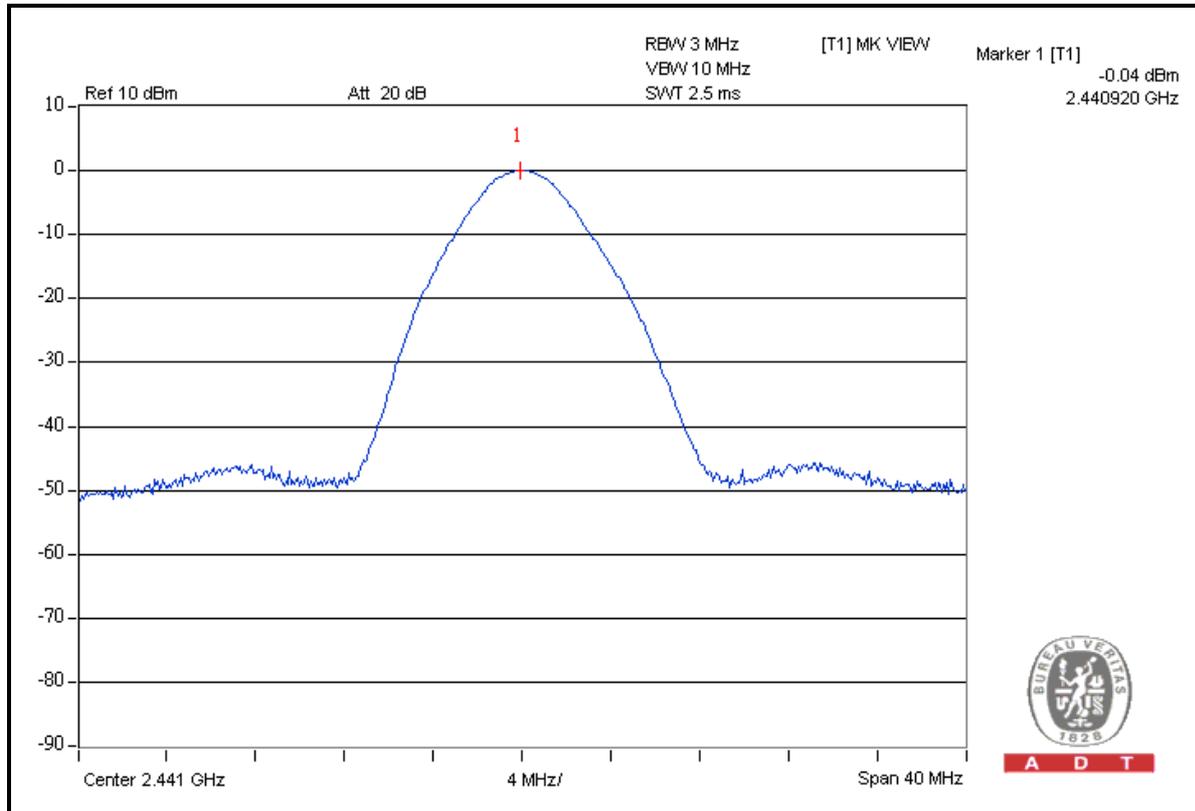




A D T

Mode A: FOR 8DPSK

| CHANNEL | CHANNEL FREQUENCY (MHz) | PEAK POWER OUTPUT (dBm) | PEAK POWER OUTPUT (mW) | PEAK POWER LIMIT (mW) | PASS/FAIL |
|---------|-------------------------|-------------------------|------------------------|-----------------------|-----------|
| 0 | 2402 | 1.8 | 1.5 | 125 | PASS |
| 39 | 2441 | 2.9 | 1.9 | 125 | PASS |
| 78 | 2480 | 2.7 | 1.9 | 125 | PASS |

CH 39

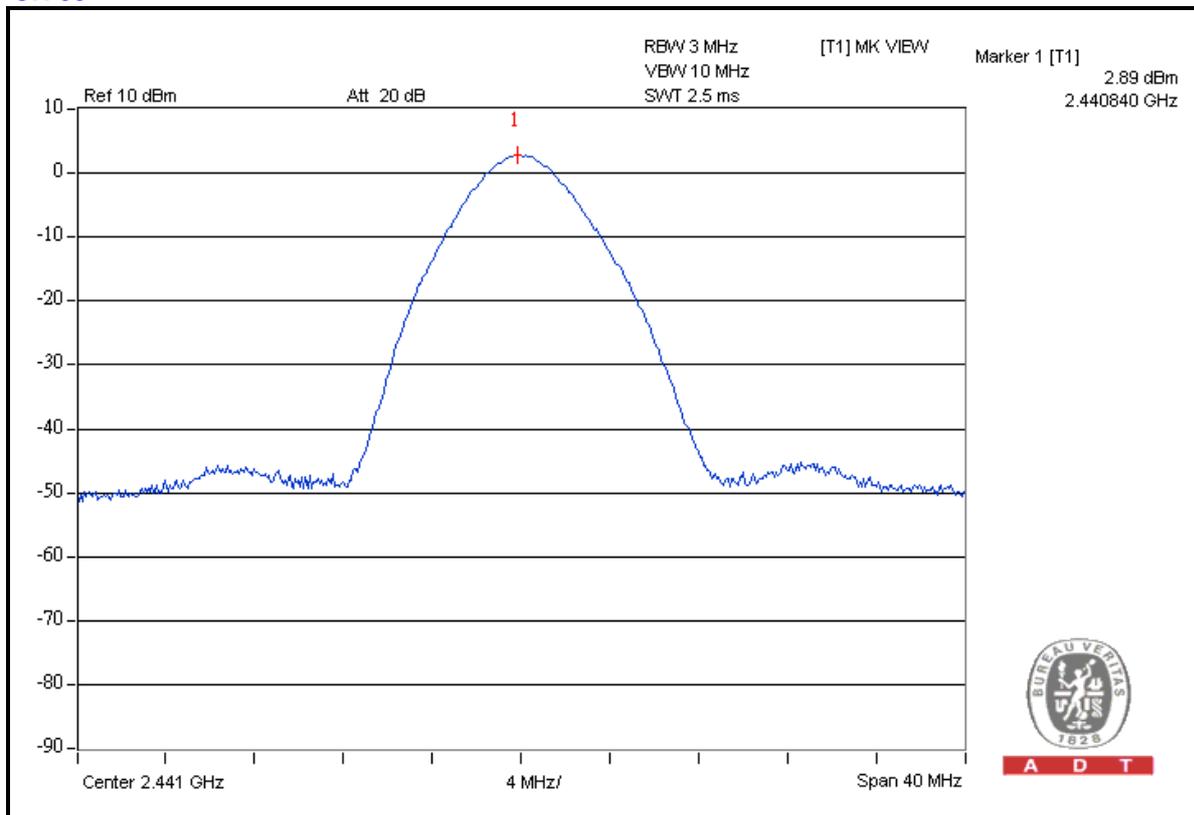



4.8 BAND EDGES MEASUREMENT

4.8.1 LIMITS OF BAND EDGES MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100KHz RBW).

4.8.2 TEST INSTRUMENTS

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | CALIBRATED DATE | CALIBRATED UNTIL |
|----------------------------|-----------|------------|-----------------|------------------|
| SPECTRUM ANALYZER | FSP 40 | 100036 | Apr. 27, 2010 | Apr. 26, 2011 |

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.8.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 100 kHz and 300 kHz with suitable frequency span including 100 MHz bandwidth from band edge. The band edges was measured and recorded.

The spectrum plots are attached on the following pages.

4.8.4 DEVIATION FROM TEST STANDARD

No deviation.

4.8.5 EUT OPERATING CONDITION

The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.

4.8.6 TEST RESULTS

The spectrum plots are attached on the following 8 images. D1 line indicates the highest level, D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(d).

Mode A: FOR GFSK

RESTRICT BAND (2310 ~ 2390 MHz)

| FREQUENCY (MHz) | FUNDAMENTAL EMISSION (dBuV/m) | DELTA (dB) | MAXIMUM FIELD STRENGTH IN RESTRICT BAND (dBuV/m) | LIMIT (dBuV/m) |
|-----------------|-------------------------------|------------|--|----------------|
| 2402.00 (PK) | 92.6 | 53.1 | 39.5 | 74.00 |
| 2402.00 (AV) | - | - | 9.4 | 54.00 |

RESTRICT BAND (2483.5 ~ 2500 MHz)



| FREQUENCY (MHz) | FUNDAMENTAL EMISSION (dBuV/m) | DELTA (dB) | MAXIMUM FIELD STRENGTH IN RESTRICT BAND (dBuV/m) | LIMIT (dBuV/m) |
|-----------------|-------------------------------|------------|--|----------------|
| 2480.00 (PK) | 95.1 | 52.7 | 42.4 | 74.00 |
| 2480.00 (AV) | - | - | 12.3 | 54.00 |

NOTE:

1. Delta = Amplitude between the peak of the fundamental and the peak of the band edge emission. Please check following 2 pages.
2. Maximum field strength in restrict band (PK value) = Fundamental emission (PK value) – Delta.
3. Average value = Peak value + 20 Log (duty cycle) = Peak value –30.1dB.
4. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25 ms per channel. Therefore, the duty cycle be equal to: $20\log(3.125/100) = -30.1$ dB.




A D T

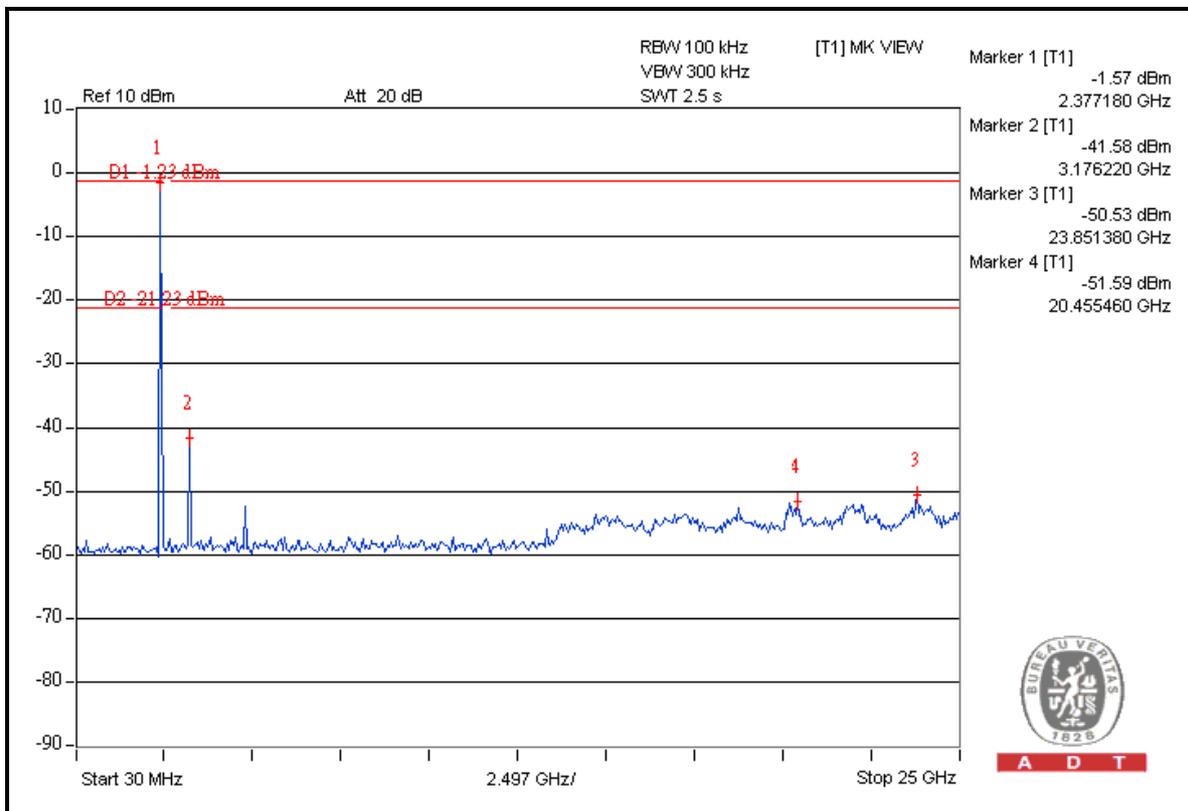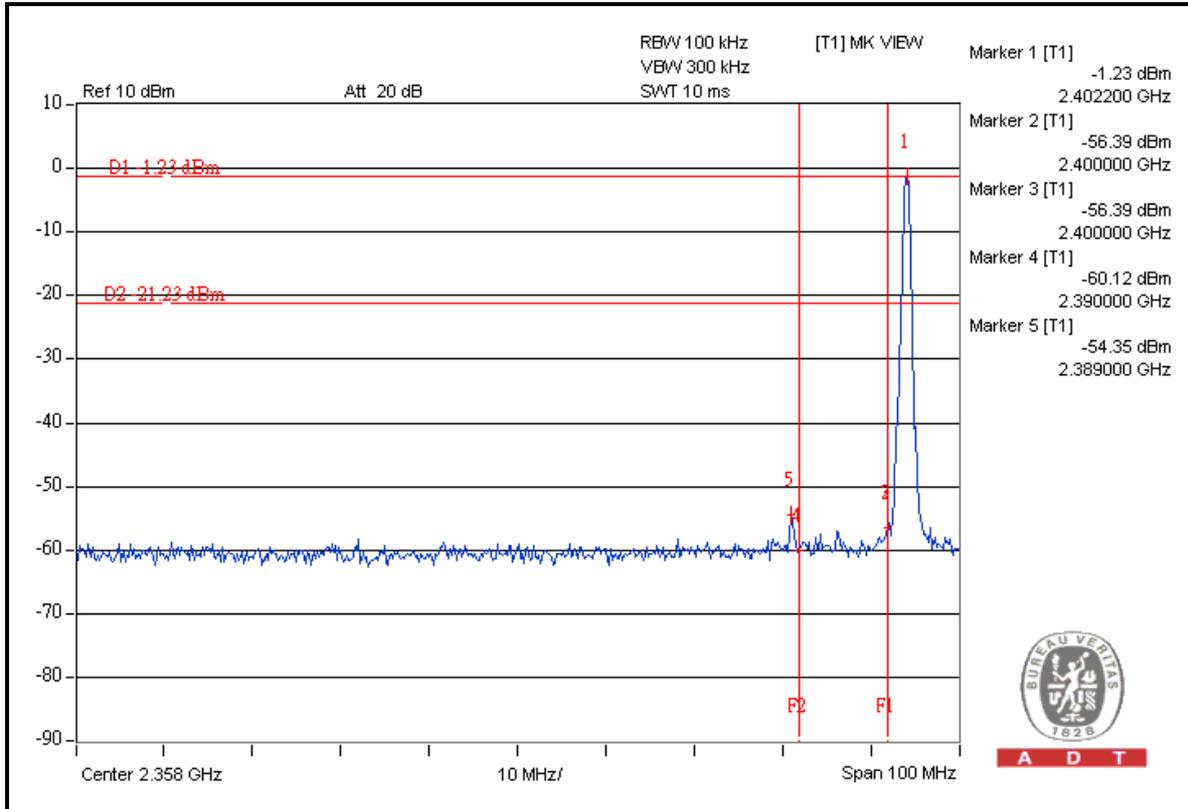




A D T

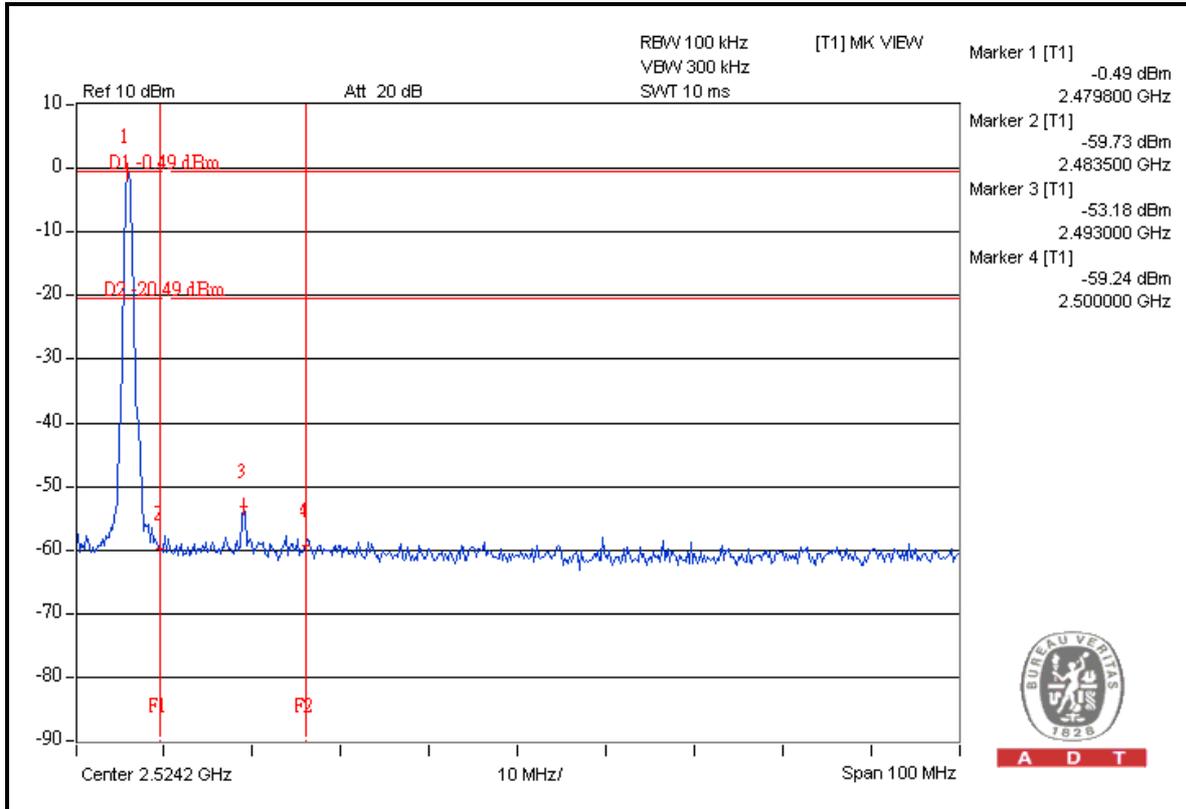

A D T

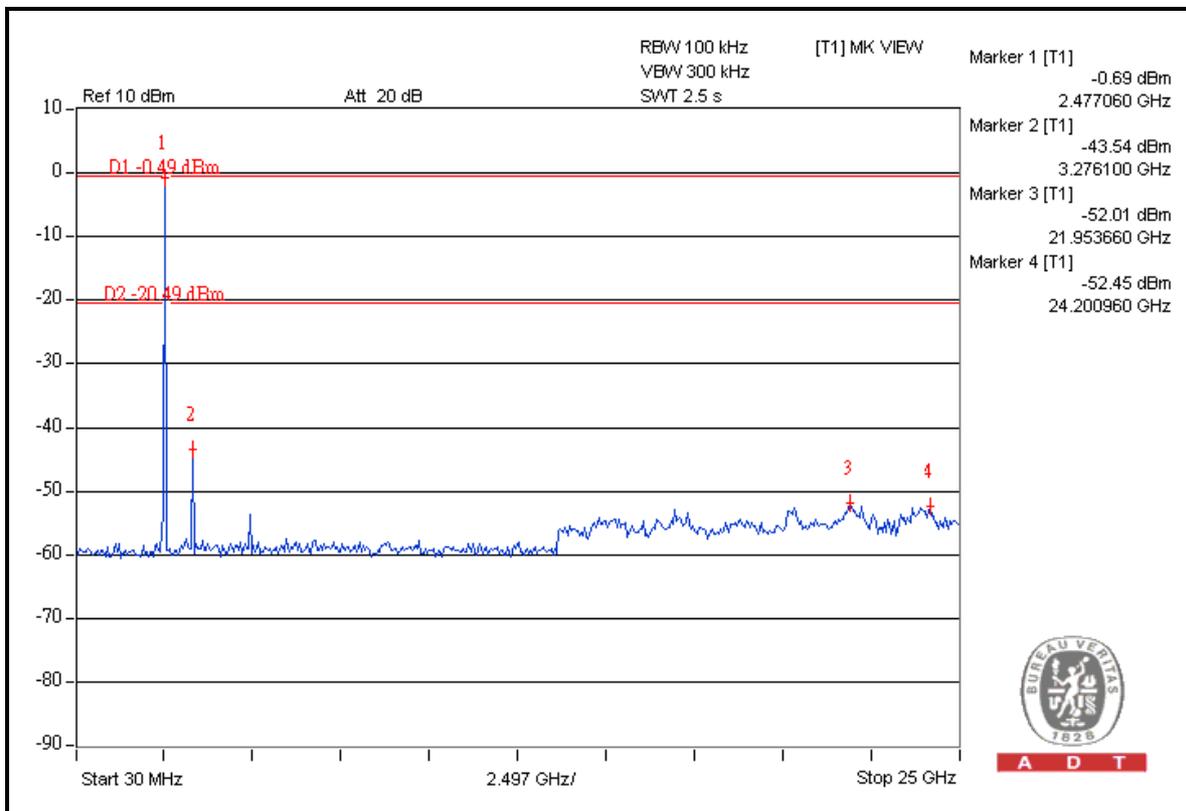

A D T

Mode A: FOR 8DPSK
RESTRICT BAND (2310 ~ 2390 MHz)

| FREQUENCY (MHz) | FUNDAMENTAL EMISSION (dBuV/m) | DELTA (dB) | MAXIMUM FIELD STRENGTH IN RESTRICT BAND (dBuV/m) | LIMIT (dBuV/m) |
|-----------------|-------------------------------|------------|--|----------------|
| 2402.00 (PK) | 96.0 | 52.3 | 43.7 | 74.00 |
| 2402.00 (AV) | - | - | 13.6 | 54.00 |

RESTRICT BAND (2483.5 ~ 2500 MHz)



| FREQUENCY (MHz) | FUNDAMENTAL EMISSION (dBuV/m) | DELTA (dB) | MAXIMUM FIELD STRENGTH IN RESTRICT BAND (dBuV/m) | LIMIT (dBuV/m) |
|-----------------|-------------------------------|------------|--|----------------|
| 2480.00 (PK) | 97.1 | 53.2 | 43.9 | 74.00 |
| 2480.00 (AV) | - | - | 13.8 | 54.00 |

NOTE:

1. Delta = Amplitude between the peak of the fundamental and the peak of the band edge emission. Please check following 2 pages.
2. Maximum field strength in restrict band (PK value) = Fundamental emission (PK value) – Delta.
3. Average value = Peak value + 20 Log (duty cycle) = Peak value –30.1dB.
4. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25 ms per channel. Therefore, the duty cycle be equal to: $20\log(3.125/100) = -30.1$ dB.



A D T

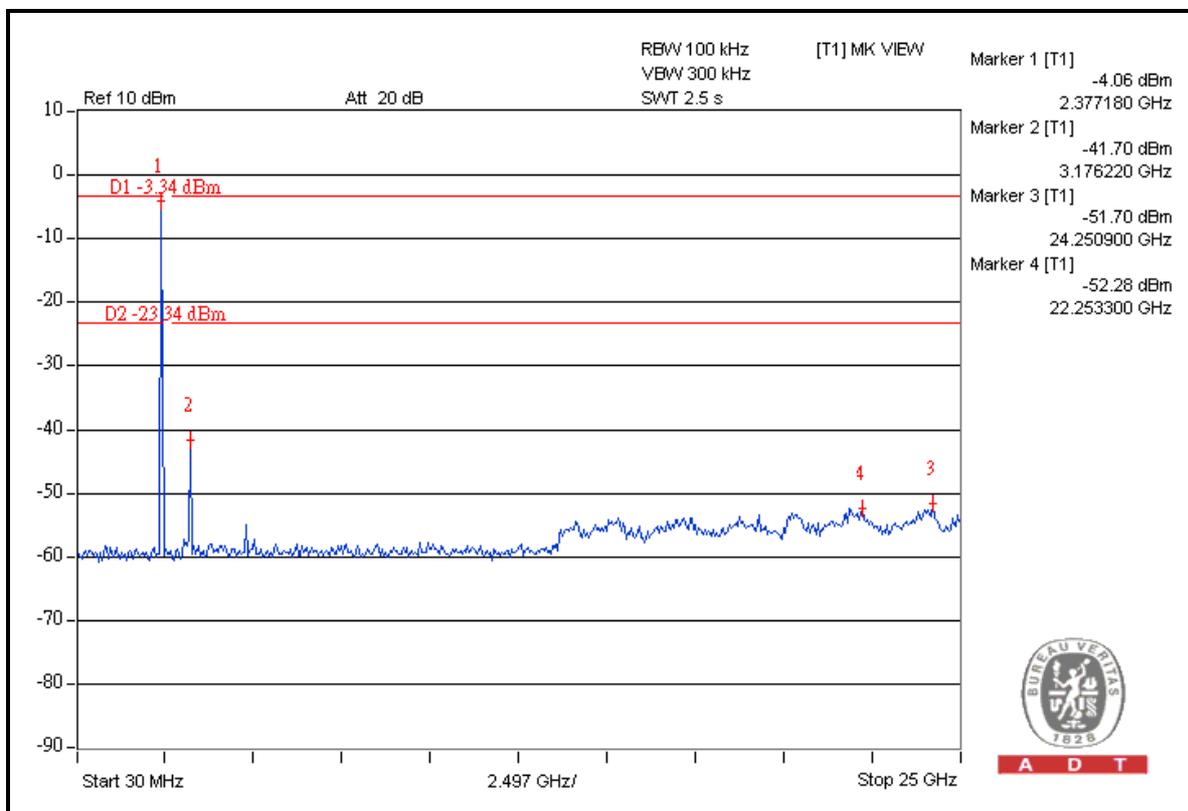
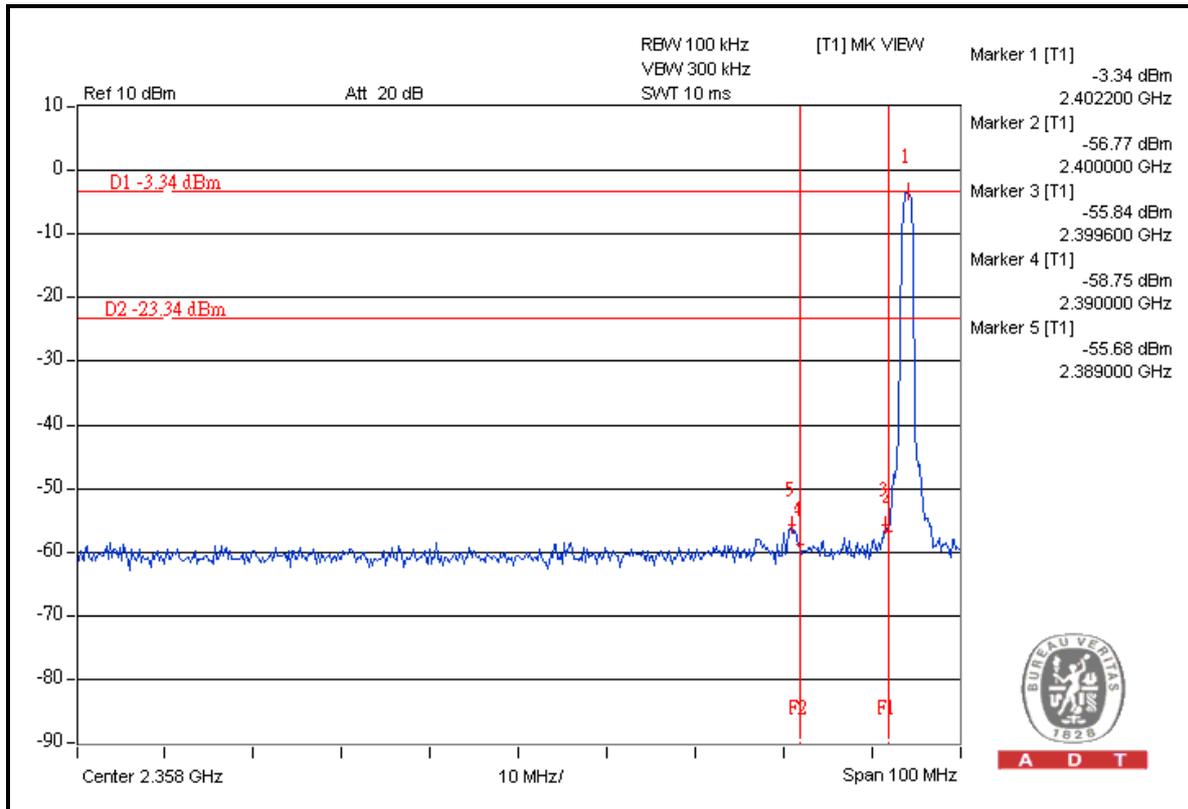




A D T



A D T

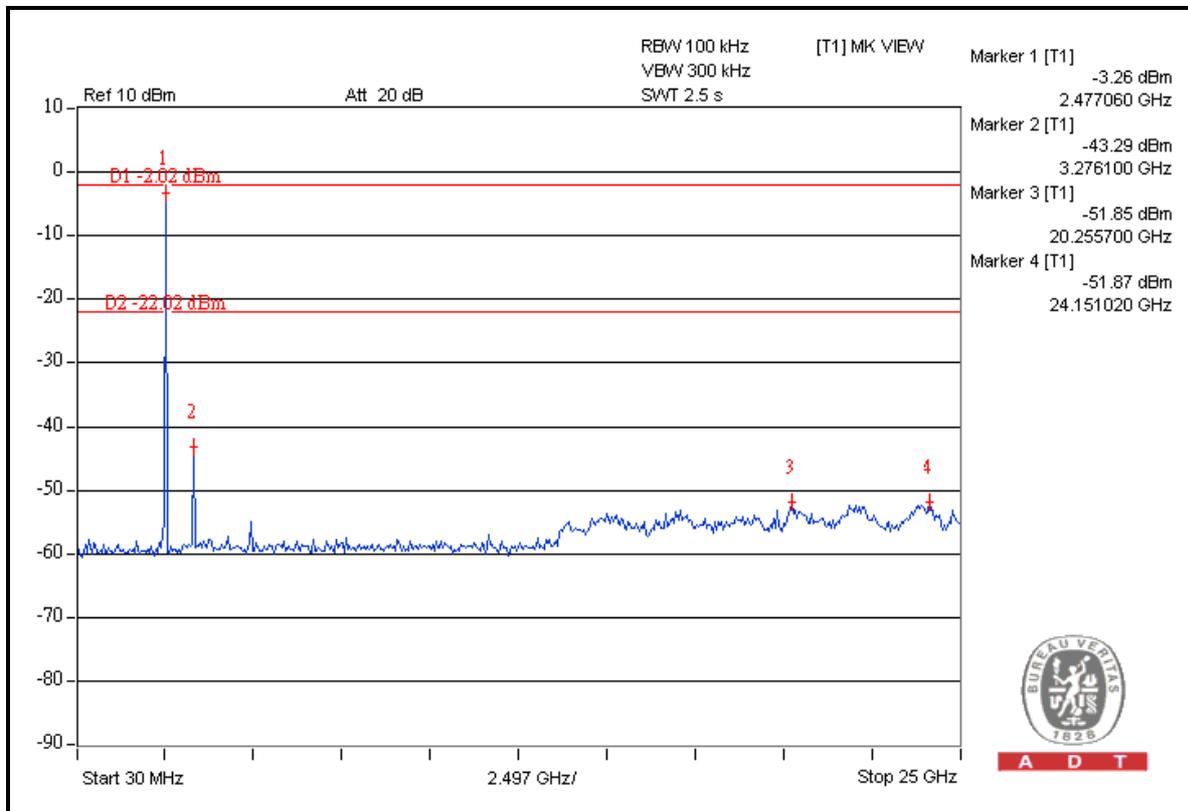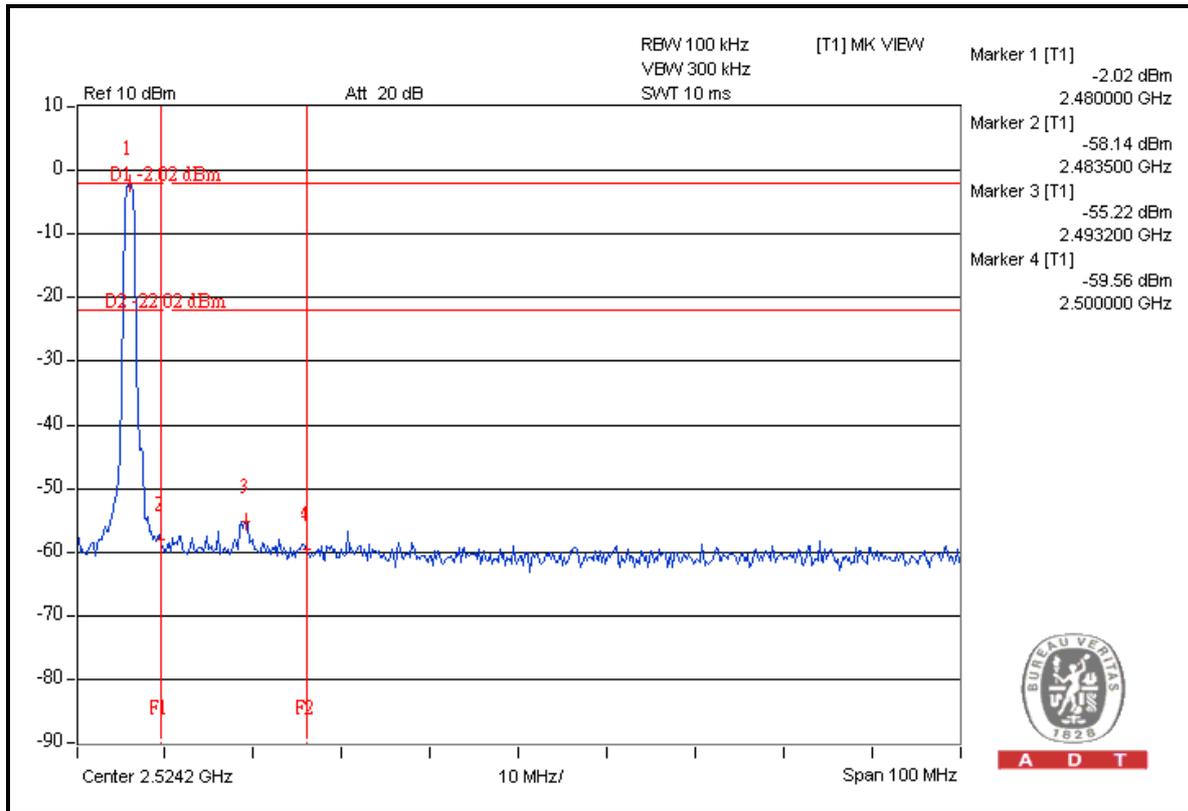



A D T

5. PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



6. INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site: www.adt.com.tw/index.5/phtml.
If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3185050

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.

7. APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

---END---