



# FCC TEST REPORT (For BLUETOOTH)

**REPORT NO.:** RF991207D25C-2

**MODEL NO.:** PCG-4121AL, PCG-4121BL

**FCC ID:** AK8PCG4121AL

**RECEIVED:** Dec. 12, 2010

**TESTED:** Dec. 13 ~ 22, 2010

**ISSUED:** Dec. 24, 2010

**APPLICANT:** SONY Corporation

**ADDRESS:** 1-7-1 Konan Minato-ku Tokyo, 108-0075 Japan

**ISSUED BY:** Bureau Veritas Consumer Products Services (H.K.)  
Ltd., Taoyuan Branch

**LAB LOCATION:** No. 47, 14th Ling, Chia Pau Tsuen, Lin Kou Hsiang,  
Taipei Hsien, 244 Taiwan

This test report consists of 68 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by TAF or any government agencies. The test results in the report only apply to the tested sample.





# TABLE OF CONTENTS

- RELEASE CONTROL RECORD..... 4
- 1. CERTIFICATION ..... 5
- 2. SUMMARY OF TEST RESULTS..... 6
  - 2.1 MEASUREMENT UNCERTAINTY ..... 7
- 3. GENERAL INFORMATION ..... 8
  - 3.1 GENERAL DESCRIPTION OF EUT..... 8
  - 3.2 DESCRIPTION OF TEST MODES..... 10
    - 3.2.1 CONFIGURATION OF SYSTEM UNDER TEST ..... 11
    - 3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL ..... 12
    - 3.2.3 GENERAL DESCRIPTION OF APPLIED STANDARDS ..... 14
    - 3.2.4 DESCRIPTION OF SUPPORT UNITS..... 14
- 4. TEST TYPES AND RESULTS ..... 15
  - 4.1 CONDUCTED EMISSION MEASUREMENT ..... 15
    - 4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT..... 15
    - 4.1.2 TEST INSTRUMENTS ..... 16
    - 4.1.3 TEST PROCEDURES..... 16
    - 4.1.4 DEVIATION FROM TEST STANDARD ..... 17
    - 4.1.5 TEST SETUP ..... 17
    - 4.1.6 EUT OPERATING CONDITIONS..... 17
    - 4.1.7 TEST RESULTS..... 18
  - 4.2 RADIATED EMISSION MEASUREMENT ..... 20
    - 4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT..... 20
    - 4.2.2 TEST INSTRUMENTS ..... 21
    - 4.2.3 TEST PROCEDURES..... 22
    - 4.2.4 DEVIATION FROM TEST STANDARD ..... 22
    - 4.2.5 TEST SETUP ..... 23
    - 4.2.6 EUT OPERATING CONDITIONS..... 23
    - 4.2.7 TEST RESULTS..... 24
  - 4.3 NUMBER OF HOPPING FREQUENCY USED ..... 34
    - 4.3.1 LIMIT OF HOPPING FREQUENCY USED ..... 34
    - 4.3.2 TEST INSTRUMENTS ..... 34
    - 4.3.3 TEST PROCEDURES..... 34
    - 4.3.4 DEVIATION FROM TEST STANDARD ..... 35
    - 4.3.5 TEST SETUP ..... 35
    - 4.3.6 TEST RESULTS..... 35
  - 4.4 DWELL TIME ON EACH CHANNEL ..... 38
    - 4.4.1 LIMIT OF DWELL TIME USED..... 38
    - 4.4.2 TEST INSTRUMENTS ..... 38
    - 4.4.3 TEST PROCEDURES..... 38
    - 4.4.4 DEVIATION FROM TEST STANDARD ..... 38
    - 4.4.5 TEST SETUP ..... 39
    - 4.4.6 TEST RESULTS..... 39
  - 4.5 CHANNEL BANDWIDTH..... 47



4.5.1	LIMITS OF CHANNEL BANDWIDTH .....	47
4.5.2	TEST INSTRUMENTS .....	47
4.5.3	TEST PROCEDURE .....	47
4.5.4	DEVIATION FROM TEST STANDARD .....	48
4.5.5	TEST SETUP .....	48
4.5.6	EUT OPERATING CONDITION .....	48
4.5.7	TEST RESULTS .....	49
4.6	HOPPING CHANNEL SEPARATION .....	51
4.6.1	LIMIT OF HOPPING CHANNEL SEPARATION .....	51
4.6.2	TEST INSTRUMENTS .....	51
4.6.3	TEST PROCEDURES .....	51
4.6.4	DEVIATION FROM TEST STANDARD .....	52
4.6.5	TEST SETUP .....	52
4.6.6	TEST RESULTS .....	53
4.7	MAXIMUM PEAK OUTPUT POWER .....	55
4.7.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT .....	55
4.7.2	TEST INSTRUMENTS .....	55
4.7.3	TEST PROCEDURES .....	55
4.7.4	DEVIATION FROM TEST STANDARD .....	55
4.7.5	TEST SETUP .....	56
4.7.6	EUT OPERATING CONDITION .....	56
4.7.7	TEST RESULTS .....	57
4.8	BAND EDGES MEASUREMENT .....	59
4.8.1	LIMITS OF BAND EDGES MEASUREMENT .....	59
4.8.2	TEST INSTRUMENTS .....	59
4.8.3	TEST PROCEDURE .....	59
4.8.4	DEVIATION FROM TEST STANDARD .....	59
4.8.5	EUT OPERATING CONDITION .....	59
4.8.6	TEST RESULTS .....	60
5.	PHOTOGRAPHS OF THE TEST CONFIGURATION .....	66
6.	INFORMATION ON THE TESTING LABORATORIES .....	67
7.	APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB .....	68



A D T

## RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
Original release	N/A	Dec. 24, 2010



A D T

## 1. CERTIFICATION

**PRODUCT:** Personal Computer  
**BRAND NAME:** SONY  
**MODEL NO.:** PCG-4121AL, PCG-4121BL  
**APPLICANT:** SONY Corporation  
**TESTED:** Dec. 13 ~ 22, 2010  
**TEST SAMPLE:** ENGINEERING SAMPLE  
**STANDARDS:** FCC Part 15, Subpart C (Section 15.247),  
ANSI C63.4-2003  
ANSI C63.10-2009

The above equipment (Model: PCG-4121AL) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

**PREPARED BY :** Annie Chang , **DATE:** Dec. 24, 2010  
(Annie Chang / Senior Specialist)

**APPROVED BY :** Ken Liu , **DATE:** Dec. 24, 2010  
(Ken Liu / Manager)

## 2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart C			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
15.207	AC Power Conducted Emission	PASS	Meets Class B Limit Minimum passing margin is -17.43dB at 0.220MHz
15.247(a)(1)(iii)	Number of Hopping Frequency Used Spec.: At least 15 channels	PASS	Meet the requirement of limit.
15.247(a)(1)(iii)	Dwell Time on Each Channel Spec.: Max. 0.4 second within 31.6 second	PASS	Meet the requirement of limit.
15.247(a)(1)	1. Hopping Channel Separation Spec. : Min. 25 kHz or 20 dB bandwidth, whichever is greater (see Note) 2. Spectrum Bandwidth of a Frequency Hopping Sequence Spread Spectrum System	PASS	Meet the requirement of limit.
15.247(b)	Maximum Peak Output Power Spec.: max. 21dBm (see Note)	PASS	Meet the requirement of limit.
15.247(d)	Transmitter Radiated Emissions Spec.: Table 15.209	PASS	Meet the requirement of limit. Minimum passing margin is -2.7dB at 3306.00MHz.
15.247(d)	Band Edge Measurement	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	Antenna connector is Hirose U.FL not a standard connector

**NOTE:** If The Frequency Hopping System operating in 2400-2483.5MHz band and the output power less than 125mW. The hopping channel carrier frequencies separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of hopping channel whichever is greater.

## 2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	150kHz ~ 30MHz	2.41 dB
Radiated emissions	30MHz ~ 1GHz	3.67 dB
	Above 1GHz	2.89 dB

### 3. GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

<b>PRODUCT</b>	Personal Computer
<b>MODEL NO.</b>	PCG-4121AL, PCG-4121BL
<b>FCC ID</b>	AK8PCG4121AL
<b>NOMINAL VOLTAGE</b>	19.5Vdc from AC adapter or 11.1Vdc from battery
<b>MODULATION TYPE</b>	GFSK, $\pi/4$ -DQPSK, 8DPSK
<b>MODULATION TECHNOLOGY</b>	FHSS
<b>TRANSFER RATE</b>	1/2/3Mbps
<b>OPERATING FREQUENCY</b>	2402 ~ 2480MHz
<b>NUMBER OF CHANNEL</b>	79
<b>OUTPUT POWER</b>	1.9mW
<b>ANTENNA TYPE</b>	Refer to note below
<b>ANTENNA CONNECTOR</b>	Refer to note below
<b>DATA CABLE</b>	NA
<b>I/O PORTS</b>	NA
<b>ASSOCIATED DEVICES</b>	Refer to note below

**Note:**

- The EUT is a Personal Computer, the functions of EUT listed as below:

Function	Test Standard	Reference Report
<b>WLAN IEEE802.11bgn Mini-PCI Card</b> (Brand: Intel, Model: 112BNHMW)	FCC Part 15, Subpart C (Section 15.247)	RF991207D25C-1
<b>Bluetooth module</b> (Brand: Foxconn, Model: T77H114)	FCC Part 15, Subpart C (Section 15.247)	RF991207D25C-2
<b>GSM 850 / CDMA 850 / WCDMA 850</b> (Brand: Qualcomm, Model: Gobi2000)	FCC Part 22	RF991207D25C-3
<b>PCS 1900 / CDMA 1900 / WCDMA 1900</b> (Brand: Qualcomm, Model: Gobi2000)	FCC Part 24	RF991207D25C-4

- The EUT has several models, which are identical to each other except for the Topcover less of ODD differences only, as the following:

Brand	Model No.	Topcover less of ODD
SONY	PCG-4121AL	Without
	PCG-4121BL	With

During the test, the **model no.: PCG-4121AL** was the worst case and only its test data was recorded in this report.

3. The case of EUT has two kinds of material: MG & CFRP. During the test, the **MG material case** was the worst case and only its test data was recorded in this report.

4. The following antennas were applied to the EUT:

Type	Connector	Gain
PIFA	Hirose U.FL	-1.59

5. The EUT consumes power from a power adapter/ battery and there are the following sources could be chosen:

Power Source	Brand	Model No.	Spec.
AC adapter 1	NJRC	VGP-AC19V31	AC Input: 100-240V, 1.5A, 50-60Hz DC Output: 19.5V, 4.7A Non-shielded AC 2Pin (0.8m) Non-shielded DC (1.8m)
AC adapter 2	NJRC	VGP-AC19V32	AC Input: 100-240V, 1.5A, 50-60Hz DC Output: 19.5V, 4.7A Non-shielded AC 3Pin (0.8m) Non-shielded DC (1.8m)
AC adapter 3	Liteon	VGP-AC19V36	AC Input: 100-240V, 1.5A, 50/60Hz DC Output: 19.5V, 4.7A Non-shielded AC 3Pin (0.8m) Non-shielded DC (1.8m)
AC adapter 4	Delta	VGP-AC19V42	AC Input: 100-240V, 1.5A 50-60Hz DC Output: 19.5V, 4.7A Non-shielded AC 3Pin (0.8m) Non-shielded DC (1.8m)
AC adapter 5	Delta	VGP-AC19V51	AC Input: 100-240V, 1.5A, 50/60Hz DC Output 1: 19.5Vdc 4.7A DC Output 2: 5Vdc 1.5A DC Output 3: 5Vdc 1.5A Non-shielded AC 3Pin (0.8m) Non-shielded DC (1.8m)
Battery	Sony	VGP-BPS24	11.1V, 4400mAh

After pre-tested above AC adapters, the **AC Adapter 3** was the worst case, therefore, only its test data was recorded in this report.

6. For more detailed features description, please refer to the manufacturer's specifications or User's Manual.


## 3.2 DESCRIPTION OF TEST MODES

79 channels are provided to this EUT:


CHANNEL	FREQ. (MHz)						
0	2402	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461		

### 3.2.1 CONFIGURATION OF SYSTEM UNDER TEST

#### Test Mode A:

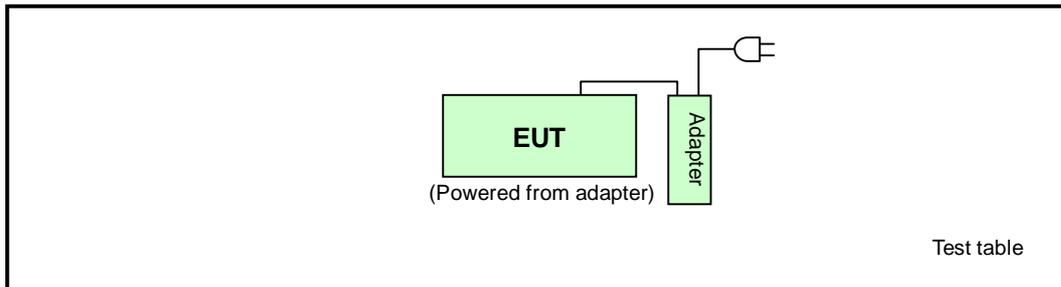

#### Test Mode B:

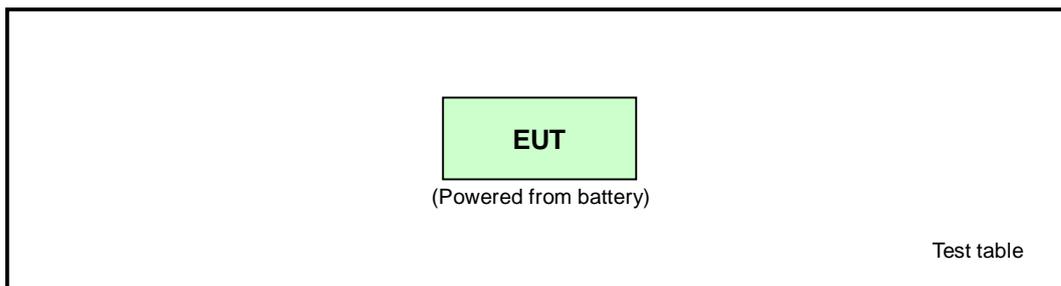

### 3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT CONFIGURE MODE	Applicable to				Description
	PLC	RE<1G	RE <sup>≥</sup> 1G	APCM	
A	√	√	√	√	EUT powered from adapter
B	Note	√	-	-	EUT powered from battery

Where **PLC**: Power Line Conducted Emission      **RE<1G**: Radiated Emission below 1GHz  
**RE<sup>≥</sup>1G**: Radiated Emission above 1GHz      **APCM**: Antenna Port Conducted Measurement  
**NOTE**: No need to concern of Conducted Emission due to the EUT is powered by battery.

#### **POWER LINE CONDUCTED EMISSION TEST:**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	PACKET TYPE	DATE RATE
A	0 to 78	78	FHSS	GFSK	DH5	1

#### **RADIATED EMISSION TEST (BELOW 1 GHz):**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, packet types data rate and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	PACKET TYPE	DATE RATE
A & B	0 to 78	78	FHSS	GFSK	DH5	1

#### **RADIATED EMISSION TEST (ABOVE 1 GHz):**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, packet types data rate and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	PACKET TYPE	DATE RATE
A	0 to 78	0, 39, 78	FHSS	GFSK	DH5	1
A	0 to 78	0, 39, 78	FHSS	8DPSK	DH5	3



**BANDEDGE MEASUREMENT:**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and packet types of the antenna and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	PACKET TYPE	DATE RATE
A	0 to 78	0, 78	FHSS	GFSK	DH5	1
A	0 to 78	0, 78	FHSS	8DPSK	DH5	3

**ANTENNA PORT CONDUCTED MEASUREMENT:**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and packet types of the antenna and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	PACKET TYPE	DATE RATE
A	0 to 78	0, 39, 78	FHSS	GFSK	DH5	1
A	0 to 78	0, 39, 78	FHSS	8DPSK	DH5	3

**TEST CONDITION:**

APPLICABLE TO	EUT CONFIGURE MODE	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
PLC	A	20deg. C, 78% RH, 1018hPa	120Vac, 60Hz	Jamison Chan
RE<1G	A	20deg. C, 76% RH, 1009hPa	120Vac, 60Hz	Nick Chen
	B	20deg. C, 76% RH, 1018hPa	11.1Vdc	Nick Chen
RE <sup>3</sup> 1G	A	21deg. C, 75% RH, 1014hPa	120Vac, 60Hz	Nick Chen
APCM	A	16deg. C, 80% RH, 1018hPa	120Vac, 60Hz	Jun Wu

### 3.2.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC Part 15, Subpart C. (15.247)**

**ANSI C63.4- 2003**

**ANSI C63.10-2009**

All test items have been performed and recorded as per the above standards.

**NOTE:** The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

### 3.2.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with its adapter or battery.

## 4. TEST TYPES AND RESULTS

### 4.1 CONDUCTED EMISSION MEASUREMENT

#### 4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB $\mu$ V)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
  2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
  3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

## 4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
ROHDE & SCHWARZ Test Receiver	ESCS 30	100276	Dec. 15, 2010	Dec. 14, 2011
ROHDE & SCHWARZ Artificial Mains Network (for EUT)	ESH3-Z5	100219	Nov. 24, 2010	Nov. 23, 2011
LISN With Adapter (for EUT)	AD10	C10Ada-001	Nov. 24, 2010	Nov. 23, 2011
ROHDE & SCHWARZ Artificial Mains Network (for peripherals)	ESH3-Z5	100218	Nov. 24, 2010	Nov. 23, 2011
Software	ADT_Cond_V7.3.7	NA	NA	NA
Software	ADT_ISN_V7.3.7	NA	NA	NA
RF cable (JYEBAO)	5D-FB	Cable-C10.01	Feb. 23, 2010	Feb. 22, 2011
SUHNTER Terminator (For ROHDE & SCHWARZ LISN)	65BNC-5001	E1-010773	Feb. 23, 2010	Feb. 22, 2011

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
  2. The test was performed in Shielded Room No. 10.
  3. The VCCI Site Registration No. C-1852.


## 4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) were not recorded.

#### 4.1.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.1.5 TEST SETUP

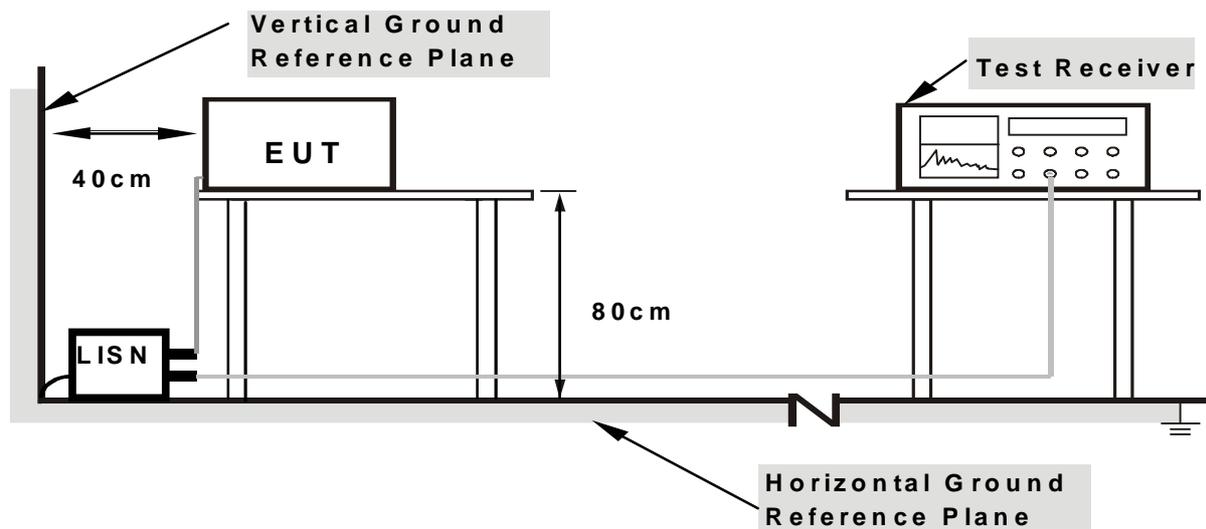

- Note:**
1. Support units were connected to second LISN.
  2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes support units.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

#### 4.1.6 EUT OPERATING CONDITIONS


- a. Turn on the power of all equipment.
- b. EUT ran a test program (provided by manufacture) to enable it under transmitting condition at specific channel continuously.

### 4.1.7 TEST RESULTS

TEST MODE	A	6dB BANDWIDTH	9kHz
CHANNEL	Channel 78	PHASE	Line 1

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
	1	0.162	0.19	40.57	-	40.76	-	65.38	55.38	-24.62
2	<b>0.220</b>	<b>0.20</b>	<b>45.18</b>	-	<b>45.38</b>	-	<b>62.81</b>	<b>52.81</b>	<b>-17.43</b>	-
3	0.334	0.26	36.59	-	36.85	-	59.36	49.36	-22.51	-
4	0.556	0.30	35.46	-	35.76	-	56.00	46.00	-20.24	-
5	0.963	0.31	32.06	-	32.37	-	56.00	46.00	-23.63	-
6	15.258	1.05	30.16	-	31.21	-	60.00	50.00	-28.79	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

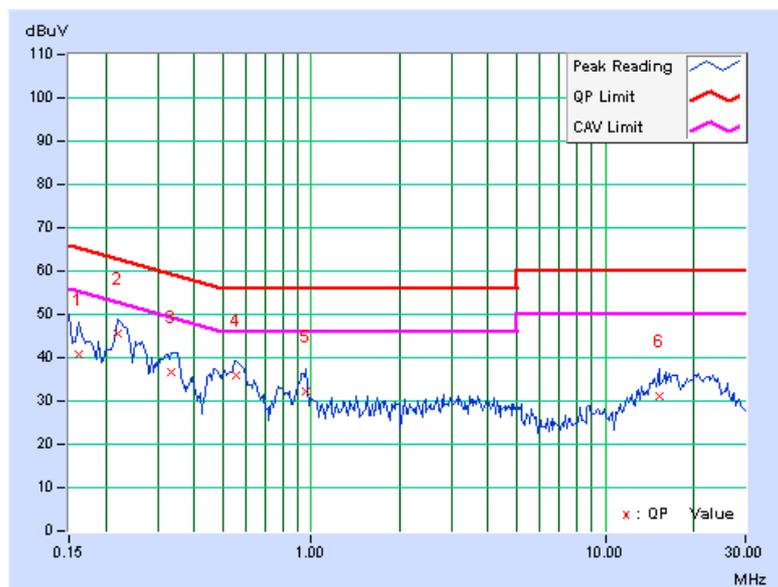




A D T

<b>TEST MODE</b>	A	<b>6dB BANDWIDTH</b>	9kHz
<b>CHANNEL</b>	Channel 78	<b>PHASE</b>	Line 2

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.29	44.62	-	44.91	-	66.00	56.00	-21.09	-
2	0.224	0.29	40.52	-	40.81	-	62.66	52.66	-21.85	-
3	0.353	0.36	36.50	-	36.86	-	58.89	48.89	-22.03	-
4	0.548	0.38	36.14	-	36.52	-	56.00	46.00	-19.48	-
5	0.963	0.39	32.54	-	32.93	-	56.00	46.00	-23.07	-
6	14.645	0.91	30.02	-	30.93	-	60.00	50.00	-29.07	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

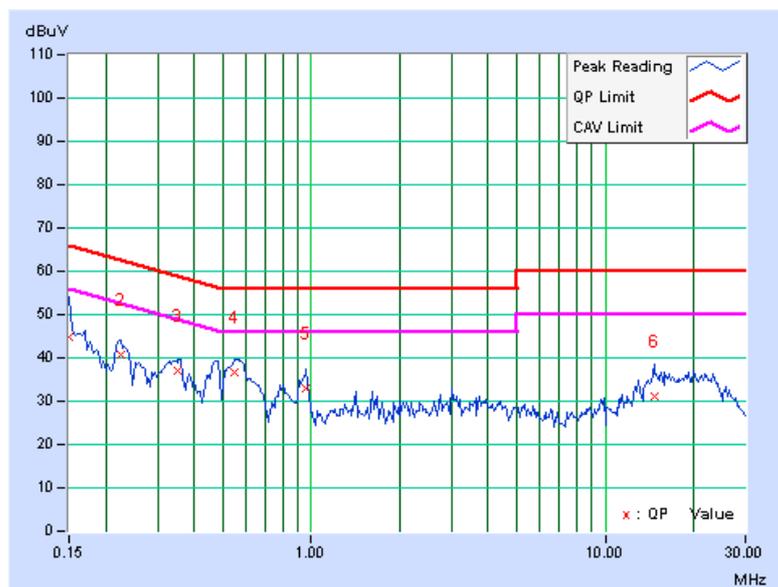

## 4.2 RADIATED EMISSION MEASUREMENT

### 4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

**NOTE:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



## 4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
HP Preamplifier	8447D	2432A03504	May 06, 2010	May 05, 2011
HP Preamplifier	8449B	3008A01924	Jul. 14, 2010	Jul. 13, 2011
HP Preamplifier	8449B	3008A01292	Jul. 14, 2010	Jul. 13, 2011
ROHDE & SCHWARZ TEST RECEIVER	ESU26	100005	Jun. 10, 2010	Jun. 09, 2011
Schwarzbeck Antenna	VULB 9168	137	Apr. 29, 2010	Apr. 28, 2011
Schwarzbeck Antenna	VHBA 9123	480	Apr. 29, 2010	Apr. 28, 2011
ADT. Turn Table	TT100	0306	NA	NA
ADT. Tower	AT100	0306	NA	NA
Software	ADT_Radiated_V 7.6.15.9.2	NA	NA	NA
SUHNER RF cable	SF102	CABLE-CH6	Aug. 20, 2010	Aug. 19, 2011
EMCO Horn Antenna	3115	6714	Oct. 26, 2010	Oct. 25, 2011
EMCO Horn Antenna	3115	9312-4192	Apr. 23, 2010	Apr. 22, 2011
Highpass filter Wainwright Instruments	WHK 3.1/18G-10SS	SN 8	NA	NA

- NOTE:** 1. The calibration interval of the above test instruments is 12/24 months. And the calibrations are traceable to NML/ROC and NIST/USA.  
 2. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.  
 3. The test was performed in Chamber No. 6.  
 4. The Industry Canada Reference No. IC 7450E-6.  
 5. The FCC Site Registration No. is 447212.

### 4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


**NOTE:**

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

### 4.2.4 DEVIATION FROM TEST STANDARD

No deviation

## 4.2.5 TEST SETUP

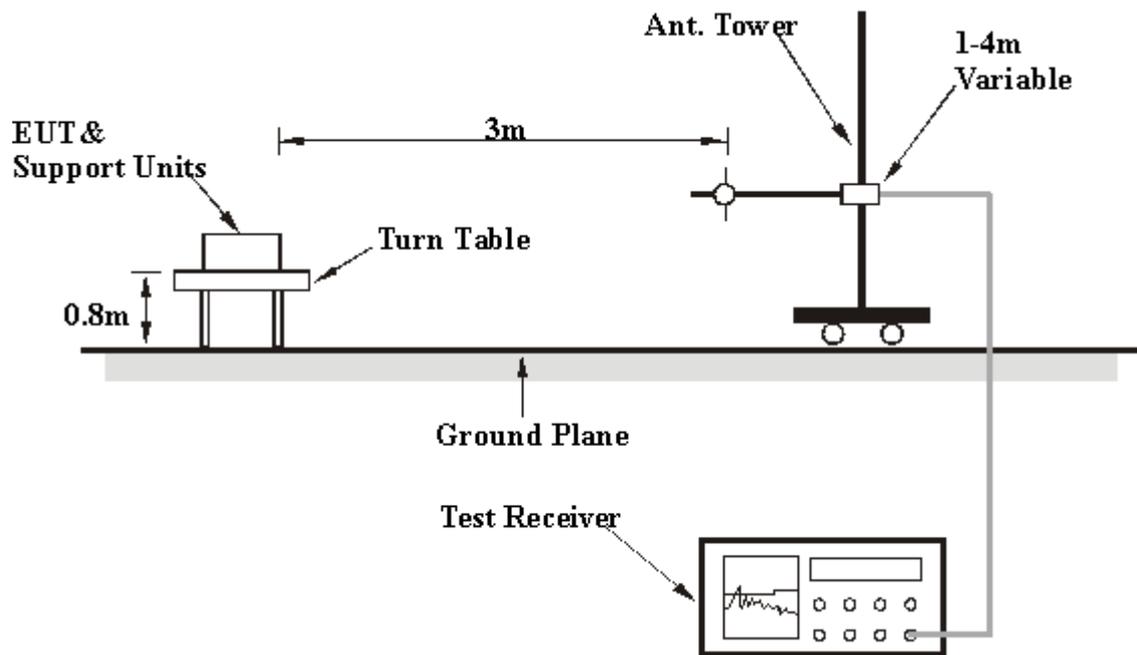

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

## 4.2.6 EUT OPERATING CONDITIONS

Same as item 4.1.6.



A D T

## 4.2.7 TEST RESULTS

### GFSK MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 0	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	21deg. C, 75% RH 1012hPa	TESTED BY	Nick Chen
TEST MODE	A		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	59.1 PK	74.0	-14.9	1.01 H	256	26.63	32.47
2	2390.00	47.0 AV	54.0	-7.0	1.01 H	256	14.54	32.47
3	2400.00	35.9 PK	74.0	-38.1	1.01 H	256	3.39	32.51
4	2400.00	5.8 AV	54.0	-48.2	1.01 H	256	-26.71	32.51
5	*2402.00	93.0 PK			1.01 H	256	60.46	32.52
6	*2402.00	62.9 AV			1.01 H	256	30.36	32.52
7	3202.00	50.3 PK	74.0	-23.7	1.05 H	69	14.69	35.65
8	3202.00	43.9 AV	54.0	-10.1	1.05 H	69	8.26	35.65
9	4804.00	54.3 PK	74.0	-19.7	1.22 H	147	14.49	39.85
10	4804.00	24.2 AV	54.0	-29.8	1.22 H	147	-15.61	39.85

- REMARKS:**
- Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  - Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  - The other emission levels were very low against the limit.
  - Margin value = Emission level – Limit value.
  - \* \*: Fundamental frequency.
  - The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 \* 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to:  $20\log(3.125 / 100) = -30.1$  dB.
  - Average value = peak reading + 20log(duty cycle).



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 0	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	21deg. C, 75% RH 1012hPa	TESTED BY	Nick Chen
TEST MODE	A		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	59.3 PK	74.0	-14.7	1.00 V	308	26.80	32.47
2	2390.00	46.9 AV	54.0	-7.1	1.00 V	308	14.45	32.47
3	2400.00	34.2 PK	74.0	-39.8	1.00 V	308	1.67	32.51
4	2400.00	4.1 AV	54.0	-49.9	1.00 V	308	-28.43	32.51
5	*2402.00	91.3 PK			1.00 V	308	58.74	32.52
6	*2402.00	61.2 AV			1.00 V	308	28.64	32.52
7	3202.00	49.0 PK	74.0	-25.0	1.12 V	156	13.36	35.65
8	3202.00	41.8 AV	54.0	-12.2	1.12 V	152	6.16	35.65
9	4804.00	54.0 PK	74.0	-20.0	1.00 V	115	14.15	39.85
10	4804.00	23.9 AV	54.0	-30.1	1.00 V	115	-15.95	39.85

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. “ \* “: Fundamental frequency.
  6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 \* 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to:  $20\log(3.125 / 100) = -30.1$  dB.
  7. Average value = peak reading +  $20\log(\text{duty cycle})$ .



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 39	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	21deg. C, 75% RH 1012hPa	TESTED BY	Nick Chen
TEST MODE	A		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	94.7 PK			1.14 H	266	62.05	32.66
2	*2441.00	64.6 AV			1.14 H	266	31.95	32.66
3	3254.00	52.5 PK	74.0	-21.5	1.08 H	174	16.73	35.77
4	3254.00	48.5 AV	54.0	-5.5	1.08 H	174	12.68	35.77
5	4882.00	58.6 PK	74.0	-15.4	1.04 H	69	18.46	40.11
6	4882.00	28.5 AV	54.0	-25.5	1.04 H	69	-11.64	40.11
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	92.8 PK			1.21 V	188	60.18	32.66
2	*2441.00	62.7 AV			1.21 V	188	30.08	32.66
3	3254.00	51.2 PK	74.0	-22.8	1.09 V	76	15.40	35.77
4	3254.00	45.5 AV	54.0	-8.5	1.09 V	76	9.73	35.77
5	4882.00	56.0 PK	74.0	-18.0	1.05 V	23	15.85	40.11
6	4882.00	25.9 AV	54.0	-28.1	1.05 V	23	-14.25	40.11

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. “ \* “: Fundamental frequency.
  6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 \* 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to:  $20\log(3.125 / 100) = -30.1$  dB.
  7. Average value = peak reading +  $20\log(\text{duty cycle})$ .



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 78	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	21deg. C, 75% RH 1012hPa	TESTED BY	Nick Chen
TEST MODE	A		

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	95.7 PK			1.04 H	285	62.92	32.80
2	*2480.00	65.6 AV			1.04 H	285	32.82	32.80
3	2483.50	38.4 PK	74.0	-35.6	1.04 H	285	5.58	32.81
4	2483.50	8.3 AV	54.0	-45.7	1.04 H	285	-24.52	32.81
5	3306.00	58.2 PK	74.0	-15.8	1.10 H	63	22.30	35.88
<b>6</b>	<b>3306.00</b>	<b>51.3 AV</b>	<b>54.0</b>	<b>-2.7</b>	<b>1.10 H</b>	<b>63</b>	<b>15.42</b>	<b>35.88</b>
7	4960.00	54.1 PK	74.0	-19.9	1.00 H	89	13.72	40.34
8	4960.00	24.0 AV	54.0	-30.0	1.00 H	89	-16.38	40.34

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	94.1 PK			1.16 V	114	61.33	32.80
2	*2480.00	64.0 AV			1.16 V	114	31.23	32.80
3	2483.50	36.8 PK	74.0	-37.2	1.16 V	114	3.99	32.81
4	2483.50	6.7 AV	54.0	-47.3	1.16 V	114	-26.11	32.81
5	3306.00	55.0 PK	74.0	-19.0	1.00 V	77	19.10	35.88
6	3306.00	47.6 AV	54.0	-6.4	1.00 V	77	11.72	35.88
7	4960.00	53.6 PK	74.0	-20.4	1.00 V	233	13.28	40.34
8	4960.00	23.5 AV	54.0	-30.5	1.00 V	233	-16.82	40.34

- REMARKS:**
- Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  - Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  - The other emission levels were very low against the limit.
  - Margin value = Emission level – Limit value.
  - \* \*: Fundamental frequency.
  - The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 \* 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to:  $20\log(3.125 / 100) = -30.1$  dB.
  - Average value = peak reading + 20log(duty cycle).

## 8DPSK MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 0	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	21deg. C, 75% RH 1012hPa	TESTED BY	Nick Chen
TEST MODE	A		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	59.3 PK	74.0	-14.7	1.09 H	336	26.87	32.47
2	2390.00	46.6 AV	54.0	-7.4	1.09 H	336	14.16	32.47
3	2400.00	38.2 PK	74.0	-35.8	1.09 H	336	5.73	32.51
4	2400.00	8.1 AV	54.0	-45.9	1.09 H	336	-24.37	32.51
5	*2402.00	95.6 PK			1.09 H	336	63.11	32.52
6	*2402.00	65.5 AV			1.09 H	336	33.01	32.52
7	3202.00	49.4 PK	74.0	-24.6	1.23 H	100	13.73	35.65
8	3202.00	42.4 AV	54.0	-11.6	1.23 H	100	6.71	35.65
9	4804.00	55.7 PK	74.0	-18.3	1.06 H	114	15.81	39.85
10	4804.00	25.6 AV	54.0	-28.4	1.06 H	114	-14.29	39.85

- REMARKS:**
- Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  - Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  - The other emission levels were very low against the limit.
  - Margin value = Emission level – Limit value.
  - \* \*: Fundamental frequency.
  - The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 \* 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to:  $20\log(3.125 / 100) = -30.1$  dB.
  - Average value = peak reading +  $20\log(\text{duty cycle})$ .



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 0	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	21deg. C, 75% RH 1012hPa	TESTED BY	Nick Chen
TEST MODE	A		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	59.5 PK	74.0	-14.5	1.16 V	224	27.07	32.47
2	2390.00	47.2 AV	54.0	-6.8	1.16 V	224	14.72	32.47
3	2400.00	37.3 PK	74.0	-36.7	1.16 V	224	4.81	32.51
4	2400.00	7.2 AV	54.0	-46.8	1.16 V	224	-25.29	32.51
5	*2402.00	94.7 PK			1.16 V	224	62.19	32.52
6	*2402.00	64.6 AV			1.16 V	224	32.09	32.52
7	3202.00	47.8 PK	74.0	-26.2	1.00 V	246	12.12	35.65
8	3202.00	39.9 AV	54.0	-14.1	1.00 V	246	4.29	35.65
9	4804.00	53.6 PK	74.0	-20.4	1.00 V	13	13.76	39.85
10	4804.00	23.5 AV	54.0	-30.5	1.00 V	13	-16.34	39.85

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. “ \* “: Fundamental frequency.
  6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 \* 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to:  $20\log(3.125 / 100) = -30.1$  dB.
  7. Average value = peak reading +  $20\log(\text{duty cycle})$ .



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 39	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	21deg. C, 75% RH 1012hPa	TESTED BY	Nick Chen
TEST MODE	A		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	96.0 PK			1.00 H	196	63.38	32.66
2	*2441.00	65.9 AV			1.00 H	196	33.28	32.66
3	3254.00	51.4 PK	74.0	-22.6	1.00 H	82	15.60	35.77
4	3254.00	47.6 AV	54.0	-6.4	1.00 H	82	11.78	35.77
5	4882.00	60.0 PK	74.0	-14.0	1.00 H	220	19.92	40.11
6	4882.00	29.9 AV	54.0	-24.1	1.00 H	220	-10.18	40.11
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	95.9 PK			1.00 V	157	63.22	32.66
2	*2441.00	65.8 AV			1.00 V	157	33.12	32.66
3	3254.00	50.5 PK	74.0	-23.5	1.12 V	147	14.69	35.77
4	3254.00	44.3 AV	54.0	-9.7	1.12 V	147	8.56	35.77
5	4882.00	57.3 PK	74.0	-16.8	1.21 V	111	17.14	40.11
6	4882.00	27.2 AV	54.0	-26.9	1.21 V	111	-12.96	40.11

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. “ \* “: Fundamental frequency.
  6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 \* 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to:  $20\log(3.125 / 100) = -30.1$  dB.
  7. Average value = peak reading +  $20\log(\text{duty cycle})$ .



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 78	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	21deg. C, 75% RH 1012hPa	TESTED BY	Nick Chen
TEST MODE	A		

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	96.9 PK			1.00 H	221	64.13	32.80
2	*2480.00	66.8 AV			1.00 H	221	34.03	32.80
3	2483.50	39.7 PK	74.0	-34.4	1.00 H	221	6.84	32.81
4	2483.50	9.6 AV	54.0	-44.5	1.00 H	221	-23.26	32.81
5	3306.00	58.4 PK	74.0	-15.6	1.20 H	155	22.50	35.88
6	3306.00	51.0 AV	54.0	-3.0	1.20 H	155	15.07	35.88
7	4960.00	54.8 PK	74.0	-19.2	1.08 H	96	14.49	40.34
8	4960.00	24.7 AV	54.0	-29.3	1.08 H	96	-15.61	40.34

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	96.5 PK			1.05 V	296	63.74	32.80
2	*2480.00	66.4 AV			1.05 V	296	33.64	32.80
3	2483.50	39.3 PK	74.0	-34.7	1.05 V	296	6.45	32.81
4	2483.50	9.2 AV	54.0	-44.8	1.05 V	296	-23.65	32.81
5	3306.00	54.7 PK	74.0	-19.3	1.00 V	142	18.82	35.88
6	3306.00	47.0 AV	54.0	-7.0	1.00 V	142	11.07	35.88
7	4960.00	53.8 PK	74.0	-20.2	1.00 V	288	13.49	40.34
8	4960.00	23.7 AV	54.0	-30.3	1.00 V	288	-16.61	40.34

- REMARKS:**
- Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  - Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  - The other emission levels were very low against the limit.
  - Margin value = Emission level – Limit value.
  - \* \*: Fundamental frequency.
  - The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 \* 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to:  $20\log(3.125 / 100) = -30.1$  dB.
  - Average value = peak reading + 20log(duty cycle).

**BELOW 1GHz WORST-CASE DATA : GFSK MODULATION**

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 78	FREQUENCY RANGE	Below 1000MHz
INPUT POWER	120Vac, 60Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	20deg. C, 76% RH 1015hPa	TESTED BY	Nick Chen
TEST MODE	A		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	99.95	31.3 QP	43.5	-12.2	1.06 H	124	22.16	9.12
2	249.18	36.9 QP	46.0	-9.1	1.22 H	124	23.21	13.65
3	320.69	37.6 QP	46.0	-8.4	1.08 H	85	21.26	16.32
4	330.02	36.8 QP	46.0	-9.2	1.12 H	79	20.26	16.57
5	384.42	37.2 QP	46.0	-8.8	1.36 H	130	19.19	18.00
6	738.85	32.6 QP	46.0	-13.4	1.04 H	121	7.23	25.38
7	751.28	32.5 QP	46.0	-13.5	1.11 H	130	6.97	25.55
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	127.93	29.6 QP	43.5	-13.9	1.08 V	235	16.46	13.15
2	232.08	34.6 QP	46.0	-11.5	1.11 V	91	21.84	12.71
3	316.03	33.5 QP	46.0	-12.5	1.28 V	292	17.33	16.20
4	395.30	34.7 QP	46.0	-11.3	1.24 V	238	16.42	18.29
5	424.84	32.0 QP	46.0	-14.0	1.32 V	181	13.20	18.83
6	455.93	34.4 QP	46.0	-11.7	1.18 V	52	14.91	19.44
7	542.98	32.1 QP	46.0	-13.9	1.34 V	10	10.14	21.95
8	583.40	35.6 QP	46.0	-10.4	1.00 V	130	12.71	22.91

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 78	FREQUENCY RANGE	Below 1000MHz
INPUT POWER	11.1Vdc	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	20deg. C, 76% RH 1015hPa	TESTED BY	Nick Chen
TEST MODE	B		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	247.63	38.3 QP	46.0	-7.7	1.08 H	148	24.70	13.57
2	258.51	34.4 QP	46.0	-11.6	1.26 H	184	20.39	14.04
3	359.55	37.9 QP	46.0	-8.1	1.16 H	142	20.60	17.34
4	398.41	36.7 QP	46.0	-9.3	1.07 H	154	18.30	18.37
5	751.28	34.0 QP	46.0	-12.0	1.28 H	151	8.47	25.55
6	912.95	39.8 QP	46.0	-6.2	1.23 H	355	11.72	28.08

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	95.29	29.7 QP	43.5	-13.8	1.07 V	193	20.92	8.81
2	173.01	33.1 QP	43.5	-10.4	1.11 V	187	20.00	13.14
3	252.29	33.6 QP	46.0	-12.5	1.03 V	277	19.76	13.79
4	399.97	34.3 QP	46.0	-11.7	1.07 V	184	15.90	18.41
5	457.48	35.4 QP	46.0	-10.6	1.28 V	10	15.95	19.49
6	494.79	32.5 QP	46.0	-13.5	1.26 V	238	11.82	20.69
7	519.66	32.8 QP	46.0	-13.2	1.17 V	70	11.42	21.36
8	577.18	32.7 QP	46.0	-13.3	1.00 V	121	9.89	22.77

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.

## 4.3 NUMBER OF HOPPING FREQUENCY USED

### 4.3.1 LIMIT OF HOPPING FREQUENCY USED

At least 15 channels frequencies, and should be equally spaced.

### 4.3.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
SPECTRUM ANALYZER	FSP 40	100036	Apr. 27, 2010	Apr. 26, 2011

**NOTE:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


### 4.3.3 TEST PROCEDURES

- a. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- c. Set the SA on MaxHold Mode, and then keep the EUT in hopping mode. Record all the signals from each channel until each one has been recorded.
- d. Set the SA on View mode and then plot the result on SA screen.
- e. Repeat above procedures until all frequencies measured were complete.

#### 4.3.4 DEVIATION FROM TEST STANDARD

No deviation.

#### 4.3.5 TEST SETUP

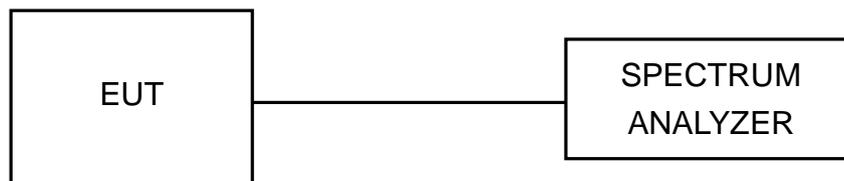



#### 4.3.6 TEST RESULTS

There are 79 hopping frequencies in the hopping mode. Please refer to next two pages for the test result. On the plots, it shows that the hopping frequencies are equally spaced.



A D T



### Mode A: FOR GFSK

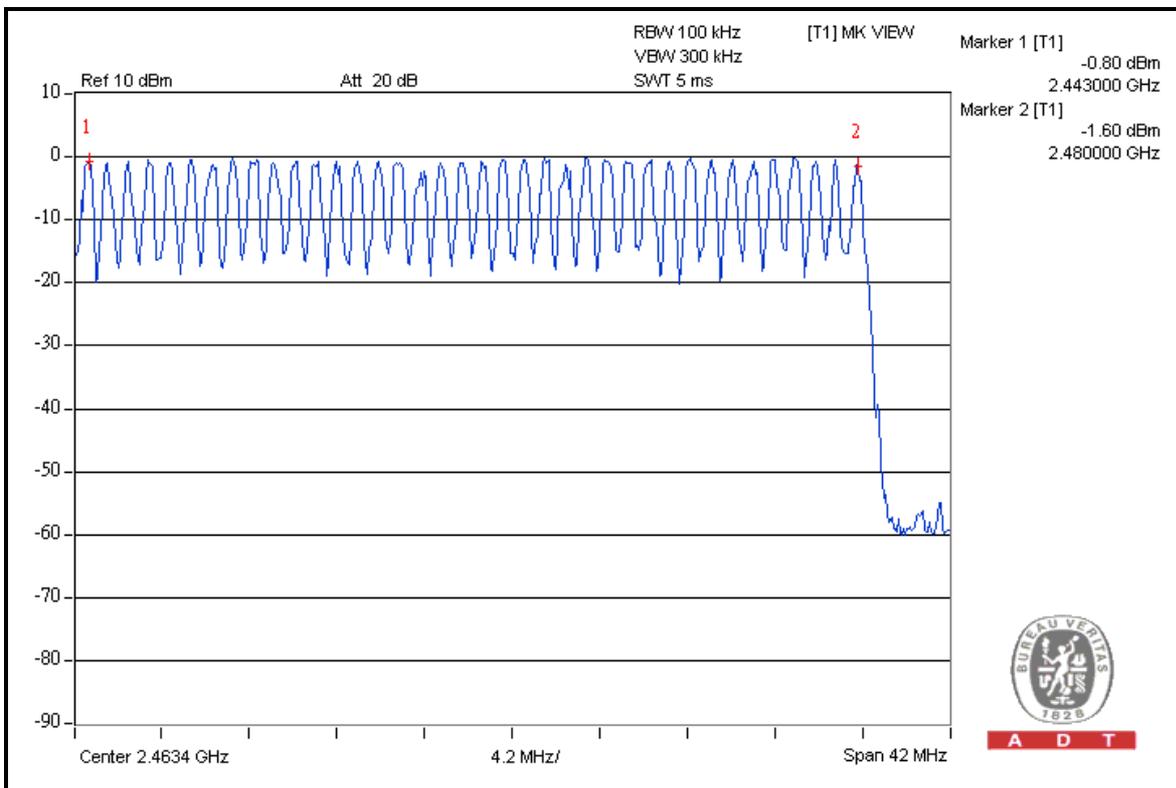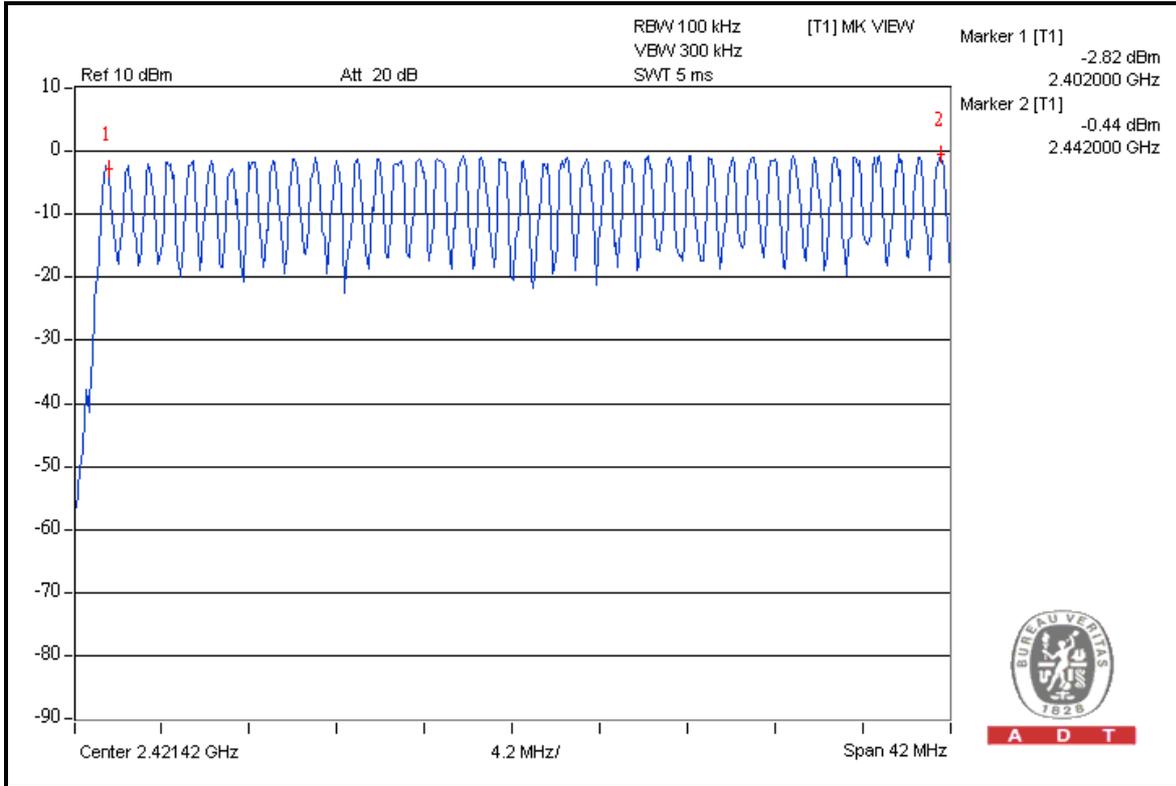



A D T

### Mode A: FOR 8DPSK

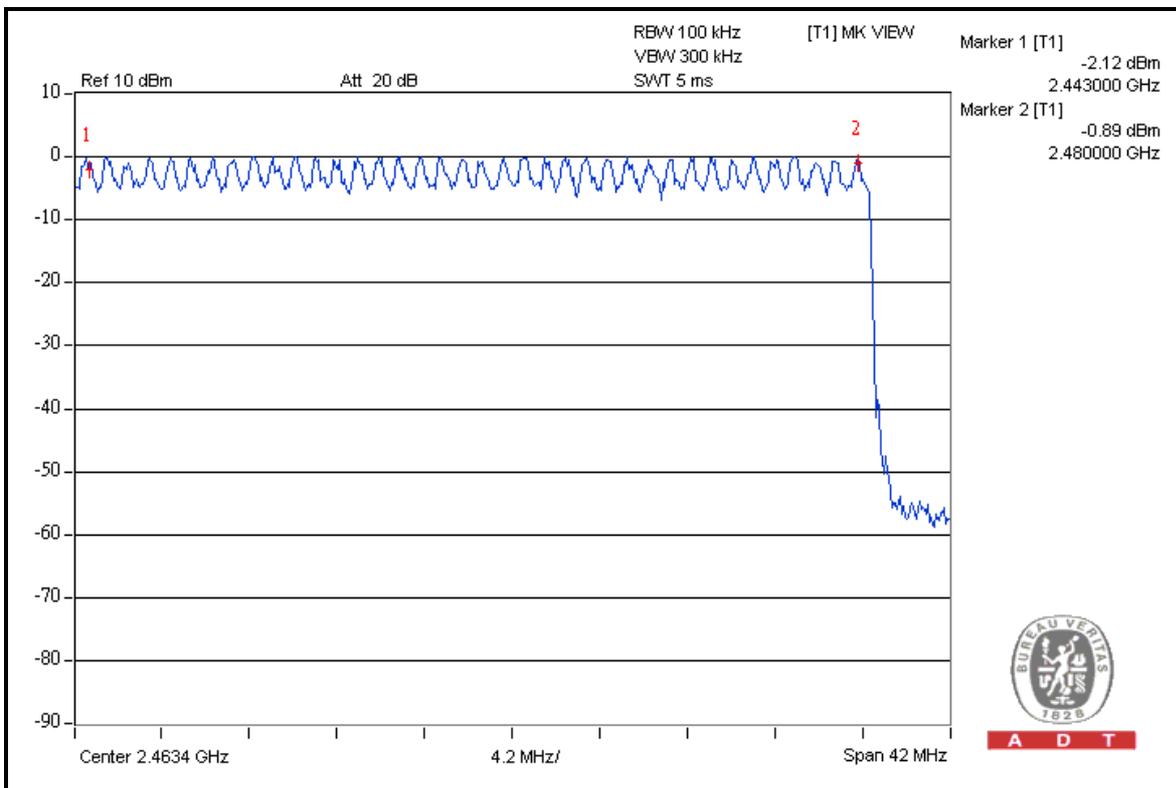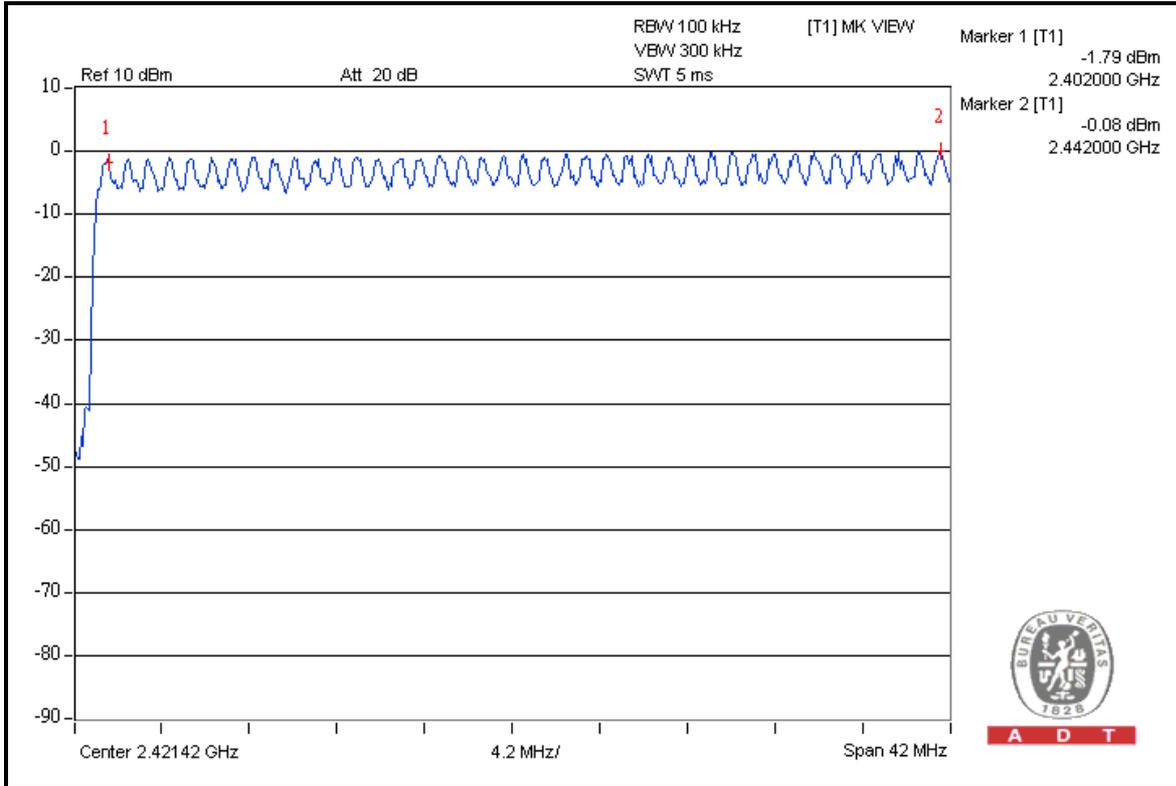

## 4.4 DWELL TIME ON EACH CHANNEL

### 4.4.1 LIMIT OF DWELL TIME USED

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

### 4.4.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
SPECTRUM ANALYZER	FSP 40	100036	Apr. 27, 2010	Apr. 26, 2011

**NOTE:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


### 4.4.3 TEST PROCEDURES

- a. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- c. Adjust the center frequency of SA on any frequency be measured and set SA to zero span mode. And then, set RBW and VBW of spectrum analyzer to proper value.
- d. Measure the time duration of one transmission on the measured frequency. And then plot the result with time difference of this time duration.
- e. Repeat above procedures until all different time-slot modes have been completed.

### 4.4.4 DEVIATION FROM TEST STANDARD

No deviation.

#### 4.4.5 TEST SETUP

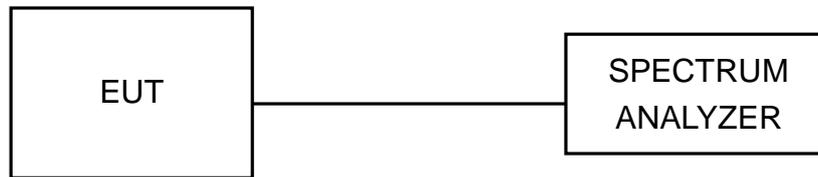

#### 4.4.6 TEST RESULTS

##### Mode A: FOR GFSK



Mode	Number of transmission in a 31.6 (79Hopping*0.4)	Length of transmission time (msec)	Result (msec)	Limit (msec)
DH1	50 (times / 5 sec) *6.32=316.00 times	0.492	155.4720	400
DH3	27 (times / 5 sec) *6.32=170.64 times	1.740	296.9136	400
DH5	16 (times / 5 sec) *6.32=101.12 times	3.030	306.3936	400

**NOTE:** Test plots of the transmitting time slot are shown on next 3 pages.



A D T



### DH1

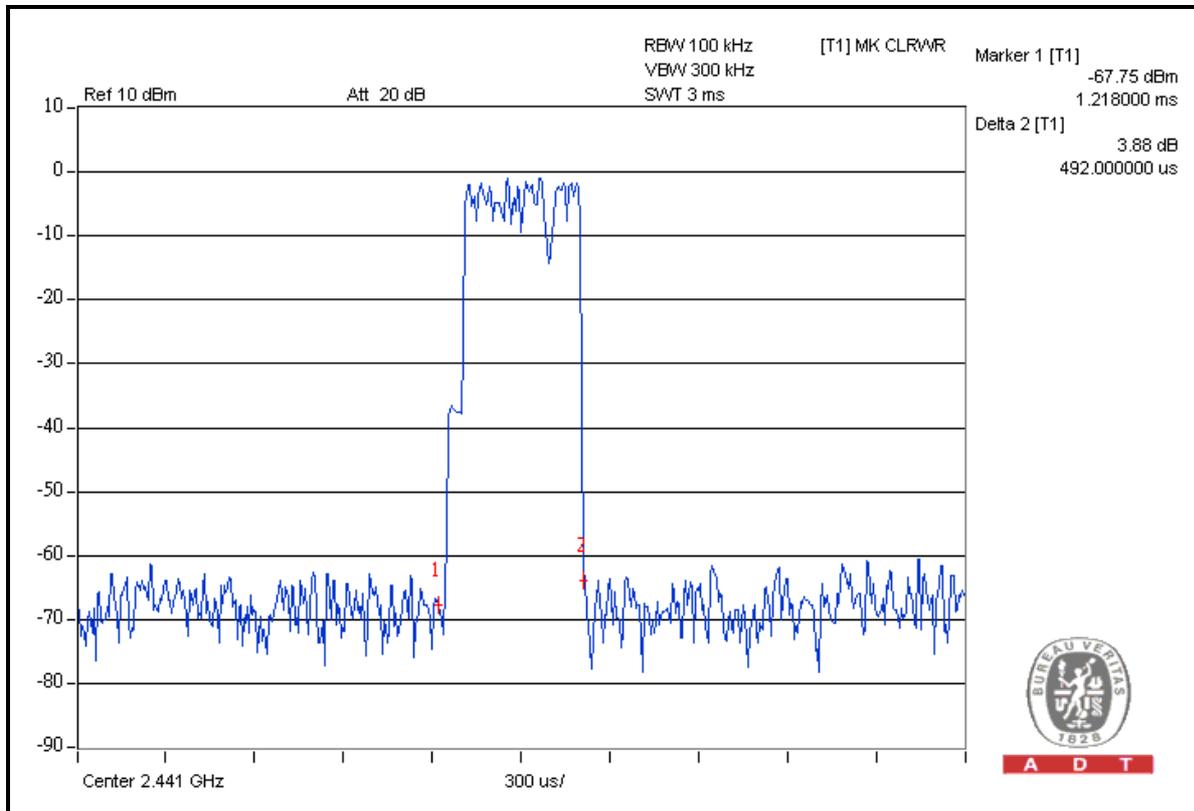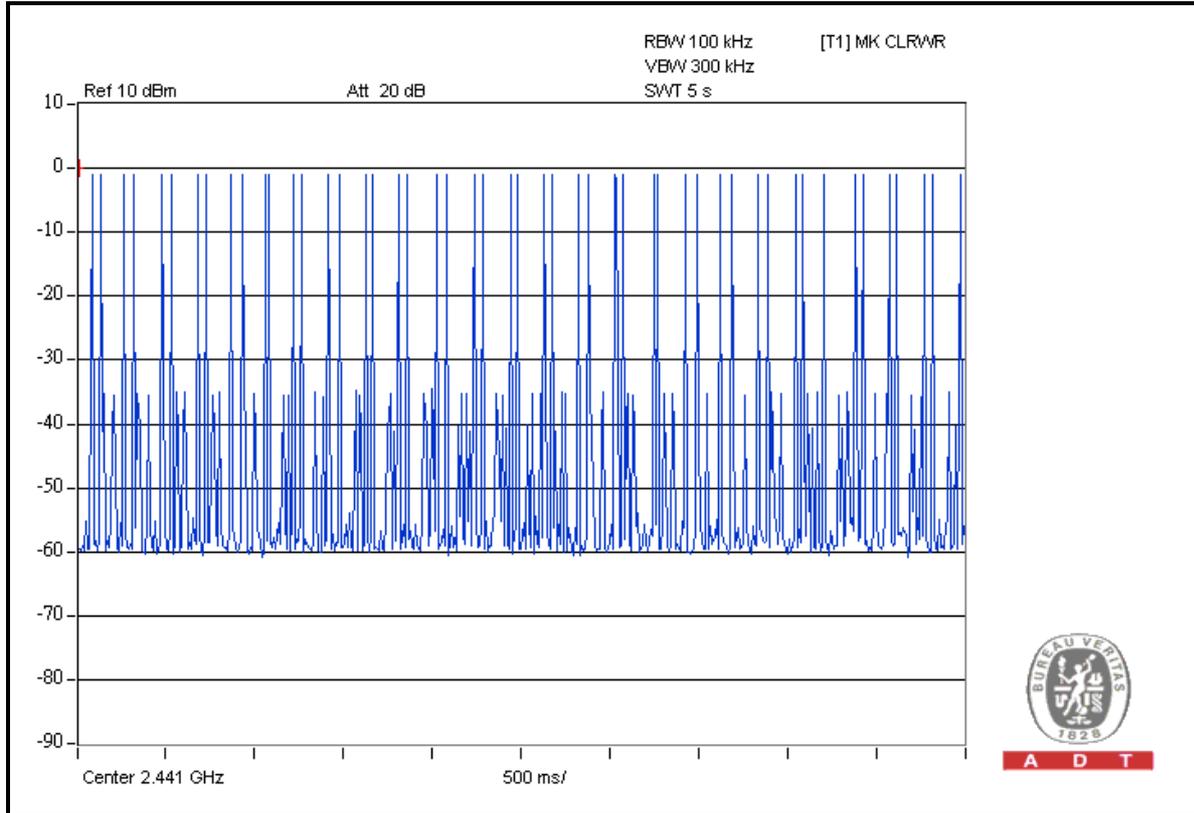



A D T



### DH3

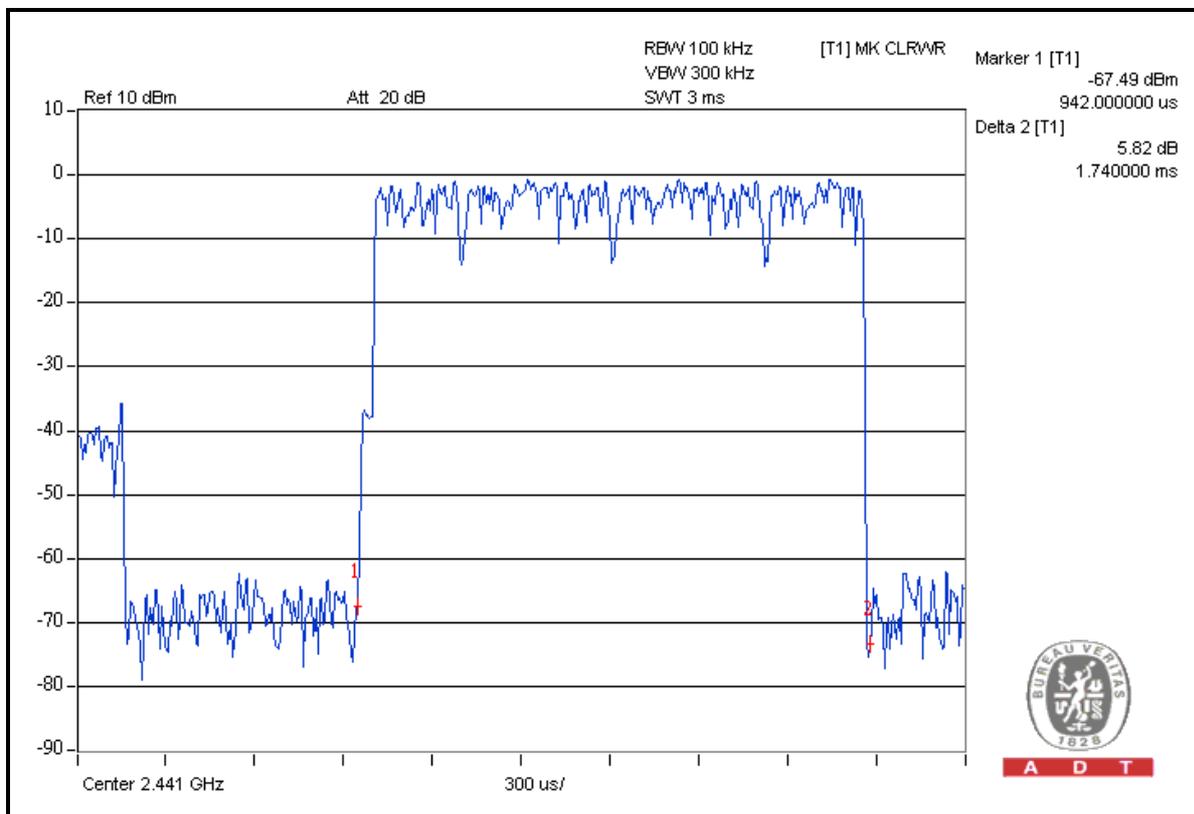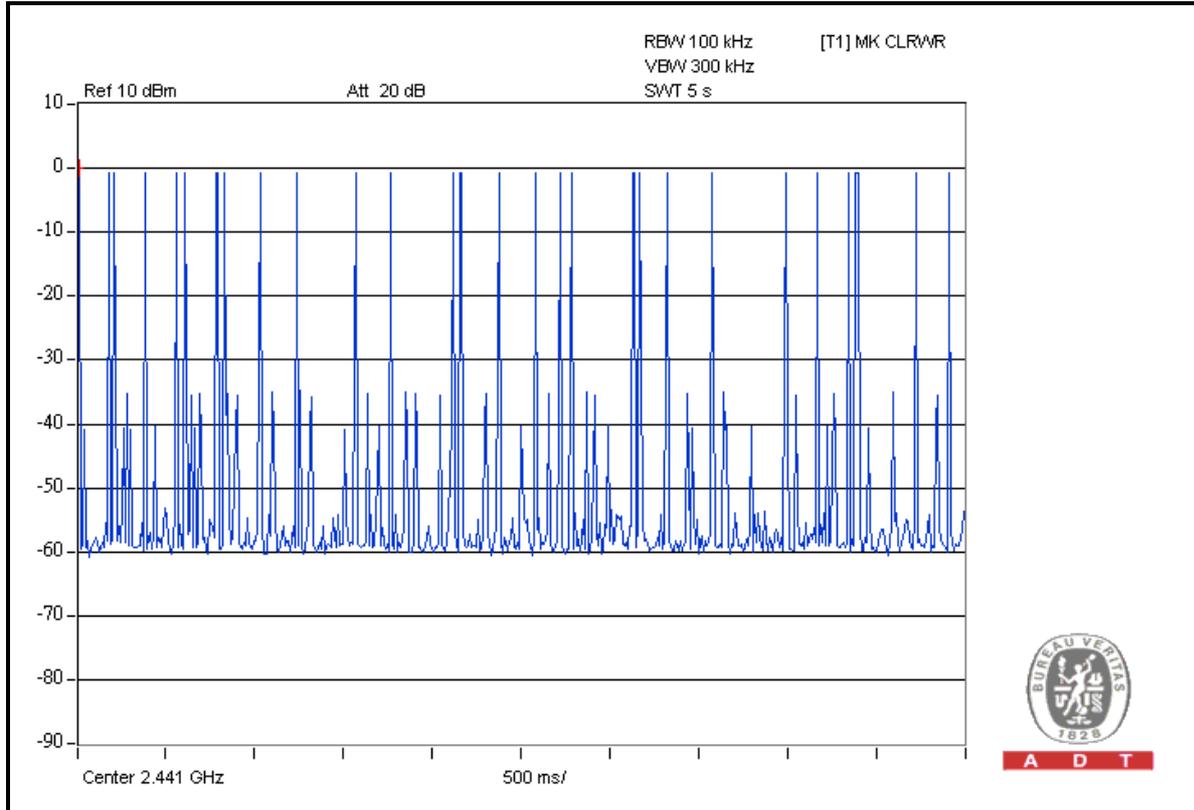



A D T

### DH5

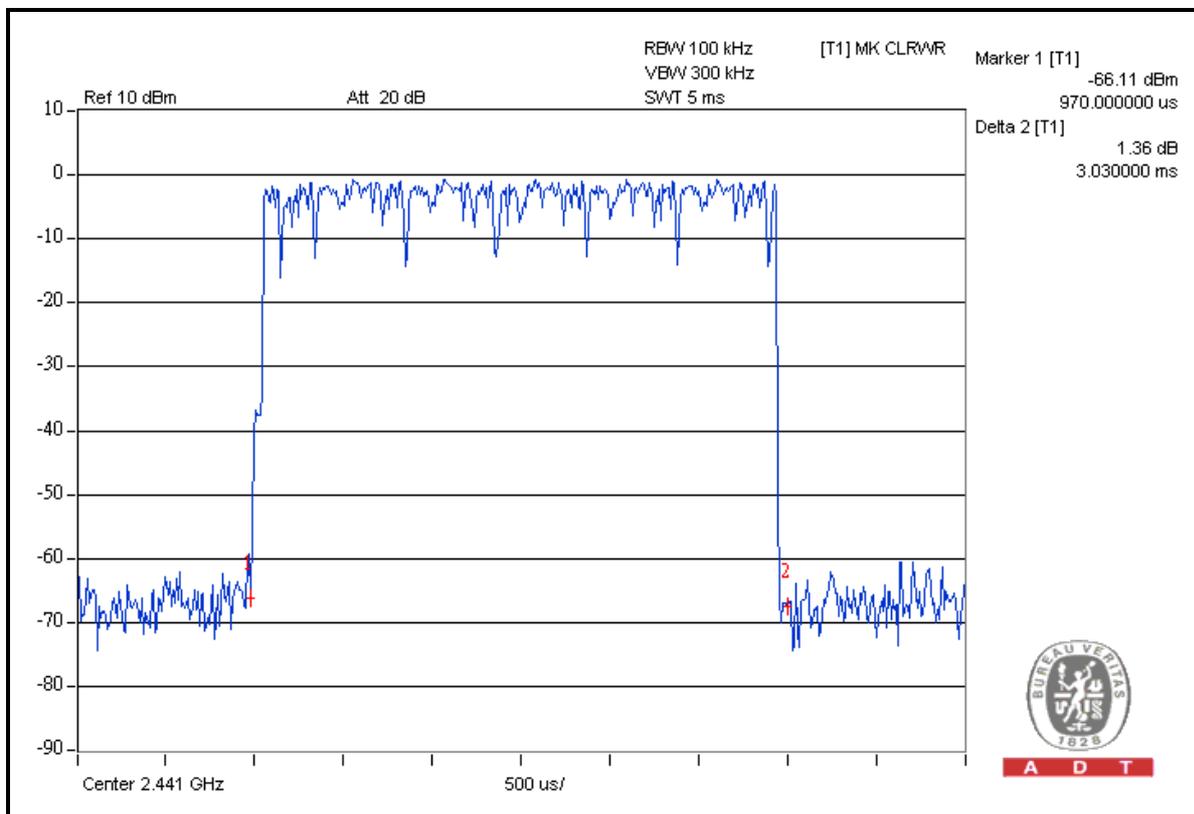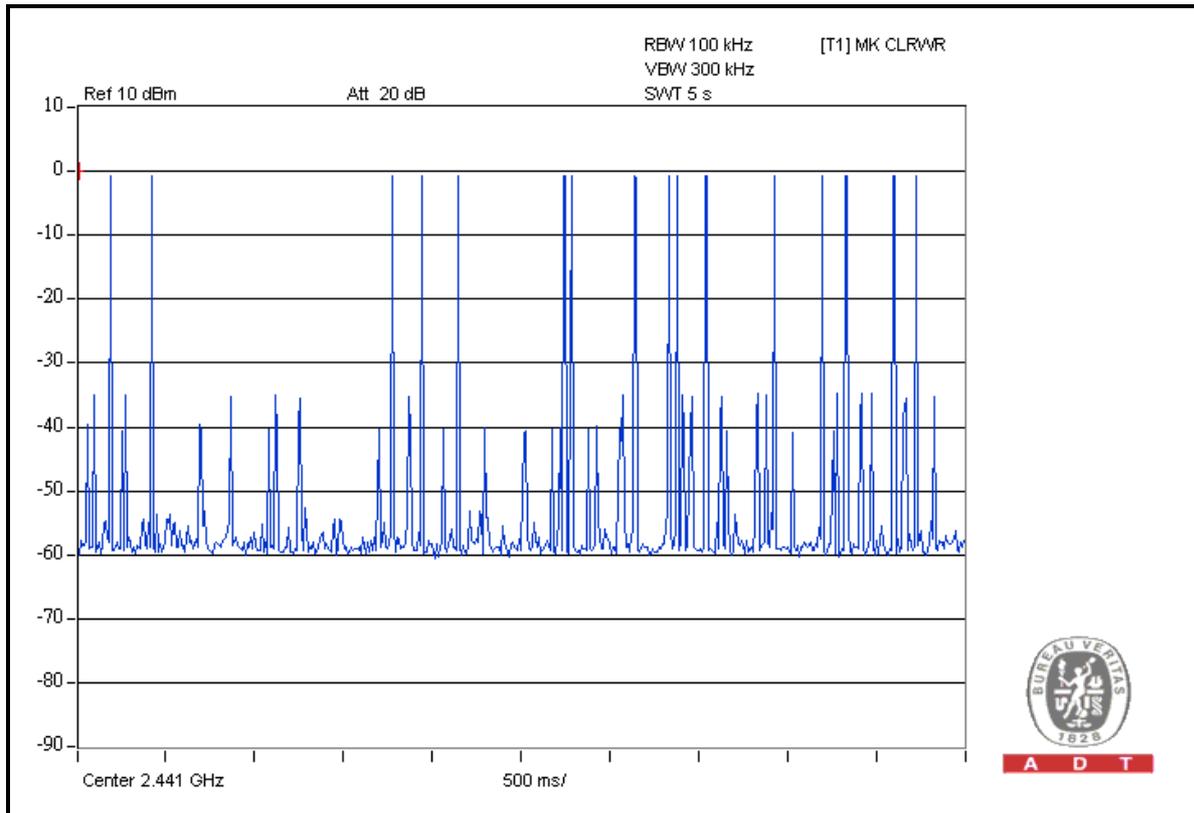



A D T

**Mode A: FOR 8DPSK**



Mode	Number of transmission in a 31.6 (79Hopping*0.4)	Length of transmission time (msec)	Result (msec)	Limit (msec)
DH1	50 (times / 5 sec) *6.32=316.00 times	0.492	155.4720	400
DH3	26 (times / 5 sec) *6.32=164.32 times	1.590	261.2688	400
DH5	18 (times / 5 sec) *6.32=113.76 times	3.060	348.1056	400

**NOTE:** Test plots of the transmitting time slot are shown on next 3 pages.



A D T



# DH1

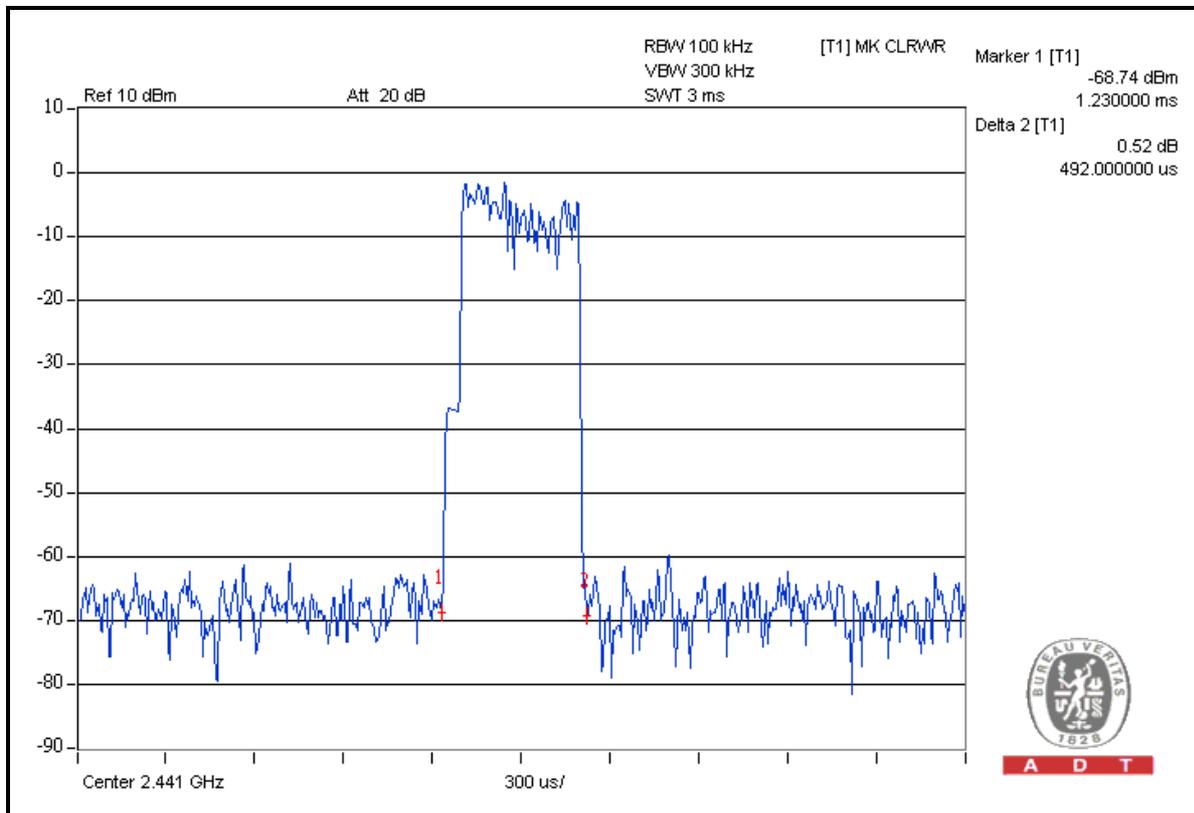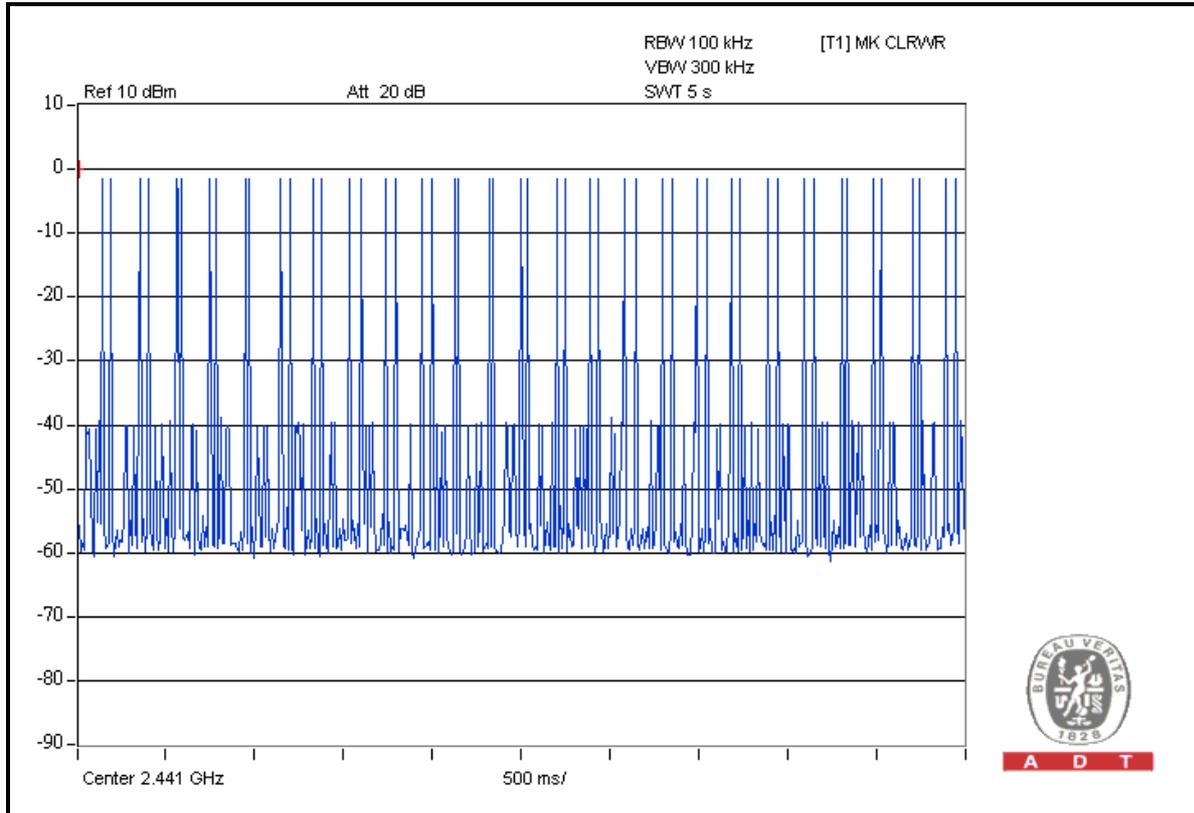



A D T


### DH3

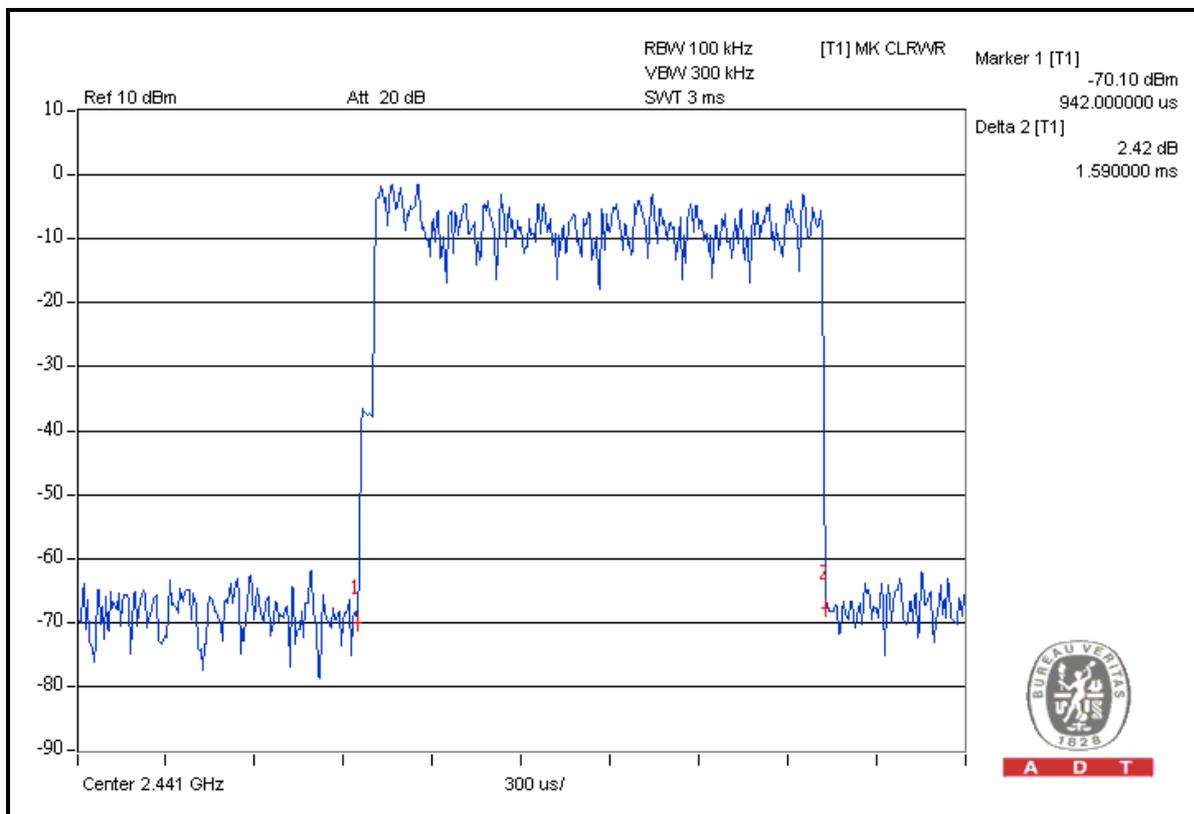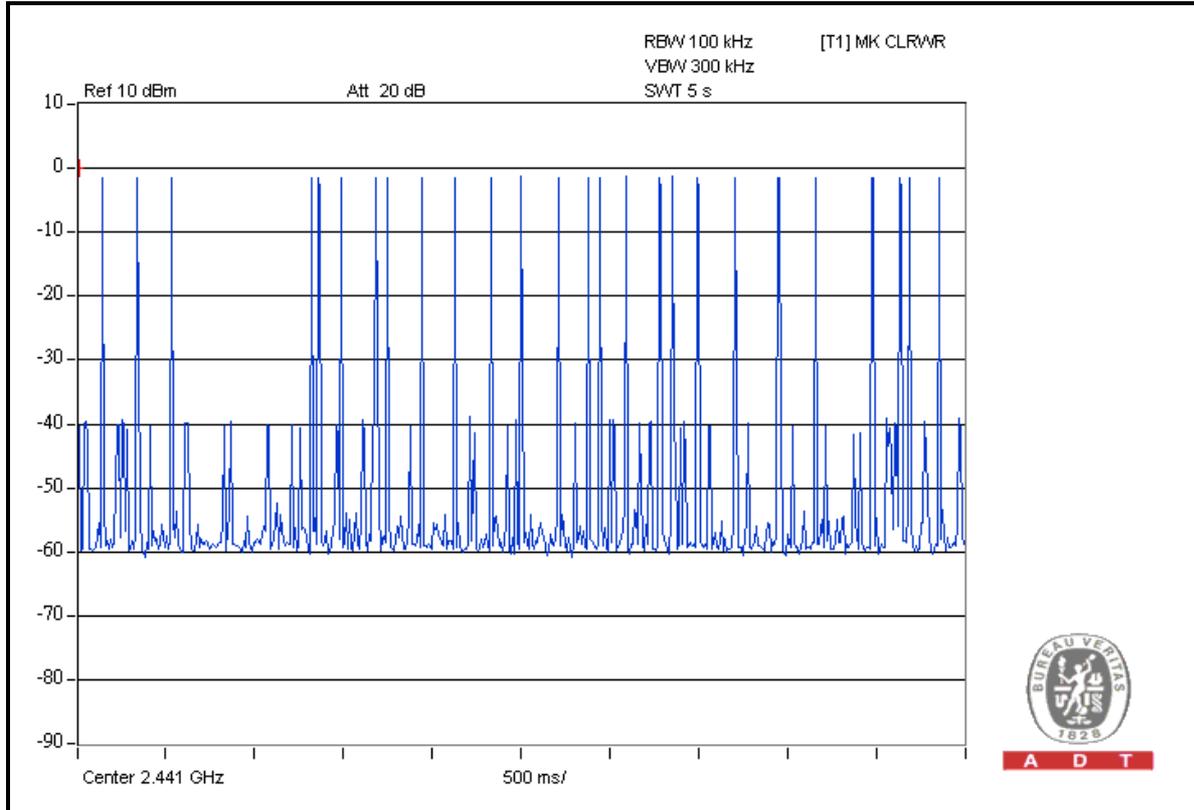




A D T

### DH5

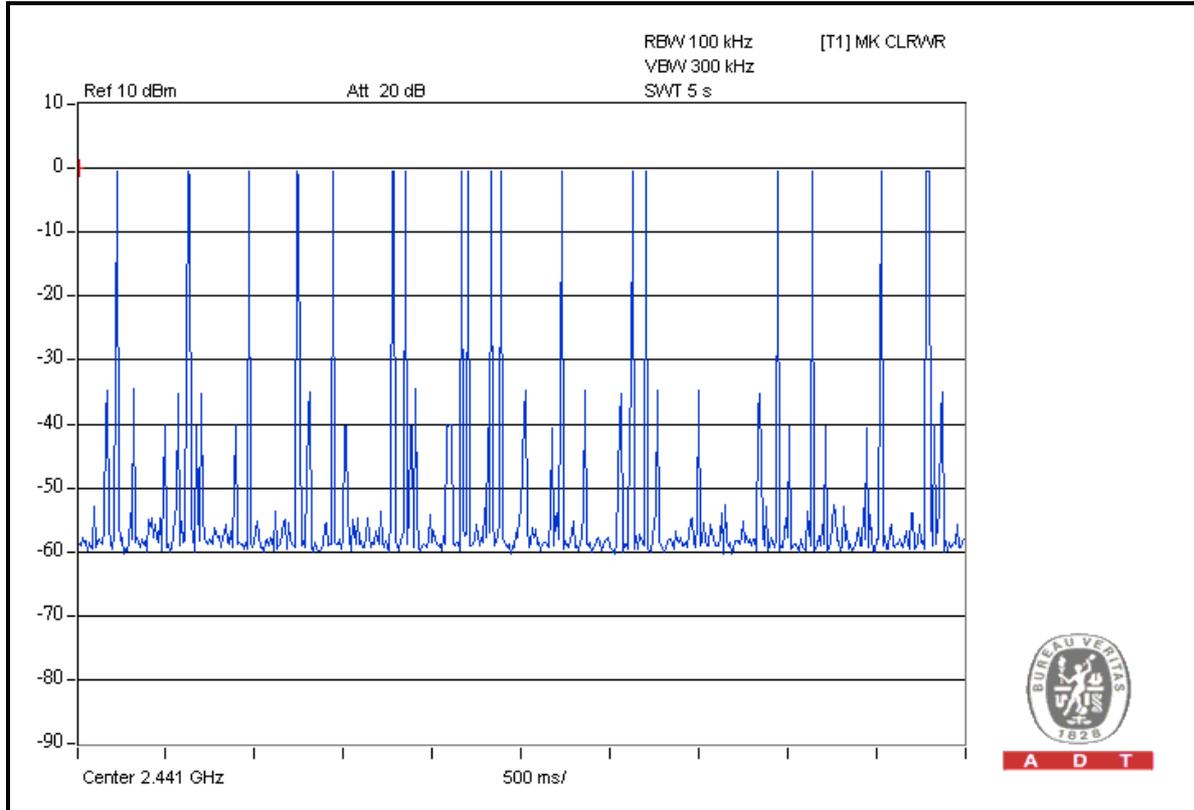

A D T

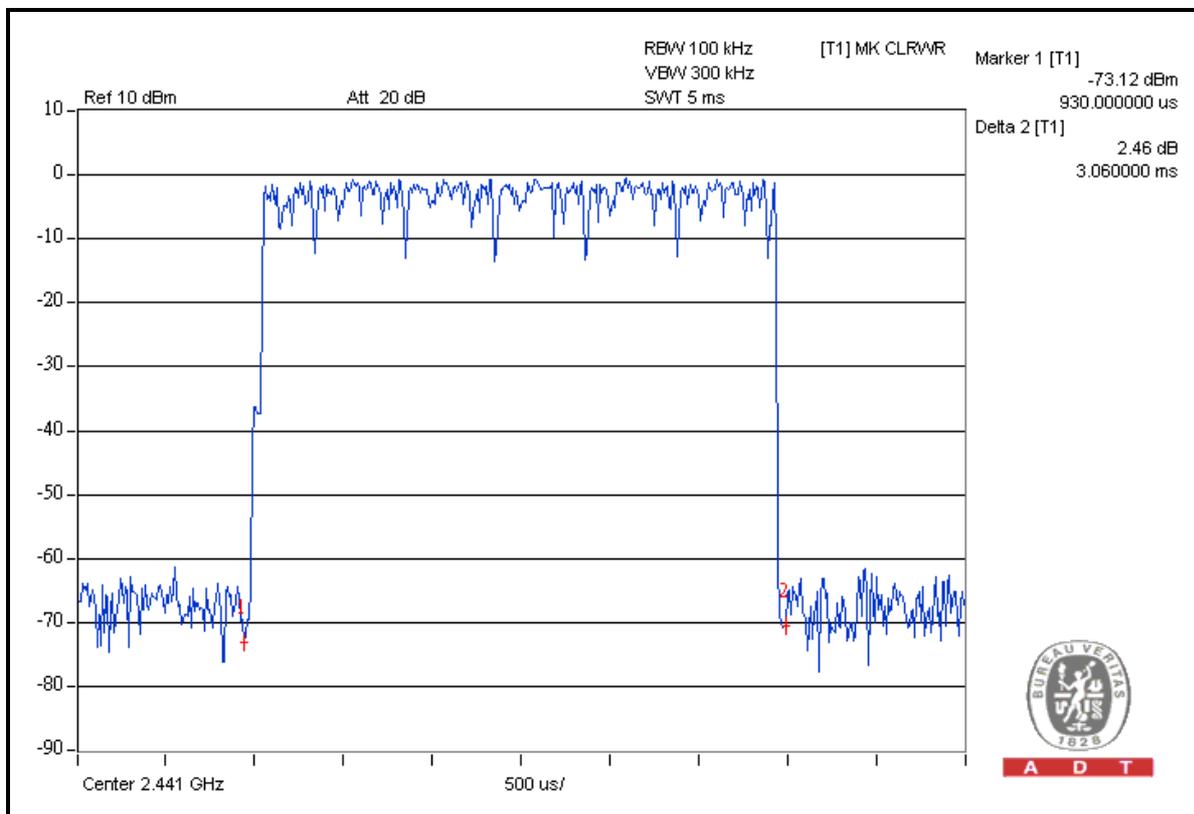

A D T

## 4.5 CHANNEL BANDWIDTH

### 4.5.1 LIMITS OF CHANNEL BANDWIDTH

For frequency hopping system operating in the 2400-2483.5MHz, If the 20dB bandwidth of hopping channel is greater than 25kHz, two-thirds 20dB bandwidth of hopping channel shall be a minimum limit for the hopping channel separation.

### 4.5.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
SPECTRUM ANALYZER	FSP 40	100036	Apr. 27, 2010	Apr. 26, 2011

**NOTE:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


### 4.5.3 TEST PROCEDURE

- a. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- c. Measure the frequency difference of two frequencies that were attenuated 20dB from the reference level. Record the frequency difference as the emission bandwidth.
- d. Repeat above procedures until all frequencies measured were complete.

#### 4.5.4 DEVIATION FROM TEST STANDARD

No deviation.

#### 4.5.5 TEST SETUP

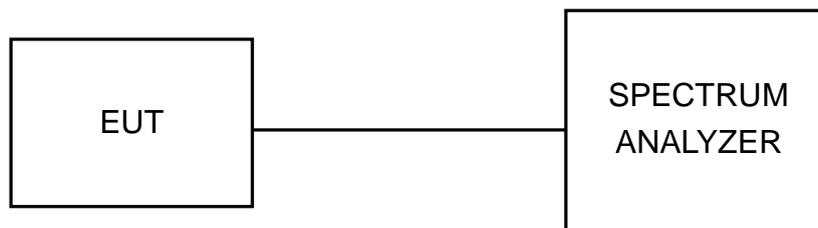

#### 4.5.6 EUT OPERATING CONDITION

The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.




A D T

## 4.5.7 TEST RESULTS

### Mode A: FOR GFSK

CHANNEL	CHANNEL FREQUENCY (MHz)	20dB BANDWIDTH (MHz)
0	2402	0.96
39	2441	0.96
78	2480	0.96

### CH 0

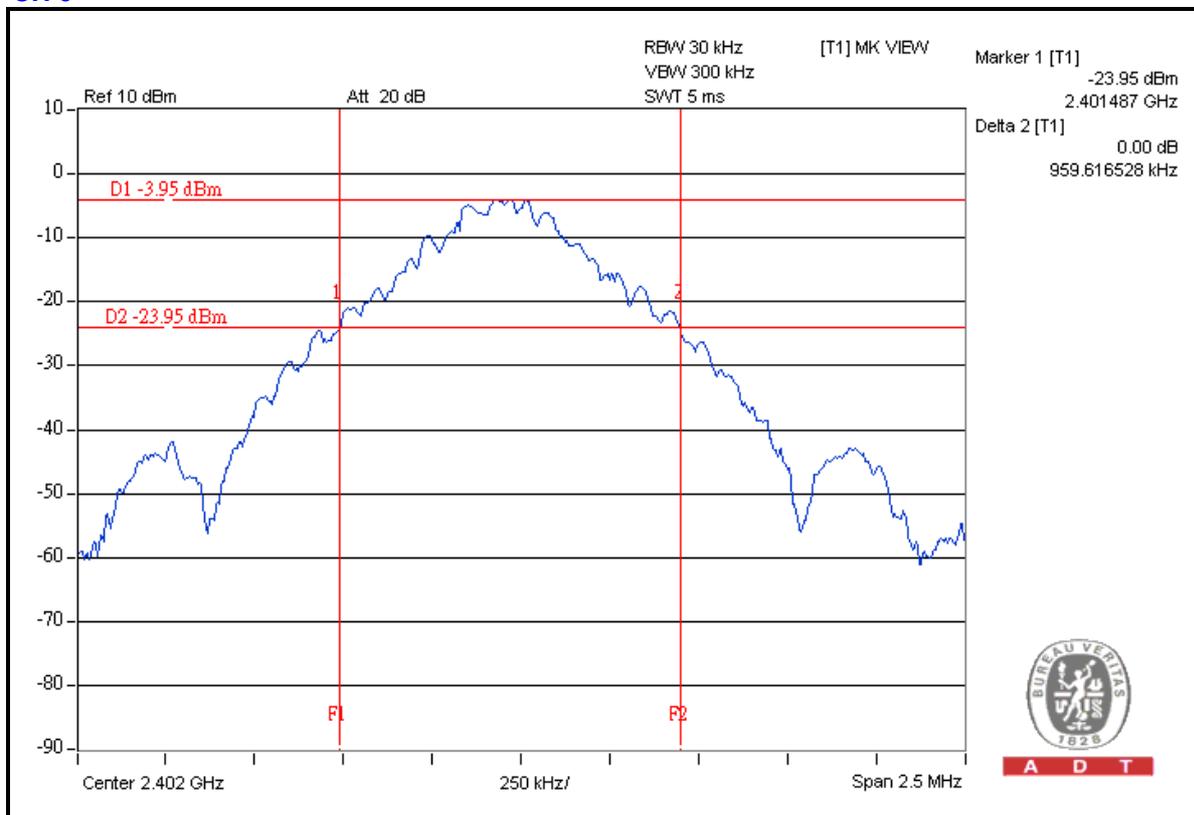




A D T

**Mode A: FOR 8DPSK**

CHANNEL	CHANNEL FREQUENCY (MHz)	20dB BANDWIDTH (MHz)
0	2402	1.35
39	2441	1.35
78	2480	1.35

**CH 78**

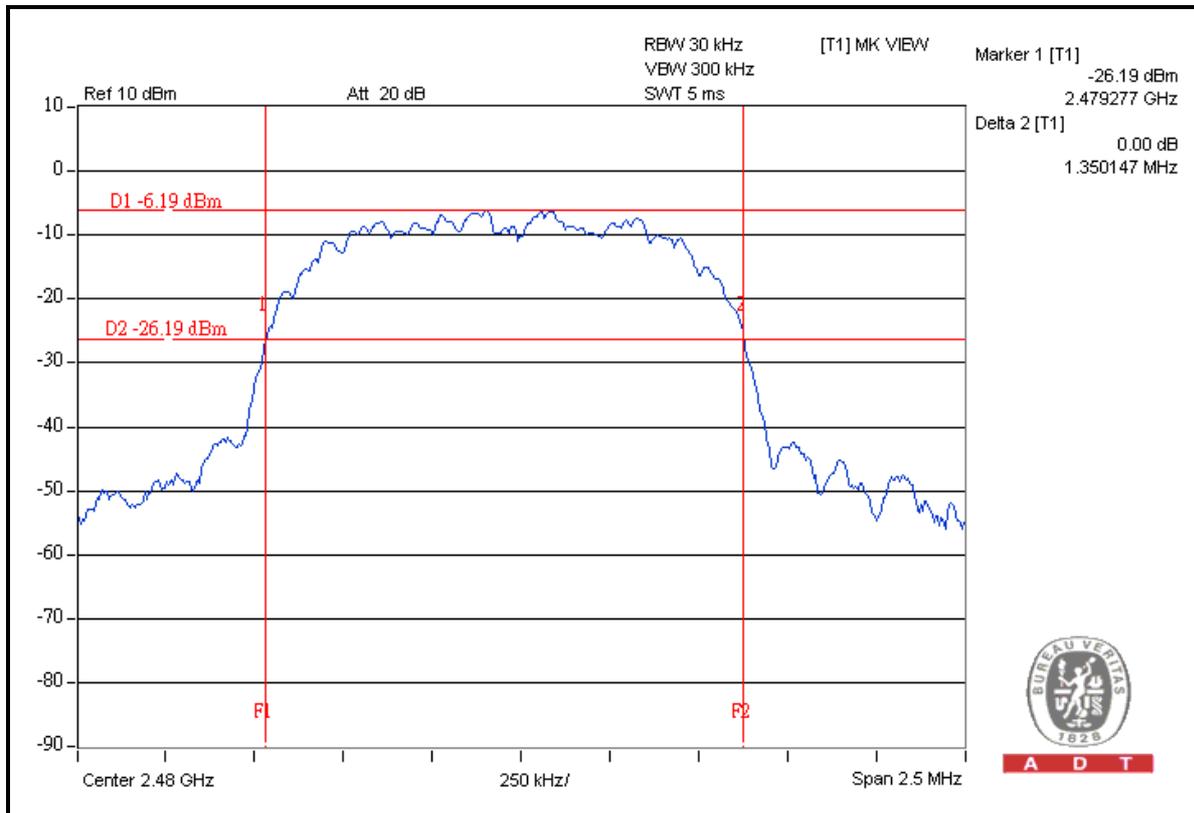

## 4.6 HOPPING CHANNEL SEPARATION

### 4.6.1 LIMIT OF HOPPING CHANNEL SEPARATION

At least 25kHz or two-third of 20dB hopping channel bandwidth (whichever is greater).

### 4.6.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
SPECTRUM ANALYZER	FSP 40	100036	Apr. 27, 2010	Apr. 26, 2011

**NOTE:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


### 4.6.3 TEST PROCEDURES

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range.
3. By using the MaxHold function record the separation of two adjacent channels.
4. Measure the frequency difference of these two adjacent channels by SA MARK function. And then plot the result on SA screen.
5. Repeat above procedures until all frequencies measured were complete.

#### 4.6.4 DEVIATION FROM TEST STANDARD

No deviation.

#### 4.6.5 TEST SETUP

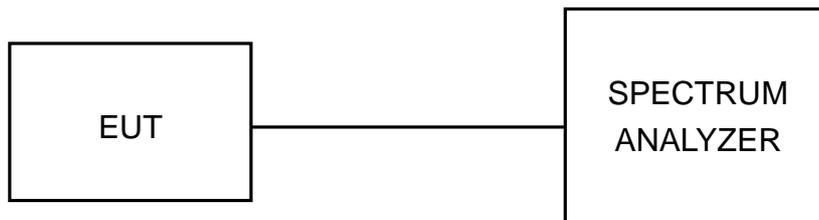



A D T


## 4.6.6 TEST RESULTS

### Mode A: FOR GFSK

CHANNEL	FREQUENCY (MHz)	ADJACENT CHANNEL SEPARATION (MHz)	20dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
0	2402	1.00	0.96	0.64	PASS
39	2441	1.00	0.96	0.64	PASS
78	2480	1.01	0.96	0.64	PASS

**NOTE:** The minimum limit is two-third 20dB bandwidth. Test results please refer to following three plots.

### CH 78

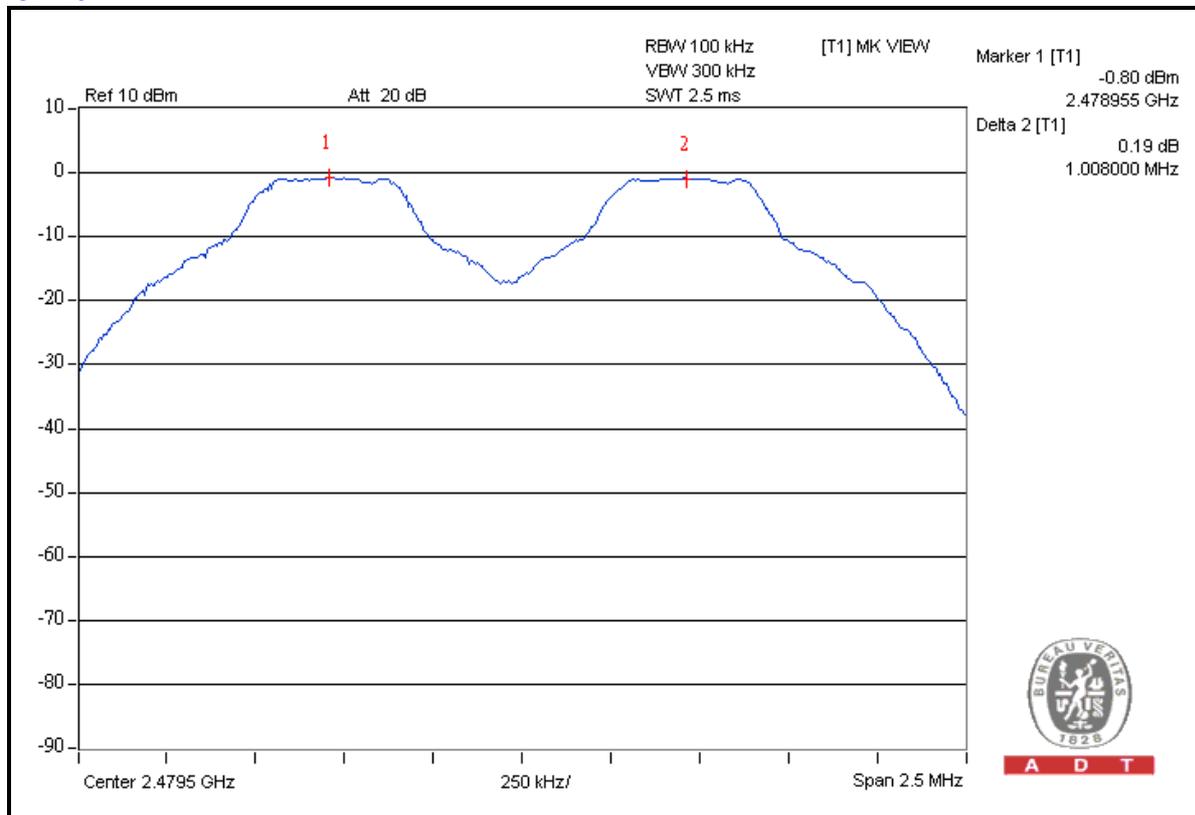




A D T

**Mode A: FOR 8DPSK**

CHANNEL	FREQUENCY (MHz)	ADJACENT CHANNEL SEPARATION (MHz)	20dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
0	2402	1.00	1.35	0.90	PASS
39	2441	1.01	1.35	0.90	PASS
78	2480	1.01	1.35	0.90	PASS

**NOTE:** The minimum limit is two-third 20dB bandwidth. Test results please refer to following three plots.

**CH 78**

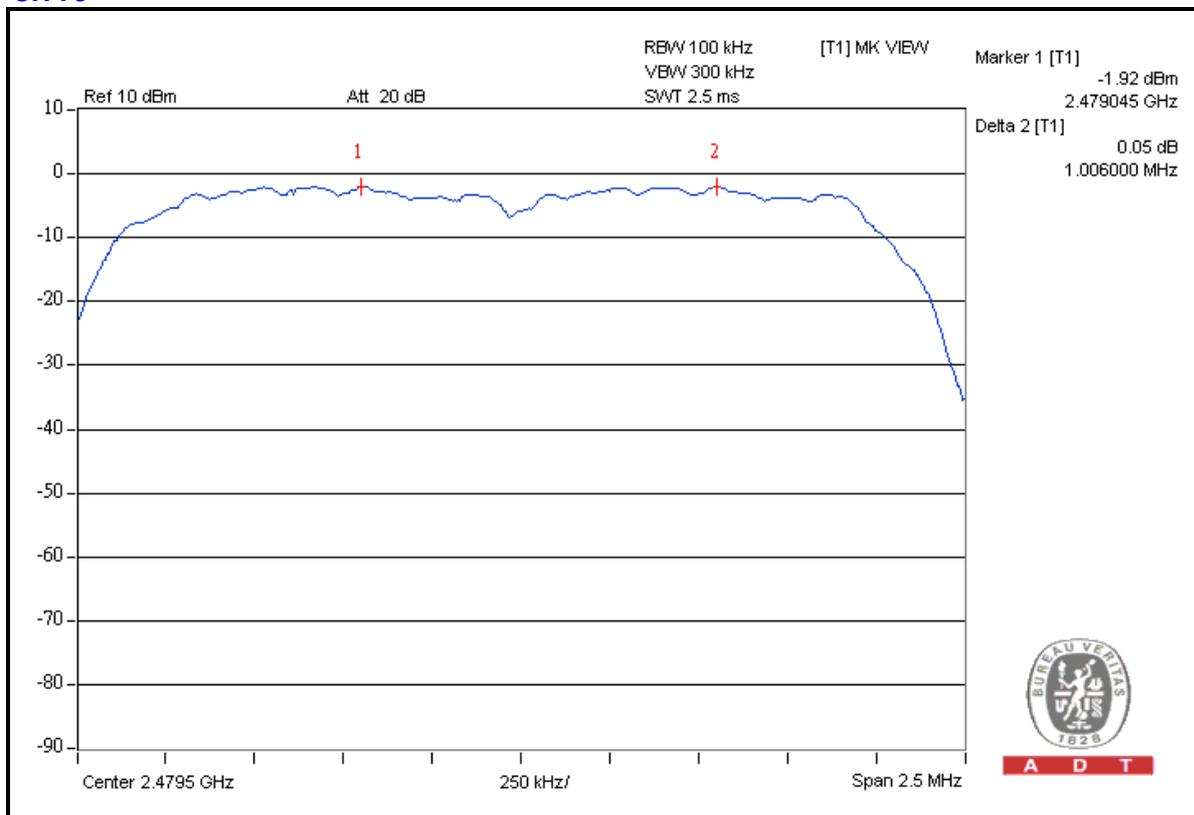

A D T

## 4.7 MAXIMUM PEAK OUTPUT POWER

### 4.7.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 125mW.

### 4.7.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
SPECTRUM ANALYZER	FSP 40	100036	Apr. 27, 2010	Apr. 26, 2011

**NOTE:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


### 4.7.3 TEST PROCEDURES

- a. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- c. The center frequency of the spectrum analyzer is set to the fundamental frequency and using 3MHz RBW and 10 MHz VBW.
- d. Measure the captured power within the band and recording the plot.
- e. Repeat above procedures until all frequencies required were complete.

### 4.7.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.7.5 TEST SETUP

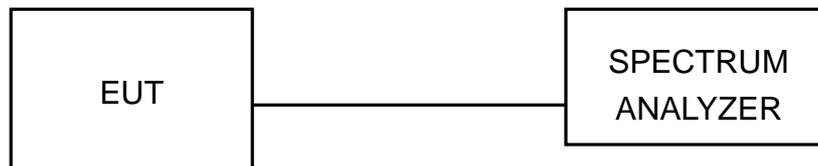

For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

#### 4.7.6 EUT OPERATING CONDITION

The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.




A D T

## 4.7.7 TEST RESULTS

### Mode A: FOR GFSK

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER OUTPUT (mW)	PEAK POWER LIMIT (mW)	PASS/FAIL
0	2402	-1.1	0.8	125	PASS
39	2441	0.0	1.0	125	PASS
78	2480	-0.2	1.0	125	PASS

### CH 39

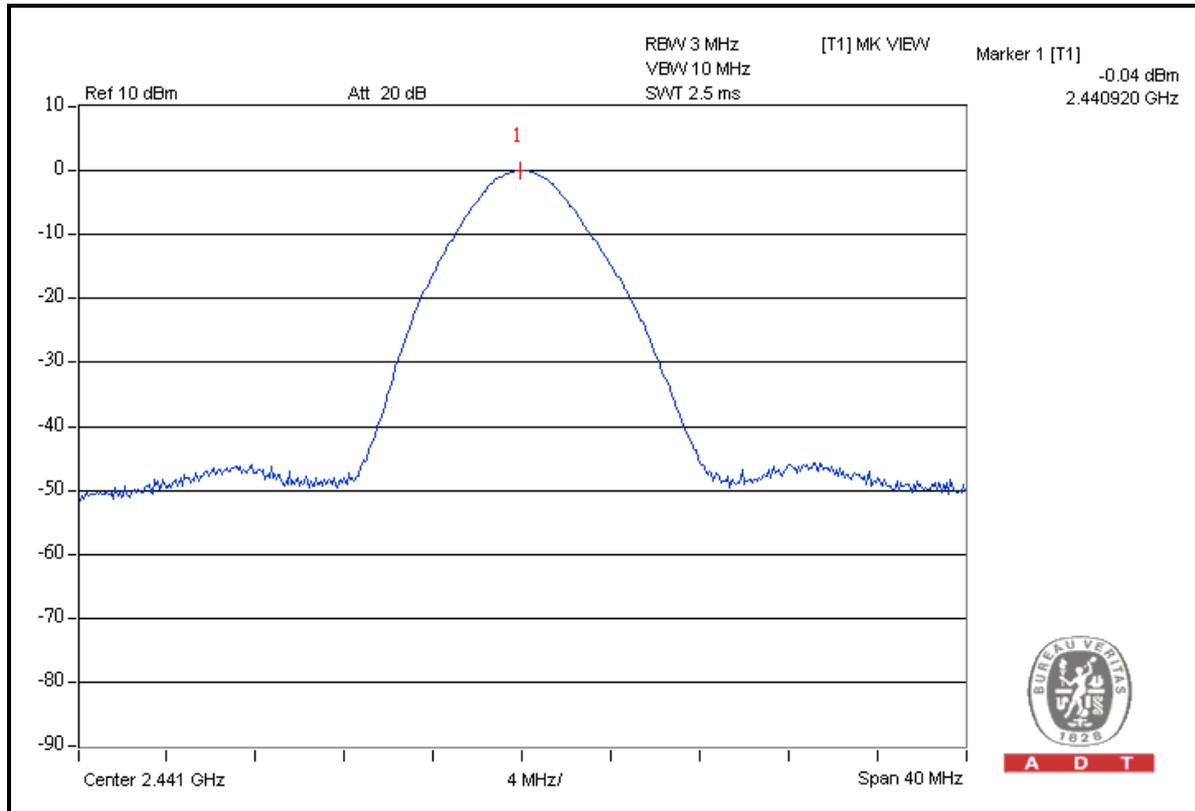




A D T

### Mode A: FOR 8DPSK

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER OUTPUT (mW)	PEAK POWER LIMIT (mW)	PASS/FAIL
0	2402	1.8	1.5	125	PASS
39	2441	2.9	1.9	125	PASS
78	2480	2.7	1.9	125	PASS

### CH 39

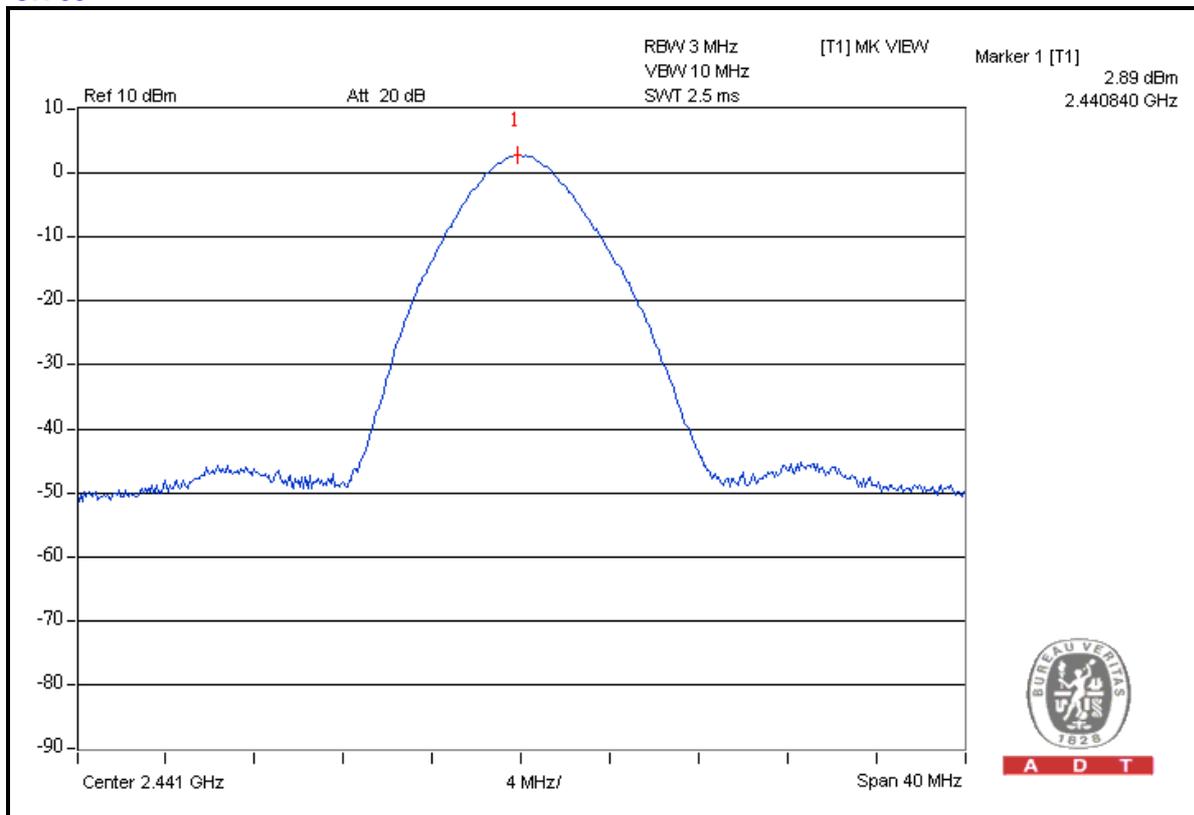

## 4.8 BAND EDGES MEASUREMENT

### 4.8.1 LIMITS OF BAND EDGES MEASUREMENT

Below  $-20\text{dB}$  of the highest emission level of operating band (in 100KHz RBW).

### 4.8.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
SPECTRUM ANALYZER	FSP 40	100036	Apr. 27, 2010	Apr. 26, 2011

**NOTE:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

### 4.8.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 100 kHz and 300 kHz with suitable frequency span including 100 MHz bandwidth from band edge. The band edges was measured and recorded.

The spectrum plots are attached on the following pages.

### 4.8.4 DEVIATION FROM TEST STANDARD

No deviation.

### 4.8.5 EUT OPERATING CONDITION

The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.

## 4.8.6 TEST RESULTS

The spectrum plots are attached on the following 8 images. D1 line indicates the highest level, D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(d).

### Mode A: FOR GFSK

#### RESTRICT BAND (2310 ~ 2390 MHz)

FREQUENCY (MHz)	FUNDAMENTAL EMISSION (dBuV/m)	DELTA (dB)	MAXIMUM FIELD STRENGTH IN RESTRICT BAND (dBuV/m)	LIMIT (dBuV/m)
2402.00 (PK)	93.0	53.1	39.9	74.00
2402.00 (AV)	-	-	9.8	54.00

#### RESTRICT BAND (2483.5 ~ 2500 MHz)



FREQUENCY (MHz)	FUNDAMENTAL EMISSION (dBuV/m)	DELTA (dB)	MAXIMUM FIELD STRENGTH IN RESTRICT BAND (dBuV/m)	LIMIT (dBuV/m)
2480.00 (PK)	95.7	52.7	43.0	74.00
2480.00 (AV)	-	-	12.9	54.00

#### NOTE:

1. Delta = Amplitude between the peak of the fundamental and the peak of the band edge emission. Please check following 2 pages.
2. Maximum field strength in restrict band (PK value) = Fundamental emission (PK value) – Delta.
3. Average value = Peak value + 20 Log (duty cycle) = Peak value –30.1dB.
4. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 \* 5 per 296.25 ms per channel. Therefore, the duty cycle be equal to:  $20\log(3.125/100) = -30.1$  dB.





A D T

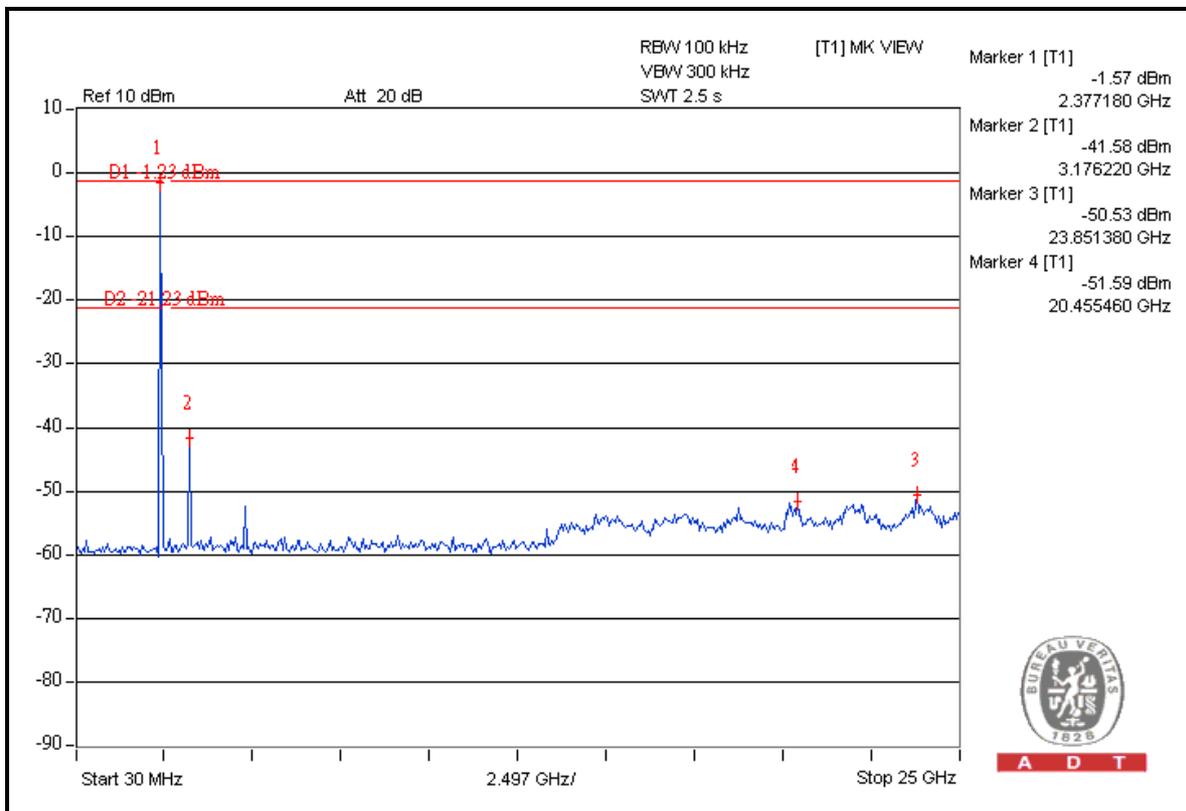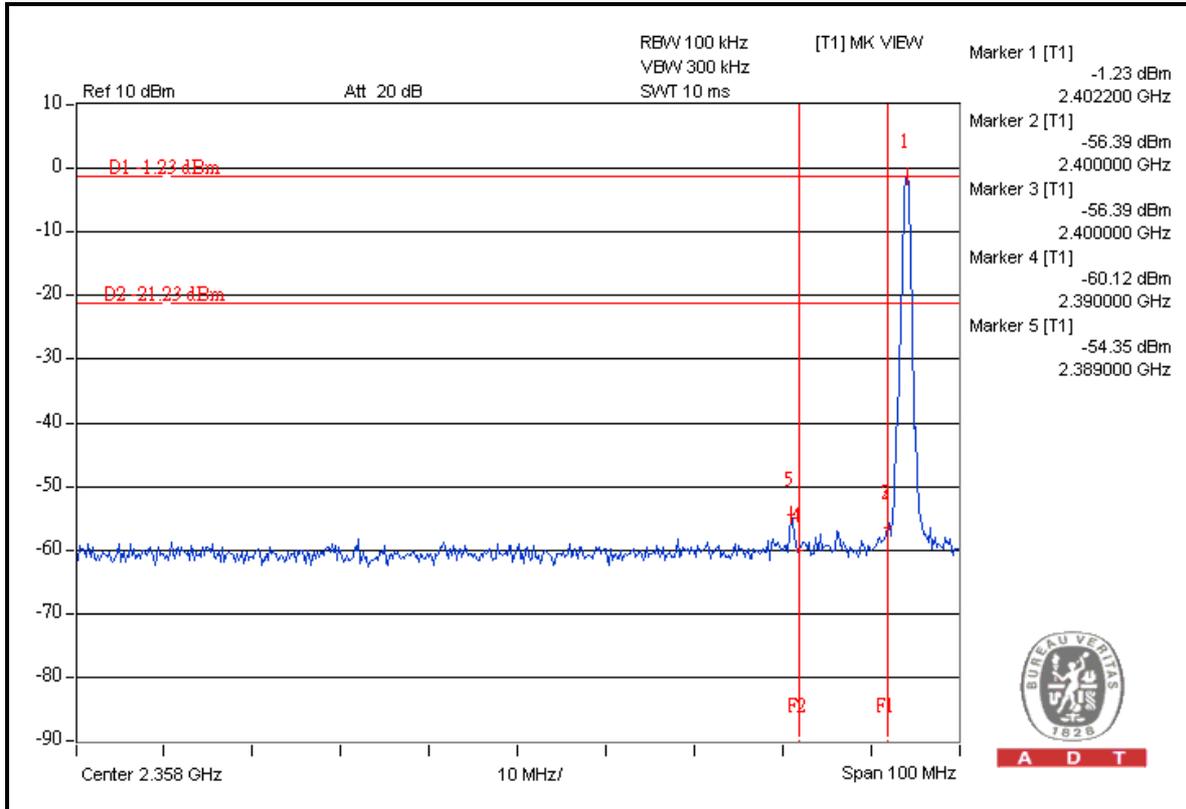



A D T

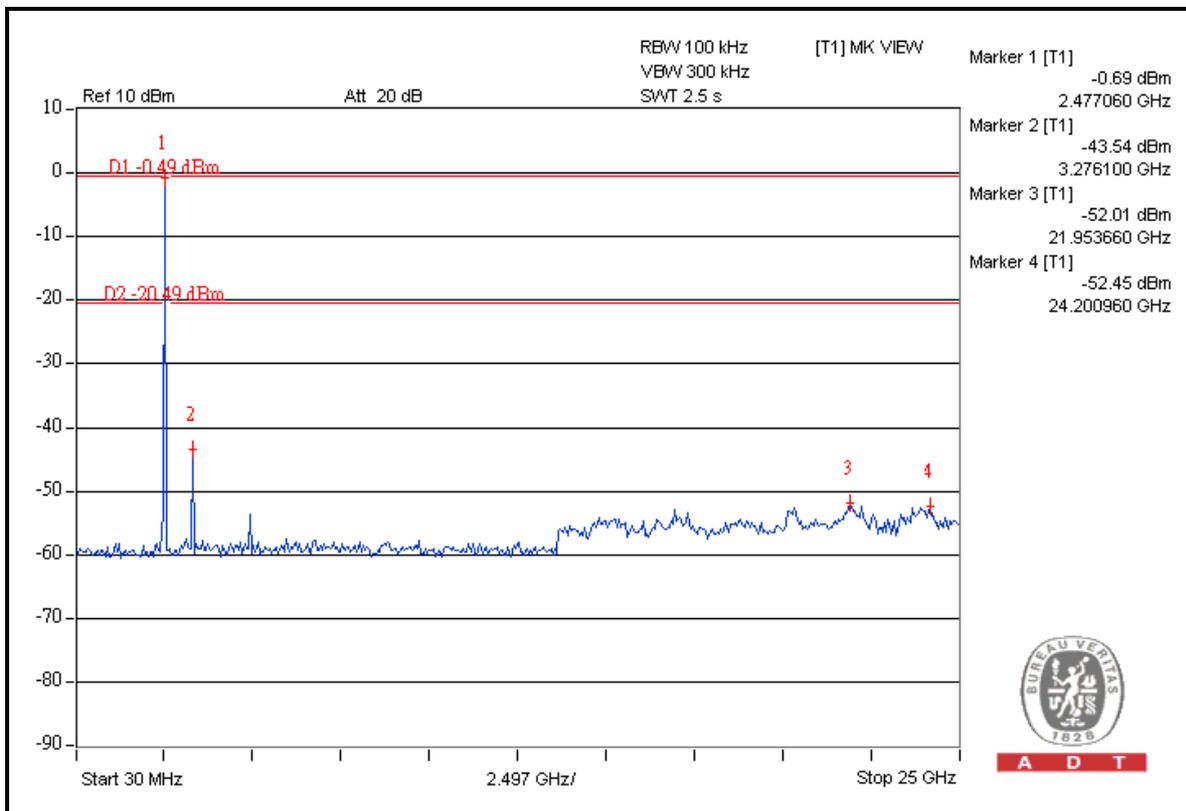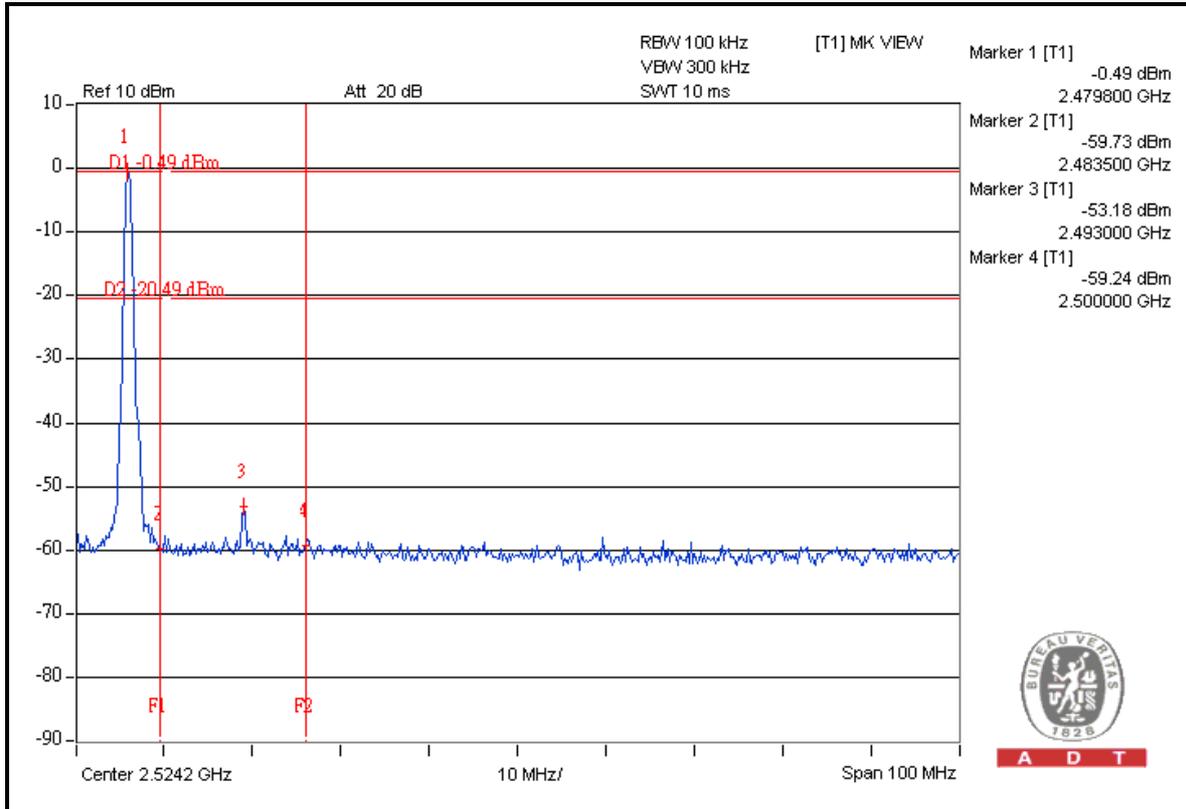

**Mode A: FOR 8DPSK**
**RESTRICT BAND (2310 ~ 2390 MHz)**

FREQUENCY (MHz)	FUNDAMENTAL EMISSION (dBuV/m)	DELTA (dB)	MAXIMUM FIELD STRENGTH IN RESTRICT BAND (dBuV/m)	LIMIT (dBuV/m)
2402.00 (PK)	95.6	52.3	43.3	74.00
2402.00 (AV)	-	-	13.2	54.00

**RESTRICT BAND (2483.5 ~ 2500 MHz)**


FREQUENCY (MHz)	FUNDAMENTAL EMISSION (dBuV/m)	DELTA (dB)	MAXIMUM FIELD STRENGTH IN RESTRICT BAND (dBuV/m)	LIMIT (dBuV/m)
2480.00 (PK)	96.9	53.2	43.7	74.00
2480.00 (AV)	-	-	13.6	54.00

**NOTE:**


1. Delta = Amplitude between the peak of the fundamental and the peak of the band edge emission. Please check following 2 pages.
2. Maximum field strength in restrict band (PK value) = Fundamental emission (PK value) – Delta.
3. Average value = Peak value + 20 Log (duty cycle) = Peak value – 30.1dB.
4. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 \* 5 per 296.25 ms per channel. Therefore, the duty cycle be equal to:  $20\log(3.125/100) = -30.1$  dB.



A D T

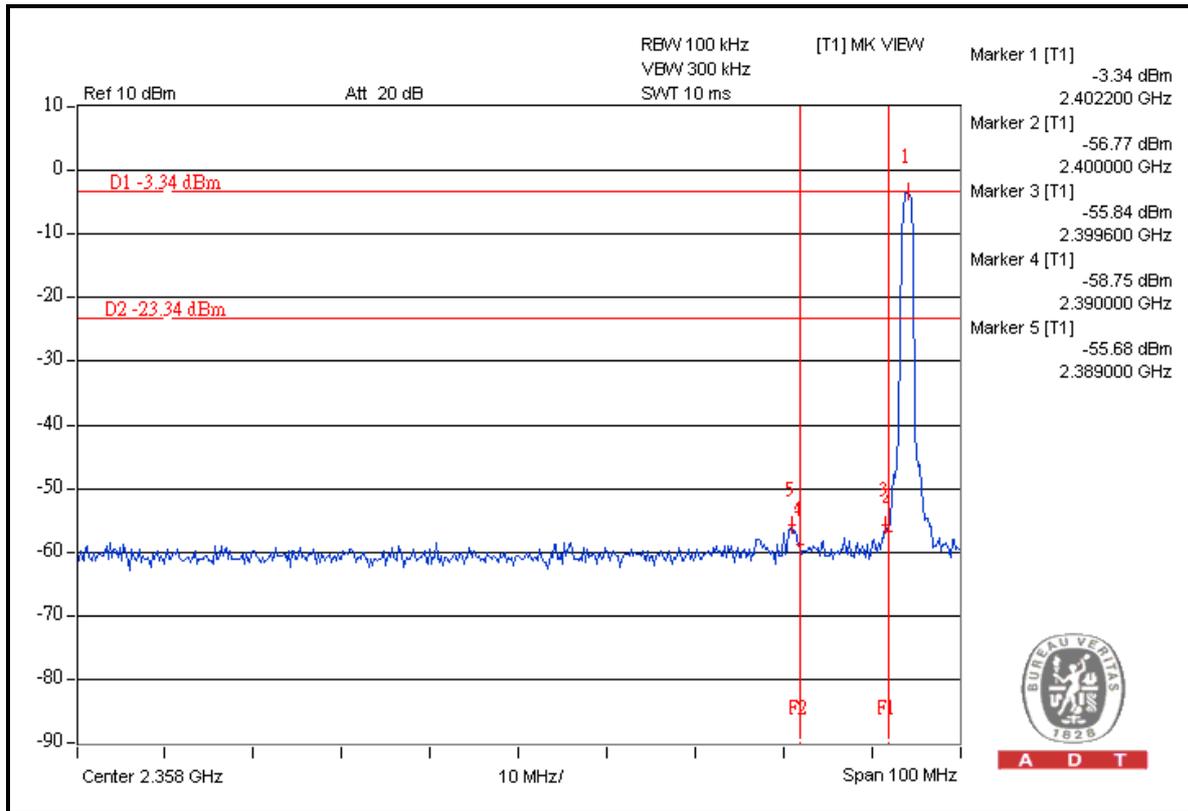



A D T

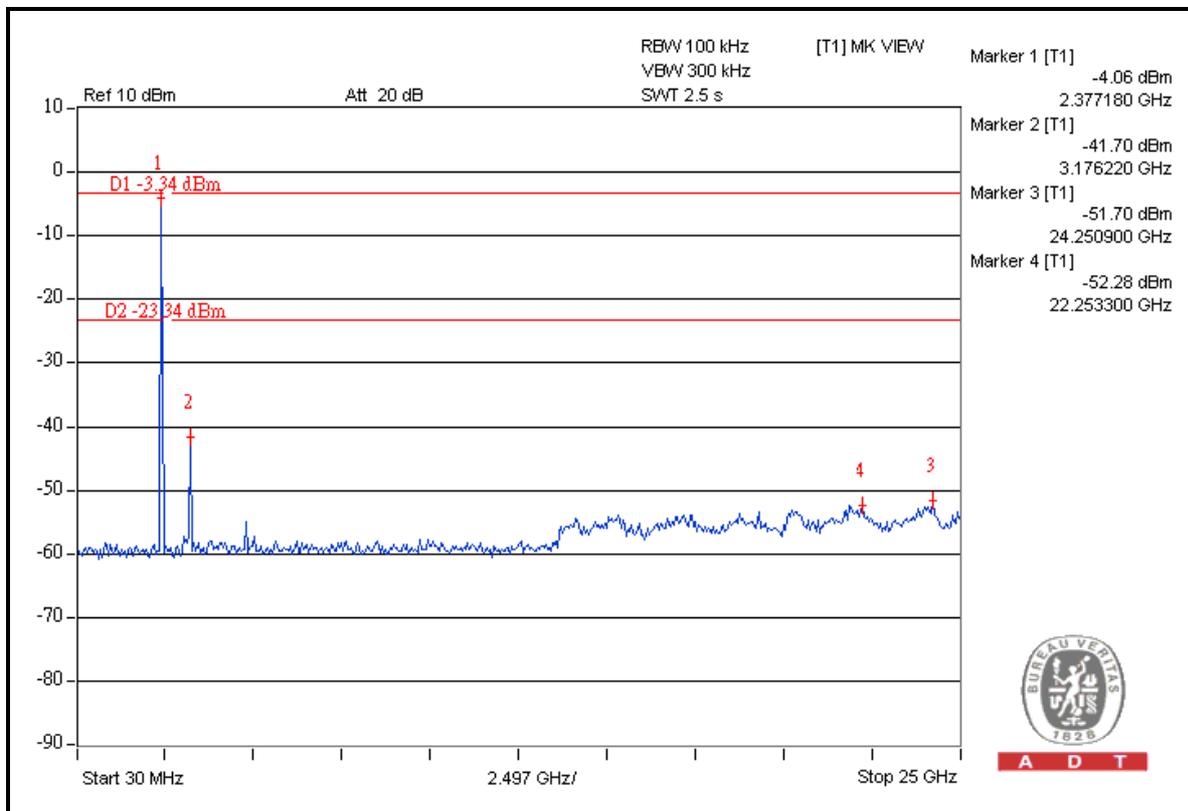

A D T



A D T

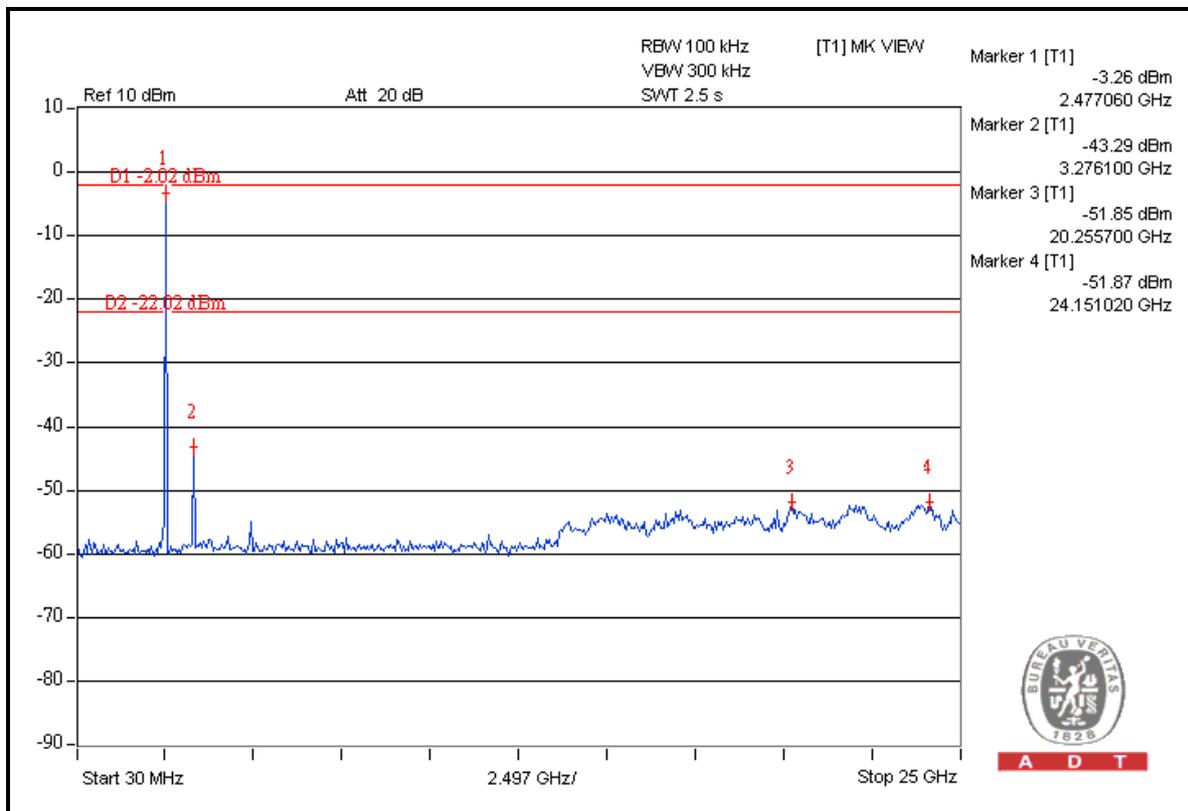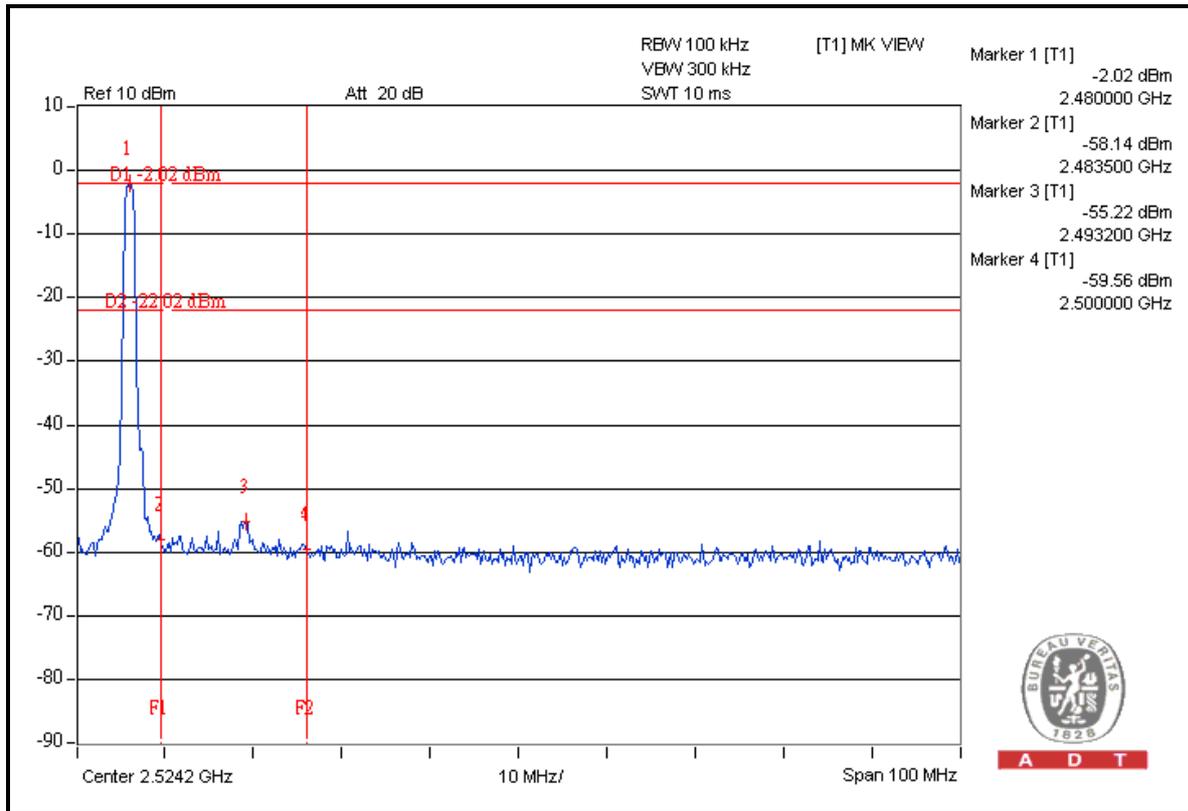

## 5. PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



## 6. INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site: [www.adt.com.tw/index.5/phtml](http://www.adt.com.tw/index.5/phtml).  
If you have any comments, please feel free to contact us at the following:

**Linko EMC/RF Lab:**

Tel: 886-2-26052180

Fax: 886-2-26051924

**Hsin Chu EMC/RF Lab:**

Tel: 886-3-5935343

Fax: 886-3-5935342

**Hwa Ya EMC/RF/Safety Telecom Lab:**

Tel: 886-3-3183232

Fax: 886-3-3185050

**Web Site:** [www.adt.com.tw](http://www.adt.com.tw)

The address and road map of all our labs can be found in our web site also.

## 7. APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

---END---