

SAR EVALUATION REPORT

Report No. : 24KE0201-HO-2

Applicant : Sony Corporation
Type of Equipment : Personal Computer
Model No. : PCG-4C1L
FCC ID : AK8PCG4C1L
Test standard : FCC47CFR 2.1093
FCC OET Bulletin 65, Supplement C
Test Result : Complied
Max SAR Measured : 0.201 W/kg(Body, 2462MHz)

1. This test report shall not be reproduced except full or partial, without the written approval of UL Apex Co., Ltd.
2. The results in this report apply only to the sample tested.
3. This equipment is in compliance with above regulation. We hereby certify that the data contain a true representation of the SAR profile.
4. The test results in this test report are traceable to the national or international standards.

Date of test : August 04 and 05, 2004

Tested by : 
Miyo Ikuta
Head Office EMC Lab.

Approved by : 
Tetsuo Maeno
Site Manager of Head Office EMC Lab.

CONTENTS

	PAGE
SECTION 1 : Client information	3
SECTION 2 : Equipment under test (E.U.T.)	4
SECTION 3 : Requirements for compliance testing defined by the FCC	6
SECTION 4 : Dosimetry assessment setup	6
SECTION 5 : Test system specifications.....	10
SECTION 6 : Test setup of EUT	11
SECTION 7 : Measurement uncertainty	14
SECTION 8 : Simulated tissue liquid parameter.....	15
SECTION 9 : System validation data	17
SECTION 10 : Evaluation procedure	18
SECTION 11 : Exposure limit	19
SECTION 12 : SAR Measurement results.....	20
SECTION 13 : Equipment & calibration information	24
SECTION 14 : References.....	25
APPENDIX 1 : Photographs of test setup.....	26
APPENDIX 2 : SAR Measurement data.....	33
APPENDIX 3 : Validation Measurement data	65
APPENDIX 4 : System Validation Dipole (D2450V2,S/N: 713).....	68
APPENDIX 5 : Dosimetric E-Field Probe Calibration (ET3DV6,S/N: 1685)	77

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

SECTION 1 : Client information

Company Name : Sony Corporation

Brand Name : SONY

Address : 6-7-35, Kitashinagawa, Shinagawa-ku, Tokyo 141-0001, Japan

Telephone Number : +81-3-5795-8716

Facsimile Number : +81-3-5795-8981

Contact Person : Takumi Ozawa

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

SECTION 2 : Equipment under test (E.U.T.)

2.1 Identification of E.U.T.

Applicant : Sony Corporation

Type of Equipment : Personal Computer

Model No. : PCG-4C1L

Serial No. : XTA084

Country of Manufacture : JAPAN

Receipt Date of Sample : July 16, 2004

Condition of EUT : Engineering prototype
(Not for sale: This sample is equivalent to mass-produced items.)

Battery option : Only one model with EUT

Rating : DC 16.0 V / 4.0 A

Category Identified : Portable device

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

2.2 Product Description of Wireless LAN

Tx Frequency : 2412MHz~2462MHz
Modulation : DSSS, OFDM
Max.Output Power Tested : 22.07 dBm Peak Conducted
Rating : DC 3.3V +/- 10%
Antenna Type : $\lambda/4$ -Monopole Antenna (Internal)
Position of Antenna : See photograph of following



SECTION 3 : Requirements for compliance testing defined by the FCC

The US Federal Communications Commission has released the report and order "Guidelines for Evaluating the Environmental Effects of RF Radiation", ET Docket No. 93-62 in August 1996. The order requires routine SAR evaluation prior to equipment authorization of portable transmitter devices, including portable telephones. For consumer products, the applicable limit is 1.6 mW/g for an uncontrolled environment and 8.0 mW/g for an occupational/controlled environment as recommended by the ANSI/IEEE standard C95.1-1992. According to the Supplement C of OET Bulletin 65 "Evaluating Compliance with FCC Guide-lines for Human Exposure to Radio frequency Electromagnetic Fields", released on Jun 29, 2001 by the FCC, the device should be evaluated at maximum output power (radiated from the antenna) under "worst-case" conditions for normal or intended use, incorporating normal antenna operating positions, device peak performance frequencies and positions for maximum RF energy coupling.

- 1 Specific Absorption Rate (SAR) is a measure of the rate of energy absorption due to exposure to an RF transmitting source (wireless portable device).
- 2 IEEE/ANSI Std. C95.1-1992 limits are used to determine compliance with FCC ET Docket 93-62.

SECTION 4 : Dosimetry assessment setup

These measurements were performed with the automated near-field scanning system DASY4 from Schmid & Partner Engineering AG (SPEAG). The system is based on a high precision robot (working range greater than 0.9 m), which positions the probes with a positional repeatability of better than +/- 0.02 mm. Special E- and H-field probes have been developed for measurements close to material discontinuity, the sensors of which are directly loaded with a Schottky diode and connected via highly resistive lines to the data acquisition unit. The SAR measurements were conducted with the dosimetry probe ET3DV6, SN: 1685 (manufactured by SPEAG), designed in the classical triangular configuration and optimized for dosimetric evaluation. The probe has been calibrated according to the procedure described in [2] with accuracy of better than +/-10%. The spherical isotropy was evaluated with the procedure described in [3] and found to be better than +/-0.25 dB. The phantom used was the SAM Twin Phantom as described in FCC supplement C, IEEE P1528 and CENELEC EN50361.

UL Apex Co., Ltd.


Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

4.1 Configuration and peripherals

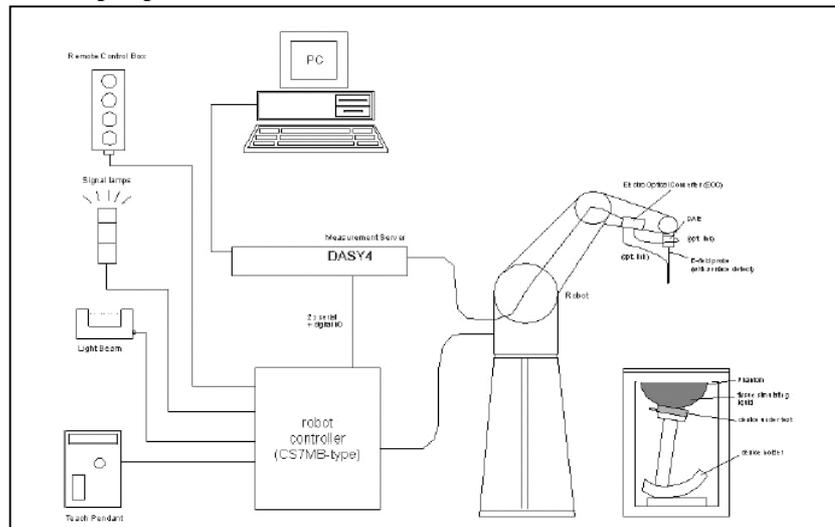

The DASYS4 system for performing compliance tests consist of the following items:

1. A standard high precision 6-axis robot (Stäubli RX family) with controller and software.
An arm extension for accommodating the data acquisition electronics (DAE).
2. A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
3. A data acquisition electronic (DAE), which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
4. The Electro-optical converter (EOC) performs the conversion between optical and electrical of the signals for the digital communication to the DAE and for the analog signal from the optical surface detection. The EOC is connected to the measurement server.
5. The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
6. A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
7. A computer operating Windows 2000.
8. DASYS4 software.
9. Remote control with teaches pendant and additional circuitry for robot safety such as warning lamps, etc.
10. The SAM twin phantom enabling testing left-hand and right-hand usage.
11. The device holder for handheld mobile phones.
12. Tissue simulating liquid mixed according to the given recipes.
13. Validation dipole kits allowing to validate the proper functioning of the system.

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

4.2 System components

4.2.1 ET3DV6 Probe Specification

Construction:

Symmetrical design with triangular core
Built-in optical fiber for surface detection System
Built-in shielding against static charges
PEEK enclosure material (resistant to organic solvents, e.g., glycol ether)

Calibration:

Basic Broad Band calibration in air from 10 MHz to 2.5 GHz
In brain and muscle simulating tissue at
Frequencies of 450 MHz, 900 MHz, 1.8 GHz and 2.45GHz (accuracy +/-8%)

Frequency:

10 MHz to 3GHz; Linearity: +/-0.2 dB

Directivity:

+/-0.2 dB in brain tissue (rotation around probe axis)
+/-0.4 dB in brain tissue (rotation normal probe axis)

Dynamic Range:

5 mW/g to > 100 mW/g; Linearity: +/-0.2 dB

Optical Surface Detection:


+/-0.2 mm repeatability in air and clear liquids over diffuse reflecting surfaces.

Dimensions:

Overall length: 330 mm (Tip: 16 mm)
Tip length: 16 mm
Body diameter: 12 mm (Body: 12 mm)
Tip diameter: 6.8 mm
Distance from probe tip to dipole centers: 2.7 mm

Application:

General dosimetric up to 3 GHz
Compliance tests of mobile phones
Fast automatic scanning in arbitrary phantoms

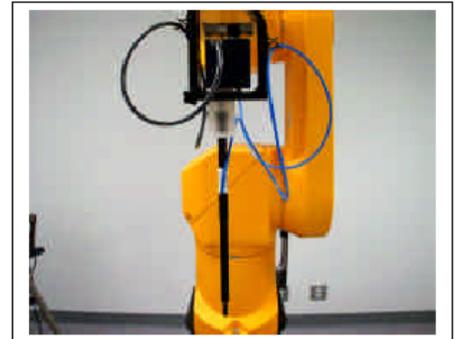

Inside view of
ET3DV6 E-field Probe

4.2.2 SAM Phantom

Construction:

The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528-200X, CENELEC EN 50361 and IEC 62209. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points with the robot.

Shell Thickness:


2 +/-0.2 mm

Filling Volume:

Approx. 25 liters

Dimensions:

(H x L x W): 810 x 1000 x 500 mm

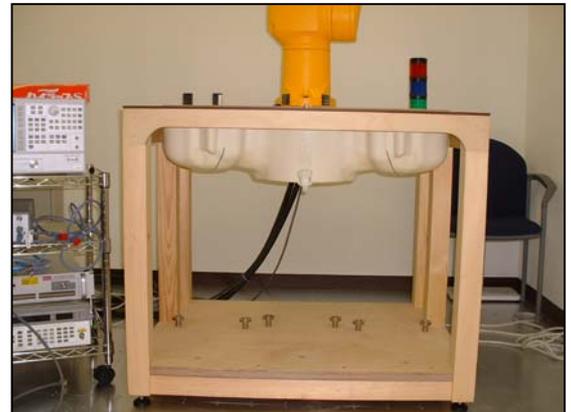

SAM Phantom

4.2.3 Device Holder for Transmitters

In combination with the SAM Twin Phantom V4.0, the Mounting Device enables the rotation of the mounted transmitter in spherical coordinates whereby the rotation points is the ear opening. The devices can be easily, accurately, and repeatedly positioned according to the FCC and CENELEC specifications. The device holder can be locked at different phantom locations (left head, right head, flat phantom).

* Note: A simulating human hand is not used due to the complex anatomical and geometrical structure of the hand that may produced infinite number of configurations. To produce the worst-case condition (the hand absorbs antenna output power), the hand is omitted during the tests.



Device Holder

Device holder couldn't be used at this SAR measurement.

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

SECTION 5 : Test system specifications**Robot RX60L**

Number of Axes	:	6
Payload	:	1.6 kg
Reach	:	800mm
Repeatability	:	+/-0.025mm
Control Unit	:	CS7M
Programming Language	:	V+
Manufacture	:	Stäubli Unimation Corp. Robot Model: RX60

DASY4 Measurement sever

Features	:	166MHz low power Pentium MMX 32MB chipdisk and 64MB RAM Serial link to DAE (with watchdog supervision) 16 Bit A/D converter for surface detection system Two serial links to robot (one for real-time communication which is supervised by watchdog) Ethernet link to PC (with watchdog supervision) Emergency stop relay for robot safety chainTwo expansion slots for future applications
Manufacture	:	Schimid & Partner Engineering AG

Data Acquisition Electronic (DAE)

Features	:	Signal amplifier, multiplexer, A/D converter and control logic Serial optical link for communication with DASY4 embedded system (fully remote controlled) 2 step probe touch detector for mechanical surface detection and emergency robot stop (not in -R version)
Measurement Range	:	1 μ V to > 200 mV (16 bit resolution and two range settings: 4mV, 400mV)
Input Offset voltage	:	< 1 μ V (with auto zero)
Input Resistance	:	200 M Ω
Battery Power	:	> 10 h of operation (with two 9 V battery)
Dimension	:	60 x 60 x 68 mm
Manufacture	:	Schimid & Partner Engineering AG

Software

Item	:	Dosimetric Assesment System DASY4
Type No.	:	SD 000 401A, SD 000 402A
Software version No.	:	4.1
Manufacture / Origin	:	Schimid & Partner Engineering AG

E-Field Probe

Model	:	ET3DV6
Serial No.	:	1685
Construction	:	Triangular core fiber optic detection system
Frequency	:	10 MHz to 6 GHz
Linearity	:	+/-0.2 dB
Manufacture	:	Schimid & Partner Engineering AG

Phantom

Type	:	SAM Twin Phantom V4.0
Shell Material	:	Fiberglass
Thickness	:	2.0 +/-0.2 mm
Volume	:	Approx. 25 liters
Manufacture	:	Schimid & Partner Engineering AG

UL Apex Co., Ltd.***Head Office EMC Lab.****4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN**Telephone: +81 596 24 8116**Facsimile: +81 596 24 8124*

SECTION 6 : Test setup of EUT

6.1 Photographs of test setup


When users operate or carry this EUT, it could be considered to touch or get close to their bodies. In addition even if this EUT is closed LCD, it can be transmitting. In order to assume this situation, we performed the test at the following positions. Please refer to "APPENDIX 1" for more details.

1. Bottom : The test was performed in touch with bottom of EUT to the flat section.
2. Back of display : The test was performed in touch with back of display to the flat section.
3. Top of display : The test was performed in touch with top of display to the flat section.


1. Bottom



2.Back of display

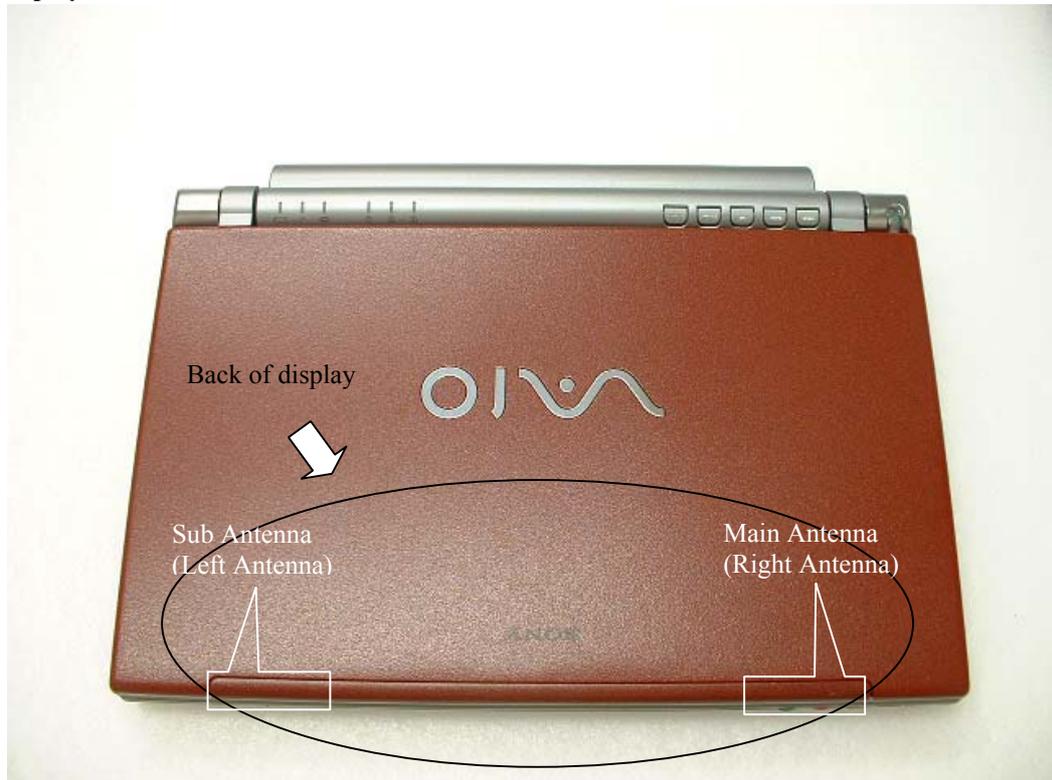

3.Top of display

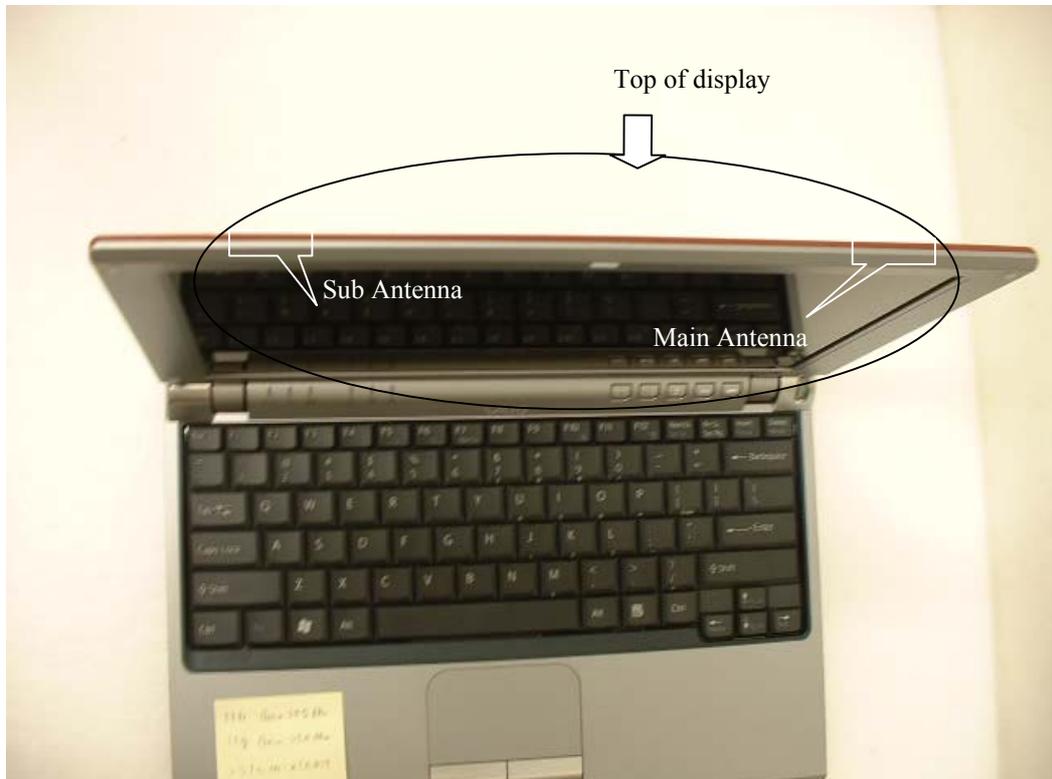

6.2 EUT Tune-up procedure

This EUT has IEEE.802.11b/11g modes.

The frequency range and the modulation were used in the testing of each mode are shown as a following.

1. IEEE 802.11b mode

Frequency band : 2412-2462MHz
Channel : 1ch(2412MHz),6ch(2437MHz),11ch(2462MHz)
Modulation : DSSS(CCK)
Crest factor : 1

2. IEEE 802.11g mode

Frequency band : 2412-2462MHz
Channel : 1ch(2412MHz),6ch(2437MHz),11ch(2462MHz)
Modulation : OFDM(64QAM & QPSK)
Crest factor : 1

SECTION 7 : Measurement uncertainty

The uncertainty budget has been determined for the DASY4 measurement system according to the NIS81 [13] and the NIST1297 [6] documents and is given in the following Table.

Error Description	Uncertainty value \pm %	Probability distribution	divisor	(ci)1 lg	Standard Uncertainty (1g)	vi or veff
Measurement System						
Probe calibration	± 4.8	Normal	1	1	± 4.8	∞
Axial isotropy of the probe	± 4.7	Rectangular	$\sqrt{3}$	$(1-c_p)^{1/2}$	± 1.9	∞
Spherical isotropy of the probe	± 9.6	Rectangular	$\sqrt{3}$	$(c_p)^{1/2}$	± 3.9	∞
Boundary effects	± 1.0	Rectangular	$\sqrt{3}$	1	± 0.6	∞
Probe linearity	± 4.7	Rectangular	$\sqrt{3}$	1	± 2.7	∞
Detection limit	± 1.0	Rectangular	$\sqrt{3}$	1	± 0.6	∞
Readout electronics	± 1.0	Normal	1	1	± 1.0	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	± 0.5	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	± 1.5	∞
RF ambient conditions	± 3.0	Rectangular	$\sqrt{3}$	1	± 1.7	∞
Mech. constraints of robot	± 0.4	Rectangular	$\sqrt{3}$	1	± 0.2	∞
Probe positioning	± 2.9	Rectangular	$\sqrt{3}$	1	± 1.7	∞
Extrap. and integration	± 1.0	Rectangular	$\sqrt{3}$	1	± 0.6	∞
Test Sample Related						
Device positioning	± 2.9	Rectangular	$\sqrt{3}$	1	± 2.9	29
Device holder uncertainty	± 3.6	Rectangular	$\sqrt{3}$	1	± 3.6	5
Power drift	± 10.0	Rectangular	$\sqrt{3}$	1	± 2.9	∞
Phantom and Setup						
Phantom uncertainty	± 4.0	Rectangular	$\sqrt{3}$	1	± 2.3	∞
Liquid conductivity (target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	± 1.8	∞
Liquid conductivity (meas.)	± 5.0	Rectangular	$\sqrt{3}$	0.64	± 3.7	∞
Liquid permittivity (target)	± 5.0	Rectangular	$\sqrt{3}$	0.6	± 3.5	∞
Liquid permittivity (meas.)	± 5.0	Rectangular	$\sqrt{3}$	0.6	± 1.7	∞
Combined Standard Uncertainty					± 11.51	
Expanded Uncertainty (k=2)					± 23.0	

The result of some test showed that the power drift has exceeded 5%. Therefore, the uncertainty of power drift expanded to 10%. However, the extended uncertainty (k= 2) of a test is less than 30%.

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

SECTION 8 : Simulated tissue liquid parameter**8.1 Simulated Tissue Liquid Parameter confirmation**

The dielectric parameters were checked prior to assessment using the HP85070D dielectric probe kit.
The dielectric parameters measurement are reported in each correspondent section.

8.1.1 Head 2450MHz

Type of liquid : **Head 2450 MHz**
 Ambient temperature (deg.c.) : **24.8(August 04) / 24.8(August 05)**
 Relative Humidity (%) : **65(August 04) / 68(August 05)**
 Liquid depth (cm) : **15.1**

Measured By : Miyo Ikuta

DIELECTRIC PARAMETERS MEASUREMENT RESULTS							
Date	Liquid Temp [deg.c]		Parameters	Target Value	Measured	Deviation [%]	Limit [%]
	Before	After					
August 04	24.1	24.1	Relative Permittivity ϵ_r	39.2	37.4	-4.6	+/-5
			Coductivity σ [mho/m]	1.80	1.84	2.2	+/-5
August 05	23.8	23.8	Relative Permittivity ϵ_r	39.2	37.5	-4.3	+/-5
			Coductivity σ [mho/m]	1.80	1.84	2.2	+/-5

UL Apex Co., Ltd.**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

8.1.2 Muscle 2450MHz

Type of liquid : **Muscle 2450 MHz**
 Ambient temperature (deg.c.) : **24.8(August 04) / 24.5(August 05)**
 Relative Humidity (%) : **65(August 04) / 68(August 05)**
 Liquid depth (cm) : **15.1**

Measured By : Miyo Ikuta

DIELECTRIC PARAMETERS MEASUREMENT RESULTS							
Date	Liquid Temp [deg.c]		Parameters	Target Value	Measured	Deviation [%]	Limit [%]
	Before	After					
August 04	24.3	24.3	Relative Permittivity ϵ_r	52.7	50.7	-3.8	+/-5
			Conductivity σ [mho/m]	1.95	1.95	0.0	+/-5
August 05	24.1	24.1	Relative Permittivity ϵ_r	52.7	50.2	-4.7	+/-5
			Conductivity σ [mho/m]	1.95	1.94	-0.5	+/-5

8.2 Simulated Tissues

Ingredient	MiXTURE(%)	
	Head 2450MHz	Muscle 2450MHz
Water	45.0	69.83
DGMBE	55.0	30.17

Note:DGMBE(Diethylenglycol-monobuthyl ether)

UL Apex Co., Ltd.**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

SECTION 9 : System validation data



Prior to the assessment, the system validation kit was used to test whether the system was operating within its specifications of +/-10%. The validation results are tabulated below. Please refer to APPENDIX 3.

Type of liquid : **HEAD 2450MHz**
Frequency : **2450MHz**
Dipole : **D2450V2 SN:713**
Liquid depth (cm) : **15.1**
Ambient temperature (deg.c.) : **24.8 (August 04) / 24.8(August 05)**
Relative Humidity (%) : **65(August 04) / 68(August 05)**
Power : **250mW**

Measured By : Miyo Ikuta

SYSTEM PERFORMANCE CHECK										
Date	Liquid (HEAD 2450MHz)						System dipole validation target & measured			
	Liquid Temp [deg.c.]		Relative Permittivity ϵ_r		Conductivity σ [mho/m]		SAR 1g [W/kg]		Deviation [%]	Limit [%]
	Before	After	Target	Measured	Target	Measured	Target	Measured		
August 04	24.1	24.1	39.2	37.4	1.80	1.84	13.1	13.7	4.6	+/-10
August 05	23.8	23.8	39.2	37.5	1.80	1.84	13.1	13.4	2.3	+/-10

Note: Please refer to Attachment for the result representation in plot format

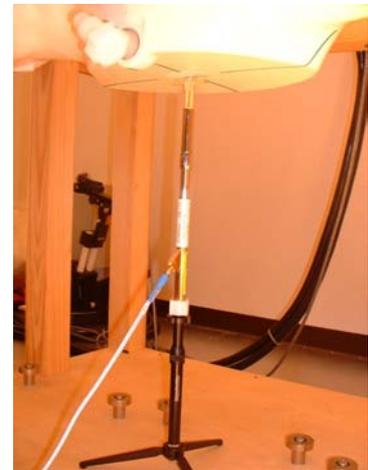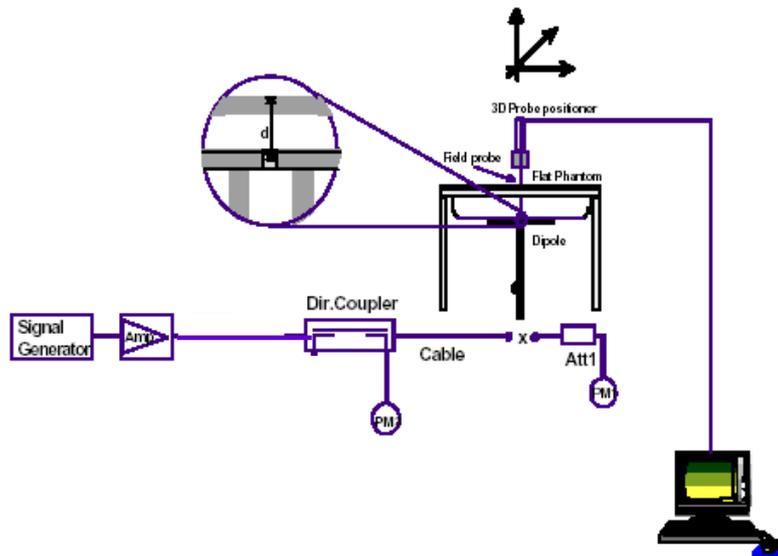

2450MHz System performance check setup

Test system for the system performance check setup diagram

SECTION 10 : Evaluation procedure

The evaluation was performed with the following procedure:

Step 1: Measurement of the E-field at a fixed location above the ear point or central position of flat section was used as a reference value for assessing the power drop.

Step 2: The SAR distribution at the exposed side of head or body position was measured at a distance of each device from the inner surface of the shell. The area covered the entire dimension the antenna of the EUT and the horizontal grid spacing was 20 mm x 20 mm. Based on these data, the area of the maximum absorption was determined by spline interpolation.

Step 3: Around this point found in the Step 2 (area scan) , a volume of 32 mm x 32 mm x 30 mm was assessed by measuring 5 x 5 x 7 points. And for any secondary peaks found in the Step2 which are within 2dB of maximum peak and not with this Step3 (Zoom scan) is repeated. On the basis of this data set, the spatial peak SAR value was evaluated under the following procedure:

1. The data at the surface were extrapolated, since the center of the dipoles is 2.7 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.3 mm. The extrapolation was based on a least square algorithm [4]. A polynomial of the fourth order was calculated through the points in z-axes. This polynomial was then used to evaluate the points between the surface and the probe tip.
2. The maximum interpolated value was searched with a straightforward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1 g or 10 g) were computed by the 3D-Spline interpolation algorithm. The 3D-Spline is composed of three one-dimensional splines with the "Not a knot"-condition (in x, y and z-directions) [4], [5]. The volume was integrated with the trapezoidal-algorithm. One thousand points (10 x 10 x 10) were interpolated to calculate the average.
3. All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.

Step 4: Re-measurement of the E-field at the same location as in Step 1.

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

SECTION 11 : Exposure limit**(A) Limits for Occupational/Controlled Exposure (W/kg)**

Spatial Average (averaged over the whole body)	Spatial Peak (averaged over any 1g of tissue)	Spatial Peak (hands/wrists/feet/ankles averaged over 10g)
0.4	8.0	20.0

(B) Limits for General population/Uncontrolled Exposure (W/kg)

Spatial Average (averaged over the whole body)	Spatial Peak (averaged over any 1g of tissue)	Spatial Peak (hands/wrists/feet/ankles averaged over 10g)
0.08	1.6	4.0

Occupational/Controlled Environments: are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure, (i.e. as a result of employment or occupation).

General Population/Uncontrolled Environments: are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

NOTE:GENERAL POPULATION/UNCONTROLLED EXPOSURE SPATIAL PEAK(averaged over any 1g of tissue) LIMIT 1.6 W/kg
--

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

SECTION 12 : SAR Measurement results

12.1 Measurement results of main antenna (Right antenna)

12.1.1 Conducted power measurement results

CONDUCTED POWER MEASUREMENT RESULTS OF MAIN ANTENNA													
Modulation	Frequency [MHz]	Before					After					Deviation [%]	Limit [%]
		Reading [dBm]	Att. [dB]	Cable loss [dB]	Result [dBm]	Convert [mW]	Reading [dBm]	Att. [dB]	Cable loss [dB]	Result [dBm]	Convert [mW]		
DSSS	2412	8.35	10	3.4	21.75	149.6	8.33	10	3.4	21.73	148.9	-0.5	+/-5
	2437	8.58	10	3.4	21.98	157.8	8.46	10	3.4	21.86	153.5	-2.7	+/-5
	2462	8.67	10	3.4	22.07	161.1	8.58	10	3.4	21.98	157.8	-2.1	+/-5
OFDM (64QAM)	2412	2.99	10	3.4	16.39	43.6	2.98	10	3.4	16.38	43.5	-0.2	+/-5
	2437	3.21	10	3.4	16.61	45.8	3.04	10	3.4	16.44	44.1	-3.8	+/-5
	2462	2.92	10	3.4	16.32	42.9	2.91	10	3.4	16.31	42.8	-0.2	+/-5
OFDM (QPSK)	2412	3.15	10	3.4	16.55	45.2	3.19	10	3.4	16.59	45.6	0.9	+/-5
	2437	2.88	10	3.4	16.28	42.5	2.78	10	3.4	16.18	41.5	-2.3	+/-5
	2462	2.69	10	3.4	16.09	40.6	2.65	10	3.4	16.05	40.3	-0.9	+/-5

12.1.2 Body 2450MHz SAR of main antenna

Liquid Depth (cm) : **15.1**
 Parameters : $\epsilon_r = 50.7, \sigma = 1.95$
 Ambient Temperature[deg.c.] : **24.8**
 Relative Humidity (%) : **65**

Model : **PCG-4C1L**
 Serial No. : **XTA084**
 Modulation : **DSSS,OFDM**
 Crest factor : **1**

Date : August 04 , 2004
 Measured By : Miyo Ikuta

BODY SAR MEASUREMENT RESULTS OF MAIN ANTENNA									
Frequency		Modulation	Phantom Section	EUT Set-up Conditions			Liquid Temp.[deg.c]		SAR(1g) [W/kg]
Channel	[MHz]			Antenna	Position	Separation [mm]	Before	After	Maximum value of multi-peak
Mid	2437	DSSS	Flat	Fixed	Bottom	0	24.4	24.4	0.0313
Mid	2437	DSSS	Flat	Fixed	Back of display	15	24.3	24.3	0.0847
Mid	2437	DSSS	Flat	Fixed	Top of display	15	24.3	24.3	0.0625
Low	2412	DSSS	Flat	Fixed	Back of display	15	24.3	24.3	0.14
High	2462	DSSS	Flat	Fixed	Back of display	15	24.3	24.3	0.201
ANSI / IEEE C95.1 1992 - SAFETY LIMIT							Body SAR: 1.6 W/kg		
Spatial Peak Uncontrolled Exposure / General Population							(averaged over 1 gram)		

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

BODY SAR MEASUREMENT RESULTS OF MAIN ANTENNA									
Frequency		Modulation	Phantom Section	EUT Set-up Conditions			Liquid Temp.[deg.c]		SAR(1g) [W/kg]
Channel	[MHz]			Antenna	Position	Separation [mm]	Before	After	Maximum value of multi-peak
Mid	2437	OFDM(64QAM)	Flat	Fixed	Bottom	0	24.3	24.3	0.00427
Mid	2437	OFDM(64QAM)	Flat	Fixed	Back of display	15	24.3	24.3	0.024
Mid	2437	OFDM(64QAM)	Flat	Fixed	Top of display	15	24.3	24.3	0.00876
Low	2412	OFDM(64QAM)	Flat	Fixed	Back of display	15	24.3	24.3	0.00259
High	2462	OFDM(64QAM)	Flat	Fixed	Back of display	15	24.3	24.3	0.0378
Mid	2437	OFDM(QPSK)	Flat	Fixed	Bottom	0	24.3	24.3	0.00479
Mid	2437	OFDM(QPSK)	Flat	Fixed	Back of display	15	24.3	24.3	0.066
Mid	2437	OFDM(QPSK)	Flat	Fixed	Top of display	15	24.3	24.3	0.0107
Low	2412	OFDM(QPSK)	Flat	Fixed	Back of display	15	24.0	24.0	0.00841
High	2462	OFDM(QPSK)	Flat	Fixed	Back of display	15	24.0	24.0	0.0121
ANSI / IEEE C95.1 1992 - SAFETY LIMIT							Body SAR: 1.6 W/kg		
Spatial Peak Uncontrolled Exposure / General Population							(averaged over 1 gram)		

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

12.2 Measurement results of sub antenna (Left antenna)**12.2.1 Conducted power measurement results**

CONDUCTED POWER MEASUREMENT RESULTS OF SUB ANTENNA													
Modulation	Frequency [MHz]	Before					After					Deviation [%]	Limit [%]
		Reading [dBm]	Att. [dB]	Cable loss [dB]	Result [dBm]	Convert [mW]	Reading [dBm]	Att. [dB]	Cable loss [dB]	Result [dBm]	Convert [mW]		
DSSS	2412	8.15	10	3.4	21.55	142.9	8.08	10	3.4	21.48	140.6	-1.6	+/-5
	2437	8.53	10	3.4	21.93	156.0	8.32	10	3.4	21.72	148.6	-4.7	+/-5
	2462	8.61	10	3.4	22.01	158.9	8.57	10	3.4	21.97	157.4	-0.9	+/-5
OFDM (64QAM)	2412	3.09	10	3.4	16.49	44.6	3.01	10	3.4	16.41	43.8	-1.8	+/-5
	2437	2.76	10	3.4	16.16	41.3	2.74	10	3.4	16.14	41.1	-0.5	+/-5
	2462	2.96	10	3.4	16.36	43.3	2.86	10	3.4	16.26	42.3	-2.3	+/-5
OFDM (QPSK)	2412	2.88	10	3.4	16.28	42.5	2.75	10	3.4	16.15	41.2	-2.9	+/-5
	2437	2.59	10	3.4	15.99	39.7	2.51	10	3.4	15.91	39.0	-1.8	+/-5
	2462	2.66	10	3.4	16.06	40.4	2.63	10	3.4	16.03	40.1	-0.7	+/-5

12.1.2 Body 2450MHz SAR of sub antenna

Liquid Depth (cm)	: 15.1	Model	: PCG-4C1L
Parameters	: $\epsilon_r = 50.2, \sigma = 1.94$	Serial No.	: XTA084
Ambient Temperature[deg.c.]	: 24.5	Modulation	: DSSS,OFDM
Relative Humidity (%)	: 68	Crest factor	: 1

Date : August 05,2004

Measured By : Miyo Ikuta

BODY SAR MEASUREMENT RESULTS OF SUB ANTENNA									
Frequency		Modulation	Phantom Section	EUT Set-up Conditions			Liquid Temp.[deg.c]		SAR(1g) [W/kg]
Channel	[MHz]			Antenna	Position	Separation [mm]	Before	After	Maximum value of multi-peak
Mid	2437	DSSS	Flat	Fixed	Bottom	0	24.3	24.3	0.0257
Mid	2437	DSSS	Flat	Fixed	Back of display	15	24.3	24.3	0.12
Mid	2437	DSSS	Flat	Fixed	Top of display	15	24.3	24.3	0.0889
Low	2412	DSSS	Flat	Fixed	Back of display	15	24.3	24.3	0.131
High	2462	DSSS	Flat	Fixed	Back of display	15	24.3	24.3	0.0918
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure / General Population							Body SAR: 1.6 W/kg (averaged over 1 gram)		

UL Apex Co., Ltd.**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

BODY SAR MEASUREMENT RESULTS OF SUB ANTENNA									
Frequency		Modulation	Phantom Section	EUT Set-up Conditions			Liquid Temp.[deg.c]		SAR(1g) [W/kg]
Channel	[MHz]			Antenna	Position	Separation [mm]	Before	After	Maximum value of multi-peak
Mid	2437	OFDM(64QAM)	Flat	Fixed	Bottom	0	24.3	24.3	0.00453
Mid	2437	OFDM(64QAM)	Flat	Fixed	Back of display	15	24.3	24.3	0.0137
Mid	2437	OFDM(64QAM)	Flat	Fixed	Top of display	15	24.1	24.1	0.0169
Low	2412	OFDM(64QAM)	Flat	Fixed	Topof display	15	24.3	24.3	0.0126
High	2462	OFDM(64QAM)	Flat	Fixed	Top of display	15	24.3	24.3	0.0141
Mid	2437	OFDM(QPSK)	Flat	Fixed	Bottom	0	24.1	24.1	0.00499
Mid	2437	OFDM(QPSK)	Flat	Fixed	Back of display	15	24.1	24.1	0.0206
Mid	2437	OFDM(QPSK)	Flat	Fixed	Top of display	15	24.3	24.3	0.0208
Low	2412	OFDM(QPSK)	Flat	Fixed	Top of display	15	24.3	24.3	0.0166
High	2462	OFDM(QPSK)	Flat	Fixed	Top of display	15	24.3	24.3	0.0171
ANSI / IEEE C95.1 1992 - SAFETY LIMIT							Body SAR: 1.6 W/kg		
Spatial Peak Uncontrolled Exposure / General Population							(averaged over 1 gram)		

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

SECTION 13 : Equipment & calibration information

Name of Equipment	Manufacture	Model number	Serial number	Calibration	
				Last Cal	due date
Power Meter	Agilent	E4417A	GB41290639	2003/11/12	2004/11/11
Power Sensor	Agilent	E9300B	US40010300	2003/11/17	2004/11/16
Power Sensor	Agilent	E9327A	US40440576	2003/11/03	2004/11/02
S-Parameter Network Analyzer	Agilent	8753ES	US39174808	2003/10/23	2006/10/22
Signal Generator	Rohde&Schwarz	SML40	100023	2003/11/26	2004/11/25
RF Amplifier	OPHIR	5056F	1005	2004/02/17	2005/02/16
Dosimetric E-Field Probe	Schmid&Partner Engineering AG	ET3DV6	1685	2003/10/10	2004/10/09
Data Acquisition Electronics	Schmid&Partner Engineering AG	DAE3 V1	509	2004/04/22	2005/04/21
Robot,SAM Phantom	Schmid&Partner Engineering AG	DASY4	I021834	N/A	N/A
Attenuator	Agilent	US40010300	08498-60012	2003/12/16	2004/12/15
Attenuator	Orient Microwave	BX10-0476-00	-	2004/03/30	2005/03/29
Spectrum Analyzer	Advantest	R3273	110101630	2004/02/18	2005/02/17
2450MHz System Validation Dipole	Schmid&Partner Engineering AG	D2450V2	713	2002/11/15	2004/11/14
Dual Directional Coupler	N/A	Narda	03702	N/A	N/A
Head 2450MHz	N/A	N/A	N/A	N/A	N/A
Body 2450MHz	N/A	N/A	N/A	N/A	N/A

UL Apex Co., Ltd.***Head Office EMC Lab.****4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN**Telephone: +81 596 24 8116**Facsimile: +81 596 24 8124*

SECTION 14 : References

- [1] ANSI, ANSI/IEEE C95.1-1992: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz, The Institute of Electrical and Electronics Engineers, Inc., New York, NY 10017, 1992.
- [2] Katja Pokovic, Thomas Schmid, and Niels Kuster, "Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequencies", in ICECOM '97, Dubrovnik, October 15-17, 1997, pp. 120-124.
- [3] Katja Pokovic, Thomas Schmid, and Niels Kuster, "E_ field probe with improved isotropy in brain simulating liquids", in Proceedings of the ELMAR, Zadar, Croatia, 23-25 June, 1996, pp.172-175.
- [4] W. Gander, Computermathematik, Birkhaeuser, Basel, 1992.
- [5] W. H. Press, S. A. Teukolsky, W. T. Vetterling, and B. P. Flannery, Numerical Recipes in C, The Art of Scientific Computing, Second Edition, Cambridge University Press, 1992.
- [6] Barry N. Taylor and Christ E. Kuyatt, "Guidelines for evaluating and expressing the uncertainty of NIST measurement results", Tech. Rep., National Institute of Standards and Technology, 1994.

UL Apex Co., Ltd.

Head Office EMC Lab.


4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116


Facsimile: +81 596 24 8124

APPENDIX 1 : Photographs of test setup

Bottom(Main antenna)

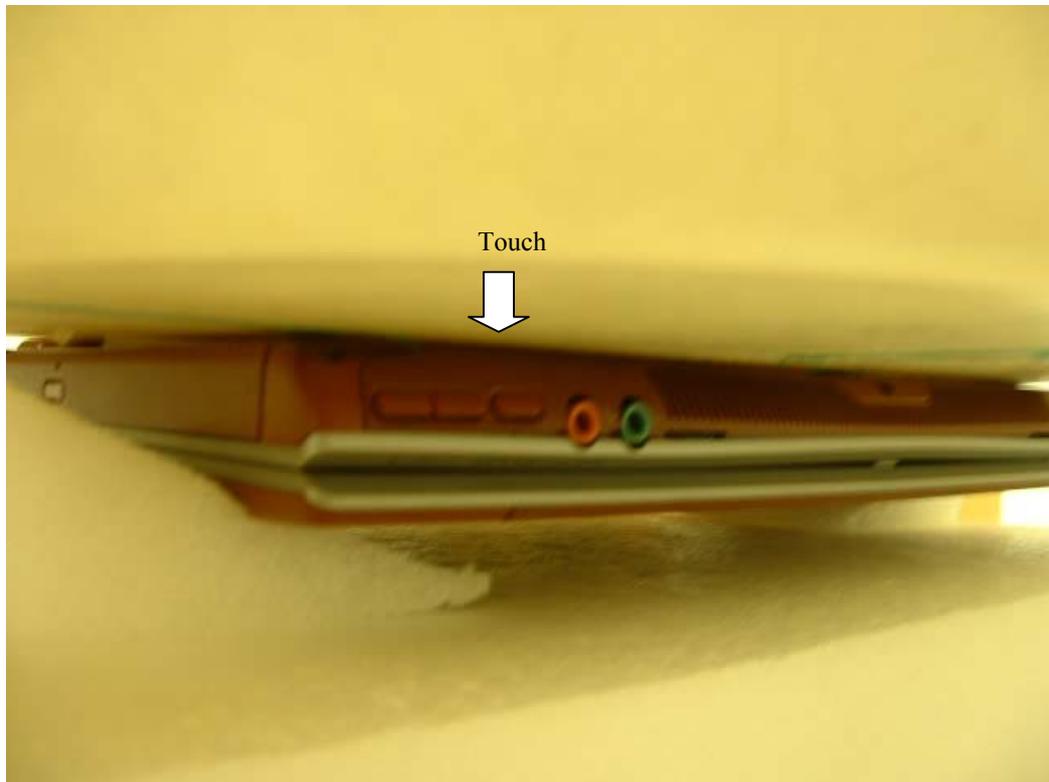


Back of display (Main antenna)

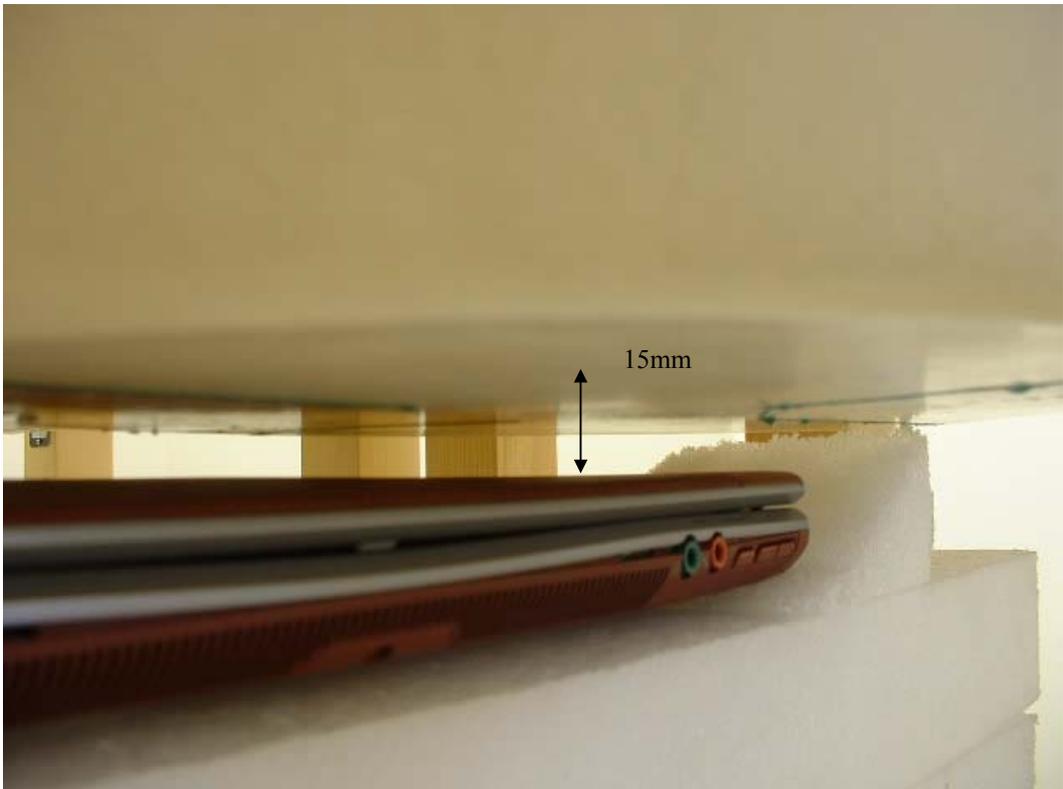


Top of display (Main antenna)



Bottom (Sub antenna)

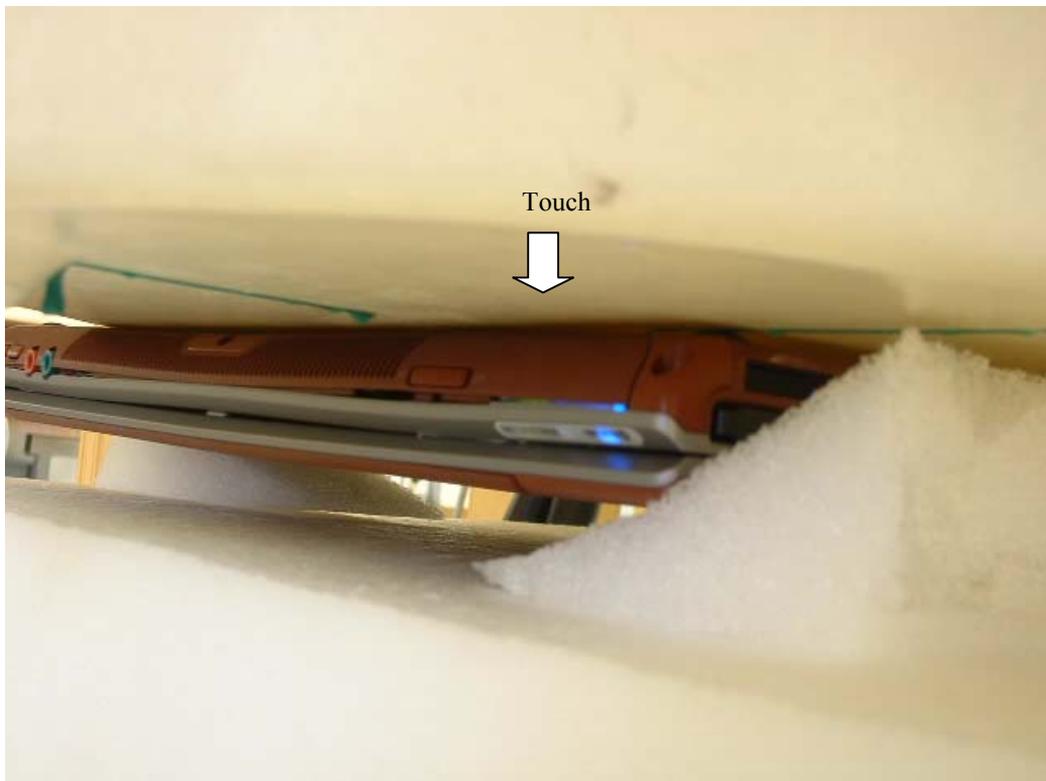

Back of display (Sub antenna)

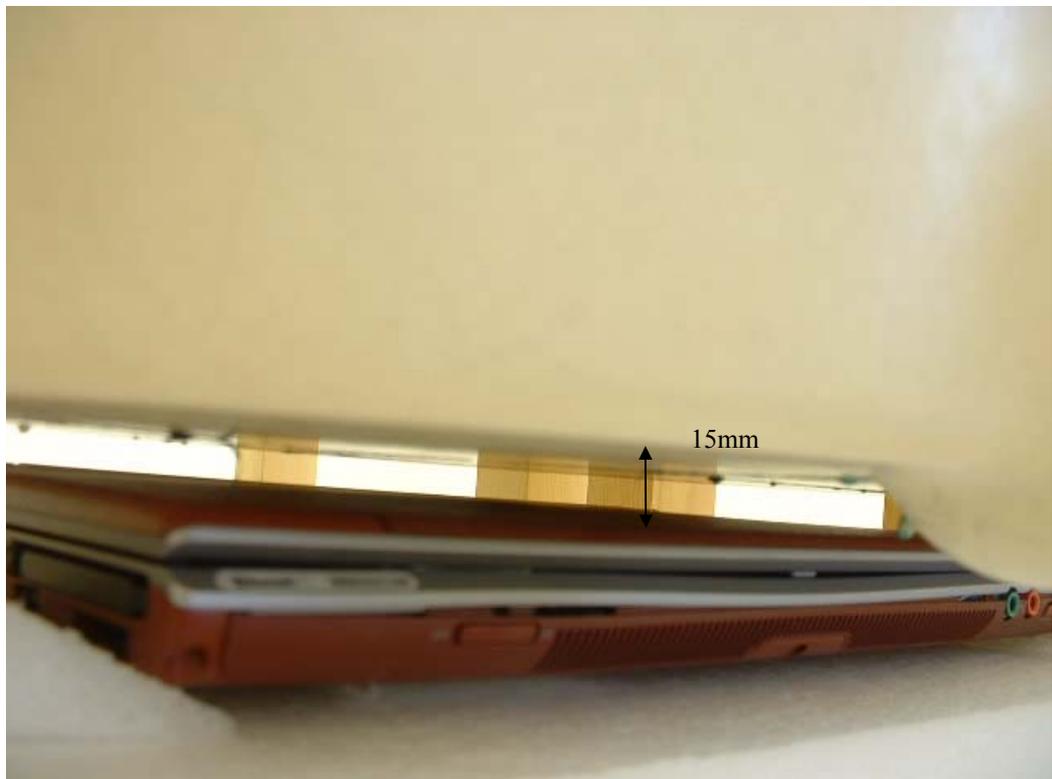

Top of display (Sub antenna)



APPENDIX 2 : SAR Measurement data

PCG-4C1L / Body / Bottom (Main antenna) / DSSS / 2437MHz

Crest factor: 1

Medium: M2450 ($\sigma = 1.95$ mho/m, $\epsilon_r = 50.7$, $\rho = 1000$ kg/m³)

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1685; ConvF(4.3, 4.3, 4.3); Calibrated: 2003/10/10

- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

- Phantom: SAM 1196

- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Area Scan (61x131x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR = 0.0256 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 0.112 W/kg

SAR(1 g) = 0.0313 mW/g; SAR(10 g) = 0.0135 mW/g

Maximum value of SAR = 0.028 mW/g


Reference Value = 1.59 V/m

Power Drift = 0.2 dB

Test Date = 08/04/04

Ambient Temperature = 24.8 degree.c

Liquid Temperature = Before 24.4 degree.C , After 24.4 degree.C

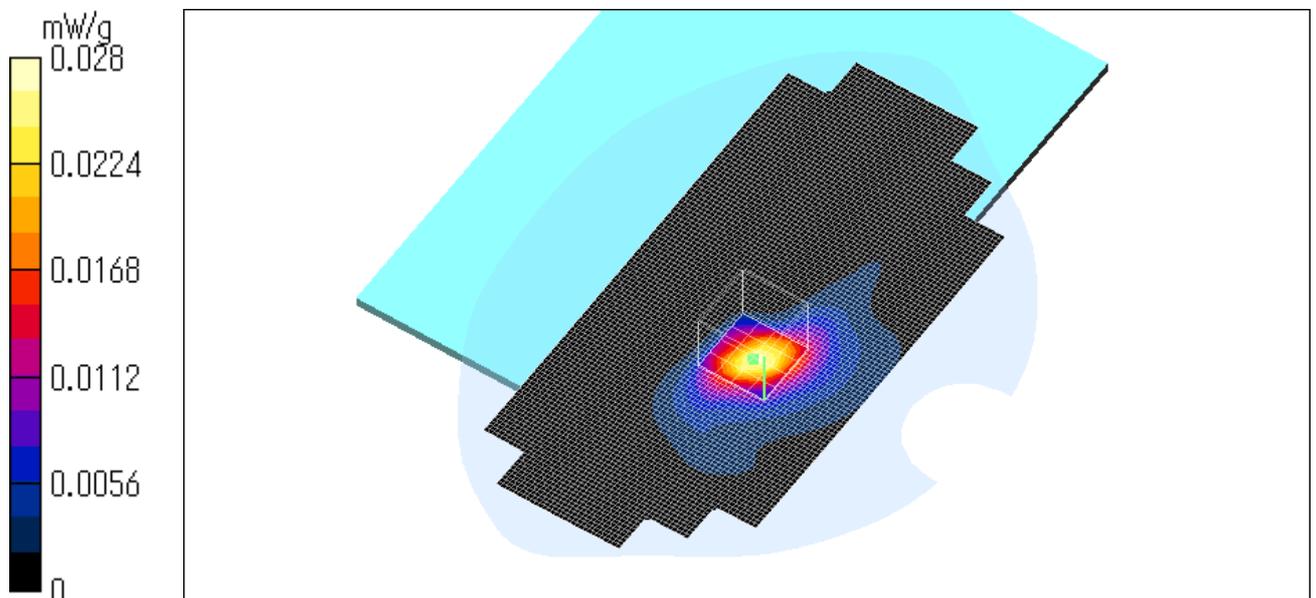

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

PCG-4C1L / Body / Back of display (Main antenna) / DSSS / 2437MHz

Crest factor: 1

Medium: M2450 ($\sigma = 1.95$ mho/m, $\epsilon_r = 50.7$, $\rho = 1000$ kg/m³)

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1685; ConvF(4.3, 4.3, 4.3); Calibrated: 2003/10/10

- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

- Phantom: SAM 1196

- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Area Scan (61x131x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR = 0.112 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 0.192 W/kg

SAR(1 g) = 0.0847 mW/g; SAR(10 g) = 0.0359 mW/g

Maximum value of SAR = 0.0903 mW/g


Reference Value = 5.7 V/m

Power Drift = -0.1 dB

Test Date = 08/04/04

Ambient Temperature = 24.8 degree.c

Liquid Temperature = Before 24.3 degree.C , After 24.3 degree.C

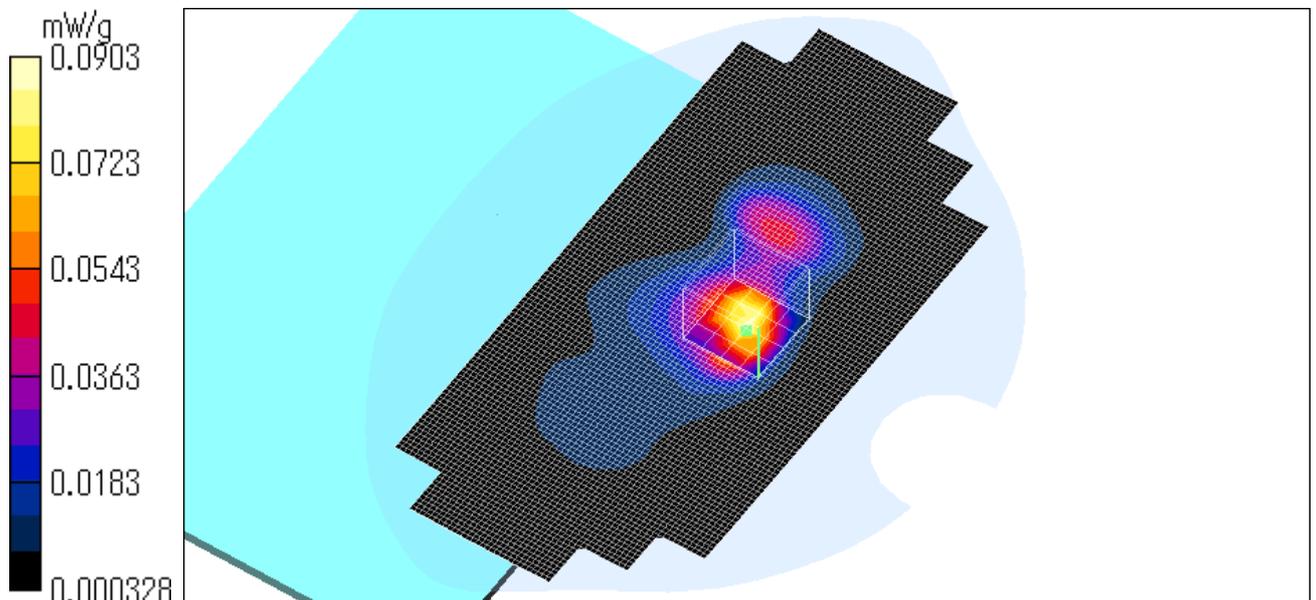

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

PCG-4C1L / Body / Top of display (Main antenna) / DSSS / 2437MHz

Crest factor: 1

Medium: M2450 ($\sigma = 1.95$ mho/m, $\epsilon_r = 50.7$, $\rho = 1000$ kg/m³)

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1685; ConvF(4.3, 4.3, 4.3); Calibrated: 2003/10/10

- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

- Phantom: SAM 1196

- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Area Scan (61x131x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR = 0.0617 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 0.129 W/kg

SAR(1 g) = 0.0618 mW/g; SAR(10 g) = 0.0311 mW/g

Maximum value of SAR = 0.0652 mW/g

Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 0.161 W/kg

SAR(1 g) = 0.0625 mW/g; SAR(10 g) = 0.0283 mW/g

Maximum value of SAR = 0.0634 mW/g


Reference Value = 5 V/m

Power Drift = -0.1 dB

Test Date = 08/04/04

Ambient Temperature = 24.8 degree.c

Liquid Temperature = Before 24.3 degree.C , After 24.3 degree.C

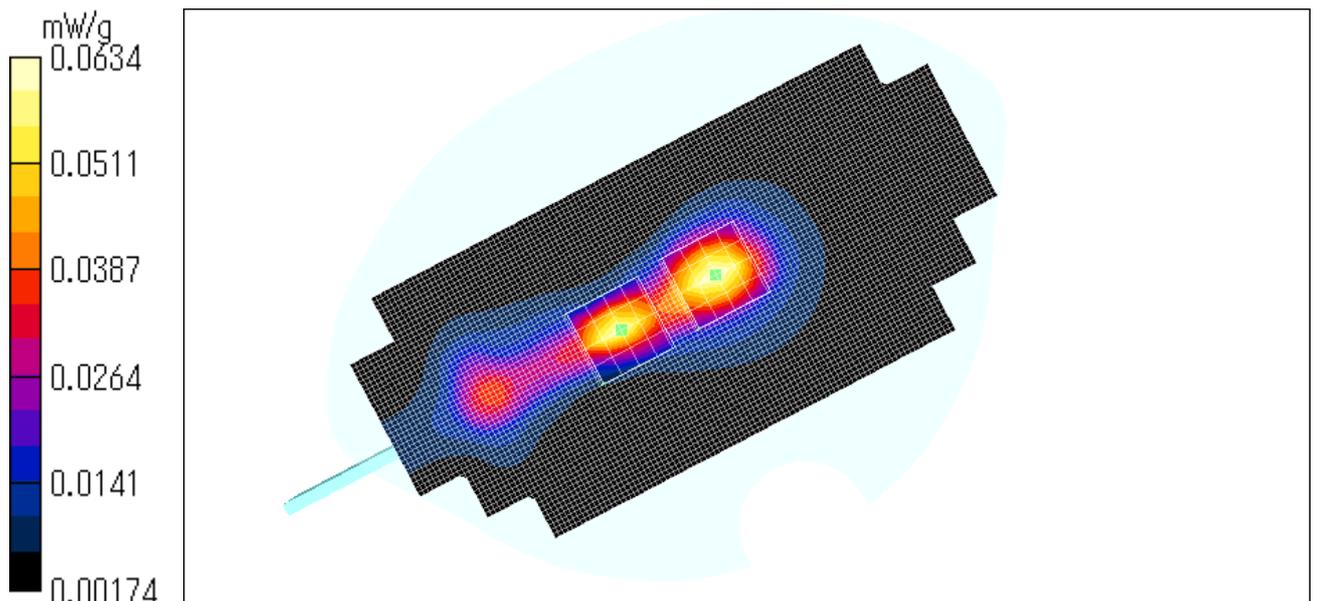

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

PCG-4C1L / Body / Back of display (Main antenna) / DSSS / 2412MHz

Crest factor: 1

Medium: M2450 ($\sigma = 1.95$ mho/m, $\epsilon_r = 50.7$, $\rho = 1000$ kg/m³)

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1685; ConvF(4.3, 4.3, 4.3); Calibrated: 2003/10/10

- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

- Phantom: SAM 1196

- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Area Scan (61x131x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR = 0.124 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 0.346 W/kg

SAR(1 g) = 0.14 mW/g; SAR(10 g) = 0.0624 mW/g

Maximum value of SAR = 0.142 mW/g


Reference Value = 6.6 V/m

Power Drift = 0.1 dB

Test Date = 08/04/04

Ambient Temperature = 24.8 degree.c

Liquid Temperature = Before 24.3 degree.C , After 24.3 degree.C

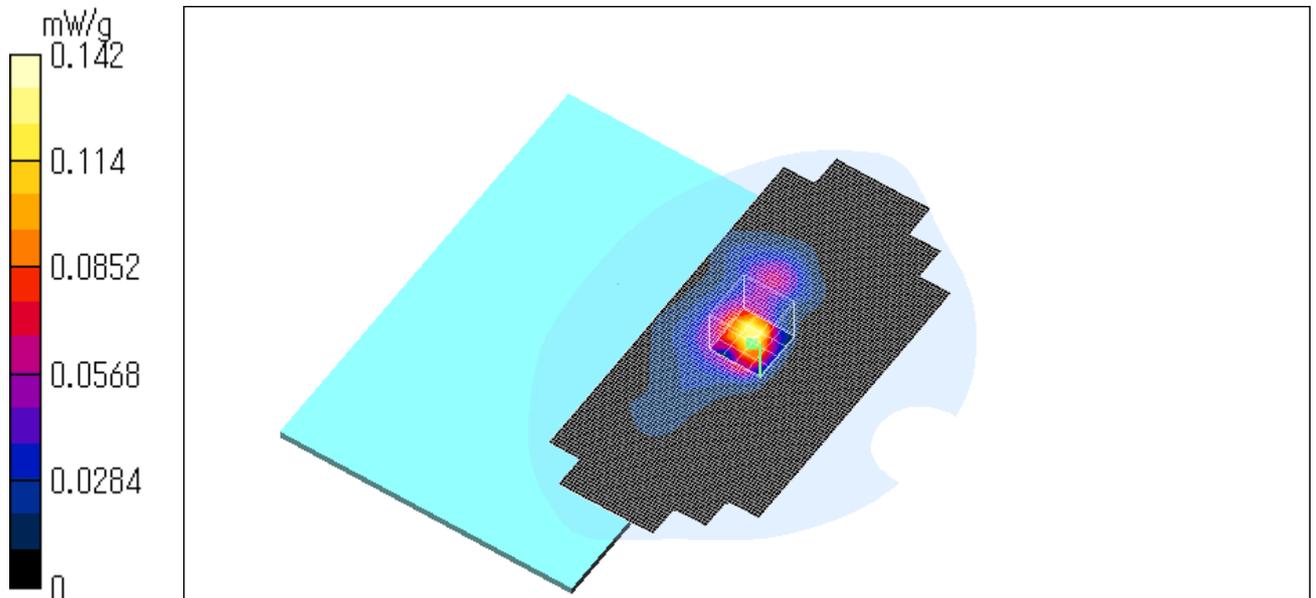

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

PCG-4C1L / Body / Back of display (Main antenna) / DSSS / 2462MHz

Crest factor: 1

Medium: M2450 ($\sigma = 1.95$ mho/m, $\epsilon_r = 50.7$, $\rho = 1000$ kg/m³)

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1685; ConvF(4.3, 4.3, 4.3); Calibrated: 2003/10/10

- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

- Phantom: SAM 1196

- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Area Scan (61x131x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR = 0.23 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 0.478 W/kg

SAR(1 g) = 0.201 mW/g; SAR(10 g) = 0.0884 mW/g

Maximum value of SAR = 0.205 mW/g


Reference Value = 3.41 V/m

Power Drift = 0.2 dB

Test Date = 08/04/04

Ambient Temperature = 24.8 degree.c

Liquid Temperature = Before 24.3 degree.C , After 24.3 degree.C

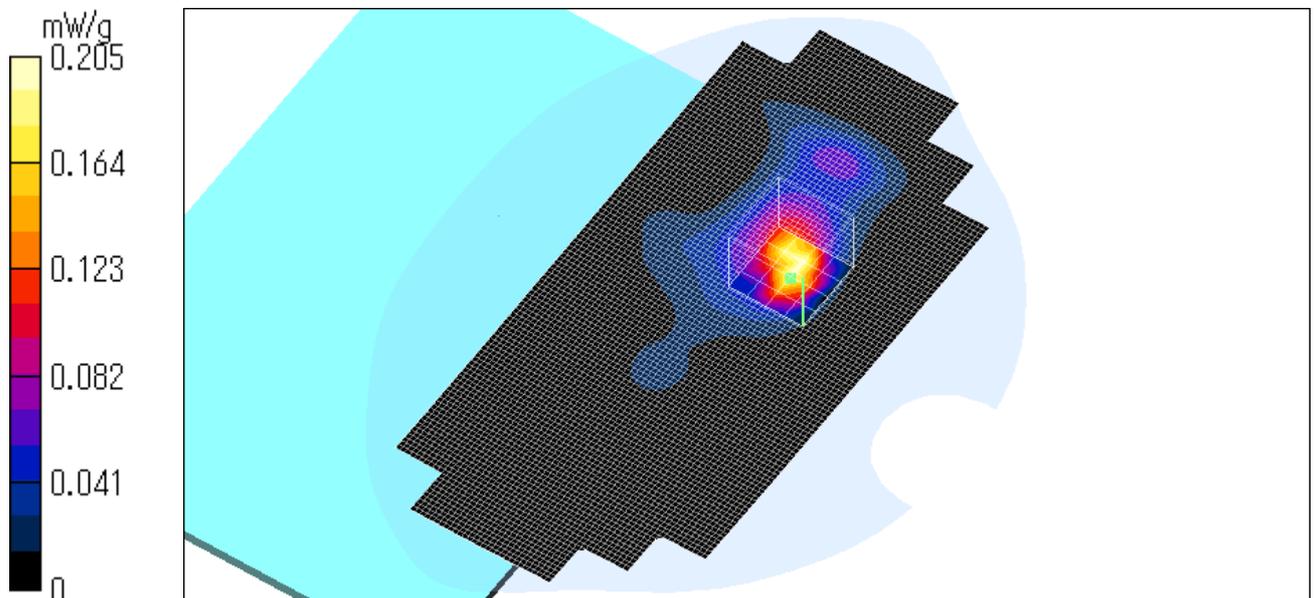

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

Z-axis scan at max SAR location

PCG-4C1L / Body / Back of display (Main antenna) / DSSS / 2462MHz

Crest factor: 1

Medium: M2450 ($\sigma = 1.95$ mho/m, $\epsilon_r = 50.7$, $\rho = 1000$ kg/m³)

Phantom section: Flat Section


DASY4 Configuration:

- Probe: ET3DV6 - SN1685; ConvF(4.3, 4.3, 4.3); Calibrated: 2003/10/10

- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

- Phantom: SAM 1196

- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

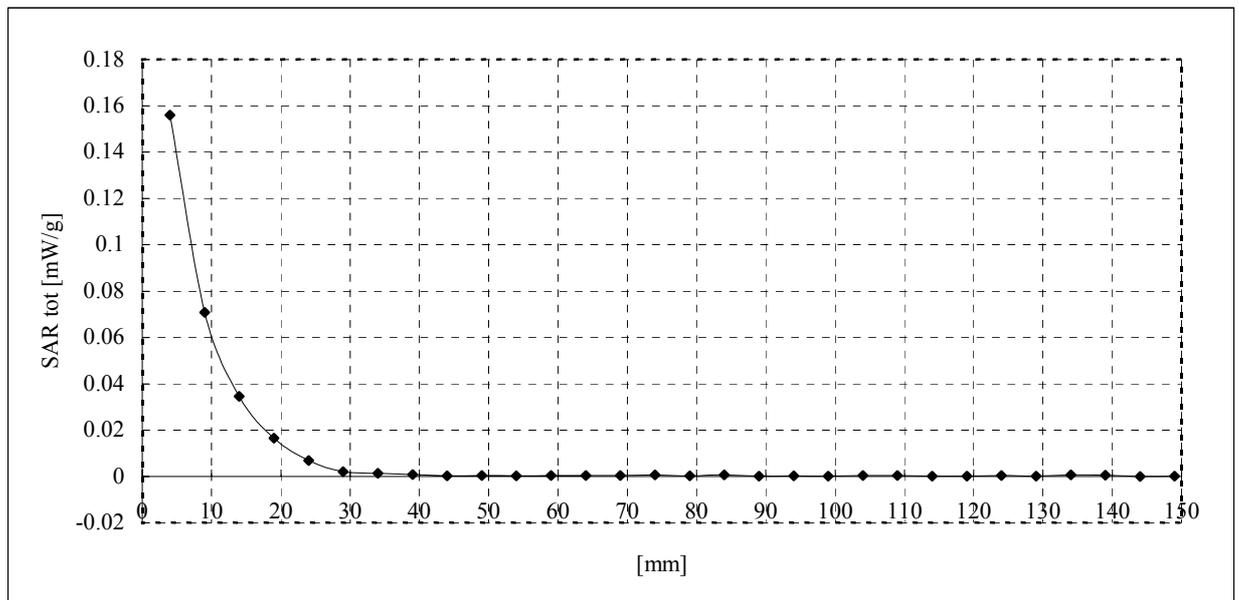

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

PCG-4C1L/ Body / Bottom (Main antenna) / OFDM 64QAM / 2437MHz

Crest factor: 1

Medium: M2450 ($\sigma = 1.95$ mho/m, $\epsilon_r = 50.7$, $\rho = 1000$ kg/m³)

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1685; ConvF(4.3, 4.3, 4.3); Calibrated: 2003/10/10

- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

- Phantom: SAM 1196

- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Area Scan (61x131x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR = 0.00331 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 0.0142 W/kg

SAR(1 g) = 0.00427 mW/g; SAR(10 g) = 0.00246 mW/g

Maximum value of SAR = 0.00406 mW/g


Reference Value = 0.586 V/m

Power Drift = 0.3 dB

Test Date = 08/04/04

Ambient Temperature = 24.8 degree.c

Liquid Temperature = Before 24.3 degree.C , After 24.3 degree.C

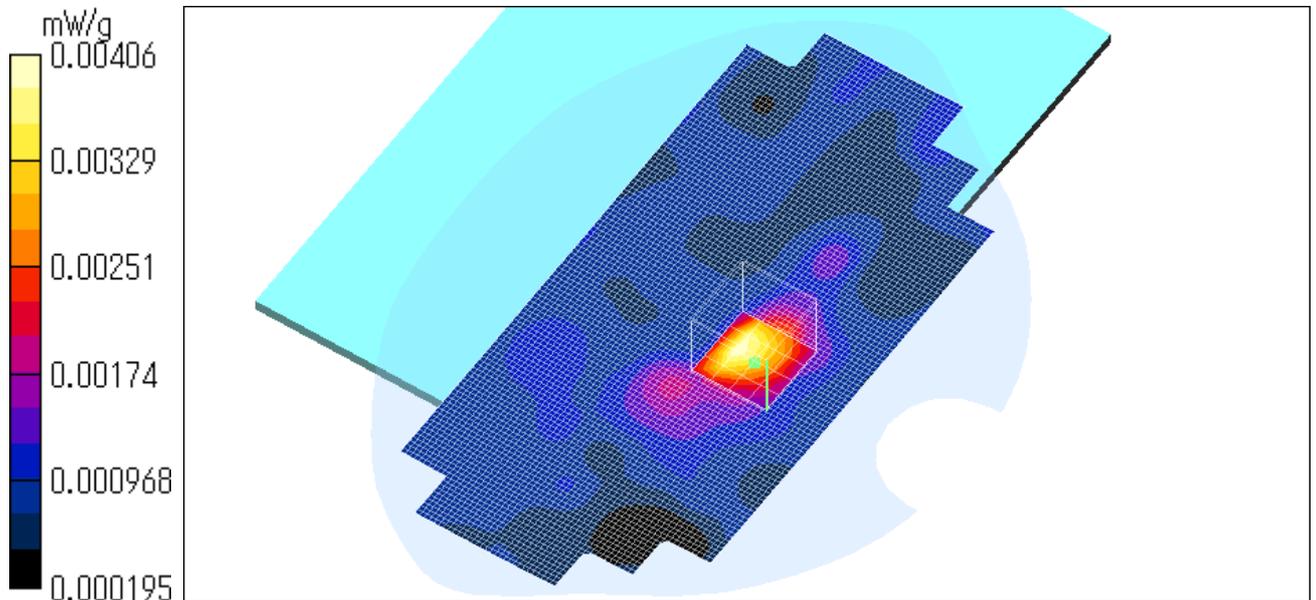

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

PCG-4C1L / Body / Back of display (Main antenna) / OFDM 64QAM / 2437MHz

Crest factor: 1

Medium: M2450 ($\sigma = 1.95$ mho/m, $\epsilon_r = 50.7$, $\rho = 1000$ kg/m³)

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1685; ConvF(4.3, 4.3, 4.3); Calibrated: 2003/10/10

- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

- Phantom: SAM 1196

- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Area Scan (61x131x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR = 0.0123 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 0.423 W/kg

SAR(1 g) = 0.024 mW/g; SAR(10 g) = 0.0062 mW/g

Maximum value of SAR = 0.0119 mW/g


Reference Value = 0.968 V/m

Power Drift = -0.2 dB

Test Date = 08/04/04

Ambient Temperature = 24.8 degree.c

Liquid Temperature = Before 24.3 degree.C , After 24.3 degree.C

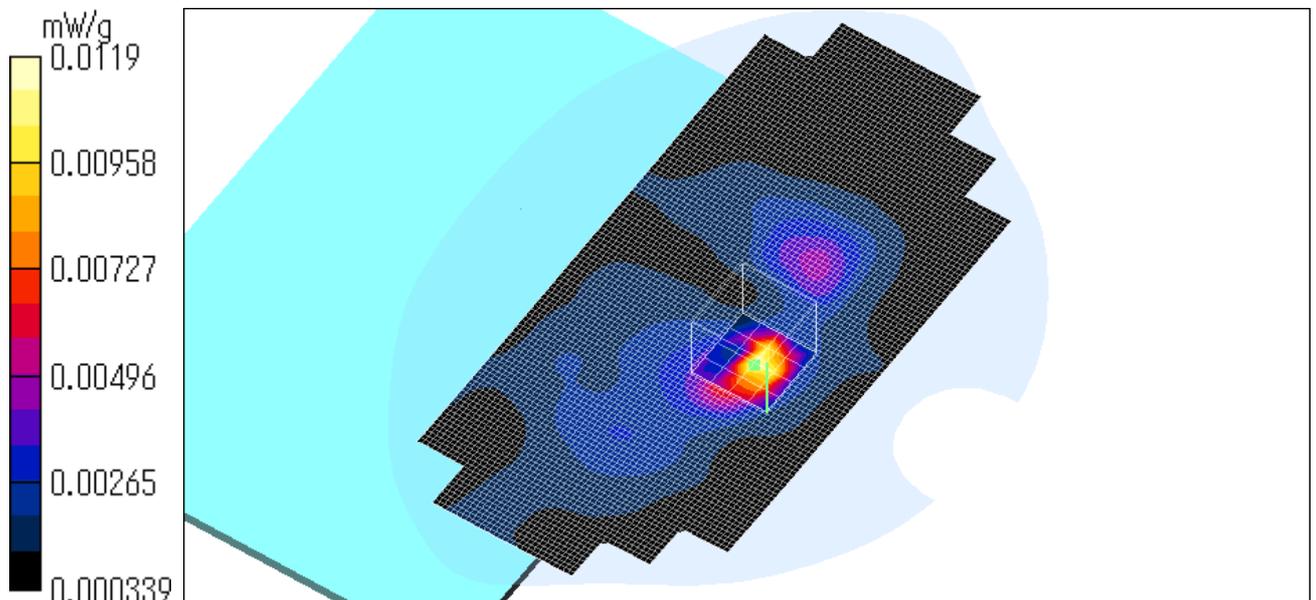

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

PCG-4C1L / Body / Top of display (Main antenna) / OFDM 64QAM / 2437MHz

Crest factor: 1

Medium: M2450 ($\sigma = 1.95$ mho/m, $\epsilon_r = 50.7$, $\rho = 1000$ kg/m³)

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1685; ConvF(4.3, 4.3, 4.3); Calibrated: 2003/10/10

- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

- Phantom: SAM 1196

- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Area Scan (61x131x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR = 0.00964 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 0.0192 W/kg

SAR(1 g) = 0.00876 mW/g; SAR(10 g) = 0.00466 mW/g

Maximum value of SAR = 0.00919 mW/g

Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 0.0154 W/kg

SAR(1 g) = 0.00766 mW/g; SAR(10 g) = 0.00456 mW/g

Maximum value of SAR = 0.00768 mW/g


Reference Value = 1.99 V/m

Power Drift = -0.3 dB

Test Date = 08/04/04

Ambient Temperature = 24.8 degree.c

Liquid Temperature = Before 24.3 degree.C , After 24.3 degree.C

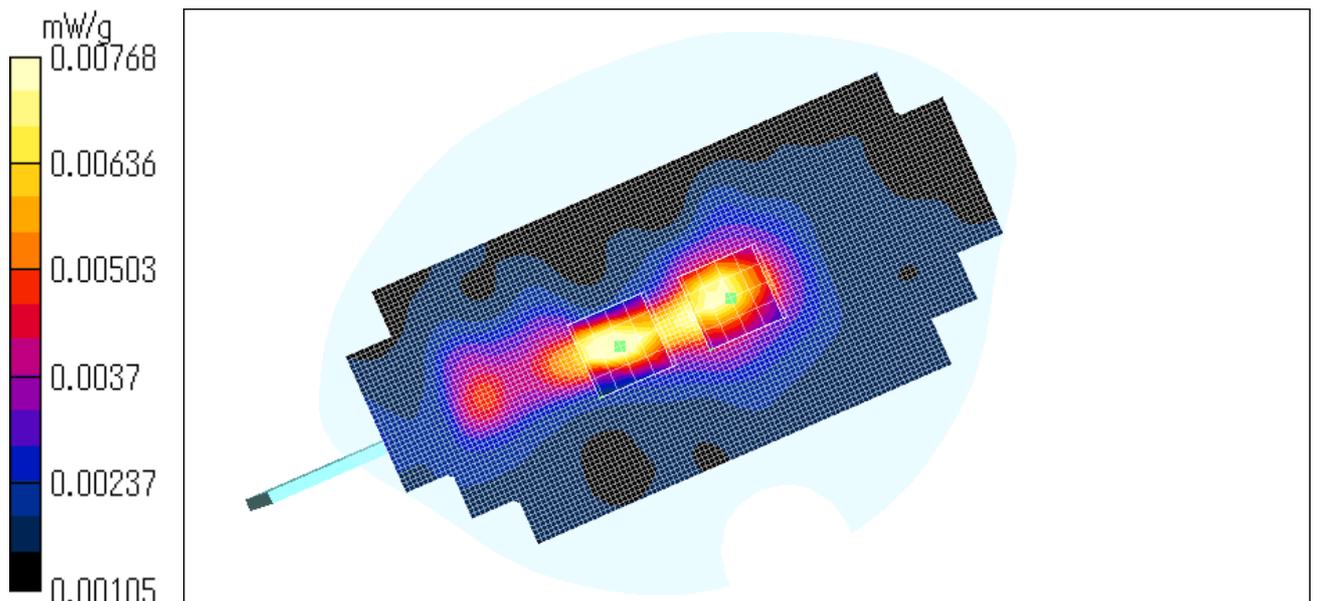

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

PCG-4C1L / Body / Back of display (Main antenna) / OFDM 64QAM / 2412MHz

Crest factor: 1

Medium: M2450 ($\sigma = 1.95$ mho/m, $\epsilon_r = 50.7$, $\rho = 1000$ kg/m³)

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1685; ConvF(4.3, 4.3, 4.3); Calibrated: 2003/10/10

- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

- Phantom: SAM 1196

- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Area Scan (61x131x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR = 0.0069 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 0.00716 W/kg

SAR(1 g) = 0.00259 mW/g; SAR(10 g) = 0.00123 mW/g

Maximum value of SAR = 0.00718 mW/g


Reference Value = 1.37 V/m

Power Drift = -0.4 dB

Test Date = 08/04/04

Ambient Temperature = 24.8 degree.c

Liquid Temperature = Before 24.3 degree.C , After 24.3 degree.C

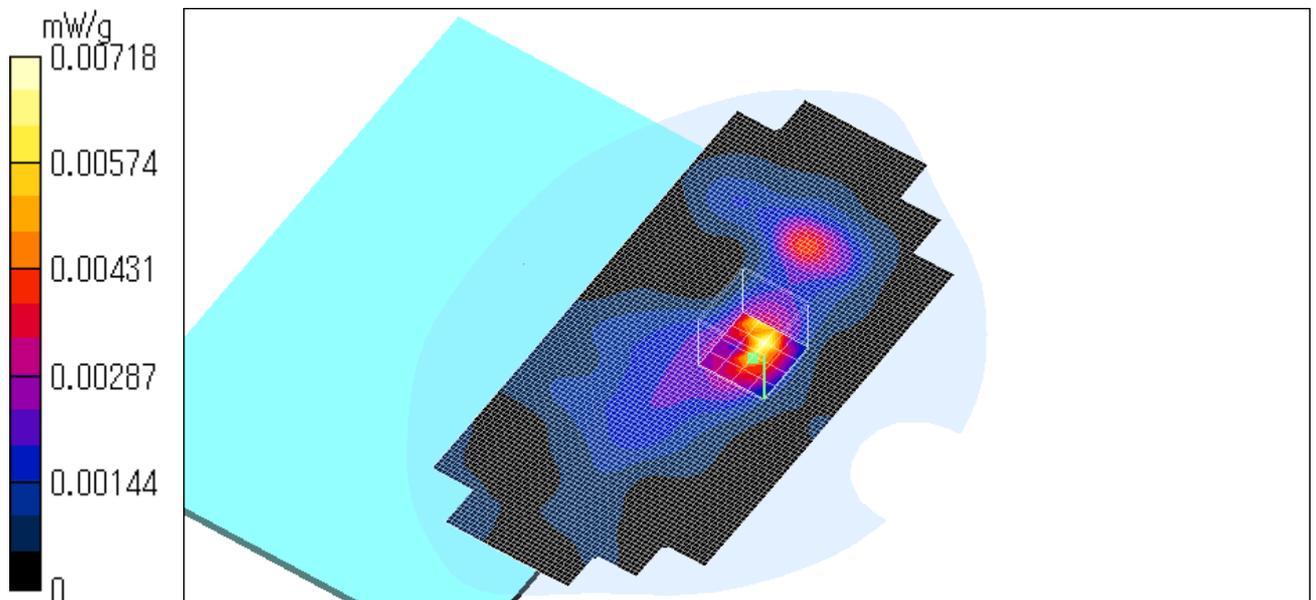

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

PCG-4C1L / Body / Back of display (Main antenna) / OFDM 64QAM / 2462MHz

Crest factor: 1

Medium: M2450 ($\sigma = 1.95$ mho/m, $\epsilon_r = 50.7$, $\rho = 1000$ kg/m³)

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1685; ConvF(4.3, 4.3, 4.3); Calibrated: 2003/10/10

- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

- Phantom: SAM 1196

- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Area Scan (61x131x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR = 0.0135 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 0.782 W/kg

SAR(1 g) = 0.0378 mW/g; SAR(10 g) = 0.00878 mW/g

Maximum value of SAR = 0.014 mW/g


Reference Value = 1.59 V/m

Power Drift = -0.2 dB

Test Date = 08/04/04

Ambient Temperature = 24.8 degree.c

Liquid Temperature = Before 24.3 degree.C , After 24.3 degree.C

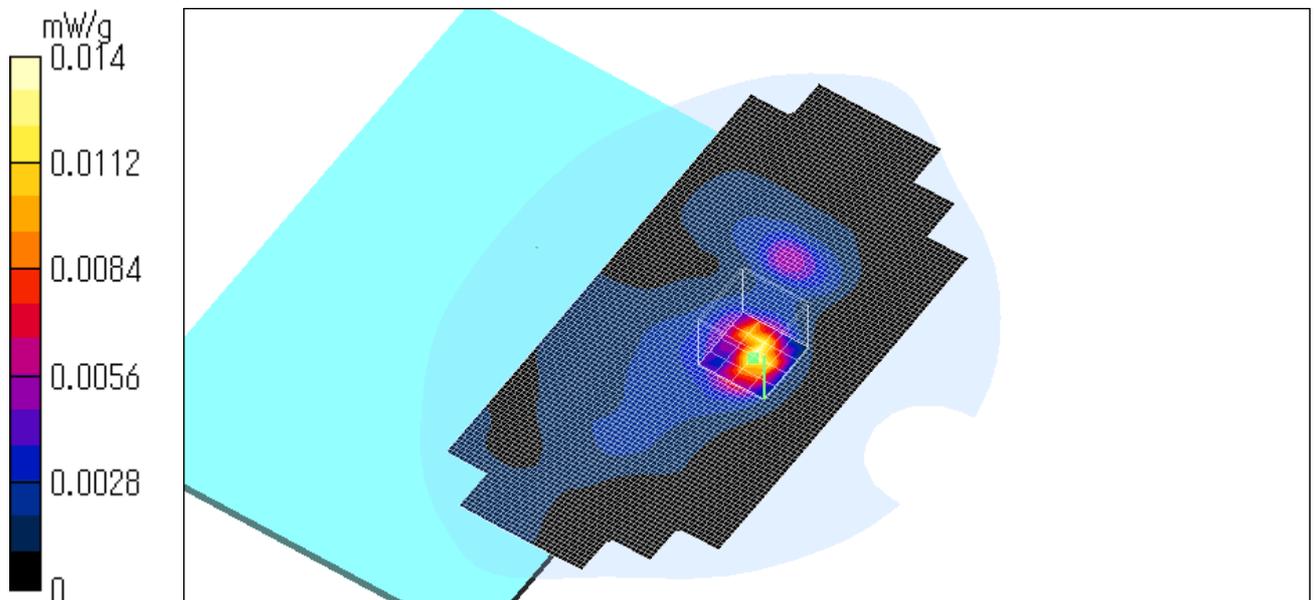

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

PCG-4C1L / Body / Bottom (Main antenna) / OFDM QPSK / 2437MHz

Crest factor: 1

Medium: M2450 ($\sigma = 1.95$ mho/m, $\epsilon_r = 50.7$, $\rho = 1000$ kg/m³)

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1685; ConvF(4.3, 4.3, 4.3); Calibrated: 2003/10/10

- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

- Phantom: SAM 1196

- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Area Scan (61x131x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR = 0.00521 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 0.0103 W/kg

SAR(1 g) = 0.00479 mW/g; SAR(10 g) = 0.00276 mW/g

Maximum value of SAR = 0.00463 mW/g


Reference Value = 0.531 V/m

Power Drift = 0.3 dB

Test Date = 08/04/04

Ambient Temperature = 24.8 degree.c

Liquid Temperature = Before 24.3 degree.C , After 24.3 degree.C

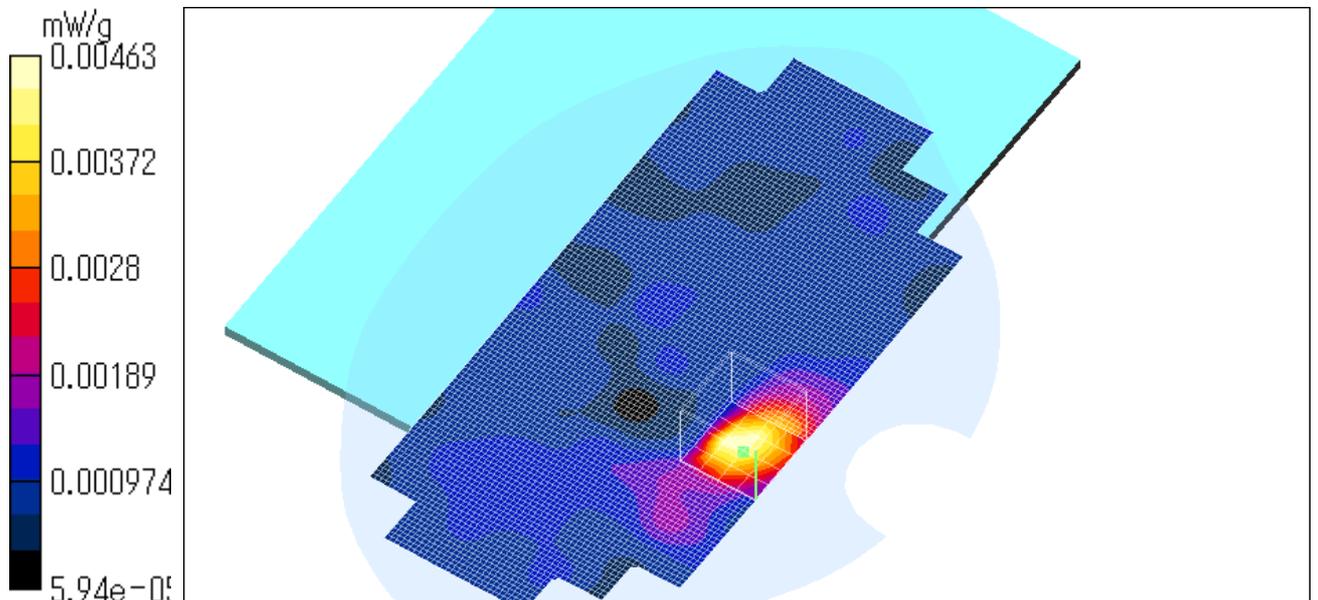

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

PCG-4C1L / Body / Back of display (Main antenna) / OFDM QPSK / 2437MHz

Crest factor: 1

Medium: M2450 ($\sigma = 1.95$ mho/m, $\epsilon_r = 50.7$, $\rho = 1000$ kg/m³)

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1685; ConvF(4.3, 4.3, 4.3); Calibrated: 2003/10/10

- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

- Phantom: SAM 1196

- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Area Scan (61x131x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR = 0.0106 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 3.45 W/kg

SAR(1 g) = 0.066 mW/g; SAR(10 g) = 0.012 mW/g

Maximum value of SAR = 0.0157 mW/g


Reference Value = 2.67 V/m

Power Drift = 0.2 dB

Test Date = 08/04/04

Ambient Temperature = 24.8 degree.c

Liquid Temperature = Before 24.3 degree.C , After 24.3 degree.C

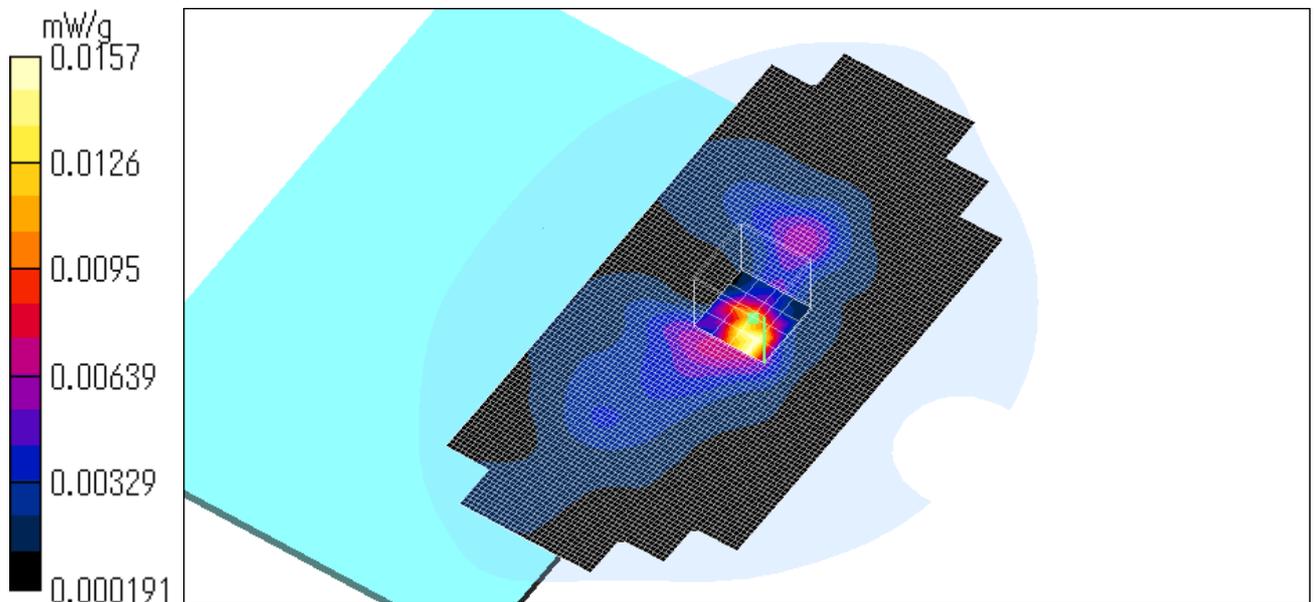

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

PCG-4C1L / Body / Top of display (Main antenna) / OFDM QPSK / 2437MHz

Crest factor: 1

Medium: M2450 ($\sigma = 1.95$ mho/m, $\epsilon_r = 50.7$, $\rho = 1000$ kg/m³)

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1685; ConvF(4.3, 4.3, 4.3); Calibrated: 2003/10/10

- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

- Phantom: SAM 1196

- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Area Scan (61x131x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR = 0.0113 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 0.0224 W/kg

SAR(1 g) = 0.0107 mW/g; SAR(10 g) = 0.00523 mW/g

Maximum value of SAR = 0.0109 mW/g

Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 0.0217 W/kg

SAR(1 g) = 0.01 mW/g; SAR(10 g) = 0.00572 mW/g

Maximum value of SAR = 0.0104 mW/g


Reference Value = 2.19 V/m

Power Drift = -0.4 dB

Test Date = 08/04/04

Ambient Temperature = 24.8 degree.c

Liquid Temperature = Before 24.3 degree.C , After 24.3 degree.C

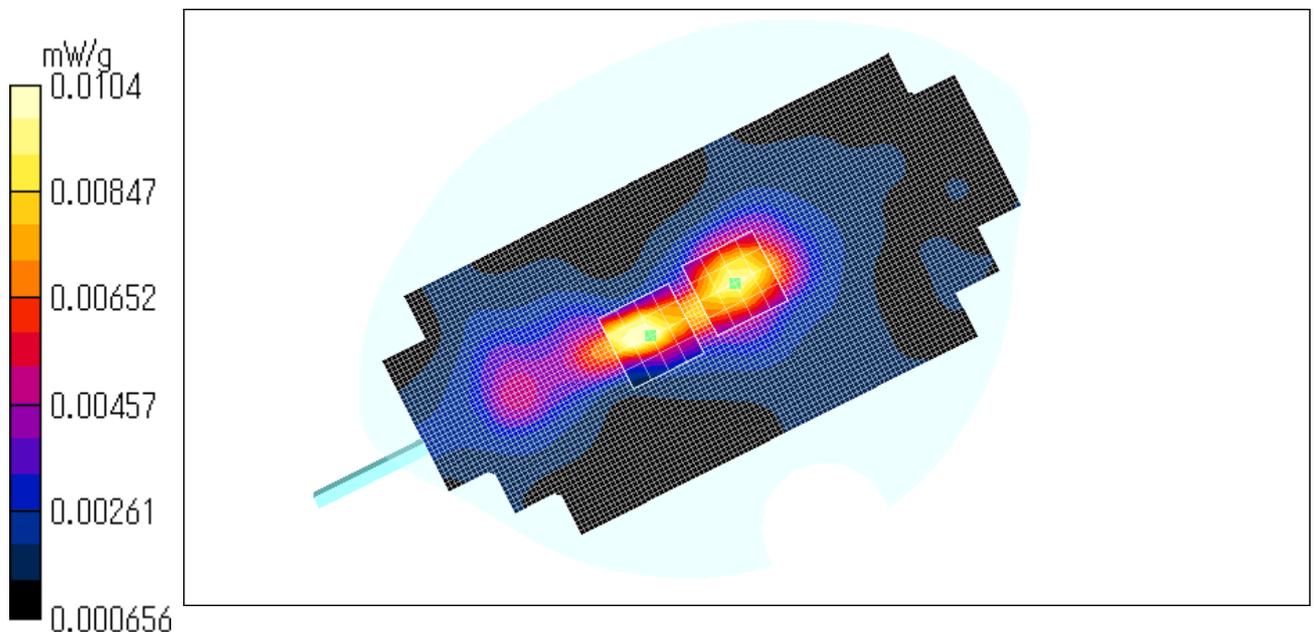

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

PCG-4C1L/ Body / Back of display (Main antenna) / OFDM QPSK / 2412MHz

Crest factor: 1

Medium: M2450 ($\sigma = 1.95$ mho/m, $\epsilon_r = 50.7$, $\rho = 1000$ kg/m³)

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1685; ConvF(4.3, 4.3, 4.3); Calibrated: 2003/10/10

- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

- Phantom: SAM 1196

- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Area Scan (61x131x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR = 0.0309 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 0.0246 W/kg

SAR(1 g) = 0.00841 mW/g; SAR(10 g) = 0.00379 mW/g

Maximum value of SAR = 0.0223 mW/g


Reference Value = 1.57 V/m

Power Drift = 0.3 dB

Test Date = 08/04/04

Ambient Temperature = 24.8 degree.c

Liquid Temperature = Before 24.0 degree.C , After 24.0 degree.C

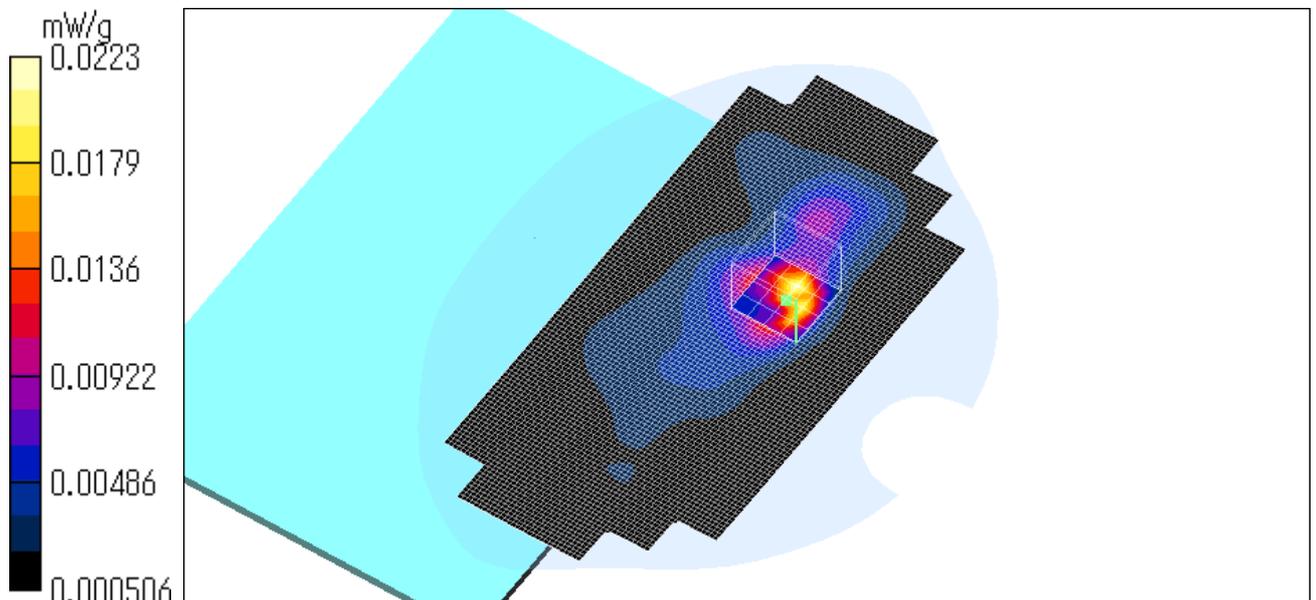

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

PCG-4C1L / Body / Back of display (Main antenna) / OFDM QPSK / 2462MHz

Crest factor: 1

Medium: M2450 ($\sigma = 1.95$ mho/m, $\epsilon_r = 50.7$, $\rho = 1000$ kg/m³)

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1685; ConvF(4.3, 4.3, 4.3); Calibrated: 2003/10/10

- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

- Phantom: SAM 1196

- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Area Scan (61x131x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR = 0.0183 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 0.0316 W/kg

SAR(1 g) = 0.0121 mW/g; SAR(10 g) = 0.00448 mW/g

Maximum value of SAR = 0.0291 mW/g


Reference Value = 2.08 V/m

Power Drift = -0.006 dB

Test Date = 08/04/04

Ambient Temperature = 24.8 degree.c

Liquid Temperature = Before 24.0 degree.C , After 24.0 degree.C

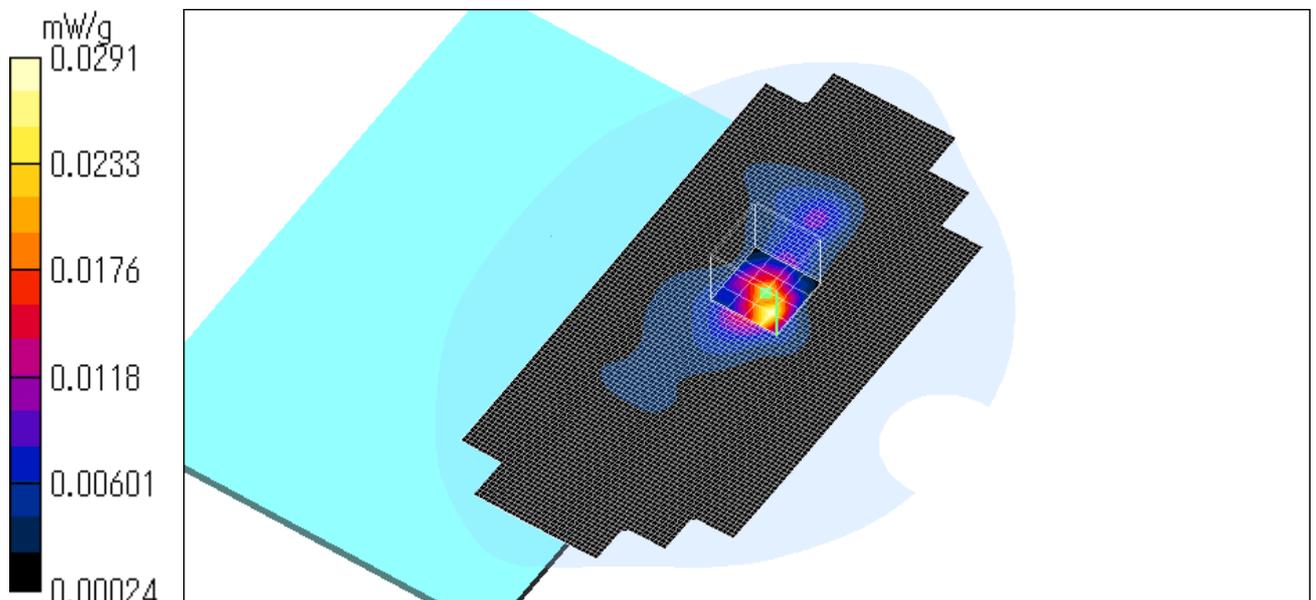

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

PCG-4C1L / Body / Bottom (Sub antenna) / DSSS / 2437MHz

Crest factor: 1

Medium: M2450 ($\sigma = 1.94$ mho/m, $\epsilon_r = 50.2$, $\rho = 1000$ kg/m³)

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1685; ConvF(4.3, 4.3, 4.3); Calibrated: 2003/10/10

- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

- Phantom: SAM 1196

- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Area Scan (61x131x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR = 0.0216 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 0.152 W/kg

SAR(1 g) = 0.0257 mW/g; SAR(10 g) = 0.0109 mW/g

Maximum value of SAR = 0.0199 mW/g


Reference Value = 1.12 V/m

Power Drift = -0.1 dB

Test Date = 08/05/04

Ambient Temperature = 24.5 degree.c

Liquid Temperature = Before 24.3 degree.C , After 24.3 degree.C

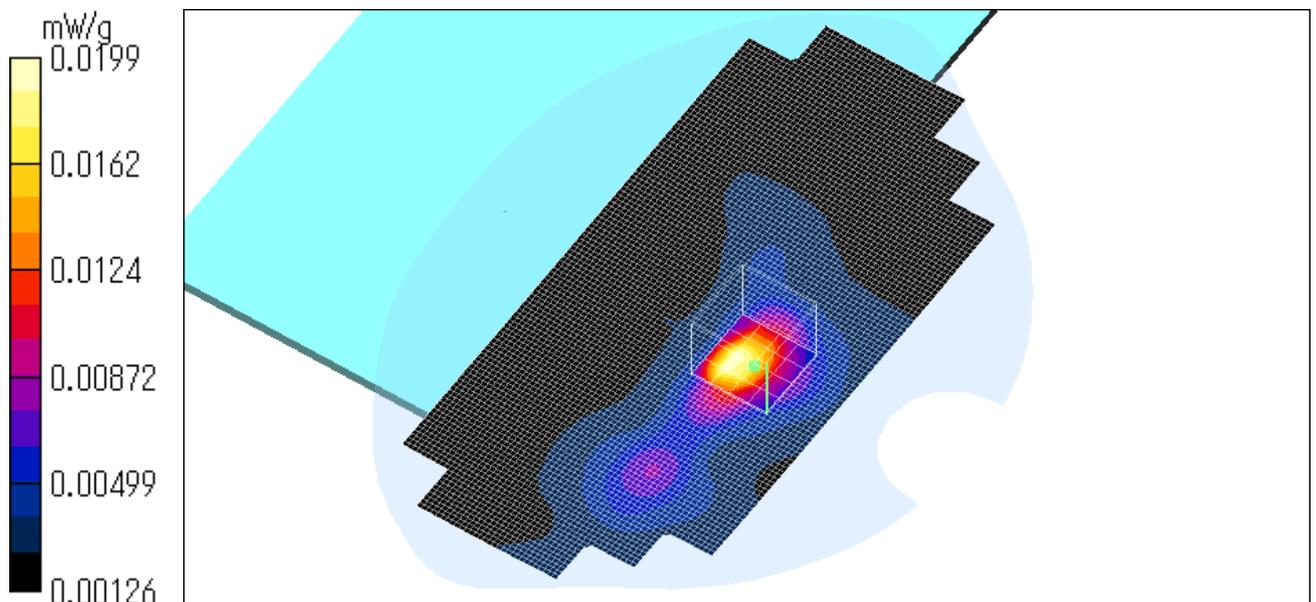

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

PCG-4C1L / Body / Back of display (Sub antenna) / DSSS / 2437MHz

Crest factor: 1

Medium: M2450 ($\sigma = 1.94$ mho/m, $\epsilon_r = 50.2$, $\rho = 1000$ kg/m³)

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1685; ConvF(4.3, 4.3, 4.3); Calibrated: 2003/10/10

- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

- Phantom: SAM 1196

- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Area Scan (61x131x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR = 0.128 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 0.277 W/kg

SAR(1 g) = 0.12 mW/g; SAR(10 g) = 0.0533 mW/g

Maximum value of SAR = 0.121 mW/g


Reference Value = 6.77 V/m

Power Drift = 0.04 dB

Test Date = 08/05/04

Ambient Temperature = 24.5 degree.c

Liquid Temperature = Before 24.3 degree.C , After 24.3 degree.C

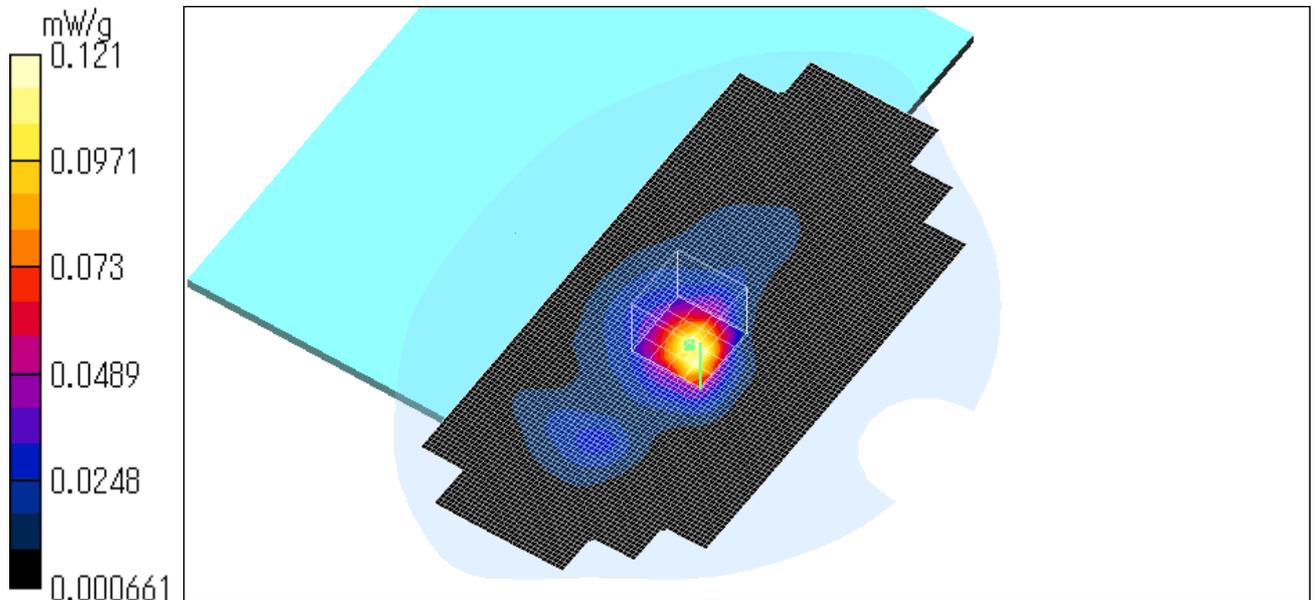

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

PCG-4C1L / Body / Top of display (Sub antenna) / DSSS / 2437MHz

Crest factor: 1

Medium: M2450 ($\sigma = 1.94$ mho/m, $\epsilon_r = 50.2$, $\rho = 1000$ kg/m³)

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1685; ConvF(4.3, 4.3, 4.3); Calibrated: 2003/10/10

- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

- Phantom: SAM 1196

- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Area Scan (61x131x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR = 0.0885 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 0.193 W/kg

SAR(1 g) = 0.0889 mW/g; SAR(10 g) = 0.0435 mW/g

Maximum value of SAR = 0.0938 mW/g


Reference Value = 4.8 V/m

Power Drift = -0.2 dB

Test Date = 08/05/04

Ambient Temperature = 24.5 degree.c

Liquid Temperature = Before 24.3 degree.C , After 24.3 degree.C

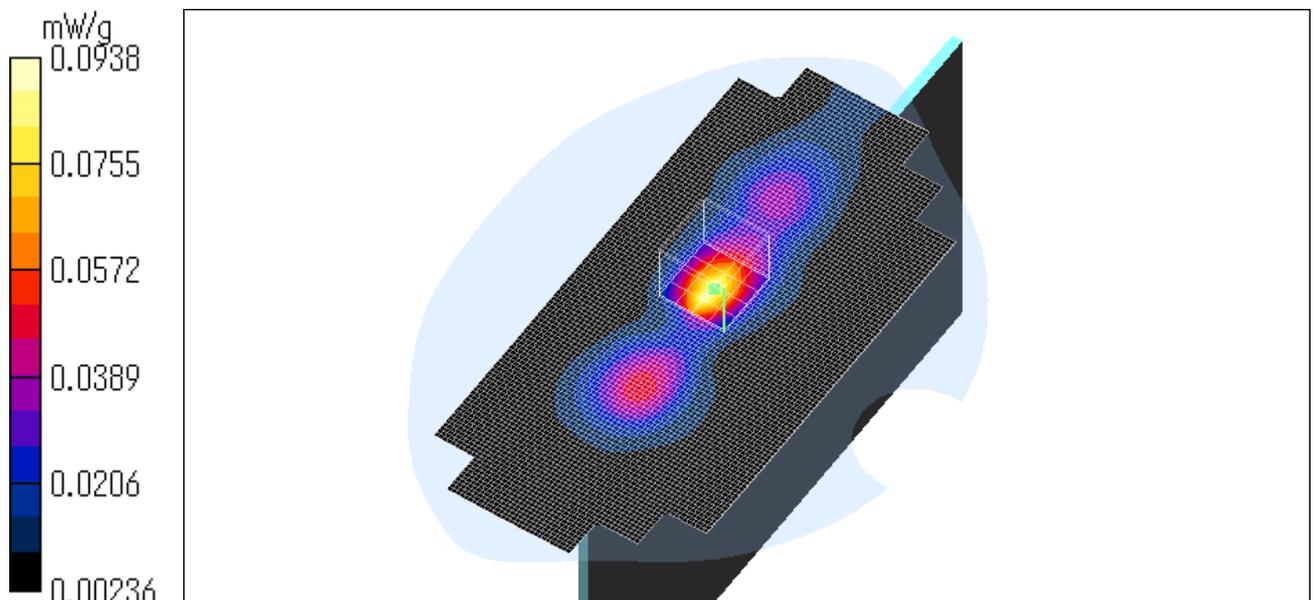

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

PCG-4C1L / Body / Back of display (Sub antenna) / DSSS / 2412MHz

Crest factor: 1

Medium: M2450 ($\sigma = 1.94$ mho/m, $\epsilon_r = 50.2$, $\rho = 1000$ kg/m³)

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1685; ConvF(4.3, 4.3, 4.3); Calibrated: 2003/10/10

- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

- Phantom: SAM 1196

- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Area Scan (61x131x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR = 0.154 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 0.309 W/kg

SAR(1 g) = 0.131 mW/g; SAR(10 g) = 0.0578 mW/g

Maximum value of SAR = 0.141 mW/g


Reference Value = 9.04 V/m

Power Drift = -0.3 dB

Test Date = 08/05/04

Ambient Temperature = 24.5 degree.c

Liquid Temperature = Before 24.3 degree.C , After 24.3 degree.C

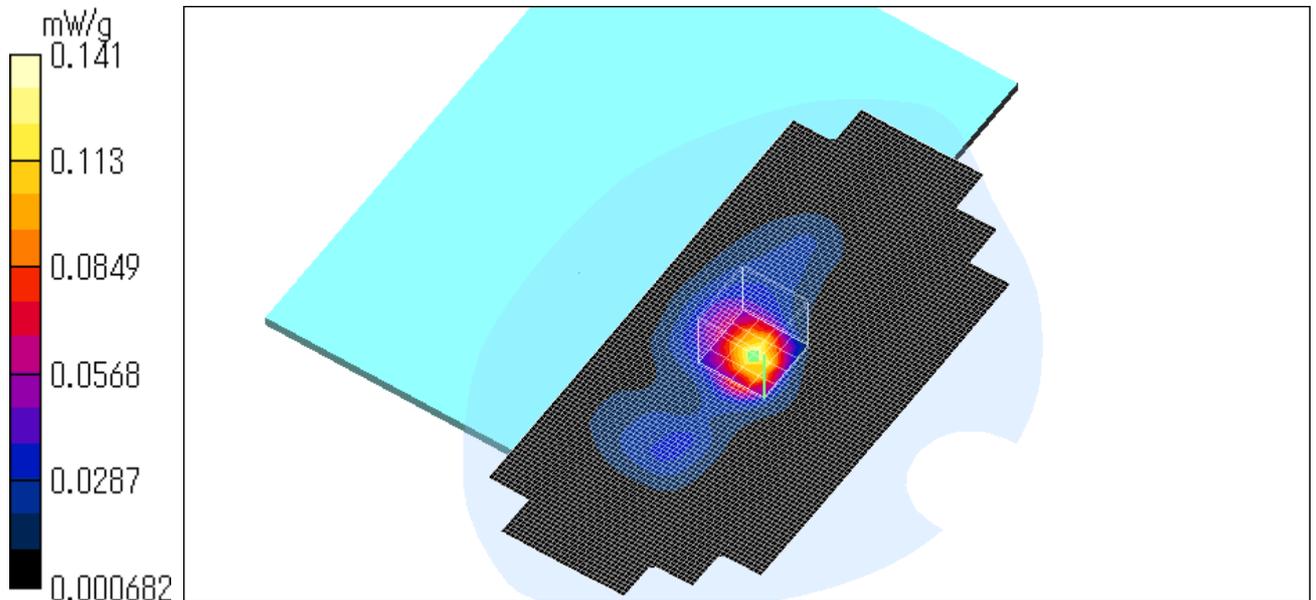

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

PCG-4C1L / Body / Back of display (Sub antenna) / DSSS / 2462MHz

Crest factor: 1
Medium: M2450 ($\sigma = 1.94$ mho/m, $\epsilon_r = 50.2$, $\rho = 1000$ kg/m³)
Phantom section: Flat Section


DASY4 Configuration:
- Probe: ET3DV6 - SN1685; ConvF(4.3, 4.3, 4.3); Calibrated: 2003/10/10
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Phantom: SAM 1196
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Area Scan (61x131x1): Measurement grid: dx=20mm, dy=20mm
Maximum value of SAR = 0.101 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Peak SAR (extrapolated) = 0.228 W/kg
SAR(1 g) = 0.0918 mW/g; SAR(10 g) = 0.0395 mW/g
Maximum value of SAR = 0.0965 mW/g

Reference Value = 5.6 V/m
Power Drift = 0.2 dB

Test Date = 08/05/04
Ambient Temperature = 24.5 degree.c
Liquid Temperature = Before 24.3 degree.C , After 24.3 degree.C

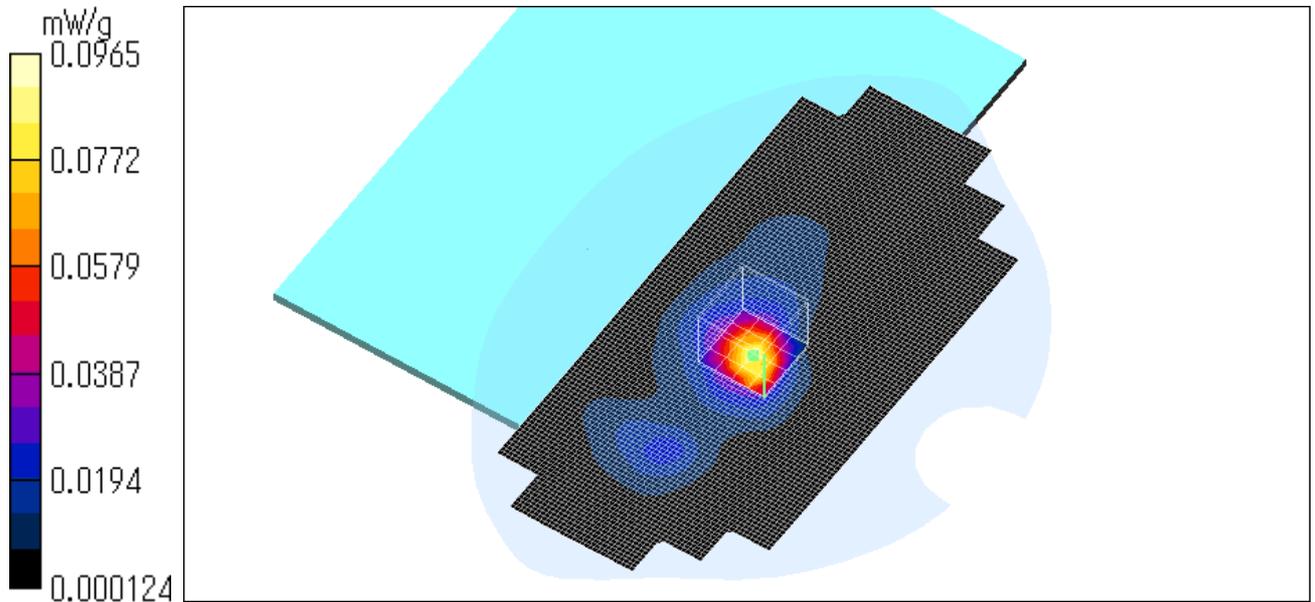

PCG-4C1L / Body / Bottom (Sub antenna) / OFDM 64QAM / 2437MHz

Crest factor: 1

Medium: M2450 ($\sigma = 1.94$ mho/m, $\epsilon_r = 50.2$, $\rho = 1000$ kg/m³)

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1685; ConvF(4.3, 4.3, 4.3); Calibrated: 2003/10/10

- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

- Phantom: SAM 1196

- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Area Scan (61x131x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR = 0.0045 mW/g

Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 0.0108 W/kg

SAR(1 g) = 0.0032 mW/g; SAR(10 g) = 0.00274 mW/g

Maximum value of SAR = 0.00374 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 0.00956 W/kg

SAR(1 g) = 0.00453 mW/g; SAR(10 g) = 0.00331 mW/g

Maximum value of SAR = 0.00458 mW/g


Reference Value = 1.17 V/m

Power Drift = -0.4 dB

Test Date = 08/05/04

Ambient Temperature = 24.5 degree.c

Liquid Temperature = Before 24.3 degree.C , After 24.3 degree.C

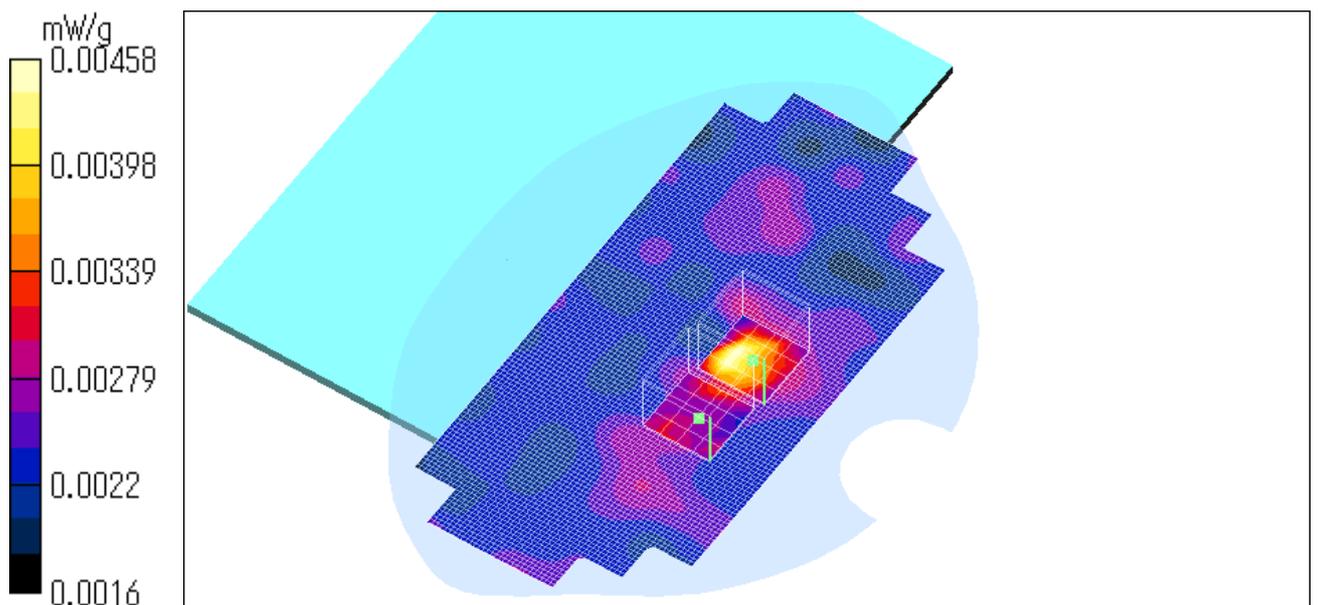

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

PCG-4C1L / Body / Back of display (Sub antenna) / OFDM 64QAM / 2437MHz

Crest factor: 1

Medium: M2450 ($\sigma = 1.94$ mho/m, $\epsilon_r = 50.2$, $\rho = 1000$ kg/m³)

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1685; ConvF(4.3, 4.3, 4.3); Calibrated: 2003/10/10

- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

- Phantom: SAM 1196

- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Area Scan (61x131x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR = 0.00806 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 0.0573 W/kg

SAR(1 g) = 0.0137 mW/g; SAR(10 g) = 0.00545 mW/g

Maximum value of SAR = 0.0117 mW/g


Reference Value = 1.2 V/m

Power Drift = 0.3 dB

Test Date = 08/05/04

Ambient Temperature = 24.5 degree.c

Liquid Temperature = Before 24.3 degree.C , After 24.3 degree.C

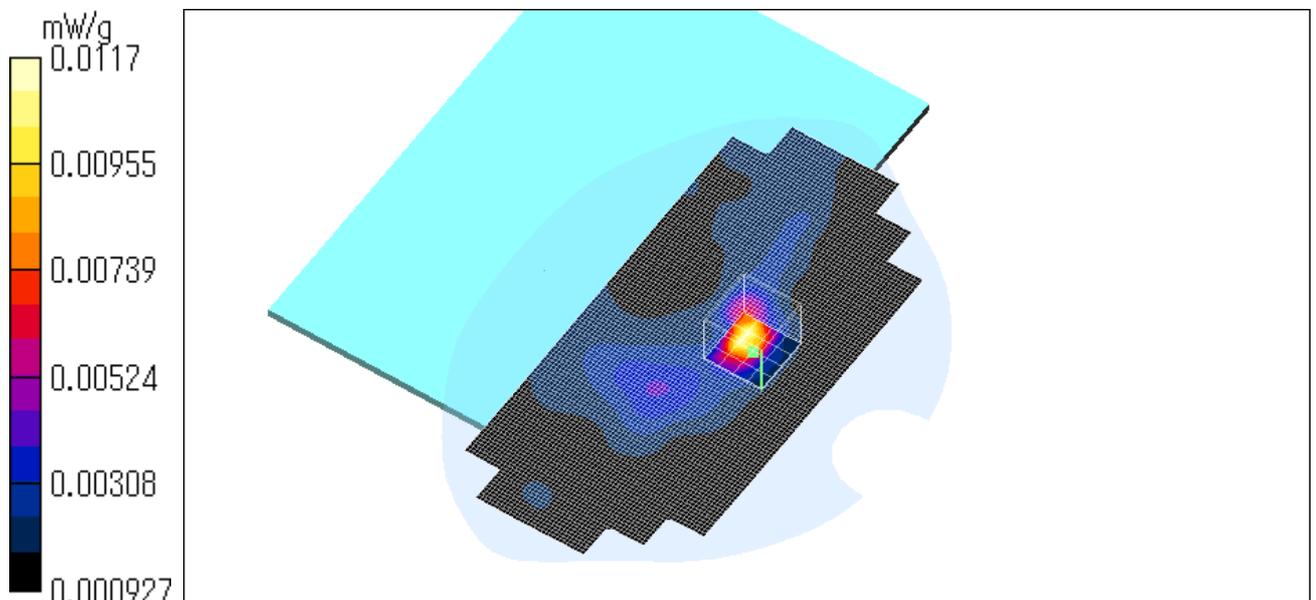

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

PCG-4C1L/ Body / Top of display (Sub antenna) / OFDM 64QAM / 2437MHz

Crest factor: 1

Medium: M2450 ($\sigma = 1.94$ mho/m, $\epsilon_r = 50.2$, $\rho = 1000$ kg/m³)

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1685; ConvF(4.3, 4.3, 4.3); Calibrated: 2003/10/10

- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

- Phantom: SAM 1196

- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Area Scan (61x131x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR = 0.0122 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 0.0645 W/kg

SAR(1 g) = 0.0169 mW/g; SAR(10 g) = 0.00822 mW/g

Maximum value of SAR = 0.0148 mW/g


Reference Value = 2.18 V/m

Power Drift = -0.4 dB

Test Date = 08/05/04

Ambient Temperature = 24.5 degree.c

Liquid Temperature = Before 24.1 degree.C , After 24.1 degree.C

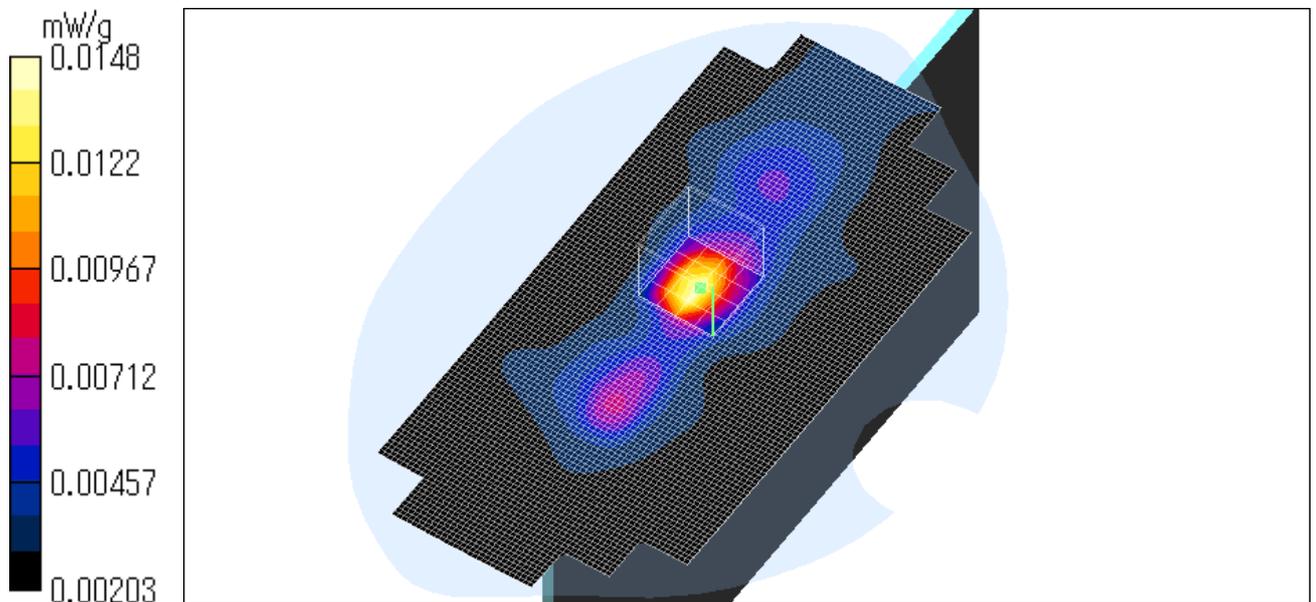

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

PCG-4C1L / Body / Top of display (Sub antenna) / OFDM 64QAM / 2412MHz

Crest factor: 1

Medium: M2450 ($\sigma = 1.94$ mho/m, $\epsilon_r = 50.2$, $\rho = 1000$ kg/m³)

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1685; ConvF(4.3, 4.3, 4.3); Calibrated: 2003/10/10

- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

- Phantom: SAM 1196

- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Area Scan (61x131x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR = 0.0104 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 0.0348 W/kg

SAR(1 g) = 0.0126 mW/g; SAR(10 g) = 0.00595 mW/g

Maximum value of SAR = 0.0119 mW/g


Reference Value = 1.92 V/m

Power Drift = 0.2 dB

Test Date = 08/05/04

Ambient Temperature = 24.5 degree.c

Liquid Temperature = Before 24.3 degree.C , After 24.3 degree.C

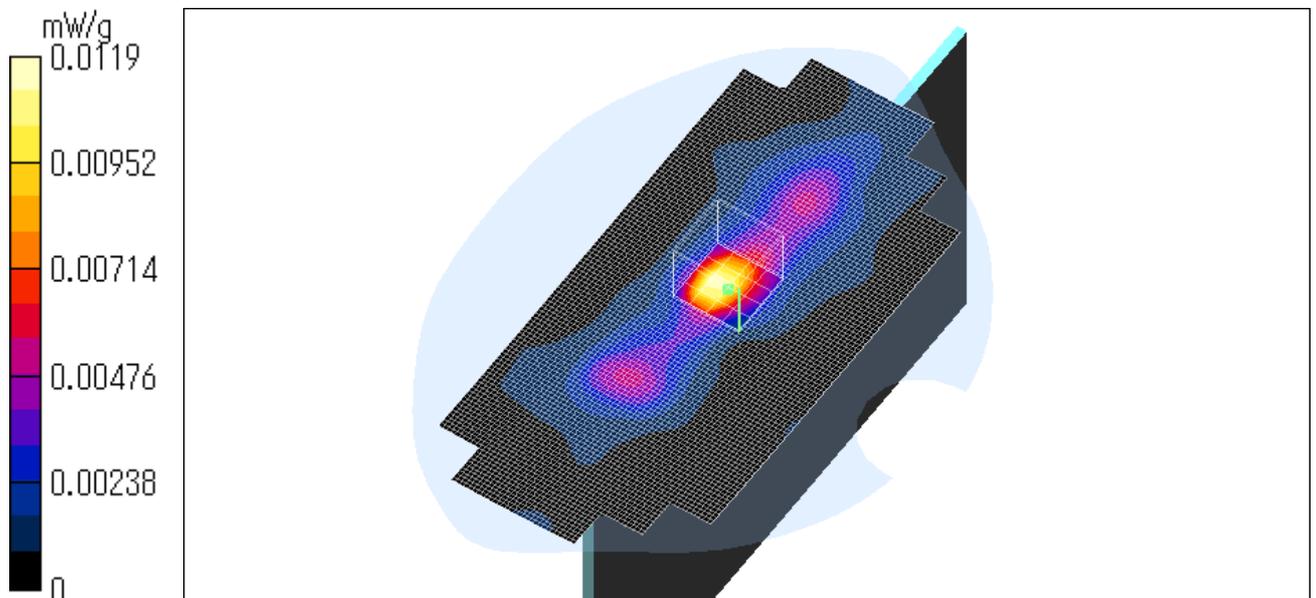

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

PCG-4C1L / Body / Top of display (Sub antenna) / OFDM 64QAM / 2462MHz

Crest factor: 1

Medium: M2450 ($\sigma = 1.94$ mho/m, $\epsilon_r = 50.2$, $\rho = 1000$ kg/m³)

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1685; ConvF(4.3, 4.3, 4.3); Calibrated: 2003/10/10

- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

- Phantom: SAM 1196

- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Area Scan (61x131x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR = 0.0111 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 0.0439 W/kg

SAR(1 g) = 0.0141 mW/g; SAR(10 g) = 0.00637 mW/g

Maximum value of SAR = 0.0125 mW/g


Reference Value = 2.07 V/m

Power Drift = -0.3 dB

Test Date = 08/05/04

Ambient Temperature = 24.5 degree.c

Liquid Temperature = Before 24.3 degree.C , After 24.3 degree.C

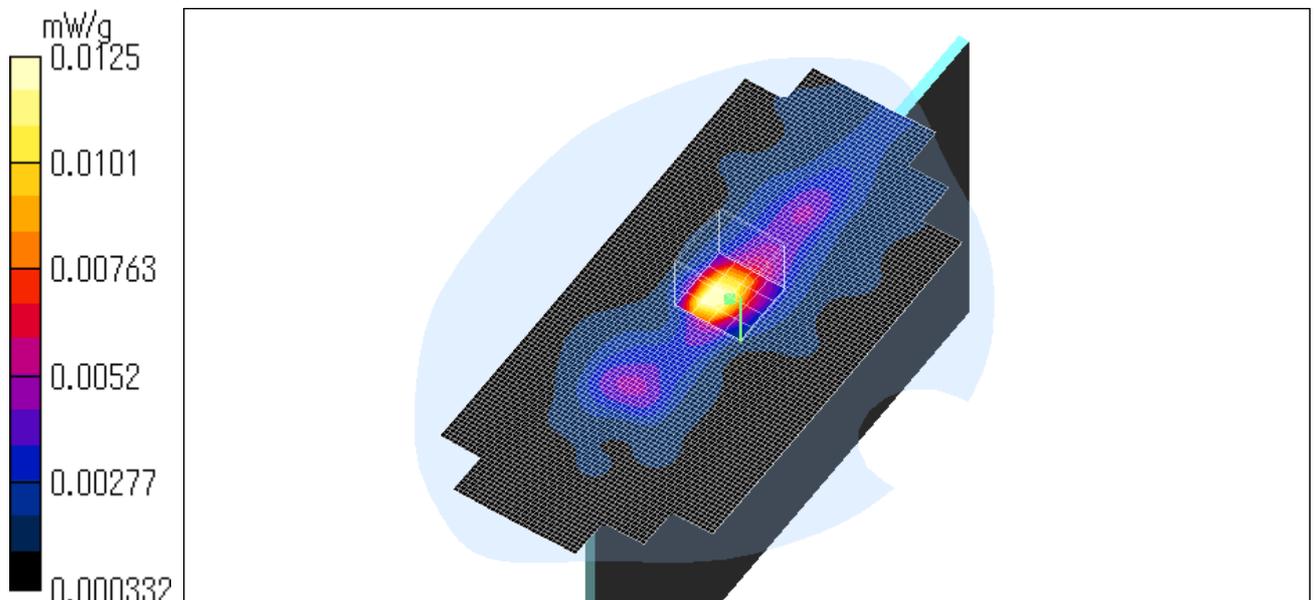

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

PCG-4C1L/ Body / Bottom (Sub antenna) / OFDM QPSK / 2437MHz

Crest factor: 1

Medium: M2450 ($\sigma = 1.94 \text{ mho/m}$, $\epsilon_r = 50.2$, $\rho = 1000 \text{ kg/m}^3$)

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1685; ConvF(4.3, 4.3, 4.3); Calibrated: 2003/10/10

- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

- Phantom: SAM 1196

- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Area Scan (61x131x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR = 0.00406 mW/g

Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 0.00453 W/kg

SAR(1 g) = 0.00322 mW/g; SAR(10 g) = 0.00281 mW/g

Maximum value of SAR = 0.00383 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 0.0121 W/kg

SAR(1 g) = 0.00499 mW/g; SAR(10 g) = 0.00332 mW/g

Maximum value of SAR = 0.00502 mW/g


Reference Value = 0.951 V/m

Power Drift = 0.1 dB

Test Date = 08/05/04

Ambient Temperature = 24.5 degree.c

Liquid Temperature = Before 24.1 degree.C , After 24.1 degree.C

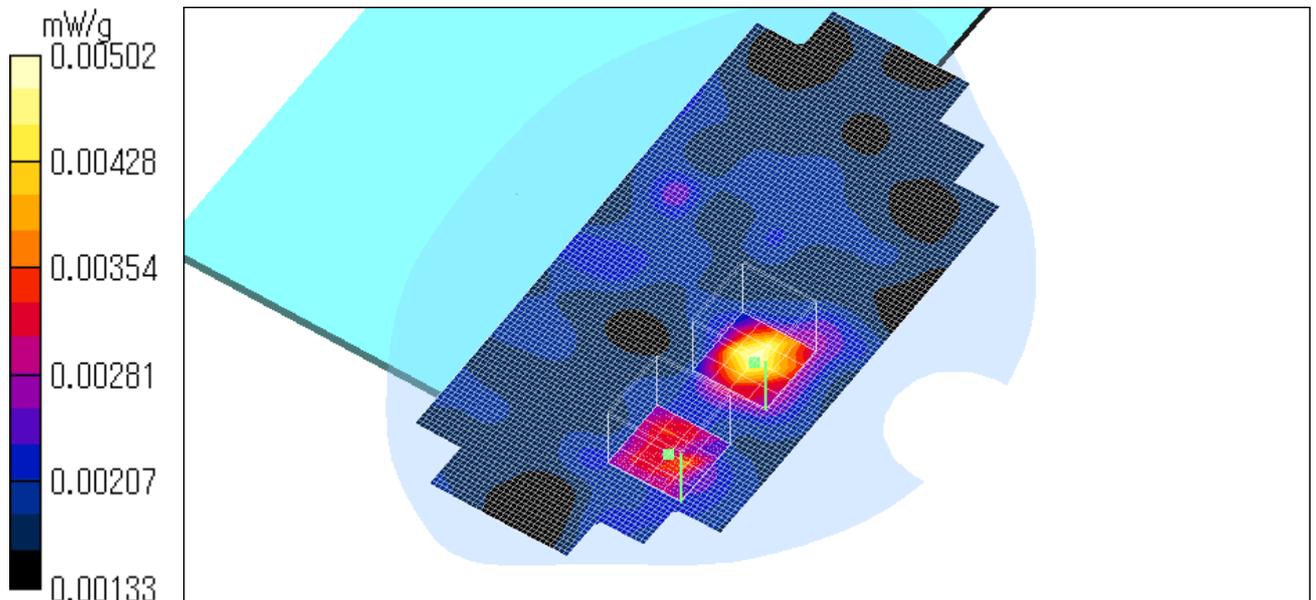

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

PCG-4C1L/ Body / Back of display (Sub antenna) / OFDM QPSK / 2437MHz

Crest factor: 1

Medium: M2450 ($\sigma = 1.94$ mho/m, $\epsilon_r = 50.2$, $\rho = 1000$ kg/m³)

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1685; ConvF(4.3, 4.3, 4.3); Calibrated: 2003/10/10

- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

- Phantom: SAM 1196

- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Area Scan (61x131x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR = 0.0209 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 0.0708 W/kg

SAR(1 g) = 0.0206 mW/g; SAR(10 g) = 0.00884 mW/g

Maximum value of SAR = 0.0197 mW/g


Reference Value = 1.23 V/m

Power Drift = -0.1 dB

Test Date = 08/05/04

Ambient Temperature = 24.5 degree.c

Liquid Temperature = Before 24.1 degree.C , After 24.1 degree.C

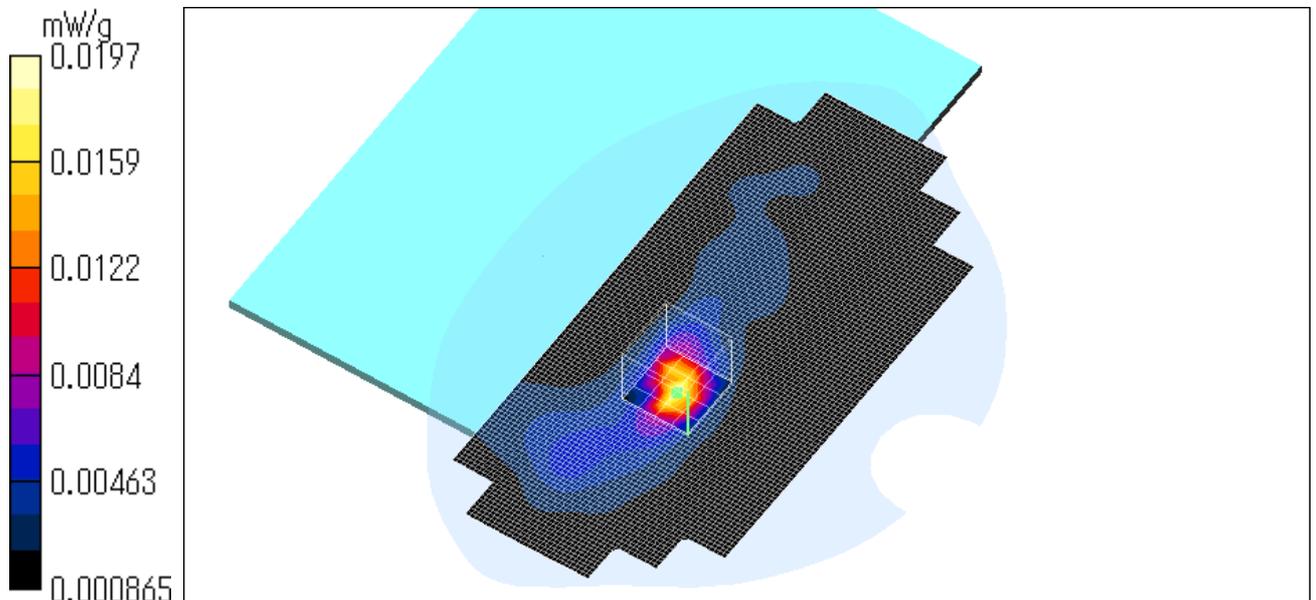

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

PCG-4C1L/ Body / Top of display (Sub antenna) / OFDM QPSK / 2437MHz

Crest factor: 1

Medium: M2450 ($\sigma = 1.94$ mho/m, $\epsilon_r = 50.2$, $\rho = 1000$ kg/m³)

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1685; ConvF(4.3, 4.3, 4.3); Calibrated: 2003/10/10

- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

- Phantom: SAM 1196

- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Area Scan (61x131x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR = 0.0169 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 0.0635 W/kg

SAR(1 g) = 0.0208 mW/g; SAR(10 g) = 0.0102 mW/g

Maximum value of SAR = 0.0197 mW/g


Reference Value = 2.41 V/m

Power Drift = -0.3 dB

Test Date = 08/05/04

Ambient Temperature = 24.5 degree.c

Liquid Temperature = Before 24.3 degree.C , After 24.3 degree.C

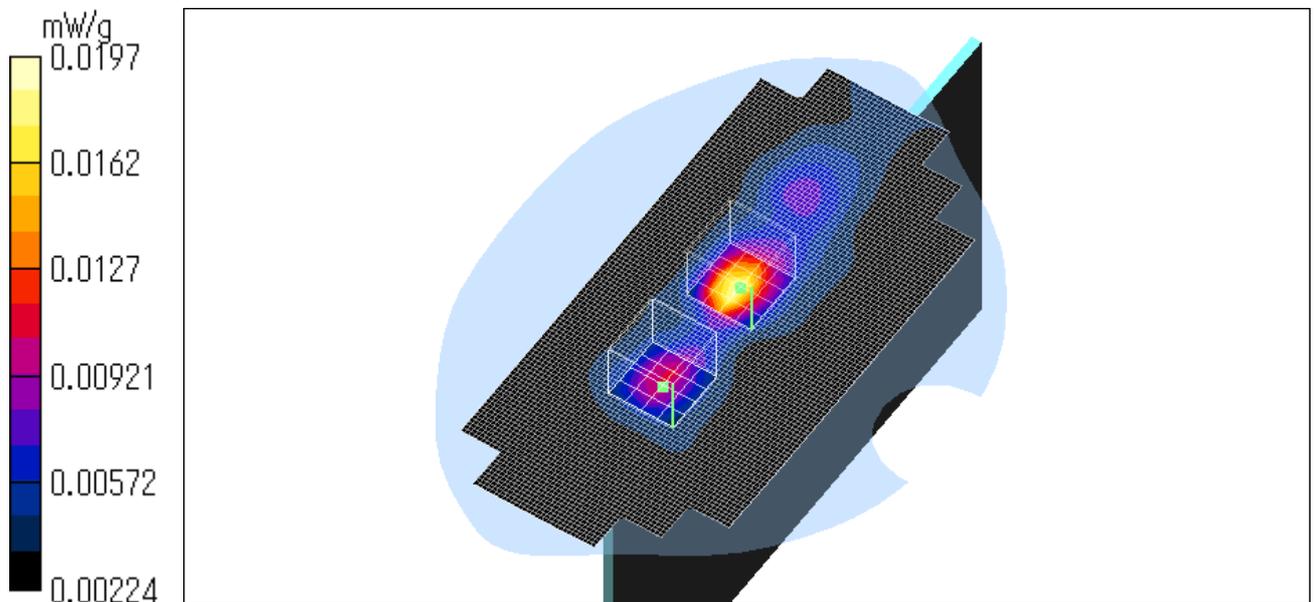

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

PCG-4C1L/ Body / Top of display (Sub antenna) / OFDM QPSK / 2412MHz

Crest factor: 1

Medium: M2450 ($\sigma = 1.94$ mho/m, $\epsilon_r = 50.2$, $\rho = 1000$ kg/m³)

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1685; ConvF(4.3, 4.3, 4.3); Calibrated: 2003/10/10

- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

- Phantom: SAM 1196

- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Area Scan (61x131x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR = 0.0152 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 0.045 W/kg

SAR(1 g) = 0.0166 mW/g; SAR(10 g) = 0.00785 mW/g

Maximum value of SAR = 0.0166 mW/g


Reference Value = 2.27 V/m

Power Drift = -0.3 dB

Test Date = 08/05/04

Ambient Temperature = 24.5 degree.c

Liquid Temperature = Before 24.3 degree.C , After 24.3 degree.C

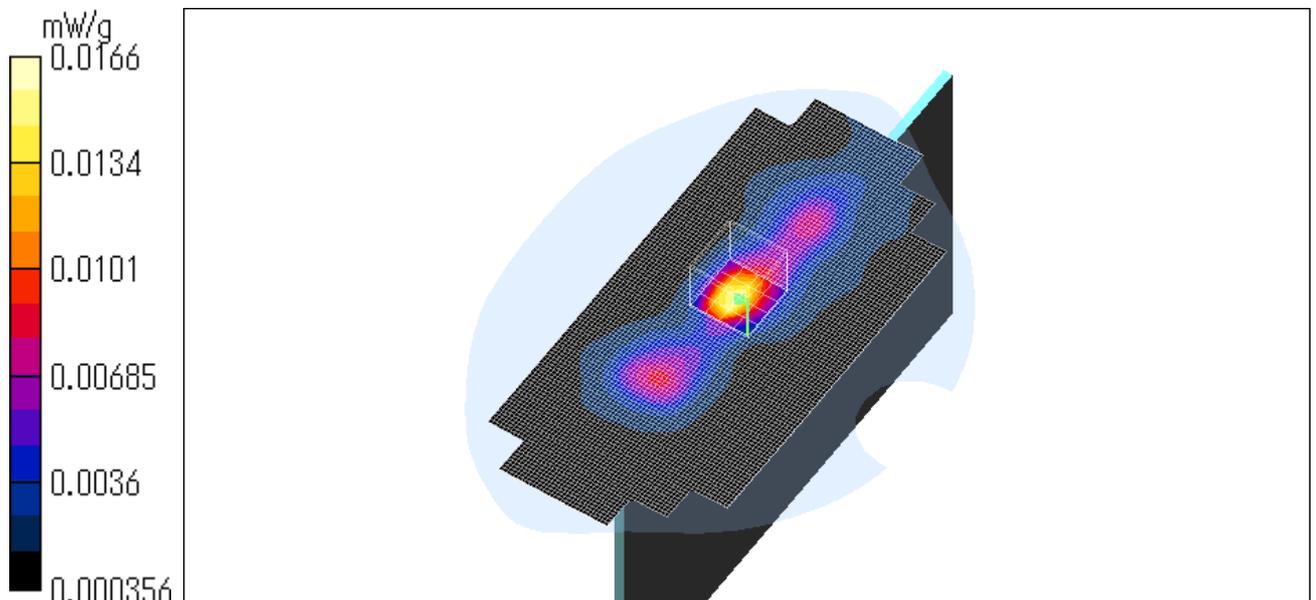

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

PCG-4C1L/ Body / Top of display (Sub antenna) / OFDM QPSK / 2462MHz

Crest factor: 1

Medium: M2450 ($\sigma = 1.94$ mho/m, $\epsilon_r = 50.2$, $\rho = 1000$ kg/m³)

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1685; ConvF(4.3, 4.3, 4.3); Calibrated: 2003/10/10

- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

- Phantom: SAM 1196

- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Area Scan (61x131x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR = 0.0155 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 0.0424 W/kg

SAR(1 g) = 0.0171 mW/g; SAR(10 g) = 0.00822 mW/g

Maximum value of SAR = 0.0162 mW/g


Reference Value = 2.33 V/m

Power Drift = -0.4 dB

Test Date = 08/05/04

Ambient Temperature = 24.5 degree.c

Liquid Temperature = Before 24.3 degree.C , After 24.3 degree.C

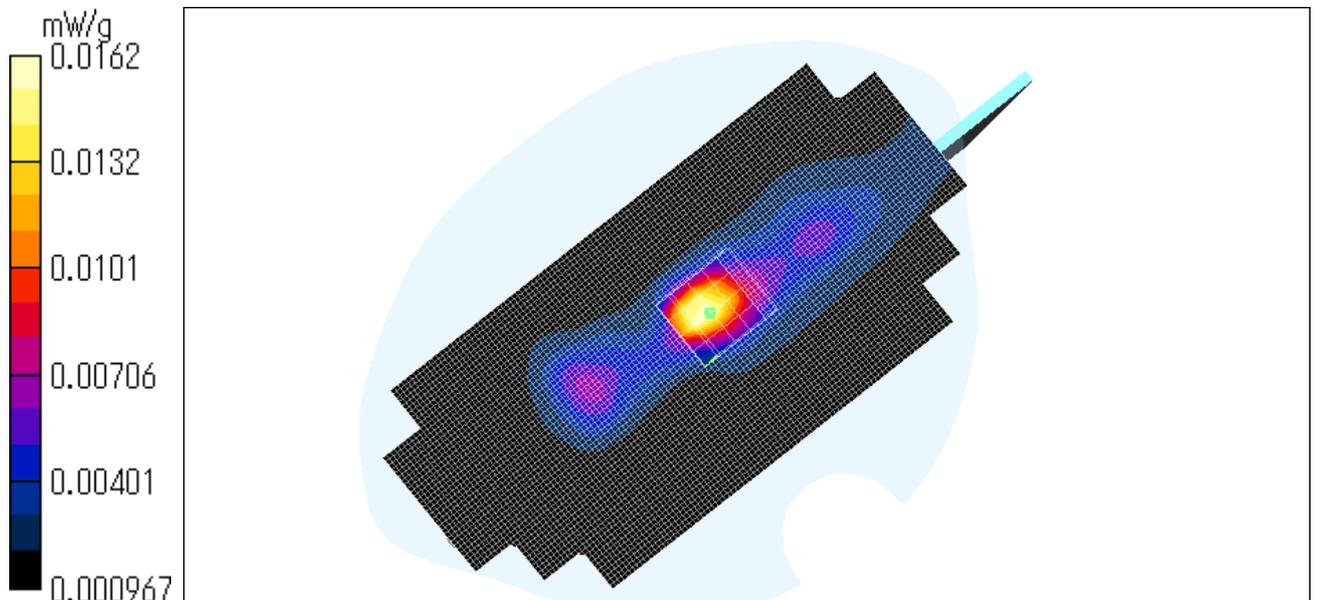

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

APPENDIX 3 : Validation Measurement data

System Validation / Dipole 2450 MHz / Forward Conducted Power : 250mW

Crest factor: 1
Medium: HSL2450 ($\sigma = 1.84$ mho/m, $\epsilon_r = 37.4$, $\rho = 1000$ kg/m³)
Phantom section: Flat Section

Dipole 2450 MHz;
- Type: D2450V2; Serial: SN:713


DASY4 Configuration:
- Probe: ET3DV6 - SN1685; ConvF(4.7, 4.7, 4.7); Calibrated: 2003/10/10
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Phantom: SAM 1196
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Area Scan (51x51x1): Measurement grid: dx=20mm, dy=20mm
Maximum value of SAR = 15.2 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Peak SAR (extrapolated) = 28.7 W/kg
SAR(1 g) = 13.7 mW/g; SAR(10 g) = 6.28 mW/g
Maximum value of SAR = 14.7 mW/g

Reference Value = 91.9 V/m
Power Drift = -0.03 dB

Test Date = 08/04/04
Ambient Temperature = 24.8 degree.c
Liquid Temperature = Before 24.1 degree.C , After 24.1 degree.C

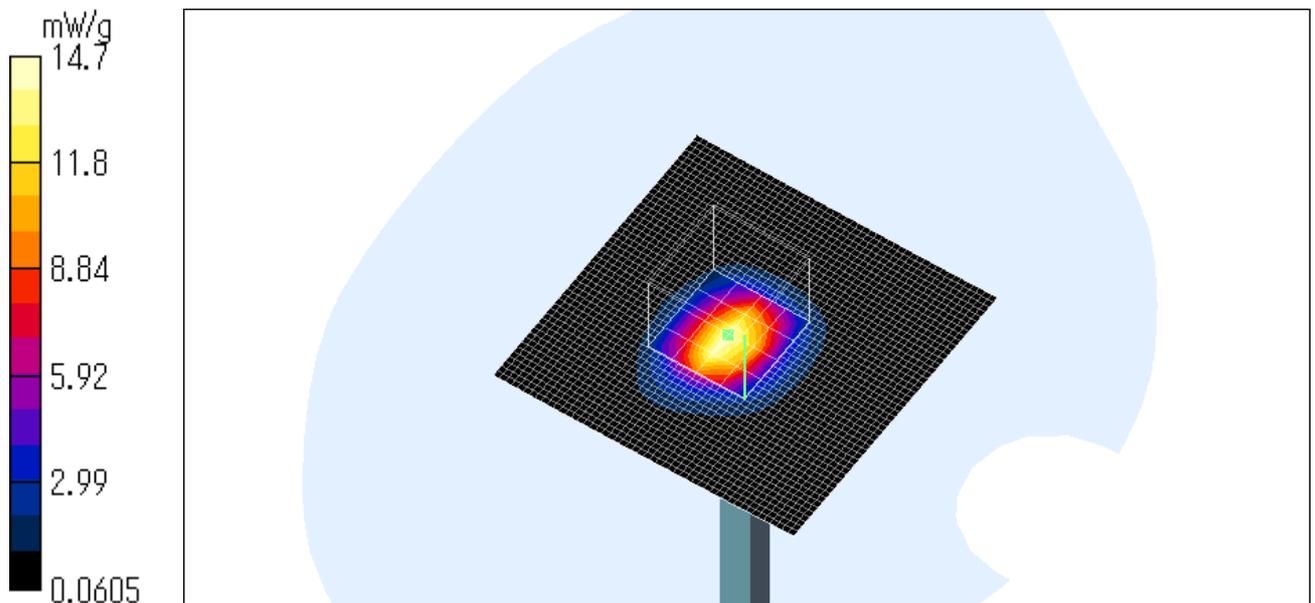

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

System Validation / Dipole 2450 MHz / Forward Conducted Power : 250mW

Crest factor: 1
Medium: HSL2450 ($\sigma = 1.84$ mho/m, $\epsilon_r = 37.5$, $\rho = 1000$ kg/m³)
Phantom section: Flat Section

Dipole 2450 MHz;
- Type: D2450V2; Serial: SN:713


DASY4 Configuration:
- Probe: ET3DV6 - SN1685; ConvF(4.7, 4.7, 4.7); Calibrated: 2003/10/10
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Phantom: SAM 1196
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Area Scan (51x51x1): Measurement grid: dx=20mm, dy=20mm
Maximum value of SAR = 14.9 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Peak SAR (extrapolated) = 27.8 W/kg
SAR(1 g) = 13.4 mW/g; SAR(10 g) = 6.18 mW/g
Maximum value of SAR = 14.5 mW/g

Reference Value = 91.3 V/m
Power Drift = -0.02 dB

Test Date = 08/05/04
Ambient Temperature = 24.8 degree.c
Liquid Temperature = Before 23.8 degree.C , After 23.8 degree.C

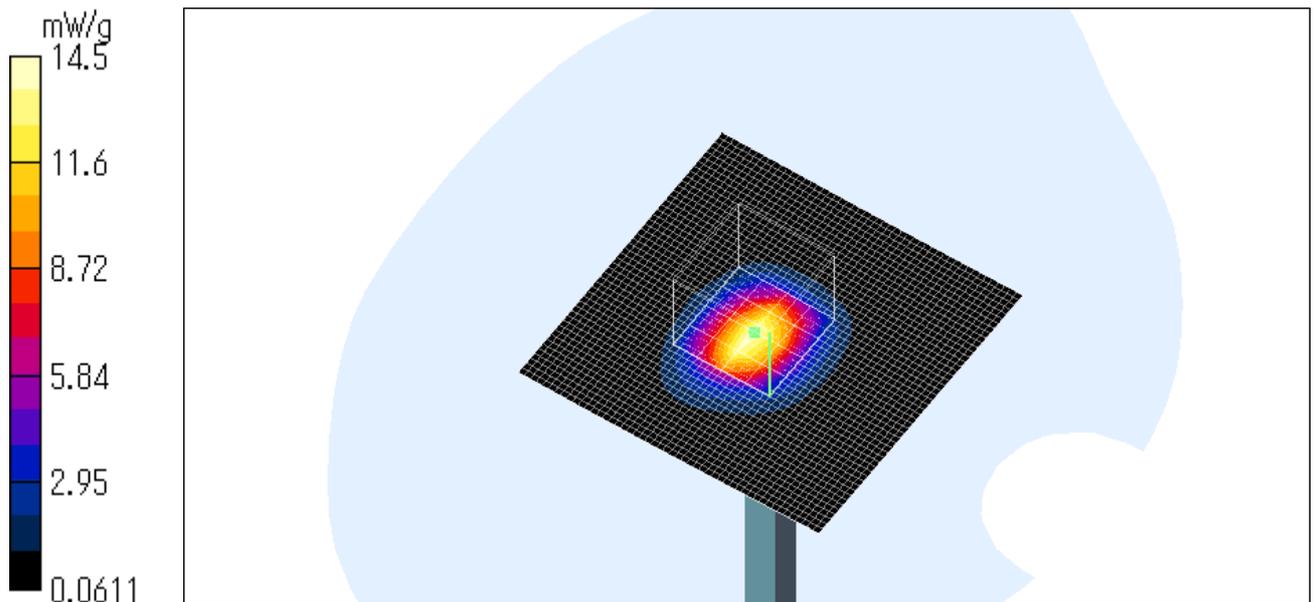

APPENDIX 4 : System Validation Dipole (D2450V2,S/N: 713)

Schmid & Partner Engineering AG

Zeughausstrasse 43, 8004 Zurich, Switzerland, Phone +41 1 245 97 00, Fax +41 1 245 97 79

Calibration Certificate

2450 MHz System Validation Dipole

Type:

D2450V2

Serial Number:

713

Place of Calibration:

Zurich

Date of Calibration:

November 15, 2002

Calibration Interval:

24 months

Schmid & Partner Engineering AG hereby certifies, that this device has been calibrated on the date indicated above. The calibration was performed in accordance with specifications and procedures of Schmid & Partner Engineering AG.

Wherever applicable, the standards used in the calibration process are traceable to international standards. In all other cases the standards of the Laboratory for EMF and Microwave Electronics at the Swiss Federal Institute of Technology (ETH) in Zurich, Switzerland have been applied.

Calibrated by:

D. Vetterli

Approved by:

Poloni Kofe

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

**Schmid & Partner
Engineering AG**

Zeughausstrasse 43, 8004 Zurich, Switzerland, Phone +41 1 245 97 00, Fax +41 1 245 97 79

DASY

Dipole Validation Kit

Type: D2450V2

Serial: 713

Manufactured: July 5, 2002

Calibrated: November 15, 2002

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

1. Measurement Conditions

The measurements were performed in the flat section of the SAM twin phantom filled with head simulating solution of the following electrical parameters at 2450 MHz:

Relative permittivity	38.0	± 5%
Conductivity	1.87 mho/m	± 10%

The DASY4 System with a dosimetric E-field probe ET3DV6 (SN:1507, conversion factor 5.0 at 2450 MHz) was used for the measurements.

The dipole feedpoint was positioned below the center marking and oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 10mm from dipole center to the solution surface. The included distance holder was used during measurements for accurate distance positioning.

The coarse grid with a grid spacing of 15mm was aligned with the dipole. The 7x7x7 fine cube was chosen for cube integration.

The dipole input power (forward power) was 250mW ± 3 %. The results are normalized to 1W input power.

2. SAR Measurement with DASY4 System

Standard SAR-measurements were performed according to the measurement conditions described in section 1. The results (see figure supplied) have been normalized to a dipole input power of 1W (forward power). The resulting averaged SAR-values measured with the dosimetric probe ET3DV6 SN:1507 and applying the advanced extrapolation are:

averaged over 1 cm ³ (1 g) of tissue:	54.4 mW/g
averaged over 10 cm ³ (10 g) of tissue:	24.2 mW/g

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

3. Dipole impedance and return loss

The impedance was measured at the SMA-connector with a network analyzer and numerically transformed to the dipole feedpoint. The transformation parameters from the SMA-connector to the dipole feedpoint are:

Electrical delay: **1.158 ns** (one direction)
Transmission factor: **0.997** (voltage transmission, one direction)

The dipole was positioned at the flat phantom sections according to section 1 and the distance holder was in place during impedance measurements.

Feedpoint impedance at 2450 MHz: $\text{Re}\{Z\} = \mathbf{51.3 \Omega}$

$\text{Im}\{Z\} = \mathbf{2.4 \Omega}$

Return Loss at 2450 MHz **- 31.4 dB**

4. Measurement Conditions

The measurements were performed in the flat section of the SAM twin phantom filled with body simulating solution of the following electrical parameters at 2450 MHz:

Relative permittivity **51.2** $\pm 5\%$
Conductivity **1.96 mho/m** $\pm 10\%$

The DASY4 System with a dosimetric E-field probe ET3DV6 (SN:1507, conversion factor 4.5 at 2450 MHz) was used for the measurements.

The dipole feedpoint was positioned below the center marking and oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 10mm from dipole center to the solution surface. The included distance holder was used during measurements for accurate distance positioning.

The coarse grid with a grid spacing of 15mm was aligned with the dipole. The 7x7x7 fine cube was chosen for cube integration.

The dipole input power (forward power) was 250mW $\pm 3\%$. The results are normalized to 1W input power.

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

Date/Time: 11/13/02 21:52:22

Test Laboratory: SPEAG, Zurich, Switzerland
File Name: SN713_SN1507_HSL2450_131102.da4


DUT: Dipole 2450 MHz Type & Serial Number: D2450V2 - SN713
Program: Dipole Calibration; Pin = 250 mW; d = 10 mm

Communication System: CW-2450; Frequency: 2450 MHz; Duty Cycle: 1:1
Medium: HSL 2450 MHz ($\sigma = 1.87$ mho/m, $\epsilon = 38.03$, $\rho = 1000$ kg/m³)
Phantom section: FlatSection

DASY4 Configuration:

- Probe: ET3DV6 - SN1507; ConvF(5, 5, 5); Calibrated: 1/24/2002
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 - SN410; Calibrated: 7/18/2002
- Phantom: SAM 4.0 - TP:1006
- Software: DASY4, V4.0 Build 35

Area Scan (81x81x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm
Reference Value = 94.4 V/m
Peak SAR = 29.6 mW/g
SAR(1 g) = 13.6 mW/g; SAR(10 g) = 6.04 mW/g
Power Drift = 0.01 dB

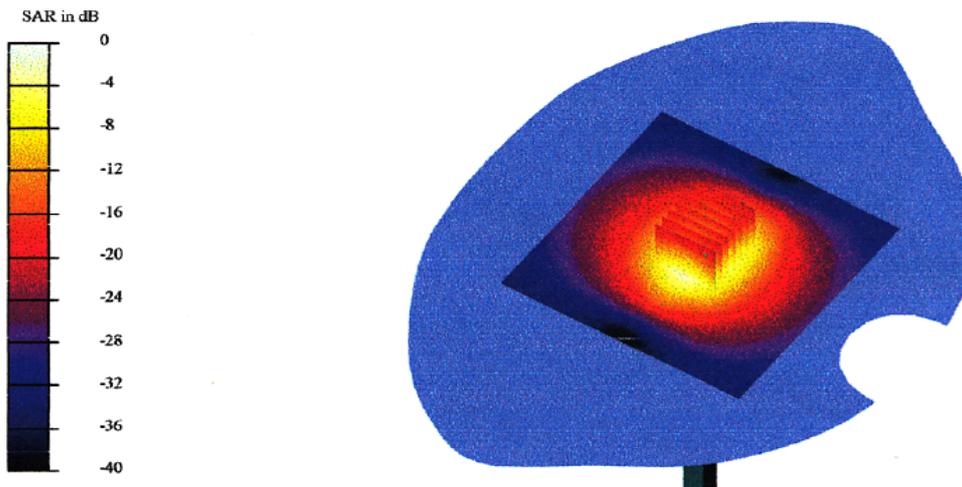

UL Apex Co., Ltd.



Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

13 Nov 2002 20:32:38
CH1 S11 1 U FS 1: 51.254 ϕ 2.4414 ϕ 158.60 pH 2 450.000 000 MHz

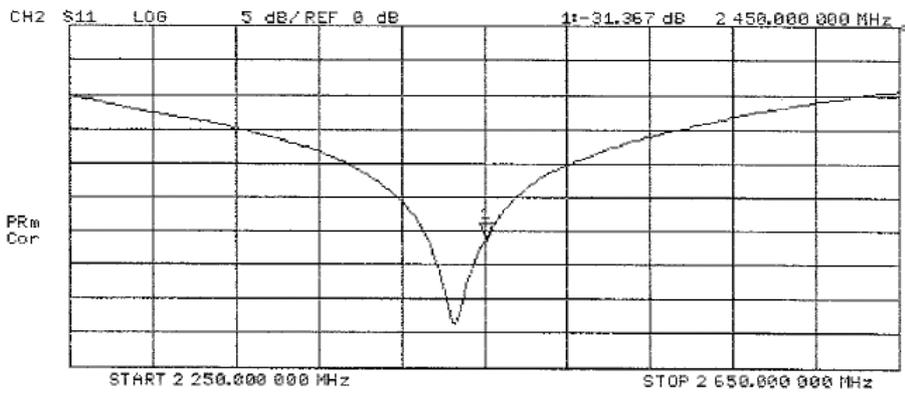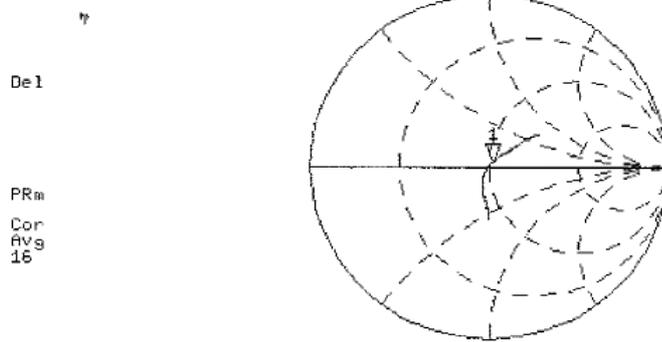

Date/Time: 11/15/02 14:25:17

Test Laboratory: SPEAG, Zurich, Switzerland
File Name: SN713_SN1507_M2450_141102.da4


DUT: Dipole 2450 MHz Type & Serial Number: D2450V2 - SN713
Program: Dipole Calibration; Pin = 250 mW; d = 10 mm

Communication System: CW-2450; Frequency: 2450 MHz; Duty Cycle: 1:1
Medium: Muscle 2450 MHz ($\sigma = 1.96$ mho/m, $\epsilon = 51.15$, $\rho = 1000$ kg/m³)
Phantom section: FlatSection

DASY4 Configuration:

- Probe: ET3DV6 - SN1507; ConvF(4.5, 4.5, 4.5); Calibrated: 1/24/2002
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 - SN410; Calibrated: 7/18/2002
- Phantom: SAM 4.0 - TP:1006
- Software: DASY4, V4.0 Build 35

Area Scan (81x81x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm
Reference Value = 95.2 V/m
Peak SAR = 25 mW/g
SAR(1 g) = 12.9 mW/g; SAR(10 g) = 5.99 mW/g
Power Drift = 0.02 dB

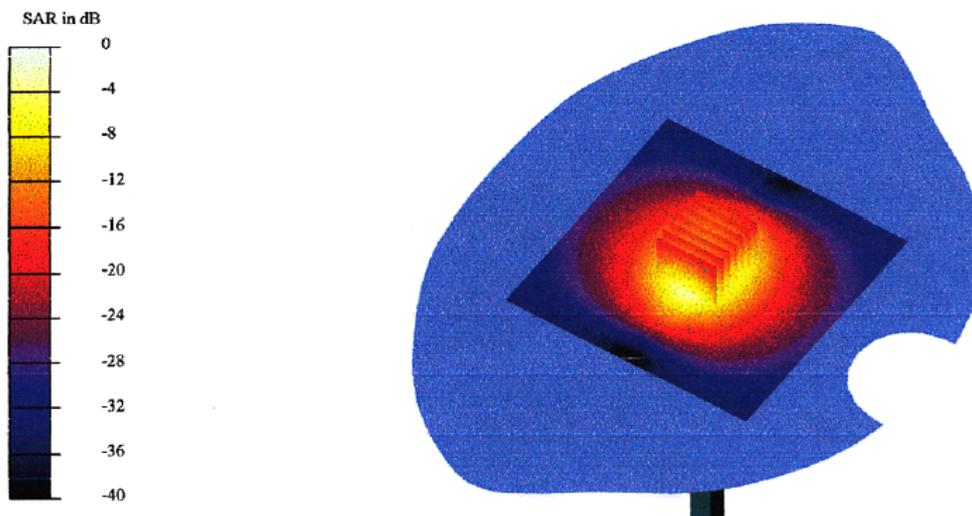


UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

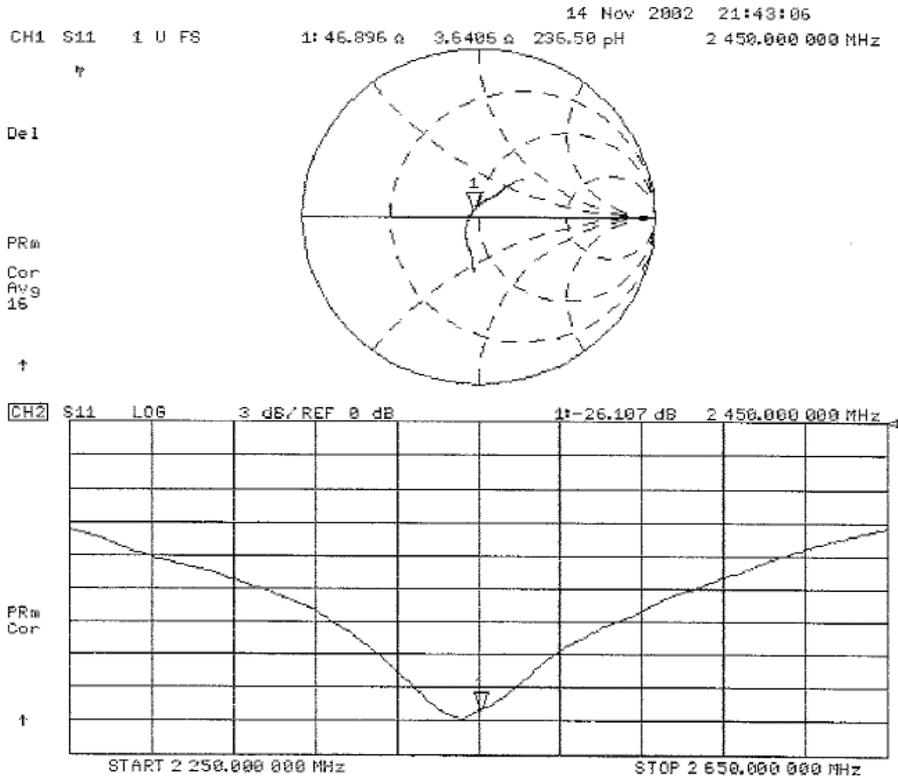

APPENDIX 5 : Dosimetric E-Field Probe Calibration (ET3DV6,S/N: 1685)

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

Schmid & Partner Engineering AG

s p e a g

Zeughausstrasse 43, 8004 Zurich, Switzerland
Phone +41 1 245 9700, Fax +41 1 245 9779
info@speag.com, http://www.speag.com

IMPORTANT NOTICE

USAGE OF PROBES IN ORGANIC SOLVENTS

Diethylene Glycol Monobuthy Ether (the basis for liquids above 1 GHz), as many other organic solvents, is a very effective softener for synthetic materials. These solvents can cause irreparable damage to certain SPEAG products, except those which are explicitly declared as compliant with organic solvents.

Compatible Probes:

- ET3DV6
- ET3DV6R
- ES3DV2
- ER3DV6
- H3DV6

Important Note for ET3DV6 Probes:

The ET3DV6 probes shall not be exposed to solvents longer than necessary for the measurements and shall be cleaned daily after use with warm water and stored dry.

s p e a g

Schmid & Partner Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland
Phone +41 1 245 9700, Fax +41 1 245 9779
info@speag.com, http://www.speag.com

Schmid & Partner Engineering AG

Technical Note 01.06.15-1

June 2002

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland

Client **UL Apex (MTT)**

CALIBRATION CERTIFICATE																																			
Object(s)	ET3DV6 - SN:1685																																		
Calibration procedure(s)	QA CAL-01 v2 Calibration procedure for dosimetric E-field probes																																		
Calibration date:	October 10, 2003																																		
Condition of the calibrated item	In Tolerance (according to the specific calibration document)																																		
<p>This calibration statement documents traceability of M&TE used in the calibration procedures and conformity of the procedures with the ISO/IEC 17025 international standard.</p> <p>All calibrations have been conducted in the closed laboratory facility: environment temperature 22 +/- 2 degrees Celsius and humidity < 75%.</p> <p>Calibration Equipment used (M&TE critical for calibration)</p> <table border="1"> <thead> <tr> <th>Model Type</th> <th>ID #</th> <th>Cal Date (Calibrated by, Certificate No.)</th> <th>Scheduled Calibration</th> </tr> </thead> <tbody> <tr> <td>Power meter EPM E4419B</td> <td>GB41293874</td> <td>2-Apr-03 (METAS, No 252-0250)</td> <td>Apr-04</td> </tr> <tr> <td>Power sensor E4412A</td> <td>MY41495277</td> <td>2-Apr-03 (METAS, No 252-0250)</td> <td>Apr-04</td> </tr> <tr> <td>Reference 20 dB Attenuator</td> <td>SN: 5086 (20b)</td> <td>3-Apr-03 (METAS No. 251-0340)</td> <td>Apr-04</td> </tr> <tr> <td>Fluke Process Calibrator Type 702</td> <td>SN: 6295803</td> <td>8-Sep-03 (Sintrel SCS No. E-030020)</td> <td>Sep-04</td> </tr> <tr> <td>Power sensor HP 8481A</td> <td>MY41092180</td> <td>18-Sep-02 (Agilent, No. 20020918)</td> <td>In house check: Oct 03</td> </tr> <tr> <td>RF generator HP 8684C</td> <td>US3642U01700</td> <td>4-Aug-99 (SPEAG, in house check Aug-02)</td> <td>In house check: Aug-05</td> </tr> <tr> <td>Network Analyzer HP 8753E</td> <td>US37390585</td> <td>18-Oct-01 (Agilent, No. 24BR1033101)</td> <td>In house check: Oct 03</td> </tr> </tbody> </table>				Model Type	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration	Power meter EPM E4419B	GB41293874	2-Apr-03 (METAS, No 252-0250)	Apr-04	Power sensor E4412A	MY41495277	2-Apr-03 (METAS, No 252-0250)	Apr-04	Reference 20 dB Attenuator	SN: 5086 (20b)	3-Apr-03 (METAS No. 251-0340)	Apr-04	Fluke Process Calibrator Type 702	SN: 6295803	8-Sep-03 (Sintrel SCS No. E-030020)	Sep-04	Power sensor HP 8481A	MY41092180	18-Sep-02 (Agilent, No. 20020918)	In house check: Oct 03	RF generator HP 8684C	US3642U01700	4-Aug-99 (SPEAG, in house check Aug-02)	In house check: Aug-05	Network Analyzer HP 8753E	US37390585	18-Oct-01 (Agilent, No. 24BR1033101)	In house check: Oct 03
Model Type	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration																																
Power meter EPM E4419B	GB41293874	2-Apr-03 (METAS, No 252-0250)	Apr-04																																
Power sensor E4412A	MY41495277	2-Apr-03 (METAS, No 252-0250)	Apr-04																																
Reference 20 dB Attenuator	SN: 5086 (20b)	3-Apr-03 (METAS No. 251-0340)	Apr-04																																
Fluke Process Calibrator Type 702	SN: 6295803	8-Sep-03 (Sintrel SCS No. E-030020)	Sep-04																																
Power sensor HP 8481A	MY41092180	18-Sep-02 (Agilent, No. 20020918)	In house check: Oct 03																																
RF generator HP 8684C	US3642U01700	4-Aug-99 (SPEAG, in house check Aug-02)	In house check: Aug-05																																
Network Analyzer HP 8753E	US37390585	18-Oct-01 (Agilent, No. 24BR1033101)	In house check: Oct 03																																
Calibrated by:	Name Nico Vetterli	Function Technician	Signature 																																
Approved by:	Name Katja Pokovic	Function Laboratory Director	Signature 																																
Date issued: October 23, 2003																																			
<p>This calibration certificate is issued as an intermediate solution until the accreditation process (based on ISO/IEC 17025 International Standard) for Calibration Laboratory of Schmid & Partner Engineering AG is completed.</p>																																			

Schmid & Partner Engineering AG

s p e a g

Zeughausstrasse 43, 8004 Zurich, Switzerland

Phone +41 1 245 9700, Fax +41 1 245 9779

info@speag.com, <http://www.speag.com>

Probe ET3DV6

SN:1685

Manufactured:	April 3, 2002
Last calibration:	May 10, 2002
Recalibrated:	October 10, 2003

Calibrated for DASY Systems

(Note: non-compatible with DASY2 system!)

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

ET3DV6 SN:1685

October 10, 2003

DASY - Parameters of Probe: ET3DV6 SN:1685

Sensitivity in Free Space

NormX	1.60 $\mu\text{V}/(\text{V}/\text{m})^2$
NormY	1.65 $\mu\text{V}/(\text{V}/\text{m})^2$
NormZ	1.56 $\mu\text{V}/(\text{V}/\text{m})^2$

Diode Compression

DCP X	95	mV
DCP Y	95	mV
DCP Z	95	mV

Sensitivity in Tissue Simulating Liquid

Head **900 MHz** $\epsilon_r = 41.5 \pm 5\%$ $\sigma = 0.97 \pm 5\%$ mho/m
Valid for f=800-1000 MHz with Head Tissue Simulating Liquid according to EN 50361, P1528-200X

ConvF X	6.6 $\pm 9.5\%$ (k=2)	Boundary effect:
ConvF Y	6.6 $\pm 9.5\%$ (k=2)	Alpha 0.26
ConvF Z	6.6 $\pm 9.5\%$ (k=2)	Depth 3.07

Head **1800 MHz** $\epsilon_r = 40.0 \pm 5\%$ $\sigma = 1.40 \pm 5\%$ mho/m
Valid for f=1710-1910 MHz with Head Tissue Simulating Liquid according to EN 50361, P1528-200X

ConvF X	5.2 $\pm 9.5\%$ (k=2)	Boundary effect:
ConvF Y	5.2 $\pm 9.5\%$ (k=2)	Alpha 0.41
ConvF Z	5.2 $\pm 9.5\%$ (k=2)	Depth 2.77

Boundary Effect

Head	900 MHz	Typical SAR gradient: 5 % per mm	
	Probe Tip to Boundary	1 mm	2 mm
	SAR _{pe} [%] Without Correction Algorithm	8.9	5.4
	SAR _{pe} [%] With Correction Algorithm	0.4	0.5

Head	1800 MHz	Typical SAR gradient: 10 % per mm	
	Probe Tip to Boundary	1 mm	2 mm
	SAR _{pe} [%] Without Correction Algorithm	11.8	8.4
	SAR _{pe} [%] With Correction Algorithm	0.4	0.2

Sensor Offset

Probe Tip to Sensor Center	2.7	mm
Optical Surface Detection	1.6 \pm 0.2	mm

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN


Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

ET3DV6 SN:1685

October 10, 2003

Receiving Pattern ($\phi, \theta = 0^\circ$)

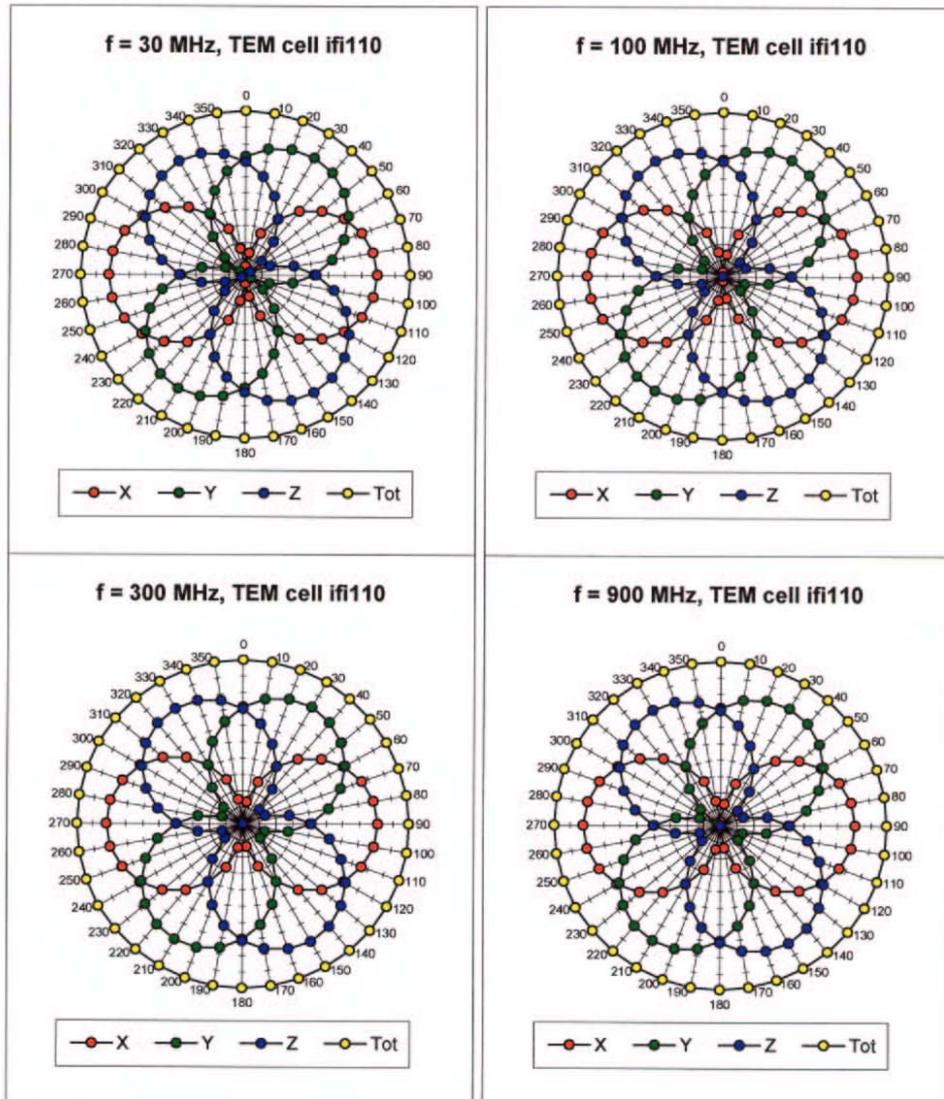

UL Apex Co., Ltd.

Head Office EMC Lab.


4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116


Facsimile: +81 596 24 8124

ET3DV6 SN:1685

October 10, 2003

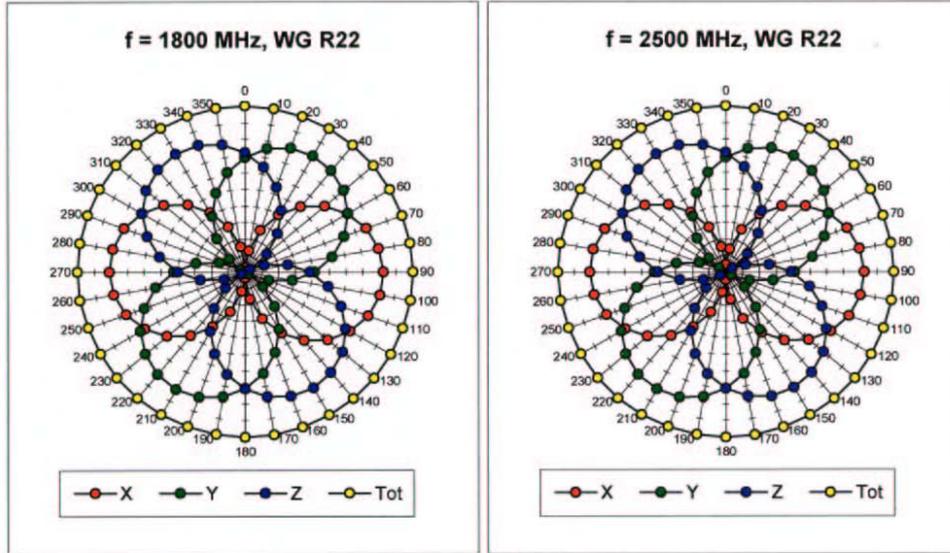

Isotropy Error (ϕ), $\theta = 0^\circ$

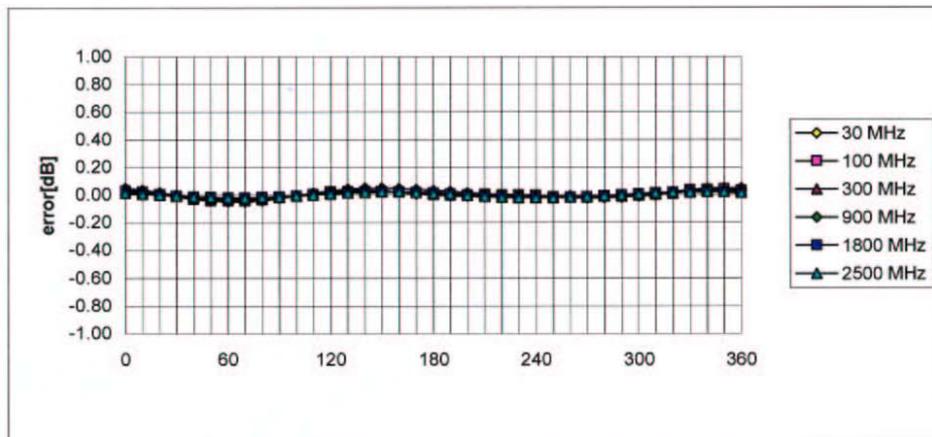


ET3DV6 SN:1685

October 10, 2003

Frequency Response of E-Field

(TEM-Cell:ifi110, Waveguide R22)

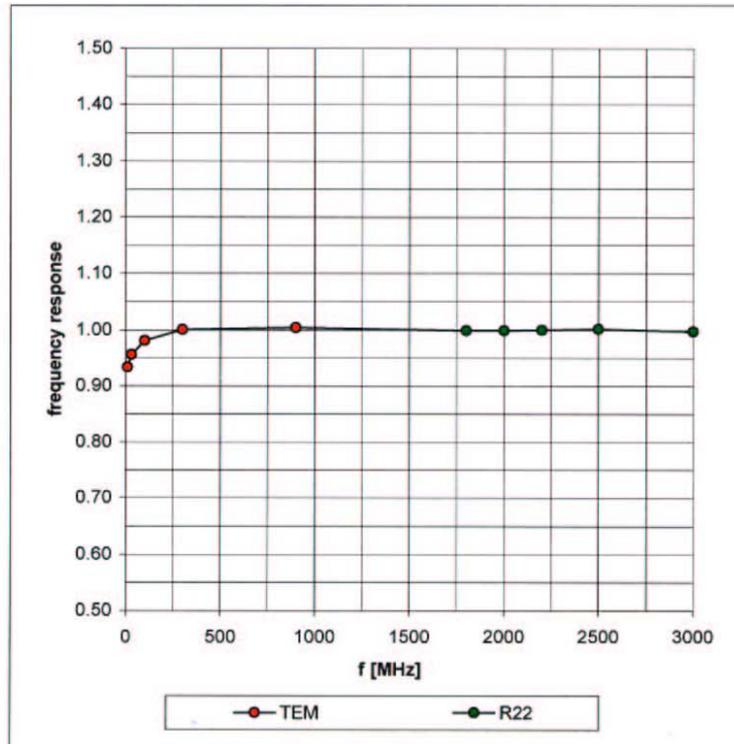

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN



Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

ET3DV6 SN:1685

October 10, 2003


Dynamic Range f(SAR_{brain}) (Waveguide R22)

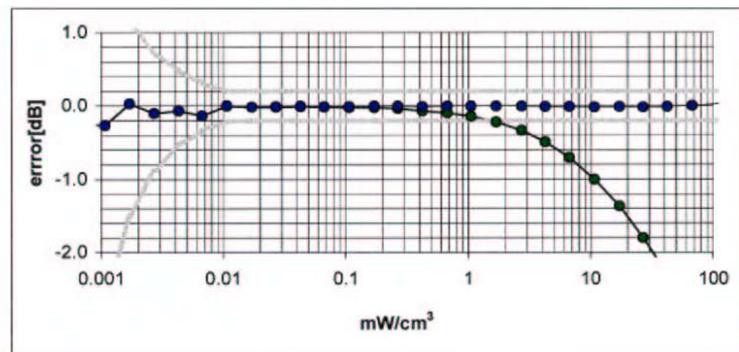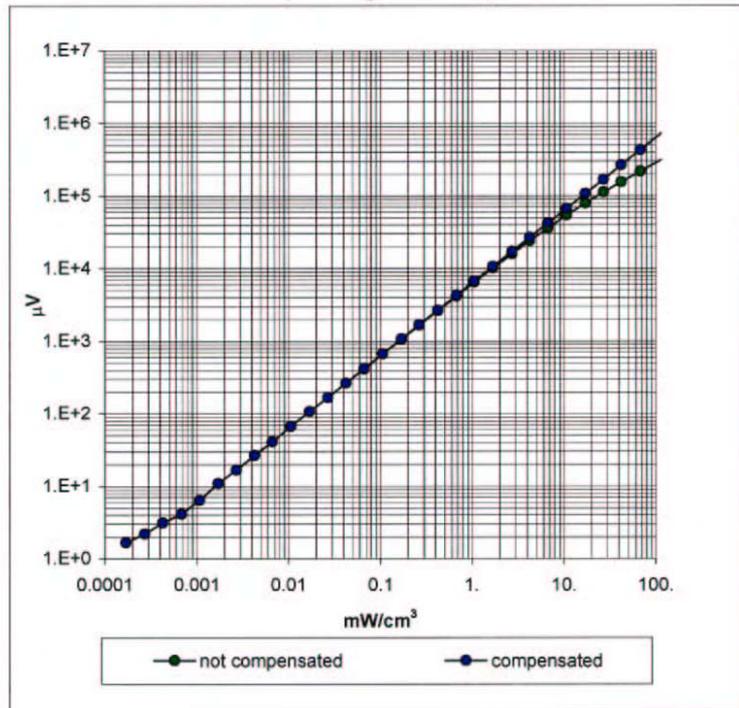

ET3DV6 SN:1685

October 10, 2003

Conversion Factor Assessment

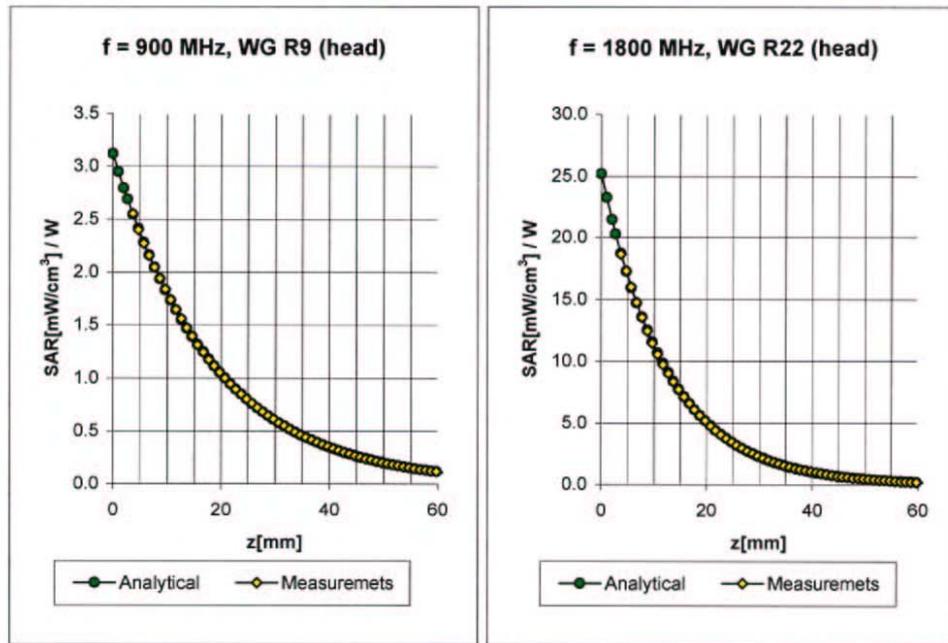

Head 900 MHz $\epsilon_r = 41.5 \pm 5\%$ $\sigma = 0.97 \pm 5\%$ mho/m

Valid for f=800-1000 MHz with Head Tissue Simulating Liquid according to EN 50361, P1528-200X

ConvF X	6.6 $\pm 9.5\%$ (k=2)	Boundary effect:
ConvF Y	6.6 $\pm 9.5\%$ (k=2)	Alpha 0.26
ConvF Z	6.6 $\pm 9.5\%$ (k=2)	Depth 3.07

Head 1800 MHz $\epsilon_r = 40.0 \pm 5\%$ $\sigma = 1.40 \pm 5\%$ mho/m

Valid for f=1710-1910 MHz with Head Tissue Simulating Liquid according to EN 50361, P1528-200X

ConvF X	5.2 $\pm 9.5\%$ (k=2)	Boundary effect:
ConvF Y	5.2 $\pm 9.5\%$ (k=2)	Alpha 0.41
ConvF Z	5.2 $\pm 9.5\%$ (k=2)	Depth 2.77

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN


Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

ET3DV6 SN:1685

October 10, 2003

Conversion Factor Assessment

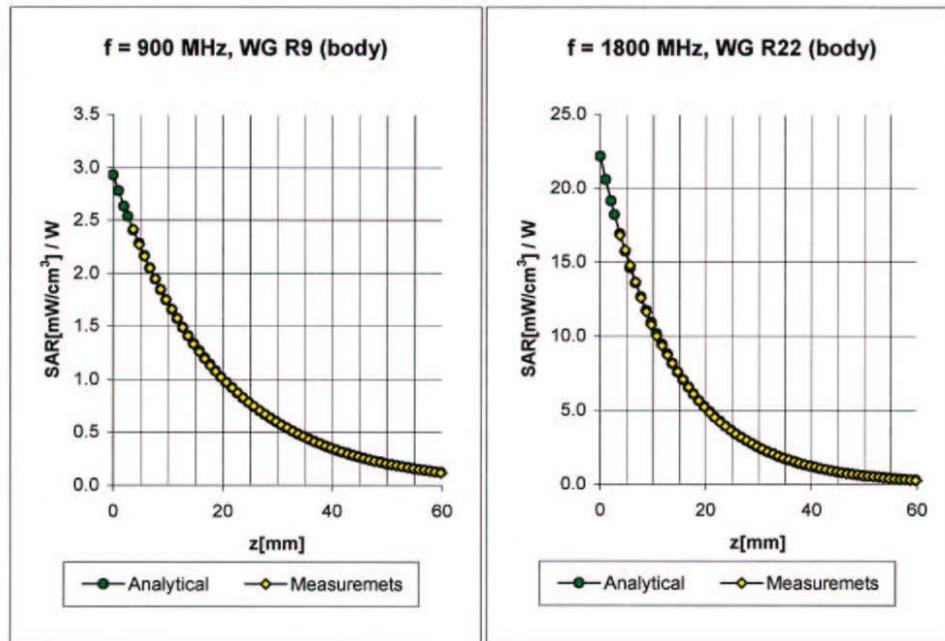

Body 900 MHz $\epsilon_r = 55.0 \pm 5\%$ $\sigma = 1.05 \pm 5\%$ mho/m

Valid for f=800-1000 MHz with Body Tissue Simulating Liquid according to OET 65 Suppl. C

ConvF X	6.4 $\pm 9.5\%$ (k=2)	Boundary effect:
ConvF Y	6.4 $\pm 9.5\%$ (k=2)	Alpha 0.27
ConvF Z	6.4 $\pm 9.5\%$ (k=2)	Depth 3.22

Body 1800 MHz $\epsilon_r = 53.3 \pm 5\%$ $\sigma = 1.52 \pm 5\%$ mho/m


Valid for f=1710-1910 MHz with Body Tissue Simulating Liquid according to OET 65 Suppl. C

ConvF X	4.7 $\pm 9.5\%$ (k=2)	Boundary effect:
ConvF Y	4.7 $\pm 9.5\%$ (k=2)	Alpha 0.48
ConvF Z	4.7 $\pm 9.5\%$ (k=2)	Depth 2.94

ET3DV6 SN:1685

October 10, 2003

Conversion Factor Assessment

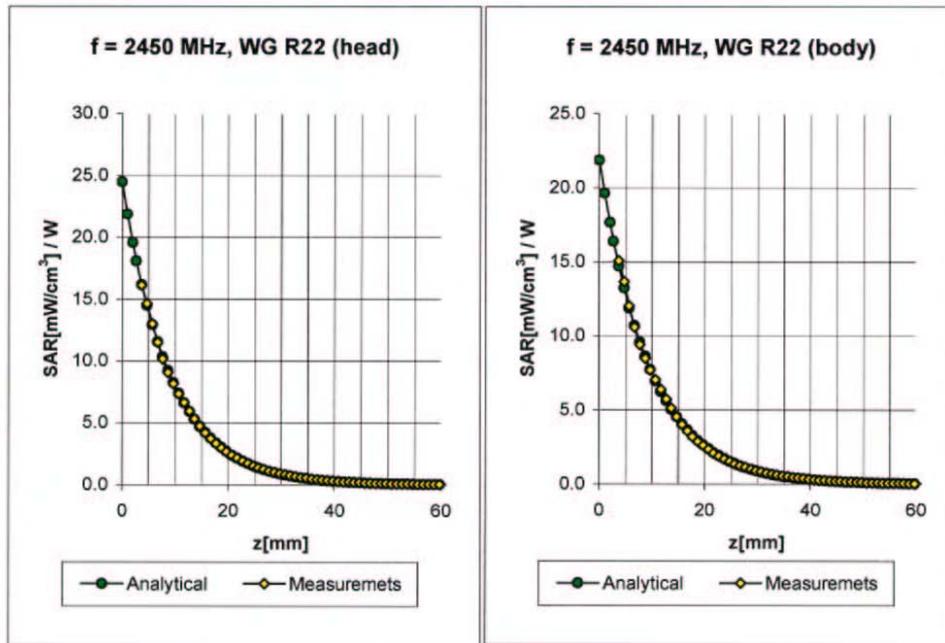

Head **2450 MHz** $\epsilon_r = 39.2 \pm 5\%$ $\sigma = 1.80 \pm 5\%$ mho/m

Valid for f=2400-2500 MHz with Head Tissue Simulating Liquid according to EN 50361, P1528-200X

ConvF X	4.7 $\pm 9.5\%$ (k=2)	Boundary effect:	
ConvF Y	4.7 $\pm 9.5\%$ (k=2)	Alpha	0.78
ConvF Z	4.7 $\pm 9.5\%$ (k=2)	Depth	2.04

Body **2450 MHz** $\epsilon_r = 52.7 \pm 5\%$ $\sigma = 1.95 \pm 5\%$ mho/m

Valid for f=2400-2500 MHz with Body Tissue Simulating Liquid according to OET 65 Suppl. C

ConvF X	4.3 $\pm 9.5\%$ (k=2)	Boundary effect:	
ConvF Y	4.3 $\pm 9.5\%$ (k=2)	Alpha	0.80
ConvF Z	4.3 $\pm 9.5\%$ (k=2)	Depth	1.89

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116


Facsimile: +81 596 24 8124

ET3DV6 SN:1685

October 10, 2003

Deviation from Isotropy in HSL

Error ($\theta\phi$), $f = 900$ MHz

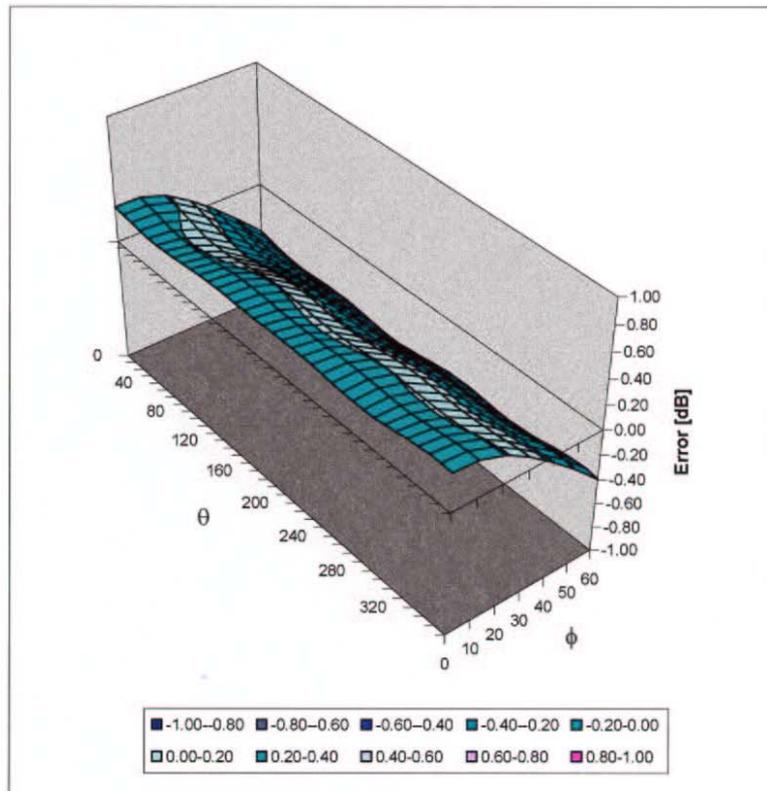

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124