



FCC Test Report

FCC Part 15.407 for UNII Devices/ CANADA RSS-210 issue 5 for Lelean Devices

FOR:

Notebook PC

MODEL #: PCG-4J3L

SONY CORPORATION
6-7-35, KITASHINAGAWA, SHINAGAWA-KU
TOKYO 141-0001
JAPAN

FCC ID: AK8PCG4J3L
IC ID: 409B-PCG4J3L

TEST REPORT #: SONYE_008_06002_15.407A
DATE: 07/11/2006



FCC listed#
101450

IC recognized #
3925

CETECOM Inc.

411 Dixon Landing Road • Milpitas, CA 95035 • U.S.A.

Phone: + 1 (408) 586 6200 • Fax: + 1 (408) 586 6299 • E-mail: info@cetecomusa.com • <http://www.cetecom.com>

CETECOM Inc. is a Delaware Corporation with Corporation number: 2113686

Board of Directors: Dr. Harald Ansorge, Dr. Klaus Matkey, Hans Peter May

© Copyright by CETECOM



TABLE OF CONTENTS

1 Assessment _____ **3**

2 Administrative Data _____ **4**

2.1 Identification of the Testing Laboratory Issuing the EMC Test Report _____ **4**

2.2 Identification of the Client _____ **4**

2.3 Identification of the Manufacturer _____ **4**

3 Equipment under Test (EUT) _____ **5**

3.1 Identification of the Equipment under Test _____ **5**

3.2 Identification of Accessory equipment _____ **5**

4 Subject Of Investigation _____ **6**

5 Measurements _____ **7**

5.1 MAXIMUM PEAK OUTPUT POWER § 15.407 (RADIATED) _____ **7**

 5.1.1 LIMIT SUB CLAUSE § 15.407 (a) _____ **7**

 5.1.2 EIRP 802.11 (a) MODE: _____ **7**

5.2 RESTRICTED BAND EDGE COMPLIANCE RADIATED §15.407(b)/15.205 _____ **11**

 5.2.1 LIMITS _____ **11**

 5.2.2 **802.11 (a) MODE (5180MHz)** _____ **12**

 5.2.3 **802.11 (a) MODE (5320MHz)** _____ **14**

5.3 TRANSMITTER SPURIOUS EMISSIONS RADIATED § 15.407(b)/15.205/15.209 _____ **16**

 5.3.1 LIMITS _____ **16**

 5.3.2 RESULTS **802.11 (a) MODE** _____ **17**

5.4 RECEIVER SPURIOUS RADIATION § 15.209/RSS210 _____ **25**

 5.4.1 LIMITS _____ **25**

 5.4.2 RESULTS _____ **26**

5.5 AC POWER LINE CONDUCTED EMISSIONS § 15.107/207 _____ **31**

 5.5.1 LIMITS _____ **31**

 5.5.2 RESULTS _____ **32**

5.6 TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS _____ **33**

5.7 BLOCK DIAGRAMS _____ **34**



1 Assessment

The following is in compliance with the applicable criteria specified in FCC rules Part 15.407 of the Code of Federal Regulations and in compliance with the applicable criteria specified in Industry Canada rules RSS210.

Company	Description	Model #
SONY CORPORATION	Notebook PC	PCG-4J3L

Michael Grings
Project Leader

Lothar Schmidt
Test Lab Manager

The test results of this test report relate exclusively to the test item specified in Identification of the Equipment under Test. The CETECOM Inc. USA does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the CETECOM Inc USA.



2 Administrative Data

2.1 Identification of the Testing Laboratory Issuing the EMC Test Report

Company Name:	CETECOM Inc.
Department:	EMC
Address:	411 Dixon Landing Road Milpitas, CA 95035 U.S.A.
Telephone:	+1 (408) 586 6200
Fax:	+1 (408) 586 6299
Responsible Test Lab Manager:	Lothar Schmidt
Responsible Project Leader:	Michael Grings
Date of test:	6/20/2006 to 6/23/2006

2.2 Identification of the Client

Applicant's Name:	SONY Corporation
Street Address:	6-7-35, Kitashinagawa, Shinagawa-ku,
City/Zip Code	Tokyo 141-0001
Country	Japan
Contact Person:	Katsunori Tsusui
Phone No.	81-263-72-5696
Fax:	81-263-72-9755
e-mail:	Katsunori.tsusui@jp.sony.com

2.3 Identification of the Manufacturer

Manufacturer's Name:	Sony EMCS Corporation
Manufacturers Address:	5432 Toyoshima, Toyoshima -machi, Minamiazumi-gun
City/Zip Code	Nagano 399-8282,
Country	Japan



3 Equipment under Test (EUT)

3.1 Identification of the Equipment under Test

Marketing Name:	VAIO-VGN-TX
Description:	Notebook PC
Model No:	PCG-4J3L
FCC ID:	AK8PCG4J3L
IC ID:	409B-PCG4J3L
Frequency Range:	5150-5250MHz, 5250-5350MHz
*Type(s) of Modulation:	OFDM
Number of Channels:	29
Antenna Type:	λ/monopole (Inverted F Antenna)
Output Power:	802.11 (a) mode: 0.045 W EIRP @ 5180MHz
	802.11 (a) mode: 0.184 W EIRP @ 5260MHz
	802.11 (a) mode: 0.139 W EIRP @ 5320MHz

*This report contains data for FCC15.407 “a” mode for all “b” and “g” mode data please see report SONYE_008_06002_15.247BG and for FCC15.247 “a” mode data please see report SONYE_008_06002_15.247A.

3.2 Identification of Accessory equipment

TYPE	MANF.	MODEL
AC ADAPTER	SONY	VGP-AC16V8



4 Subject Of Investigation

All testing was performed on the PCG-4J3L referred to as EUT. The EUT carries a pre-certified WLAN module with FCC ID# PD9WM3945ABG. This test report contains full radiated testing as per FCC15.407 on the EUT with the pre-certified WLAN module. All conducted measurements are covered under *test report# INTEL-050901F and # # INTEL-051020F*

During the testing process the EUT was tested in "a" mode with 1Mbps data rate which yielded the worst case results. All testing was performed on main antenna which yielded the highest gain, all data in this report shows the worst case between horizontal and vertical polarization for above 1GHz.

The objective of the measurements done by Cetecom Inc. was to measure the performance of the EUT as specified by requirements listed in FCC rules Part 15.407 of Title 47 of the Code of Federal Regulations and Industry Canada rules RSS210.



5 Measurements

5.1 MAXIMUM PEAK OUTPUT POWER § 15.407 (RADIATED)

5.1.1 LIMIT SUB CLAUSE § 15.407 (a)

Frequency range	RF power output
5180MHz	17.68 dBm EIRP
5260MHz	24.68 dBm EIRP
5320MHz	25.04 dBm EIRP

*limit is based upon 26dB bandwidth from report# # INTEL-051020F

5.1.2 EIRP 802.11 (a) MODE:

TEST CONDITIONS		MAXIMUM PEAK OUTPUT POWER (dBm)		
Frequency (MHz)		5180	5260	5320
T _{nom} (23)°C	V _{nom} VDC	16.50	22.65	21.42
Measurement uncertainty		±0.5dBm		




EIRP 802.11 (a) Mode (5180)

CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA

EUT / Description: Vaio laptop "F" series unit #2 ESN: 5B101BC3
Customer: Sony Electronics
Operating Mode: WLAN
Antenna: V
EUT: V
Test Engineer: PETER
Voltage: AC
Sweep: EIRP 802.11a 36, 200°

SWEEP TABLE: "EIRP 802.11a 36"

Short Description:		EIRP channel-5180 MHz			
Start	Stop	Detector	Meas.	IF	Transducer
Frequency	Frequency		Time	Bandw.	
5.2 GHz	5.2 GHz	MaxPeak	Coupled	10 MHz	DUMMY-DBM
		MaxPeak			

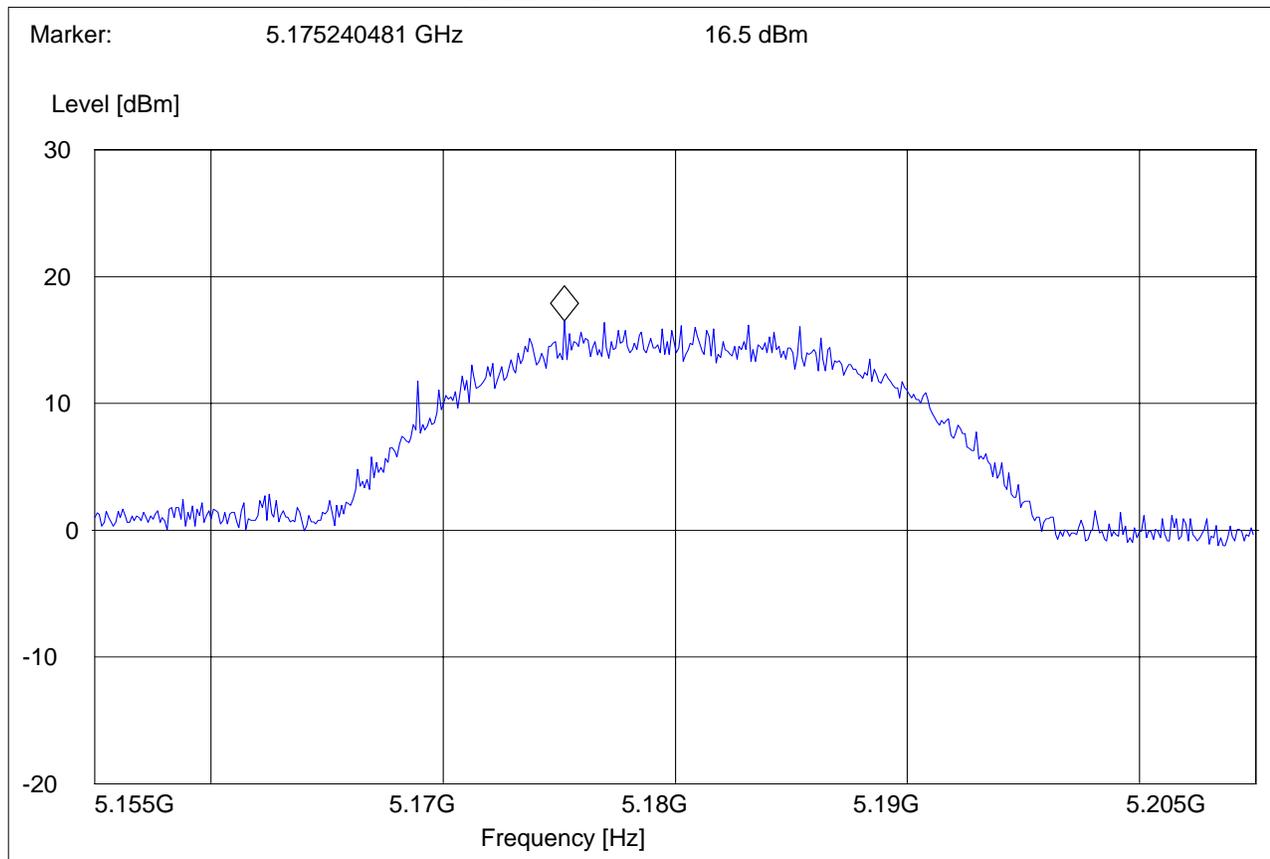



EIRP 802.11 (a) Mode (5260MHz)


CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA

EUT / Description: Vaio laptop "F" series unit #2 ESN: 5B101BC3
Customer: Sony Electronics
Operating Mode: WLAN
Antenna: V
EUT: V
Test Engineer: PETER
Voltage: AC
Sweep: EIRP 802.11a 52, 200°

SWEEP TABLE: "EIRP 802.11a 52"

Short Description:		EIRP channel-5260 MHz			
Start	Stop	Detector	Meas.	IF	Transducer
Frequency	Frequency		Time	Bandw.	
5.2 GHz	5.3 GHz	MaxPeak	Coupled	10 MHz	DUMMY-DBM

Marker: 5.258947896 GHz 22.65 dBm

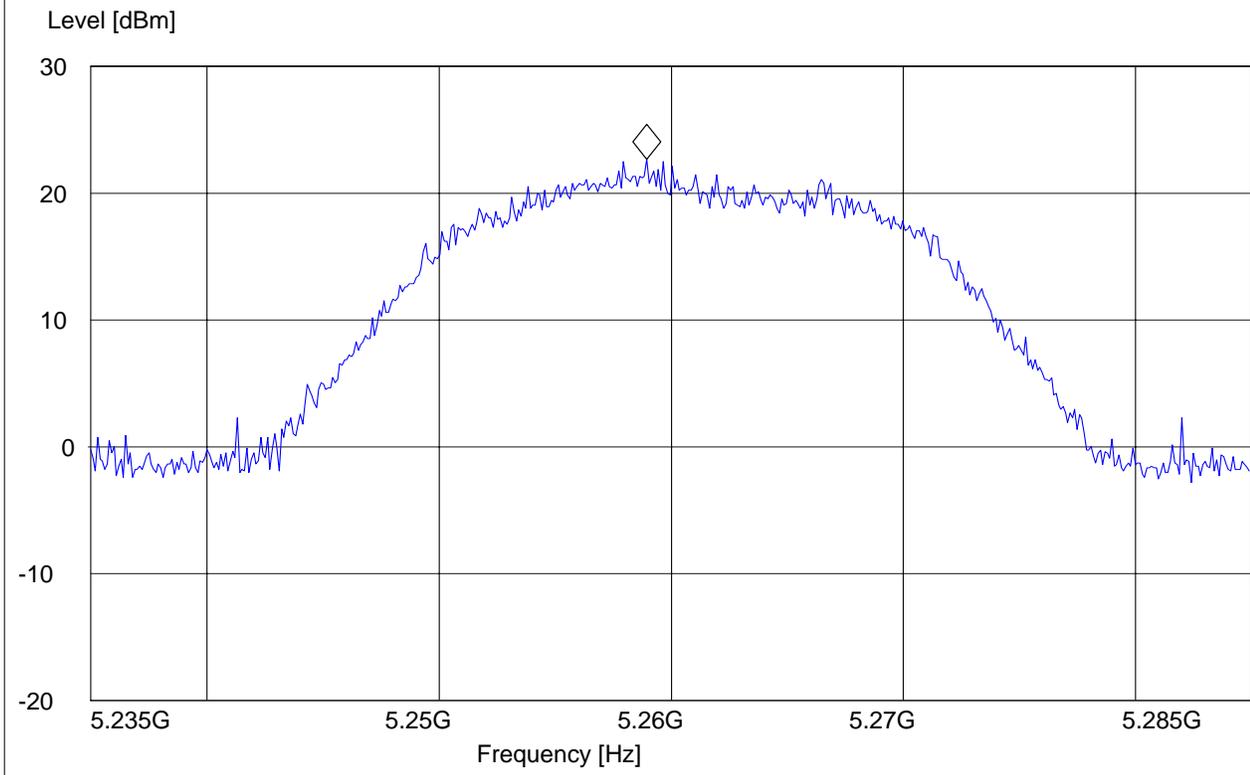



EIRP 802.11 (a) Mode (5320MHz)


CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA

EUT / Description: Vaio laptop "F" series unit #2 ESN: 5B101BC3
Customer: Sony Electronics
Operating Mode: WLAN, TX 5320MHz
Antenna: V
EUT: V
Test Engineer: PETER
Voltage: AC
Sweep: EIRP_802.11a_64, 200°

SWEEP TABLE: "EIRP 802.11a 64"

Short Description:		EIRP channel-5320 MHz			
Start	Stop	Detector	Meas.	IF	Transducer
Frequency	Frequency		Time	Bandw.	
5.3 GHz	5.3 GHz	MaxPeak	Coupled	10 MHz	DUMMY-DBM

Marker: 5.319649299 GHz 21.42 dBm

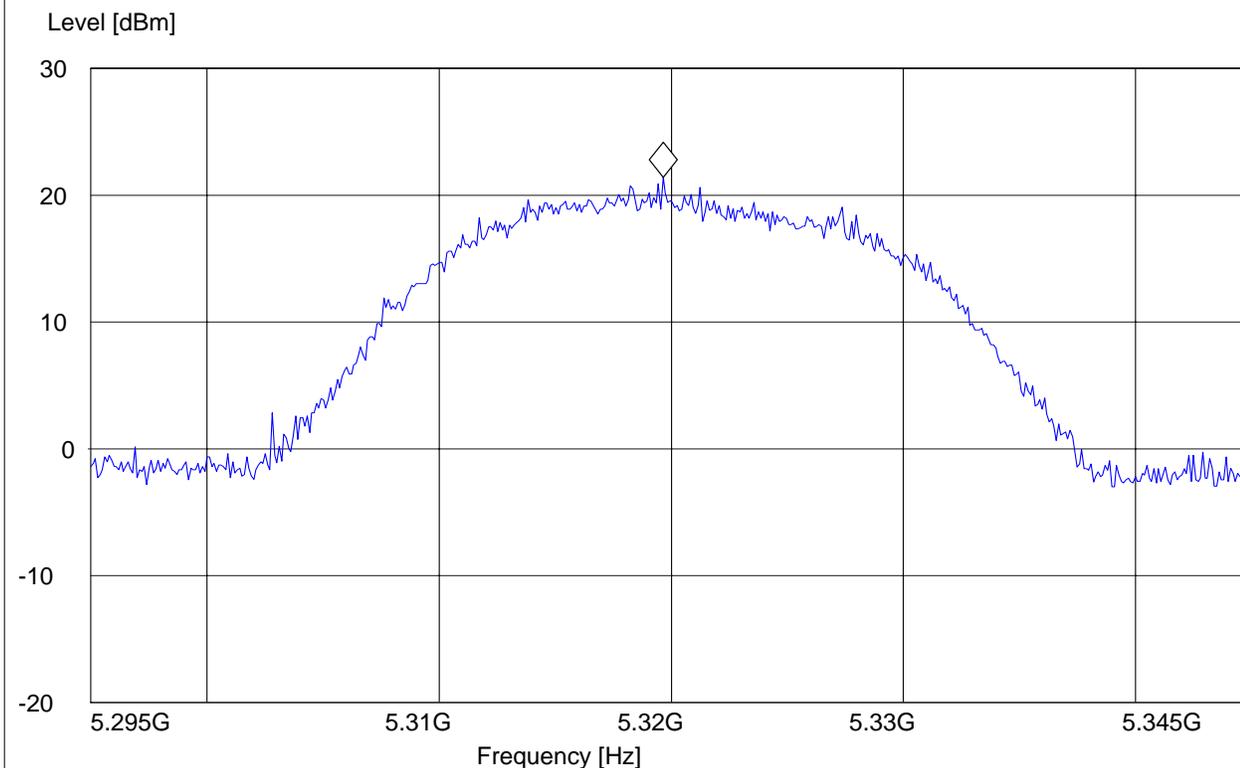



5.2 RESTRICTED BAND EDGE COMPLIANCE RADIATED §15.407(b)/15.205

5.2.1 LIMITS

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

*PEAK LIMIT= 74dBuV/m

*AVG. LIMIT= 54dBuV/m



5.2.2 802.11 (a) MODE (5180MHz)

PEAK

CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA

EUT / Description: Vaio laptop "F" series unit #2 ESN: 5B101BC3

Customer: Sony Electronics

Operating Mode: WLAN, TX 5180MHz

Antenna: V

EUT: V


Test Engineer: PETER

Voltage: AC

Sweep: FCC15_407_A_LBE_PK, 200°

SWEEP TABLE: "FCC15.407 A_LBE_PK"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
4.5 GHz	5.2 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_horz

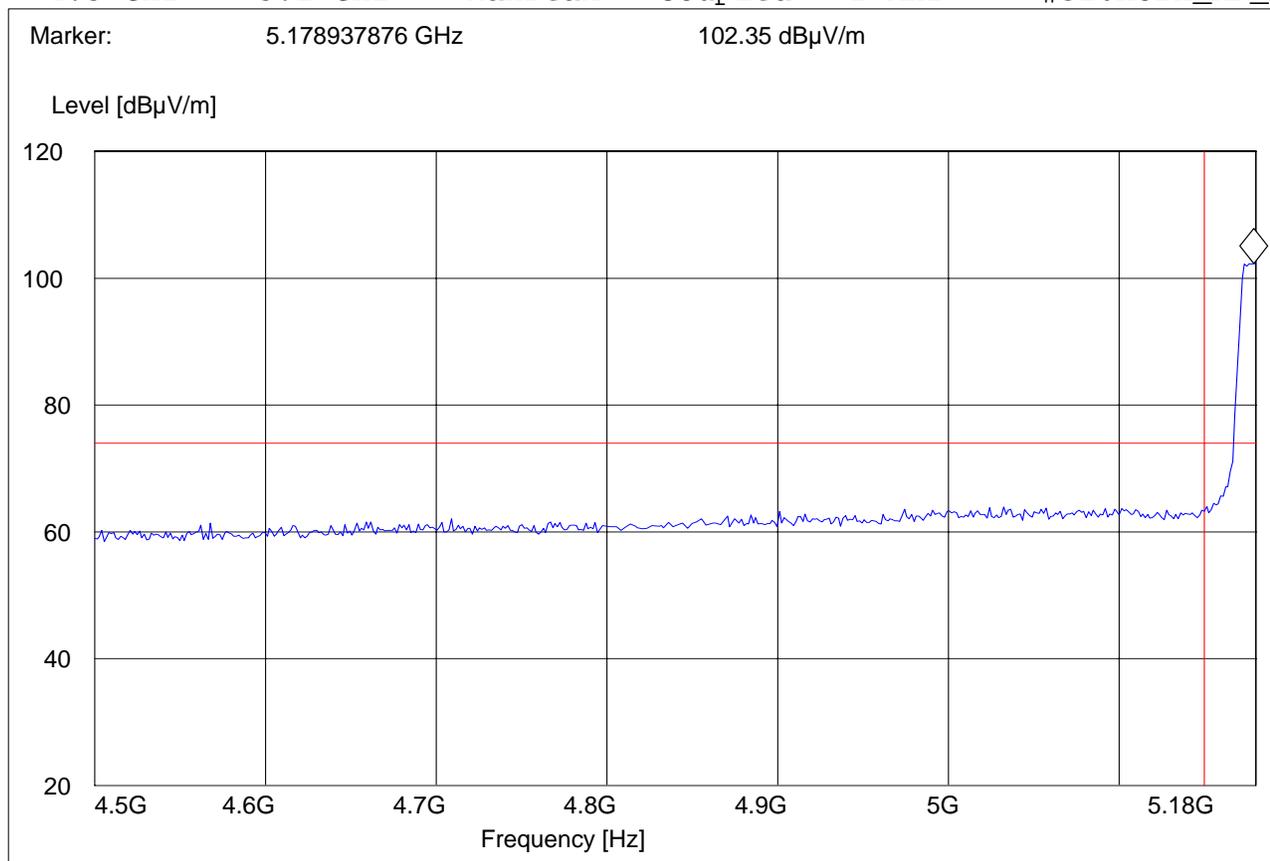



AVG


CETECOM Inc.

CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA

EUT / Description: Vaio laptop "F" series unit #2 ESN: 5B101BC3
Customer: Sony Electronics
Operating Mode: WLAN, TX 5180MHz
Antenna: V
EUT: V
Test Engineer: PETER
Voltage: AC
Sweep: FCC15_407_A_LBE_AVG, 200°

SWEEP TABLE: "FCC15.407 A_LBE_AVG"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
4.5 GHz	5.3 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_vert

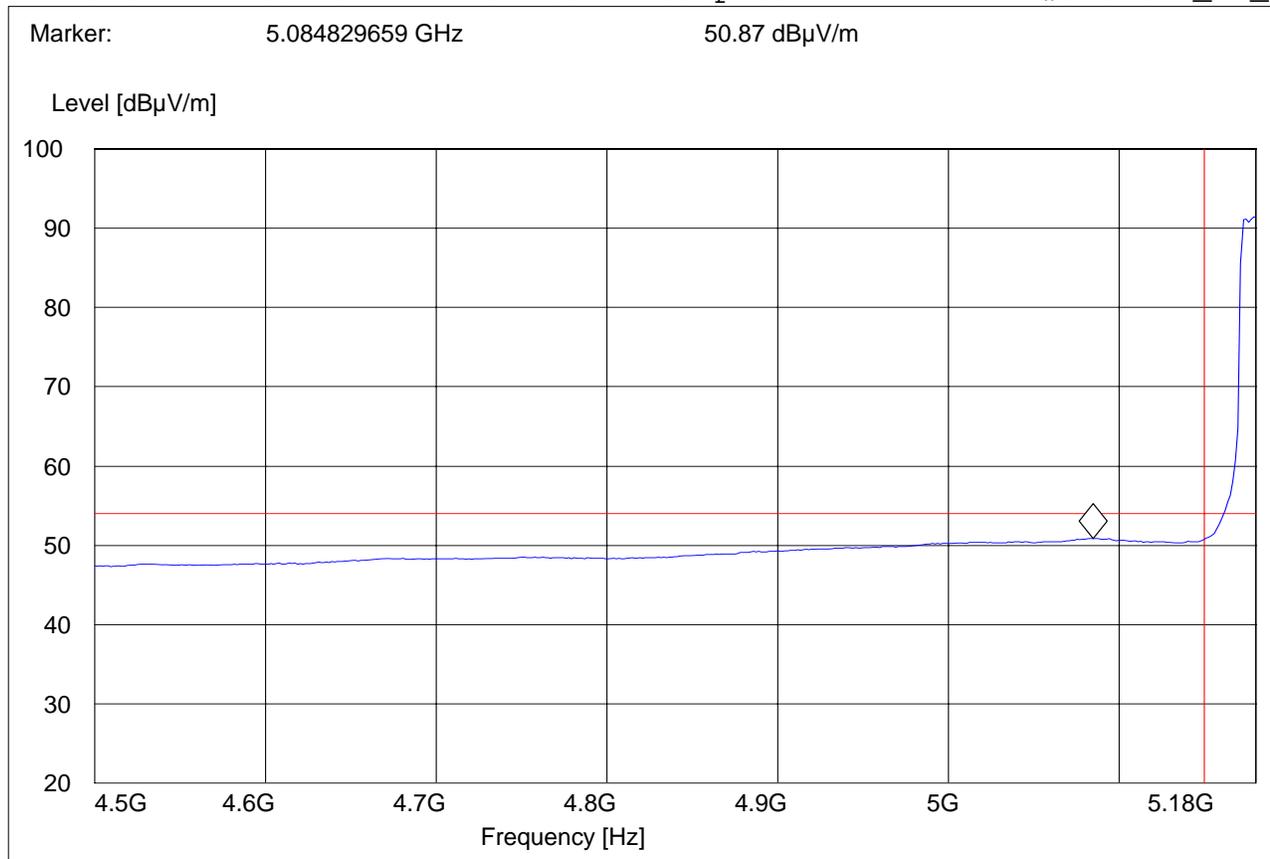




**5.2.3 802.11 (a) MODE (5320MHz)
PEAK**

CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA

EUT / Description: Vaio laptop "F" series unit #2 ESN: 5B101BC3
Customer: Sony Electronics
Operating Mode: WLAN, TX 5320MHz
Antenna: V
EUT: V
Test Engineer: PETER
Voltage: AC
Sweep: FCC15_407_A_HBE_PK, 200°

SWEEP TABLE: "FCC15.407 A_HBE_PK"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
5.2 GHz	5.5 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_horz

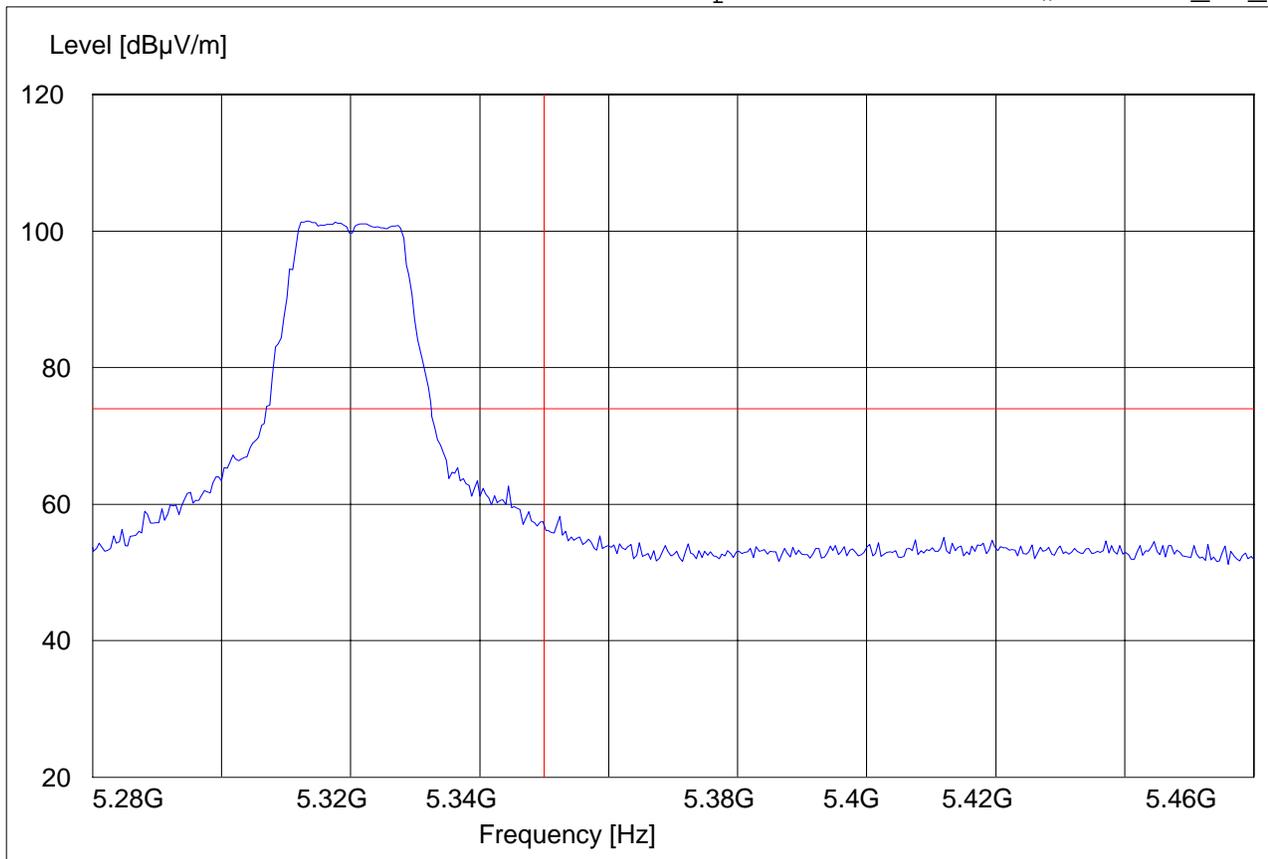




AVG

CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA

EUT / Description: Vaio laptop "F" series unit #2 ESN: 5B101BC3
Customer: Sony Electronics
Operating Mode: WLAN, TX 5320MHz
Antenna: V
EUT: V
Test Engineer: PETER
Voltage: AC
Sweep: FCC15_407_A_HBE_AVG, 200°

SWEEP TABLE: "FCC15.407 A_HBE_AVG"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
5.2 GHz	5.5 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_horz

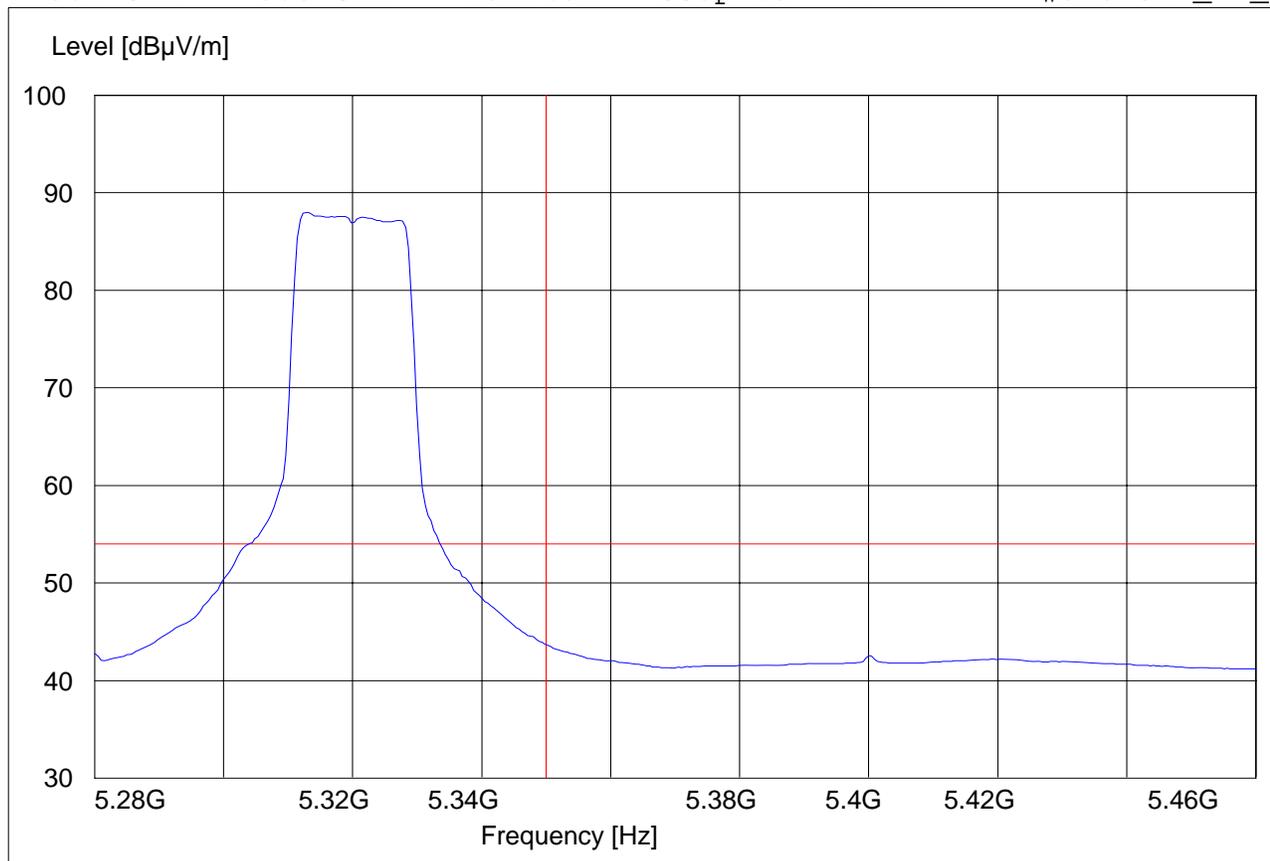



5.3 TRANSMITTER SPURIOUS EMISSIONS RADIATED § 15.407(b)/15.205/15.209

5.3.1 LIMITS

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

- *PEAK LIMIT= 74dBuV/m for spurious in restricted bands
- *AVG. LIMIT= 54dBuV/m for spurious in restricted bands
- *PEAK LIMIT= 68.2dBuV/m for spurious NOT in restricted bands

NOTE:

1. The radiated emissions were done with different settings, using the relevant pre-amplifiers for the relevant frequency ranges. This is the reason that the graphs show different noise levels. In the range between 3 and 25 GHz very short cable connections to the antenna was used to minimize the noise level.
2. All measurements are done in peak mode using an average limit , unless specified with the plots.

Results for the radiated measurements below 30MHz according § 15.33

Frequency	Measured values	Remarks
9KHz – 30MHz	No emissions found, caused by the EUT	This is valid for all the tested channels



5.3.2 RESULTS 802.11 (a) MODE

30MHz – 1GHz

Antenna:


Note: This plot is valid for low, mid, high channels horizontal and vertical polarities (worst-case plot).

CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA

EUT / Description: Vaio laptop "F" series unit #2 ESN: 5B101BC3
Customer: Sony Electronics
Operating Mode: WLAN, TX 5180MHz
Antenna: V
EUT: V
Test Engineer: ED
Voltage: AC
Sweep: FCC15.247_30M-1G_V

SWEEP TABLE: "FCC15.247_30M-1G_Ver"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	3141-#1186_Vert

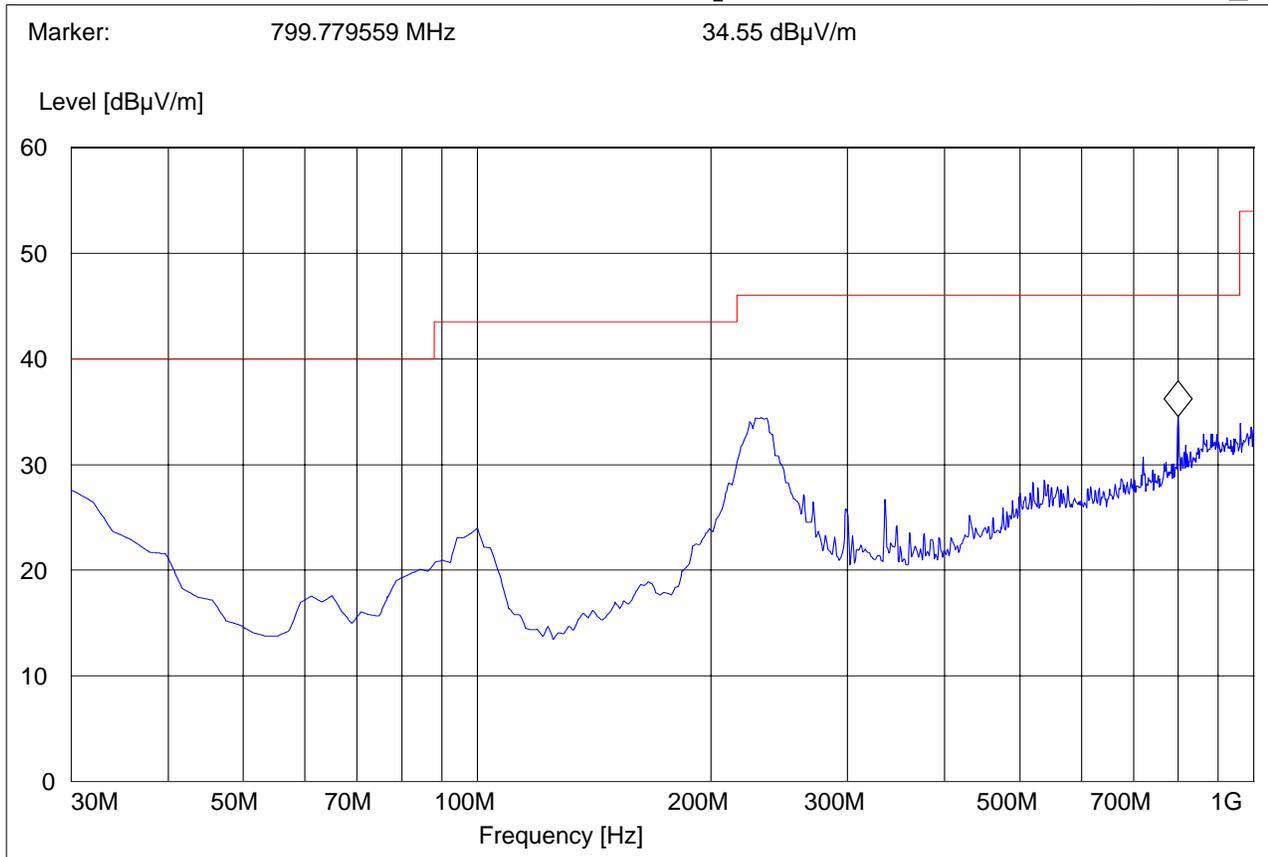



1-18GHz (5180MHz)


Note: The peaks above the limit line is the carrier freq.

Note: Peak Reading vs. Average limit

CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA

SWEEP TABLE: "FCC 15.407 1-18G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
1.0 GHz	18.0 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_horz

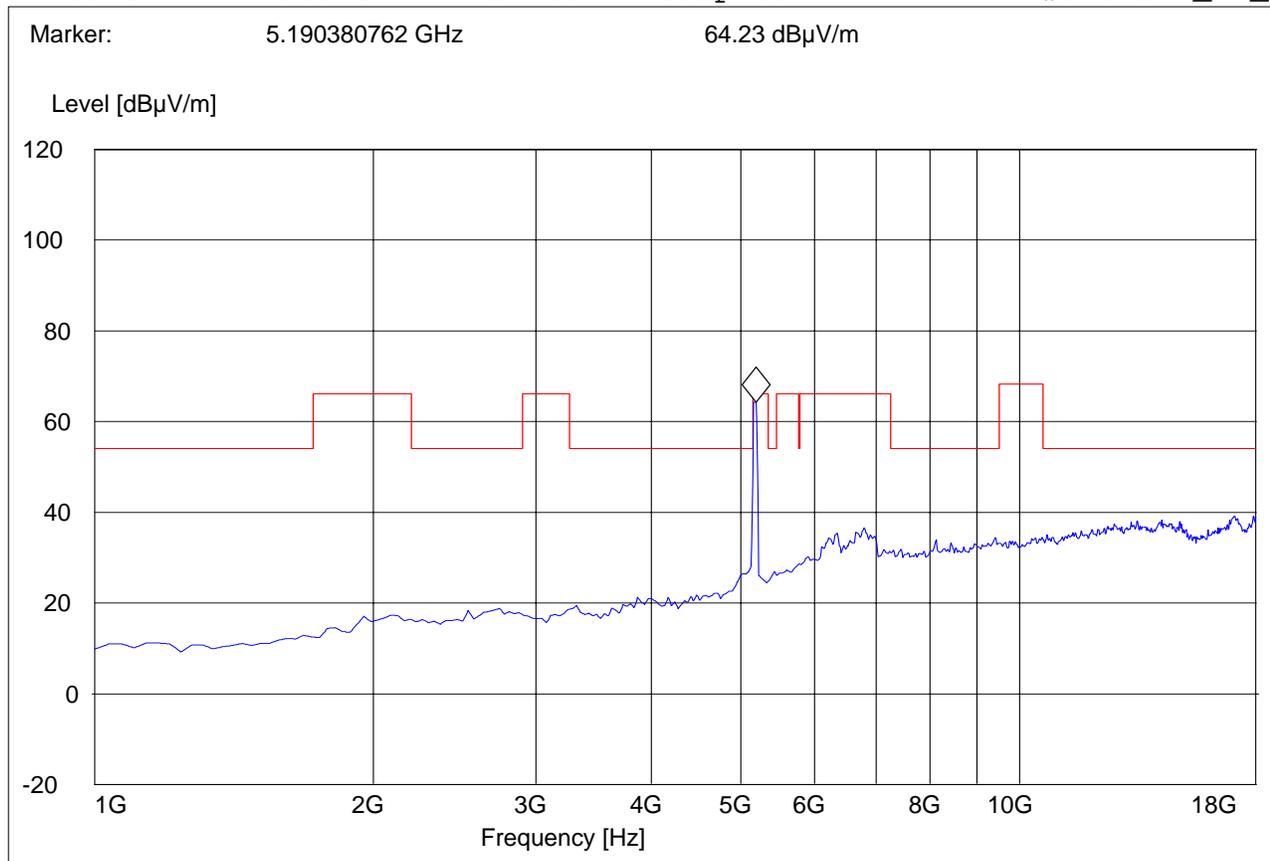



1-18GHz (5260MHz)


Note: The peaks above the limit line is the carrier freq.

Note: Peak Reading vs. Average limit

CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA

SWEEP TABLE: "FCC 15.407 1-18G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
1.0 GHz	18.0 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_horz

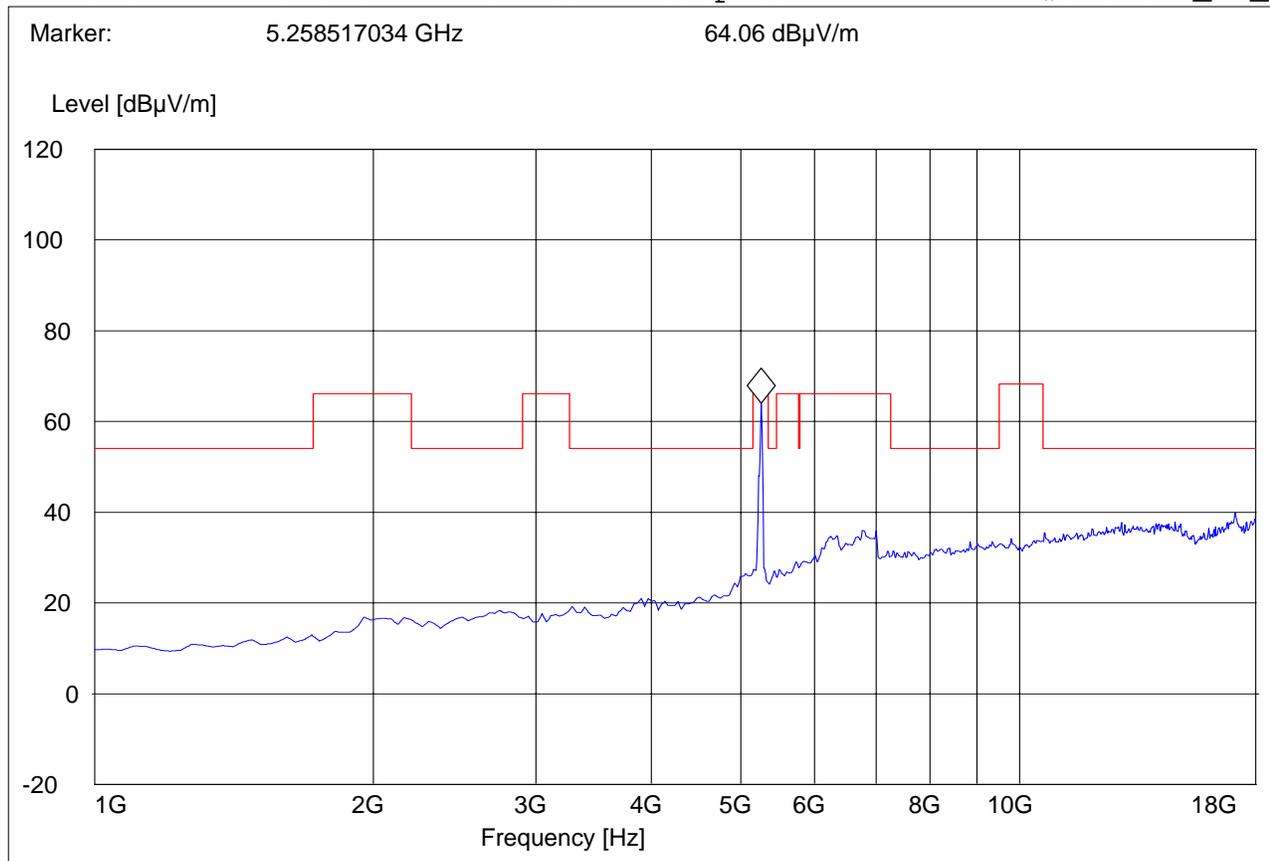



1-18GHz (5320MHz)


Note: The peaks above the limit line is the carrier freq.

Note: Peak Reading vs. Average limit

CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA

SWEEP TABLE: "FCC 15.407 1-18G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
1.0 GHz	18.0 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_horz

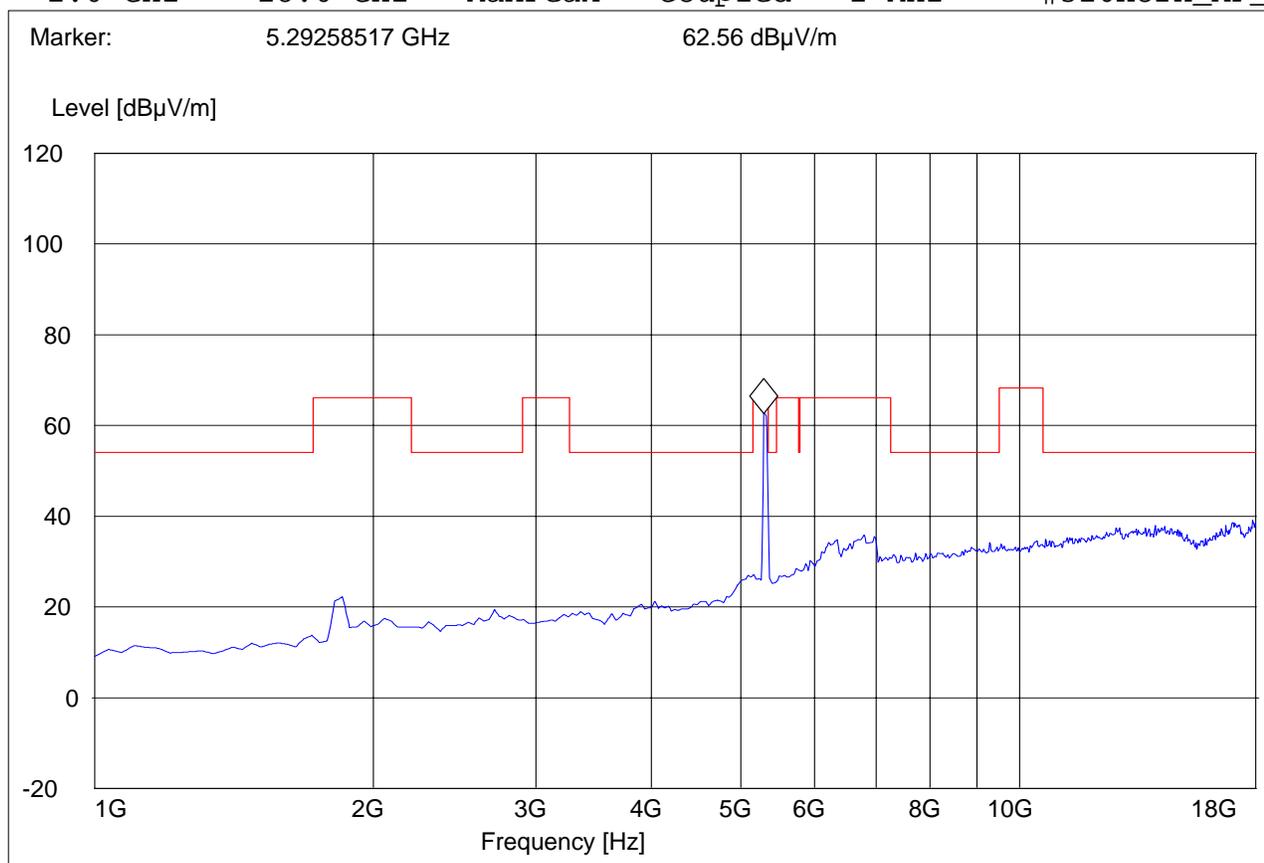



18-26.5GHz (5180MHz)


Note: Peak Reading vs. Average limit ,

CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA

EUT / Description: Vaio laptop "F" series unit #2 ESN: 5B101BC3
Customer: Sony Electronics
Operating Mode: WLAN, TX 5180MHz TABLE 185°
Antenna: V
EUT: V
Test Engineer: PETER
Voltage: AC ADAPTOR
Sweep: FCC15.407.18-26.5G

SWEEP TABLE: "FCC15.247_18-26.5G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
18.0 GHz	25.0 GHz	MaxPeak	Coupled	1 MHz	3160 Horn 18-26.5G

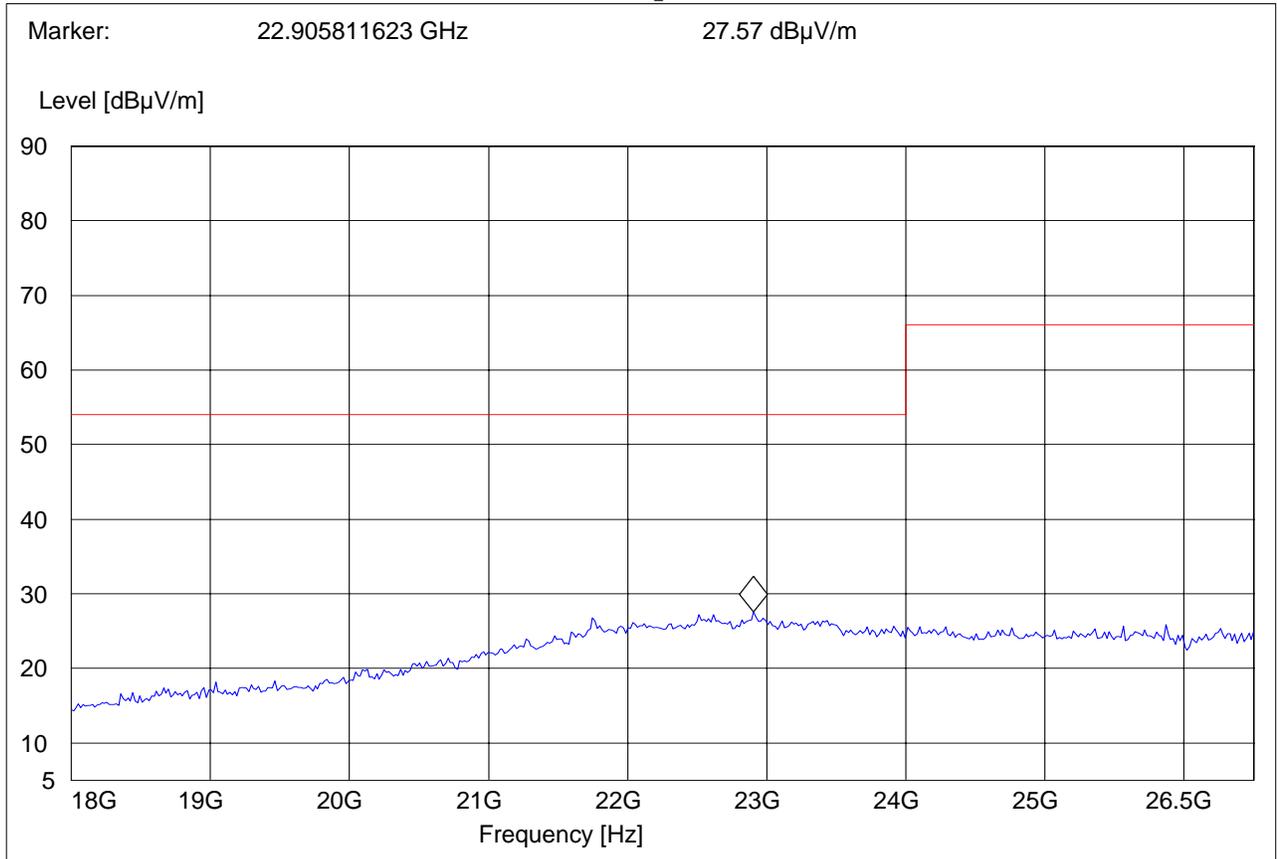



18-26.5GHz (5260MHz)


Note: Peak Reading vs. Average limit ,

CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA

EUT / Description: Vaio laptop "F" series unit #2 ESN: 5B101BC3
Customer: Sony Electronics
Operating Mode: WLAN, TX 5260MHz TABLE 185°
Antenna: V
EUT: V
Test Engineer: PETER
Voltage: AC ADAPTOR
Sweep: FCC15.407.18-26.5G

SWEEP TABLE: "FCC15.247_18-26.5G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
18.0 GHz	25.0 GHz	MaxPeak	Coupled	1 MHz	3160 Horn 18-26.5G

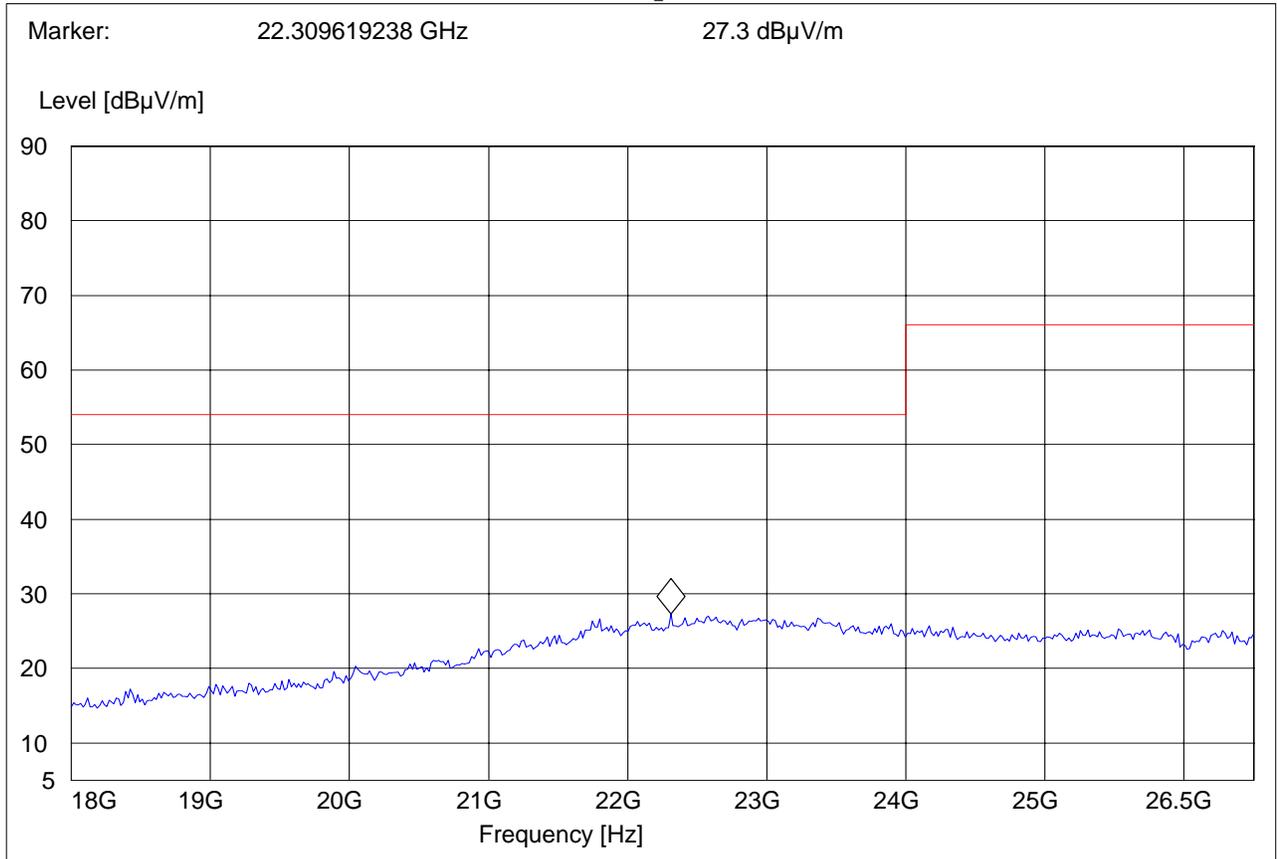

Test Report #: SONYE_008_06002_15.407A

Date of Report: 07/11/2006

Page 23 of 34



18-26.5GHz (5320MHz)

Note: Peak Reading vs. Average limit ,

CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA

EUT / Description: Vaio laptop "F" series unit #2 ESN: 5B101BC3

Customer: Sony Electronics

Operating Mode: WLAN, TX 5320MHz TABLE 185°

Antenna: V

EUT: V

Test Engineer: PETER


Voltage: AC ADAPTOR

Sweep: FCC15.407.18-26.5G

SWEEP TABLE: "FCC15.247_18-26.5G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
18.0 GHz	25.0 GHz	MaxPeak	Coupled	1 MHz	3160 Horn 18-26.5G

Marker: 22.616232465 GHz 27.62 dBµV/m

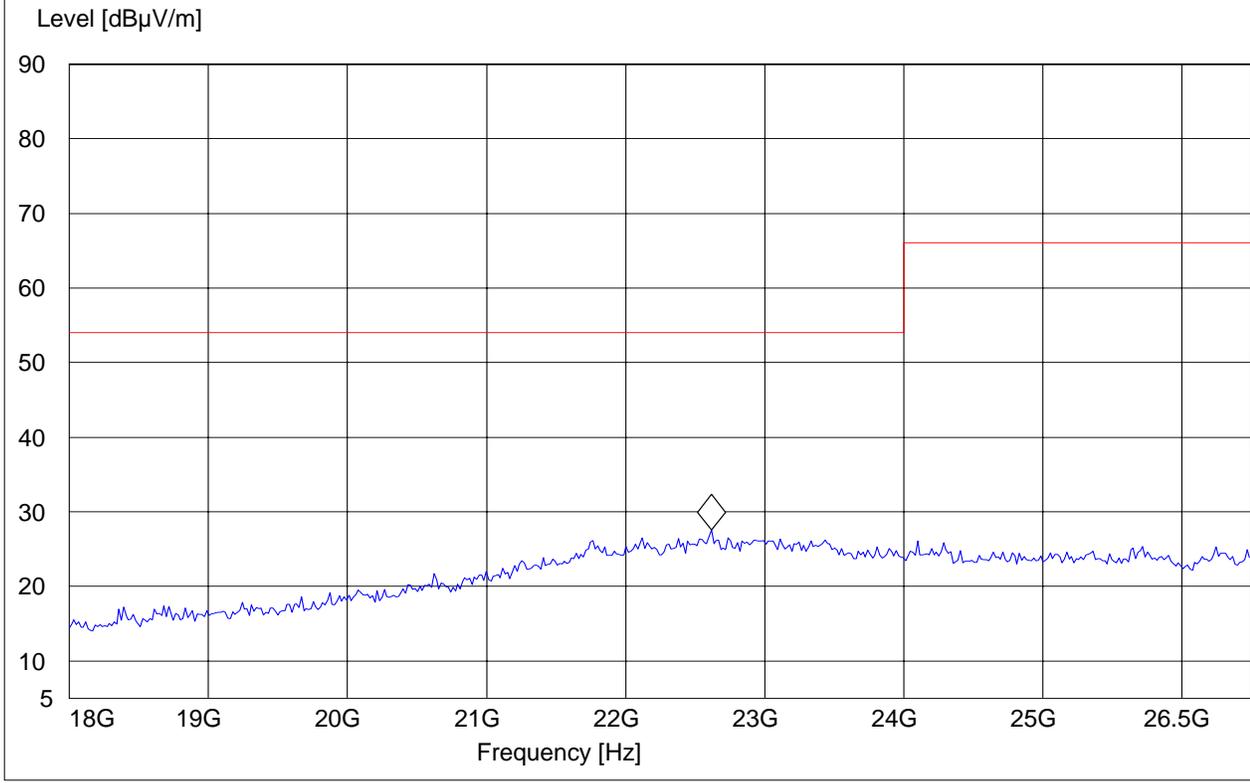



26-40GHz

Note: This plot is valid for low, mid, high channels (worst-case plot)

Note: Peak Reading vs. Average limit ,


CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA

SWEEP TABLE: "FCC15.247_26.5-40G"

Short Description:		Bluetooth 18 - 26 GHz				
Start	Stop	Detector	Meas.	IF	Transducer	
Frequency	Frequency		Time	Bandw.		
26.5 GHz	40.0 GHz	MaxPeak	Coupled	1 MHz	3160 Horn 26.5-40G	

Marker: 29.881763527 GHz 35.29 dBµV/m

Level [dBµV/m]

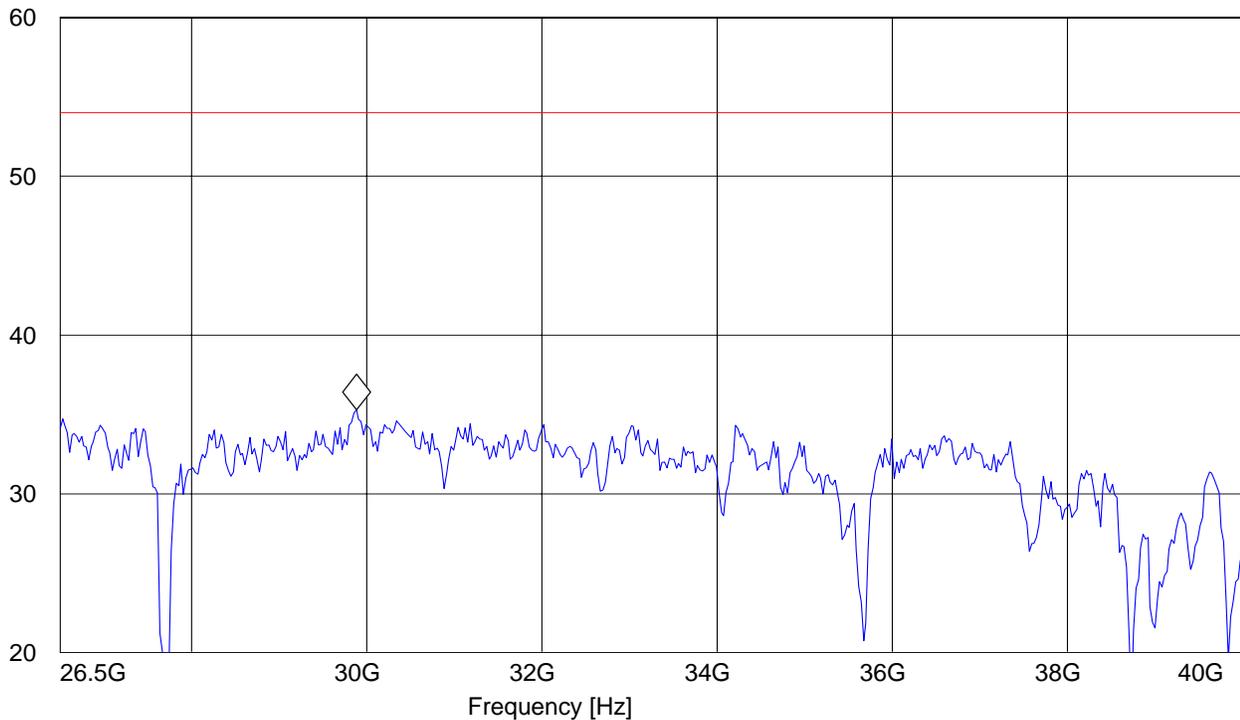



5.4 RECEIVER SPURIOUS RADIATION § 15.209/RSS210

5.4.1 LIMITS

Frequency (MHz)	Field strength ($\mu\text{V}/\text{m}$)	Measurement distance (m)
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
above 960	500	3

NOTE:

1. The radiated emissions were done with different settings, using the relevant pre-amplifiers for the relevant frequency ranges. This is the reason that the graphs show different noise levels. In the range between 3 and 25 GHz very short cable connections to the antenna was used to minimize the noise level.

2. All measurements are done in peak mode using an average limit , unless specified with the plots.



5.4.2 RESULTS

30MHz – 1GHz


Antenna: horizontal

CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA

EUT / Description: Vaio laptop "F" series unit #2 ESN: 5B101BC3
Customer: Sony Electronics
Operating Mode: WLAN, RX 5180MHz TABLE 280°, ANNT 100CM, NO absorbers
Antenna: H
EUT: V
Test Engineer: PETER
Voltage: AC ADAPTOR
Sweep: CANADA RE_30M-1G_HOR

SWEEP TABLE: "CANADA RE_30M-1G_Hor"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	3141-#1186_Vert

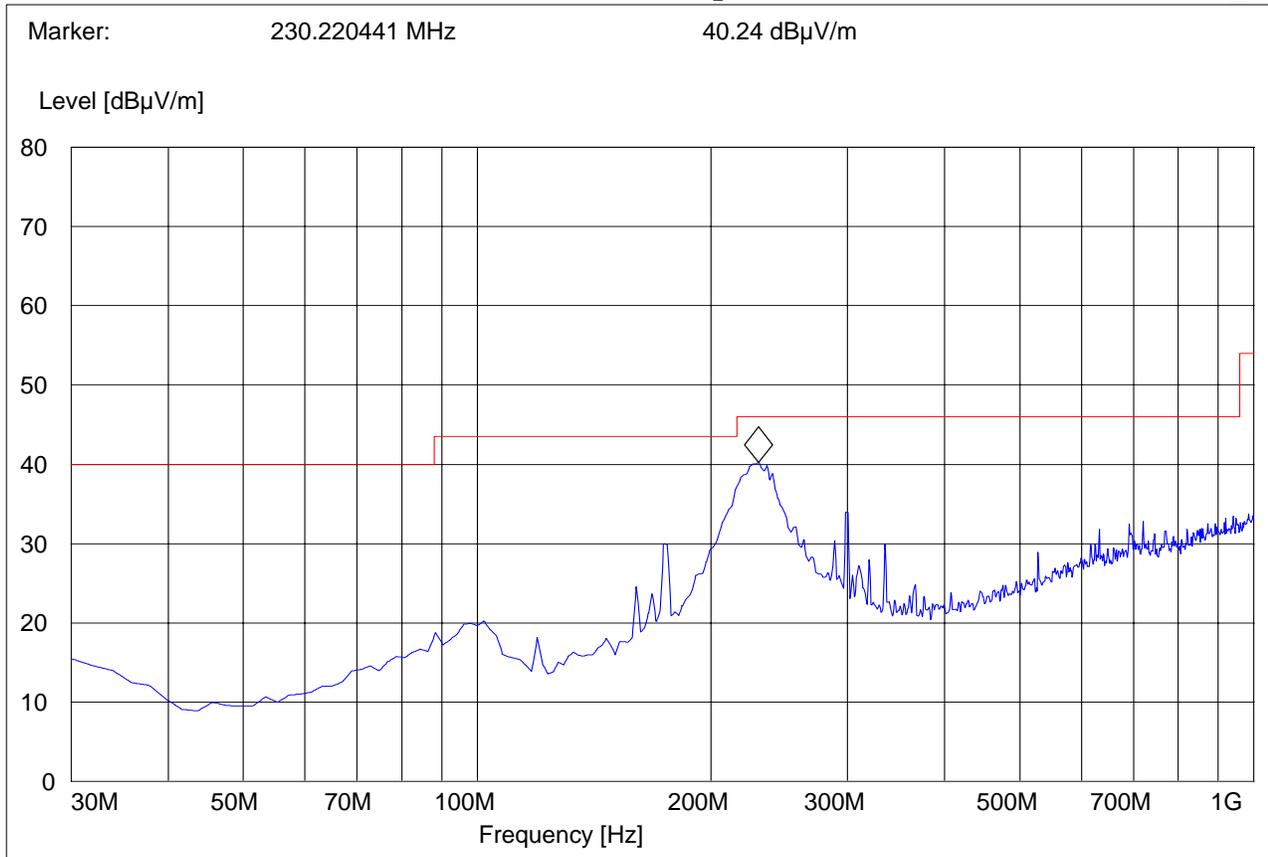



1-3GHz


Note: Peak Reading vs. Average limit

CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA

EUT / Description: Vaio laptop "F" series unit #2 ESN: 5B101BC3
Customer: Sony Electronics
Operating Mode: WLAN, RX 5180MHz
Antenna: V
EUT: V
Test Engineer: ED
Voltage: AC
Sweep: CANADA RE_1-3G

SWEEP TABLE: "CANADA RE_1-3G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
1.0 GHz	3.0 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_vert

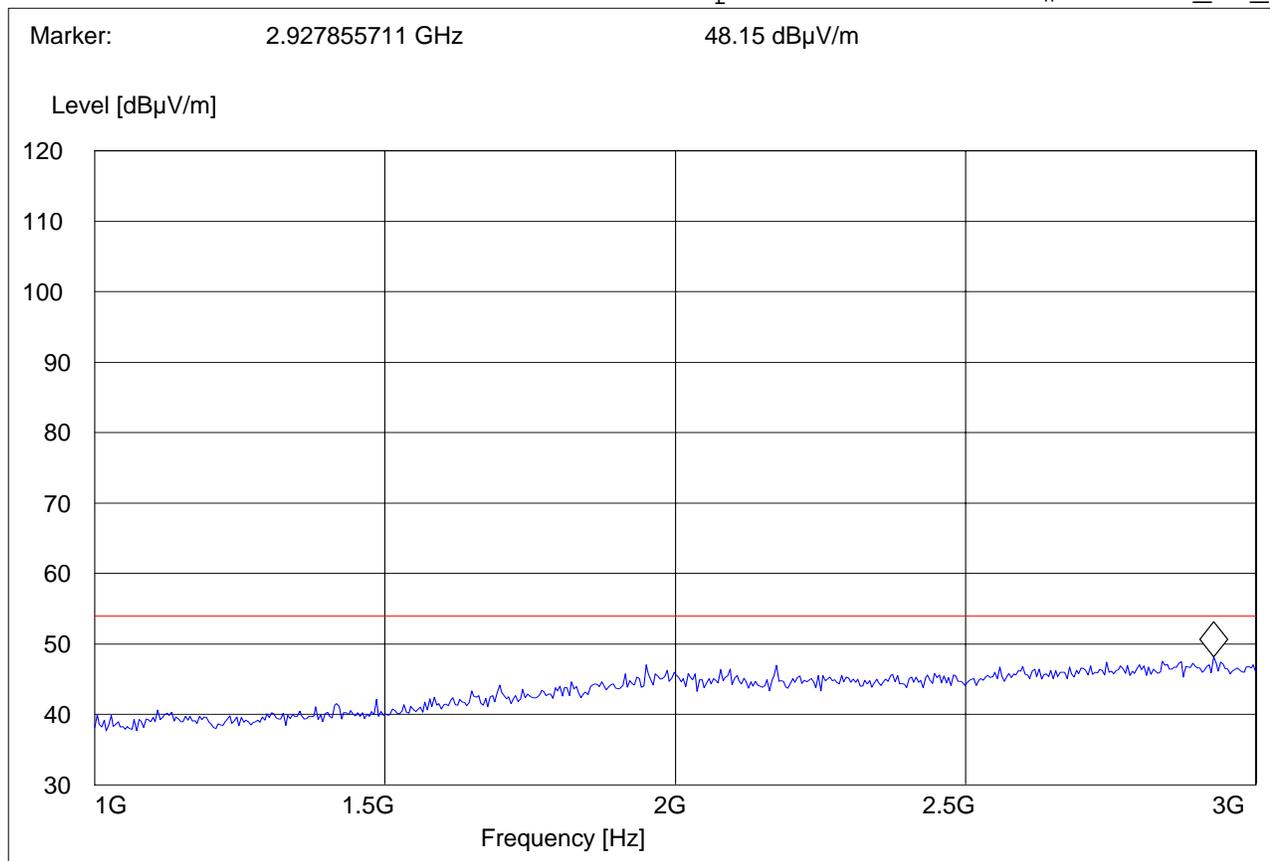



3-18GHz

Note: Peak Reading vs. Average limit


CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA

EUT / Description: Vaio laptop "F" series unit #2 ESN: 5B101BC3
Customer: Sony Electronics
Operating Mode: WLAN, RX 5180MHz
Antenna: V
EUT: V
Test Engineer: ED
Voltage: AC
Sweep: CANADA RE_3-18G

SWEEP TABLE: "CANADA RE_3-18G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
1.0 GHz	18.0 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_vert

Marker: 17.216432866 GHz 39.93 dBµV/m

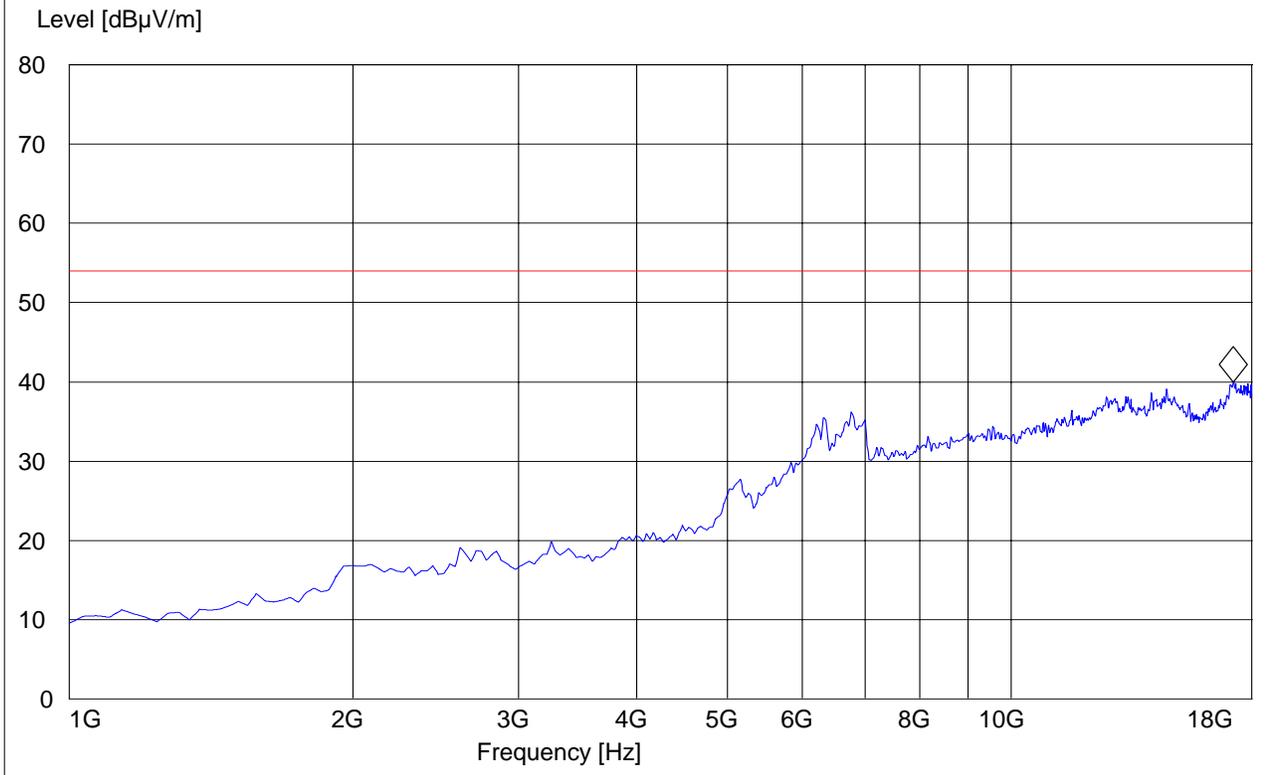



18-26.5GHz


Note: Peak Reading vs. Average limit

CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA

EUT / Description: Vaio laptop "F" series unit #2 ESN: 5B101BC3
 Customer: Sony Electronics
 Operating Mode: WLAN, TX 5260MHz
 Antenna: V
 EUT: V
 Test Engineer: ED
 Voltage: AC
 Sweep: FCC15.247_18-26.5G

SWEEP TABLE: "FCC15.247_18-26.5G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
18.0 GHz	25.0 GHz	MaxPeak	Coupled	1 MHz	3160 Horn 18-26.5G

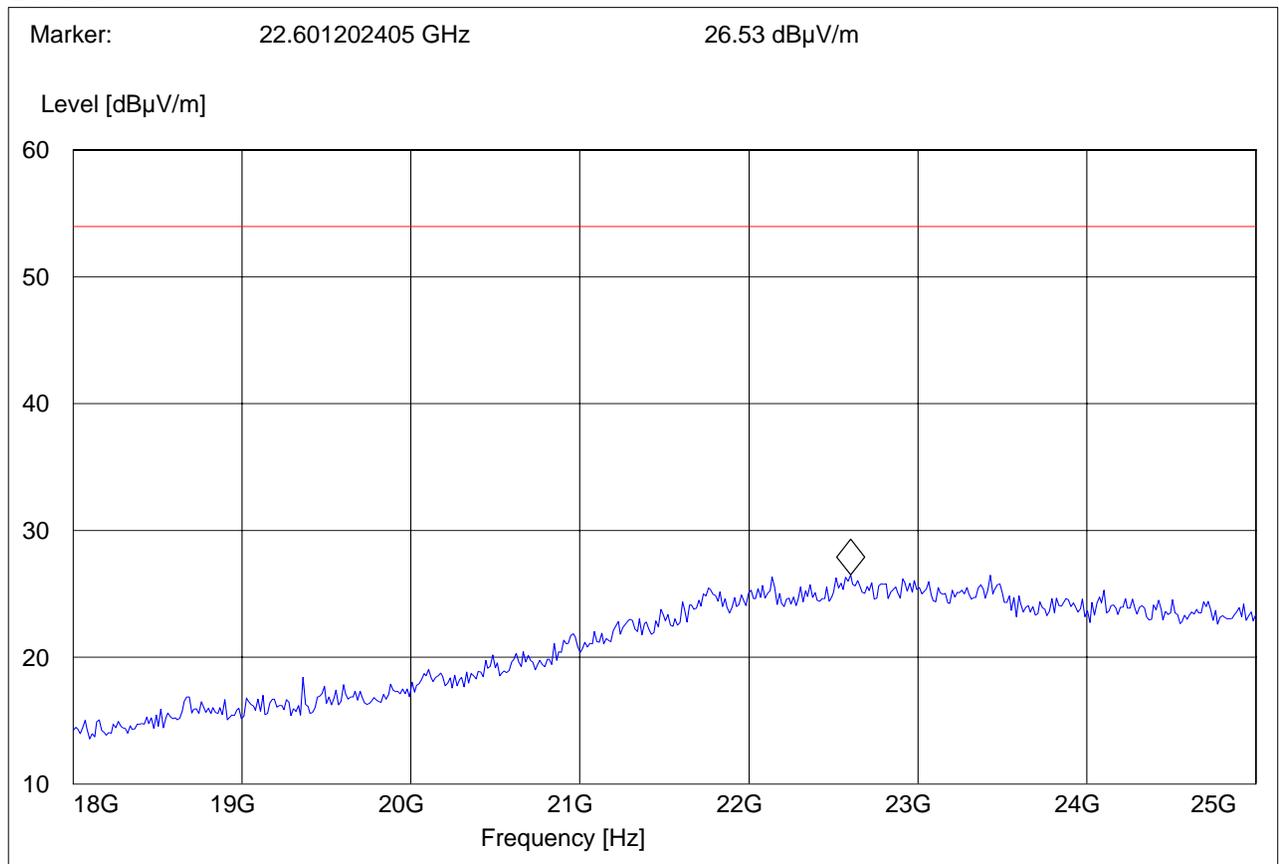




26.5-40GHz

Note: Peak Reading vs. Average limit

CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA

SWEEP TABLE: "FCC15.247_26.5-40G"

Short Description:		Bluetooth 18 - 26 GHz			
Start	Stop	Detector	Meas.	IF	Transducer
Frequency	Frequency		Time	Bandw.	
26.5 GHz	40.0 GHz	MaxPeak	Coupled	1 MHz	3160 Horn 26.5-40G

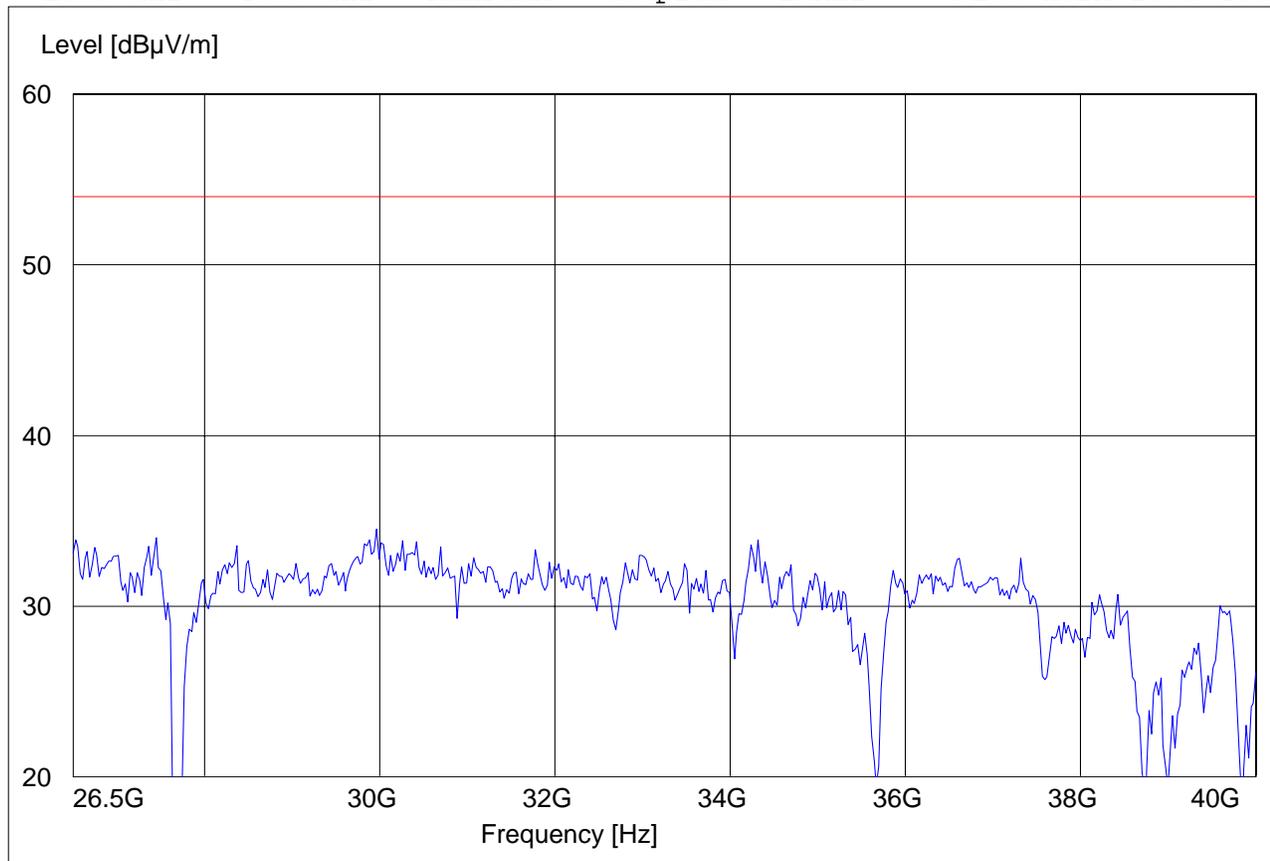



5.5 AC POWER LINE CONDUCTED EMISSIONS § 15.107/207

5.5.1 LIMITS

Technical specification: 15.107 / 15.207 (Revised as of August 20, 2002)

Limit

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-Peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

* Decreases with logarithm of the frequency

ANALYZER SETTINGS: RBW = 10KHz

VBW = 10KHz



5.5.2 RESULTS


LISN

CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA

EUT / Description: Vaio laptop "F" series unit #1 ESN: 5B101BA6
 Manufacturer: Sony Electronics
 Test Engineer: Ed
 Phase: L & N
 Comment: EN55022
 AC/DC adapter at 110V

SWEEP TABLE: "EN 55022 Voltage"

Short Description:		EN 55022 Voltage			
Start	Stop	Detector	Meas.	IF	Transducer
Frequency	Frequency		Time	Bandw.	
150.0 kHz	30.0 MHz	MaxPeak	Coupled	9 kHz	None
Average					

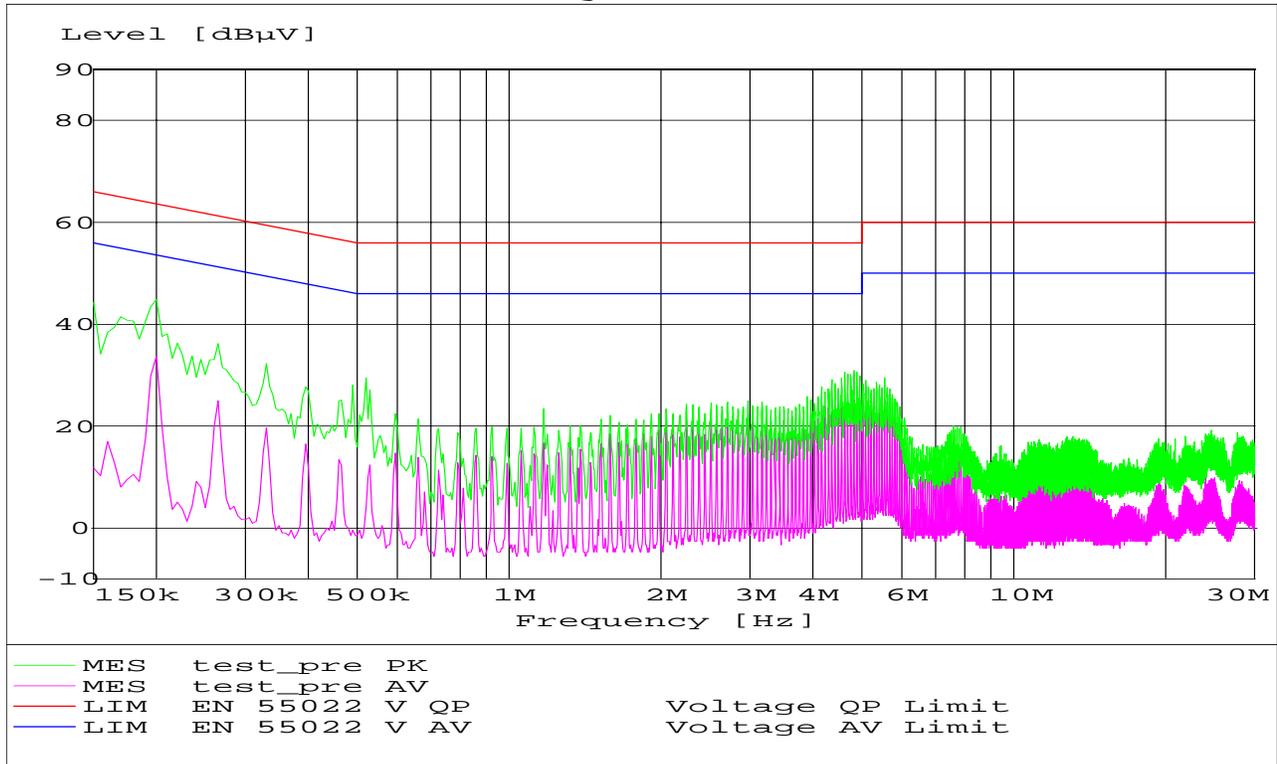



5.6 TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS

No	Instrument/Ancillary	Type	Manufacturer	Serial No.	Cal Due	Interval
01	Spectrum Analyzer	ESIB 40	Rohde & Schwarz	100107	May 2007	1 year
02	Spectrum Analyzer	FSEM 30	Rohde & Schwarz	100017	August 2007	1 year
03	Signal Generator	SMY02	Rohde & Schwarz	836878/011	May 2007	1 year
04	Power-Meter	NRVD	Rohde & Schwarz	0857.8008.02	May 2007	1 year
05	Biconilog Antenna	3141	EMCO	0005-1186	June 2007	1 year
06	Horn Antenna (1-18GHz)	SAS-200/571	AH Systems	325	June 2007	1 year
07	Horn Antenna (18-26.5GHz)	3160-09	EMCO	1240	June 2007	1 year
08	Power Splitter	11667B	Hewlett Packard	645348	n/a	n/a
09	Climatic Chamber	VT4004	Voltsch	G1115	May 2007	1 year
10	High Pass Filter	5HC2700	Trilithic Inc.	9926013	n/a	n/a
11	High Pass Filter	4HC1600	Trilithic Inc.	9922307	n/a	n/a
12	Pre-Amplifier	JS4-00102600	Miteq	00616	May 2007	1 year
13	Power Sensor	URV5-Z2	Rohde & Schwarz	DE30807	May 2007	1 year
14	Digital Radio Comm. Tester	CMD-55	Rohde & Schwarz	847958/008	May 2007	1 year
15	Universal Radio Comm. Tester	CMU 200	Rohde & Schwarz	832221/06	May 2007	1 year
16	LISN	ESH3-Z5	Rohde & Schwarz	836679/003	May 2007	1 year
17	Loop Antenna	6512	EMCO	00049838	July 2007	2 years

5.7 BLOCK DIAGRAMS

Radiated Testing

ANECHOIC CHAMBER

