




System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	3/9/2007 12:57:38 PM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	L0116
Ambient Temperature:	22.8°C	Liquid Simulant:	800
Device Under Test:	Sony	Relative Permittivity:	56.12
Relative Humidity:	30%	Conductivity:	0.982
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	14.00 mm
DUT Position:	Lap,	Max SAR Y-axis Location:	-7.00 mm
Antenna Configuration:	Integral	Max E Field:	6.25 V/m
Test Frequency:	836.6MHz	SAR 1g:	0.047 W/kg
Air Factors:	488 / 373 / 340	SAR 10g:	0.031 W/kg
Conversion Factors:	.470 / .470 / .470	SAR Start:	0.011 W/kg
Type of Modulation:		SAR End:	0.011 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	1.36 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	03/08/07
Input Power Level:	max	Extrapolation:	poly4

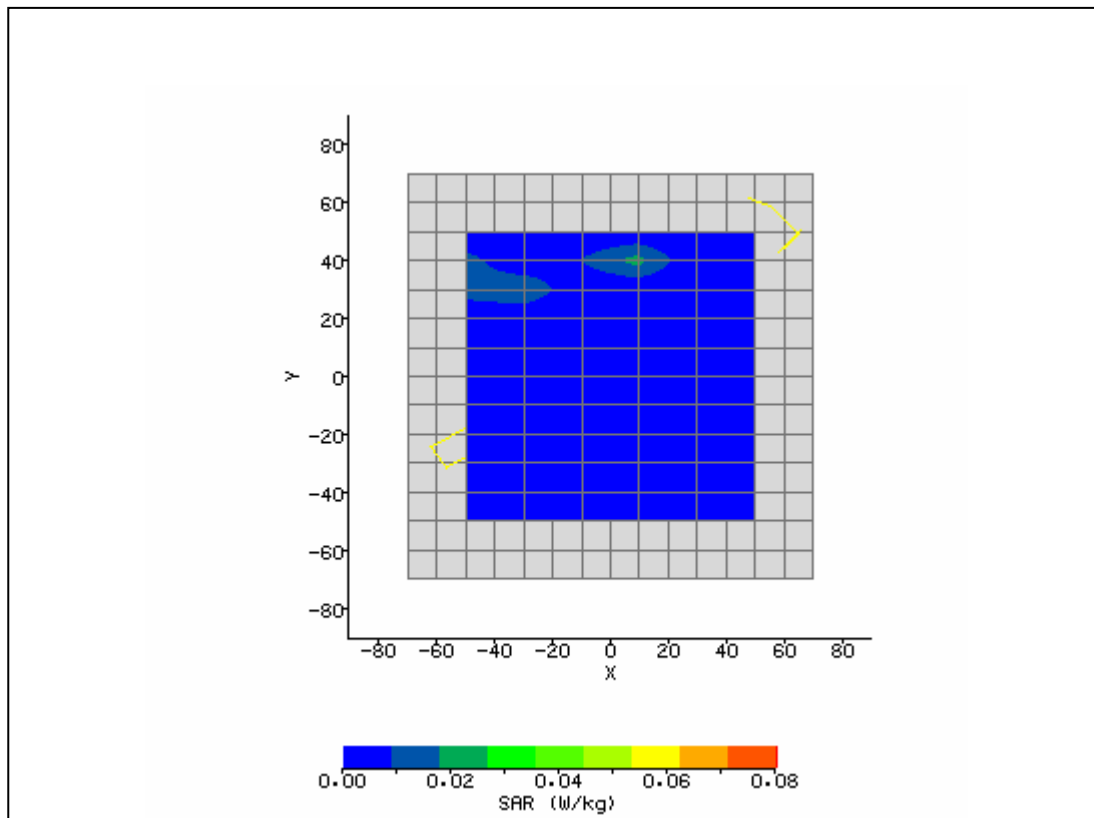


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	6/13/2007 10:47:50 AM	DUT Battery Model/No:	
Filename:	Lap190_3d.txt	Probe Serial Number:	L0116
Ambient Temperature:	22.8°C	Liquid Simulant:	850
Device Under Test:	Sony-2	Relative Permittivity:	55.72
Relative Humidity:	30%	Conductivity:	0.988
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	6.00 mm
DUT Position:	Lap 0mm.	Max SAR Y-axis Location:	2.00 mm
Antenna Configuration:	Integral	Max E Field:	6.48 V/m
Test Frequency:	836.6MHz + 2480(BT)	SAR 1g:	0.055 W/kg
Air Factors:	488 / 373 / 340	SAR 10g:	0.036 W/kg
Conversion Factors:	.470 / .470 / .470	SAR Start:	0.020 W/kg
Type of Modulation:		SAR End:	0.021 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	4.56 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	06/13/07
Input Power Level:	max	Extrapolation:	poly4

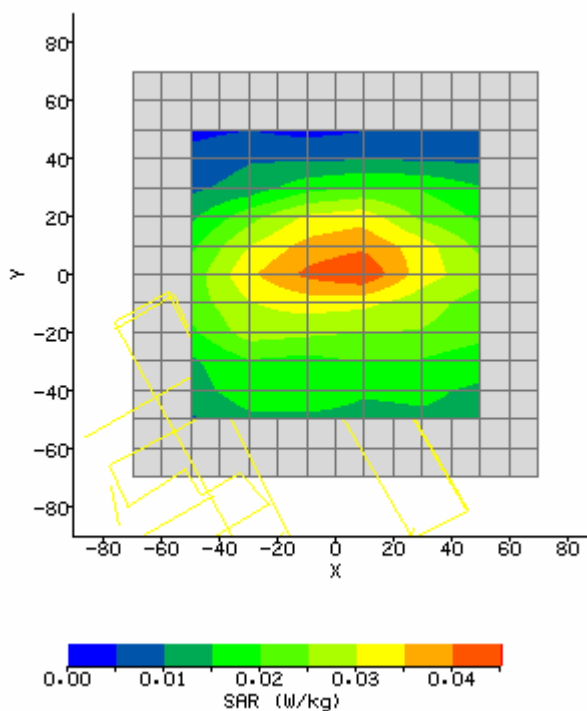


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	3/9/2007 4:19:43 PM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	L0116
Ambient Temperature:	22.8°C	Liquid Simulant:	1900
Device Under Test:	Sony	Relative Permittivity:	53.16
Relative Humidity:	30%	Conductivity:	1.576
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	34.00 mm
DUT Position:	Lap touch,	Max SAR Y-axis Location:	50.00 mm
Antenna Configuration:	Integral	Max E Field:	3.27 V/m
Test Frequency:	1880.0MHz	SAR 1g:	0.035 W/kg
Air Factors:	488 / 373 / 340	SAR 10g:	0.012 W/kg
Conversion Factors:	.630 / .630 / .630	SAR Start:	0.002 W/kg
Type of Modulation:		SAR End:	0.002 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	2.59 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	03/08/07
Input Power Level:	max	Extrapolation:	poly4

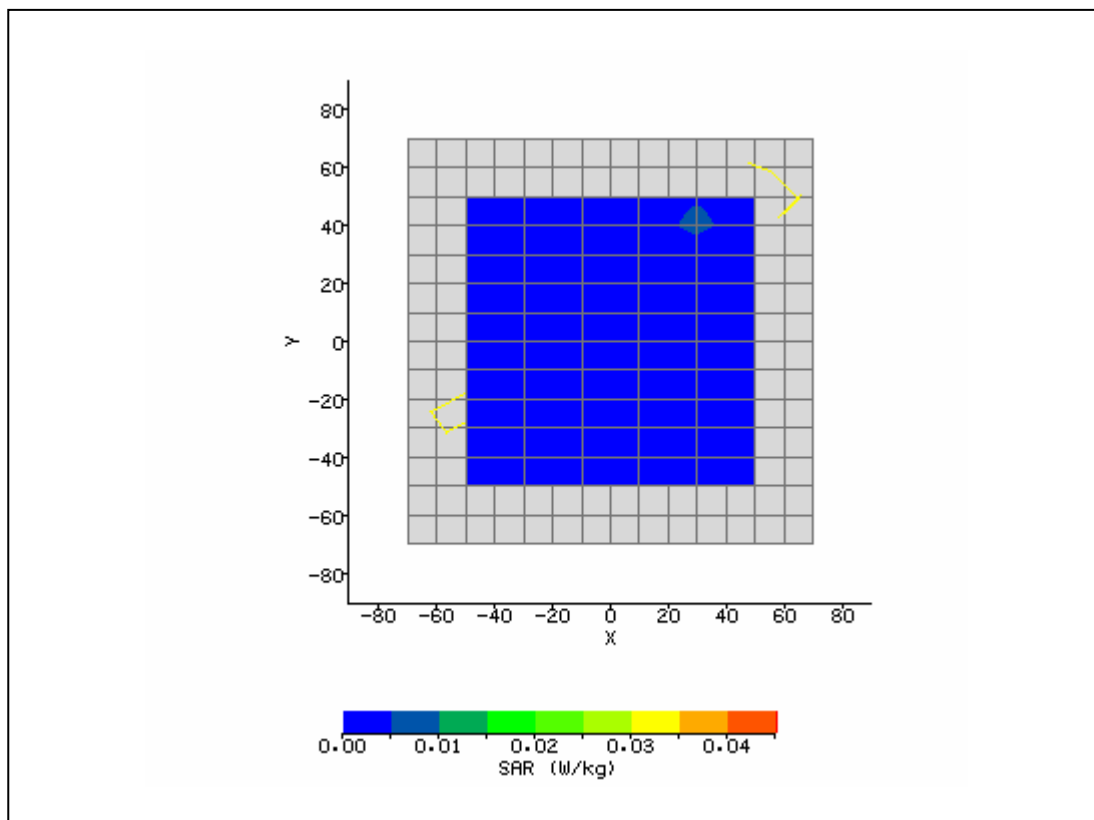


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	6/13/2007 11:35:48 AM	DUT Battery Model/No:	
Filename:	temp_3d.txt	Probe Serial Number:	L0116
Ambient Temperature:	22.8°C	Liquid Simulant:	1900
Device Under Test:	Sony-2	Relative Permittivity:	53.26
Relative Humidity:	30%	Conductivity:	1.52
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	20.00 mm
DUT Position:	Lap	Max SAR Y-axis Location:	39.00 mm
Antenna Configuration:	Integral	Max E Field:	5.57 V/m
Test Frequency:	1880MHz + 2480 (BT)	SAR 1g:	0.051 W/kg
Air Factors:	488 / 373 / 340	SAR 10g:	0.037 W/kg
Conversion Factors:	.630 / .630 / .630	SAR Start:	0.003 W/kg
Type of Modulation:		SAR End:	0.003 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.03 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	06/13/07
Input Power Level:	max	Extrapolation:	poly4

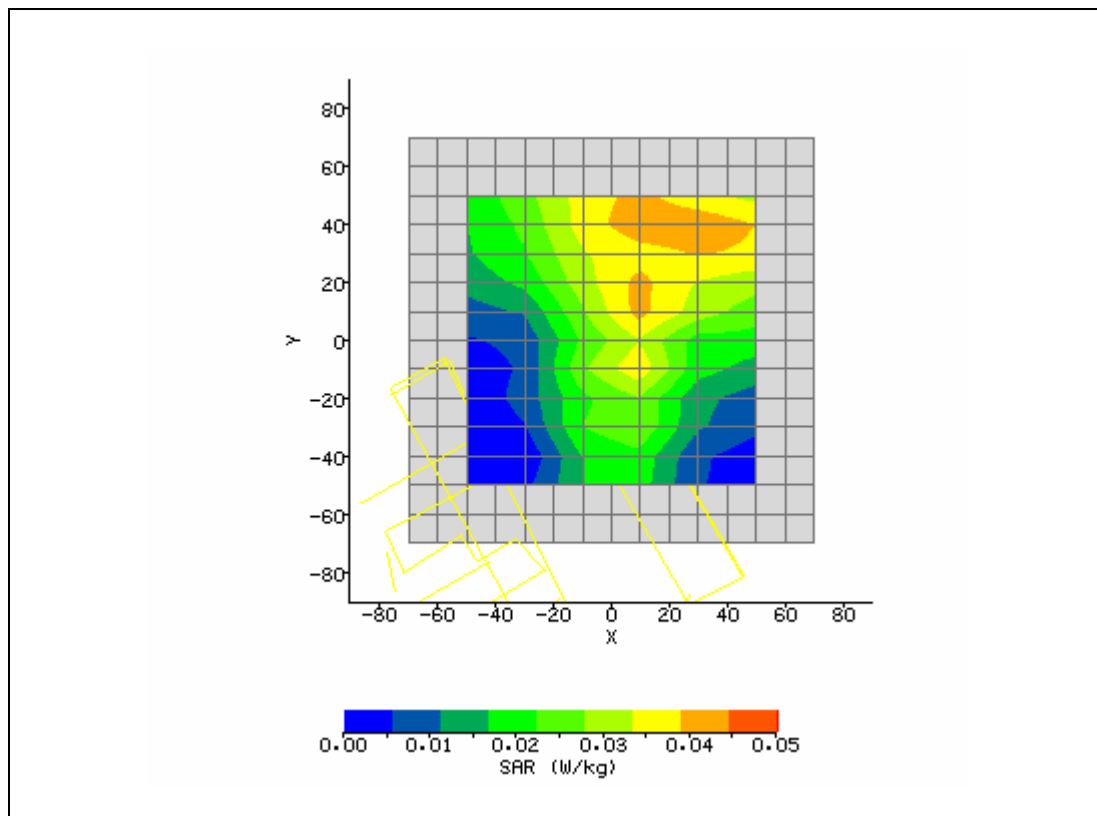


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	3/7/2007 4:37:45 PM	DUT Battery Model/No:	
Filename:	Left6B_batt_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	2450
Device Under Test:	Sony	Relative Permittivity:	50.99
Relative Humidity:	30%	Conductivity:	1.909
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	30.00 mm
DUT Position:	Lap	Max SAR Y-axis Location:	30.00 mm
Antenna Configuration:	Chain A	Max E Field:	4.25 V/m
Test Frequency:	2437MHz	SAR 1g:	0.010 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	0.002 W/kg
Conversion Factors:	.462 / .462 / .462	SAR Start:	0.008 W/kg
Type of Modulation:		SAR End:	0.008 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	3.90 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	03/07/07
Input Power Level:	max	Extrapolation:	poly4

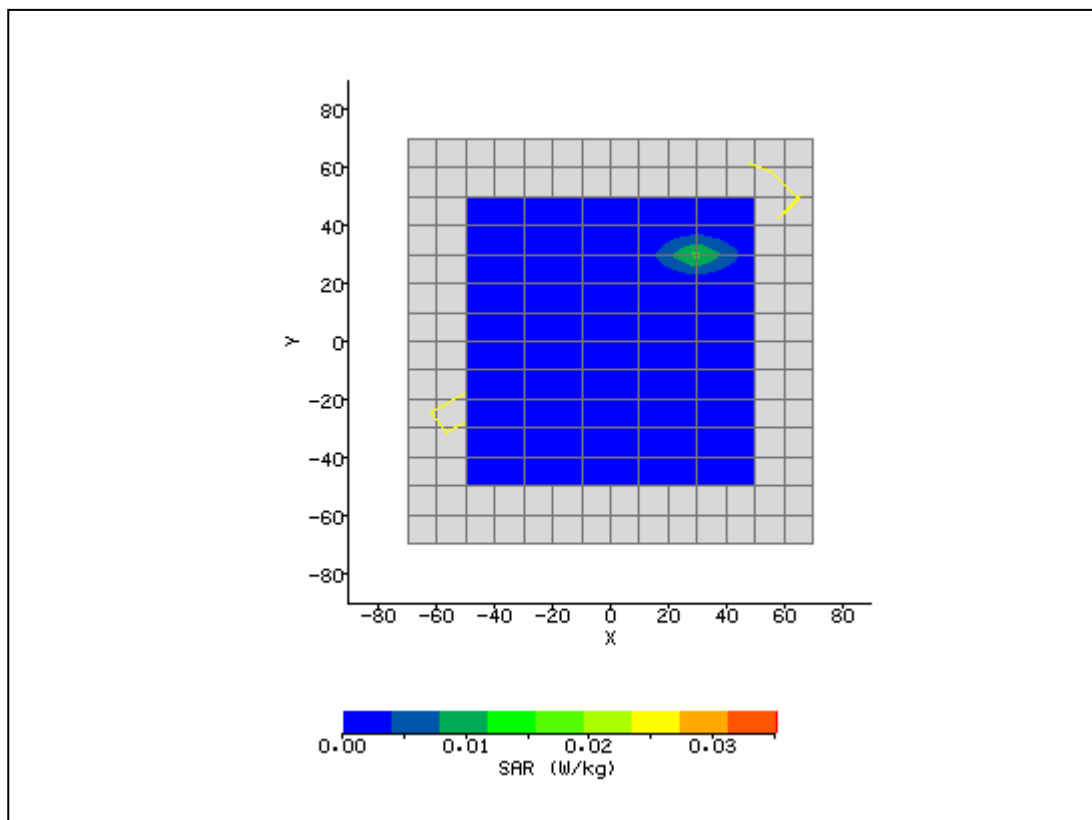


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	3/7/2007 4:21:31 PM	DUT Battery Model/No:	
Filename:	Lap11_batt_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	2450
Device Under Test:	Sony	Relative Permittivity:	50.99
Relative Humidity:	30%	Conductivity:	1.909
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	50.00 mm
DUT Position:	Lap	Max SAR Y-axis Location:	39.00 mm
Antenna Configuration:	Chain B	Max E Field:	4.31 V/m
Test Frequency:	2437MHz	SAR 1g:	0.018 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	0.007 W/kg
Conversion Factors:	.462 / .462 / .462	SAR Start:	0.005 W/kg
Type of Modulation:		SAR End:	0.005 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	2.91 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	03/07/07
Input Power Level:	max	Extrapolation:	poly4

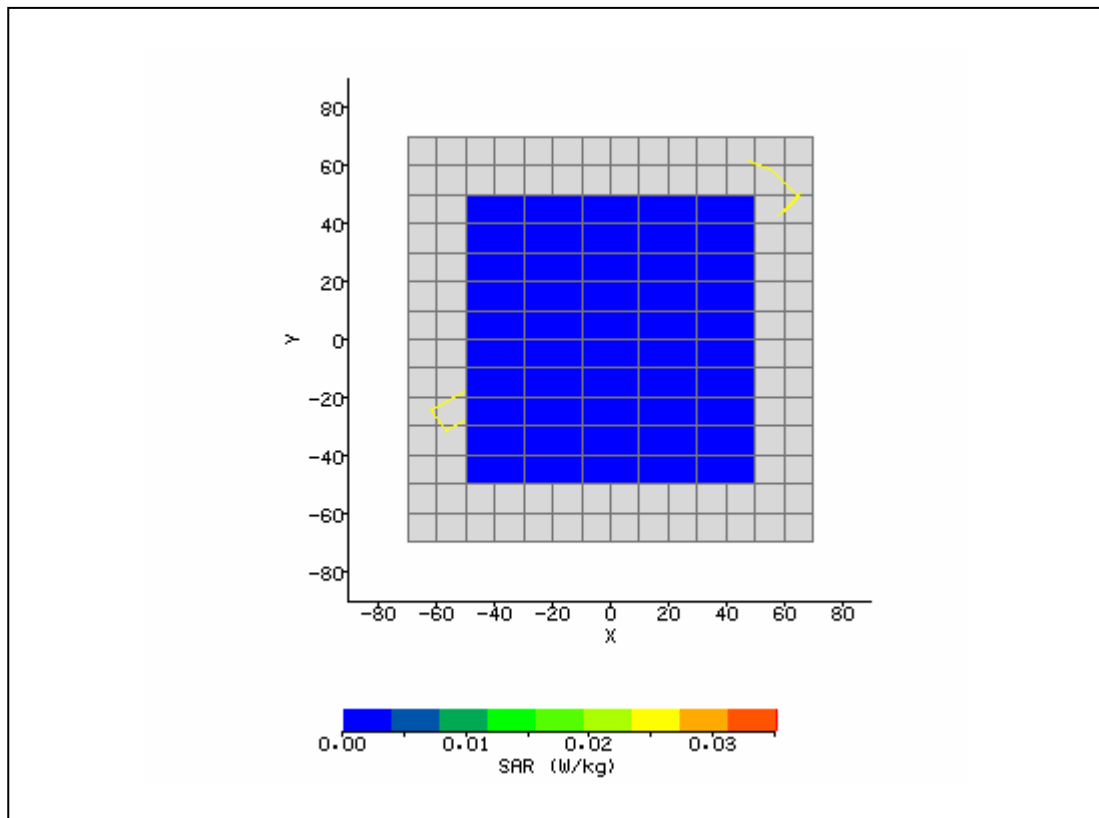


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	6/12/2007 2:03:31 PM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	2450
Device Under Test:	ES725_2	Relative Permittivity:	51.03
Relative Humidity:	30%	Conductivity:	1.907
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	50.00 mm
DUT Position:	Lap 0 mm.	Max SAR Y-axis Location:	50.00 mm
Antenna Configuration:	Integral - Main	Max E Field:	6.18 V/m
Test Frequency:	2437MHz	SAR 1g:	0.017 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	0.015 W/kg
Conversion Factors:	.462 / .462 / .462	SAR Start:	0.017 W/kg
Type of Modulation:		SAR End:	0.018 W/kg
Modn. Duty Cycle:	98%	SAR Drift during Scan:	2.32 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	06/11/07
Input Power Level:	max	Extrapolation:	poly4

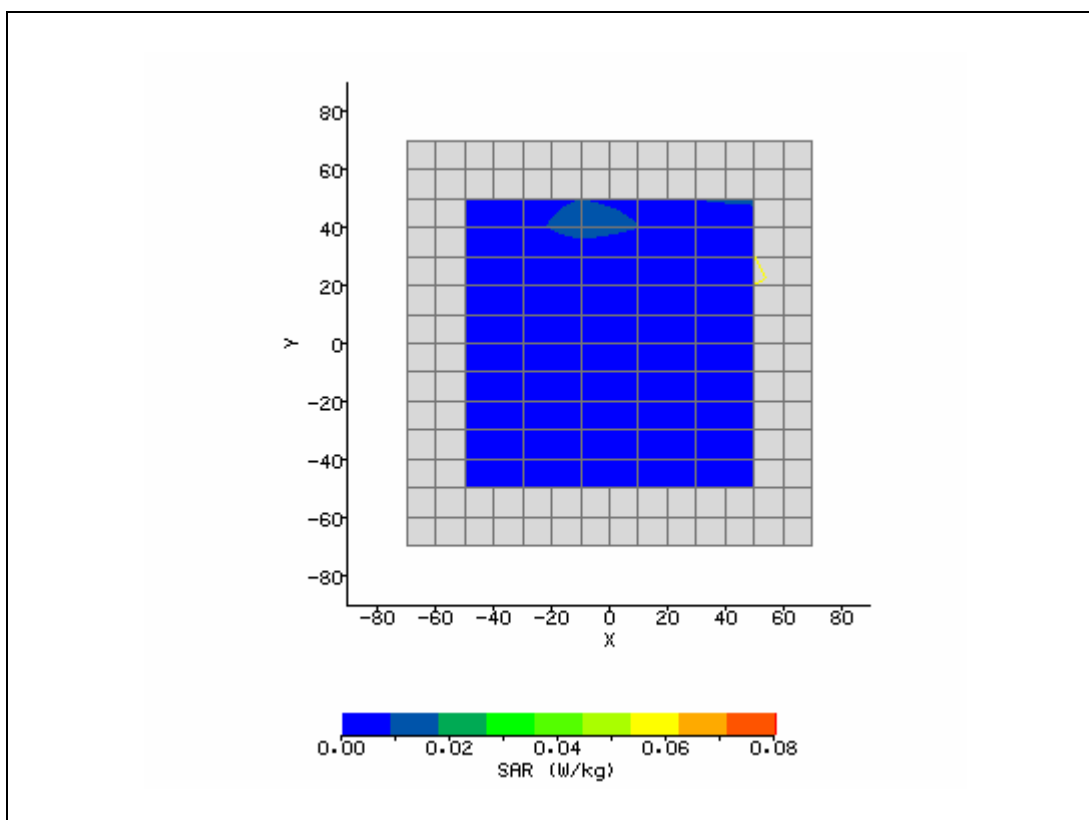


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	6/12/2007 2:35:02 PM	DUT Battery Model/No:	
Filename:	LapAux6+BT_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	2450
Device Under Test:	ES725_2	Relative Permittivity:	51.03
Relative Humidity:	30%	Conductivity:	1.91
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	55.33 mm
DUT Position:	Lap 0 mm.	Max SAR Y-axis Location:	27.67 mm
Antenna Configuration:	Integral - Main	Max E Field:	4.94 V/m
Test Frequency:	2437 + BTMHz	SAR 1g:	0.020 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	0.014 W/kg
Conversion Factors:	.462 / .462 / .462	SAR Start:	0.009 W/kg
Type of Modulation:	DSSS	SAR End:	0.010 W/kg
Modn. Duty Cycle:	98%	SAR Drift during Scan:	3.46 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	06/11/07
Input Power Level:	max	Extrapolation:	poly4

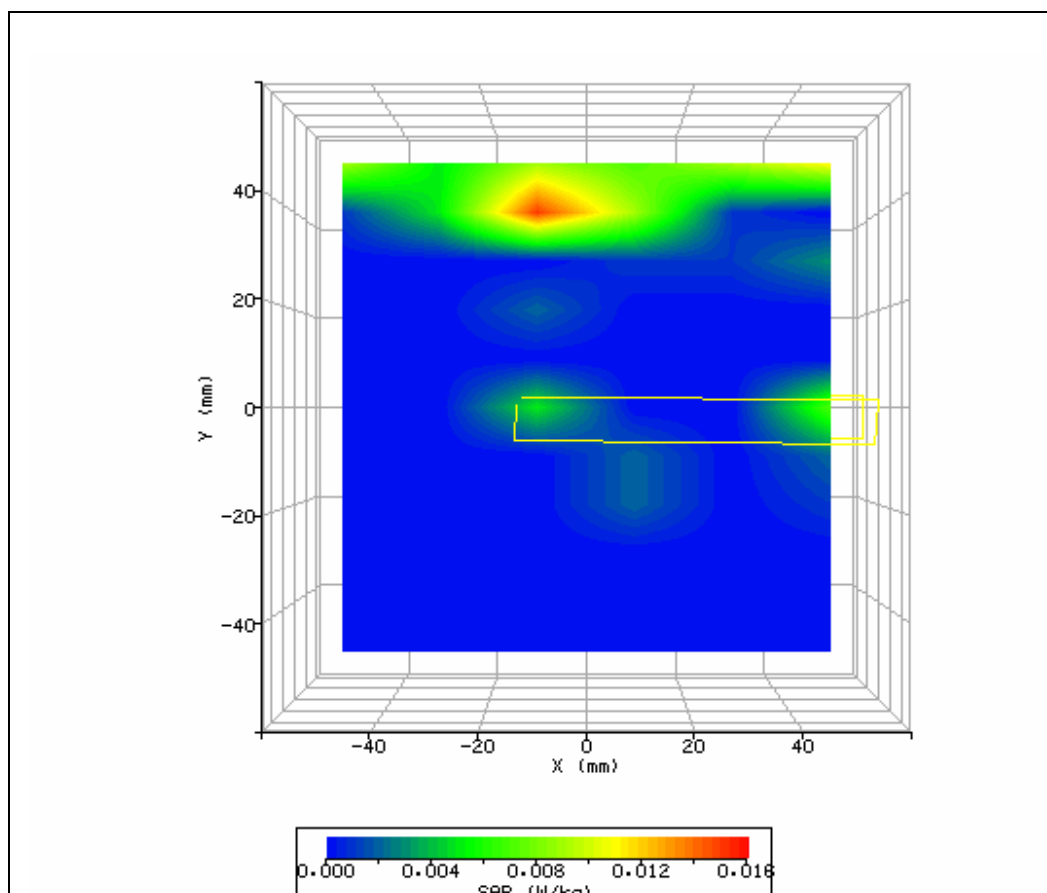


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	3/8/2007 10:08:58 AM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	2450
Device Under Test:	Sony	Relative Permittivity:	50.99
Relative Humidity:	30%	Conductivity:	1.909
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-26.00 mm
DUT Position:	Lap	Max SAR Y-axis Location:	50.00 mm
Antenna Configuration:	Chain A	Max E Field:	6.38 V/m
Test Frequency:	2437 MHz	SAR 1g:	0.059 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	0.039 W/kg
Conversion Factors:	.462 / .462 / .462	SAR Start:	0.037 W/kg
Type of Modulation:		SAR End:	0.036 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-2.70 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	03/07/07
Input Power Level:	max	Extrapolation:	poly4

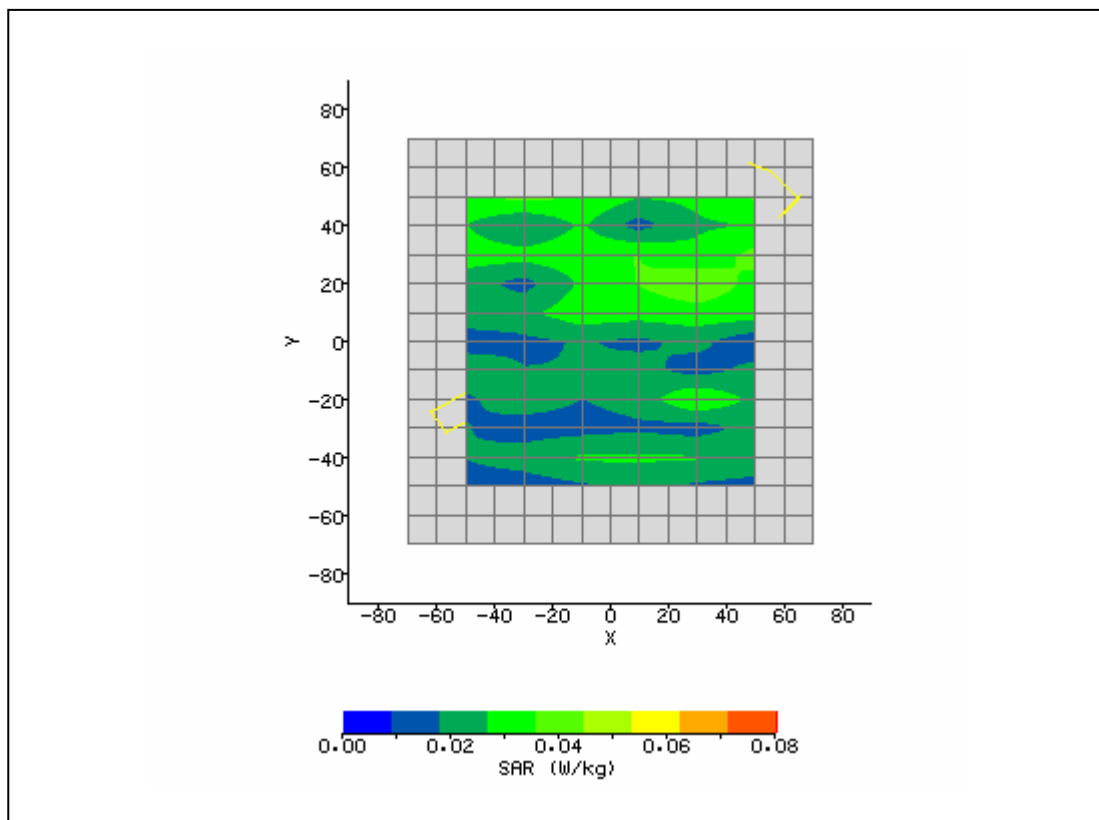


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	3/8/2007 10:25:04 AM	DUT Battery Model/No:	
Filename:	Left6A_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	2450
Device Under Test:	Sony	Relative Permittivity:	50.99
Relative Humidity:	30%	Conductivity:	1.909
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	50.00 mm
DUT Position:	Lap	Max SAR Y-axis Location:	16.00 mm
Antenna Configuration:	Chain B	Max E Field:	5.68 V/m
Test Frequency:	2437 MHz	SAR 1g:	0.041 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	0.028 W/kg
Conversion Factors:	.462 / .462 / .462	SAR Start:	0.023 W/kg
Type of Modulation:		SAR End:	0.023 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.83 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	03/07/07
Input Power Level:	max	Extrapolation:	poly4

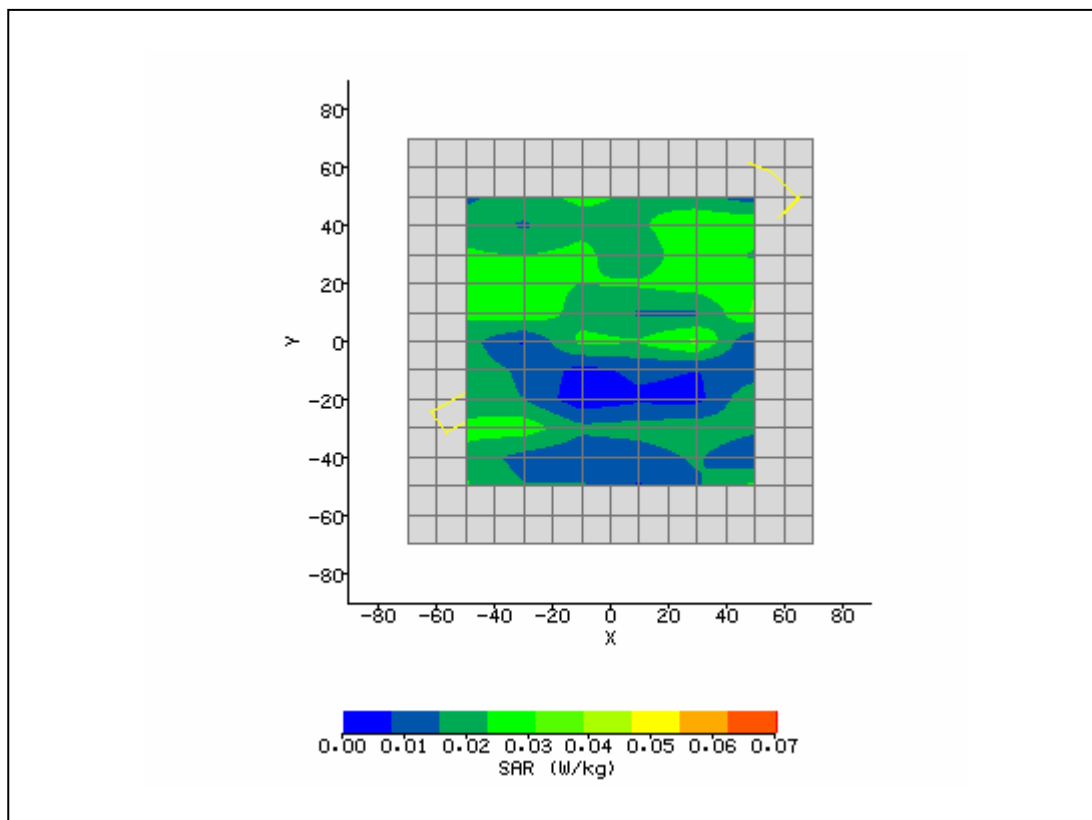


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	6/12/2007 3:14:09 PM	DUT Battery Model/No:	
Filename:	AuxMain6+BT_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	2450
Device Under Test:	ES725_2	Relative Permittivity:	51.03
Relative Humidity:	30%	Conductivity:	1.91
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	16.00 mm
DUT Position:	Lap 0 mm.	Max SAR Y-axis Location:	50.00 mm
Antenna Configuration:	Integral - Main	Max E Field:	5.65 V/m
Test Frequency:	2437 + BTMHz	SAR 1g:	0.061 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	0.038 W/kg
Conversion Factors:	.462 / .462 / .462	SAR Start:	0.023 W/kg
Type of Modulation:	OFDM	SAR End:	0.024 W/kg
Modn. Duty Cycle:	91%	SAR Drift during Scan:	4.85 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	06/11/07
Input Power Level:	max	Extrapolation:	poly4

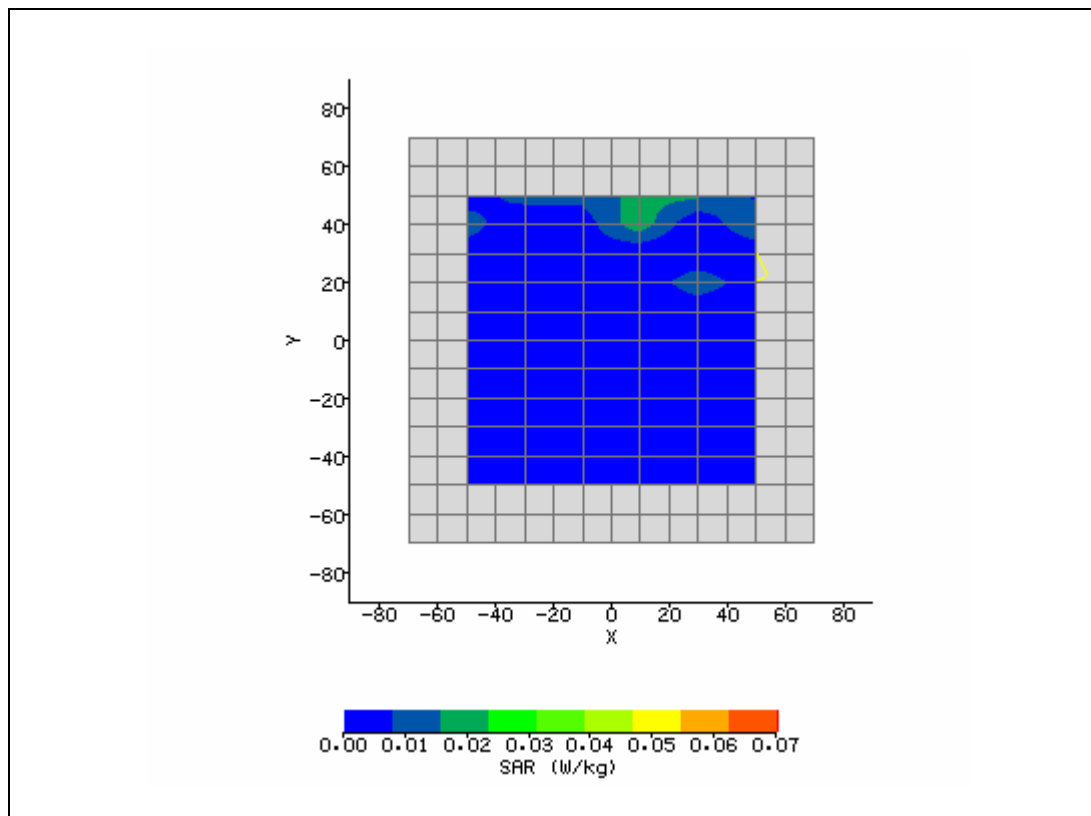


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	6/12/2007 4:54:54 PM	DUT Battery Model/No:	
Filename:	G-LapAux6+BT_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	2450
Device Under Test:	ES725_2	Relative Permittivity:	51.03
Relative Humidity:	30%	Conductivity:	1.91
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	44.00 mm
DUT Position:	Lap 0 mm.	Max SAR Y-axis Location:	50.00 mm
Antenna Configuration:	Integral - Aux	Max E Field:	5.19 V/m
Test Frequency:	2437 + BTMHz	SAR 1g:	0.050 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	0.025 W/kg
Conversion Factors:	.462 / .462 / .462	SAR Start:	0.021 W/kg
Type of Modulation:	OFDM	SAR End:	0.020 W/kg
Modn. Duty Cycle:	91%	SAR Drift during Scan:	-4.76 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	06/11/07
Input Power Level:	max	Extrapolation:	poly4

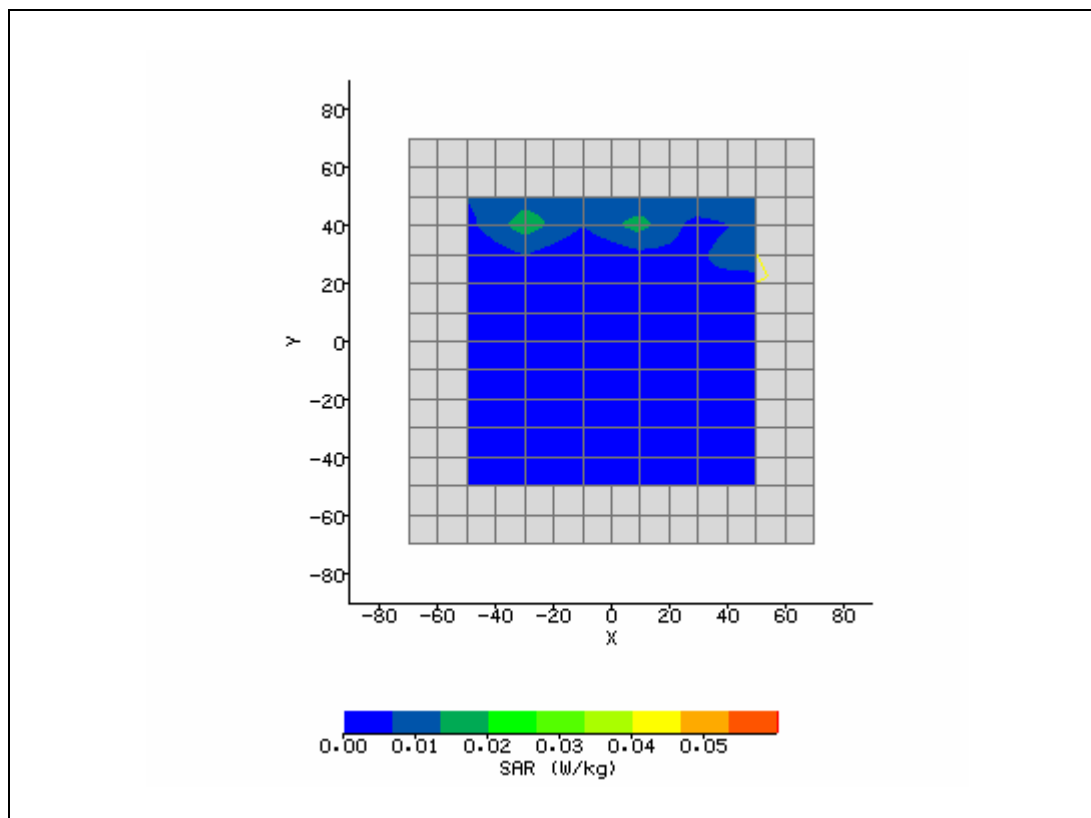


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	3/6/2007 4:03:19 PM	DUT Battery Model/No:	
Filename:	Back_52_chainB_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	5200
Device Under Test:	Sony	Relative Permittivity:	5180MHz
Relative Humidity:	30%	Conductivity:	5180MHz
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-50.00 mm
DUT Position:	Lap	Max SAR Y-axis Location:	50.00 mm
Antenna Configuration:	Chain A	Max E Field:	7.01 V/m
Test Frequency:	5180MHz	SAR 1g:	0.122 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	0.100 W/kg
Conversion Factors:	.494 / .494 / .494	SAR Start:	0.095 W/kg
Type of Modulation:		SAR End:	0.094 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-1.05 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	03/05/07
Input Power Level:	max	Extrapolation:	poly4

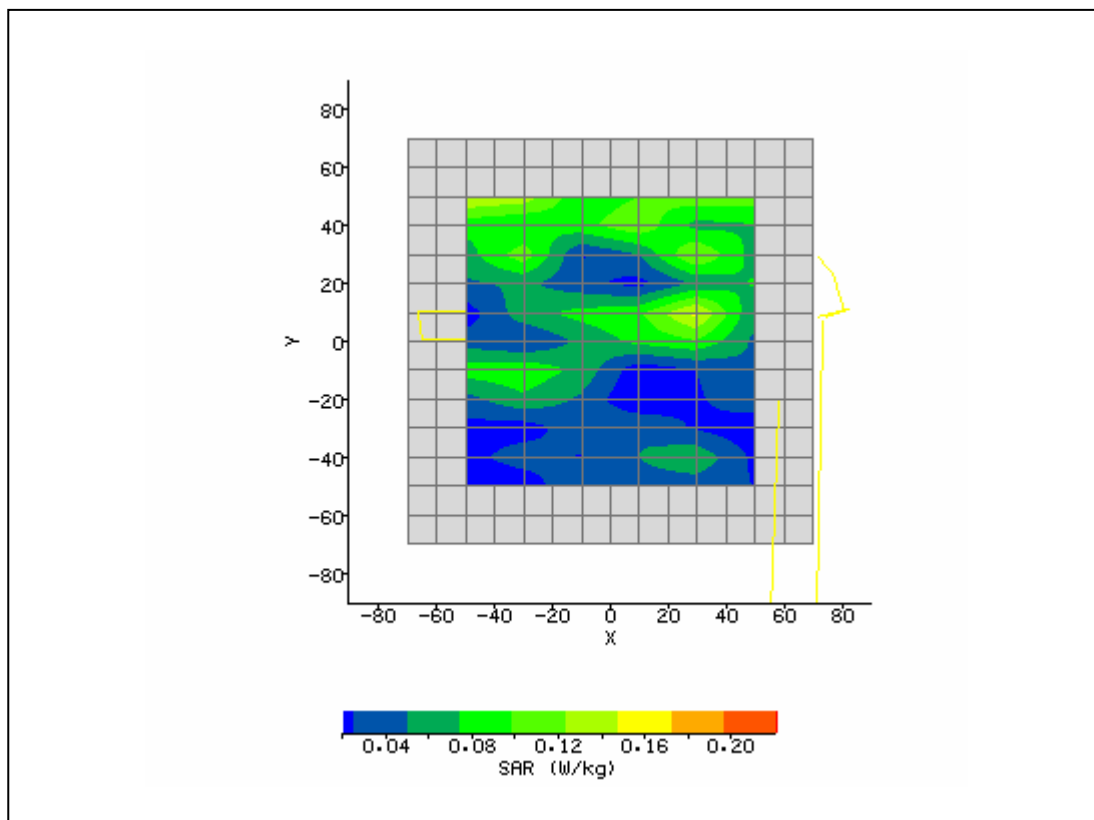


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	3/6/2007 5:53:45 PM	DUT Battery Model/No:	
Filename:	Lap_48_chainB_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	5200
Device Under Test:	Sony	Relative Permittivity:	5180MHz
Relative Humidity:	30%	Conductivity:	5180MHz
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	26.00 mm
DUT Position:	Lap	Max SAR Y-axis Location:	50.00 mm
Antenna Configuration:	Chain B	Max E Field:	4.67 V/m
Test Frequency:	5180MHz	SAR 1g:	0.042 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	0.023 W/kg
Conversion Factors:	.494 / .494 / .494	SAR Start:	0.013 W/kg
Type of Modulation:		SAR End:	0.013 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-1.43 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	03/06/07
Input Power Level:	max	Extrapolation:	poly4

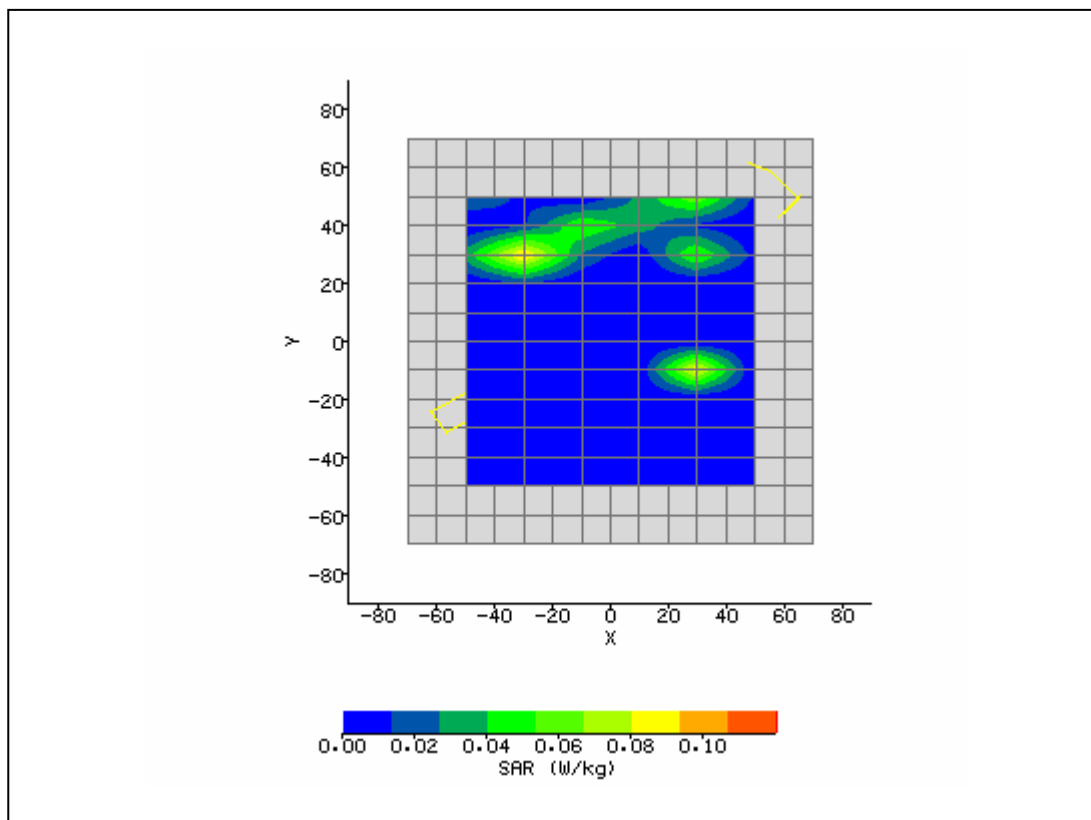


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	3/6/2007 5:11:57 PM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	5200
Device Under Test:	Sony	Relative Permittivity:	48.06
Relative Humidity:	30%	Conductivity:	5.226
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	28.00 mm
DUT Position:	Lap	Max SAR Y-axis Location:	50.00 mm
Antenna Configuration:	Chain A	Max E Field:	6.83 V/m
Test Frequency:	5240MHz	SAR 1g:	0.135 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	0.129 W/kg
Conversion Factors:	.494 / .494 / .494	SAR Start:	0.132 W/kg
Type of Modulation:		SAR End:	0.132 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-1.66 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	03/06/07
Input Power Level:	max	Extrapolation:	poly4

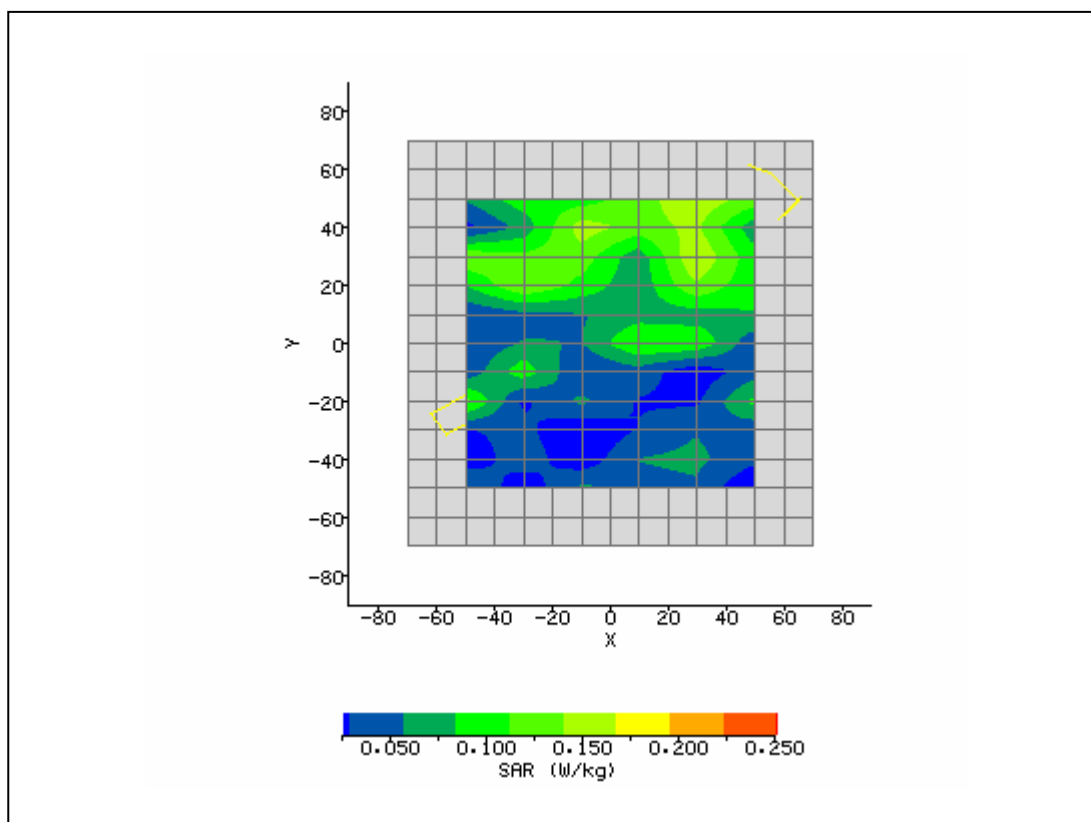


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	3/6/2007 5:35:56 PM	DUT Battery Model/No:	
Filename:	Lap_48_chainA_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	5200
Device Under Test:	Sony	Relative Permittivity:	48.06
Relative Humidity:	30%	Conductivity:	5.226
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	50.00 mm
DUT Position:	Lap	Max SAR Y-axis Location:	50.00 mm
Antenna Configuration:	Chain B	Max E Field:	4.70 V/m
Test Frequency:	5240MHz	SAR 1g:	0.048 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	0.018 W/kg
Conversion Factors:	.494 / .494 / .494	SAR Start:	0.004 W/kg
Type of Modulation:		SAR End:	0.004 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	2.58 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	03/06/07
Input Power Level:	max	Extrapolation:	poly4

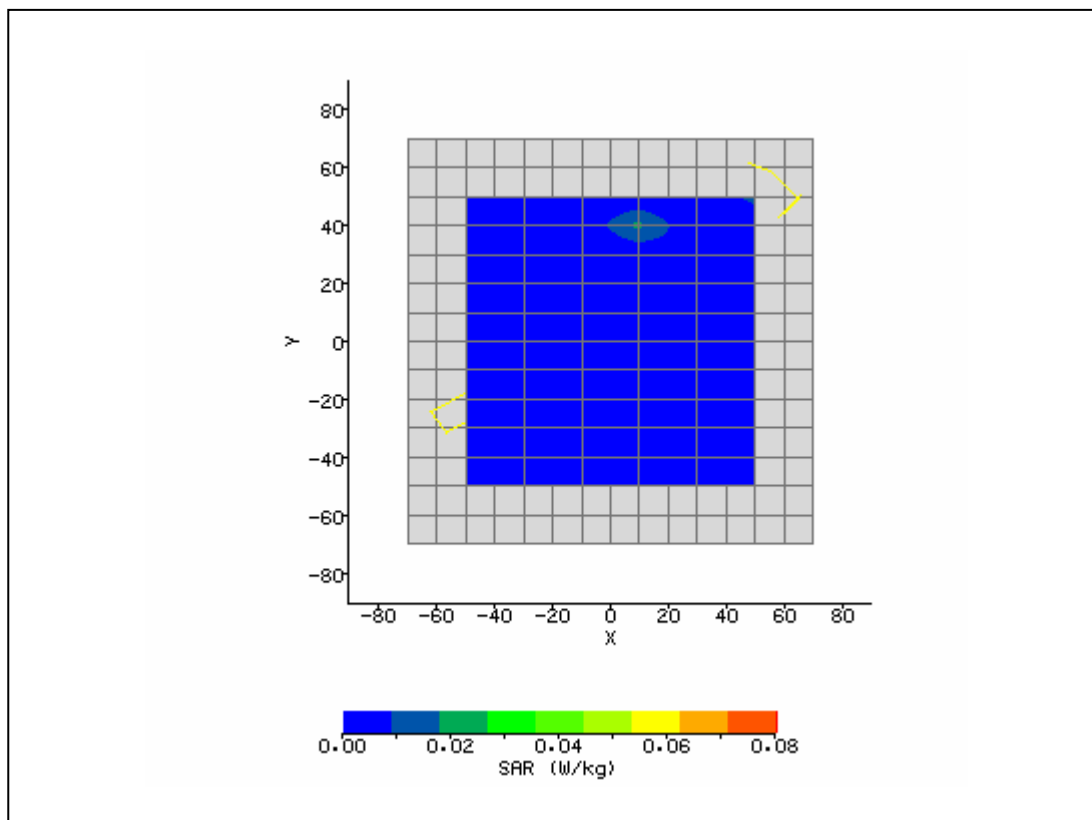


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	3/6/2007 1:40:03 PM	DUT Battery Model/No:	
Filename:	Lap_52_chainB_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	5200
Device Under Test:	Sony	Relative Permittivity:	48.00
Relative Humidity:	30%	Conductivity:	5.218
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	50.00 mm
DUT Position:	lap	Max SAR Y-axis Location:	38.00 mm
Antenna Configuration:	Chain A	Max E Field:	6.52 V/m
Test Frequency:	5260MHz	SAR 1g:	0.137 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	0.125 W/kg
Conversion Factors:	.494 / .494 / .494	SAR Start:	0.097 W/kg
Type of Modulation:		SAR End:	0.097 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-1.28 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	03/05/07
Input Power Level:	max	Extrapolation:	poly4

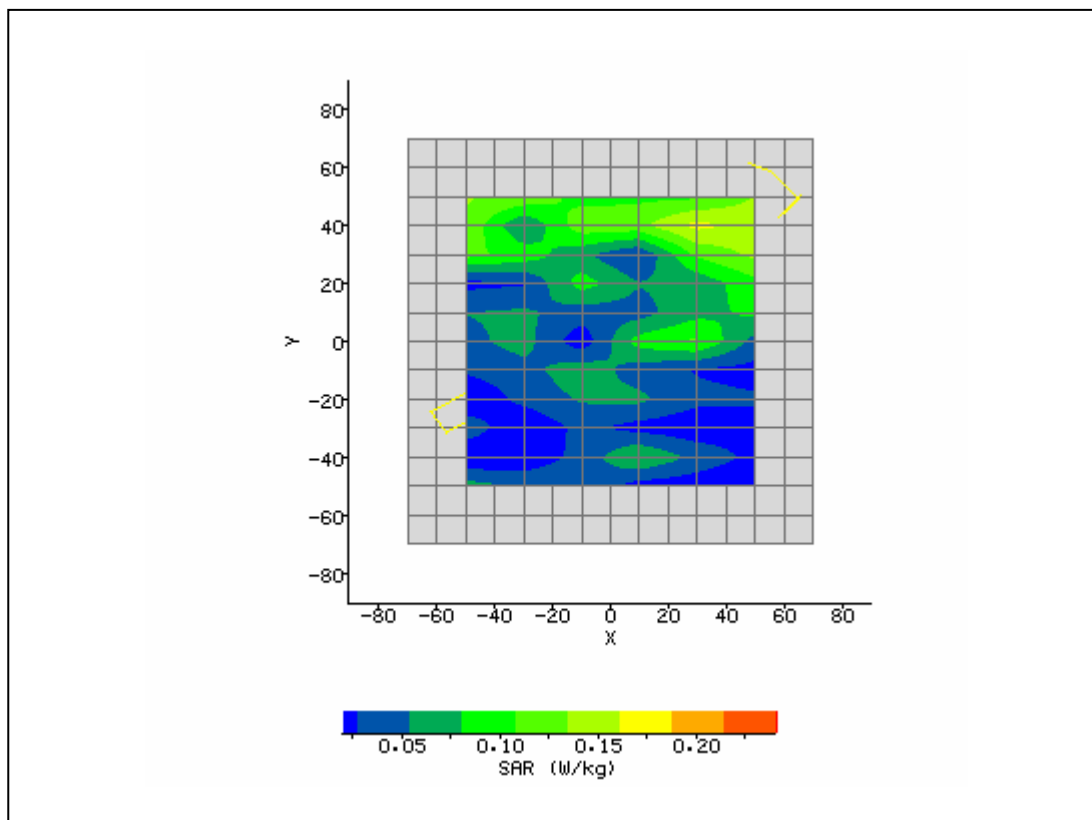


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	3/6/2007 3:09:53 PM	DUT Battery Model/No:	
Filename:	Back_52_chainB_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	5200
Device Under Test:	Sony	Relative Permittivity:	48.00
Relative Humidity:	30%	Conductivity:	5.218
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-60.0 mm
DUT Position:	Lap	Max SAR Y-axis Location:	34.0 mm
Antenna Configuration:	Chain B	Max E Field:	5.88 V/m
Test Frequency:	5260MHz	SAR 1g:	0.034 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	0.019 W/kg
Conversion Factors:	.494 / .494 / .494	SAR Start:	0.012 W/kg
Type of Modulation:		SAR End:	0.012 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-1.80 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	03/05/07
Input Power Level:	max	Extrapolation:	poly4

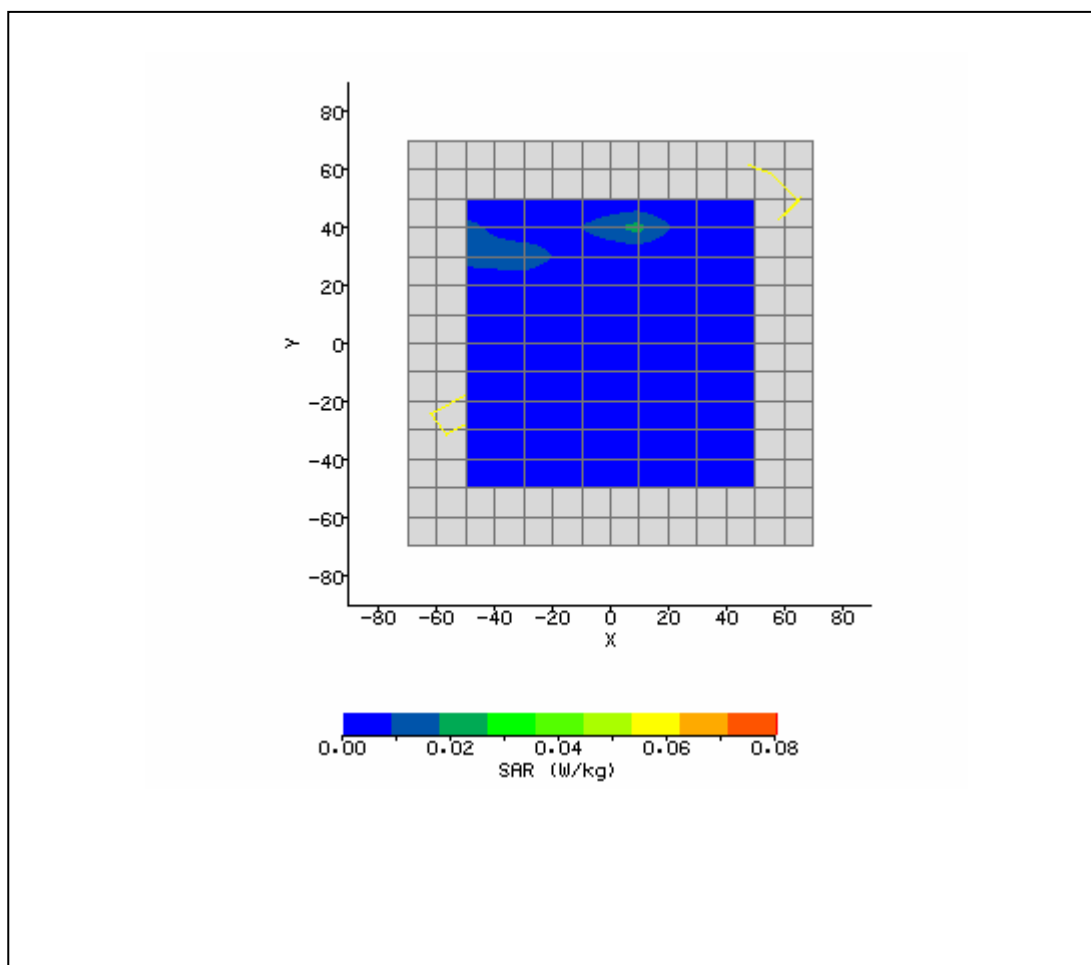


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	3/6/2007 4:03:19 PM	DUT Battery Model/No:	
Filename:	Back_52_chainB_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	5200
Device Under Test:	Sony	Relative Permittivity:	47.86
Relative Humidity:	30%	Conductivity:	5.199
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	50.00 mm
DUT Position:	Lap	Max SAR Y-axis Location:	50.00 mm
Antenna Configuration:	Chain A	Max E Field:	7.01 V/m
Test Frequency:	5320MHz	SAR 1g:	0.146 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	0.130 W/kg
Conversion Factors:	.494 / .494 / .494	SAR Start:	0.100 W/kg
Type of Modulation:		SAR End:	0.096 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-4.00 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	03/05/07
Input Power Level:	max	Extrapolation:	poly4

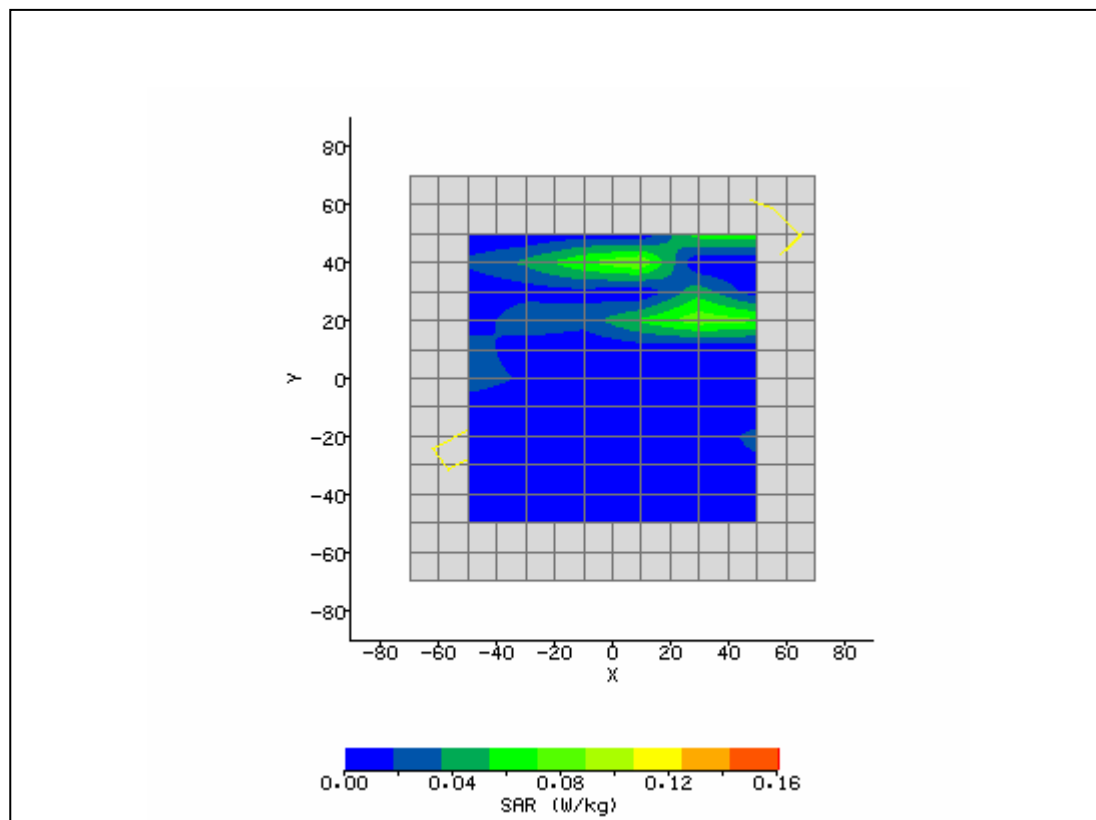


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	3/6/2007 2:40:50 PM	DUT Battery Model/No:	
Filename:	Left_52_chainA_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	5200
Device Under Test:	Sony	Relative Permittivity:	47.86
Relative Humidity:	30%	Conductivity:	5.199
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-8.00 mm
DUT Position:	lap	Max SAR Y-axis Location:	50.00 mm
Antenna Configuration:	Chain B	Max E Field:	5.06 V/m
Test Frequency:	5320MHz	SAR 1g:	0.034 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	0.019 W/kg
Conversion Factors:	.494 / .494 / .494	SAR Start:	0.022 W/kg
Type of Modulation:		SAR End:	0.022 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-1.78 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	03/05/07
Input Power Level:	max	Extrapolation:	poly4

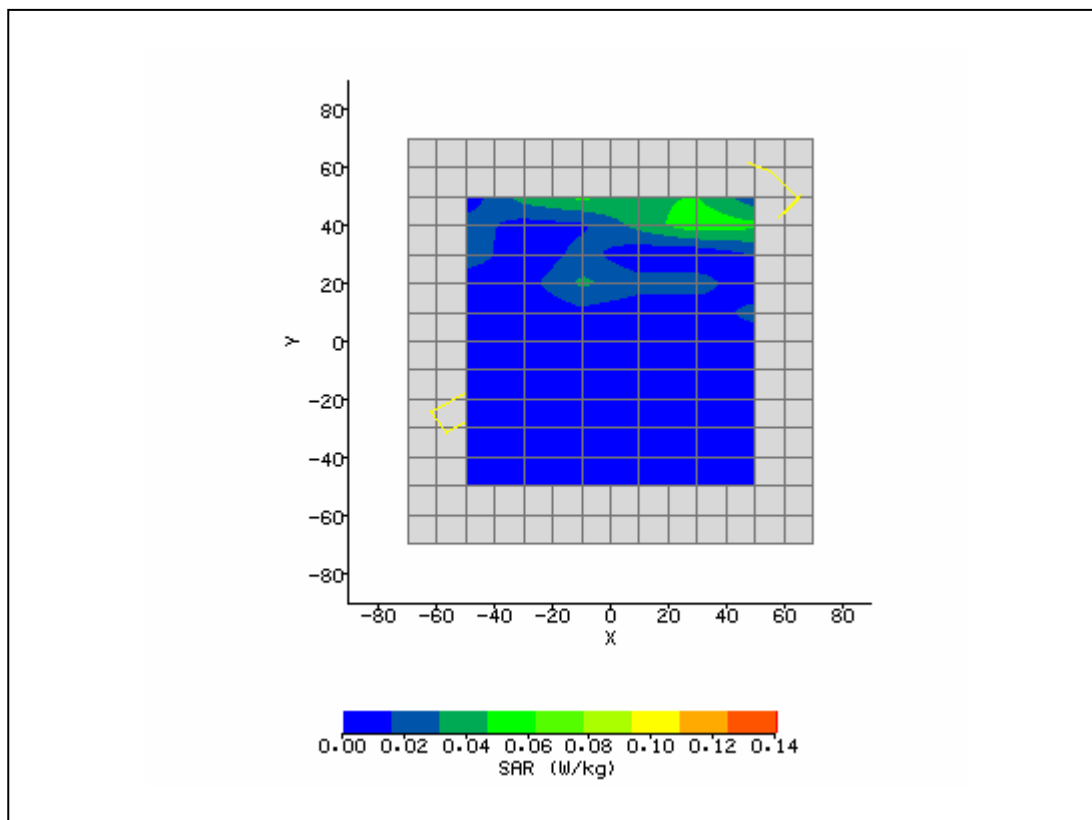


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	6/13/2007 9:38:09 AM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	5250
Device Under Test:	ES725_2	Relative Permittivity:	47.98
Relative Humidity:	30%	Conductivity:	5.183
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-50.00 mm
DUT Position:	Lap 0 mm.	Max SAR Y-axis Location:	50.00 mm
Antenna Configuration:	Integral - Main	Max E Field:	6.01 V/m
Test Frequency:	5320 + BTMHz	SAR 1g:	0.152 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	0.257 W/kg
Conversion Factors:	.494 / .494 / .494	SAR Start:	0.078 W/kg
Type of Modulation:		SAR End:	0.082 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	4.54 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	06/13/07
Input Power Level:	max	Extrapolation:	poly4

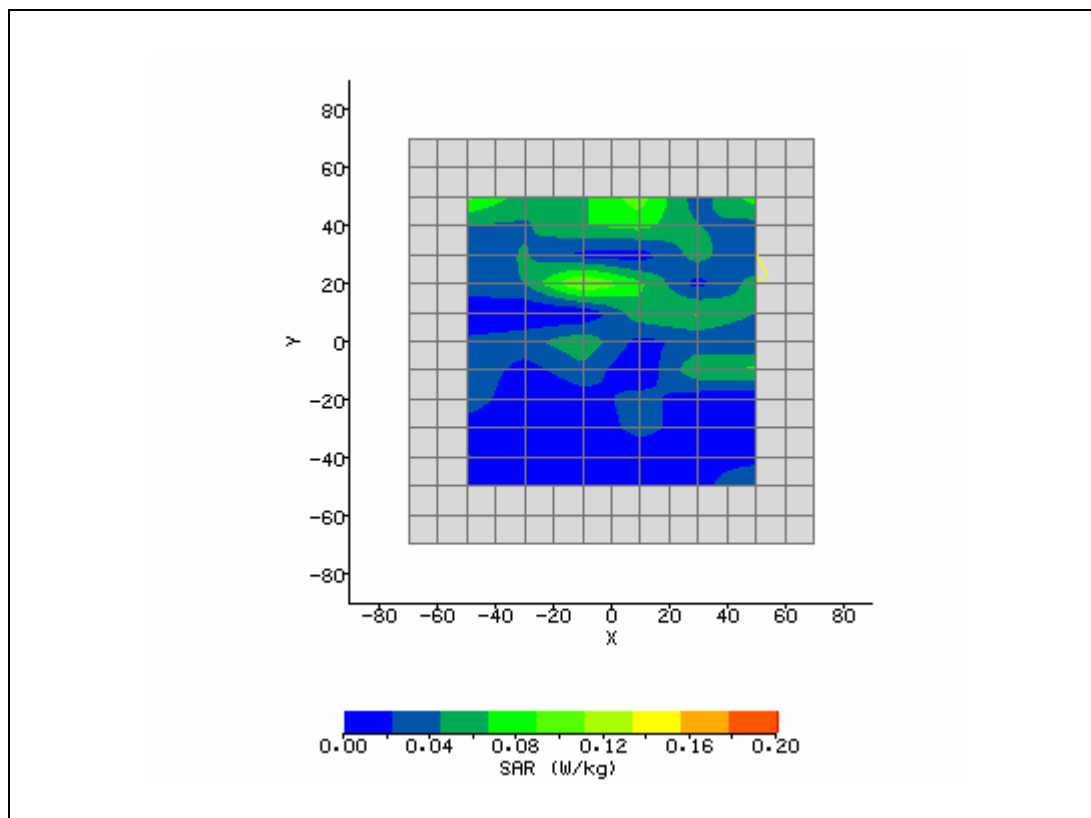


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	6/13/2007 2:58:04 PM	DUT Battery Model/No:	
Filename:	LapAux48_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	5250
Device Under Test:	ES725_2	Relative Permittivity:	48.18
Relative Humidity:	30%	Conductivity:	5.219
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-32.00 mm
DUT Position:	Lap 0 mm.	Max SAR Y-axis Location:	50.00 mm
Antenna Configuration:	Integral - Aux	Max E Field:	6.25 V/m
Test Frequency:	5240 + BTMHz	SAR 1g:	0.093 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	0.143 W/kg
Conversion Factors:	.494 / .494 / .494	SAR Start:	0.097 W/kg
Type of Modulation:		SAR End:	0.100 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	3.93 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	06/13/07
Input Power Level:	max	Extrapolation:	poly4

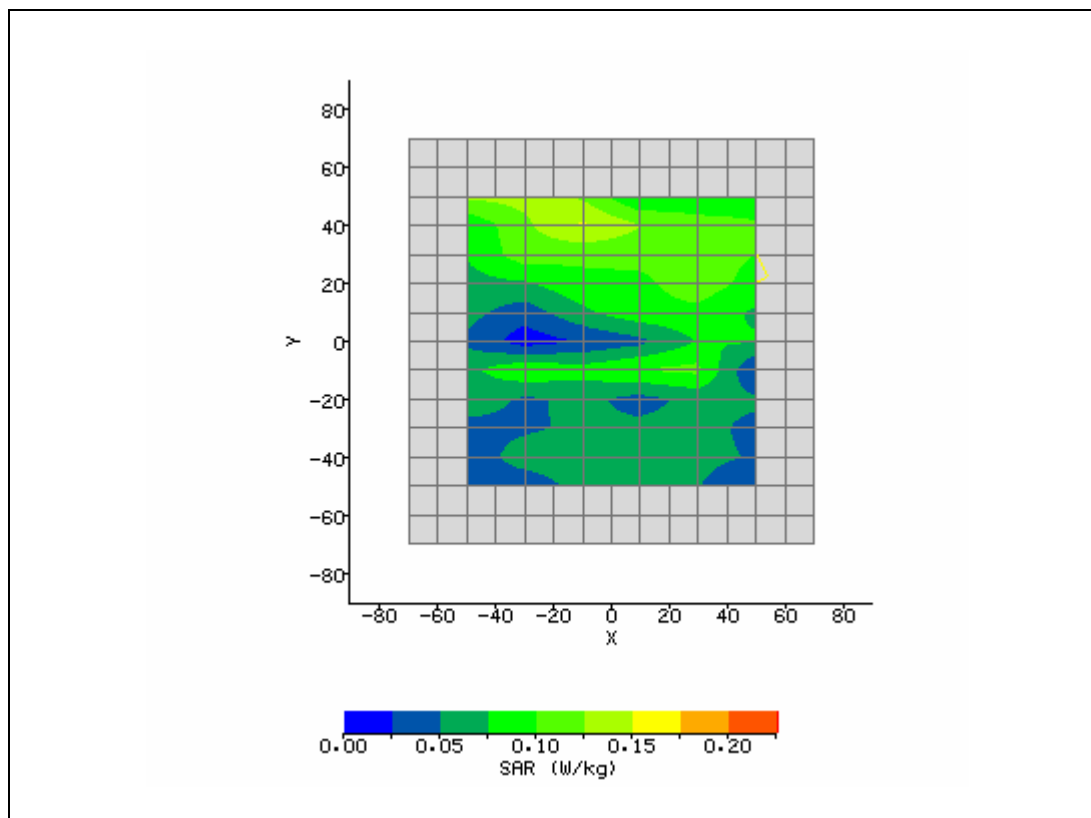


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	3/7/2007 10:54:26 AM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	5800
Device Under Test:	Sony	Relative Permittivity:	47.71
Relative Humidity:	30%	Conductivity:	5.875
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	20.00 mm
DUT Position:	Lap	Max SAR Y-axis Location:	41.00 mm
Antenna Configuration:	Chain A	Max E Field:	10.80 V/m
Test Frequency:	5745MHz	SAR 1g:	0.372 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	0.223 W/kg
Conversion Factors:	.583 / .583 / .583	SAR Start:	0.186 W/kg
Type of Modulation:		SAR End:	0.181 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-2.69 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	03/06/07
Input Power Level:	max	Extrapolation:	poly4

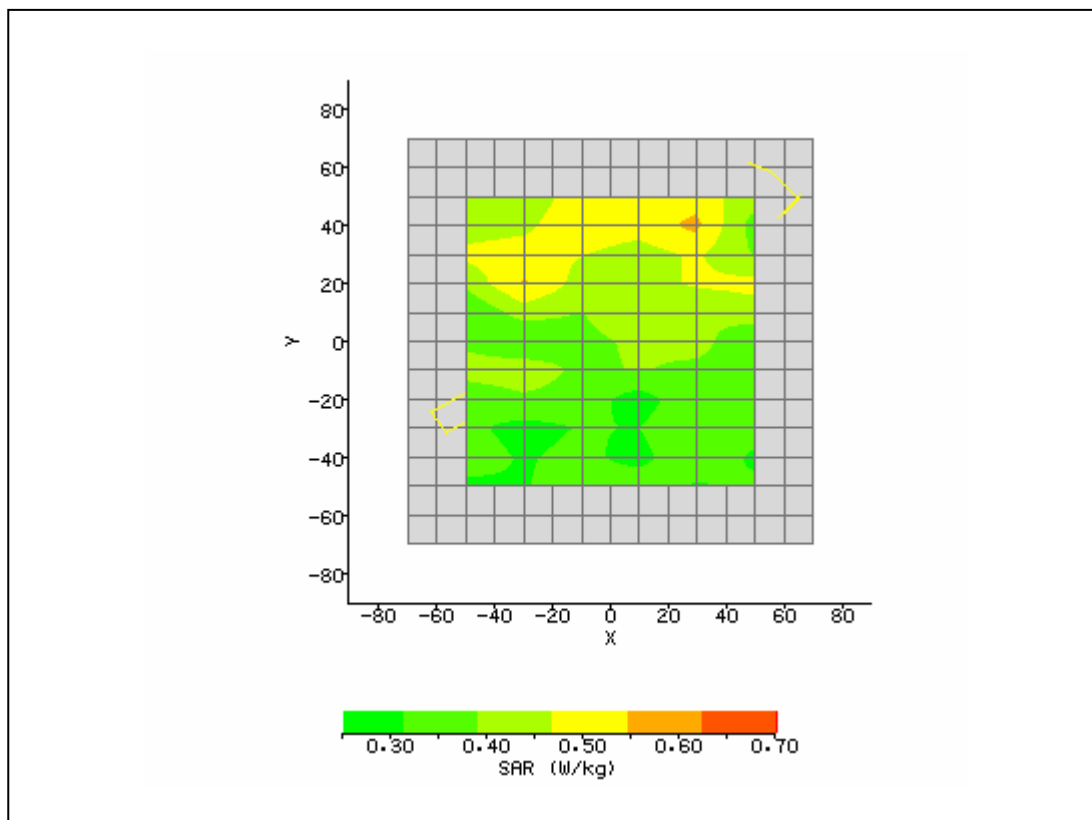


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	3/7/2007 1:41:38 PM	DUT Battery Model/No:	
Filename:	Left157B_batt_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	5800
Device Under Test:	Sony	Relative Permittivity:	47.71
Relative Humidity:	30%	Conductivity:	5.875
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	28.00 mm
DUT Position:	Lap	Max SAR Y-axis Location:	30.00 mm
Antenna Configuration:	Chain B	Max E Field:	4.10 V/m
Test Frequency:	5745MHz	SAR 1g:	0.043 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	0.023 W/kg
Conversion Factors:	.583 / .583 / .583	SAR Start:	0.005 W/kg
Type of Modulation:		SAR End:	0.005 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	4.51 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	03/06/07
Input Power Level:	max	Extrapolation:	poly4

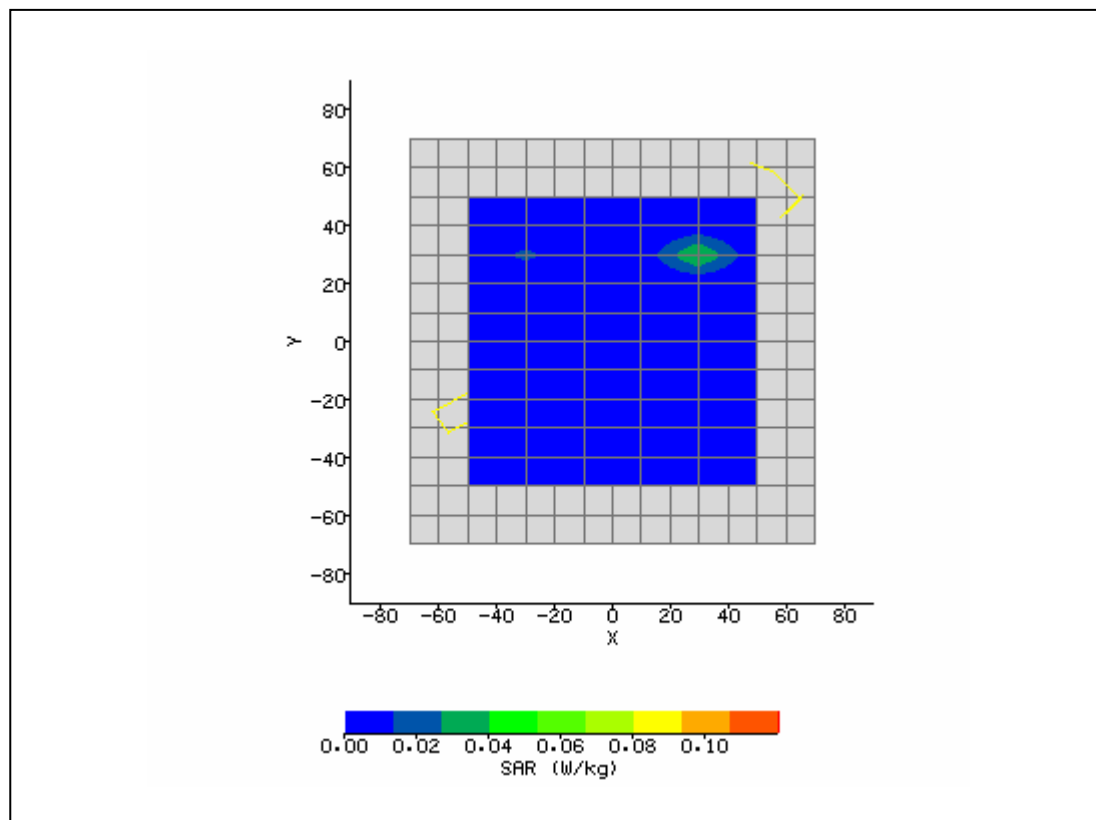


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	3/7/2007 11:18:52 AM	DUT Battery Model/No:	
Filename:	back149_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	5800
Device Under Test:	Sony	Relative Permittivity:	46.89
Relative Humidity:	30%	Conductivity:	6.044
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	10.00 mm
DUT Position:	Lap	Max SAR Y-axis Location:	50.00 mm
Antenna Configuration:	Chain A	Max E Field:	9.13 V/m
Test Frequency:	5785MHz	SAR 1g:	0.347 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	0.327 W/kg
Conversion Factors:	.583 / .583 / .583	SAR Start:	0.331 W/kg
Type of Modulation:		SAR End:	0.338 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	2.12 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	03/06/07
Input Power Level:	max	Extrapolation:	poly4

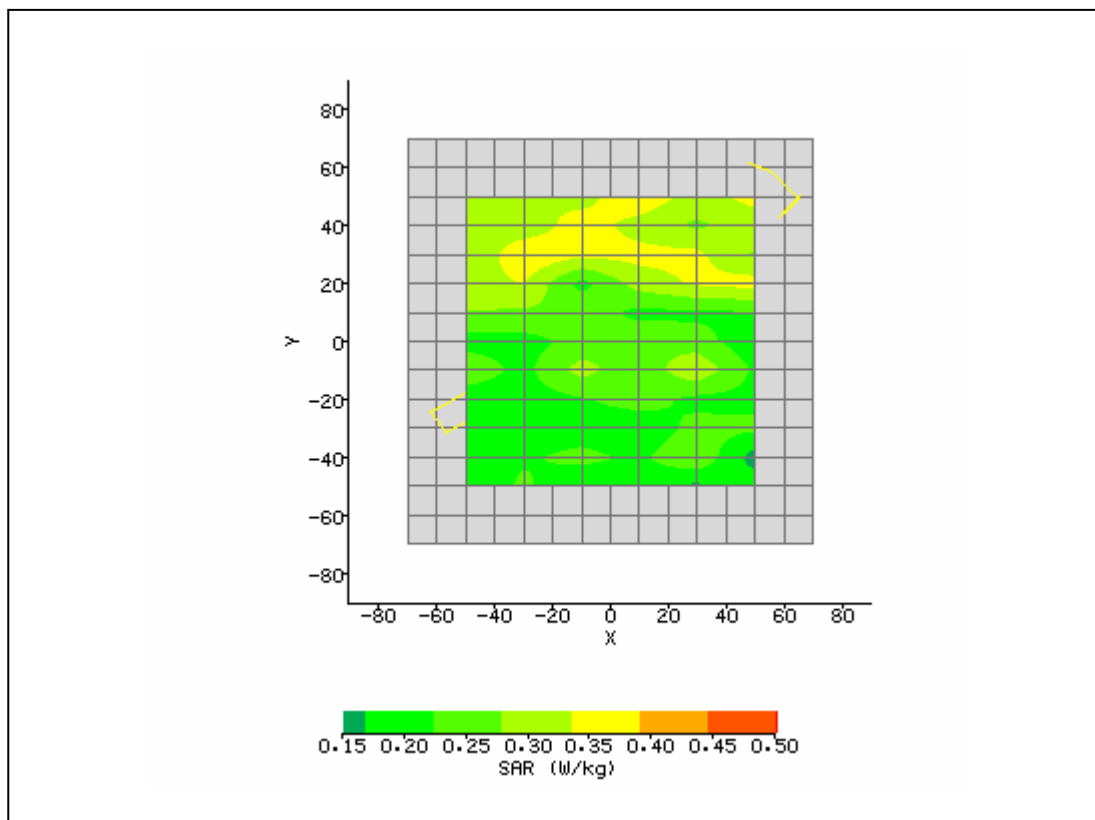


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	3/8/2007 1:58:04 PM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	5800
Device Under Test:	Sony	Relative Permittivity:	46.89
Relative Humidity:	30%	Conductivity:	6.044
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	0.00 mm
DUT Position:	Lap	Max SAR Y-axis Location:	35.00 mm
Antenna Configuration:	Chain B	Max E Field:	4.86 V/m
Test Frequency:	5785 MHz	SAR 1g:	0.053 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	0.044 W/kg
Conversion Factors:	.583 / .583 / .583	SAR Start:	0.044 W/kg
Type of Modulation:		SAR End:	0.045 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	3.58 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	03/08/07
Input Power Level:	max	Extrapolation:	poly4

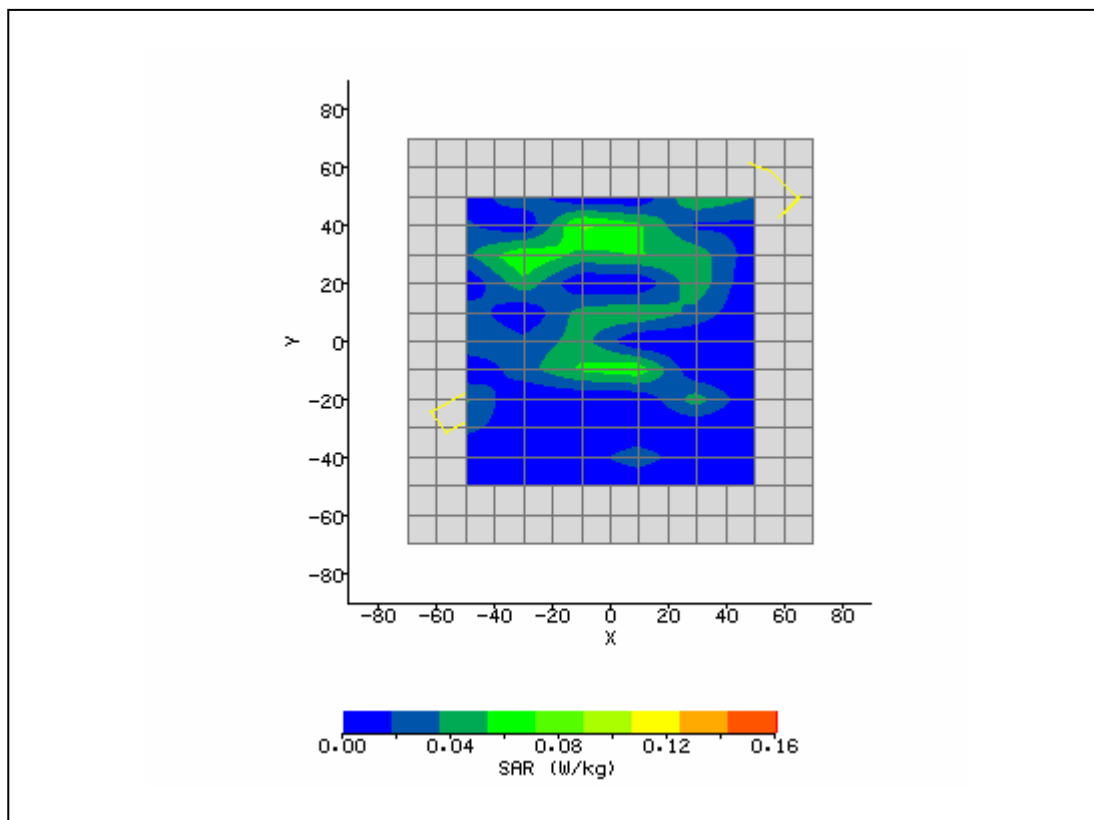


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	3/7/2007 11:42:54 AM	DUT Battery Model/No:	
Filename:	back157_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	5800
Device Under Test:	Sony	Relative Permittivity:	46.56
Relative Humidity:	30%	Conductivity:	6.106
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-10.00 mm
DUT Position:	Lap	Max SAR Y-axis Location:	38.00 mm
Antenna Configuration:	Chain A	Max E Field:	8.14 V/m
Test Frequency:	5825MHz	SAR 1g:	0.351 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	0.089 W/kg
Conversion Factors:	.583 / .583 / .583	SAR Start:	0.233 W/kg
Type of Modulation:		SAR End:	0.233 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.44 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	03/06/07
Input Power Level:	max	Extrapolation:	poly4

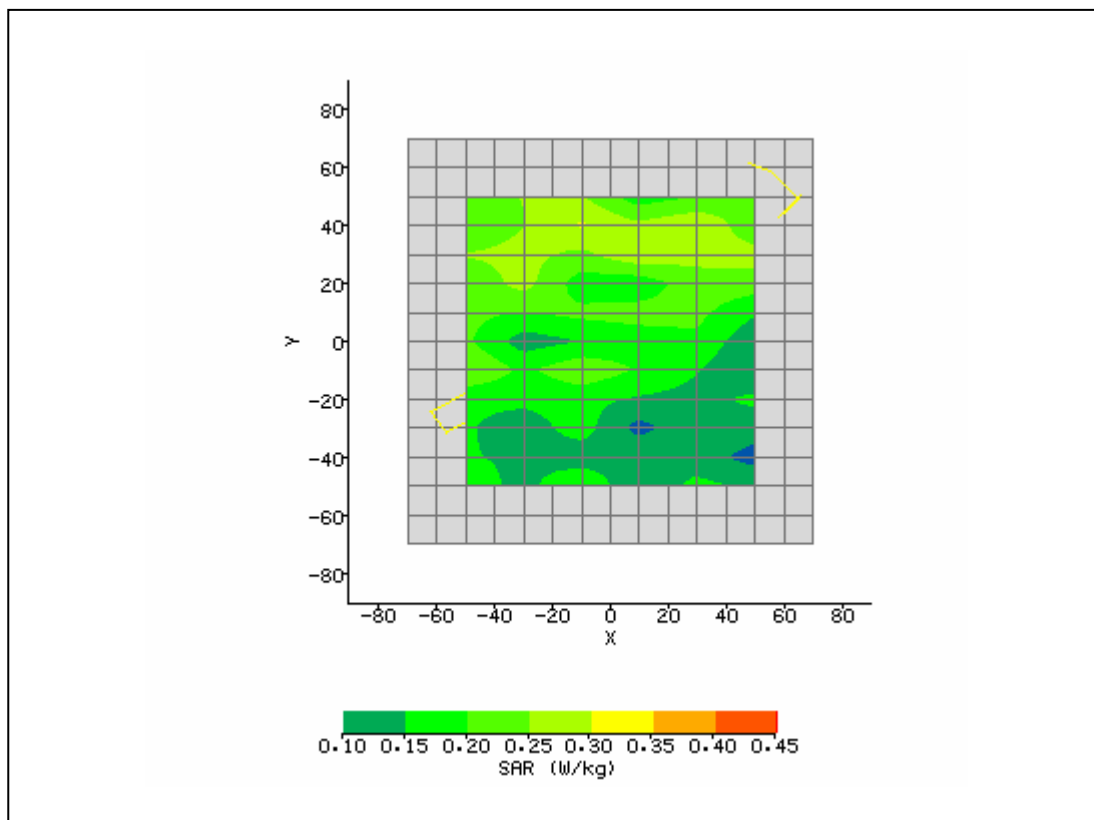

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	3/7/2007 1:21:09 PM	DUT Battery Model/No:	
Filename:	Left157A_batt_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	5800
Device Under Test:	Sony	Relative Permittivity:	46.56
Relative Humidity:	30%	Conductivity:	6.106
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	18.00 mm
DUT Position:	Lap	Max SAR Y-axis Location:	37.00 mm
Antenna Configuration:	Chain B	Max E Field:	3.42 V/m
Test Frequency:	5825MHz	SAR 1g:	0.032 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	0.014 W/kg
Conversion Factors:	.583 / .583 / .583	SAR Start:	0.013 W/kg
Type of Modulation:		SAR End:	0.013 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	4.51 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	03/06/07
Input Power Level:	max	Extrapolation:	poly4

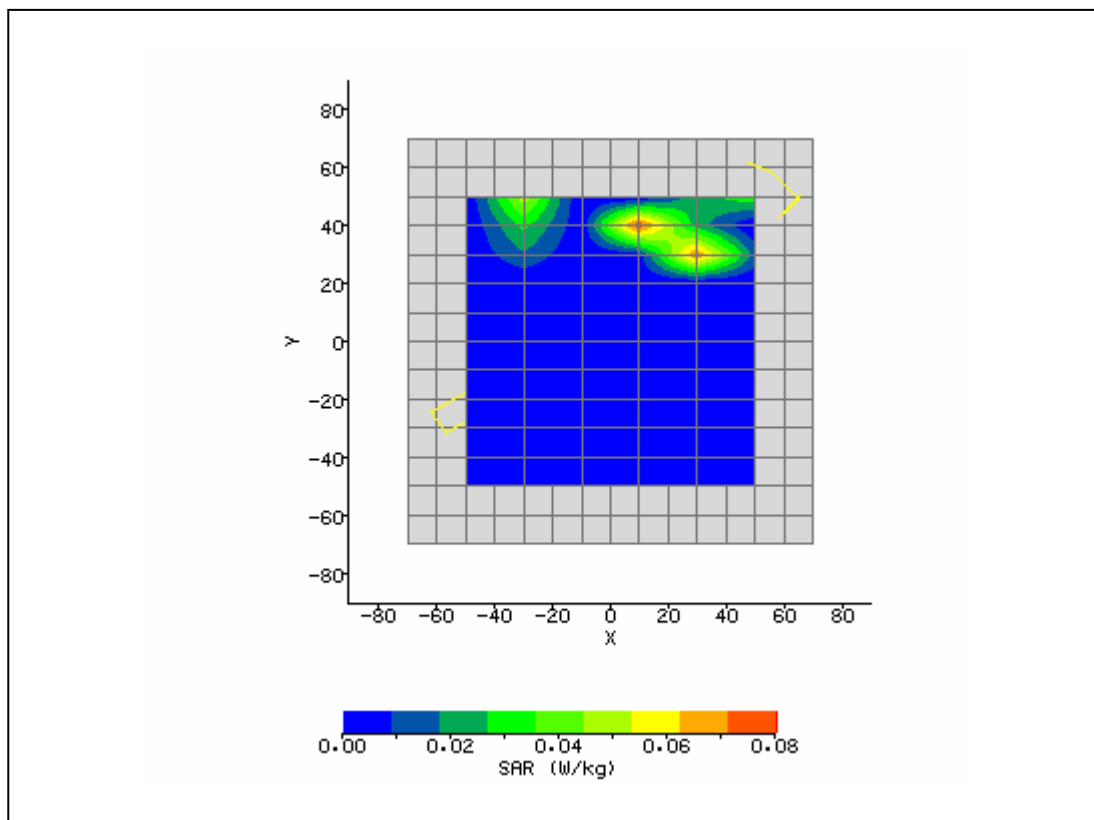

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	6/13/2007 1:18:52 PM	DUT Battery Model/No:	
Filename:	Lap149_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	5800
Device Under Test:	Sony-2	Relative Permittivity:	46.01
Relative Humidity:	30%	Conductivity:	5.875
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	10.00 mm
DUT Position:	back touch, Main	Max SAR Y-axis Location:	50.00 mm
Antenna Configuration:	Integral	Max E Field:	9.13 V/m
Test Frequency:	5745MHz	SAR 1g:	0.396 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	0.387 W/kg
Conversion Factors:	.583 / .583 / .583	SAR Start:	0.341 W/kg
Type of Modulation:	OFDM	SAR End:	0.343 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	4.11 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	06/13/07
Input Power Level:	max	Extrapolation:	poly4

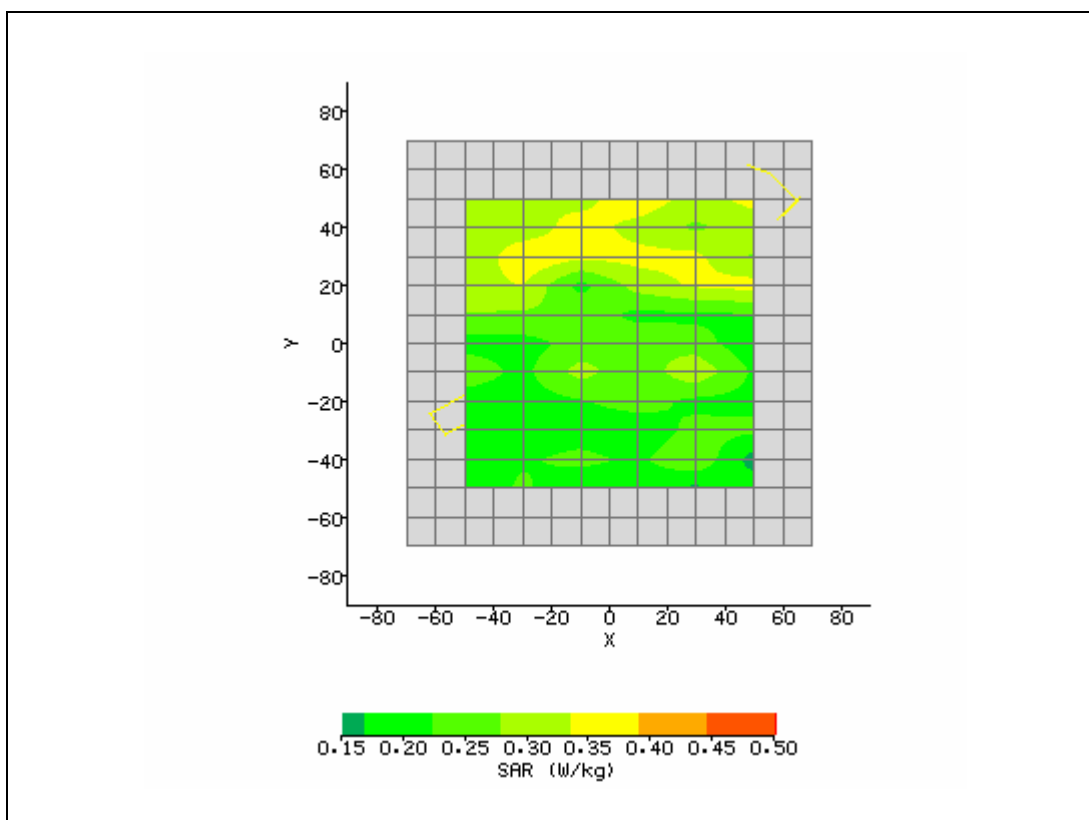

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	6/13/2007 2:36:44 PM	DUT Battery Model/No:	
Filename:	Lap157B_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.5°C	Liquid Simulant:	5800
Device Under Test:	Sony	Relative Permittivity:	46.89
Relative Humidity:	30%	Conductivity:	6.044
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	50.00 mm
DUT Position:	Lap touch, battery	Max SAR Y-axis Location:	50.00 mm
Antenna Configuration:	Integral	Max E Field:	5.08 V/m
Test Frequency:	5785MHz + 2480(BT)	SAR 1g:	0.077 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	0.103 W/kg
Conversion Factors:	.583 / .583 / .583	SAR Start:	0.059 W/kg
Type of Modulation:		SAR End:	0.060 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	2.23 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	06/13/07
Input Power Level:	max	Extrapolation:	poly4

