



FCC 47 CFR PART 15 SUBPART C

TEST REPORT

For

Personal Computer

Model: PCG-4T1L; PCG-4V1L

Trade Name: Sony

Issued to

**Sony Corporation
1-7-1 Konan Minato-ku, Tokyo, 108-0075, Japan**

Issued by

**Compliance Certification Services Inc.
No. 81-1, Lane 210, Pa-De 2nd Rd., Luchu Hsiang,
Taoyuan Shien, (338) Taiwan, R.O.C.
TEL: 886-3-324-0332
FAX: 886-3-324-5235
<http://www.ccsrf.com>
service@ccsrf.com**



Note: *This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF, A2LA, NIST or any government agencies. The test results in the report only apply to the tested sample.*



Revision History

| Rev. | Issue Date | Revisions | Effect Page | Revised By |
|------|---------------|---------------|-------------|------------|
| 00 | June 16, 2009 | Initial Issue | ALL | Jill Shiau |
| | | | | |
| | | | | |
| | | | | |



TABLE OF CONTENTS

| | | |
|----------|--|-----------|
| 1 | TEST RESULT CERTIFICATION..... | 4 |
| 2 | EUT DESCRIPTION | 5 |
| 3 | TEST METHODOLOGY | 6 |
| 3.1. | EUT CONFIGURATION | 6 |
| 3.2. | EUT EXERCISE | 6 |
| 3.3. | GENERAL TEST PROCEDURES | 6 |
| 3.4. | FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS | 7 |
| 3.5. | DESCRIPTION OF TEST MODES | 8 |
| 4 | INSTRUMENT CALIBRATION..... | 9 |
| 4.1. | MEASUREMENT EQUIPMENT USED | 9 |
| 4.2. | MEASUREMENT UNCERTAINTY | 10 |
| 5 | FACILITIES AND ACCREDITATIONS..... | 11 |
| 5.1. | FACILITIES..... | 11 |
| 5.2. | EQUIPMENT | 11 |
| 5.3. | TABLE OF ACCREDITATIONS AND LISTINGS..... | 12 |
| 6 | SETUP OF EQUIPMENT UNDER TEST..... | 13 |
| 6.1. | SETUP CONFIGURATION OF EUT | 13 |
| 6.2. | SUPPORT EQUIPMENT | 13 |
| 7 | FCC PART 15.247 REQUIREMENTS..... | 14 |
| 7.1. | 20dB BANDWIDTH | 14 |
| 7.2. | PEAK POWER..... | 18 |
| 7.3. | AVERAGE POWER..... | 20 |
| 7.4. | BAND EDGES MEASUREMENT | 21 |
| 7.5. | FREQUENCY SEPARATION | 30 |
| 7.6. | NUMBER OF HOPPING FREQUENCY | 33 |
| 7.7. | TIME OF OCCUPANCY (DWELL TIME)..... | 36 |
| 7.8. | SPURIOUS EMISSIONS..... | 48 |
| 7.9. | POWERLINE CONDUCTED EMISSIONS | 64 |
| | APPENDIX I RADIO FREQUENCY EXPOSURE..... | 67 |
| | APPENDIX II PHOTOGRAPHS OF TEST SETUP..... | 67 |



1 TEST RESULT CERTIFICATION

Applicant: Sony Corporation
1-7-1 Konan Minato-ku, Tokyo, 108-0075, Japan

Manufacturer: Quanta Computer Inc.
No. 188, Wen Hwa 2nd RD., Kuei Shan Hsiang,
Taoyuan Hsien, Taiwan, R.O.C.

Equipment Under Test: Personal Computer

Trade Name: Sony

Model: PCG-4T1L; PCG-4V1L

Date of Test: June 2 ~ 5, 2009

| APPLICABLE STANDARDS | |
|------------------------------|-------------------------|
| STANDARD | TEST RESULT |
| FCC 47 CFR Part 15 Subpart C | No non-compliance noted |

We hereby certify that:

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4: 2003 and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 15.207, 15.209, 15.247.

The test results of this report relate only to the tested sample EUT identified in this report.

Approved by:

David Wang
Director

Reviewed by:

Ethan Huang
Section Manager



2 EUT DESCRIPTION

| | | | |
|-----------------------------------|--|--------------|-------------|
| Product | Personal Computer | | |
| Trade Name | Sony | | |
| Model Number | PCG-4T1L; PCG-4V1L | | |
| Model/Type reference | 1. PCG-4T1L and PCG-4V1L share the same transmitter configuration (Notebook PC with WLAN FCC ID: PPDAR5B95 & BT: QDSBRCM1026) 2. PCG-4T1L is the representative case for final testing. | | |
| EUT Power Rating | 19V, 2A | | |
| Power Adapter | SONY | Model | VGP-AC19V39 |
| Power Adapter Power Rating | I/P: 100-240V, 50-60HZ, 1A O/P: 19V, 2A | | |
| Bluetooth Module | Broadcom (ALPS) | Model | UGPZ9 |
| Operating Frequency Range | 2402 MHz ~ 2480MHz | | |
| Transmit Power | 2.50 dBm (0.00178W) | | |
| Modulation Technique | FHSS, GFSK, $\pi/4$ -DQPSK, 8DPSK | | |
| Number of Channels | 79 Channels | | |
| Antenna Specification | -1.04dBi | | |
| Antenna Designation | PIFA Antenna | | |

Remark:

1. The sample selected for test was production product and was provided by manufacturer.
2. This submittal(s) (test report) is intended for FCC ID: **AK8PCG4T1L** filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.



3 TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4 (2003) and FCC CFR 47 Part 2, 15.207, 15.209 and 15.247.

3.1. EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

3.2. EUT EXERCISE

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

3.3. GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4 (2003) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.4 (2003).



3.4. FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

| MHz | MHz | MHz | GHz |
|----------------------------|---------------------|-----------------|------------------|
| 0.090 - 0.110 | 16.42 - 16.423 | 399.9 - 410 | 4.5 - 5.15 |
| ¹ 0.495 - 0.505 | 16.69475 - 16.69525 | 608 - 614 | 5.35 - 5.46 |
| 2.1735 - 2.1905 | 16.80425 - 16.80475 | 960 - 1240 | 7.25 - 7.75 |
| 4.125 - 4.128 | 25.5 - 25.67 | 1300 - 1427 | 8.025 - 8.5 |
| 4.17725 - 4.17775 | 37.5 - 38.25 | 1435 - 1626.5 | 9.0 - 9.2 |
| 4.20725 - 4.20775 | 73 - 74.6 | 1645.5 - 1646.5 | 9.3 - 9.5 |
| 6.215 - 6.218 | 74.8 - 75.2 | 1660 - 1710 | 10.6 - 12.7 |
| 6.26775 - 6.26825 | 108 - 121.94 | 1718.8 - 1722.2 | 13.25 - 13.4 |
| 6.31175 - 6.31225 | 123 - 138 | 2200 - 2300 | 14.47 - 14.5 |
| 8.291 - 8.294 | 149.9 - 150.05 | 2310 - 2390 | 15.35 - 16.2 |
| 8.362 - 8.366 | 156.52475 - | 2483.5 - 2500 | 17.7 - 21.4 |
| 8.37625 - 8.38675 | 156.52525 | 2655 - 2900 | 22.01 - 23.12 |
| 8.41425 - 8.41475 | 156.7 - 156.9 | 3260 - 3267 | 23.6 - 24.0 |
| 12.29 - 12.293 | 162.0125 - 167.17 | 3332 - 3339 | 31.2 - 31.8 |
| 12.51975 - 12.52025 | 167.72 - 173.2 | 3345.8 - 3358 | 36.43 - 36.5 |
| 12.57675 - 12.57725 | 240 - 285 | 3600 - 4400 | (²) |
| 13.36 - 13.41 | 322 - 335.4 | | |

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.



3.5. DESCRIPTION OF TEST MODES

The EUT (model: PCG-4T1L) had been tested under operating condition.

Test program used to control the EUT for staying in continuous transmitting mode was programmed.

During the preliminary test, GFSK, $\pi/4$ -QPSK & 8DPSK with DH1 were pre-tested and found that 8DPSK emits the highest output power. Then the tests were carried on with DH1 compare to DH3 & DH5 and found that 8DPSK with DH5 emit the highest output power, and therefore had been tested under operating condition.

Following channels were selected for the for radiated emission testing only as listed below:

| Tested Channel | Modulation Type | Packet Type | Date Rate |
|----------------|-----------------|-------------|-----------|
| Low, Mid, High | GFSK | DH 5 | 1 |
| Low, Mid, High | 8DPSK | DH 5 | 3 |

After verification, all tests were carried out with the worst case test modes as shown below except radiated spurious emission below 1GHz, which worst case was in normal link mode only.



4 INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

4.1. MEASUREMENT EQUIPMENT USED

Equipment Used for Emissions Measurement

Remark: Each piece of equipment is scheduled for calibration once a year.

| Conducted Emissions Test Site | | | | |
|-------------------------------|--------------|--------|---------------|-----------------|
| Name of Equipment | Manufacturer | Model | Serial Number | Calibration Due |
| Spectrum Analyzer | Agilnet | E4446A | MY48250064 | 10/28/2009 |
| Spectrum Analyzer | R&S | FSEB | 825829/011 | 10/29/2009 |
| Power Meter | Agilent | E4416A | GB41291611 | 04/03/2010 |

| 3M Chamber Test Site | | | | |
|----------------------|--|----------|---------------|-----------------|
| Name of Equipment | Manufacturer | Model | Serial Number | Calibration Due |
| Spectrum Analyzer | Agilnet | E4446A | MY48250064 | 10/28/2009 |
| Spectrum Analyzer | R&S | FSEB | 825829/011 | 10/29/2009 |
| Pre-Amplifier | HP | 8447D | 2944A06530 | 12/31/2009 |
| Pre-Amplifier | HP | 8449B | 3008A01738 | 04/17/2010 |
| EMI Test Receiver | SCHAFFNER | SCR 3501 | 436 | 01/21/2010 |
| Loop Antenna | EMCO | 6502 | 2356 | 05/28/2010 |
| Bilog Antenna | SCHWAZBECK | VULB9160 | 3084 | 09/08/2009 |
| Horn Antenna | EMCO | 3115 | 00022250 | 05/08/2010 |
| Turn Table | CCS | CC-T-1F | N/A | N.C.R |
| Antenna Tower | CCS | CC-A-1F | N/A | N.C.R |
| Controller | CCS | CC-C-1F | N/A | N.C.R |
| Test S/W | LabVIEW 6.1 (Wugu Chamber EMI Teat V1_4.5.3) | | | |

Remark: The measurement uncertainty is less than +/-4.0235dB (30MHz ~ 1GHz), +/-3.0958dB (Above 1GHz) which is evaluated as per the NAMAS NIS 81 and CISPR/A/291/CDV.



| Powerline Conducted Emissions Test Site | | | | |
|---|------------------|-----------------------------|---------------|-----------------|
| Name of Equipment | Manufacturer | Model | Serial Number | Calibration Due |
| EMI Test Receiver | R&S | ESCS30 | 845552/030 | 05/18/2010 |
| LISN | R&S | ENV216 | 100074 | 12/09/2009 |
| LISN | FCC | FCC-LISN-50/ 250-16-2-07 | 06013 | 10/12/2009 |
| Test S/W | CCS-3A1-CE-Luchu | | | |

Remark: The measurement uncertainty is less than +/- 1.7806dB, which is evaluated as per the NAMAS NIS 81 and CISPR/A/291/CDV.

4.2. MEASUREMENT UNCERTAINTY

For the test methods, according to the present document, the measurement uncertainty figures shall be calculated in accordance with TR 100 028-1 [2] and shall correspond to an expansion factor (coverage factor) $k = 1,96$ or $k = 2$ (which provide confidence levels of respectively 95 % and 95,45 % in the case where the distributions characterizing the actual measurement uncertainties are normal (Gaussian)).

Table 6 is based on such expansion factors.

Table 6: Maximum measurement uncertainty

| Parameter | Uncertainty |
|-------------------------------|-------------------------|
| RF frequency | +/-1 * 10 ⁻⁵ |
| Total RF power conducted | +/- 1,5 dB |
| RF power density, conducted | +/- 3 dB |
| Spurious emissions, conducted | +/- 3 dB |
| All emissions, radiated | +/- 6 dB |
| Humidity | +/- 5 % |
| Temperature | +/- 1°C |
| DC and low frequency voltages | +/- 3% |



5 FACILITIES AND ACCREDITATIONS

5.1. FACILITIES

All measurement facilities used to collect the measurement data are located at

- No.199, Chunghsen Road, Hsintien City, Taipei Hsien, Taiwan, R.O.C.
Tel: 886-2-2217-0894 / Fax: 886-2-2217-1029

- No.11, Wugong 6th Rd., Wugu Industrial Park, Taipei Hsien 248, Taiwan
Tel: 886-2-2299-9720 / Fax: 886-2-2298-4045

- No. 81-1, Lane 210, Pa-De 2nd Rd., Luchu Hsiang, Taoyuan Shien, (338) Taiwan, R.O.C.
Tel: 886-3-324-0332 / Fax: 886-3-324-5235

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 (2003) and CISPR Publication 22.

5.2. EQUIPMENT

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5.3. TABLE OF ACCREDITATIONS AND LISTINGS

| Country | Agency | Scope of Accreditation | Logo |
|---------|-----------------|--|--|
| USA | A2LA | CFR 47, FCC Part15/18, CISPR 22, EN 55022, ICES-003, AS/NZS CISPR 22, VCCI V-3, EN 55011, CISPR 11, IEC/EN 61000-4-2/3/4/5/6/8/11, EN 61000-6-1/2/3/4, EN 55024, CISPR 24, AS/NZS CISPR 24, AS/NZS 61000.6.2, EN 55014-1/-2, ETSI EN 300 386 v1.3.2/v1.3.3, IEC/EN 61000-3-2, AS/NZS 61000.3.2, IEC/EN 61000-3-3, AS/NZS 61000.3.3 |  ACCREDITED No. 0824-01 |
| USA | FCC MRA | 3/10 meter Open Area Test Sites to perform FCC Part 15/18 measurements |  TW1026 |
| Japan | VCCI | 3/10 meter Open Area Test Sites and conducted test sites to perform radiated/conducted measurements | VCCI R-2882/2541/2798/725/1868 C-402/747/912 T-321/325 |
| Taiwan | TAF | EN 55014-1, CISPR 14, CNS 13781-1, EN 55013, CISPR 13, CNS 13439, EN 55011, CISPR 11, CNS 13803, PLMN09, IS2045-0, LP0002 FCC Part 27/90, Part 15B/C/D/E, RSS-192/193/210/310 ETSI EN 300 328/ 300 220-1/ 300 220-2/ 301 893/ 301 489-01/ 301 489-03/ 301 489-07 / 301 489-17/ 300 440-1/ 300 440-2 AS/NZS 4268, AS/NZS 4771 CISPR 22, EN 55022, CNS 13438, AS/NZS CISPR 22, VCCI, IEC/EN 61000-4-2/3/4/5/6/8/11, CNS 14676-2/3/4/5/6/8, CNS 14934-2/3, CNS 13783-1, CNS 13439, CNS 13803 |  ilac-MRA TAF Testing Laboratory 0363 |
| Taiwan | BSMI | CNS 13438, CNS 13783-1, CNS 13439, CNS 14115 | SL2-IS-E-0014 / IN-E-0014 /A1-E-0014 /R1-E-0014 /R2-E-0014 /L1-E-0014 |
| Canada | Industry Canada | RSS212, Issue 1 |  IC 2324C-3 IC 2324C-5 |

Note: No part of this report may be used to claim or imply product endorsement by A2LA, TAF or other government agency.



6 SETUP OF EQUIPMENT UNDER TEST

6.1. SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

6.2. SUPPORT EQUIPMENT

For Conducted Measurement & Radiated

| No. | Device Type | Brand | Model | Series No. | FCC ID | Data Cable | Power Cord |
|-----|-------------|-------|-------|------------|--------|------------|------------|
| | N/A | | | | | | |

****No any support equipment during the test.**

For Powerline Measurement

| No. | Equipment | Model No. | Serial No. | FCC ID | Trade Name | Data Cable | Power Cord |
|-----|---------------------|------------|------------------------------|---------|------------|--------------------------------|------------------|
| 1 | LCD Monitor | 2408WFB | CN-0NN792-74261-84 9-15JS | FCC DoC | DELL | D-SUB Cable: Shielded, 1.8m | Unshielded, 1.8m |
| 2 | USB Mouse | MO19UCA | 020509272 | FCC DoC | HP | Unshielded, 1.8m | N/A |
| 3 | Multimedia Headset | CJC-5258MV | 0507106322 | FCC DoC | CJC | Unshielded, 1.8m | N/A |
| 4 | USB 2.0 Flash Drive | U172P | N/A | FCC DoC | PQI | Unshielded, 1.8m | N/A |

Remark: Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.




7 FCC PART 15.247 REQUIREMENTS

7.1. 20dB BANDWIDTH

LIMIT

None; for reporting purposes only.

TEST CONFIGURATION



TEST PROCEDURE

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW=10kHz, VBW = 30kHz, Span = 2.5MHz, Sweep = auto. For GFSK Mode.
4. Set the spectrum analyzer as RBW=30kHz, VBW = 100kHz, Span = 2.5MHz, Sweep = auto. For 8DPSK Mode.
5. Mark the peak frequency and 20dB (upper and lower) frequency.
6. Repeat until all the rest channels are investigated.

TEST RESULTS

No non-compliance noted

TEST DATA

For GFSK Mode

| Channel | Frequency (MHz) | 20dB Bandwidth (MHz) |
|---------|-----------------|----------------------|
| Low | 2402 | 0.960 |
| Mid | 2441 | 0.955 |
| High | 2480 | 0.963 |

For 8DPSK Mode


| Channel | Frequency (MHz) | 20dB Bandwidth (MHz) |
|---------|-----------------|----------------------|
| Low | 2402 | 1.311 |
| Mid | 2441 | 1.311 |
| High | 2480 | 1.316 |



Test Plot


GFSK Mode

20dB Bandwidth (CH Low)

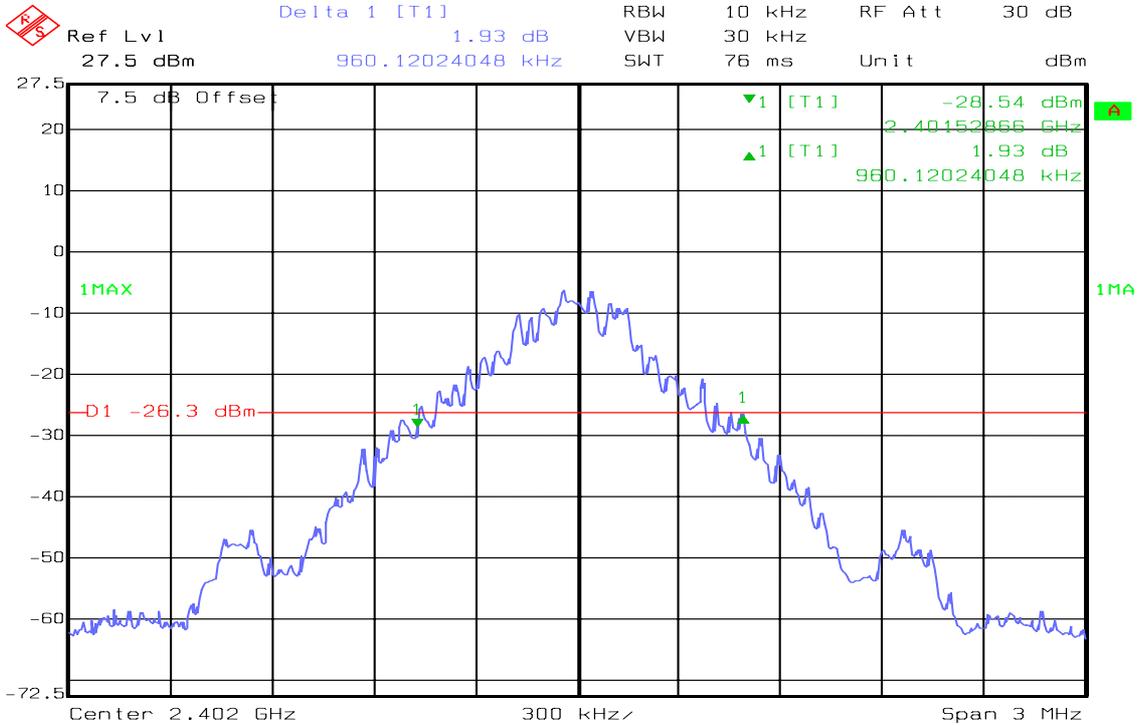

Date: 05.JUN.2009 10:33:55


20dB Bandwidth (CH Mid)

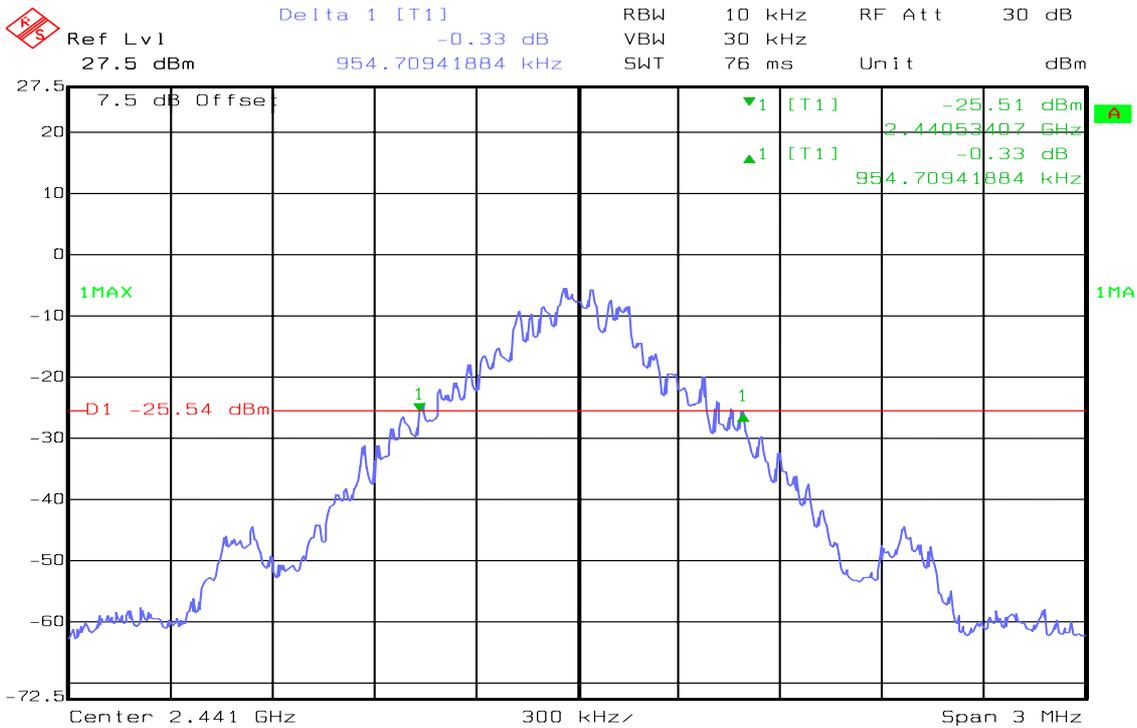

Date: 05.JUN.2009 10:35:57




20dB Bandwidth (CH High)

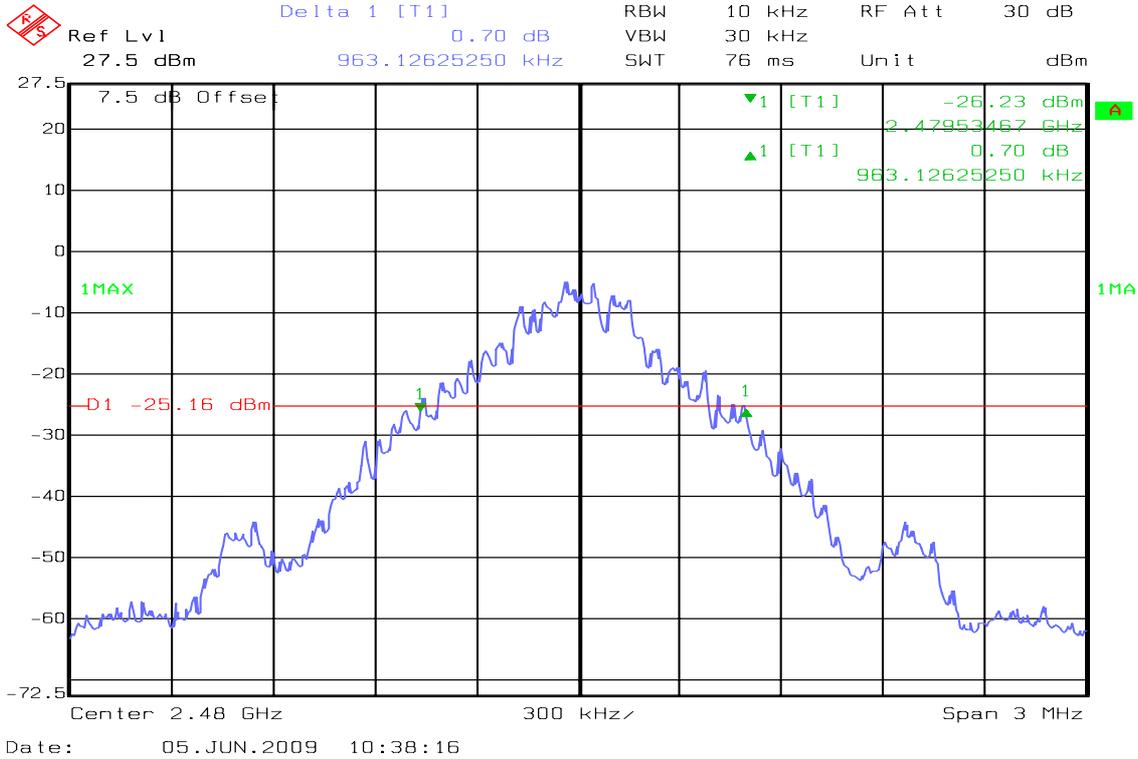


8DPSK Mode

20dB Bandwidth (CH Low)

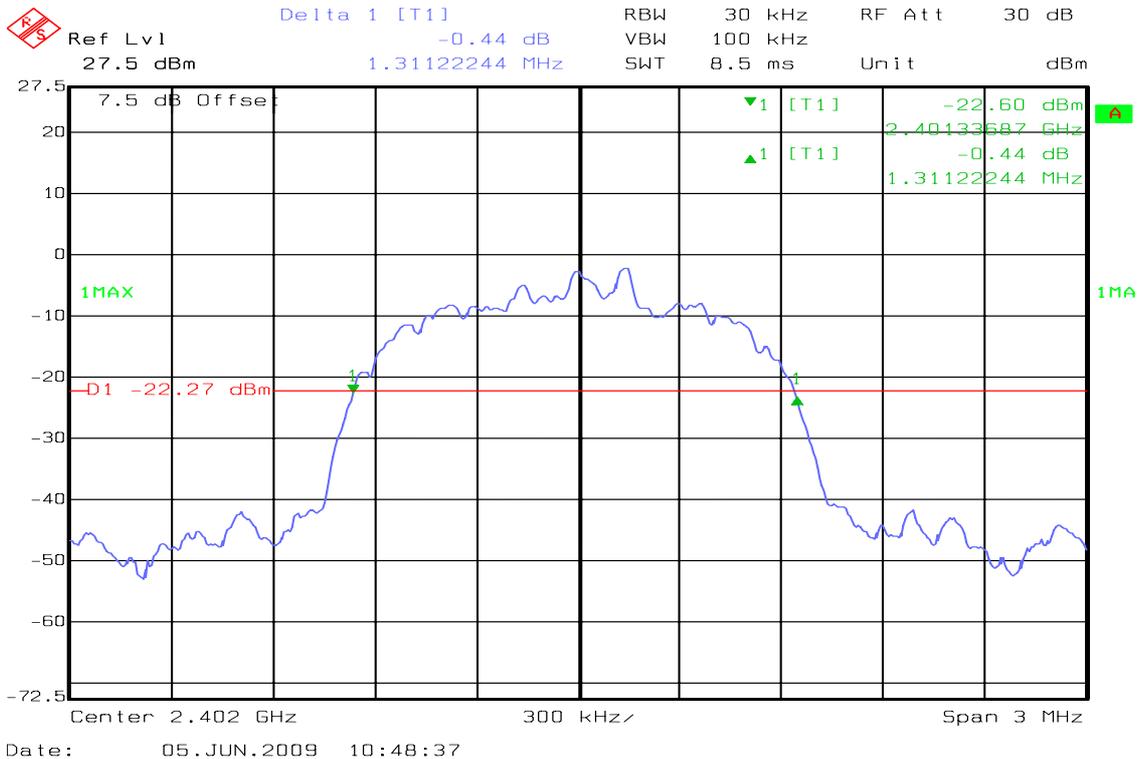



20dB Bandwidth (CH Mid)

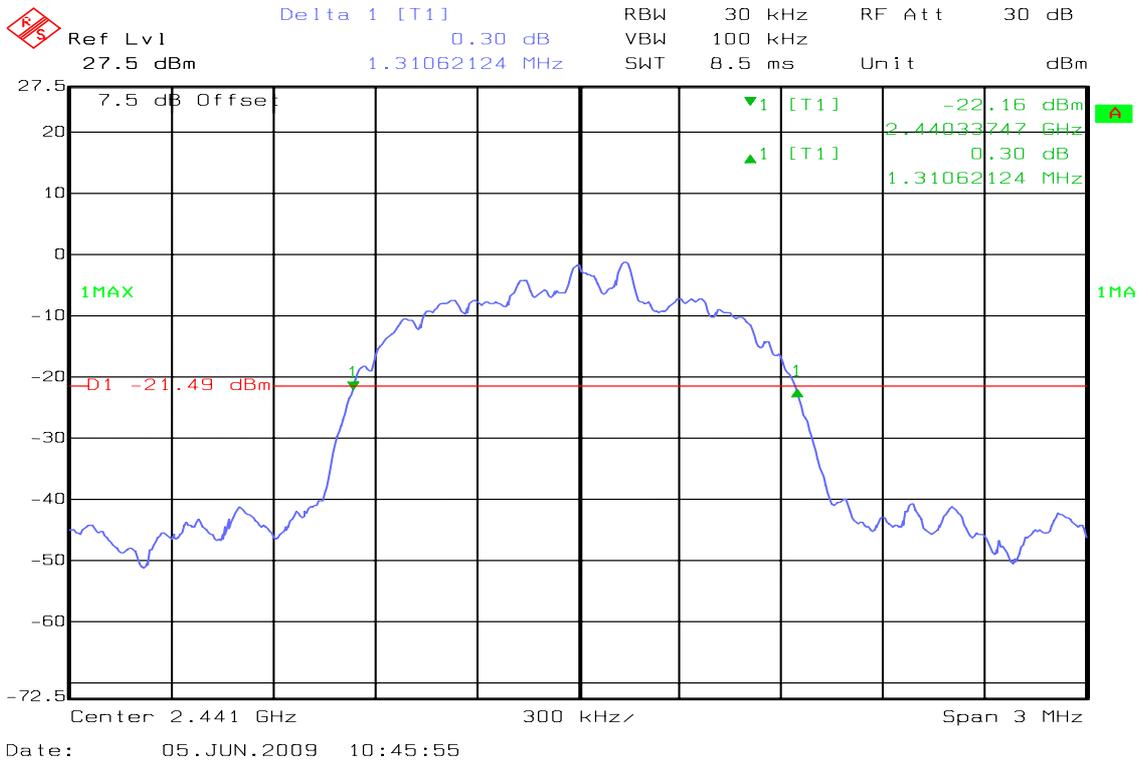

20dB Bandwidth (CH High)




7.2. PEAK POWER

LIMIT

According to §15.247, the maximum peak output power of the intentional radiator shall not exceed the following:

1. According to §15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.
2. According to §15.247(b)(3), for systems using digital modulation in the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz: 1 watt.
3. According to §15.247(b) (4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST CONFIGURATION

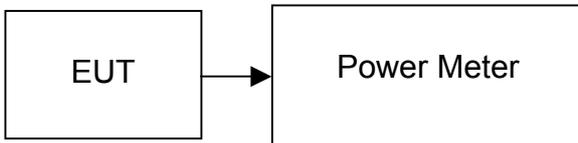

TEST PROCEDURE

The transmitter output is connected to the Power Meter. The Power Meter is set to the peak power detection.

TEST RESULTS

No non-compliance noted



TEST DATA

GFSK Mode

| Channel | Frequency (MHz) | Output Power (dBm) | Output Power (W) | Limit (W) | Test Result |
|---------|-----------------|--------------------|------------------|-----------|-------------|
| Low | 2402 | -0.60 | 0.00087 | 1 | PASS |
| Mid | 2441 | 0.14 | 0.00103 | | PASS |
| High | 2480 | 0.50 | 0.00112 | | PASS |

8DPSK

| Channel | Frequency (MHz) | Output Power (dBm) | Output Power (W) | Limit (W) | Test Result |
|---------|-----------------|--------------------|------------------|-----------|-------------|
| Low | 2402 | 1.51 | 0.00142 | 1 | PASS |
| Mid | 2441 | 2.27 | 0.00169 | | PASS |
| High | 2480 | 2.50 | 0.00178 | | PASS |




7.3. AVERAGE POWER

LIMIT

None; for reporting purposes only.

TEST CONFIGURATION



TEST PROCEDURE

The transmitter output is connected to the Power Meter. The Power Meter is set to the average power detection.

TEST RESULTS

No non-compliance noted

TEST DATA

GFSK

| Channel | Frequency (MHz) | Output Power (dBm) | Output Power (W) |
|---------|-----------------|--------------------|------------------|
| Low | 2402 | -1.97 | 0.00064 |
| Mid | 2441 | -1.25 | 0.00075 |
| High | 2480 | -0.82 | 0.00083 |

8DPSK


| Channel | Frequency (MHz) | Output Power (dBm) | Output Power (W) |
|---------|-----------------|--------------------|------------------|
| Low | 2402 | -1.60 | 0.00069 |
| Mid | 2441 | -0.80 | 0.00083 |
| High | 2480 | -0.86 | 0.00082 |

7.4. BAND EDGES MEASUREMENT

LIMIT

According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

TEST CONFIGURATION

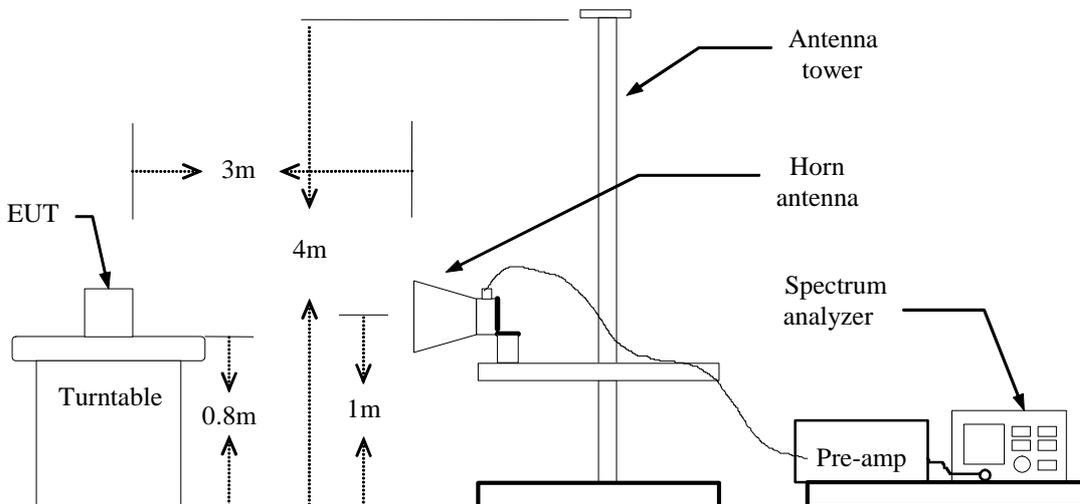

TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
 - (b) AVERAGE: RBW=1MHz / VBW=1MHz / Sweep=AUTO
5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.

TEST RESULTS

No non-compliance noted



TEST DATA

Refer to attach spectrum analyzer data chart.

Band Edges (Bluetooth GFSK / CH Low)


Detector mode: Peak

Polarity: Vertical

Agilent 17:30:39 Jun 2, 2009

R T

Mkr1 2.390 00 GHz
41.24 dBμV

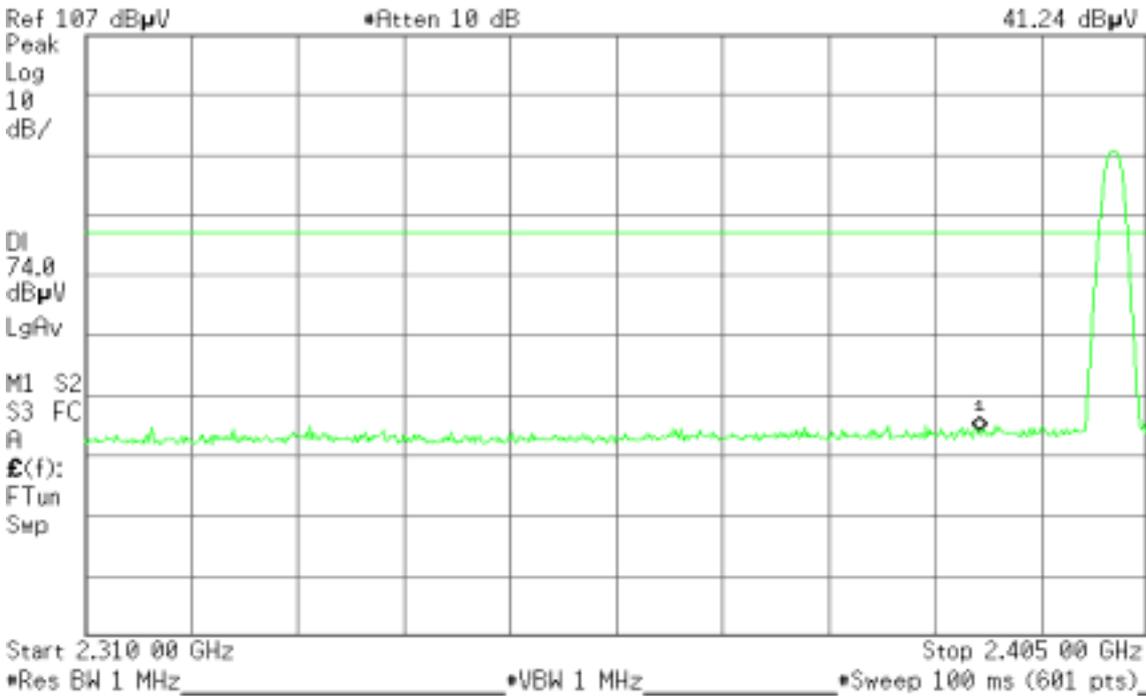


Detector mode: Average

Polarity: Vertical

Agilent 17:31:14 Jun 2, 2009

R T

Mkr1 2.390 00 GHz
28.12 dBμV

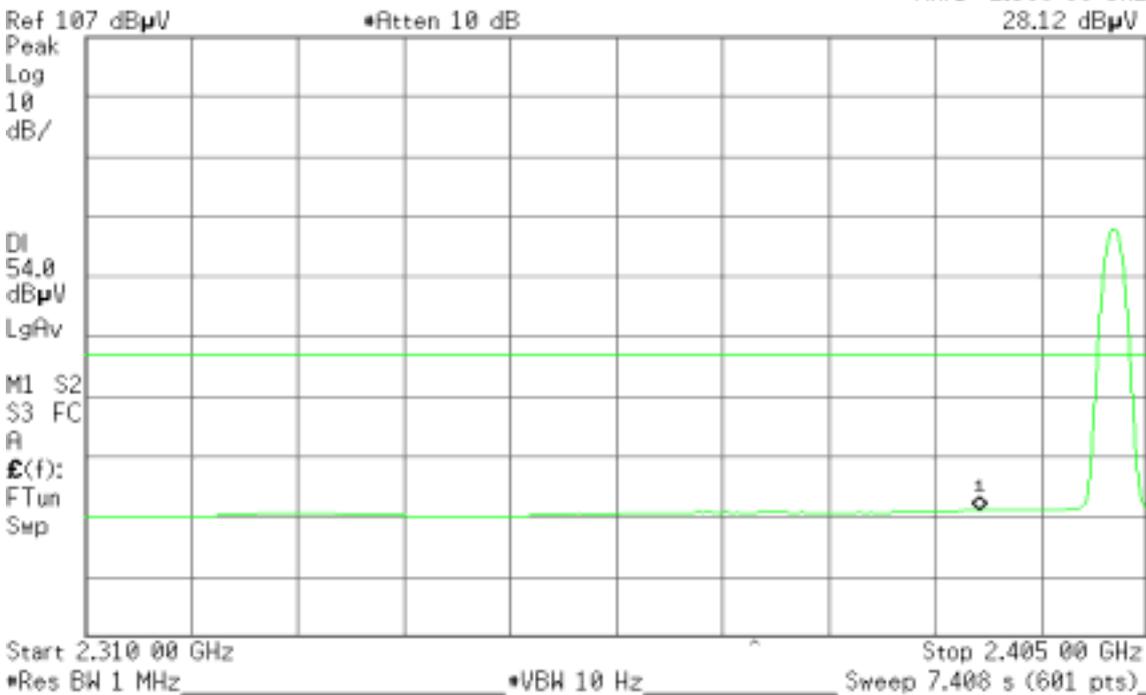




Detector mode: Peak

Polarity: Horizontal

Agilent 17:33:31 Jun 2, 2009

R T

Mkr1 2.390 00 GHz
41.17 dB μ V

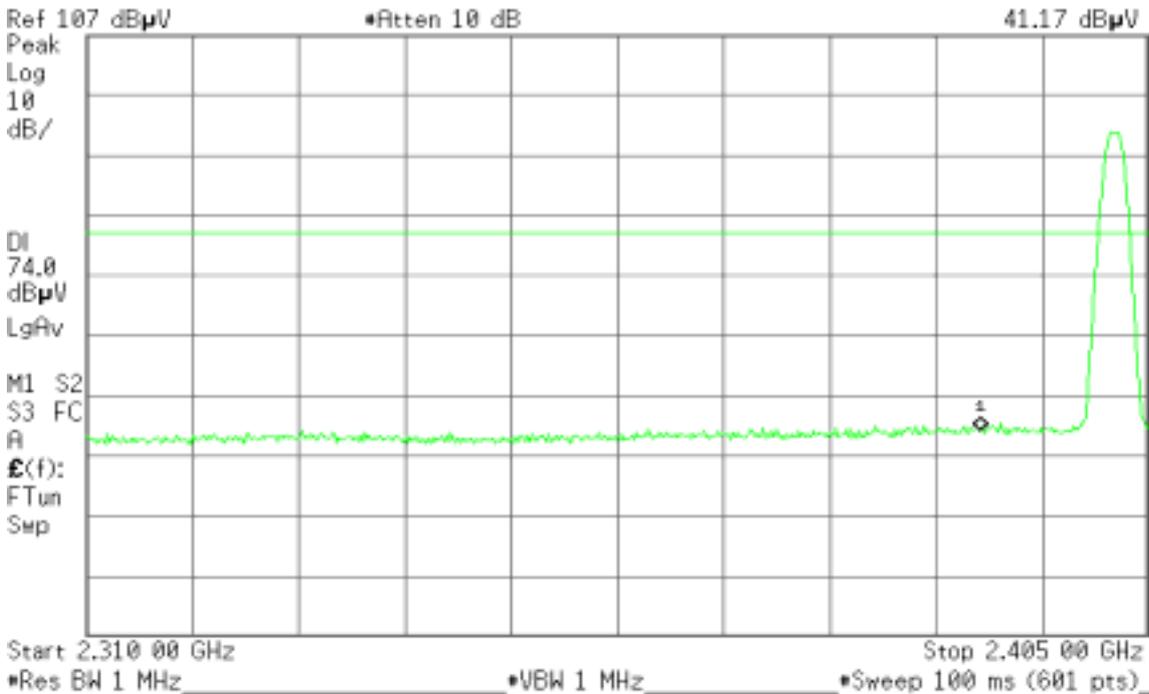


Detector mode: Average

Polarity: Horizontal

Agilent 17:34:10 Jun 2, 2009

R T

Mkr1 2.390 00 GHz
28.76 dB μ V

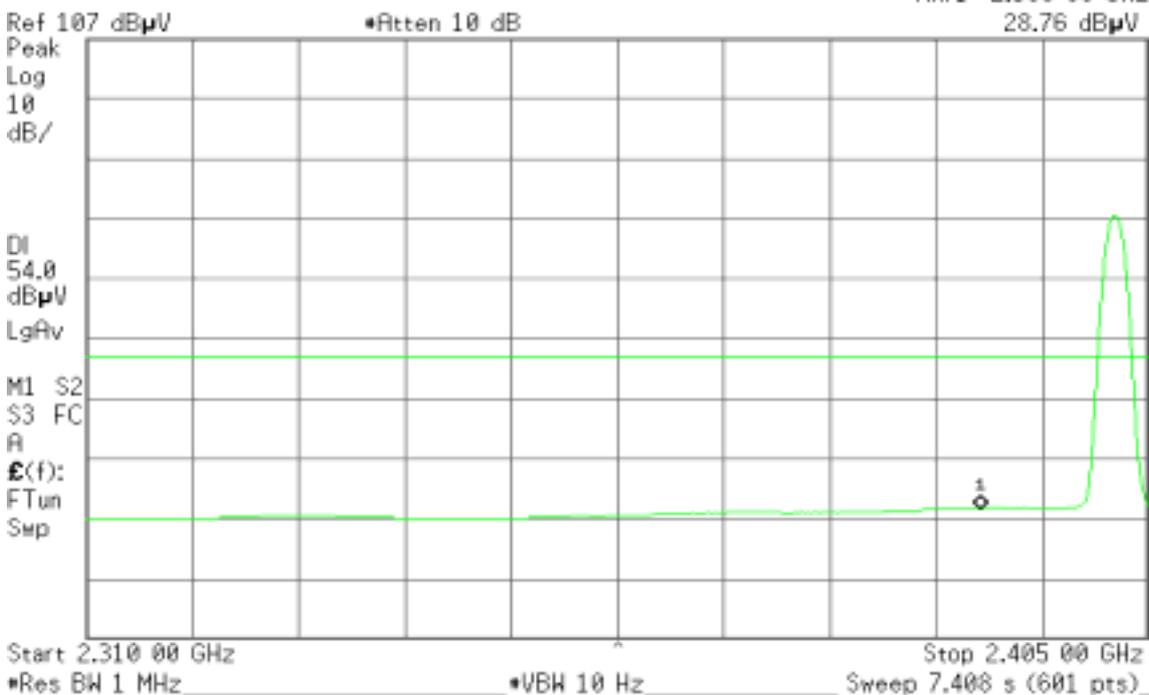



Band Edges (Bluetooth GFSK / CH High)


Detector mode: Peak

Polarity: Vertical

Agilent 17:59:54 Jun 2, 2009

R T

Mkr2 2.492 43 GHz
45.18 dBµV

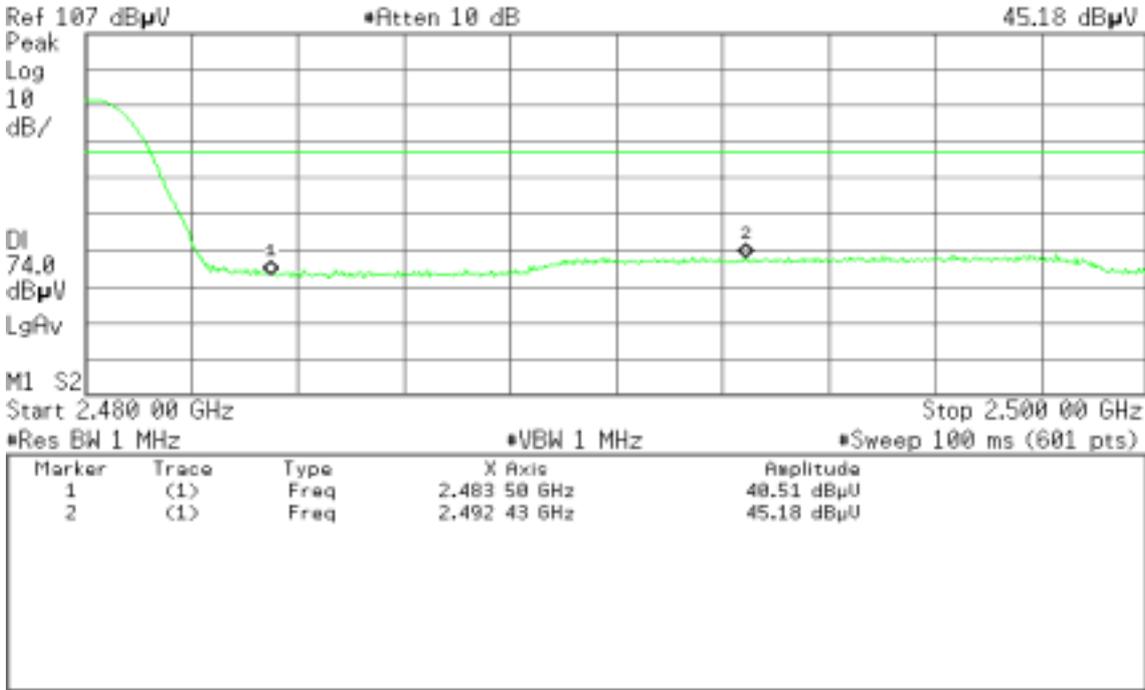


Detector mode: Average

Polarity: Vertical

Agilent 18:00:37 Jun 2, 2009

R T

Mkr2 2.496 70 GHz
29.83 dBµV

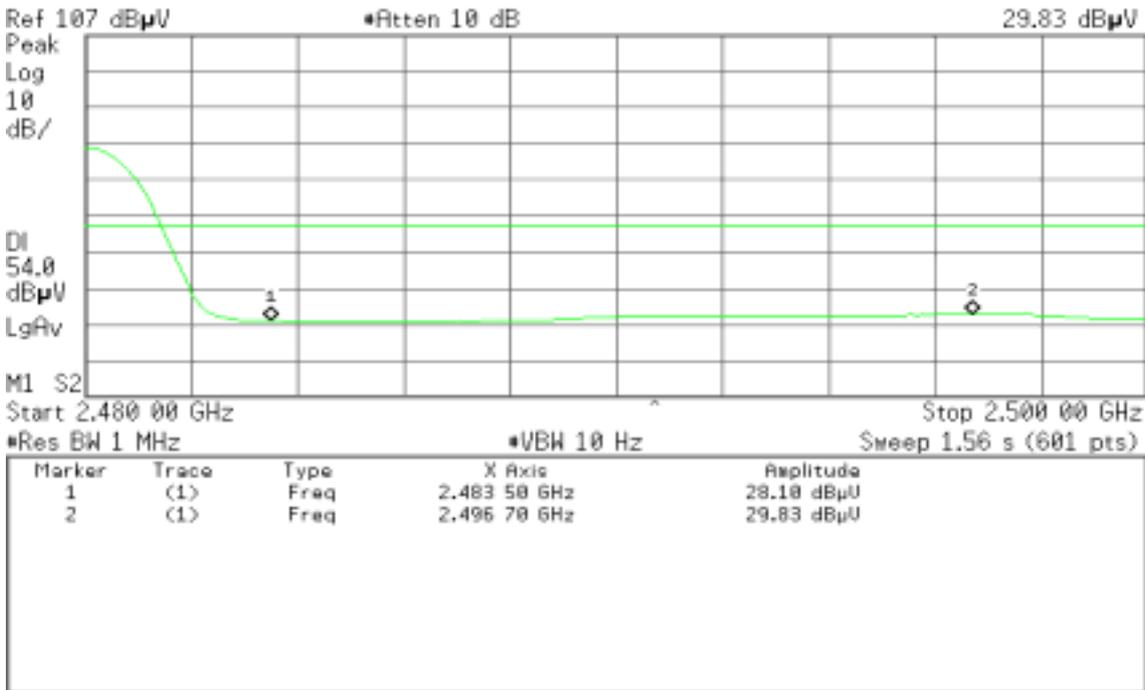




Detector mode: Peak

Polarity: Horizontal

Agilent 17:56:52 Jun 2, 2009

R T

Mkr2 2.494 10 GHz
42.74 dBµV

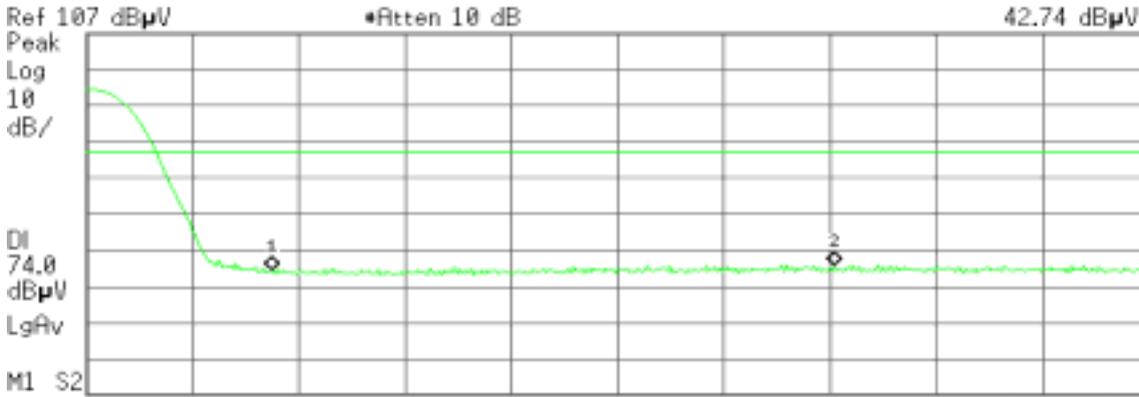

Start 2.480 00 GHz Stop 2.500 00 GHz
Res BW 1 MHz VBW 1 MHz Sweep 100 ms (601 pts)

| Marker | Trace | Type | X Axis | Amplitude |
|--------|-------|------|--------------|------------|
| 1 | (1) | Freq | 2.483 50 GHz | 41.51 dBµU |
| 2 | (1) | Freq | 2.494 10 GHz | 42.74 dBµU |


Detector mode: Average

Polarity: Horizontal

Agilent 17:57:21 Jun 2, 2009

R T

Mkr2 2.494 10 GHz
29.10 dBµV

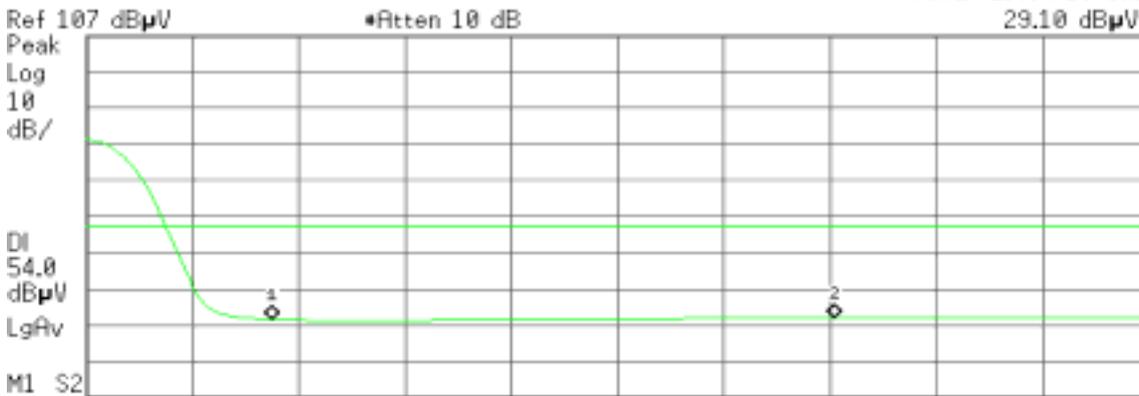

Start 2.480 00 GHz Stop 2.500 00 GHz
Res BW 1 MHz VBW 10 Hz Sweep 1.56 s (601 pts)

| Marker | Trace | Type | X Axis | Amplitude |
|--------|-------|------|--------------|------------|
| 1 | (1) | Freq | 2.483 50 GHz | 28.64 dBµU |
| 2 | (1) | Freq | 2.494 10 GHz | 29.10 dBµU |



Band Edges (Bluetooth 8DPSK / CH Low)


Detector mode: Peak

Polarity: Vertical

Agilent 17:38:53 Jun 2, 2009

R T

Mkr1 2.390 00 GHz
40.96 dB μ V

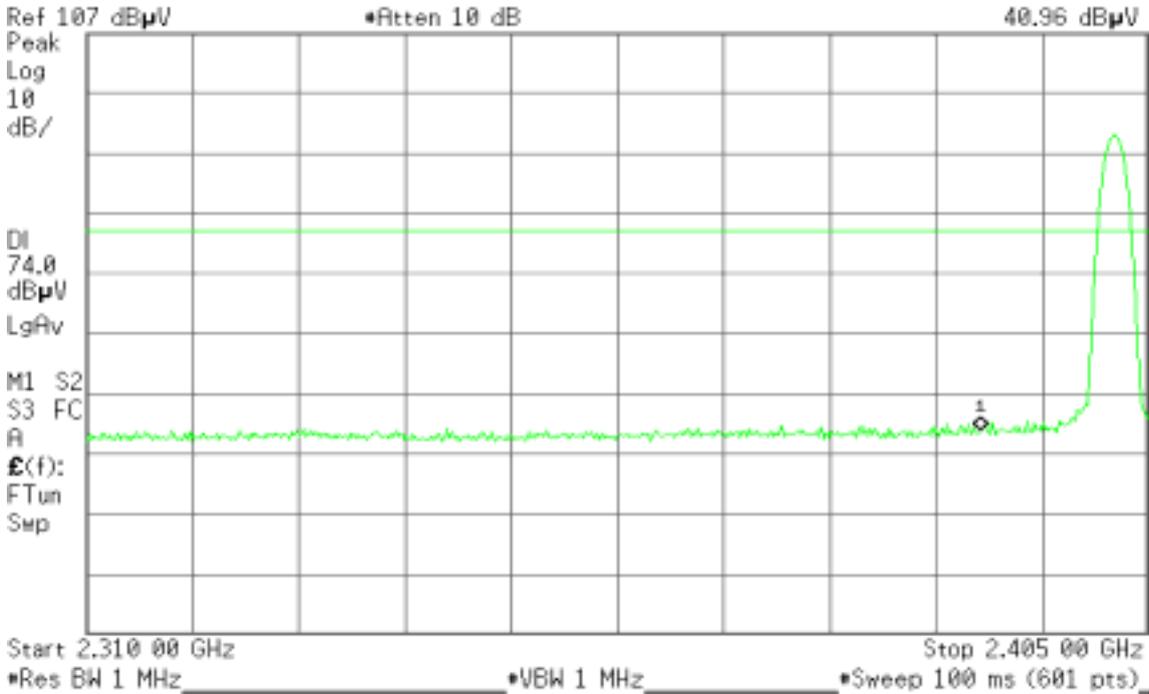


Detector mode: Average

Polarity: Vertical

Agilent 17:39:25 Jun 2, 2009

R T

Mkr1 2.390 00 GHz
28.15 dB μ V

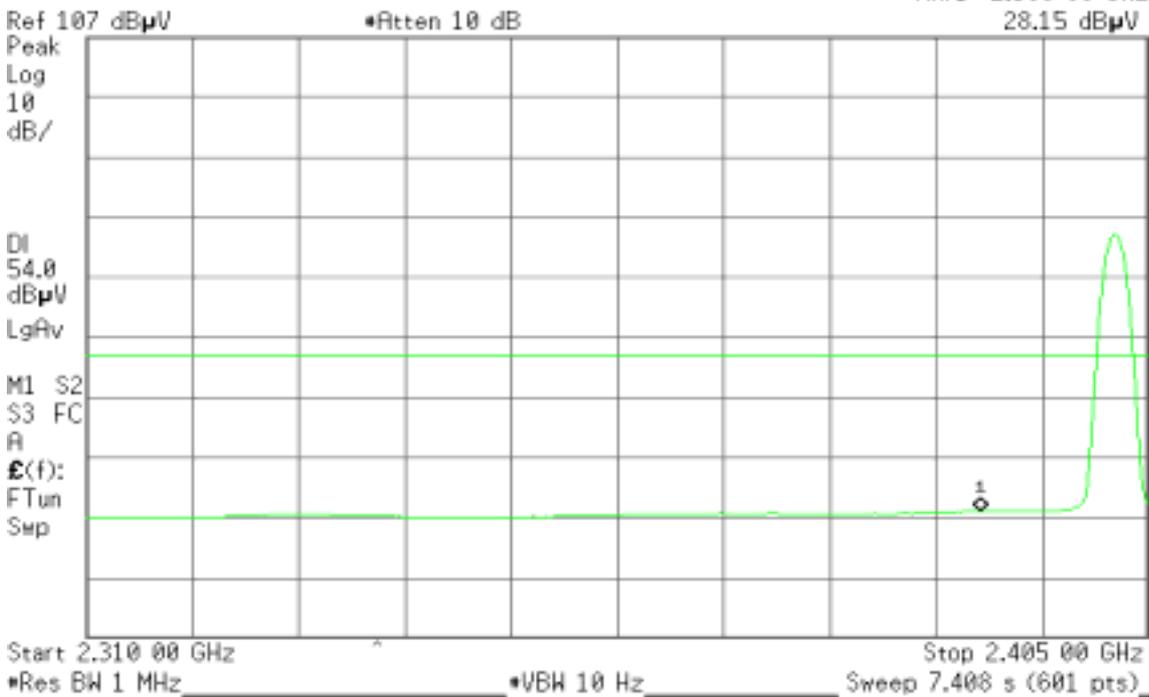




Detector mode: Peak

Polarity: Horizontal

Agilent 17:35:38 Jun 2, 2009

R T

Mkr1 2.390 00 GHz
41.52 dB μ V

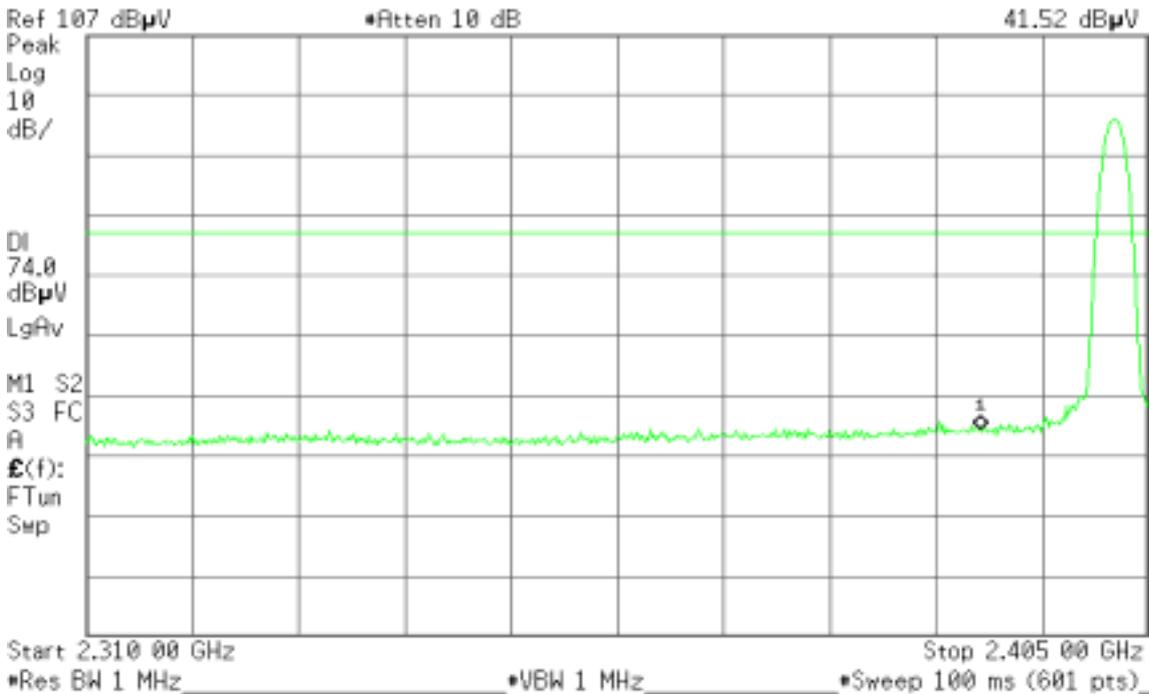


Detector mode: Average

Polarity: Horizontal

Agilent 17:36:38 Jun 2, 2009

R T

Mkr1 2.390 00 GHz
28.77 dB μ V

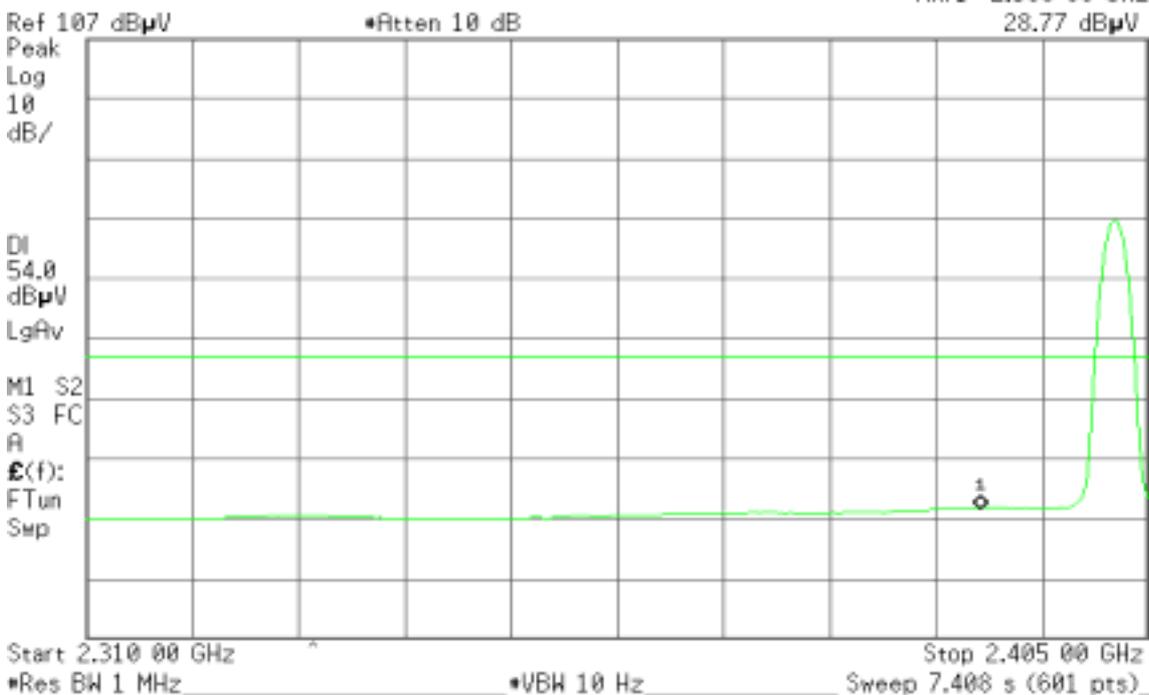



Band Edges (Bluetooth 8DPSK / CH High)


Detector mode: Peak

Polarity: Vertical

Agilent 17:49:34 Jun 2, 2009

R T

Mkr2 2.495 07 GHz
45.49 dBμV

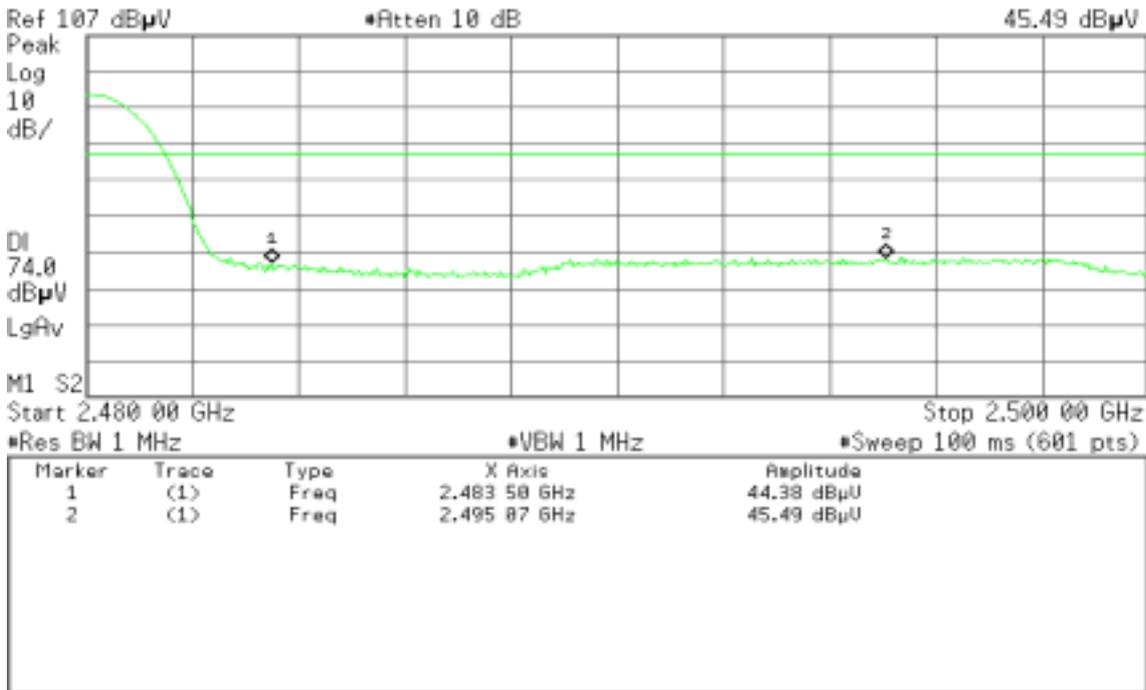


Detector mode: Average

Polarity: Vertical

Agilent 17:51:28 Jun 2, 2009

R T

Mkr2 2.497 03 GHz
29.88 dBμV

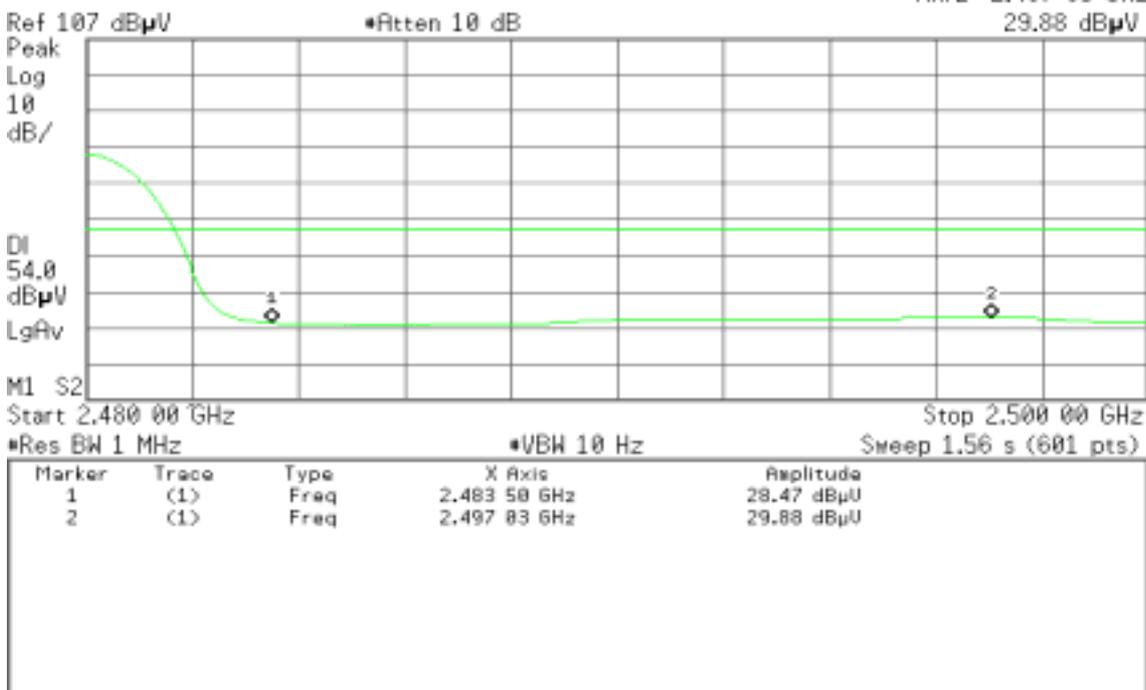




Detector mode: Peak

Polarity: Horizontal

Agilent 17:54:10 Jun 2, 2009

R T

Mkr2 2.496 90 GHz
45.01 dBµV

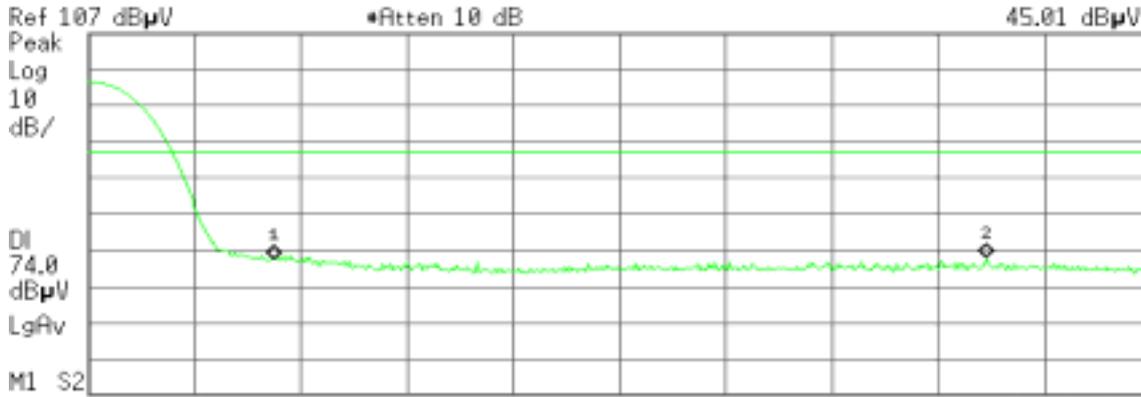

Ref 107 dBµV *Atten 10 dB *Res BW 1 MHz *VBW 1 MHz *Sweep 100 ms (601 pts)

| Marker | Trace | Type | X Axis | Amplitude |
|--------|-------|------|--------------|------------|
| 1 | (1) | Freq | 2.483 50 GHz | 44.60 dBµV |
| 2 | (1) | Freq | 2.496 90 GHz | 45.01 dBµV |


Detector mode: Average

Polarity: Horizontal

Agilent 17:54:56 Jun 2, 2009

R T

Mkr2 2.496 83 GHz
29.25 dBµV

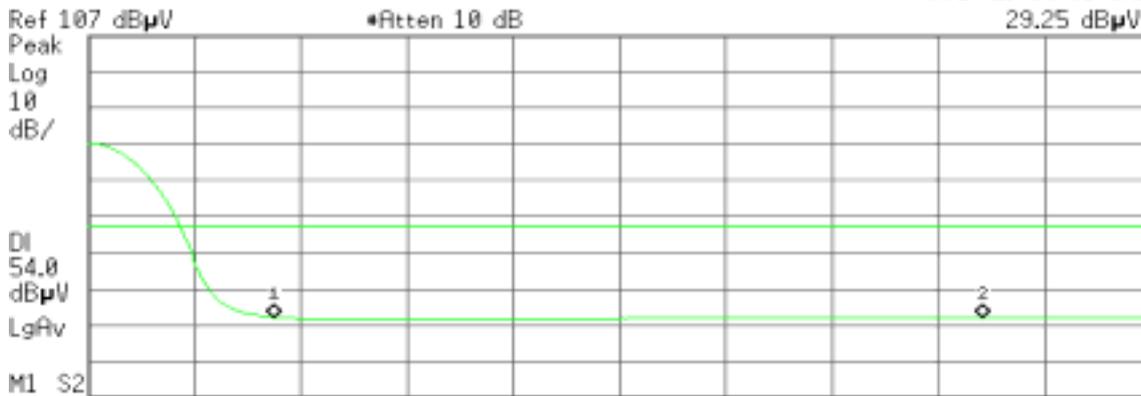

Ref 107 dBµV *Atten 10 dB *Res BW 1 MHz *VBW 10 Hz Sweep 1.56 s (601 pts)


| Marker | Trace | Type | X Axis | Amplitude |
|--------|-------|------|--------------|------------|
| 1 | (1) | Freq | 2.483 50 GHz | 29.25 dBµV |
| 2 | (1) | Freq | 2.496 83 GHz | 29.25 dBµV |

7.5. FREQUENCY SEPARATION

LIMIT

1. According to §15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

TEST CONFIGURATION



TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set center frequency of spectrum analyzer = middle of hopping channel.
4. Set the spectrum analyzer as RBW = 30kHz, VBW = 100kHz, Span = 3MHz, Sweep = auto.
5. Max hold, mark 3 peaks of hopping channel and record the 3 peaks frequency.

TEST RESULTS

No non-compliance noted



TEST DATA

GFSK

| Channel Separation (MHz) | two-thirds of the 20 dB bandwidth | Channel Separation Limit | Result |
|---------------------------------|--|---|---------------|
| 1.00 | 642 | > 20dB Bandwidth or two-thirds of the 20 dB bandwidth | Pass |

8DPSK


| Channel Separation (MHz) | two-thirds of the 20 dB bandwidth | Channel Separation Limit | Result |
|---------------------------------|--|---|---------------|
| 1.00 | 877 | > 20dB Bandwidth or two-thirds of the 20 dB bandwidth | Pass |




Test Plot

Measurement of Channel Separation

GFSK

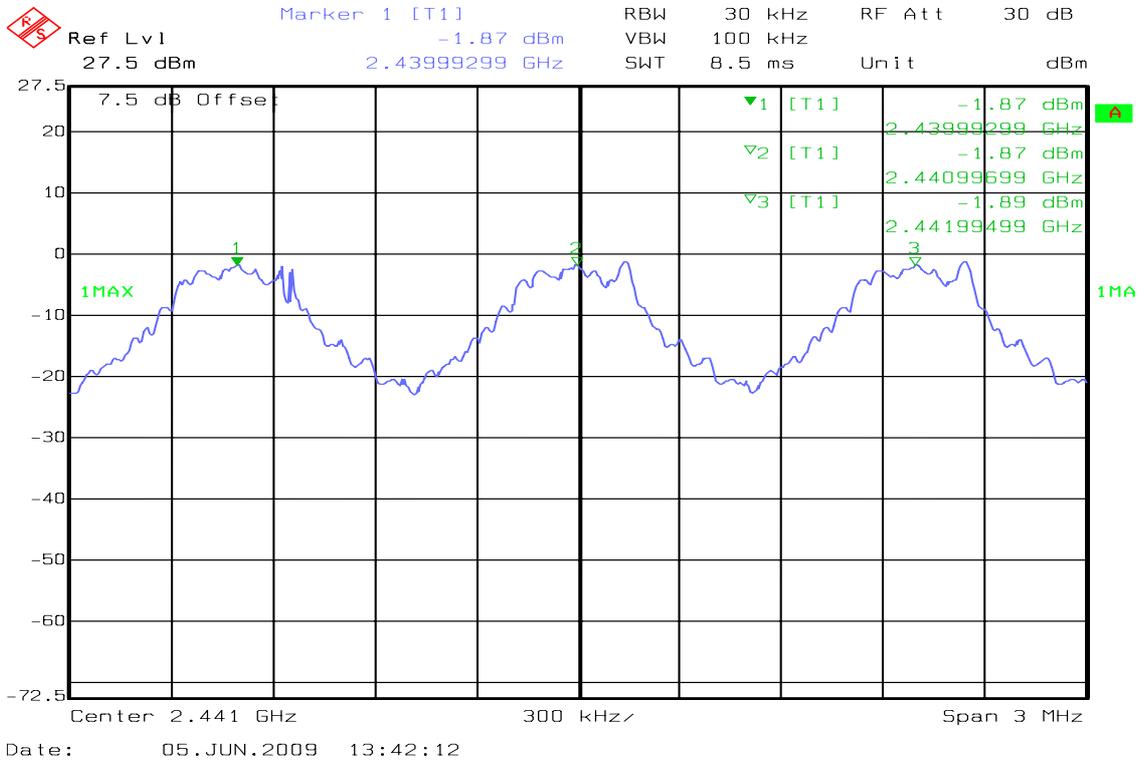

8DPSK

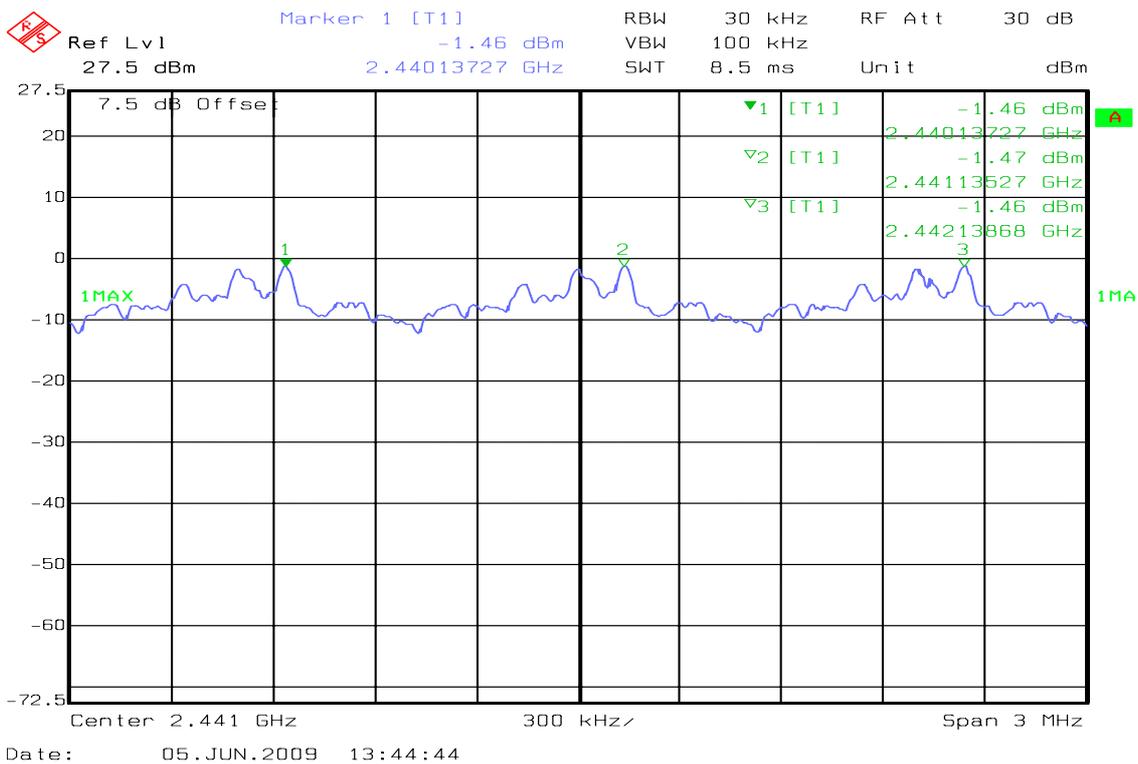




7.6. NUMBER OF HOPPING FREQUENCY

LIMIT

According to §15.247(a)(1)(ii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz bands shall use at least 75 hopping frequencies.

TEST CONFIGURATION



TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set spectrum analyzer Start=2400MHz, Stop = 2441.5MHz, Sweep = auto and Start=2441.5MHz, Stop = 2483.5MHz, Sweep = auto.
4. Set the spectrum analyzer as RBW, VBW=500kHz.
5. Max hold, view and count how many channel in the band.

TEST RESULTS

No non-compliance noted

TEST DATA

| Result (No. of CH) | Limit (No. of CH) | Result |
|--------------------|-------------------|--------|
| 79 | >75 | PASS |




Test Plot


GFSK

Channel Number

2.4 GHz – 2.4415 GHz

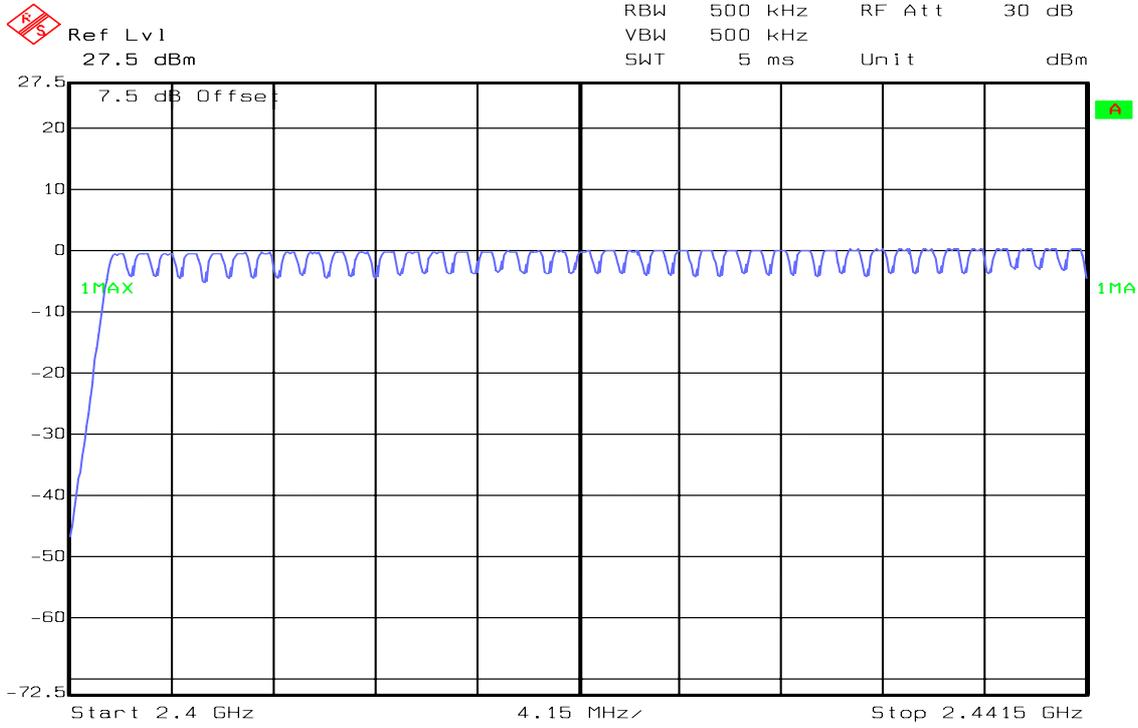

2.4415 GHz – 2.4835 GHz

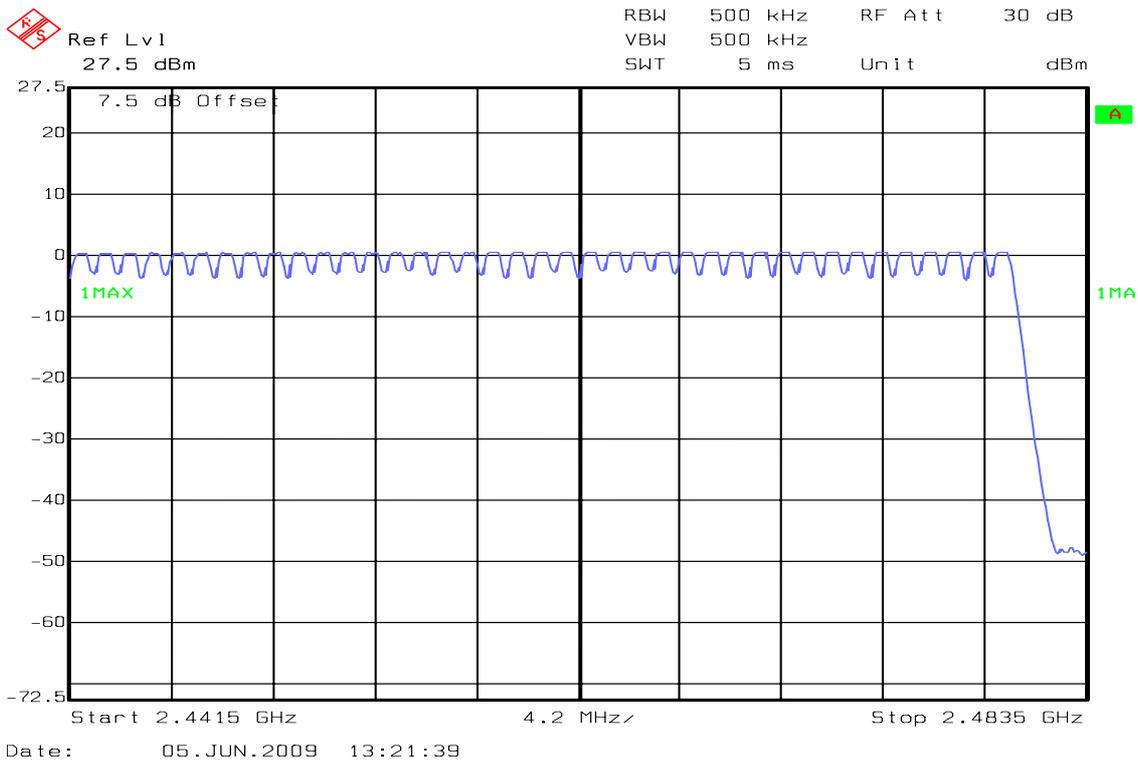




8DPSK


Channel Number

2.4 GHz – 2.4415 GHz

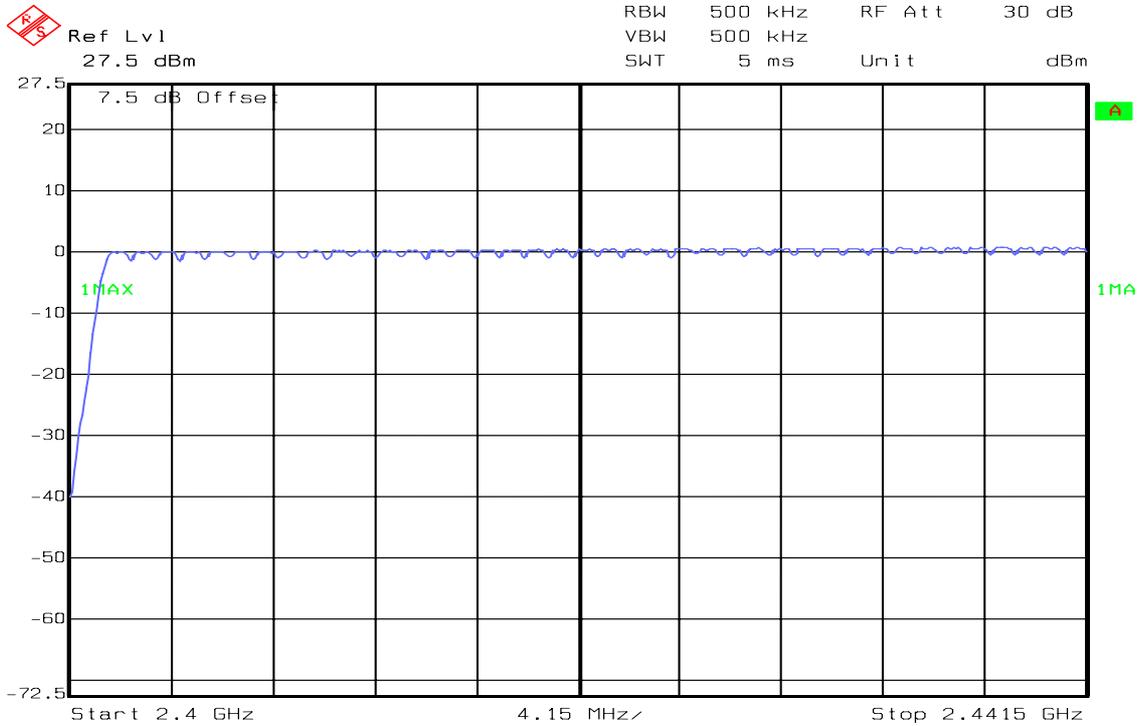

Date: 05.JUN.2009 13:26:42

2.4415 GHz – 2.4835 GHz

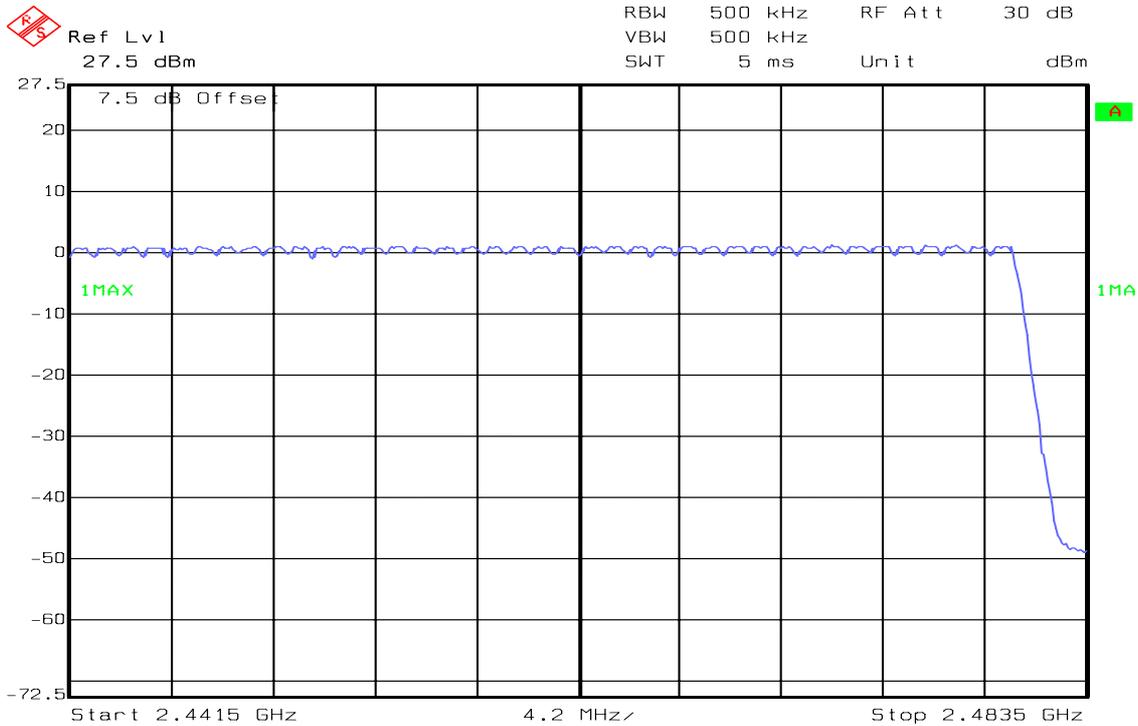

Date: 05.JUN.2009 13:23:33




7.7. TIME OF OCCUPANCY (DWELL TIME)

LIMIT

According to §15.247(a)(1)(iii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz bands. The average time of occupancy on any channels shall not greater than 0.4 s within a period 0.4 s multiplied by the number of hopping channels employed.

TEST CONFIGURATION



TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set center frequency of spectrum analyzer = operating frequency.
4. Set the spectrum analyzer as RBW, VBW=1MHz, Span = 0Hz, Sweep = auto.
5. Repeat above procedures until all frequency measured were complete.

TEST RESULTS

No non-compliance noted



TEST DATA

GFSK

DH 1

CH Low: $0.379 * (1600/2)/79 * 31.60 = 121.22$ (ms)

CH Mid: $0.379 * (1600/2)/79 * 31.60 = 121.22$ (ms)

CH High: $0.397 * (1600/2)/79 * 31.60 = 126.67$ (ms)

| CH | Pulse Time (ms) | Total of Dwell (ms) | Period Time (s) | Limit (ms) | Result |
|------|-----------------|---------------------|-----------------|------------|--------|
| Low | 0.379 | 121.22 | 31.60 | 400.00 | PASS |
| Mid | 0.379 | 121.22 | 31.60 | | PASS |
| High | 0.397 | 126.97 | 31.60 | | PASS |

DH 3

CH Low: $1.695 * (1600/4)/79 * 31.60 = 271.20$ (ms)

CH Mid: $1.657 * (1600/4)/79 * 31.60 = 265.12$ (ms)

CH High: $1.657 * (1600/4)/79 * 31.60 = 265.12$ (ms)

| CH | Pulse Time (ms) | Total of Dwell (ms) | Period Time (s) | Limit (ms) | Result |
|------|-----------------|---------------------|-----------------|------------|--------|
| Low | 1.695 | 271.20 | 31.60 | 400.00 | PASS |
| Mid | 1.657 | 265.12 | 31.60 | | PASS |
| High | 1.657 | 265.12 | 31.60 | | PASS |

DH 5

CH Low: $2.880 * (1600/6)/79 * 31.60 = 307.17$ (ms)

CH Mid: $2.898 * (1600/6)/79 * 31.60 = 309.09$ (ms)

CH High: $2.898 * (1600/6)/79 * 31.60 = 309.09$ (ms)

| CH | Pulse Time (ms) | Total of Dwell (ms) | Period Time (s) | Limit (ms) | Result |
|------|-----------------|---------------------|-----------------|------------|--------|
| Low | 2.880 | 307.17 | 31.60 | 400.00 | PASS |
| Mid | 2.898 | 309.09 | 31.60 | | PASS |
| High | 2.898 | 309.09 | 31.60 | | PASS |



8DPSK

DH 1

CH Low: $0.381 * (1600/2)/79 * 31.60 = 121.84$ (ms)

CH Mid: $0.383 * (1600/2)/79 * 31.60 = 122.46$ (ms)

CH High: $0.417 * (1600/2)/79 * 31.60 = 133.39$ (ms)

| CH | Pulse Time (ms) | Total of Dwell (ms) | Period Time (s) | Limit (ms) | Result |
|------|-----------------|---------------------|-----------------|------------|--------|
| Low | 0.381 | 121.84 | 31.60 | 400.00 | PASS |
| Mid | 0.383 | 122.46 | 31.60 | | PASS |
| High | 0.417 | 133.39 | 31.60 | | PASS |

DH 3

CH Low: $1.659 * (1600/4)/79 * 31.60 = 265.49$ (ms)

CH Mid: $1.643 * (1600/4)/79 * 31.60 = 262.88$ (ms)

CH High: $1.659 * (1600/4)/79 * 31.60 = 265.44$ (ms)

| CH | Pulse Time (ms) | Total of Dwell (ms) | Period Time (s) | Limit (ms) | Result |
|------|-----------------|---------------------|-----------------|------------|--------|
| Low | 1.659 | 265.49 | 31.60 | 400.00 | PASS |
| Mid | 1.643 | 262.88 | 31.60 | | PASS |
| High | 1.659 | 265.44 | 31.60 | | PASS |

DH 5

CH Low: $2.920 * (1600/6)/79 * 31.60 = 311.45$ (ms)

CH Mid: $2.902 * (1600/6)/79 * 31.60 = 309.53$ (ms)

CH High: $2.900 * (1600/6)/79 * 31.60 = 309.31$ (ms)


| CH | Pulse Time (ms) | Total of Dwell (ms) | Period Time (s) | Limit (ms) | Result |
|------|-----------------|---------------------|-----------------|------------|--------|
| Low | 2.920 | 311.45 | 31.60 | 400.00 | PASS |
| Mid | 2.902 | 309.53 | 31.60 | | PASS |
| High | 2.900 | 309.31 | 31.60 | | PASS |




Test Plot

GFSK / DH 1

(CH Low)

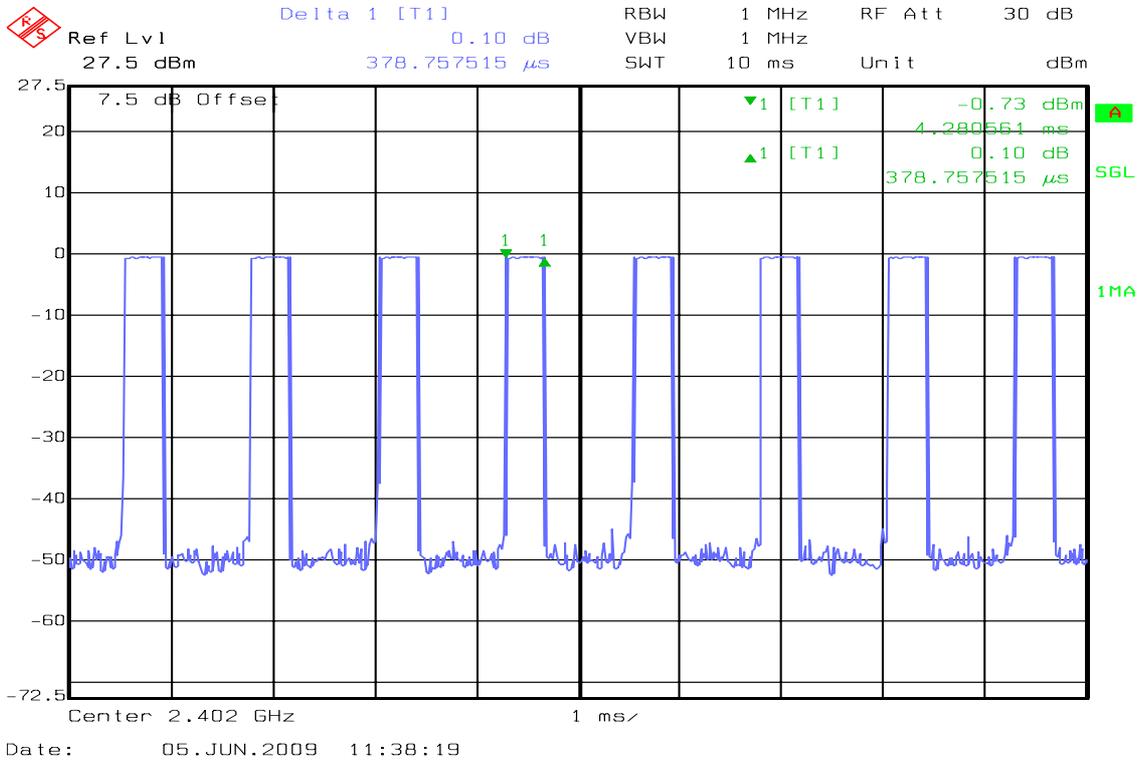


(CH Mid)

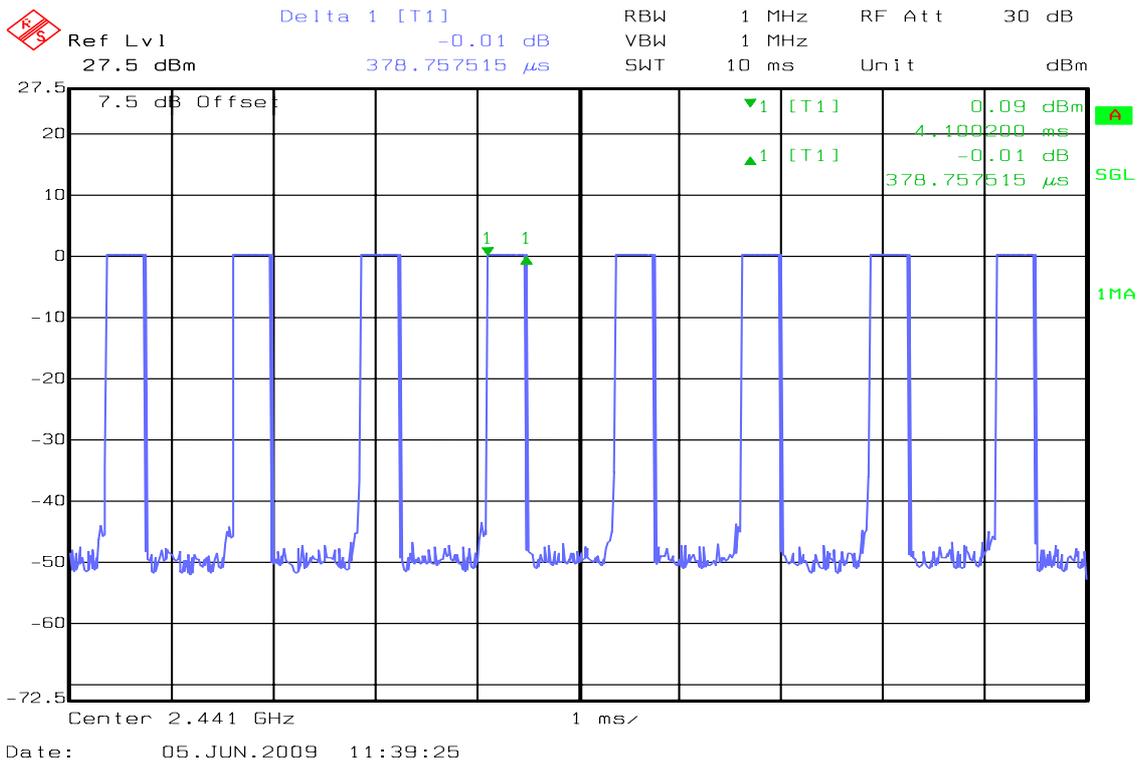




(CH High)

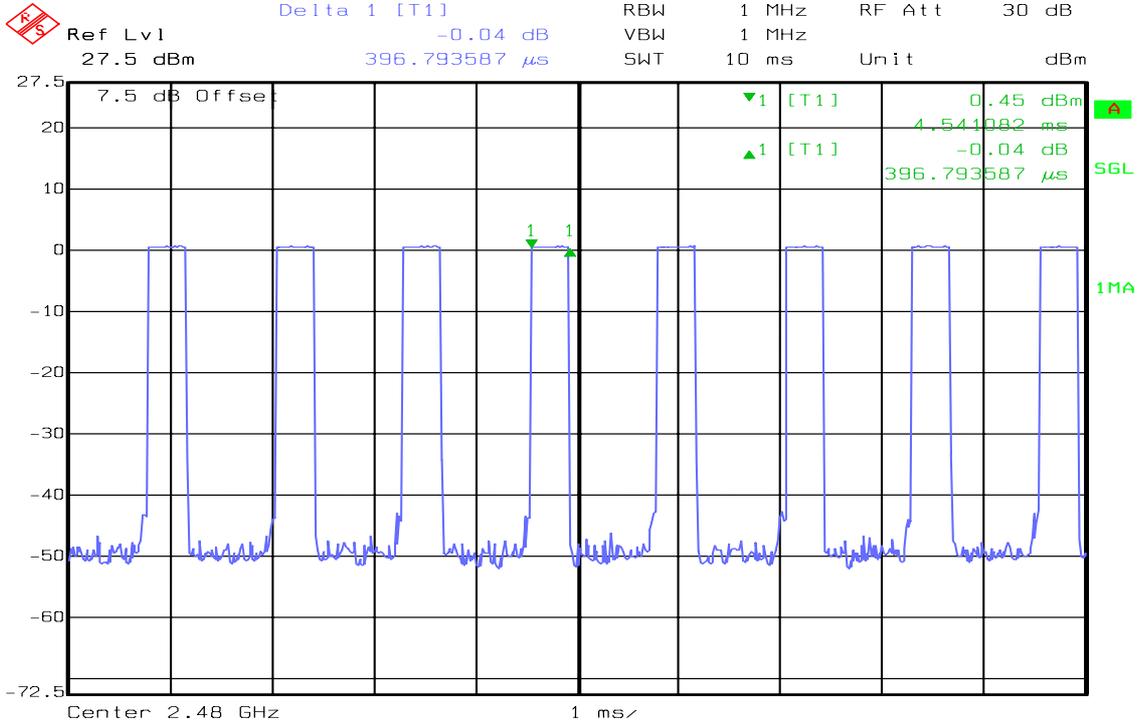

Date: 05.JUN.2009 11:43:30

GFSK / DH 3


(CH Low)

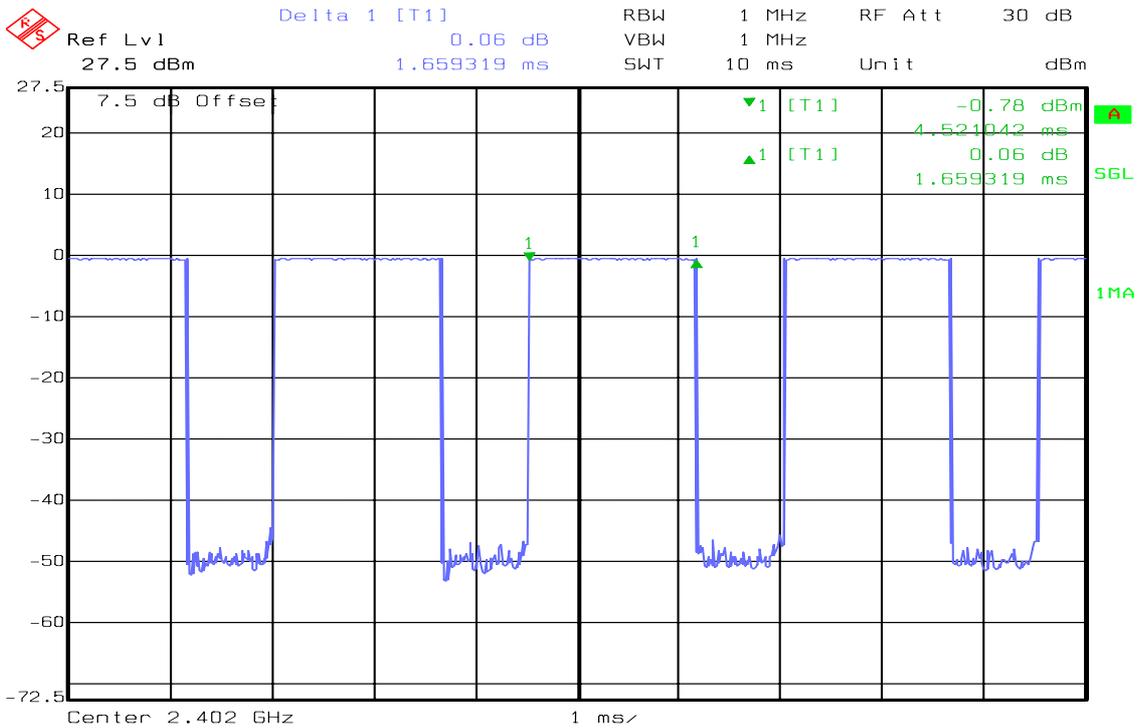

Date: 05.JUN.2009 11:37:29




(CH Mid)

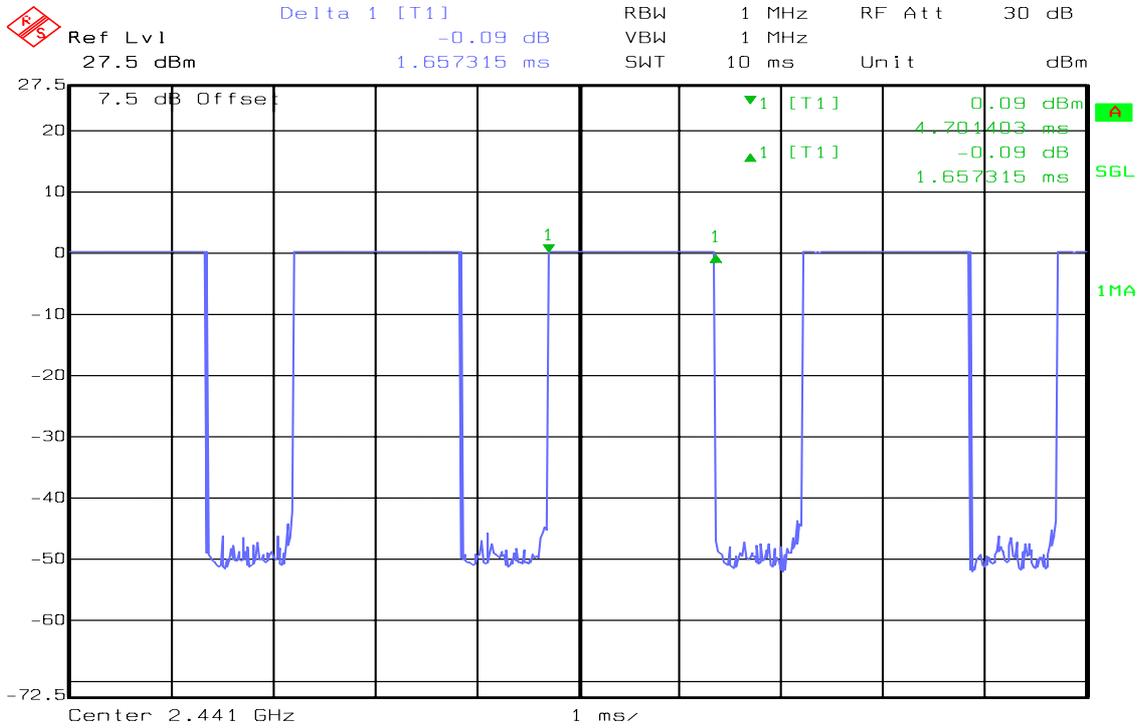

Date: 05.JUN.2009 11:40:11

(CH High)

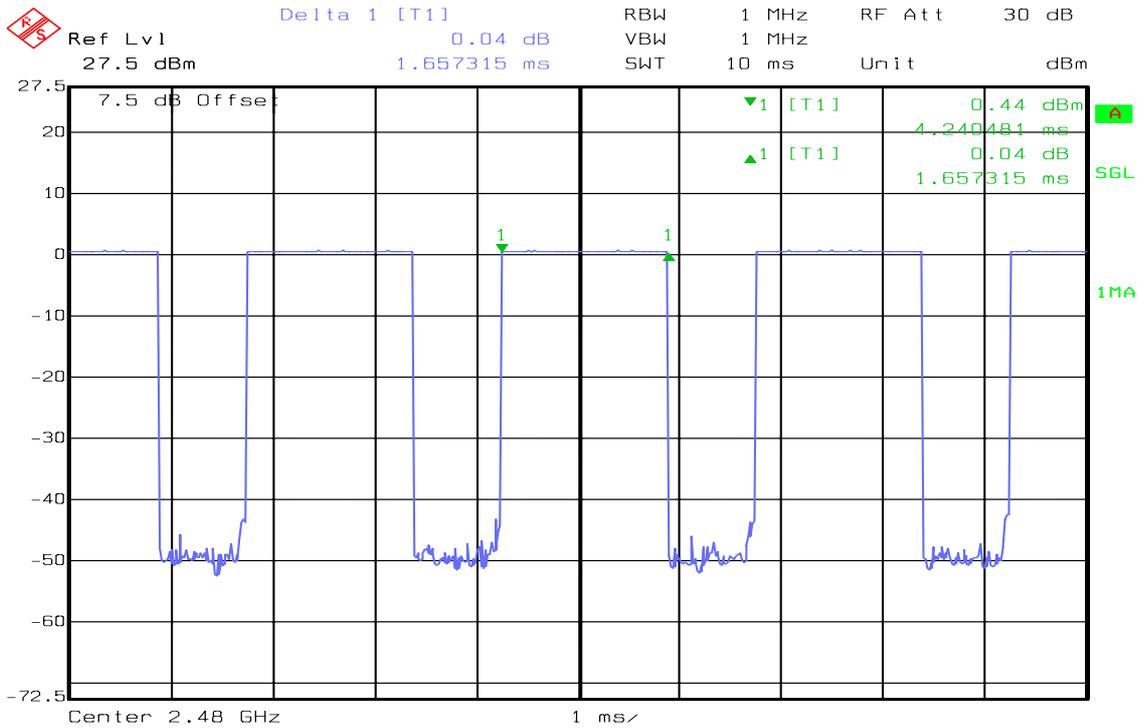


Date: 05.JUN.2009 11:42:38




GFSK / DH 5

(CH Low)

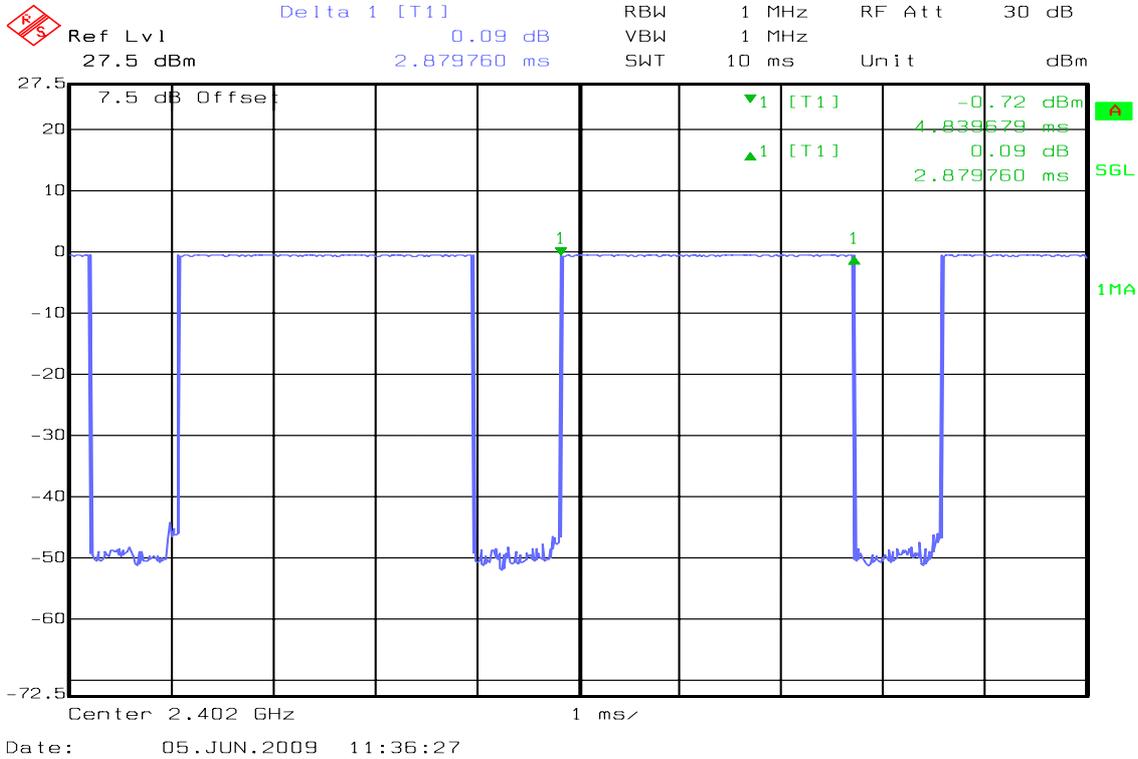


(CH Mid)

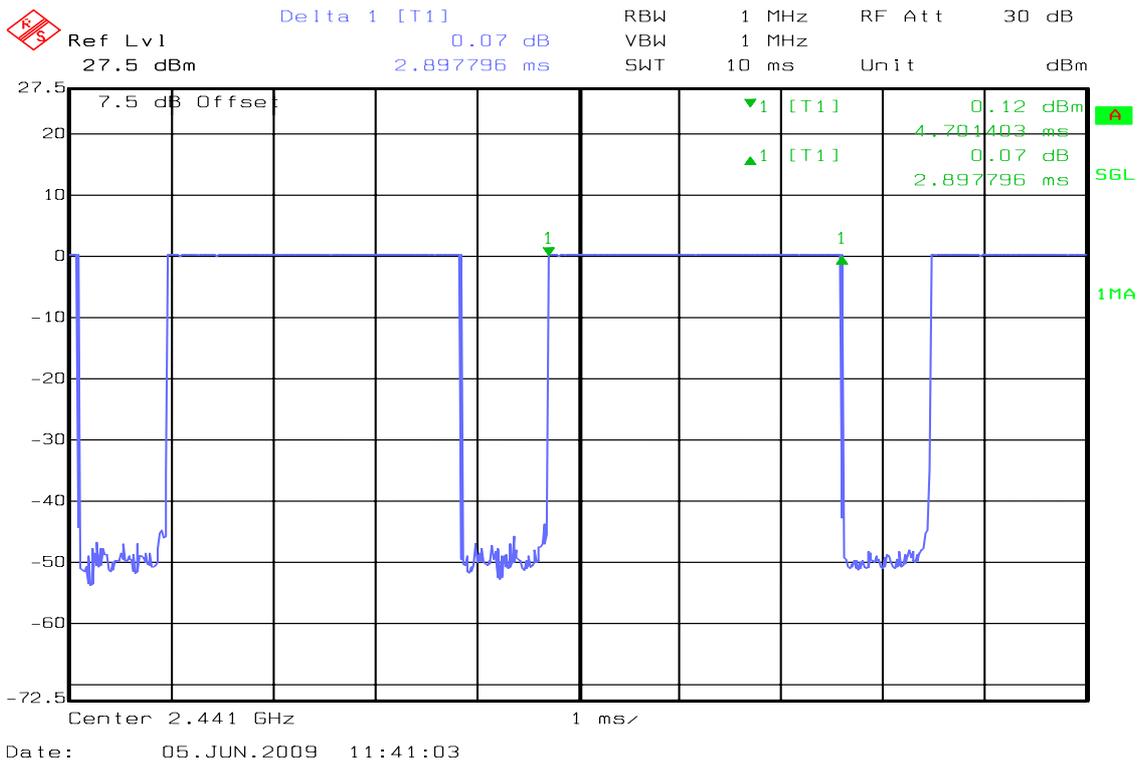




(CH High)

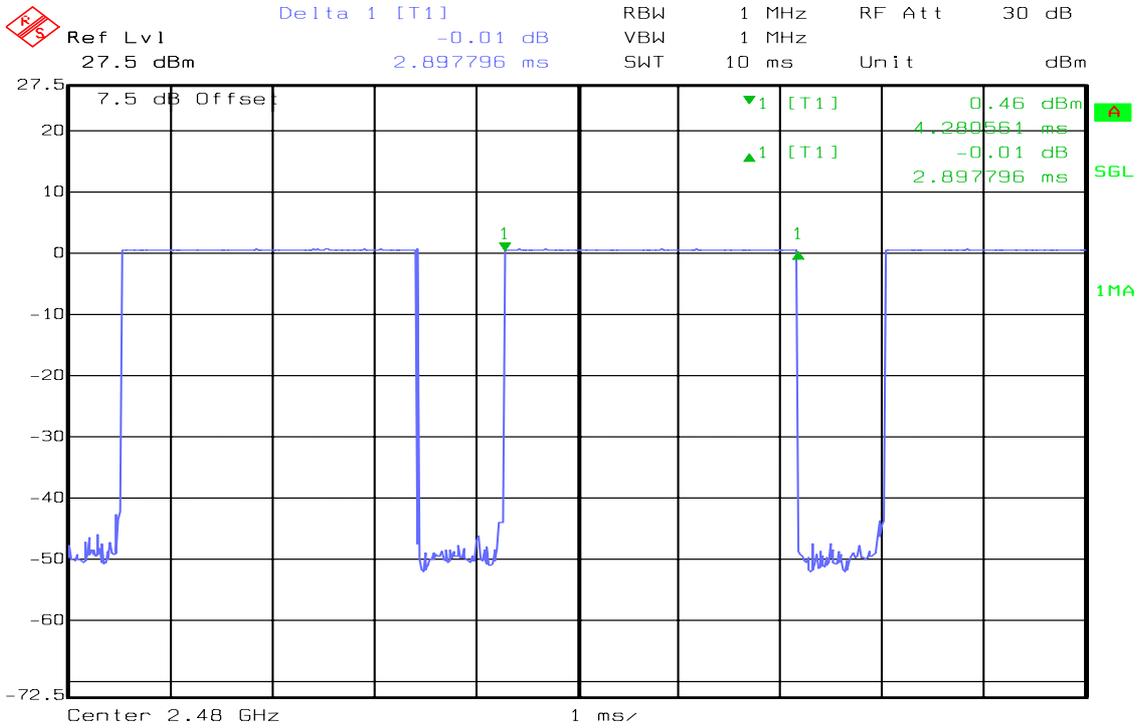

Date: 05.JUN.2009 11:41:56

8DPSK / DH 1


(CH Low)

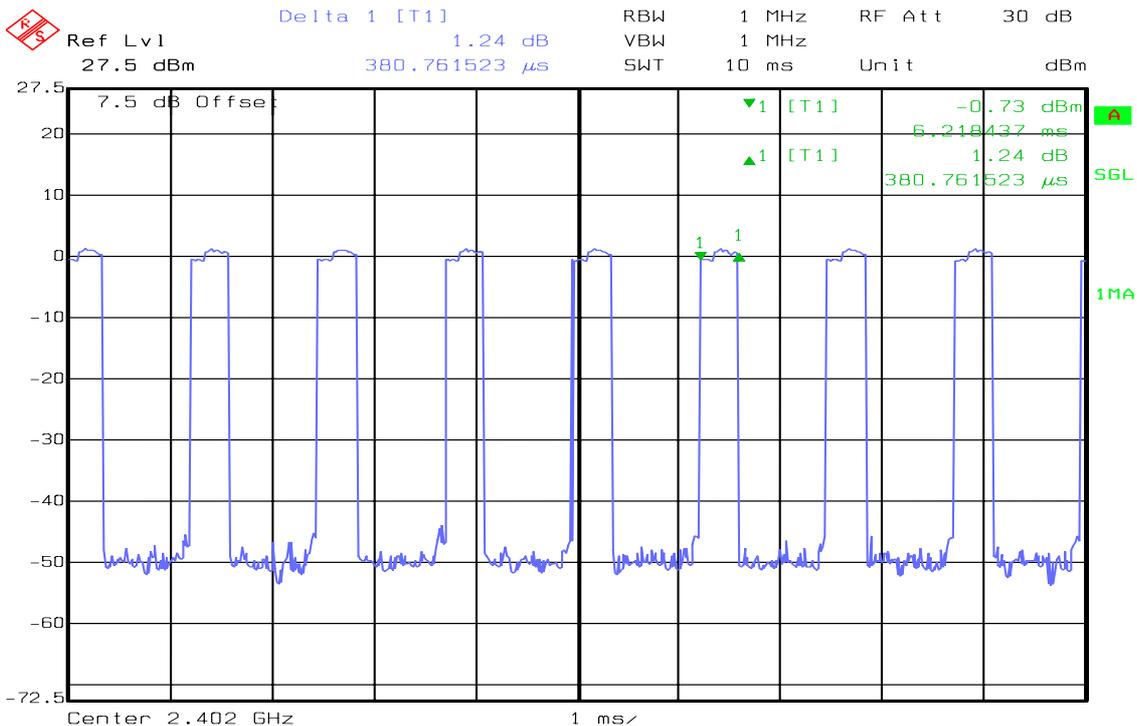

Date: 05.JUN.2009 11:32:17




(CH Mid)

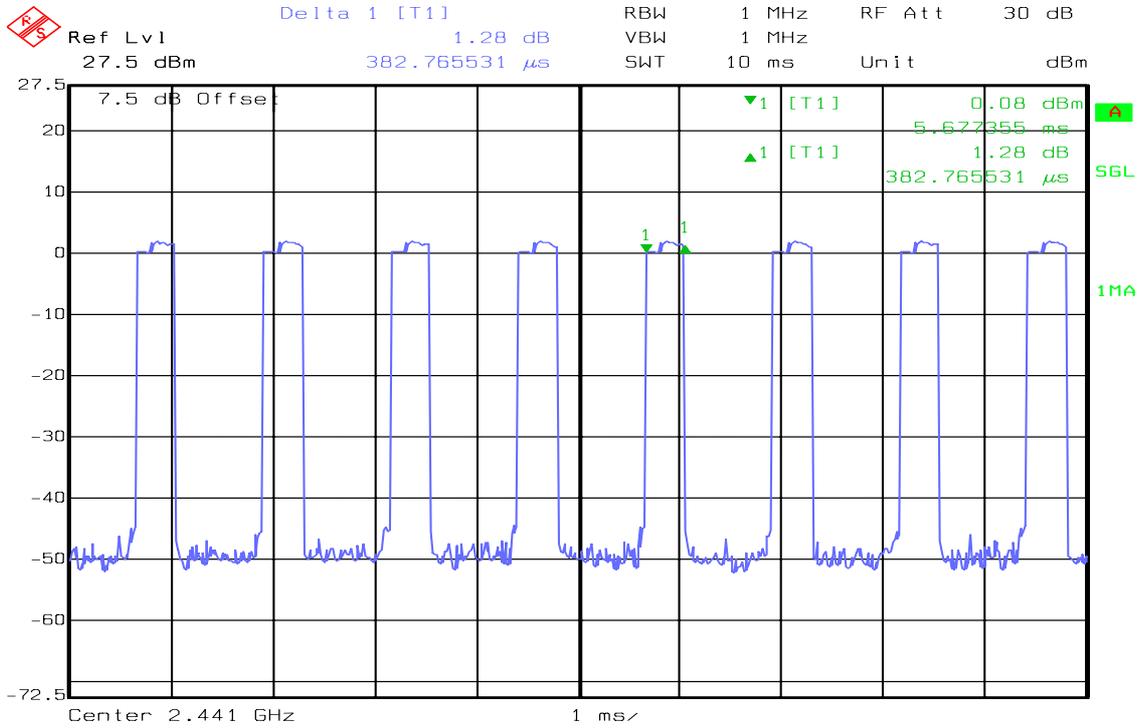

Date: 05.JUN.2009 11:31:09

(CH High)

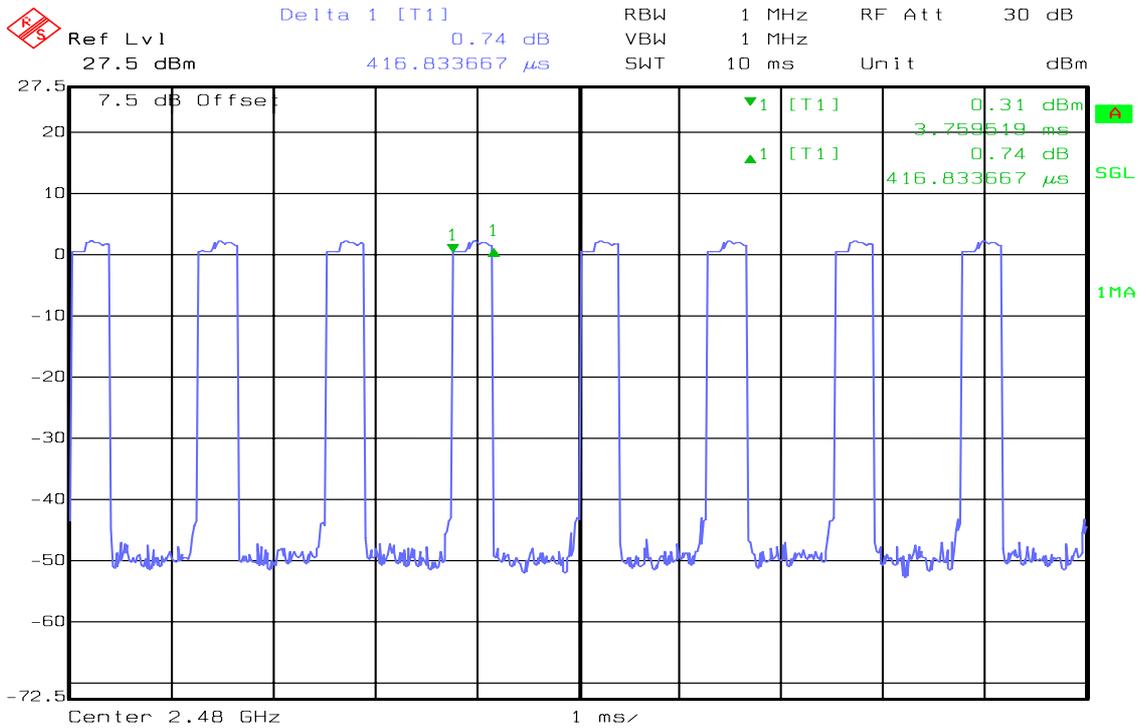


Date: 05.JUN.2009 11:26:16




8DPSK / DH 3

(CH Low)

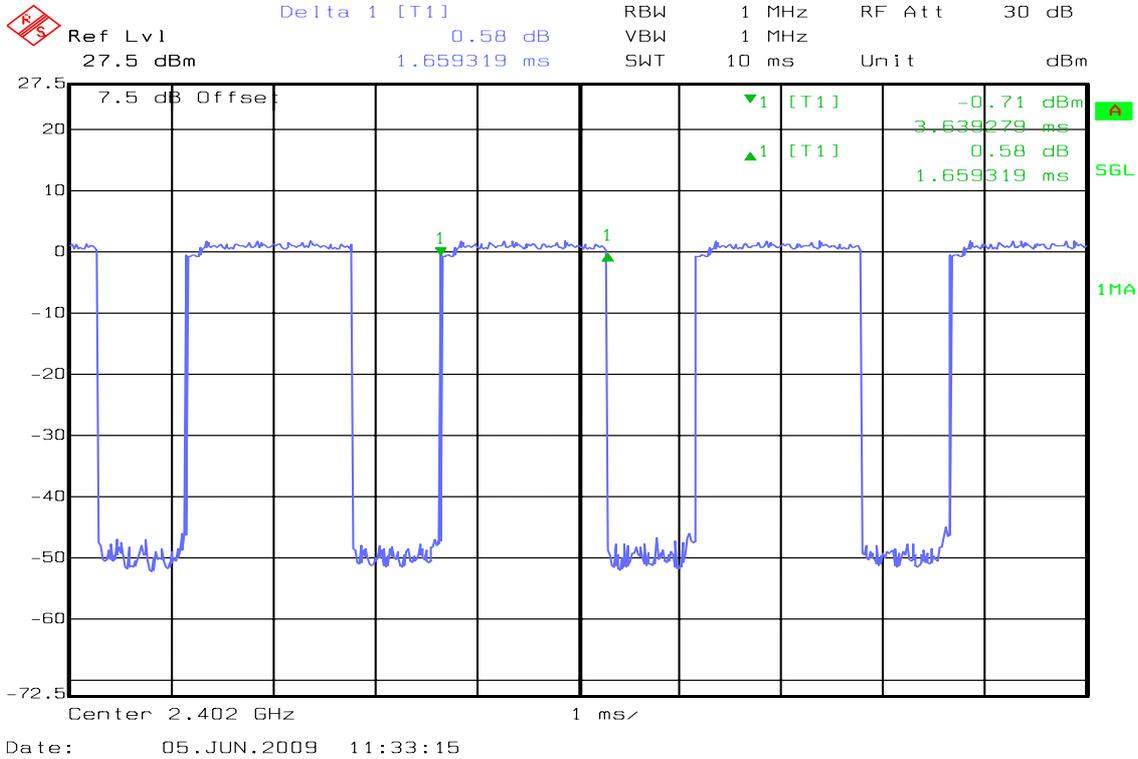


(CH Mid)

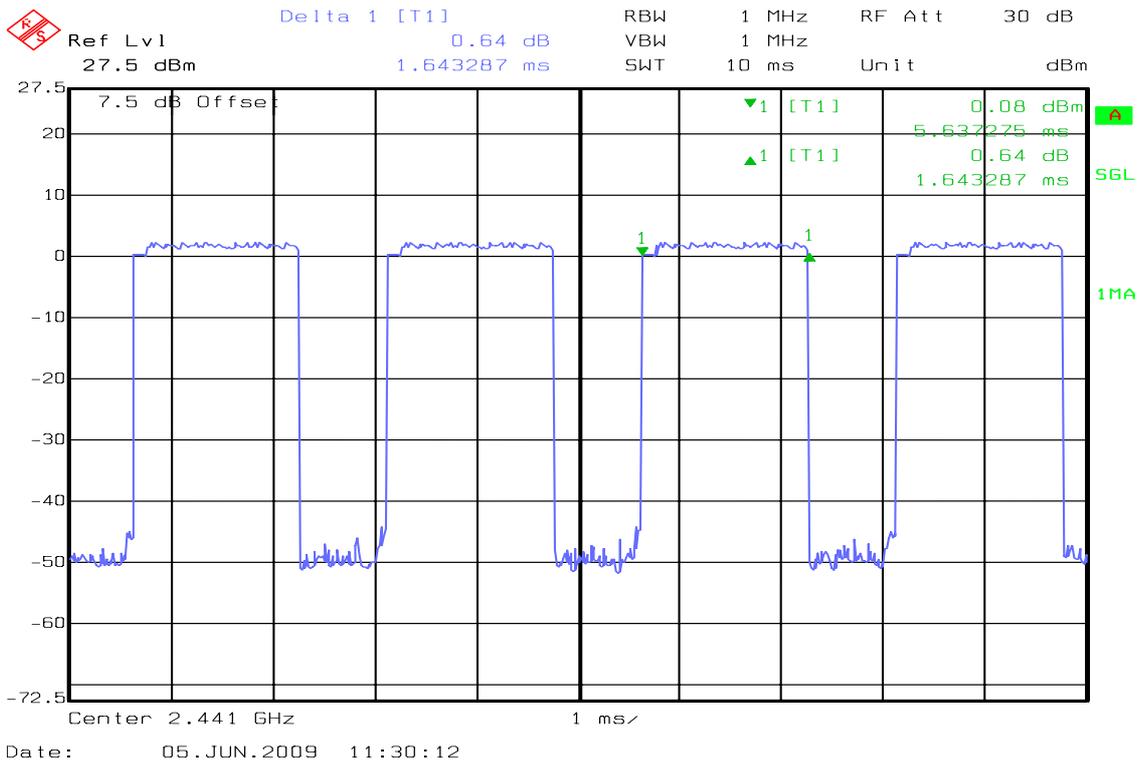




(CH High)

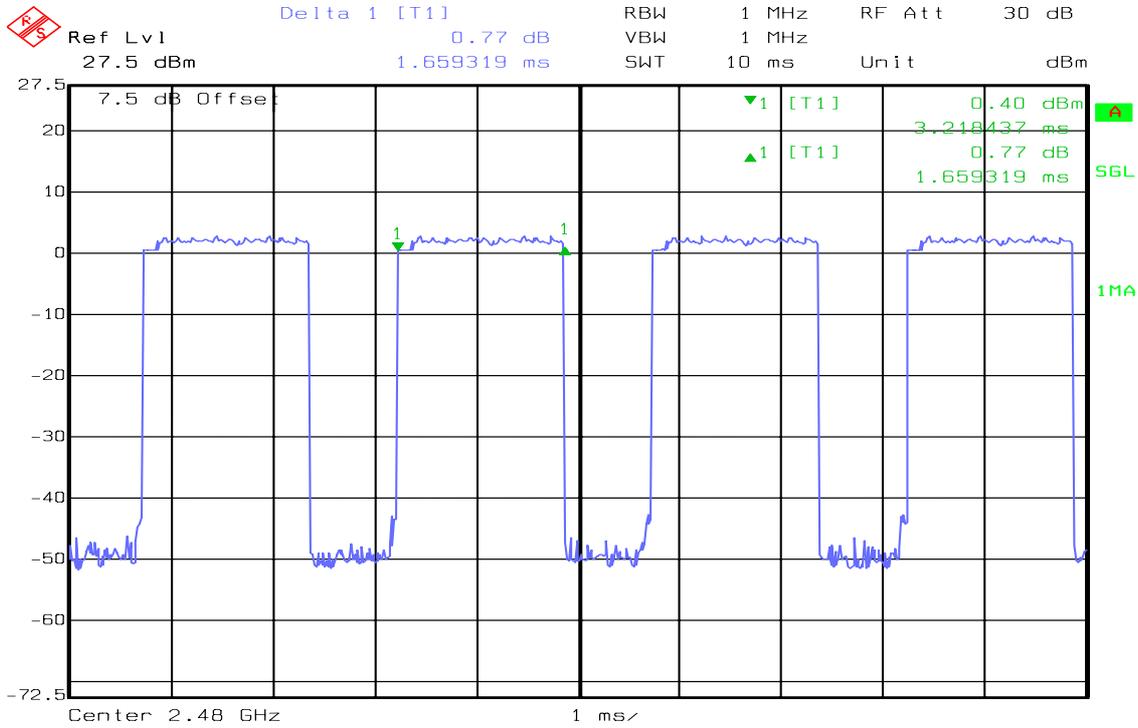

Date: 05.JUN.2009 11:27:17

8DPSK / DH 5


(CH Low)

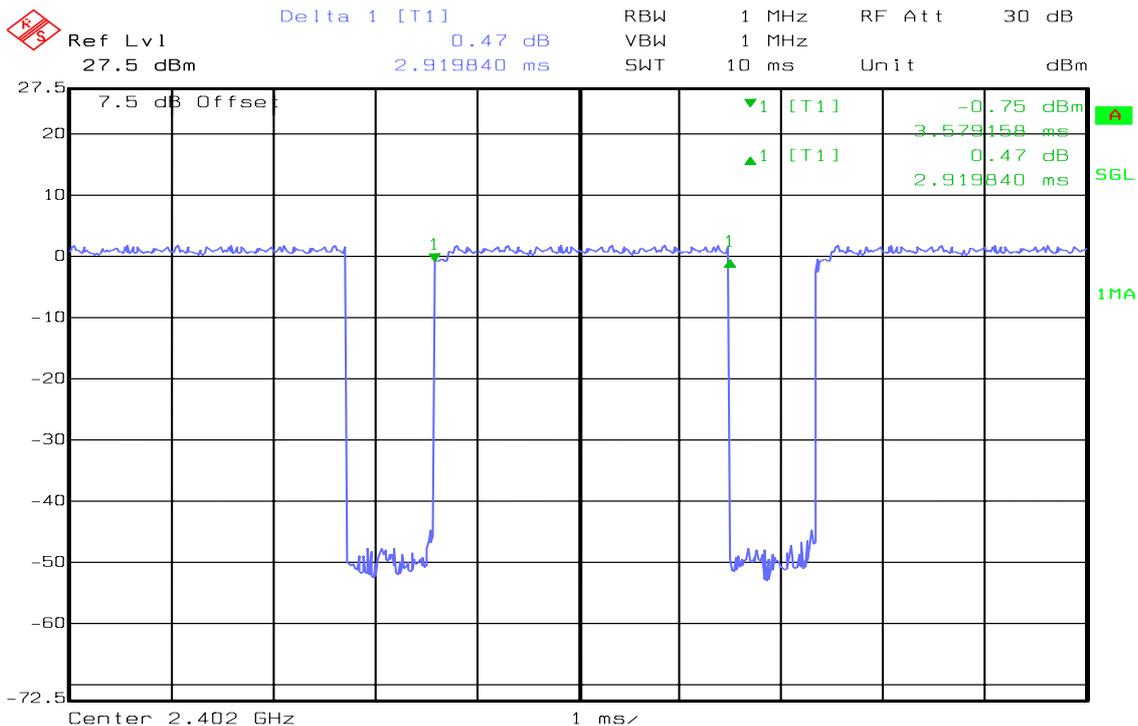

Date: 05.JUN.2009 11:34:50




(CH Mid)

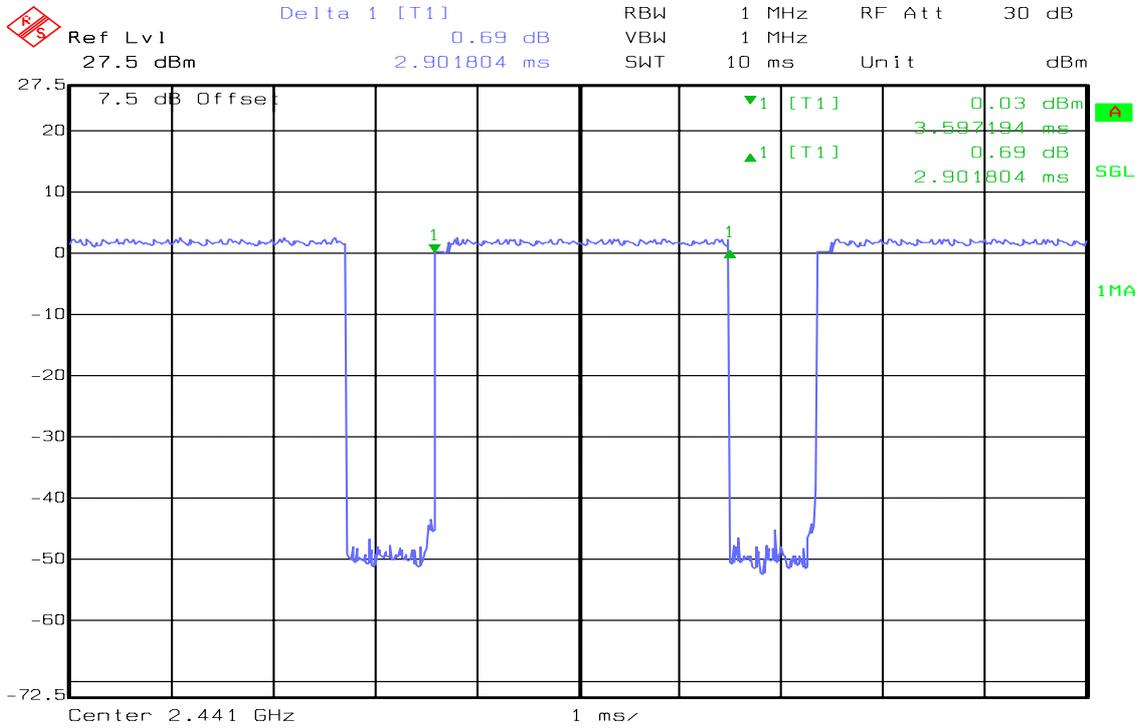

Date: 05.JUN.2009 11:29:15

(CH High)

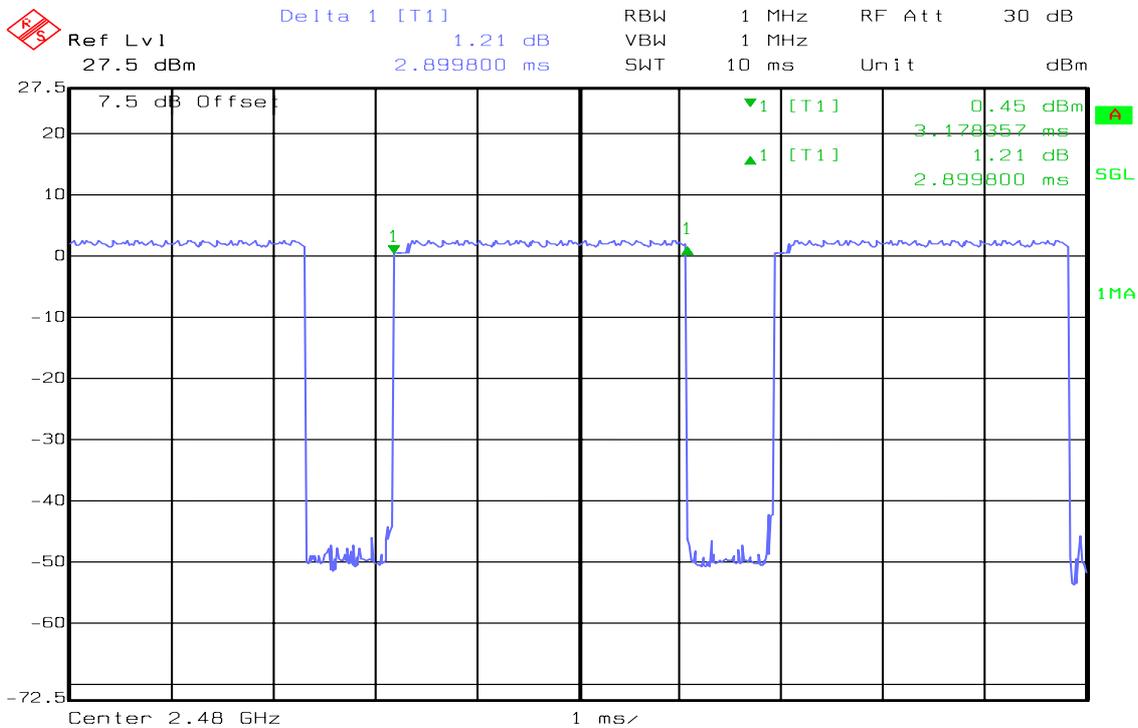

Date: 05.JUN.2009 11:28:14


7.8. SPURIOUS EMISSIONS

Conducted Measurement

LIMIT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

TEST CONFIGURATION



TEST PROCEDURE

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 100 kHz.

Measurements are made over the 30MHz to 26GHz range with the transmitter set to the lowest, middle, and highest channels.

TEST RESULTS

No non-compliance noted




TEST DATA


Refer to attach spectrum analyzer data chart.

Test Plot

GFSK / CH Low

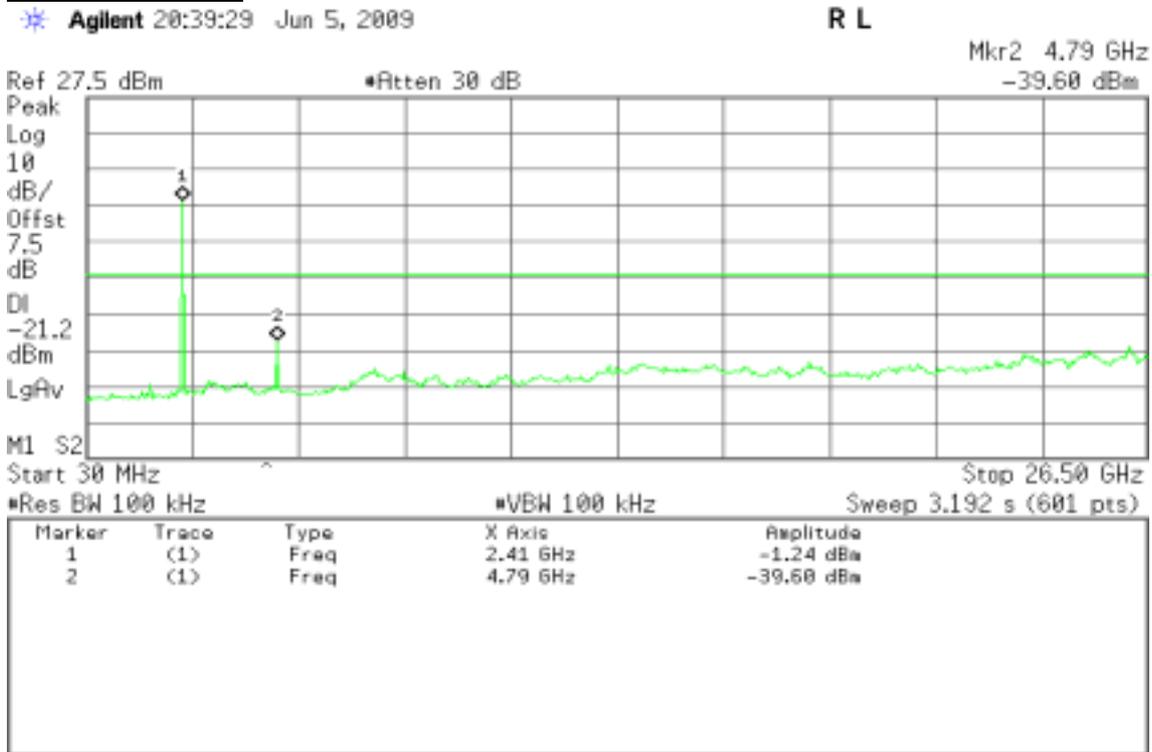

GFSK / CH Mid

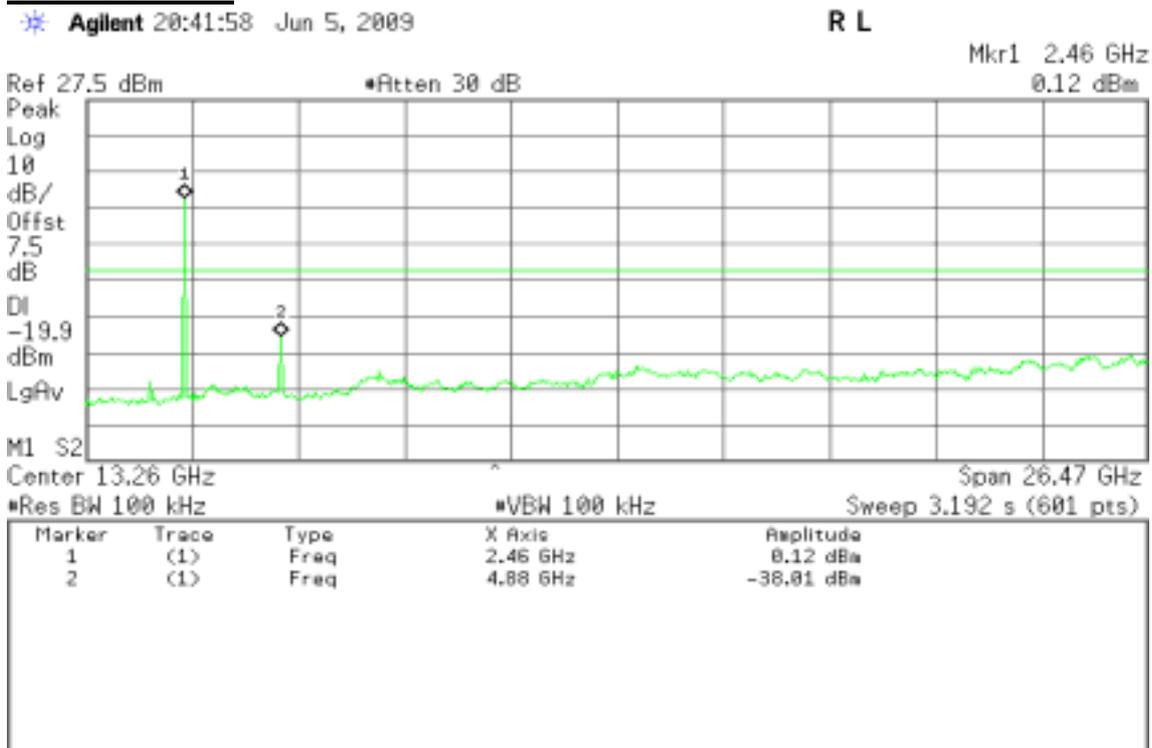



GFSK / CH High

Agilent 20:44:08 Jun 5, 2009

R L

Mkr1 2.50 GHz
-0.54 dBm



Center 13.26 GHz Span 26.47 GHz
#Res BW 100 kHz #VBW 100 kHz Sweep 3.192 s (601 pts)

| Marker | Trace | Type | X Axis | Amplitude |
|--------|-------|------|----------|------------|
| 1 | (1) | Freq | 2.50 GHz | -0.54 dBm |
| 2 | (1) | Freq | 4.97 GHz | -40.94 dBm |

8DPSK / CH Low

Agilent 20:48:46 Jun 5, 2009

R L

Mkr1 2.41 GHz
-2.54 dBm



Center 13.26 GHz Span 26.47 GHz
#Res BW 100 kHz #VBW 100 kHz Sweep 3.192 s (601 pts)

| Marker | Trace | Type | X Axis | Amplitude |
|--------|-------|------|----------|------------|
| 1 | (1) | Freq | 2.41 GHz | -2.54 dBm |
| 2 | (1) | Freq | 4.79 GHz | -41.26 dBm |



8DPSK / CH Mid

Agilent 20:51:15 Jun 5, 2009

R T

Mkr1 2.46 GHz
-0.49 dBm



| Marker | Trace | Type | X Axis | Amplitude |
|--------|-------|------|----------|------------|
| 1 | (1) | Freq | 2.46 GHz | -0.49 dBm |
| 2 | (1) | Freq | 4.88 GHz | -39.48 dBm |

8DPSK / CH High

Agilent 20:53:14 Jun 5, 2009

R L

Mkr1 2.50 GHz
-0.82 dBm



| Marker | Trace | Type | X Axis | Amplitude |
|--------|-------|------|----------|------------|
| 1 | (1) | Freq | 2.50 GHz | -0.82 dBm |
| 2 | (1) | Freq | 4.97 GHz | -41.14 dBm |



RADIATED EMISSIONS

LIMIT

1. According to §15.209(a), except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

| Frequency (MHz) | Field Strength (μV/m) | Measurement Distance (m) |
|-----------------|-----------------------|--------------------------|
| 30-88 | 100* | 3 |
| 88-216 | 150* | 3 |
| 216-960 | 200* | 3 |
| Above 960 | 500 | 3 |


Remark: Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

2. In the emission table above, the tighter limit applies at the band edges.


| Frequency (Hz) | Field Strength (μV/m at 3-meter) | Field Strength (dBμV/m at 3-meter) |
|----------------|----------------------------------|------------------------------------|
| 30-88 | 100 | 40 |
| 88-216 | 150 | 43.5 |
| 216-960 | 200 | 46 |
| Above 960 | 500 | 54 |

TEST CONFIGURATION

Below 1 GHz

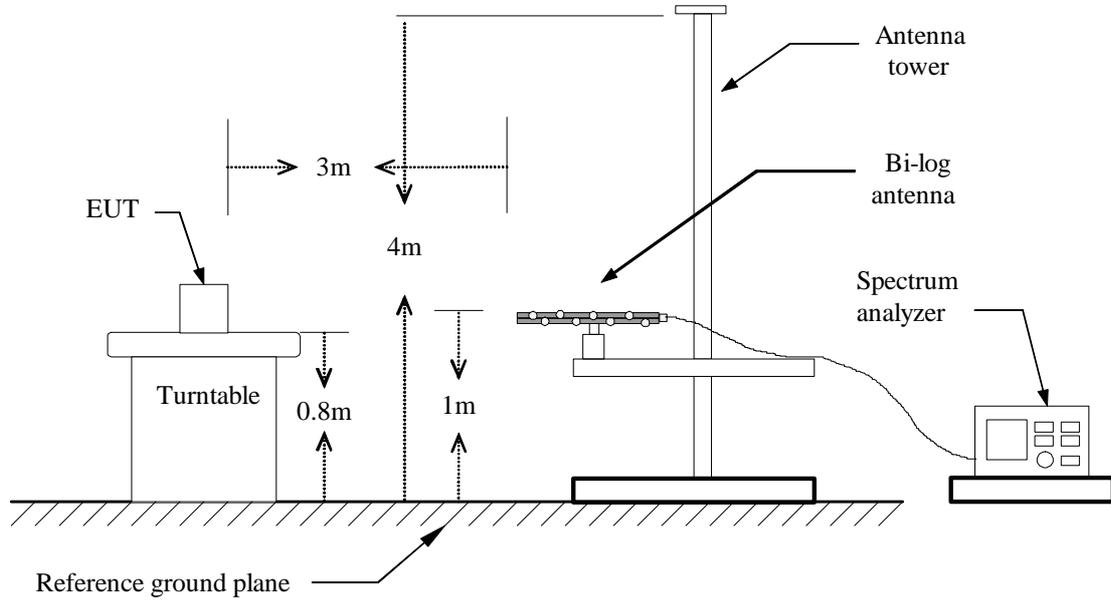

Above 1 GHz

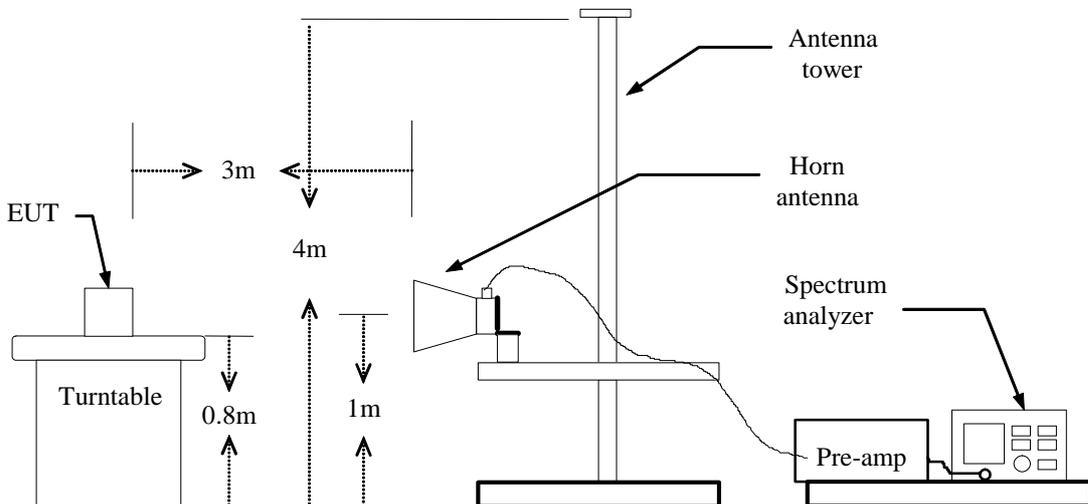



TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Set the spectrum analyzer in the following setting as:
Below 1GHz:
 RBW=100kHz / VBW=300kHz / Sweep=AUTO
Above 1GHz:
 (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
 (b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
7. Repeat above procedures until the measurements for all frequencies are complete.

TEST RESULTS

No non-compliance noted



TEST DATA

Below 1 GHz

Operation Mode: Normal Link

Test Date: June 4, 2009

Temperature: 18°C

Tested by: Stan Lin

Humidity: 60% RH

Polarity: Ver. / Hor.

| Frequency (MHz) | Ant. Pol. (H/V) | Reading (dBuV) | Correction Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----------------|-----------------|----------------|--------------------------|-----------------|----------------|-------------|--------|
| 37.2750 | V | 50.30 | -15.07 | 35.23 | 40.00 | -4.77 | Peak |
| 42.1250 | V | 50.08 | -14.76 | 35.32 | 40.00 | -4.68 | Peak |
| 76.0750 | V | 53.85 | -17.43 | 36.42 | 40.00 | -3.58 | Peak |
| 129.4250 | V | 48.69 | -13.56 | 35.13 | 43.50 | -8.37 | Peak |
| 151.2500 | V | 52.55 | -12.94 | 39.61 | 43.50 | -3.89 | Peak |
| 321.0000 | V | 53.40 | -12.35 | 41.05 | 46.00 | -4.95 | Peak |
| 376.7750 | V | 48.83 | -11.45 | 37.38 | 46.00 | -8.62 | Peak |
| 505.3000 | V | 43.72 | -8.83 | 34.89 | 46.00 | -11.11 | Peak |
| 866.6250 | V | 38.77 | -1.53 | 37.24 | 46.00 | -8.76 | Peak |
| 76.0750 | H | 46.68 | -17.43 | 29.25 | 40.00 | -10.75 | Peak |
| 100.3250 | H | 49.32 | -17.12 | 32.20 | 43.50 | -11.30 | Peak |
| 149.2239 | H | 51.58 | -13.09 | 38.49 | 43.50 | -5.01 | Peak |
| 289.4750 | H | 46.60 | -12.10 | 34.50 | 46.00 | -11.50 | Peak |
| 321.0000 | H | 53.45 | -12.35 | 41.10 | 46.00 | -4.90 | Peak |
| 376.7750 | H | 49.84 | -11.45 | 38.39 | 46.00 | -7.61 | Peak |
| 750.2250 | H | 39.52 | -3.08 | 36.44 | 46.00 | -9.56 | Peak |

Remark:

1. No emission found between lowest internal used / generated frequency to 30 MHz. (9kHz ~ 30MHz)
2. Measuring frequencies from 30 MHz to the 1GHz.
3. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using peak/quasi-peak detector mode.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. Margin (dB) = Result (dBuV/m) – Limit (dBuV/m).



Above 1 GHz

GFSK

Operation Mode: TX / CH Low**Test Date:** June 2, 2009**Temperature:** 18°C**Tested by:** Alonso Lu**Humidity:** 49 % RH**Polarity:** Ver. / Hor.

| Freq. (MHz) | Ant. Pol H/V | Peak Reading (dBuV) | AV Reading (dBuV) | Ant. / CL CF (dB) | Actual Fs | | Peak Limit (dBuV/m) | AV Limit (dBuV/m) | Margin (dB) | Remark |
|-------------|--------------|---------------------|-------------------|-------------------|---------------|-------------|---------------------|-------------------|-------------|--------|
| | | | | | Peak (dBuV/m) | AV (dBuV/m) | | | | |
| 1063.33 | V | 50.19 | --- | -6.96 | 43.23 | --- | 74.00 | 54.00 | -10.77 | Peak |
| 1333.33 | V | 57.58 | --- | -6.05 | 51.52 | --- | 74.00 | 54.00 | -2.48 | Peak |
| 1596.67 | V | 47.13 | --- | -4.03 | 43.10 | --- | 74.00 | 54.00 | -10.90 | Peak |
| 2496.67 | V | 46.91 | --- | 1.20 | 48.11 | --- | 74.00 | 54.00 | -5.89 | Peak |
| 4991.67 | V | 46.03 | 30.27 | 7.45 | 53.48 | 37.72 | 74.00 | 54.00 | -16.28 | AVG |
| 7208.33 | V | 42.77 | 34.64 | 12.73 | 55.50 | 47.37 | 74.00 | 54.00 | -6.63 | AVG |
| 1040.00 | H | 48.40 | --- | -7.12 | 41.28 | --- | 74.00 | 54.00 | -12.72 | Peak |
| 1330.00 | H | 53.66 | --- | -7.41 | 46.25 | --- | 74.00 | 54.00 | -7.75 | Peak |
| 2103.33 | H | 44.03 | --- | -1.31 | 42.72 | --- | 74.00 | 54.00 | -11.28 | Peak |
| 2813.33 | H | 43.66 | --- | -0.14 | 43.52 | --- | 74.00 | 54.00 | -10.48 | Peak |
| 4808.33 | H | 45.28 | 38.76 | 6.78 | 52.07 | 45.54 | 74.00 | 54.00 | -8.46 | AVG |
| 4991.67 | H | 42.99 | --- | 8.10 | 51.09 | --- | 74.00 | 54.00 | -2.91 | Peak |
| 7208.33 | H | 42.88 | 35.16 | 10.90 | 53.78 | 46.06 | 74.00 | 54.00 | -7.94 | AVG |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
 - a. Peak Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 1MHz, Sweep time = Auto.
 - b. AV Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 10Hz, Sweep time = Auto.

**Operation Mode:** TX / CH Mid**Test Date:** June 2, 2009**Temperature:** 18°C**Tested by:** Alonso Lu**Humidity:** 49 % RH**Polarity:** Ver. / Hor.

| Freq. (MHz) | Ant. Pol H/V | Peak Reading (dBuV) | AV Reading (dBuV) | Ant. / CL CF (dB) | Actual Fs | | Peak Limit (dBuV/m) | AV Limit (dBuV/m) | Margin (dB) | Remark |
|-------------|--------------|---------------------|-------------------|-------------------|---------------|-------------|---------------------|-------------------|-------------|--------|
| | | | | | Peak (dBuV/m) | AV (dBuV/m) | | | | |
| 1063.33 | V | 54.14 | --- | -6.96 | 47.18 | --- | 74.00 | 54.00 | -6.82 | Peak |
| 1330.00 | V | 57.60 | --- | -6.09 | 51.52 | --- | 74.00 | 54.00 | -2.48 | Peak |
| 1593.33 | V | 49.09 | --- | -4.09 | 45.00 | --- | 74.00 | 54.00 | -9.00 | Peak |
| 2500.00 | V | 46.48 | --- | 1.25 | 47.73 | --- | 74.00 | 54.00 | -6.27 | Peak |
| 2706.67 | V | 44.04 | --- | -0.34 | 43.70 | --- | 74.00 | 54.00 | -10.30 | Peak |
| 4991.67 | V | 45.49 | 30.19 | 7.45 | 52.93 | 37.64 | 74.00 | 54.00 | -16.36 | AVG |
| 7325.00 | V | 41.33 | 35.28 | 13.03 | 54.36 | 48.31 | 74.00 | 54.00 | -5.69 | AVG |
| 11666.67 | V | 40.01 | --- | 10.65 | 50.66 | --- | 74.00 | 54.00 | -3.34 | Peak |
| 1063.33 | H | 50.69 | --- | -6.90 | 43.79 | --- | 74.00 | 54.00 | -10.21 | Peak |
| 1330.00 | H | 52.46 | --- | -7.41 | 45.05 | --- | 74.00 | 54.00 | -8.95 | Peak |
| 2080.00 | H | 43.73 | --- | -1.57 | 42.16 | --- | 74.00 | 54.00 | -11.84 | Peak |
| 2673.33 | H | 43.62 | --- | -0.01 | 43.60 | --- | 74.00 | 54.00 | -10.40 | Peak |
| 4883.33 | H | 44.83 | 37.69 | 7.42 | 52.25 | 45.11 | 74.00 | 54.00 | -8.89 | Peak |
| 4991.67 | H | 42.86 | --- | 8.10 | 50.96 | --- | 74.00 | 54.00 | -3.04 | Peak |
| 7325.00 | H | 41.22 | --- | 9.88 | 51.10 | --- | 74.00 | 54.00 | -2.90 | Peak |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
 - a. Peak Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 1MHz, Sweep time = Auto.
 - b. AV Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 10Hz, Sweep time = Auto.

**Operation Mode:** TX / CH High**Test Date:** June 2, 2009**Temperature:** 18°C**Tested by:** Alonso Lu**Humidity:** 49 % RH**Polarity:** Ver. / Hor.

| Freq. (MHz) | Ant. Pol H/V | Peak Reading (dBuV) | AV Reading (dBuV) | Ant. / CL CF (dB) | Actual Fs | | Peak Limit (dBuV/m) | AV Limit (dBuV/m) | Margin (dB) | Remark |
|-------------|--------------|---------------------|-------------------|-------------------|---------------|-------------|---------------------|-------------------|-------------|--------|
| | | | | | Peak (dBuV/m) | AV (dBuV/m) | | | | |
| 1063.33 | V | 51.50 | --- | -6.96 | 44.55 | --- | 74.00 | 54.00 | -9.45 | Peak |
| 1330.00 | V | 57.25 | --- | -6.09 | 51.16 | --- | 74.00 | 54.00 | -2.84 | Peak |
| 1596.67 | V | 47.60 | --- | -4.03 | 43.57 | --- | 74.00 | 54.00 | -10.43 | Peak |
| 2496.67 | V | 46.55 | --- | 1.20 | 47.75 | --- | 74.00 | 54.00 | -6.25 | Peak |
| 1063.33 | V | 51.50 | --- | -6.96 | 44.55 | --- | 74.00 | 54.00 | -9.45 | Peak |
| 4991.67 | V | 46.33 | 30.25 | 7.45 | 53.78 | 37.70 | 74.00 | 54.00 | -16.30 | AVG |
| 7441.67 | V | 40.90 | 33.67 | 13.18 | 54.07 | 46.85 | 74.00 | 54.00 | -7.15 | AVG |
| 1063.33 | H | 50.74 | --- | -6.90 | 43.84 | --- | 74.00 | 54.00 | -10.16 | Peak |
| 1330.00 | H | 52.83 | --- | -7.41 | 45.42 | --- | 74.00 | 54.00 | -8.58 | Peak |
| 2103.33 | H | 43.08 | --- | -1.31 | 41.77 | --- | 74.00 | 54.00 | -12.23 | Peak |
| 4958.33 | H | 44.10 | 37.41 | 7.90 | 52.00 | 45.31 | 74.00 | 54.00 | -8.69 | AVG |
| 7441.67 | H | 39.99 | --- | 11.47 | 51.45 | --- | 74.00 | 54.00 | -2.55 | Peak |
| 11983.33 | H | 39.87 | --- | 10.75 | 50.63 | --- | 74.00 | 54.00 | -3.37 | Peak |
| N/A | | | | | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
 - a. Peak Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 1MHz, Sweep time = Auto.
 - b. AV Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 10Hz, Sweep time = Auto.

**Operation Mode:** RX / CH Mid**Test Date:** June 2, 2009**Temperature:** 18°C**Tested by:** Alonso Lu**Humidity:** 49 % RH**Polarity:** Ver. / Hor.

| Freq. (MHz) | Ant. Pol H/V | Peak Reading (dBuV) | AV Reading (dBuV) | Ant. / CL CF (dB) | Actual Fs | | Peak Limit (dBuV/m) | AV Limit (dBuV/m) | Margin (dB) | Remark |
|-------------|--------------|---------------------|-------------------|-------------------|---------------|-------------|---------------------|-------------------|-------------|--------|
| | | | | | Peak (dBuV/m) | AV (dBuV/m) | | | | |
| 1333.33 | V | 56.71 | --- | -6.05 | 50.65 | --- | 74.00 | 54.00 | -3.35 | Peak |
| 1596.67 | V | 46.62 | --- | -4.03 | 42.59 | --- | 74.00 | 54.00 | -11.41 | Peak |
| 2496.67 | V | 45.95 | --- | 1.20 | 47.15 | --- | 74.00 | 54.00 | -6.85 | Peak |
| 4075.00 | V | 41.82 | --- | 5.54 | 47.37 | --- | 74.00 | 54.00 | -6.63 | Peak |
| 4991.67 | V | 46.17 | 30.21 | 7.45 | 53.62 | 37.66 | 74.00 | 54.00 | -16.34 | AVG |
| 6941.67 | V | 40.24 | --- | 11.32 | 51.56 | --- | 74.00 | 54.00 | -2.44 | Peak |
| 10158.33 | V | 41.62 | --- | 8.61 | 50.23 | --- | 74.00 | 54.00 | -3.77 | Peak |
| 11450.00 | V | 39.76 | --- | 10.56 | 50.32 | --- | 74.00 | 54.00 | -3.68 | Peak |
| 11925.00 | V | 40.75 | --- | 10.74 | 51.49 | --- | 74.00 | 54.00 | -2.51 | Peak |
| 1063.33 | H | 51.40 | --- | -6.90 | 44.50 | --- | 74.00 | 54.00 | -9.50 | Peak |
| 1330.00 | H | 51.18 | --- | -7.41 | 43.77 | --- | 74.00 | 54.00 | -10.23 | Peak |
| 1543.33 | H | 45.27 | --- | -6.09 | 39.18 | --- | 74.00 | 54.00 | -14.82 | Peak |
| 3775.00 | H | 42.27 | --- | 6.25 | 48.52 | --- | 74.00 | 54.00 | -5.48 | Peak |
| 4975.00 | H | 43.33 | --- | 8.00 | 51.34 | --- | 74.00 | 54.00 | -2.66 | Peak |
| 10175.00 | H | 41.01 | --- | 8.65 | 49.66 | --- | 74.00 | 54.00 | -4.34 | Peak |
| 11916.67 | H | 39.96 | --- | 10.73 | 50.69 | --- | 74.00 | 54.00 | -3.31 | Peak |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
 - a. Peak Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 1MHz, Sweep time = Auto.
 - b. AV Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 10Hz, Sweep time = Auto.



8DPSK

Operation Mode: TX / CH Low**Test Date:** June 2, 2009**Temperature:** 18°C**Tested by:** Alonso Lu**Humidity:** 49 % RH**Polarity:** Ver. / Hor.

| Freq. (MHz) | Ant. Pol H/V | Peak Reading (dBuV) | AV Reading (dBuV) | Ant. / CL CF (dB) | Actual Fs | | Peak Limit (dBuV/m) | AV Limit (dBuV/m) | Margin (dB) | Remark |
|-------------|--------------|---------------------|-------------------|-------------------|---------------|-------------|---------------------|-------------------|-------------|--------|
| | | | | | Peak (dBuV/m) | AV (dBuV/m) | | | | |
| 1063.33 | V | 54.47 | --- | -6.96 | 47.51 | --- | 74.00 | 54.00 | -6.49 | Peak |
| 1330.00 | V | 58.24 | 37.21 | -6.09 | 52.15 | 31.12 | 74.00 | 54.00 | -22.88 | Peak |
| 1940.00 | V | 45.23 | --- | -2.08 | 43.15 | --- | 74.00 | 54.00 | -10.85 | Peak |
| 2223.33 | V | 45.69 | --- | 0.41 | 46.09 | --- | 74.00 | 54.00 | -7.91 | Peak |
| 2496.67 | V | 46.90 | --- | 1.20 | 48.10 | --- | 74.00 | 54.00 | -5.90 | Peak |
| 4991.67 | V | 46.43 | 30.16 | 7.45 | 53.87 | 37.61 | 74.00 | 54.00 | -16.39 | AVG |
| 7208.33 | V | 44.77 | 34.93 | 12.73 | 57.50 | 47.66 | 74.00 | 54.00 | -6.34 | AVG |
| 10900.00 | V | 39.89 | --- | 10.04 | 49.94 | --- | 74.00 | 54.00 | -4.06 | Peak |
| 1063.33 | H | 49.80 | --- | -6.90 | 42.90 | --- | 74.00 | 54.00 | -11.10 | Peak |
| 1333.33 | H | 53.92 | --- | -7.47 | 46.46 | --- | 74.00 | 54.00 | -7.54 | Peak |
| 2070.00 | H | 43.87 | --- | -1.73 | 42.14 | --- | 74.00 | 54.00 | -11.86 | Peak |
| 2633.33 | H | 44.06 | --- | -0.13 | 43.93 | --- | 74.00 | 54.00 | -10.07 | Peak |
| 4800.00 | H | 46.51 | 37.72 | 6.71 | 53.22 | 44.43 | 74.00 | 54.00 | -9.57 | AVG |
| 7208.33 | H | 45.87 | 35.07 | 10.90 | 56.77 | 45.97 | 74.00 | 54.00 | -8.03 | AVG |
| 11850.00 | H | 40.87 | --- | 10.71 | 51.58 | --- | 74.00 | 54.00 | -2.42 | Peak |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
 - a. Peak Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 1MHz, Sweep time = Auto.
 - b. AV Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 10Hz, Sweep time = Auto.

**Operation Mode:** TX / CH Mid**Test Date:** June 2, 2009**Temperature:** 18°C**Tested by:** Alonso Lu**Humidity:** 49 % RH**Polarity:** Ver. / Hor.

| Freq. (MHz) | Ant. Pol H/V | Peak Reading (dBuV) | AV Reading (dBuV) | Ant. / CL CF (dB) | Actual Fs | | Peak Limit (dBuV/m) | AV Limit (dBuV/m) | Margin (dB) | Remark |
|-------------|--------------|---------------------|-------------------|-------------------|---------------|-------------|---------------------|-------------------|-------------|--------|
| | | | | | Peak (dBuV/m) | AV (dBuV/m) | | | | |
| 1066.67 | V | 49.90 | --- | -6.91 | 42.99 | --- | 74.00 | 54.00 | -11.01 | Peak |
| 1330.00 | V | 56.75 | --- | -6.09 | 50.66 | --- | 74.00 | 54.00 | -3.34 | Peak |
| 1600.00 | V | 49.10 | --- | -3.97 | 45.13 | --- | 74.00 | 54.00 | -8.87 | Peak |
| 2496.67 | V | 46.36 | --- | 1.20 | 47.55 | --- | 74.00 | 54.00 | -6.45 | Peak |
| 4991.67 | V | 44.79 | 31.48 | 7.45 | 52.23 | 38.93 | 74.00 | 54.00 | -15.07 | AVG |
| 7325.00 | V | 44.47 | 34.94 | 13.03 | 57.50 | 47.97 | 74.00 | 54.00 | -6.03 | AVG |
| 11850.00 | V | 40.94 | --- | 10.71 | 51.65 | --- | 74.00 | 54.00 | -2.35 | Peak |
| 1066.67 | H | 50.40 | --- | -6.87 | 43.53 | --- | 74.00 | 54.00 | -10.47 | Peak |
| 1333.33 | H | 53.05 | --- | -7.47 | 45.58 | --- | 74.00 | 54.00 | -8.42 | Peak |
| 2096.67 | H | 44.32 | --- | -1.30 | 43.02 | --- | 74.00 | 54.00 | -10.98 | Peak |
| 2743.33 | H | 43.75 | --- | -0.09 | 43.66 | --- | 74.00 | 54.00 | -10.34 | Peak |
| 4883.33 | H | 45.79 | 37.42 | 7.42 | 53.21 | 44.84 | 74.00 | 54.00 | -9.16 | AVG |
| 7325.00 | H | 44.12 | 33.34 | 9.88 | 54.01 | 43.22 | 74.00 | 54.00 | -10.78 | AVG |
| 10316.67 | H | 41.84 | --- | 8.98 | 50.82 | --- | 74.00 | 54.00 | -3.18 | Peak |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
 - a. Peak Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 1MHz, Sweep time = Auto.
 - b. AV Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 10Hz, Sweep time = Auto.

**Operation Mode:** TX / CH High**Test Date:** June 2, 2009**Temperature:** 18°C**Tested by:** Alonso Lu**Humidity:** 49 % RH**Polarity:** Ver. / Hor.

| Freq. (MHz) | Ant. Pol H/V | Peak Reading (dBuV) | AV Reading (dBuV) | Ant. / CL CF (dB) | Actual Fs | | Peak Limit (dBuV/m) | AV Limit (dBuV/m) | Margin (dB) | Remark |
|-------------|--------------|---------------------|-------------------|-------------------|---------------|-------------|---------------------|-------------------|-------------|--------|
| | | | | | Peak (dBuV/m) | AV (dBuV/m) | | | | |
| 1063.33 | V | 49.90 | --- | -6.96 | 42.94 | --- | 74.00 | 54.00 | -11.06 | Peak |
| 1333.33 | V | 57.82 | --- | -6.05 | 51.77 | --- | 74.00 | 54.00 | -2.23 | Peak |
| 1596.67 | V | 47.72 | --- | -4.03 | 43.69 | --- | 74.00 | 54.00 | -10.31 | Peak |
| 2193.33 | V | 43.16 | --- | 0.33 | 43.49 | --- | 74.00 | 54.00 | -10.51 | Peak |
| 2546.67 | V | 43.80 | --- | 0.31 | 44.10 | --- | 74.00 | 54.00 | -9.90 | Peak |
| 4991.67 | V | 46.43 | 30.22 | 7.45 | 53.88 | 37.67 | 74.00 | 54.00 | -16.33 | AVG |
| 7441.67 | V | 39.99 | 33.30 | 13.18 | 53.17 | 46.48 | 74.00 | 54.00 | -7.52 | AVG |
| 11066.67 | V | 40.01 | --- | 10.25 | 50.27 | --- | 74.00 | 54.00 | -3.73 | Peak |
| 1063.33 | H | 49.89 | --- | -6.90 | 43.00 | --- | 74.00 | 54.00 | -11.00 | Peak |
| 1326.67 | H | 53.43 | --- | -7.36 | 46.08 | --- | 74.00 | 54.00 | -7.92 | Peak |
| 2073.33 | H | 44.09 | --- | -1.68 | 42.41 | --- | 74.00 | 54.00 | -11.59 | Peak |
| 2816.67 | H | 44.18 | --- | -0.10 | 44.08 | --- | 74.00 | 54.00 | -9.92 | Peak |
| 4958.33 | H | 46.09 | 36.49 | 7.90 | 53.99 | 44.39 | 74.00 | 54.00 | -9.61 | AVG |
| 7441.67 | H | 42.96 | 32.78 | 11.47 | 54.42 | 44.25 | 74.00 | 54.00 | -9.75 | AVG |
| 10966.67 | 10966.67 | 39.37 | --- | 10.15 | 49.52 | --- | 74.00 | 54.00 | -4.48 | Peak |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
 - a. Peak Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 1MHz, Sweep time = Auto.
 - b. AV Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 10Hz, Sweep time = Auto.

**Operation Mode:** RX / CH Mid**Test Date:** June 2, 2009**Temperature:** 18°C**Tested by:** Alonso Lu**Humidity:** 49 % RH**Polarity:** Ver. / Hor.

| Freq. (MHz) | Ant. Pol H/V | Peak Reading (dBuV) | AV Reading (dBuV) | Ant. / CL CF (dB) | Actual Fs | | Peak Limit (dBuV/m) | AV Limit (dBuV/m) | Margin (dB) | Remark |
|-------------|--------------|---------------------|-------------------|-------------------|---------------|-------------|---------------------|-------------------|-------------|--------|
| | | | | | Peak (dBuV/m) | AV (dBuV/m) | | | | |
| 1063.33 | V | 49.18 | --- | -6.96 | 42.23 | --- | 74.00 | 54.00 | -11.77 | Peak |
| 1330.00 | V | 57.74 | --- | -6.09 | 51.65 | --- | 74.00 | 54.00 | -2.35 | Peak |
| 1596.67 | V | 45.97 | --- | -4.03 | 41.94 | --- | 74.00 | 54.00 | -12.06 | Peak |
| 2500.00 | V | 45.43 | --- | 1.25 | 46.68 | --- | 74.00 | 54.00 | -7.32 | Peak |
| 4983.33 | V | 46.81 | 30.17 | 7.50 | 54.32 | 37.67 | 74.00 | 54.00 | -16.33 | AVG |
| 6416.67 | V | 40.08 | --- | 9.38 | 49.46 | --- | 74.00 | 54.00 | -4.54 | Peak |
| 8800.00 | V | 40.31 | --- | 8.22 | 48.53 | --- | 74.00 | 54.00 | -5.47 | Peak |
| 10166.67 | V | 40.65 | --- | 8.63 | 49.28 | --- | 74.00 | 54.00 | -4.72 | Peak |
| 11058.33 | V | 39.53 | --- | 10.25 | 49.78 | --- | 74.00 | 54.00 | -4.22 | Peak |
| 11841.67 | V | 40.45 | --- | 10.71 | 51.16 | --- | 74.00 | 54.00 | -2.84 | Peak |
| 1066.67 | H | 51.07 | --- | -6.87 | 44.21 | --- | 74.00 | 54.00 | -9.79 | Peak |
| 1330.00 | H | 52.90 | --- | -7.41 | 45.48 | --- | 74.00 | 54.00 | -8.52 | Peak |
| 2700.00 | H | 43.07 | --- | 0.06 | 43.13 | --- | 74.00 | 54.00 | -10.87 | Peak |
| 4041.67 | H | 40.76 | --- | 8.10 | 48.86 | --- | 74.00 | 54.00 | -5.14 | Peak |
| 4975.00 | H | 42.94 | --- | 8.00 | 50.94 | --- | 74.00 | 54.00 | -3.06 | Peak |
| 6916.67 | H | 39.47 | --- | 10.66 | 50.14 | --- | 74.00 | 54.00 | -3.86 | Peak |
| 8650.00 | H | 40.61 | --- | 8.06 | 48.67 | --- | 74.00 | 54.00 | -5.33 | Peak |
| 11083.33 | H | 39.14 | --- | 10.27 | 49.41 | --- | 74.00 | 54.00 | -4.59 | Peak |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
 - a. Peak Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 1MHz, Sweep time = Auto.
 - b. AV Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 10Hz, Sweep time = Auto.



7.9. POWERLINE CONDUCTED EMISSIONS

LIMIT

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

| Frequency Range (MHz) | Limits (dBµV) | |
|-----------------------|---------------|----------|
| | Quasi-peak | Average |
| 0.15 to 0.50 | 66 to 56 | 56 to 46 |
| 0.50 to 5 | 56 | 46 |
| 5 to 30 | 60 | 50 |

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

TEST CONFIGURATION

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

TEST PROCEDURE

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.

TEST RESULTS

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.



TEST DATA

Operation Mode: Normal Link

Test Date: June 3, 2009

Temperature: 25°C

Tested by: Stan Lin

Humidity: 57% RH

| Freq. (MHz) | QP Reading (dBuV) | AV Reading (dBuV) | Corr. factor (dB) | QP Result (dBuV) | AV Result (dBuV) | QP Limit (dBuV) | AV Limit (dBuV) | QP Margin (dB) | AV Margin (dB) | Note |
|-------------|-------------------|-------------------|-------------------|------------------|------------------|-----------------|-----------------|----------------|----------------|------|
| 0.1930 | 36.52 | 19.62 | 9.68 | 46.20 | 29.30 | 63.91 | 53.91 | -17.71 | -24.61 | L1 |
| 0.2516 | 29.52 | 13.32 | 9.68 | 39.20 | 23.00 | 61.70 | 51.70 | -22.50 | -28.70 | L1 |
| 0.3141 | 27.32 | 7.52 | 9.68 | 37.00 | 17.20 | 59.86 | 49.86 | -22.86 | -32.66 | L1 |
| 2.4000 | 26.20 | 14.00 | 9.70 | 35.90 | 23.70 | 56.00 | 46.00 | -20.10 | -22.30 | L1 |
| 3.4273 | 27.99 | 14.39 | 9.71 | 37.70 | 24.10 | 56.00 | 46.00 | -18.30 | -21.90 | L1 |
| 4.6223 | 26.22 | 15.52 | 9.78 | 36.00 | 25.30 | 56.00 | 46.00 | -20.00 | -20.70 | L1 |
| 13.5133 | 25.46 | 15.86 | 10.24 | 35.70 | 26.10 | 60.00 | 50.00 | -24.30 | -23.90 | L1 |
| 0.1891 | 37.61 | 21.01 | 9.69 | 47.30 | 30.70 | 64.08 | 54.08 | -16.78 | -23.38 | L2 |
| 2.5094 | 25.49 | 14.49 | 9.71 | 35.20 | 24.20 | 56.00 | 46.00 | -20.80 | -21.80 | L2 |
| 3.4352 | 25.39 | 12.09 | 9.71 | 35.10 | 21.80 | 56.00 | 46.00 | -20.90 | -24.20 | L2 |
| 4.5602 | 27.71 | 16.31 | 9.79 | 37.50 | 26.10 | 56.00 | 46.00 | -18.50 | -19.90 | L2 |
| 5.2008 | 28.36 | 18.66 | 9.84 | 38.20 | 28.50 | 60.00 | 50.00 | -21.80 | -21.50 | L2 |
| 13.3453 | 25.19 | 15.89 | 10.31 | 35.50 | 26.20 | 60.00 | 50.00 | -24.50 | -23.80 | L2 |


Remark:

1. The measuring frequencies range between 0.15 MHz and 30 MHz.
2. The emissions measured in the frequency range between 0.15 MHz and 30MHz were made with an instrument using Quasi-peak detector and Average detector.
3. The IF bandwidth of SPA between 0.15MHz and 30MHz was 10kHz. The IF bandwidth of Test Receiver between 0.15MHz and 30MHz was 9kHz.
4. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line)




Test Plot

Conducted emissions (Line 1)

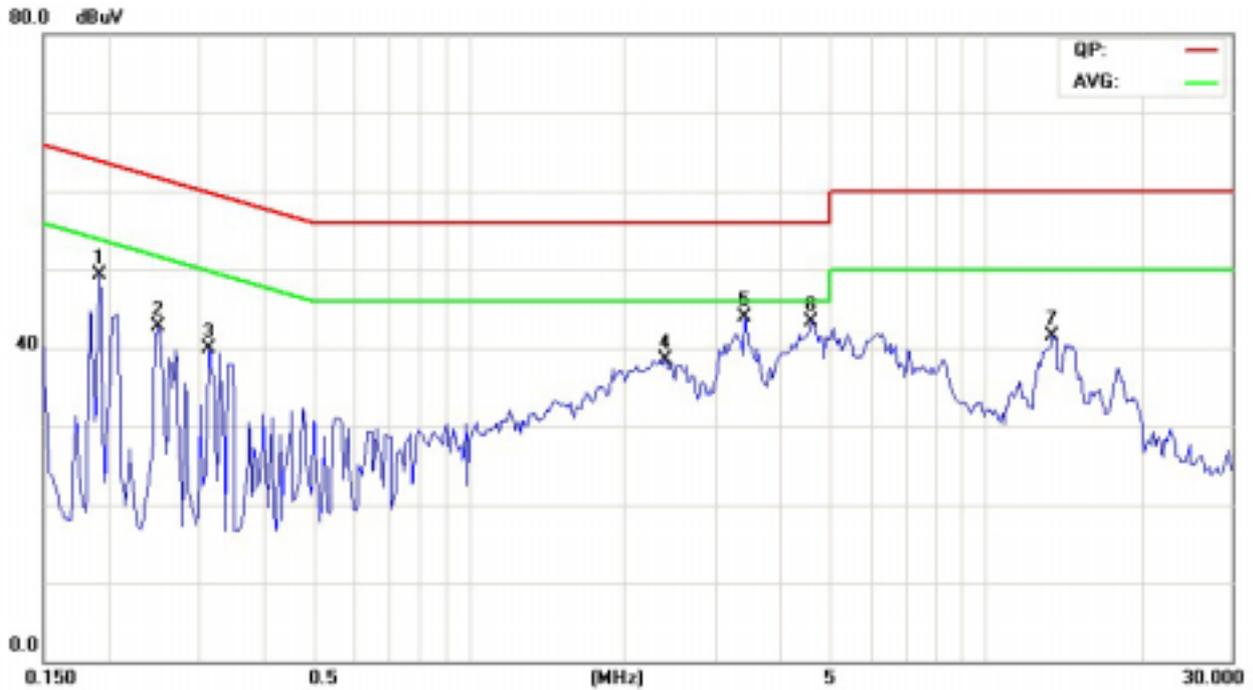

Conducted emissions (Line 2)

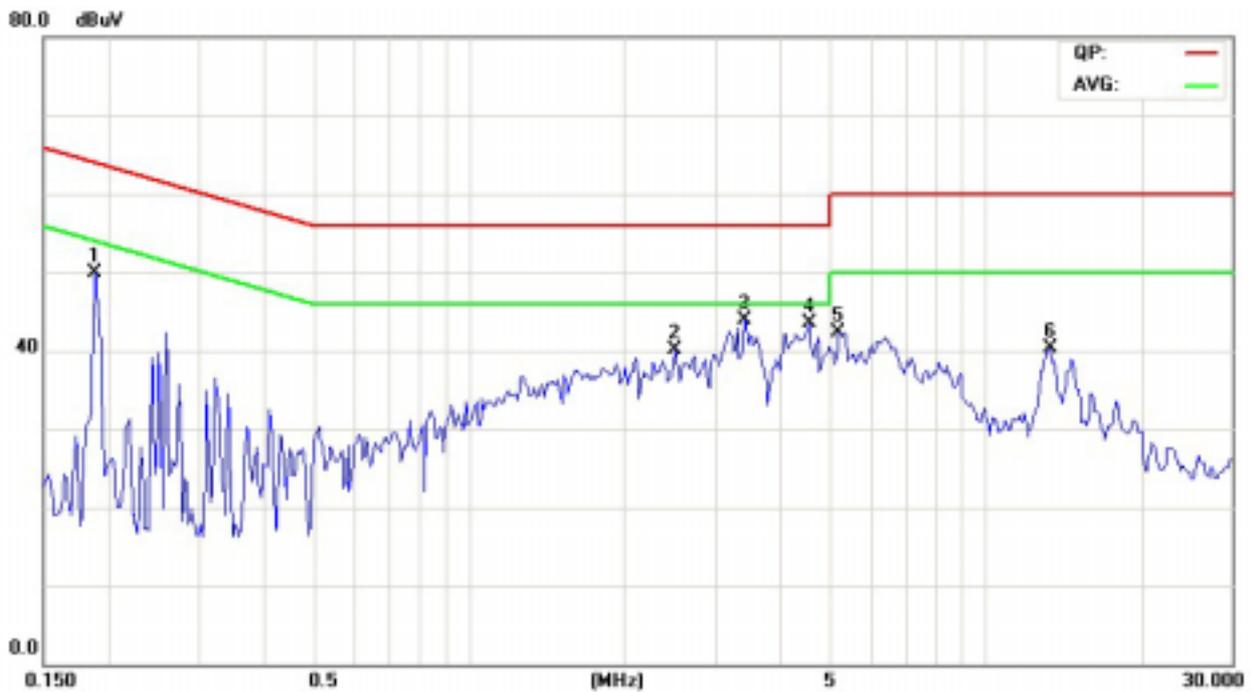



APPENDIX I RADIO FREQUENCY EXPOSURE

LIMIT

According to §15.247(i), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines. See § 1.1307(b)(1) of this chapter.

EUT SPECIFICATION

| | |
|-----------------------------------|---|
| EUT | Personal Computer |
| Frequency band (Operating) | <input type="checkbox"/> WLAN: 2.412GHz ~ 2.462GHz <input type="checkbox"/> WLAN: 5.18GHz ~ 5.32GHz / 5.50GHz ~ 5.70GHz <input type="checkbox"/> WLAN: 5.745GHz ~ 5.825GHz <input checked="" type="checkbox"/> Others Bluetooth: 2.402GHz ~ 2.480GHz |
| Device category | <input checked="" type="checkbox"/> Portable (<20cm separation) <input type="checkbox"/> Mobile (>20cm separation) <input type="checkbox"/> Others |
| Exposure classification | <input type="checkbox"/> Occupational/Controlled exposure ($S = 5mW/cm^2$) <input checked="" type="checkbox"/> General Population/Uncontrolled exposure ($S=1mW/cm^2$) |
| Antenna diversity | <input type="checkbox"/> Single antenna <input checked="" type="checkbox"/> Multiple antennas <input type="checkbox"/> Tx diversity <input type="checkbox"/> Rx diversity <input checked="" type="checkbox"/> Tx/Rx diversity |
| Max. output power | 2.50 dBm (1.78mW) |
| Antenna gain (Max) | -1.04 dBi (Numeric gain: 0.787) |
| Evaluation applied | <input type="checkbox"/> MPE Evaluation <input type="checkbox"/> SAR Evaluation <input checked="" type="checkbox"/> N/A |

Remark:

1. The maximum output power is 2.5dBm (1.78mW) at 2480MHz (with 0.787 numeric antenna gain.)
2. DTS device is not subject to routine RF evaluation; MPE estimate is used to justify the compliance.
3. For mobile or fixed location transmitters, no SAR consideration applied. The minimum separation generally be used is at least 20 cm, even if the calculations indicate that the MPE distance would be lesser.

TEST RESULTS

No non-compliance noted.

(SAR evaluation is not required for the PORTABLE device while its maximum output power is lower than the general population low threshold: $60/f_{(GHz)}=60/2.441=24.58mW$)