

部品番号 (H=1) 末尾迄記入
文字色: PANTONE 430C

A部
CNR-002#/R5A
Complies with Part 68, FCC Rules
US: G65M500BCR0002R5A
Ringer Equivalence: 0.0 (CANADA)
Required Connector: USOC RJ11C

色	記載文字	字高	書体
PANTONE 430C	SONY®	ソニーロゴタイプ	L=13 (No. 2) (R) マーク付き
	MODEL	h=1.8	NEW SONY ID TYPE HRC (SHIRUKU)
	PCV-E21L	h=2.0	NEW SONY ID TYPE HR (SHIRUKU)
	PERSONAL COMPUTER	h=1.5	
	AC INPUT	h=2.0	ヘルベチカ デミボールド ワイド
	100-120V	h=2.0	NEW SONY ID TYPE HR (SHIRUKU)
	6A 50/60Hz	h=2.0	
	~	a=1.5	清刷参照 交流マーク
	I. T. E. 13C1	h=1.2	NEW SONY ID TYPE HR (SHIRUKU)
	IC: 409B-PCVE21L	h=1.5	NEW SONY ID TYPE HR (SHIRUKU)
	FCC ID: AK8PCVE21L	h=1.5	NEW SONY ID TYPE HR (SHIRUKU)
	Sony Corporation	h=1.5	SONY CORPORATION REGULAR
	Made in Japan	h=1.5	NEW SONY ID TYPE HR (SHIRUKU)
	CNR-002#/R5A Complies (A部参照)	h=1.5	NEW SONY ID TYPE HRC (SHIRUKU)
Complies Canada ICES/NMB-003	h=1.5	NEW SONY ID TYPE HRC (SHIRUKU)	
FC	h=4.5	清刷参照	
UL LISTED	h=7.0	清刷参照	


- 注 1) この部品にはSS-00259-1PART1に指定する物質を含んだ材料は使用してはならない。
- 2) 成形樹脂・インキ・塗料・被覆電線はグリーンパートナー認定取引先から調達すること
- 3) 品質特性: SS-00077「ソニー部品設計基準-機銘板」の6項に定める各特性を満足すること。
- 4) 版下校正を必ず受けること。
- 5) 印刷色 地: SP-572
- 6) UL969承認ラベルのこと

△x					UNIT mm	TOLERANCE	USED ON	RANK
△x					ANGLE			
△x					SCALE	±0.3		FAMILY
△x					2:1		ORIGINAL MODEL ATX-9400 (U)	
△x					MATERIAL (COLOR)	PC+PSA t0.3	FINISH (COLOR)	下地色: SP-572 文字色: PANTONE 430C
△x					DESCRIPTION	(E) LABEL, MODEL NUMBER		
△x		EC-A*****	P/N RELEASE K.S		(J) 機銘板			
HISTORY X COUNT	SUFFIX REPL.	ECN-NO. DATE	REVISION	SIGN.	DRAWN BY PLANNED BY CHECKED BY APPROVED BY MODEL ATX-9400 (1) PART NO. 0-432-908-01			
04.09.22 安西	04.09.22 安西				PART NO. 2-580-080-01			
THIS DOCUMENT IS THE PROPRIETARY PROPERTY OF SONY. ITS USE IS AUTHORIZED ONLY FOR RESPONDING TO A REQUEST FOR QUOTATION, OR FOR THE PERFORMANCE OF WORK FOR SONY. ALL QUESTIONS MUST BE REFERRED TO THE LOCAL PURCHASING DEPARTMENT OF SONY.					SHEET 1/1			

DRAWING (TYPE D32)

SONY STANDARD 90.10

A3

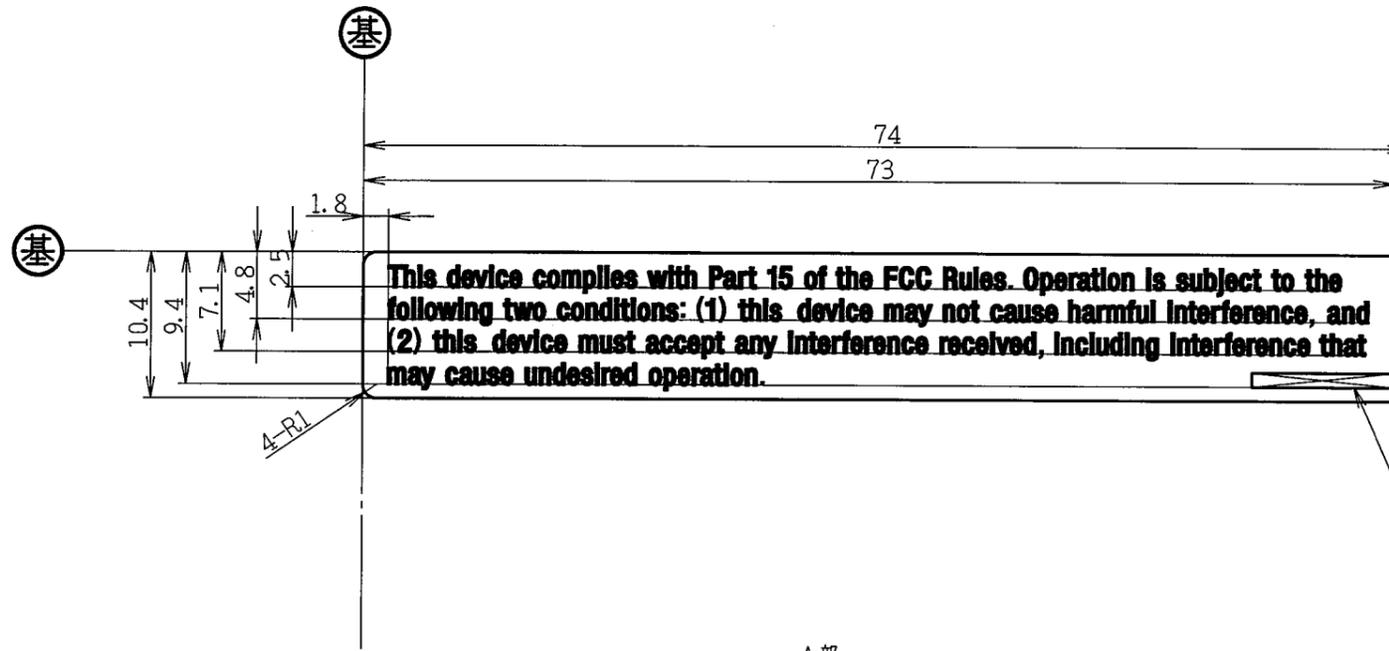


部品番号 (H=1) 末尾遊記入
文字色: PANTONE 430C

A部

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

材料構成図

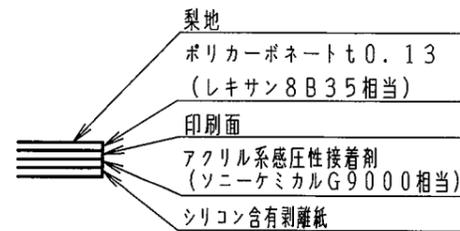

- 注1) この部品には SS-00259-1 に指定する物質を含んだ材料は、使用してはならない。
- 2) 成形用樹脂・インキ・塗料・被覆電線はグリーンパートナー認定取引先から調達すること。
- 3) 品質特性：ソニー部品設計基準ラベル・銘板の第7-1項に定める各特性を満足すること。
- 4) UL-969承認ラベルのこと。
- 5) 版下校正を必ず受けること。
- 6) 印刷色 地：SP-572

△x	UNIT	mm	TOLERANCE	±0.3	USED ON	RANK
	ANGLE	SCALE				
△x	MATERIAL (COLOR)			FINISH (COLOR)		
△x	PC+PSA			下地色: SP-572		
△x	t0.3			文字色: PANTONE 430C		
△x	DESCRIPTION			ORIGINAL MODEL		
△x	P/N RELEASE K.S			ATX-9400 (U)		
△x	REVISION			SIGN.		
△x	HISTORY			PART NO.		
△x	SUFFIX			PART NO.		
△x	ECN-NO.			PART NO.		
△x	DATE			PART NO.		
△x	DRAWN BY			PART NO.		
△x	PLANNED BY			PART NO.		
△x	CHECKED BY			PART NO.		
△x	APPROVED BY			PART NO.		
△x	MODEL			PART NO.		
△x	ATX-9400 (1)			PART NO.		
△x	PART NO.			PART NO.		
△x	0-466-457-01			PART NO.		
△x	SHEET			PART NO.		
△x	1			PART NO.		
△x	1			PART NO.		

Color	Mention letter	Height of letter	Typeface
PANTONE 430C	The device complies with Part 15 of the FCC Rules、 (A部参照)	h=1.5	NEW SONY ID TYPE HRC (SHIRUKU)

THIS DOCUMENT IS THE PROPRIETARY PROPERTY OF SONY. ITS USE IS AUTHORIZED ONLY FOR RESPONDING TO A REQUEST FOR QUOTATION, OR FOR THE PERFORMANCE OF WORK FOR SONY. ALL QUESTIONS MUST BE REFERRED TO THE LOCAL PURCHASING DEPARTMENT OF SONY.

< ATX-9400UAXE >

