

SAR EVALUATION REPORT

Report No. : 23FE0021-HO-3

Applicant : Sony Corporation
Type of Equipment : Wireless LAN card
Model No. : PEGA-WL110
FCC ID : AK8PEGAWL110
Test standard : FCC47CFR 2.1093
FCC OET Bulletin 65, Supplement C
Test Result : Complied
Max SAR Measured : 0.962 W/kg (Body,Bottom of card, 2462MHz)

1. This test report shall not be reproduced except full or partial, without the written approval of A-PEX International Co., Ltd.
2. The results in this report apply only to the sample tested.
3. This equipment is in compliance with above regulation. We hereby certify that the data contain a true representation of the SAR profile.
4. The test results in this test report are traceable to the national or international standards.

Date of test: January 21,23 and March 20 ,2003

Tested by: 

Miyo Ikuta
EMC Head Office Division

Approved by: 

Tetsuo Maeno
Site Manager of EMC Head Office Division

A-PEX International Co., Ltd.

EMC Head Office Division.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

CONTENTS

	PAGE
SECTION 1 : Client information	4
SECTION 2 : Equipment under test (E.U.T.)	4
SECTION 3 : Requirements for compliance testing defined by the FCC	5
SECTION 4 : Dosimetric assessment setup	5
4.1 : Configuration and peripherals	6
4.2 : System components	7
SECTION 5 : Test system specifications	8
SECTION 6 : Evaluation procedure	9
SECTION 7 : Exposure limit	10
SECTION 8 : Measurement outline	11
SECTION 9 : Measurement 1 (PCG-Z600HEK)	13
9.1 : Test setup of EUT	13
9.2 : Simulated tissue liquid parameter	14
9.3 : System validation data	15
SECTION 10 : Measurement 2 (Extension)	16
12.1 : Test setup of EUT	16
12.2 : Simulated tissue liquid parameter	18
12.3 : System validation data	19
SECTION 11 : Measurement 3 (PEG-NZ90/U)	20
13.1 : Test setup of EUT	20
13.2 : Simulated tissue liquid parameter	22
13.3 : System validation data	23
SECTION 12 : Measurement uncertainty	24
SECTION 13 : SAR Measurement results	25
13.1 : Measurement 1 (PCG-Z600HEK)	25
13.2 : Measurement 2 (Extension)	26
13.3 : Measurement 3 (PEG-NZ90/U)	27
SECTION 14 : Equipment & calibration information	28

A-PEX International Co., Ltd.

EMC Head Office Division.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

SECTION 15	: References	29
SECTION 16	: APPENDIX	30
APPENDIX 1	: Photographs of test setup	
APPENDIX 2	: SAR Measurement data	
APPENDIX 3	: Validation Measurement data	
APPENDIX 4	: System Validation Dipole (D2450V2,S/N: 713)	
APPENDIX 5	: Dosimetric E-Field Probe Calibration(ET3DV6,S/N: 1684)	

SECTION 1 : Client information

Company Name : Sony Corporation
Brand Name : SONY
Address : 6-7-35 Kita-Sinagawa Sinagawa -ku Tokyo,141-0001,Japan
Telephone Number : +81-3-5795-8712
Facsimile Number : +81-3-5795-8981
Contact Person : Masaharu abe

SECTION 2 : Equipment under test (E.U.T.)

2.1 Identification of E.U.T.

APPLICANT : Sony Corporation
Type of Equipment : Wireless LAN card
Model No. : PEGA-WL110
Serial No. : No.8 (PC and extension)
: No.4 (PDA)
Rating : DC3.3V
Country of Manufacture : JAPAN
Receipt Date of Sample : January 20,2003
Condition of EUT : Production prototype
Tx Frequency : 2412MHz~2462MHz
Modulation : DSSS
Max.Output Power Tested : 16.4 dBm Peak Conducted
Antenna Type : Internal
(Monopole Antenna)
Category Identified : Portable device



A-PEX International Co., Ltd.

EMC Head Office Division.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

SECTION 3 : Requirements for compliance testing defined by the FCC

The US Federal Communications Commission has released the report and order "Guidelines for Evaluating the Environmental Effects of RF Radiation", ET Docket No. 93-62 in August 1996. The order requires routine SAR evaluation prior to equipment authorization of portable transmitter devices, including portable telephones. For consumer products, the applicable limit is 1.6 mW/g for an uncontrolled environment and 8.0 mW/g for an occupational/controlled environment as recommended by the ANSI/IEEE standard C95.1-1992. According to the Supplement C of OET Bulletin 65 "Evaluating Compliance with FCC Guide-lines for Human Exposure to Radio frequency Electromagnetic Fields", released on Jun 29, 2001 by the FCC, the device should be evaluated at maximum output power (radiated from the antenna) under "worst-case" conditions for normal or intended use, incorporating normal antenna operating positions, device peak performance frequencies and positions for maximum RF energy coupling.

- 1 Specific Absorption Rate (SAR) is a measure of the rate of energy absorption due to exposure to an RF transmitting source (wireless portable device).
- 2 IEEE/ANSI Std. C95.1-1992 limits are used to determine compliance with FCC ET Docket 93-62.

SECTION 4 : Dosimetry assessment setup

These measurements were performed with the automated near-field scanning system DASY3 from Schmid & Partner Engineering AG (SPEAG). The system is based on a high precision robot (working range greater than 0.9 m), which positions the probes with a positional repeatability of better than +/- 0.02 mm. Special E- and H-field probes have been developed for measurements close to material discontinuity, the sensors of which are directly loaded with a Schottky diode and connected via highly resistive lines to the data acquisition unit. The SAR measurements were conducted with the dosimetry probe ET3DV6, SN: 1684 (manufactured by SPEAG), designed in the classical triangular configuration and optimized for dosimetric evaluation. The probe has been calibrated according to the procedure described in [2] with accuracy of better than +/-10%. The spherical isotropy was evaluated with the procedure described in [3] and found to be better than +/-0.25 dB. The phantom used was the SAM Twin Phantom as described in FCC supplement C, IEEP1528 and CENELEC EN50361.

A-PEX International Co., Ltd.


EMC Head Office Division.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

4.1 Configuration and peripherals

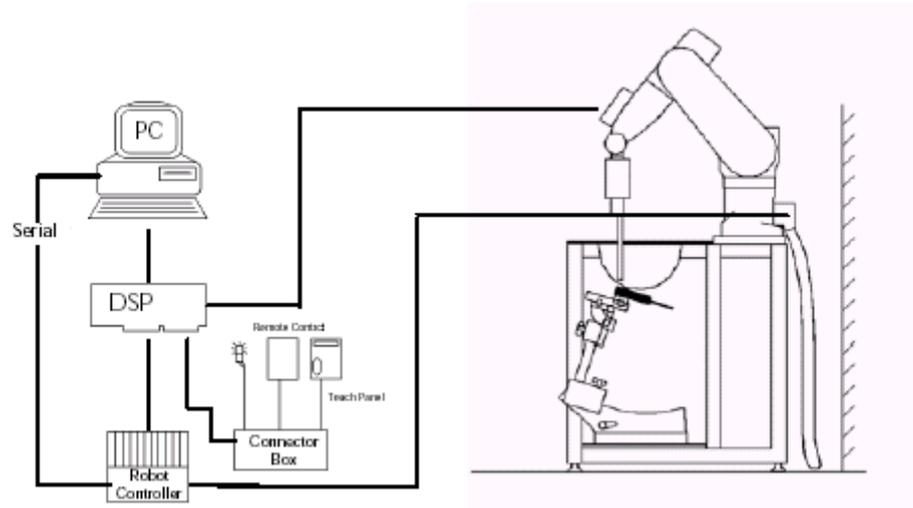

The DASY3 system for performing compliance tests consist of the following items:

1. A standard high precision 6-axis robot (Stäubli RX family) with controller and software.
2. An arm extension for accommodating the data acquisition electronics (DAE).
3. A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
4. A data acquisition electronic (DAE), which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
5. A unit to operate the optical surface detector, which is connected to the EOC.
6. The Electro-optical coupler (EOC) performs the conversion from the optical into a digital electric signal of the DAE. The EOC is connected to the PC plug-in card.
7. The functions of the PC plug-in card based on a DSP is to perform the time critical task such as signal filtering, surveillance of the robot operation fast movement interrupts.
8. A computer operating Windows 98
9. DASY3 software
10. Remote control with teaches pendant and additional circuitry for robot safety such as warning lamps, etc.
11. The SAM phantom enabling testing left-hand and right-hand usage.
12. The device holder for handheld EUT.
13. Tissue simulating liquid mixed according to the given recipes (see Application Note).
14. System validation dipoles to validate the proper functioning of the system.

A-PEX International Co., Ltd.

EMC Head Office Division.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

4.2 System components

4.2.1 ET3DV6 Probe Specification

Construction:

Symmetrical design with triangular core
Built-in optical fiber for surface detection System
Built-in shielding against static charges
PEEK enclosure material (resistant to organic solvents, e.g., glycol ether)

Calibration:

Basic Broad Band calibration in air from 10 MHz to 2.5 GHz
In brain and muscle simulating tissue at
Frequencies of 450 MHz, 900 MHz, 1.8 GHz and 2.45GHz (accuracy +/- 8%)

Frequency:

10 MHz to 3GHz; Linearity: +/-0.2 dB
(30 MHz to 3 GHz)

Directivity:

+/-0.2 dB in brain tissue (rotation around probe axis)
+/-0.4 dB in brain tissue (rotation normal probe axis)

Dynamic Range:

5 mW/g to > 100 mW/g; Linearity: +/-0.2 dB

Optical Surface Detection:


+/-0.2 mm repeatability in air and clear liquids over diffuse reflecting surfaces.

Dimensions:

Overall length: 330 mm (Tip: 16 mm)
Tip length: 16 mm
Body diameter: 12 mm (Body: 12 mm)
Tip diameter: 6.8 mm
Distance from probe tip to dipole centers: 2.7 mm

Application:

General dosimetric up to 3 GHz
Compliance tests of mobile phones
Fast automatic scanning in arbitrary phantoms

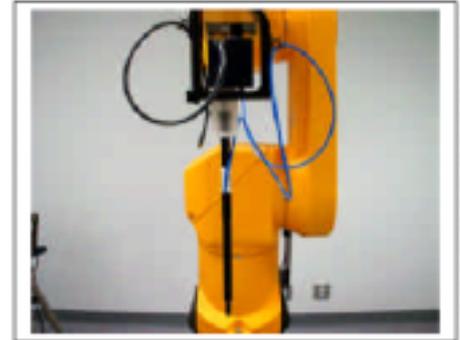

Inside view of
ET3DV6 E-field
Probe

4.2.2 SAM Phantom

Construction:

The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528-200X, CENELEC 50361 and IEC 62209. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points with the robot.

Shell Thickness:

2 +/-0.2 mm

Filling Volume:

Approx. 25 liters

Dimensions:(H x L x W): 810 x 1000 x 500 mm



SAM Phantom

A-PEX International Co., Ltd.

EMC Head Office Division.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

4.2.3 Device Holder for Transmitters

In combination with the SAM Twin Phantom V4.0, the Mounting Device enables the rotation of the mounted transmitter in spherical coordinates whereby the rotation points is the ear opening. The devices can be easily, accurately, and repeatedly positioned according to the FCC and CENELEC specifications. The device holder can be locked at different phantom locations (left head, right head, flat phantom).

* Note: A simulating human hand is not used due to the complex anatomical and geometrical structure of the hand that may produced infinite number of configurations.

To produce the worst-case condition (the hand absorbs antenna output power), the hand is omitted during the tests.

Device holder couldn't be used at this SAR measurement.



Device Holder

SECTION 5 : Test system specifications

Positioner

Robot: Stäubli Unimation Corp. Robot Model: RX60L
Repeatability: 0.02 mm
No. of axis: 6

Data Acquisition Electronic (DAE) System

Cell Controller

Processor: Pentium III
Clock Speed: 450 MHz
Operating System : Windows 98
Data Card: DASY3 PC-Board

Data Converter

Features: Signal Amplifier, multiplexer, A/D converter, and control logic
Software: DASY3 software
Connecting Lines: Optical downlink for data and status info.
Optical uplink for commands and clock

PC Interface Card

Function: 24 bit (64 MHz) DSP for real time processing
Link to DAE3
16-bit A/D converter for surface detection system
serial link to robot
direct emergency stop output for robot

E-Field Probe

Model: ET3DV6
Serial No.: 1684
Construction: Triangular core fiber optic detection system
Frequency: 10 MHz to 6 GHz
Linearity: +/-0.2 dB (30 MHz to 3 GHz)

Phantom

Type: SAM Twin Phantom V4.0
Shell Material: Fiberglass
Thickness: 2.0 +/-0.2 mm
Volume: Approx. 20 liters

A-PEX International Co., Ltd.

EMC Head Office Division.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

SECTION 6 : Evaluation procedure

The evaluation was performed with the following procedure:

Step 1: Measurement of the SAR value at a fixed location above the ear point or central position of flat phantom was used as a reference value for assessing the power drop.

Step 2: The SAR distribution at the exposed side of head or body position was measured at a distance of each device from the inner surface of the shell. The area covered the entire dimension of the head or EUT and the horizontal grid spacing was 20 mm x 20 mm. Based on these data, the area of the maximum absorption was determined by spline interpolation.

Step 3: Around this point, a volume of 32 mm x 32 mm x 30 mm was assessed by measuring 5 x 5 x 7 points. On the basis of this data set, the spatial peak SAR value was evaluated under the following procedure:

1. The data at the surface were extrapolated, since the center of the dipoles is 2.7 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.2 mm. The extrapolation was based on a least square algorithm [4]. A polynomial of the fourth order was calculated through the points in z-axes. This polynomial was then used to evaluate the points between the surface and the probe tip.
2. The maximum interpolated value was searched with a straightforward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1 g or 10 g) were computed by the 3D-Spline interpolation algorithm. The 3D-Spline is composed of three one-dimensional splines with the "Not a knot"-condition (in x, y and z-directions) [4], [5]. The volume was integrated with the trapezoidal-algorithm. One thousand points (10 x 10 x 10) were interpolated to calculate the average.
3. All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.

Step 4: Re-measurement of the SAR value at the same location as in Step 1. If the value changed by more than 5%, the evaluation was repeated.

A-PEX International Co., Ltd.

EMC Head Office Division.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

SECTION 7 : Exposure limit

(A) Limits for Occupational/Controlled Exposure (W/kg)

Spatial Average (averaged over the whole body)	Spatial Peak (averaged over any 1g of tissue)	Spatial Peak (hands/wrists/feet/ankles averaged over 10g)
0.4	8.0	20.0

(B) Limits for General population/Uncontrolled Exposure (W/kg)

Spatial Average (averaged over the whole body)	Spatial Peak (averaged over any 1g of tissue)	Spatial Peak (hands/wrists/feet/ankles averaged over 10g)
0.08	1.6	4.0

Occupational/Controlled Environments: are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure, (i.e. as a result of employment or occupation).

General Population/Uncontrolled Environments: are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

<p>NOTE:GENERAL POPULATION/UNCONTROLLED EXPOSURE SPATIAL PEAK(averaged over any 1g of tissue) LIMIT 1.6 W/kg</p>

A-PEX International Co., Ltd.

EMC Head Office Division.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

SECTION 8 : Measurement outline

This EUT (Wireless LAN Card) can be inserted into PCMCIA slot of notebook computers or PDA's.
We tested in each 1 host of PC and PDA, because the power of this EUT was less than 100mW.
(PC: Measurement 1 / PDA: Measurement 3)

To evaluate the SAR value of the worst condition rather than EUT is inserted into the notebook computers, we measured in Wireless LAN card with taking out the LAN card using extension circuit board. (Measurement 2)
The conditions of Measurement 1-3 are shown in the following.

Measurement 1

Information of PC

Manufacture	: Sony Corporation	Serial No.	: 5101649
Model No.	: PCG-Z600HEK	Display	: 12.1 TFT display
Microprocessor	: 800MHz Mobile Intel Pentium III		
Slot	: Single slot		



Note: When EUT is inserted into the notebook computers, the adapter of the PCMCIA card is shown in the following photograph.



A-PEX International Co., Ltd.

EMC Head Office Division.


4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

Measurement 2

We inserted EUT into the PC by using the extension circuit board.

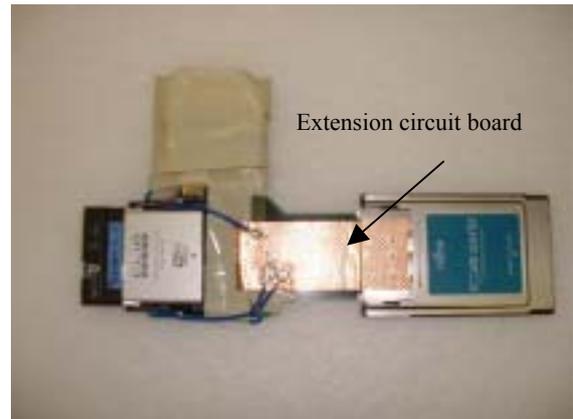


Measurement 3

Information of PDA

Manufacture : **Sony Corporation**
Serial No. : **3001542**

Model No. : **PEG-NZ90/U**
Slot : **Single slot**

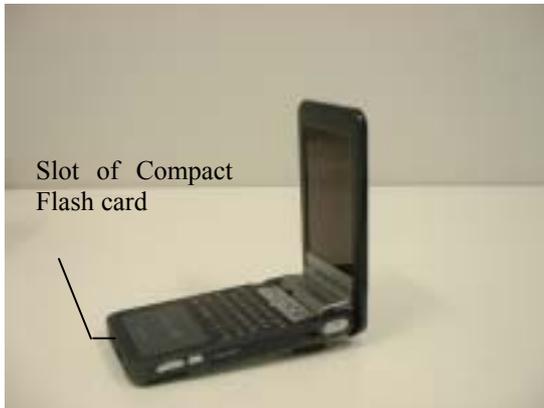

A-PEX International Co., Ltd.

EMC Head Office Division.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

SECTION 9 : Measurement 1 (PCG-Z600HEK)

9.1 Test setup of EUT

9.1.1 Photographs of test setup

When users operate notebook computer which inserted this EUT, it could be considered to touch or get close to their bodies. In order to assume this situation, we performed the test at the following positions.

Measurement 1 measured in notebook computer(Model No. PCG-Z600HEK) which inserted this EUT.

Please refer to "APPENDIX 1.1" for more details.

1. Bottom of PC : We performed the test with bottom of PC touching to the center of flat phantom. Wireless LAN card was distanced 5mm from the flat phantom
2. Side of PC : We performed the test with side of PC distanced 15mm from the center of flat phantom. Side of Wireless LAN card touched to the center of falt phantom.



Bottom of PC



Side of PC

9.1.2 EUT Tune-up procedure

In order to measure SAR value, we used continuous transmission mode. The test set up mode was prepared by manufacturer.

Value of Crest Factor = 1 was used for SAR testing according to the nature of the EUT.

The test configuration tested at the low, middle and high frequency channels (2412MHz,2437MHz and 2462MHz).

A-PEX International Co., Ltd.

EMC Head Office Division.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

9.2 Simulated tissue liquid parameter

9.2.1 Simulated Tissue Liquid Parameter confirmation

The dielectric parameters were checked prior to assessment using the HP85070A dielectric probe kit. The dielectric parameters measured are reported in each correspondent section.

9.2.1.1 Head 2450MHz

Type of liquid : **Head 2450 MHz**
Ambient temperature (deg.c.) : **24.3**
Relative Humidity (%) : **31**
Liquid depth (cm) : **15.0**

Date : January 21,2003
Measured By : Miyo Ikuta

DIELECTRIC PARAMETERS MEASUREMENT RESULTS						
Liquid Temp [deg.c]		Parameters	Target Value	Measured	Deviation [%]	Limit [%]
Before	After					
23.4	23.4	Relative Permittivity ϵ_r	39.2	35.5	-9.4	+/-10
		Conductivity σ [mho/m]	1.80	1.88	+4.4	+/-5

9.2.1.2 Muscle 2450MHz

Type of liquid : **Muscle 2450 MHz**
Ambient temperature (deg.c.) : **24.5**
Relative Humidity (%) : **31**
Liquid depth (cm) : **15.2**

Date : January 21,2003
Measured By : Miyo Ikuta

DIELECTRIC PARAMETERS MEASUREMENT RESULTS						
Liquid Temp [deg.c]		Parameters	Target Value	Measured	Deviation [%]	Limit [%]
Before	After					
22.6	22.6	Relative Permittivity ϵ_r	52.7	50.5	-4.2	+/-10
		Conductivity σ [mho/m]	1.95	2.02	+3.6	+/-5

9.2.2 Simulated Tissues

Ingredient	MiXTURE(%)	
	Head 2450MHz	Muscle 2450MHz
Water	45.0	69.83
DGMBE	55.0	30.17

Note:DGMBE(Diethylenglycol-monobuthyl ether)

A-PEX International Co., Ltd.

EMC Head Office Division.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

9.3 System validation data


Prior to the assessment, the system validation kit was used to test whether the system was operating within its specifications of +/-10%. The validation results are tabulated below. And SAR plot is attached in the APPENDIX 3. IEEE P1528 Recommended Reference Value

Type of liquid : **HEAD 2450MHz**
Frequency : **2450MHz**
Liquid depth (cm) : **15.0**
Ambient temperature (deg.c.) : **24.3**
Relative Humidity (%) : **31**
Dipole : **D2450V2 SN:713**
Power : **250mW**

Date : January 21,2003
Measured By : Miyo Ikuta

SYSTEM PERFORMANCE CHECK									
Liquid (HEAD 2450MHz)						System dipole validation target & measured			
Temperature (deg.c.)		Relative Permittivity ϵ_r		Conductivity σ [mho/m]		SAR 1g [W/kg]		Deviation [%]	Limit [%]
Before	After	Target	Measured	Target	Measured	Target	Measured		
23.4	23.4	39.2	35.5	1.80	1.88	13.1	13.9	+6.1	+/-10

Note: Please refer to Attachment for the result representation in plot format

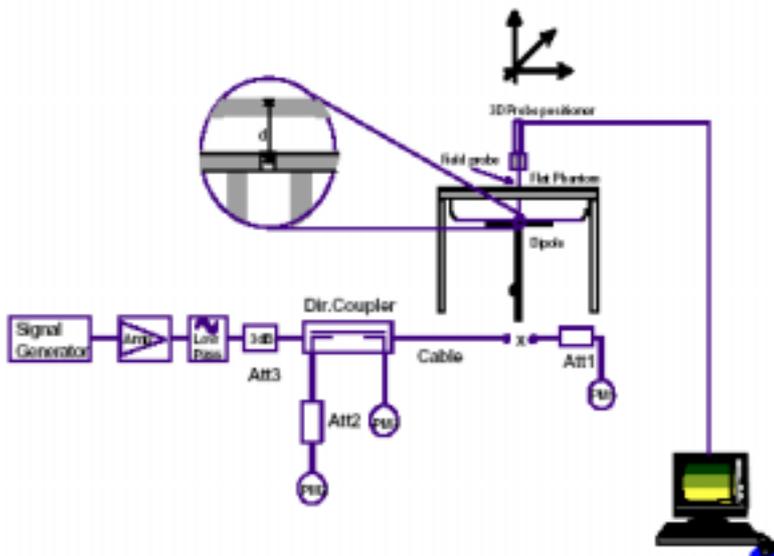

2450MHz System performance check setup

Test system for the system performance check setup diagram

SECTION 10 : Measurement 2 (Extension)

10.1 Test setup of EUT

10.1.1 Photographs of test setup

When users operate notebook computer which inserted this EUT, it could be considered to touch or get close to their bodies.

Measurement 2 measured in Wireless LAN card with taking out the LAN card using extension circuit board. We performed the test at the following positions. Please refer to "APPENDIX 1.2" for more details

1. Bottom of PC : We performed the test with bottom of Wireless LAN card touching to the flat phantom.
2. Face of PC : We performed the test with face of Wireless LAN card touching to the flat phantom.
3. Side of PC : We performed the test with side of Wireless LAN card touching to the flat phantom.



Bottom of card



Face of card



Side of card

A-PEX International Co., Ltd.

EMC Head Office Division.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

10.1.2 EUT Tune-up procedure

In order to measure SAR value, we used continuous transmission mode. The test set up mode was prepared by manufacturer.

Value of Crest Factor = 1 was used for SAR testing according to the nature of the EUT.

The test configuration tested at the low, middle and high frequency channels (2412MHz,2437MHz and 2462MHz).

A-PEX International Co., Ltd.

EMC Head Office Division.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

10.2 Simulated tissue liquid parameter

10.2.1 Simulated Tissue Liquid Parameter confirmation

The dielectric parameters were checked prior to assessment using the HP85070A dielectric probe kit. The dielectric parameters measured are reported in each correspondent section.

10.2.1.1 Head 2450MHz

Type of liquid : **Head 2450 MHz**
Ambient temperature (deg.c.) : **23.6**
Relative Humidity (%) : **31**
Liquid depth (cm) : **15.0**

Date : January 23,2003
Measured By : Miyo Ikuta

DIELECTRIC PARAMETERS MEASUREMENT RESULTS						
Liquid Temp [deg.c]		Parameters	Target Value	Measured	Deviation [%]	Limit [%]
Before	After					
23.0	23.0	Relative Permittivity ϵ_r	39.2	35.4	-9.7	+/-10
		Conductivity σ [mho/m]	1.80	1.87	+3.9	+/-5

10.2.1.2 Muscle 2450MHz

Type of liquid : **Muscle 2450 MHz**
Ambient temperature (deg.c.) : **24.3**
Relative Humidity (%) : **31**
Liquid depth (cm) : **15.2**

Date : January 23,2003
Measured By : Miyo Ikuta

DIELECTRIC PARAMETERS MEASUREMENT RESULTS						
Liquid Temp [deg.c]		Parameters	Target Value	Measured	Deviation [%]	Limit [%]
Before	After					
22.2	22.2	Relative Permittivity ϵ_r	52.7	49.6	-5.9	+/-10
		Conductivity σ [mho/m]	1.95	2.01	3.1	+/-5

10.2.2 Simulated Tissues

Ingredient	MiXTURE(%)	
	Head 2450MHz	Muscle 2450MHz
Water	45.0	69.83
DGMBE	55.0	30.17

Note:DGMBE(Diethylenglycol-monobuthyl ether)

A-PEX International Co., Ltd.

EMC Head Office Division.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

10.3 System validation data


Prior to the assessment, the system validation kit was used to test whether the system was operating within its specifications of +/-10%. The validation results are tabulated below. And SAR plot is attached in the APPENDIX 3. IEEE P1528 Recommended Reference Value

Type of liquid : **HEAD 2450MHz**
Frequency : **2450MHz**
Liquid depth (cm) : **15.0**
Ambient temperature (deg.c.) : **23.6**
Relative Humidity (%) : **31**
Dipole : **D2450V2 SN:713**
Power : **250mW**

Date : January 23,2003
Measured By : Miyo Ikuta

SYSTEM PERFORMANCE CHECK										
Liquid (HEAD 2450MHz)						System dipole validation target & measured				
Temperature (deg.c.)		Relative Permittivity ϵ_r		Conductivity σ [mho/m]		SAR 1g [W/kg]		Deviation [%]	Limit [%]	
Before	After	Target	Measured	Target	Measured	Target	Measured			
23.0	23.0	39.2	35.4	1.80	1.87	13.1	14.2	8.4	+/-10	

Note: Please refer to Attachment for the result representation in plot format

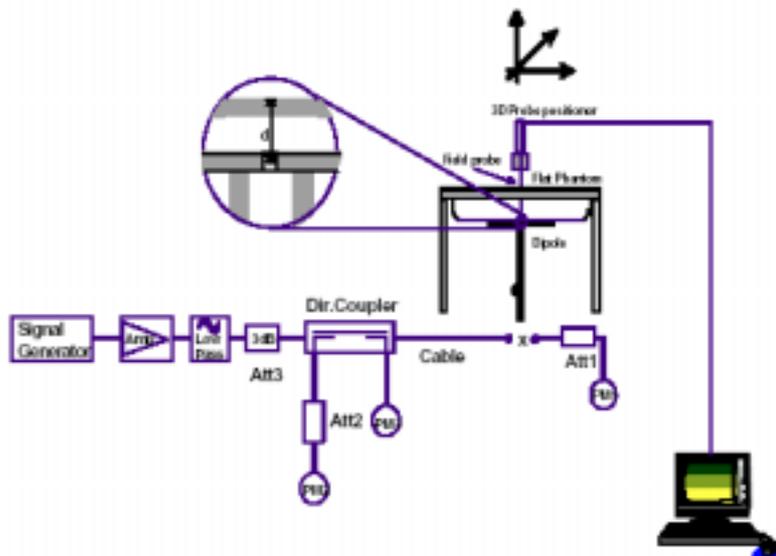

2450MHz System performance check setup

Test system for the system performance check setup diagram

SECTION 11 : Measurement 3 (PEG-NZ90/U)

11.1 Test setup of EUT

11.1.1 Photographs of test setup

When users operate PDA which inserted this EUT, it could be considered to touch or get close to their bodies. In order to assume this situation, we performed the test at the following positions.

Measurement 3 measured in PDA(Model No.PEG-NZ90/U) which inserted this EUT.

Please refer to "APPENDIX 1.3" for more details.

- | | |
|-------------|---|
| 1.Bottom | : We performed the test with bottom of PDA touching to the center of flat phantom. Wireless LAN card was distanced 4mm from the flat phantom) |
| 2.Front | : We performed the test with front of PDA touching to the center of flat phantom. .Wireless LAN card was distanced 10mm from the flat phantom. |
| 3.Bystander | : We performed the test with side of PDA distanced 18mm from the center of flat phantom. Side of Wireless LAN card touched to the center of falt phantom. |



Bottom



Front (R)



Front (N)



Bystander

A-PEX International Co., Ltd.

EMC Head Office Division.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

11.1.2 EUT Tune-up procedure

In order to measure SAR value, we used continuous transmission mode. The test set up mode was prepared by manufacturer.

Value of Crest Factor = 1 was used for SAR testing according to the nature of the EUT.

The test configuration tested at the low, middle and high frequency channels (2412MHz,2437MHz and 2462MHz).

A-PEX International Co., Ltd.

EMC Head Office Division.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

11.2 Simulated tissue liquid parameter

11.2.1 Simulated Tissue Liquid Parameter confirmation

The dielectric parameters were checked prior to assessment using the HP85070A dielectric probe kit. The dielectric parameters measured are reported in each correspondent section.

11.2.1.1 Head 2450MHz

Type of liquid : **Head 2450 MHz**
Ambient temperature (deg.c.) : **24.5**
Relative Humidity (%) : **30**
Liquid depth (cm) : **15.0**

Date : Marh 20,2003
Measured By : Miyo Ikuta

DIELECTRIC PARAMETERS MEASUREMENT RESULTS						
Liquid Temp [deg.c]		Parameters	Target Value	Measured	Deviation [%]	Limit [%]
Before	After					
23.6	23.6	Relative Permittivity ϵ_r	39.2	35.3	-9.9	+/-10
		Conductivity σ [mho/m]	1.80	1.88	+4.4	+/-5

11.2.1.2 Muscle 2450MHz

Type of liquid : **Muscle 2450 MHz**
Ambient temperature (deg.c.) : **23.6**
Relative Humidity (%) : **30**
Liquid depth (cm) : **15.2**

Date : March 20,2003
Measured By : Miyo Ikuta

DIELECTRIC PARAMETERS MEASUREMENT RESULTS						
Liquid Temp [deg.c]		Parameters	Target Value	Measured	Deviation [%]	Limit [%]
Before	After					
22.6	22.6	Relative Permittivity ϵ_r	52.7	48.6	-7.8	+/-10
		Conductivity σ [mho/m]	1.95	1.99	+2.1	+/-5

11.2 Simulated Tissues

Ingredient	MiXTURE(%)	
	Head 2450MHz	Muscle 2450MHz
Water	45.0	69.83
DGMBE	55.0	30.17

Note:DGMBE(Diethylenglycol-monobuthyl ether)

A-PEX International Co., Ltd.

EMC Head Office Division.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

11.3 System validation data


Prior to the assessment, the system validation kit was used to test whether the system was operating within its specifications of +/-10%. The validation results are tabulated below. And SAR plot is attached in the APPENDIX 3. IEEE P1528 Recommended Reference Value

Type of liquid : **HEAD 2450MHz**
Frequency : **2450MHz**
Liquid depth (cm) : **15.0**
Ambient temperature (deg.c.) : **24.5**
Relative Humidity (%) : **30**
Dipole : **D2450V2 SN:713**
Power : **250mW**

Date : March 20,2003
Measured By : Miyo Ikuta

SYSTEM PERFORMANCE CHECK									
Liquid (HEAD 2450MHz)						System dipole validation target & measured			
Temperature (deg.c.)		Relative Permittivity ϵ_r		Conductivity σ [mho/m]		SAR 1g [W/kg]		Deviation [%]	Limit [%]
Before	After	Target	Measured	Target	Measured	Target	Measured		
23.6	23.6	39.2	35.3	1.80	1.88	13.1	14.3	+9.2	+/-10

Note: Please refer to Attachment for the result representation in plot format

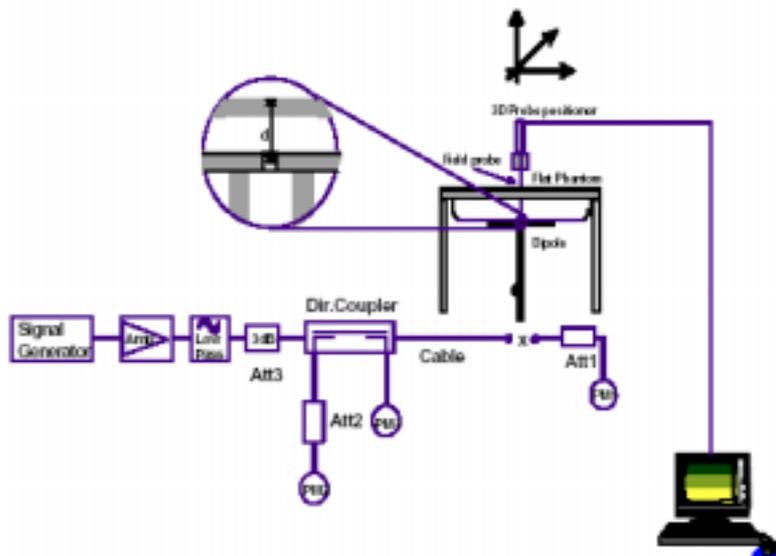

2450MHz System performance check setup

Test system for the system performance check setup diagram

SECTION 12 : Measurement uncertainty

The uncertainty budget has been determined for the DASY3 measurement system according to the NIS81 [13] and the NIST1297 [6] documents and is given in the following Table.

Error Description	Uncertainty value \pm %	Probability distribution	divisor	(ci)1 lg	Standard Uncertainty (1g)	vi or veff
Measurement System						
Probe calibration	± 4.8	Normal	1	1	± 4.8	∞
Axial isotropy of the probe	± 4.7	Rectangular	$\sqrt{3}$	$(1-c_p)^{1/2}$	± 1.9	∞
Spherical isotropy of the probe	± 9.6	Rectangular	$\sqrt{3}$	$(c_p)^{1/2}$	± 3.9	∞
Boundary effects	± 5.5	Rectangular	$\sqrt{3}$	1	± 3.2	∞
Probe linearity	± 4.7	Rectangular	$\sqrt{3}$	1	± 2.7	∞
Detection limit	± 1.0	Rectangular	$\sqrt{3}$	1	± 0.6	∞
Readout electronics	± 1.0	Normal	1	1	± 1.0	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	± 0.5	∞
Integration time	± 1.4	Rectangular	$\sqrt{3}$	1	± 0.8	∞
RF ambient conditions	± 3.0	Rectangular	$\sqrt{3}$	1	± 1.7	∞
Mech. constraints of robot	± 0.4	Rectangular	$\sqrt{3}$	1	± 0.2	∞
Probe positioning	± 2.9	Rectangular	$\sqrt{3}$	1	± 1.7	∞
Extrap. and integration	± 3.9	Rectangular	$\sqrt{3}$	1	± 2.3	∞
Test Sample Related						
Device positioning	± 6.0	Rectangular	$\sqrt{3}$	1	± 6.7	5
Device holder uncertainty	± 5.0	Rectangular	$\sqrt{3}$	1	± 5.9	3
Power drift	± 5.0	Rectangular	$\sqrt{3}$	1	± 2.9	∞
Phantom and Setup						
Phantom uncertainty	± 4.0	Rectangular	$\sqrt{3}$	1	± 2.3	∞
Liquid conductivity (target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	± 1.8	∞
Liquid conductivity (meas.)	± 10.0	Rectangular	$\sqrt{3}$	0.64	± 3.7	∞
Liquid permittivity (target)	± 5.0	Rectangular	$\sqrt{3}$	0.6	± 1.7	∞
Liquid permittivity (meas.)	± 5.0	Rectangular	$\sqrt{3}$	0.6	± 1.7	∞
Combined Standard Uncertainty					± 13.7	
Expanded Uncertainty (k=2)					± 27.5	

A-PEX International Co., Ltd.

EMC Head Office Division.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

SECTION 13 : SAR Measurement results

13.1 Measurement 1 (PCG-Z600HEK)

Liquid Depth (cm) : **15.2** Model : **PEGA-WL110**
Parameters : $\epsilon_r = 50.5, \sigma = 2.02$ Serial No. : **NO.8**
Ambient Temperature[deg.c.] : **24.5** Modulation : **DSSS**
Relative Humidity (%) : **31** Crest factor : **1**

Date : January 21,2003

Measured By : Miyo Ikuta

CONDUCTED POWER MEASUREMENT RESULTS												
Frequency [MHz]	Before					After					Deviation [%]	Limit [%]
	Reading [dBm]	Att. [dB]	Cable loss [dB]	Result [dBm]	Convert [mW]	Reading [dBm]	Att. [dB]	Cable loss [dB]	Result [dBm]	Convert [mW]		
2412	4.6	10	1.3	15.9	38.90	4.6	10	1.3	15.9	38.90	0.0	+/-5
2437	4.8	10	1.3	16.1	40.74	4.9	10	1.3	16.2	41.69	2.3	+/-5
2462	5.0	10	1.3	16.3	42.66	4.9	10	1.3	16.2	41.69	-2.3	+/-5

BODY SAR MEASUREMENT RESULTS								
Frequency		Phantom Section	EUT Set-up Conditions			Liquid Temp.[deg.c]		SAR(1g) [w/kg]
Channel	MHz		Antenna	Position	Separation[mm]	Before	After	
Mid	2437	Flat	Fixed	Bottom of PC	5	22.6	22.6	0.167
Mid	2437	Flat	Fixed	Side of PC	0	22.6	22.6	0.396
Low	2412	Flat	Fixed	Side of PC	0	22.8	23.0	0.397
High	2462	Flat	Fixed	Side of PC	0	23.0	23.1	0.493
ANSI / IEEE C95.1 1992 - SAFETY LIMIT						Body SAR: 1.6 W/kg		
Spatial Peak Uncontrolled Exposure / General Population						(averaged over 1 gram)		

A-PEX International Co., Ltd.

EMC Head Office Division.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

13.2 Measurement 2 (Extension)

Liquid Depth (cm) : **15.2** Model : **PEGA-WL110**
Parameters : $\epsilon_r = 49.6, \sigma = 2.01$ Serial No. : **NO.8**
Ambient Temperature[deg.c.] : **24.3** Modulation : **DSSS**
Relative Humidity (%) : **31** Crest factor : **1**

Date : January 23,2003

Measured By : Miyo Ikuta

CONDUCTED POWER MEASUREMENT RESULTS												
Frequency [MHz]	Before					After					Deviation [%]	Limit [%]
	Reading [dBm]	Att. [dB]	Cable loss [dB]	Result [dBm]	Convert [mW]	Reading [dBm]	Att. [dB]	Cable loss [dB]	Result [dBm]	Convert [mW]		
2412	4.8	10	1.3	16.1	40.74	4.7	10	1.3	16.0	39.81	-2.3	+/-5
2437	4.8	10	1.3	16.1	40.74	4.8	10	1.3	16.1	40.74	0.0	+/-5
2462	5.1	10	1.3	16.4	43.65	5.0	10	1.3	16.3	42.66	-2.3	+/-5

BODY SAR MEASUREMENT RESULTS								
Frequency		Phantom Section	EUT Set-up Conditions			Liquid Temp.[deg.c]		SAR(1g) [w/kg]
Channel	MHz		Antenna	Position	Separation [mm]	Before	After	
Mid	2437	Flat	Fixed	Bottom of card	0	22.2	22.2	0.647
Mid	2437	Flat	Fixed	Face of card	0	22.3	22.4	0.464
Mid	2437	Flat	Fixed	Side of card	0	22.4	22.4	0.363
Low	2412	Flat	Fixed	Bottom of card	0	22.9	23.1	0.463
High	2462	Flat	Fixed	Bottom of card	0	23.2	23.2	0.962
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure / General Population						Body SAR: 1.6 W/kg (averaged over 1 gram)		

A-PEX International Co., Ltd.

EMC Head Office Division.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

13.3 Measurement 3 (PEG-NZ90/U)

Liquid Depth (cm) : **15.2** Model : **PEGA-WL110**
Parameters : $\epsilon_r = 48.6, \sigma = 1.99$ Serial No. : **NO.4**
Ambient Temperature[deg.c.] : **24.0** Modulation : **DSSS**
Relative Humidity (%) : **30** Crest factor : **1**

Date : March 20,2003

Measured By : Miyo Ikuta

CONDUCTED POWER MEASUREMENT RESULTS													
Frequency [MHz]	Before					After					Deviation [%]	Limit [%]	
	Reading [dBm]	Att. [dB]	Cable loss [dB]	Result [dBm]	Convert [mW]	Reading [dBm]	Att. [dB]	Cable loss [dB]	Result [dBm]	Convert [mW]			
2412	4.9	10	1.3	16.2	41.69	4.9	10	1.3	16.2	41.69	0.0	+/-5	
2437	4.9	10	1.3	16.2	41.69	4.9	10	1.3	16.2	41.69	0.0	+/-5	
2462	5.0	10	1.3	16.3	42.66	4.9	10	1.3	16.2	41.69	-2.3	+/-5	

BODY SAR MEASUREMENT RESULTS									
Frequency		Phantom Section	EUT Set-up Conditions				Liquid Temp.[deg.c]		SAR(1g) [w/kg]
Channel	MHz		Antenna	Position	LCD position	Separation [mm]	Before	After	
Mid	2437	Flat	Fixed	Bottom	Nomal	4	22.8	23.0	0.265
Mid	2437	Flat	Fixed	Front	Reverse	10	23.0	23.0	0.119
Mid	2437	Flat	Fixed	Front	Nomal	10	23.0	23.0	0.142
Mid	2437	Flat	Fixed	Bystander	OUT	0	22.8	22.8	0.580
Low	2412	Flat	Fixed	Bystander	OUT	0	23.0	23.0	0.537
High	2462	Flat	Fixed	Bystander	OUT	0	22.8	22.6	0.611
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure / General Population							Body SAR: 1.6 W/kg (averaged over 1 gram)		

A-PEX International Co., Ltd.

EMC Head Office Division.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

SECTION 14 : Equipment & calibration information

Name of Equipment	Manufacture	Model number	Serial number	Calibration	
				Last Cal	due date
Power Meter	Agilent	E4417A	GB41290639	2002/11/08	2003/11/07
Power Sensor	Agilent	E9300B	US40010300	2002/11/14	2003/11/13
Power Sensor	Agilent	E9327A	US40440576	2002/4/16	2003/4/15
Power Sensor	Agilent	E9327A	US40440544	2003/02/21	2004/02/20
S-Parameter Network Analyzer	Agilent	8753ES	US39174808	2000/10/5	2003/10/04
Signal Generator	Rohde&Schwarz	SML03	100332	2002/08/28	2003/08/27
RF Amplifier	OPHIR	5056F	1005	2003/01/06	2004/01/05
Dosimetric E-Field Probe	Schmid&Partner Engineering AG	ET3DV6	1684	2002/11/20	2003/11/19
Data Acquisition Electronics	Schmid&Partner Engineering AG	DAE3 V1	509	2002/4/10	2003/04/09
Robot,SAM Phantom	Schmid&Partner Engineering AG	DASY3	I021834	N/A	N/A
Attenuator	Agilent.	US40010300	08498-60012	2002/12/24	2003/12/23
Attenuator	Orient Microwave	BX10-0476-00	-	2002/04/19	2003/04/18
Attenuator	HIROSE ELECTRIC CO.,LTD.	AT-110	N/A	2002/02/04	2003/02/03*1
2450MHz System Validation Dipole	Schmid&Partner Engineering AG	D2450V2	713	2002/11/15	2004/11/14
Dual Directional Coupler	N/A	Narda	3702	N/A	N/A
Head 2450MHz	N/A	N/A	N/A	N/A	N/A
Body 2450MHz	N/A	N/A	N/A	N/A	N/A
Notebook computer	Sony	PCG-Z600HEK	5101649	N/A	N/A
PDA	SONY	PEG-NZ90/U	3001524	N/A	N/A

*1 : It was used on January 21 and 23,2003

A-PEX International Co., Ltd.

EMC Head Office Division.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

SECTION 15 : References

- [1] ANSI, ANSI/IEEE C95.1-1992: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz, The Institute of Electrical and Electronics Engineers, Inc., New York, NY 10017, 1992.
- [2] Katja Pokovic, Thomas Schmid, and Niels Kuster, "Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequencies", in ICECOM '97, Dubrovnik, October 15-17, 1997, pp. 120-124.
- [3] Katja Pokovic, Thomas Schmid, and Niels Kuster, "E_ field probe with improved isotropy in brain simulating liquids", in Proceedings of the ELMAR, Zadar, Croatia, 23-25 June, 1996, pp.172-175.
- [4] W. Gander, Computermathematik, Birkhaeuser, Basel, 1992.
- [5] W. H. Press, S. A. Teukolsky, W. T. Vetterling, and B. P. Flannery, Numerical Recipes in C, The Art of Scientific Computing, Second Edition, Cambridge University Press, 1992.
- [6] Barry N. Taylor and Christ E. Kuyatt, "Guidelines for evaluating and expressing the uncertainty of NIST measurement results", Tech. Rep., National Institute of Standards and Technology, 1994.

SECTION 16 : APPENDIX

APPENDIX 1 : Photographs of test setup	30-33
APPENDIX 1.1 : Measurement 1	31
APPENDIX 1.2 : Measurement 2	32
APPENDIX 1.3 : Measurement 3	33
APPENDIX 2 : SAR Measurement data	34-55
APPENDIX 2.1 : Measurement 1	35-40
APPENDIX 2.2 : Measurement 2	41-47
APPENDIX 2.3 : Measurement 3	48-55
APPENDIX 3 : Validation Measurement data	56-59
APPENDIX 4 : System Validation Dipole (D2450V2,S/N: 713)	60-69
APPENDIX 5 : Dosimetric E-Field Probe Calibration(ET3DV6,S/N: 1684)	70-83

A-PEX International Co., Ltd.

EMC Head Office Division.


4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116


Facsimile: +81 596 24 8124

APPENDIX 1: Photographs of test setup

APPENDIX 1.1 : Measurement 1 (PCG-Z600HEK)

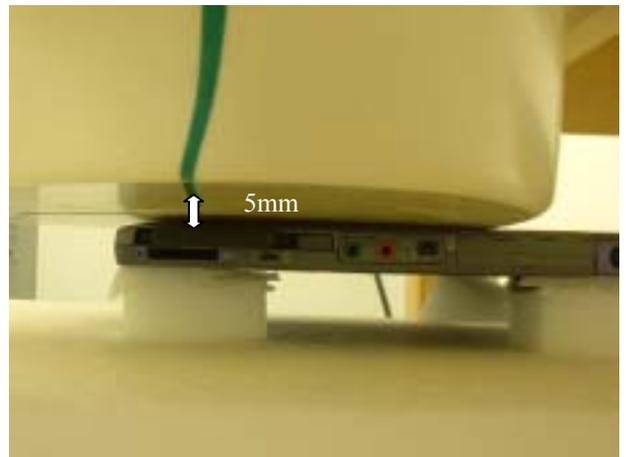


Bottom of PC

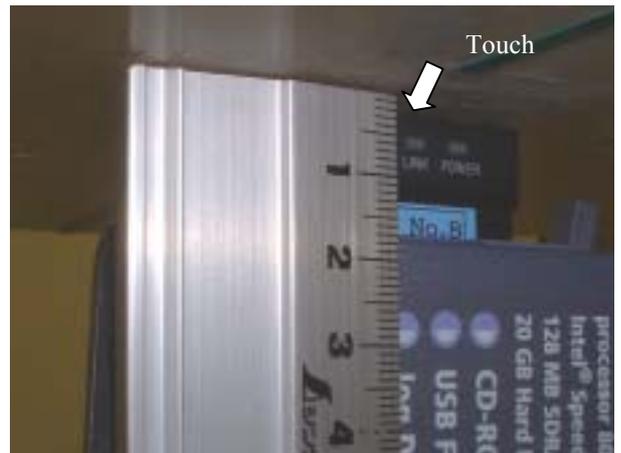


Side of PC

APPENDIX 1.2 : Measurement 2 (Extension)

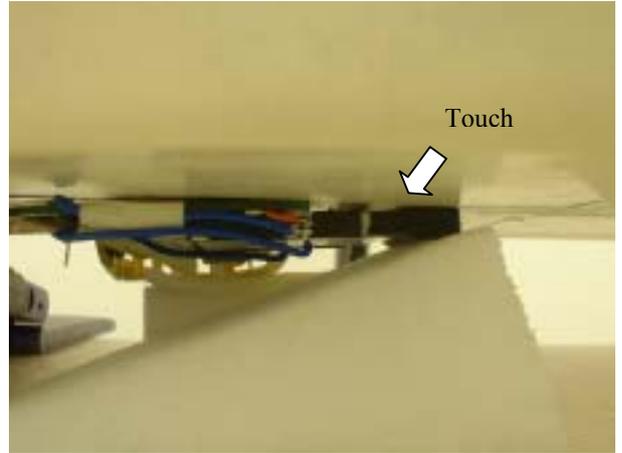

Bottom of card

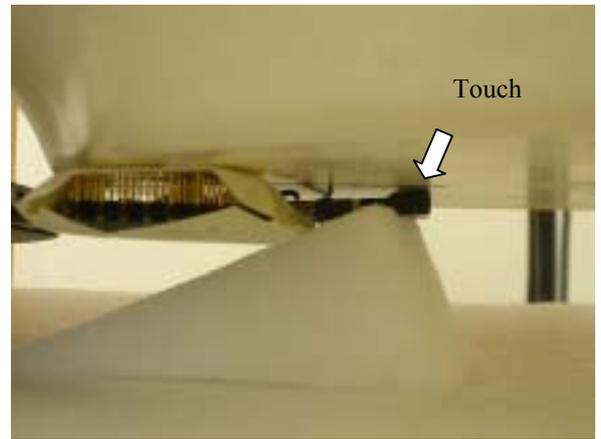


Face of card




Side of card

APPENDIX 1.3 : Measurement 3 (PEG-NZ90/U)

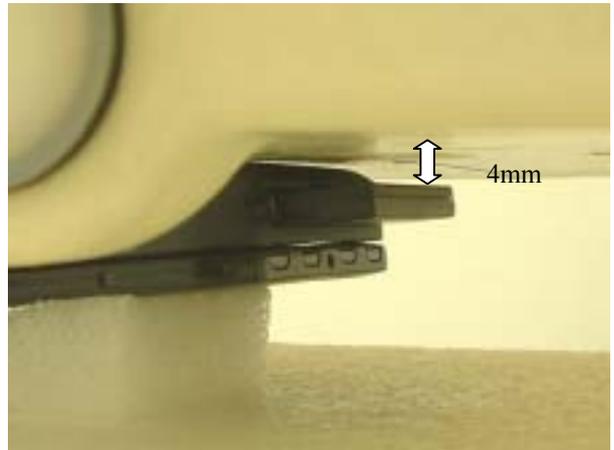

Bottom

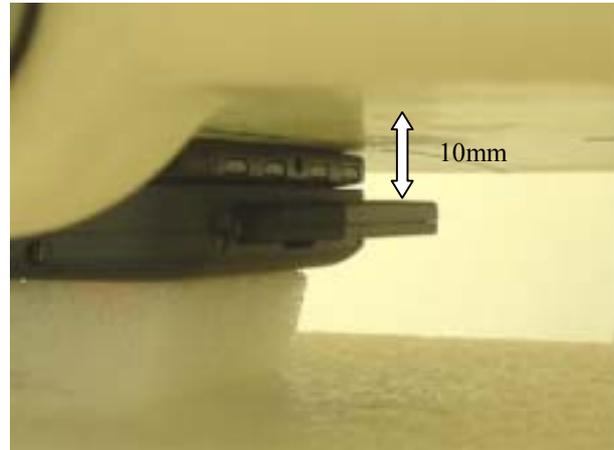

Front



Bystander