



Test report No. : 10329798S-A
Page : 1 of 26
Issued date : May 30, 2014
Revised date : June 17, 2014
FCC ID : AK8RMTNWS10B

RADIO TEST REPORT

Test Report No.: 10329798S-A

Applicant : Sony Corporation
Type of Equipment : Remote Commander
Model No. : RMT-NWS10B
FCC ID : AK8RMTNWS10B
Test regulation : FCC Part15 Subpart C: 2014
Test result : Complied

1. This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
2. The results in this report apply only to the sample tested.
3. This sample tested is in compliance with the limits of the above regulation.
4. The test results in this test report are traceable to the national or international standards.
5. This test report must not be used by the customer to claim product certification, approval, or endorsement by any agency of the Federal Government.
6. The opinions and the interpretations to the result of the description in this report are outside scopes where UL Japan has been accredited.

Date of test: May 15 to 21, 2014

Tested by: S. Takano
Shinichi Takano
Engineer
Consumer Technology Division

Approved by : T. Amamura
Toyokazu Imamura
Leader
Consumer Technology Division



- The testing in which "Non-accreditation" is displayed is outside the accreditation scopes in UL Japan.
 There is no testing item of "Non-accreditation".

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone: +81 463 50 6400

Facsimile: +81 463 50 6401

13-EM-F0429

Contents

	Page
SECTION 1: Customer information	4
SECTION 2: Equipment under test (E.U.T.)	4
SECTION 3: Test specification, procedures & results	5
SECTION 4: Operation of E.U.T. during testing.....	8
SECTION 5: 6dB bandwidth & Occupied bandwidth (99%)	9
SECTION 6: Maximum peak output power.....	9
SECTION 7: Spurious emissions (Antenna port conducted).....	9
SECTION 8: Peak power density.....	9
SECTION 9: Radiated emission.....	10
Contents of APPENDIXES	12
APPENDIX 1: Data of radio tests	13
APPENDIX 2: Test instruments.....	24
APPENDIX 3: Photographs of test setup.....	25

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone: +81 463 50 6400

Facsimile: +81 463 50 6401

SECTION 1: Customer information

Company Name : Sony Corporation
Brand Name : SONY
Address : 2-10-1 Osaki, Shinagawa-ku, Tokyo, 141-8610, Japan
Telephone Number : +81 50 3750 7634
Contact Person : Shinichi Maru

SECTION 2: Equipment under test (E.U.T.)

2.1 Identification of E.U.T.

Type of Equipment : Remote Commander
Model Number : RMT-NWS10B
Serial Number : Refer to Clause 4.2
Rating : DC3V
Country of Mass-production : Malaysia
Condition of EUT : Engineering prototype
(Not for Sale: This sample is equivalent to mass-produced items.)
Receipt Date of Sample : May 9, 2014
Modification of EUT : No modification by the test lab.

2.2 Product description

Model: RMT-NWS10B (referred to as the EUT in this report) is a Remote Commander.

Clock frequency(ies) in the system : 16MHz (BT), 32.768kHz (BT)

Bluetooth specification:

Equipment type : Transceiver
Frequency of operation : 2402-2480MHz
Bandwidth / Channel spacing : 1MHz / 2MHz
Type of modulation : DSSS (GFSK)
Antenna type : Pattern
Antenna connector type : None
Antenna gain : +1.6dBi
ITU code : F1D
Operation temperature range : +5 to +35 deg.C

FCC 15.31 (e)

The test was performed with a new battery. Therefore, the EUT complies with the requirement.

FCC 15.203

It is impossible for end users to replace the antenna, because the antenna is mounted inside of the EUT. Therefore the EUT complies with the requirement.

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone: +81 463 50 6400

Facsimile: +81 463 50 6401

SECTION 3: Test specification, procedures & results

3.1 Test specification

Test specification : FCC Part 15 Subpart C: 2014, final revised on March 6, 2014 and effective April 7, 2014
Title : FCC 47CFR Part15 Radio Frequency Device Subpart C Intentional Radiators
Section 15.207 Conducted limits
Section 15.209 Radiated emission limits, general requirements
Section 15.247 Operation within the bands 902-928MHz, 2400-2483.5MHz,
and 5725-5850MHz

3.2 Procedures & Results

Item	Test Procedure *1)	Specification	Remarks	Deviation	Worst Margin	Results
Conducted emission	ANSI C63.10:2009	FCC 15.207	-	N/A *2)	N/A	N/A
6dB bandwidth	ANSI C63.10:2009	FCC 15.247 (a)(2)	Conducted	N/A	* See data	Complied
Maximum peak output power	ANSI C63.10:2009	FCC 15.247 (b)(3)	Conducted	N/A		Complied
Out of band emission & Restricted band edges	ANSI C63.10:2009	FCC 15.109, 15.247 (d) & 15.209	Conducted / Radiated	N/A	7.4 dB Freq.: 7206.000MHz Polarization: Horizontal Detection: Average Mode: Tx 2402MHz	Complied
Power density	ANSI C63.10:2009	FCC 15.247 (e)	Conducted	N/A	* See data	Complied

Note: UL Japan's EMI Work Procedures No.13-EM-W0420 and 13-EM-W0422.
*1) These tests were also referred to KDB 558074 v03r01 (FCC), "Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247".
*2) The test is not applicable since the EUT has no AC mains.

3.3 Addition to standard

Item	Test Procedure	Specification	Remarks	Worst Margin	Results
Occupied Bandwidth (99%)	ANSI C63.4:2009 13. Measurement of intentional radiators, RSS-Gen 4.6.1	-	Conducted	-	-

Note: UL Japan's Work Procedures No. 13-EM-W0420 and 13-EM-W0422

* Other than above, no addition, exclusion nor deviation has been made from the standard.

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone: +81 463 50 6400

Facsimile: +81 463 50 6401

3.4 Uncertainty

The following uncertainties have been calculated to provide a confidence level of 95% using a coverage factor k=2.

Item	Frequency range	No.1 SAC ^{*1} /SR ^{*2} (±)	No.2 SAC/SR (±)	No.3 SAC/SR (±)
Radiated emission (Measurement distance: 3m)	9kHz-30MHz	3.7 dB	3.7 dB	3.6 dB
	30MHz-300MHz	4.8 dB	5.0 dB	4.8 dB
	300MHz-1GHz	5.0 dB	5.0 dB	4.8 dB
	1GHz-15GHz	4.9 dB	4.9 dB	4.9 dB
Radiated emission (Measurement distance: 1m)	15GHz-18GHz	5.7 dB	5.6 dB	5.6 dB
	18GHz-40GHz	5.2 dB	4.3 dB	4.3 dB

*1: SAC=Semi-Anechoic Chamber

*2: SR= Shielded Room is applied besides radiated emission

The data listed in this test report has enough margin, more than the site margin.

Antenna port conducted test

Power measurement uncertainty above 1GHz for this test was: (±) 1.5dB

Spurious emission (Conducted) measurement (below 1GHz) uncertainty for this test was: (±) 1.6dB

Spurious emission (Conducted) measurement (1G-3GHz) uncertainty for this test was: (±) 1.4dB

Spurious emission (Conducted) measurement (3G-18GHz) uncertainty for this test was: (±) 2.8dB

Spurious emission (Conducted) measurement (18G-26.5GHz) uncertainty for this test was: (±) 2.5dB

Bandwidth measurement uncertainty for this test was: (±) 5.4%

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone: +81 463 50 6400

Facsimile: +81 463 50 6401

3.5 Test location

UL Japan, Inc. Shonan EMC Lab.

1-22-3, Megumigaoka, Hiratsuka-shi, Kanagawa-ken 259-1220 JAPAN

Telephone number : +81 463 50 6400

Facsimile number : +81 463 50 6401

JAB Accreditation No. : RTL02610

	IC Registration No.	Width x Depth x Height (m)	Size of reference ground plane (m) / horizontal conducting plane	Maximum measurement distance
<input type="checkbox"/> No.1 semi-anechoic chamber	2973D-1	20.6 x 11.3 x 7.65	20.6 x 11.3	10m
<input type="checkbox"/> No.2 semi-anechoic chamber	2973D-2	20.6 x 11.3 x 7.65	20.6 x 11.3	10m
<input checked="" type="checkbox"/> No.3 semi-anechoic chamber	2973D-3	12.7 x 7.7 x 5.35	12.7 x 7.7	5m
<input type="checkbox"/> No.4 semi-anechoic chamber	-	8.1 x 5.1 x 3.55	8.1 x 5.1	-
<input type="checkbox"/> No.1 shielded room	-	6.8 x 4.1 x 2.7	6.8 x 4.1	-
<input type="checkbox"/> No.2 shielded room	-	6.8 x 4.1 x 2.7	6.8 x 4.1	-
<input type="checkbox"/> No.3 shielded room	-	6.3 x 4.7 x 2.7	6.3 x 4.7	-
<input type="checkbox"/> No.4 shielded room	-	4.4 x 4.7 x 2.7	4.4 x 4.7	-
<input checked="" type="checkbox"/> No.5 shielded room	-	7.8 x 6.4 x 2.7	7.8 x 6.4	-
<input type="checkbox"/> No.6 shielded room	-	7.8 x 6.4 x 2.7	7.8 x 6.4	-
<input type="checkbox"/> No.1 measurement room	-	2.55 x 4.1 x 2.5	-	-

3.6 Test setup, Data of test & Test instruments

Refer to APPENDIX 1 to 3.

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone: +81 463 50 6400

Facsimile: +81 463 50 6401

SECTION 4: Operation of E.U.T. during testing

4.1 Operating mode

Test item	Mode	Tested frequency
All items	Transmitting Hopping OFF (Low Energy), Payload: PRBS9	2402MHz, 2440MHz, 2480MHz

Software : prodtest.exe ver.1.0
Power settings : Fixed

Justification: The system was configured in typical fashion (as customer would normally use it) for testing.

4.2 Configuration and peripherals



* Test data was taken under worse case conditions.

Description of EUT and support equipment

No.	Item	Model number	Serial number	Manufacturer	Remarks
A	Remote Commander	RMT-NWS10B	*1)	SONY	EUT

*1) Antenna port conducted tests: 6, Radiated emission tests: 24

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone: +81 463 50 6400

Facsimile: +81 463 50 6401

SECTION 5: 6dB bandwidth & Occupied bandwidth (99%)

Test procedure

The bandwidth was measured with a spectrum analyzer connected to the antenna port.
The test was measured based on Method 8.1 Option 1 and 8.2 Option 2 of KDB 558074 "Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247".

Summary of the test results: Pass

Refer to APPENDIX 1

SECTION 6: Maximum peak output power

Test procedure

The Maximum Peak Output Power was measured with a power meter connected to the antenna port.
The test was measured based on Method 9.1.3 PKPM1 of KDB 558074 "Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247".

Summary of the test results: Pass

Refer to APPENDIX 1

SECTION 7: Spurious emissions (Antenna port conducted)

Test procedure

The Out of Band Emissions was measured with a spectrum analyzer connected to the antenna port.
The radio frequency power that is produced by the intentional radiator confirmed 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on a radiated measurement.
In the frequency range below 30MHz, RBW was narrowed to separate the noise contents.
Then, wide-band noise near the limit was checked separately, however the noise was not detected as shown in the chart. (9kHz-150kHz:RBW=200Hz, 150kHz-30MHz:RBW=10kHz)

Summary of the test results: Pass

Refer to APPENDIX 1.

SECTION 8: Peak power density

Test procedure

The peak power density was measured with a spectrum analyzer connected to the antenna port.

Instrument used : Spectrum Analyzer
RBW / VBW : 3kHz / 9kHz

The test was measured based on Method 10.2 PKPSD of KDB 558074 "Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247".

Summary of the test results: Pass

Refer to APPENDIX 1

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone: +81 463 50 6400

Facsimile: +81 463 50 6401

SECTION 9: Radiated emission

9.1 Operating environment

Test room : See test data (APPENDIX 1)
Temperature : See test data (APPENDIX 1)
Humidity : See test data (APPENDIX 1)

9.2 Test configuration

EUT was placed on a polystyrene platform of nominal size, 0.5m by 0.5m, raised 0.8m above the conducting ground plane. Photographs of the set up are shown in APPENDIX 3.

9.3 Test conditions

Frequency range : 30MHz - 25GHz
EUT position : Table top

9.4 Test procedure

The Radiated Electric Field Strength intensity has been measured on a semi-anechoic chamber with a ground plane and at a distance of 3m (below 15GHz) / 1m (above 15GHz) (Refer to Figure 1). Measurements were performed with quasi-peak, peak and average detector. The measuring antenna height was varied between 1 and 4m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field intensity. The measurements were performed for both vertical and horizontal antenna polarization.

The radiated emission measurements were made with the following detection.

Frequency	30 - 1000MHz	1 - 25GHz		20dBc
Detection Type	: Quasi-Peak	Peak	Average *1)	Peak
IF Bandwidth	: 120kHz	RBW:1MHz VBW:3MHz	RBW: 1MHz VBW: 3MHz	RBW: 100kHz, VBW: 300kHz
			Detector: RMS	

*1) Average Power Measurement was measured based on 12.2.5 of "Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247".

The carrier levels and noise levels were confirmed at each position of X, Y and Z axes to see the position of maximum noise, and the test was made at the position that has the maximum noise.

Antenna polarization	Carrier	Spurious (Below 1GHz)	Spurious (Above 1GHz)
Horizontal	X	Y	X
Vertical	Y	Y	Y

UL Japan, Inc.


Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone: +81 463 50 6400

Facsimile: +81 463 50 6401

Figure 1. Antenna angle

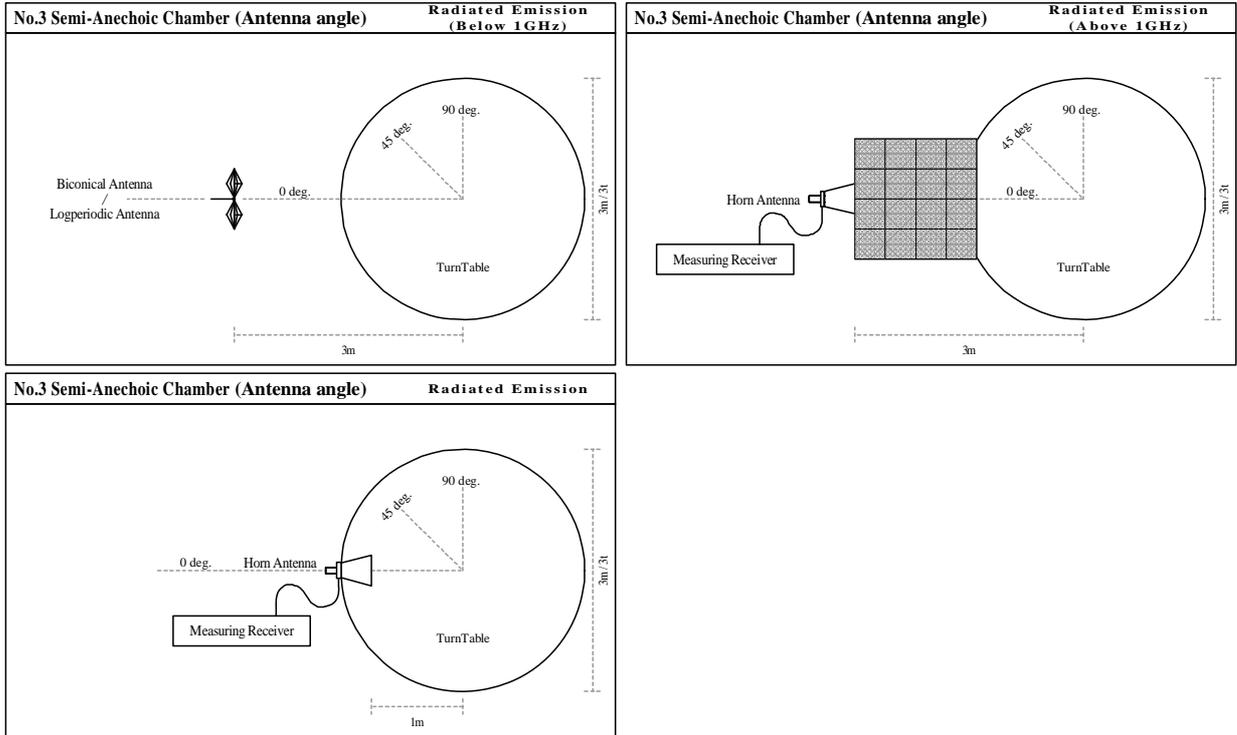

9.5 Band edge

Band edge level at 2390MHz and 2483.5MHz is below the limits of FCC 15.209 and band edge level at 2400MHz is below the 20dBc. Refer to the data.

9.6 Results

Summary of the test results: Pass
*No noise was detected above the 4th order harmonics.

Refer to APPENDIX 1.

Contents of APPENDIXES

APPENDIX 1: Data of Radio tests

6dB bandwidth
Maximum peak output power
Radiated emission
Spurious emission (Antenna port conducted)
Peak power density
Occupied bandwidth

APPENDIX 2: Test instruments

Test instruments

APPENDIX 3: Photographs of test setup

Radiated emission
Pre-check of the worst position

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone: +81 463 50 6400


Facsimile: +81 463 50 6401

APPENDIX 1: Data of Radio tests

-6dB Bandwidth

Test place	UL Japan, Inc. Shonan EMC Lab.	No.5 Shielded Room
Date	May 15, 2014	
Temperature / Humidity	26deg.C , 48%RH	
Engineer	Akio Hayashi	
Mode	Tx, Bluetooth Low Energy, PN9	

Freq. [MHz]	-6dB Bandwidth [MHz]	Limit [MHz]
2402.0000	0.731	> 0.500
2440.0000	0.732	> 0.500
2480.0000	0.741	> 0.500

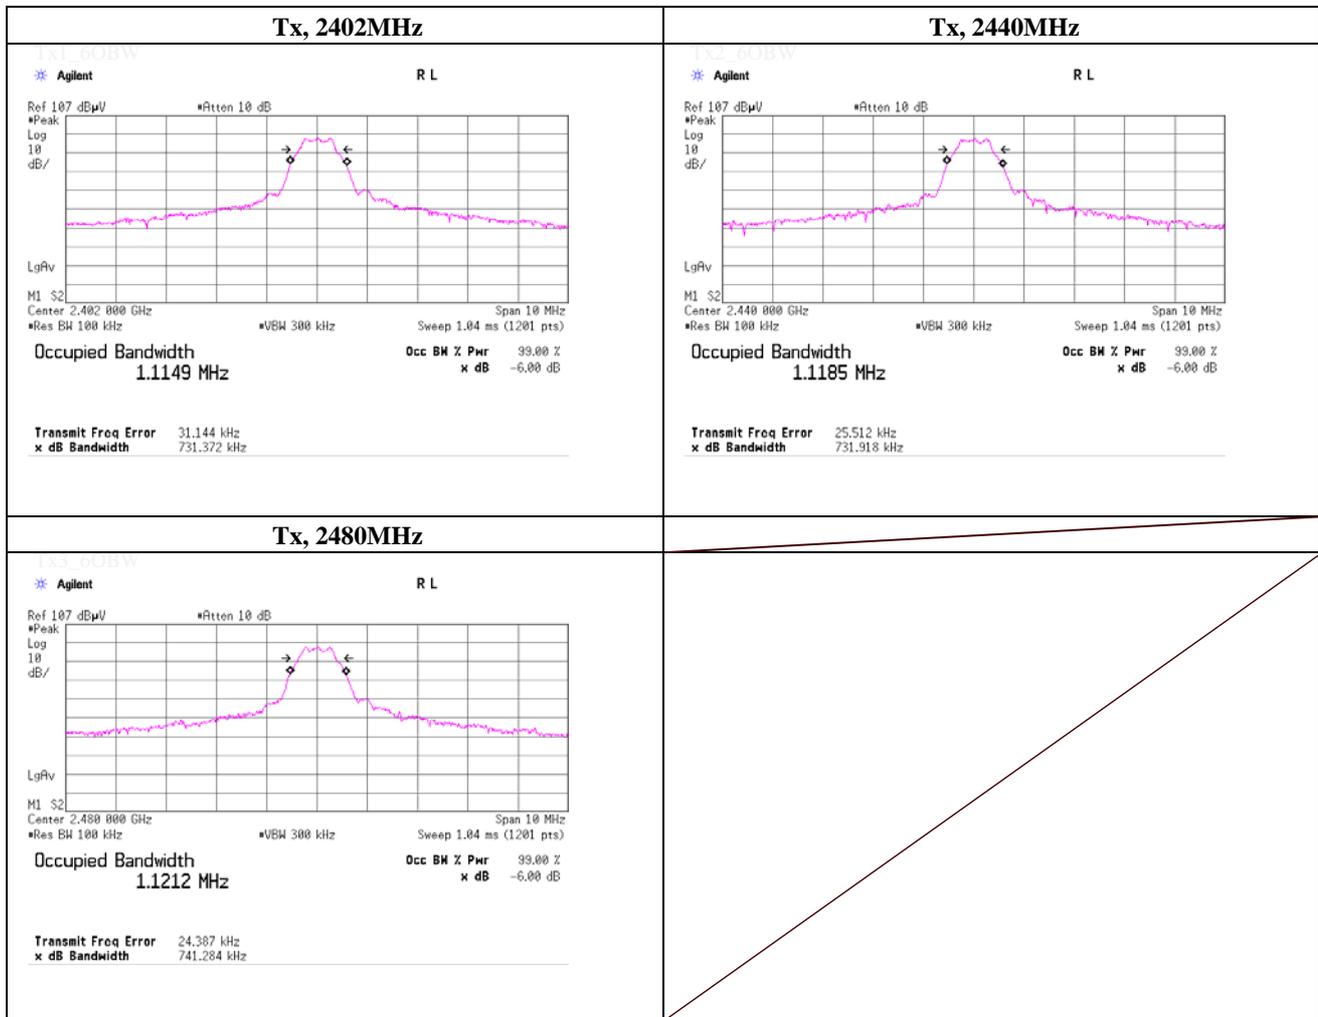

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

Maximum Peak Conducted Output Power

(PKPM1)

Test place UL Japan, Inc. Shonan EMC Lab. No.5 Shielded Room
 Date May 15, 2014
 Temperature / Humidity 26deg.C , 48%RH
 Engineer Akio Hayashi
 Mode Tx, Bluetooth Low Energy, PN9,

(* P/M: Power Meter with power sensor)

Ch	Freq. [MHz]	P/M (Peak) Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Result		Limit		Margin [dB]
					[dBm]	[mW]	[dBm]	[mW]	
Low	2402.0	-11.33	1.80	9.65	0.12	1.03	30.00	1000	29.88
Mid	2440.0	-11.48	1.81	9.66	-0.01	1.00	30.00	1000	30.01
High	2480.0	-11.59	1.82	9.66	-0.11	0.97	30.00	1000	30.11

Sample Calculation:

Result = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss

UL Japan, Inc.
Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

Radiated Emission

Test place No.3 Semi Anechoic Chamber
 Date May 16, 2014 May 21, 2014
 Temperature / Humidity 26 deg.C, 48 %RH 25 deg.C, 52 %RH
 Engineer Shinichi Takano Shinichi Takano
 Mode Tx, 2402 MHz
 Tx, Bluetooth Low Energy, PN9

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg]	Remark
Hori.	75.860	QP	22.7	6.3	7.0	32.2	3.8	40.0	36.2	247	201	
Hori.	160.000	QP	22.3	14.8	7.6	32.1	12.6	43.5	30.9	100	0	
Hori.	320.000	QP	22.5	14.3	8.5	32.0	13.3	46.0	32.7	100	0	
Hori.	536.000	QP	22.0	17.7	9.4	32.1	17.0	46.0	29.0	100	0	
Hori.	2390.000	PK	51.1	26.8	14.6	38.2	54.3	73.9	19.6	100	359	
Hori.	4804.000	PK	46.6	30.9	7.5	37.1	47.9	73.9	26.0	100	30	
Hori.	7206.000	PK	45.1	37.1	8.6	39.4	51.4	73.9	22.5	100	0	
Hori.	2390.000	AV	34.0	26.8	14.6	38.2	37.2	53.9	16.7	100	359	
Vert.	114.000	QP	22.5	12.2	7.3	32.1	9.9	43.5	33.6	100	0	
Vert.	320.000	QP	22.6	14.3	8.5	32.0	13.4	46.0	32.6	100	0	
Vert.	640.000	QP	22.2	19.0	9.7	32.0	18.9	46.0	27.1	100	0	
Vert.	2390.000	PK	49.2	26.8	14.6	38.2	52.4	73.9	21.5	123	321	
Vert.	4804.000	PK	43.2	30.9	7.5	37.1	44.5	73.9	29.4	100	233	
Vert.	7206.000	PK	44.9	37.1	8.6	39.4	51.2	73.9	22.7	100	0	
Vert.	2390.000	AV	33.7	26.8	14.6	38.2	36.9	53.9	17.0	123	321	

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18GHz)-Distance factor(above 15GHz)) - Gain(Amplifier)

Distance factor : 15GHz -40GHz : 20log(3.0m/1.0m)= 9.5dB

Average measurement value with duty factor

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	4804.000	AV	37.9	30.9	7.5	37.1	4.1	43.3	53.9	10.6	
Hori.	7206.000	AV	36.1	37.1	8.6	39.4	4.1	46.5	53.9	7.4	
Vert.	4804.000	AV	38.2	30.9	7.5	37.1	4.1	43.6	53.9	10.3	
Vert.	7206.000	AV	36.0	37.1	8.6	39.4	4.1	46.4	53.9	7.5	

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18GHz)-Distance factor(above 15GHz)) - Gain(Amplifier) + Duty factor

Distance factor : 15GHz -40GHz : 20log(3.0m/1.0m)= 9.5dB

20dBc Data Sheet (RBW 100kHz, VBW 300kHz)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	2402.000	PK	86.9	26.8	14.6	38.2	90.1	-	-	
Hori.	2400.000	PK	49.7	26.8	14.6	38.2	52.9	70.1	17.2	
Vert.	2402.000	PK	84.6	26.8	14.6	38.2	87.8	-	-	
Vert.	2400.000	PK	47.9	26.8	14.6	38.2	51.1	67.8	16.7	

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18GHz)-Distance factor(above 15GHz)) - Gain(Amplifier)

Distance factor : 15GHz -40GHz : 20log(3.0m/1.0m)= 9.5dB

UL Japan, Inc.**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

Radiated Emission

Test place No.3 Semi Anechoic Chamber
 Date May 16, 2014 May 21, 2014
 Temperature / Humidity 26 deg.C, 48 %RH 25 deg.C, 52 %RH
 Engineer Shinichi Takano Shinichi Takano
 Mode Tx, 2440 MHz
 Tx, Bluetooth Low Energy, PN9

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg]	Remark
Hori.	160.000	QP	22.4	14.8	7.6	32.1	12.7	43.5	30.8	100	0	
Hori.	320.000	QP	22.5	14.3	8.5	32.0	13.3	46.0	32.7	100	0	
Hori.	536.000	QP	22.0	17.7	9.4	32.1	17.0	46.0	29.0	100	0	
Hori.	4880.000	PK	46.2	31.4	7.5	37.0	48.1	73.9	25.8	100	35	
Hori.	7320.000	PK	44.0	37.2	8.6	39.4	50.4	73.9	23.5	100	0	
Vert.	77.553	QP	24.5	6.3	7.0	32.2	5.6	40.0	34.4	100	176	
Vert.	114.001	QP	22.5	12.2	7.3	32.1	9.9	43.5	33.6	100	0	
Vert.	320.000	QP	22.5	14.3	8.5	32.0	13.3	46.0	32.7	100	0	
Vert.	640.000	QP	22.2	19.0	9.7	32.0	18.9	46.0	27.1	100	0	
Vert.	4880.000	PK	46.1	31.4	7.5	37.0	48.0	73.9	25.9	100	170	
Vert.	7320.000	PK	45.2	37.2	8.6	39.4	51.6	73.9	22.3	100	0	

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18GHz)-Distance factor(above 15GHz)) - Gain(Amplifier)

Distance factor : 15GHz -40GHz : 20log(3.0m/1.0m)= 9.5dB

Average measurement value with duty factor

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	4880.000	AV	37.4	31.4	7.5	37.0	4.1	43.4	53.9	10.5	
Hori.	7320.000	AV	35.4	37.2	8.6	39.4	4.1	45.9	53.9	8.0	
Vert.	4880.000	AV	36.6	31.4	7.5	37.0	4.1	42.6	53.9	11.3	
Vert.	7320.000	AV	35.6	37.2	8.6	39.4	4.1	46.1	53.9	7.8	

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18GHz)-Distance factor(above 15GHz)) - Gain(Amplifier) + Duty factor

Distance factor : 15GHz -40GHz : 20log(3.0m/1.0m)= 9.5dB

UL Japan, Inc.**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

Radiated Emission

Test place No.3 Semi Anechoic Chamber
 Date May 16, 2014 May 21, 2014
 Temperature / Humidity 26 deg.C, 48 %RH 25 deg.C, 52 %RH
 Engineer Shinichi Takano Shinichi Takano
 Mode Tx, 2480 MHz
 Tx, Bluetooth Low Energy, PN9

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg]	Remark
Hori.	70.238	QP	22.6	6.3	6.9	32.2	3.6	40.0	36.4	100	0	
Hori.	160.000	QP	22.4	14.8	7.6	32.1	12.7	43.5	30.8	100	0	
Hori.	320.000	QP	22.5	14.3	8.5	32.0	13.3	46.0	32.7	100	0	
Hori.	536.000	QP	22.0	17.7	9.4	32.1	17.0	46.0	29.0	100	0	
Hori.	2483.500	PK	58.3	26.9	14.7	38.1	61.8	73.9	12.1	100	19	
Hori.	4960.000	PK	45.6	31.8	7.5	37.0	47.9	73.9	26.0	100	27	
Hori.	7440.000	PK	45.2	37.4	8.8	39.4	52.0	73.9	21.9	100	0	
Hori.	2483.500	AV	37.4	26.9	14.7	38.1	40.9	53.9	13.0	100	19	
Vert.	73.090	QP	22.8	6.3	7.0	32.2	3.9	40.0	36.1	100	0	
Vert.	114.000	QP	22.5	12.2	7.3	32.1	9.9	43.5	33.6	100	0	
Vert.	320.000	QP	22.6	14.3	8.5	32.0	13.4	46.0	32.6	100	0	
Vert.	640.000	QP	22.2	19.0	9.7	32.0	18.9	46.0	27.1	100	0	
Vert.	2483.500	PK	56.2	26.9	14.7	38.1	59.7	73.9	14.2	100	332	
Vert.	4960.000	PK	47.2	31.8	7.5	37.0	49.5	73.9	24.4	100	168	
Vert.	7440.000	PK	44.7	37.4	8.8	39.4	51.5	73.9	22.4	100	0	
Vert.	2483.500	AV	36.5	26.9	14.7	38.1	40.0	53.9	13.9	100	332	

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18GHz)-Distance factor(above 15GHz)) - Gain(Amplifier)

Distance factor : 15GHz -40GHz : 20log(3.0m/1.0m)= 9.5dB

Average measurement value with duty factor


Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	4960.000	AV	37.1	31.8	7.5	37.0	4.1	43.5	53.9	10.4	
Hori.	7440.000	AV	35.3	37.4	8.8	39.4	4.1	46.2	53.9	7.7	
Vert.	4960.000	AV	39.6	31.8	7.5	37.0	4.1	46.0	53.9	7.9	
Vert.	7440.000	AV	35.2	37.4	8.8	39.4	4.1	46.1	53.9	7.8	

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18GHz)-Distance factor(above 15GHz)) - Gain(Amplifier) + Duty factor

Distance factor : 15GHz -40GHz : 20log(3.0m/1.0m)= 9.5dB

Duty Factor Calculation Chart


Tx, Bluetooth Low Energy, PN9

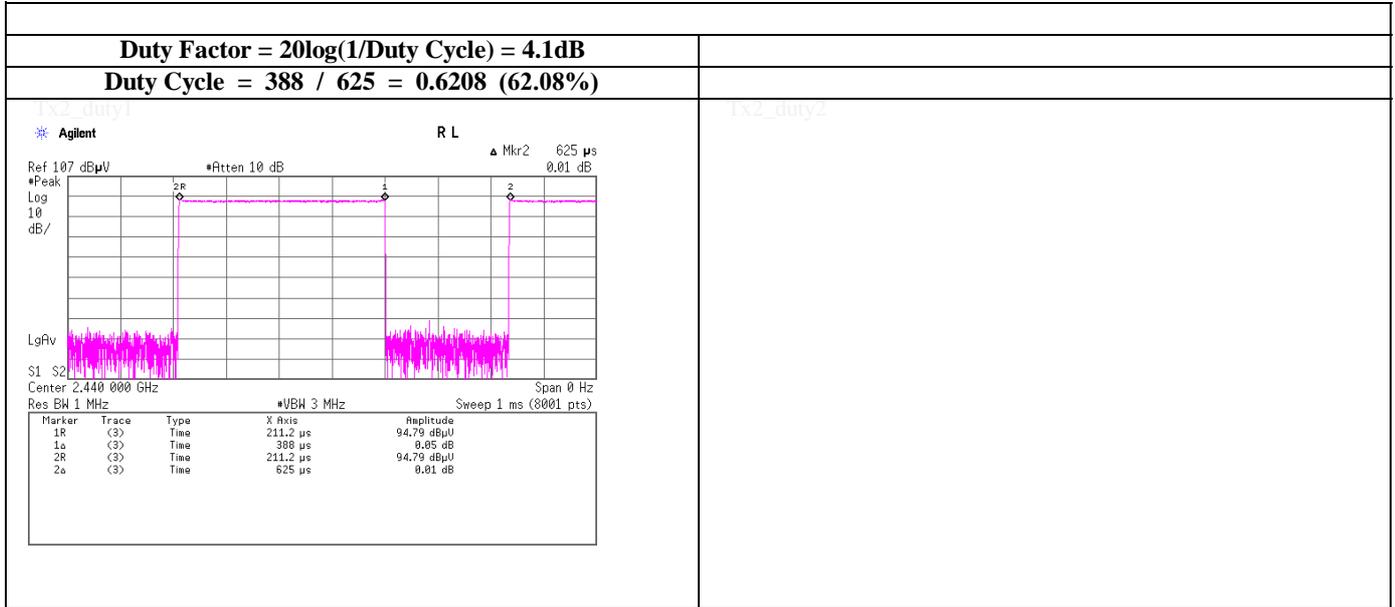

(Reference chart) Spurious emission (Conducted)

Tx, Bluetooth Low Energy, PN9

Tx, 2402MHz (below 30MHz)

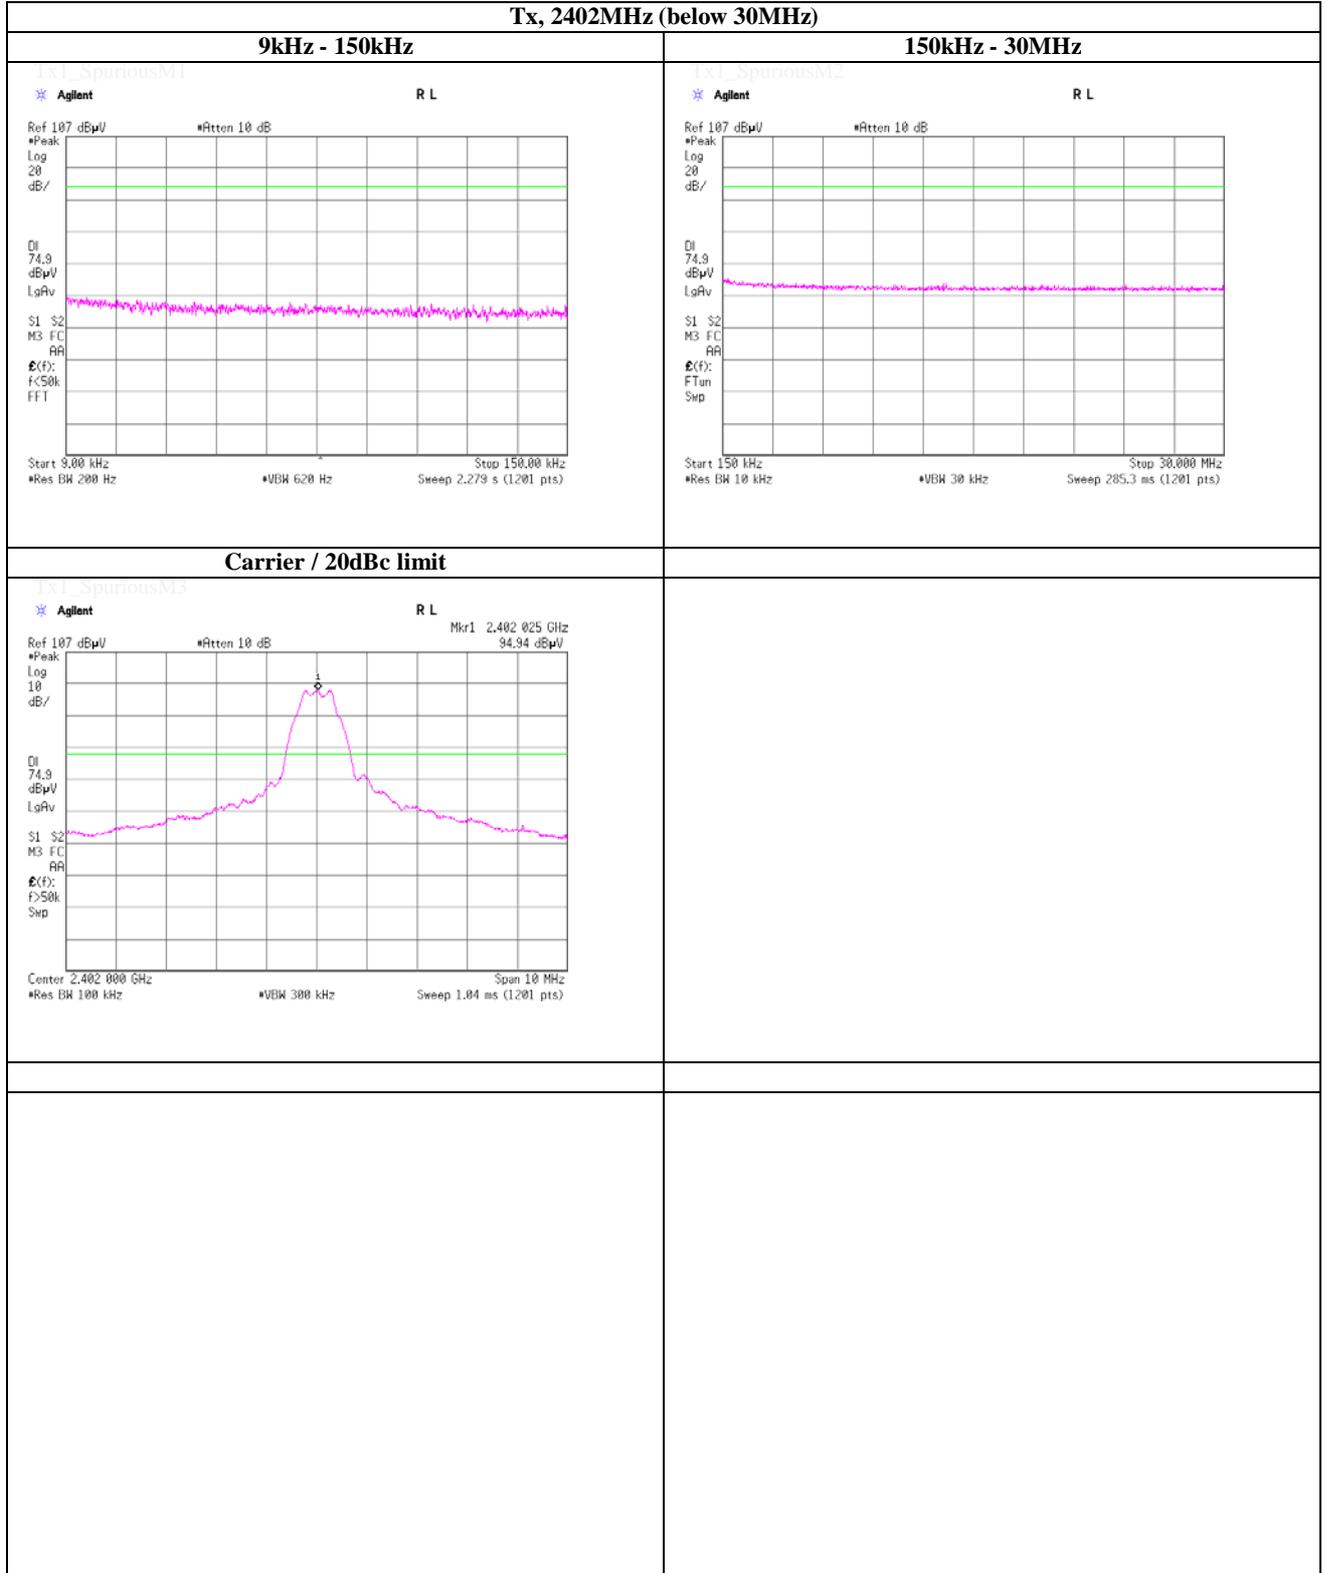

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN


Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

(Reference chart) Spurious emission (Conducted)

Tx, Bluetooth Low Energy, PN9

Tx, 2440MHz (below 30MHz)

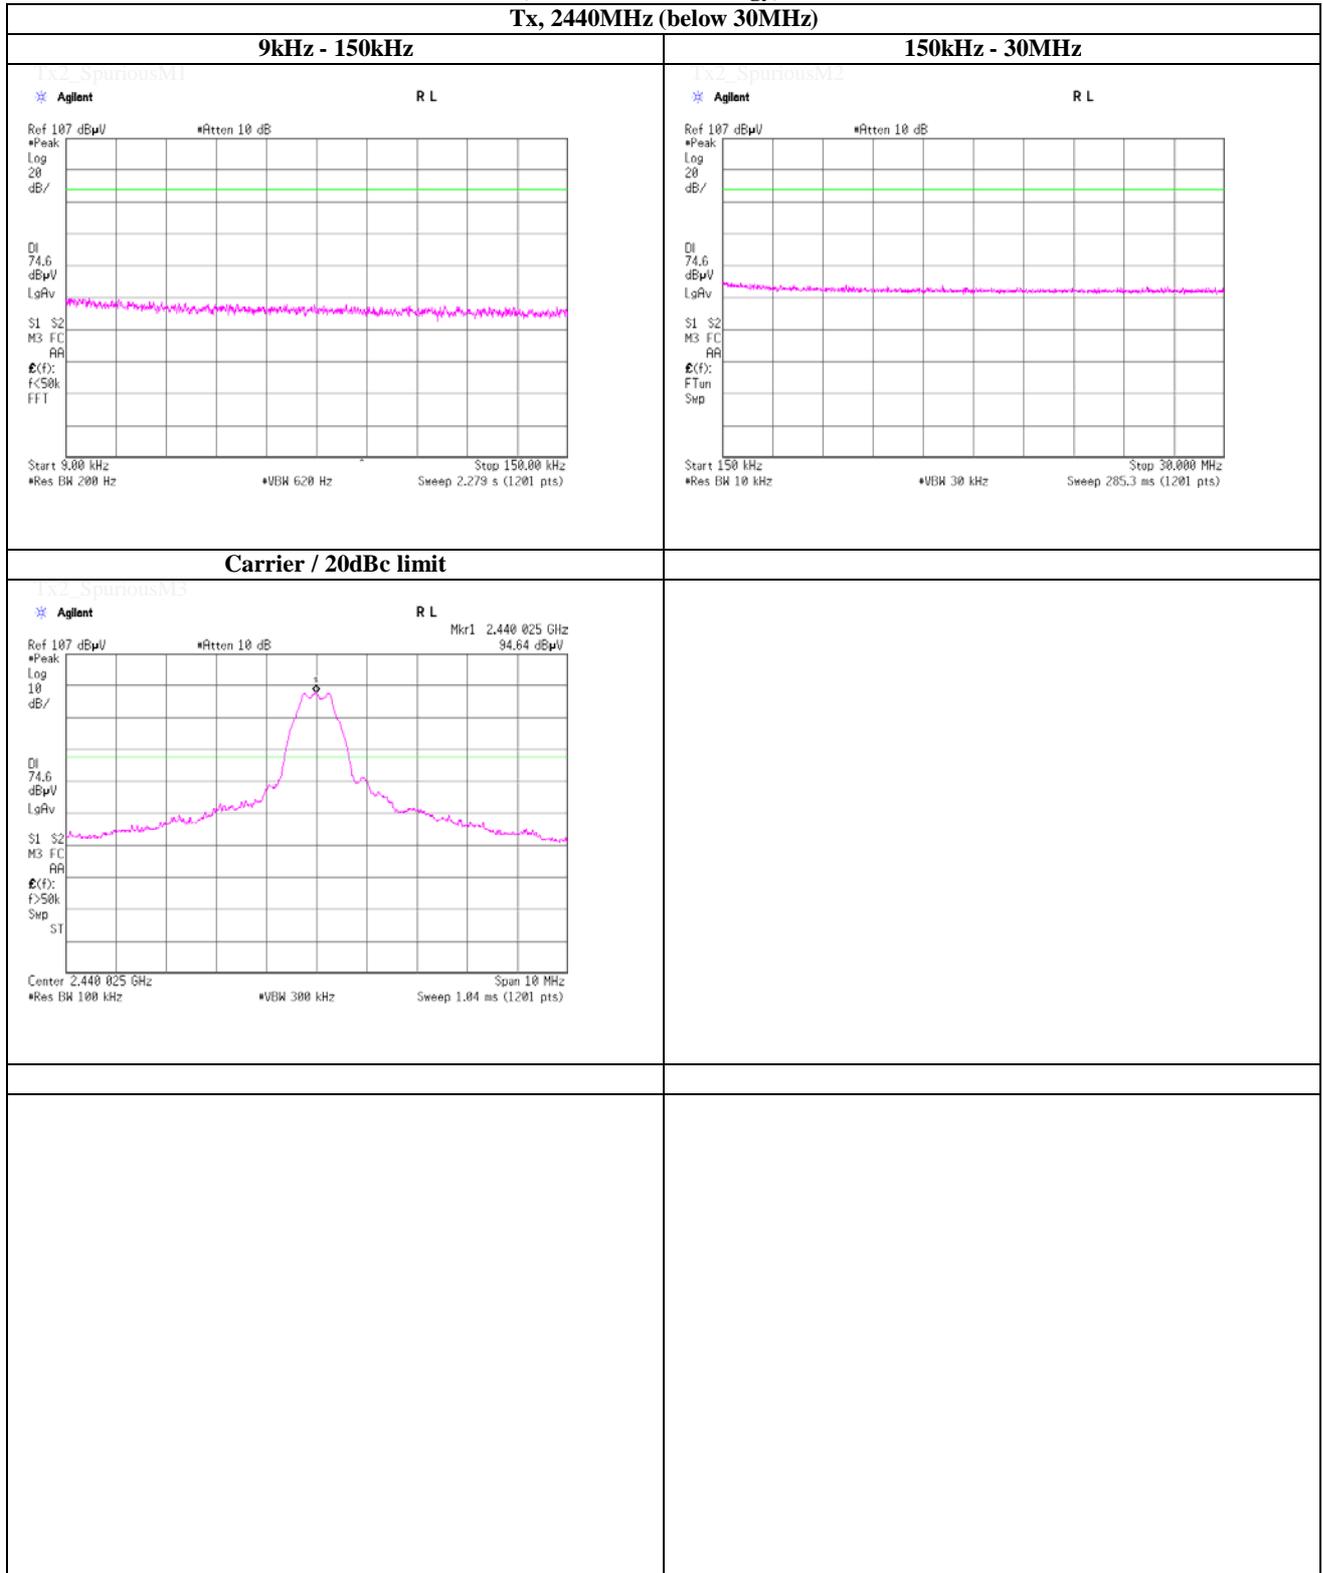

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN


Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

(Reference chart) Spurious emission (Conducted)

Tx, Bluetooth Low Energy, PN9

Tx, 2480MHz (below 30MHz)

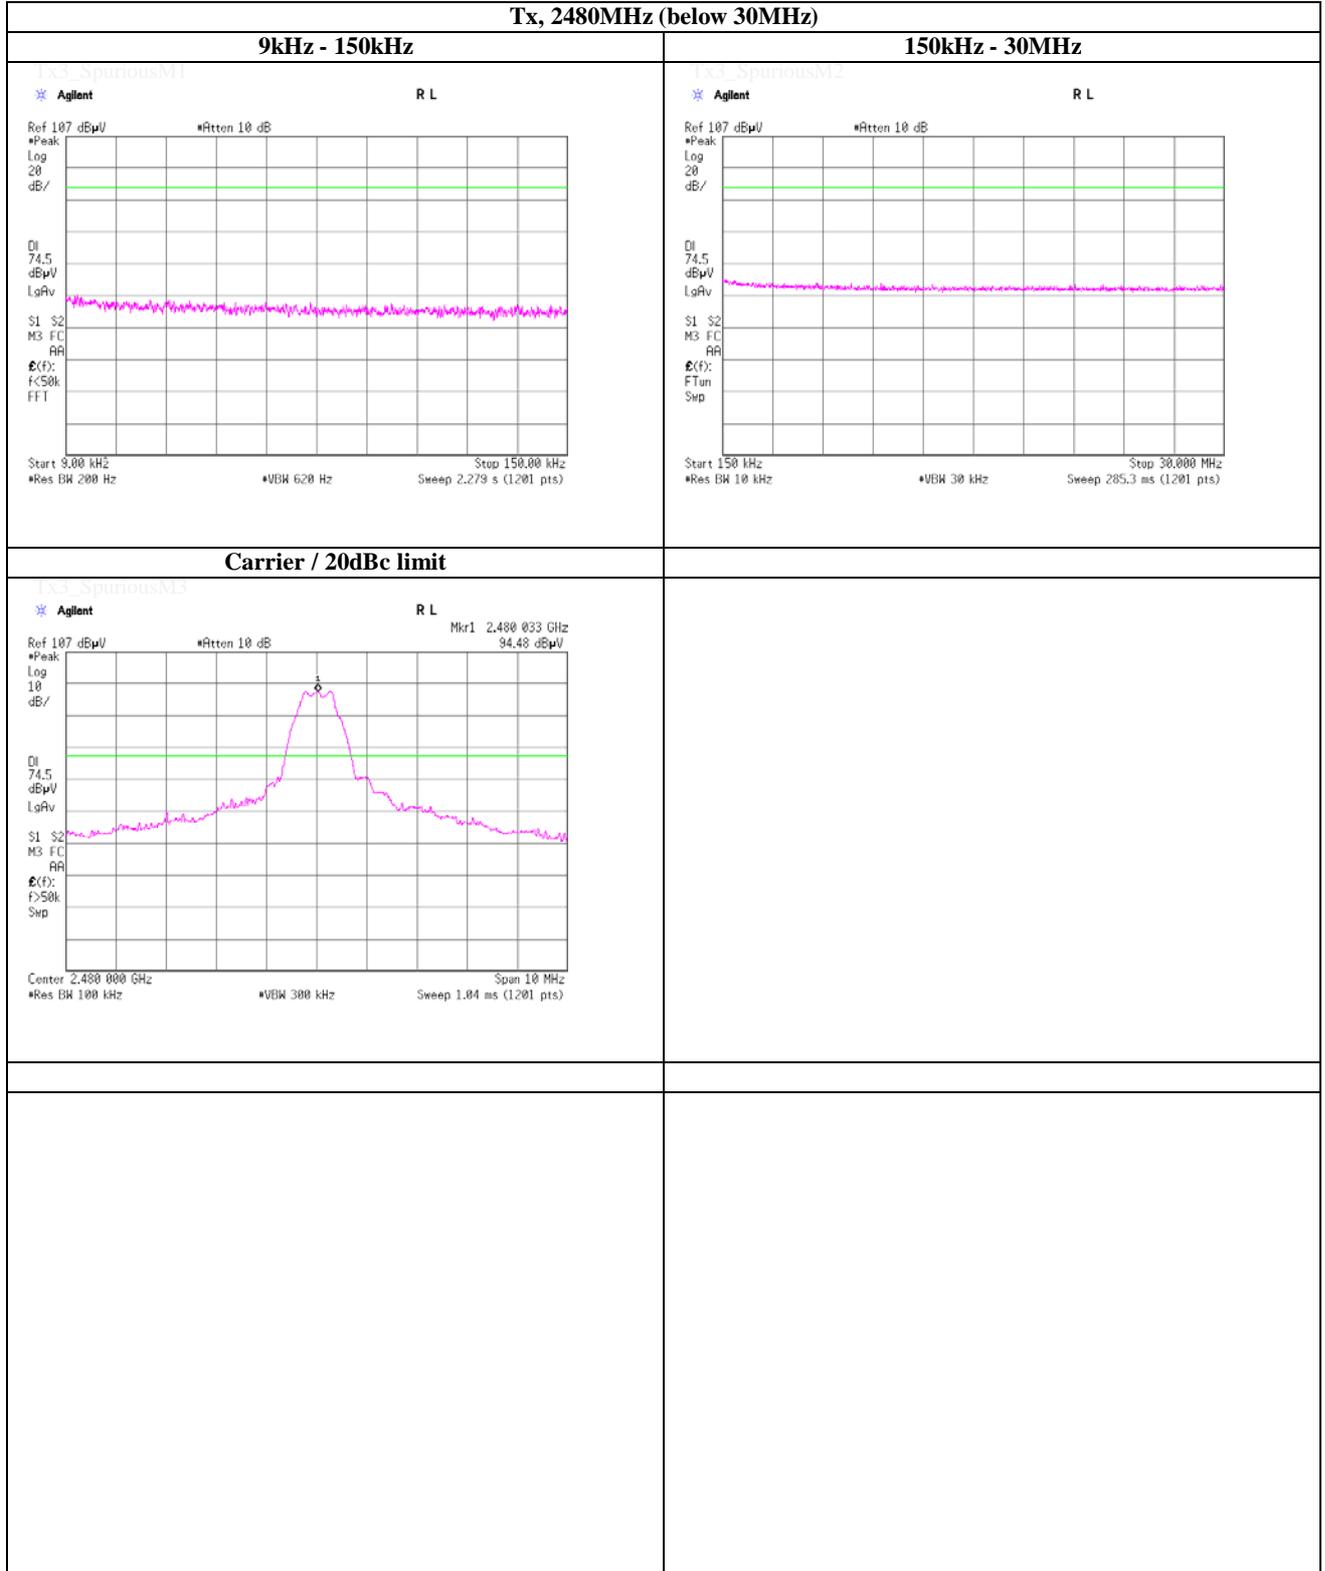


Maximum Power Spectral Density

(PKPSD)

Test place	UL Japan, Inc. Shonan EMC Lab.	No.5 Shielded Room
Date	May 15, 2014	
Temperature / Humidity	26deg.C , 48%RH	
Engineer	Akio Hayashi	
Mode	Tx, Bluetooth Low Energy, PN9	


Ch. Freq. [MHz]	Freq. Reading [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. [dB]	Result [dBm]	Limit [dBm]	Margin [dB]
2402.0000	2402.00	-26.27	1.80	9.65	-14.82	8.00	22.82
2440.0000	2440.00	-26.38	1.81	9.66	-14.91	8.00	22.91
2480.0000	2480.00	-26.61	1.82	9.66	-15.13	8.00	23.13

Sample Calculation:
 Result = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss

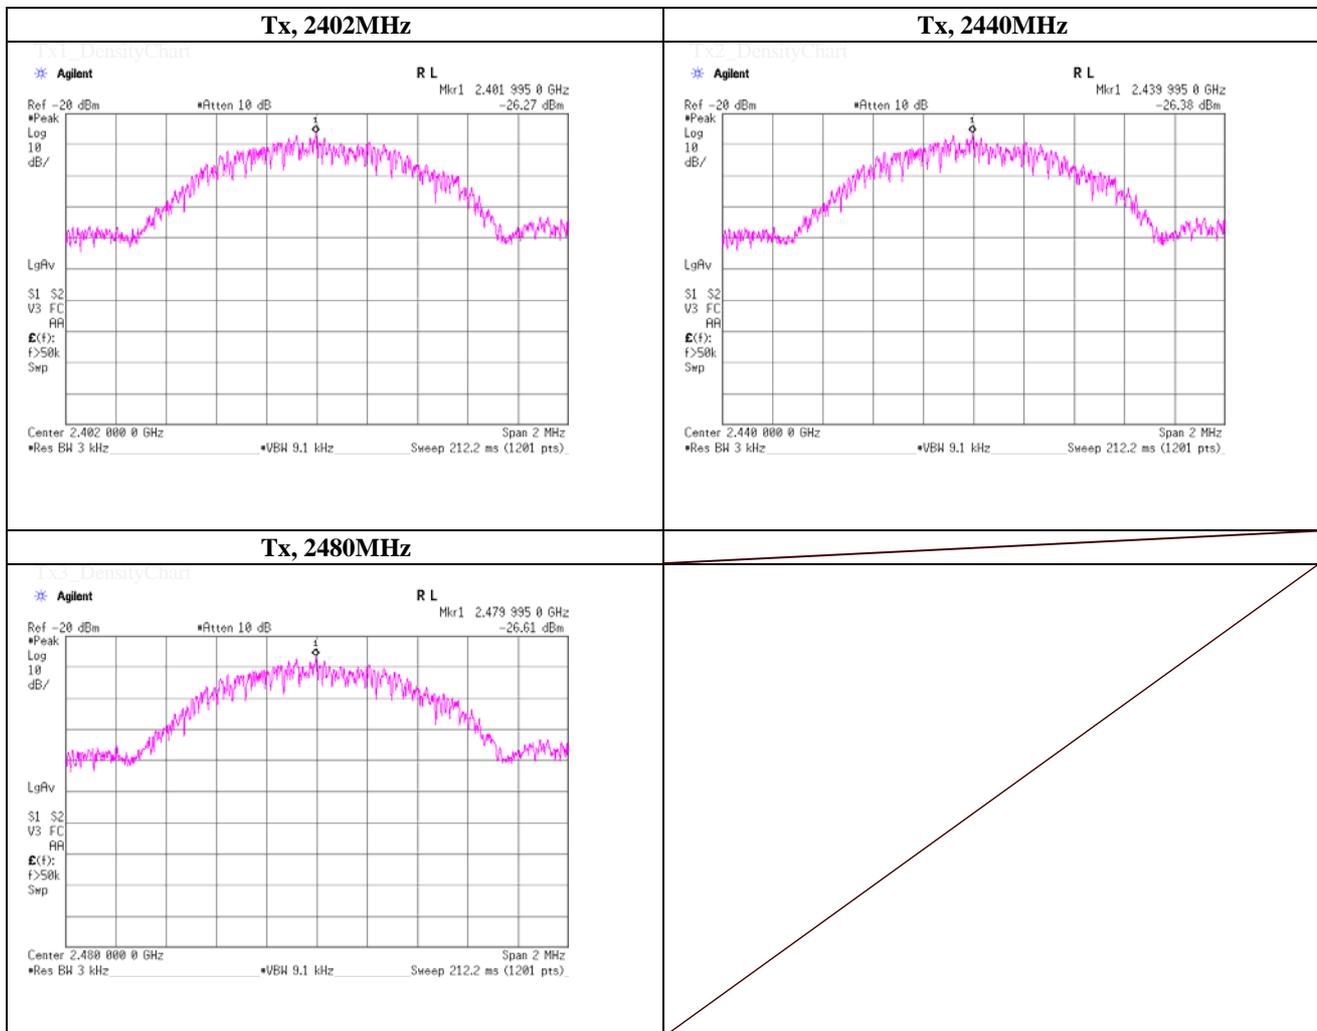

UL Japan, Inc.
Shonan EMC Lab.
 1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN
 Telephone : +81 463 50 6400
 Facsimile : +81 463 50 6401

99% Occupied Bandwidth

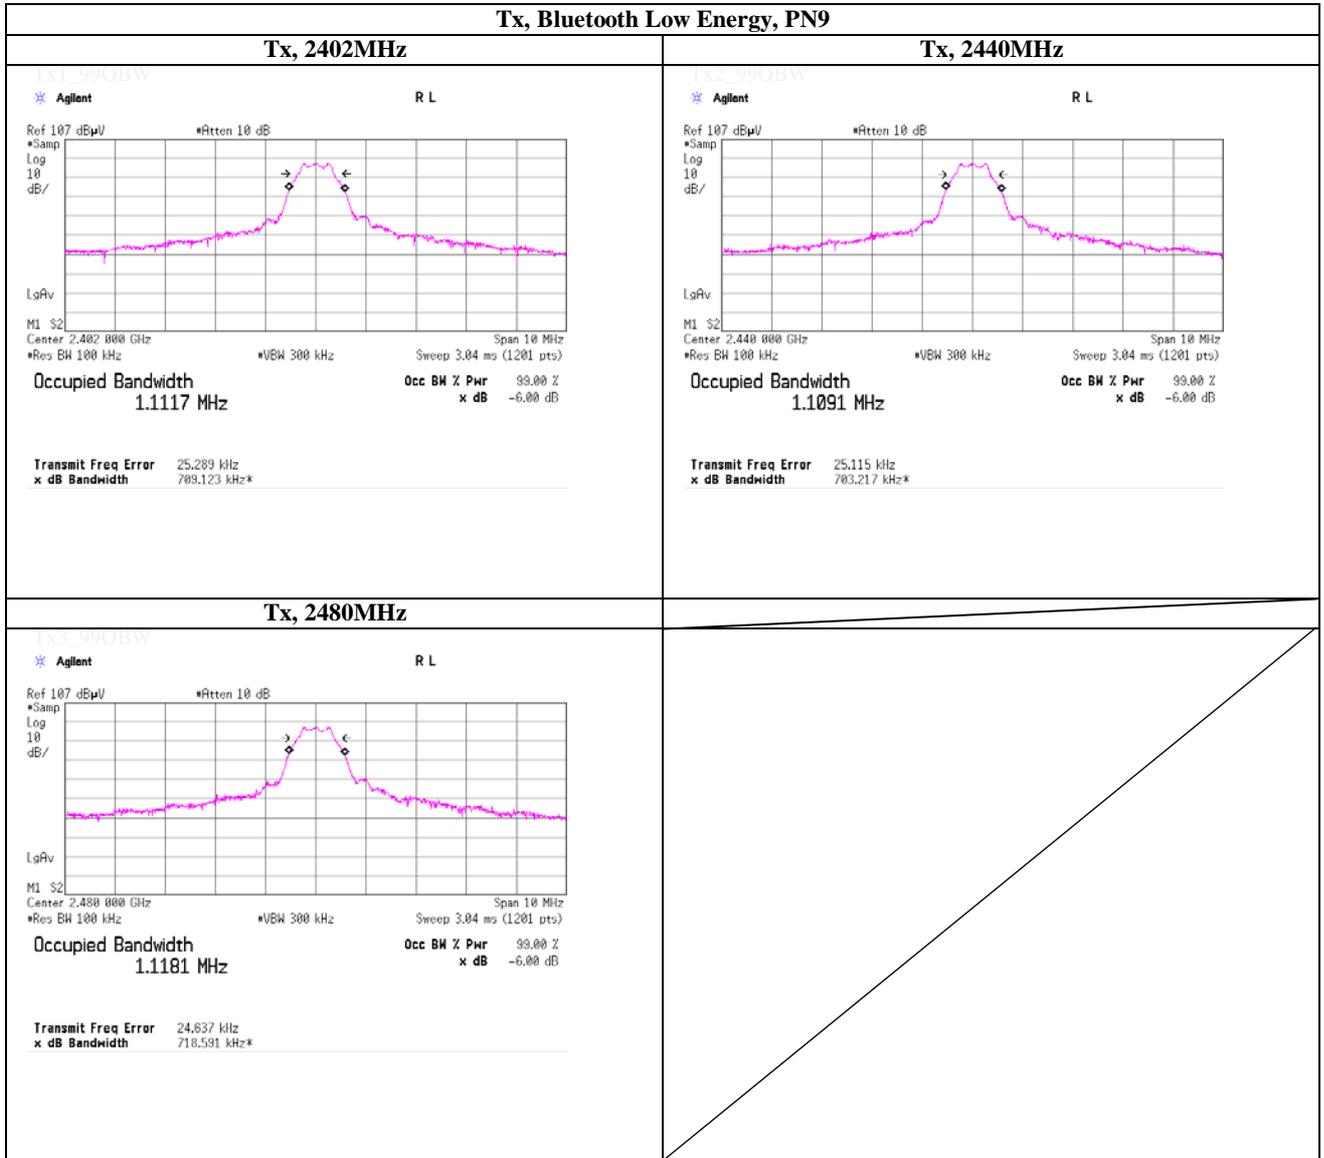

APPENDIX 2 Test Instruments

EMI test equipment

Control No.	Instrument	Manufacturer	Model No	Serial No	Test Item	Calibration Date * Interval(month)
SSA-03	Spectrum Analyzer	Agilent	E4448A	MY48250152	AT	2014/02/03 * 12
SAT10-09	Attenuator	Weinschel Corp.	54A-10	W5692	AT	2013/11/27 * 12
SCC-G14	Coaxial Cable	Suhner	SUCOFLEX 102	31600/2	AT	2014/03/13 * 12
SPM-06	Power Meter	Anritsu	ML2495A	0850009	AT	2014/04/08 * 12
SPSS-03	Power sensor	Anritsu	MA2411B	0917063	AT	2014/04/08 * 12
SOS-09	Humidity Indicator	A&D	AD-5681	4061484	AT	2014/03/07 * 12
SAEC-03(NSA)	Semi-Anechoic Chamber	TDK	SAEC-03(NSA)	3	RE	2013/07/09 * 12
SAF-05	Pre Amplifier	TOYO Corporation	TPA0118-36	1440490	RE	2013/11/22 * 12
SCC-G01	Coaxial Cable	Suhner	SUCOFLEX 104A	46497/4A	RE	2014/04/22 * 12
SCC-G21	Coaxial Cable	Suhner	SUCOFLEX 104	296169/4	RE	2014/05/15 * 12
SHA-03	Horn Antenna	Schwarzbeck	BBHA9120D	9120D-739	RE	2013/08/19 * 12
SOS-05	Humidity Indicator	A&D	AD-5681	4062518	RE	2014/02/21 * 12
SSA-02	Spectrum Analyzer	Agilent	E4448A	MY48250106	RE	2014/03/17 * 12
SJM-15	Measure	ASKUL	-	-	RE	-
COTS-SEMI-1	EMI Software	TSJ	TEPTO-DV(RE,CE, RFLMF)	-	RE	-
SAT10-06	Attenuator	Agilent	8493C-010	74865	RE	2013/11/22 * 12
SFL-02	Highpass Filter	MICRO-TRONICS	HPM50111	051	RE	2013/11/22 * 12
SHA-04	Horn Antenna	ETS LINDGREN	3160-09	LM3640	RE	2014/03/15 * 12
SAF-08	Pre Amplifier	TOYO Corporation	HAP18-26W	00000019	RE	2014/03/14 * 12
SCC-G15	Coaxial Cable	Suhner	SUCOFLEX 102	32703/2	RE	2014/03/13 * 12
SAF-03	Pre Amplifier	SONOMA	310N	290213	RE	2014/02/14 * 12
SAT6-06	Attenuator	JFW	50HF-006N	-	RE	2014/02/17 * 12
SBA-03	Biconical Antenna	Schwarzbeck	BBA9106	91032666	RE	2013/10/26 * 12
SCC-C1/C2/C3/C4/C5/C10/SRSE-03	Coaxial Cable&RF Selector	Fujikura/Fujikura/Suhner/Suhner/Suhner/Suhner/TOYO	8D2W/12DSFA/141PE/141PE/141PE/NS4906	-/0901-271 (RF Selector)	RE	2014/04/25 * 12
SLA-03	Logperiodic Antenna	Schwarzbeck	UHALP9108A	UHALP 9108-A 0901	RE	2013/10/26 * 12
STR-06	Test Receiver	Rohde & Schwarz	ESCI	101259	RE	2014/03/04 * 12

The expiration date of the calibration is the end of the expired month .
As for some calibrations performed after the tested dates , those test equipment have been controlled by means of an unbroken chains of calibrations .

All equipment is calibrated with valid calibrations . Each measurement data is traceable to the national or international standards .

Test Item :

RE: Radiated emission

AT: Antenna terminal conducted test