

RADIO TEST REPORT

Test Report No. : 31CE0169-HO-02-A-R1

Applicant : Murata Manufacturing Co., Ltd.
Type of Equipment : Communication Module
Model No. : LBEE69QSYC
FCC ID : VPYLBSY
Test regulation : FCC Part 15 Subpart C: 2010
Test Result : Complied

1. This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
2. The results in this report apply only to the sample tested.
3. This sample tested is in compliance with the above regulation.
4. The test results in this report are traceable to the national or international standards.
5. This test report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.
6. This report is a revised version of 31CE0169-HO-02-A. 31CE0169-HO-02-A is replaced with this report.

Date of test: February 7 to 16, 2011

**Representative
test engineer:**

T. Shimada

Takumi Shimada
Engineer of WiSE Japan,
UL Verification Service

Approved by:

T. Hataheda

Takahiro Hataheda
Leader of WiSE Japan,
UL Verification Service



NVLAP LAB CODE: 200572-0

This laboratory is accredited by the NVLAP LAB CODE 200572-0, U.S.A. The tests reported herein have been performed in accordance with its terms of accreditation. *As for the range of Accreditation in NVLAP, you may refer to the WEB address, <http://www.ul.com/japan/jpn/pages/services/emc/about/mark1/index.jsp#nvlap>

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF058b (12.01.11)

CONTENTS	PAGE
SECTION 1: Customer information.....	3
SECTION 2: Equipment under test (E.U.T.).....	3
SECTION 3: Test specification, procedures & results.....	4
SECTION 4: Operation of E.U.T. during testing.....	7
SECTION 5: Conducted Emission.....	9
SECTION 6: Radiated Spurious Emission	10
SECTION 7: Antenna Terminal Conducted Tests.....	11
APPENDIX 1: Photographs of test setup.....	12
Conducted Emission	12
Radiated Spurious Emission	13
Worst Case Position	14
APPENDIX 2: Data of EMI test.....	15
Conducted Emission	15
6dB Bandwidth	22
Maximum Peak Output Power	25
Radiated Spurious Emission	28
Conducted Spurious Emission	42
Conducted Emission Band Edge compliance	52
Power Density	53
99% Occupied Bandwidth	57
APPENDIX 3: Test instruments	59

SECTION 1: Customer information

Company Name : Murata Manufacturing Co., Ltd.
Address : 10-1, Higashikotari 1-chome, Nagaokakyo-shi, Kyoto 617-8555 Japan
Telephone Number : +81-75-955-7059
Facsimile Number : +81-75-955-7098
Contact Person : Takaharu Kawakatsu

SECTION 2: Equipment under test (E.U.T.)

2.1 Identification of E.U.T.

Type of Equipment : Communication Module
Model No. : LBEE69QSYC
Serial No. : Refer to Section 4, Clause 4.2
Rating : DC1.8, 3.3V
Receipt Date of Sample : January 17, 2011
Country of Mass-production : Japan
Condition of EUT : Production prototype
(Not for Sale: This sample is equivalent to mass-produced items.)
Modification of EUT : No Modification by the test lab

2.2 Product Description

General Specification

Clock frequency(ies) in the system : 26MHz(WLAN), 38.4MHz(Bluetooth)
Operating temperature range : -20 to +75 deg. C

Radio Specification

WLAN 11b/g/n-20

Radio Type : Transceiver
Frequency of Operation : 2412-2462MHz
Modulation : 11b: DSSS, 11g/n-20: OFDM
Power Supply (radio part input) : DC1.8, 3.3V
Antenna type : Inverted F antenna
Antenna Gain : 3.05dBi

Bluetooth

Radio Type : Transceiver
Frequency of Operation : 2402-2480MHz
Modulation : FHSS
Power Supply (radio part input) : DC3.3V
Antenna type : Inverted F antenna
Antenna Gain : 3.05dBi

*For Bluetooth part, see Test Report No. 31CE0169-HO-02-B-R1 issued by UL Japan, Inc.

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

SECTION 3: Test specification, procedures & results

3.1 Test Specification

Test Specification : FCC Part 15 Subpart C: 2010, final revised on December 6, 2010 and effective January 5, 2011

Title : FCC 47CFR Part15 Radio Frequency Device Subpart C Intentional Radiators
Section 15.207 Conducted limits
Section 15.247 Operation within the bands 902-928MHz,
2400-2483.5MHz, and 5725-5850MHz

3.2 Procedures and results

Item	Test Procedure	Specification	Worst margin	Results	Remarks
Conducted Emission	FCC: ANSI C63.4:2003 7. AC powerline Conducted Emission measurements ----- IC: RSS-Gen 7.2.4	FCC: Section 15.207 ----- IC: RSS-Gen 7.2.4	QP 13.0dB, 29.09388MHz, N AV 4.1dB, 29.09388MHz, N	Complied	-
6dB Bandwidth	FCC: "Guidance on Measurement of Digital Transmission Systems Operating under Section15.247" ----- IC: RSS-Gen 4.6.2	FCC: Section 15.247(a)(2) ----- IC: RSS-210 A8.2(a)	See data.	Complied	Conducted
Maximum Peak Output Power	FCC: "Guidance on Measurement of Digital Transmission Systems Operating under Section15.247" ----- IC: RSS-Gen 4.8	FCC: Section 15.247(b)(3) ----- IC: RSS-210 A8.4(4)		Complied	Conducted
Power Density	FCC: "Guidance on Measurement of Digital Transmission Systems Operating under Section15.247" ----- IC: -	FCC: Section 15.247 (e) ----- IC: RSS-210 A8.2(b)		Complied	Conducted
Spurious Emission Restricted Band Edges	FCC: "Guidance on Measurement of Digital Transmission Systems Operating under Section15.247" ----- IC: RSS-Gen 4.9	FCC: Section15.247(d) ----- IC: RSS-210 A8.5 RSS-Gen 7.2.3	0.2dB 2483.500MHz, PK, Hori.	Complied	Conducted/ Radiated

Note: UL Japan, Inc.'s EMI Work Procedures No.QPM05 and QPM15.

* In case any questions arise about test procedure, ANSI C63.4: 2003 is also referred.

FCC 15.31 (e)

The stable voltage (DC1.8, 3.3V) is constantly provided with the EUT through the regulator installed in the end product. Therefore, the EUT complies with the requirement.

FCC Part 15.203/212 Antenna requirement

It is impossible for end users to replace the antenna, because it is soldered on the circuit board. Therefore, the equipment complies with the antenna requirement of Section 15.203/212.

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

3.3 Addition to standard

Item	Test Procedure	Specification	Worst margin	Results	Remarks
99% Occupied Bandwidth	IC: RSS-Gen 4.6.1	IC: RSS-Gen 4.6.1	N/A	-	Conducted
Receiver Spurious Emission	C: RSS-Gen 4.10	IC: RSS-Gen 6	2.4dB 72.023MHz, QP, Vert.	Complied	Radiated

Other than above, no addition, exclusion nor deviation has been made from the standard.

3.4 Uncertainty

EMI

The following uncertainties have been calculated to provide a confidence level of 95% using a coverage factor k=2.

Test room (semi-anechoic chamber)	Conducted emission (+dB)
	150kHz-30MHz
No.1	3.1dB
No.2	3.3dB
No.3	3.7dB
No.4	3.2dB

Test room (semi-anechoic chamber)	Radiated emission						
	(3m*)(+dB)				(1m*)(+dB)		(0.5m*)(+dB)
	9kHz -30MHz	30MHz -300MHz	300MHz -1GHz	1GHz -10GHz	10GHz -18GHz	18GHz -26.5GHz	26.5GHz -40GHz
No.1	3.5dB	5.1dB	5.2dB	4.8dB	5.1dB	4.4dB	4.3dB
No.2	4.0dB	5.1dB	5.2dB	4.8dB	5.0dB	4.3dB	4.2dB
No.3	4.2dB	4.7dB	5.2dB	4.8dB	5.0dB	4.5dB	4.2dB
No.4	4.0dB	5.0dB	5.1dB	4.8dB	5.0dB	5.1dB	4.2dB

*3m/1m/0.5m = Measurement distance

Power meter (+dB)	
Below 1GHz	Above 1GHz
1.0dB	1.0dB

Antenna terminal conducted emission and Power density (+dB)			Antenna terminal conducted emission (+dB)		Channel power (+dB)
Below 1GHz	1GHz-3GHz	3GHz-18GHz	18GHz-26.5GHz	26.5GHz-40GHz	
1.0dB	1.1dB	2.7dB	3.2dB	3.3dB	1.5dB

Conducted Emission test

The data listed in this test report has enough margin, more than the site margin.

Radiated emission test

The data listed in this report meets the limits unless the uncertainty is taken into consideration.

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

3.5 Test Location

UL Japan, Inc. Head Office EMC Lab. *NVLAP Lab. code: 200572-0
4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN
Telephone : +81 596 24 8116 Facsimile : +81 596 24 8124

	FCC Registration Number	IC Registration Number	Width x Depth x Height (m)	Size of reference ground plane (m) / horizontal conducting plane	Other rooms
No.1 semi-anechoic chamber	313583	2973C-1	19.2 x 11.2 x 7.7m	7.0 x 6.0m	No.1 Power source room
No.2 semi-anechoic chamber	655103	2973C-2	7.5 x 5.8 x 5.2m	4.0 x 4.0m	-
No.3 semi-anechoic chamber	148738	2973C-3	12.0 x 8.5 x 5.9m	6.8 x 5.75m	No.3 Preparation room
No.3 shielded room	-	-	4.0 x 6.0 x 2.7m	N/A	-
No.4 semi-anechoic chamber	134570	2973C-4	12.0 x 8.5 x 5.9m	6.8 x 5.75m	No.4 Preparation room
No.4 shielded room	-	-	4.0 x 6.0 x 2.7m	N/A	-
No.5 semi-anechoic chamber	-	-	6.0 x 6.0 x 3.9m	6.0 x 6.0m	-
No.6 shielded room	-	-	4.0 x 4.5 x 2.7m	4.75 x 5.4 m	-
No.6 measurement room	-	-	4.75 x 5.4 x 3.0m	4.75 x 4.15 m	-
No.7 shielded room	-	-	4.7 x 7.5 x 2.7m	4.7 x 7.5m	-
No.8 measurement room	-	-	3.1 x 5.0 x 2.7m	N/A	-
No.9 measurement room	-	-	8.0 x 4.5 x 2.8m	2.0 x 2.0m	-
No.10 measurement room	-	-	2.6 x 2.8 x 2.5m	2.4 x 2.4m	-
No.11 measurement room	-	-	3.1 x 3.4 x 3.0m	2.4 x 3.4m	-

* Size of vertical conducting plane (for Conducted Emission test) : 2.0 x 2.0m for No.1, No.2, No.3, and No.4 semi-anechoic chambers and No.3 and No.4 shielded rooms.

3.6 Test set up, Data of EMI, and Test instruments

Refer to APPENDIX.

SECTION 4: Operation of E.U.T. during testing

4.1 Operating Mode(s)

Mode	Remarks*
IEEE 802.11b (11b)	5.5Mbps, PN9
IEEE 802.11g (11g)	24Mbps, PN9
IEEE 802.11n MIMO 20MHz BW (11n-20)	MCS4, PN9
*The worst condition was determined based on the test result of Maximum Peak Output Power (Mid Channel)	
*Power of the EUT was set by the software as follows; Power setting: possible worst case of production model. Software: Artista for AR6003 Controller Ver 1.0.4.2 *This setting of software is the worst case. Any conditions under the normal use do not exceed the condition of setting. In addition, end users cannot change the settings of the output power of the product.	

*Details of Operating mode(s)

Test Item	Operating Mode	Tested frequency
Conducted Emission Spurious Emission	11b Tx	2412MHz
	11g Tx	2437MHz 2462MHz
	11n-20 Tx	2412MHz 2437MHz 2462MHz
	11b/g Rx	2437MHz
	11n-20 Rx	2437MHz
6dB Bandwidth Maximum Peak Output Power Power Density 99% Occupied Bandwidth	11b Tx	2412MHz
	11g Tx	2437MHz 2462MHz
	11n-20 Tx	2412MHz 2437MHz 2462MHz

UL Japan, Inc.


Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

4.2 Configuration and peripherals

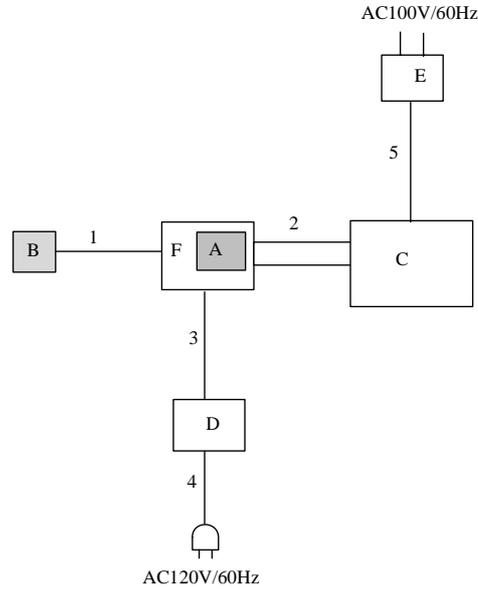

* Cabling and setup(s) were taken into consideration and test data was taken under worse case conditions.

Description of EUT

No.	Item	Model number	Serial number	Manufacturer	Remarks
A	Communication Module	LBEE69QSYC	001	Murata Manufacturing Co., Ltd.	EUT
B	Antenna	WDAN-F1SN1001-DF-REF	4	Murata Manufacturing Co., Ltd.	EUT
C	Jig Board	-	-	Murata Manufacturing Co., Ltd.	-
D	DC Power Supply *1)	PW18-1.3AT	08016530	KENWOOD	-
E	AC Adaptor	A15D2-05MP	-	COSMO POWER SOURCE	-
F	Jig Board	-	-	Murata Manufacturing Co., Ltd.	-

*1) Used for Conducted Emission test only

List of cables used

No.	Name	Length (m)	Shield		Remarks
			Cable	Connector	
1	Antenna Cable	0.5	Shielded	Shielded	-
2	Flat Cable	0.16	Unshielded	Unshielded	-
3	DC Cable	2.5	Unshielded	Unshielded	-
4	AC Cable *1)	2.4	Unshielded	Unshielded	-
5	DC Cable	1.5	Unshielded	Unshielded	-

*1) Used for Conducted Emission test only

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

SECTION 5: Conducted Emission

Test Procedure and conditions

EUT was placed on a urethane platform of nominal size, 1.0m by 0.5m, raised 0.8m above the conducting ground plane. The rear of tabletop was located 40cm to the vertical conducting plane. The rear of EUT, including peripherals aligned and flushed with rear of tabletop. All other surfaces of tabletop were at least 80cm from any other grounded conducting surface. EUT was located 80cm from a Line Impedance Stabilization Network (LISN)/ Artificial mains Network (AMN) and excess AC cable was bundled in center.

For the tests on EUT with other peripherals (as a whole system)

I/O cables that were connected to the peripherals were bundled in center. They were folded back and forth forming a bundle 30cm to 40cm long and were hanged at a 40cm height to the ground plane. All unused 50ohm connectors of the LISN(AMN) were resistivity terminated in 50ohm when not connected to the measuring equipment.

The AC Mains Terminal Continuous disturbance Voltage has been measured with the EUT in a Semi Anechoic Chamber. The EUT was connected to a LISN (AMN).

An overview sweep with peak detection has been performed.

The test results and limit are rounded off to one decimal place, so some differences might be observed.

Detector	: QP and AV
Measurement range	: 0.15-30MHz
Test data	: APPENDIX
Test result	: Pass

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

SECTION 6: Radiated Spurious Emission

Test Procedure

It was measured based on "2. Radiated emission test" of "Guidance on Measurement of Digital Transmission Systems Operating under Section 15.247".

EUT was placed on a urethane platform of nominal size, 0.5m by 1.0m, raised 0.8m above the conducting ground plane. The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with a ground plane.

The height of the measuring antenna varied between 1 and 4m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field strength.

The measurements were performed for both vertical and horizontal antenna polarization with the Test Receiver, or the Spectrum Analyzer.

The measurements were made with the following detector function of the test receiver and the Spectrum analyzer (in linear mode).

The test was made with the detector (RBW/VBW) in the following table.

When using Spectrum analyzer, the test was made with adjusting span to zero by using peak hold.

Test Antennas are used as below;

Frequency	Below 30MHz	30MHz to 300MHz	300MHz to 1GHz	Above 1GHz
Antenna Type	Loop	Biconical	Logperiodic	Horn

In any 100kHz bandwidth outside the restricted band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator confirmed 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on a radiated measurement.

20dBc was applied to the frequency over the limit of FCC 15.209 / Table 5 of RSS-Gen 7.2.5(IC) and outside the restricted band of FCC15.205 / Table 3 of RSS-Gen 7.2.2 (IC).

Frequency	Below 1GHz	Above 1GHz		20dBc
Instrument used	Test Receiver	Spectrum Analyzer		Spectrum Analyzer
Detector	QP	PK	AV	PK
IF Bandwidth	BW 120kHz(T/R)	RBW: 1MHz VBW: 3MHz	RBW: 1MHz VBW: 10Hz *1)	RBW: 100kHz VBW: 300kHz (S/A)
Test Distance	3m	3m (below 10GHz), 1m*2) (above 10GHz),		3m (below 10GHz), 1m*2) (above 10GHz),

*1) The test was performed with VBW 10Hz since the EUT had no intervals during which the transmitter was off (see Appendix).

*2) Distance Factor: $20 \times \log(3.0\text{m}/1.0\text{m}) = 9.5\text{dB}$

- The carrier level and noise levels were confirmed at each position of X, Y and Z axes of module and antenna to see the position of maximum noise, and the test was made at the position that has the maximum noise.

The test results and limit are rounded off to one decimal place, so some differences might be observed.

Measurement range : 30M-25GHz
Test data : APPENDIX
Test result : Pass

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

SECTION 7: Antenna Terminal Conducted Tests

Test Procedure

The tests were made with below setting connected to the antenna port.

Test	Span	RBW	VBW	Sweep time	Detector	Trace	Instrument used
6dB Bandwidth	20MHz	100kHz	300kHz	Auto	Peak	Max Hold	Spectrum Analyzer
99% Occupied Bandwidth	Enough width to display 20dB Bandwidth	1 to 3% of Span	Three times of RBW	Auto	Peak	Max Hold	Spectrum Analyzer
Maximum Peak Output Power	-	-	-	Auto	Peak	-	Power Meter (Sensor: 50MHz BW)
Peak Power Density	18MHz	30kHz	100kHz	600sec	Peak	Max Hold	Spectrum Analyzer *1) *2)
Conducted Spurious Emission	Less or equal to 5GHz (Range: 30MHz-25GHz)	100kHz	300kHz	Auto	Peak	Max Hold	Spectrum Analyzer

*1) PSD Option 1 of "Guidance on Measurement of Digital Transmission Systems Operating under Section15.247".

*2) The test was not performed at RBW:3kHz however the measurement is to be performed with RBW:3kHz in the regulation, because, the measurement value with RBW:3kHz is less than the value of RBW:30kHz and the test data met the limit with RBW:30kHz.

The test results and limit are rounded off to two decimals place, so some differences might be observed.

Test data : **APPENDIX**
Test result : **Pass**

APPENDIX 1: Photographs of test setup

Conducted Emission



Photo 1

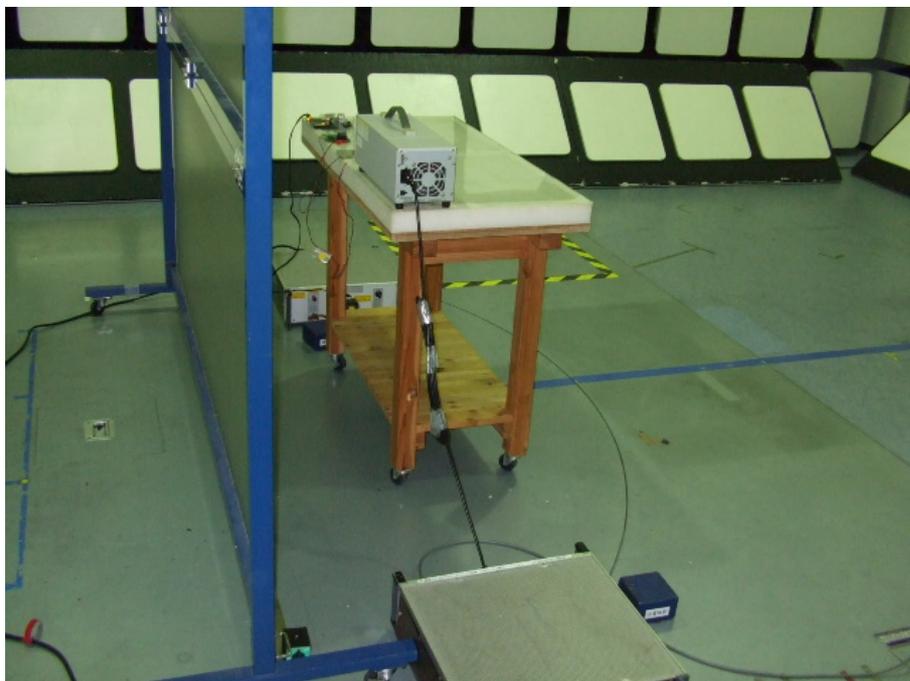


Photo 2

Radiated Spurious Emission

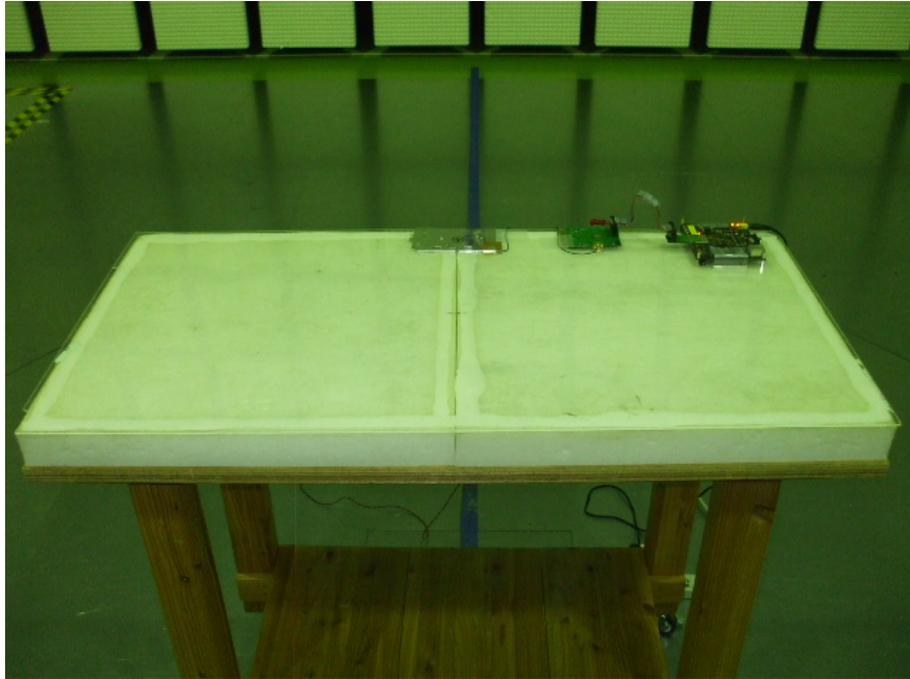


Photo 1


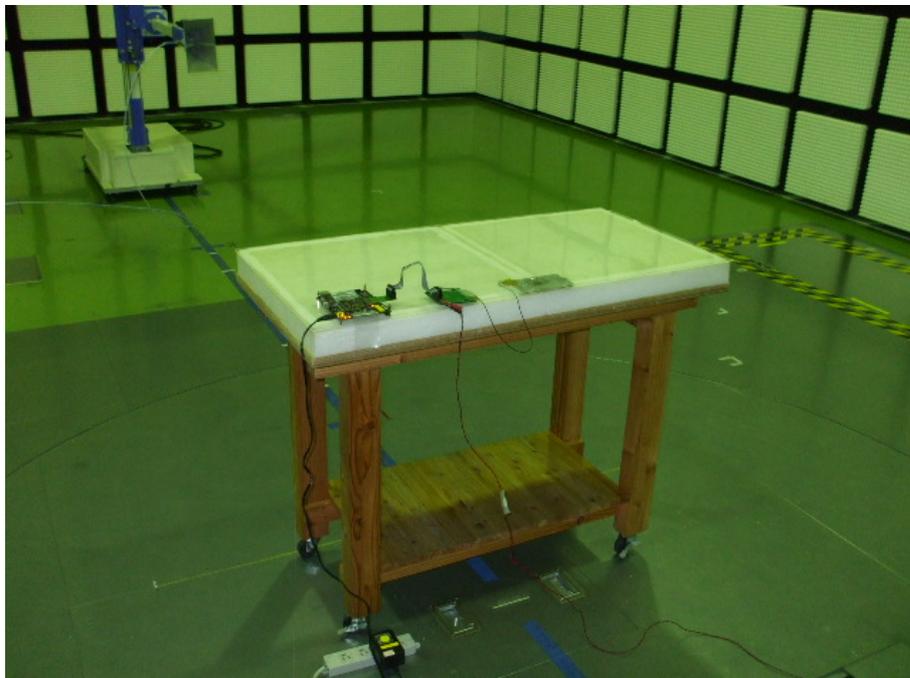


Photo 2


Worst Case Position

ANT(Hori:X-axis/Vert:Y-axis)


X-axis

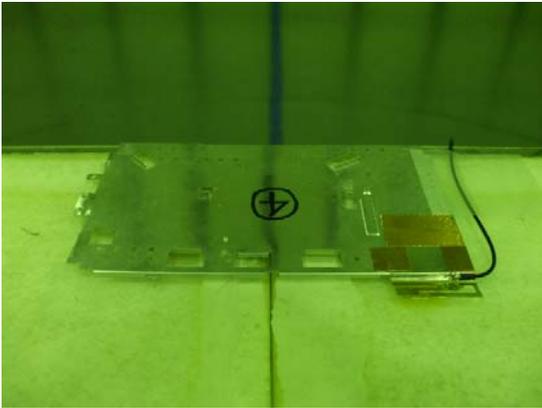

Y-axis

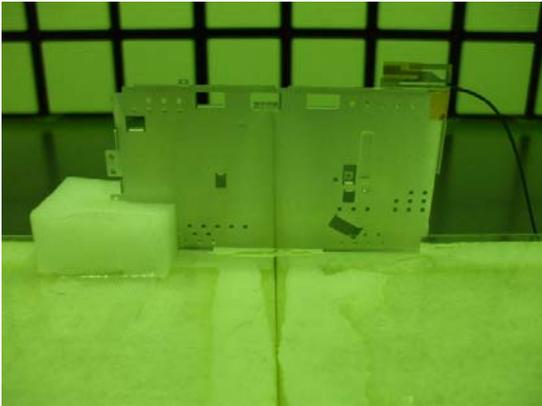


Z-axis

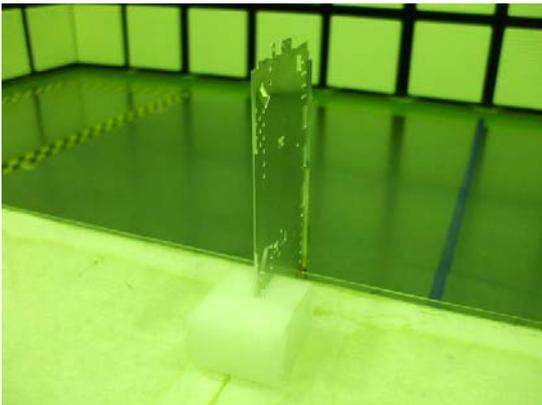


Module(Hori:X-axis/Vert:Z-axis)


X-axis

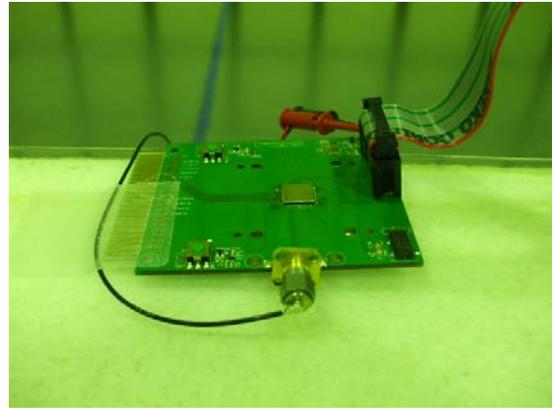

Y-axis

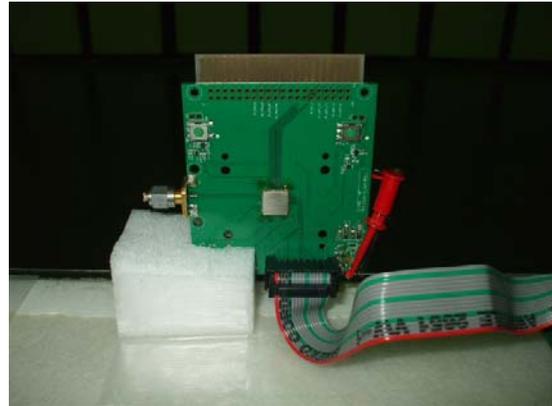

Z-axis

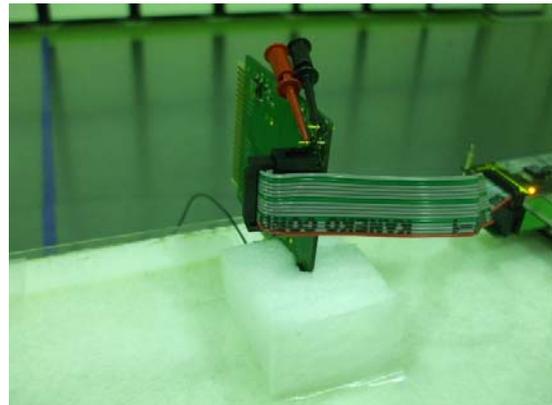

APPENDIX 2: Data of EMI test

Conducted Emission


DATA OF CONDUCTED EMISSION TEST

UL Japan, Inc. Head Office EMC Lab. No.2 Semi Anechoic Chamber
Date : 2011/02/16

Report No. : 31CE0169-HO-02
 Temp./Humi. : 22deg. C / 29%
 Engineer : Hiroshi Kukita

Mode / Remarks : Tx 11b 5.5Mbps 2437MHz

LIMIT : FCC15.207 QP
 FCC15.207 AV

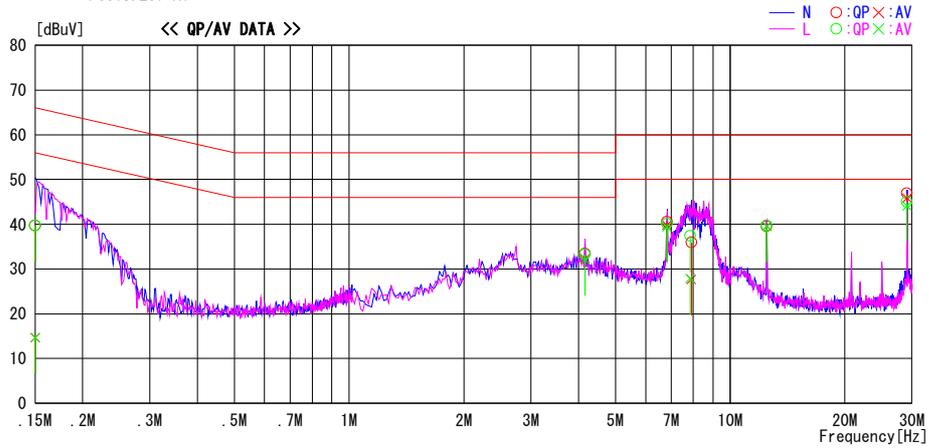


Frequency [MHz]	Reading Level		Corr. Factor [dB]	Results		Limit		Margin		Phase
	QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dB]	AV [dB]	
0.15000	26.4	1.4	13.3	39.7	14.7	66.0	56.0	26.3	41.3	N
4.15732	19.8	18.6	13.7	33.5	32.3	56.0	46.0	22.5	13.7	N
6.81628	26.7	25.9	13.9	40.6	39.8	60.0	50.0	19.4	10.2	N
7.90561	21.9	13.6	14.1	36.0	27.7	60.0	50.0	24.0	22.3	N
12.46903	25.1	25.1	14.5	39.6	39.6	60.0	50.0	20.4	10.4	N
29.09388	31.5	30.4	15.5	47.0	45.9	60.0	50.0	13.0	4.1	N
0.15000	26.4	1.4	13.3	39.7	14.7	66.0	56.0	26.3	41.3	L
4.15740	19.6	18.4	13.7	33.3	32.1	56.0	46.0	22.7	13.9	L
6.81720	26.3	25.5	13.9	40.2	39.4	60.0	50.0	19.8	10.6	L
7.85560	23.3	13.8	14.1	37.4	27.9	60.0	50.0	22.6	22.1	L
12.46976	25.2	25.1	14.5	39.7	39.6	60.0	50.0	20.3	10.4	L
29.09280	29.5	28.6	15.5	45.0	44.1	60.0	50.0	15.0	5.9	L

CHART: WITH FACTOR, Peak hold data. CALCULATION: RESULT=READING+C.F (LISN LOSS+CABLE LOSS+ATTEN. LOSS)
 Except for the above table : adequate margin data below the limits.

Conducted Emission

Test place	Head Office EMC Lab. No.2 Semi Anechoic Chamber
Report No.	31CE0169-HO-02
Date	02/16/2011
Temperature/ Humidity	22 deg.C./ 29%
Engineer	Hiroshi Kukita
Mode	11b Tx

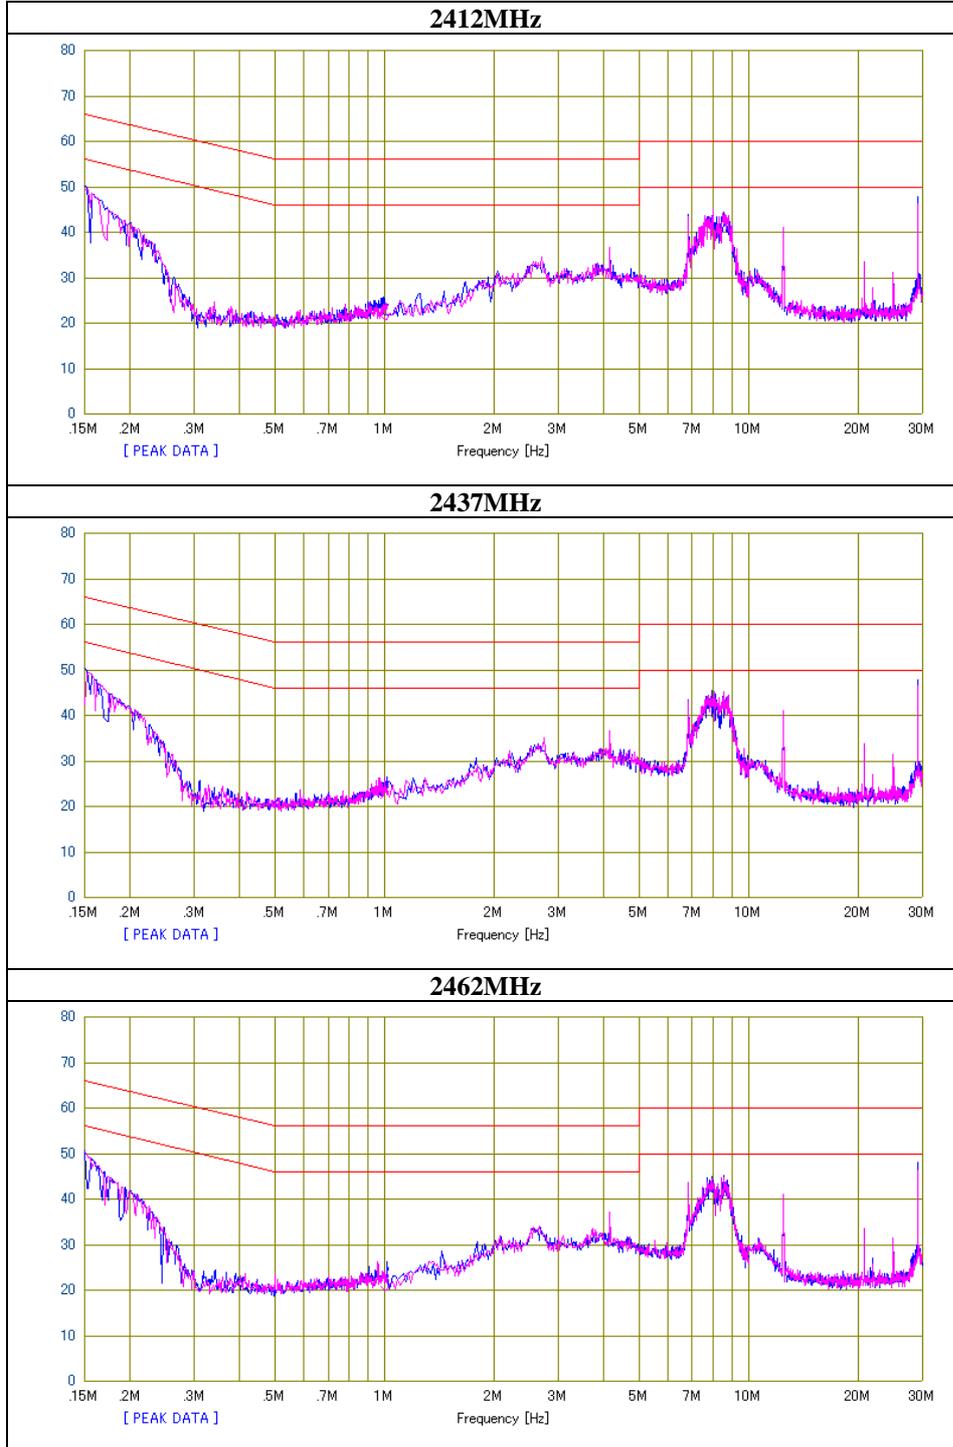

Y scale [dBμV] Chart N L

Conducted Emission


DATA OF CONDUCTED EMISSION TEST

UL Japan, Inc. Head Office EMC Lab. No.2 Semi Anechoic Chamber
Date : 2011/02/16

Report No. : 31CE0169-HO-02
Temp./Humi. : 22deg.C / 29%
Engineer : Hiroshi Kukita

Mode / Remarks : Tx 11g 24Mbps 2437MHz

LIMIT : FCC15.207 QP
FCC15.207 AV

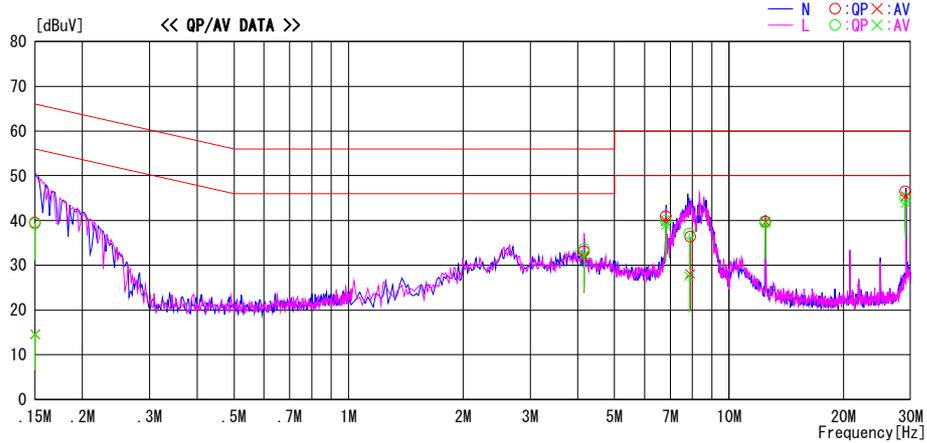


Frequency [MHz]	Reading Level		Corr. Factor [dB]	Results		Limit		Margin		Phase
	QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dB]	AV [dB]	
0.15000	26.2	1.3	13.3	39.5	14.6	66.0	56.0	26.5	41.4	N
4.15911	19.4	18.2	13.7	33.1	31.9	56.0	46.0	22.9	14.1	N
6.81678	27.0	26.0	13.9	40.9	39.9	60.0	50.0	19.1	10.1	N
7.90433	22.3	14.0	14.1	36.4	28.1	60.0	50.0	23.6	21.9	N
12.47028	25.3	25.2	14.5	39.8	39.7	60.0	50.0	20.2	10.3	N
29.08891	31.0	30.0	15.5	46.5	45.5	60.0	50.0	13.5	4.5	N
0.15000	26.0	1.3	13.3	39.3	14.6	66.0	56.0	26.7	41.4	L
4.16086	19.9	18.7	13.7	33.6	32.4	56.0	46.0	22.4	13.6	L
6.81773	26.0	25.0	13.9	39.9	38.9	60.0	50.0	20.1	11.1	L
7.84899	23.0	13.5	14.1	37.1	27.6	60.0	50.0	22.9	22.4	L
12.46211	25.0	25.0	14.5	39.5	39.5	60.0	50.0	20.5	10.5	L
29.09256	29.4	28.4	15.5	44.9	43.9	60.0	50.0	15.1	6.1	L

CHART: WITH FACTOR, Peak hold data. CALCULATION: RESULT=READING+C.F (LISN LOSS+CABLE LOSS+ATTEN. LOSS)
Except for the above table : adequate margin data below the limits.

Conducted Emission

Test place	Head Office EMC Lab. No.2 Semi Anechoic Chamber
Report No.	31CE0169-HO-02
Date	02/16/2011
Temperature/ Humidity	22 deg.C./ 29%
Engineer	Hiroshi Kukita
Mode	11g Tx

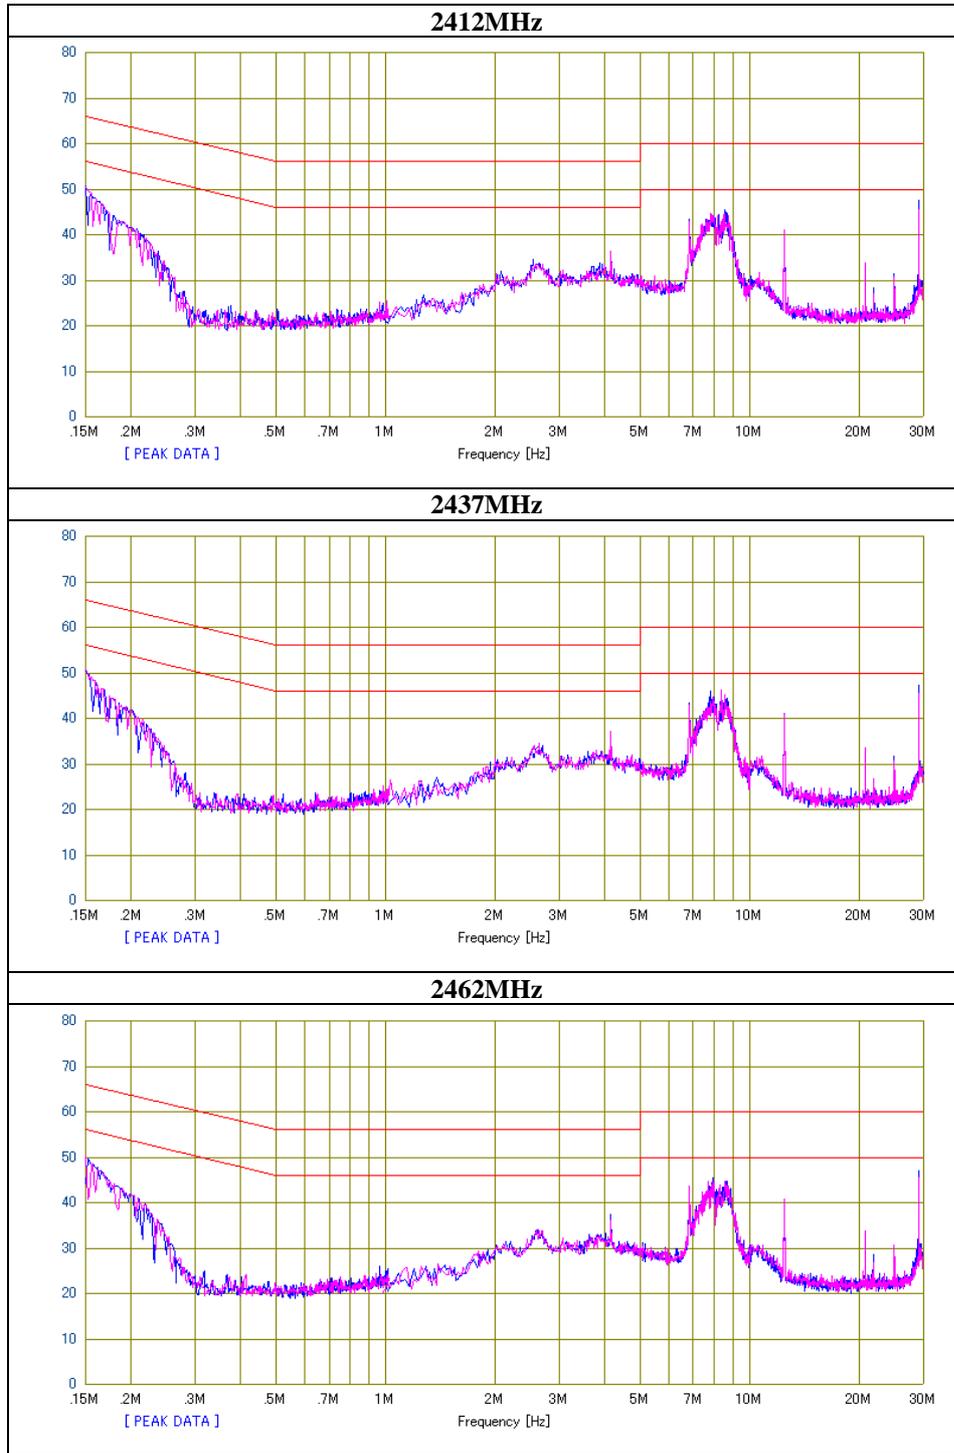

Conducted Emission

DATA OF CONDUCTED EMISSION TEST


UL Japan, Inc. Head Office EMC Lab. No.2 Semi Anechoic Chamber
 Date : 2011/02/16

Report No. : 31CE0169-HO-02

Temp./Humi. : 22deg.C / 29%
 Engineer : Hiroshi Kukita

Mode / Remarks : Tx 11n MCS4 2437MHz

LIMIT : FCC15.207 QP
 FCC15.207 AV

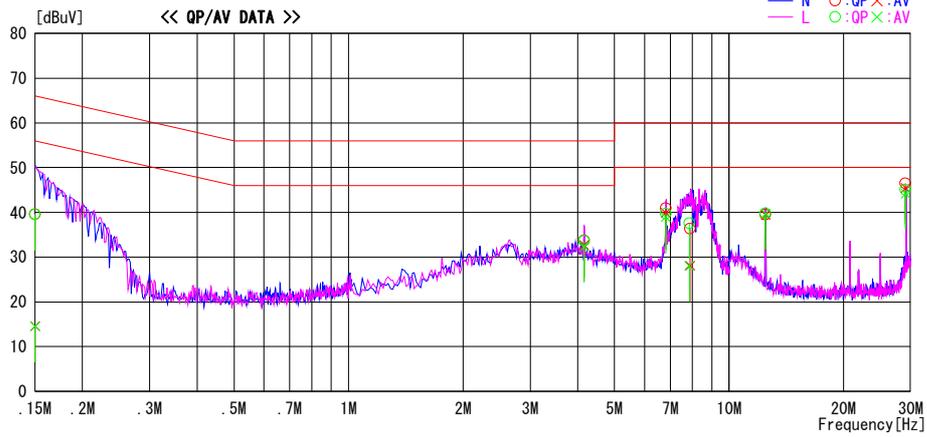


Frequency [MHz]	Reading Level		Corr. Factor [dB]	Results		Limit		Margin		Phase
	QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dB]	AV [dB]	
0.15000	26.3	1.3	13.3	39.6	14.6	66.0	56.0	26.4	41.4	N
4.15744	20.0	19.0	13.7	33.7	32.7	56.0	46.0	22.3	13.3	N
6.81634	27.0	26.0	13.9	40.9	39.9	60.0	50.0	19.1	10.1	N
7.89412	22.3	14.0	14.1	36.4	28.1	60.0	50.0	23.6	21.9	N
12.46835	25.0	24.9	14.5	39.5	39.4	60.0	50.0	20.5	10.6	N
29.09365	31.0	30.0	15.5	46.5	45.5	60.0	50.0	13.5	4.5	N
0.15000	26.3	1.3	13.3	39.6	14.6	66.0	56.0	26.4	41.4	L
4.15810	19.9	18.7	13.7	33.6	32.4	56.0	46.0	22.4	13.6	L
6.81811	25.8	25.0	13.9	39.7	38.9	60.0	50.0	20.3	11.1	L
7.85573	23.5	14.0	14.1	37.6	28.1	60.0	50.0	22.4	21.9	L
12.46982	25.3	25.2	14.5	39.8	39.7	60.0	50.0	20.2	10.3	L
29.08056	29.6	28.7	15.5	45.1	44.2	60.0	50.0	14.9	5.8	L

CHART: WITH FACTOR, Peak hold data. CALCULATION: RESULT=READING+C.F (L1SN LOSS+CABLE LOSS+ATTEN. LOSS)
 Except for the above table : adequate margin data below the limits.

Conducted Emission

Test place	Head Office EMC Lab. No.2 Semi Anechoic Chamber
Report No.	31CE0169-HO-02
Date	02/16/2011
Temperature/ Humidity	22 deg.C./ 29%
Engineer	Hiroshi Kukita
Mode	11n Tx

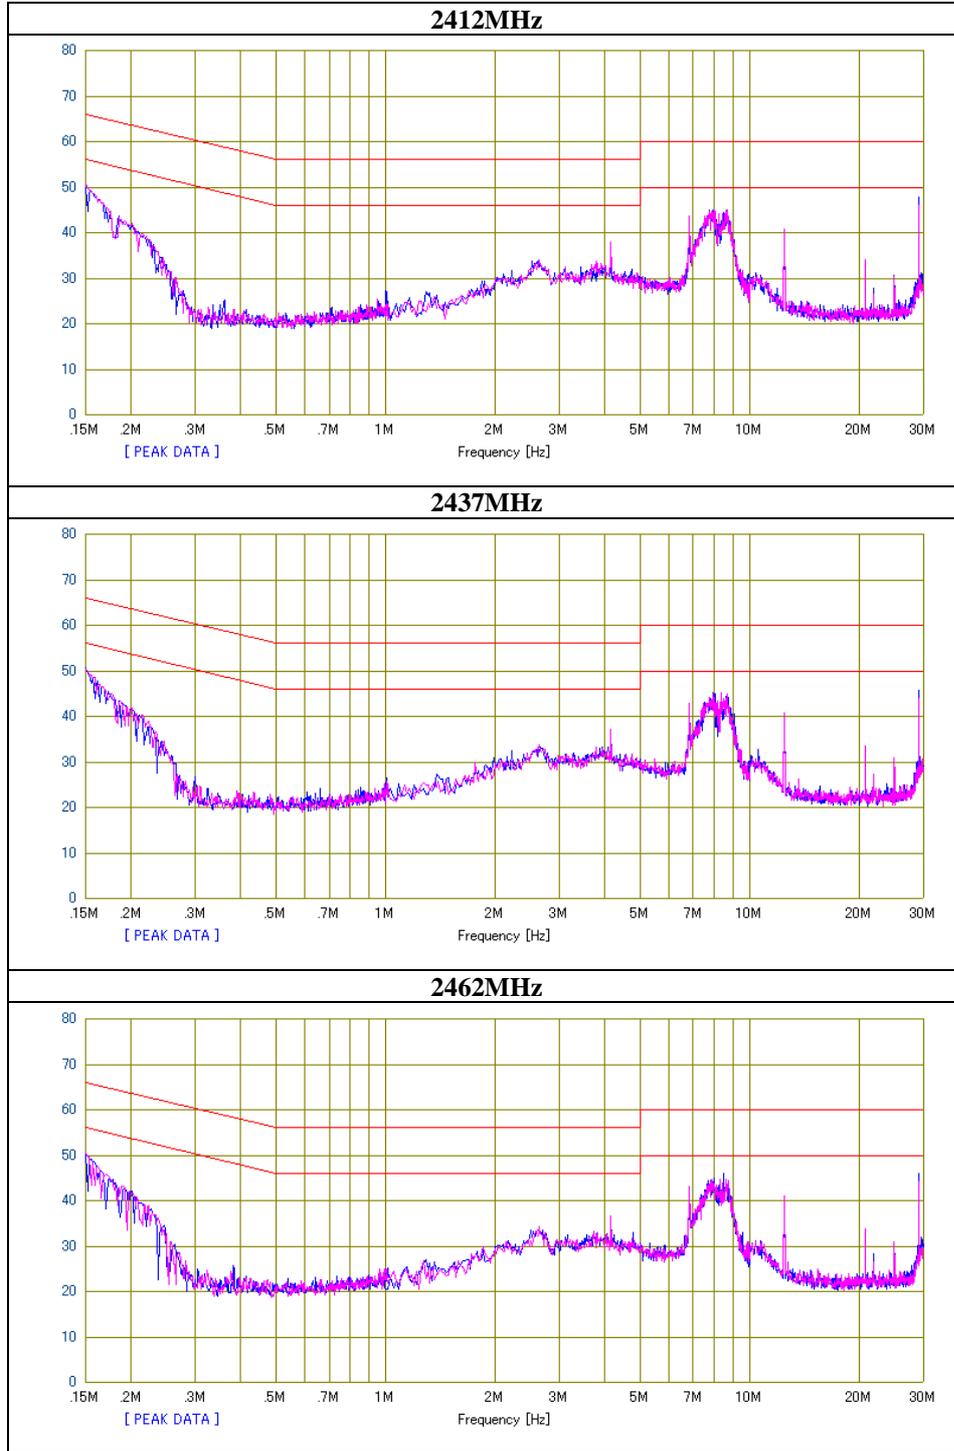

Conducted Emission

DATA OF CONDUCTED EMISSION TEST


UL Japan, Inc. Head Office EMC Lab. No.2 Semi Anechoic Chamber
 Date : 2011/02/16

Report No. : 31CE0169-HO-02

Temp./Humi. : 22deg.C / 29%
 Engineer : Hiroshi Kukita

Mode / Remarks : Rx 2437MHz

LIMIT : FCC15.207 QP
 FCC15.207 AV

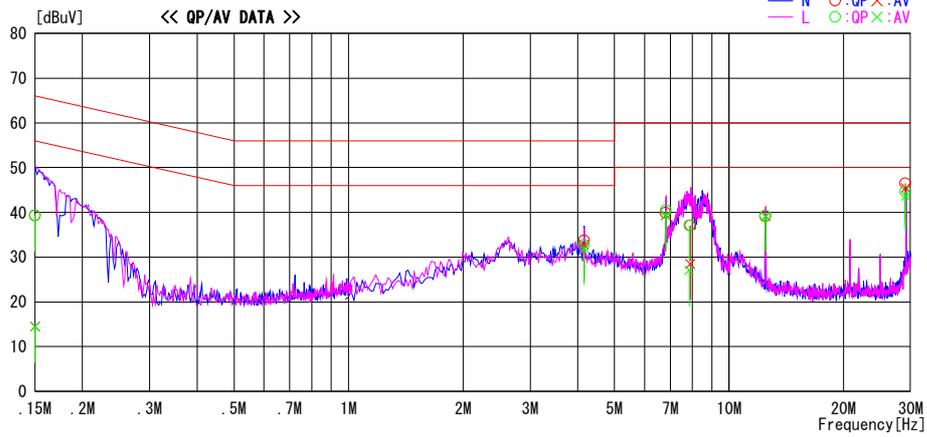

Frequency [MHz]	Reading		Level [dBuV]	Corr. Factor [dB]	Results		Limit		Margin		Phase
	QP [dBuV]	AV [dBuV]			QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dB]	AV [dB]	
0.15000	26.0	1.2	13.3	39.3	14.5	66.0	56.0	26.7	41.5	N	
4.15755	20.0	19.1	13.7	33.7	32.8	56.0	46.0	22.3	13.2	N	
6.81281	26.0	25.4	13.9	39.9	39.3	60.0	50.0	20.1	10.7	N	
7.90502	23.0	14.4	14.1	37.1	28.5	60.0	50.0	22.9	21.5	N	
12.46435	24.6	24.6	14.5	39.1	39.1	60.0	50.0	20.9	10.9	N	
29.09566	31.0	30.0	15.5	46.5	45.5	60.0	50.0	13.5	4.5	N	
0.15000	26.1	1.2	13.3	39.4	14.5	66.0	56.0	26.6	41.5	L	
4.16120	19.0	18.2	13.7	32.7	31.9	56.0	46.0	23.3	14.1	L	
6.81689	26.6	25.5	13.9	40.5	39.4	60.0	50.0	19.5	10.6	L	
7.85521	23.0	13.0	14.1	37.1	27.1	60.0	50.0	22.9	22.9	L	
12.46945	24.8	24.7	14.5	39.3	39.2	60.0	50.0	20.7	10.8	L	
29.09256	29.1	28.2	15.5	44.6	43.7	60.0	50.0	15.4	6.3	L	

CHART: WITH FACTOR, Peak hold data. CALCULATION: RESULT=READING+C.F (L1SN LOSS+CABLE LOSS+ATTEN. LOSS)
 Except for the above table : adequate margin data below the limits.

6dB Bandwidth

Test place Head Office EMC Lab. No.6 Measurement Room
Report No. 31CE0169-HO-02
Date 02/16/2011
Temperature/ Humidity 21 deg.C./ 31%
Engineer Keisuke Kawamura
Mode Tx

11b

Frequency [MHz]	6dB Bandwidth [MHz]	Limit [kHz]
2412	10.130	>500
2437	9.782	>500
2462	9.779	>500


11g

Frequency [MHz]	6dB Bandwidth [MHz]	Limit [kHz]
2412	16.385	>500
2437	16.427	>500
2462	16.407	>500

11n-20


Frequency [MHz]	6dB Bandwidth [MHz]	Limit [kHz]
2412	17.625	>500
2437	17.243	>500
2462	17.518	>500

6dB Bandwidth

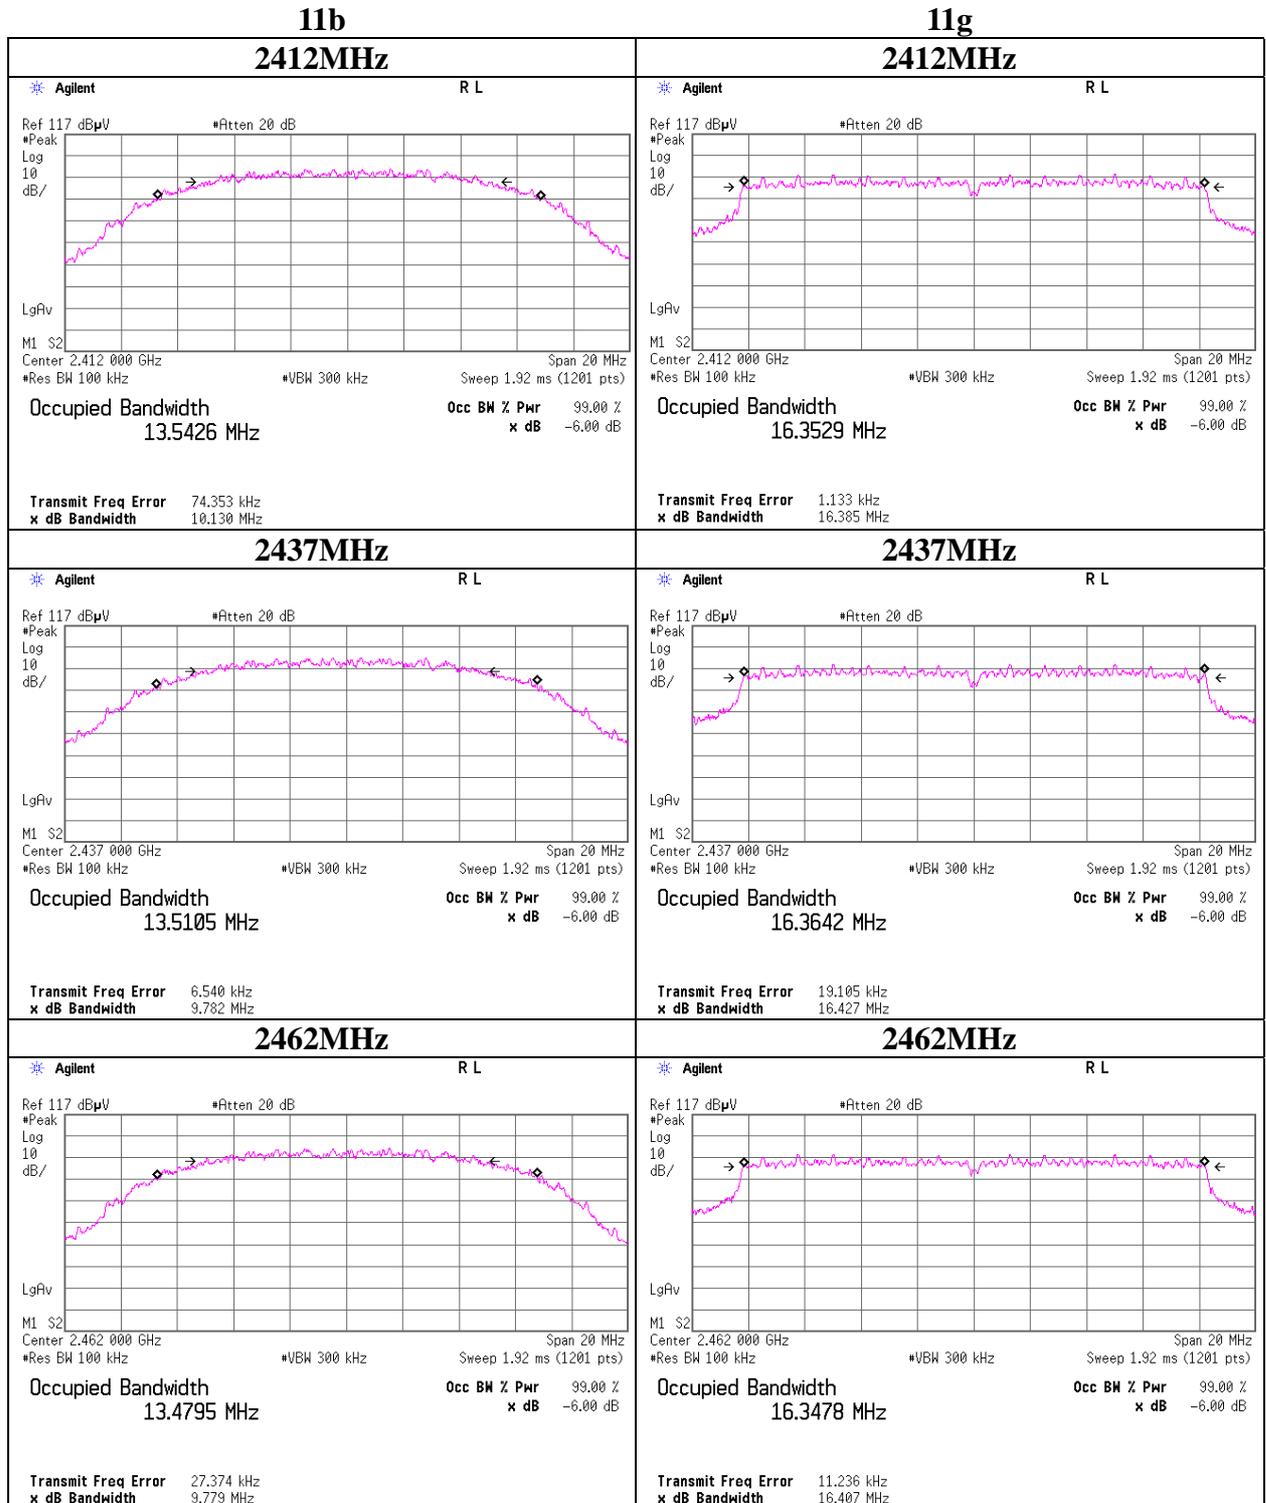

6dB Bandwidth

11n-20

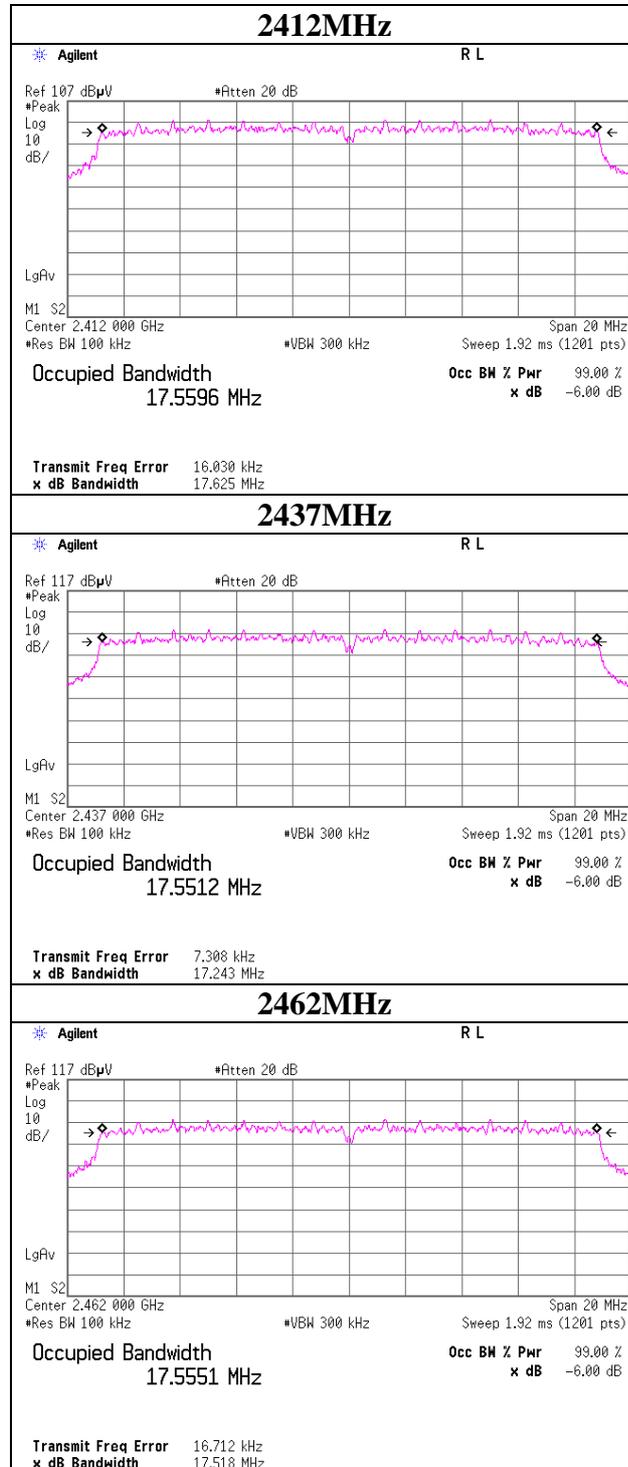

Maximum Peak Output Power

Test place	Head Office EMC Lab. No.6 Measurement Room
Report No.	31CE0169-HO-02
Date	02/07/2011
Temperature/ Humidity	21 deg.C./ 33%
Engineer	Satofumi Matsuyama
Mode	11b Tx

Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. [dB]	Result		Limit		Margin [dB]
				[dBm]	[mW]	[dBm]	[mW]	
2412	5.87	0.97	10.07	16.91	49.09	30.00	1000	13.09
2437	6.59	0.98	10.07	17.64	58.08	30.00	1000	12.36
2462	6.28	0.98	10.07	17.33	54.08	30.00	1000	12.67

Sample Calculation:

Result = Reading + Cable Loss (including the cable(s) customer supplied) + Attenuator

2437MHz

Rate [Mbps]	Reading PK [dBm]	Remark
1	6.56	
2 long	6.49	
2 Short	6.51	
5.5 long	6.57	
5.5 Short	6.59	*
11 long	6.54	
11 Short	6.56	

*: Worst Rate

Result=Reading + Duty Factor

All comparison were carried out on same frequency and measurement factors.

Maximum Peak Output Power

Test place	Head Office EMC Lab. No.6 Measurement room
Report No.	31CE0169-HO-02
Date	02/07/2011
Temperature/ Humidity	21 deg.C./ 33%
Engineer	Satofumi Matsuyama
Mode	11g Tx

Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. [dB]	Result		Limit		Margin [dB]
				[dBm]	[mW]	[dBm]	[mW]	
2412	9.90	0.97	10.07	20.94	124.17	30.00	1000	9.06
2437	9.96	0.98	10.07	21.01	126.18	30.00	1000	8.99
2462	10.36	0.98	10.07	21.41	138.36	30.00	1000	8.59

Sample Calculation:

Result = Reading + Cable Loss (including the cable(s) customer supplied) + Attenuator

2437MHz

Rate [Mbps]	Reading PK [dBm]	Remark
6	9.80	
9	9.83	
12	9.85	
18	9.93	
24	9.96	*
36	9.91	
48	9.41	
54	8.37	

*: Worst Rate

Result=Reading + Duty Factor

All comparison were carried out on same frequency and measurement factors.

Maximum Peak Output Power

Test place : Head Office EMC Lab. No.6 Measurement room
 Report No. : 31CE0169-HO-02
 Date : 02/07/2011
 Temperature/ Humidity : 21 deg.C./ 33%
 Engineer : Satofumi Matsuyama
 Mode : 11n-20 Tx

Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. [dB]	Result		Limit		Margin [dB]
				[dBm]	[mW]	[dBm]	[mW]	
2412	9.98	0.97	10.07	21.02	126.47	30.00	1000	8.98
2437	10.08	0.98	10.07	21.13	129.72	30.00	1000	8.87
2462	10.62	0.98	10.07	21.67	146.89	30.00	1000	8.33

Sample Calculation:

Result = Reading + Cable Loss (including the cable(s) customer supplied) + Attenuator

2437MHz

MCS Number	Reading PK [dBm]	Remark
0	9.76	
1	9.72	
2	9.67	
3	9.70	
4	10.08	*
5	9.58	
6	8.81	
7	7.86	

*: Worst Rate

Result=Reading + Duty Factor

All comparison were carried out on same frequency and measurement factors.

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

Radiated Spurious Emission

Test place : Head Office EMC Lab. No.2 and 4 Semi Anechoic Chamber
Report No. : 31CE0169-HO-02
Date : 02/09/2011 Takumi Shimada 02/13/2011 02/24/2011
Temperature/ Humidity : 24 deg.C./ 21% (Below 1GHz) 20 deg.C./ 29% 25 deg.C./ 25%
Engineer : Satofumi Matsuyama Takayuki Shimada Takumi Shimada Katsunori Okai
(Bandedge) (Above 1GHz) (Below 1GHz) (Bandedge)
Mode : 11b Tx 2412MHz

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	72.020	QP	47.6	6.5	7.2	28.6	32.7	40.0	7.3	
Hori	91.560	QP	46.2	8.5	7.4	28.5	33.6	43.5	9.9	
Hori	199.772	QP	36.5	16.7	8.1	28.0	33.3	43.5	10.2	
Hori	364.504	QP	35.5	16.5	9.1	28.1	33.0	46.0	13.0	
Hori	458.633	QP	30.7	17.7	9.5	28.7	29.2	46.0	16.8	
Hori	729.008	QP	37.6	20.9	10.5	28.4	40.6	46.0	5.4	
Hori	2390.000	PK	53.2	27.2	3.0	32.1	51.3	73.9	22.6	
Hori	2397.500	PK	75.5	27.2	3.1	32.1	73.7	-	-	- See 20dBc Data Sheet
Hori	2400.000	PK	71.9	27.2	3.1	32.1	70.1	-	-	- See 20dBc Data Sheet
Hori	4824.000	PK	40.8	31.4	5.0	31.3	45.9	73.9	28.0	
Hori	7236.000	PK	41.4	35.5	5.3	31.6	50.6	73.9	23.3	
Hori	9648.000	PK	41.1	38.4	6.1	31.9	53.7	73.9	20.2	
Hori	24120.000	PK	45.5	40.4	-0.9	29.6	55.4	73.9	18.5	
Hori	2390.000	AV	37.2	27.2	3.0	32.1	35.3	53.9	18.6	
Hori	2397.500	AV	58.9	27.2	3.1	32.1	57.1	-	-	- See 20dBc Data Sheet
Hori	2400.000	AV	56.4	27.2	3.1	32.1	54.6	-	-	- See 20dBc Data Sheet
Hori	4824.000	AV	28.8	31.4	5.0	31.3	33.9	53.9	20.0	
Hori	7236.000	AV	29.6	35.5	5.3	31.6	38.8	53.9	15.1	
Hori	9648.000	AV	29.0	38.4	6.1	31.9	41.6	53.9	12.3	
Hori	24120.000	AV	33.9	40.4	-0.9	29.6	43.8	53.9	10.1	
Vert	72.020	QP	52.6	6.5	7.2	28.6	37.7	40.0	2.3	
Vert	91.568	QP	43.6	8.5	7.4	28.5	31.0	43.5	12.5	
Vert	199.586	QP	40.0	16.7	8.1	28.0	36.8	43.5	6.7	
Vert	364.506	QP	33.8	16.5	9.1	28.1	31.3	46.0	14.7	
Vert	458.622	QP	32.5	17.7	9.5	28.7	31.0	46.0	15.0	
Vert	729.011	QP	31.8	20.9	10.5	28.4	34.8	46.0	11.2	
Vert	2390.000	PK	51.2	27.2	3.0	32.1	49.3	73.9	24.6	
Vert	2397.500	PK	72.7	27.2	3.1	32.1	70.9	-	-	- See 20dBc Data Sheet
Vert	2400.000	PK	69.3	27.2	3.1	32.1	67.5	-	-	- See 20dBc Data Sheet
Vert	4824.000	PK	41.0	31.4	5.0	31.3	46.1	73.9	27.8	
Vert	7236.000	PK	41.7	35.5	5.3	31.6	50.9	73.9	23.0	
Vert	9648.000	PK	41.3	38.4	6.1	31.9	53.9	73.9	20.0	
Vert	24120.000	PK	45.6	40.4	-0.9	29.6	55.5	73.9	18.4	
Vert	2390.000	AV	35.4	27.2	3.0	32.1	33.5	53.9	20.4	
Vert	2397.500	AV	55.1	27.2	3.1	32.1	53.3	-	-	- See 20dBc Data Sheet
Vert	2400.000	AV	54.1	27.2	3.1	32.1	52.3	-	-	- See 20dBc Data Sheet
Vert	4824.000	AV	28.8	31.4	5.0	31.3	33.9	53.9	20.0	
Vert	7236.000	AV	29.6	35.5	5.3	31.6	38.8	53.9	15.1	
Vert	9648.000	AV	29.0	38.4	6.1	31.9	41.6	53.9	12.3	
Vert	24120.000	AV	33.9	40.4	-0.9	29.6	43.8	53.9	10.1	

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter-Distance factor(above 10GHz)) - Gain(Amplifier)

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20dB).

*The 10th harmonic was not seen so the result was its base noise level.

Distance factor: 10GHz-26.5GHz 20log(3.0m/1.0m)= 9.5dB
 26.5GHz-40GHz 20log(3.0m/0.5m)=15.6dB

Radiated Spurious Emission
(20dBc data sheet)

Test place : Head Office EMC Lab. No.4 Semi Anechoic Chamber
Report No. : 31CE0169-HO-02
Date : 02/09/2011 02/24/2011
Temperature/ Humidity : 24 deg.C./ 21% 25 deg.C./ 25%
Engineer : Satofumi Matsuyama Katsunori Okai

Mode : 11b Tx 2412MHz

20dBc Data Sheet

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	2412.000	PK	105.2	27.2	3.1	32.1	103.4	-	-	Carrier
Hori	2397.500	PK	69.6	27.2	3.1	32.1	67.8	83.4	15.6	
Hori	2400.000	PK	64.7	27.2	3.1	32.1	62.9	83.4	20.5	
Vert	2412.000	PK	102.9	27.2	3.1	32.1	101.1	-	-	Carrier
Vert	2397.500	PK	64.7	27.2	3.1	32.1	62.9	81.1	18.2	
Vert	2400.000	PK	62.5	27.2	3.1	32.1	60.7	81.1	20.4	

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter-Distance factor(above 10GHz)) - Gain(Amplifier)

Radiated Spurious Emission

Test place : Head Office EMC Lab. No.2 and 4 Semi Anechoic Chamber
Report No. : 31CE0169-HO-02
Date : 02/09/2011 02/12/2011 02/13/2011
Temperature/ Humidity : 24 deg.C./ 21% 22 deg.C./ 27% 20 deg.C./ 29%
Engineer : Satofumi Matsuyama Takayuki Shimada Takumi Shimada
(Bandedge) (Above 1GHz) (Below 1GHz)
Mode : 11b Tx 2462MHz

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	72.021	QP	46.0	6.5	7.2	28.6	31.1	40.0	8.9	
Hori	91.392	QP	45.3	8.5	7.4	28.5	32.7	43.5	10.8	
Hori	199.473	QP	34.6	16.7	8.1	28.0	31.4	43.5	12.1	
Hori	364.505	QP	35.7	16.5	9.1	28.1	33.2	46.0	12.8	
Hori	458.632	QP	32.4	17.7	9.5	28.7	30.9	46.0	15.1	
Hori	729.009	QP	36.9	20.9	10.5	28.4	39.9	46.0	6.1	
Hori	2483.500	PK	51.1	27.2	3.1	32.1	49.3	73.9	24.6	
Hori	4924.000	PK	43.6	31.6	5.0	31.3	48.9	73.9	25.0	
Hori	7386.000	PK	42.0	35.7	5.4	31.6	51.5	73.9	22.4	
Hori	9848.000	PK	41.0	38.6	6.3	31.8	54.1	73.9	19.8	
Hori	24620.000	PK	46.1	40.3	-0.9	29.4	56.1	73.9	17.8	
Hori	2483.500	AV	35.5	27.2	3.1	32.1	33.7	53.9	20.2	
Hori	4924.000	AV	29.7	31.6	5.0	31.3	35.0	53.9	18.9	
Hori	7386.000	AV	29.6	35.7	5.4	31.6	39.1	53.9	14.8	
Hori	9848.000	AV	29.3	38.6	6.3	31.8	42.4	53.9	11.5	
Hori	24620.000	AV	33.9	40.3	-0.9	29.4	43.9	53.9	10.0	
Vert	72.018	QP	51.7	6.5	7.2	28.6	36.8	40.0	3.2	
Vert	91.498	QP	43.4	8.5	7.4	28.5	30.8	43.5	12.7	
Vert	199.535	QP	40.6	16.7	8.1	28.0	37.4	43.5	6.1	
Vert	364.502	QP	34.6	16.5	9.1	28.1	32.1	46.0	13.9	
Vert	458.629	QP	34.1	17.7	9.5	28.7	32.6	46.0	13.4	
Vert	729.010	QP	31.1	20.9	10.5	28.4	34.1	46.0	11.9	
Vert	2483.500	PK	49.4	27.2	3.1	32.1	47.6	73.9	26.3	
Vert	4924.000	PK	45.6	31.6	5.0	31.3	50.9	73.9	23.0	
Vert	7386.000	PK	41.8	35.7	5.4	31.6	51.3	73.9	22.6	
Vert	9848.000	PK	41.2	38.6	6.3	31.8	54.3	73.9	19.6	
Vert	24620.000	PK	45.8	40.3	-0.9	29.4	55.8	73.9	18.1	
Vert	2483.500	AV	34.8	27.2	3.1	32.1	33.0	53.9	20.9	
Vert	4924.000	AV	30.7	31.6	5.0	31.3	36.0	53.9	17.9	
Vert	7386.000	AV	29.6	35.7	5.4	31.6	39.1	53.9	14.8	
Vert	9848.000	AV	29.3	38.6	6.3	31.8	42.4	53.9	11.5	
Vert	24620.000	AV	33.9	40.3	-0.9	29.4	43.9	53.9	10.0	

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter-Distance factor(above 10GHz)) - Gain(Amplifier)

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20dB).

*The 10th harmonic was not seen so the result was its base noise level.

Distance factor: 10GHz-26.5GHz 20log(3.0m/1.0m)= 9.5dB

Radiated Spurious Emission

Test place : Head Office EMC Lab. No.2 and 4 Semi Anechoic Chamber
Report No. : 31CE0169-HO-02
Date : 02/09/2011 02/12/2011 02/13/2011
Temperature/ Humidity : 24 deg.C./ 21% 22 deg.C./ 27% 20 deg.C./ 29%
Engineer : Satofumi Matsuyama Takayuki Shimada Takumi Shimada
(Bandedge) (Above 1GHz) (Below 1GHz)
Mode : 11g Tx 2412MHz

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	72.021	QP	46.1	6.5	7.2	28.6	31.2	40.0	8.8	
Hori	91.311	QP	46.0	8.5	7.4	28.5	33.4	43.5	10.1	
Hori	199.485	QP	34.1	16.7	8.1	28.0	30.9	43.5	12.6	
Hori	364.507	QP	35.5	16.5	9.1	28.1	33.0	46.0	13.0	
Hori	458.629	QP	32.9	17.7	9.5	28.7	31.4	46.0	14.6	
Hori	729.009	QP	38.0	20.9	10.5	28.4	41.0	46.0	5.0	
Hori	2390.000	PK	71.2	27.2	3.0	32.1	69.3	73.9	4.6	
Hori	2400.000	PK	85.3	27.2	3.1	32.1	83.5	-	-	See 20dBc Data Sheet
Hori	2400.000	PK	73.2	27.2	3.1	32.1	71.4	73.9	2.5	
Hori	4824.000	PK	40.7	31.4	5.0	31.3	45.8	73.9	28.1	
Hori	7236.000	PK	41.6	35.5	5.3	31.6	50.8	73.9	23.1	
Hori	9648.000	PK	40.9	38.4	6.1	31.9	53.5	73.9	20.4	
Hori	24120.000	PK	45.7	40.4	-0.9	29.6	55.6	73.9	18.3	
Hori	2390.000	AV	48.6	27.2	3.0	32.1	46.7	53.9	7.2	
Hori	2400.000	AV	64.5	27.2	3.1	32.1	62.7	-	-	See 20dBc Data Sheet
Hori	4824.000	AV	28.8	31.4	5.0	31.3	33.9	53.9	20.0	
Hori	7236.000	AV	29.6	35.5	5.3	31.6	38.8	53.9	15.1	
Hori	9648.000	AV	29.0	38.4	6.1	31.9	41.6	53.9	12.3	
Hori	24120.000	AV	33.9	40.4	-0.9	29.6	43.8	53.9	10.1	
Vert	72.021	QP	52.2	6.5	7.2	28.6	37.3	40.0	2.7	
Vert	91.346	QP	43.9	8.5	7.4	28.5	31.3	43.5	12.2	
Vert	199.613	QP	41.5	16.7	8.1	28.0	38.3	43.5	5.2	
Vert	364.505	QP	34.7	16.5	9.1	28.1	32.2	46.0	13.8	
Vert	458.631	QP	33.2	17.7	9.5	28.7	31.7	46.0	14.3	
Vert	729.009	QP	31.4	20.9	10.5	28.4	34.4	46.0	11.6	
Vert	2390.000	PK	69.5	27.2	3.0	32.1	67.6	73.9	6.3	
Vert	2400.000	PK	83.6	27.2	3.1	32.1	81.8	-	-	See 20dBc Data Sheet
Vert	2400.000	PK	71.4	27.2	3.1	32.1	69.6	73.9	4.3	
Vert	4824.000	PK	41.1	31.4	5.0	31.3	46.2	73.9	27.7	
Vert	7236.000	PK	41.5	35.5	5.3	31.6	50.7	73.9	23.2	
Vert	9648.000	PK	40.9	38.4	6.1	31.9	53.5	73.9	20.4	
Vert	24120.000	PK	45.6	40.4	-0.9	29.6	55.5	73.9	18.4	
Vert	2390.000	AV	45.9	27.2	3.0	32.1	44.0	53.9	9.9	
Vert	2400.000	AV	62.9	27.2	3.1	32.1	61.1	-	-	See 20dBc Data Sheet
Vert	4824.000	AV	28.8	31.4	5.0	31.3	33.9	53.9	20.0	
Vert	7236.000	AV	29.6	35.5	5.3	31.6	38.8	53.9	15.1	
Vert	9648.000	AV	29.0	38.4	6.1	31.9	41.6	53.9	12.3	
Vert	24120.000	AV	33.9	40.4	-0.9	29.6	43.8	53.9	10.1	

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter-Distance factor(above 10GHz)) - Gain(Amplifier)

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20dB).

*The 10th harmonic was not seen so the result was its base noise level.

Distance factor: 10GHz-26.5GHz 20log(3.0m/1.0m)= 9.5dB

Radiated Spurious Emission
 (20dBc data sheet)

Test place : Head Office EMC Lab. No.4 Semi Anechoic Chamber
 Report No. : 31CE0169-HO-02
 Date : 02/09/2011
 Temperature/ Humidity : 24 deg.C./ 21%
 Engineer : Satofumi Matsuyama
 (Bandedge)
 Mode : 11g Tx 2412MHz

20dBc Data Sheet

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Result dBuV/m	Limit dBuV/m	Margin [dB]	Remark
Hori	2412.000	PK	101.7	27.2	3.1	32.1	99.9	-	-	Carrier
Hori	2400.000	PK	73.2	27.2	3.1	32.1	71.4	79.9	8.5	
Vert	2412.000	PK	100.6	27.2	3.1	32.1	98.8	-	-	Carrier
Vert	2400.000	PK	71.4	27.2	3.1	32.1	69.6	78.8	9.2	

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter-Distance factor(above 10GHz)) - Gain(Amplifier)

Radiated Spurious Emission

Test place : Head Office EMC Lab. No.2 and 4 Semi Anechoic Chamber
Report No. : 31CE0169-HO-02
Date : 02/09/2011 02/12/2011 02/13/2011
Temperature/ Humidity : 24 deg.C./ 21% 22 deg.C./ 27% 20 deg.C./ 29%
Engineer : Satofumi Matsuyama Takayuki Shimada Takumi Shimada
(Bandedge) (Above 1GHz) (Below 1GHz)
Mode : 11g Tx 2462MHz

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	72.021	QP	47.2	6.5	7.2	28.6	32.3	40.0	7.7	
Hori	91.424	QP	45.7	8.5	7.4	28.5	33.1	43.5	10.4	
Hori	199.524	QP	34.4	16.7	8.1	28.0	31.2	43.5	12.3	
Hori	364.504	QP	35.2	16.5	9.1	28.1	32.7	46.0	13.3	
Hori	458.631	QP	31.8	17.7	9.5	28.7	30.3	46.0	15.7	
Hori	729.007	QP	36.1	20.9	10.5	28.4	39.1	46.0	6.9	
Hori	2483.500	PK	74.7	27.2	3.1	32.1	72.9	73.9	1.0	
Hori	4924.000	PK	40.6	31.6	5.0	31.3	45.9	73.9	28.0	
Hori	7386.000	PK	41.7	35.7	5.4	31.6	51.2	73.9	22.7	
Hori	9848.000	PK	40.9	38.6	6.3	31.8	54.0	73.9	19.9	
Hori	24620.000	PK	45.8	40.3	-0.9	29.4	55.8	73.9	18.1	
Hori	2483.500	AV	51.2	27.2	3.1	32.1	49.4	53.9	4.5	
Hori	4924.000	AV	28.8	31.6	5.0	31.3	34.1	53.9	19.8	
Hori	7386.000	AV	29.6	35.7	5.4	31.6	39.1	53.9	14.8	
Hori	9848.000	AV	29.3	38.6	6.3	31.8	42.4	53.9	11.5	
Hori	24620.000	AV	33.9	40.3	-0.9	29.4	43.9	53.9	10.0	
Vert	72.022	QP	51.9	6.5	7.2	28.6	37.0	40.0	3.0	
Vert	91.522	QP	42.8	8.5	7.4	28.5	30.2	43.5	13.3	
Vert	199.515	QP	41.7	16.7	8.1	28.0	38.5	43.5	5.0	
Vert	364.505	QP	35.3	16.5	9.1	28.1	32.8	46.0	13.2	
Vert	458.633	QP	36.5	17.7	9.5	28.7	35.0	46.0	11.0	
Vert	729.009	QP	32.1	20.9	10.5	28.4	35.1	46.0	10.9	
Vert	2483.500	PK	75.4	27.2	3.1	32.1	73.6	73.9	0.3	
Vert	4924.000	PK	40.8	31.6	5.0	31.3	46.1	73.9	27.8	
Vert	7386.000	PK	41.9	35.7	5.4	31.6	51.4	73.9	22.5	
Vert	9848.000	PK	40.9	38.6	6.3	31.8	54.0	73.9	19.9	
Vert	24620.000	PK	45.8	40.3	-0.9	29.4	55.8	73.9	18.1	
Vert	2483.500	AV	51.9	27.2	3.1	32.1	50.1	53.9	3.8	
Vert	4924.000	AV	28.8	31.6	5.0	31.3	34.1	53.9	19.8	
Vert	7386.000	AV	29.6	35.7	5.4	31.6	39.1	53.9	14.8	
Vert	9848.000	AV	29.3	38.6	6.3	31.8	42.4	53.9	11.5	
Vert	24620.000	AV	33.9	40.3	-0.9	29.4	43.9	53.9	10.0	

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter-Distance factor(above 10GHz)) - Gain(Amplifier)

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20dB).

*The 10th harmonic was not seen so the result was its base noise level.

Distance factor: 10GHz-26.5GHz 20log(3.0m/1.0m)= 9.5dB

Radiated Spurious Emission

Test place : Head Office EMC Lab. No.2 and 4 Semi Anechoic Chamber
Report No. : 31CE0169-HO-02
Date : 02/09/2011 02/12/2011 02/13/2011
Temperature/ Humidity : 24 deg.C./ 21% 22 deg.C./ 27% 20 deg.C./ 29%
Engineer : Satofumi Matsuyama Takayuki Shimada Takumi Shimada
(Bandedge) (Above 1GHz) (Below 1GHz)
Mode : 1In Tx 2412MHz

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	72.023	QP	47.1	6.5	7.2	28.6	32.2	40.0	7.8	
Hori	91.424	QP	46.1	8.5	7.4	28.5	33.5	43.5	10.0	
Hori	199.521	QP	34.3	16.7	8.1	28.0	31.1	43.5	12.4	
Hori	364.507	QP	36.0	16.5	9.1	28.1	33.5	46.0	12.5	
Hori	458.633	QP	32.2	17.7	9.5	28.7	30.7	46.0	15.3	
Hori	729.012	QP	36.8	20.9	10.5	28.4	39.8	46.0	6.2	
Hori	2390.000	PK	73.4	27.2	3.0	32.1	71.5	73.9	2.4	
Hori	2400.000	PK	86.2	27.2	3.1	32.1	84.4	-	-	See 20dBc Data Sheet
Hori	4824.000	PK	41.0	31.4	5.0	31.3	46.1	73.9	27.8	
Hori	7236.000	PK	41.4	35.5	5.3	31.6	50.6	73.9	23.3	
Hori	9648.000	PK	41.0	38.4	6.1	31.9	53.6	73.9	20.3	
Hori	24120.000	PK	45.6	40.4	-0.9	29.6	55.5	73.9	18.4	
Hori	2390.000	AV	50.3	27.2	3.0	32.1	48.4	53.9	5.5	
Hori	2400.000	AV	64.4	27.2	3.1	32.1	62.6	-	-	See 20dBc Data Sheet
Hori	4824.000	AV	28.8	31.4	5.0	31.3	33.9	53.9	20.0	
Hori	7236.000	AV	29.6	35.5	5.3	31.6	38.8	53.9	15.1	
Hori	9648.000	AV	29.0	38.4	6.1	31.9	41.6	53.9	12.3	
Hori	24120.000	AV	33.9	40.4	-0.9	29.6	43.8	53.9	10.1	
Vert	72.021	QP	52.3	6.5	7.2	28.6	37.4	40.0	2.6	
Vert	91.538	QP	42.6	8.5	7.4	28.5	30.0	43.5	13.5	
Vert	199.521	QP	41.4	16.7	8.1	28.0	38.2	43.5	5.3	
Vert	364.508	QP	34.2	16.5	9.1	28.1	31.7	46.0	14.3	
Vert	458.630	QP	34.7	17.7	9.5	28.7	33.2	46.0	12.8	
Vert	729.011	QP	31.1	20.9	10.5	28.4	34.1	46.0	11.9	
Vert	2390.000	PK	72.3	27.2	3.0	32.1	70.4	73.9	3.5	
Vert	2400.000	PK	84.9	27.2	3.1	32.1	83.1	-	-	See 20dBc Data Sheet
Vert	4824.000	PK	41.0	31.4	5.0	31.3	46.1	73.9	27.8	
Vert	7236.000	PK	41.4	35.5	5.3	31.6	50.6	73.9	23.3	
Vert	9648.000	PK	41.2	38.4	6.1	31.9	53.8	73.9	20.1	
Vert	24120.000	PK	46.0	40.4	-0.9	29.6	55.9	73.9	18.0	
Vert	2390.000	AV	48.5	27.2	3.0	32.1	46.6	53.9	7.3	
Vert	2400.000	AV	63.1	27.2	3.1	32.1	61.3	-	-	See 20dBc Data Sheet
Vert	4824.000	AV	28.8	31.4	5.0	31.3	33.9	53.9	20.0	
Vert	7236.000	AV	29.6	35.5	5.3	31.6	38.8	53.9	15.1	
Vert	9648.000	AV	29.0	38.4	6.1	31.9	41.6	53.9	12.3	
Vert	24120.000	AV	33.9	40.4	-0.9	29.6	43.8	53.9	10.1	

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter-Distance factor(above 10GHz)) - Gain(Amplifier)

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20dB).

*The 10th harmonic was not seen so the result was its base noise level.

Distance factor: 10GHz-26.5GHz 20log(3.0m/1.0m)= 9.5dB

Radiated Spurious Emission
 (20dBc data sheet)

Test place : Head Office EMC Lab. No.4 Semi Anechoic Chamber
 Report No. : 31CE0169-HO-02
 Date : 02/09/2011
 Temperature/ Humidity : 24 deg.C./ 21%
 Engineer : Satofumi Matsuyama
 (Bandedge)
 Mode : 11n Tx 2412MHz

20dBc Data Sheet

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Result dBuV/m	Limit dBuV/m	Margin [dB]	Remark
Hori	2412.000	PK	101.9	27.2	3.1	32.1	100.1	-	-	Carrier
Hori	2400.000	PK	73.4	27.2	3.1	32.1	71.6	80.1	8.5	
Vert	2412.000	PK	100.5	27.2	3.1	32.1	98.7	-	-	Carrier
Vert	2400.000	PK	72.3	27.2	3.1	32.1	70.5	78.7	8.2	

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter-Distance factor(above 10GHz)) - Gain(Amplifier)

Radiated Spurious Emission

Test place : Head Office EMC Lab. No.2 and 4 Semi Anechoic Chamber
Report No. : 31CE0169-HO-02
Date : 02/09/2011 02/12/2011 02/13/2011
Temperature/ Humidity : 24 deg.C./ 21% 22 deg.C./ 27% 20 deg.C./ 29%
Engineer : Satofumi Matsuyama Takayuki Shimada Takumi Shimada
(Bandedge) (Above 1GHz) (Below 1GHz)
Mode : 11n Tx 2462MHz

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	72.021	QP	46.1	6.5	7.2	28.6	31.2	40.0	8.8	
Hori	91.295	QP	46.3	8.4	7.4	28.5	33.6	43.5	9.9	
Hori	199.521	QP	34.5	16.7	8.1	28.0	31.3	43.5	12.2	
Hori	364.506	QP	35.5	16.5	9.1	28.1	33.0	46.0	13.0	
Hori	458.610	QP	32.2	17.7	9.5	28.7	30.7	46.0	15.3	
Hori	729.003	QP	36.9	20.9	10.5	28.4	39.9	46.0	6.1	
Hori	2483.500	PK	75.5	27.2	3.1	32.1	73.7	73.9	0.2	
Hori	4924.000	PK	40.8	31.6	5.0	31.3	46.1	73.9	27.8	
Hori	7386.000	PK	41.7	35.7	5.4	31.6	51.2	73.9	22.7	
Hori	9848.000	PK	41.1	38.6	6.3	31.8	54.2	73.9	19.7	
Hori	24620.000	PK	46.0	40.3	-0.9	29.4	56.0	73.9	17.9	
Hori	2483.500	AV	53.2	27.2	3.1	32.1	51.4	53.9	2.5	
Hori	4924.000	AV	28.8	31.6	5.0	31.3	34.1	53.9	19.8	
Hori	7386.000	AV	29.6	35.7	5.4	31.6	39.1	53.9	14.8	
Hori	9848.000	AV	29.3	38.6	6.3	31.8	42.4	53.9	11.5	
Hori	24620.000	AV	33.9	40.3	-0.9	29.4	43.9	53.9	10.0	
Vert	72.022	QP	52.2	6.5	7.2	28.6	37.3	40.0	2.7	
Vert	91.426	QP	42.9	8.5	7.4	28.5	30.3	43.5	13.2	
Vert	199.616	QP	41.6	16.7	8.1	28.0	38.4	43.5	5.1	
Vert	364.503	QP	35.0	16.5	9.1	28.1	32.5	46.0	13.5	
Vert	458.628	QP	35.4	17.7	9.5	28.7	33.9	46.0	12.1	
Vert	729.008	QP	31.4	20.9	10.5	28.4	34.4	46.0	11.6	
Vert	2483.500	PK	75.4	27.2	3.1	32.1	73.6	73.9	0.3	
Vert	4924.000	PK	40.7	31.6	5.0	31.3	46.0	73.9	27.9	
Vert	7386.000	PK	41.8	35.7	5.4	31.6	51.3	73.9	22.6	
Vert	9848.000	PK	41.0	38.6	6.3	31.8	54.1	73.9	19.8	
Vert	24620.000	PK	46.1	40.3	-0.9	29.4	56.1	73.9	17.8	
Vert	2483.500	AV	53.1	27.2	3.1	32.1	51.3	53.9	2.6	
Vert	4924.000	AV	28.8	31.6	5.0	31.3	34.1	53.9	19.8	
Vert	7386.000	AV	29.6	35.7	5.4	31.6	39.1	53.9	14.8	
Vert	9848.000	AV	29.3	38.6	6.3	31.8	42.4	53.9	11.5	
Vert	24620.000	AV	33.9	40.3	-0.9	29.4	43.9	53.9	10.0	

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter-Distance factor(above 10GHz)) - Gain(Amplifier)

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20dB).

*The 10th harmonic was not seen so the result was its base noise level.

Distance factor: 10GHz-26.5GHz 20log(3.0m/1.0m)= 9.5dB

Radiated Spurious Emission

Test place : Head Office EMC Lab. No.2 Semi Anechoic Chamber
Report No. : 31CE0169-HO-02
Date : 02/12/2011 02/13/2011
Temperature/ Humidity : 22 deg.C./ 27% 20 deg.C./ 29%
Engineer : Takayuki Shimada Takumi Shimada
(Above 1GHz) (Below 1GHz)
Mode : 11b/g/n Rx 2437MHz

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	72.022	QP	46.6	6.5	7.2	28.6	31.7	40.0	8.3	
Hori	91.327	QP	46.7	8.5	7.4	28.5	34.1	43.5	9.4	
Hori	199.625	QP	34.7	16.7	8.1	28.0	31.5	43.5	12.0	
Hori	364.507	QP	35.3	16.5	9.1	28.1	32.8	46.0	13.2	
Hori	458.633	QP	32.3	17.7	9.5	28.7	30.8	46.0	15.2	
Hori	729.005	QP	36.9	20.9	10.5	28.4	39.9	46.0	6.1	
Hori	2437.000	PK	41.7	27.5	3.1	32.4	39.9	73.9	34.0	
Hori	3249.500	PK	45.5	28.8	3.5	32.1	45.7	73.9	28.2	
Hori	4874.000	PK	40.7	31.5	4.3	31.3	45.2	73.9	28.7	
Hori	7311.000	PK	41.4	35.6	4.8	31.6	50.2	73.9	23.7	
Hori	2437.000	AV	29.8	27.5	3.1	32.4	28.0	53.9	25.9	
Hori	3249.500	AV	37.3	28.8	3.5	32.1	37.5	53.9	16.4	
Hori	4874.000	AV	28.7	31.5	4.3	31.3	33.2	53.9	20.7	
Hori	7311.000	AV	29.2	35.6	4.8	31.6	38.0	53.9	15.9	
Vert	72.023	QP	52.5	6.5	7.2	28.6	37.6	40.0	2.4	
Vert	91.434	QP	44.0	8.5	7.4	28.5	31.4	43.5	12.1	
Vert	199.633	QP	40.5	16.7	8.1	28.0	37.3	43.5	6.2	
Vert	364.502	QP	34.2	16.5	9.1	28.1	31.7	46.0	14.3	
Vert	458.632	QP	35.5	17.7	9.5	28.7	34.0	46.0	12.0	
Vert	729.012	QP	31.6	20.9	10.5	28.4	34.6	46.0	11.4	
Vert	2437.000	PK	41.8	27.5	3.1	32.4	40.0	73.9	33.9	
Vert	3249.500	PK	45.6	28.8	3.5	32.1	45.8	73.9	28.1	
Vert	4874.000	PK	40.7	31.5	4.3	31.3	45.2	73.9	28.7	
Vert	7311.000	PK	41.3	35.6	4.8	31.6	50.1	73.9	23.8	
Vert	2437.000	AV	29.8	27.5	3.1	32.4	28.0	53.9	25.9	
Vert	3249.500	AV	37.7	28.8	3.5	32.1	37.9	53.9	16.0	
Vert	4874.000	AV	28.7	31.5	4.3	31.3	33.2	53.9	20.7	
Vert	7311.000	AV	29.2	35.6	4.8	31.6	38.0	53.9	15.9	


Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter-Distance factor(above 10GHz)) - Gain(Amplifier)

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20dB).

*The 10th harmonic was not seen so the result was its base noise level.


Distance factor: 10GHz-26.5GHz 20log(3.0m/1.0m)= 9.5dB

The tested burst timing

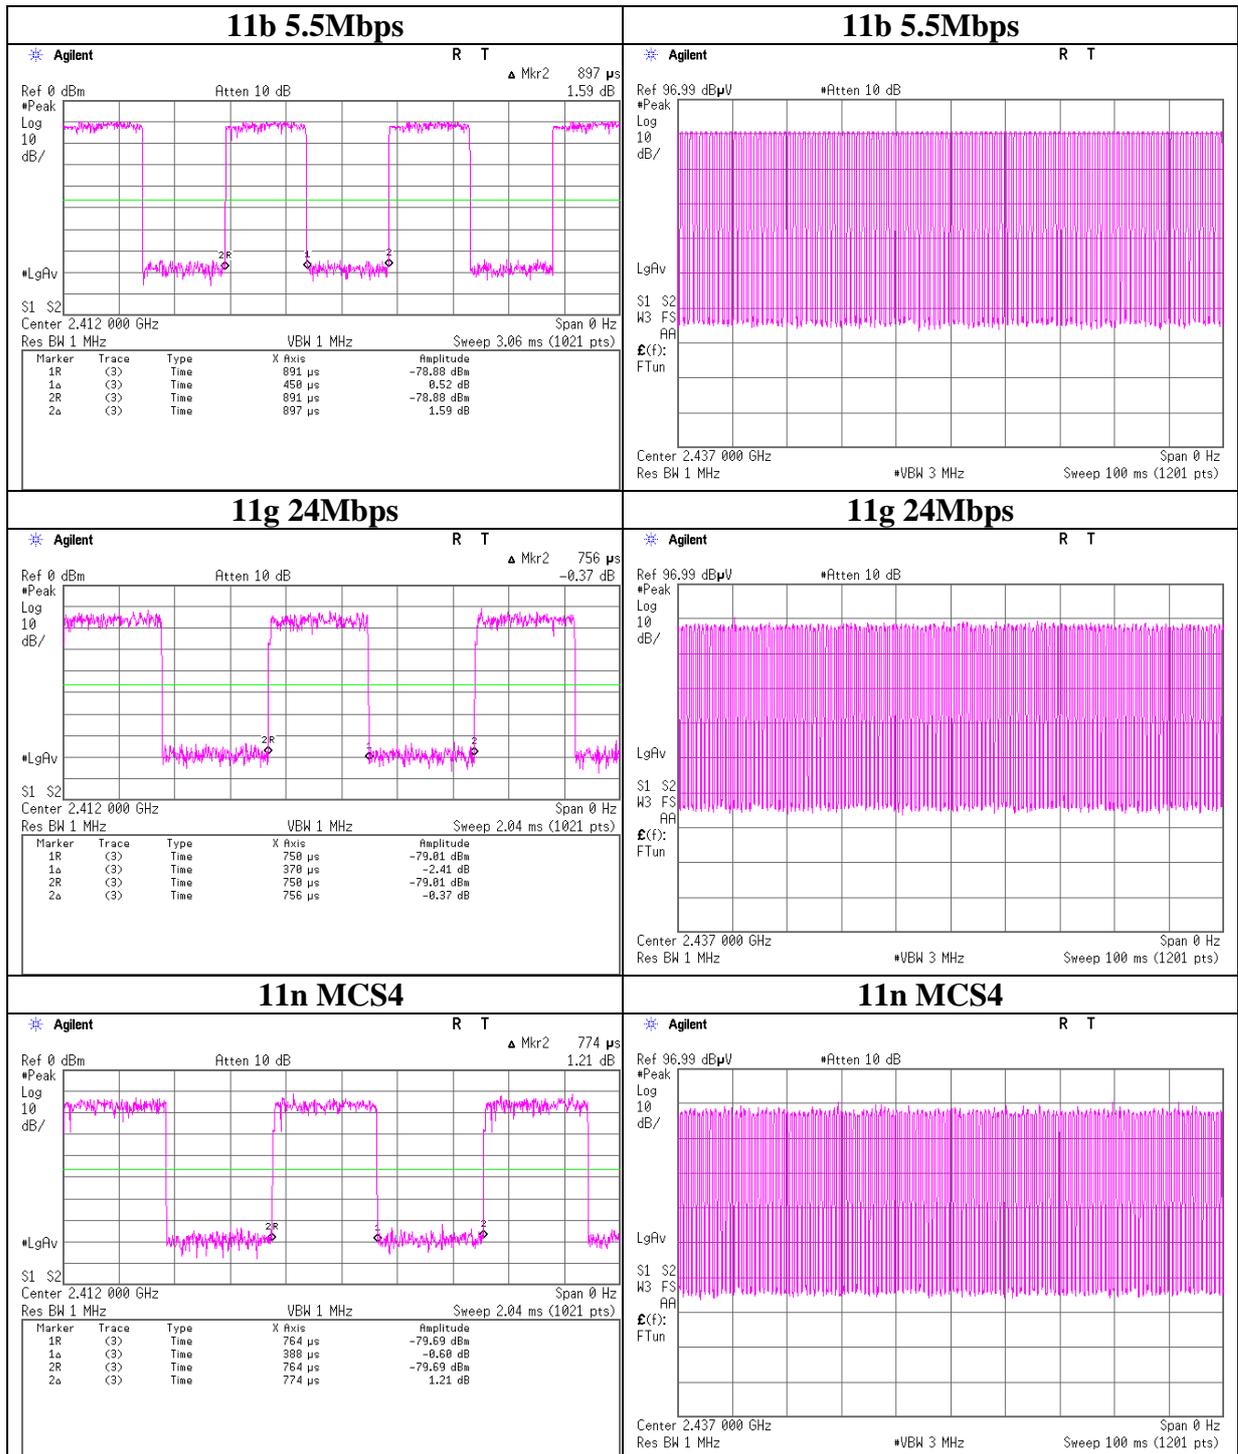


Conducted Spurious Emission

11b Tx 2412MHz

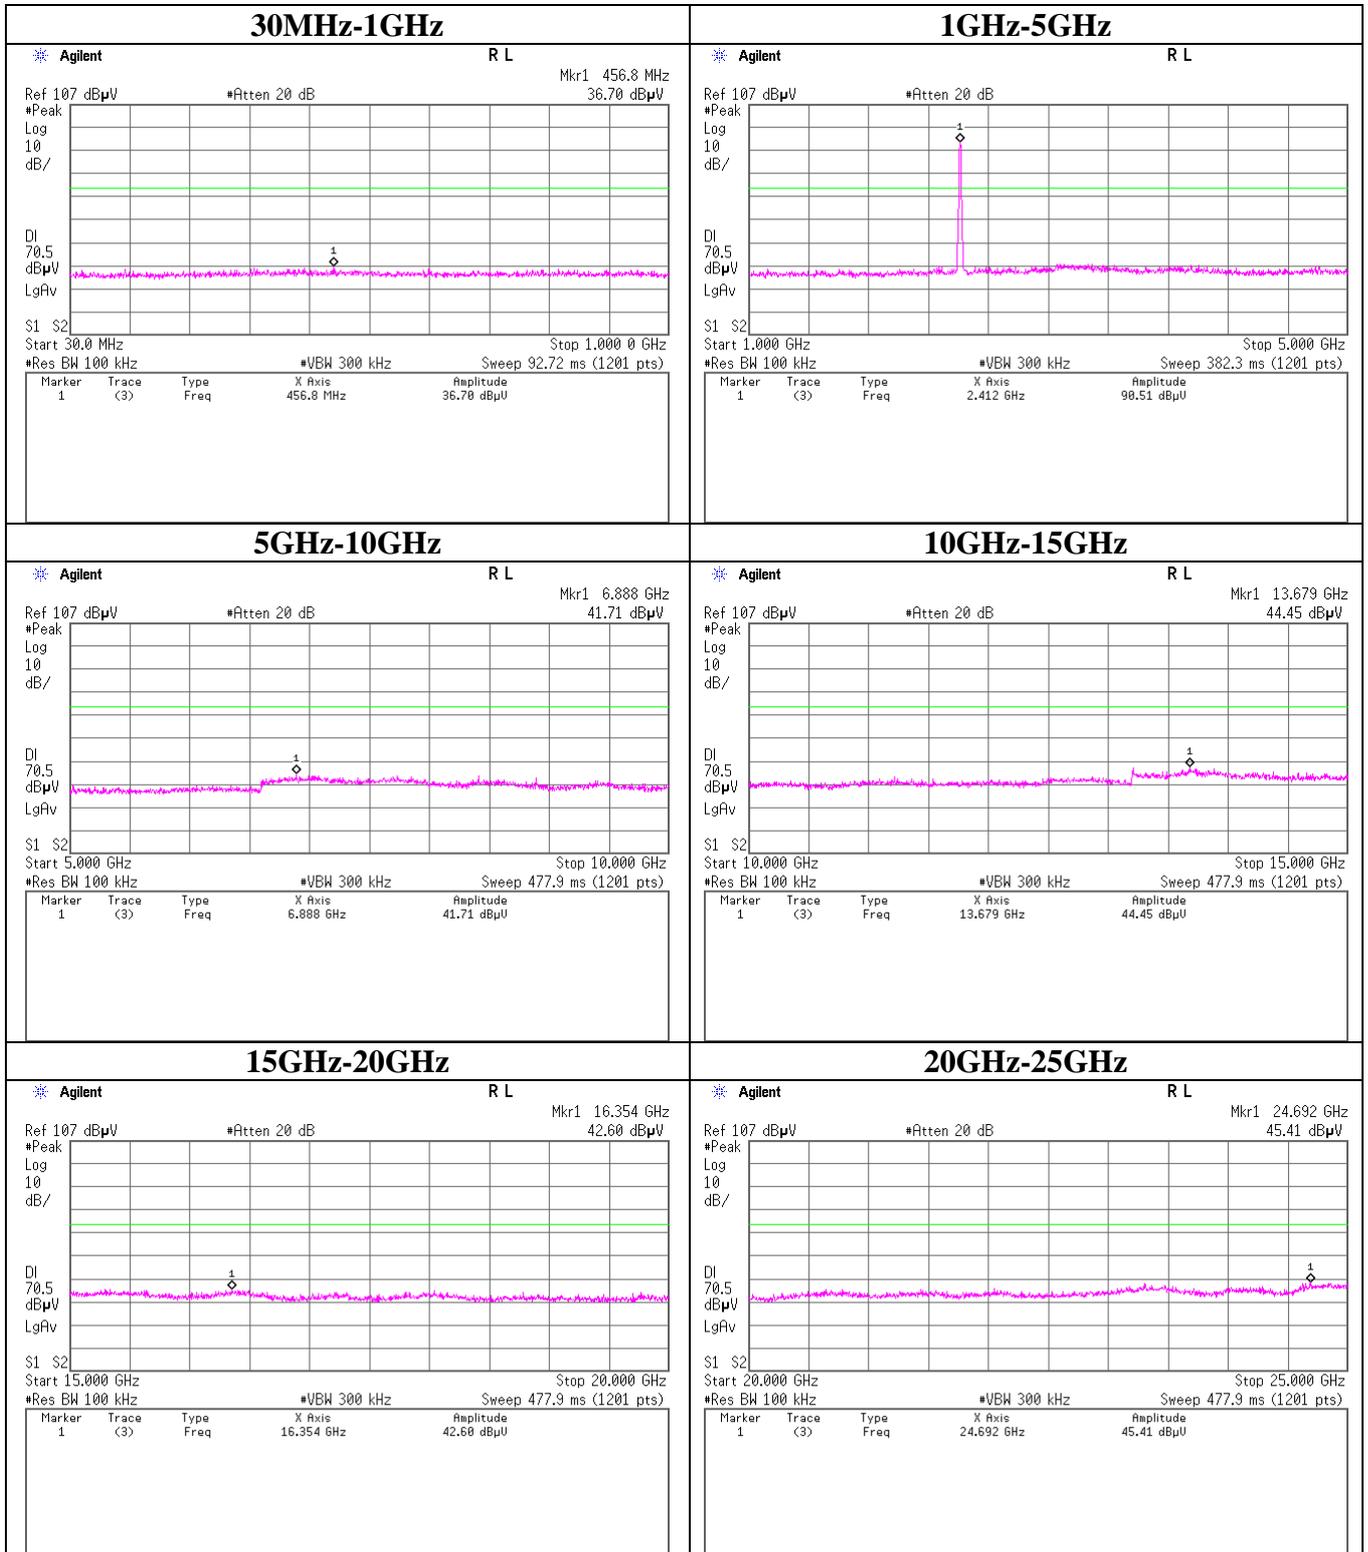


Conducted Spurious Emission

11b Tx 2437MHz

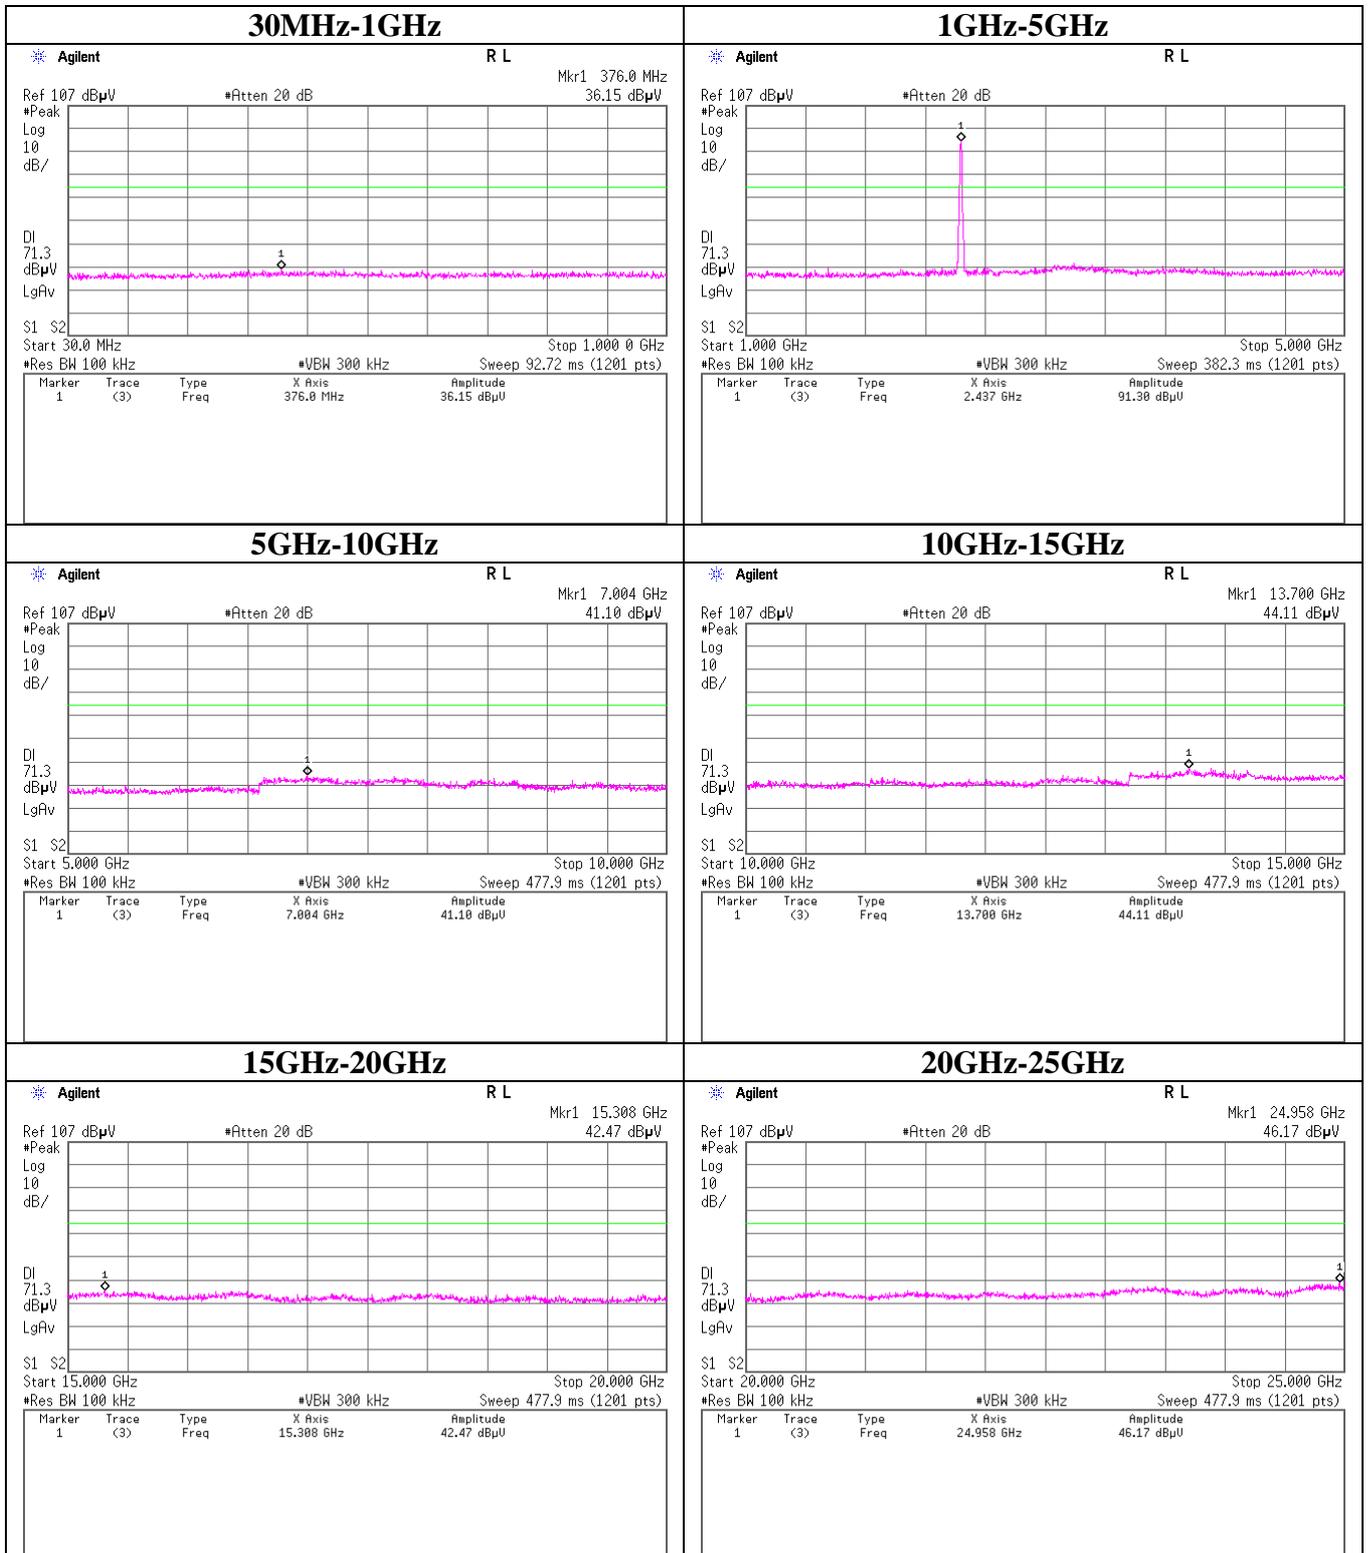


Conducted Spurious Emission

11b Tx 2462MHz

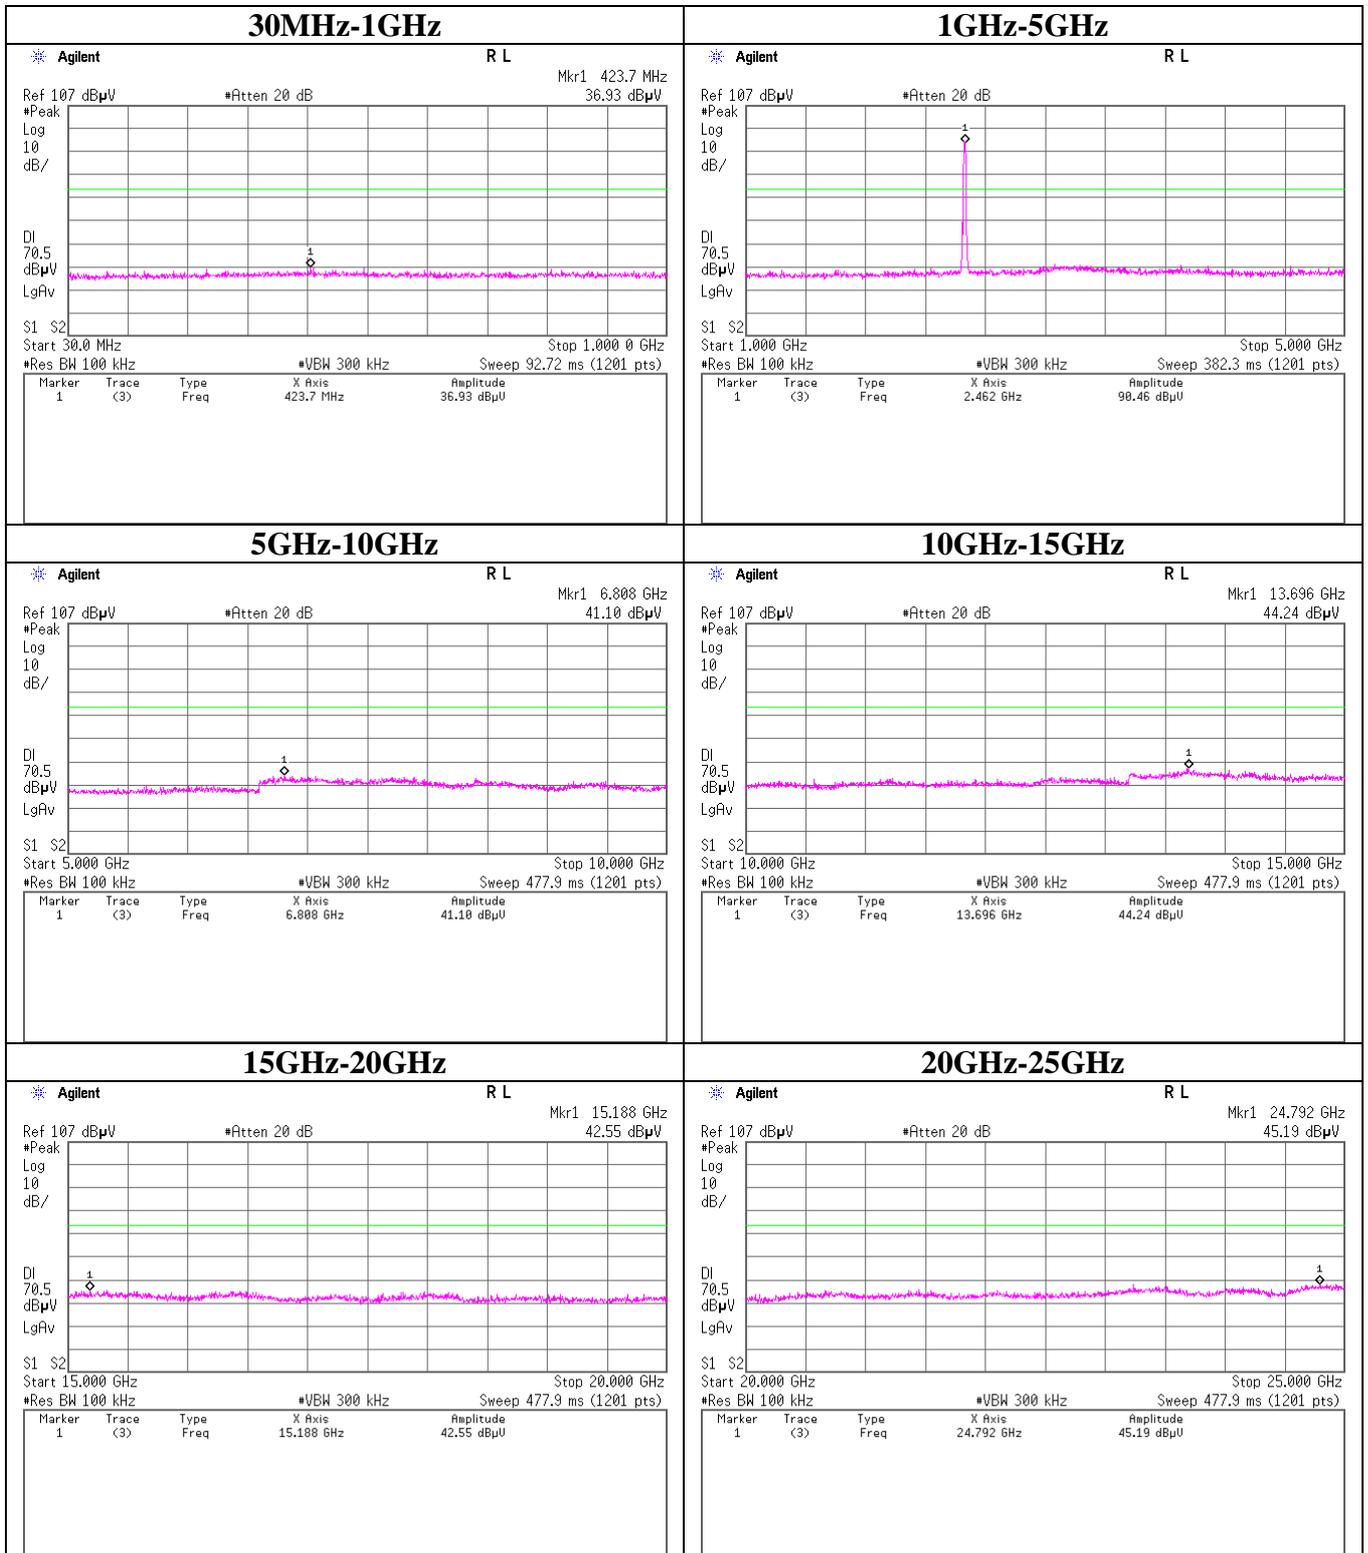


Conducted Spurious Emission

11g Tx 2412MHz

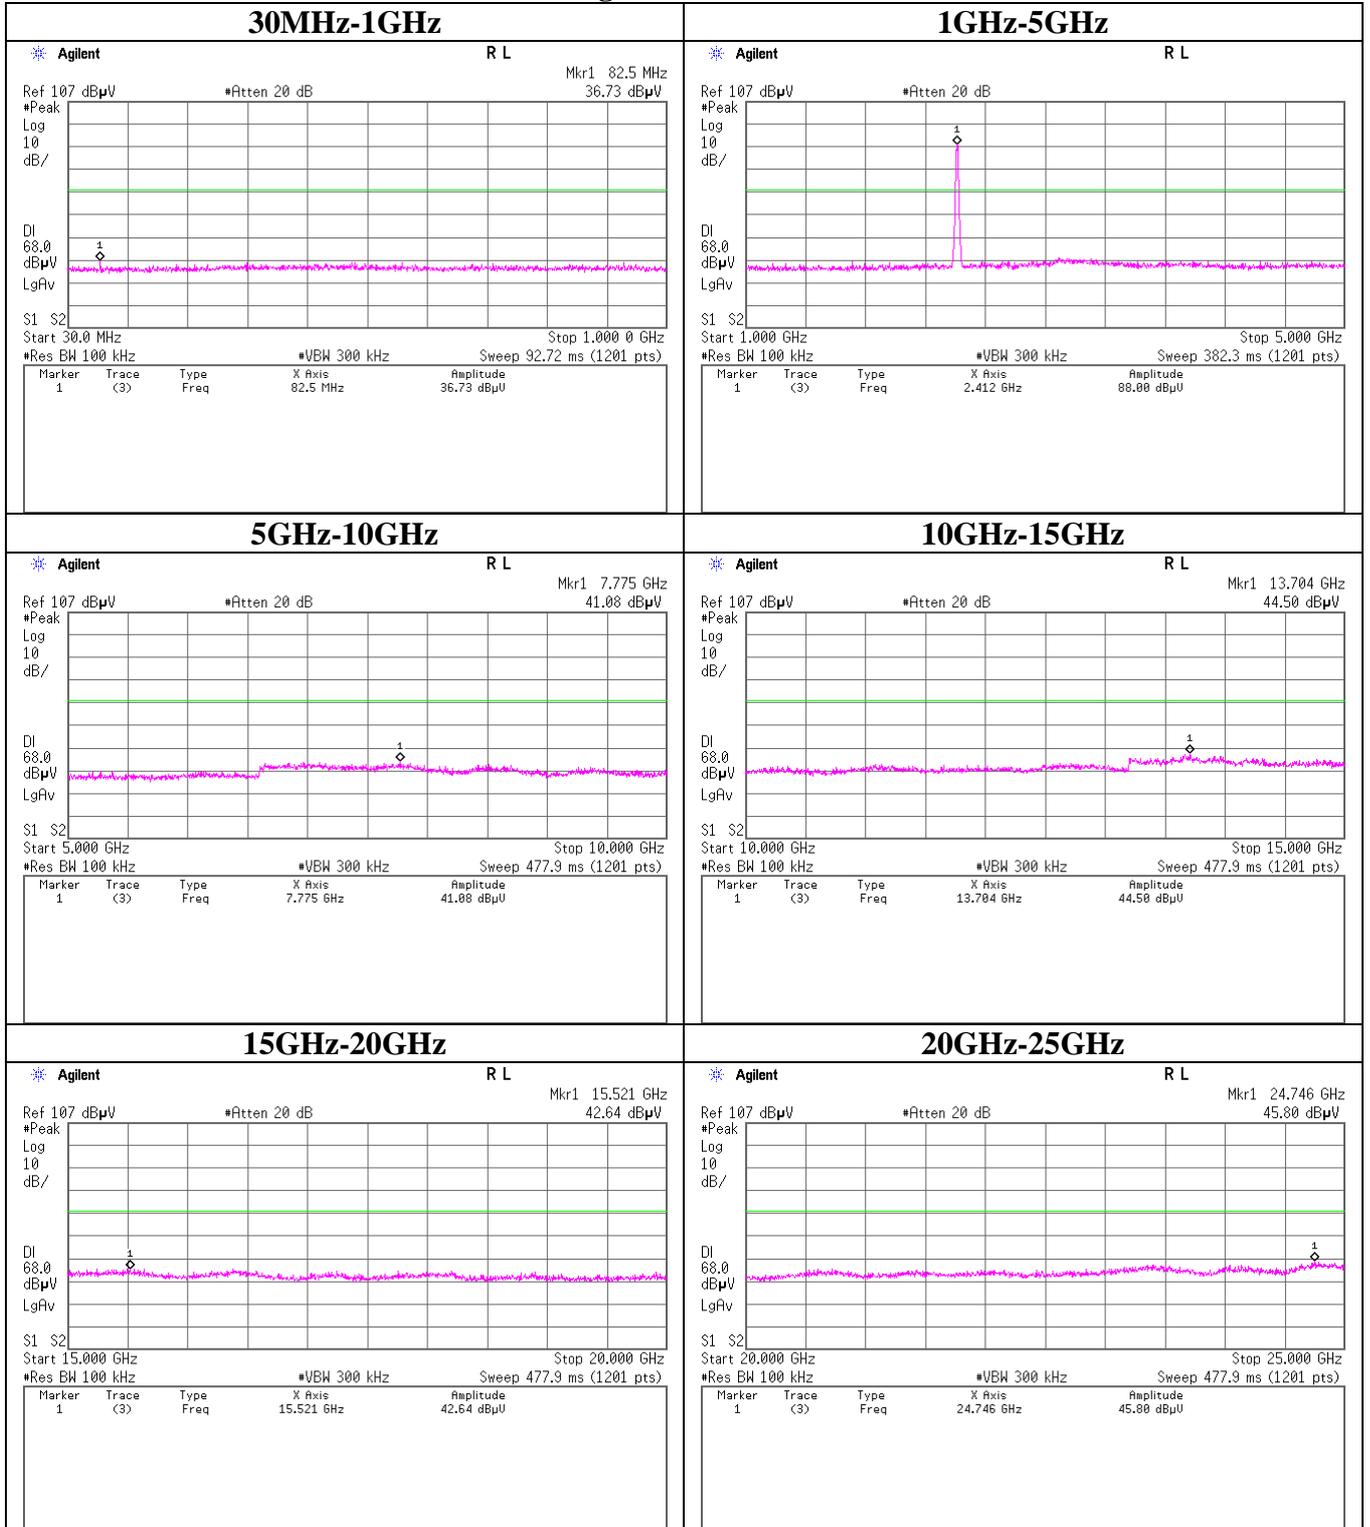


Conducted Spurious Emission

11g Tx 2437MHz

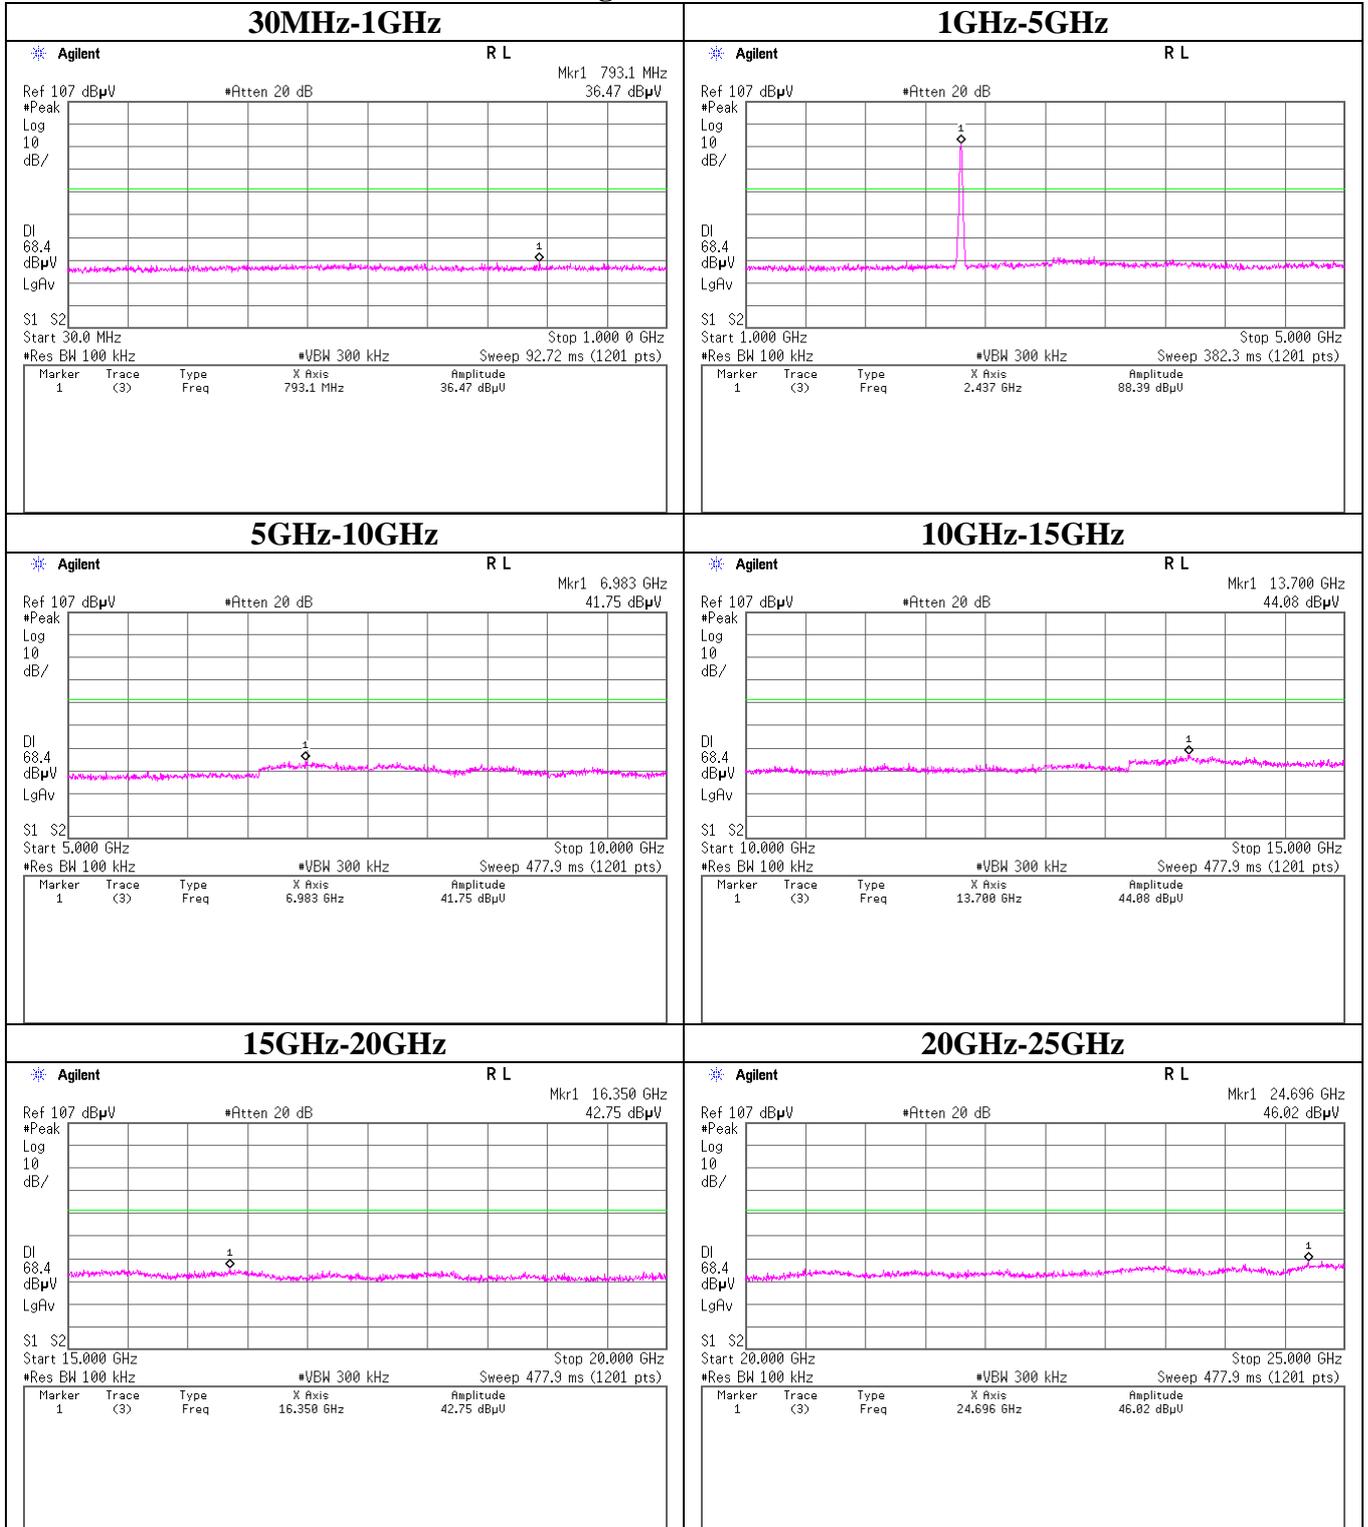


Conducted Spurious Emission

11g Tx 2462MHz

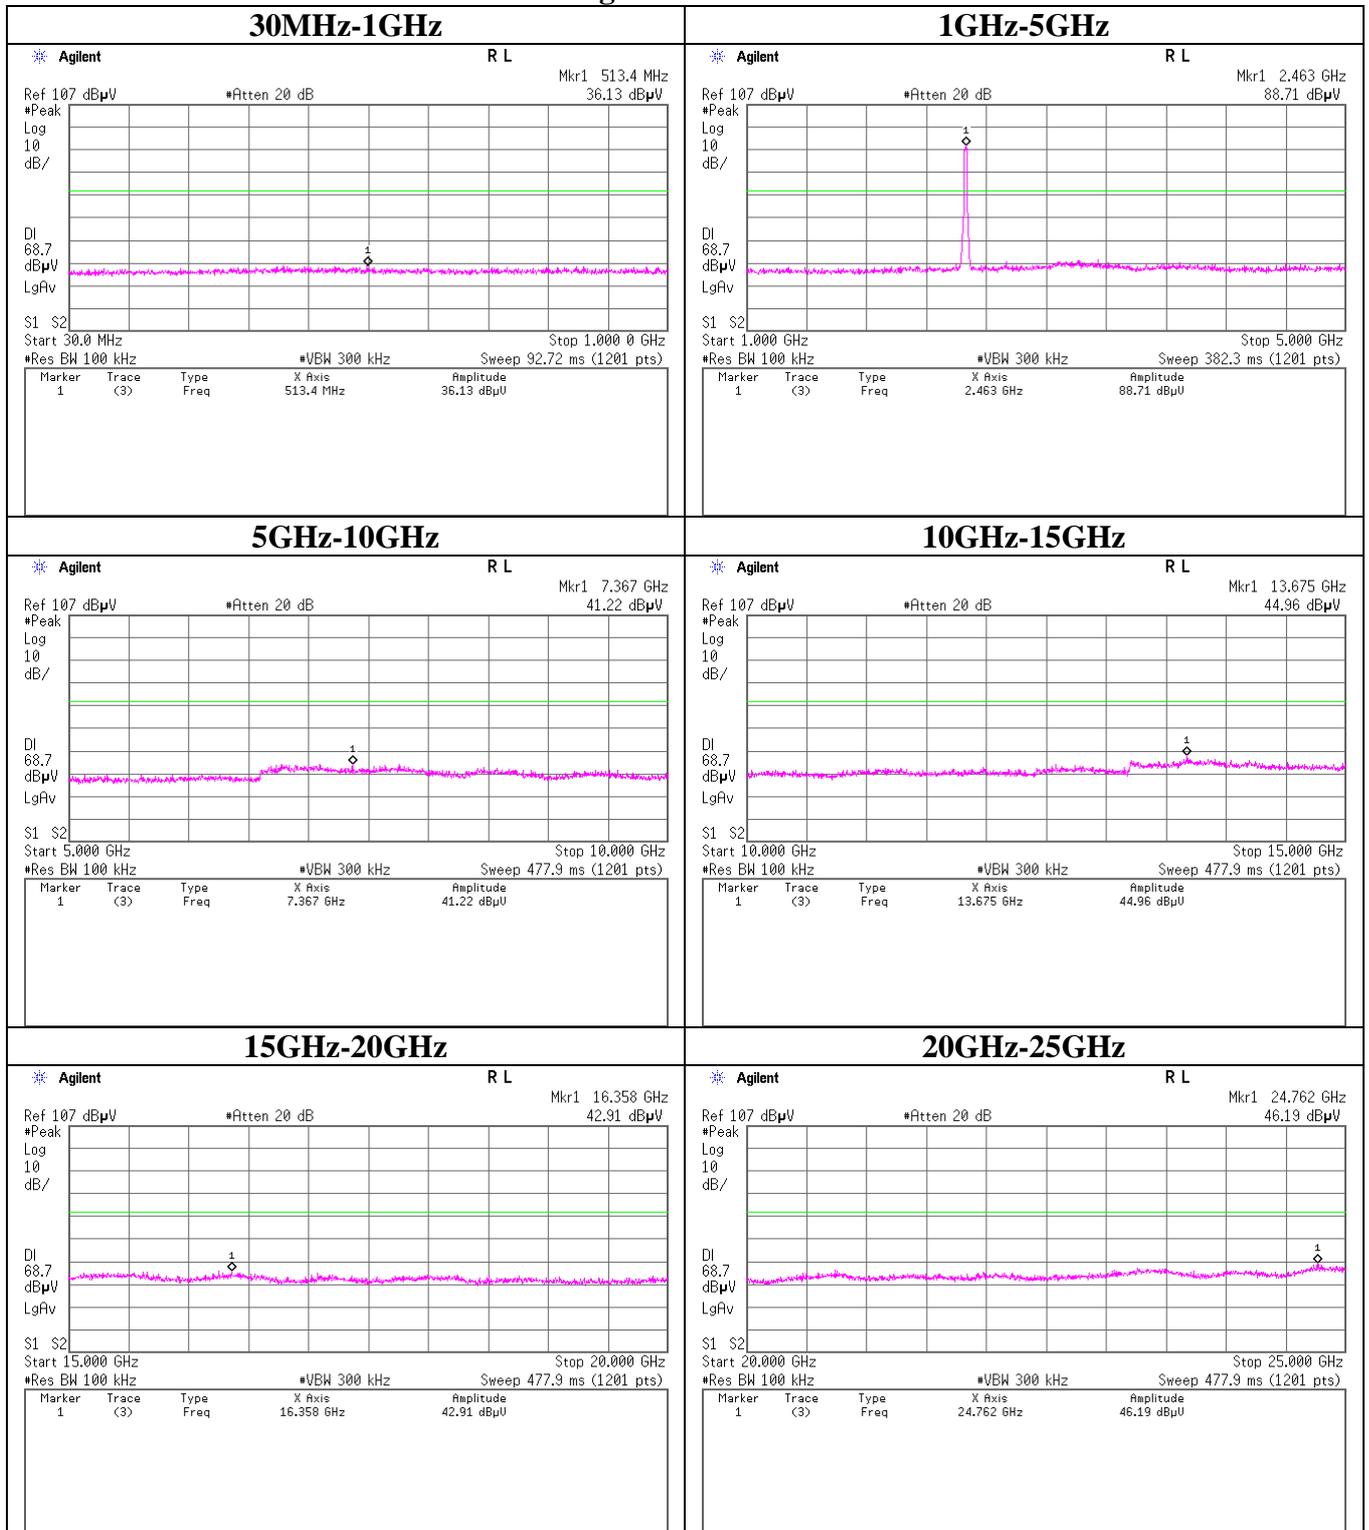


Conducted Spurious Emission

11n-20 Tx 2412MHz

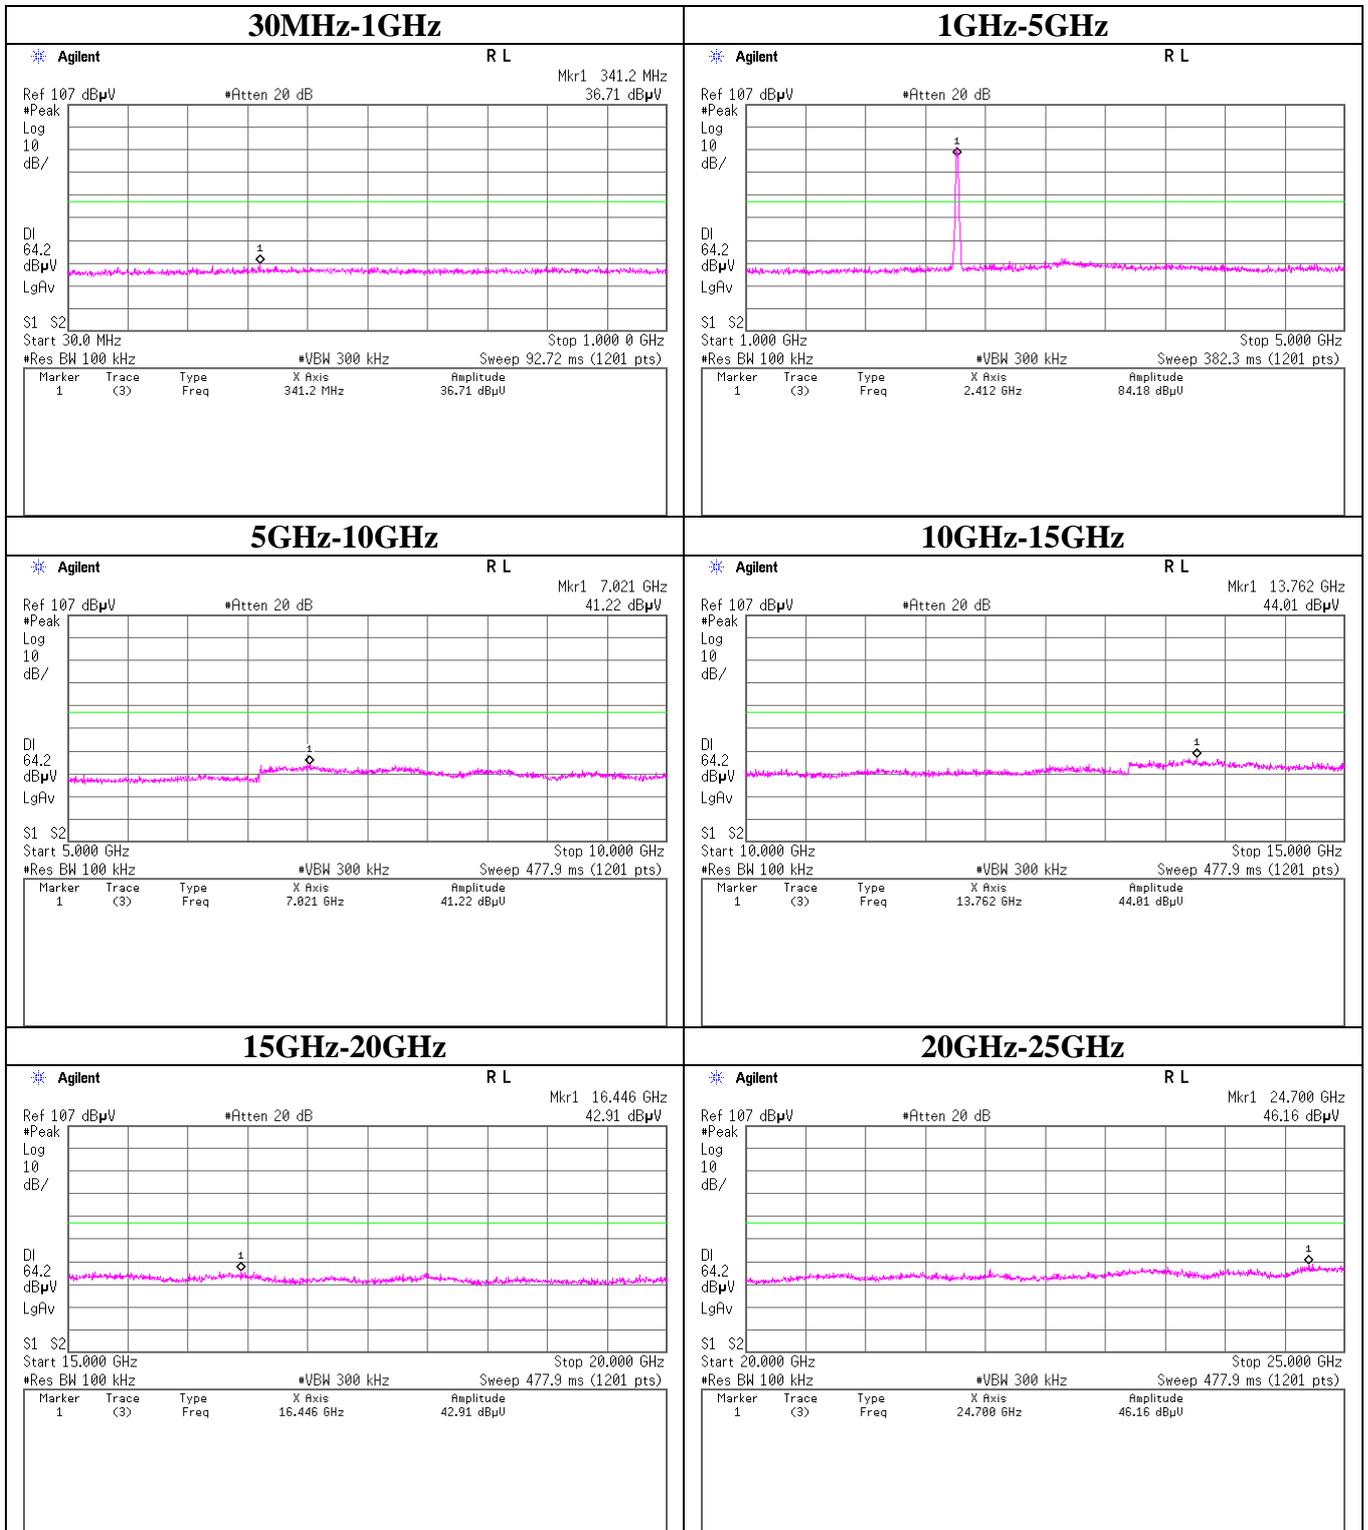


Conducted Spurious Emission

11n-20 Tx 2437MHz

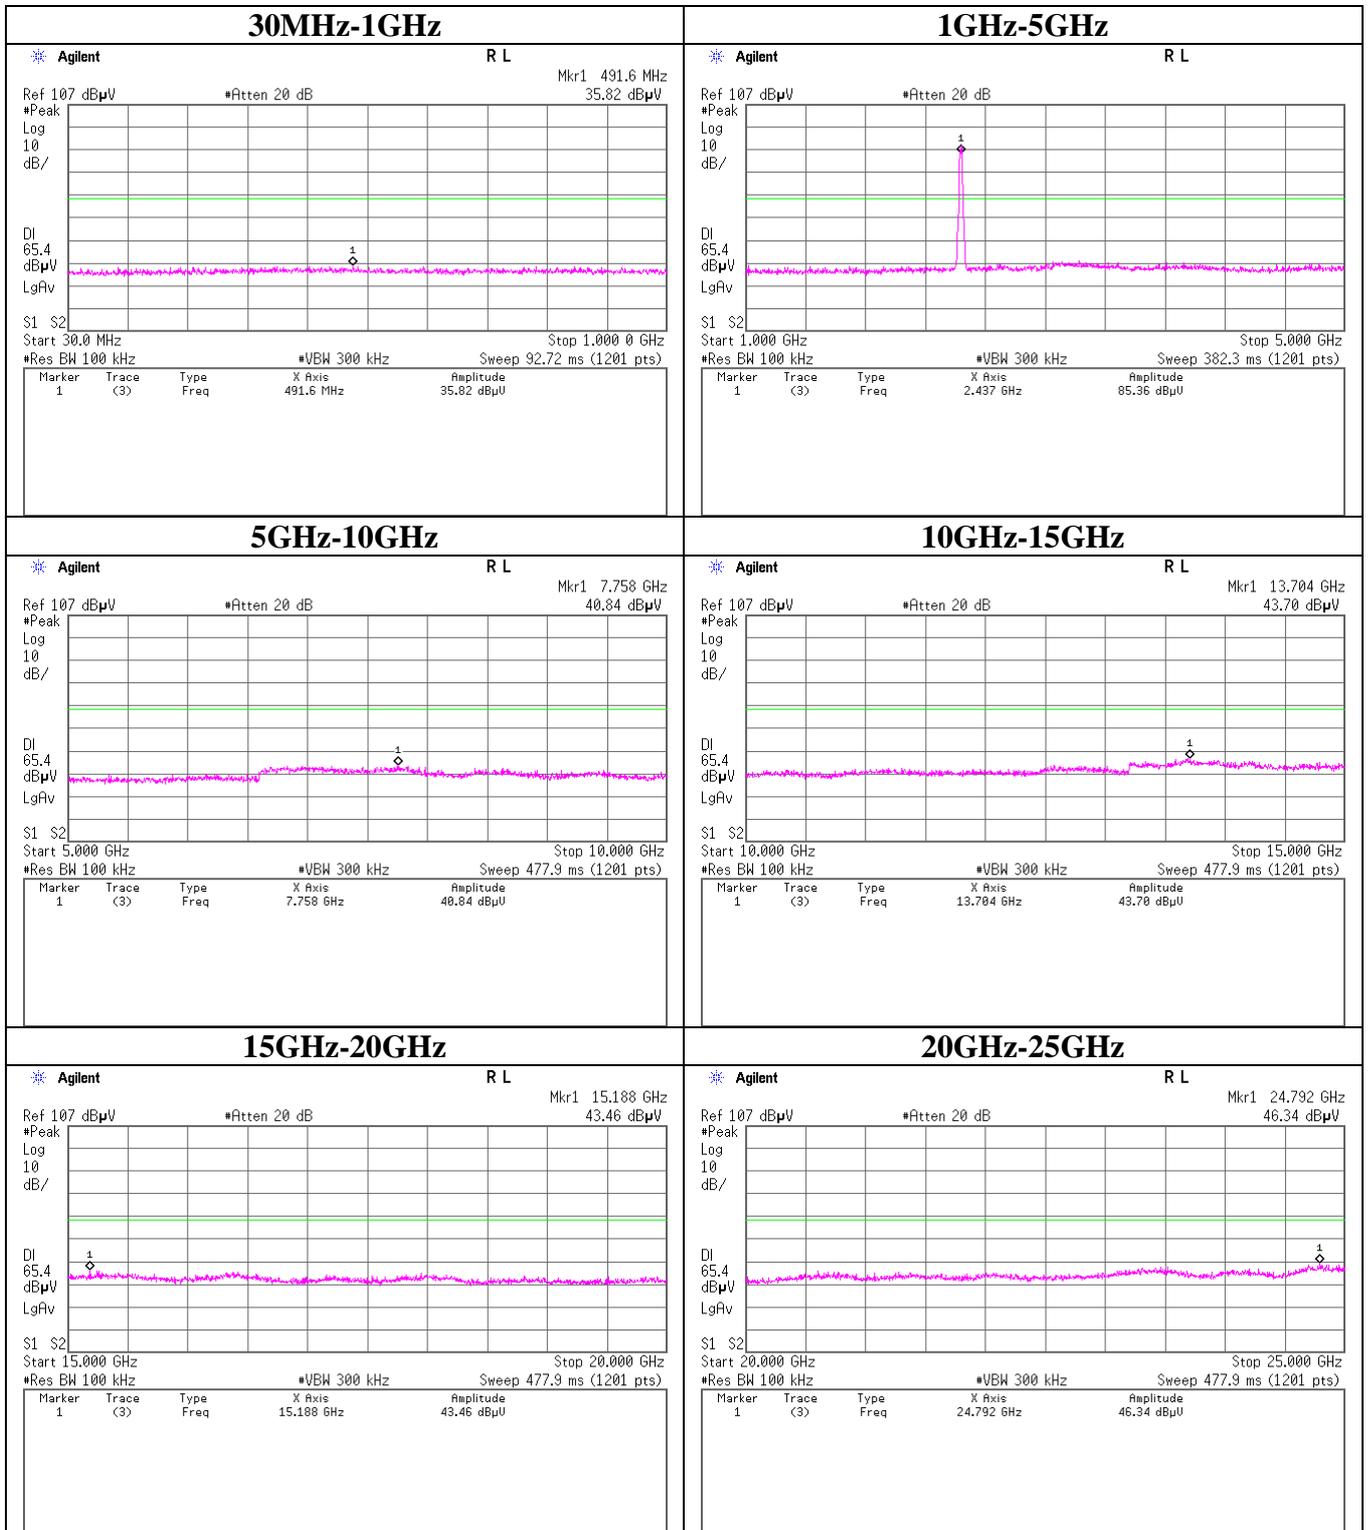


Conducted Spurious Emission

11n-20 Tx 2462MHz

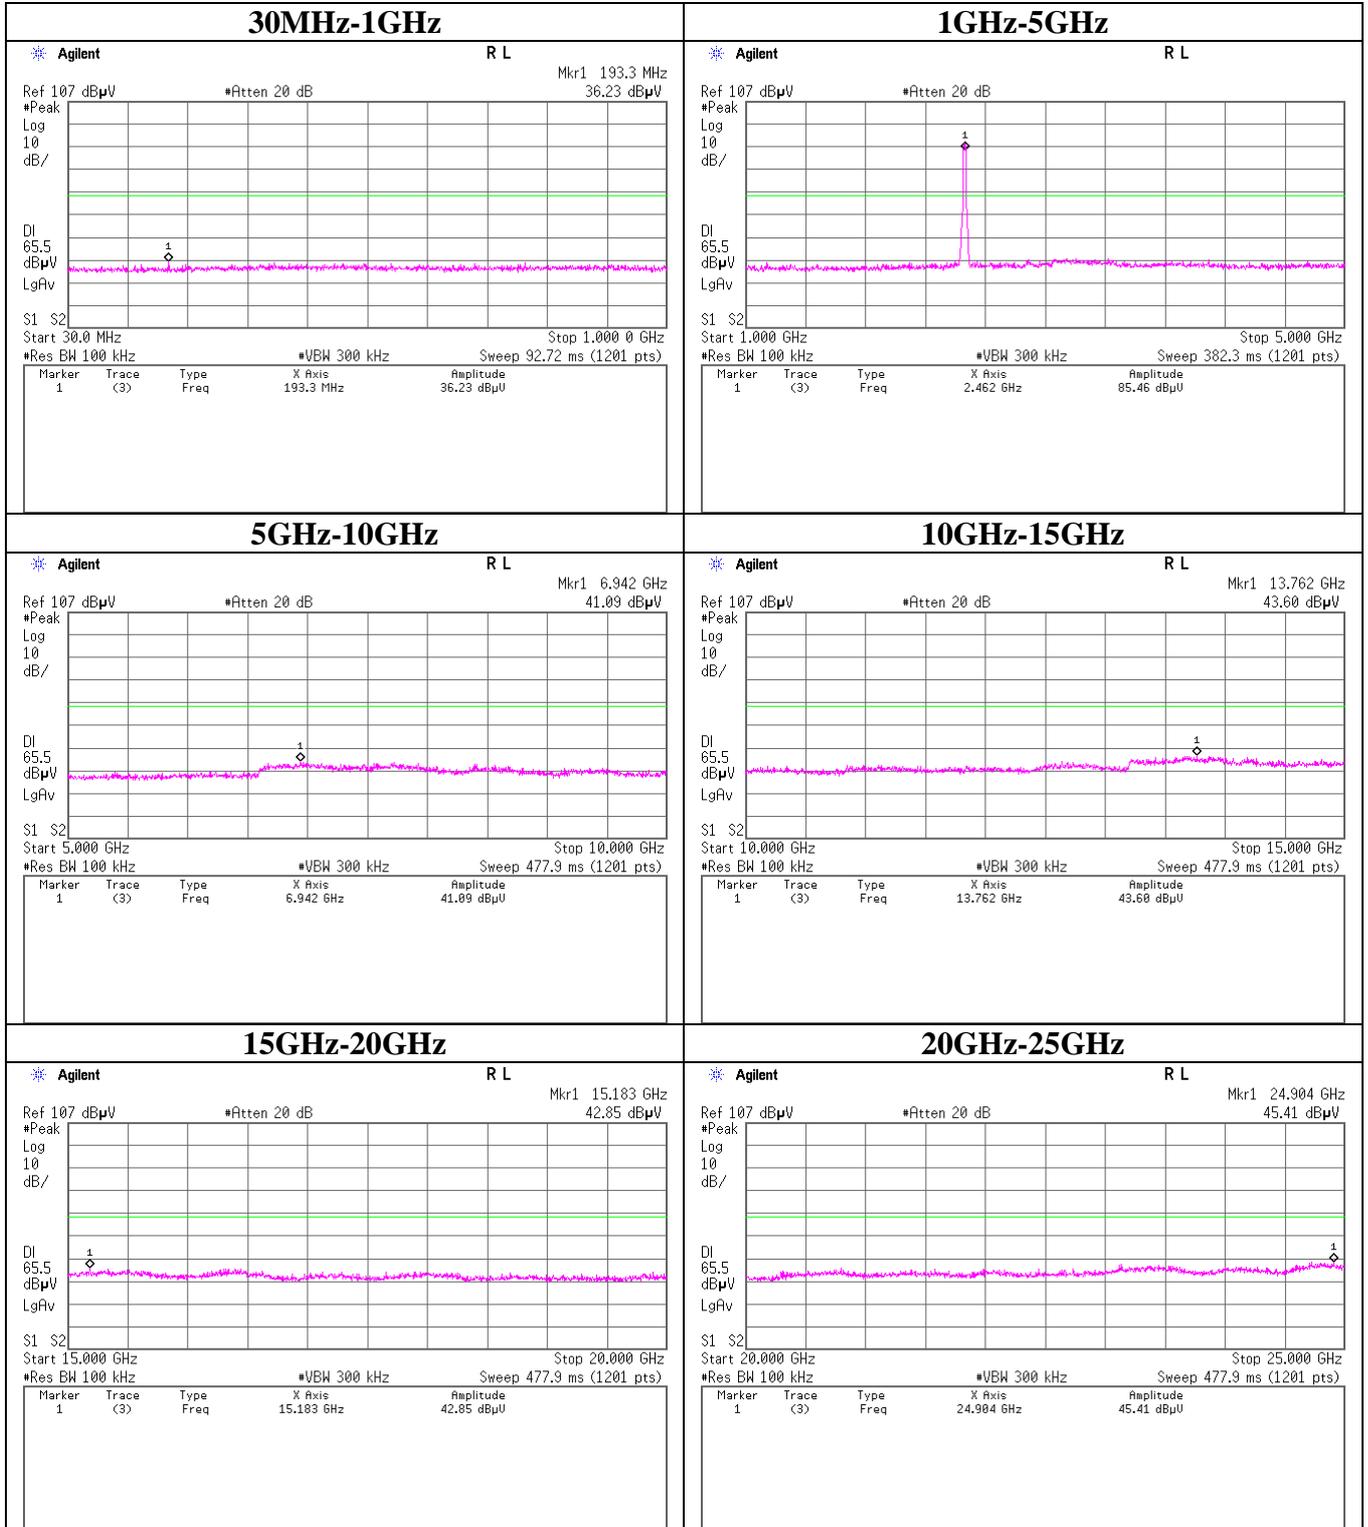


Conducted Spurious Emission

Rx 2437MHz

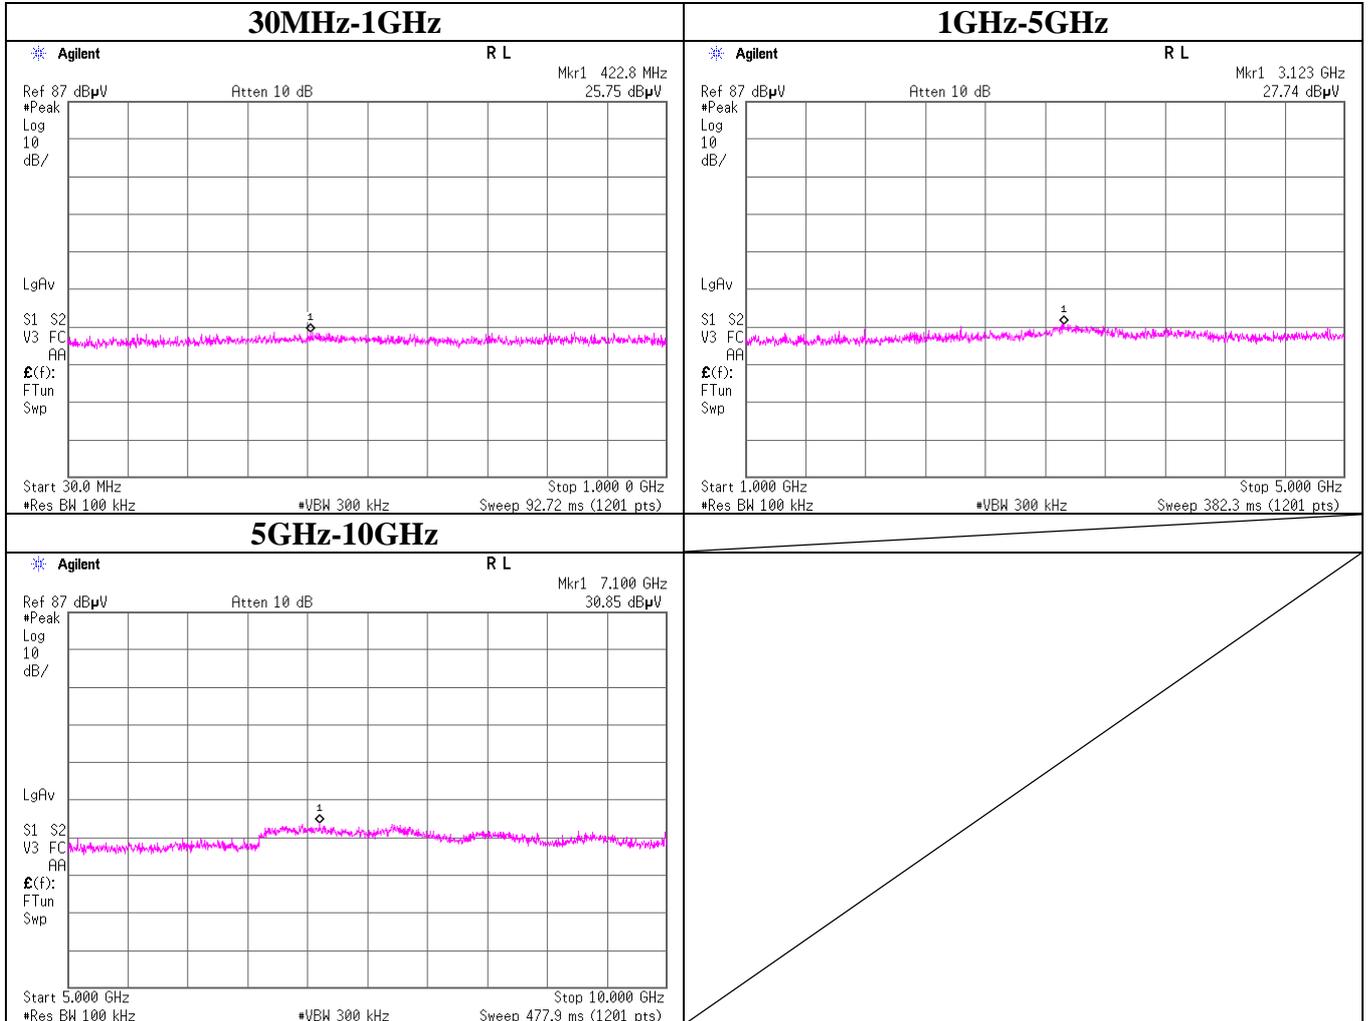


Conducted Emission Band Edge compliance


11b Tx

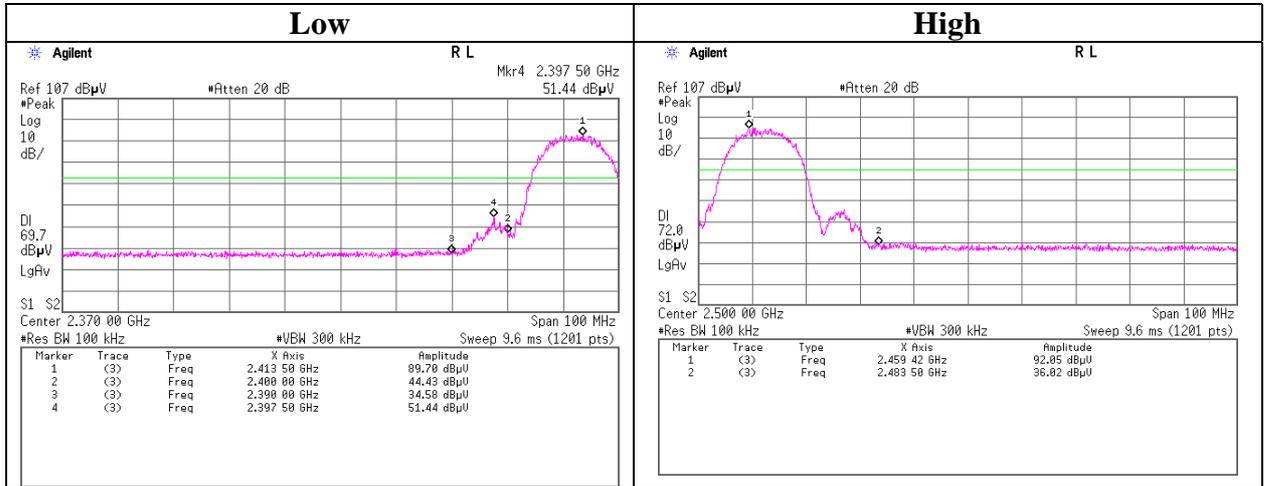

11g Tx

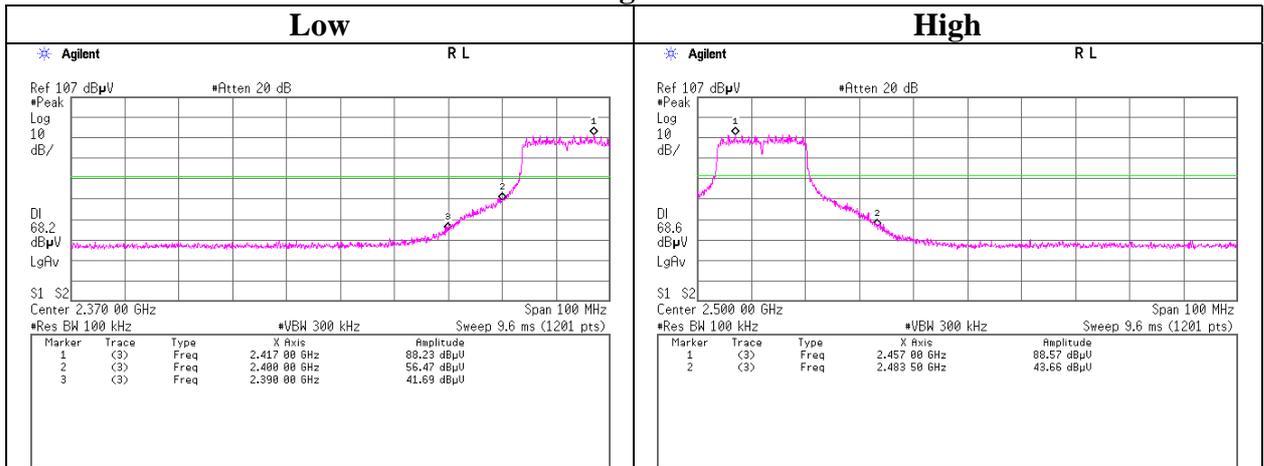

11n-20 Tx

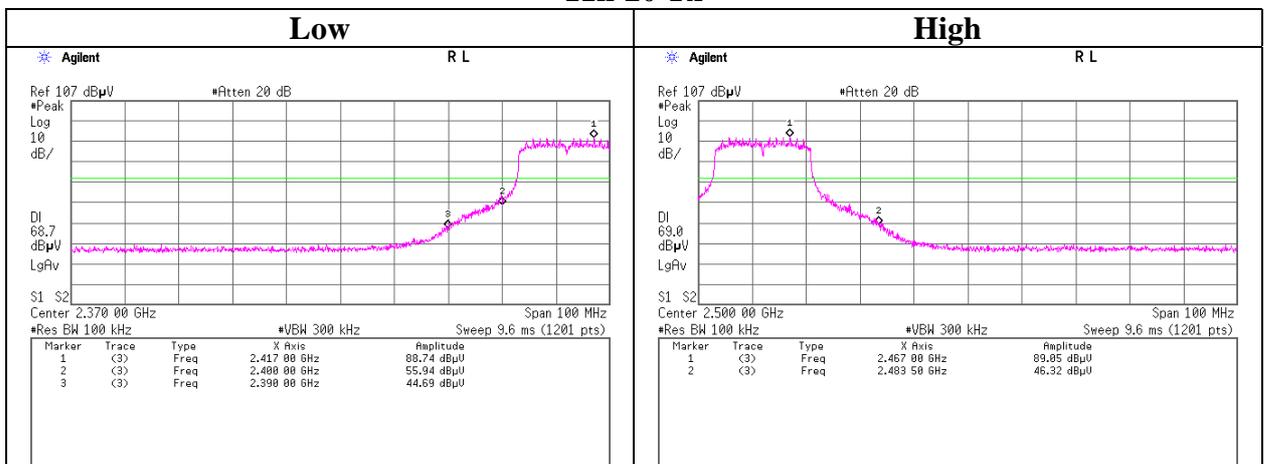

Power Density

Test place Head Office EMC Lab. No.6 Measurement Room
Report No. 31CE0169-HO-02
Date 02/16/2011
Temperature/ Humidity 21 deg.C./ 31%
Engineer Keisuke Kawamura
Mode 11b Tx, 11g Tx

11b

Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. [dB]	Result [dBm]	Limit [dBm]	Margin [dB]
2412.00	-11.31	0.97	9.97	-0.37	8.00	8.37
2437.00	-10.12	0.98	9.97	0.83	8.00	7.17
2462.00	-10.48	0.98	9.97	0.47	8.00	7.53


11g

Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. [dB]	Result [dBm]	Limit [dBm]	Margin [dB]
2412.00	-13.03	0.97	9.97	-2.09	8.00	10.09
2437.00	-12.12	0.98	9.97	-1.17	8.00	9.17
2462.00	-12.61	0.98	9.97	-1.66	8.00	9.66

Sample Calculation:

Result = Reading + Cable Loss (including the cable(s) customer supplied) + Attenuator

Power Density

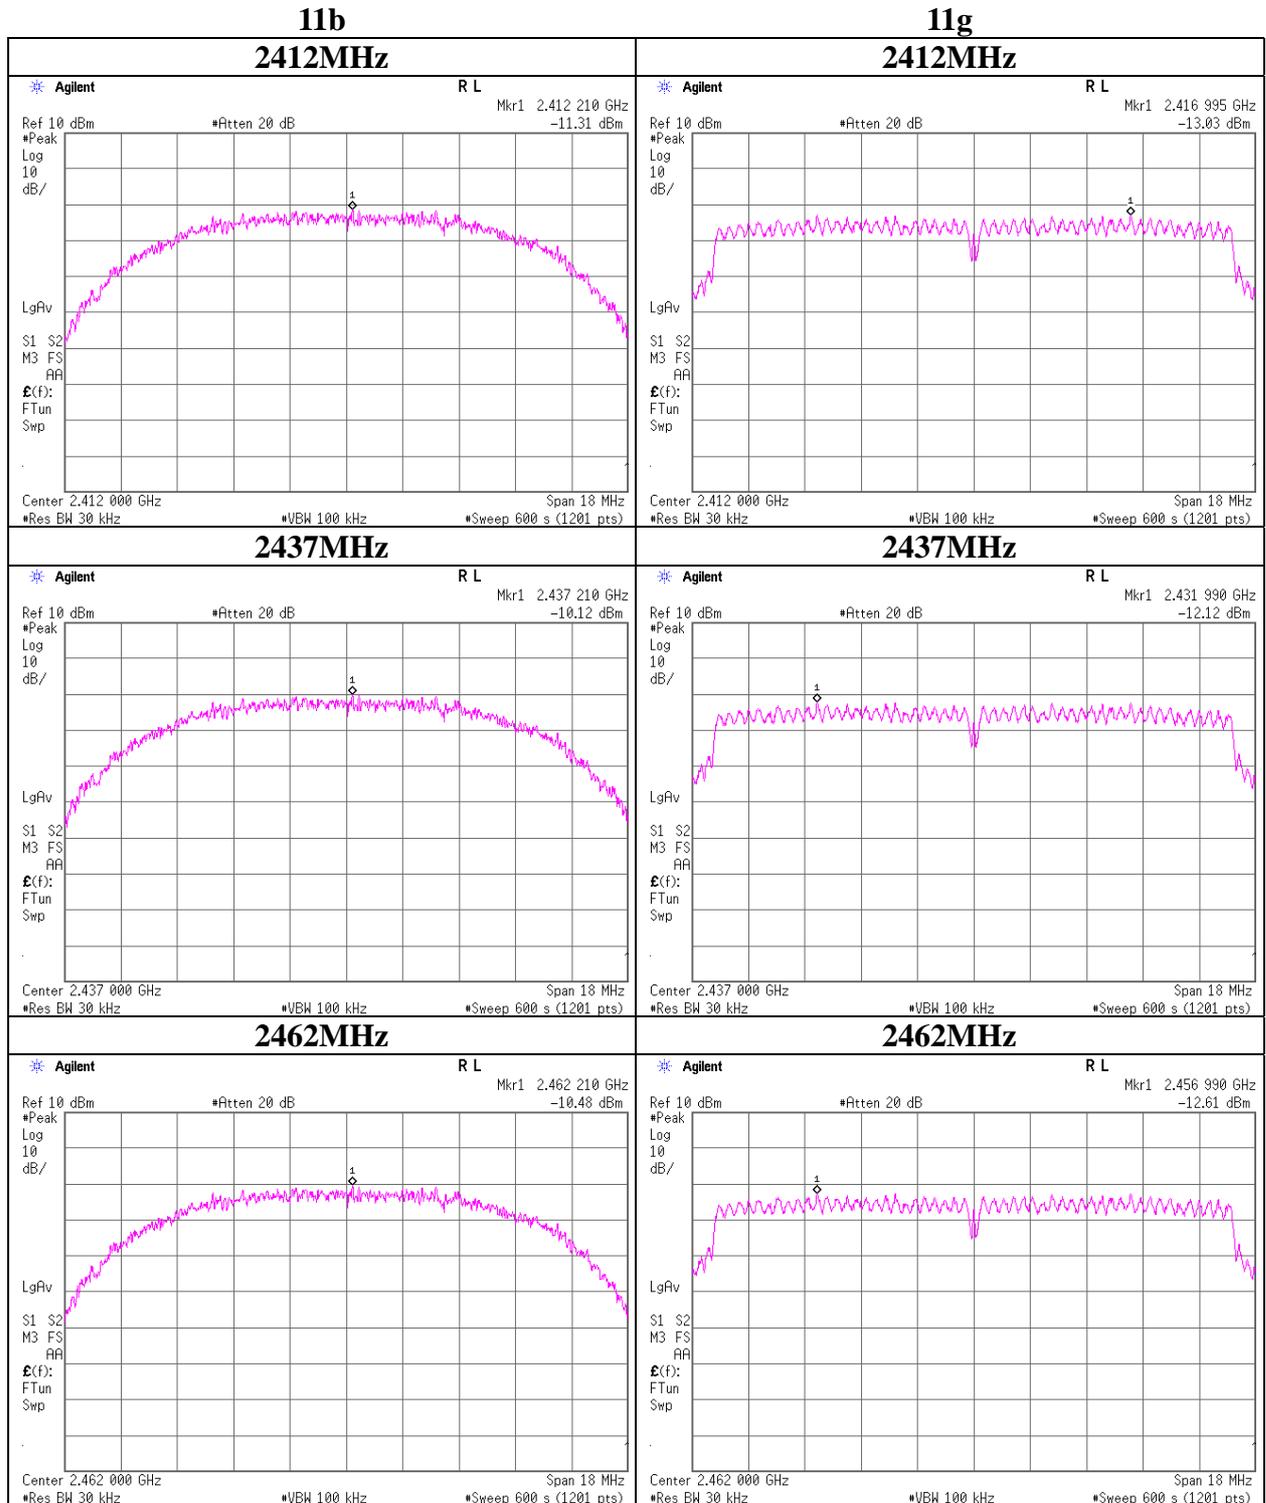

Power Density

Test place Head Office EMC Lab. No.6 Measurement Room
Report No. 31CE0169-HO-02
Date 02/16/2011
Temperature/ Humidity 21 deg.C./ 31%
Engineer Keisuke Kawamura
Mode 11n-20 Tx

Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. [dB]	Result		Limit [dBm]	Margin [dB]
				[dBm]	[mW]		
2412.00	-13.18	0.97	9.97	-2.24	0.60	8.00	10.24
2437.00	-12.39	0.98	9.97	-1.44	0.72	8.00	9.44
2462.00	-12.85	0.98	9.97	-1.90	0.65	8.00	9.90


Sample Calculation:

Result = Reading + Cable Loss (including the cable(s) customer supplied) + Attenuator


Power Density

11n-20


2412MHz

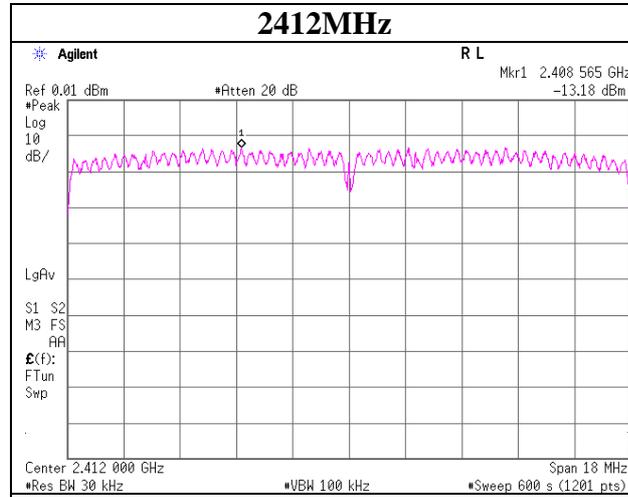


2437MHz

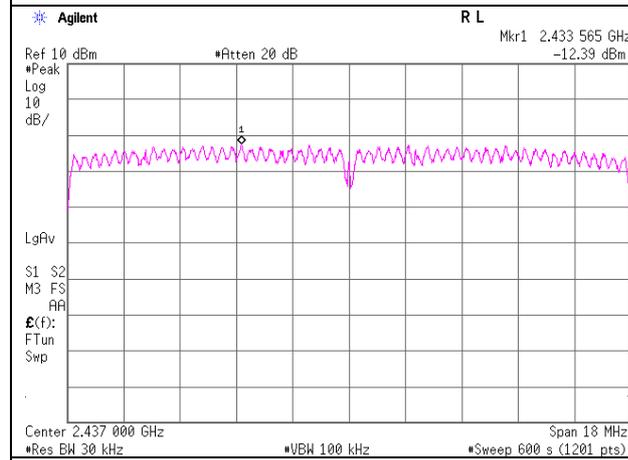

2462MHz

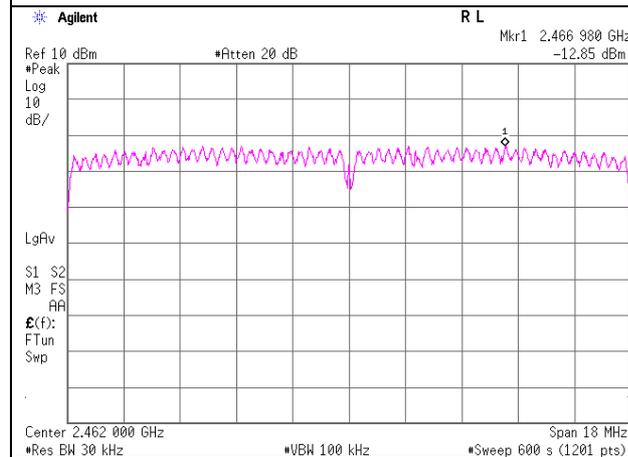


99% Occupied Bandwidth

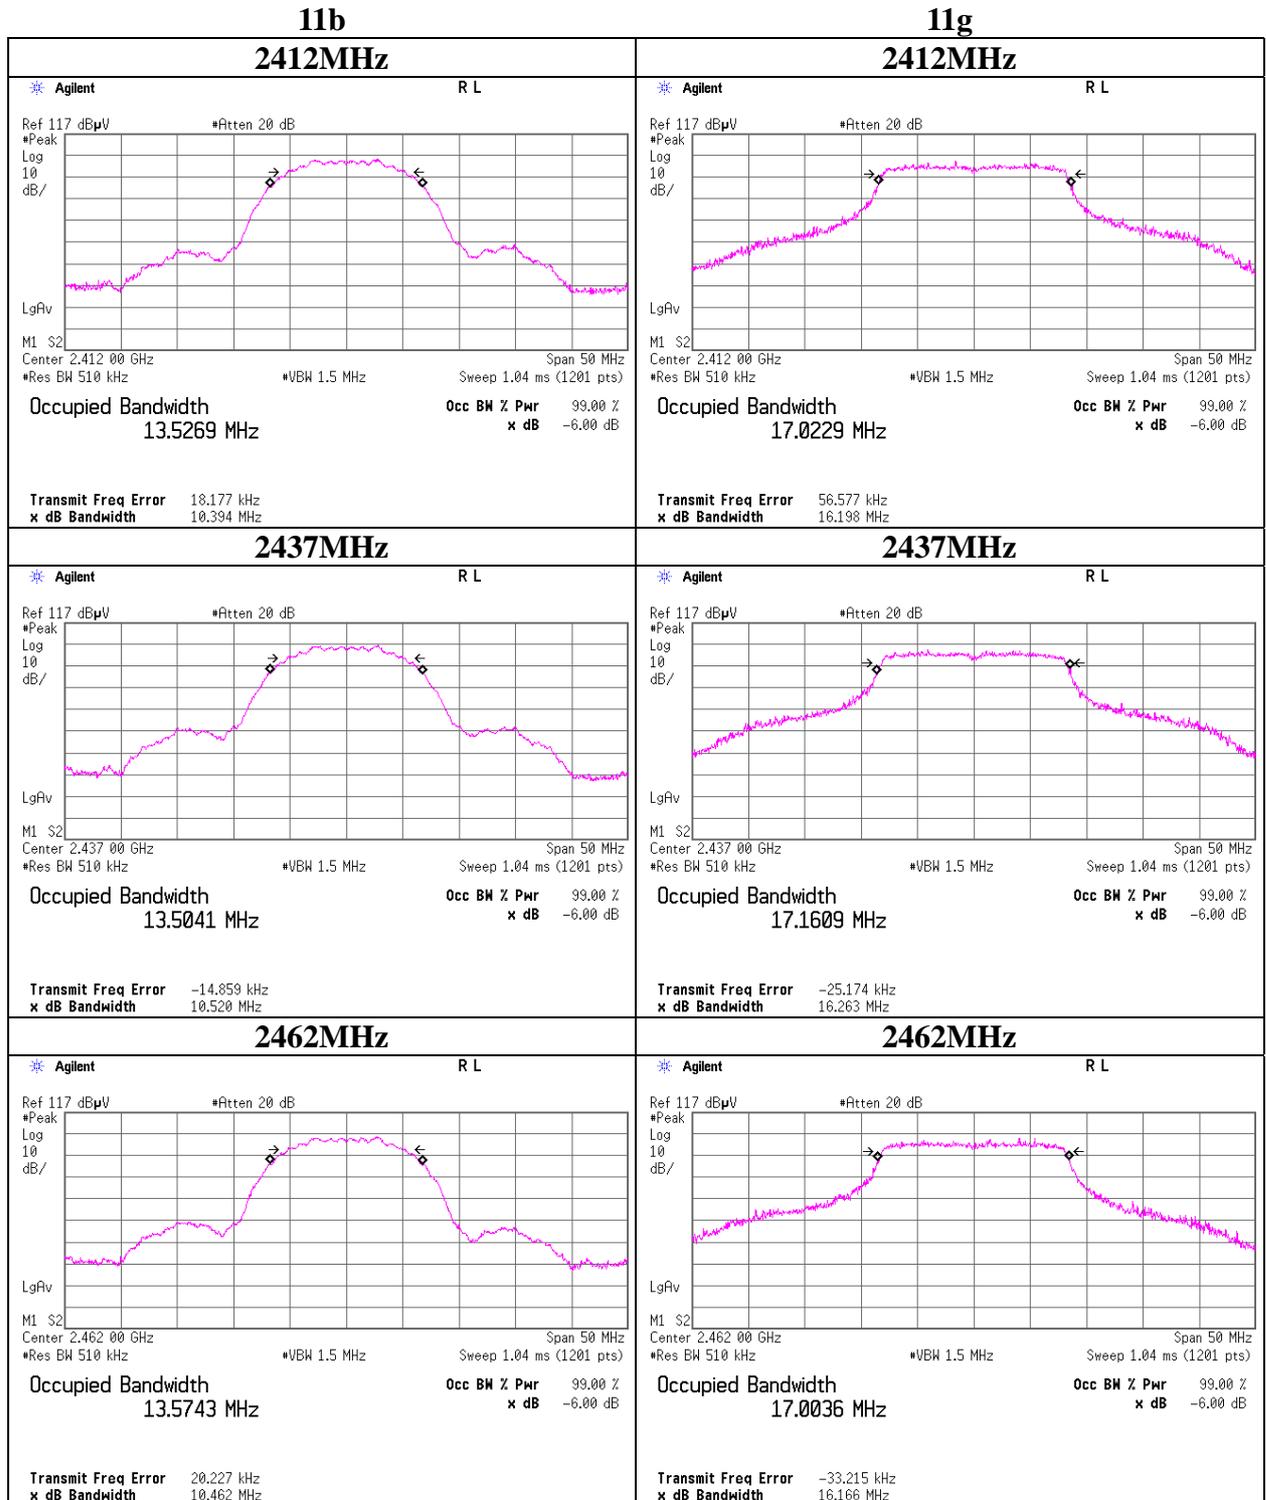


99% Occupied Bandwidth

11n-20


2412MHz

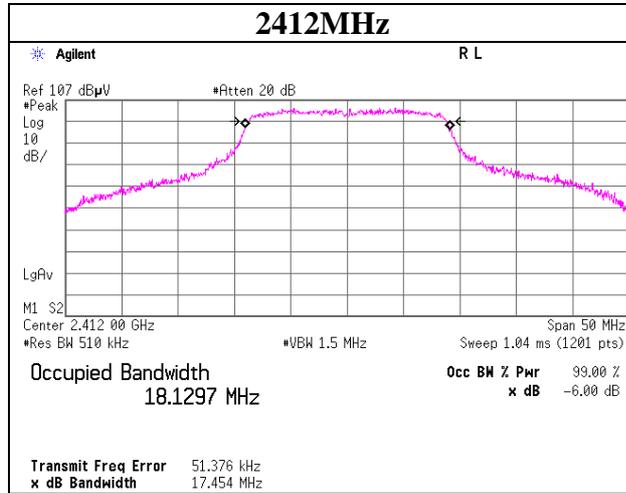

2437MHz

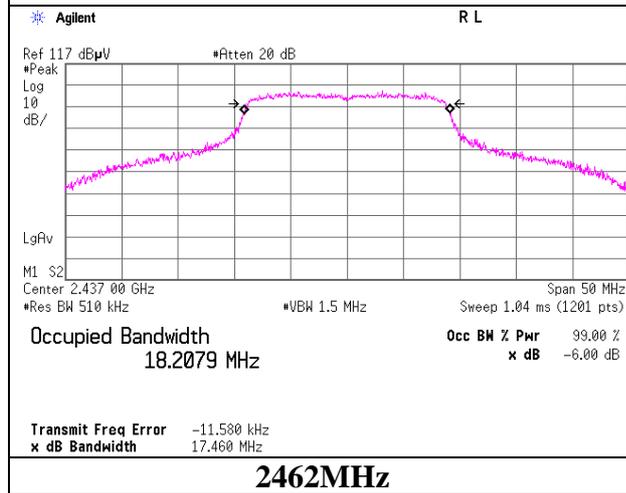

2462MHz

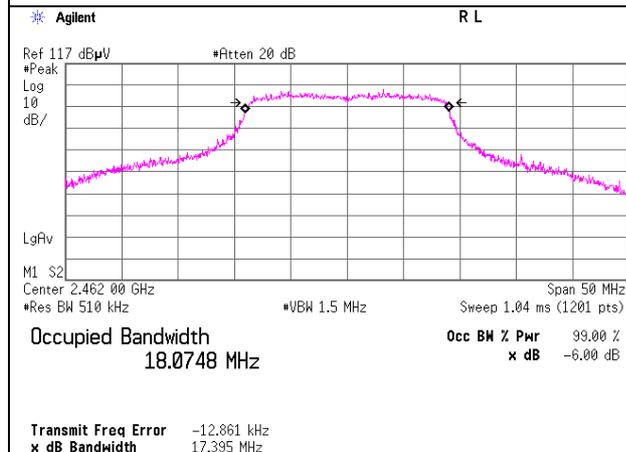

APPENDIX 3: Test instruments

EMI test equipment (1/2)

Control No.	Instrument	Manufacturer	Model No	Serial No	Test Item	Calibration Date * Interval(month)
MAEC-04	Semi Anechoic Chamber(NSA)	TDK	Semi Anechoic Chamber 3m	DA-10005	RE	2010/02/02 * 12
MOS-15	Thermo-Hygrometer	Custom	CTH-180	-	RE	2010/02/09 * 12
MJM-07	Measure	PROMART	SEN1955	-	RE	-
COTS-MEMI	EMI measurement program	TSJ	TEPTO-DV	-	RE	-
MSA-10	Spectrum Analyzer	Agilent	E4448A	MY46180655	RE/AT	2010/02/03 * 12
MHA-21	Horn Antenna 1-18GHz	Schwarzbeck	BBHA9120D	9120D-557	RE	2010/08/08 * 12
MCC-57	Microwave Cable	Suhner	SUCOFLEX104	267195/4(0.6m) / 292411(5m)	RE	2010/11/26 * 12
MPA-12	MicroWave System Amplifier	Agilent	83017A	MY39500780	RE	2010/03/16 * 12
MCC-114	Microwave Cable 1G-26.5GHz	Suhner	SUCOFLEX104	290212/4	AT	2010/08/05 * 12
MAT-21	Attenuator(20dB)(above 1GHz)	HIROSE ELECTRIC CO.,LTD.	AT-120	901247	AT	2011/01/06 * 12
MAEC-02	Semi Anechoic Chamber(NSA)	TDK	Semi Anechoic Chamber 3m	DA-06902	RE/CE	2010/09/01 * 12
MOS-22	Thermo-Hygrometer	Custom	CTH-201	0003	RE/CE	2010/02/09 * 12
MJM-05	Measure	PROMART	SEN1955	-	RE/CE	-
MHA-06	Horn Antenna 1-18GHz	Schwarzbeck	BBHA9120D	254	RE	2011/01/16 * 12
MPA-10	Pre Amplifier	Agilent	8449B	3008A02142	RE	2010/09/30 * 12
MHA-02	Horn Antenna 18-26.5GHz	EMCO	3160-09	1265	RE	2011/01/16 * 12
MHF-06	High Pass Filter 3.5-24GHz	TOKIMEC	TF323DCA	601	RE	2010/05/19 * 12
MSA-03	Spectrum Analyzer	Agilent	E4448A	MY44020357	RE	2010/11/30 * 12
MTR-03	Test Receiver	Rohde & Schwarz	ESCI	100300	RE	2010/04/19 * 12
MBA-02	Biconical Antenna	Schwarzbeck	BBA9106	VHA9103200 8	RE	2010/10/11 * 12
MLA-02	Logperiodic Antenna	Schwarzbeck	USLP9143	201	RE	2010/10/11 * 12
MCC-12	Coaxial Cable	Fujikura/Agilent	-	-	RE	2010/02/22 * 12
MAT-07	Attenuator(6dB)	Weinschel Corp	2	BK7970	RE	2010/11/05 * 12
MPA-09	Pre Amplifier	Agilent	8447D	2944A10845	RE	2010/09/09 * 12
MLS-06	LISN(AMN)	Schwarzbeck	NSLK8127	8127363	CE(AE)	2010/02/04 * 12
MLS-07	LISN(AMN)	Schwarzbeck	NSLK8127	8127364	CE(EUT)	2010/02/05 * 12

EMI test equipment (2/2)

Control No.	Instrument	Manufacturer	Model No	Serial No	Test Item	Calibration Date * Interval(month)
MTA-31	Terminator	TME	CT-01	-	CE	2011/01/05 * 12
MCC-13	Coaxial Cable	Fujikura	3D-2W(12m)/5D-2W(5m)/5D-2W(0.8m)/5D-2W(1m)	-	CE	2010/02/22 * 12
MAT-65	Attenuator(13dB)	JFW Industries, Inc.	50FP-013H2 N	-	CE	2010/02/04 * 12
MPM-08	Power Meter	Anritsu	ML2495A	6K00003338	AT	2010/09/10 * 12
MPSE-11	Power sensor	Anritsu	MA2411B	011737	AT	2010/09/10 * 12
MOS-14	Thermo-Hygrometer	Custom	CTH-201	-	AT	2010/05/19 * 12
MAT-24	Attenuator(10dB)(above 1GHz)	Agilent	8493C	71389	AT	2010/06/14 * 12

The expiration date of the calibration is the end of the expired month.

All equipment is calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

As for some calibrations performed after the tested dates, those test equipment have been controlled by means of an unbroken chains of calibrations.

**Test Item: CE: Conducted Emission
RE: Radiated Emission
AT: Antenna Terminal Conducted test**