



TEST REPORT
FOR TV INTERFACE DEVICES UNDER FCC PART 15

Date : September 28, 1998
Issued at : TOKYO, JAPAN

JQA APPLICATION NO. : 80-80460
APPLICANT : Sony Kisarazu Corporation
8-4, Shiomi, Kisarazu-shi, Chiba-ken, 292-0834 JAPAN
MANUFACTURER : Sony Corporation
7-35, Kitashinagawa 6-chome, Shinagawa-ku, Tokyo, 141-8680 JAPAN
TYPE OF EQUIPMENT : Video Cassette Recorder
REGULATION APPLIED : FCC Rules and Regulations Part 15 Subpart B (1989)
MEASUREMENT PROCEDURES USED : ANSI C63.4-1992
PLACE OF MEASUREMENT : JQA EMC Engineering Department (Anechoic Chamber No.3)

Test Facility : This test site and conducted measurement facility have been fully described in report dated May 14, 1996 submitted to FCC office, and accepted in a letter dated June 7, 1996 (31040/SIT).

The test results are only applicable to the test item as described below.
This report should not be reproduced, except in full, without the approval of the JQA EMC Engineering Department.

Takaharu Hada, Manager
Testing Division
EMC Engineering Department

Model No. : SLV-679HF

Serial No. : None

Table of Contents

| | Page |
|--|------|
| 1. Description of Equipment Under Test (EUT) | 3 |
| 2. Test Condition of EUT | 3 |
| 3. All Terminals of EUT | 4 |
| 4. Type of Connected Cables | 5 |
| 5. Testing Signal Sources | 5 |
| 6. Configuration of EUT | 5 |
| 7. Summary of Measurement Result | 6 |
| 8. §15.107(a) AC Powerline Conducted Emissions Measurement | 7 |
| 9. §15.109(a) Radiated Emissions Measurement | 17 |
| 10. §15.115(b)(1)(ii) Output Signal Level Measurement | 27 |
| 11. §15.115(b)(2)(ii) Spurious Conducted Level Measurement | 31 |
| 12. §15.115(c)(1)(ii) Antenna Transfer Switch Measurement | 45 |
| 13. Test Equipment Used | 48 |

Model No. : SLV-679HF
Serial No. : None

1. Description of EUT

- 1.1) Type of Device : TV Interface Device
- 1.2) Equipment Authorization : Certification
- 1.3) FCC ID : AK8SLV679HF
- 1.4) Brand Name : SONY
- 1.5) Model No. : SLV-679HF
- 1.6) Serial No. : None
- 1.7) Date of Manufacture : -
- 1.8) Highest Frequency Used : 67.25 MHz
- 1.9) Rating Power Supply : AC 120 V, 60 Hz
- 1.10) RF Output Channels : Channel No. 3 and Channel No. 4
- 1.11) RF Output Terminal : F-type Connector / 75 ohms (Unbalanced)

2. Test Condition of EUT

- 2.1) Operating Condition : Playing Mode / Recording Mode
- 2.2) Grounding : None
- 2.3) Warm-up Time : 5 minutes
- 2.4) Power Supply : AC 120 V, 60 Hz

Model No. : SLV-679HF
Serial No. : None

3. All Terminals of EUT

3.1) Input Terminals

| | <u>Description of Terminal</u> | <u>Type of Connector</u> | <u>Number of Terminals</u> |
|-------------|--------------------------------|--------------------------|----------------------------|
| Rear Side : | RF Terminal | F-type Connector | 1 |
| | Audio Terminal | Phono Jack | 2 |
| | Video Terminal | Phono Jack | 1 |

Front Side : None

Note: Each input terminals of EUT were terminated with the terminator of specified impedances.

3.2) Output Terminals

| | <u>Description of Terminal</u> | <u>Type of Connector</u> | <u>Number of Terminals</u> |
|-------------|--------------------------------|--------------------------|----------------------------|
| Rear Side : | RF Terminal | F-type Connector | 1 |
| | Audio Terminal | Phono Jack | 2 |
| | Video Terminal | Phono Jack | 1 |

Front Side : None

Note: Each output terminals of EUT were connected to the cable terminated with the specified impedances.

Model No. : SLV-679HF
Serial No. : None

4. Type of Connected Cables

| <u>Description of Cable</u> | <u>Shielded</u> | <u>Length</u> | <u>Number of Cables</u> | <u>Supplied</u> |
|-----------------------------|-----------------|---------------|-------------------------|-----------------|
| RF Cable | Yes | 1.5 m | 1 | Yes |
| Audio/video Cable | Yes | 1.5 m | 1 | Yes |

Notes: 1) Each input terminals of EUT were terminated with the terminator of specified impedances.
2) Each output terminals of EUT were connected to the cable terminated with the specified impedances.

5. Testing Signal Sources

- 5.1) Internal Modulation Sources : NTSC TV Signal Recording Tape
- 5.2) Video Modulation Sources : VITS (1 Vp-p and 5 Vp-p)
- 5.3) RF Modulation Sources : NTSC Colorbar (70 dB/uV at 193.25 MHz)

6. Configuration of EUT

- 6.1) S15.107(a) AC Powerline Conducted Emissions Measurement : Refer to Page 7.
- 6.2) S15.109(a) Radiated Emissions Measurement : Refer to Page 17.
- 6.3) S15.115(b)(1)(ii) Output Signal Level Measurement : Refer to Page 27.
- 6.4) S15.115(b)(2)(ii) Spurious Conducted Level Measurement : Refer to Page 31.
- 6.5) S15.115(c)(1)(ii) Antenna Transfer Switch Measurement : Refer to Page 45.

Model No. : SLV-679HF

Serial No. : None

7. Summary of Measurement Result

The EUT complied with the requirement of FCC Rules and Regulations Part 15 Subpart B (1989) as detailed from page 7 to page 48.

S15.107(a) AC Powerline Conducted Emissions Measurement : PASSED
Margins with respect to the Limit : 10.7 dB at 1.18 MHz

S15.109(a) Radiated Emissions Measurement : PASSED
Margins with respect to the Limit : 10.9 dB at 43.0 MHz

S15.115(b)(1)(ii) Output Signal Level Measurement : PASSED
Margins with respect to the Limit : 6.9 dB at 61.32 MHz

S15.115(b)(2)(ii) Spurious Conducted Level Measurement : PASSED
Margins with respect to the Limit : 17.8 dB at 47.9 MHz

S15.115(c)(1)(ii) Antenna Transfer Switch Measurement : PASSED
Margins with respect to the Limit : More than 10.7 dB

I HEREBY STATE THAT:

The measurements shown in the reports of this form were made in accordance with the procedures indicated and the energy emitted by this equipment was found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements and vouch for the qualification of all persons taking them.

Testing Supervisor : Toshiyuki Itoi
Toshiyuki Itoi, Deputy Manager
Testing Division
EMC Engineering Department

Model No. : SLV-679HF
Serial No. : None

Date : September 24, 1998
Temp. : 24 °C; Humi. : 42 %

8. S15.107(a) AC Powerline Conducted Emissions Measurement

Tested by : Toshiyuki Itoi

Toshiyuki Itoi, Deputy Manager
Testing Division
EMC Engineering Department


Model No. : SLV-679HF

Serial No. : None

§15.107(a) AC Powerline Conducted Emissions Measurement

Configuration of EUT

Side View

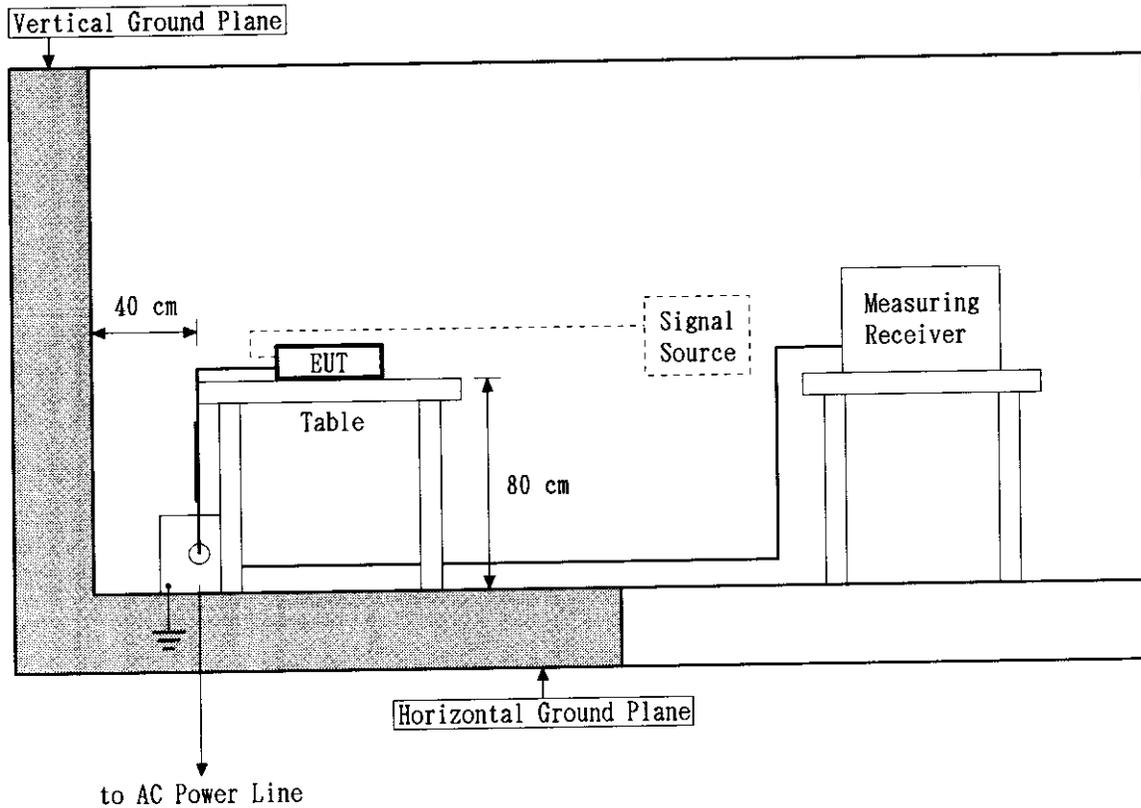

Note: The same configuration of cables and terminators which were connected to VCR was applied to all applicable measurements, shown as photograph in page 19 and 20.


Model No. : SLV-679HF

Serial No. : None

§15.107(a) AC Powerline Conducted Emissions Measurement

Configuration of EUT

Top View

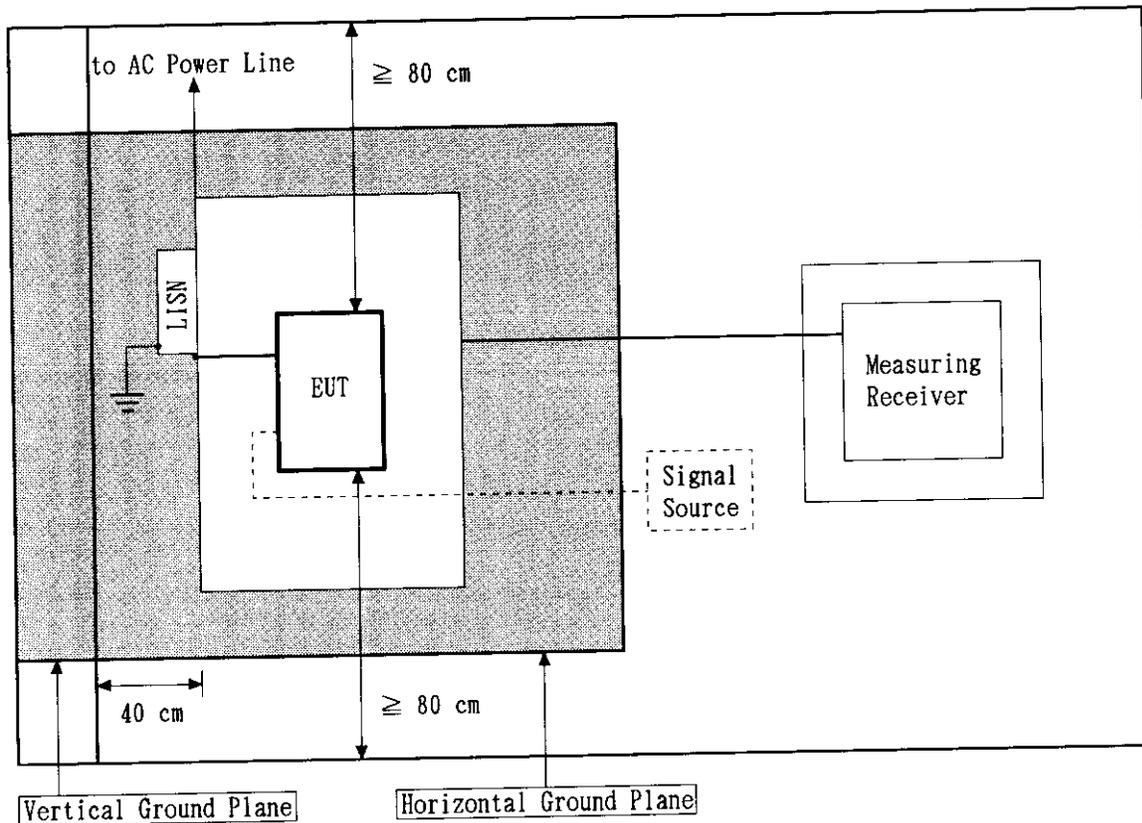


Note: The same configuration of cables and terminators which were connected to VCR was applied to all applicable measurements, shown as photograph in page 19 and 20.

Model No. : SLV-679HF
Serial No. : None

S15.107(a) AC Powerline Conducted Emissions Measurement

Configuration of EUT

Front View

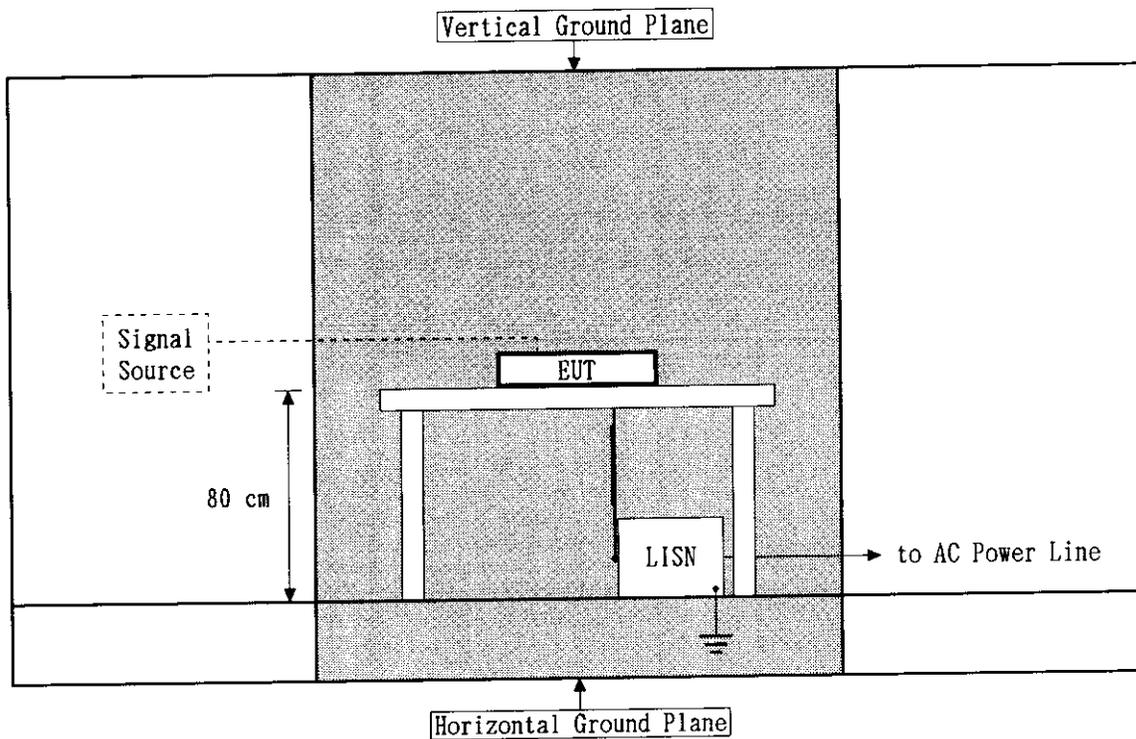

Note: The same configuration of cables and terminators which were connected to VCR was applied to all applicable measurements, shown as photograph in page 19 and 20.

Model No. : SLV-679HF
Serial No. : None

S15.107(a) AC Powerline Conducted Emissions Measurement

Testing Signal Sources : Internal Modulation Sources (NTSC TV Signal Recording Tape)
Operating Condition : Playing Mode

| Frequency (MHz) | Correction Factor (dB) | Meter Reading (dB/uV) | | Result (dB/uV) | | Limit (dB/uV) |
|--------------------|------------------------------|-----------------------------|--------|-------------------|--------|------------------|
| | | V-A | V-B | V-A | V-B | |
| 0.45 | 0.2 | 15.8 | 15.3 | 16.0 | 15.5 | 48.0 |
| 0.52 | 0.2 | 33.8 | 31.2 | 34.0 | 31.4 | 48.0 |
| 0.61 | 0.2 | 30.7 | 29.1 | 30.9 | 29.3 | 48.0 |
| 0.70 | 0.2 | 30.2 | 26.1 | 30.4 | 26.3 | 48.0 |
| 0.80 | 0.2 | 33.2 | 31.6 | 33.4 | 31.8 | 48.0 |
| 0.96 | 0.2 | 33.5 | 30.6 | 33.7 | 30.8 | 48.0 |
| 1.64 | 0.2 | 31.1 | 31.5 | 31.3 | 31.7 | 48.0 |
| 2.36 | 0.2 | 26.4 | 25.7 | 26.6 | 25.9 | 48.0 |
| 2.92 | 0.2 | 28.9 | 27.7 | 29.1 | 27.9 | 48.0 |
| 3.94 | 0.2 | 22.4 | 23.0 | 22.6 | 23.2 | 48.0 |
| 4.11 | 0.2 | 21.6 | 21.6 | 21.8 | 21.8 | 48.0 |
| 6.00 | 0.2 | 19.2 | 21.0 | 19.4 | 21.2 | 48.0 |
| 8.00 | 0.2 | 12.3 | 14.1 | 12.5 | 14.3 | 48.0 |
| 10.00 | 0.2 | 10.3 | 11.5 | 10.5 | 11.7 | 48.0 |
| 12.00 | 0.2 | < 10.0 | 10.9 | < 10.2 | 11.1 | 48.0 |
| 14.00 | 0.3 | < 10.0 | < 10.0 | < 10.3 | < 10.3 | 48.0 |
| 16.00 | 0.3 | < 10.0 | < 10.0 | < 10.3 | < 10.3 | 48.0 |
| 18.00 | 0.4 | < 10.0 | < 10.0 | < 10.4 | < 10.4 | 48.0 |
| 20.00 | 0.4 | < 10.0 | < 10.0 | < 10.4 | < 10.4 | 48.0 |
| 24.00 | 0.5 | < 10.0 | < 10.0 | < 10.5 | < 10.5 | 48.0 |
| 27.73 | 0.6 | 16.5 | 17.2 | 17.1 | 17.8 | 48.0 |
| 30.00 | 0.6 | < 10.0 | < 10.0 | < 10.6 | < 10.6 | 48.0 |

- Notes:
- 1) The spectrum was checked from 0.45 MHz to 30 MHz.
 - 2) V-A : One end & Grounded ; V-B : The other end & Grounded
 - 3) The symbol of '<' means 'or less'.
 - 4) Correction Factor includes a LISN factor and a cable (2.0 m) loss.
 - 5) A sample calculation was made at 0.52 MHz.
Correction Factor + Meter Reading = 0.2 + 33.8 = 34.0 dB/uV

Model No. : SLV-679HF

Serial No. : None

§15.107(a) AC Powerline Conducted Emissions Measurement

Testing Signal Sources : Video Modulation Sources (VITS : 1 Vp-p and 5 Vp-p)

Operating Condition : Recording Mode

| Frequency (MHz) | Correction Factor (dB) | Meter Reading (dB/uV) | | Result (dB/uV) | | Limit (dB/uV) |
|--------------------|------------------------------|-----------------------------|--------|-------------------|--------|------------------|
| | | V-A | V-B | V-A | V-B | |
| 0.45 | 0.2 | 15.6 | 15.4 | 15.8 | 15.6 | 48.0 |
| 0.51 | 0.2 | 36.1 | 33.7 | 36.3 | 33.9 | 48.0 |
| 0.59 | 0.2 | 32.8 | 31.4 | 33.0 | 31.6 | 48.0 |
| 0.66 | 0.2 | 34.3 | 31.6 | 34.5 | 31.8 | 48.0 |
| 0.76 | 0.2 | 36.3 | 35.6 | 36.5 | 35.8 | 48.0 |
| 0.92 | 0.2 | 36.7 | 34.9 | 36.9 | 35.1 | 48.0 |
| 1.18 | 0.2 | 37.1 | 37.0 | 37.3 | 37.2 | 48.0 |
| 1.60 | 0.2 | 36.0 | 35.3 | 36.2 | 35.5 | 48.0 |
| 2.00 | 0.2 | 31.2 | 29.9 | 31.4 | 30.1 | 48.0 |
| 2.70 | 0.2 | 32.8 | 31.7 | 33.0 | 31.9 | 48.0 |
| 4.20 | 0.2 | 25.2 | 25.6 | 25.4 | 25.8 | 48.0 |
| 6.00 | 0.2 | 24.3 | 24.7 | 24.5 | 24.9 | 48.0 |
| 8.00 | 0.2 | 18.5 | 19.3 | 18.7 | 19.5 | 48.0 |
| 10.00 | 0.2 | 12.4 | 13.3 | 12.6 | 13.5 | 48.0 |
| 12.00 | 0.2 | 11.5 | 12.7 | 11.7 | 12.9 | 48.0 |
| 14.32 | 0.3 | 24.5 | 24.5 | 24.8 | 24.8 | 48.0 |
| 16.00 | 0.3 | 11.2 | 12.2 | 11.5 | 12.5 | 48.0 |
| 18.01 | 0.4 | 10.8 | 10.4 | 11.2 | 10.8 | 48.0 |
| 20.00 | 0.4 | < 10.0 | < 10.0 | < 10.4 | < 10.4 | 48.0 |
| 24.00 | 0.5 | < 10.0 | < 10.0 | < 10.5 | < 10.5 | 48.0 |
| 27.73 | 0.6 | 16.1 | 14.1 | 16.7 | 14.7 | 48.0 |
| 28.64 | 0.6 | 30.4 | 28.4 | 31.0 | 29.0 | 48.0 |
| 30.00 | 0.6 | < 10.0 | < 10.0 | < 10.6 | < 10.6 | 48.0 |

- Notes:
- 1) The spectrum was checked from 0.45 MHz to 30 MHz.
 - 2) V-A : One end & Grounded ; V-B : The other end & Grounded
 - 3) The symbol of '<' means 'or less'.
 - 4) Correction Factor includes a LISN factor and a cable (2.0 m) loss.
 - 5) A sample calculation was made at 1.18 MHz.
 $Correction\ Factor + Meter\ Reading = 0.2 + 37.1 = 37.3\ dB/uV$

Model No. : SLV-679HF

Serial No. : None

S15.107(a) AC Powerline Conducted Emissions Measurement

Testing Signal Sources : RF Modulation Sources (NTSC Colorbar : 70 dB/uV at 193.25 MHz)

Operating Condition : Recording Mode

| Frequency (MHz) | Correction Factor (dB) | Meter Reading (dB/uV) | | Result (dB/uV) | | Limit (dB/uV) |
|--------------------|------------------------------|-----------------------------|--------|-------------------|--------|------------------|
| | | V-A | V-B | V-A | V-B | |
| 0.45 | 0.2 | 15.3 | 15.4 | 15.5 | 15.6 | 48.0 |
| 0.50 | 0.2 | 36.1 | 34.1 | 36.3 | 34.3 | 48.0 |
| 0.59 | 0.2 | 33.1 | 31.3 | 33.3 | 31.5 | 48.0 |
| 0.66 | 0.2 | 33.7 | 31.3 | 33.9 | 31.5 | 48.0 |
| 0.75 | 0.2 | 36.5 | 35.1 | 36.7 | 35.3 | 48.0 |
| 0.92 | 0.2 | 35.7 | 34.9 | 35.9 | 35.1 | 48.0 |
| 1.18 | 0.2 | 37.1 | 36.1 | 37.3 | 36.3 | 48.0 |
| 1.61 | 0.2 | 34.0 | 34.2 | 34.2 | 34.4 | 48.0 |
| 2.01 | 0.2 | 31.4 | 29.5 | 31.6 | 29.7 | 48.0 |
| 2.82 | 0.2 | 31.1 | 32.5 | 31.3 | 32.7 | 48.0 |
| 4.23 | 0.2 | 26.2 | 25.0 | 26.4 | 25.2 | 48.0 |
| 6.00 | 0.2 | 23.7 | 24.7 | 23.9 | 24.9 | 48.0 |
| 8.00 | 0.2 | 18.0 | 19.2 | 18.2 | 19.4 | 48.0 |
| 10.00 | 0.2 | 12.9 | 13.3 | 13.1 | 13.5 | 48.0 |
| 12.00 | 0.2 | 11.6 | 12.3 | 11.8 | 12.5 | 48.0 |
| 14.32 | 0.3 | 15.0 | 16.1 | 15.3 | 16.4 | 48.0 |
| 16.00 | 0.3 | 10.7 | 11.9 | 11.0 | 12.2 | 48.0 |
| 18.01 | 0.4 | 13.6 | 13.1 | 14.0 | 13.5 | 48.0 |
| 20.00 | 0.4 | < 10.0 | < 10.0 | < 10.4 | < 10.4 | 48.0 |
| 24.00 | 0.5 | < 10.0 | < 10.0 | < 10.5 | < 10.5 | 48.0 |
| 27.73 | 0.6 | 18.2 | 18.2 | 18.8 | 18.8 | 48.0 |
| 28.64 | 0.6 | 11.8 | < 10.0 | 12.4 | < 10.6 | 48.0 |
| 30.00 | 0.6 | < 10.0 | < 10.0 | < 10.6 | < 10.6 | 48.0 |

- Notes:
- 1) The spectrum was checked from 0.45 MHz to 30 MHz.
 - 2) V-A : One end & Grounded ; V-B : The other end & Grounded
 - 3) The symbol of '<' means 'or less'.
 - 4) Correction Factor includes a LISN factor and a cable (2.0 m) loss.
 - 5) A sample calculation was made at 1.18 MHz.
Correction Factor + Meter Reading = 0.2 + 37.1 = 37.3 dB/uV

Model No. : SLV-679HF
Serial No. : None

Date : September 22, 1998
Temp. : 24 °C; Humi. : 42 %

9. S15.109(a) Radiated Emissions Measurement


Tested by : Toshiyuki Itoi
Toshiyuki Itoi, Deputy Manager
Testing Division
EMC Engineering Department

Model No. : SLV-679HF


Serial No. : None

Configuration of Testing Signal Sources


Testing Signal Sources : Internal Modulation Sources (NTSC TV Signal Recording Tape)

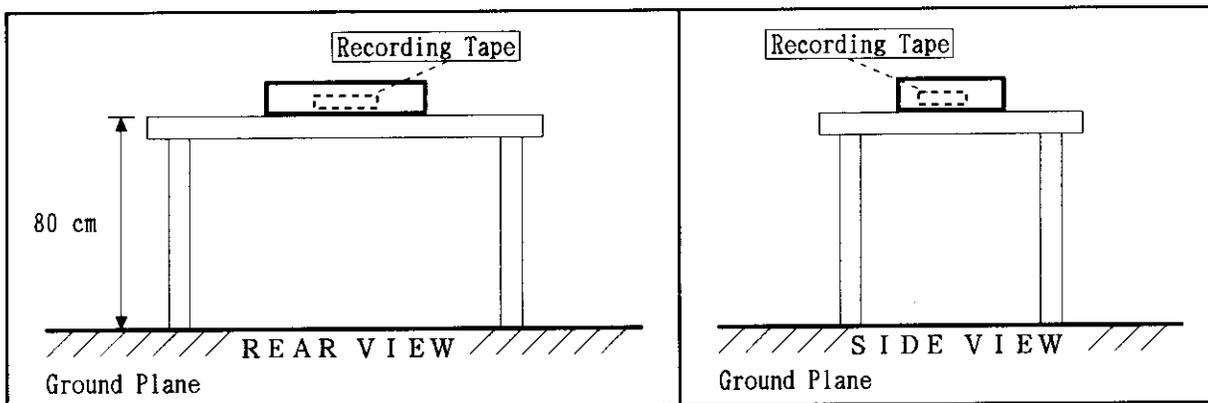

Testing Signal Sources : Video Modulation Sources (VITS : 1 Vp-p and 5 Vp-p)

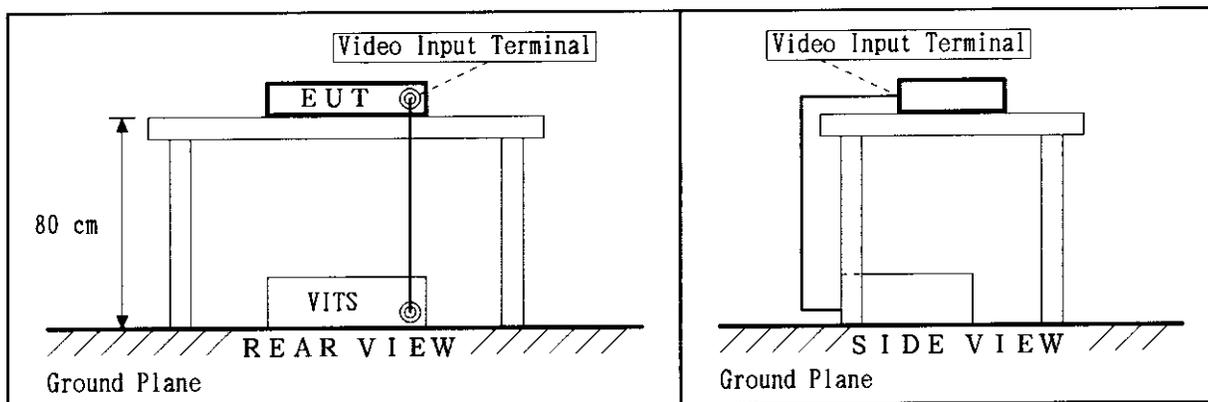

Testing Signal Sources : RF Modulation Sources (NTSC Colorbar : 70 dB/uV at 193.25 MHz)

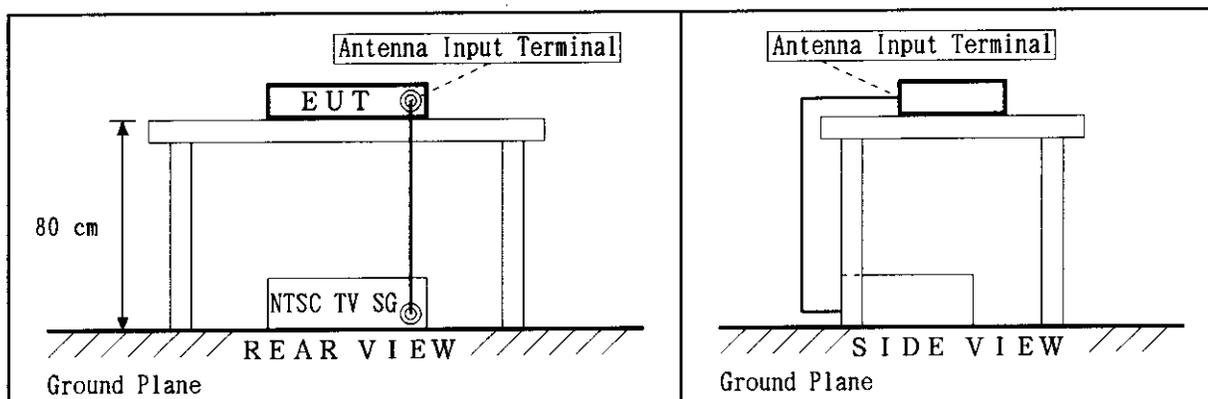

Model No. : SLV-679HF

Serial No. : None

S15.109(a) Radiated Emissions Measurement

Testing Signal Sources : Internal Modulation Sources (NTSC TV Signal Recording Tape)

Operating Condition : Playing Mode

| Frequency (MHz) | Correction Factor (dB) | Meter Reading (dB/uV) | | Result (dB/uV/m) | | Limit (dB/uV/m) |
|--------------------|------------------------------|-----------------------------|----------|---------------------|----------|--------------------|
| | | Horizontal | Vertical | Horizontal | Vertical | |
| 30.6 | -0.3 | < 0.0 | 7.1 | < -0.3 | 6.8 | 40.0 |
| 43.0 | 2.8 | 3.3 | 4.2 | 6.1 | 7.0 | 40.0 |
| 57.3 | 5.5 | 6.0 | 4.3 | 11.5 | 9.8 | 40.0 |
| 67.6 | 7.1 | < 0.0 | < 0.0 | < 7.1 | < 7.1 | 40.0 |
| 71.6 | 7.6 | 7.7 | 6.9 | 15.3 | 14.5 | 40.0 |
| 86.0 | 9.4 | 11.2 | 10.7 | 20.6 | 20.1 | 40.0 |
| 100.2 | 10.9 | 2.6 | 2.5 | 13.5 | 13.4 | 43.5 |
| 114.6 | 12.3 | 6.2 | 6.6 | 18.5 | 18.9 | 43.5 |
| 138.6 | 14.2 | 7.6 | 2.3 | 21.8 | 16.5 | 43.5 |
| 165.9 | 16.1 | 1.6 | 1.0 | 17.7 | 17.1 | 43.5 |
| 194.1 | 17.7 | 3.8 | 5.5 | 21.5 | 23.2 | 43.5 |
| 221.8 | 19.2 | 10.9 | 6.2 | 30.1 | 25.4 | 46.0 |
| 229.1 | 19.5 | 10.7 | 4.5 | 30.2 | 24.0 | 46.0 |
| 249.6 | 20.4 | 0.8 | < 0.0 | 21.2 | < 20.4 | 46.0 |
| 277.2 | 21.6 | 5.1 | 1.0 | 26.7 | 22.6 | 46.0 |
| 305.3 | 22.6 | 2.5 | < 0.0 | 25.1 | < 22.6 | 46.0 |
| 332.7 | 23.6 | < 0.0 | < 0.0 | < 23.6 | < 23.6 | 46.0 |
| 400.0 | 25.6 | < 0.0 | < 0.0 | < 25.6 | < 25.6 | 46.0 |
| 500.0 | 28.1 | < 0.0 | < 0.0 | < 28.1 | < 28.1 | 46.0 |
| 600.0 | 30.5 | < 0.0 | < 0.0 | < 30.5 | < 30.5 | 46.0 |
| 700.0 | 32.6 | < 0.0 | < 0.0 | < 32.6 | < 32.6 | 46.0 |
| 800.0 | 34.4 | < 0.0 | < 0.0 | < 34.4 | < 34.4 | 46.0 |
| 1000.0 | 37.4 | < 0.0 | < 0.0 | < 37.4 | < 37.4 | 54.0 |

- Notes:
- 1) Measured Distance : 3.0 m
 - 2) The spectrum was checked from 30 MHz to 1000 MHz.
 - 3) The symbol of '<' means 'or less'.
 - 4) Correction Factor includes an antenna factor and a cable (14.0 m) loss.
 - 5) A sample calculation was made at 229.1 MHz.
Correction Factor + Meter Reading = 19.5 + 10.7 = 30.2 dB/uV/m

Model No. : SLV-679HF

Serial No. : None

S15.109(a) Radiated Emissions Measurement

Testing Signal Sources : Video Modulation Sources (VITS : 1 Vp-p and 5 Vp-p)

Operating Condition : Recording Mode

| Frequency (MHz) | Correction Factor (dB) | Meter Reading (dB/uV) | | Result (dB/uV/m) | | Limit (dB/uV/m) |
|--------------------|------------------------------|-----------------------------|----------|---------------------|----------|--------------------|
| | | Horizontal | Vertical | Horizontal | Vertical | |
| 35.8 | 1.1 | 6.7 | 22.5 | 7.8 | 23.6 | 40.0 |
| 43.0 | 2.8 | 14.0 | 26.3 | 16.8 | 29.1 | 40.0 |
| 55.5 | 5.2 | 11.1 | 16.9 | 16.3 | 22.1 | 40.0 |
| 67.6 | 7.1 | < 0.0 | < 0.0 | < 7.1 | < 7.1 | 40.0 |
| 71.6 | 7.6 | 6.6 | 6.8 | 14.2 | 14.4 | 40.0 |
| 85.9 | 9.4 | 9.8 | 10.5 | 19.2 | 19.9 | 40.0 |
| 100.2 | 10.9 | 4.7 | 5.2 | 15.6 | 16.1 | 43.5 |
| 114.5 | 12.3 | 7.2 | 9.4 | 19.5 | 21.7 | 43.5 |
| 138.6 | 14.2 | 9.3 | 2.4 | 23.5 | 16.6 | 43.5 |
| 165.9 | 16.1 | 2.6 | 1.9 | 18.7 | 18.0 | 43.5 |
| 194.1 | 17.7 | 7.5 | 7.5 | 25.2 | 25.2 | 43.5 |
| 221.8 | 19.2 | 8.9 | 8.7 | 28.1 | 27.9 | 46.0 |
| 229.1 | 19.5 | 8.0 | 5.5 | 27.5 | 25.0 | 46.0 |
| 249.6 | 20.4 | 0.2 | 1.7 | 20.6 | 22.1 | 46.0 |
| 277.3 | 21.6 | 4.9 | 1.6 | 26.5 | 23.2 | 46.0 |
| 305.3 | 22.6 | < 0.0 | < 0.0 | < 22.6 | < 22.6 | 46.0 |
| 332.7 | 23.6 | < 0.0 | < 0.0 | < 23.6 | < 23.6 | 46.0 |
| 400.0 | 25.6 | < 0.0 | < 0.0 | < 25.6 | < 25.6 | 46.0 |
| 500.0 | 28.1 | < 0.0 | < 0.0 | < 28.1 | < 28.1 | 46.0 |
| 600.0 | 30.5 | < 0.0 | < 0.0 | < 30.5 | < 30.5 | 46.0 |
| 700.0 | 32.6 | < 0.0 | < 0.0 | < 32.6 | < 32.6 | 46.0 |
| 800.0 | 34.4 | < 0.0 | < 0.0 | < 34.4 | < 34.4 | 46.0 |
| 1000.0 | 37.4 | < 0.0 | < 0.0 | < 37.4 | < 37.4 | 54.0 |

- Notes:
- 1) Measured Distance : 3.0 m
 - 2) The spectrum was checked from 30 MHz to 1000 MHz.
 - 3) The symbol of '<' means 'or less'.
 - 4) Correction Factor includes an antenna factor and a cable (14.0 m) loss.
 - 5) A sample calculation was made at 43.0 MHz.
 Correction Factor + Meter Reading = 2.8 + 26.3 = 29.1 dB/uV/m

Model No. : SLV-679HF

Serial No. : None

S15.109(a) Radiated Emissions Measurement

Testing Signal Sources : RF Modulation Sources (NTSC Colorbar : 70 dB/uV at 193.25 MHz)

Operating Condition : Recording Mode

| Frequency (MHz) | Correction Factor (dB) | Meter Reading (dB/uV) | | Result (dB/uV/m) | | Limit (dB/uV/m) |
|--------------------|------------------------------|-----------------------------|----------|---------------------|----------|--------------------|
| | | Horizontal | Vertical | Horizontal | Vertical | |
| 31.5 | -0.1 | < 0.0 | 14.2 | < -0.1 | 14.1 | 40.0 |
| 43.0 | 2.8 | 8.0 | 16.5 | 10.8 | 19.3 | 40.0 |
| 57.3 | 5.5 | 5.6 | 4.9 | 11.1 | 10.4 | 40.0 |
| 68.0 | 7.1 | < 0.0 | 4.1 | < 7.1 | 11.2 | 40.0 |
| 71.6 | 7.6 | 8.7 | 8.8 | 16.3 | 16.4 | 40.0 |
| 85.9 | 9.4 | 8.7 | 6.5 | 18.1 | 15.9 | 40.0 |
| 100.2 | 10.9 | 3.9 | 0.7 | 14.8 | 11.6 | 43.5 |
| 114.6 | 12.3 | 11.3 | 10.0 | 23.6 | 22.3 | 43.5 |
| 138.6 | 14.2 | 6.2 | 1.6 | 20.4 | 15.8 | 43.5 |
| 166.0 | 16.1 | < 0.0 | 3.0 | < 16.1 | 19.1 | 43.5 |
| 193.9 | 17.7 | 7.4 | 7.1 | 25.1 | 24.8 | 43.5 |
| 221.7 | 19.1 | 10.2 | 8.4 | 29.3 | 27.5 | 46.0 |
| 229.1 | 19.5 | 10.8 | 6.4 | 30.3 | 25.9 | 46.0 |
| 249.4 | 20.4 | 1.2 | 2.6 | 21.6 | 23.0 | 46.0 |
| 277.1 | 21.6 | 3.5 | < 0.0 | 25.1 | < 21.6 | 46.0 |
| 304.9 | 22.6 | 2.9 | < 0.0 | 25.5 | < 22.6 | 46.0 |
| 322.7 | 23.2 | < 0.0 | < 0.0 | < 23.2 | < 23.2 | 46.0 |
| 400.0 | 25.6 | < 0.0 | < 0.0 | < 25.6 | < 25.6 | 46.0 |
| 500.0 | 28.1 | < 0.0 | < 0.0 | < 28.1 | < 28.1 | 46.0 |
| 600.0 | 30.5 | < 0.0 | < 0.0 | < 30.5 | < 30.5 | 46.0 |
| 700.0 | 32.6 | < 0.0 | < 0.0 | < 32.6 | < 32.6 | 46.0 |
| 800.0 | 34.4 | < 0.0 | < 0.0 | < 34.4 | < 34.4 | 46.0 |
| 1000.0 | 37.4 | < 0.0 | < 0.0 | < 37.4 | < 37.4 | 54.0 |

- Notes:
- 1) Measured Distance : 3.0 m
 - 2) The spectrum was checked from 30 MHz to 1000 MHz.
 - 3) The symbol of '<' means 'or less'.
 - 4) Correction Factor includes an antenna factor and a cable (14.0 m) loss.
 - 5) A sample calculation was made at 229.1 MHz.
 Correction Factor + Meter Reading = 19.5 + 10.8 = 30.3 dB/uV/m

Model No. : SLV-679HF
Serial No. : None

Date : September 22, 1998
Temp. : 24 °C; Humi. : 42 %

10. §15.115(b)(1)(ii) Output Signal Level Measurement


Tested by : Toshiyuki Itoi

Toshiyuki Itoi, Deputy Manager
Testing Division
EMC Engineering Department

Model No. : SLV-679HF
Serial No. : None

§15.115(b)(1)(ii) Output Signal Level Measurement


Block Diagram

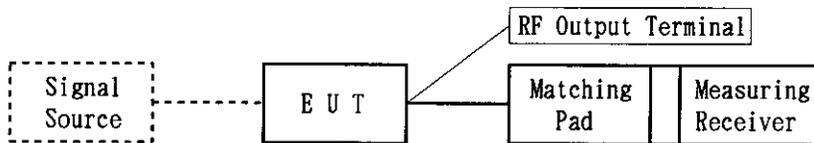


Note: Antenna input terminal of EUT was terminated with the terminator of specified impedances.

Configuration of EUT

Side View

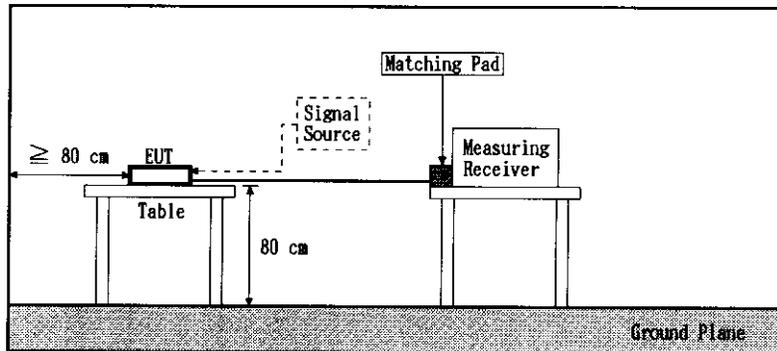

Top View

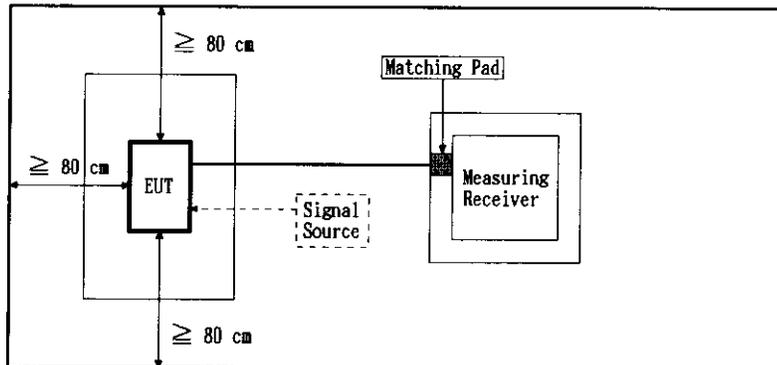

Note: The same configuration of cables and terminators which were connected to VCR was applied to all applicable measurements, shown as photograph in page 19 and 20.

Model No. : SLV-679HF
Serial No. : None

S15.115(b)(1)(ii) Output Signal Level Measurement (Visual)

Testing Signal Sources : Internal Modulation Sources (NTSC TV Signal Recording Tape)
Operating Condition : Playing Mode

| RF Output Channel | Frequency (MHz) | Matching Pad Loss (dB) | Meter Reading (dB/uV) | Result (dB/uV) | Limit (dB/uV) |
|-------------------|-----------------|------------------------|-----------------------|----------------|---------------|
| 3 | 61.32 | 7.8 | 54.8 | 62.6 | 69.5 |
| 4 | 67.34 | 7.8 | 53.9 | 61.7 | 69.5 |

Testing Signal Sources : Video Modulation Sources (VITS : 1 Vp-p and 5 Vp-p)
Operating Condition : Recording Mode

| RF Output Channel | Frequency (MHz) | Matching Pad Loss (dB) | Meter Reading (dB/uV) | Result (dB/uV) | Limit (dB/uV) |
|-------------------|-----------------|------------------------|-----------------------|----------------|---------------|
| 3 | 61.32 | 7.8 | 54.8 | 62.6 | 69.5 |
| 4 | 67.33 | 7.8 | 53.9 | 61.7 | 69.5 |

Testing Signal Sources : RF Modulation Sources (NTSC Colorbar : 70 dB/uV at 193.25 MHz)
Operating Condition : Recording Mode

| RF Output Channel | Frequency (MHz) | Matching Pad Loss (dB) | Meter Reading (dB/uV) | Result (dB/uV) | Limit (dB/uV) |
|-------------------|-----------------|------------------------|-----------------------|----------------|---------------|
| 3 | 61.32 | 7.8 | 54.8 | 62.6 | 69.5 |
| 4 | 67.32 | 7.8 | 53.9 | 61.7 | 69.5 |

- Notes: 1) Spectrum Analyzer ; SPAN : 10 MHz, RES BW : 100 kHz, VBW : 300 kHz, SWP : 20 msec
2) Impedance at the RF output terminal : 75 ohms (Unbalanced)
3) A sample calculation was made at 61.32 MHz.
Matching Pad Loss + Meter Reading = 7.8 + 54.8 = 62.6 dB/uV

Model No. : SLV-679HF
Serial No. : None

S15.115(b)(1)(ii) Output Signal Level Measurement (Aural)

Testing Signal Sources : Internal Modulation Sources (NTSC TV Signal Recording Tape)
Operating Condition : Playing Mode

| RF Output Channel | Frequency (MHz) | Matching Pad Loss (dB) | Meter Reading (dB/uV) | Result (dB/uV) | Limit (dB/uV) |
|-------------------|-----------------|------------------------|-----------------------|----------------|---------------|
| 3 | 65.78 | 7.8 | 37.4 | 45.2 | 56.5 |
| 4 | 71.78 | 7.8 | 36.5 | 44.3 | 56.5 |

Testing Signal Sources : Video Modulation Sources (VITS : 1 Vp-p and 5 Vp-p)
Operating Condition : Recording Mode

| RF Output Channel | Frequency (MHz) | Matching Pad Loss (dB) | Meter Reading (dB/uV) | Result (dB/uV) | Limit (dB/uV) |
|-------------------|-----------------|------------------------|-----------------------|----------------|---------------|
| 3 | 65.78 | 7.8 | 37.5 | 45.3 | 56.5 |
| 4 | 71.79 | 7.8 | 36.4 | 44.2 | 56.5 |

Testing Signal Sources : RF Modulation Sources (NTSC Colorbar : 70 dB/uV at 193.25 MHz)
Operating Condition : Recording Mode

| RF Output Channel | Frequency (MHz) | Matching Pad Loss (dB) | Meter Reading (dB/uV) | Result (dB/uV) | Limit (dB/uV) |
|-------------------|-----------------|------------------------|-----------------------|----------------|---------------|
| 3 | 65.79 | 7.8 | 37.4 | 45.2 | 56.5 |
| 4 | 71.81 | 7.8 | 36.5 | 44.3 | 56.5 |

- Notes: 1) Spectrum Analyzer ; SPAN : 10 MHz, RES BW : 100 kHz, VBW : 300 kHz, SWP : 20 msec
2) Impedance at the RF output terminal : 75 ohms (Unbalanced)
3) A sample calculation was made at 65.78 MHz.
Matching Pad Loss + Meter Reading = 7.8 + 37.5 = 45.3 dB/uV

Model No. : SLV-679HF
Serial No. : None

Date : September 22, 1998
Temp. : 24 °C; Humi. : 42 %


11. §15.115(b)(2)(i) Spurious Conducted Level Measurement

Tested by : Toshiyuki Itoi
Toshiyuki Itoi, Deputy Manager
Testing Division
EMC Engineering Department

Model No. : SLV-679HF
Serial No. : None

S15.115(b)(2)(ii) Spurious Conducted Level Measurement


Block Diagram

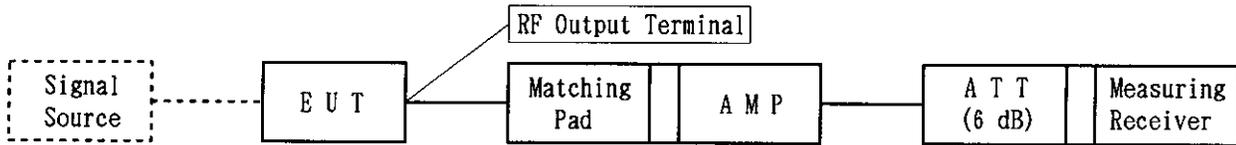


Note: Antenna input terminal of EUT was terminated with the terminator of specified impedances.

Configuration of EUT

Side View

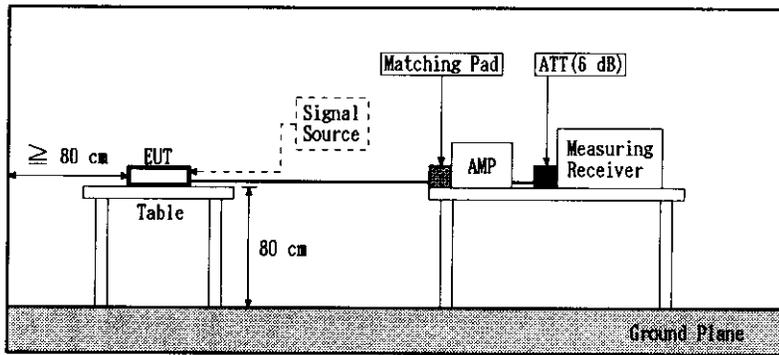

Top View

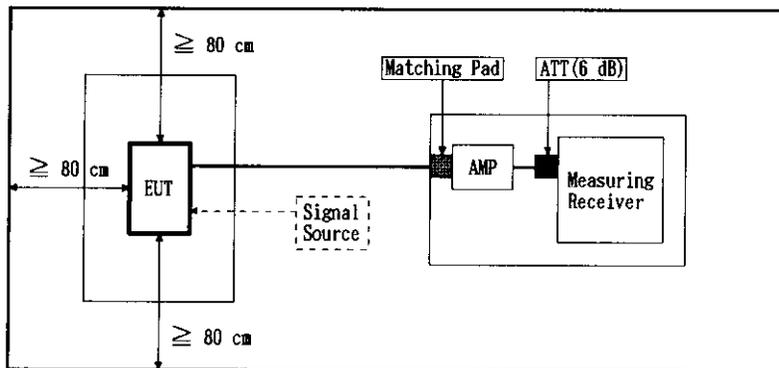

Note: The same configuration of cables and terminators which were connected to VCR was applied to all applicable measurements, shown as photograph in page 19 and 20.

Model No. : SLV-679HF
Serial No. : None

S15.115(b)(2)(ii) Spurious Conducted Level Measurement

Testing Signal Sources : Internal Modulation Sources (NTSC TV Signal Recording Tape)
Operating Condition : Playing Mode

RF Output Channel : No.3

| Frequency (MHz) | Correction Factor (dB) | Meter Reading (dB/uV) | Result (dB/uV) | Limit (dB/uV) |
|--------------------|------------------------------|-----------------------------|-------------------|------------------|
| 30.0 | -13.2 | < 30.0 | < 16.8 | 39.6 |
| 38.9 | -13.2 | < 30.0 | < 16.8 | 39.6 |
| 47.8 | -13.2 | 34.7 | 21.5 | 39.6 |
| 74.8 | -13.2 | < 30.0 | < 16.8 | 39.6 |
| 80.0 | -13.2 | < 30.0 | < 16.8 | 39.6 |
| 100.0 | -13.2 | < 30.0 | < 16.8 | 39.6 |
| 122.5 | -13.1 | < 30.0 | < 16.9 | 39.6 |
| 183.9 | -13.0 | < 30.0 | < 17.0 | 39.6 |
| 245.0 | -12.9 | < 30.0 | < 17.1 | 39.6 |
| 306.3 | -12.9 | < 30.0 | < 17.1 | 39.6 |
| 367.5 | -12.8 | < 30.0 | < 17.2 | 39.6 |
| 428.8 | -12.8 | < 30.0 | < 17.2 | 39.6 |
| 490.0 | -12.8 | < 30.0 | < 17.2 | 39.6 |
| 551.3 | -12.7 | < 30.0 | < 17.3 | 39.6 |
| 612.5 | -12.6 | < 30.0 | < 17.4 | 39.6 |
| 673.8 | -12.4 | < 30.0 | < 17.6 | 39.6 |
| 735.0 | -12.2 | < 30.0 | < 17.8 | 39.6 |
| 796.3 | -12.0 | < 30.0 | < 18.0 | 39.6 |
| 857.5 | -12.1 | < 30.0 | < 17.9 | 39.6 |
| 918.8 | -12.4 | < 30.0 | < 17.6 | 39.6 |
| 980.0 | -12.6 | < 30.0 | < 17.4 | 39.6 |

- Notes:
- 1) The spectrum was checked from 30 MHz to 1000 MHz.
 - 2) Spectrum Analyzer ; SPAN : 10 MHz, RES BW : 100 kHz, VBW : 300 kHz, SWP : 20 msec
 - 3) Impedance at the RF output terminal : 75 ohms (Unbalanced)
 - 4) The symbol of '<' means 'or less'.
 - 5) Correction Factor includes a gain of preamplifier, a matching pad loss and an attenuation pad loss.
 - 6) A sample calculation was made at 47.8 MHz.
Correction Factor + Meter Reading = -13.2 + 34.7 = 21.5 dB/uV

Model No. : SLV-679HF
Serial No. : None

S15.115(b)(2)(ii) Spurious Conducted Level Measurement

Testing Signal Sources : Internal Modulation Sources (NTSC TV Signal Recording Tape)
Operating Condition : Playing Mode

RF Output Channel : No.4

| Frequency (MHz) | Correction Factor (dB) | Meter Reading (dB/uV) | Result (dB/uV) | Limit (dB/uV) |
|--------------------|------------------------------|-----------------------------|-------------------|------------------|
| 30.0 | -13.2 | < 30.0 | < 16.8 | 39.6 |
| 40.0 | -13.2 | < 30.0 | < 16.8 | 39.6 |
| 44.8 | -13.2 | < 30.0 | < 16.8 | 39.6 |
| 53.8 | -13.2 | 34.4 | 21.2 | 39.6 |
| 80.8 | -13.2 | 31.8 | 18.6 | 39.6 |
| 100.0 | -13.2 | < 30.0 | < 16.8 | 39.6 |
| 120.0 | -13.1 | < 30.0 | < 16.9 | 39.6 |
| 134.6 | -13.1 | < 30.0 | < 16.9 | 39.6 |
| 201.9 | -13.0 | < 30.0 | < 17.0 | 39.6 |
| 269.0 | -12.9 | < 30.0 | < 17.1 | 39.6 |
| 336.3 | -12.9 | < 30.0 | < 17.1 | 39.6 |
| 403.5 | -12.8 | < 30.0 | < 17.2 | 39.6 |
| 470.8 | -12.8 | < 30.0 | < 17.2 | 39.6 |
| 538.0 | -12.7 | < 30.0 | < 17.3 | 39.6 |
| 605.3 | -12.7 | < 30.0 | < 17.3 | 39.6 |
| 672.5 | -12.4 | < 30.0 | < 17.6 | 39.6 |
| 739.8 | -12.2 | < 30.0 | < 17.8 | 39.6 |
| 807.0 | -11.9 | < 30.0 | < 18.1 | 39.6 |
| 974.3 | -12.6 | < 30.0 | < 17.4 | 39.6 |
| 941.5 | -12.5 | < 30.0 | < 17.5 | 39.6 |

- Notes:
- 1) The spectrum was checked from 30 MHz to 1000 MHz.
 - 2) Spectrum Analyzer ; SPAN : 10 MHz, RES BW : 100 kHz, VBW : 300 kHz, SWP : 20 msec
 - 3) Impedance at the RF output terminal : 75 ohms (Unbalanced)
 - 4) The symbol of '<' means 'or less'.
 - 5) Correction Factor includes a gain of preamplifier, a matching pad loss and an attenuation pad loss.
 - 6) A sample calculation was made at 53.8 MHz.
Correction Factor + Meter Reading = -13.2 + 34.4 = 21.2 dB/uV

Model No. : SLV-679HF
Serial No. : None

§15.115(b)(2)(ii) Spurious Conducted Level Measurement

Testing Signal Sources : Video Modulation Sources (VITS : 1 Vp-p and 5 Vp-p)
Operating Condition : Recording Mode

RF Output Channel : No.3

| Frequency (MHz) | Correction Factor (dB) | Meter Reading (dB/uV) | Result (dB/uV) | Limit (dB/uV) |
|--------------------|------------------------------|-----------------------------|-------------------|------------------|
| 30.0 | -13.2 | < 30.0 | < 16.8 | 39.6 |
| 38.9 | -13.2 | < 30.0 | < 16.8 | 39.6 |
| 47.8 | -13.2 | 34.5 | 21.3 | 39.6 |
| 74.8 | -13.2 | 32.9 | 19.7 | 39.6 |
| 80.0 | -13.2 | < 30.0 | < 16.8 | 39.6 |
| 100.0 | -13.2 | < 30.0 | < 16.8 | 39.6 |
| 122.6 | -13.1 | < 30.0 | < 16.9 | 39.6 |
| 183.8 | -13.0 | < 30.0 | < 17.0 | 39.6 |
| 245.0 | -12.9 | < 30.0 | < 17.1 | 39.6 |
| 306.3 | -12.9 | < 30.0 | < 17.1 | 39.6 |
| 367.5 | -12.8 | < 30.0 | < 17.2 | 39.6 |
| 428.8 | -12.8 | < 30.0 | < 17.2 | 39.6 |
| 490.0 | -12.8 | < 30.0 | < 17.2 | 39.6 |
| 551.3 | -12.7 | < 30.0 | < 17.3 | 39.6 |
| 612.5 | -12.6 | < 30.0 | < 17.4 | 39.6 |
| 673.8 | -12.4 | < 30.0 | < 17.6 | 39.6 |
| 735.0 | -12.2 | < 30.0 | < 17.8 | 39.6 |
| 796.3 | -12.0 | < 30.0 | < 18.0 | 39.6 |
| 857.5 | -12.1 | < 30.0 | < 17.9 | 39.6 |
| 918.8 | -12.4 | < 30.0 | < 17.6 | 39.6 |
| 980.0 | -12.6 | < 30.0 | < 17.4 | 39.6 |

- Notes:
- 1) The spectrum was checked from 30 MHz to 1000 MHz.
 - 2) Spectrum Analyzer ; SPAN : 10 MHz, RES BW : 100 kHz, VBW : 300 kHz, SWP : 20 msec
 - 3) Impedance at the RF output terminal : 75 ohms (Unbalanced)
 - 4) The symbol of '<' means 'or less'.
 - 5) Correction Factor includes a gain of preamplifier, a matching pad loss and an attenuation pad loss.
 - 6) A sample calculation was made at 47.8 MHz.
Correction Factor + Meter Reading = -13.2 + 34.5 = 21.3 dB/uV

Model No. : SLV-679HF
Serial No. : None

§15.115(b)(2)(ii) Spurious Conducted Level Measurement

Testing Signal Sources : Video Modulation Sources (VITS : 1 Vp-p and 5 Vp-p)
Operating Condition : Recording Mode

RF Output Channel : No. 4

| Frequency (MHz) | Correction Factor (dB) | Meter Reading (dB/uV) | Result (dB/uV) | Limit (dB/uV) |
|--------------------|------------------------------|-----------------------------|-------------------|------------------|
| 30.0 | -13.2 | < 30.0 | < 16.8 | 39.6 |
| 40.0 | -13.2 | < 30.0 | < 16.8 | 39.6 |
| 44.8 | -13.2 | < 30.0 | < 16.8 | 39.6 |
| 53.8 | -13.2 | 34.0 | 20.8 | 39.6 |
| 80.8 | -13.2 | 32.1 | 18.9 | 39.6 |
| 100.0 | -13.2 | < 30.0 | < 16.8 | 39.6 |
| 120.0 | -13.1 | < 30.0 | < 16.9 | 39.6 |
| 134.6 | -13.1 | < 30.0 | < 16.9 | 39.6 |
| 201.9 | -13.0 | < 30.0 | < 17.0 | 39.6 |
| 269.0 | -12.9 | < 30.0 | < 17.1 | 39.6 |
| 336.3 | -12.9 | < 30.0 | < 17.1 | 39.6 |
| 403.5 | -12.8 | < 30.0 | < 17.2 | 39.6 |
| 470.8 | -12.8 | < 30.0 | < 17.2 | 39.6 |
| 538.0 | -12.7 | < 30.0 | < 17.3 | 39.6 |
| 605.3 | -12.7 | < 30.0 | < 17.3 | 39.6 |
| 672.5 | -12.4 | < 30.0 | < 17.6 | 39.6 |
| 739.8 | -12.2 | < 30.0 | < 17.8 | 39.6 |
| 807.0 | -11.9 | < 30.0 | < 18.1 | 39.6 |
| 874.3 | -12.2 | < 30.0 | < 17.8 | 39.6 |
| 941.5 | -12.5 | < 30.0 | < 17.5 | 39.6 |

- Notes:
- 1) The spectrum was checked from 30 MHz to 1000 MHz.
 - 2) Spectrum Analyzer ; SPAN : 10 MHz, RES BW : 100 kHz, VBW : 300 kHz, SWP : 20 msec
 - 3) Impedance at the RF output terminal : 75 ohms (Unbalanced)
 - 4) The symbol of '<' means 'or less'.
 - 5) Correction Factor includes a gain of preamplifier, a matching pad loss and an attenuation pad loss.
 - 6) A sample calculation was made at 53.8 MHz.
Correction Factor + Meter Reading = -13.2 + 34.0 = 20.8 dB/uV

Model No. : SLV-679HF
Serial No. : None

§15.115(b)(2)(ii) Spurious Conducted Level Measurement

Testing Signal Sources : RF Modulation Sources (NTSC Colorbar : 70 dB/uV at 193.25 MHz)
Operating Condition : Recording Mode

RF Output Channel : No. 3

| Frequency (MHz) | Correction Factor (dB) | Meter Reading (dB/uV) | Result (dB/uV) | Limit (dB/uV) |
|--------------------|------------------------------|-----------------------------|-------------------|------------------|
| 30.0 | -13.2 | < 30.0 | < 16.8 | 39.6 |
| 38.8 | -13.2 | < 30.0 | < 16.8 | 39.6 |
| 47.9 | -13.2 | 35.0 | 21.8 | 39.6 |
| 74.8 | -13.2 | 33.0 | 19.8 | 39.6 |
| 80.0 | -13.2 | < 30.0 | < 16.8 | 39.6 |
| 100.0 | -13.2 | < 30.0 | < 16.8 | 39.6 |
| 122.6 | -13.1 | < 30.0 | < 16.9 | 39.6 |
| 183.8 | -13.0 | < 30.0 | < 17.0 | 39.6 |
| 245.0 | -12.9 | < 30.0 | < 17.1 | 39.6 |
| 306.3 | -12.9 | < 30.0 | < 17.1 | 39.6 |
| 367.5 | -12.8 | < 30.0 | < 17.2 | 39.6 |
| 428.8 | -12.8 | < 30.0 | < 17.2 | 39.6 |
| 490.0 | -12.8 | < 30.0 | < 17.2 | 39.6 |
| 551.3 | -12.7 | < 30.0 | < 17.3 | 39.6 |
| 612.5 | -12.6 | < 30.0 | < 17.4 | 39.6 |
| 673.8 | -12.4 | < 30.0 | < 17.6 | 39.6 |
| 735.0 | -12.2 | < 30.0 | < 17.8 | 39.6 |
| 796.3 | -12.0 | < 30.0 | < 18.0 | 39.6 |
| 857.5 | -12.1 | < 30.0 | < 17.9 | 39.6 |
| 918.8 | -12.4 | < 30.0 | < 17.6 | 39.6 |
| 980.0 | -12.6 | < 30.0 | < 17.4 | 39.6 |

- Notes:
- 1) The spectrum was checked from 30 MHz to 1000 MHz.
 - 2) Spectrum Analyzer ; SPAN : 10 MHz, RES BW : 100 kHz, VBW : 300 kHz, SWP : 20 msec
 - 3) Impedance at the RF output terminal : 75 ohms (Unbalanced)
 - 4) The symbol of '<' means 'or less'.
 - 5) Correction Factor includes a gain of preamplifier, a matching pad loss and an attenuation pad loss.
 - 6) A sample calculation was made at 47.9 MHz.
Correction Factor + Meter Reading = -13.2 + 35.0 = 21.8 dB/uV

Model No. : SLV-679HF
Serial No. : None

S15.115(b)(2)(ii) Spurious Conducted Level Measurement

Testing Signal Sources : RF Modulation Sources (NTSC Colorbar : 70 dB/uV at 193.25 MHz)
Operating Condition : Recording Mode

RF Output Channel : No. 4

| Frequency (MHz) | Correction Factor (dB) | Meter Reading (dB/uV) | Result (dB/uV) | Limit (dB/uV) |
|--------------------|------------------------------|-----------------------------|-------------------|------------------|
| 30.0 | -13.2 | < 30.0 | < 16.8 | 39.6 |
| 40.0 | -13.2 | < 30.0 | < 16.8 | 39.6 |
| 45.8 | -13.2 | < 30.0 | < 16.8 | 39.6 |
| 53.8 | -13.2 | 34.0 | 20.8 | 39.6 |
| 80.8 | -13.2 | 32.0 | 18.8 | 39.6 |
| 100.0 | -13.2 | < 30.0 | < 16.8 | 39.6 |
| 120.0 | -13.1 | < 30.0 | < 16.9 | 39.6 |
| 134.6 | -13.1 | < 30.0 | < 16.9 | 39.6 |
| 201.9 | -13.0 | < 30.0 | < 17.0 | 39.6 |
| 269.0 | -12.9 | < 30.0 | < 17.1 | 39.6 |
| 336.3 | -12.9 | < 30.0 | < 17.1 | 39.6 |
| 403.5 | -12.8 | < 30.0 | < 17.2 | 39.6 |
| 470.8 | -12.8 | < 30.0 | < 17.2 | 39.6 |
| 538.0 | -12.7 | < 30.0 | < 17.3 | 39.6 |
| 605.3 | -12.7 | < 30.0 | < 17.3 | 39.6 |
| 672.5 | -12.4 | < 30.0 | < 17.6 | 39.6 |
| 739.8 | -12.2 | < 30.0 | < 17.8 | 39.6 |
| 807.0 | -11.9 | < 30.0 | < 18.1 | 39.6 |
| 874.3 | -12.2 | < 30.0 | < 17.8 | 39.6 |
| 941.5 | -12.5 | < 30.0 | < 17.5 | 39.6 |

- Notes: 1) The spectrum was checked from 30 MHz to 1000 MHz.
 2) Spectrum Analyzer ; SPAN : 10 MHz, RES BW : 100 kHz, VBW : 300 kHz, SWP : 20 msec
 3) Impedance at the RF output terminal : 75 ohms (Unbalanced)
 4) The symbol of '<' means 'or less'.
 5) Correction Factor includes a gain of preamplifier, a matching pad loss and an attenuation pad loss.
 6) A sample calculation was made at 53.8 MHz.
 Correction Factor + Meter Reading = -13.2 + 34.0 = 20.8 dB/uV

Model No. : SLV-679HF
Serial No. : None

Date : September 22, 1998
Temp. : 24 °C; Humi. : 42 %

12. S15.115(c)(1)(ii) Antenna Transfer Switch Measurement

Tested by :

Toshiyuki Itoi


Toshiyuki Itoi, Deputy Manager
Testing Division
EMC Engineering Department

Model No. : SLV-679HF

Serial No. : None

§15.115(c)(1)(ii) Antenna Transfer Switch Measurement


Block Diagram

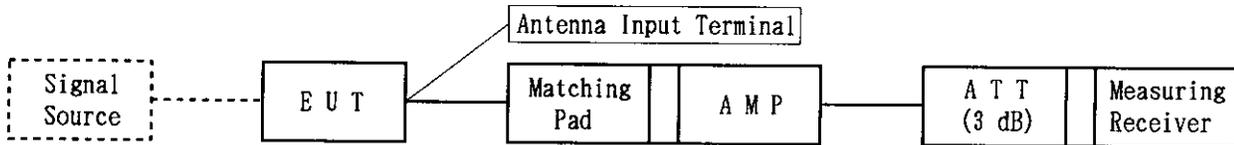


Note: RF output terminal of EUT was connected to the cable terminated with the specified impedances.

Configuration of EUT

Side View

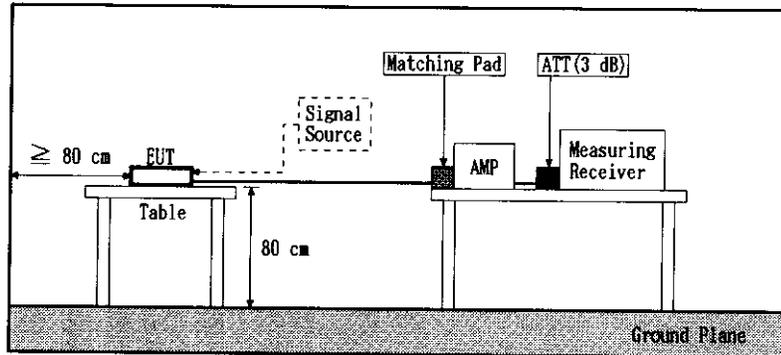

Top View

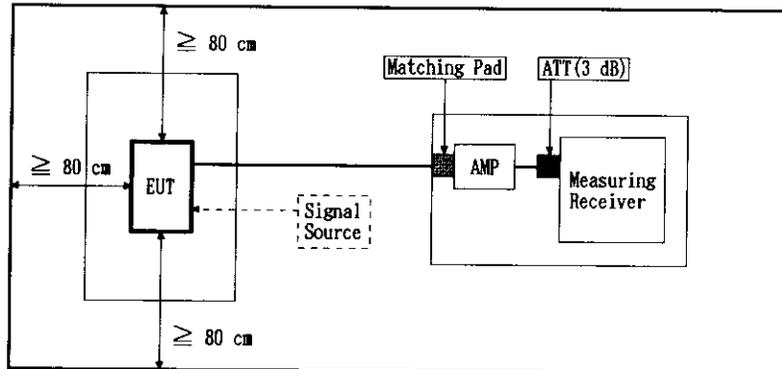

Note: The same configuration of cables and terminators which were connected to VCR was applied to all applicable measurements, shown as photograph in page 19 and 20.

Model No. : SLV-679HF

Serial No. : None

§15.115(c)(1)(ii) Antenna Transfer Switch Measurement

Testing Signal Sources : Internal Modulation Sources (NTSC TV Signal Recording Tape)

Operating Condition : Playing Mode

| RF Output Channel | Frequency (MHz) | Correction Factor (dB) | Meter Reading (dB/uV) | Result (dB/uV) | Limit (dB/uV) |
|-------------------|-----------------|------------------------|-----------------------|----------------|---------------|
| 3 | 61.27 | -16.2 | < 15.0 | < -1.2 | 9.5 |
| 4 | 67.29 | -16.2 | < 15.0 | < -1.2 | 9.5 |

Testing Signal Sources : Video Modulation Sources (VITS : 1 Vp-p and 5 Vp-p)

Operating Condition : Recording Mode

| RF Output Channel | Frequency (MHz) | Correction Factor (dB) | Meter Reading (dB/uV) | Result (dB/uV) | Limit (dB/uV) |
|-------------------|-----------------|------------------------|-----------------------|----------------|---------------|
| 3 | 61.27 | -16.2 | < 15.0 | < -1.2 | 9.5 |
| 4 | 67.29 | -16.2 | < 15.0 | < -1.2 | 9.5 |

Testing Signal Sources : RF Modulation Sources (NTSC Colorbar : 70 dB/uV at 193.25 MHz)

Operating Condition : Recording Mode

| RF Output Channel | Frequency (MHz) | Correction Factor (dB) | Meter Reading (dB/uV) | Result (dB/uV) | Limit (dB/uV) |
|-------------------|-----------------|------------------------|-----------------------|----------------|---------------|
| | | | | | |

Not Applicable

- Notes: 1) Spectrum Analyzer ; SPAN : 1 MHz, RES BW : 10kHz, VBW : 10kHz, SWP : 30 msec
 2) Impedance at the Antenna input terminal : 75 ohms (Unbalanced)
 3) The symbol of '<' means 'or less'.
 4) Correction Factor includes a gain of preamplifier, a matching pad loss and an attenuation pad loss.
 5) A sample calculation was made at 61.27 MHz.
 Correction Factor + Meter Reading = -16.2 + 15.0 = -1.2 dB/uV

Model No. : SLV-679HF

Serial No. : None

13. Test Equipment Used

| Equipment | Manufacturer | Model No. [Serial No.] | Last Cal. [Cal. Interval] |
|--|---------------------------------|-------------------------------|--------------------------------|
| Measuring Receiver | Rohde & Schwarz | ESH 3 [872994/035] | May, 1998 [1 year] |
| Measuring Receiver | Rohde & Schwarz | ESVP [881487/004] | May, 1998 [1 year] |
| Spectrum Analyzer | Hewlett Packard | 8566B [2140A01091] | April, 1998 [1 year] |
| Line Impedance Stabilized Network | Kyoritsu Electrical Works | KNW-407 [8-1130-6] | April, 1998 [1 year] |
| Dipole Antenna | Kyoritsu Electrical Works | KBA-511 [0-170-1] | November, 1997 [1 year] |
| Dipole Antenna | Kyoritsu Electrical Works | KBA-611 [0-147-14] | November, 1997 [1 year] |
| Preamplifier | Hewlett Packard | 8447D [1937A02168] | July, 1998 [1 year] |
| Vertical Internal Test Signal Generator (VITS) | Anritsu | MG318A [M08128] | June, 1998 [1 year] |
| Color TV Pattern Generator | Philips Consumer Electronics | PM 5418 TNSI [LO 609096] | June, 1998 [1 year] |
| Matching Pad | Wiltron | 12N50/75B [90400] | June, 1998 [1 year] |
| 6 dB Attenuation Pad | Weinschel | 1 [AD8054] | June, 1998 [1 year] |
| 3 dB Attenuation Pad | Weinschel | 1 [AD9615] | June, 1998 [1 year] |


Model No. : SLV-679HF

Serial No. : None

§15.115(b)(2)(11) Spurious Conducted Level Measurement


Testing Signal Sources : RF Modulation Sources (NTSC Colorbar : 70 dB/uV at 193.25 MHz)

Operating Condition : Recording Mode

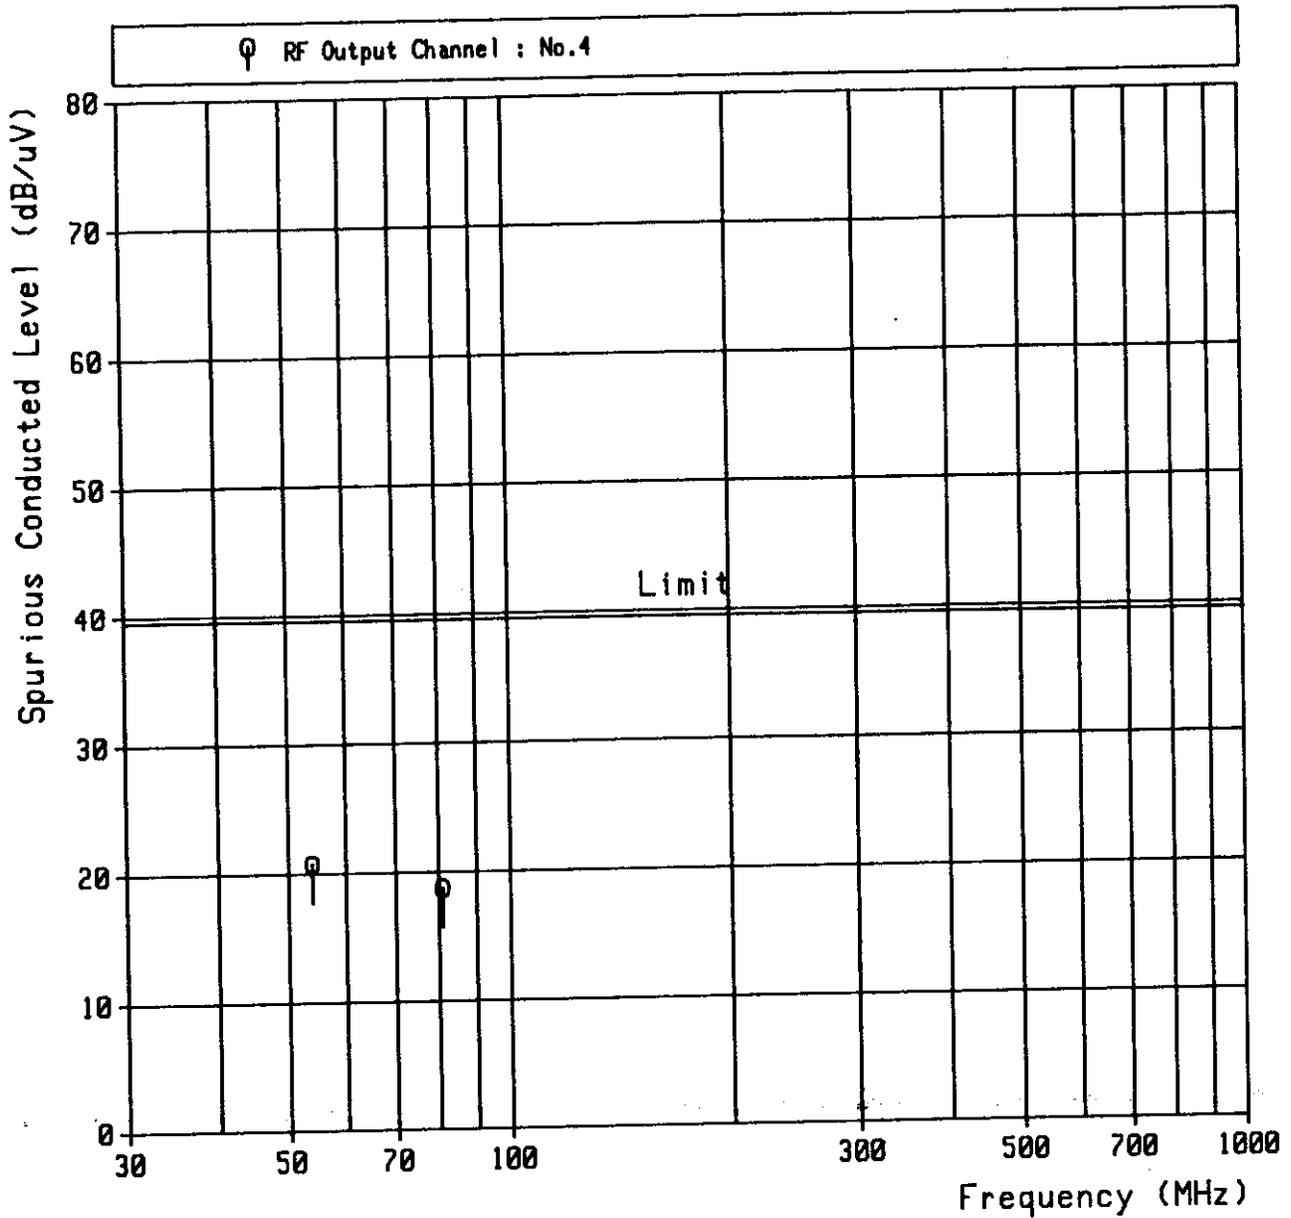


Model No. : SLV-679HF
Serial No. : None

§15.115(b)(2)(ii) Spurious Conducted Level Measurement

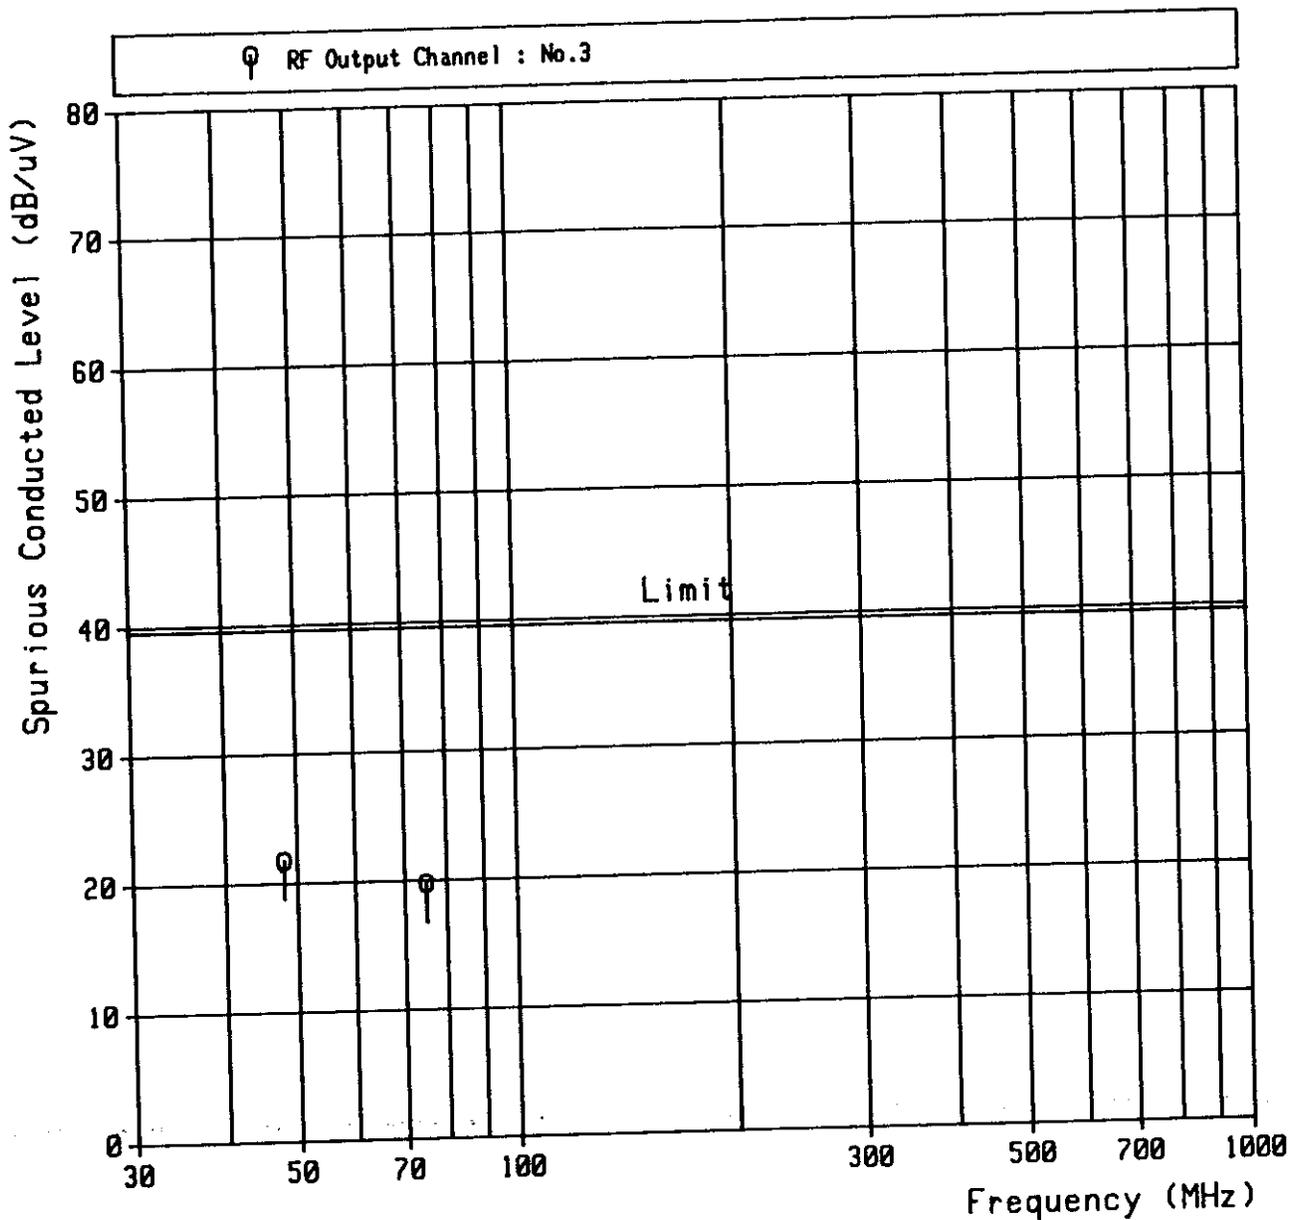Testing Signal Sources : RF Modulation Sources (NTSC Colorbar : 70 dB/uV at 193.25 MHz)
Operating Condition : Recording Mode

Model No. : SLV-679HF
Serial No. : None


§15.115(b)(2)(ii) Spurious Conducted Level Measurement

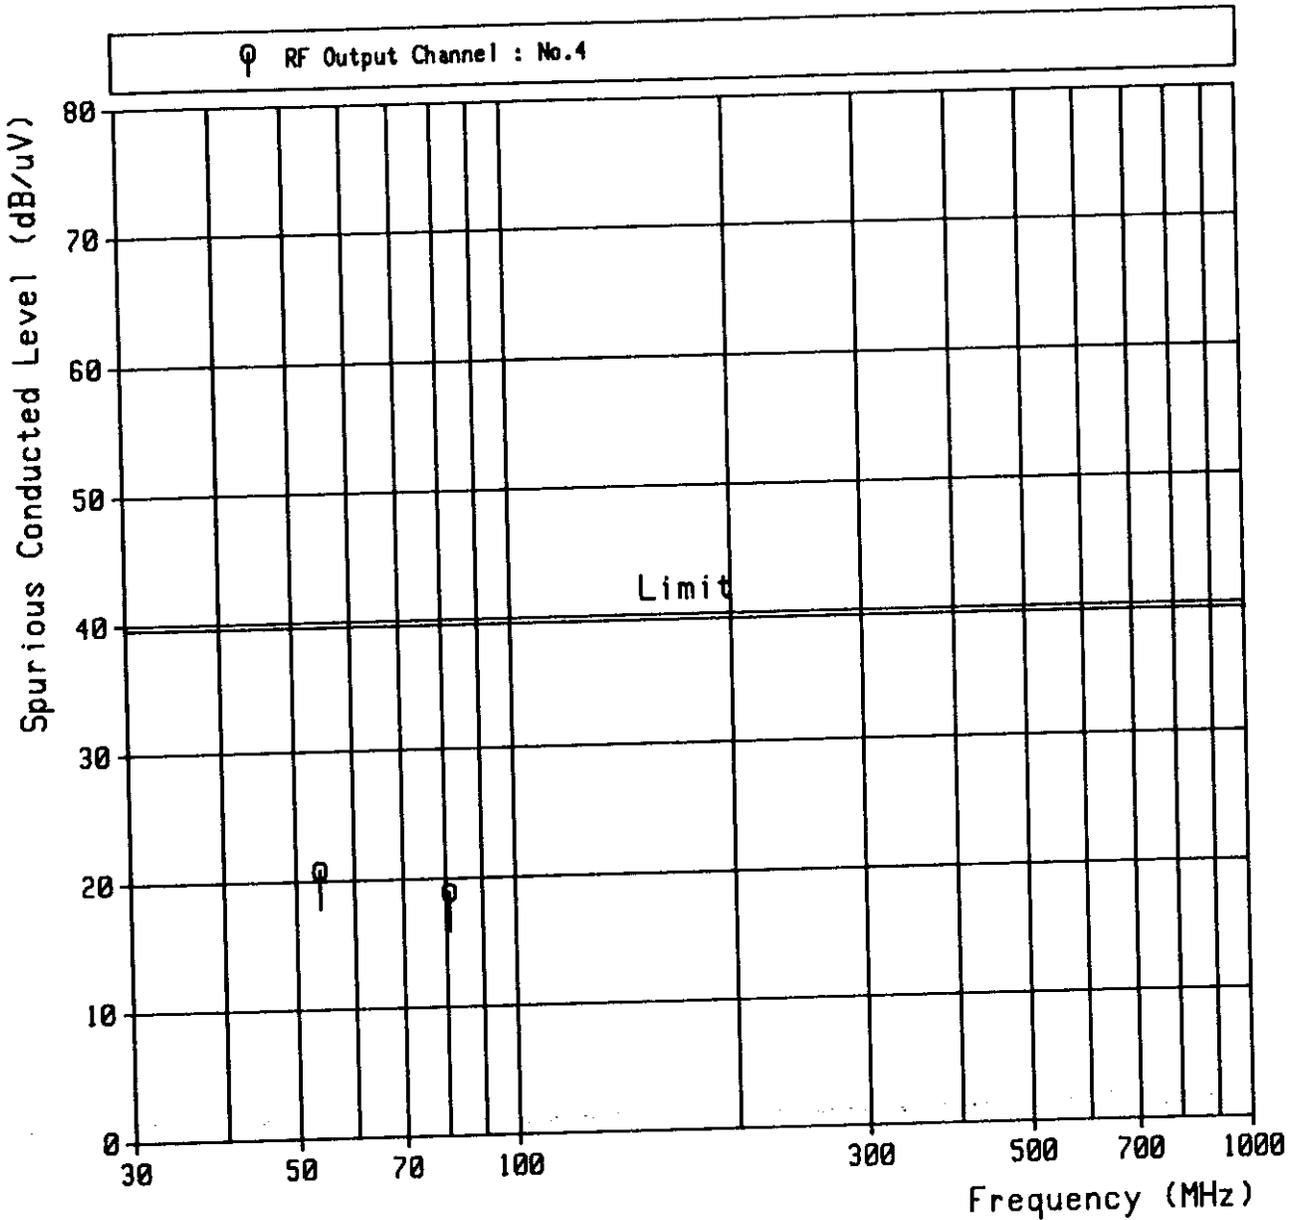Testing Signal Sources : Video Modulation Sources (VITS : 1 Vp-p and 5 Vp-p)
Operating Condition : Recording Mode

Model No. : SLV-679HF
Serial No. : None


§15.115(b)(2)(ii) Spurious Conducted Level Measurement

Testing Signal Sources : Video Modulation Sources (VITS : 1 Vp-p and 5 Vp-p)
Operating Condition : Recording Mode

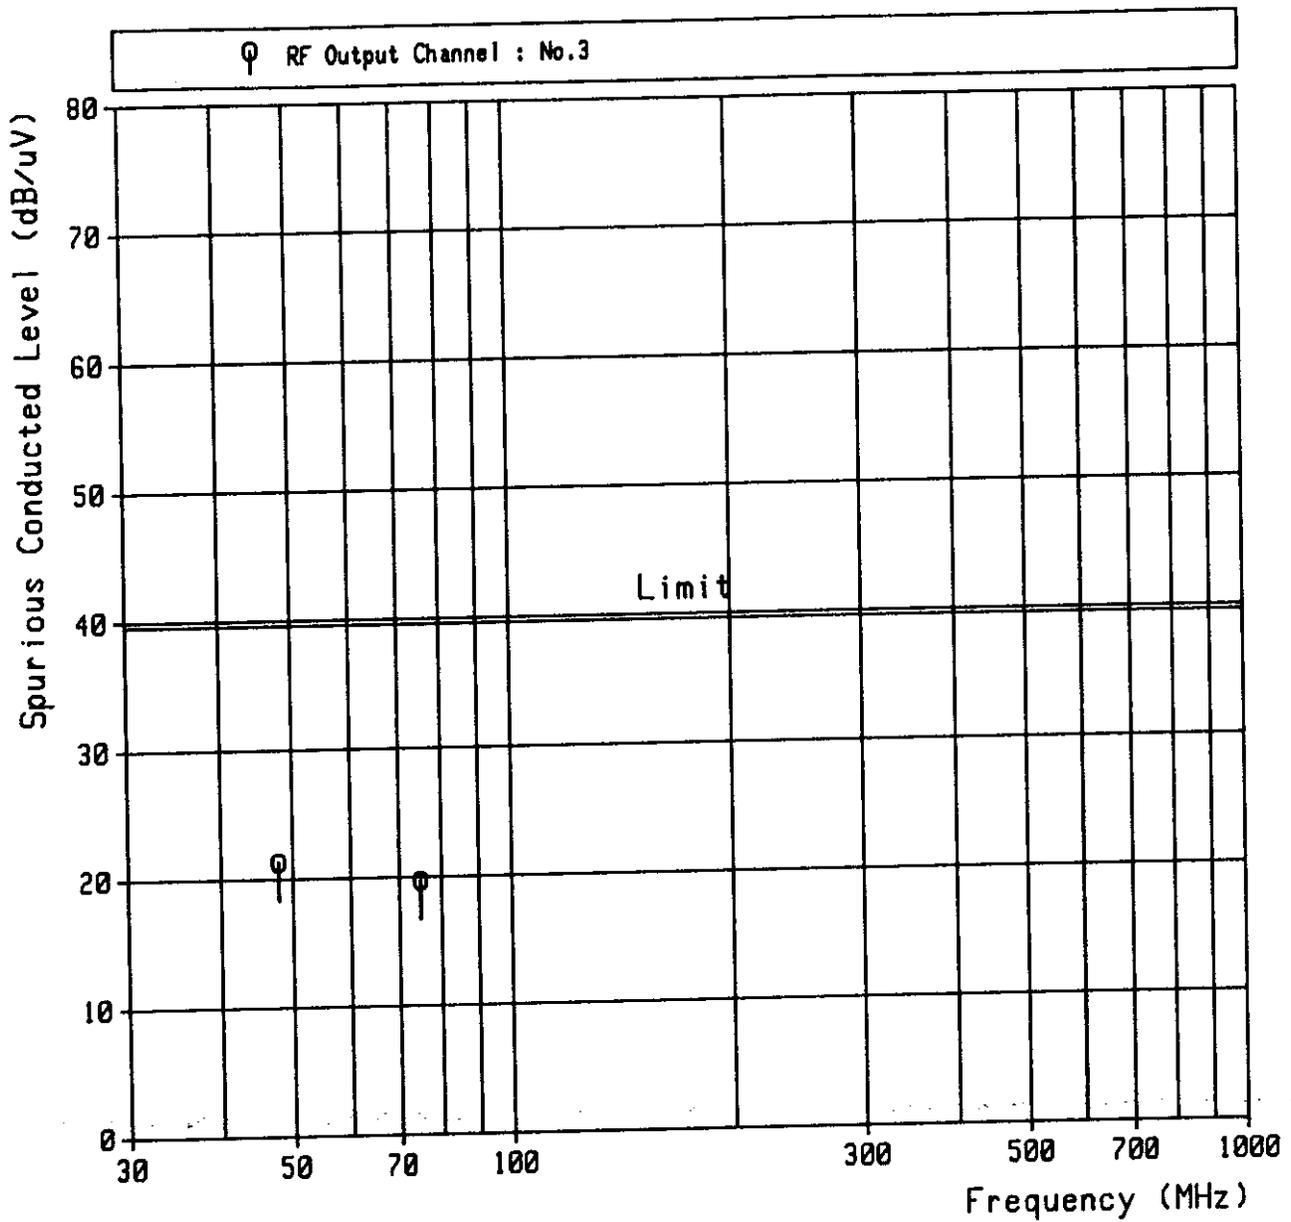

Model No. : SLV-679HF
Serial No. : None


§15.115(b)(2)(i) Spurious Conducted Level Measurement

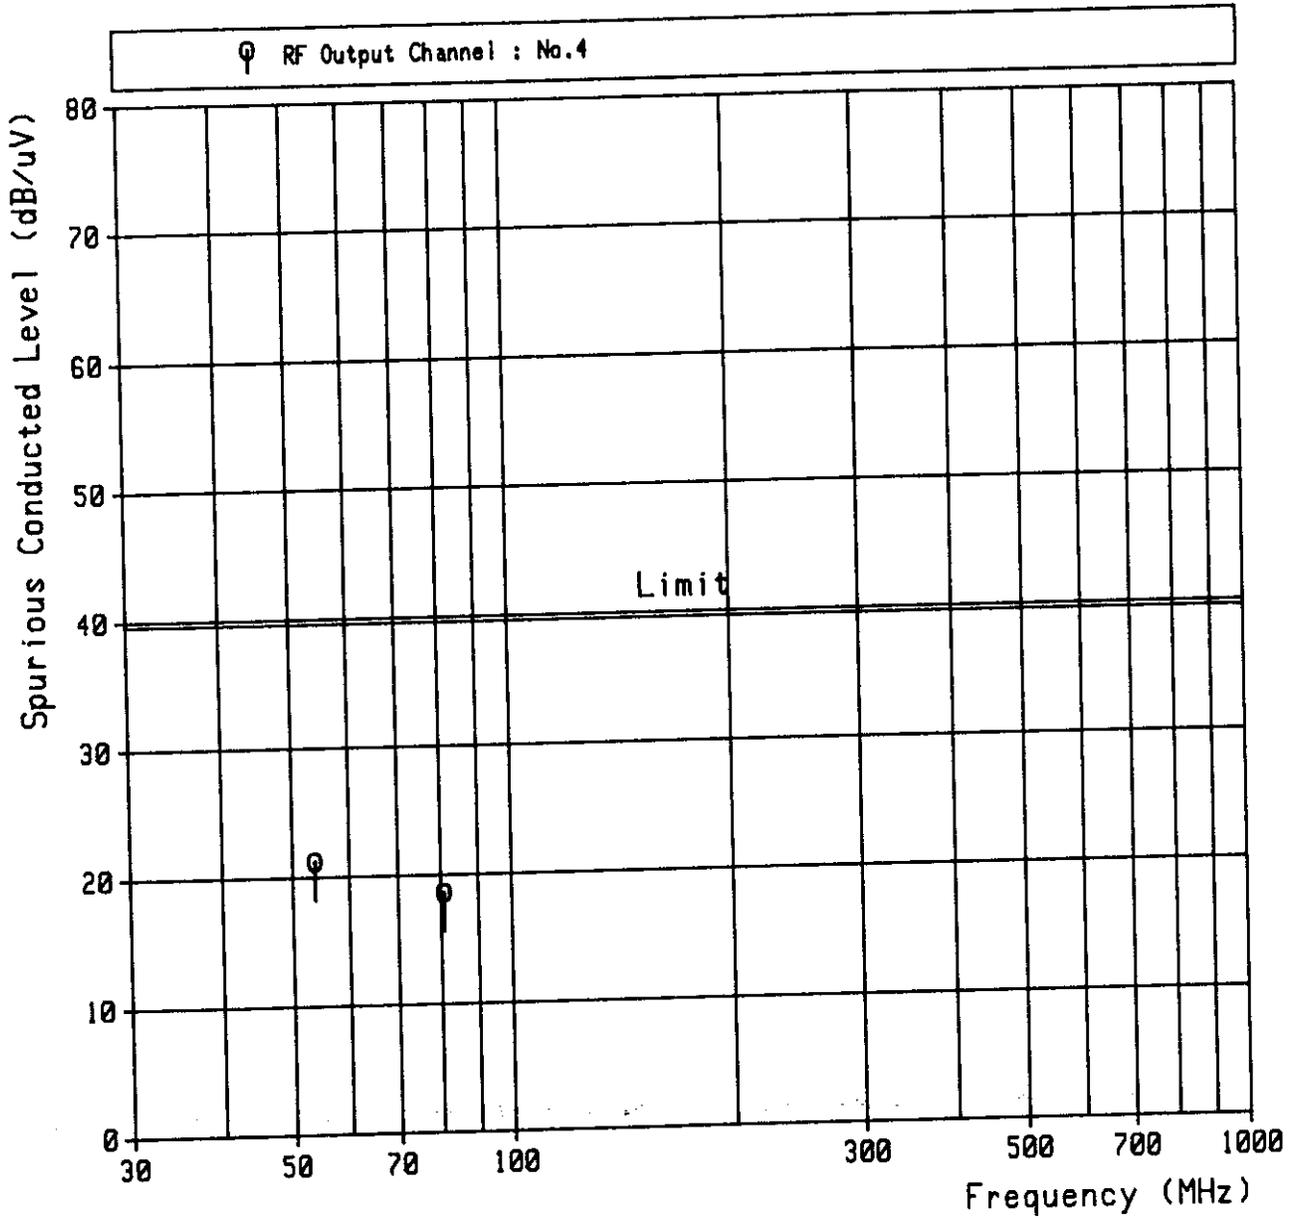Testing Signal Sources : Internal Modulation Sources (NTSC TV Signal Recording Tape)
Operating Condition : Playing Mode

Model No. : SLV-679HF
Serial No. : None

§15.115(b)(2)(ii) Spurious Conducted Level Measurement


Testing Signal Sources : Internal Modulation Sources (NTSC TV Signal Recording Tape)
Operating Condition : Playing Mode

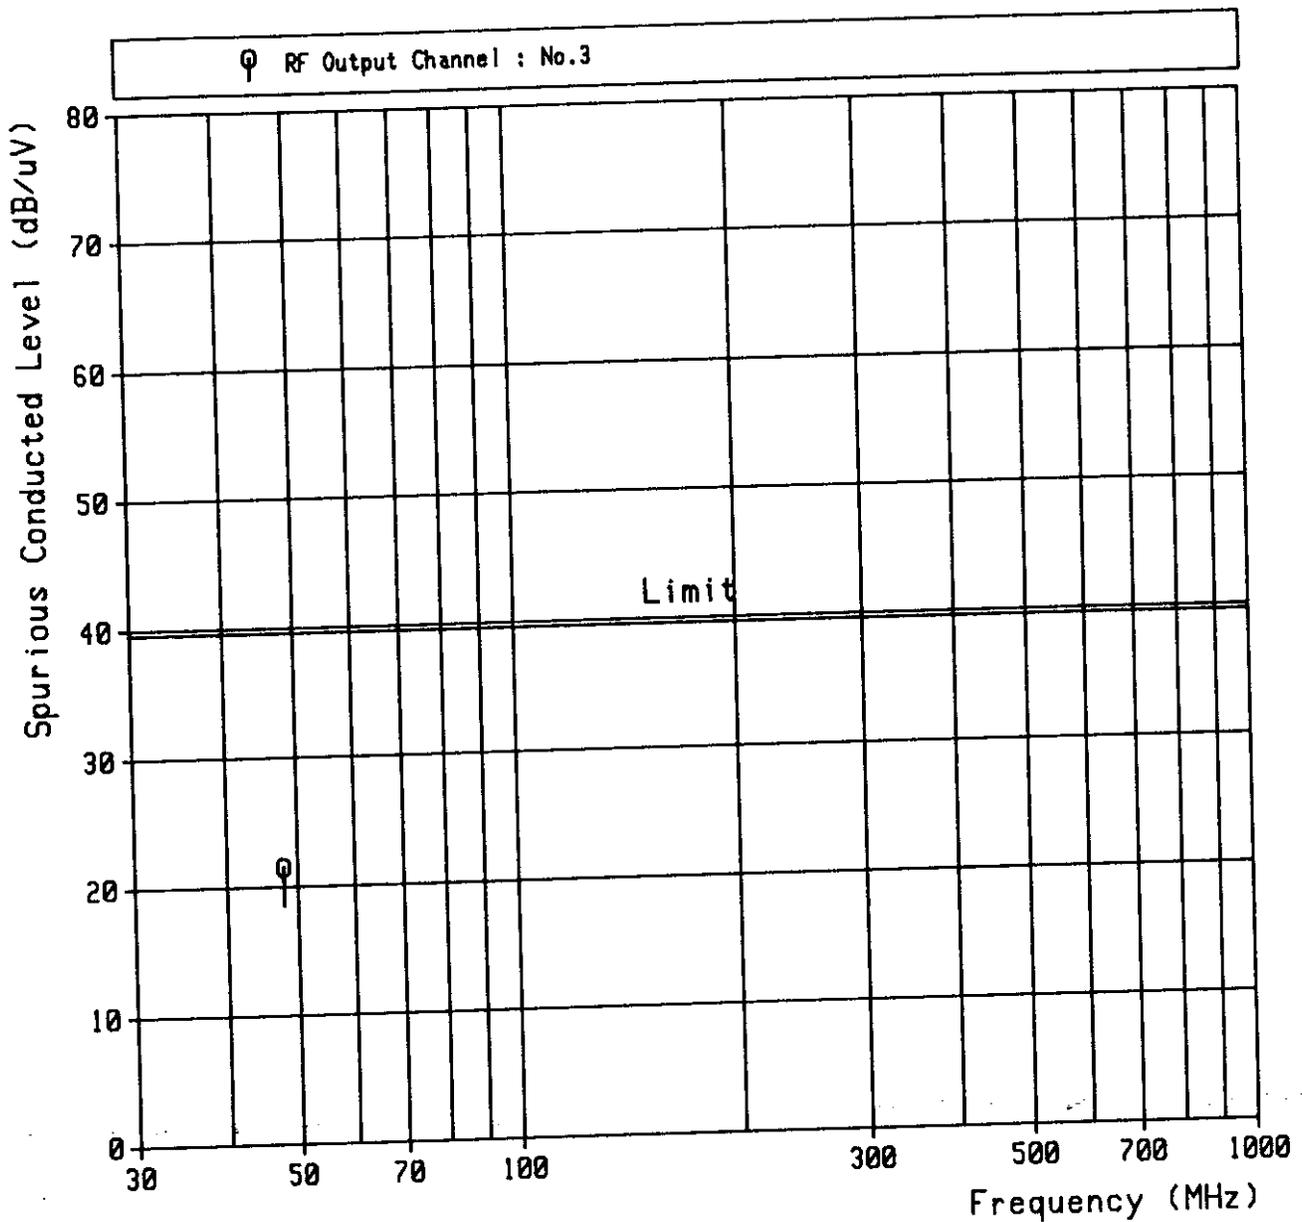

Model No. : SLV-679HF
Serial No. : None


\$15.109(a) Radiated Emissions Measurement

Testing Signal Sources : RF Modulation Sources (NTSC Colorbar : 70 dB/uV at 193.25 MHz)
Operating Condition : Recording Mode

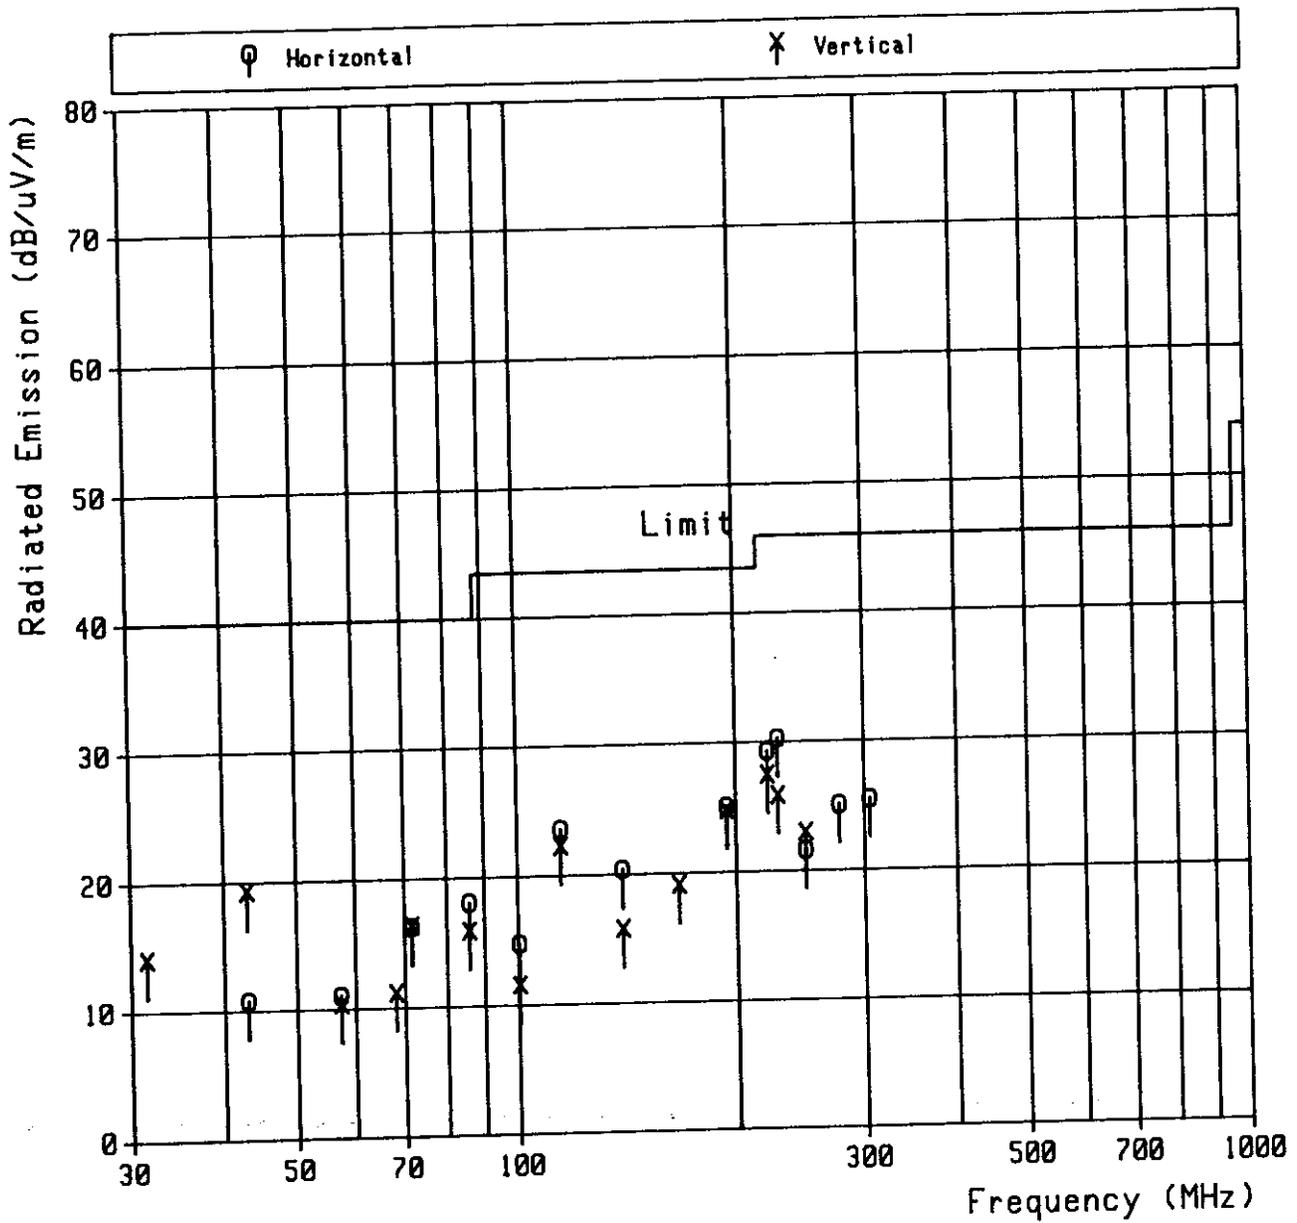

Model No. : SLV-679HF
Serial No. : None


§15.109(a) Radiated Emissions Measurement

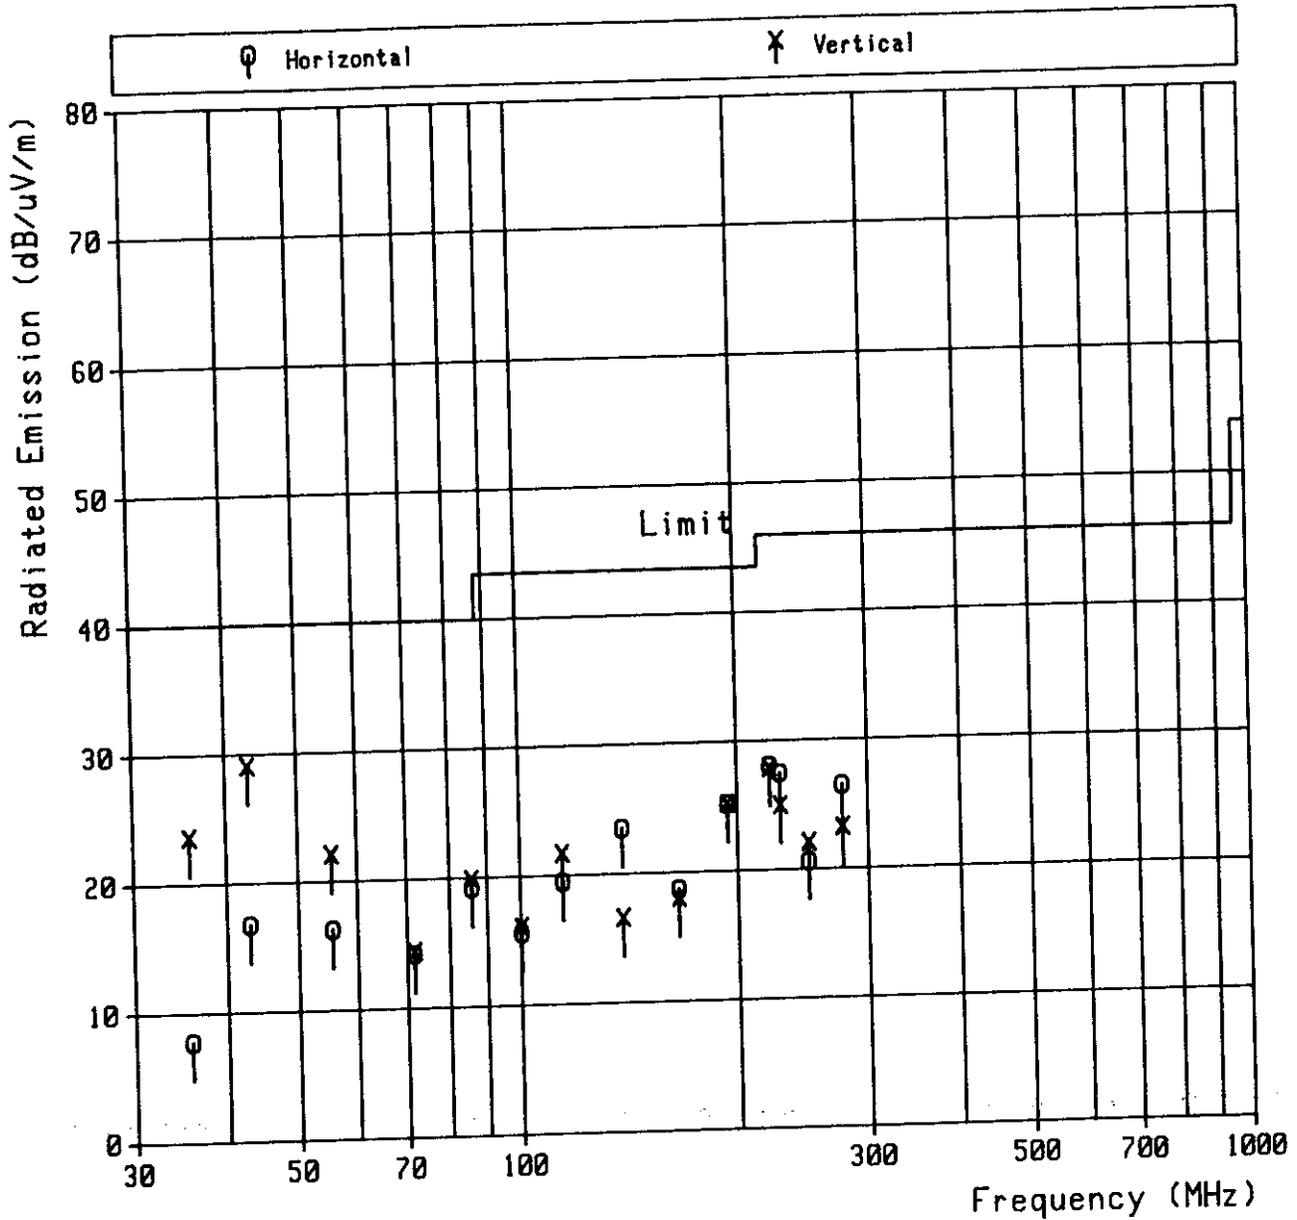Testing Signal Sources : Video Modulation Sources (VITS : 1 Vp-p and 5 Vp-p)
Operating Condition : Recording Mode

Model No. : SLV-679HF
Serial No. : None


§15.109(a) Radiated Emissions Measurement

Testing Signal Sources : Internal Modulation Sources (NTSC TV Signal Recording Tape)
Operating Condition : Playing Mode

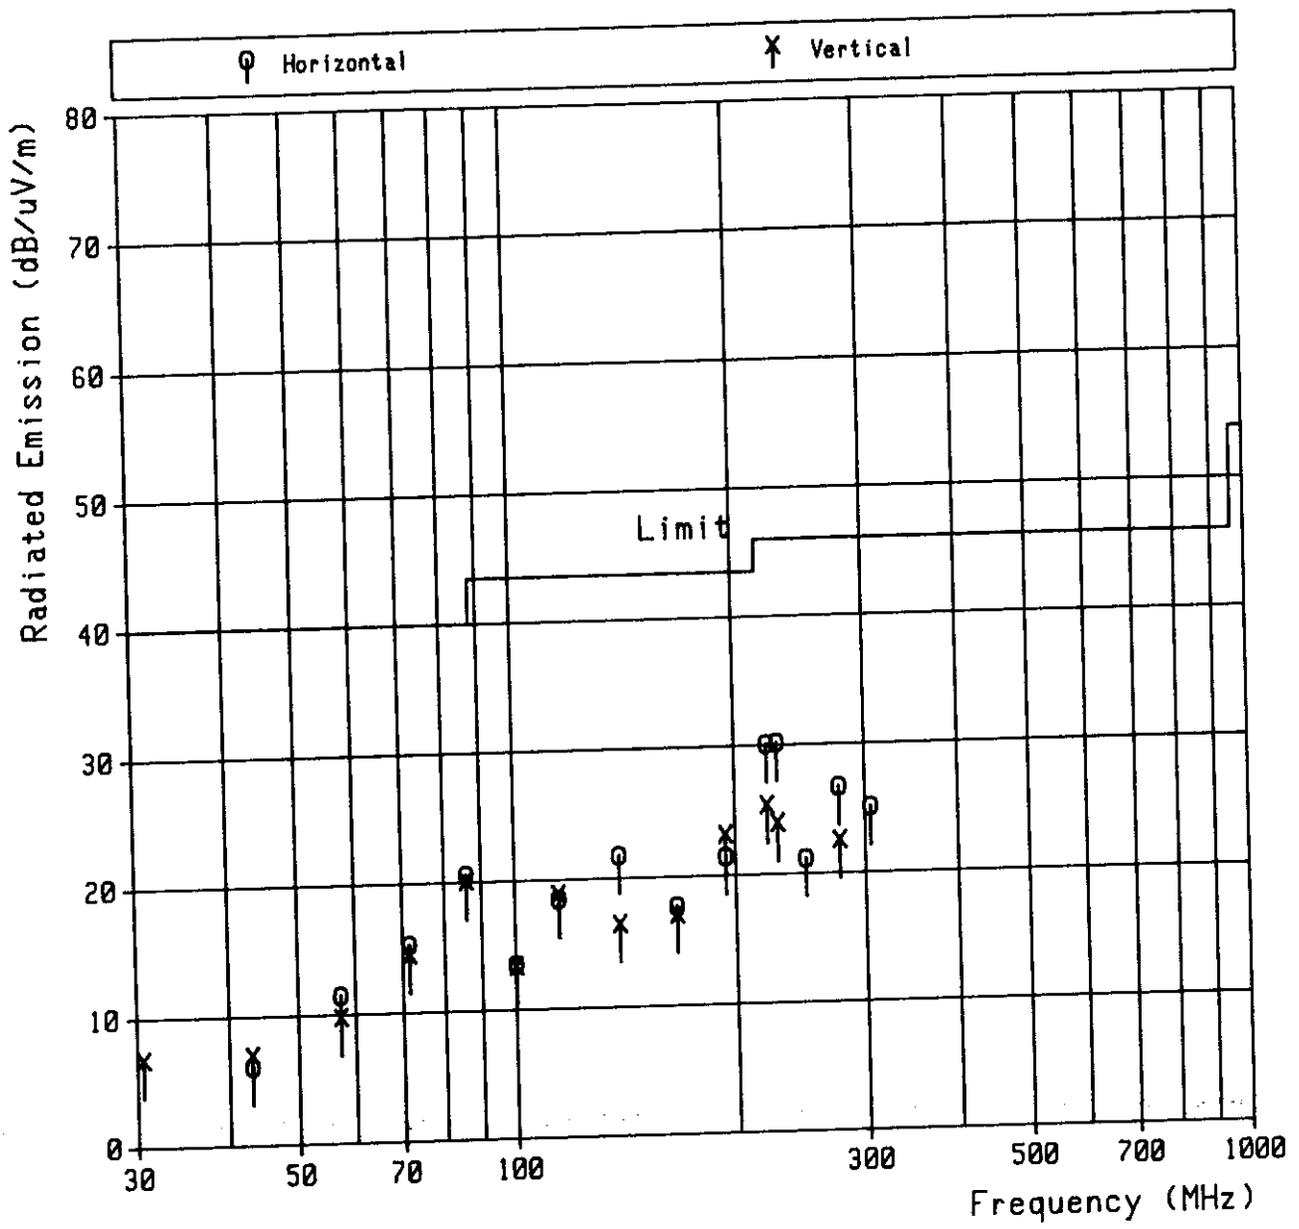

Model No. : SLV-679HF
Serial No. : None


§15.107(a) AC Powerline Conducted Emissions Measurement

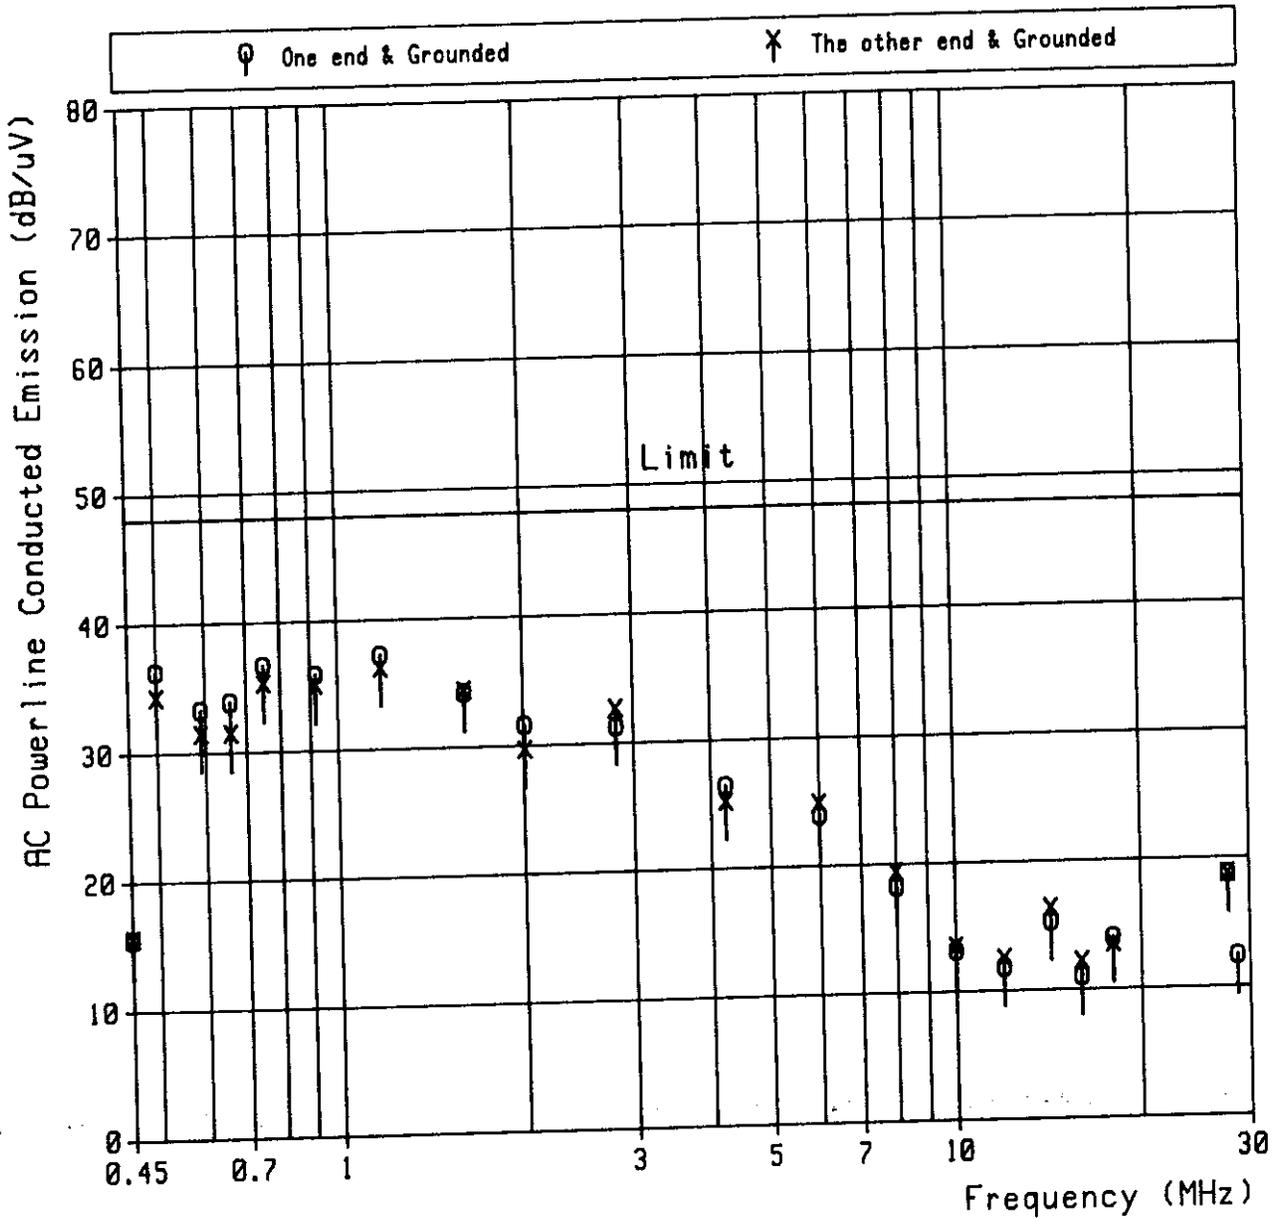Testing Signal Sources : RF Modulation Sources (NTSC Colorbar : 70 dB/uV at 193.25 MHz)
Operating Condition : Recording Mode

Model No. : SLV-679HF
 Serial No. : None

§15.107(a) AC Powerline Conducted Emissions Measurement

Testing Signal Sources : Video Modulation Sources (VITS : 1 Vp-p and 5 Vp-p)
 Operating Condition : Recording Mode

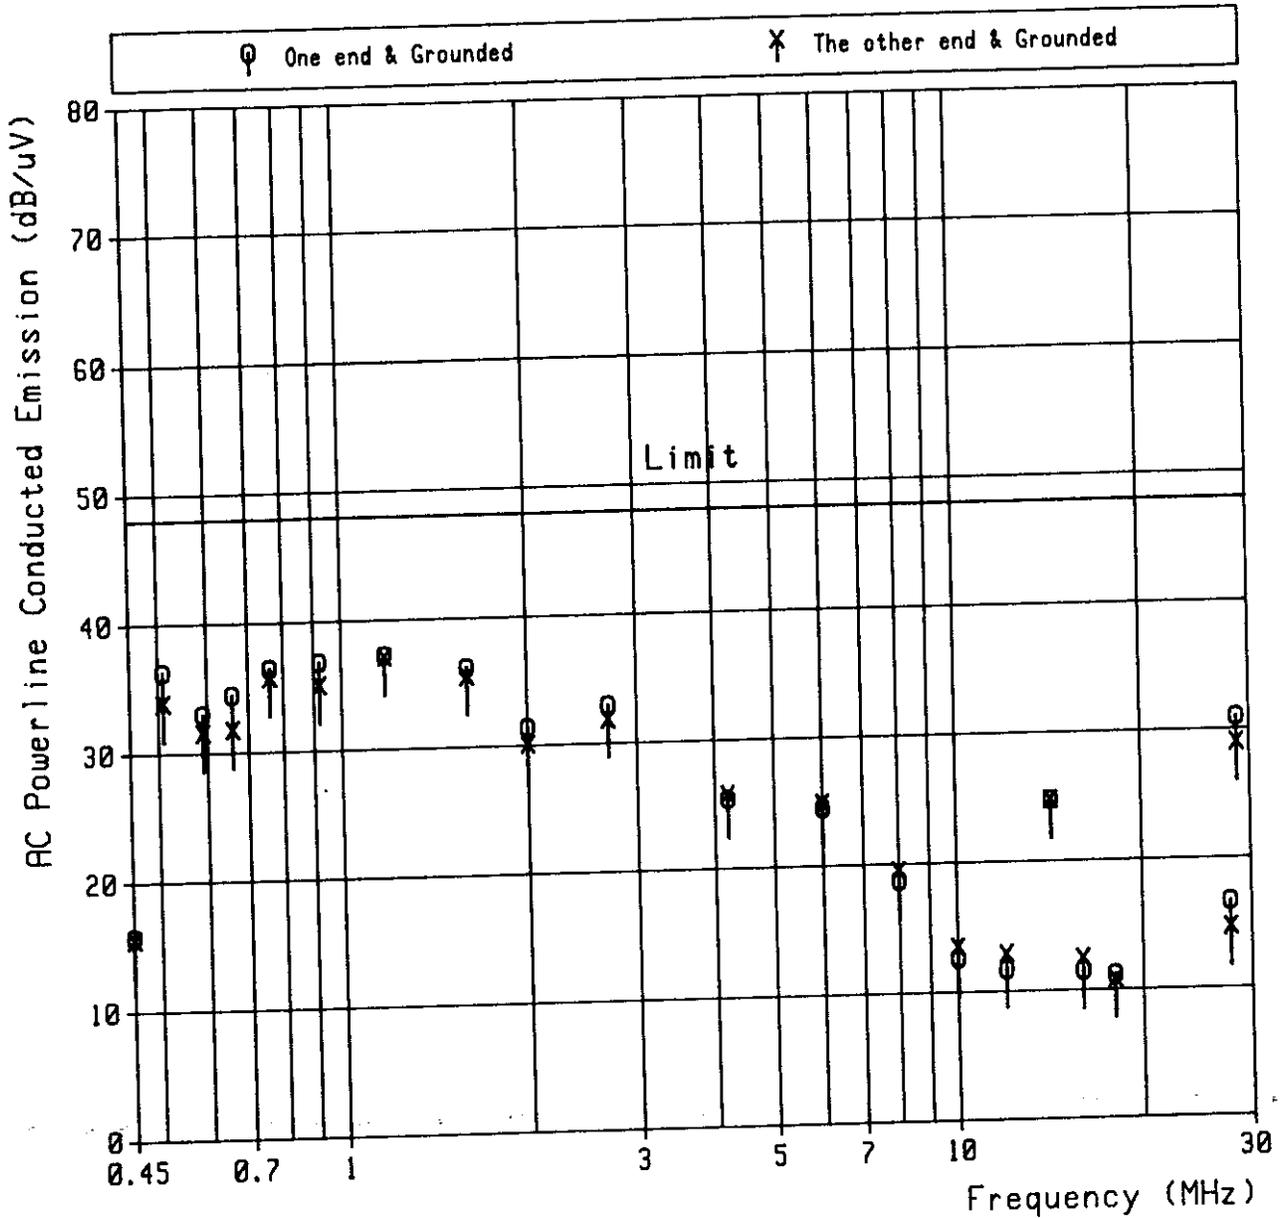

Model No. : SLV-679HF

Serial No. : None

§15.107(a) AC Powerline Conducted Emissions Measurement

Testing Signal Sources : Internal Modulation Sources (NTSC TV Signal Recording Tape)

Operating Condition : Playing Mode

