

# FCC Test Report

**Equipment** : Personal Computer  
**Brand Name** : SONY  
**Model No.** : SVF13NA1UL  
**FCC ID** : AK8SVF13NA1UL  
**Standard** : 47 CFR FCC Part 15.247  
**Operating Band** : 2400 MHz – 2483.5 MHz  
**FCC Classification** : DSS  
**Applicant** : Sony Corporation  
**Manufacturer** : 1-7-1 Konan, Minato-ku, Tokyo 108-0075, Japan  
**RF Module** : Intel / 7260NGW AN

The product sample received on Aug. 08, 2013 and completely tested on Sep. 13, 2013. We, SPORTON, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2009 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:

  
**Wayne Hsu / Assistant Manager**



## Table of Contents

<b>1</b>	<b>GENERAL DESCRIPTION .....</b>	<b>5</b>
1.1	Information.....	5
1.2	Accessories .....	7
1.3	Support Equipment .....	7
1.4	Testing Applied Standards .....	7
1.5	Testing Location Information .....	7
1.6	Measurement Uncertainty .....	8
<b>2</b>	<b>TEST CONFIGURATION OF EUT .....</b>	<b>9</b>
2.1	The Worst Case Modulation Configuration .....	9
2.2	Test Channel Frequencies Configuration.....	9
2.3	The Worst Case Power Setting Parameter .....	9
2.4	The Worst Case Measurement Configuration .....	10
2.5	Test Setup Diagram .....	11
<b>3</b>	<b>TRANSMITTER TEST RESULT .....</b>	<b>13</b>
3.1	AC Power-line Conducted Emissions .....	13
3.2	20dB Bandwidth and Carrier Frequency Separation .....	18
3.3	Number of Hopping Frequencies.....	20
3.4	Time of Occupancy (Dwell Time).....	22
3.5	RF Output Power .....	24
3.6	Transmitter Radiated Bandedge Emissions .....	27
3.7	Transmitter Radiated Unwanted Emissions .....	30
<b>4</b>	<b>TEST EQUIPMENT AND CALIBRATION DATA.....</b>	<b>41</b>

### APPENDIX A. TEST PHOTOS

### APPENDIX B. PHOTOGRAPHS OF EUT



## Summary of Test Result

Conformance Test Specifications					
Report Clause	Ref. Std. Clause	Description	Measured	Limit	Result
1.1.2	15.203	Antenna Requirement	Antenna connector mechanism complied	FCC 15.203	Complied
3.1	15.207	AC Power-line Conducted Emissions	[dBuV]: 0.1834550MHz 43.36 (Margin 10.97dB) - AV 59.02 (Margin 5.31dB) - QP	FCC 15.207	Complied
3.2	15.247(a)	20dB Bandwidth	EDR: 1.4731MHz	N/A	Complied
3.2	15.247(a)	Carrier Frequency Separation (ChS)	EDR: 1.0000MHz	ChS $\geq$ BW <sub>20dB</sub> x2/3.	Complied
3.3	15.247(a)	Number of Hopping Frequencies (N)	Max: 79 Min: 15	N $\geq$ 15	Complied
3.4	15.247(a)	Time of Occupancy (Dwell Time)	EDR:0.322sec	0.4 s within 0.4 x N	Complied
3.5	15.247(b)	RF Output Power (Maximum Peak Conducted Output Power)	Power [dBm] BR: 8.42 EDR: 5.93	Power [dBm] BR:21 EDR:21	Complied
3.6	15.247(c)	Transmitter Radiated Bandedge Emissions	Restricted Bands [dBuV/m at 3m]: 2483.53MHz 60.32 (Margin 13.68dB) - PK 48.13 (Margin 5.87dB) - AV	Non-Restricted Bands: > 20 dBc Restricted Bands: FCC 15.209	Complied
3.7	15.247(c)	Transmitter Radiated Unwanted Emissions	Restricted Bands [dBuV/m at 3m]: 71.710MHz 35.73 (Margin 4.27dB) - PK	Non-Restricted Bands: > 20 dBc Restricted Bands: FCC 15.209	Complied



# 1 General Description

## 1.1 Information

### 1.1.1 RF General Information

RF General Information					
Frequency Range (MHz)	Bluetooth Mode	Ch. Frequency (MHz)	Channel Number	RF Output Power (dBm)	Co-location
2400-2483.5	BR / EDR	2402-2480	0-78 [79]	8.42	Yes
<p>Note 1: Bluetooth BR uses a GFSK (1Mbps).</p> <p>Note 2: Bluetooth EDR uses a combination of <math>\pi/4</math>-DQPSK (2Mbps) and 8DPSK (3Mbps).</p> <p>Note 3: RF output power specifies that Maximum Peak Conducted Output Power.</p> <p>Note 4: Co-location, Co-location is generally defined as simultaneously transmitting (co-transmitting) antennas within 20 cm of each other. (i.e., EUT has simultaneously co-transmitting that operating 2.4GHz and 5GHz.)</p>					

### 1.1.2 Antenna Information

Antenna Category	
<input checked="" type="checkbox"/>	Integral antenna (antenna permanently attached)
<input checked="" type="checkbox"/>	Temporary RF connector provided
<input type="checkbox"/>	No temporary RF connector provided Transmit chains bypass antenna and soldered temporary RF connector provided for connected measurement. In case of conducted measurements the transmitter shall be connected to the measuring equipment via a suitable attenuator and correct for all losses in the RF path.

Antenna General Information			
No.	Ant. Cat.	Ant. Type	Gain (dBi)
1	Integral	PIFA	-1.42



1.1.3 Type of EUT

Identify EUT	
EUT Serial Number	N/A
Presentation of Equipment	<input type="checkbox"/> Production ; <input type="checkbox"/> Pre-Production ; <input checked="" type="checkbox"/> Prototype
Type of EUT	
<input checked="" type="checkbox"/>	Stand-alone
<input type="checkbox"/>	Combined (EUT where the radio part is fully integrated within another device) Combined Equipment - Brand Name / Model No.:
<input type="checkbox"/>	Plug-in radio (EUT intended for a variety of host systems) Host System - Brand Name / Model No.:
<input type="checkbox"/>	Other:

1.1.4 Test Signal Duty Cycle

Operated Mode for Worst Duty Cycle	
<input checked="" type="checkbox"/> Operated test mode for worst duty cycle	
Test Signal Duty Cycle (x)	Power Duty Factor [dB] – (10 log 1/x)
<input checked="" type="checkbox"/> 80.32% - test mode single channel-DH5	0.95
Bluetooth ACL packets can be 1, 3, or 5 time slots. The DH1 packet can cover a single time slot. The DH3 packet can cover up to 3 time slots. The DH5 packet can cover up to 5 time slots. Operate DH5 at maximum dwell time and maximum duty cycle.	

1.1.5 EUT Operational Condition

Supply Voltage	<input checked="" type="checkbox"/> AC mains	<input checked="" type="checkbox"/> DC	
Type of DC Source	<input type="checkbox"/> Internal DC supply	<input checked="" type="checkbox"/> External DC adapter	<input checked="" type="checkbox"/> Li-on Battery

## 1.2 Accessories

Accessories Information				
AC Adapter	Brand Name	SONY	Model Name	VGP-AC19V73
	Power Rating	I/P: 100-240V ~ 1.0A 50/60Hz O/P1: 19.5V $\overline{=}$ 2.0A ; O/P2: 5.0V $\overline{=}$ 1.0A		
Li-ion Battery	Brand Name	SONY	Model Name	VGP-BPS41

Reminder: Regarding to more detail and other information, please refer to user manual.

## 1.3 Support Equipment

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
1	Printer	EPSON	C61	DoC
2	(USB) Mouse	Microsoft	1004	DoC
3	Identity Badge	-	-	-
4	Wireless AP (Remote Workstation)	ASUS	RT-AC66U	MSQ-RTAC66U
5	Bluetooth Headset (Remote Workstation)	Sony Ericsson	Z354	PY7DDA-2006

## 1.4 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ◆ 47 CFR FCC Part 15
- ◆ ANSI C63.10-2009
- ◆ FCC Public Notice DA 00-705
- ◆ FCC KDB 412172

## 1.5 Testing Location Information

Testing Location				
<input checked="" type="checkbox"/>	HWA YA	ADD : No. 52, Hwa Ya 1 <sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.		
		TEL : 886-3-327-3456	FAX : 886-3-327-0973	
Test Condition	Test Site No.	Test Engineer	Test Environment	
AC Conduction	CO04-HY	Zeus	22°C / 57%	
RF Conducted	TH01-HY	Ian	22.1°C / 61%	
Radiated Emission	03CH02-HY	Daniel	26°C / 58%	



### 1.6 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Measurement Uncertainty			
Test Item		Uncertainty	Limit
AC power-line conducted emissions		±2.26 dB	N/A
Emission bandwidth, 6dB bandwidth		±1.42 %	N/A
RF output power, conducted		±0.63 dB	N/A
Power density, conducted		±0.81 dB	N/A
Unwanted emissions, conducted	30 – 1000 MHz	±0.51 dB	N/A
	1 – 18 GHz	±0.67 dB	N/A
	18 – 40 GHz	±0.83 dB	N/A
	40 – 200 GHz	N/A	N/A
All emissions, radiated	30 – 1000 MHz	±2.56 dB	N/A
	1 – 18 GHz	±3.59 dB	N/A
	18 – 40 GHz	±3.82 dB	N/A
	40 – 200 GHz	N/A	N/A
Temperature		±0.8 °C	N/A
Humidity		±3 %	N/A
DC and low frequency voltages		±3 %	N/A
Time		±1.42 %	N/A
Duty Cycle		±1.42 %	N/A

## 2 Test Configuration of EUT

### 2.1 The Worst Case Modulation Configuration

Worst Modulation Used for Conformance Testing					
Bluetooth Mode	Transmit Chains (N <sub>TX</sub> )	Data Rate	Modulation Mode	RF Output Power (dBm)	Worst Mode
BR	1	1 Mbps	BR-1Mbps	8.42	BR-1Mbps
EDR	1	2 Mbps	EDR-2Mbps	6.15	
EDR	1	3 Mbps	EDR-3Mbps	5.93	
Note 1: Bluetooth BR uses a combination of GFSK (1Mbps). Note 2: Bluetooth EDR uses a combination of $\pi/4$ -DQPSK (2Mbps) and 8DPSK (3Mbps). Note 3: Modulation modes consist below configuration: FHSS BR-1Mbps: GFSK (1Mbps), EDR-2Mbps: $\pi/4$ -DQPSK (2Mbps), EDR-3Mbps: 8DPSK(3Mbps) Note 4: RF output power specifies that Maximum Peak Conducted Output Power.					

### 2.2 Test Channel Frequencies Configuration

Test Channel Frequencies Configuration	
Bluetooth Mode	Test Channel Frequencies (MHz) – FX (Frequencies Abbreviations)
BR / EDR	2402-(F1), 2440-(F2), 2480-(F3)

### 2.3 The Worst Case Power Setting Parameter

The Worst Case Power Setting Parameter			
Test Software Version	DRTU		
Modulation Mode	2402 MHz	2440 MHz	2480 MHz
BR,1Mbps	10	10	10
EDR,2Mbps	8	8	8
EDR,3Mbps	6	6	6


## 2.4 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
<b>Tests Item</b>	AC power-line conducted emissions
<b>Condition</b>	AC power-line conducted measurement for line and neutral Test Voltage: 120Vac / 60Hz
<b>Operating Mode</b>	Operating Mode Description
1	AC Power & Radio link


The Worst Case Mode for Following Conformance Tests	
<b>Tests Item</b>	RF Output Power, 20dB Bandwidth, Carrier Frequency Separation (ChS) Number of Hopping Frequencies (N), Time of Occupancy (Dwell Time)
<b>Test Condition</b>	Conducted measurement at transmit chains
<b>Modulation Mode</b>	BR-1Mbps, EDR-3Mbps

The Worst Case Mode for Following Conformance Tests			
<b>Tests Item</b>	Transmitter Radiated Unwanted Emissions Transmitter Radiated Bandedge Emissions		
<b>Test Condition</b>	Radiated measurement		
<b>User Position</b>	<input type="checkbox"/> EUT will be placed in fixed position.		
	<input checked="" type="checkbox"/> EUT will be placed in mobile position and operating multiple positions. EUT shall be performed two orthogonal planes. The worst planes is X.		
	<input type="checkbox"/> EUT will be a hand-held or body-worn battery-powered devices and operating multiple positions. EUT shall be performed two or three orthogonal planes.		
<b>Operating Mode</b>	<input checked="" type="checkbox"/> 1. AC Power & Radio link		
<b>Modulation Mode</b>	BR-1Mbps, EDR-3Mbps		
<b>Orthogonal Planes of EUT</b>	<b>X Plane</b>	<b>Y Plane</b>	<b>Z Plane</b>
			


## 2.5 Test Setup Diagram

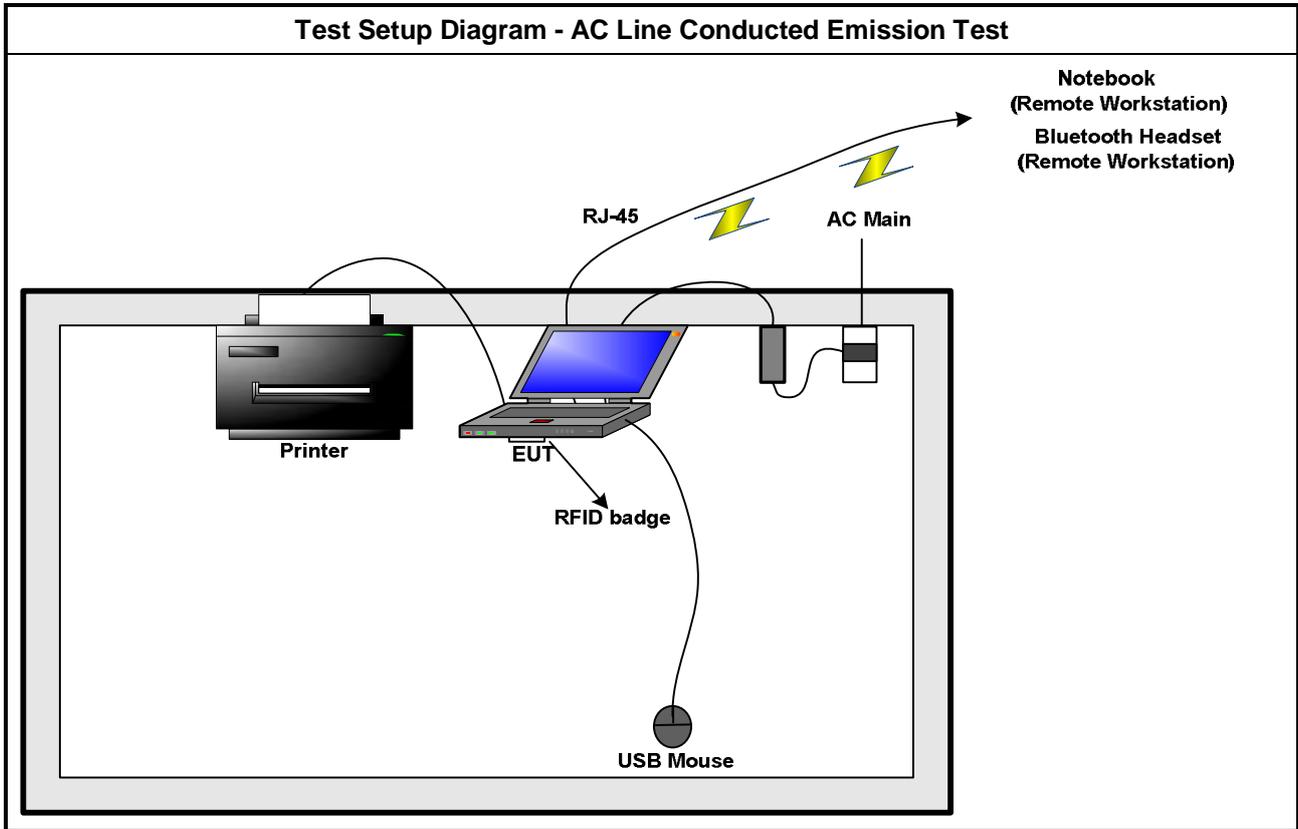

Test Setup Diagram - Radiated Below 1GHz Test

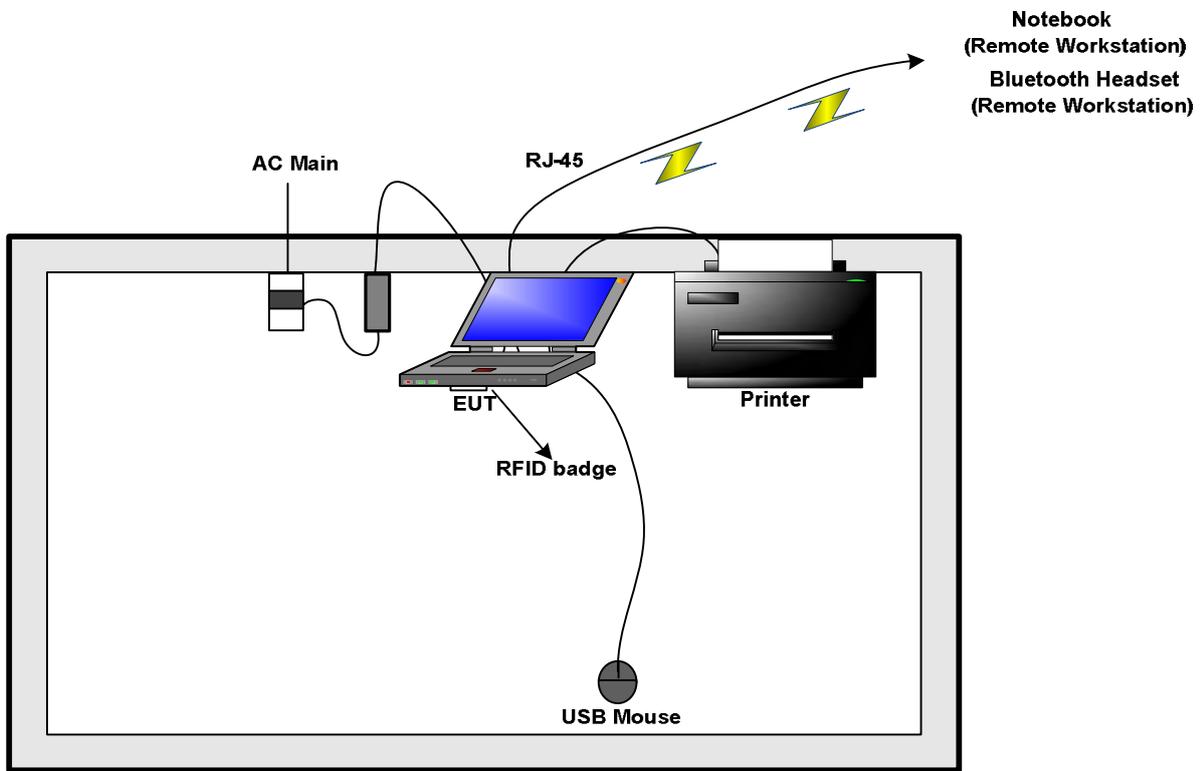

Test Setup Diagram - Radiated Above 1GHz Test

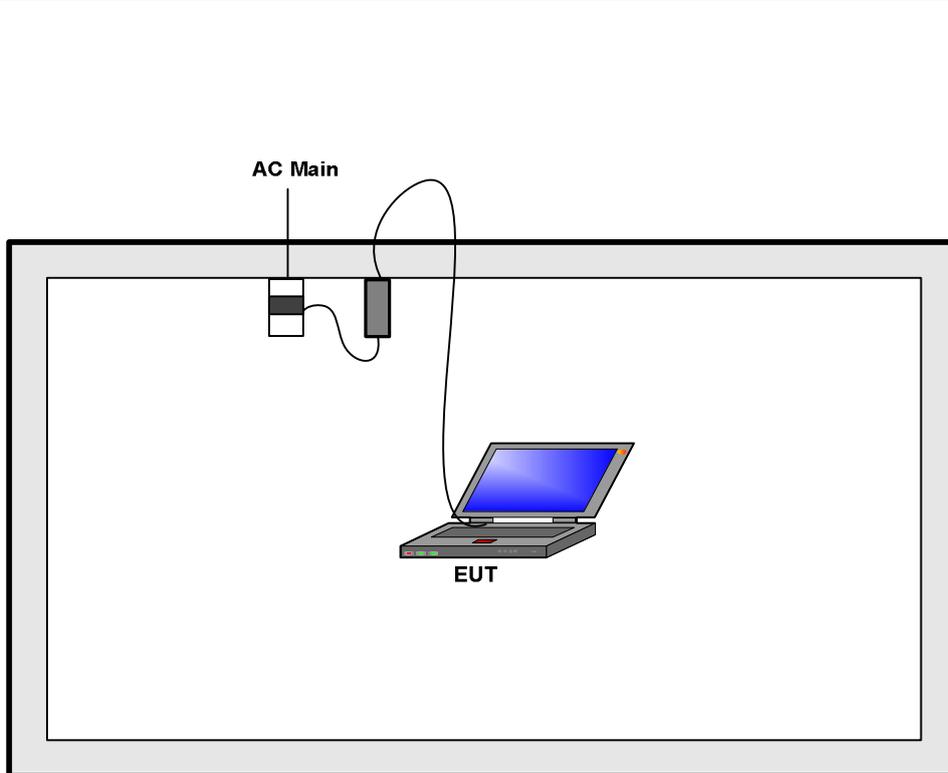

### 3 Transmitter Test Result

#### 3.1 AC Power-line Conducted Emissions

##### 3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: \* Decreases with the logarithm of the frequency.


##### 3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.


##### 3.1.3 Test Procedures

Test Method
<input checked="" type="checkbox"/> Refer as ANSI C63.10-2009, clause 6.2 for AC power-line conducted emissions.

##### 3.1.4 Test Setup

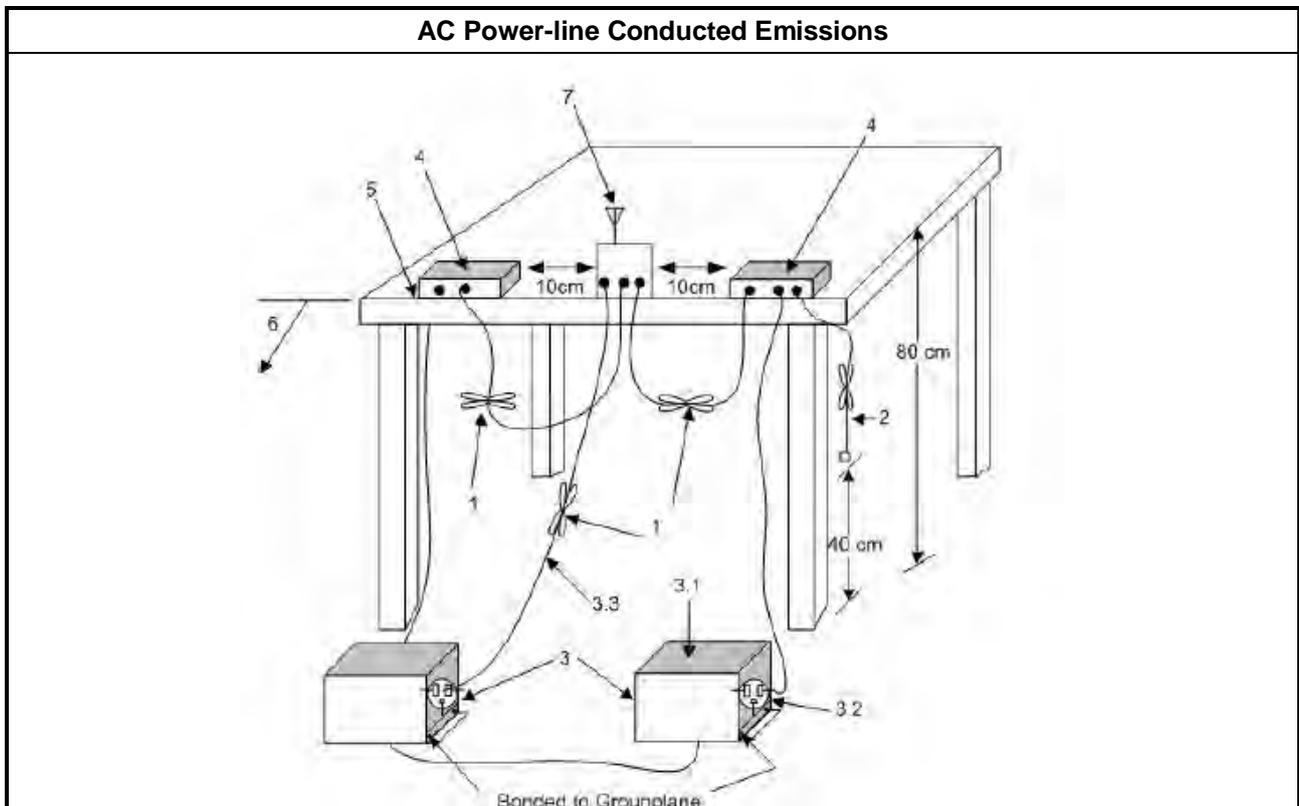


### 3.1.5 Test Result of AC Power-line Conducted Emissions

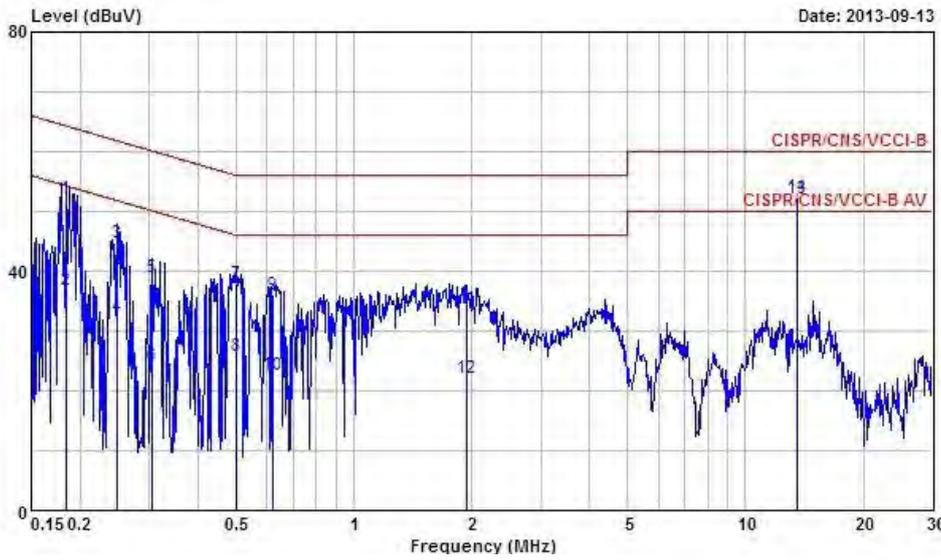AC Power-line Conducted Emissions Result																																																																																																																																																			
Operating Mode	1	Power Phase	Neutral																																																																																																																																																
Operating Function	AC Power & Radio link with AP the NFC is normal function with antenna																																																																																																																																																		
 <p style="text-align: right;">Date: 2013-09-13</p>																																																																																																																																																			
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Line</th> <th>Freq</th> <th>Level</th> <th>Over Limit</th> <th>Limit Line</th> <th>Read Level</th> <th>LISN Factor</th> <th>Cable Loss</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV</th> <th>dB</th> <th>dBuV</th> <th>dBuV</th> <th>dB</th> <th>dB</th> <th></th> </tr> </thead> <tbody> <tr><td>1</td><td>0.1844300</td><td>52.03</td><td>-12.25</td><td>64.28</td><td>51.65</td><td>0.23</td><td>0.15</td><td>QP</td></tr> <tr><td>2</td><td>0.1844300</td><td>36.96</td><td>-17.32</td><td>54.28</td><td>36.58</td><td>0.23</td><td>0.15</td><td>Average</td></tr> <tr><td>3</td><td>0.2494540</td><td>44.80</td><td>-16.98</td><td>61.78</td><td>44.47</td><td>0.23</td><td>0.10</td><td>QP</td></tr> <tr><td>4</td><td>0.2494540</td><td>32.29</td><td>-19.49</td><td>51.78</td><td>31.96</td><td>0.23</td><td>0.10</td><td>Average</td></tr> <tr><td>5</td><td>0.3050910</td><td>38.94</td><td>-21.16</td><td>60.10</td><td>38.62</td><td>0.22</td><td>0.10</td><td>QP</td></tr> <tr><td>6</td><td>0.3050910</td><td>24.11</td><td>-25.99</td><td>50.10</td><td>23.79</td><td>0.22</td><td>0.10</td><td>Average</td></tr> <tr><td>7</td><td>0.5020260</td><td>37.96</td><td>-18.04</td><td>56.00</td><td>37.62</td><td>0.22</td><td>0.12</td><td>QP</td></tr> <tr><td>8</td><td>0.5020260</td><td>25.77</td><td>-20.23</td><td>46.00</td><td>25.43</td><td>0.22</td><td>0.12</td><td>Average</td></tr> <tr><td>9</td><td>0.6205370</td><td>35.93</td><td>-20.07</td><td>56.00</td><td>35.56</td><td>0.22</td><td>0.15</td><td>QP</td></tr> <tr><td>10</td><td>0.6205370</td><td>22.61</td><td>-23.39</td><td>46.00</td><td>22.24</td><td>0.22</td><td>0.15</td><td>Average</td></tr> <tr><td>11</td><td>1.950</td><td>33.70</td><td>-22.30</td><td>56.00</td><td>33.15</td><td>0.25</td><td>0.30</td><td>QP</td></tr> <tr><td>12</td><td>1.950</td><td>22.18</td><td>-23.82</td><td>46.00</td><td>21.63</td><td>0.25</td><td>0.30</td><td>Average</td></tr> <tr><td>13</td><td>13.560</td><td>52.22</td><td>-7.78</td><td>60.00</td><td>51.57</td><td>0.48</td><td>0.17</td><td>QP</td></tr> <tr><td>14</td><td>13.560</td><td>52.47</td><td>2.47</td><td>50.00</td><td>51.82</td><td>0.48</td><td>0.17</td><td>Average</td></tr> </tbody> </table> <p style="text-align: right;">→ This frequency is NFC signal.</p>				Line	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark		MHz	dBuV	dB	dBuV	dBuV	dB	dB		1	0.1844300	52.03	-12.25	64.28	51.65	0.23	0.15	QP	2	0.1844300	36.96	-17.32	54.28	36.58	0.23	0.15	Average	3	0.2494540	44.80	-16.98	61.78	44.47	0.23	0.10	QP	4	0.2494540	32.29	-19.49	51.78	31.96	0.23	0.10	Average	5	0.3050910	38.94	-21.16	60.10	38.62	0.22	0.10	QP	6	0.3050910	24.11	-25.99	50.10	23.79	0.22	0.10	Average	7	0.5020260	37.96	-18.04	56.00	37.62	0.22	0.12	QP	8	0.5020260	25.77	-20.23	46.00	25.43	0.22	0.12	Average	9	0.6205370	35.93	-20.07	56.00	35.56	0.22	0.15	QP	10	0.6205370	22.61	-23.39	46.00	22.24	0.22	0.15	Average	11	1.950	33.70	-22.30	56.00	33.15	0.25	0.30	QP	12	1.950	22.18	-23.82	46.00	21.63	0.25	0.30	Average	13	13.560	52.22	-7.78	60.00	51.57	0.48	0.17	QP	14	13.560	52.47	2.47	50.00	51.82	0.48	0.17	Average
Line	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark																																																																																																																																											
	MHz	dBuV	dB	dBuV	dBuV	dB	dB																																																																																																																																												
1	0.1844300	52.03	-12.25	64.28	51.65	0.23	0.15	QP																																																																																																																																											
2	0.1844300	36.96	-17.32	54.28	36.58	0.23	0.15	Average																																																																																																																																											
3	0.2494540	44.80	-16.98	61.78	44.47	0.23	0.10	QP																																																																																																																																											
4	0.2494540	32.29	-19.49	51.78	31.96	0.23	0.10	Average																																																																																																																																											
5	0.3050910	38.94	-21.16	60.10	38.62	0.22	0.10	QP																																																																																																																																											
6	0.3050910	24.11	-25.99	50.10	23.79	0.22	0.10	Average																																																																																																																																											
7	0.5020260	37.96	-18.04	56.00	37.62	0.22	0.12	QP																																																																																																																																											
8	0.5020260	25.77	-20.23	46.00	25.43	0.22	0.12	Average																																																																																																																																											
9	0.6205370	35.93	-20.07	56.00	35.56	0.22	0.15	QP																																																																																																																																											
10	0.6205370	22.61	-23.39	46.00	22.24	0.22	0.15	Average																																																																																																																																											
11	1.950	33.70	-22.30	56.00	33.15	0.25	0.30	QP																																																																																																																																											
12	1.950	22.18	-23.82	46.00	21.63	0.25	0.30	Average																																																																																																																																											
13	13.560	52.22	-7.78	60.00	51.57	0.48	0.17	QP																																																																																																																																											
14	13.560	52.47	2.47	50.00	51.82	0.48	0.17	Average																																																																																																																																											
<p>Note 1: "&gt;20dB" means emission levels that exceed the level of 20 dB below the applicable limit.            Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)</p>																																																																																																																																																			

AC Power-line Conducted Emissions Result

Operating Mode	1	Power Phase	Line
Operating Function	AC Power & Radio link with AP the NFC is normal function with antenna		

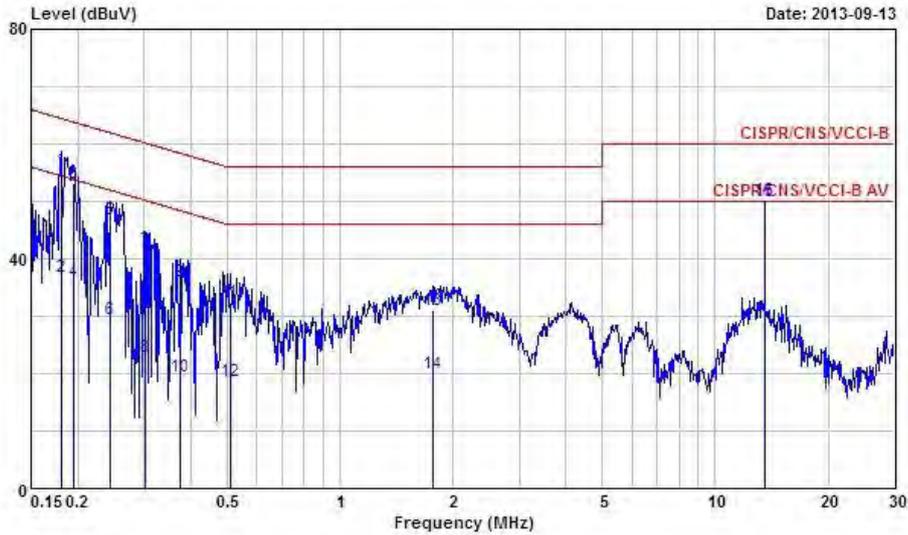

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.1805620	55.52	-8.94	64.46	55.25	0.11	0.16	QP
2	0.1805620	36.86	-17.60	54.46	36.59	0.11	0.16	Average
3	0.1944650	53.03	-10.81	63.84	52.81	0.11	0.11	QP
4	0.1944650	35.96	-17.88	53.84	35.74	0.11	0.11	Average
5	0.2429320	46.86	-15.14	62.00	46.65	0.11	0.10	QP
6	0.2429320	29.45	-22.55	52.00	29.24	0.11	0.10	Average
7	0.3034790	41.54	-18.61	60.15	41.34	0.10	0.10	QP
8	0.3034790	23.02	-27.13	50.15	22.82	0.10	0.10	Average
9	0.3751190	36.07	-22.32	58.39	35.87	0.10	0.10	QP
10	0.3751190	19.37	-29.02	48.39	19.17	0.10	0.10	Average
11	0.5100690	32.29	-23.71	56.00	32.06	0.10	0.13	QP
12	0.5100690	18.60	-27.40	46.00	18.37	0.10	0.13	Average
13	1.760	31.04	-24.96	56.00	30.63	0.13	0.28	QP
14	1.760	19.96	-26.04	46.00	19.55	0.13	0.28	Average
15	13.560	50.08	-9.92	60.00	49.64	0.27	0.17	QP
16 X	13.560	50.18	0.18	50.00	49.74	0.27	0.17	Average


→ This frequency is NFC signal.

Note 1: ">20dB" means emission levels that exceed the level of 20 dB below the applicable limit.  
 Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)



AC Power-line Conducted Emissions Result

Operating Mode	1	Power Phase	Neutral
Operating Function	AC Power & Radio link with AP the NFC is normal function and antenna terminal		

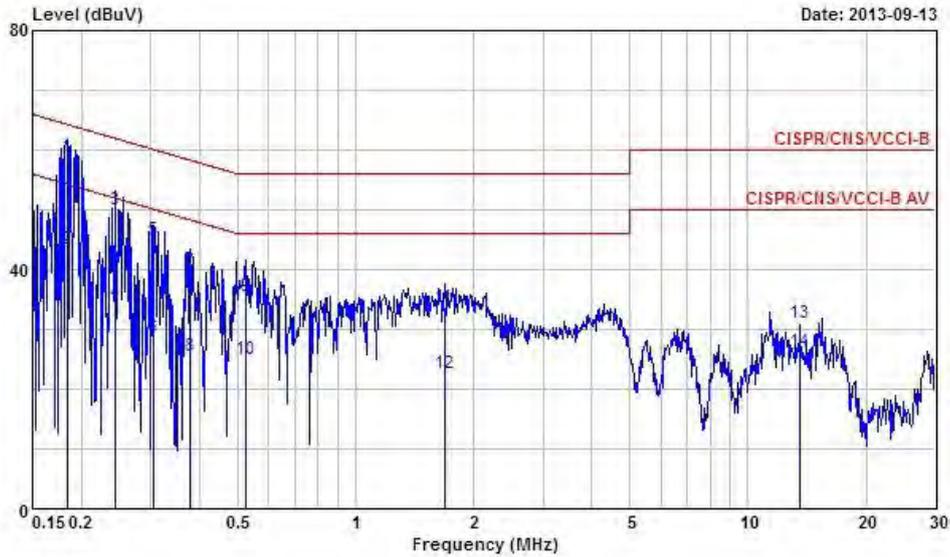


	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.1834550	59.02	-5.31	64.33	58.64	0.23	0.15	QP
2	0.1834550	43.36	-10.97	54.33	42.98	0.23	0.15	Average
3	0.2429320	50.10	-11.90	62.00	49.77	0.23	0.10	QP
4	0.2429320	34.57	-17.43	52.00	34.24	0.23	0.10	Average
5	0.3050910	45.00	-15.10	60.10	44.68	0.22	0.10	QP
6	0.3050910	28.55	-21.55	50.10	28.23	0.22	0.10	Average
7	0.3771120	39.86	-18.48	58.34	39.54	0.22	0.10	QP
8	0.3771120	25.51	-22.83	48.34	25.19	0.22	0.10	Average
9	0.5237620	35.61	-20.39	56.00	35.26	0.22	0.13	QP
10	0.5237620	24.90	-21.10	46.00	24.55	0.22	0.13	Average
11	1.680	33.77	-22.23	56.00	33.24	0.25	0.28	QP
12	1.680	22.53	-23.47	46.00	22.00	0.25	0.28	Average
13	13.560	31.08	-28.92	60.00	30.43	0.48	0.17	QP
14	13.560	26.19	-23.81	50.00	25.54	0.48	0.17	Average

Note 1: ">20dB" means emission levels that exceed the level of 20 dB below the applicable limit.  
 Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)



AC Power-line Conducted Emissions Result

Operating Mode	1	Power Phase	Line
Operating Function	AC Power & Radio link with AP the NFC is normal function and antenna terminal		

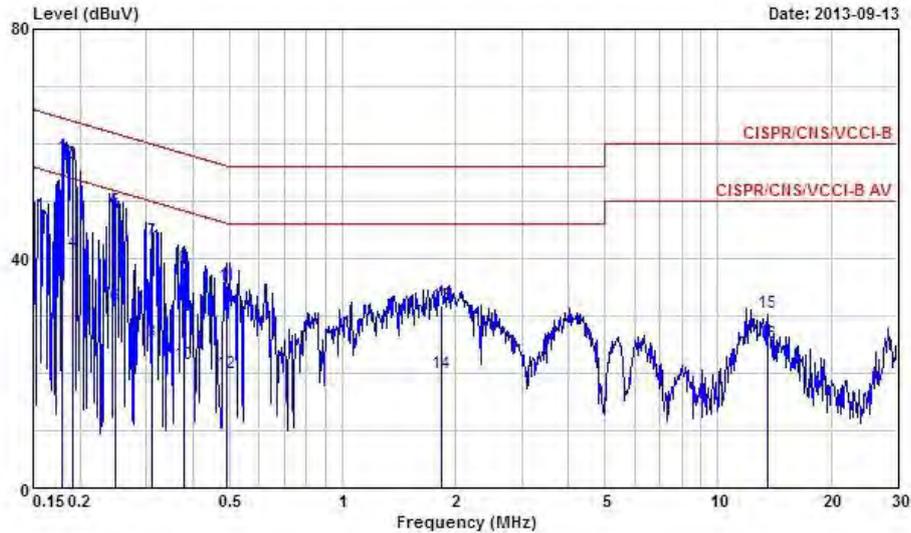

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.1786590	57.59	-6.96	64.55	57.31	0.11	0.17	QP
2	0.1786590	37.13	-17.42	54.55	36.85	0.11	0.17	Average
3	0.1903870	56.55	-7.47	64.02	56.31	0.11	0.13	QP
4	0.1903870	41.16	-12.86	54.02	40.92	0.11	0.13	Average
5	0.2494540	48.30	-13.48	61.78	48.09	0.11	0.10	QP
6	0.2494540	31.77	-20.01	51.78	31.56	0.11	0.10	Average
7	0.3099790	43.25	-16.72	59.97	43.05	0.10	0.10	QP
8	0.3099790	25.42	-24.55	49.97	25.22	0.10	0.10	Average
9	0.3791160	38.29	-20.01	58.30	38.09	0.10	0.10	QP
10	0.3791160	21.45	-26.85	48.30	21.25	0.10	0.10	Average
11	0.4914980	35.15	-20.99	56.14	34.93	0.10	0.12	QP
12	0.4914980	20.09	-26.05	46.14	19.87	0.10	0.12	Average
13	1.840	31.82	-24.18	56.00	31.40	0.13	0.29	QP
14	1.840	20.02	-25.98	46.00	19.60	0.13	0.29	Average
15	13.560	30.51	-29.49	60.00	30.07	0.27	0.17	QP
16	13.560	25.98	-24.62	50.00	24.94	0.27	0.17	Average

Note 1: ">20dB" means emission levels that exceed the level of 20 dB below the applicable limit.  
 Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)

### 3.2 20dB Bandwidth and Carrier Frequency Separation

#### 3.2.1 20dB Bandwidth and Carrier Frequency Separation Limit

20dB Bandwidth and Carrier Frequency Separation Limit for Frequency Hopping Systems	
<input checked="" type="checkbox"/>	2400-2483.5 MHz Band:
<input type="checkbox"/>	$N \geq 75$ and $ChS \geq MAX$ (20 dB bandwidth, 25 kHz).
<input checked="" type="checkbox"/>	$N \geq 15$ and $ChS \geq MAX$ (20 dB bandwidth x 2/3, 25 kHz).
<b>N:</b> Number of Hopping Frequencies; <b>ChS:</b> Hopping Channel Separation	


#### 3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

#### 3.2.3 Test Procedures


Test Method	
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.9.1 for 20 dB bandwidth measurement.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 7.7.2 for carrier frequency separation measurement.
<input checked="" type="checkbox"/>	For conducted measurement.
<input checked="" type="checkbox"/>	The EUT supports single transmit chain and measurements performed on this transmit chain.
<input type="checkbox"/>	The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.

#### 3.2.4 Test Setup

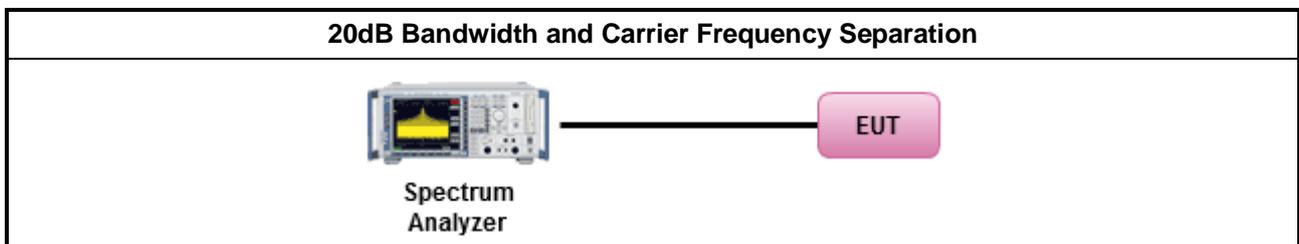

### 3.2.5 Test Result of 20dB Bandwidth and Carrier Frequency Separation

20dB Bandwidth and Carrier Frequency Separation Result					
Modulation Mode	Freq. (MHz)	20dB Bandwidth (MHz)	99% Bandwidth (MHz)	Channel Separation (MHz)	Channel Separation Limits (MHz)
BR-1Mbps	2402	0.9508	0.8769	-	-
BR-1Mbps	2440	0.9508	0.8900	-	-
BR-1Mbps	2480	0.9508	0.8856	-	-
EDR-3Mbps	2402	1.4671	1.3479	1	0.9780667
EDR-3Mbps	2440	1.4731	1.3473	1	0.9820667
EDR-3Mbps	2480	1.4731	1.3592	1	0.9820667
<b>Result</b>		<b>Complied</b>			

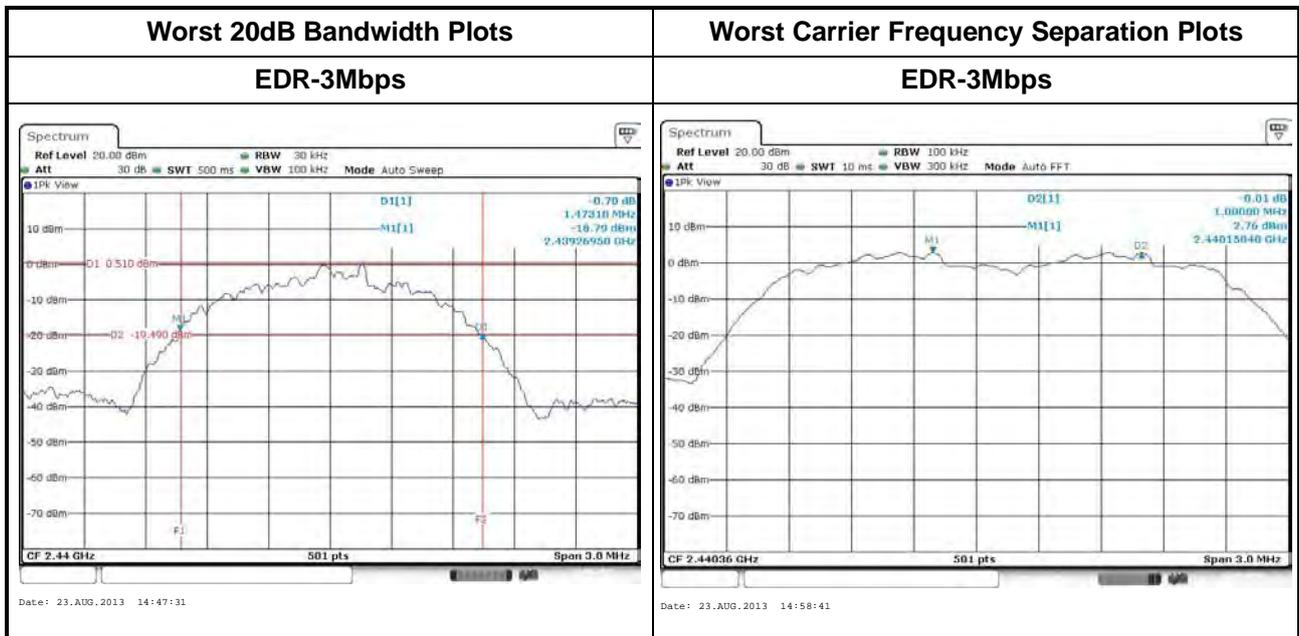

### 3.3 Number of Hopping Frequencies

#### 3.3.1 Number of Hopping Frequencies Limit

Number of Hopping Frequencies Limit for Frequency Hopping Systems	
<input checked="" type="checkbox"/>	2400-2483.5 MHz Band:
<input type="checkbox"/>	$N \geq 75$ and $ChS \geq MAX$ (20 dB bandwidth, 25 kHz).
<input checked="" type="checkbox"/>	$N \geq 15$ and $ChS \geq MAX$ (20 dB bandwidth x 2/3, 25 kHz).
<b>N:</b> Number of Hopping Frequencies; <b>ChS:</b> Hopping Channel Separation	


#### 3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

#### 3.3.3 Test Procedures


Test Method	
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 7.7.3 for number of hopping frequencies measurement.
<input checked="" type="checkbox"/>	For conducted measurement.
<input checked="" type="checkbox"/>	The EUT supports single transmit chain and measurements performed on this transmit chain.
<input type="checkbox"/>	The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.

#### 3.3.4 Test Setup

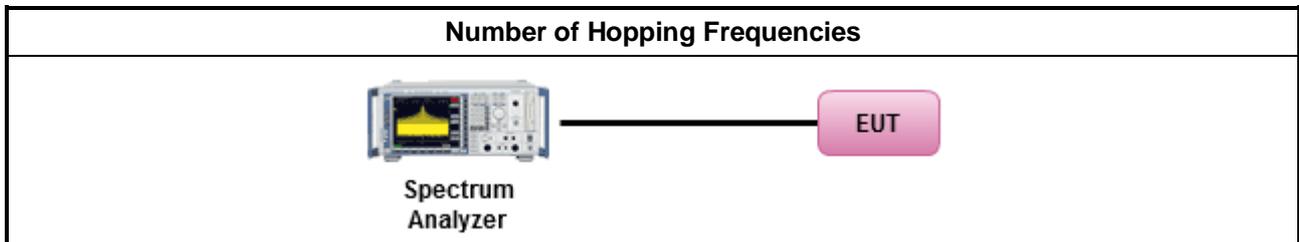

### 3.3.5 Test Result of Number of Hopping Frequencies

Number of Hopping Frequencies Result			
Modulation Mode	Freq. (MHz)	Hopping Channel Number (N)	Hopping Channel Number Limits
EDR-3Mbps	2402-2480	79	15
<b>Result</b>	<b>Complied</b>		

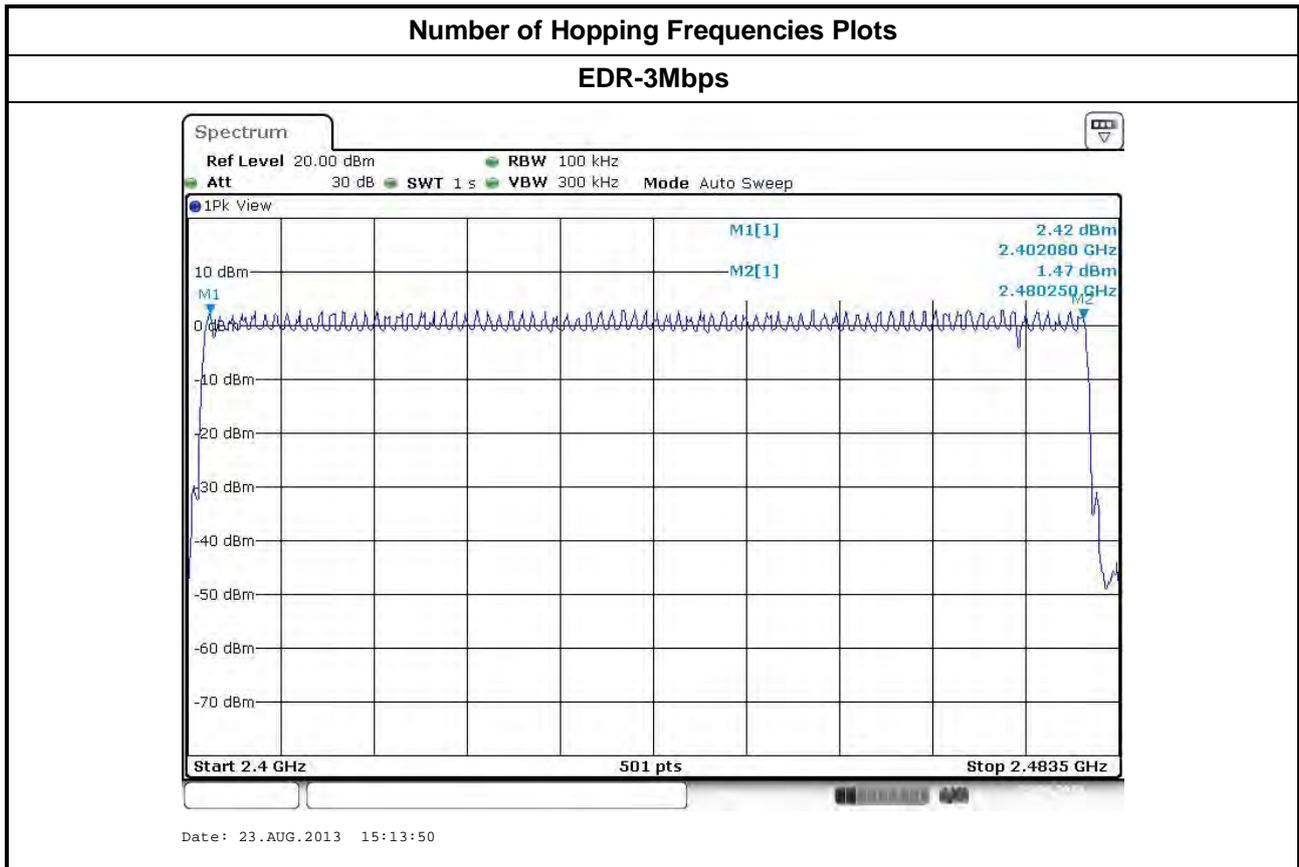

### 3.4 Time of Occupancy (Dwell Time)

#### 3.4.1 Time of Occupancy (Dwell Time) Limit

Time of Occupancy (Dwell Time) Limit for Frequency Hopping Systems
<input checked="" type="checkbox"/> 2400-2483.5 MHz Band: Dwell time $\leq 0.4$ second within $0.4 \times N$
<b>N:</b> Number of Hopping Frequencies


#### 3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

#### 3.4.3 Test Procedures

Test Method
<input checked="" type="checkbox"/> Refer as ANSI C63.10, clause 7.7.4 for dwell time measurement.
<input checked="" type="checkbox"/> Bluetooth ACL packets can be 1, 3, or 5 time slots. Following as dwell time. Operate DH5 at maximum dwell time and maximum duty cycle.
<input checked="" type="checkbox"/> The DH1 packet can cover a single time slot. A maximum length packet has duration of 1 time slots. The hopping rate is 1600 hops/second so the maximum dwell time is $1/1600$ seconds, or 0.625ms. DH1 Packet permit maximum $1600 / 79 / 2 = 10.12$ hops per second in each channel (1 time slot RX, 1 time slot TX). So, the dwell time is the time duration of the pulse times $10.12 \times 31.6 = 320$ within 31.6 seconds.
<input checked="" type="checkbox"/> The DH3 packet can cover up to 3 time slots. A maximum length packet has duration of 3 time slots. The hopping rate is 1600 hops/second so the maximum dwell time is $3/1600$ seconds, or 1.875ms. DH3 Packet permit maximum $1600 / 79 / 4 = 5.06$ hops per second in each channel (3 time slots RX, 1 time slot TX). So, the dwell time is the time duration of the pulse times $5.06 \times 31.6 = 160$ within 31.6 seconds.
<input checked="" type="checkbox"/> The DH5 packet can cover up to 5 time slots. Operate DH5 at maximum dwell time and maximum duty cycle. A maximum length packet has duration of 5 time slots. The hopping rate is 1600 hops/second so the maximum dwell time is $5/1600$ seconds, or 3.125ms. DH5 Packet permit maximum $1600 / 79 / 6 = 3.37$ hops per second in each channel (5 time slots RX, 1 time slot TX). So, the dwell time is the time duration of the pulse times $3.37 \times 31.6 = 106.6$ within 31.6 seconds
<input checked="" type="checkbox"/> For conducted measurement.
<input checked="" type="checkbox"/> The EUT supports single transmit chain and measurements performed on this transmit chain.
<input type="checkbox"/> The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.

#### 3.4.4 Test Setup

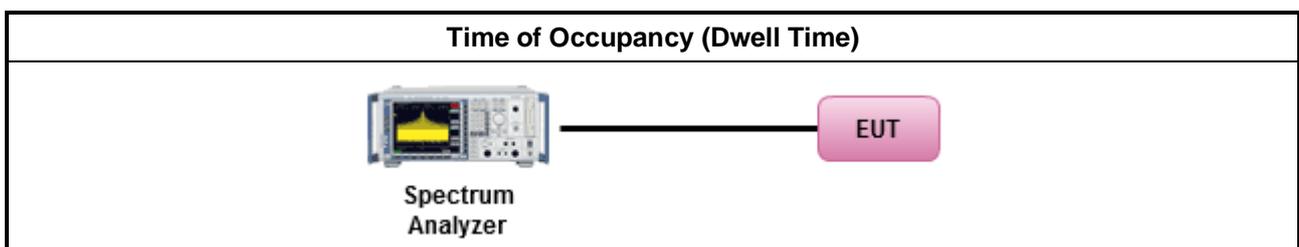




3.4.5 Test Result of Time of Occupancy (Dwell Time)

Time of Occupancy (Dwell Time) Result					
Modulation Mode	Freq. (MHz)	Pulse Time per Hop (ms)	Number of Pulse in [0.4 x N sec]	Dwell Time in [0.4 x N sec] (s)	Dwell Time Limits (s)
EDR-3Mbps	2402	3.02	106.7	0.322	0.4
<b>Result</b>		<b>Complied</b>			

Bluetooth ACL packets can be 1, 3, or 5 time slots. The DH1 packet can cover a single time slot. The DH3 packet can cover up to 3 time slots. The DH5 packet can cover up to 5 time slots. Operate DH5 at maximum dwell time and maximum duty cycle. A maximum length packet has duration of 5 time slots. The hopping rate is 1600 hops/second so the maximum dwell time is 5/1600 seconds, or 3.125ms.

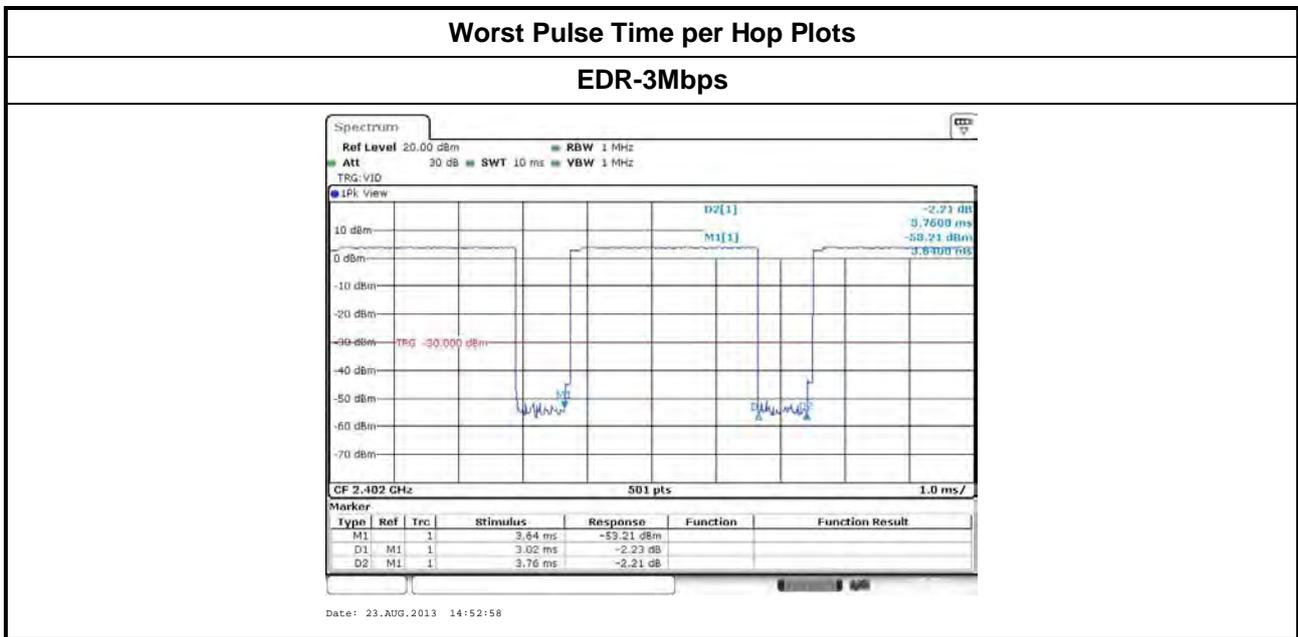



### 3.5 RF Output Power

#### 3.5.1 RF Output Power Limit

RF Output Power Limit for Frequency Hopping Systems	
<b>Maximum Peak Conducted Output Power Limit</b>	
<input checked="" type="checkbox"/> 2400-2483.5 MHz Band:	
<input type="checkbox"/>	For Hopping Channel: $N \geq 75$
<input type="checkbox"/>	If $G_{TX} \leq 6$ dBi, then $P_{Out} \leq 30$ dBm (1 W)
<input type="checkbox"/>	If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$ dBm
<input checked="" type="checkbox"/>	For Hopping Channel: $N \geq 15$
<input checked="" type="checkbox"/>	If $G_{TX} \leq 6$ dBi, then $P_{Out} \leq 21$ dBm (0.125 W)
<input type="checkbox"/>	If $G_{TX} > 6$ dBi, then $P_{Out} = 21 - (G_{TX} - 6)$ dBm
<b>e.i.r.p. Power Limit:</b>	
<input checked="" type="checkbox"/> 2400-2483.5 MHz Band:	
<input type="checkbox"/>	For Hopping Channel: $N \geq 75 - P_{eirp} \leq 36$ dBm (4 W)
<input checked="" type="checkbox"/>	For Hopping Channel: $N \geq 15 - P_{eirp} \leq 27$ dBm (0.5 W)
$G_{TX}$ = the maximum transmitting antenna directional gain in dBi. $P_{eirp}$ = e.i.r.p. Power in dBm. <b>N</b> : Number of Hopping Frequencies <b>ChS</b> : Hopping Channel Separation	


#### 3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

#### 3.5.3 Test Procedures

Test Method	
<input checked="" type="checkbox"/>	Maximum Peak Conducted Output Power
<input type="checkbox"/>	Refer as FCC DA 00-0705, spectrum analyzer for peak power.
<input checked="" type="checkbox"/>	Refer as FCC DA 00-0705, peak power meter for peak power.
<input type="checkbox"/>	Refer as ANSI C63.10, clause 6.10.2.1 a) for peak power meter.
<input type="checkbox"/>	Refer as ANSI C63.10, clause 6.10.2.1 a) for spectrum analyzer - (RBW $\geq$ EBW).
<input checked="" type="checkbox"/>	For conducted measurement.
<input checked="" type="checkbox"/>	The EUT supports single transmit chain and measurements performed on this transmit chain.
<input type="checkbox"/>	The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.

### 3.5.4 Test Setup

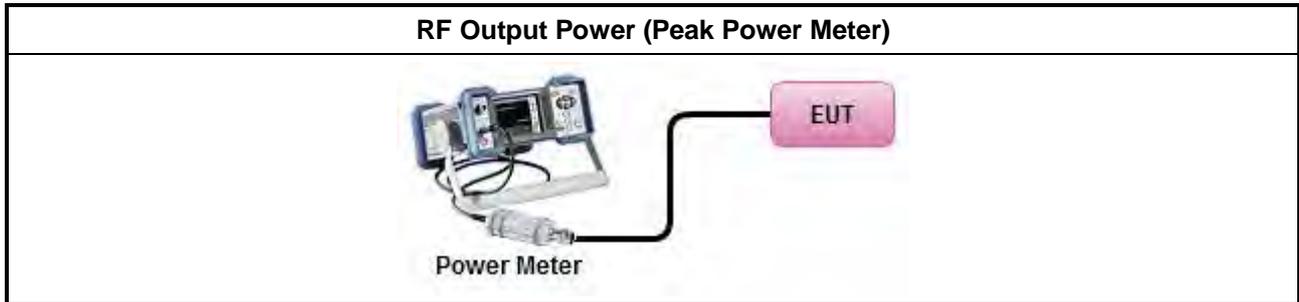



3.5.5 Test Result of Maximum Peak Conducted Output Power


Maximum Peak Conducted Output Power Result						
Condition		RF Output Power (dBm)				
Modulation Mode	Freq. (MHz)	RF Output Power	Power Limit	Antenna Gain (dBi)	EIRP Power	EIRP Limit
BR-1Mbps	2402	8.26	21	-1.42	6.84	27
BR-1Mbps	2440	8.42	21	-1.42	7.00	27
BR-1Mbps	2480	8.11	21	-1.42	6.69	27
EDR-3Mbps	2402	5.85	21	-1.42	4.43	27
EDR-3Mbps	2440	5.93	21	-1.42	4.51	27
EDR-3Mbps	2480	5.56	21	-1.42	4.14	27
<b>Result</b>		<b>Complied</b>				

3.5.6 Test Result of Maximum Average Conducted Output Power

Maximum Average Conducted Output Power Result						
Condition		RF Output Power (dBm)				
Modulation Mode	Freq. (MHz)	Average Power	Duty Factor (dB)	RF Output Power	Antenna Gain (dBi)	EIRP Power
BR-1Mbps	2402	7.09	0.95	8.04	-1.42	6.62
BR-1Mbps	2440	7.22	0.95	8.17	-1.42	6.75
BR-1Mbps	2480	6.92	0.95	7.87	-1.42	6.45
EDR-3Mbps	2402	2.17	0.95	3.12	-1.42	1.70
EDR-3Mbps	2440	2.37	0.95	3.32	-1.42	1.90
EDR-3Mbps	2480	1.99	0.95	2.94	-1.42	1.52
<b>Result</b>		<b>Complied</b>				

### 3.6 Transmitter Radiated Bandedge Emissions

#### 3.6.1 Transmitter Radiated Bandedge Emissions Limit

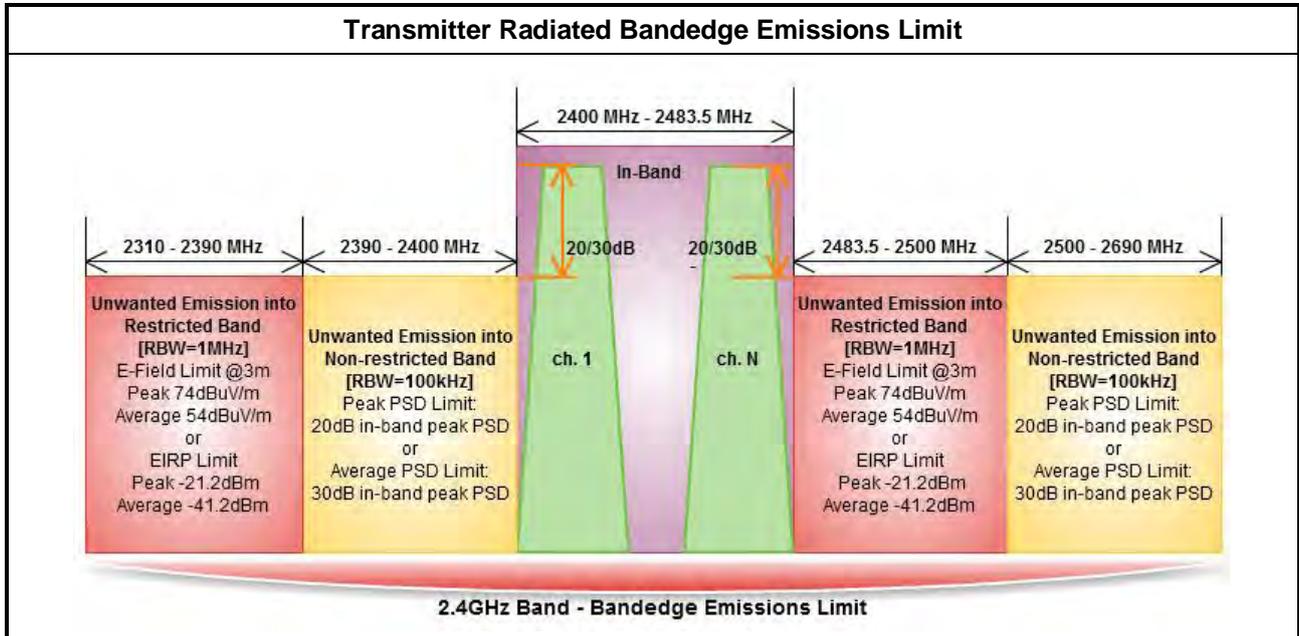


#### 3.6.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

#### 3.6.3 Test Procedures

Test Method – General Information	
<input checked="" type="checkbox"/>	The average emission levels shall be measured in [duty cycle $\geq$ 98 or duty factor].
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.9.2.2 bandedge testing shall be performed at the lowest frequency channel and highest frequency channel within the allowed operating band.
<input checked="" type="checkbox"/>	For the transmitter unwanted emissions shall be measured using following options below:
<input checked="" type="checkbox"/>	For unwanted emissions into non-restricted bands. Peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level.
<input checked="" type="checkbox"/>	For unwanted emissions into restricted bands.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 4.2.3.2.3 (Reduced VBW). $VBW \geq 1/T$ , where T is pulse time.
<input type="checkbox"/>	Refer as ANSI C63.10, clause 4.2.3.2.4 average value of pulsed emissions.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 4.2.3.2.2 measurement procedure peak limit.
<input checked="" type="checkbox"/>	For the transmitter bandedge emissions shall be measured using following options below:
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.9.2 for band-edge testing.
<input type="checkbox"/>	Refer as ANSI C63.10, clause 6.9.3 for marker-delta method for band-edge measurements.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 7.7.9 for band-edge testing into non-restricted bands.
<input checked="" type="checkbox"/>	For radiated measurement, refer as ANSI C63.10, clause 6.6 for radiated emissions from above 1 GHz.

### 3.6.4 Test Setup

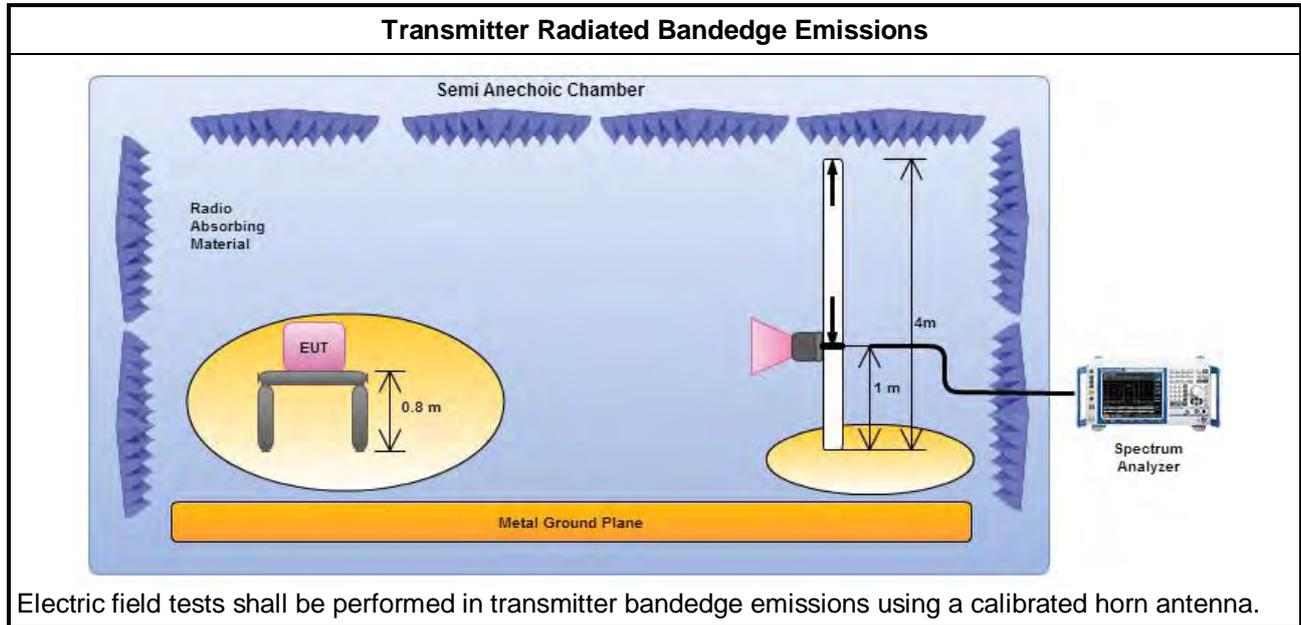



3.6.5 Test Result of Transmitter Radiated Bandedge Emissions

Transmitter Radiated Bandedge Emissions (Non-restricted Band)								
Modulation	N <sub>TX</sub>	Test Freq. (MHz)	In-band PSD [i] (dBuV/100kHz)	Freq. (MHz)	Out-band PSD [o] (dBuV/100kHz)	[i] – [o] (dB)	Limit (dB)	Pol.
EDR-3Mbps	1	2402	94.16	2394.25	63.37	30.79	20	V
EDR-3Mbps	1	2480	94.08	2519.77	63.76	30.32	20	V

Note 1: Measurement worst emissions of receive antenna polarization

Transmitter Radiated Bandedge Emissions (Restricted Band)										
Modulation Mode	N <sub>TX</sub>	Freq. (MHz)	Measure Distance (m)	Freq. (MHz) PK	Level (dBuV/m) PK	Limit (dBuV/m) PK	Freq. (MHz) AV	Level (dBuV/m) AV	Limit (dBuV/m) AV	Pol.
EDR-3Mbps	1	2402	3	2322.14	60.14	74	2321.73	47.48	54	V
EDR-3Mbps	1	2480	3	2495.75	60.32	74	2483.53	48.13	54	V

Note 1: Measurement worst emissions of receive antenna polarization.  
 Note 2: Average emission setting: RBW=1MHz; VBW ≥ 1/T, where T is "Pulse On Time", e.g., DH5 VBW≥1/3.125ms, VBW=1kHz



### 3.7 Transmitter Radiated Unwanted Emissions

#### 3.7.1 Transmitter Radiated Unwanted Emissions Limit

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Un-restricted Band Emissions Limit	
RF output power procedure	Limit (dB)
Peak output power procedure	20
Average output power procedure	30

Note 1: If the peak output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level.

Note 2: If the average output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the power in any 100 kHz outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum measured in-band average PSD level.

#### 3.7.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.



3.7.3 Test Procedures

Test Method – General Information	
<input checked="" type="checkbox"/>	Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).
<input checked="" type="checkbox"/>	Measurements in the frequency range 10 GHz - 18GHz are typically made at a closer distance 1m, because the instrumentation noise floor is typically close to the radiated emission limit.
<input checked="" type="checkbox"/>	Measurements in the frequency range above 18 GHz - 25GHz are typically made at a closer distance 0.5m, because the instrumentation noise floor is typically close to the radiated emission limit.
<input checked="" type="checkbox"/>	The average emission levels shall be measured in [duty cycle $\geq$ 98 or duty factor].
<input checked="" type="checkbox"/>	For the transmitter unwanted emissions shall be measured using following options below:
<input checked="" type="checkbox"/>	Refer as FCC DA 00-0705, for spurious radiated emissions. The dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a “duty cycle correction factor”, derived from $20\log(\text{dwell time}/100 \text{ ms})$
<input checked="" type="checkbox"/>	For unwanted emissions into non-restricted bands. Peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level.
<input checked="" type="checkbox"/>	For unwanted emissions into restricted bands.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 4.2.3.2.3 (Reduced VBW). $VBW \geq 1/T$ , where T is pulse time.
<input type="checkbox"/>	Refer as ANSI C63.10, clause 4.2.3.2.4 average value of pulsed emissions.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 4.2.3.2.2 measurement procedure peak limit.
<input checked="" type="checkbox"/>	For radiated measurement.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.4 for radiated emissions from below 30 MHz.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.5 for radiated emissions from 30 MHz to 1000 MHz.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.6 for radiated emissions from above 1 GHz.

### 3.7.4 Test Setup

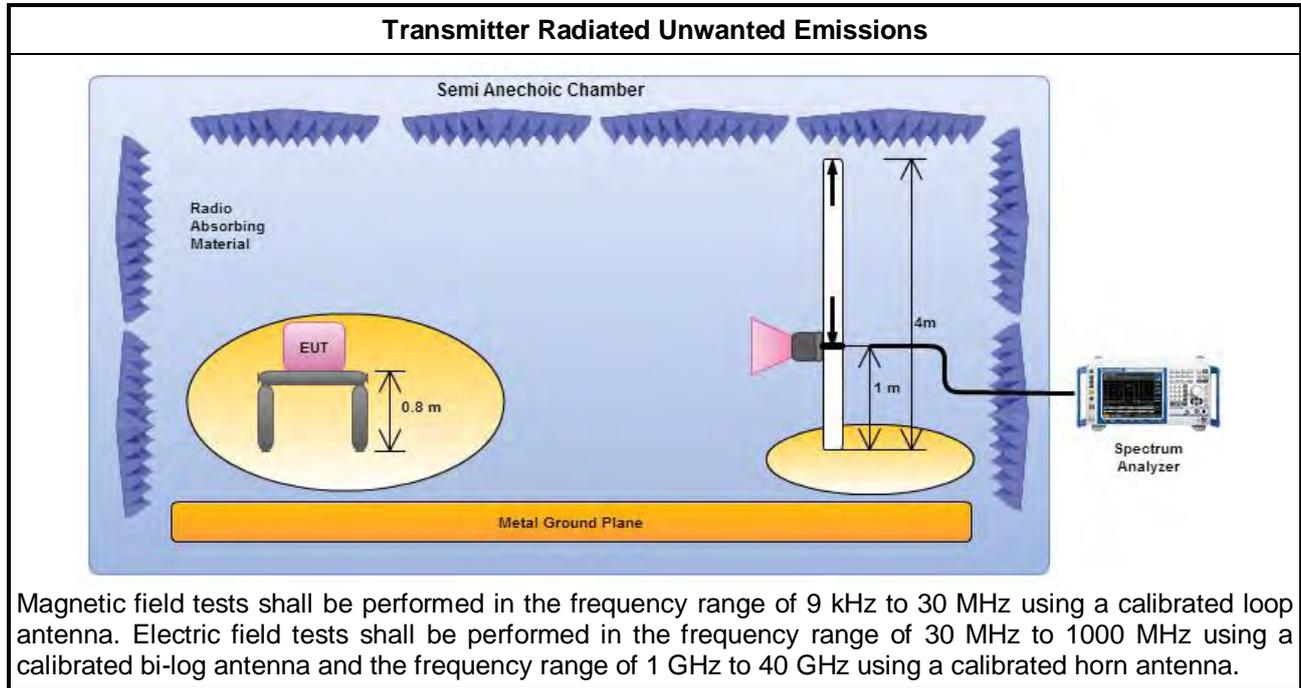


### 3.7.5 Transmitter Radiated Unwanted Emissions (Below 30MHz)

All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

### 3.7.6 Transmitter Radiated Unwanted Emissions (Below 1GHz)

Transmitter Radiated Unwanted Emissions (Below 1GHz)			
Operating Mode	1	Polarization	V
Operating Function	AC Power & Radio link		

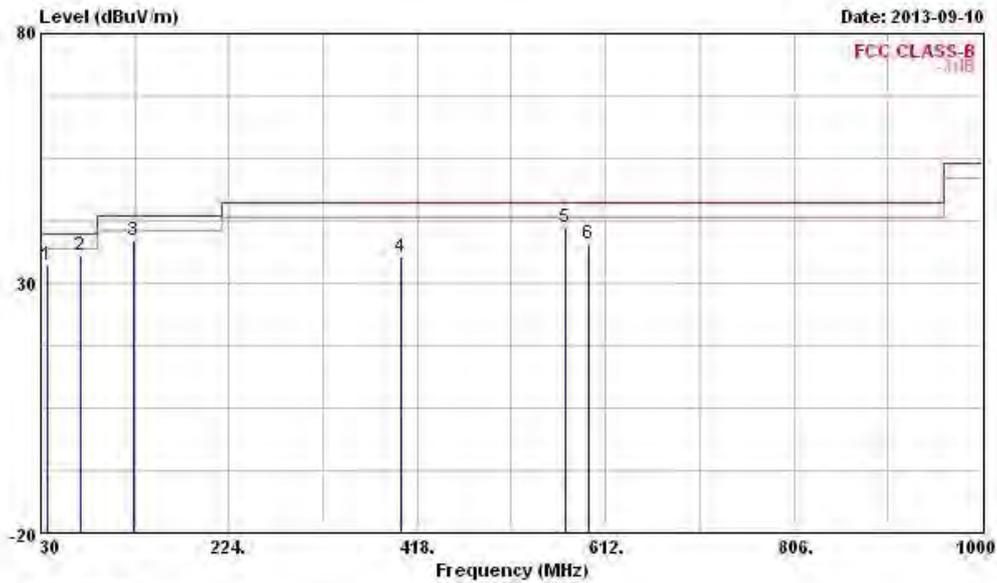


1	2	3	4	5	6	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
36.790	33.77	-6.23	40.00	46.72	13.92	0.83	27.70	Peak	---	---				
71.710	35.73	-4.27	40.00	55.29	6.85	1.20	27.61	Peak	---	---				
125.060	38.64	-4.86	43.50	51.54	13.18	1.59	27.67	Peak	---	---				
400.540	35.31	-10.69	46.00	44.97	15.27	2.98	27.91	Peak	---	---				
571.260	41.13	-4.87	46.00	46.66	19.34	3.61	28.48	Peak	---	---				
594.540	37.89	-8.11	46.00	42.71	20.01	3.67	28.50	Peak	---	---				

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.  
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)  
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)



Transmitter Radiated Unwanted Emissions (Below 1GHz)			
Operating Mode	1	Polarization	H
Operating Function	AC Power & Radio link		

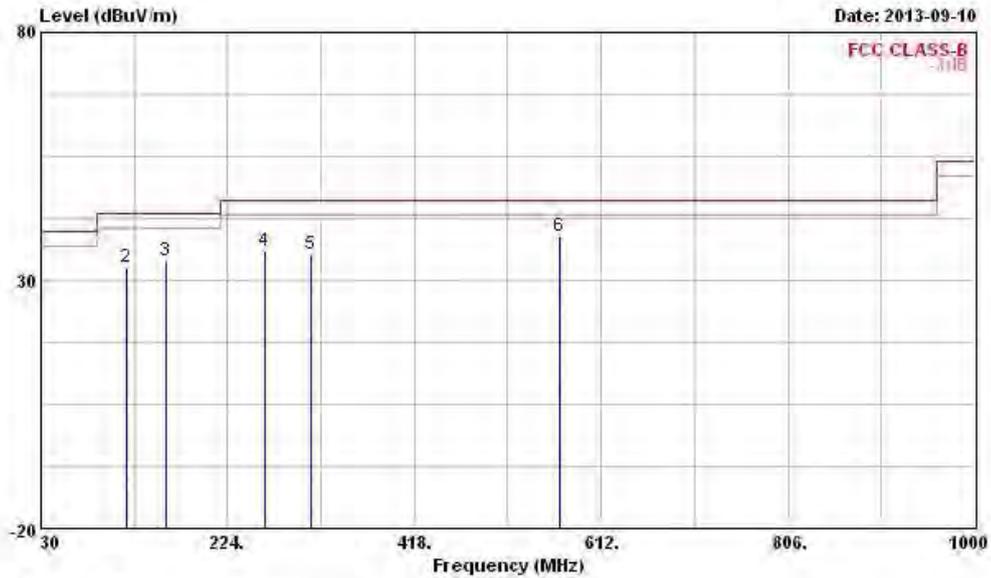


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	30.000	28.46	-11.54	40.00	39.27	16.22	0.78	27.81	Peak	---	---
2	118.270	32.47	-11.03	43.50	45.24	13.38	1.54	27.69	Peak	---	---
3	159.980	34.03	-9.47	43.50	49.26	10.55	1.78	27.56	Peak	---	---
4	261.830	35.88	-10.12	46.00	47.55	13.16	2.43	27.26	Peak	---	---
5	311.300	35.22	-10.78	46.00	45.97	13.88	2.61	27.24	Peak	---	---
6	568.350	38.80	-7.20	46.00	44.43	19.25	3.60	28.48	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.  
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)  
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)



3.7.7 Transmitter Radiated Unwanted Emissions (Above 1GHz)

Transmitter Radiated Unwanted Emissions (Above 1GHz)			
Modulation Mode	BR-1Mbps	Test Freq. (FX)	F1
Operating Function	Transmit	Polarization	V

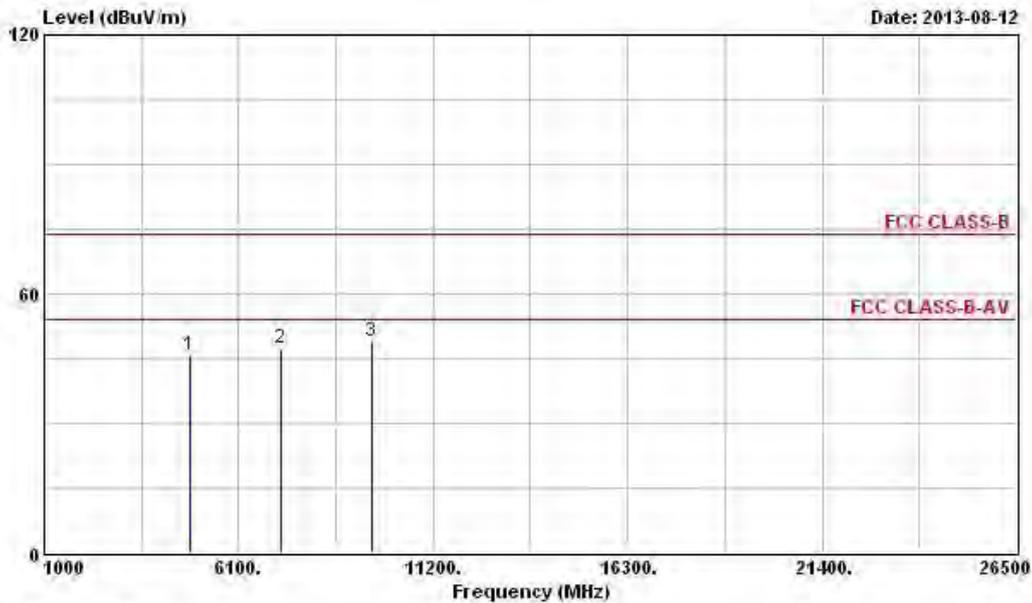


	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Remark	Ant	Table
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	4804.000	45.91	-28.09	74.00	41.28	34.81	4.70	34.88	Peak	---
2	7206.000	47.22			41.13	35.90	5.33	35.14	Peak	---
3	9608.000	49.04			41.42	36.87	6.32	35.57	Peak	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.  
 Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)  
 Note 3: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.  
 Note 4: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (100.73 dBuV/m).  
 Note 5: Average emission setting: RBW=1MHz; VBW ≥ 1/T, where T is "Pulse On Time", e.g., DH5 VBW≥1/3.125ms, VBW=1kHz.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	BR-1Mbps	Test Freq. (FX)	F1
Operating Function	Transmit	Polarization	H

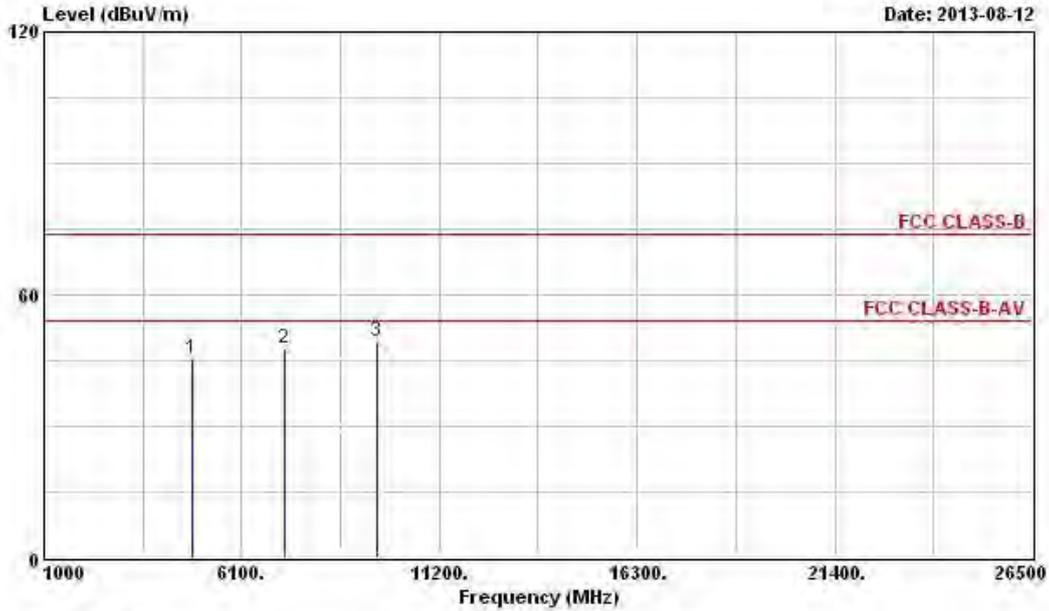


	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4804.000	45.25	-28.75	74.00	40.62	34.81	4.70	34.88	Peak	---	---
2	7206.000	47.90			41.81	35.90	5.33	35.14	Peak	---	---
3	9608.000	49.35			41.73	36.87	6.32	35.57	Peak	---	---

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 3: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 4: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (100.73 dBuV/m).
- Note 5: Average emission setting: RBW=1MHz; VBW ≥ 1/T, where T is "Pulse On Time", e.g., DH5 VBW≥1/3.125ms, VBW=1kHz.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	BR-1Mbps	Test Freq. (FX)	F2
Operating Function	Transmit	Polarization	V

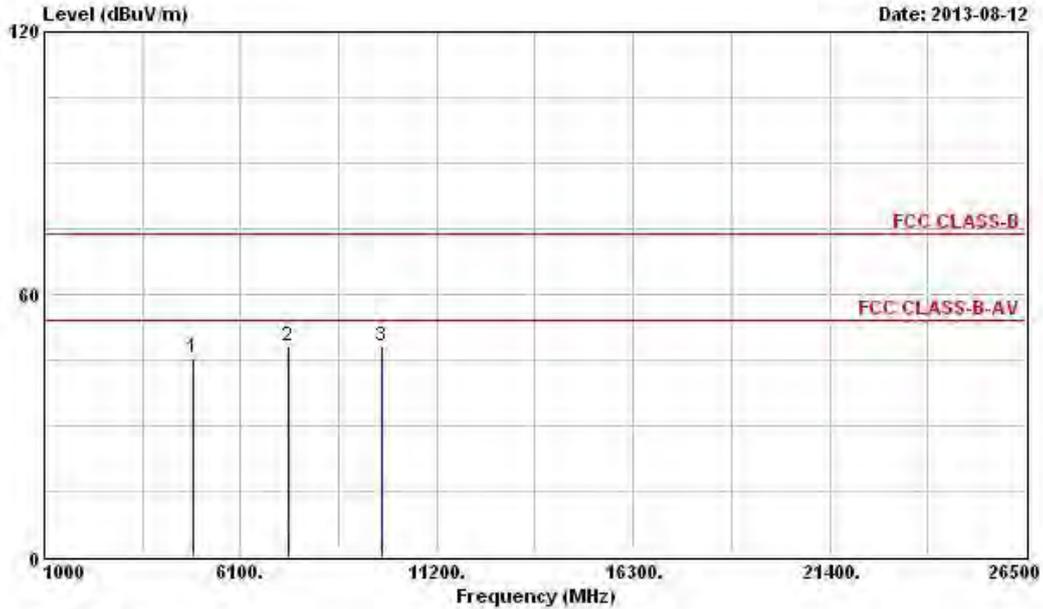


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4880.000	45.23	-28.77	74.00	40.59	34.77	4.73	34.86	Peak	---	---
2	7320.000	48.04	-25.96	74.00	41.84	35.90	5.47	35.17	Peak	---	---
3	9760.000	48.34			40.37	37.11	6.44	35.58	Peak	---	---

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 3: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 4: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (102.03 dBuV/m).
- Note 5: Average emission setting: RBW=1MHz; VBW ≥ 1/T, where T is "Pulse On Time", e.g., DH5 VBW≥1/3.125ms, VBW=1kHz.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	BR-1Mbps	Test Freq. (FX)	F2
Operating Function	Transmit	Polarization	H

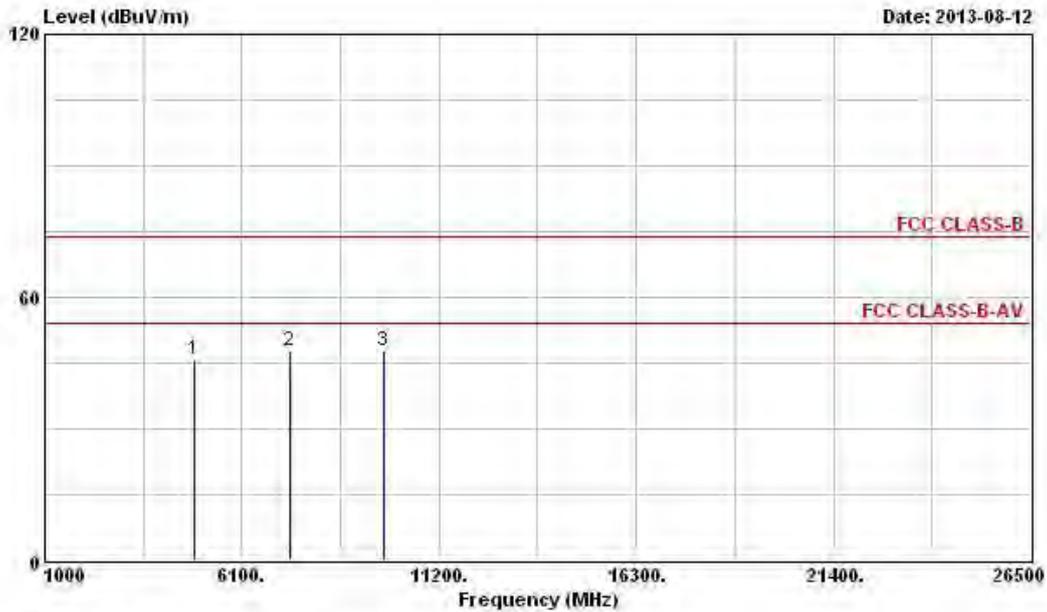


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4880.000	45.70	-28.30	74.00	41.06	34.77	4.73	34.86	Peak	---	---
2	7320.000	47.82	-26.18	74.00	41.62	35.90	5.47	35.17	Peak	---	---
3	9760.000	47.86			39.89	37.11	6.44	35.58	Peak	---	---

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 3: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 4: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (102.03 dBUV/m).
- Note 5: Average emission setting: RBW=1MHz; VBW ≥ 1/T, where T is "Pulse On Time", e.g., DH5 VBW≥1/3.125ms, VBW=1kHz.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	BR-1Mbps	Test Freq. (FX)	F3
Operating Function	Transmit	Polarization	V

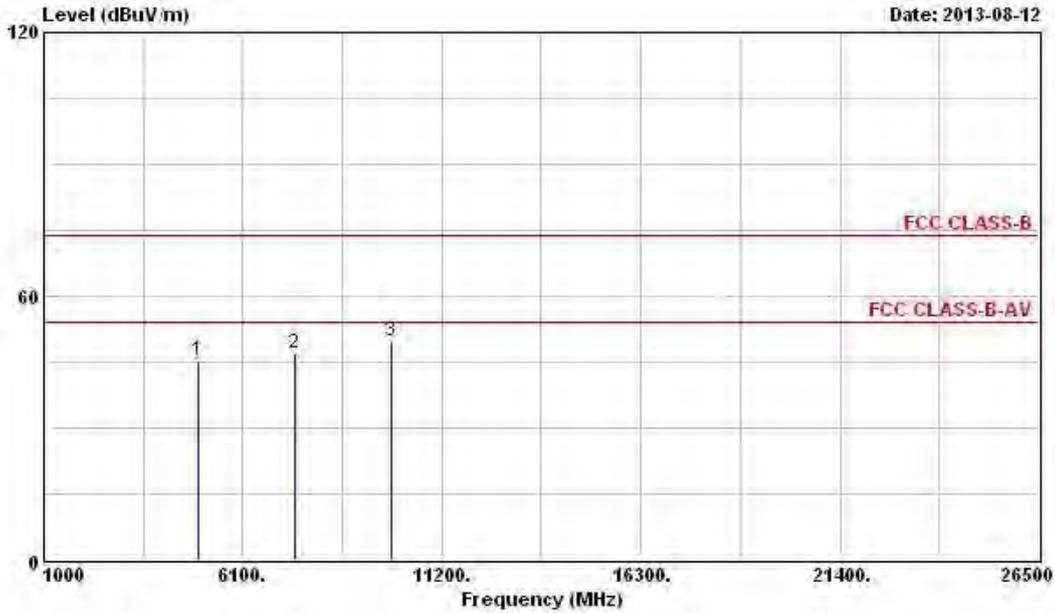


	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4960.000	45.43	-28.57	74.00	40.73	34.72	4.82	34.84	Peak	---	---
2	7440.000	47.12	-26.88	74.00	40.82	35.90	5.61	35.21	Peak	---	---
3	9920.000	49.67			41.31	37.39	6.56	35.59	Peak	---	---

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 3: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 4: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (100.68 dBuV/m).
- Note 5: Average emission setting: RBW=1MHz; VBW ≥ 1/T, where T is "Pulse On Time", e.g., DH5 VBW≥1/3.125ms, VBW=1kHz.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	BR-1Mbps	Test Freq. (FX)	F3
Operating Function	Transmit	Polarization	H

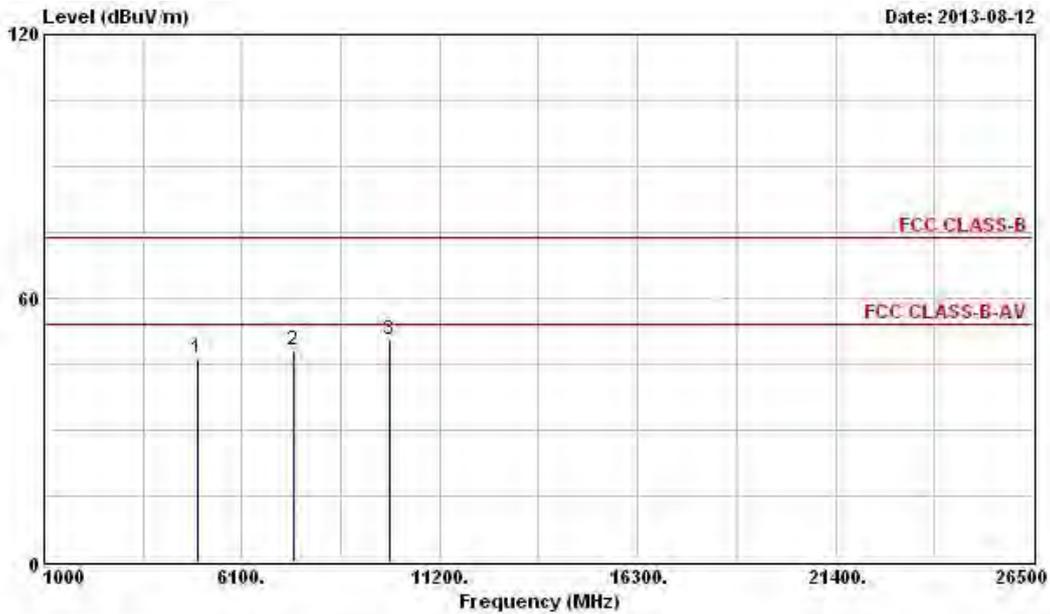

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4960.000	46.31	-27.69	74.00	41.61	34.72	4.82	34.84	Peak	---	---
2	7440.000	48.13	-25.87	74.00	41.83	35.90	5.61	35.21	Peak	---	---
3	9920.000	50.64			42.28	37.39	6.56	35.59	Peak	---	---

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 3: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 4: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (100.68 dBuV/m).
- Note 5: Average emission setting: RBW=1MHz; VBW ≥ 1/T, where T is "Pulse On Time", e.g., DH5 VBW≥1/3.125ms, VBW=1kHz.



## 4 Test Equipment and Calibration Data

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMC Receiver	R&S	ESCS 30	100174	9kHz ~ 2.75GHz	Mar. 26, 2013	Conduction (CO04-HY)
LISN	SCHWARZBECK MESS-ELEKTRONIK	NSLK 8127	8127-477	9kHz ~ 30MHz	Jan. 21, 2013	Conduction (CO04-HY)
LISN (Support Unit)	EMCO	3810/2NM	9703-1839	9kHz ~ 30MHz	Apr. 18, 2013	Conduction (CO04-HY)
RF Cable-CON	HUBER+SUHNER	RG213/U	7.61183201e+012	9kHz ~ 30MHz	Nov. 09, 2012	Conduction (CO04-HY)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Spectrum Analyzer	R&S	FSV 40	101013	9KHz ~ 40GHz	Jan. 29, 2013	Conducted (TH01-HY)
AC Power Source	G.W	APS-9102	EL920581	AC 0V ~ 300V	Jul. 16, 2013	Conducted (TH01-HY)
Temp. and Humidity Chamber	Giant Force	GTH-225-20-SP-SD	MAA1112-007	-20 ~ 100°C	Nov. 21, 2012	Conducted (TH01-HY)
Power Sensor	Anritsu	MA2411B	0917017	300MHz ~ 40GHz	Feb. 02, 2013	Conducted (TH01-HY)
Power Meter	Anritsu	ML2495A	0949003	300MHz ~ 40GHz	Feb. 02, 2013	Conducted (TH01-HY)
RF Cable-2m	HUBER+SUHNER	SUCOFLEX_104	SN 345675/4	1GHz ~ 26.5GHz	Dec. 04, 2012	Conducted (TH01-HY)
RF Cable-0.2m	HUBER+SUHNER	SUCOFLEX_103	10712/4	1GHz ~ 33GHz	Dec. 04, 2012	Conducted (TH01-HY)

Note: Calibration Interval of instruments listed above is one year.



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Spectrum Analyzer	R&S	FSP40	100593	9kHz ~ 40GHz	Sep. 14, 2012	Radiation (03CH02-HY)
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH02-HY	30MHz ~ 1GHz 3m	May 11, 2013	Radiation (03CH02-HY)
Amplifier	Agilent	8447D	2944A11146	100kHz ~ 1.3GHz	Jul. 17, 2013	Radiation (03CH02-HY)
Amplifier	Agilent	8449B	3008A02364	1GHz ~ 26.5GHz	May 06, 2013	Radiation (03CH02-HY)
Horn Antenna	ETS-LINDGREN	3117	00091920	1GHz ~ 18GHz	Nov. 16, 2012	Radiation (03CH02-HY)
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA9170154	15GHz ~ 40GHz	Jan. 08, 2013	Radiation (03CH02-HY)
RF Cable-R03m	Jye Bao	RG142	CB021	9kHz ~ 1GHz	Nov. 10, 2012	Radiation (03CH02-HY)
RF Cable-high	SUHNER	SUCOFLEX106	03CH02-HY	1GHz ~ 40GHz	Mar. 05, 2013	Radiation (03CH02-HY)
Bilog Antenna	SCHAFFNER	CBL61128	2723	30MHz ~ 2GHz	Oct. 22, 2012	Radiation (03CH02-HY)
Turn Table	Chaintek Instruments	3000	MF7802058	0~ 360 degree	N/A	Radiation (03CH02-HY)
Antenna Mast	MF	MF7802	MF780208205	1 ~ 4 m	N/A	Radiation (03CH02-HY)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Loop Antenna	TESEQ	HLA 6120	31244	9 kHz ~ 30 MHz	Dec. 02, 2012	Radiation (03CH02-HY)

Note: Calibration Interval of instruments listed above is two year.