

FCC Test Report

Equipment : Personal Computer
Brand Name : SONY
Model No. : SVF13NA1UL
FCC ID : AK8SVF13NA1UL
Standard : 47 CFR FCC Part 15.247
Operating Band : 2400 MHz – 2483.5 MHz
FCC Classification : DTS
Applicant : Sony Corporation
Manufacturer : 1-7-1 Konan, Minato-ku, Tokyo 108-0075, Japan
RF Module : Intel / 7260NGW AN

The product sample received on Aug. 08, 2013 and completely tested on Sep. 27, 2013. We, SPORTON, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2009 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:



Wayne Hsu / Assistant Manager



Table of Contents

- 1 GENERAL DESCRIPTION5**
- 1.1 Information.....5
- 1.2 Accessories7
- 1.3 Support Equipment7
- 1.4 Testing Applied Standards7
- 1.5 Testing Location Information7
- 1.6 Measurement Uncertainty8
- 2 TEST CONFIGURATION OF EUT9**
- 2.1 The Worst Case Modulation Configuration9
- 2.2 The Worst Case Power Setting Parameter9
- 2.3 The Worst Case Measurement Configuration10
- 2.4 Test Setup Diagram11
- 3 TRANSMITTER TEST RESULT13**
- 3.1 AC Power-line Conducted Emissions13
- 3.2 6dB Bandwidth.....18
- 3.3 RF Output Power20
- 3.4 Power Spectral Density26
- 3.5 Transmitter Bandedge Emissions29
- 3.6 Transmitter Unwanted Emissions32
- 4 TEST EQUIPMENT AND CALIBRATION DATA.....73**

APPENDIX A. TEST PHOTOS

APPENDIX B. PHOTOGRAPHS OF EUT



Summary of Test Result

Conformance Test Specifications					
Report Clause	Ref. Std. Clause	Description	Measured	Limit	Result
1.1.2	15.203	Antenna Requirement	Antenna connector mechanism complied	FCC 15.203	Complied
3.1	15.207	AC Power-line Conducted Emissions	[dBuV]: 0.1834550MHz 43.36 (Margin 10.97dB) - AV 59.02 (Margin 5.31dB) - QP	FCC 15.207	Complied
3.2	15.247(a)	Bandwidth	6dB Bandwidth Unit [MHz] 20M:11.25 / 40M:29.12	≥500kHz	Complied
3.3	15.247(b)	RF Output Power (Maximum Peak Conducted Output Power)	Power [dBm]:19.90	Power [dBm]:30	Complied
3.4	15.247(d)	Power Spectral Density	PSD [dBm/100kHz]:-8.91	PSD [dBm/3kHz]:8	Complied
3.5	15.247(c)	Transmitter Radiated Bandedge Emissions	Non-Restricted Bands: 2399.49MHz: 27.54dB Restricted Bands [dBuV/m at 3m]: 2390.00MHz 71.37 (Margin 2.63dB) - PK 52.81 (Margin 1.19dB) - AV	Non-Restricted Bands: > 20 dBc Restricted Bands: FCC 15.209	Complied
3.6	15.247(c)	Transmitter Radiated Unwanted Emissions	Restricted Bands [dBuV/m at 3m]: 71.710MHz 35.73 (Margin 4.27dB) - PK	Non-Restricted Bands: > 20 dBc Restricted Bands: FCC 15.209	Complied

1 General Description

1.1 Information

1.1.1 RF General Information

RF General Information						
Frequency Range (MHz)	IEEE Std. 802.11	Ch. Freq. (MHz)	Channel Number	Transmit Chains (N _{TX})	RF Output Power (dBm)	Co-location
2400-2483.5	b	2412-2462	1-11 [11]	1	17.31	Yes
2400-2483.5	g	2412-2462	1-11 [11]	1	19.59	Yes
2400-2483.5	n (HT20)	2412-2462	1-11 [11]	1	19.68	Yes
2400-2483.5	n (HT20)	2412-2462	1-11 [11]	2	16.57	Yes
2400-2483.5	n (HT40)	2422-2452	3-9 [7]	1	19.90	Yes
2400-2483.5	n (HT40)	2422-2452	3-9 [7]	2	15.53	Yes

Note 1: RF output power specifies that Maximum Peak Conducted Output Power.
 Note 2: 802.11b uses a combination of DSSS-DBPSK, DQPSK, CCK modulation.
 Note 3: 802.11g/n uses a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.
 Note 4: Co-location, Co-location is generally defined as simultaneously transmitting (co-transmitting) antennas within 20 cm of each other. (i.e., EUT has simultaneously co-transmitting that operating 2.4GHz and 5GHz.)

1.1.2 Antenna Information

Antenna Category	
<input checked="" type="checkbox"/>	Integral antenna (antenna permanently attached)
<input checked="" type="checkbox"/>	Temporary RF connector provided
<input type="checkbox"/>	No temporary RF connector provided Transmit chains bypass antenna and soldered temporary RF connector provided for connected measurement. In case of conducted measurements the transmitter shall be connected to the measuring equipment via a suitable attenuator and correct for all losses in the RF path.

Antenna General Information			
Antenna Port	Ant. Cat.	Ant. Type	Gain (dBi)
1	Integral	PIFA	1.82
2	Integral	PIFA	-1.42

Reminder: The EUT was pre-tested Antenna Port 1 and Antenna Port 2 for single chain, the worst case was Antenna Port 1. Therefore only the test data recorded in this report.



1.1.3 Type of EUT

Identify EUT	
EUT Serial Number	N/A
Presentation of Equipment	<input type="checkbox"/> Production ; <input type="checkbox"/> Pre-Production ; <input checked="" type="checkbox"/> Prototype
Type of EUT	
<input checked="" type="checkbox"/>	Stand-alone
<input type="checkbox"/>	Combined (EUT where the radio part is fully integrated within another device) Combined Equipment - Brand Name / Model No.:
<input type="checkbox"/>	Plug-in radio (EUT intended for a variety of host systems) Host System - Brand Name / Model No.:
<input type="checkbox"/>	Other:

1.1.4 Test Signal Duty Cycle

Operated Mode for Worst Duty Cycle	
<input type="checkbox"/> Operated normally mode for worst duty cycle	
<input checked="" type="checkbox"/> Operated test mode for worst duty cycle	
Test Signal Duty Cycle (x)	Power Duty Factor [dB] – (10 log 1/x)
<input checked="" type="checkbox"/> 98.00% - IEEE 802.11b	0.09
<input checked="" type="checkbox"/> 99.00% - IEEE 802.11g	0.04
<input checked="" type="checkbox"/> 98.00% - IEEE 802.11n (HT20)	0.09
<input checked="" type="checkbox"/> 96.00% - IEEE 802.11n (HT40)	0.18

Note 1: RF Output Power Plots w/o Duty Factor

1.1.5 EUT Operational Condition

Supply Voltage	<input checked="" type="checkbox"/> AC mains	<input checked="" type="checkbox"/> DC	
Type of DC Source	<input type="checkbox"/> Internal DC supply	<input checked="" type="checkbox"/> External DC adapter	<input checked="" type="checkbox"/> Li-on Battery

1.2 Accessories

Accessories Information				
AC Adapter	Brand Name	SONY	Model Name	VGP-AC19V73
	Power Rating	I/P: 100-240V ~ 1.0A 50/60Hz O/P1: 19.5V $\overline{=}$ 2.0A ; O/P2: 5.0V $\overline{=}$ 1.0A		
Li-ion Battery	Brand Name	SONY	Model Name	VGP-BPS41

Reminder: Regarding to more detail and other information, please refer to user manual.

1.3 Support Equipment

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
1	Printer	EPSON	C61	DoC
2	(USB) Mouse	Microsoft	1004	DoC
3	Identity Badge	-	-	-
4	Wireless AP (Remote Workstation)	ASUS	RT-AC66U	MSQ-RTAC66U
5	Bluetooth Headset (Remote Workstation)	Sony Ericsson	Z354	PY7DDA-2006

1.4 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ◆ 47 CFR FCC Part 15
- ◆ ANSI C63.10-2009
- ◆ FCC KDB 558074 v03r01
- ◆ FCC KDB 662911 v02

1.5 Testing Location Information

Testing Location				
<input checked="" type="checkbox"/>	HWA YA	ADD : No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.		
		TEL : 886-3-327-3456	FAX : 886-3-327-0973	
Test Condition	Test Site No.	Test Engineer	Test Environment	
AC Conduction	CO04-HY	Zeus	22°C / 57%	
RF Conducted	TH01-HY	Wei	25°C / 65%	
Radiated Emission	03CH02-HY	Daniel	26°C / 58%	

1.6 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Measurement Uncertainty			
Test Item		Uncertainty	Limit
AC power-line conducted emissions		±2.26 dB	N/A
Emission bandwidth, 6dB bandwidth		±1.42 %	N/A
RF output power, conducted		±0.63 dB	N/A
Power density, conducted		±0.81 dB	N/A
Unwanted emissions, conducted	30 – 1000 MHz	±0.51 dB	N/A
	1 – 18 GHz	±0.67 dB	N/A
	18 – 40 GHz	±0.83 dB	N/A
	40 – 200 GHz	N/A	N/A
All emissions, radiated	30 – 1000 MHz	±2.56 dB	N/A
	1 – 18 GHz	±3.59 dB	N/A
	18 – 40 GHz	±3.82 dB	N/A
	40 – 200 GHz	N/A	N/A
Temperature		±0.8 °C	N/A
Humidity		±3 %	N/A
DC and low frequency voltages		±3 %	N/A
Time		±1.42 %	N/A
Duty Cycle		±1.42 %	N/A

2 Test Configuration of EUT

2.1 The Worst Case Modulation Configuration

Worst Modulation Used for Conformance Testing			
Modulation Mode	Transmit Chains (N _{TX})	Data Rate / MCS	Worst Data Rate / MCS
11b,1-11Mbps	1	1-11 Mbps	11 Mbps
11g,6-54Mbps	1	6-54 Mbps	6 Mbps
HT20,M0-7	1	M0-7	MCS 0
HT20,M8-15	2	M8-15	MCS 8
HT40,M0-7	1	M0-7	MCS 0
HT40,M8-15	2	M8-15	MCS 8

2.2 The Worst Case Power Setting Parameter

The Worst Case Power Setting Parameter (2400-2483.5MHz band)							
Test Software Version	DRTU						
Modulation Mode	N _{TX}	Test Frequency (MHz)					
		NCB: 20MHz			NCB: 40MHz		
		2412	2437	2462	2422	2437	2452
11b,1-11Mbps	1	19	20.5	19.5	-	-	-
11g,6-54Mbps	1	17.5	21.5	18	-	-	-
HT20,M0-7	1	17.5	22.5	18.5	-	-	-
HT20,M8-15	2	16.5,16.5	19.5,19.5	15,15	-	-	-
HT40,M0-7	1	-	-	-	18	23.5	19.5
HT40,M8-15	2	-	-	-	14.5,14.5	19.5,19.5	18.5,18.5


2.3 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	AC power-line conducted emissions
Condition	AC power-line conducted measurement for line and neutral Test Voltage: 120Vac / 60Hz
Operating Mode	Operating Mode Description
1	AC Power & Radio link


The Worst Case Mode for Following Conformance Tests	
Tests Item	RF Output Power, Power Spectral Density, 6 dB Bandwidth
Test Condition	Conducted measurement at transmit chains
Modulation Mode	11b, 11g, HT20, HT40

The Worst Case Mode for Following Conformance Tests			
Tests Item	Transmitter Radiated Unwanted Emissions Transmitter Radiated Bandedge Emissions		
Test Condition	Radiated measurement		
User Position	<input type="checkbox"/> EUT will be placed in fixed position.		
	<input checked="" type="checkbox"/> EUT will be placed in mobile position and operating multiple positions. EUT shall be performed two orthogonal planes. The worst planes is X.		
	<input type="checkbox"/> EUT will be a hand-held or body-worn battery-powered devices and operating multiple positions. EUT shall be performed two or three orthogonal planes.		
Operating Mode	<input checked="" type="checkbox"/> 1. AC Power & Radio Link		
Modulation Mode	11b, 11g, HT20, HT40		
Orthogonal Planes of EUT	X Plane	Y Plane	Z Plane
			


2.4 Test Setup Diagram

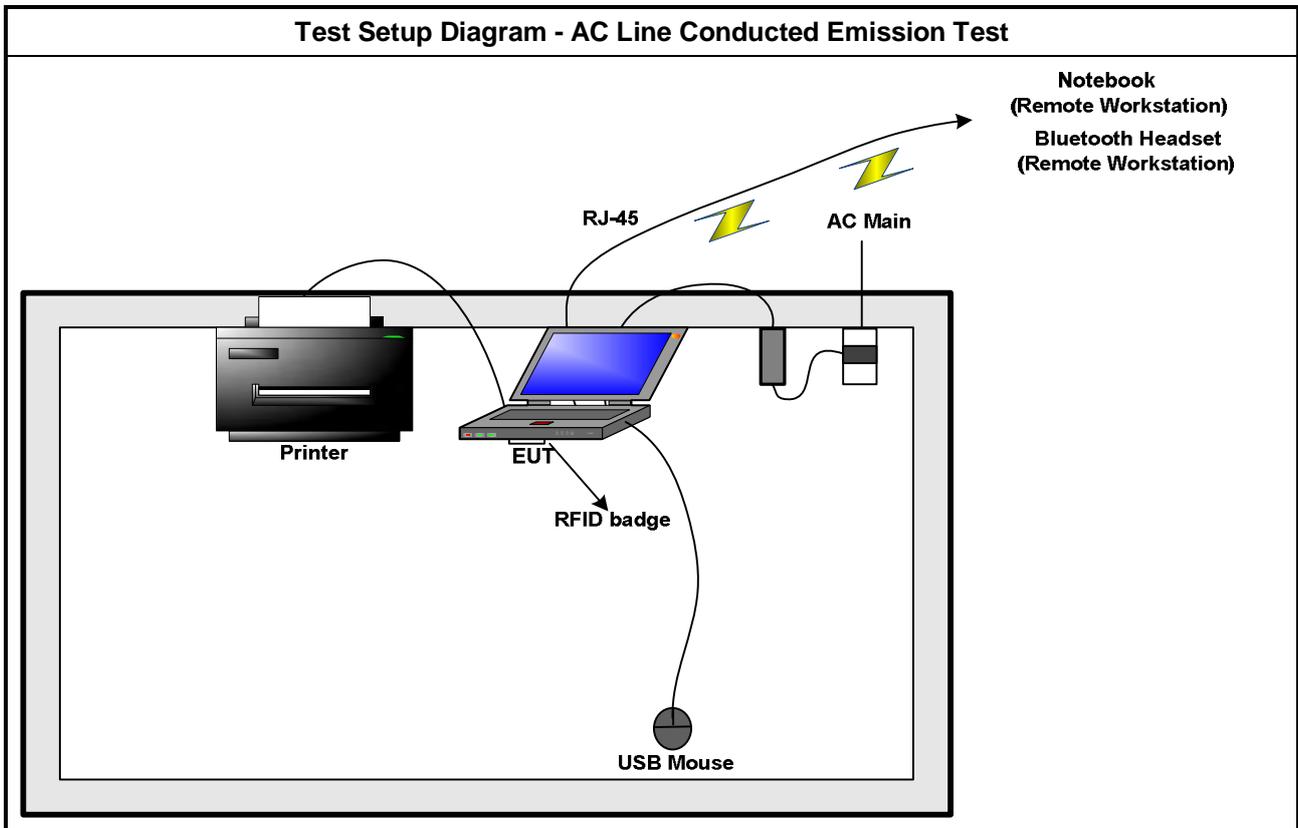

Test Setup Diagram - Radiated Below 1GHz Test

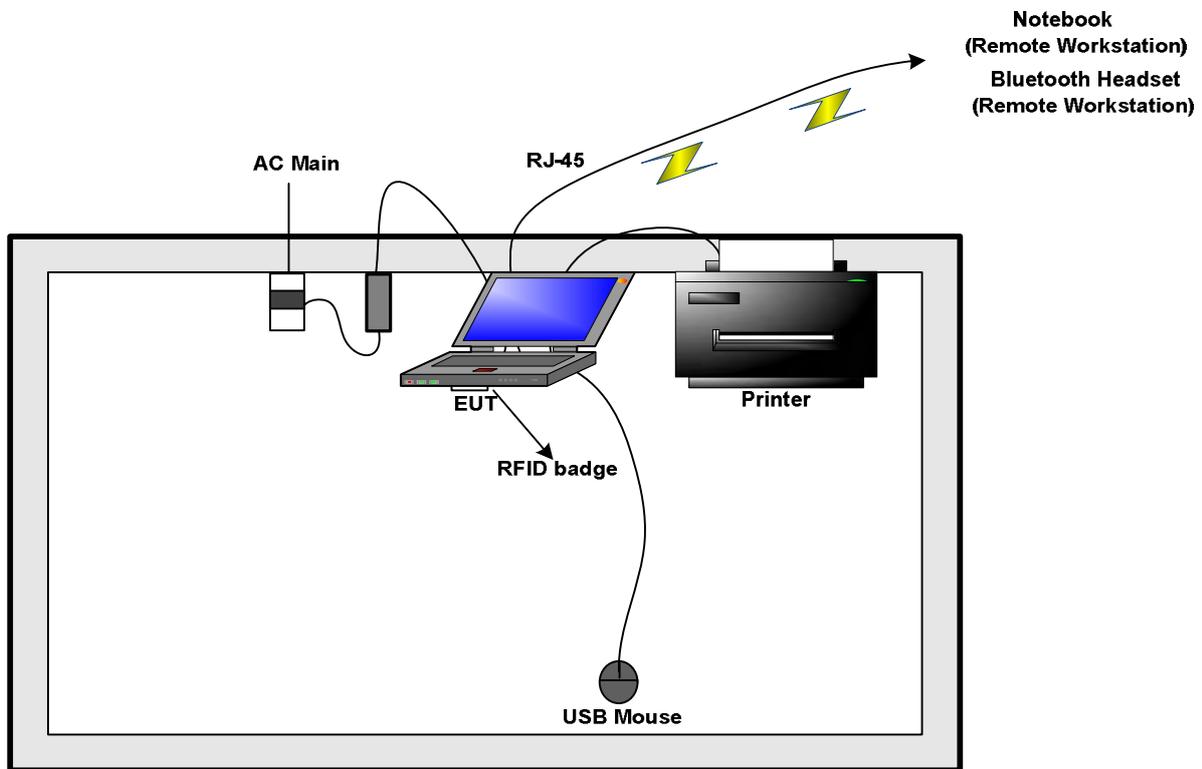

Test Setup Diagram - Radiated Above 1GHz Test

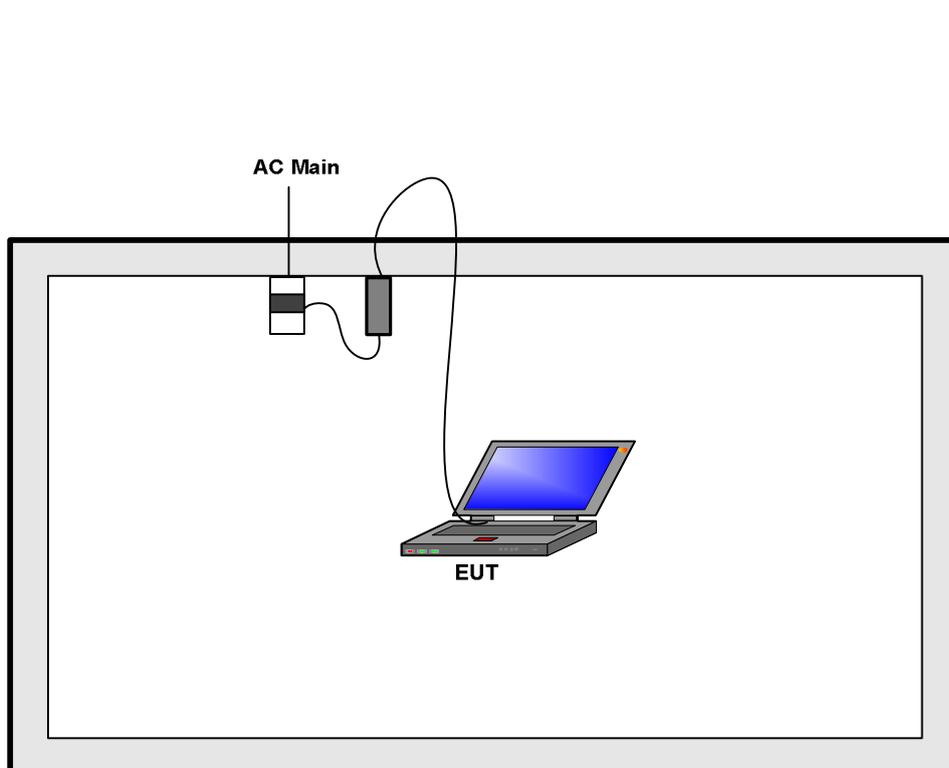

3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.


3.1.3 Test Procedures

Test Method
<input checked="" type="checkbox"/> Refer as ANSI C63.10-2009, clause 6.2 for AC power-line conducted emissions.

3.1.4 Test Setup

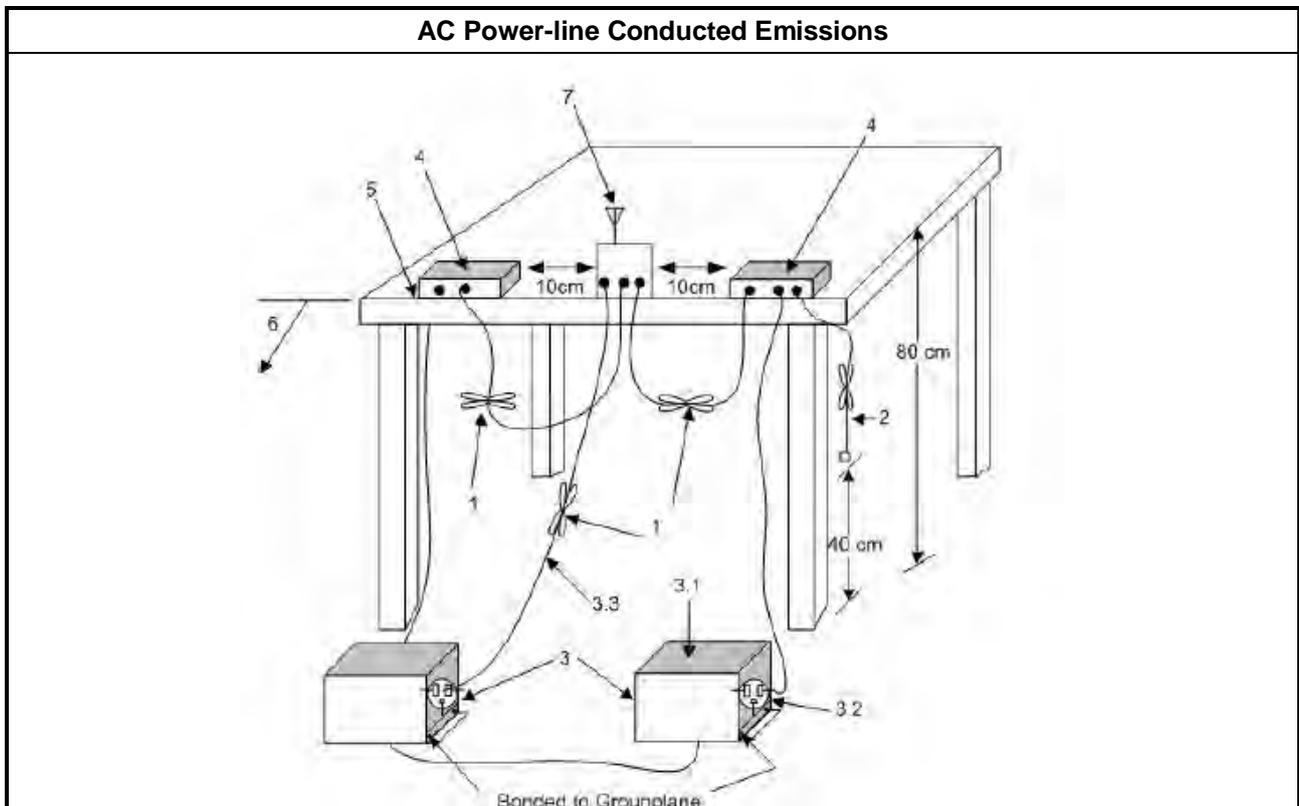


3.1.5 Test Result of AC Power-line Conducted Emissions

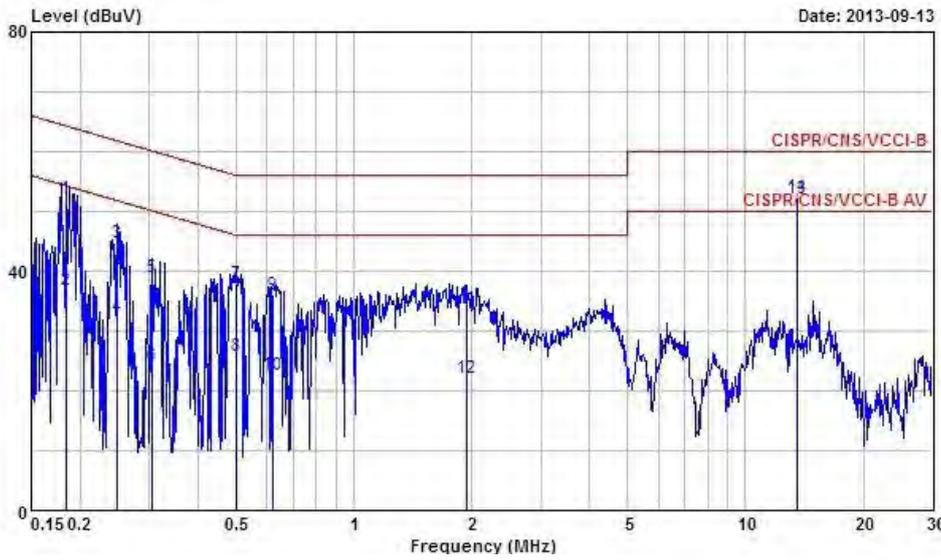AC Power-line Conducted Emissions Result																																																																																																																																																			
Operating Mode	1	Power Phase	Neutral																																																																																																																																																
Operating Function	AC Power & Radio link with AP the NFC is normal function with antenna																																																																																																																																																		
 <p style="text-align: right; font-size: small;">Date: 2013-09-13</p>																																																																																																																																																			
<table border="1" style="width: 100%; border-collapse: collapse; font-size: x-small;"> <thead> <tr> <th>Line</th> <th>Freq</th> <th>Level</th> <th>Over Limit</th> <th>Limit Line</th> <th>Read Level</th> <th>LISN Factor</th> <th>Cable Loss</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV</th> <th>dB</th> <th>dBuV</th> <th>dBuV</th> <th>dB</th> <th>dB</th> <th></th> </tr> </thead> <tbody> <tr><td>1</td><td>0.1844300</td><td>52.03</td><td>-12.25</td><td>64.28</td><td>51.65</td><td>0.23</td><td>0.15</td><td>QP</td></tr> <tr><td>2</td><td>0.1844300</td><td>36.96</td><td>-17.32</td><td>54.28</td><td>36.58</td><td>0.23</td><td>0.15</td><td>Average</td></tr> <tr><td>3</td><td>0.2494540</td><td>44.80</td><td>-16.98</td><td>61.78</td><td>44.47</td><td>0.23</td><td>0.10</td><td>QP</td></tr> <tr><td>4</td><td>0.2494540</td><td>32.29</td><td>-19.49</td><td>51.78</td><td>31.96</td><td>0.23</td><td>0.10</td><td>Average</td></tr> <tr><td>5</td><td>0.3050910</td><td>38.94</td><td>-21.16</td><td>60.10</td><td>38.62</td><td>0.22</td><td>0.10</td><td>QP</td></tr> <tr><td>6</td><td>0.3050910</td><td>24.11</td><td>-25.99</td><td>50.10</td><td>23.79</td><td>0.22</td><td>0.10</td><td>Average</td></tr> <tr><td>7</td><td>0.5020260</td><td>37.96</td><td>-18.04</td><td>56.00</td><td>37.62</td><td>0.22</td><td>0.12</td><td>QP</td></tr> <tr><td>8</td><td>0.5020260</td><td>25.77</td><td>-20.23</td><td>46.00</td><td>25.43</td><td>0.22</td><td>0.12</td><td>Average</td></tr> <tr><td>9</td><td>0.6205370</td><td>35.93</td><td>-20.07</td><td>56.00</td><td>35.56</td><td>0.22</td><td>0.15</td><td>QP</td></tr> <tr><td>10</td><td>0.6205370</td><td>22.61</td><td>-23.39</td><td>46.00</td><td>22.24</td><td>0.22</td><td>0.15</td><td>Average</td></tr> <tr><td>11</td><td>1.950</td><td>33.70</td><td>-22.30</td><td>56.00</td><td>33.15</td><td>0.25</td><td>0.30</td><td>QP</td></tr> <tr><td>12</td><td>1.950</td><td>22.18</td><td>-23.82</td><td>46.00</td><td>21.63</td><td>0.25</td><td>0.30</td><td>Average</td></tr> <tr><td>13</td><td>13.560</td><td>52.22</td><td>-7.78</td><td>60.00</td><td>51.57</td><td>0.48</td><td>0.17</td><td>QP</td></tr> <tr><td>14</td><td>13.560</td><td>52.47</td><td>2.47</td><td>50.00</td><td>51.82</td><td>0.48</td><td>0.17</td><td>Average</td></tr> </tbody> </table> <p style="text-align: right; margin-top: 5px;">→ This frequency is NFC signal.</p>				Line	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark		MHz	dBuV	dB	dBuV	dBuV	dB	dB		1	0.1844300	52.03	-12.25	64.28	51.65	0.23	0.15	QP	2	0.1844300	36.96	-17.32	54.28	36.58	0.23	0.15	Average	3	0.2494540	44.80	-16.98	61.78	44.47	0.23	0.10	QP	4	0.2494540	32.29	-19.49	51.78	31.96	0.23	0.10	Average	5	0.3050910	38.94	-21.16	60.10	38.62	0.22	0.10	QP	6	0.3050910	24.11	-25.99	50.10	23.79	0.22	0.10	Average	7	0.5020260	37.96	-18.04	56.00	37.62	0.22	0.12	QP	8	0.5020260	25.77	-20.23	46.00	25.43	0.22	0.12	Average	9	0.6205370	35.93	-20.07	56.00	35.56	0.22	0.15	QP	10	0.6205370	22.61	-23.39	46.00	22.24	0.22	0.15	Average	11	1.950	33.70	-22.30	56.00	33.15	0.25	0.30	QP	12	1.950	22.18	-23.82	46.00	21.63	0.25	0.30	Average	13	13.560	52.22	-7.78	60.00	51.57	0.48	0.17	QP	14	13.560	52.47	2.47	50.00	51.82	0.48	0.17	Average
Line	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark																																																																																																																																											
	MHz	dBuV	dB	dBuV	dBuV	dB	dB																																																																																																																																												
1	0.1844300	52.03	-12.25	64.28	51.65	0.23	0.15	QP																																																																																																																																											
2	0.1844300	36.96	-17.32	54.28	36.58	0.23	0.15	Average																																																																																																																																											
3	0.2494540	44.80	-16.98	61.78	44.47	0.23	0.10	QP																																																																																																																																											
4	0.2494540	32.29	-19.49	51.78	31.96	0.23	0.10	Average																																																																																																																																											
5	0.3050910	38.94	-21.16	60.10	38.62	0.22	0.10	QP																																																																																																																																											
6	0.3050910	24.11	-25.99	50.10	23.79	0.22	0.10	Average																																																																																																																																											
7	0.5020260	37.96	-18.04	56.00	37.62	0.22	0.12	QP																																																																																																																																											
8	0.5020260	25.77	-20.23	46.00	25.43	0.22	0.12	Average																																																																																																																																											
9	0.6205370	35.93	-20.07	56.00	35.56	0.22	0.15	QP																																																																																																																																											
10	0.6205370	22.61	-23.39	46.00	22.24	0.22	0.15	Average																																																																																																																																											
11	1.950	33.70	-22.30	56.00	33.15	0.25	0.30	QP																																																																																																																																											
12	1.950	22.18	-23.82	46.00	21.63	0.25	0.30	Average																																																																																																																																											
13	13.560	52.22	-7.78	60.00	51.57	0.48	0.17	QP																																																																																																																																											
14	13.560	52.47	2.47	50.00	51.82	0.48	0.17	Average																																																																																																																																											
<p>Note 1: ">20dB" means emission levels that exceed the level of 20 dB below the applicable limit. Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)</p>																																																																																																																																																			



AC Power-line Conducted Emissions Result

Operating Mode	1	Power Phase	Line
Operating Function	AC Power & Radio link with AP the NFC is normal function with antenna		

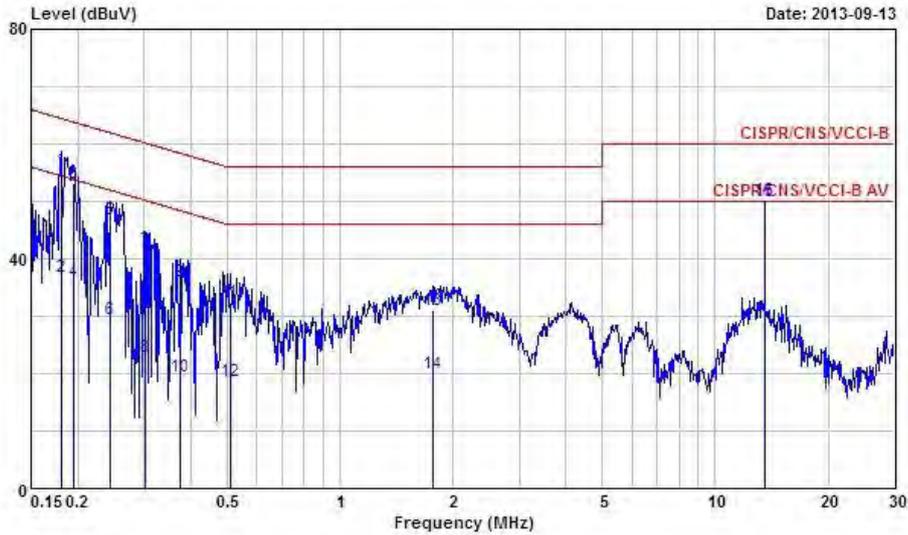

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.1805620	55.52	-8.94	64.46	55.25	0.11	0.16	QP
2	0.1805620	36.86	-17.60	54.46	36.59	0.11	0.16	Average
3	0.1944650	53.03	-10.81	63.84	52.81	0.11	0.11	QP
4	0.1944650	35.96	-17.88	53.84	35.74	0.11	0.11	Average
5	0.2429320	46.86	-15.14	62.00	46.65	0.11	0.10	QP
6	0.2429320	29.45	-22.55	52.00	29.24	0.11	0.10	Average
7	0.3034790	41.54	-18.61	60.15	41.34	0.10	0.10	QP
8	0.3034790	23.02	-27.13	50.15	22.82	0.10	0.10	Average
9	0.3751190	36.07	-22.32	58.39	35.87	0.10	0.10	QP
10	0.3751190	19.37	-29.02	48.39	19.17	0.10	0.10	Average
11	0.5100690	32.29	-23.71	56.00	32.06	0.10	0.13	QP
12	0.5100690	18.60	-27.40	46.00	18.37	0.10	0.13	Average
13	1.760	31.04	-24.96	56.00	30.63	0.13	0.28	QP
14	1.760	19.96	-26.04	46.00	19.55	0.13	0.28	Average
15	13.560	50.08	-9.92	60.00	49.64	0.27	0.17	QP
16	X 13.560	50.18	0.18	50.00	49.74	0.27	0.17	Average


→ This frequency is NFC signal.

Note 1: ">20dB" means emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)



AC Power-line Conducted Emissions Result

Operating Mode	1	Power Phase	Neutral
Operating Function	AC Power & Radio link with AP the NFC is normal function and antenna terminal		

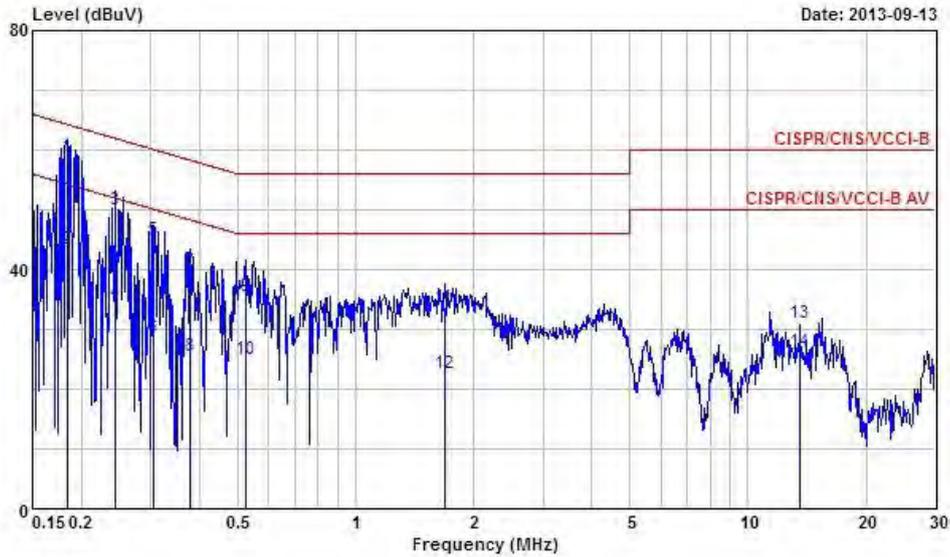


	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.1834550	59.02	-5.31	64.33	58.64	0.23	0.15	QP
2	0.1834550	43.36	-10.97	54.33	42.98	0.23	0.15	Average
3	0.2429320	50.10	-11.90	62.00	49.77	0.23	0.10	QP
4	0.2429320	34.57	-17.43	52.00	34.24	0.23	0.10	Average
5	0.3050910	45.00	-15.10	60.10	44.68	0.22	0.10	QP
6	0.3050910	28.55	-21.55	50.10	28.23	0.22	0.10	Average
7	0.3771120	39.86	-18.48	58.34	39.54	0.22	0.10	QP
8	0.3771120	25.51	-22.83	48.34	25.19	0.22	0.10	Average
9	0.5237620	35.61	-20.39	56.00	35.26	0.22	0.13	QP
10	0.5237620	24.90	-21.10	46.00	24.55	0.22	0.13	Average
11	1.680	33.77	-22.23	56.00	33.24	0.25	0.28	QP
12	1.680	22.53	-23.47	46.00	22.00	0.25	0.28	Average
13	13.560	31.08	-28.92	60.00	30.43	0.48	0.17	QP
14	13.560	26.19	-23.81	50.00	25.54	0.48	0.17	Average

Note 1: ">20dB" means emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)



AC Power-line Conducted Emissions Result

Operating Mode	1	Power Phase	Line
Operating Function	AC Power & Radio link with AP the NFC is normal function and antenna terminal		

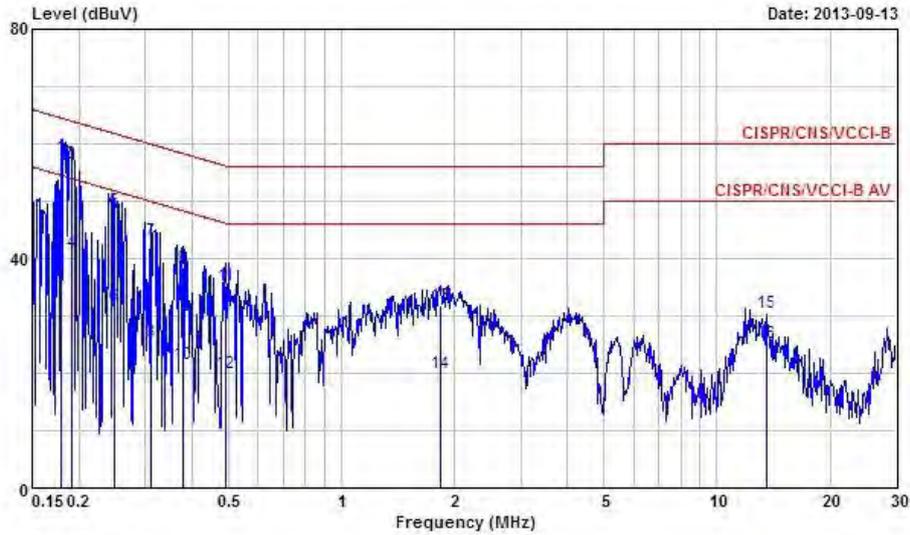

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.1786590	57.59	-6.96	64.55	57.31	0.11	0.17	QP
2	0.1786590	37.13	-17.42	54.55	36.85	0.11	0.17	Average
3	0.1903870	56.55	-7.47	64.02	56.31	0.11	0.13	QP
4	0.1903870	41.16	-12.86	54.02	40.92	0.11	0.13	Average
5	0.2494540	48.30	-13.48	61.78	48.09	0.11	0.10	QP
6	0.2494540	31.77	-20.01	51.78	31.56	0.11	0.10	Average
7	0.3099790	43.25	-16.72	59.97	43.05	0.10	0.10	QP
8	0.3099790	25.42	-24.55	49.97	25.22	0.10	0.10	Average
9	0.3791160	38.29	-20.01	58.30	38.09	0.10	0.10	QP
10	0.3791160	21.45	-26.85	48.30	21.25	0.10	0.10	Average
11	0.4914980	35.15	-20.99	56.14	34.93	0.10	0.12	QP
12	0.4914980	20.09	-26.05	46.14	19.87	0.10	0.12	Average
13	1.840	31.82	-24.18	56.00	31.40	0.13	0.29	QP
14	1.840	20.02	-25.98	46.00	19.60	0.13	0.29	Average
15	13.560	30.51	-29.49	60.00	30.07	0.27	0.17	QP
16	13.560	25.98	-24.62	50.00	24.94	0.27	0.17	Average

Note 1: ">20dB" means emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)

3.2 6dB Bandwidth

3.2.1 6dB Bandwidth Limit

6dB Bandwidth Limit	
Systems using digital modulation techniques:	
<input checked="" type="checkbox"/>	6 dB bandwidth \geq 500 kHz.


3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

Test Method	
<input checked="" type="checkbox"/>	For the emission bandwidth shall be measured using one of the options below:
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074, clause 8.1 Option 1 for 6 dB bandwidth measurement.
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 8.2 Option 2 for 6 dB bandwidth measurement.
<input type="checkbox"/>	Refer as ANSI C63.10, clause 6.9.1 for occupied bandwidth testing.
<input checked="" type="checkbox"/>	For conducted measurement.
<input type="checkbox"/>	The EUT supports single transmit chain and measurements performed on this transmit chain.
<input checked="" type="checkbox"/>	The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.
<input checked="" type="checkbox"/>	The EUT supports multiple transmit chains using options given below:
<input type="checkbox"/>	Option 1: Multiple transmit chains measurements need to be performed on one of the active transmit chains (antenna outputs). All measurement had be performed on transmit chains 1.
<input checked="" type="checkbox"/>	Option 2: Multiple transmit chains measurements need to be performed on each transmit chains individually (antenna outputs). All measurement had be performed on all transmit chains.


3.2.4 Test Setup

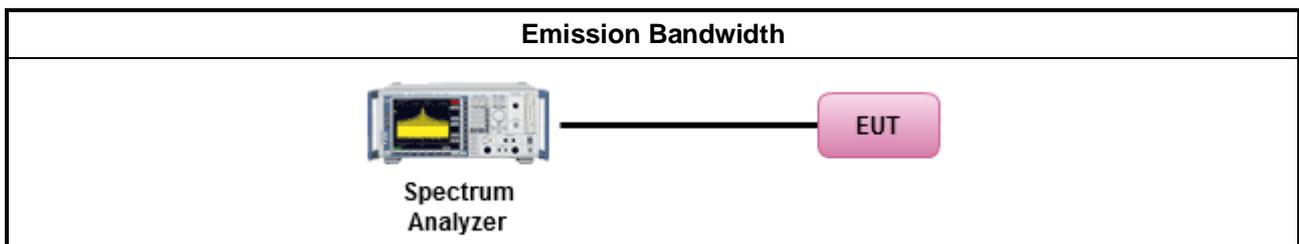

3.2.5 Test Result of Emission Bandwidth

Emission Bandwidth Result						
Condition			Emission Bandwidth (MHz)			
Modulation Mode	N _{TX}	Freq. (MHz)	99% Bandwidth		6dB Bandwidth	
			Chain Port 1	Chain Port 2	Chain Port 1	Chain Port 2
11b	1	2412	14.16	-	11.43	-
11b	1	2437	14.09	-	11.25	-
11b	1	2462	14.04	-	11.71	-
11g	1	2412	16.47	-	16.41	-
11g	1	2437	16.50	-	16.44	-
11g	1	2462	16.34	-	16.35	-
HT20	1	2412	17.67	-	17.67	-
HT20	1	2437	16.50	-	16.54	-
HT20	1	2462	17.63	-	17.23	-
HT20	2	2412	17.70	17.66	17.56	17.68
HT20	2	2437	17.69	17.66	17.59	17.67
HT20	2	2462	17.61	17.61	17.58	17.55
HT40	1	2422	35.86	-	30.08	-
HT40	1	2437	35.90	-	29.76	-
HT40	1	2452	35.94	-	32.60	-
HT40	2	2422	35.94	35.94	30.04	29.12
HT40	2	2437	35.82	35.78	35.08	33.80
HT40	2	2452	35.90	35.94	33.92	32.60
Limit			N/A		≥500 kHz	
Result			Complied			

Note 1: N_{TX} = Number of Transmit Chains

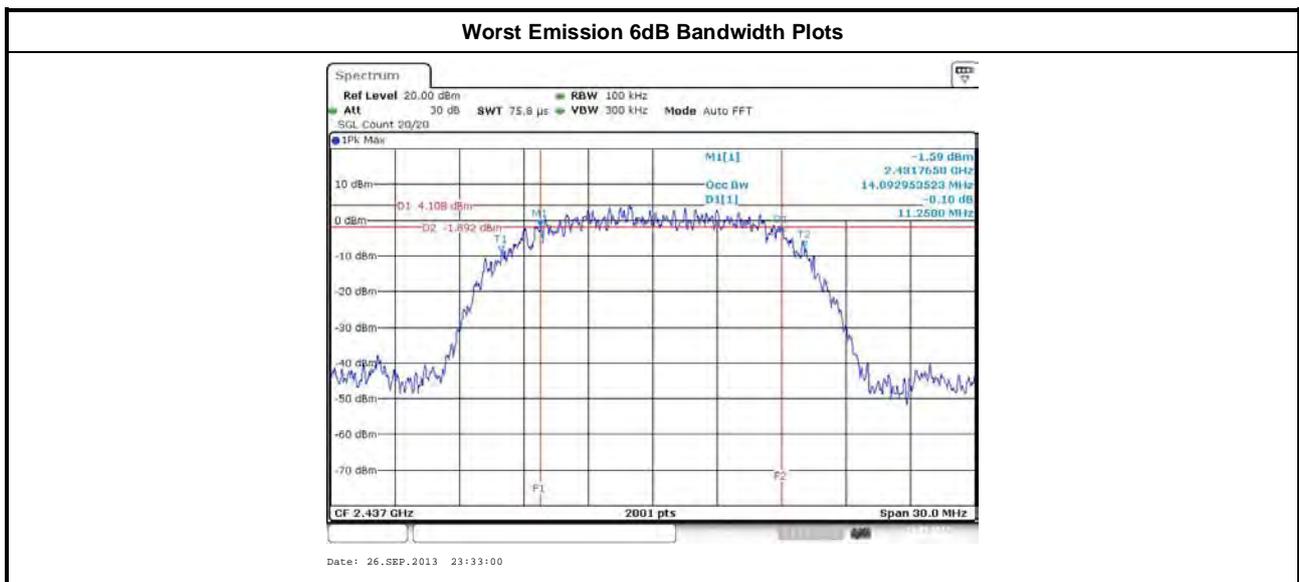

3.3 RF Output Power

3.3.1 RF Output Power Limit

RF Output Power Limit	
Maximum Peak Conducted Output Power or Maximum Conducted Output Power Limit	
<input checked="" type="checkbox"/> 2400-2483.5 MHz Band:	
<input checked="" type="checkbox"/>	If $G_{TX} \leq 6$ dBi, then $P_{Out} \leq 30$ dBm (1 W)
<input checked="" type="checkbox"/>	Point-to-multipoint systems (P2M): If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$ dBm
<input type="checkbox"/>	Point-to-point systems (P2P): If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
<input type="checkbox"/>	Smart antenna system (SAS):
<input type="checkbox"/>	Single beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
<input type="checkbox"/>	Overlap beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
<input type="checkbox"/>	Aggregate power on all beams: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3 + 8$ dB dBm
e.i.r.p. Power Limit:	
<input checked="" type="checkbox"/> 2400-2483.5 MHz Band	
<input checked="" type="checkbox"/>	Point-to-multipoint systems (P2M): $P_{eirp} \leq 36$ dBm (4 W)
<input type="checkbox"/>	Point-to-point systems (P2P): $P_{eirp} \leq \text{MAX}(36, [P_{Out} + G_{TX}])$ dBm
<input type="checkbox"/>	Smart antenna system (SAS)
<input type="checkbox"/>	Single beam: $P_{eirp} \leq \text{MAX}(36, P_{Out} + G_{TX})$ dBm
<input type="checkbox"/>	Overlap beam: $P_{eirp} \leq \text{MAX}(36, P_{Out} + G_{TX})$ dBm
<input type="checkbox"/>	Aggregate power on all beams: $P_{eirp} \leq \text{MAX}(36, [P_{Out} + G_{TX} + 8])$ dBm
P_{Out} = maximum peak conducted output power or maximum conducted output power in dBm, G_{TX} = the maximum transmitting antenna directional gain in dBi. P_{eirp} = e.i.r.p. Power in dBm.	


3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures

Test Method	
<input checked="" type="checkbox"/>	Maximum Peak Conducted Output Power
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 9.1.1 Option 1 (RBW ≥ EBW method).
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074, clause 9.1.2 Option 2 (integrated band power method).
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 9.1.3 Option 2 (peak power meter for VBW ≥ DTS BW)
<input checked="" type="checkbox"/>	Maximum Conducted Output Power
	[duty cycle ≥ 98% or external video / power trigger]
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074, clause 9.2.2.2 Method AVGSA-1 (spectral trace averaging).
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 9.2.2.3 Method AVGSA-1 Alt. (slow sweep speed)
	duty cycle < 98% and average over on/off periods with duty factor
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074, clause 9.2.2.4 Method AVGSA-2 (spectral trace averaging).
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 9.2.2.5 Method AVGSA-2 Alt. (slow sweep speed)
	RF power meter and average over on/off periods with duty factor or gated trigger
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 9.2.3 Method AVGPM (using an RF average power meter).
<input checked="" type="checkbox"/>	For conducted measurement.
<input type="checkbox"/>	The EUT supports single transmit chain and measurements performed on this transmit chain.
<input checked="" type="checkbox"/>	The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.
<input checked="" type="checkbox"/>	The EUT supports multiple transmit chains using options given below: Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them.
<input checked="" type="checkbox"/>	If multiple transmit chains, EIRP calculation could be following as methods: $P_{total} = P_1 + P_2 + \dots + P_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = P_{total} + DG$

3.3.4 Test Setup

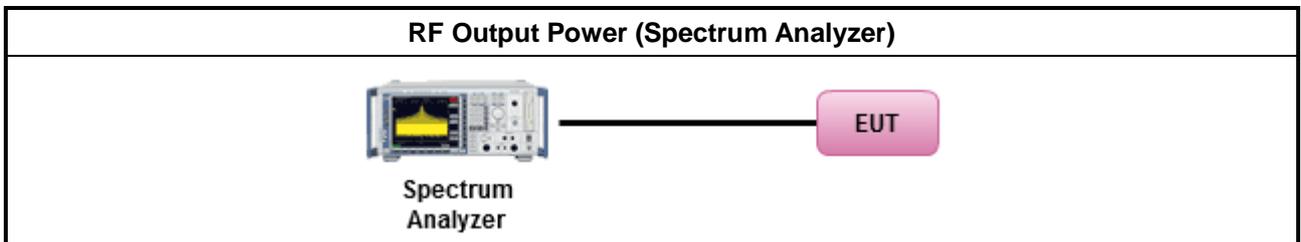

3.3.5 Directional Gain for Power Measurement

Directional Gain (DG) Result				
Transmit Chains No.	1	2	-	-
Maximum G _{ANT} (dBi)	1.82	-1.42	-	-
Modulation Mode	N _{TX}	N _{SS} (Min.)	Array Gain (dB)	Power DG (dBi) Note ³
11b,1-11Mbps	1	1	-	1.82
11g,6-54Mbps	1	1	-	1.82
HT20,M0-M7	1	1	-	-1.19
HT20,M8-M15	2	2	-	0.50
HT40,M0-M7	1	1	-	-1.19
HT40, M8-M15	2	2	-	0.50

Note 1: For all transmitter outputs with equal antenna gains, directional gain is to be computed as follows:
Any transmit signals are correlated, Directional Gain = G_{ANT} + 10 log(N_{TX})
All transmit signals are completely uncorrelated, Directional Gain = G_{ANT}

Note 2: For all transmitter outputs with unequal antenna gains, directional gain is to be computed as follows:
Any transmit signals are correlated, Directional Gain = 10 log[(10^{G₁/20} + ... + 10^{G_N/20})² / N_{TX}]
All transmit signals are completely uncorrelated, Directional Gain = 10 log[(10^{G₁/10} + ... + 10^{G_N/10}) / N_{TX}]

Note 3: For Spatial Multiplexing, Directional Gain (DG) = G_{ANT} + 10 log(N_{TX}/N_{SS}),
where N_{SS} = the number of independent spatial streams data.

Note 4: For CDD transmissions, directional gain is calculated as power measurements:
Directional Gain (DG) = G_{ANT} + Array Gain, where Array Gain is as follows:
Array Gain = 0 dB (i.e., no array gain) for N_{TX} ≤ 4;
Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any N_{TX};



3.3.6 Test Result of Maximum Peak Conducted Output Power

Maximum Peak Conducted Output Power Result									
Condition			RF Output Power (dBm)						
Modulation Mode	N _{TX}	Freq. (MHz)	Chain Port 1	Chain Port 2	Sum Chain	Power Limit	DG (dBi)	EIRP Power	EIRP Limit
11b	1	2412	17.13	-	17.13	30.00	1.82	18.95	36.00
11b	1	2437	17.31	-	17.31	30.00	1.82	19.13	36.00
11b	1	2462	17.24	-	17.24	30.00	1.82	19.06	36.00
11g	1	2412	16.12	-	16.12	30.00	1.82	17.94	30.00
11g	1	2437	19.59	-	19.59	30.00	1.82	21.41	30.00
11g	1	2462	16.37	-	16.37	30.00	1.82	18.19	30.00
HT20	1	2412	16.35	-	16.35	30.00	1.82	18.17	30.00
HT20	1	2437	19.68	-	19.68	30.00	1.82	21.50	30.00
HT20	1	2462	16.44	-	16.44	30.00	1.82	18.26	30.00
HT20	2	2412	12.71	9.24	14.32	30.00	0.50	14.82	36.00
HT20	2	2437	14.93	11.55	16.57	30.00	0.50	17.07	36.00
HT20	2	2462	12.24	8.93	13.90	30.00	0.50	14.40	36.00
HT40	1	2422	15.31	-	15.31	30.00	1.82	17.13	30.00
HT40	1	2437	19.90	-	19.90	30.00	1.82	21.72	30.00
HT40	1	2452	16.31	-	16.31	30.00	1.82	18.13	30.00
HT40	2	2422	10.21	6.77	11.83	30.00	0.50	12.33	36.00
HT40	2	2437	13.89	10.50	15.53	30.00	0.50	16.02	36.00
HT40	2	2452	13.67	10.22	15.29	30.00	0.50	15.78	36.00
Result			Complied						




3.3.7 Test Result of Maximum Conducted Output Power

Maximum Conducted Output Power									
Condition			RF Output Power (dBm)						
Modulation Mode	N _{Tx}	Freq. (MHz)	Chain Port 1	Chain Port 2	Sum Chain	Power Limit	DG (dBi)	EIRP Power	EIRP Limit
11b	1	2412	14.28	-	14.28	30.00	1.82	16.10	36.00
11b	1	2437	14.43	-	14.43	30.00	1.82	16.25	36.00
11b	1	2462	14.37	-	14.37	30.00	1.82	16.19	36.00
11g	1	2412	11.30	-	11.30	30.00	1.82	13.12	36.00
11g	1	2437	14.63	-	14.63	30.00	1.82	16.45	36.00
11g	1	2462	11.45	-	11.45	30.00	1.82	13.27	36.00
HT20	1	2412	11.47	-	11.47	30.00	1.82	13.29	36.00
HT20	1	2437	14.76	-	14.76	30.00	1.82	16.58	36.00
HT20	1	2462	11.50	-	11.50	30.00	1.82	13.32	36.00
HT20	2	2412	7.83	4.32	9.43	30.00	0.50	9.92	36.00
HT20	2	2437	10.05	6.43	11.61	30.00	0.50	12.11	36.00
HT20	2	2462	7.38	3.80	8.96	30.00	0.50	9.45	36.00
HT40	1	2422	10.38	-	10.38	30.00	1.82	12.20	36.00
HT40	1	2437	14.90	-	14.90	30.00	1.82	16.72	36.00
HT40	1	2452	11.38	-	11.38	30.00	1.82	13.20	36.00
HT40	2	2422	5.27	1.78	6.87	30.00	0.50	7.37	36.00
HT40	2	2437	8.97	5.62	10.62	30.00	0.50	11.11	36.00
HT40	2	2452	8.82	5.20	10.38	30.00	0.50	10.88	36.00
Result			Complied						



2400-2483.5MHz - Worst RF Output Power Plots

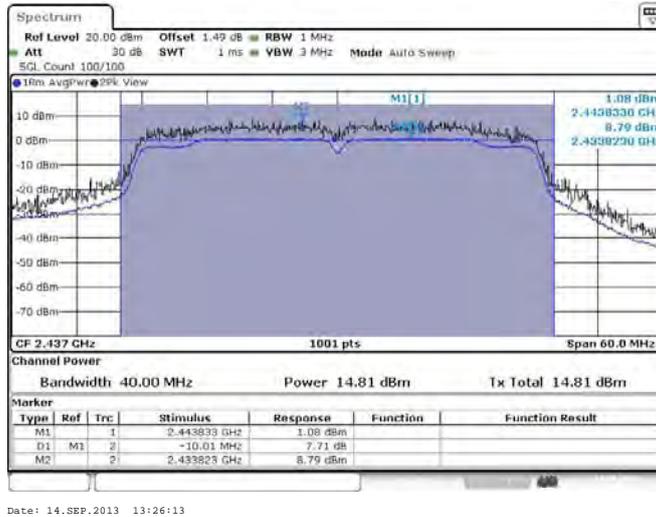

Note 1: RF Output Power Plots w/o Duty Factor



3.4 Power Spectral Density

3.4.1 Power Spectral Density Limit

Power Spectral Density Limit
<input checked="" type="checkbox"/> Power Spectral Density (PSD) \leq 8 dBm/3kHz


3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.4.3 Test Procedures

Test Method
<input checked="" type="checkbox"/> Peak power spectral density procedures that the same method as used to determine the conducted output power. If maximum peak conducted output power was measured to demonstrate compliance to the output power limit, then the peak PSD procedure below (Method PKPSD) shall be used. If maximum conducted output power was measured to demonstrate compliance to the output power limit, then one of the average PSD procedures shall be used, as applicable based on the following criteria (the peak PSD procedure is also an acceptable option).
<input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 10.2 Method PKPSD (RBW=3-100kHz;detector=peak).. [duty cycle \geq 98% or external video / power trigger]
<input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 10.3 Method AVGPSD-1 (spectral trace averaging).
<input type="checkbox"/> Refer as FCC KDB 558074, clause 10.4 Method AVGPSD-1 Alt. (slow sweep speed) duty cycle < 98% and average over on/off periods with duty factor
<input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 10.5 Method AVGPSD-2 (spectral trace averaging).
<input type="checkbox"/> Refer as FCC KDB 558074, clause 10.6 Method AVGPSD-2 Alt. (slow sweep speed)
<input checked="" type="checkbox"/> For conducted measurement.
<input type="checkbox"/> The EUT supports single transmit chain and measurements performed on this transmit chain.
<input checked="" type="checkbox"/> The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.
<input checked="" type="checkbox"/> The EUT supports multiple transmit chains using options given below:
<input checked="" type="checkbox"/> Option 1: Measure and sum the spectra across the outputs. Refer as FCC KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the N _{TX} output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace.
<input type="checkbox"/> Option 2: Measure and add 10 log(N) dB, where N is the number of transmit chains. Refer as FCC KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with 10 log(N). Or each transmit chains shall be add 10 log(N) to compared with the limit.

3.4.4 Test Setup

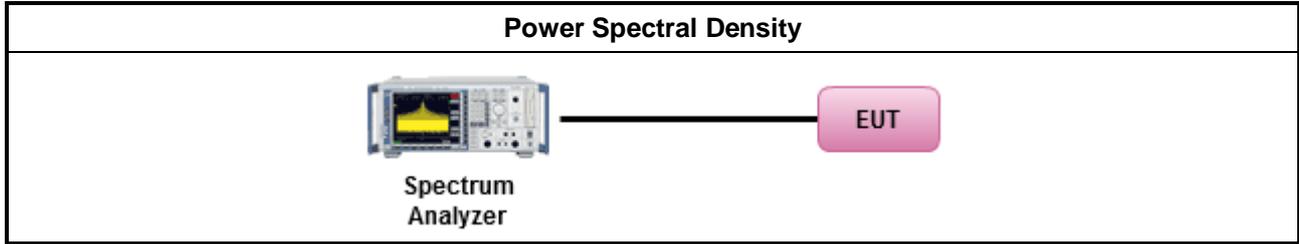


3.4.5 Test Result of Power Spectral Density

Power Spectral Density Result				
Condition			Power Spectral Density	
Modulation Mode	N _{TX}	Freq. (MHz)	Sum Chain (dBm/100kHz)	PSD Limit (dBm/3kHz)
11b	1	2412	-9.55	8
11b	1	2437	-8.91	8
11b	1	2462	-10.68	8
11g	1	2412	-16.96	8
11g	1	2437	-12.73	8
11g	1	2462	-16.76	8
HT20	1	2412	-17.06	8
HT20	1	2437	-14.84	8
HT20	1	2462	-18.43	8
HT20	2	2412	-15.33	8
HT20	2	2437	-11.68	8
HT20	2	2462	-19.63	8
HT40	1	2422	-20.46	8
HT40	1	2437	-16.58	8
HT40	1	2452	-20.44	8
HT40	2	2422	-19.69	8
HT40	2	2437	-15.94	8
HT40	2	2452	-15.82	8
Result			Complied	

Note 1: PSD = sum each transmit chains by bin-to-bin PSD




Worst Power Spectral Density Plots

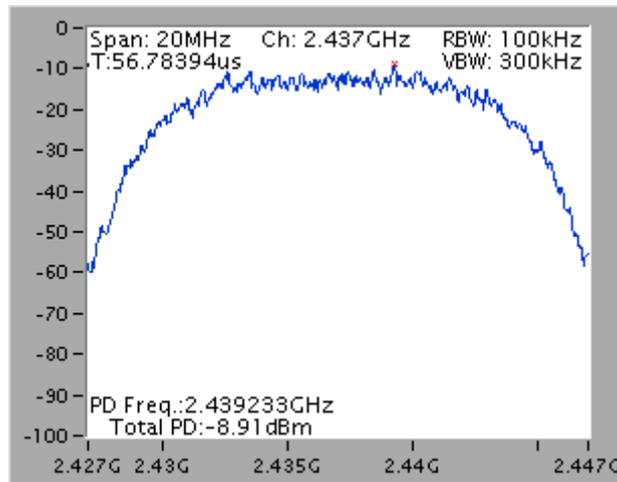

3.5 Transmitter Bandedge Emissions

3.5.1 Transmitter Radiated Bandedge Emissions Limit

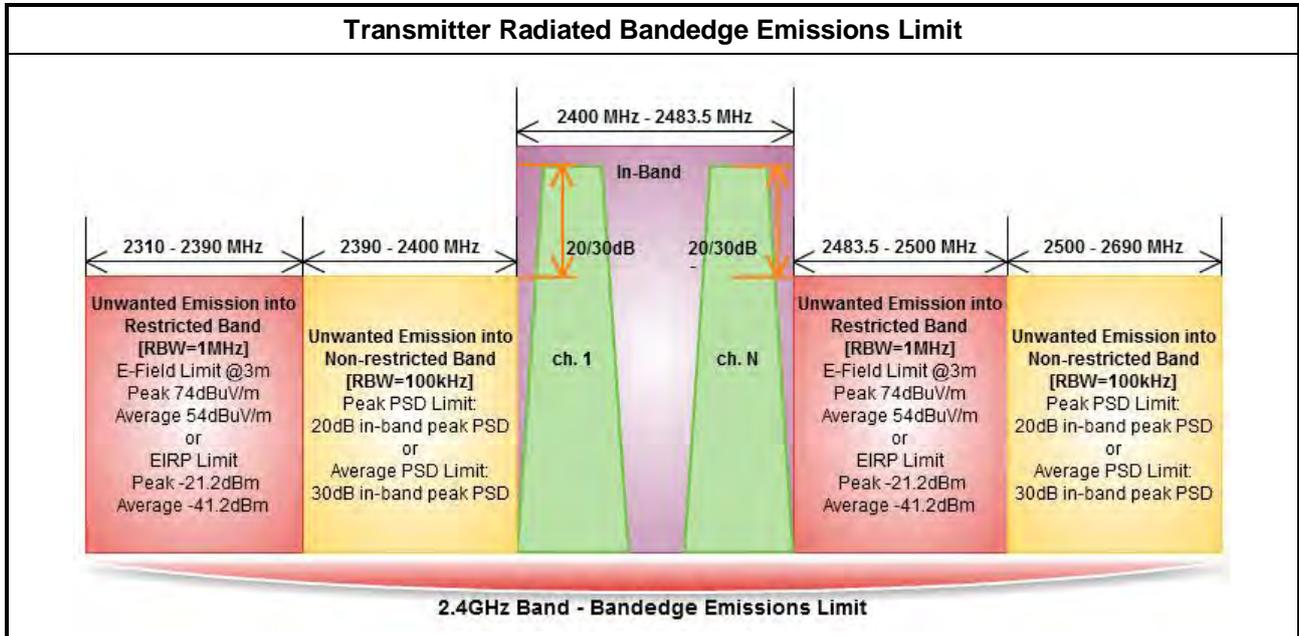


3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.5.3 Test Procedures

Test Method	
<input checked="" type="checkbox"/>	The average emission levels shall be measured in [duty cycle ≥ 98 or duty factor].
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.9.2.2 bandedge testing shall be performed at the lowest frequency channel and highest frequency channel within the allowed operating band.
<input checked="" type="checkbox"/>	For the transmitter unwanted emissions shall be measured using following options below:
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074, clause 11 for unwanted emissions into non-restricted bands.
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074, clause 12 for unwanted emissions into restricted bands.
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 12.2.5.1 Option 1 (trace averaging for duty cycle $\geq 98\%$)
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 12.2.5.2 Option 2 (trace averaging + duty factor).
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 12.2.5.3 Option 3 (Reduced VBW $\geq 1/T$).
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 4.2.3.2.3 (Reduced VBW). VBW $\geq 1/T$, where T is pulse time.
<input type="checkbox"/>	Refer as ANSI C63.10, clause 4.2.3.2.4 average value of pulsed emissions.
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074, clause 11.3 and 12.2.4 measurement procedure peak limit.
<input checked="" type="checkbox"/>	For the transmitter bandedge emissions shall be measured using following options below:
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 13.3 for narrower resolution bandwidth (100kHz) using the band power and summing the spectral levels (i.e., 1 MHz).
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.9.2 for band-edge testing.
<input type="checkbox"/>	Refer as ANSI C63.10, clause 6.9.3 for marker-delta method for band-edge measurements.
<input checked="" type="checkbox"/>	For radiated measurement, refer as FCC KDB 558074, clause 12.2.7.

3.5.4 Test Setup

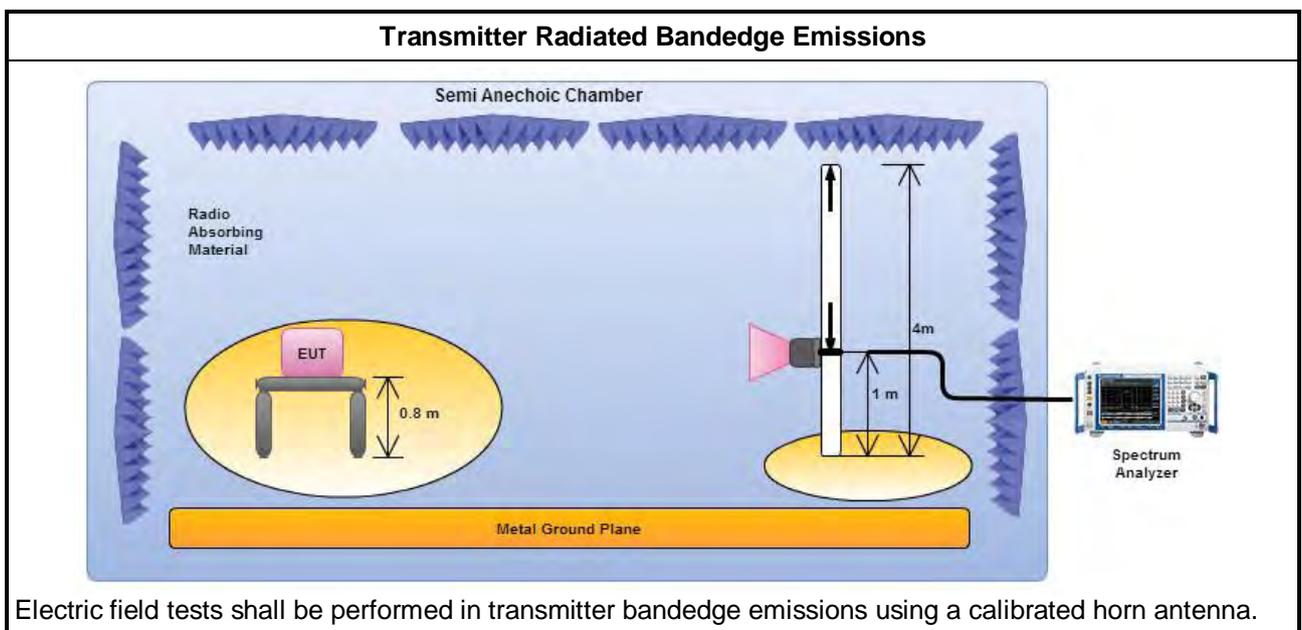



3.5.5 Transmitter Radiated Bandedge Emissions

2400-2483.5MHz Transmitter Radiated Bandedge Emissions (Non-restricted Band)								
Modulation	N _{TX}	Test Freq. (MHz)	In-band PSD [i] (dBuV/100kHz)	Freq. (MHz)	Out-band PSD [o] (dBuV/100kHz)	[i] – [o] (dB)	Limit (dB)	Pol.
11b	1	2412	104.14	2397.14	70.69	33.45	20	V
11b	1	2462	102.40	2547.90	63.38	39.02	20	V
11g	1	2412	98.66	2399.82	70.36	28.30	20	V
11g	1	2462	98.33	2515.50	64.83	33.50	20	V
HT20,M0-7	1	2412	97.39	2399.49	69.85	27.54	20	V
HT20,M0-7	1	2462	96.29	2545.10	64.01	32.28	20	V
HT20,M8-15	2	2412	95.49	2399.50	67.64	27.85	20	V
HT20,M8-15	2	2462	96.94	2540.84	64.28	32.66	20	V
HT40,M0-7	1	2422	97.95	2399.94	70.17	27.78	20	V
HT40,M0-7	1	2452	97.82	2537.80	63.96	33.86	20	V
HT40,M8-15	2	2422	93.41	2398.44	64.87	28.54	20	V
HT40,M8-15	2	2452	96.52	2528.84	64.55	31.97	20	V

Note 1: Measurement worst emissions of receive antenna polarization

2400-2483.5MHz Transmitter Radiated Bandedge Emissions (Restricted Band)										
Modulation Mode	N _{TX}	Freq. (MHz)	Measure Distance (m)	Freq. (MHz) PK	Level (dBuV/m) PK	Limit (dBuV/m) PK	Freq. (MHz) AV	Level (dBuV/m) AV	Limit (dBuV/m) AV	Pol.
11b	1	2412	3	2389.18	63.83	74	2390.00	52.15	54	V
11b	1	2462	3	2484.30	63.33	74	2484.60	51.96	54	V
11g	1	2412	3	2389.97	71.37	74	2390.00	52.81	54	V
11g	1	2462	3	2483.50	67.68	74	2483.50	52.26	54	V
HT20,M0-7	1	2412	3	2389.63	69.28	74	2390.00	52.15	54	V
HT20,M0-7	1	2462	3	2483.90	70.31	74	2483.50	52.61	54	V
HT20,M8-15	2	2412	3	2386.96	65.73	74	2390.00	52.60	54	V
HT20,M8-15	2	2462	3	2483.60	66.12	74	2483.50	52.56	54	V
HT40,M0-7	1	2422	3	2388.62	67.98	74	2390.00	52.63	54	V
HT40,M0-7	1	2452	3	2483.90	67.90	74	2483.50	52.40	54	V
HT40,M8-15	2	2422	3	2389.99	67.28	74	2390.00	52.53	54	V
HT40,M8-15	2	2452	3	2485.04	65.98	74	2483.50	52.22	54	V

Note 1: Measurement worst emissions of receive antenna polarization.



3.6 Transmitter Unwanted Emissions

3.6.1 Transmitter Radiated Unwanted Emissions Limit

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Un-restricted Band Emissions Limit	
RF output power procedure	Limit (dB)
Peak output power procedure	20
Average output power procedure	30

Note 1: If the peak output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level.

Note 2: If the average output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the power in any 100 kHz outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum measured in-band average PSD level.

3.6.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.



3.6.3 Test Procedures

Test Method	
<input checked="" type="checkbox"/>	Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).
<input checked="" type="checkbox"/>	Measurements in the frequency range 10 GHz - 18GHz are typically made at a closer distance 1m, because the instrumentation noise floor is typically close to the radiated emission limit.
<input checked="" type="checkbox"/>	Measurements in the frequency range above 18 GHz - 25GHz are typically made at a closer distance 0.5m, because the instrumentation noise floor is typically close to the radiated emission limit.
<input checked="" type="checkbox"/>	The average emission levels shall be measured in [duty cycle \geq 98 or duty factor].
<input checked="" type="checkbox"/>	For the transmitter unwanted emissions shall be measured using following options below:
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074, clause 11 for unwanted emissions into non-restricted bands.
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074, clause 12 for unwanted emissions into restricted bands.
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 12.2.5.1 Option 1 (trace averaging for duty cycle \geq 98%)
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 12.2.5.2 Option 2 (trace averaging + duty factor).
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 12.2.5.3 Option 3 (Reduced VBW \geq 1/T).
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 4.2.3.2.3 (Reduced VBW). VBW \geq 1/T, where T is pulse time.
<input type="checkbox"/>	Refer as ANSI C63.10, clause 4.2.3.2.4 average value of pulsed emissions.
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074, clause 11.3 and 12.2.4 measurement procedure peak limit.
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074, clause 12.2.3 measurement procedure Quasi-Peak limit.
<input checked="" type="checkbox"/>	For radiated measurement, refer as FCC KDB 558074, clause 12.2.7.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.4 for radiated emissions from below 30 MHz.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.5 for radiated emissions from 30 MHz to 1000 MHz.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.6 for radiated emissions from above 1 GHz.

3.6.4 Test Setup

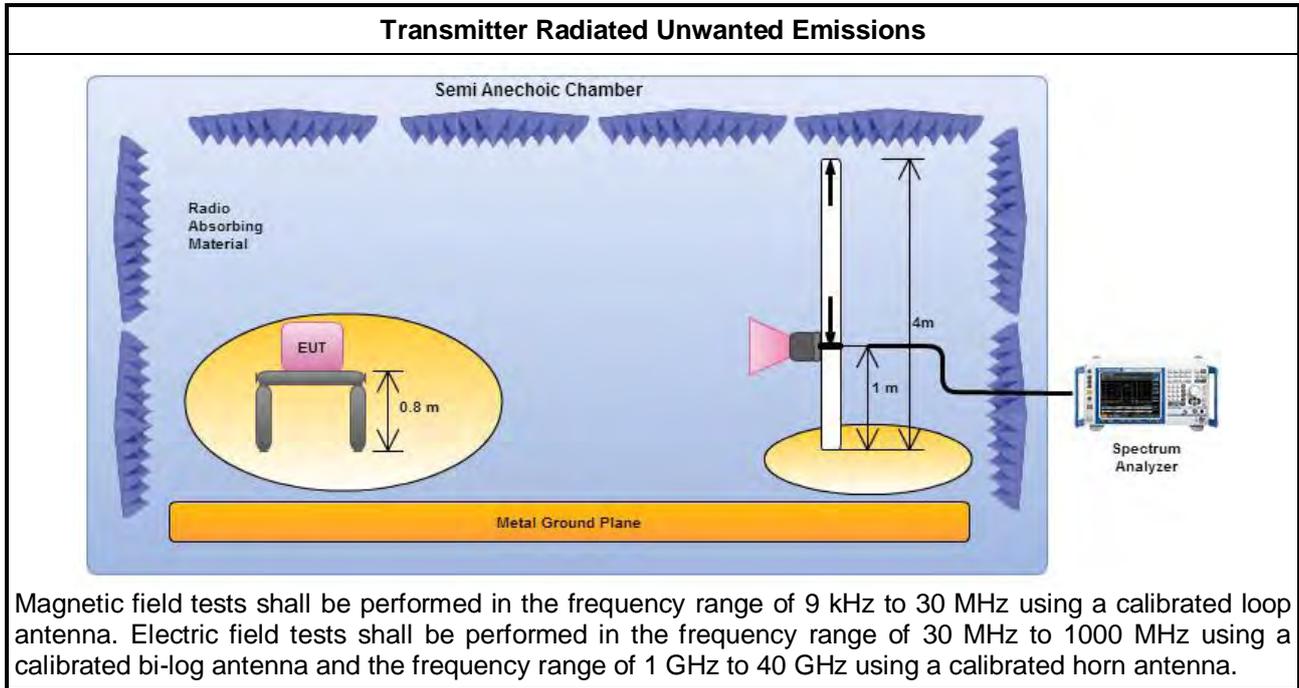


3.6.5 Transmitter Radiated Unwanted Emissions (Below 30MHz)

All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

3.6.6 Transmitter Radiated Unwanted Emissions (Below 1GHz)

Transmitter Radiated Unwanted Emissions (Below 1GHz)			
Operating Mode	1	Polarization	V
Operating Function	AC Power & Radio Link		

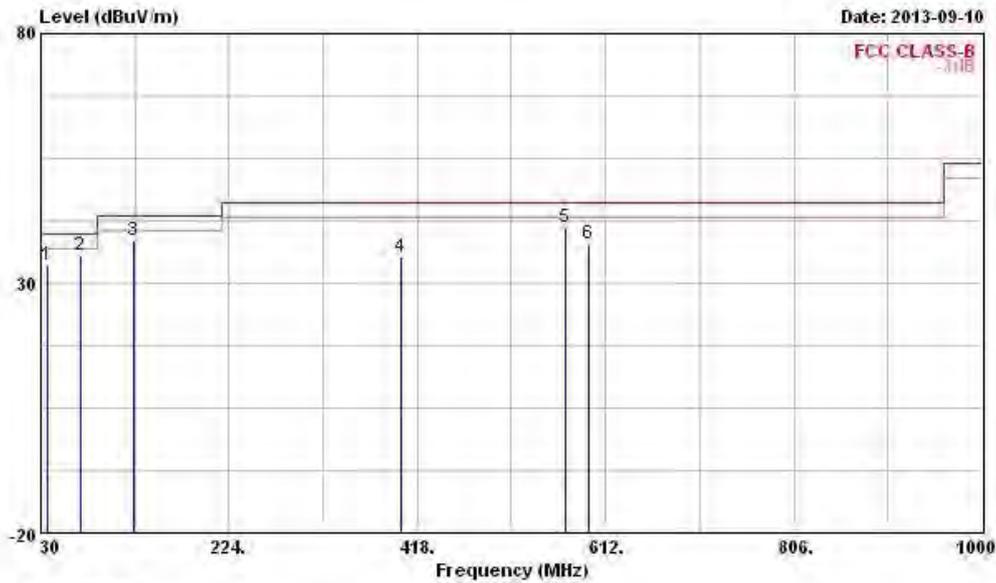


Peak	Freq MHz	Level dBuV/m	Over Limit dB	Limit Line dBuV/m	ReadAntenna Level dBuV	Antenna Factor dB/m	Cable Loss dB	Preamp Factor dB	Remark	Ant Pos cm	Table Pos deg
1	36.790	33.77	-6.23	40.00	46.72	13.92	0.83	27.70	Peak	---	---
2	71.710	35.73	-4.27	40.00	55.29	6.85	1.20	27.61	Peak	---	---
3	125.060	38.64	-1.36	43.50	51.54	13.18	1.59	27.67	Peak	---	---
4	400.540	35.31	-4.69	46.00	44.97	15.27	2.98	27.91	Peak	---	---
5	571.260	41.13	-1.87	46.00	46.66	19.34	3.61	28.48	Peak	---	---
6	594.540	37.89	-2.11	46.00	42.71	20.01	3.67	28.50	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)



Transmitter Radiated Unwanted Emissions (Below 1GHz)			
Operating Mode	1	Polarization	H
Operating Function	AC Power & Radio Link		

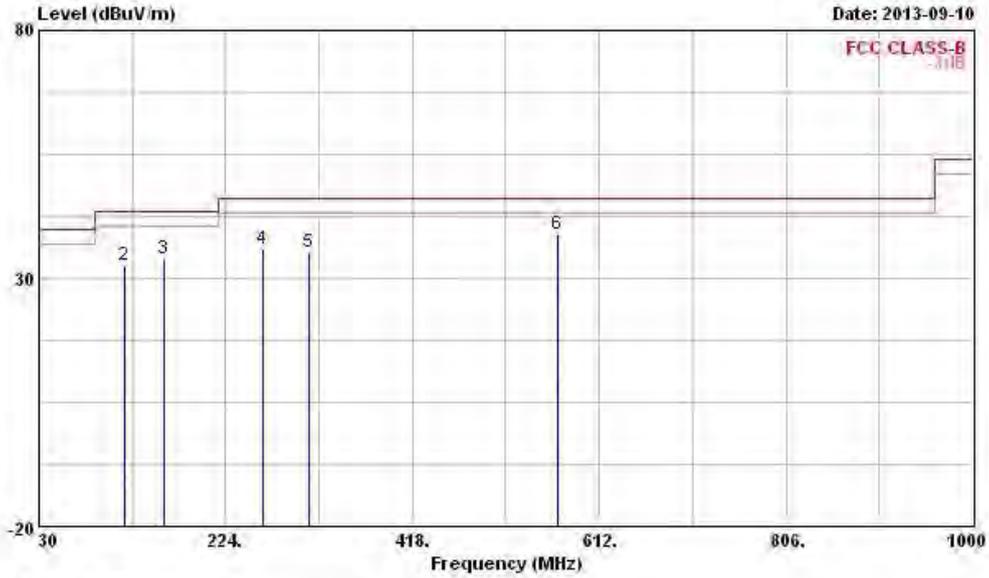


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	30.000	28.46	-11.54	40.00	39.27	16.22	0.78	27.81	Peak	---	---
2	118.270	32.47	-11.03	43.50	45.24	13.38	1.54	27.69	Peak	---	---
3	159.980	34.03	-9.47	43.50	49.26	10.55	1.78	27.56	Peak	---	---
4	261.830	35.88	-10.12	46.00	47.55	13.16	2.43	27.26	Peak	---	---
5	311.300	35.22	-10.78	46.00	45.97	13.88	2.61	27.24	Peak	---	---
6	568.350	38.80	-7.20	46.00	44.43	19.25	3.60	28.48	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)



3.6.7 Transmitter Radiated Unwanted Emissions (Above 1GHz)

Transmitter Radiated Unwanted Emissions (Above 1GHz)			
Modulation Mode	11b	Test Freq. (MHz)	2412
N _{TX}	1	Polarization	V

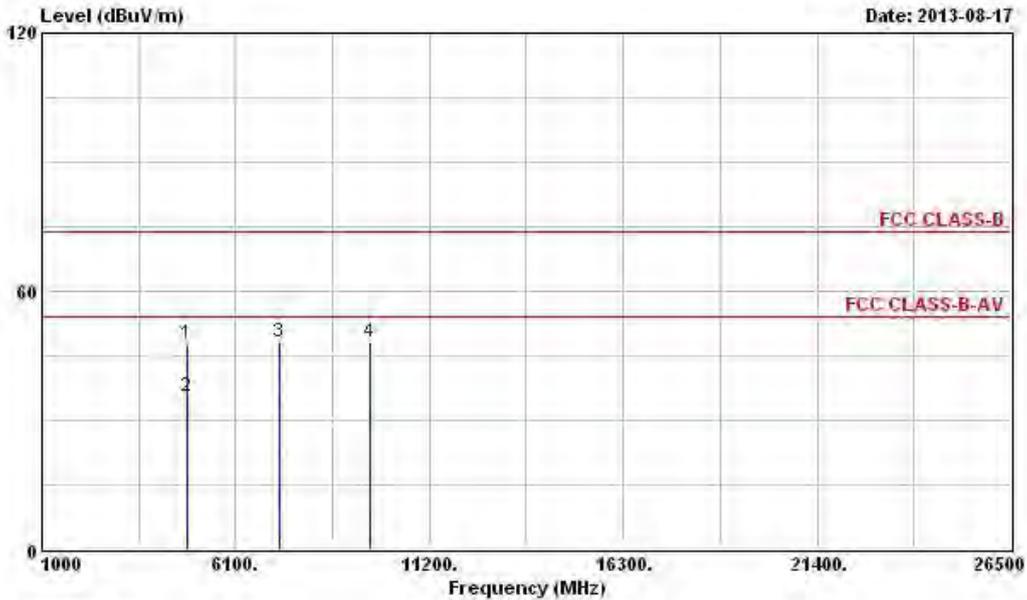


Line	Freq MHz	Level dBuV/m	Over Limit dB	Limit Line dBuV/m	ReadAntenna Level dBuV	Antenna Factor dB/m	Cable Loss dB	Preamp Factor dB	Remark	Ant Pos cm	Table Pos deg
1	4824.000	47.83	-26.17	74.00	43.20	34.80	4.70	34.87	Peak	---	---
2	4824.000	35.42	-18.58	54.00	30.79	34.80	4.70	34.87	Average	---	---
3	7236.000	48.15			42.03	35.90	5.37	35.15	Peak	---	---
4	9648.000	48.15			40.42	36.95	6.35	35.57	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (109.65 dBuV/m).



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11b	Test Freq. (MHz)	2412
N _{TX}	1	Polarization	H

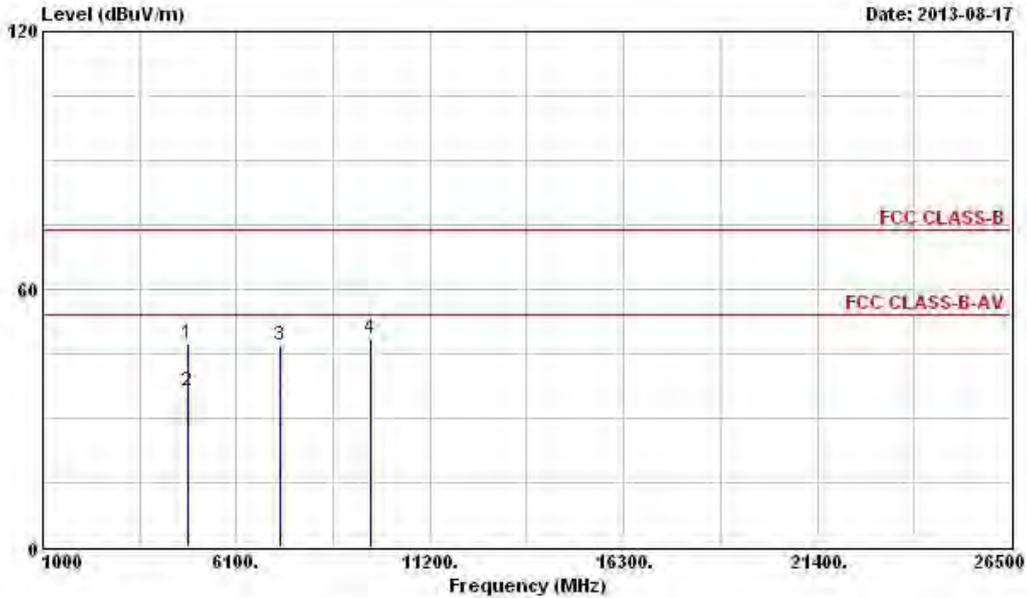


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp	Remark	Rnt Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4824.000	47.52	-26.48	74.00	42.89	34.80	4.70	34.87	Peak	---	---
2	4824.000	36.49	-17.51	54.00	31.86	34.80	4.70	34.87	Average	---	---
3	7236.000	46.82			40.70	35.90	5.37	35.15	Peak	---	---
4	9648.000	48.36			40.63	36.95	6.35	35.57	Peak	---	---

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (109.65 dBuV/m).



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11b	Test Freq. (MHz)	2437
N _{TX}	1	Polarization	V

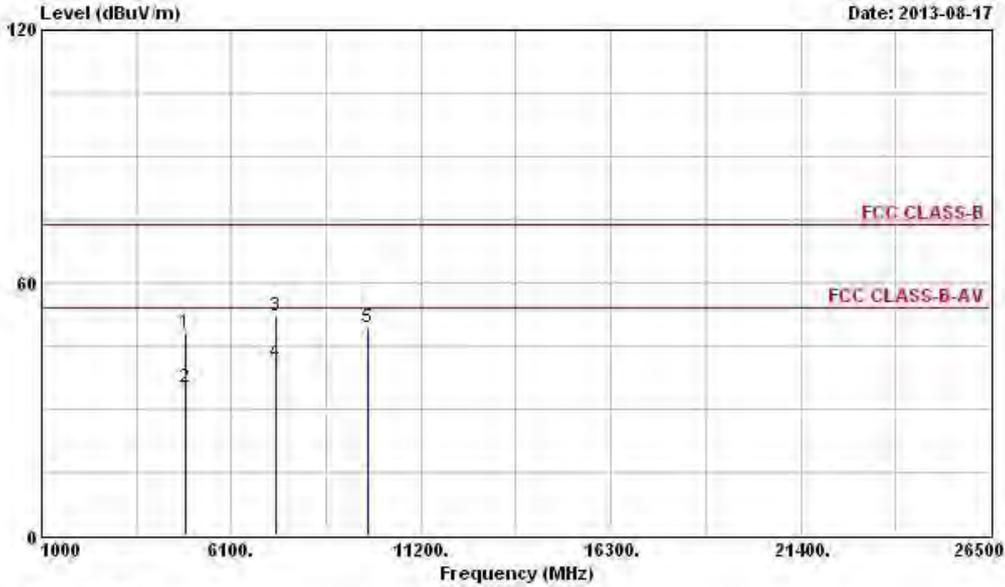


Freq	Level	Over Limit	Limit Line	Read Antenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4874.000	48.13	-25.87	74.00	43.49	34.77	4.73	34.86 Peak	---	---
2	4874.000	35.29	-18.71	54.00	30.65	34.77	4.73	34.86 Average	---	---
3	7311.000	52.06	-21.94	74.00	45.86	35.90	5.47	35.17 Peak	---	---
4	7311.000	41.02	-12.98	54.00	34.82	35.90	5.47	35.17 Average	---	---
5	9748.000	49.45			41.51	37.11	6.41	35.58 Peak	---	---

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (109.65 dBuV/m).



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11b	Test Freq. (MHz)	2437
N _{TX}	1	Polarization	H

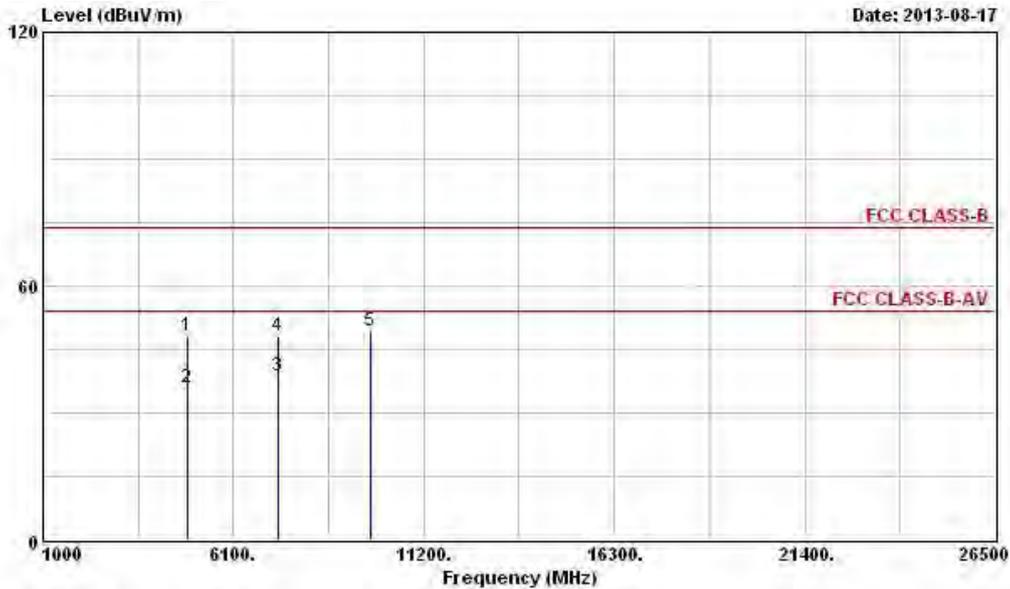


	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4874.000	48.27	-25.73	74.00	43.63	34.77	4.73	34.86	Peak	---	---
2	4874.000	35.75	-18.25	54.00	31.11	34.77	4.73	34.86	Average	---	---
3	7311.000	38.66	-15.34	54.00	32.46	35.90	5.47	35.17	Average	---	---
4	7311.000	48.15	-25.85	74.00	41.95	35.90	5.47	35.17	Peak	---	---
5	9748.000	49.52			41.58	37.11	6.41	35.58	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (109.65 dBuV/m).



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11b	Test Freq. (MHz)	2462
N _{TX}	1	Polarization	V

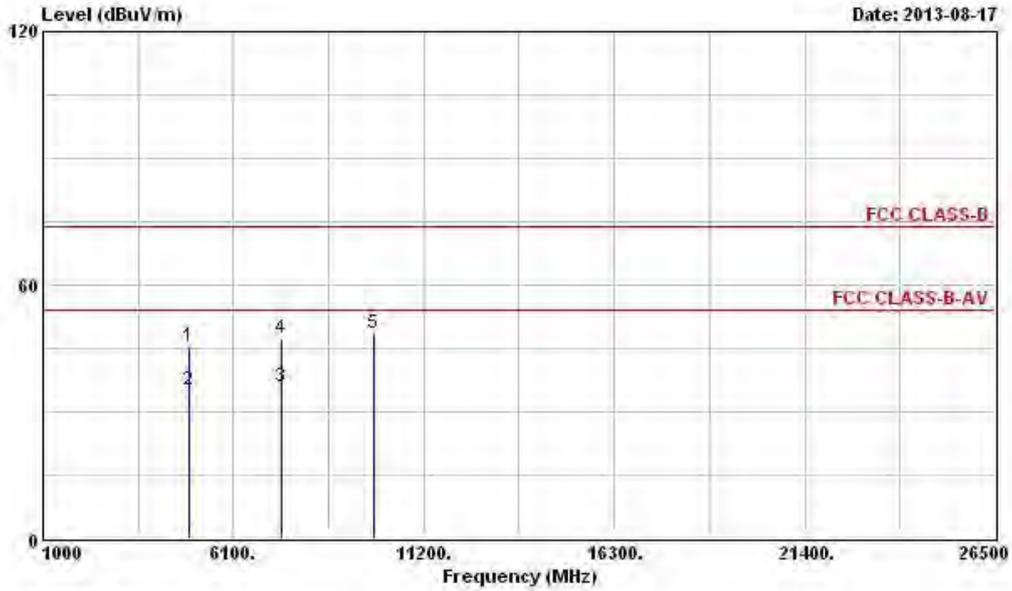


	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Remark	Ant	Table
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4924.000	45.45	-28.55	74.00	40.77	34.74	4.79	34.85	Peak	---	---
2	4924.000	35.26	-18.74	54.00	30.58	34.74	4.79	34.85	Average	---	---
3	7386.000	35.85	-18.15	54.00	29.57	35.90	5.57	35.19	Average	---	---
4	7386.000	47.40	-26.60	74.00	41.12	35.90	5.57	35.19	Peak	---	---
5	9848.000	48.73			40.56	37.25	6.50	35.58	Peak	---	---

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (109.65 dBuV/m).



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11b	Test Freq. (MHz)	2462
N _{TX}	1	Polarization	H

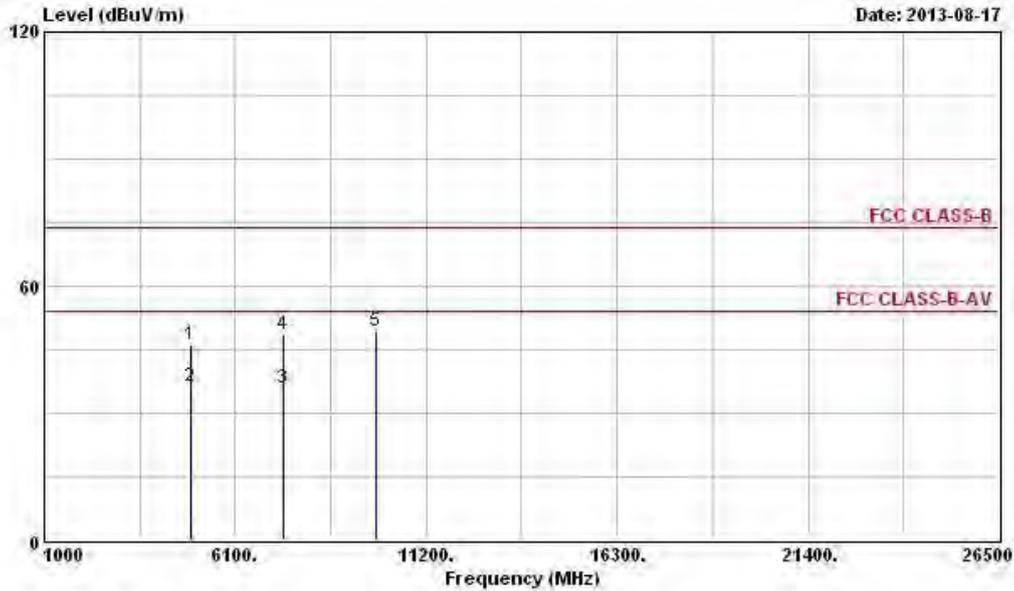


Line	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4924.000	46.31	-27.69	74.00	41.63	34.74	4.79	34.85	Peak	---	---
2	4924.000	36.49	-17.51	54.00	31.81	34.74	4.79	34.85	Average	---	---
3	7386.000	35.80	-18.20	54.00	29.52	35.90	5.57	35.19	Average	---	---
4	7386.000	48.47	-25.53	74.00	42.19	35.90	5.57	35.19	Peak	---	---
5	9848.000	49.51			41.34	37.25	6.50	35.58	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (109.65 dBuV/m).



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11g	Test Freq. (MHz)	2412
N _{TX}	1	Polarization	V

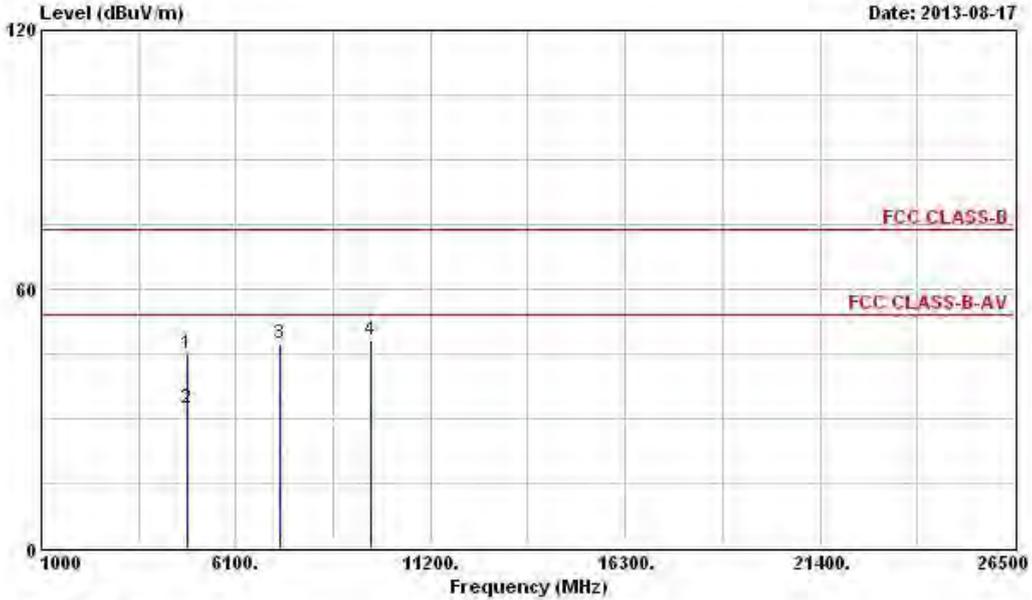


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	dB		cm	deg
1	4824.000	45.11	-28.89	74.00	40.48	34.80	4.70	34.87	Peak	---	---
2	4824.000	32.41	-21.59	54.00	27.78	34.80	4.70	34.87	Average	---	---
3	7236.000	47.22			41.10	35.90	5.37	35.15	Peak	---	---
4	9648.000	48.07			40.34	36.95	6.35	35.57	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (105.43 dBUV/m).



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11g	Test Freq. (MHz)	2412
N _{TX}	1	Polarization	H

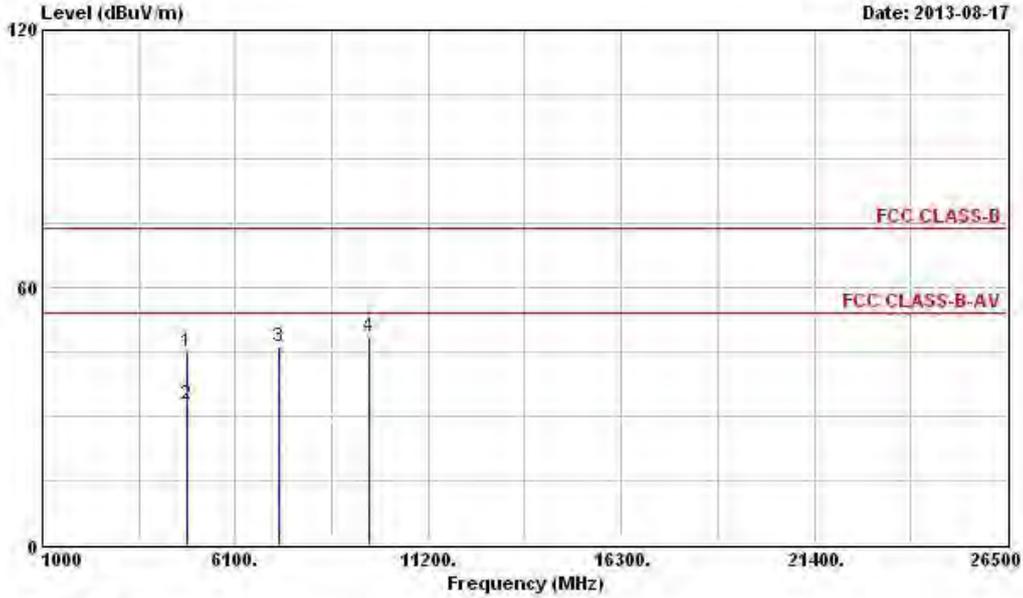


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4824.000	44.97	-29.03	74.00	40.34	34.80	4.70	34.87	Peak	---	---
2	4824.000	32.91	-21.09	54.00	28.28	34.80	4.70	34.87	Average	---	---
3	7236.000	46.35			40.23	35.90	5.37	35.15	Peak	---	---
4	9648.000	48.54			40.81	36.95	6.35	35.57	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (105.43 dBuV/m).



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11g	Test Freq. (MHz)	2437
N _{TX}	1	Polarization	V

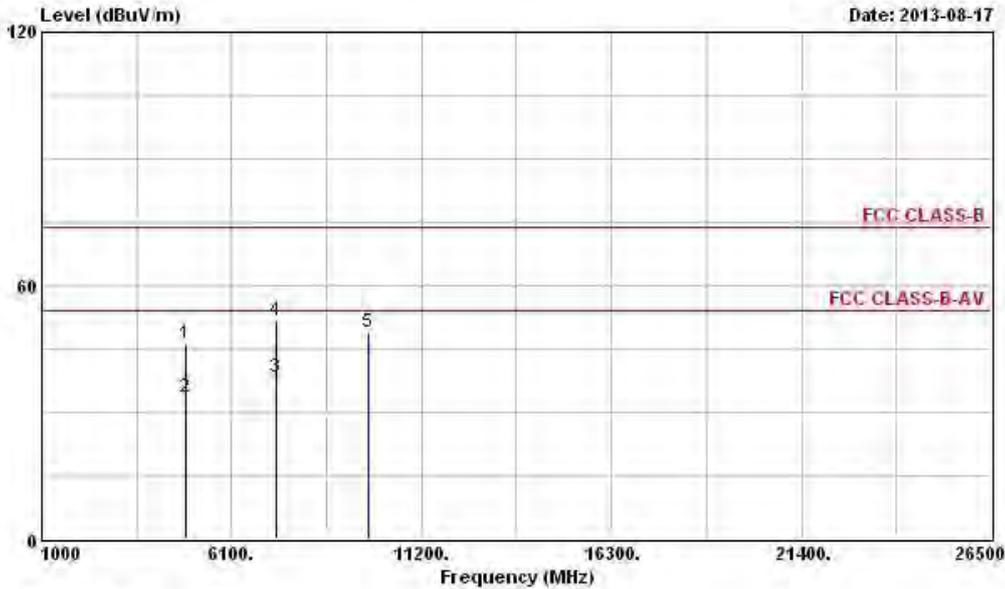


	E _{req}	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4874.000	46.19	-27.81	74.00	41.55	34.77	4.73	34.86	Peak	---	---
2	4874.000	33.39	-20.61	54.00	28.75	34.77	4.73	34.86	Average	---	---
3	7311.000	38.15	-15.85	54.00	31.95	35.90	5.47	35.17	Average	---	---
4	7311.000	51.56	-22.44	74.00	45.36	35.90	5.47	35.17	Peak	---	---
5	9748.000	48.79			40.85	37.11	6.41	35.58	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (105.43 dBuV/m).



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11g	Test Freq. (MHz)	2437
N _{TX}	1	Polarization	H

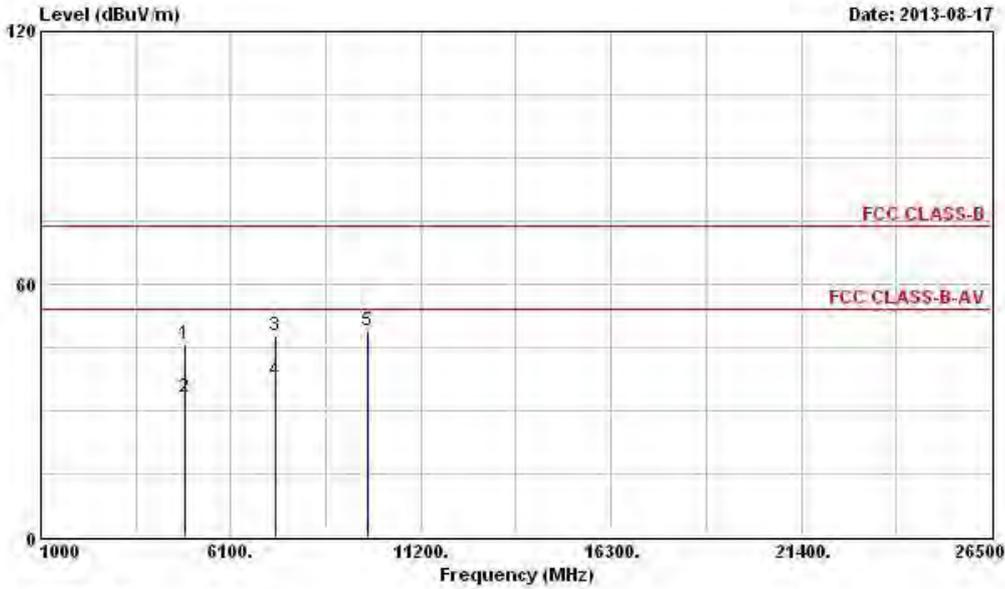


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4874.000	45.88	-28.12	74.00	41.24	34.77	4.73	34.86	Peak	---	---
2	4874.000	33.25	-20.75	54.00	28.61	34.77	4.73	34.86	Average	---	---
3	7311.000	47.77	-26.23	74.00	41.57	35.90	5.47	35.17	Peak	---	---
4	7311.000	36.93	-17.07	54.00	30.73	35.90	5.47	35.17	Average	---	---
5	9748.000	48.99			41.05	37.11	6.41	35.58	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (105.43 dBuV/m).



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11g	Test Freq. (MHz)	2462
N _{TX}	1	Polarization	V

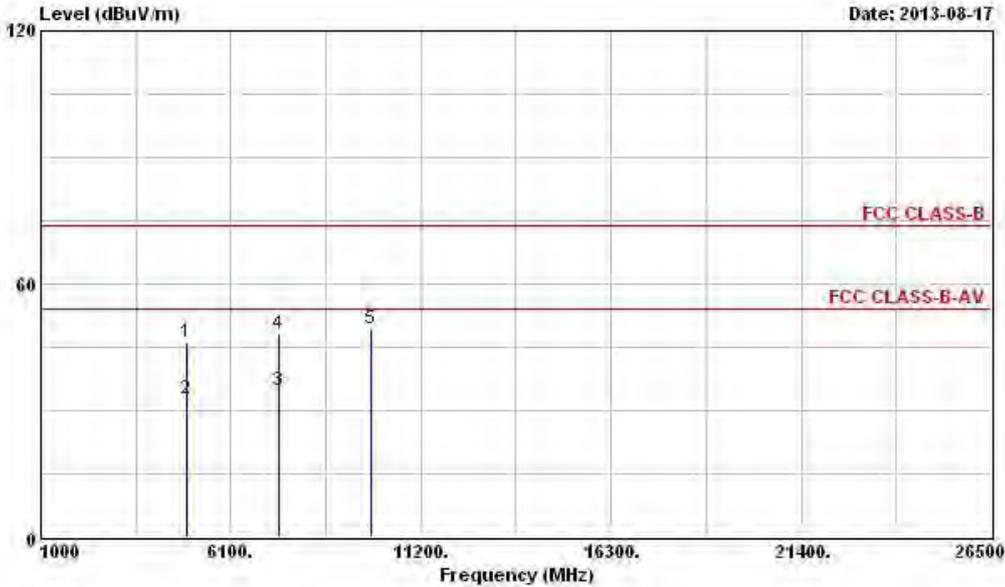


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4924.000	46.12	-27.88	74.00	41.44	34.74	4.79	34.85	Peak	---	---
2	4924.000	32.72	-21.28	54.00	28.04	34.74	4.79	34.85	Average	---	---
3	7386.000	34.81	-19.19	54.00	28.53	35.90	5.57	35.19	Average	---	---
4	7386.000	48.17	-25.83	74.00	41.89	35.90	5.57	35.19	Peak	---	---
5	9848.000	49.28			41.11	37.25	6.50	35.58	Peak	---	---

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (105.43 dBuV/m).



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11g	Test Freq. (MHz)	2462
N _{TX}	1	Polarization	H

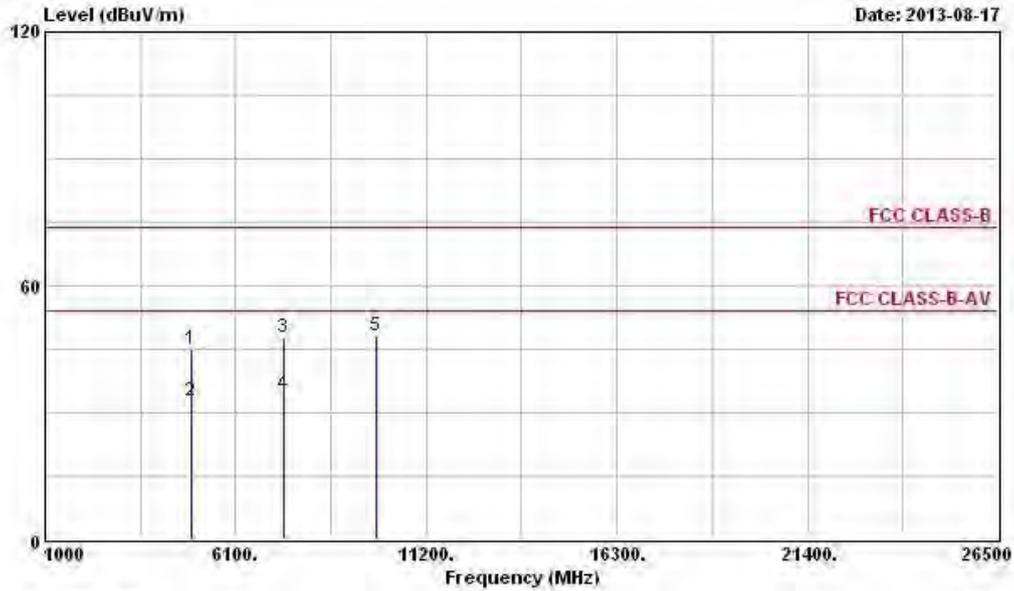


Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4924.000	44.92	-29.08	74.00	40.24	34.74	4.79	34.85	Peak	---
2	4924.000	32.91	-21.09	54.00	28.23	34.74	4.79	34.85	Average	---
3	7386.000	47.60	-26.40	74.00	41.32	35.90	5.57	35.19	Peak	---
4	7386.000	34.52	-19.48	54.00	28.24	35.90	5.57	35.19	Average	---
5	9848.000	48.31			40.14	37.25	6.50	35.58	Peak	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (105.43 dBuV/m).



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	2412
N _{TX}	1	Polarization	V

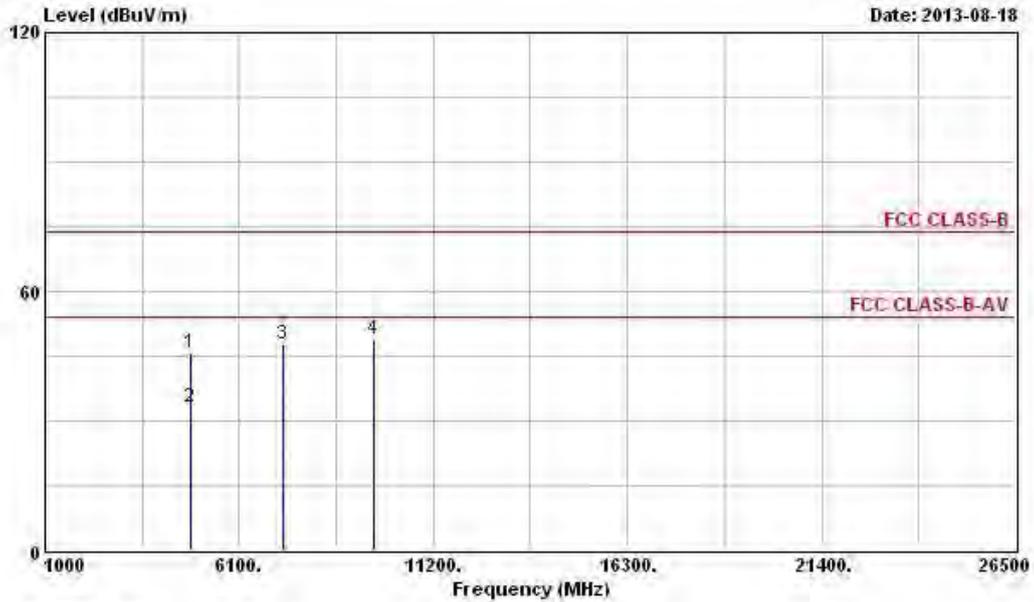


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Rnt Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4824.000	45.93	-28.07	74.00	41.30	34.80	4.70	34.87	Peak	---	---
2	4824.000	33.01	-20.99	54.00	28.38	34.80	4.70	34.87	Average	---	---
3	7236.000	47.67			41.55	35.90	5.37	35.15	Peak	---	---
4	9648.000	48.78			41.05	36.95	6.35	35.57	Peak	---	---

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (104.37 dBuV/m).



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	2412
N _{TX}	1	Polarization	H

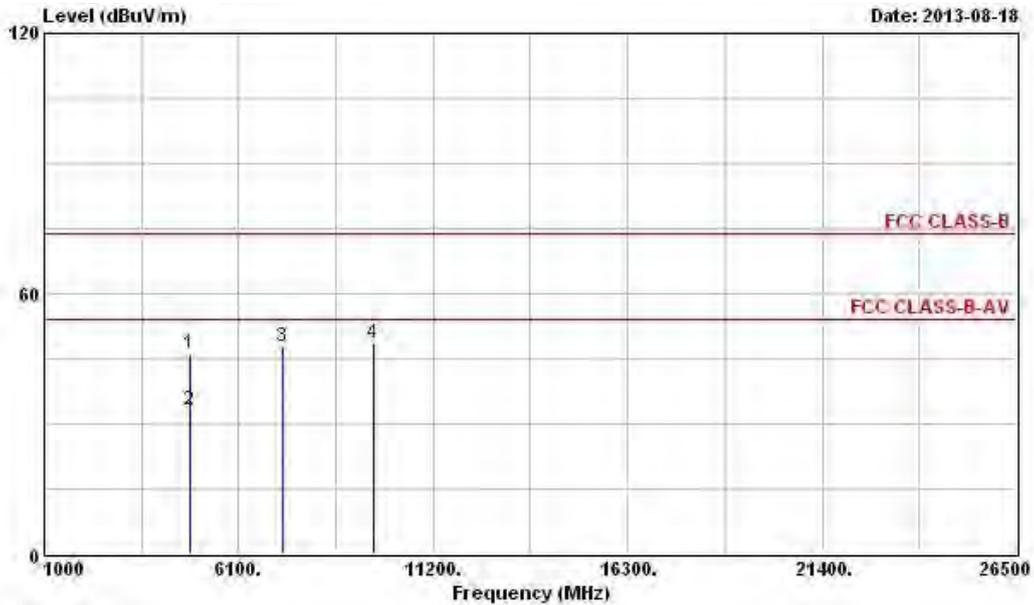


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp	Remark	Rnt Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4824.000	46.07	-27.93	74.00	41.44	34.80	4.70	34.87	Peak	---	---
2	4824.000	33.18	-20.82	54.00	28.55	34.80	4.70	34.87	Average	---	---
3	7236.000	47.62			41.50	35.90	5.37	35.15	Peak	---	---
4	9648.000	48.69			40.96	36.95	6.35	35.57	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (104.37 dBuV/m).



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	2437
N _{TX}	1	Polarization	V

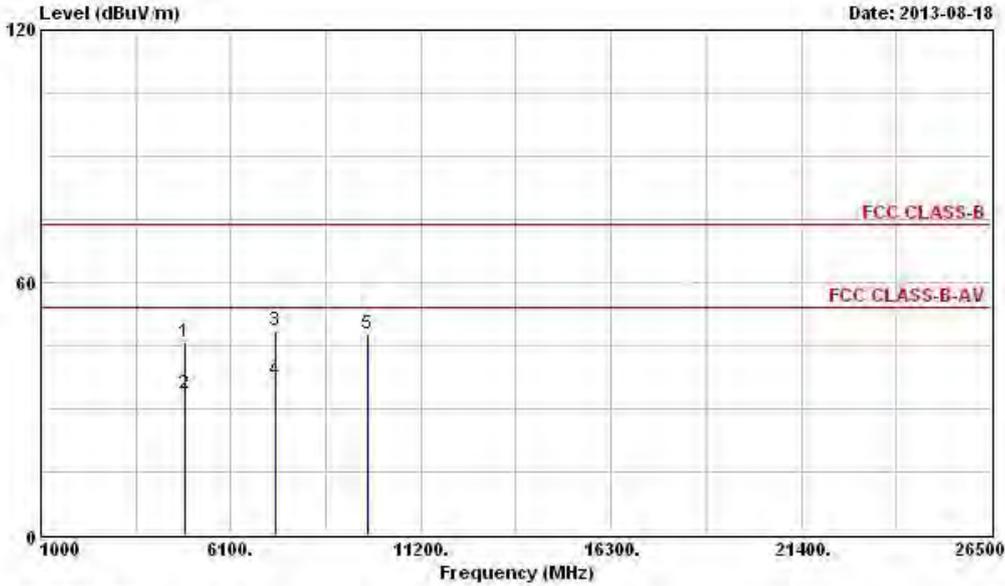


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4874.000	45.74	-28.26	74.00	41.10	34.77	4.73	34.86	Peak	---	---
2	4874.000	33.64	-20.36	54.00	29.00	34.77	4.73	34.86	Average	---	---
3	7311.000	48.43	-25.57	74.00	42.23	35.90	5.47	35.17	Peak	---	---
4	7311.000	36.80	-17.20	54.00	30.60	35.90	5.47	35.17	Average	---	---
5	9748.000	47.73			39.79	37.11	6.41	35.58	Peak	---	---

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (104.37 dBuV/m).



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	2437
N _{TX}	1	Polarization	H

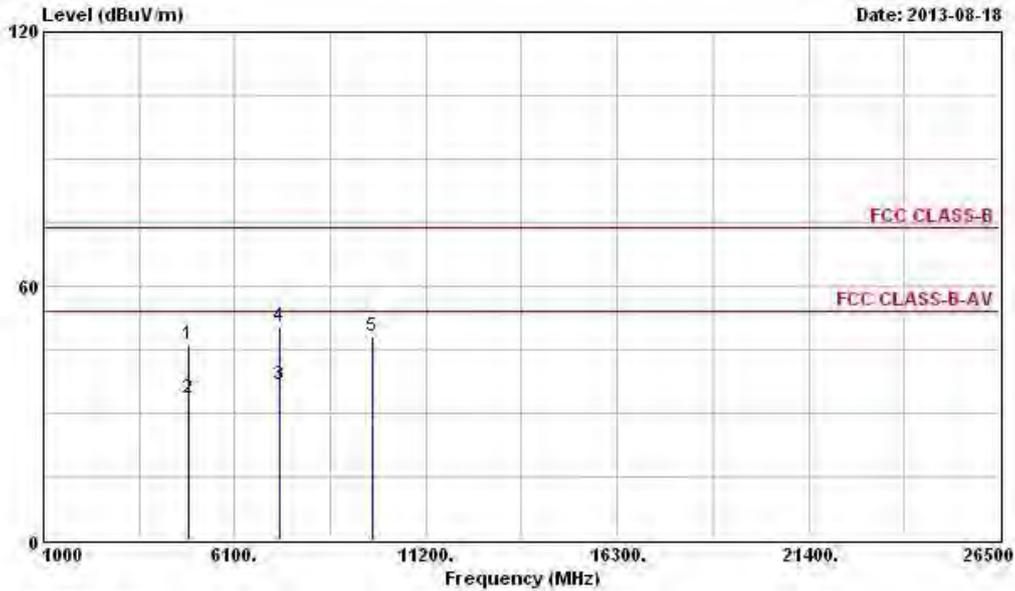


Line	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4874.000	46.15	-27.85	74.00	41.51	34.77	4.73	34.86	Peak	---	---
2	4874.000	33.37	-20.63	54.00	28.73	34.77	4.73	34.86	Average	---	---
3	7311.000	36.66	-17.34	54.00	30.46	35.90	5.47	35.17	Average	---	---
4	7311.000	50.54	-23.46	74.00	44.34	35.90	5.47	35.17	Peak	---	---
5	9748.000	48.18			40.24	37.11	6.41	35.58	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (104.37 dBuV/m).



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	2462
N _{TX}	1	Polarization	V

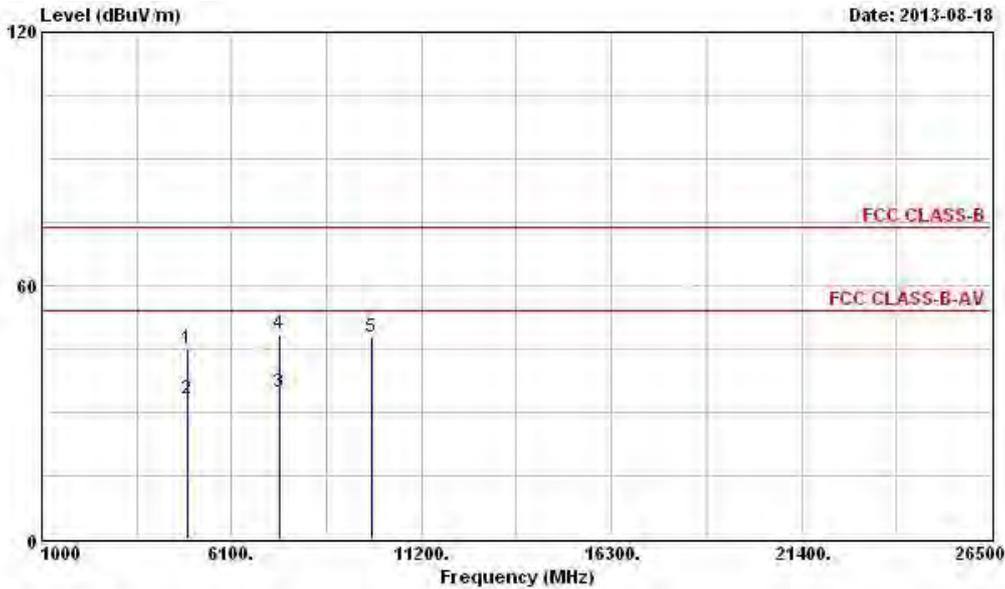


Peak	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4924.000	45.09	-28.91	74.00	40.41	34.74	4.79	34.85	Peak	---	---
2	4924.000	33.01	-20.99	54.00	28.33	34.74	4.79	34.85	Average	---	---
3	7386.000	34.75	-19.25	54.00	28.47	35.90	5.57	35.19	Average	---	---
4	7386.000	48.61	-25.39	74.00	42.33	35.90	5.57	35.19	Peak	---	---
5	9848.000	47.64			39.47	37.25	6.50	35.58	Peak	---	---

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (104.37 dBuV/m).



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	2462
N _{TX}	1	Polarization	H

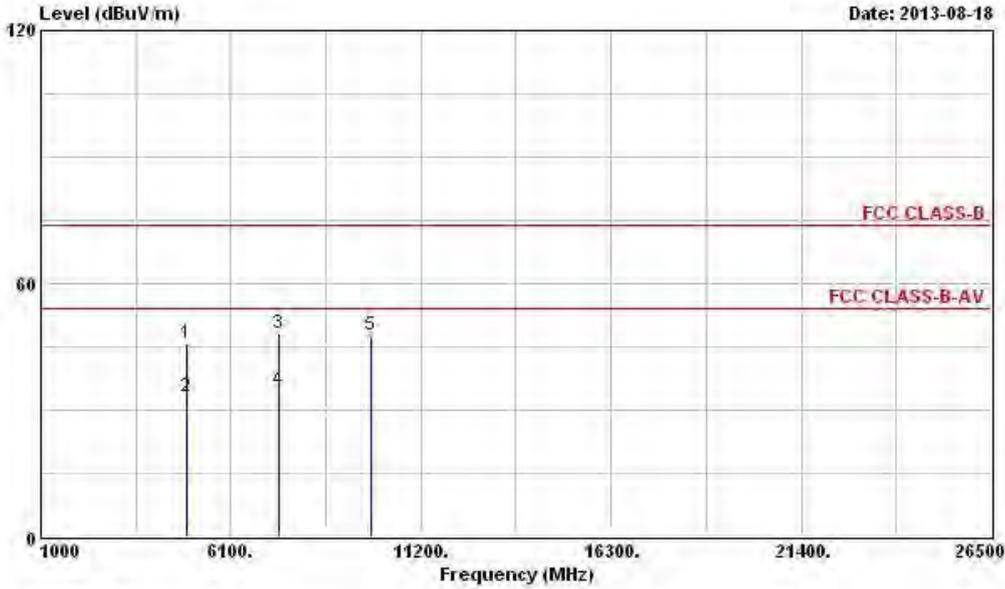


Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4924.000	45.79	-28.21	74.00	41.11	34.74	4.79	34.85	Peak	---
2	4924.000	33.04	-20.96	54.00	28.36	34.74	4.79	34.85	Average	---
3	7386.000	48.22	-25.78	74.00	41.94	35.90	5.57	35.19	Peak	---
4	7386.000	34.73	-19.27	54.00	28.45	35.90	5.57	35.19	Average	---
5	9848.000	47.85			39.68	37.25	6.50	35.58	Peak	---

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (104.37 dBuV/m).



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT40	Test Freq. (MHz)	2422
N _{TX}	1	Polarization	V

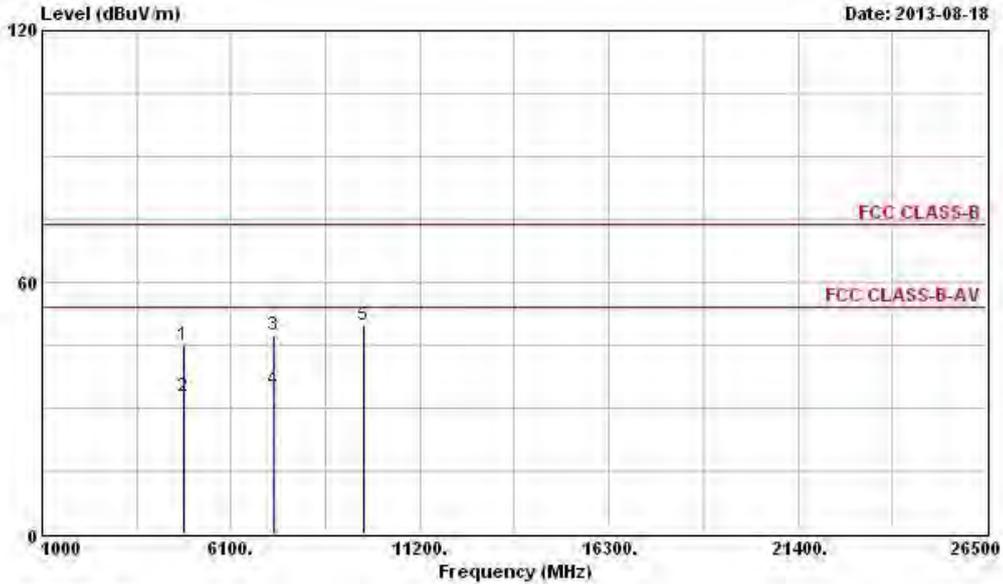


	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4844.000	45.15	-28.85	74.00	40.50	34.79	4.73	34.87	Peak	---	---
2	4844.000	32.60	-21.40	54.00	27.95	34.79	4.73	34.87	Average	---	---
3	7266.000	47.40	-26.60	74.00	41.24	35.90	5.42	35.16	Peak	---	---
4	7266.000	34.19	-19.81	54.00	28.03	35.90	5.42	35.16	Average	---	---
5	9688.000	49.69			41.88	37.00	6.38	35.57	Peak	---	---

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (104.38 dBuV/m).



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT40	Test Freq. (MHz)	2422
N _{TX}	1	Polarization	H

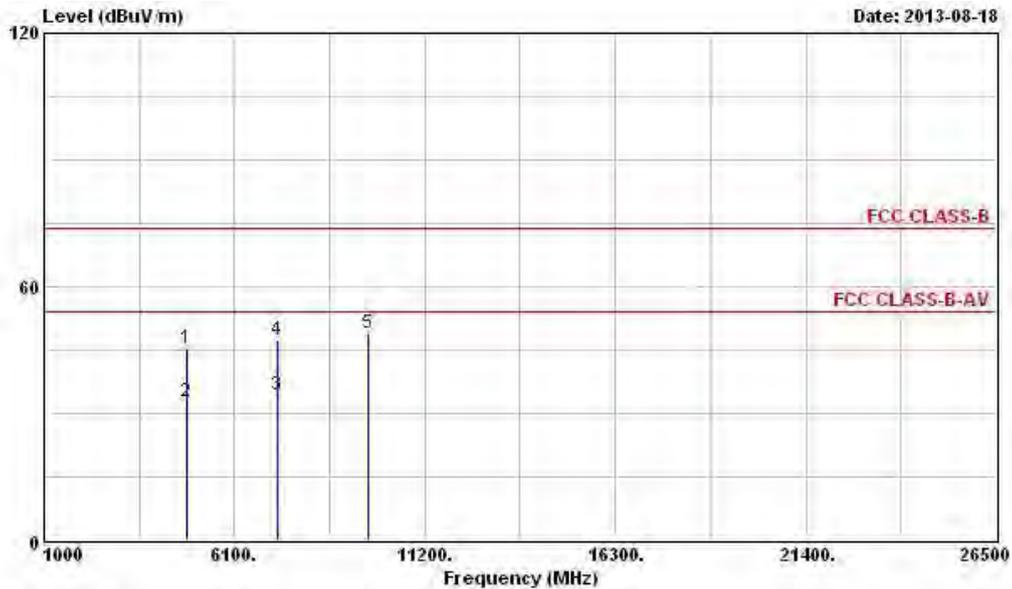


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4844.000	45.52	-28.48	74.00	40.87	34.79	4.73	34.87	Peak	---	---
2	4844.000	32.58	-21.42	54.00	27.93	34.79	4.73	34.87	Average	---	---
3	7266.000	34.23	-19.77	54.00	28.07	35.90	5.42	35.16	Average	---	---
4	7266.000	47.31	-26.69	74.00	41.15	35.90	5.42	35.16	Peak	---	---
5	9688.000	48.88			41.07	37.00	6.38	35.57	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (104.38 dBuV/m).



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT40	Test Freq. (MHz)	2437
N _{TX}	1	Polarization	V

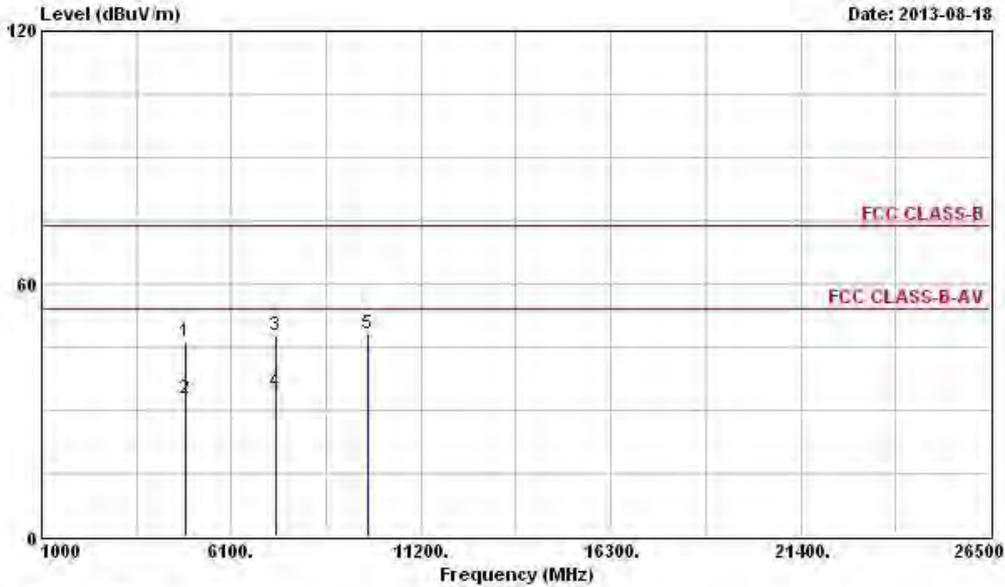


Line	Freq	Level	Over Limit	Limit Line	Read Antenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4874.000	46.05	-27.95	74.00	41.41	34.77	4.73	34.86	Peak	---	---
2	4874.000	32.74	-21.26	54.00	28.10	34.77	4.73	34.86	Average	---	---
3	7311.000	47.65	-26.35	74.00	41.45	35.90	5.47	35.17	Peak	---	---
4	7311.000	34.18	-19.82	54.00	27.98	35.90	5.47	35.17	Average	---	---
5	9748.000	48.08			40.14	37.11	6.41	35.58	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (104.38 dBuV/m).



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT40	Test Freq. (MHz)	2437
N _{TX}	1	Polarization	H

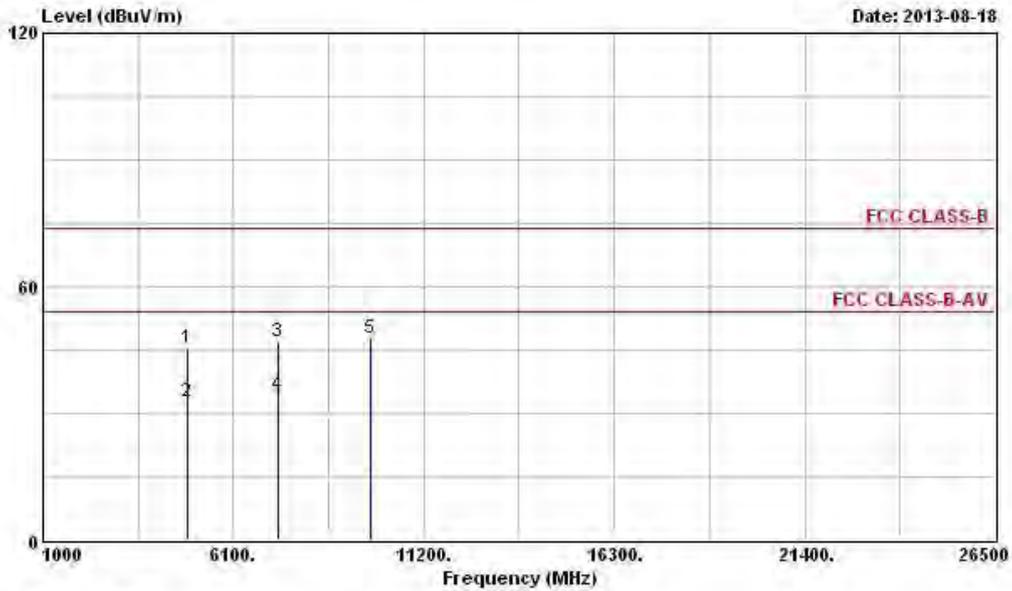


Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4874.000	45.30	-28.70	74.00	40.66	34.77	4.73	34.86 Peak	---	---
2	4874.000	32.67	-21.33	54.00	28.03	34.77	4.73	34.86 Average	---	---
3	7311.000	47.10	-26.90	74.00	40.90	35.90	5.47	35.17 Peak	---	---
4	7311.000	34.29	-19.71	54.00	28.09	35.90	5.47	35.17 Average	---	---
5	9748.000	47.71			39.77	37.11	6.41	35.58 Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (104.38 dBuV/m).



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT40	Test Freq. (MHz)	2452
N _{TX}	1	Polarization	V

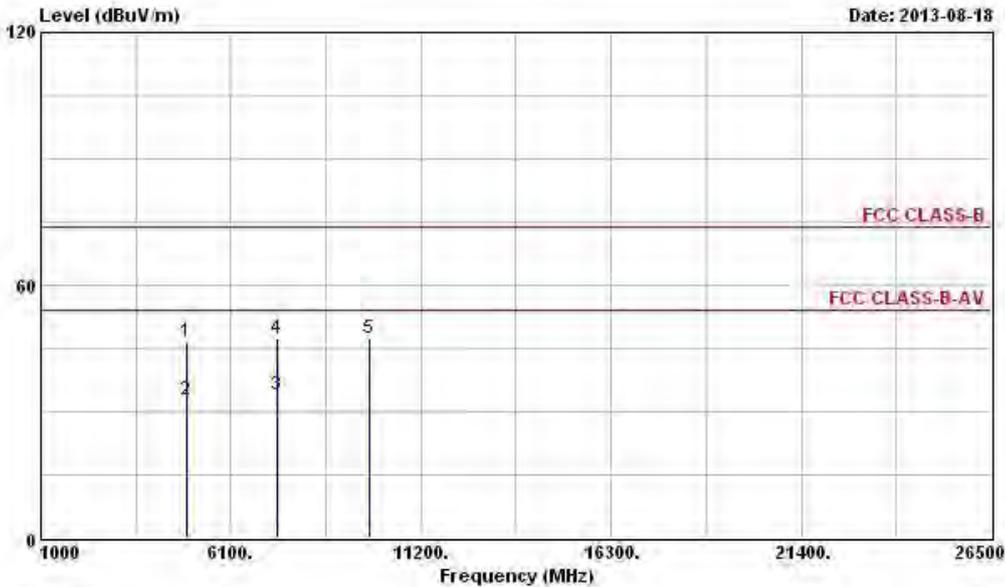


	E _{req}	Level	Over	Limit	ReadAntenna	Cable	Preamp		Ant	Table
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	4904.000	46.77	-27.23	74.00	42.11	34.75	4.76	34.85	Peak	---
2	4904.000	32.82	-21.18	54.00	28.16	34.75	4.76	34.85	Average	---
3	7356.000	34.08	-19.92	54.00	27.84	35.90	5.52	35.18	Average	---
4	7356.000	47.46	-26.54	74.00	41.22	35.90	5.52	35.18	Peak	---
5	9808.000	47.39			39.30	37.20	6.47	35.58	Peak	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (104.38 dBuV/m).



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT40	Test Freq. (MHz)	2452
N _{TX}	1	Polarization	H

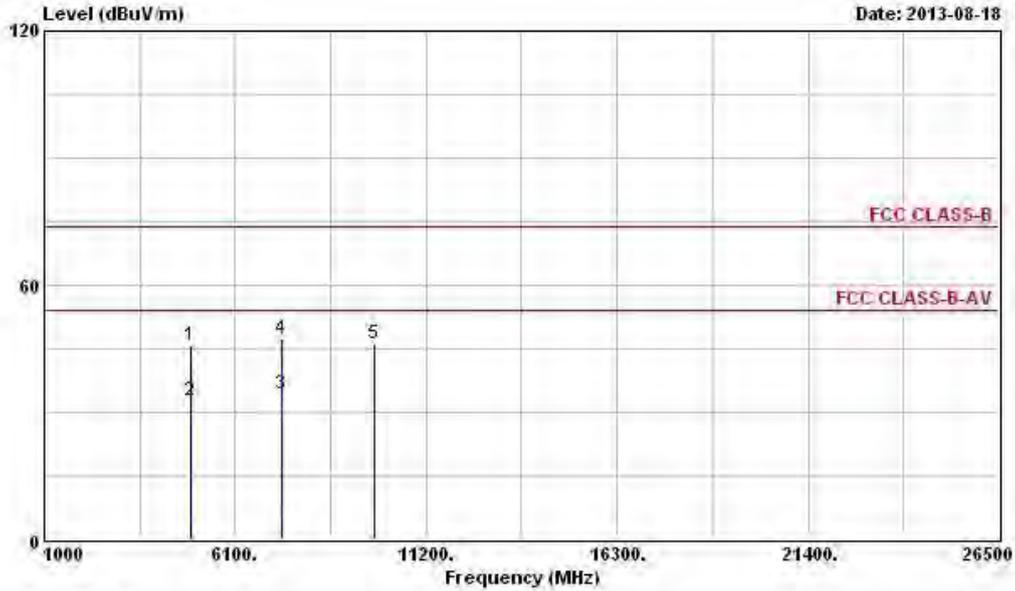


Line	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4904.000	45.65	-28.35	74.00	40.99	34.75	4.76	34.85	Peak	---	---
2	4904.000	32.96	-21.04	54.00	28.30	34.75	4.76	34.85	Average	---	---
3	7356.000	34.20	-19.80	54.00	27.96	35.90	5.52	35.18	Average	---	---
4	7356.000	47.33	-26.67	74.00	41.09	35.90	5.52	35.18	Peak	---	---
5	9808.000	46.31			38.22	37.20	6.47	35.58	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (104.38 dBuV/m).



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	2412
N _{TX}	2	Polarization	V

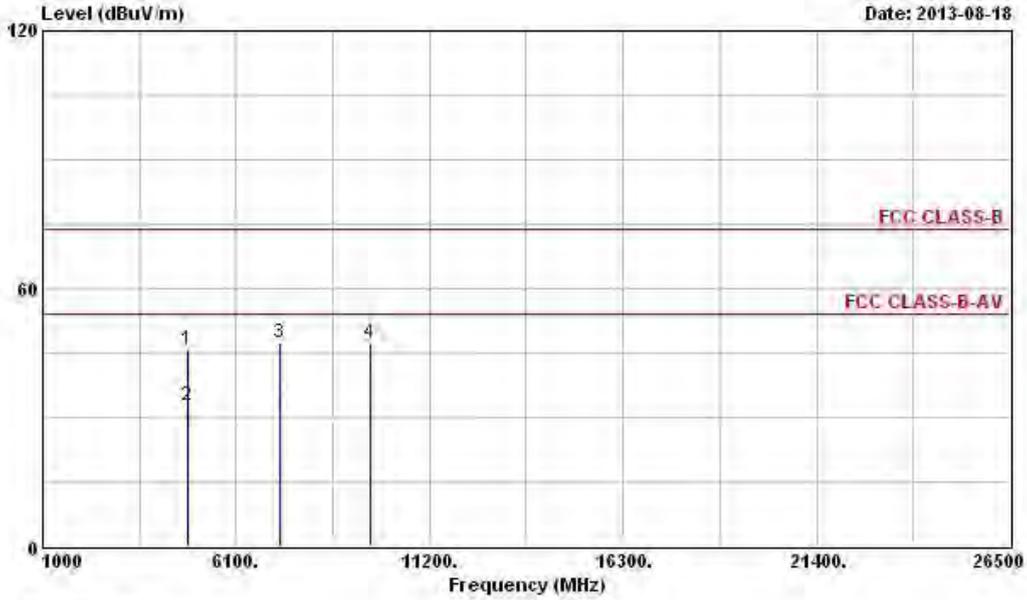


Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4824.000	45.94	-28.06	74.00	41.31	34.80	4.70	34.87 Peak	---	---
2	4824.000	32.63	-21.37	54.00	28.00	34.80	4.70	34.87 Average	---	---
3	7236.000	47.55			41.43	35.90	5.37	35.15 Peak	---	---
4	9648.000	47.55			39.82	36.95	6.35	35.57 Peak	---	---

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (104.05 dBuV/m).



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	2412
N _{TX}	2	Polarization	H

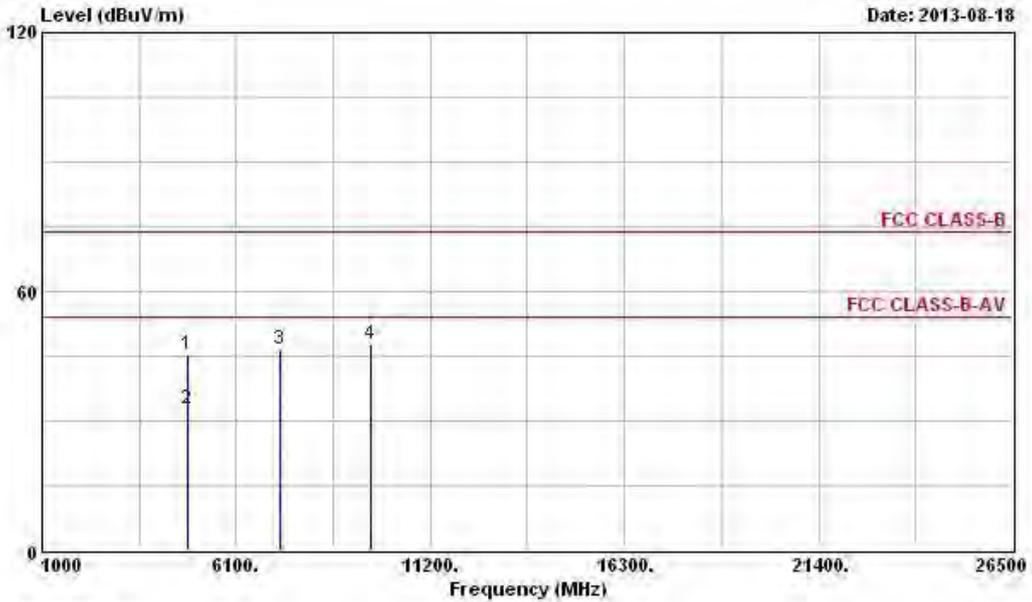


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Rnt Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4824.000	45.45	-28.55	74.00	40.82	34.80	4.70	34.87	Peak	---	---
2	4824.000	32.81	-21.19	54.00	28.18	34.80	4.70	34.87	Average	---	---
3	7236.000	46.39			40.27	35.90	5.37	35.15	Peak	---	---
4	9648.000	47.84			40.11	36.95	6.35	35.57	Peak	---	---

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (104.05 dBuV/m).



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	2437
N _{TX}	2	Polarization	V

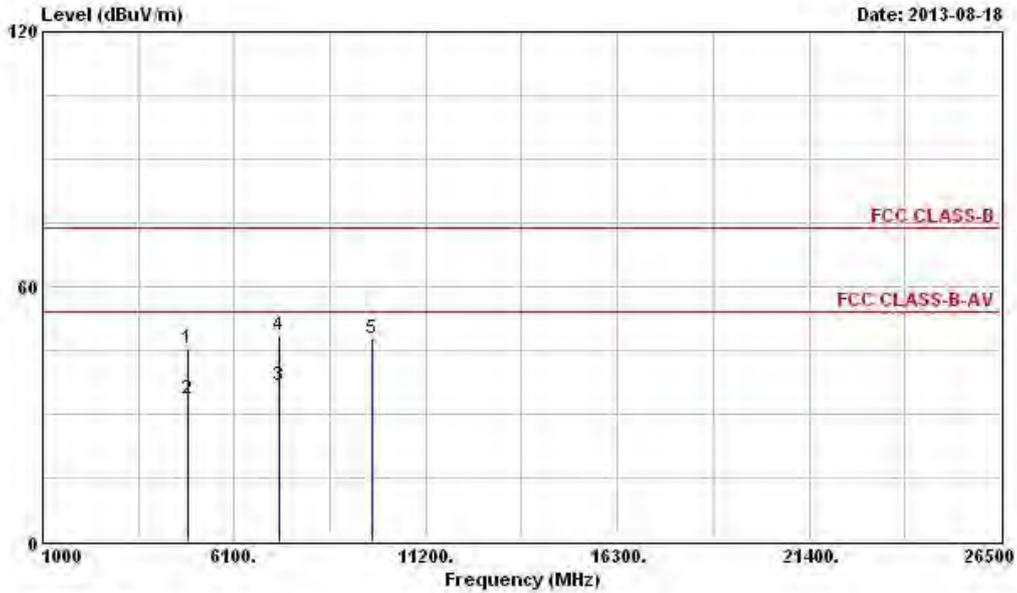


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4874.000	45.52	-28.48	74.00	40.88	34.77	4.73	34.86	Peak	---	---
2	4874.000	33.37	-20.63	54.00	28.73	34.77	4.73	34.86	Average	---	---
3	7311.000	36.60	-17.40	54.00	30.40	35.90	5.47	35.17	Average	---	---
4	7311.000	48.49	-25.51	74.00	42.29	35.90	5.47	35.17	Peak	---	---
5	9748.000	47.62			39.68	37.11	6.41	35.58	Peak	---	---

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (104.05 dBuV/m).



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	2437
N _{TX}	2	Polarization	H

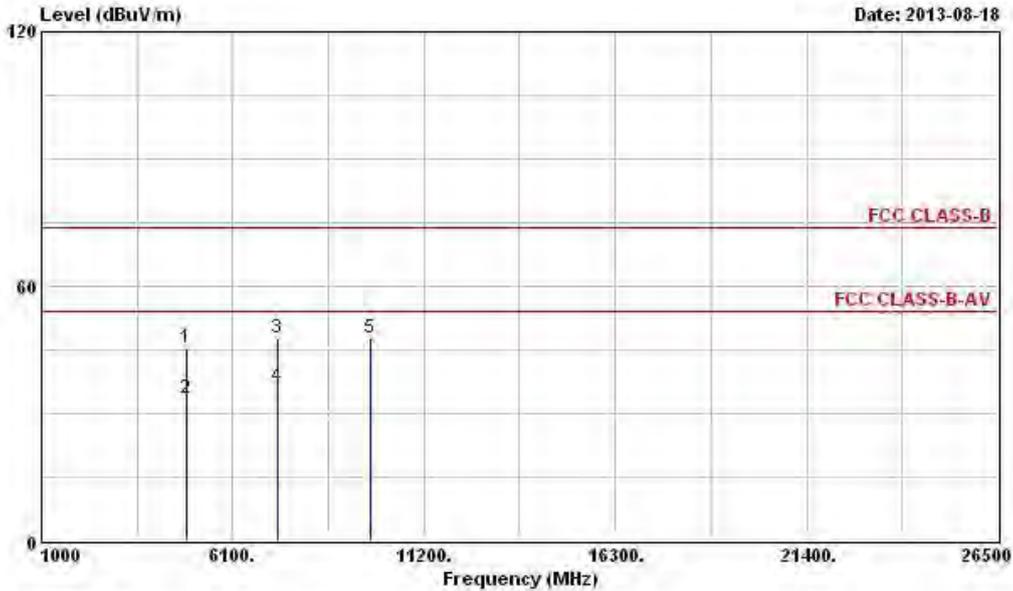


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4874.000	45.42	-28.58	74.00	40.78	34.77	4.73	34.86	Peak	---	---
2	4874.000	33.50	-20.50	54.00	28.86	34.77	4.73	34.86	Average	---	---
3	7311.000	47.93	-26.07	74.00	41.73	35.90	5.47	35.17	Peak	---	---
4	7311.000	36.18	-17.82	54.00	29.98	35.90	5.47	35.17	Average	---	---
5	9748.000	47.95			40.01	37.11	6.41	35.58	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (104.05 dBuV/m).



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	2462
N _{TX}	2	Polarization	V

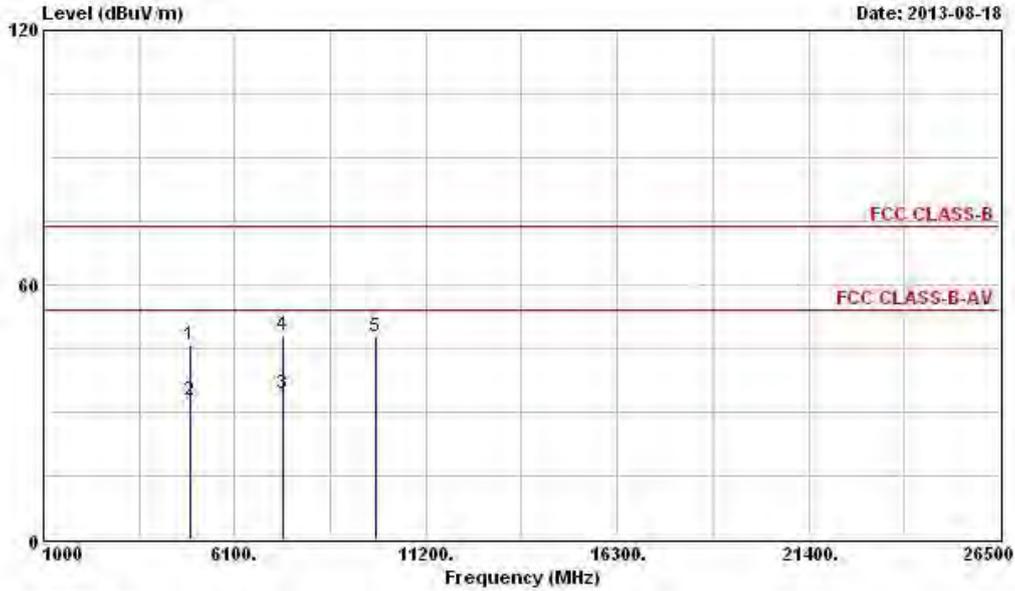


	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Remark	Ant	Table
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4924.000	45.80	-28.20	74.00	41.12	34.74	4.79	34.85	Peak	---	---
2	4924.000	32.85	-21.15	54.00	28.17	34.74	4.79	34.85	Average	---	---
3	7386.000	34.52	-19.48	54.00	28.24	35.90	5.57	35.19	Average	---	---
4	7386.000	48.09	-25.91	74.00	41.81	35.90	5.57	35.19	Peak	---	---
5	9848.000	47.65			39.48	37.25	6.50	35.58	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (104.05 dBuV/m).



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	2462
N _{TX}	2	Polarization	H

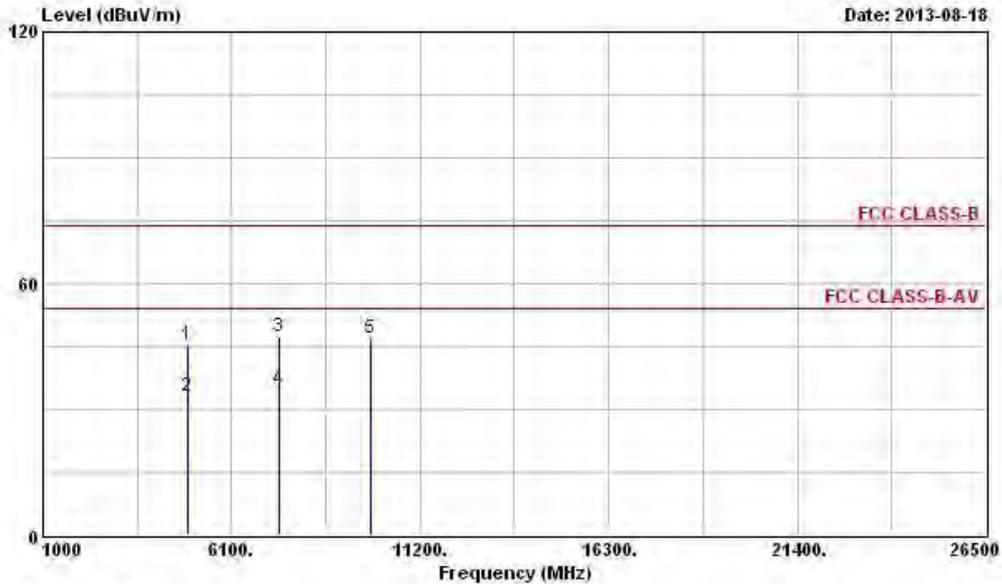


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Loss	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4924.000	45.38	-28.62	74.00	40.70	34.74	4.79	34.85	Peak	---	---
2	4924.000	33.01	-20.99	54.00	28.33	34.74	4.79	34.85	Average	---	---
3	7386.000	47.20	-26.80	74.00	40.92	35.90	5.57	35.19	Peak	---	---
4	7386.000	34.56	-19.44	54.00	28.28	35.90	5.57	35.19	Average	---	---
5	9848.000	46.90			38.73	37.25	6.50	35.58	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (104.05 dBuV/m).



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT40	Test Freq. (MHz)	2422
N _{TX}	2	Polarization	V

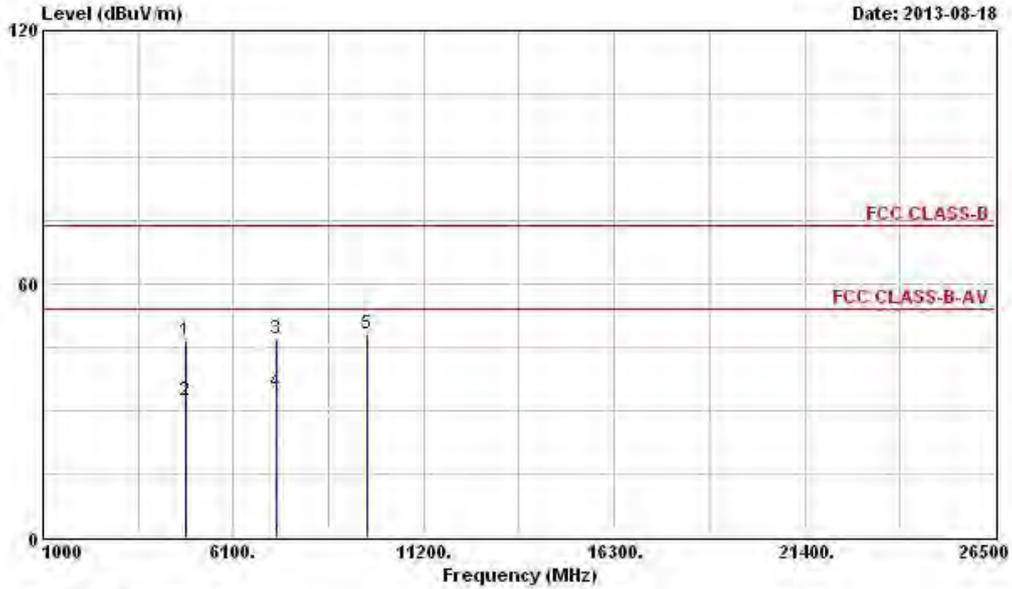


Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4844.000	46.40	-27.60	74.00	41.75	34.79	4.73	34.87 Peak	---	---
2	4844.000	32.50	-21.50	54.00	27.85	34.79	4.73	34.87 Average	---	---
3	7266.000	46.78	-27.22	74.00	40.62	35.90	5.42	35.16 Peak	---	---
4	7266.000	34.37	-19.63	54.00	28.21	35.90	5.42	35.16 Average	---	---
5	9688.000	48.08			40.27	37.00	6.38	35.57 Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (101.90 dBuV/m).



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT40	Test Freq. (MHz)	2422
N _{TX}	2	Polarization	H

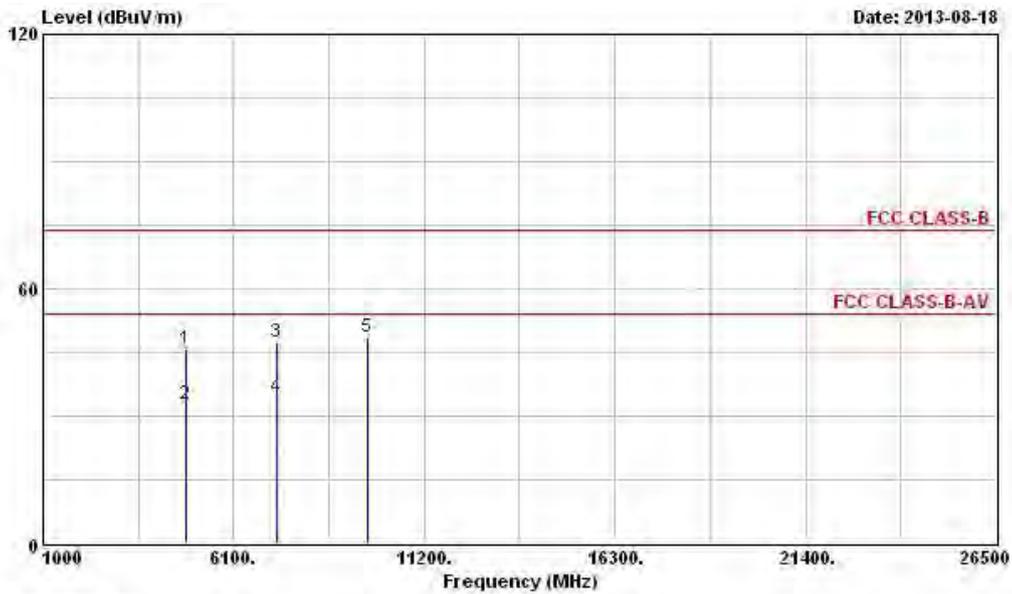


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4844.000	45.64	-28.36	74.00	40.99	34.79	4.73	34.87	Peak	---	---
2	4844.000	32.73	-21.27	54.00	28.08	34.79	4.73	34.87	Average	---	---
3	7266.000	47.45	-26.55	74.00	41.29	35.90	5.42	35.16	Peak	---	---
4	7266.000	34.17	-19.83	54.00	28.01	35.90	5.42	35.16	Average	---	---
5	9688.000	48.73			40.92	37.00	6.38	35.57	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (101.90 dBuV/m).



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT40	Test Freq. (MHz)	2437
N _{TX}	2	Polarization	V

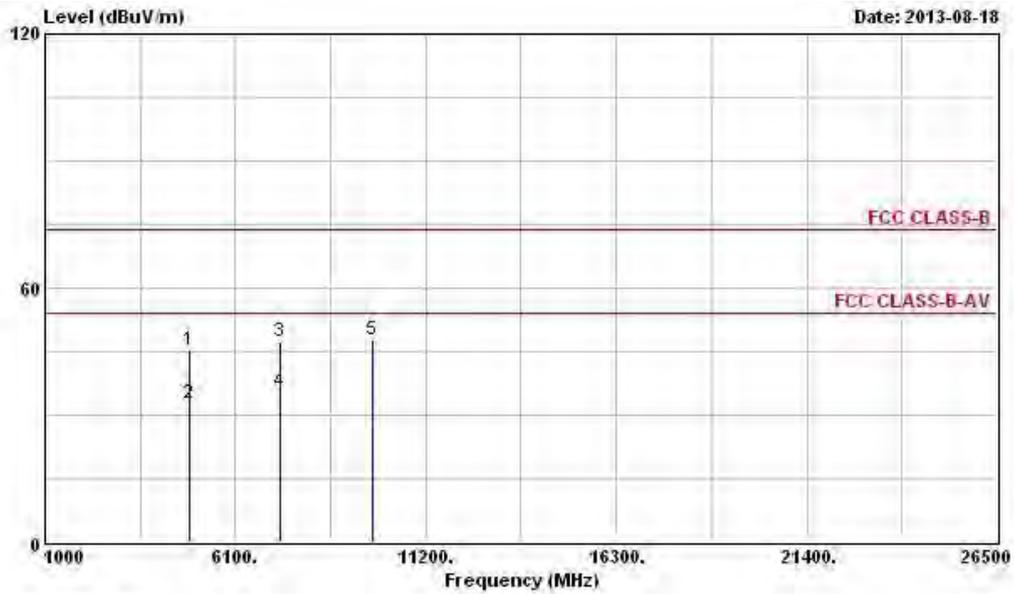


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4874.000	45.48	-28.52	74.00	40.84	34.77	4.73	34.86	Peak	---	---
2	4874.000	32.93	-21.07	54.00	28.29	34.77	4.73	34.86	Average	---	---
3	7311.000	47.54	-26.46	74.00	41.34	35.90	5.47	35.17	Peak	---	---
4	7311.000	35.56	-18.44	54.00	29.36	35.90	5.47	35.17	Average	---	---
5	9748.000	47.79			39.85	37.11	6.41	35.58	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (101.90 dBuV/m).



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT40	Test Freq. (MHz)	2437
N _{TX}	2	Polarization	H

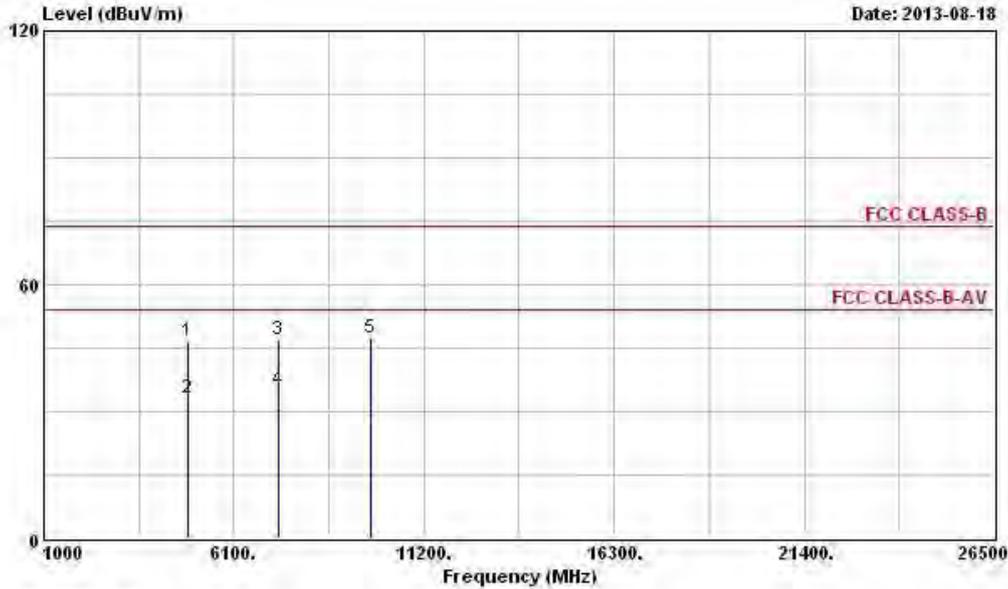


Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4874.000	46.49	-27.51	74.00	41.85	34.77	4.73	34.86 Peak	---	---
2	4874.000	33.12	-20.88	54.00	28.48	34.77	4.73	34.86 Average	---	---
3	7311.000	46.94	-27.06	74.00	40.74	35.90	5.47	35.17 Peak	---	---
4	7311.000	35.14	-18.86	54.00	28.94	35.90	5.47	35.17 Average	---	---
5	9748.000	47.39			39.45	37.11	6.41	35.58 Peak	---	---

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (101.90 dBuV/m).



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT40	Test Freq. (MHz)	2452
N _{TX}	2	Polarization	V

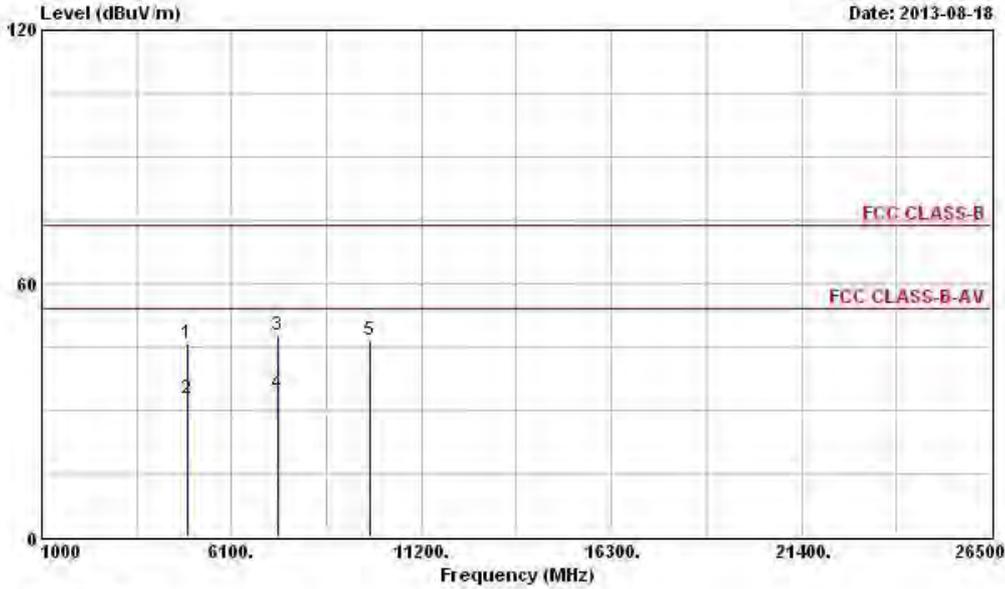


	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4904.000	45.79	-28.21	74.00	41.13	34.75	4.76	34.85	Peak	---	---
2	4904.000	32.87	-21.13	54.00	28.21	34.75	4.76	34.85	Average	---	---
3	7356.000	47.62	-26.38	74.00	41.38	35.90	5.52	35.18	Peak	---	---
4	7356.000	34.10	-19.90	54.00	27.86	35.90	5.52	35.18	Average	---	---
5	9808.000	46.42			38.33	37.20	6.47	35.58	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (101.90 dBuV/m).



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT40	Test Freq. (MHz)	2452
N _{TX}	2	Polarization	H

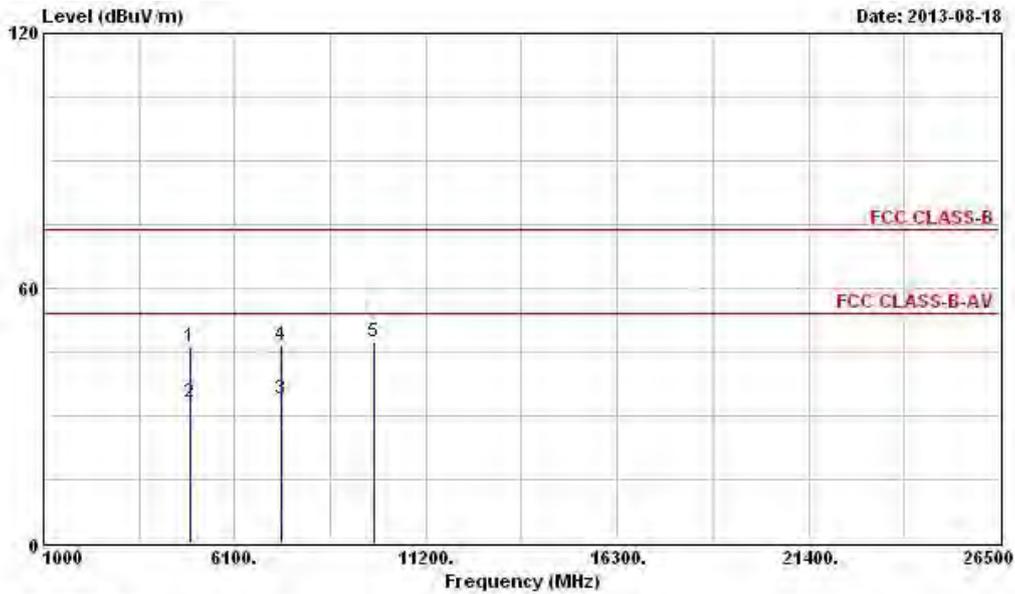

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4904.000	45.99	-28.01	74.00	41.33	34.75	4.76	34.85	Peak	---	---
2	4904.000	33.10	-20.90	54.00	28.44	34.75	4.76	34.85	Average	---	---
3	7356.000	34.09	-19.91	54.00	27.85	35.90	5.52	35.18	Average	---	---
4	7356.000	46.64	-27.36	74.00	40.40	35.90	5.52	35.18	Peak	---	---
5	9808.000	47.30			39.21	37.20	6.47	35.58	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (101.90 dBuV/m).



4 Test Equipment and Calibration Data

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMC Receiver	R&S	ESCS 30	100174	9kHz ~ 2.75GHz	Mar. 26, 2013	Conduction (CO04-HY)
LISN	SCHWARZBECK MESS-ELEKTRONIK	NSLK 8127	8127-477	9kHz ~ 30MHz	Jan. 21, 2013	Conduction (CO04-HY)
LISN (Support Unit)	EMCO	3810/2NM	9703-1839	9kHz ~ 30MHz	Apr. 18, 2013	Conduction (CO04-HY)
RF Cable-CON	HUBER+SUHNER	RG213/U	7.61183201e+012	9kHz ~ 30MHz	Nov. 09, 2012	Conduction (CO04-HY)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Spectrum Analyzer	R&S	FSV 40	101013	9KHz ~ 40GHz	Jan. 29, 2013	Conducted (TH01-HY)
AC Power Source	G.W	APS-9102	EL920581	AC 0V ~ 300V	Jul. 16, 2013	Conducted (TH01-HY)
Temp. and Humidity Chamber	Giant Force	GTH-225-20-SP-SD	MAA1112-007	-20 ~ 100°C	Nov. 21, 2012	Conducted (TH01-HY)
RF Cable-2m	HUBER+SUHNER	SUCOFLEX_104	SN 345675/4	1GHz ~ 26.5GHz	Dec. 04, 2012	Conducted (TH01-HY)
RF Cable-0.2m	HUBER+SUHNER	SUCOFLEX_103	10712/4	1GHz ~ 33GHz	Dec. 04, 2012	Conducted (TH01-HY)

Note: Calibration Interval of instruments listed above is one year.



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Spectrum Analyzer	R&S	FSP40	100593	9kHz ~ 40GHz	Sep. 14, 2012	Radiation (03CH02-HY)
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH02-HY	30MHz ~ 1GHz 3m	May 11, 2013	Radiation (03CH02-HY)
Amplifier	Agilent	8447D	2944A11146	100kHz ~ 1.3GHz	Jul. 17, 2013	Radiation (03CH02-HY)
Amplifier	Agilent	8449B	3008A02364	1GHz ~ 26.5GHz	May 06, 2013	Radiation (03CH02-HY)
Horn Antenna	ETS-LINDGREN	3117	00091920	1GHz ~ 18GHz	Nov. 16, 2012	Radiation (03CH02-HY)
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA9170154	15GHz ~ 40GHz	Jan. 08, 2013	Radiation (03CH02-HY)
RF Cable-R03m	Jye Bao	RG142	CB021	9kHz ~ 1GHz	Nov. 10, 2012	Radiation (03CH02-HY)
RF Cable-high	SUHNER	SUCOFLEX106	03CH02-HY	1GHz ~ 40GHz	Mar. 05, 2013	Radiation (03CH02-HY)
Bilog Antenna	SCHAFFNER	CBL61128	2723	30MHz ~ 2GHz	Oct. 22, 2012	Radiation (03CH02-HY)
Turn Table	Chaintek Instruments	3000	MF7802058	0~ 360 degree	N/A	Radiation (03CH02-HY)
Antenna Mast	MF	MF7802	MF780208205	1 ~ 4 m	N/A	Radiation (03CH02-HY)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Loop Antenna	TESEQ	HLA 6120	31244	9 kHz ~ 30 MHz	Dec. 02, 2012	Radiation (03CH02-HY)

Note: Calibration Interval of instruments listed above is two year.