

1 CO-LOCATION

1.1 Transmitter Radiated Unwanted Emissions

1.1.1 Transmitter Radiated Unwanted Emissions Limit

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Un-restricted Band Emissions Limit	
RF output power procedure	Limit (dB)
Peak output power procedure	20
Average output power procedure	30

Note 1: If the peak output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level.

Note 2: If the average output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the power in any 100 kHz outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum measured in-band average PSD level.

1.1.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.



1.1.3 Test Procedures

Test Method	
<input checked="" type="checkbox"/>	Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).
<input checked="" type="checkbox"/>	Measurements in the frequency range 10 GHz - 18GHz are typically made at a closer distance 1m, because the instrumentation noise floor is typically close to the radiated emission limit.
<input checked="" type="checkbox"/>	Measurements in the frequency range above 18 GHz - 25GHz are typically made at a closer distance 0.5m, because the instrumentation noise floor is typically close to the radiated emission limit.
<input checked="" type="checkbox"/>	The average emission levels shall be measured in [duty cycle \geq 98 or duty factor].
<input checked="" type="checkbox"/>	For the transmitter unwanted emissions shall be measured using following options below:
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074, clause 10.1 for unwanted emissions into non-restricted bands.
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074, clause 10.2 for unwanted emissions into restricted bands.
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 10.2.3.3 and 8.2.1 Option 1 (spectral trace averaging)
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 10.2.3.3 and 8.2.1 Option 2 (slow sweep speed).
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 4.2.3.2.3 (Reduced VBW). VBW \geq 1/T, where T is pulse time.
<input type="checkbox"/>	Refer as ANSI C63.10, clause 4.2.3.2.4 average value of pulsed emissions.
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074, clause 10.2.3.2 and 8.1.1 measurement procedure peak limit.
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074, clause 10.2.3.1 measurement procedure Quasi-Peak limit.
<input checked="" type="checkbox"/>	For radiated measurement, refer as FCC KDB 558074, clause 10.2.1.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.4 for radiated emissions from below 30 MHz.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.5 for radiated emissions from 30 MHz to 1000 MHz.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.6 for radiated emissions from above 1 GHz.
<input type="checkbox"/>	For conducted and cabinet radiation measurement, refer as FCC KDB 558074, clause 10.2.2.
<input type="checkbox"/>	For conducted unwanted emissions into non-restricted bands (relative emission limits). Devices with multiple transmit chains: Refer as FCC KDB 662911, when testing out-of-band and spurious emissions against relative emission limits, tests may be performed on each output individually without summing or adding 10 log(N) if the measurements are made relative to the in-band emissions on the individual outputs.
<input type="checkbox"/>	For conducted unwanted emissions into restricted bands (absolute emission limits). Devices with multiple transmit chains using options given below: (1) Measure and sum the spectra across the outputs or (2) Measure and add 10 log(N) dB

1.1.4 Test Setup

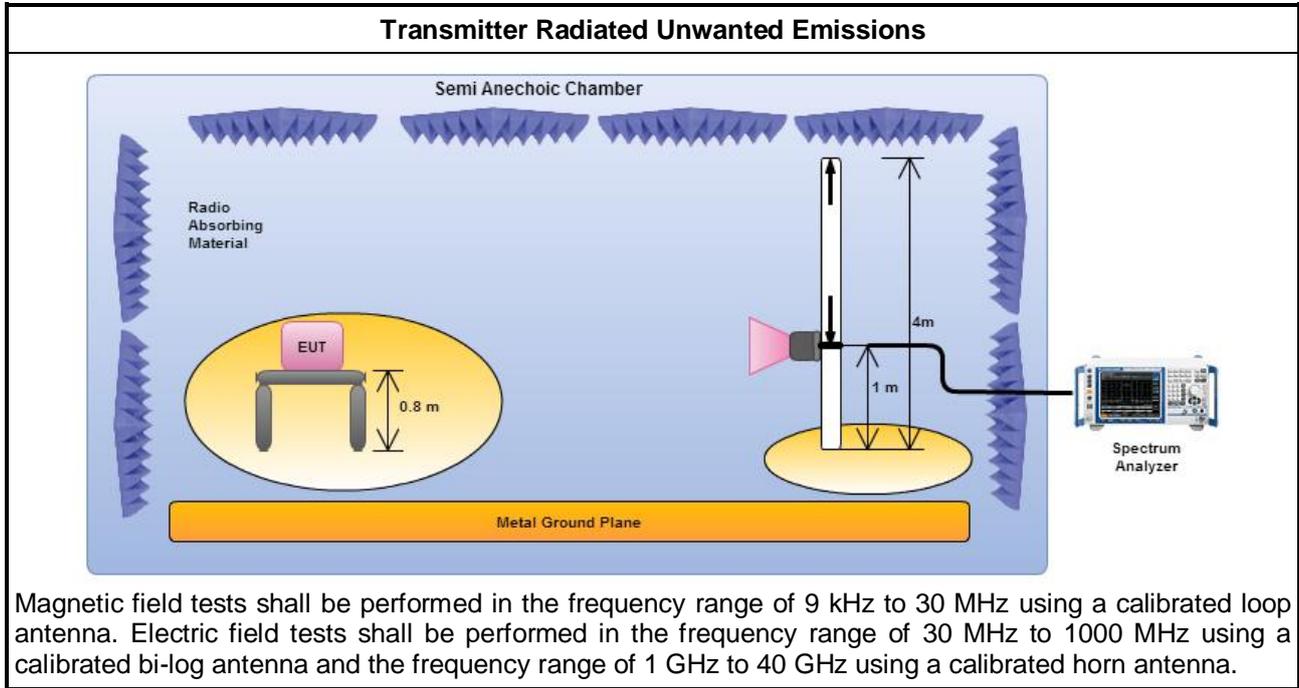


1.1.5 Transmitter Radiated Unwanted Emissions (Below 30MHz)

All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.




1.1.6 Results of Radiated Emissions (30MHz~1GHz)

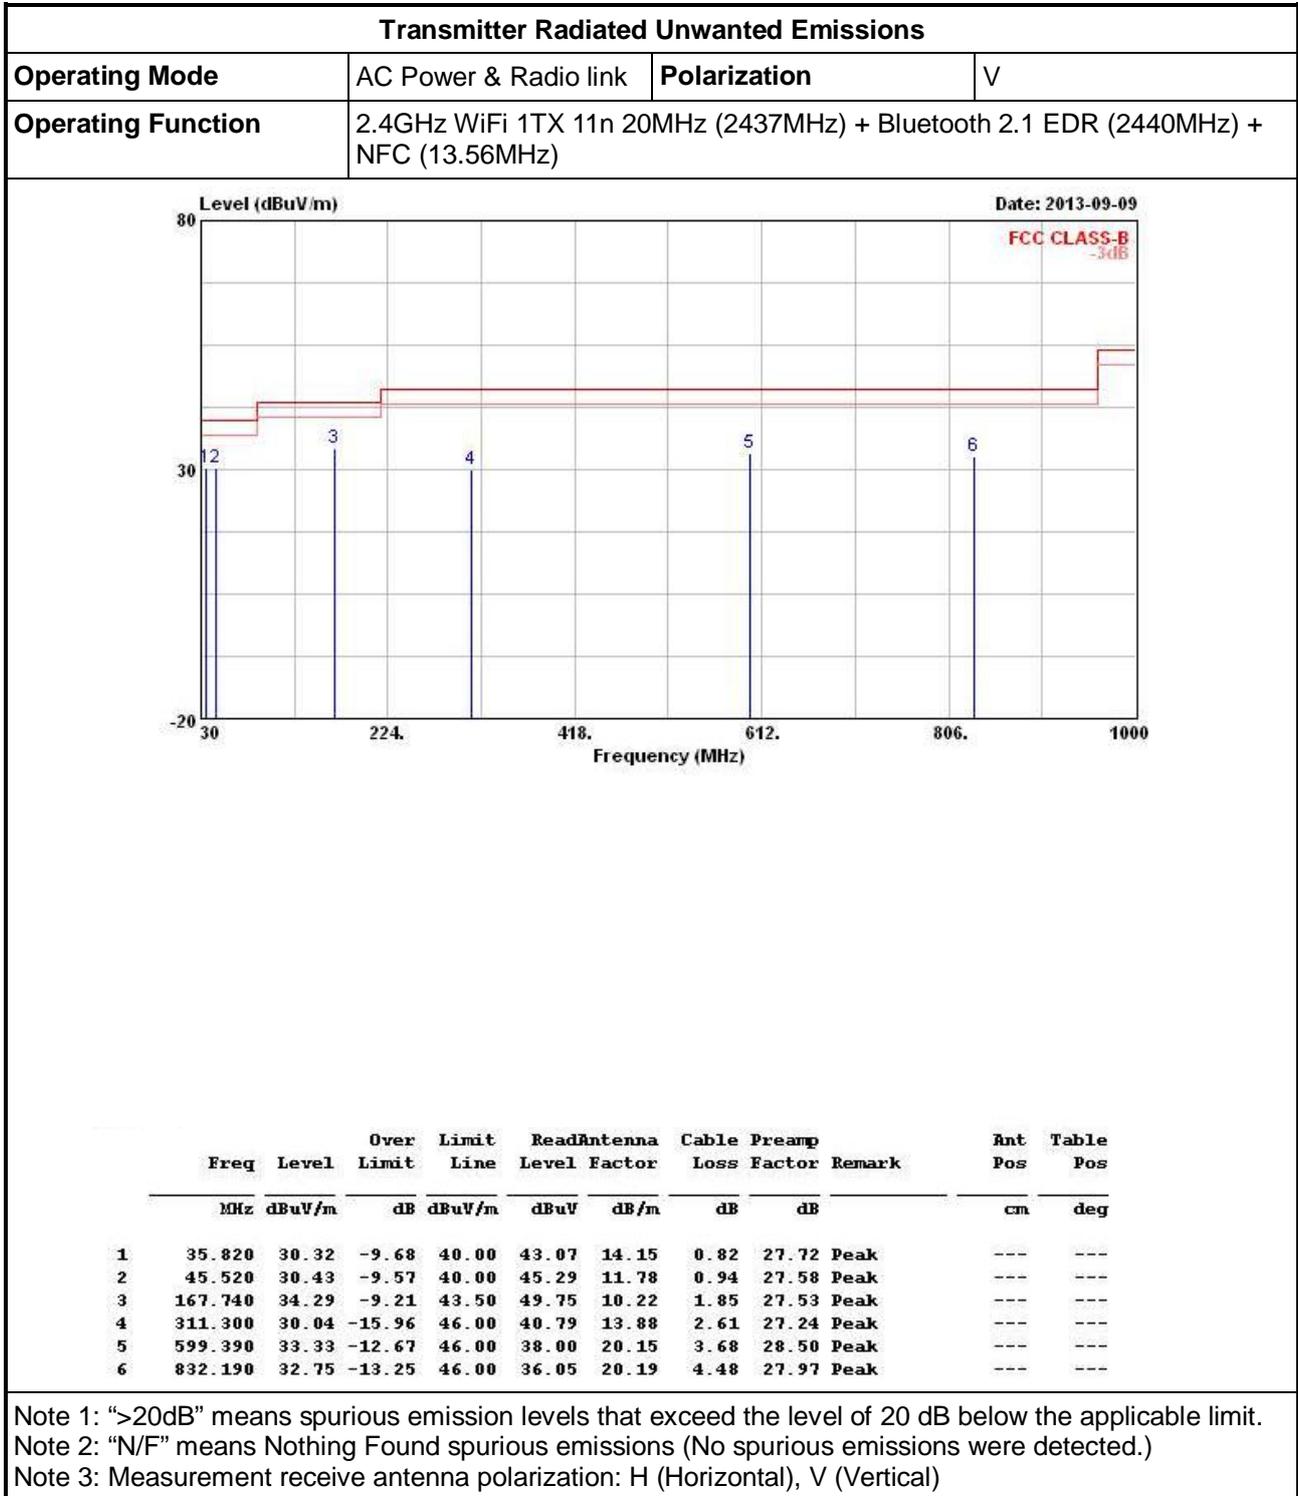



Transmitter Radiated Unwanted Emissions			
Operating Mode	AC Power & Radio link	Polarization	H
Operating Function	2.4GHz WiFi 1TX 11n 20MHz (2437MHz) + Bluetooth 2.1 EDR (2440MHz) + NFC (13.56MHz)		

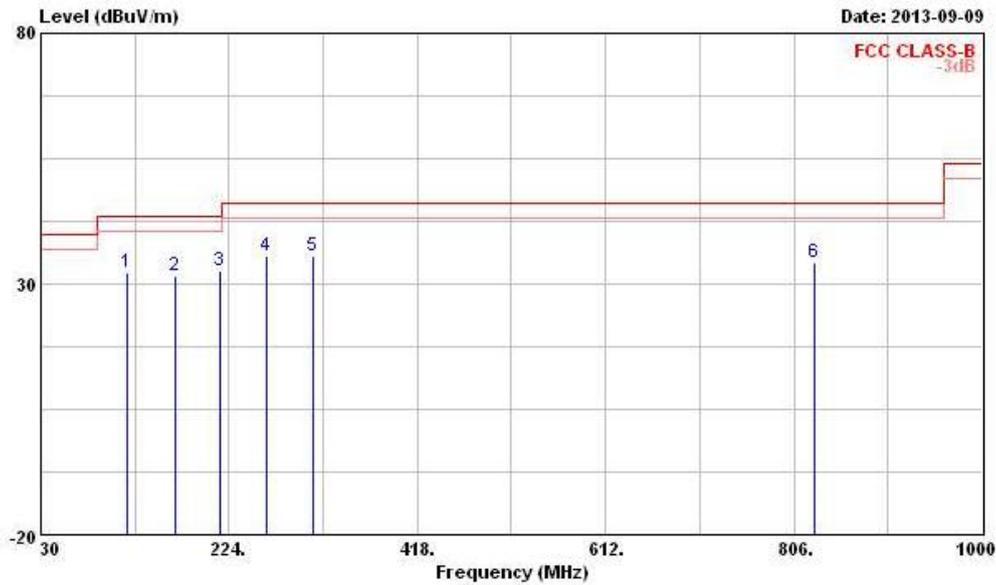


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	118.270	32.24	-11.26	43.50	45.01	13.38	1.54	27.69	Peak	---	---
2	167.740	31.51	-11.99	43.50	46.97	10.22	1.85	27.53	Peak	---	---
3	215.270	32.62	-10.88	43.50	45.98	11.86	2.17	27.39	Peak	---	---
4	261.830	35.48	-10.52	46.00	47.15	13.16	2.43	27.26	Peak	---	---
5	311.300	35.61	-10.39	46.00	46.36	13.88	2.61	27.24	Peak	---	---
6	827.340	34.22	-11.78	46.00	37.54	20.20	4.47	27.99	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)



Transmitter Radiated Unwanted Emissions			
Operating Mode	AC Power & Radio link	Polarization	V
Operating Function	5.2GHz WiFi 11a 20MHz (5300MHz) + Bluetooth 2.1 EDR (2440MHz) + NFC (13.56MHz)		

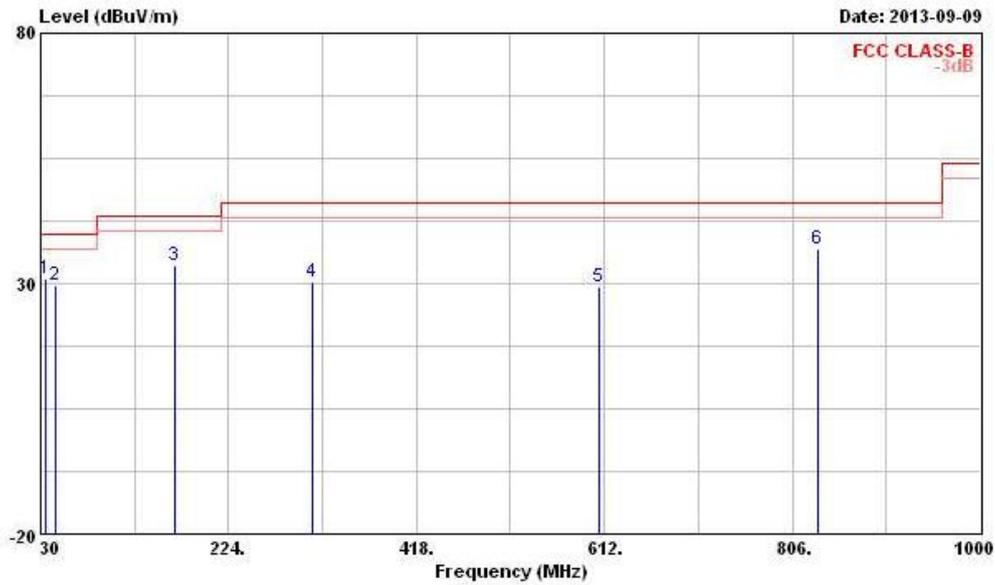


Peak	Freq	Level	Over Limit	Limit	ReadAntenna	Cable	Preamp	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB		cm	deg
1	35.820	31.03	-8.97	40.00	43.78	14.15	0.82	27.72 Peak	---	---
2	44.550	29.63	-10.37	40.00	44.26	12.02	0.93	27.58 Peak	---	---
3	167.740	33.69	-9.81	43.50	49.15	10.22	1.85	27.53 Peak	---	---
4	311.300	30.30	-15.70	46.00	41.05	13.88	2.61	27.24 Peak	---	---
5	606.180	29.46	-16.54	46.00	34.14	20.10	3.71	28.49 Peak	---	---
6	832.190	36.77	-9.23	46.00	40.07	20.19	4.48	27.97 Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)



Transmitter Radiated Unwanted Emissions			
Operating Mode	AC Power & Radio link	Polarization	H
Operating Function	5.2GHz WiFi 11a 20MHz (5300MHz) + Bluetooth 2.1 EDR (2440MHz) + NFC (13.56MHz)		

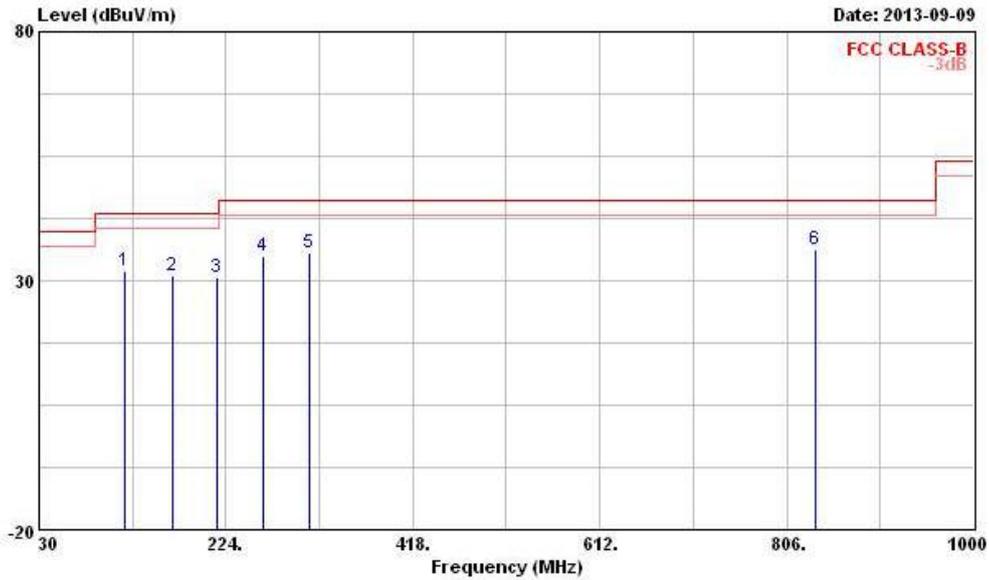


Freq	Level	Over Limit	Limit Line	ReadAntenna		Cable Preamp		Remark	Ant Pos	Table Pos	
				Level	Factor	Loss	Factor				
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	118.270	32.02	-11.48	43.50	44.79	13.38	1.54	27.69	Peak	---	---
2	167.740	30.86	-12.64	43.50	46.32	10.22	1.85	27.53	Peak	---	---
3	215.270	30.75	-12.75	43.50	44.11	11.86	2.17	27.39	Peak	---	---
4	261.830	34.82	-11.18	46.00	46.49	13.16	2.43	27.26	Peak	---	---
5	311.300	35.44	-10.56	46.00	46.19	13.88	2.61	27.24	Peak	---	---
6	835.100	36.22	-9.78	46.00	39.50	20.19	4.49	27.96	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)



Transmitter Radiated Unwanted Emissions			
Operating Mode	AC Power & Radio link	Polarization	V
Operating Function	5.8GHz WiFi 2TX 11n 20MHz (5580MHz) + Bluetooth 2.1 EDR (2440MHz) + NFC (13.56MHz)		

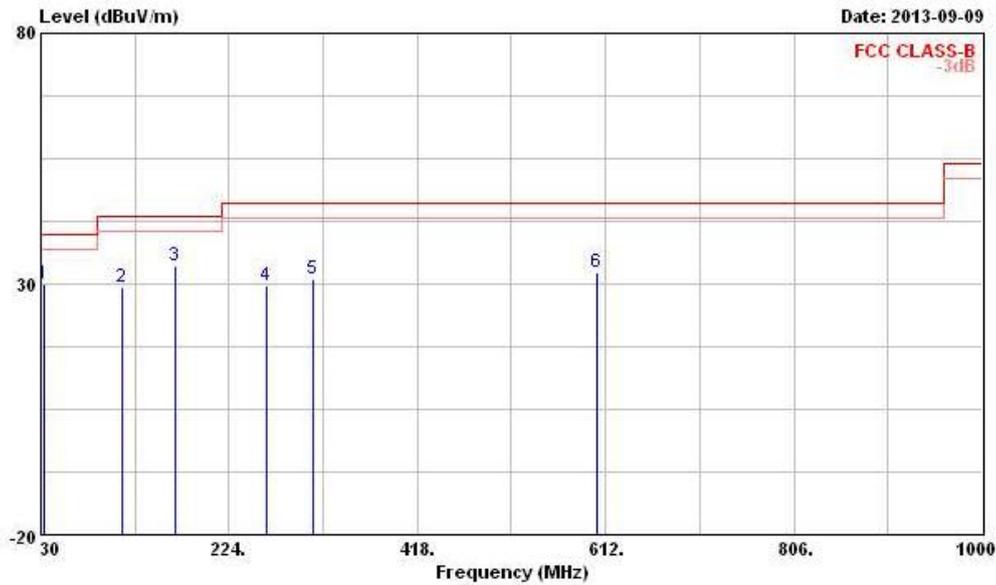


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	32.910	29.93	-10.07	40.00	41.78	15.11	0.79	27.75	Peak	---	---
2	113.420	29.19	-14.31	43.50	42.59	12.80	1.50	27.70	Peak	---	---
3	167.740	33.47	-10.03	43.50	48.93	10.22	1.85	27.53	Peak	---	---
4	261.830	29.80	-16.20	46.00	41.47	13.16	2.43	27.26	Peak	---	---
5	311.300	31.00	-15.00	46.00	41.75	13.88	2.61	27.24	Peak	---	---
6	602.300	32.36	-13.64	46.00	37.01	20.15	3.69	28.49	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)



Transmitter Radiated Unwanted Emissions			
Operating Mode	AC Power & Radio link	Polarization	H
Operating Function	5.8GHz WiFi 2TX 11n 20MHz (580MHz) + Bluetooth 2.1 EDR (2440MHz) + NFC (13.56MHz)		

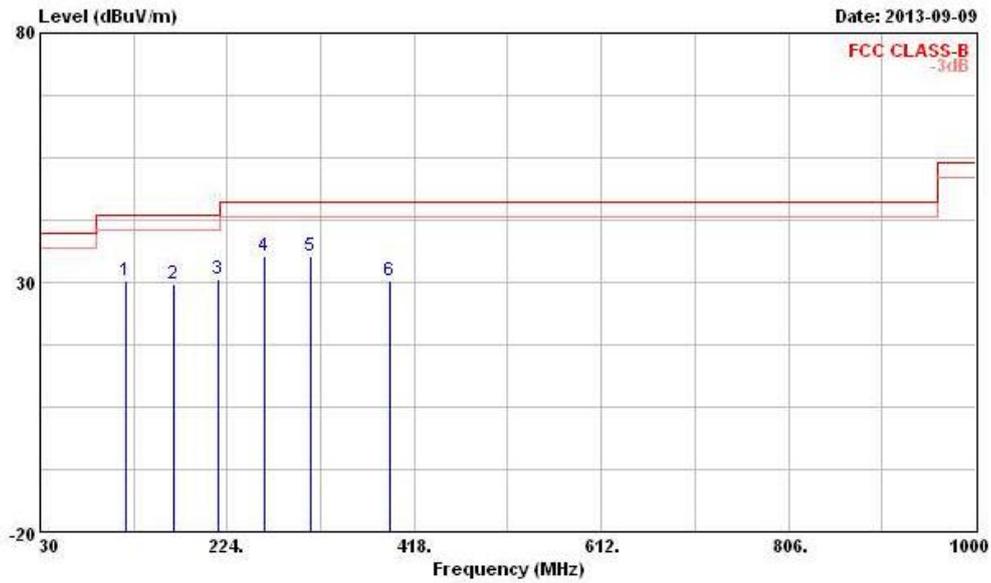

Freq	Level	Over	Limit	ReadAntenna		Cable Preamp		Remark	Ant	Table	
				Level	Factor	Loss	Factor				
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	118.270	30.19	-13.31	43.50	42.96	13.38	1.54	27.69	Peak	---	---
2	167.740	29.58	-13.92	43.50	45.04	10.22	1.85	27.53	Peak	---	---
3	215.270	30.74	-12.76	43.50	44.10	11.86	2.17	27.39	Peak	---	---
4	261.830	35.31	-10.69	46.00	46.98	13.16	2.43	27.26	Peak	---	---
5	311.300	35.37	-10.63	46.00	46.12	13.88	2.61	27.24	Peak	---	---
6	392.780	30.27	-15.73	46.00	40.01	15.15	2.96	27.85	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)




1.1.7 Results for Radiated Emissions (1GHz~10th Harmonic)

Transmitter Radiated Unwanted Emissions																																																																																																																																														
Operating Mode	AC Power & Radio link			Polarization				V																																																																																																																																						
Operating Function	2.4GHz WiFi 1TX 11n 20MHz (2437MHz) + Bluetooth 2.1 EDR (2440MHz) + NFC (13.56MHz)																																																																																																																																													
<div style="display: flex; justify-content: space-between;"> <div> <p>Level (dBuV/m)</p> <p>Date: 2013-11-08</p> </div> </div> <table border="1" style="width: 100%; border-collapse: collapse; margin-top: 10px;"> <thead> <tr> <th></th> <th>Freq</th> <th>Level</th> <th>Over Limit</th> <th>Limit Line</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>Remark</th> <th>Ant Pos</th> <th>Table Pos</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr><td>1</td><td>4874.000</td><td>45.05</td><td>-28.95</td><td>74.00</td><td>40.22</td><td>34.77</td><td>4.73</td><td>34.67 Peak</td><td>---</td><td>---</td></tr> <tr><td>2</td><td>4874.000</td><td>32.74</td><td>-21.26</td><td>54.00</td><td>27.91</td><td>34.77</td><td>4.73</td><td>34.67 Average</td><td>---</td><td>---</td></tr> <tr><td>3</td><td>4880.000</td><td>45.11</td><td>-28.89</td><td>74.00</td><td>40.28</td><td>34.77</td><td>4.73</td><td>34.67 Peak</td><td>---</td><td>---</td></tr> <tr><td>4</td><td>4880.000</td><td>15.01</td><td>-38.99</td><td>54.00</td><td>10.18</td><td>34.77</td><td>4.73</td><td>34.67 Average</td><td>---</td><td>---</td></tr> <tr><td>5</td><td>7311.000</td><td>47.21</td><td>-26.79</td><td>74.00</td><td>40.79</td><td>35.90</td><td>5.47</td><td>34.95 Peak</td><td>---</td><td>---</td></tr> <tr><td>6</td><td>7311.000</td><td>33.89</td><td>-20.11</td><td>54.00</td><td>27.47</td><td>35.90</td><td>5.47</td><td>34.95 Average</td><td>---</td><td>---</td></tr> <tr><td>7</td><td>7320.000</td><td>47.94</td><td>-26.06</td><td>74.00</td><td>41.53</td><td>35.90</td><td>5.47</td><td>34.96 Peak</td><td>---</td><td>---</td></tr> <tr><td>8</td><td>7320.000</td><td>17.84</td><td>-36.16</td><td>54.00</td><td>11.43</td><td>35.90</td><td>5.47</td><td>34.96 Average</td><td>---</td><td>---</td></tr> <tr><td>9</td><td>9748.000</td><td>49.26</td><td>-24.74</td><td>74.00</td><td>41.10</td><td>37.11</td><td>6.41</td><td>35.36 Peak</td><td>---</td><td>---</td></tr> <tr><td>10</td><td>9760.000</td><td>49.81</td><td>-24.19</td><td>74.00</td><td>41.62</td><td>37.11</td><td>6.44</td><td>35.36 Peak</td><td>---</td><td>---</td></tr> </tbody> </table>												Freq	Level	Over Limit	Limit Line	ReadAntenna	Cable	Preamp	Remark	Ant Pos	Table Pos		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	4874.000	45.05	-28.95	74.00	40.22	34.77	4.73	34.67 Peak	---	---	2	4874.000	32.74	-21.26	54.00	27.91	34.77	4.73	34.67 Average	---	---	3	4880.000	45.11	-28.89	74.00	40.28	34.77	4.73	34.67 Peak	---	---	4	4880.000	15.01	-38.99	54.00	10.18	34.77	4.73	34.67 Average	---	---	5	7311.000	47.21	-26.79	74.00	40.79	35.90	5.47	34.95 Peak	---	---	6	7311.000	33.89	-20.11	54.00	27.47	35.90	5.47	34.95 Average	---	---	7	7320.000	47.94	-26.06	74.00	41.53	35.90	5.47	34.96 Peak	---	---	8	7320.000	17.84	-36.16	54.00	11.43	35.90	5.47	34.96 Average	---	---	9	9748.000	49.26	-24.74	74.00	41.10	37.11	6.41	35.36 Peak	---	---	10	9760.000	49.81	-24.19	74.00	41.62	37.11	6.44	35.36 Peak	---	---
	Freq	Level	Over Limit	Limit Line	ReadAntenna	Cable	Preamp	Remark	Ant Pos	Table Pos																																																																																																																																				
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																				
1	4874.000	45.05	-28.95	74.00	40.22	34.77	4.73	34.67 Peak	---	---																																																																																																																																				
2	4874.000	32.74	-21.26	54.00	27.91	34.77	4.73	34.67 Average	---	---																																																																																																																																				
3	4880.000	45.11	-28.89	74.00	40.28	34.77	4.73	34.67 Peak	---	---																																																																																																																																				
4	4880.000	15.01	-38.99	54.00	10.18	34.77	4.73	34.67 Average	---	---																																																																																																																																				
5	7311.000	47.21	-26.79	74.00	40.79	35.90	5.47	34.95 Peak	---	---																																																																																																																																				
6	7311.000	33.89	-20.11	54.00	27.47	35.90	5.47	34.95 Average	---	---																																																																																																																																				
7	7320.000	47.94	-26.06	74.00	41.53	35.90	5.47	34.96 Peak	---	---																																																																																																																																				
8	7320.000	17.84	-36.16	54.00	11.43	35.90	5.47	34.96 Average	---	---																																																																																																																																				
9	9748.000	49.26	-24.74	74.00	41.10	37.11	6.41	35.36 Peak	---	---																																																																																																																																				
10	9760.000	49.81	-24.19	74.00	41.62	37.11	6.44	35.36 Peak	---	---																																																																																																																																				
<p>Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit. Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.) Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical) Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition. Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.</p>																																																																																																																																														




Transmitter Radiated Unwanted Emissions			
Operating Mode	AC Power & Radio link	Polarization	H
Operating Function	2.4GHz WiFi 1TX 11n 20MHz (2437MHz) + Bluetooth 2.1 EDR (2440MHz) + NFC (13.56MHz)		

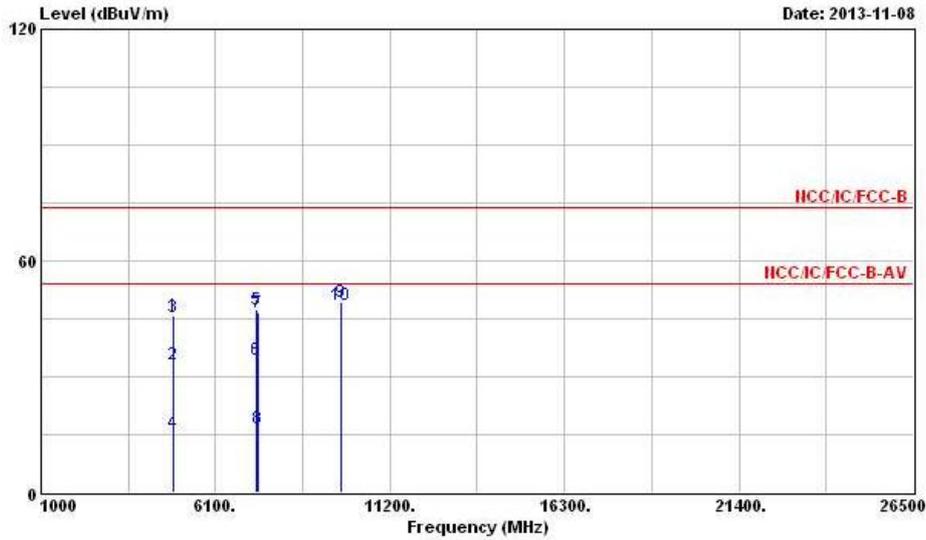


	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4874.000	45.61	-28.39	74.00	40.78	34.77	4.73	34.67	Peak	---	---
2	4874.000	33.13	-20.87	54.00	28.30	34.77	4.73	34.67	Average	---	---
3	4880.000	45.44	-28.56	74.00	40.61	34.77	4.73	34.67	Peak	---	---
4	4880.000	15.34	-38.66	54.00	10.51	34.77	4.73	34.67	Average	---	---
5	7311.000	47.51	-26.49	74.00	41.09	35.90	5.47	34.95	Peak	---	---
6	7311.000	34.16	-19.84	54.00	27.74	35.90	5.47	34.95	Average	---	---
7	7320.000	46.53	-27.47	74.00	40.12	35.90	5.47	34.96	Peak	---	---
8	7320.000	16.43	-37.57	54.00	10.02	35.90	5.47	34.96	Average	---	---
9	9748.000	49.43	-24.57	74.00	41.27	37.11	6.41	35.36	Peak	---	---
10	9760.000	48.58	-25.42	74.00	40.39	37.11	6.44	35.36	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

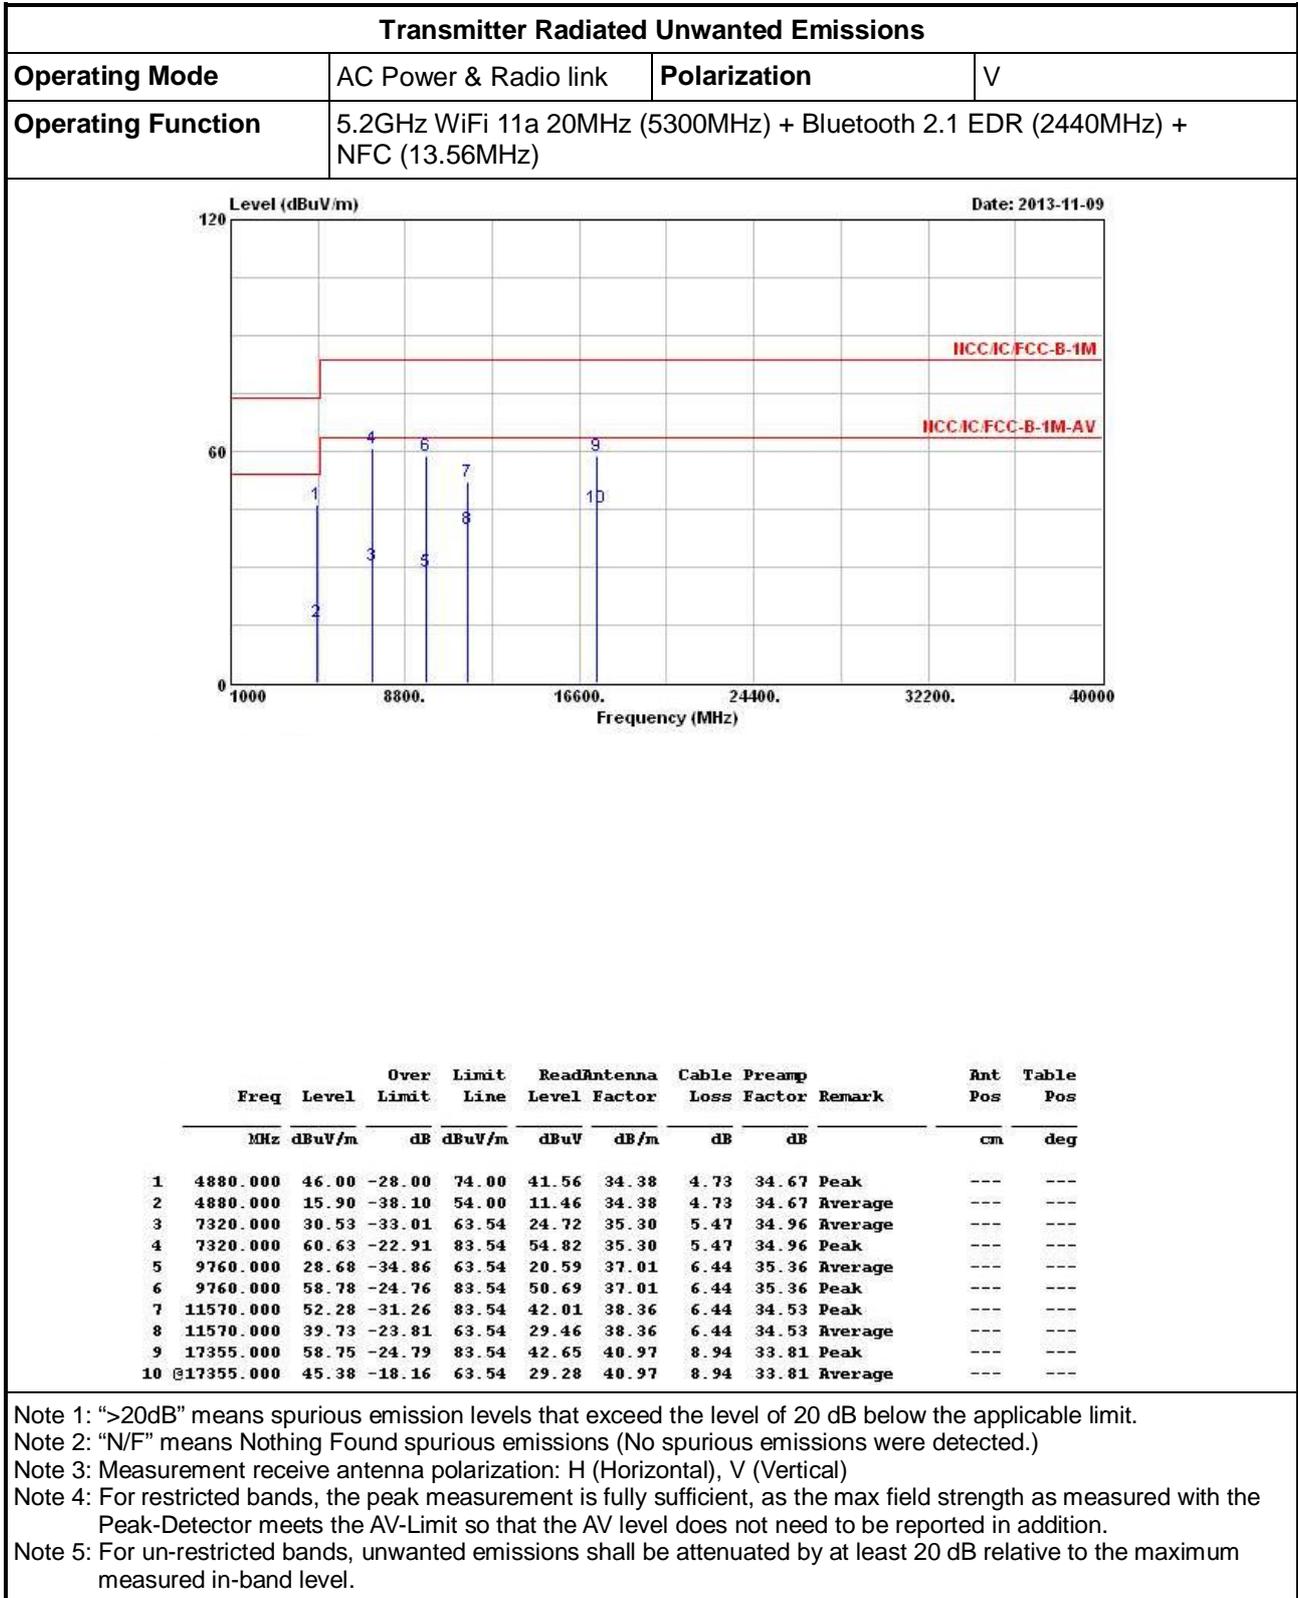




Transmitter Radiated Unwanted Emissions			
Operating Mode	AC Power & Radio link	Polarization	H
Operating Function	5.2GHz WiFi 11a 20MHz (5300MHz) + Bluetooth 2.1 EDR (2440MHz) + NFC (13.56MHz)		

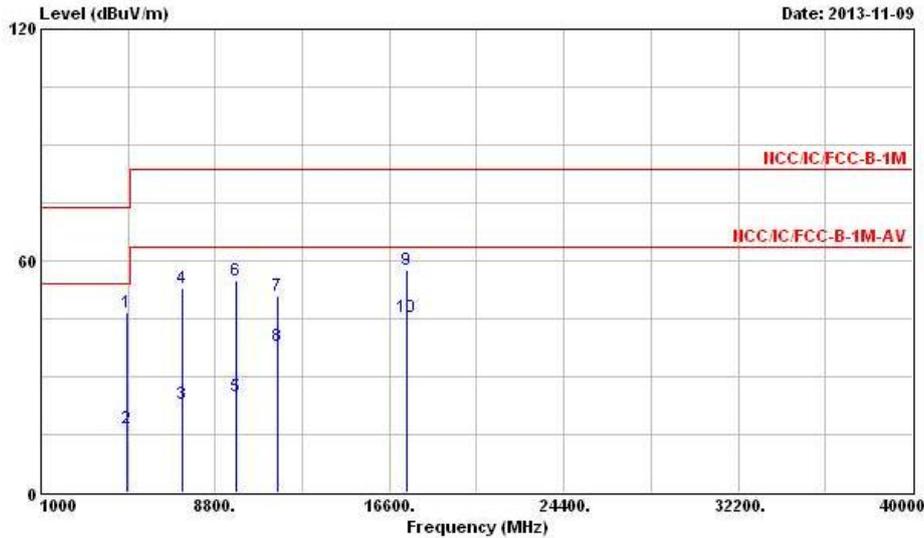


Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	dB		cm	deg
1	4880.000	46.65	-27.35	74.00	42.21	34.38	4.73	34.67 Peak	---	---
2	4880.000	16.55	-37.45	54.00	12.11	34.38	4.73	34.67 Average	---	---
3	7320.000	22.92	-40.62	63.54	17.11	35.30	5.47	34.96 Average	---	---
4	7320.000	53.02	-30.52	83.54	47.21	35.30	5.47	34.96 Peak	---	---
5	9760.000	24.94	-38.60	63.54	16.85	37.01	6.44	35.36 Average	---	---
6	9760.000	55.04	-28.50	83.54	46.95	37.01	6.44	35.36 Peak	---	---
7	11570.000	50.79	-32.75	83.54	40.52	38.36	6.44	34.53 Peak	---	---
8	11570.000	37.99	-25.55	63.54	27.72	38.36	6.44	34.53 Average	---	---
9	17355.000	57.77	-25.77	83.54	41.67	40.97	8.94	33.81 Peak	---	---
10	@17355.000	45.53	-18.01	63.54	29.43	40.97	8.94	33.81 Average	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

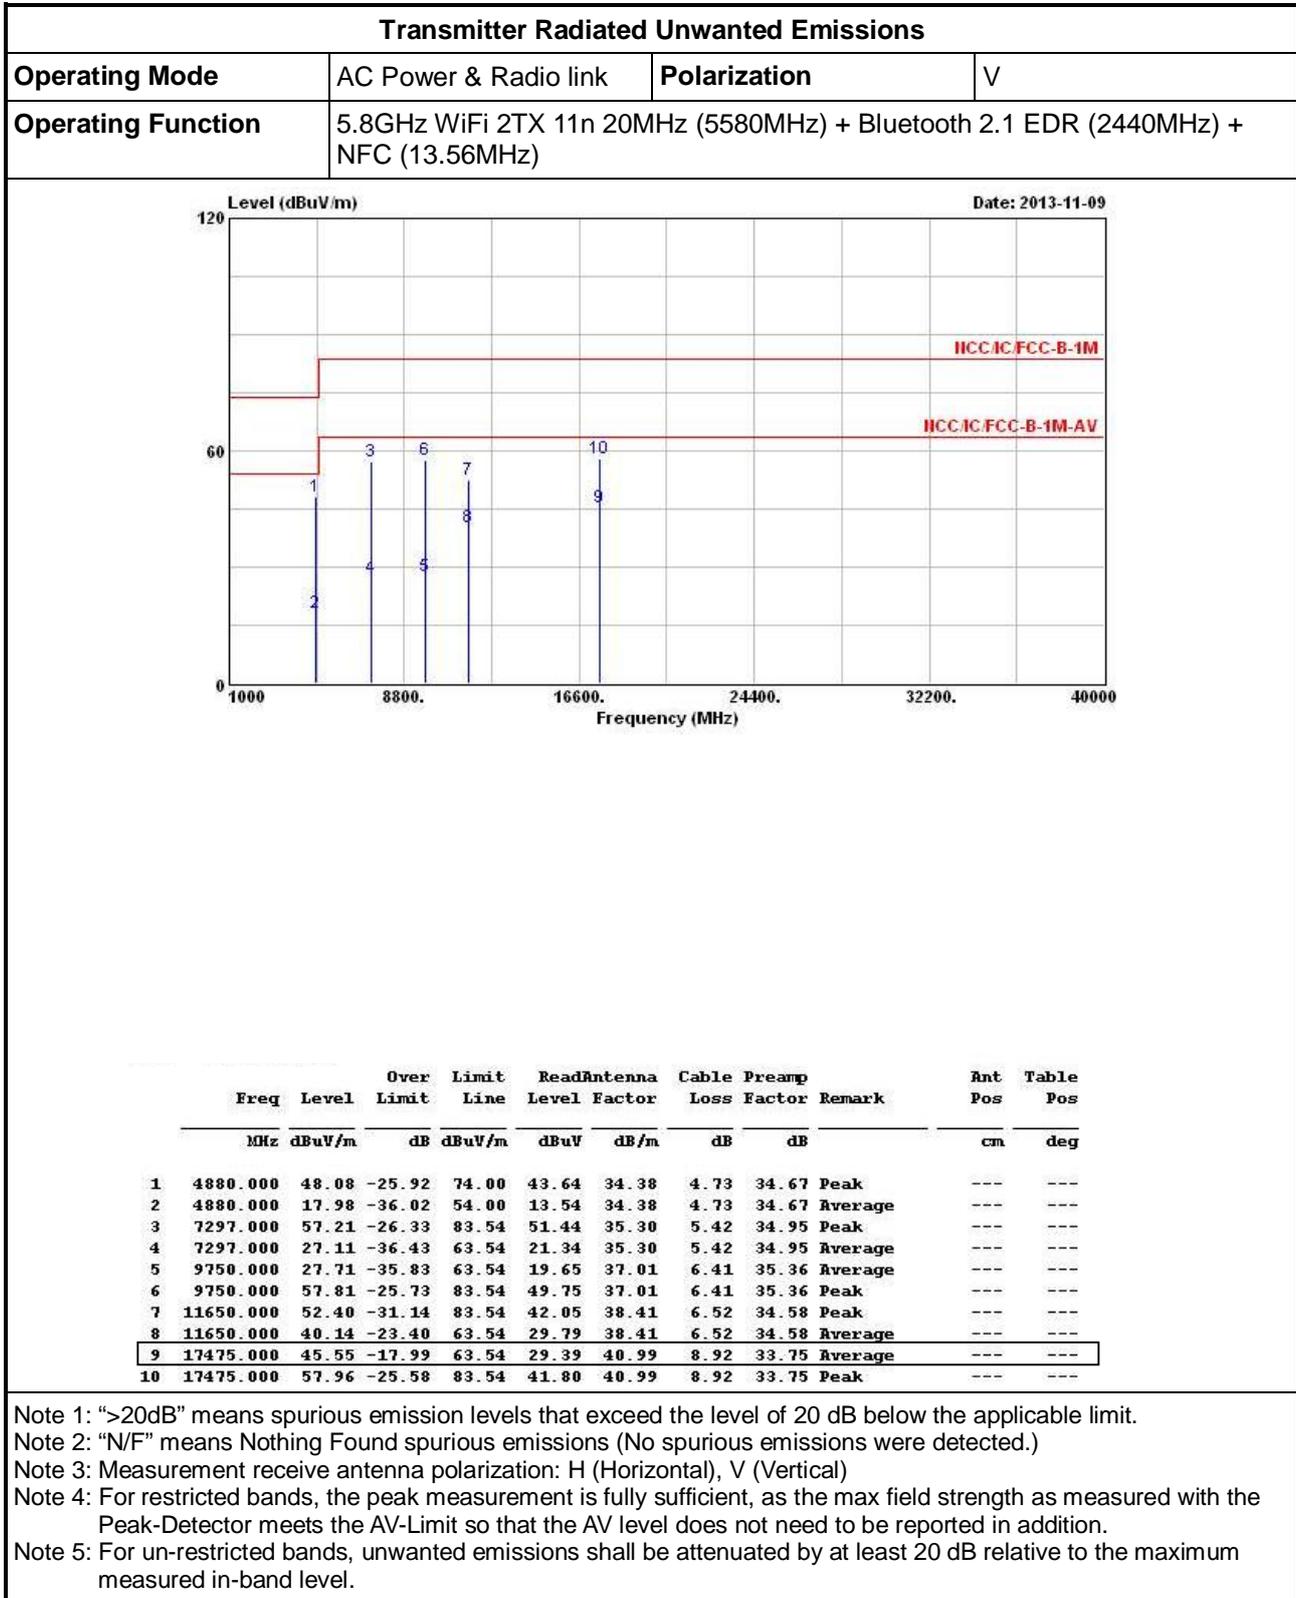



Transmitter Radiated Unwanted Emissions			
Operating Mode	AC Power & Radio link	Polarization	H
Operating Function	5.8GHz WiFi 2TX 11n 20MHz (5580MHz) + Bluetooth 2.1 EDR (2440MHz) + NFC (13.56MHz)		

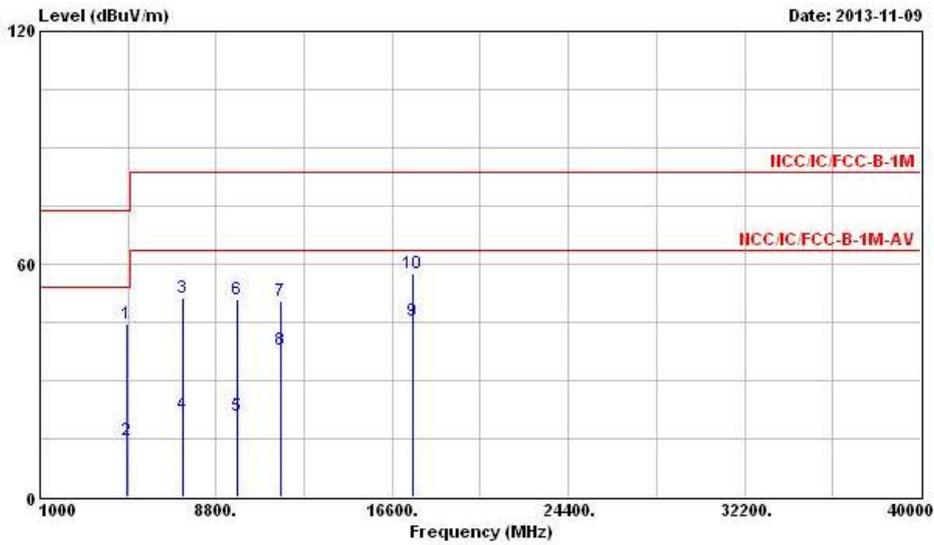

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4880.000	44.56	-29.44	74.00	40.12	34.38	4.73	34.67	Peak	---	---
2	4880.000	14.46	-39.54	54.00	10.02	34.38	4.73	34.67	Average	---	---
3	7320.000	51.32	-32.22	83.54	45.51	35.30	5.47	34.96	Peak	---	---
4	7320.000	21.22	-42.32	63.54	15.41	35.30	5.47	34.96	Average	---	---
5	9760.000	20.94	-42.60	63.54	12.85	37.01	6.44	35.36	Average	---	---
6	9760.000	51.04	-32.50	83.54	42.95	37.01	6.44	35.36	Peak	---	---
7	11650.000	50.35	-33.19	83.54	40.00	38.41	6.52	34.58	Peak	---	---
8	11650.000	37.72	-25.82	63.54	27.37	38.41	6.52	34.58	Average	---	---
9	17475.000	45.27	-18.27	63.54	29.11	40.99	8.92	33.75	Average	---	---
10	17475.000	57.65	-25.89	83.54	41.49	40.99	8.92	33.75	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



2 TEST EQUIPMENT AND CALIBRATION DATA

< Radiation emission below 1GHz>

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Spectrum Analyzer	R&S	FSP40	100593	9kHz ~ 40GHz	Sep. 14, 2012	Radiation (03CH02-HY)
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH02-HY	30MHz ~ 1GHz 3m	May 11, 2013	Radiation (03CH02-HY)
Amplifier	Agilent	8447D	2944A11146	100kHz ~ 1.3GHz	Jul. 17, 2013	Radiation (03CH02-HY)
RF Cable-R03m	Jye Bao	RG142	CB021	9kHz ~ 1GHz	Nov. 10, 2012	Radiation (03CH02-HY)
Bilog Antenna	SCHAFFNER	CBL61128	2723	30MHz ~ 2GHz	Oct. 22, 2012	Radiation (03CH02-HY)
Turn Table	Chaintek Instruments	3000	MF7802058	0~ 360 degree	N/A	Radiation (03CH02-HY)
Antenna Mast	MF	MF7802	MF780208205	1 ~ 4 m	N/A	Radiation (03CH02-HY)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Loop Antenna	TESEQ	HLA 6120	31244	9 kHz - 30 MHz	Dec. 02, 2012	Radiation (03CH02-HY)

Note: Calibration Interval of instruments listed above is two year.



< Radiation emission above 1GHz >

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Spectrum Analyzer	R&S	FSP40	100593	9kHz ~ 40GHz	Oct. 03, 2013	Radiation (03CH02-HY)
Amplifier	Agilent	8449B	3008A02364	1GHz ~ 26.5GHz	May 06, 2013	Radiation (03CH02-HY)
Horn Antenna	ETS-LINDGREN	3117	00091920	1GHz ~ 18GHz	Nov. 16, 2012	Radiation (03CH02-HY)
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA9170154	15GHz ~ 40GHz	Jan. 08, 2013	Radiation (03CH02-HY)
RF Cable-high	SUHNER	SUCOFLEX106	03CH02-HY	1GHz ~ 40GHz	Mar. 05, 2013	Radiation (03CH02-HY)
Turn Table	Chaintek Instruments	3000	MF7802058	0~ 360 degree	N/A	Radiation (03CH02-HY)
Antenna Mast	MF	MF7802	MF780208205	1 ~ 4 m	N/A	Radiation (03CH02-HY)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Amplifier	MITEQ	AMF-6F-260400	9121372	26.5GHz ~ 40GHz	Apr. 19, 2013	Radiation (03CH02-HY)

Note: Calibration Interval of instruments listed above is two year.