

# FCC Test Report

**Equipment** : Personal Computer  
**Brand Name** : SONY  
**Model No.** : SVF15NA1YL  
**FCC ID** : AK8SVF15NA1YL  
**Standard** : 47 CFR FCC Part 15.247  
**Operating Band** : 2400 MHz – 2483.5 MHz  
**FCC Classification** : DSS  
**Applicant** : Sony Corporation  
1-7-1 Konan Minato-ku, Tokyo, Japan  
**Manufacturer** : Sony Corporation  
1-7-1 Konan Minato-ku, Tokyo, Japan

This report only contains BR and EDR mode test result.

The product sample received on Jul. 26, 2013 and completely tested on Oct. 17, 2013. We, SPORTON, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2009 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:



Gary Chang / Manager





## Table of Contents

<b>1</b>	<b>GENERAL DESCRIPTION .....</b>	<b>5</b>
1.1	Information.....	5
1.2	Accessories and Support Equipment .....	7
1.3	Testing Applied Standards .....	7
1.4	Testing Location Information .....	7
1.5	Measurement Uncertainty .....	8
<b>2</b>	<b>TEST CONFIGURATION OF EUT.....</b>	<b>9</b>
2.1	The Worst Case Modulation Configuration .....	9
2.2	Test Channel Frequencies Configuration.....	9
2.3	The Worst Case Power Setting Parameter .....	9
2.4	The Worst Case Measurement Configuration.....	10
2.5	Test Setup Diagram .....	11
<b>3</b>	<b>TRANSMITTER TEST RESULT .....</b>	<b>12</b>
3.1	AC Power-line Conducted Emissions .....	12
3.2	20dB Bandwidth and Carrier Frequency Separation.....	15
3.3	Number of Hopping Frequencies .....	18
3.4	Time of Occupancy (Dwell Time) .....	20
3.5	RF Output Power.....	22
3.6	Emissions in Non-Restricted Frequency Bands.....	24
3.7	Transmitter Radiated Unwanted Emissions .....	29
<b>4</b>	<b>TEST EQUIPMENT AND CALIBRATION DATA .....</b>	<b>46</b>
	<b>APPENDIX A. TEST PHOTOS .....</b>	<b>A1-A2</b>

## Summary of Test Result

Conformance Test Specifications					
Report Clause	Ref. Std. Clause	Description	Measured	Limit	Result
1.1.2	15.203	Antenna Requirement	Antenna connector mechanism complied	FCC 15.203	Complied
3.1	15.207	AC Power-line Conducted Emissions	0.160MHz: 27.47dBuV (28.00dB) - AV 55.37dBuV (10.10dB) - QP	FCC 15.207	Complied
3.2	15.247(a)	20dB Bandwidth	BR:1.1201MHz EDR:1.4197 MHz	N/A	Complied
3.2	15.247(a)	Carrier Frequency Separation (ChS)	BR:1.0029MHz EDR:1.0029MHz	ChS $\geq$ 20 dB BW x 2/3.	Complied
3.3	15.247(a)	Number of Hopping Frequencies (N)	Max: 79 Min: 20	N $\geq$ 15	Complied
3.4	15.247(a)	Time of Occupancy (Dwell Time)	0.319 sec	0.4 s within 0.4 x N	Complied
3.5	15.247(b)	RF Output Power (Maximum Peak Conducted Output Power)	Power [dBm] BR: -0.9 EDR: 1.33	Power [dBm] 21	Complied
3.6	15.247(c)	Emissions in Non-Restricted Frequency Bands	Meet the requirement of limit	Non-Restricted Bands: > 20 dBc  Restricted Bands: FCC 15.209	Complied
3.7	15.247(c)	Transmitter Radiated Unwanted Emissions	Restricted Bands [dBuV/m at 3m]: 950.53MHz 42.93 (Margin 3.07dB) - PK	Non-Restricted Bands: > 20 dBc  Restricted Bands: FCC 15.209	Complied



# 1 General Description

## 1.1 Information

### 1.1.1 RF General Information

RF General Information				
Frequency Range (MHz)	Bluetooth Mode	Ch. Frequency (MHz)	Channel Number	Co-location
2400-2483.5	BR / EDR	2402-2480	0-78 [79]	YES
Note 1: Bluetooth BR uses a GFSK (1Mbps). Note 2: Bluetooth EDR uses a combination of $\pi/4$ -DQPSK (2Mbps) and 8DPSK (3Mbps). Note 3: RF output power specifies that Maximum Peak Conducted Output Power. Note 4: Co-location, Co-location is generally defined as simultaneously transmitting (co-transmitting) antennas within 20 cm of each other. (EUT has simultaneously co-transmitting that operating BT and WWAN.)				

### 1.1.2 Antenna Information

Antenna Category	
<input type="checkbox"/>	Equipment placed on the market without antennas
<input type="checkbox"/>	Integral antenna (antenna permanently attached)
<input type="checkbox"/>	Temporary RF connector provided
<input type="checkbox"/>	No temporary RF connector provided Transmit chains bypass antenna and soldered temporary RF connector provided for connected measurement. In case of conducted measurements the transmitter shall be connected to the measuring equipment via a suitable attenuator and correct for all losses in the RF path.
<input checked="" type="checkbox"/>	External antenna (dedicated antennas)
<input checked="" type="checkbox"/>	RF connector provided
<input checked="" type="checkbox"/>	Unique antenna connector. (e.g., MMCX, U.FL, IPX, and RP-SMA, RP-N type...)
<input type="checkbox"/>	Standard antenna connector. (e.g., SMA, N, BNC, and TNC type...)

Antenna General Information				
No.	Ant. Cat.	Ant. Type	Gain (dBi)	P/N
1	Integral	PIFA	-0.62	SONY_IRX-7690(B)

1.1.3 Type of EUT

Identify EUT	
EUT Serial Number	N/A
Presentation of Equipment	<input type="checkbox"/> Production ; <input checked="" type="checkbox"/> Pre-Production ; <input type="checkbox"/> Prototype
Type of EUT	
<input checked="" type="checkbox"/>	Stand-alone
<input type="checkbox"/>	Combined (EUT where the radio part is fully integrated within another device) Combined Equipment - Brand Name / Model No.: ...
<input type="checkbox"/>	Plug-in radio (EUT intended for a variety of host systems) Host System - Brand Name / Model No.: ...
<input type="checkbox"/>	Other:

1.1.4 Test Signal Duty Cycle

Operated Mode for Worst Duty Cycle	
<input checked="" type="checkbox"/> Operated test mode for worst duty cycle	
Test Signal Duty Cycle (x)	Power Duty Factor [dB] – (10 log 1/x)
<input checked="" type="checkbox"/> 79.27% - test mode single channel - DH5	1.01
Bluetooth ACL packets can be 1, 3, or 5 time slots. The DH1 packet can cover a single time slot. The DH3 packet can cover up to 3 time slots. The DH5 packet can cover up to 5 time slots. Operate DH5 at maximum dwell time and maximum duty cycle.	

1.1.5 EUT Operational Condition

Supply Voltage	<input checked="" type="checkbox"/> AC mains	<input checked="" type="checkbox"/> DC	
Type of DC Source	<input type="checkbox"/> Internal DC supply	<input type="checkbox"/> External DC adapter	<input checked="" type="checkbox"/> Battery

## 1.2 Accessories and Support Equipment

Accessories				
No.	Equipment	Brand Name	Model Name	Remarks
1	AC Adapter	SONY	VGP-AC19V75	I/P: 100-240Vac, 1.2A, 50/60Hz O/P: 19.5Vdc, 2.3A 0.8m non-shielded cable w/o core
2	Battery	SONY	VGP-BPS40	15Vdc, 3170mAh, 48Wh

Support Equipment				
No.	Equipment	Brand Name	Model Name	Remarks
1	---	---	---	---

## 1.3 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR FCC Part 15
- ♦ ANSI C63.10-2009
- ♦ FCC Public Notice DA 00-705
- ♦ FCC KDB 412172 - Guidelines for Determining the ERP and EIRP

## 1.4 Testing Location Information

Testing Location				
<input checked="" type="checkbox"/>	Sporton Lab	ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 886-3-327-3456 FAX : 886-3-318-0055		
<input checked="" type="checkbox"/>	ICC Lab	ADD : No.3-1, Lane 6, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsein 333, Taiwan (R.O.C.) TEL : 886-3-271-8666 FAX : 886-3-318-0155		
Test Condition	Test Site No.	Test Engineer	Test Environment	Test Date
RF Conducted	TH01-HY	Aaron Liang	22.6°C / 61.4%	Sep. 28, 2013
*AC Conduction	CO01-WS	Skys Huang	23°C / 58%	Sep. 27, 2013
*Radiated Emission	03CH02-WS	Skys Huang	25°C / 65%	Sep. 27, 2013
Test site registered number [657002] with FCC. Test site registered number [10807A-2] with IC.				

Note: \* Sporton Lab subcontracts this test item to ICC lab (TAF: 2732).

ICC lab is a TAF accreditation test firm and also is an approved provider of Sporton lab.

## 1.5 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Measurement Uncertainty			
Test Item		Uncertainty	Limit
AC power-line conducted emissions		±2.26 dB	N/A
Emission bandwidth,		±1.42 %	N/A
RF output power, conducted		±0.63 dB	N/A
All emissions, radiated	30 – 1000 MHz	±3.9 dB	N/A
	Above 1GHz	±4.2 dB	N/A
Temperature		±0.8 °C	N/A
Humidity		±3 %	N/A
DC and low frequency voltages		±3 %	N/A
Time		±1.42 %	N/A
Duty Cycle		±1.42 %	N/A

## 2 Test Configuration of EUT

### 2.1 The Worst Case Modulation Configuration

Worst Modulation Used for Conformance Testing					
Bluetooth Mode	Transmit Chains (N <sub>TX</sub> )	Data Rate	Modulation Mode	RF Output Power (dBm)	Worst Mode
BR	1	1 Mbps	BR-1Mbps	-0.9	EDR-3Mbps
EDR	1	2 Mbps	EDR-2Mbps	1.12	
EDR	1	3 Mbps	EDR-3Mbps	1.33	

### 2.2 Test Channel Frequencies Configuration

Test Channel Frequencies Configuration	
Bluetooth Mode	Test Channel Frequencies (MHz) – FX (Frequencies Abbreviations)
BR / EDR	2402-(F1), 2440-(F2), 2480-(F3)

### 2.3 The Worst Case Power Setting Parameter

The Worst Case Power Setting Parameter			
Test Software Version	BlueTool		
Modulation Mode	2402 MHz	2440 MHz	2480 MHz
BR	0	0	0
EDR	0	0	0
EDR	0	0	0

## 2.4 The Worst Case Measurement Configuration


The Worst Case Mode for Following Conformance Tests	
<b>Tests Item</b>	AC power-line conducted emissions
<b>Condition</b>	AC power-line conducted measurement for line and neutral Test Voltage: 120Vac / 60Hz
<b>Operating Mode</b>	<b>Operating Mode Description</b>
1	Transmit

The Worst Case Mode for Following Conformance Tests	
<b>Tests Item</b>	RF Output Power
<b>Test Condition</b>	Conducted measurement at transmit chains
<b>Modulation Mode</b>	BR-1Mbps, EDR-3Mbps

The Worst Case Mode for Following Conformance Tests	
<b>Tests Item</b>	20dB Bandwidth, Carrier Frequency Separation (ChS) Number of Hopping Frequencies (N), Time of Occupancy (Dwell Time)
<b>Test Condition</b>	Conducted measurement at transmit chains
<b>Modulation Mode</b>	EDR-3Mbps

The Worst Case Mode for Following Conformance Tests			
<b>Tests Item</b>	Transmitter Radiated Unwanted Emissions Emissions in Non-Restricted Frequency Bands		
<b>Test Condition</b>	Radiated measurement		
<b>User Position</b>	<input type="checkbox"/> EUT will be placed in fixed position.		
	<input type="checkbox"/> EUT will be placed in mobile position and operating multiple positions. EUT shall be performed two orthogonal planes. The worst planes is X.		
	<input checked="" type="checkbox"/> EUT will be a hand-held or body-worn battery-powered devices and operating multiple positions. EUT shall be performed three orthogonal planes. The worst planes is Z.		
<b>Operating Mode</b>	<input checked="" type="checkbox"/> 1. Transmit		
<b>Modulation Mode</b>	BR-1Mbps, EDR-3Mbps		
<b>Orthogonal Planes of EUT</b>	<b>X Plane</b>	<b>Y Plane</b>	<b>Z Plane</b>
			

## 2.5 Test Setup Diagram

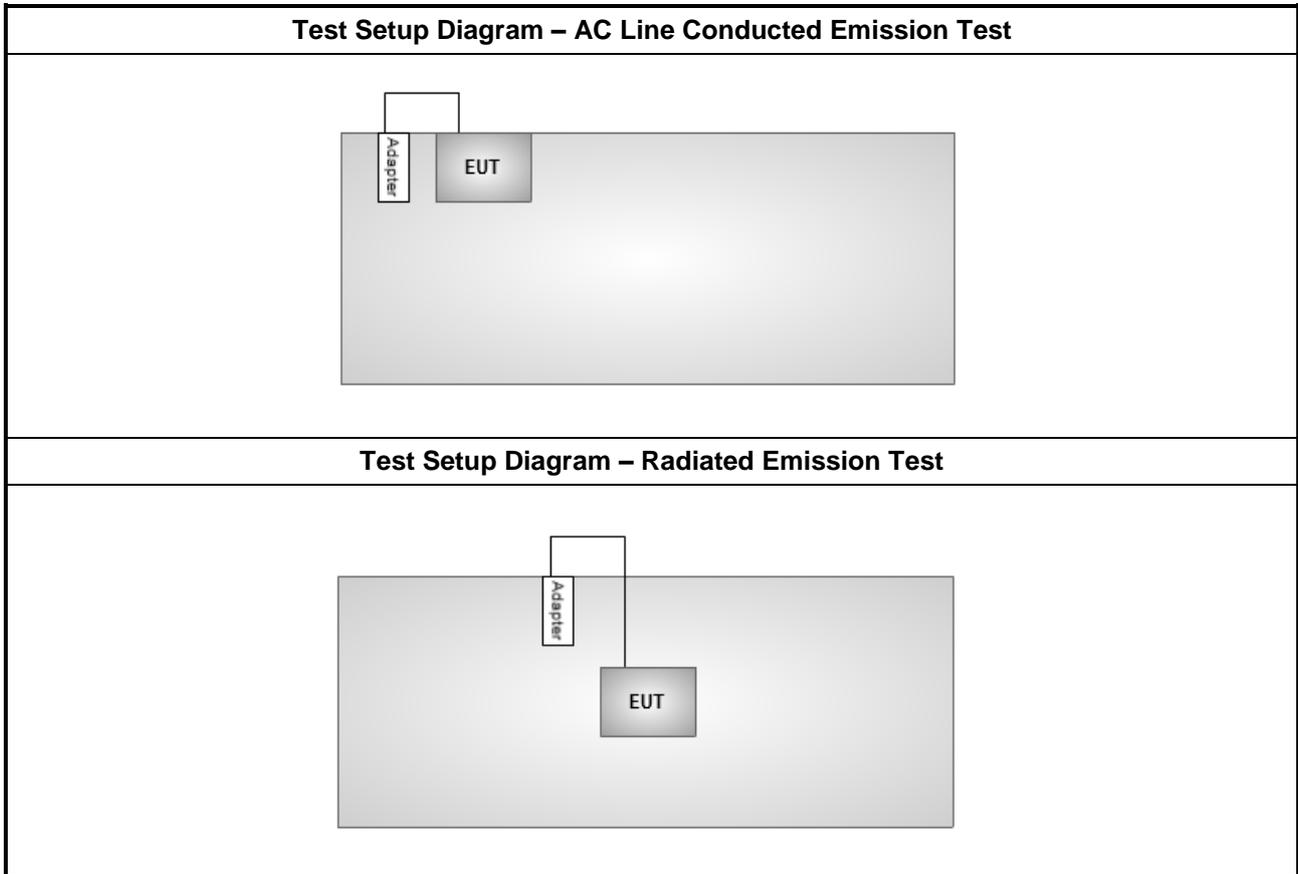

### 3 Transmitter Test Result

#### 3.1 AC Power-line Conducted Emissions

##### 3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: \* Decreases with the logarithm of the frequency.


##### 3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.


##### 3.1.3 Test Procedures

Test Method
<input checked="" type="checkbox"/> Refer as ANSI C63.10-2009, clause 6.2 for AC power-line conducted emissions.

##### 3.1.4 Test Setup

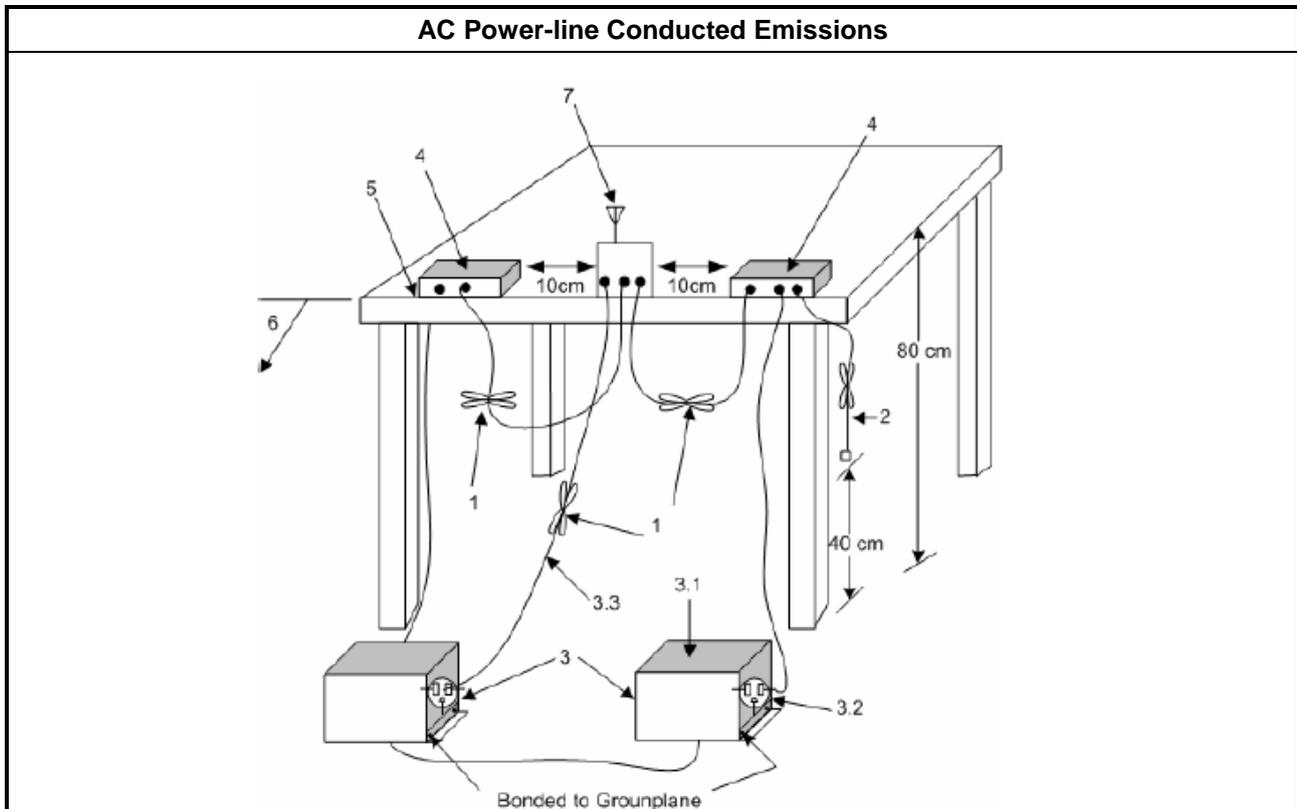


### 3.1.5 Test Result of AC Power-line Conducted Emissions

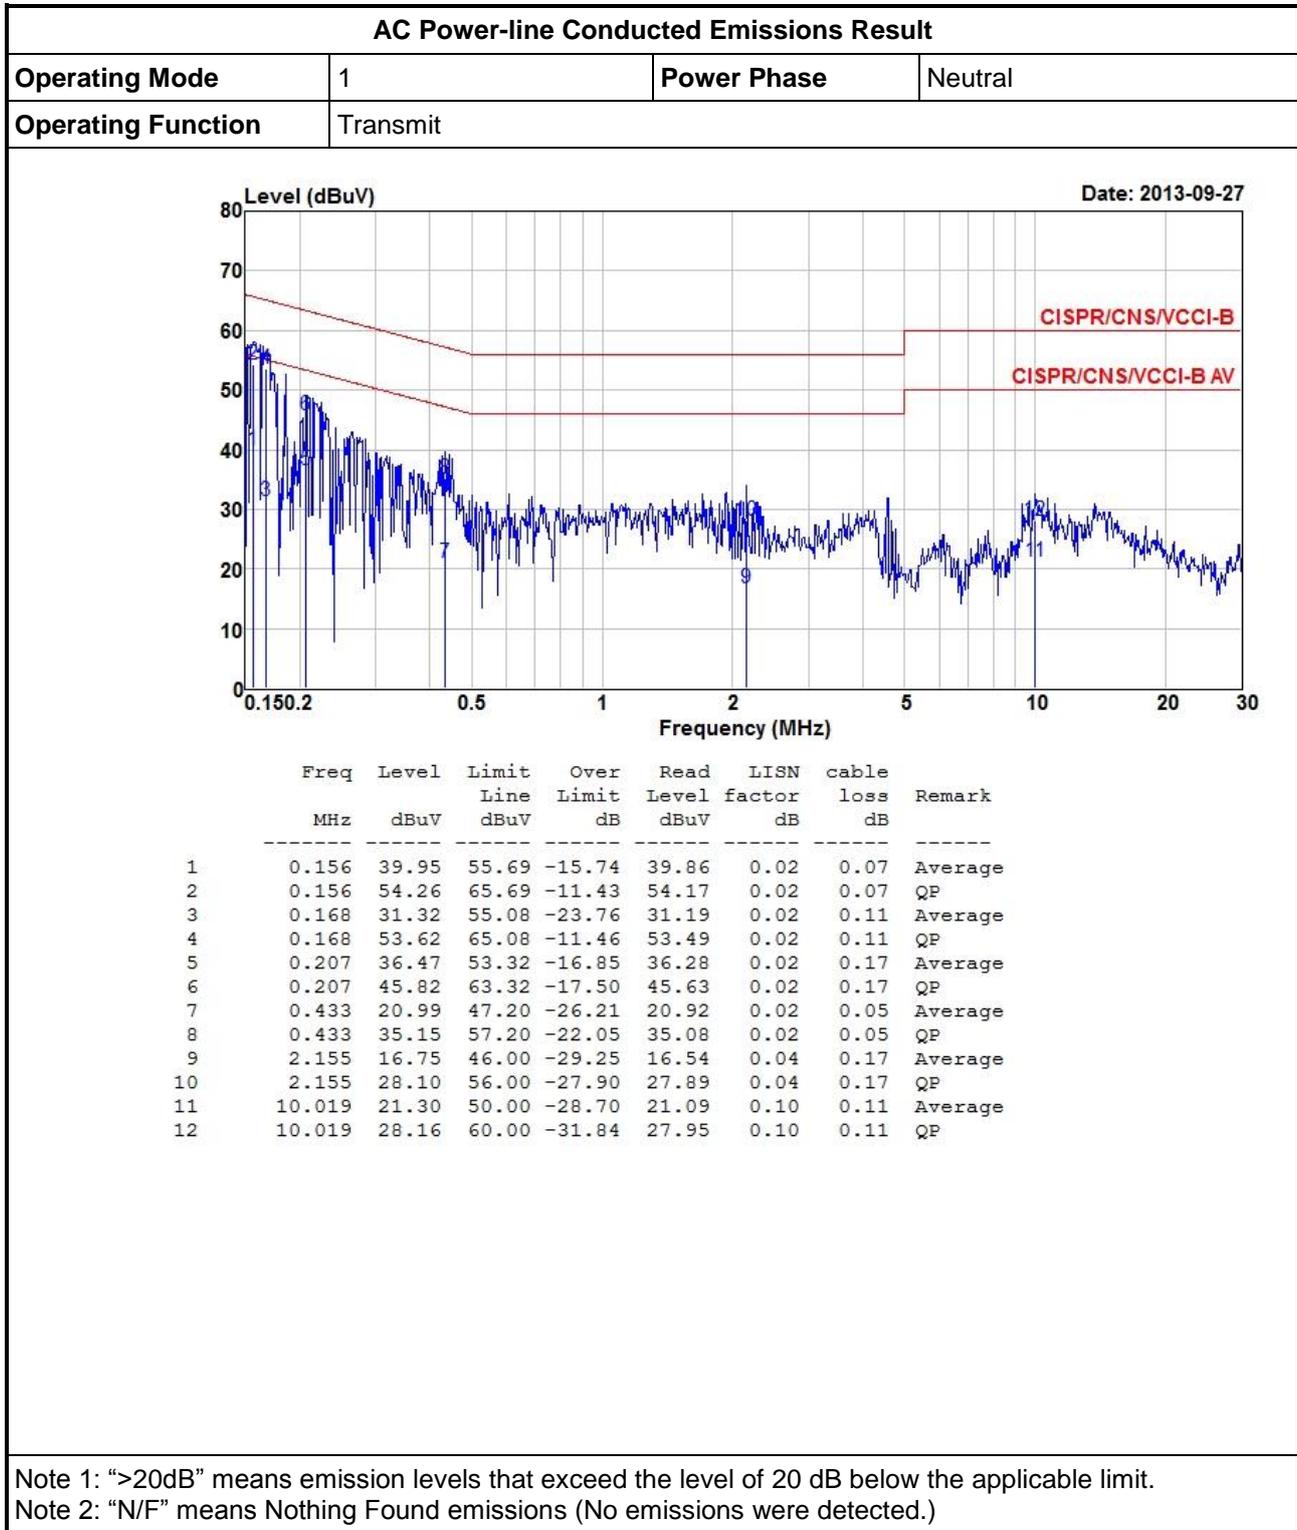

AC Power-line Conducted Emissions Result

Operating Mode	1	Power Phase	Line
Operating Function	Transmit		

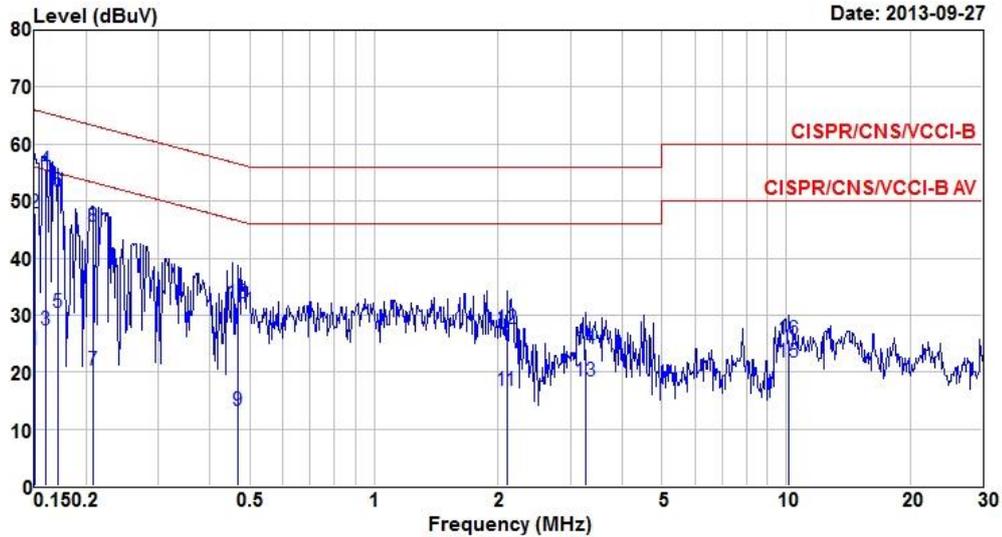

	Freq MHz	Level dBuV	Limit dBuV	Over Limit dB	Read Level dBuV	LISN factor dB	cable loss dB	Remark
1	0.151	23.81	55.96	-32.15	23.72	0.03	0.06	Average
2	0.151	47.90	65.96	-18.06	47.81	0.03	0.06	QP
3	0.160	27.47	55.47	-28.00	27.35	0.03	0.09	Average
4	0.160	55.37	65.47	-10.10	55.25	0.03	0.09	QP
5	0.171	30.50	54.90	-24.40	30.36	0.03	0.11	Average
6	0.171	51.63	64.90	-13.27	51.49	0.03	0.11	QP
7	0.208	20.25	53.27	-33.02	20.05	0.03	0.17	Average
8	0.208	45.65	63.27	-17.62	45.45	0.03	0.17	QP
9	0.469	13.13	46.54	-33.41	13.05	0.03	0.05	Average
10	0.469	32.10	56.54	-24.44	32.02	0.03	0.05	QP
11	2.099	16.68	46.00	-29.32	16.46	0.05	0.17	Average
12	2.099	27.55	56.00	-28.45	27.33	0.05	0.17	QP
13	3.276	18.43	46.00	-27.57	18.15	0.06	0.22	Average
14	3.276	23.99	56.00	-32.01	23.71	0.06	0.22	QP
15	10.179	21.63	50.00	-28.37	21.40	0.12	0.11	Average
16	10.179	25.73	60.00	-34.27	25.50	0.12	0.11	QP

Note 1: ">20dB" means emission levels that exceed the level of 20 dB below the applicable limit.  
 Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)

### 3.2 20dB Bandwidth and Carrier Frequency Separation

#### 3.2.1 20dB Bandwidth and Carrier Frequency Separation Limit

20dB Bandwidth and Carrier Frequency Separation Limit for Frequency Hopping Systems	
<input checked="" type="checkbox"/>	2400-2483.5 MHz Band:
<input type="checkbox"/>	$N \geq 79$ and $ChS \geq MAX$ (20 dB bandwidth, 25 kHz).
<input checked="" type="checkbox"/>	$N \geq 15$ and $ChS \geq MAX$ (20 dB bandwidth x 2/3, 25 kHz).
<b>N:</b> Number of Hopping Frequencies; <b>ChS:</b> Hopping Channel Separation	


#### 3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

#### 3.2.3 Test Procedures



Test Method	
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.9.1 for 20 dB bandwidth measurement.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 7.7.2 for carrier frequency separation measurement.
<input checked="" type="checkbox"/>	For conducted measurement.
<input checked="" type="checkbox"/>	The EUT supports single transmit chain and measurements performed on this transmit chain.
<input type="checkbox"/>	The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.

#### 3.2.4 Test Setup


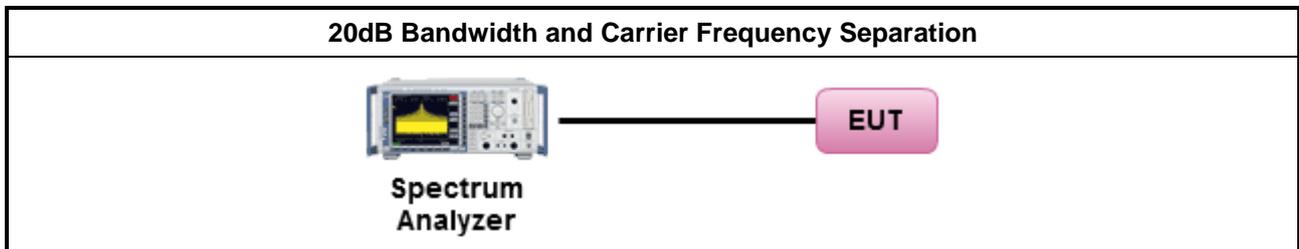


### 3.2.5 Test Result of 20dB Bandwidth and Carrier Frequency Separation

20dB Bandwidth and Carrier Frequency Separation Result					
Modulation Mode	Freq. (MHz)	20dB Bandwidth (MHz)	99% Bandwidth (MHz)	Channel Separation (MHz)	Channel Separation Limits (MHz)
BR-1Mbps	2402	1.1158	0.9855	1.0029	0.7439
BR-1Mbps	2440	1.1201	0.9898	1.0029	0.7467
BR-1Mbps	2480	1.1201	0.9855	1.0029	0.7467
<b>Result</b>		<b>Complied</b>			

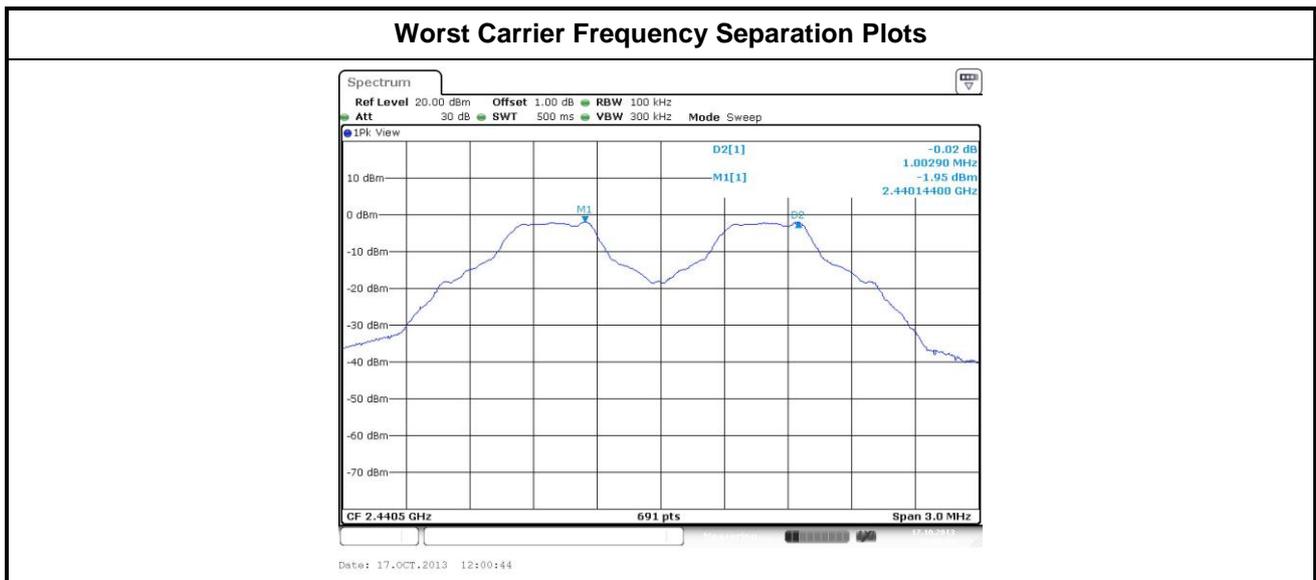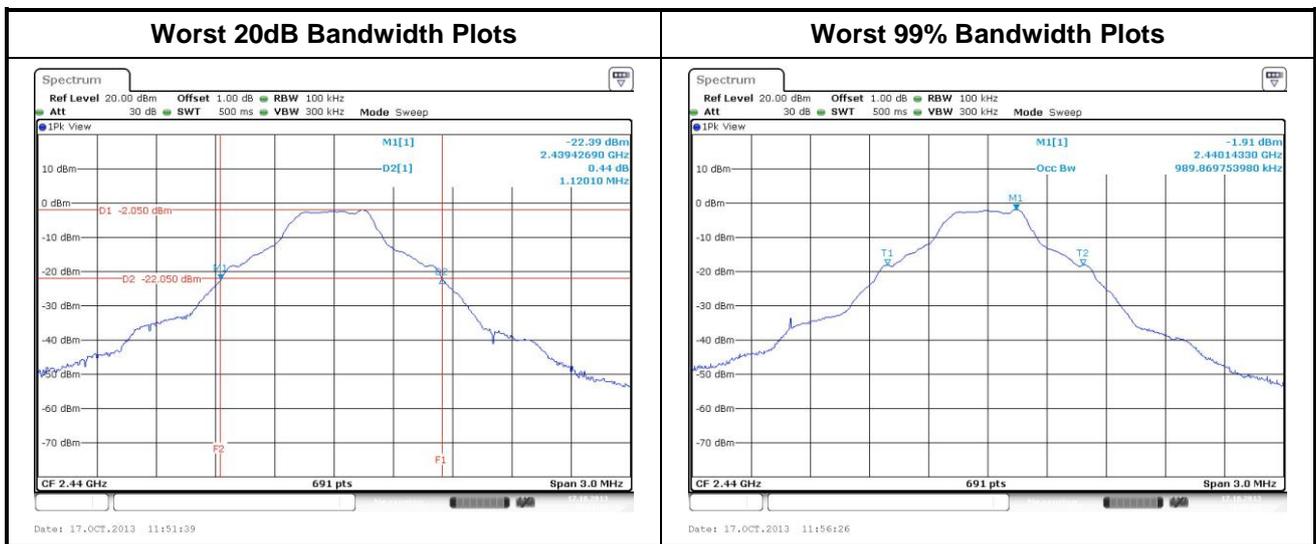

20dB Bandwidth and Carrier Frequency Separation Result					
Modulation Mode	Freq. (MHz)	20dB Bandwidth (MHz)	99% Bandwidth (MHz)	Channel Separation (MHz)	Channel Separation Limits (MHz)
EDR-3Mbps	2402	1.4197	1.2460	1.0029	0.9465
EDR-3Mbps	2440	1.4197	1.2460	1.0029	0.9465
EDR-3Mbps	2480	1.4197	1.2503	1.0029	0.9465
<b>Result</b>		<b>Complied</b>			

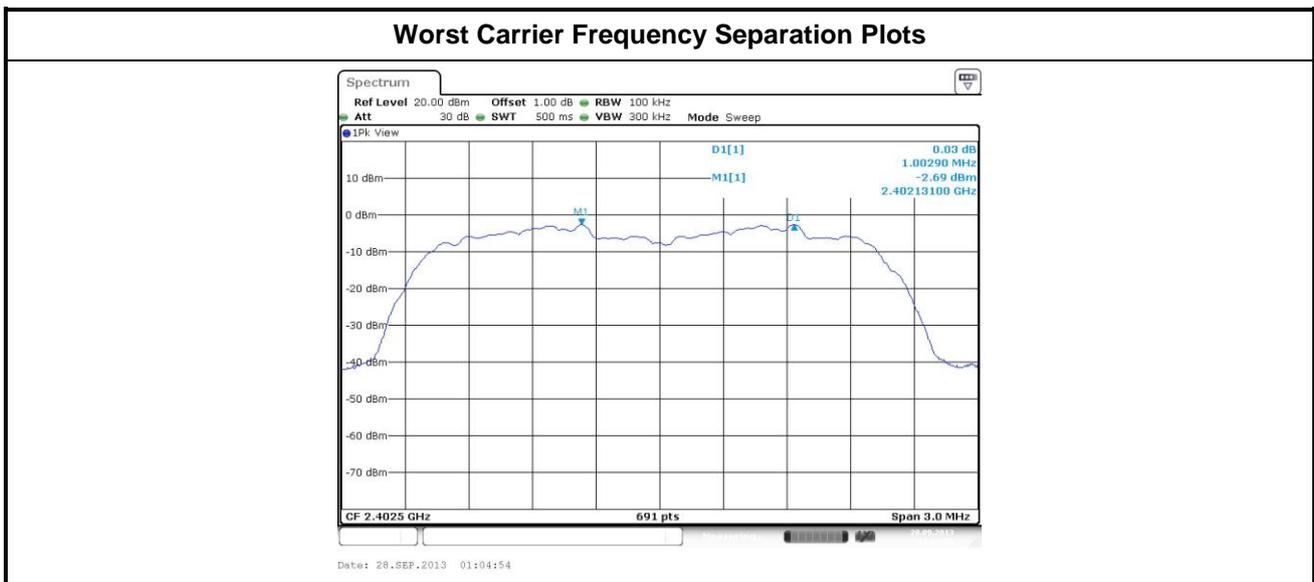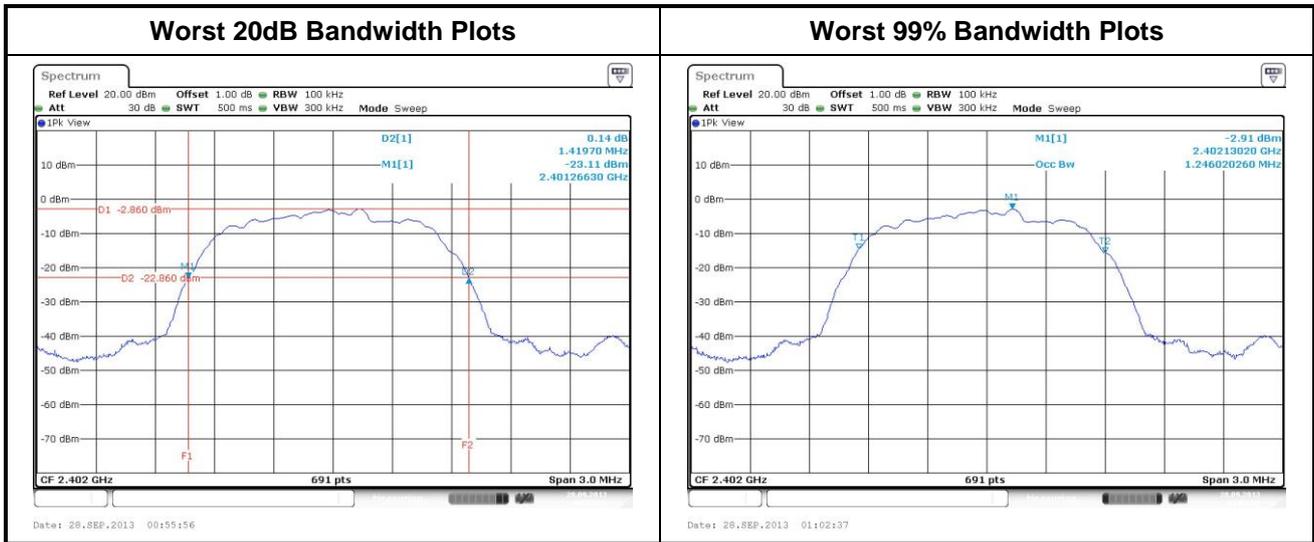

### 3.3 Number of Hopping Frequencies

#### 3.3.1 Number of Hopping Frequencies Limit

Number of Hopping Frequencies Limit for Frequency Hopping Systems	
<input checked="" type="checkbox"/>	2400-2483.5 MHz Band:
<input type="checkbox"/>	$N \geq 79$ and $ChS \geq MAX$ (20 dB bandwidth, 25 kHz).
<input checked="" type="checkbox"/>	$N \geq 15$ and $ChS \geq MAX$ (20 dB bandwidth x 2/3, 25 kHz).
<b>N:</b> Number of Hopping Frequencies; <b>ChS:</b> Hopping Channel Separation	


#### 3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

#### 3.3.3 Test Procedures

Test Method	
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 7.7.3 for number of hopping frequencies measurement.
<input checked="" type="checkbox"/>	For conducted measurement.
<input checked="" type="checkbox"/>	The EUT supports single transmit chain and measurements performed on this transmit chain.
<input type="checkbox"/>	The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.

#### 3.3.4 Test Setup

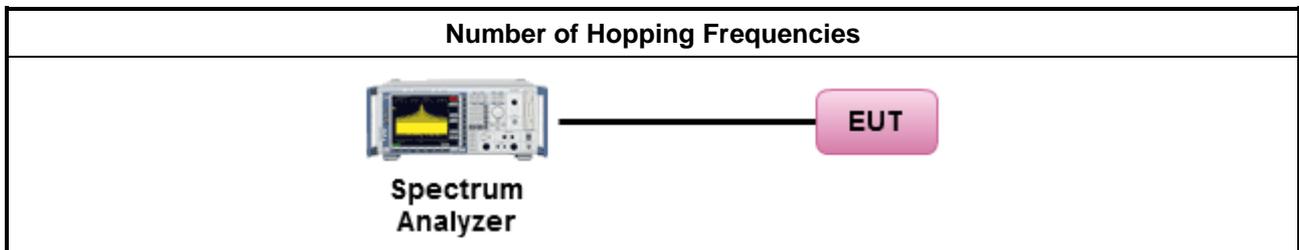



### 3.4 Time of Occupancy (Dwell Time)

#### 3.4.1 Time of Occupancy (Dwell Time) Limit

Time of Occupancy (Dwell Time) Limit for Frequency Hopping Systems
<input checked="" type="checkbox"/> 2400-2483.5 MHz Band: Dwell time $\leq 0.4$ second within $0.4 \times N$
<b>N:</b> Number of Hopping Frequencies


#### 3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

#### 3.4.3 Test Procedures

Test Method
<input checked="" type="checkbox"/> Refer as ANSI C63.10, clause 7.7.4 for dwell time measurement.
<input checked="" type="checkbox"/> Bluetooth ACL packets can be 1, 3, or 5 time slots. Following as dwell time. Operate DH5 at maximum dwell time and maximum duty cycle.
<input type="checkbox"/> The DH1 packet can cover a single time slot. A maximum length packet has duration of 1 time slots. The hopping rate is 1600 hops/second so the maximum dwell time is $1/1600$ seconds, or 0.625ms. DH1 Packet permit maximum $1600 / 79 / 2 = 10.12$ hops per second in each channel (1 time slot RX, 1 time slot TX). So, the dwell time is the time duration of the pulse times $10.12 \times 31.6 = 320$ within 31.6 seconds.
<input type="checkbox"/> The DH3 packet can cover up to 3 time slots. A maximum length packet has duration of 3 time slots. The hopping rate is 1600 hops/second so the maximum dwell time is $3/1600$ seconds, or 1.875ms. DH3 Packet permit maximum $1600 / 79 / 4 = 5.06$ hops per second in each channel (3 time slots RX, 1 time slot TX). So, the dwell time is the time duration of the pulse times $5.06 \times 31.6 = 160$ within 31.6 seconds.
<input checked="" type="checkbox"/> The DH5 packet can cover up to 5 time slots. Operate DH5 at maximum dwell time and maximum duty cycle. A maximum length packet has duration of 5 time slots. The hopping rate is 1600 hops/second so the maximum dwell time is $5/1600$ seconds, or 3.125ms. DH5 Packet permit maximum $1600 / 79 / 6 = 3.37$ hops per second in each channel (5 time slots RX, 1 time slot TX). So, the dwell time is the time duration of the pulse times $3.37 \times 31.6 = 106.6$ within 31.6 seconds
<input checked="" type="checkbox"/> For conducted measurement.
<input checked="" type="checkbox"/> The EUT supports single transmit chain and measurements performed on this transmit chain.
<input type="checkbox"/> The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.


#### 3.4.4 Test Setup

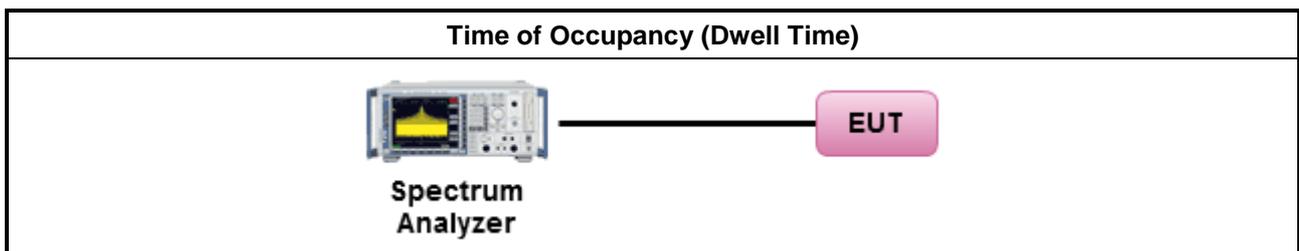

### 3.4.5 Test Result of Time of Occupancy (Dwell Time)

Time of Occupancy (Dwell Time) Result					
Modulation Mode	Freq. (MHz)	Pulse Time per Hop (ms)	Number of Pulse in [0.4 x N sec]	Dwell Time in [0.4 x N sec] (s)	Dwell Time Limits (s)
EDR-3Mbps	2402	2.9928	106.7	0.319	0.4
<b>Result</b>		<b>Complied</b>			

Bluetooth ACL packets can be 1, 3, or 5 time slots. The DH1 packet can cover a single time slot. The DH3 packet can cover up to 3 time slots. The DH5 packet can cover up to 5 time slots. Operate DH5 at maximum dwell time and maximum duty cycle. A maximum length packet has duration of 5 time slots. The hopping rate is 1600 hops/second so the maximum dwell time is 5/1600 seconds, or 3.125ms.

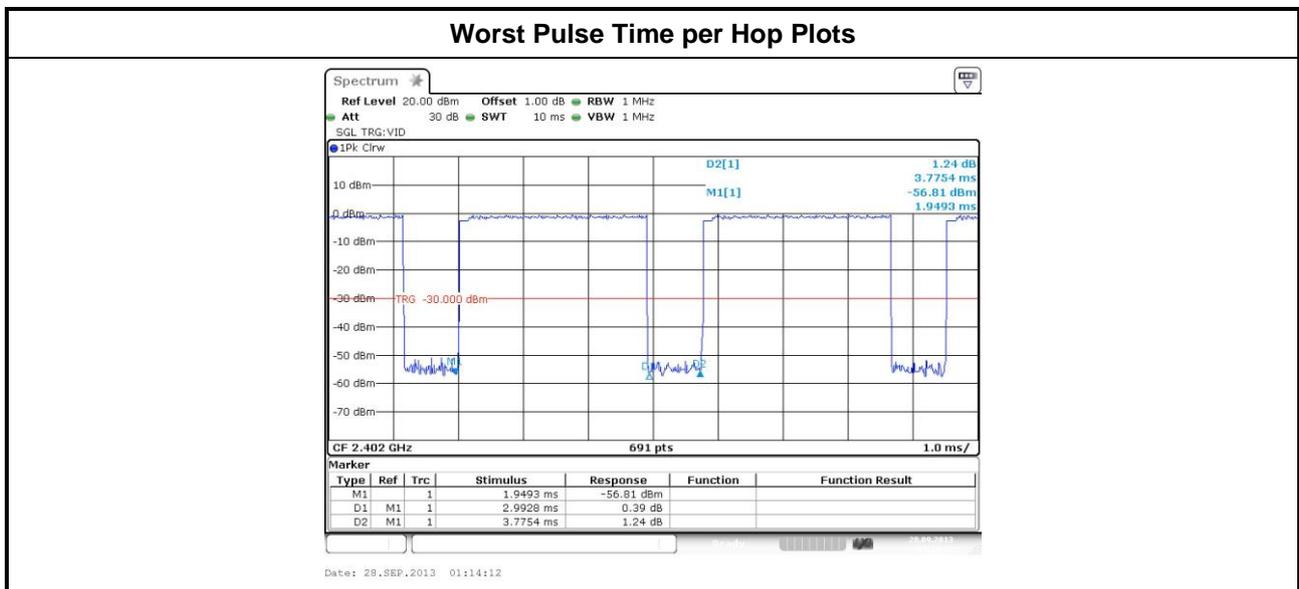

### 3.5 RF Output Power

#### 3.5.1 RF Output Power Limit

RF Output Power Limit for Frequency Hopping Systems	
<b>Maximum Peak Conducted Output Power Limit</b>	
<input checked="" type="checkbox"/> 2400-2483.5 MHz Band:	
<input type="checkbox"/>	For Hopping Channel: $N \geq 79$
<input type="checkbox"/>	If $G_{TX} \leq 6$ dBi, then $P_{Out} \leq 30$ dBm (1 W)
<input type="checkbox"/>	If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$ dBm
<input checked="" type="checkbox"/>	For Hopping Channel: $N \geq 15$
<input checked="" type="checkbox"/>	If $G_{TX} \leq 6$ dBi, then $P_{Out} \leq 21$ dBm (0.125 W)
<input type="checkbox"/>	If $G_{TX} > 6$ dBi, then $P_{Out} = 21 - (G_{TX} - 6)$ dBm
<b>e.i.r.p. Power Limit:</b>	
<input checked="" type="checkbox"/> 2400-2483.5 MHz Band:	
<input type="checkbox"/>	For Hopping Channel: $N \geq 79 - P_{eirp} \leq 36$ dBm (4 W)
<input checked="" type="checkbox"/>	For Hopping Channel: $79 > N \geq 15 - P_{eirp} \leq 27$ dBm (0.5 W)
<p><math>G_{TX}</math> = the maximum transmitting antenna directional gain in dBi.  <math>P_{eirp}</math> = e.i.r.p. Power in dBm.  <b>N</b>: Number of Hopping Frequencies  <b>ChS</b>: Hopping Channel Separation</p>	


#### 3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

#### 3.5.3 Test Procedures

Test Method	
<input checked="" type="checkbox"/> Maximum Peak Conducted Output Power	
<input type="checkbox"/>	Refer as FCC DA 00-0705, spectrum analyzer for peak power.
<input checked="" type="checkbox"/>	Refer as FCC DA 00-0705, peak power meter for peak power.
<input type="checkbox"/>	Refer as ANSI C63.10, clause 6.10.2.1 a) for peak power meter.
<input type="checkbox"/>	Refer as ANSI C63.10, clause 6.10.2.1 a) for spectrum analyzer - (RBW $\geq$ EBW).
<input checked="" type="checkbox"/> For conducted measurement.	
<input checked="" type="checkbox"/>	The EUT supports single transmit chain and measurements performed on this transmit chain.
<input type="checkbox"/>	The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.

3.5.4 Test Setup

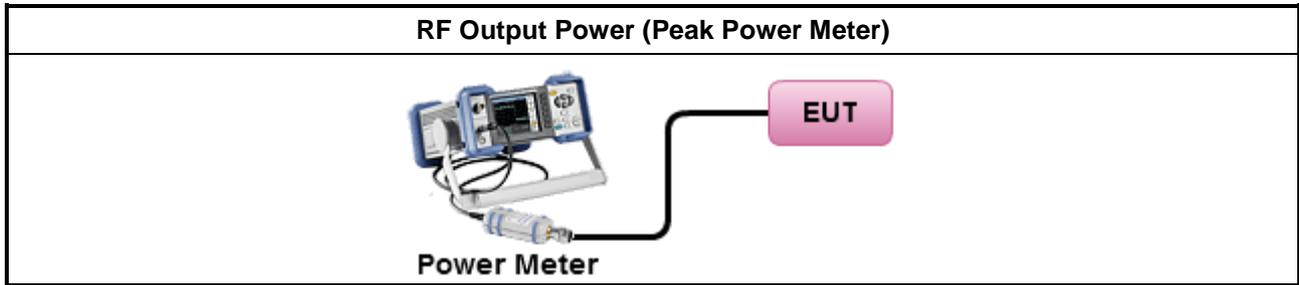

3.5.5 Test Result of Maximum Peak Conducted Output Power

Maximum Peak Conducted Output Power Result						
Condition		RF Output Power (dBm)				
Modulation Mode	Freq. (MHz)	RF Output Power	Power Limit	Antenna Gain (dBi)	EIRP Power	EIRP Limit
BR-1Mbps	2402	-2.01	21	-0.62	-2.63	27
BR-1Mbps	2440	-1.11	21	-0.62	-1.73	27
BR-1Mbps	2480	-0.9	21	-0.62	-1.52	27
EDR-3Mbps	2402	-0.1	21	-0.62	-0.72	27
EDR-3Mbps	2440	1.04	21	-0.62	0.42	27
EDR-3Mbps	2480	1.33	21	-0.62	0.71	27
<b>Result</b>		<b>Complied</b>				

### 3.6 Emissions in Non-Restricted Frequency Bands

#### 3.6.1 Emissions in Non-Restricted Frequency Bands Limit

Peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz

#### 3.6.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

#### 3.6.3 Test Procedures


##### Reference level measurement

1. Set RBW=100kHz, VBW = 300kHz , Detector = Peak, Sweep time = Auto
2. Trace = max hold , Allow Trace to fully stabilize
3. Use the peak marker function to determine the maximum PSD level

##### Emission level measurement


1. Set RBW=100kHz, VBW = 300kHz , Detector = Peak, Sweep time = Auto
2. Trace = max hold , Allow Trace to fully stabilize
3. Scan Frequency range is up to 26.5GHz
4. Use the peak marker function to determine the maximum amplitude level


#### 3.6.4 Test Setup

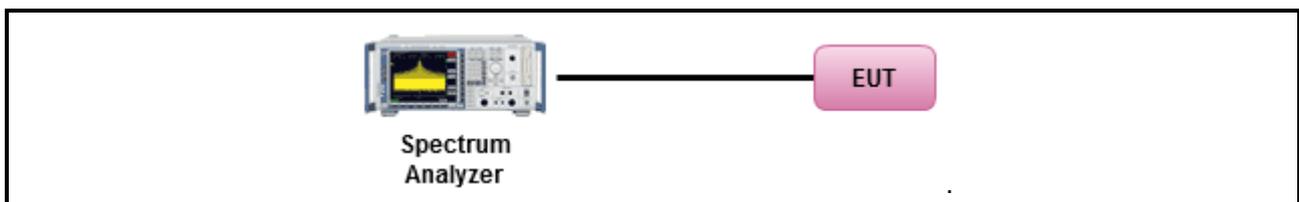

### 3.6.5 Test Result of Emissions in non-restricted frequency bands


#### GFSK

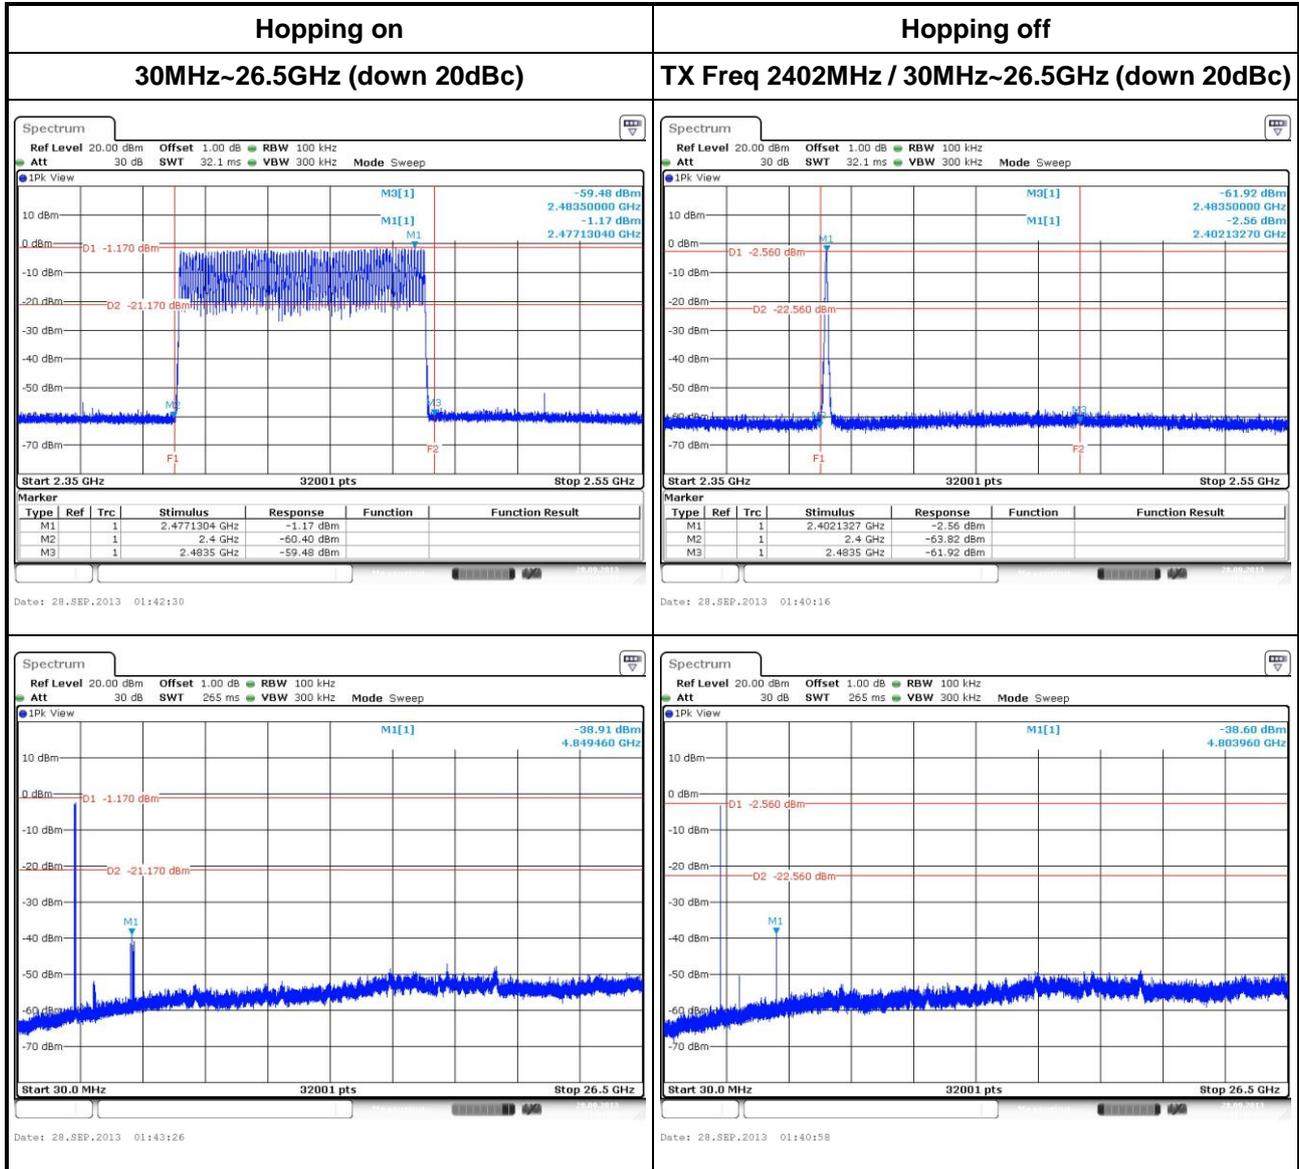


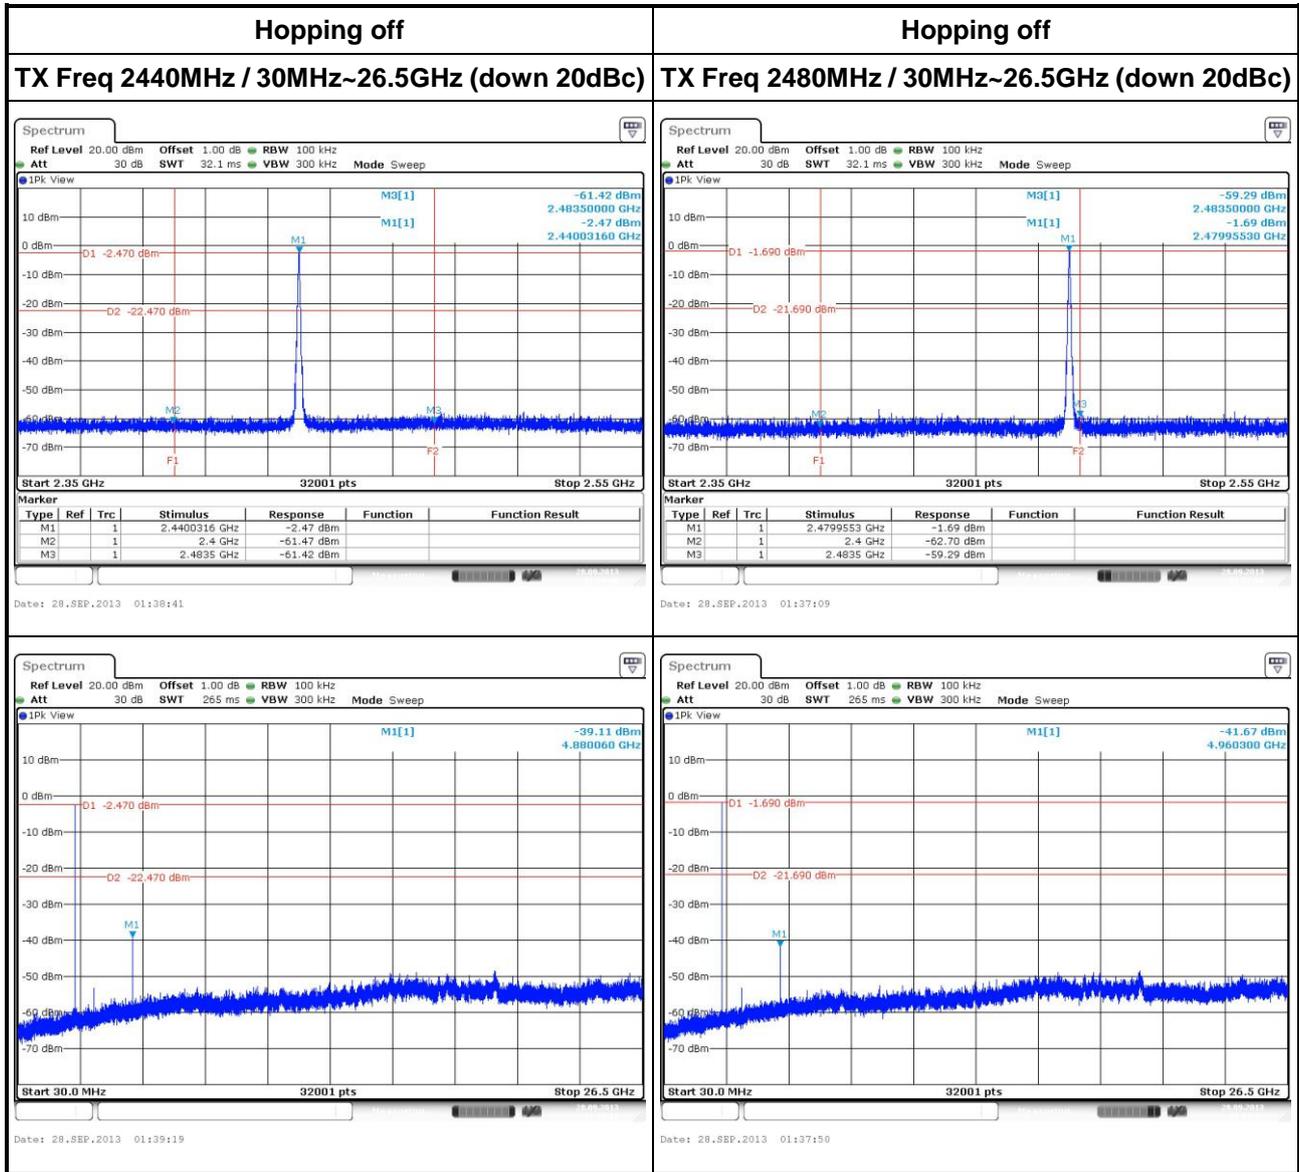



8DPSK

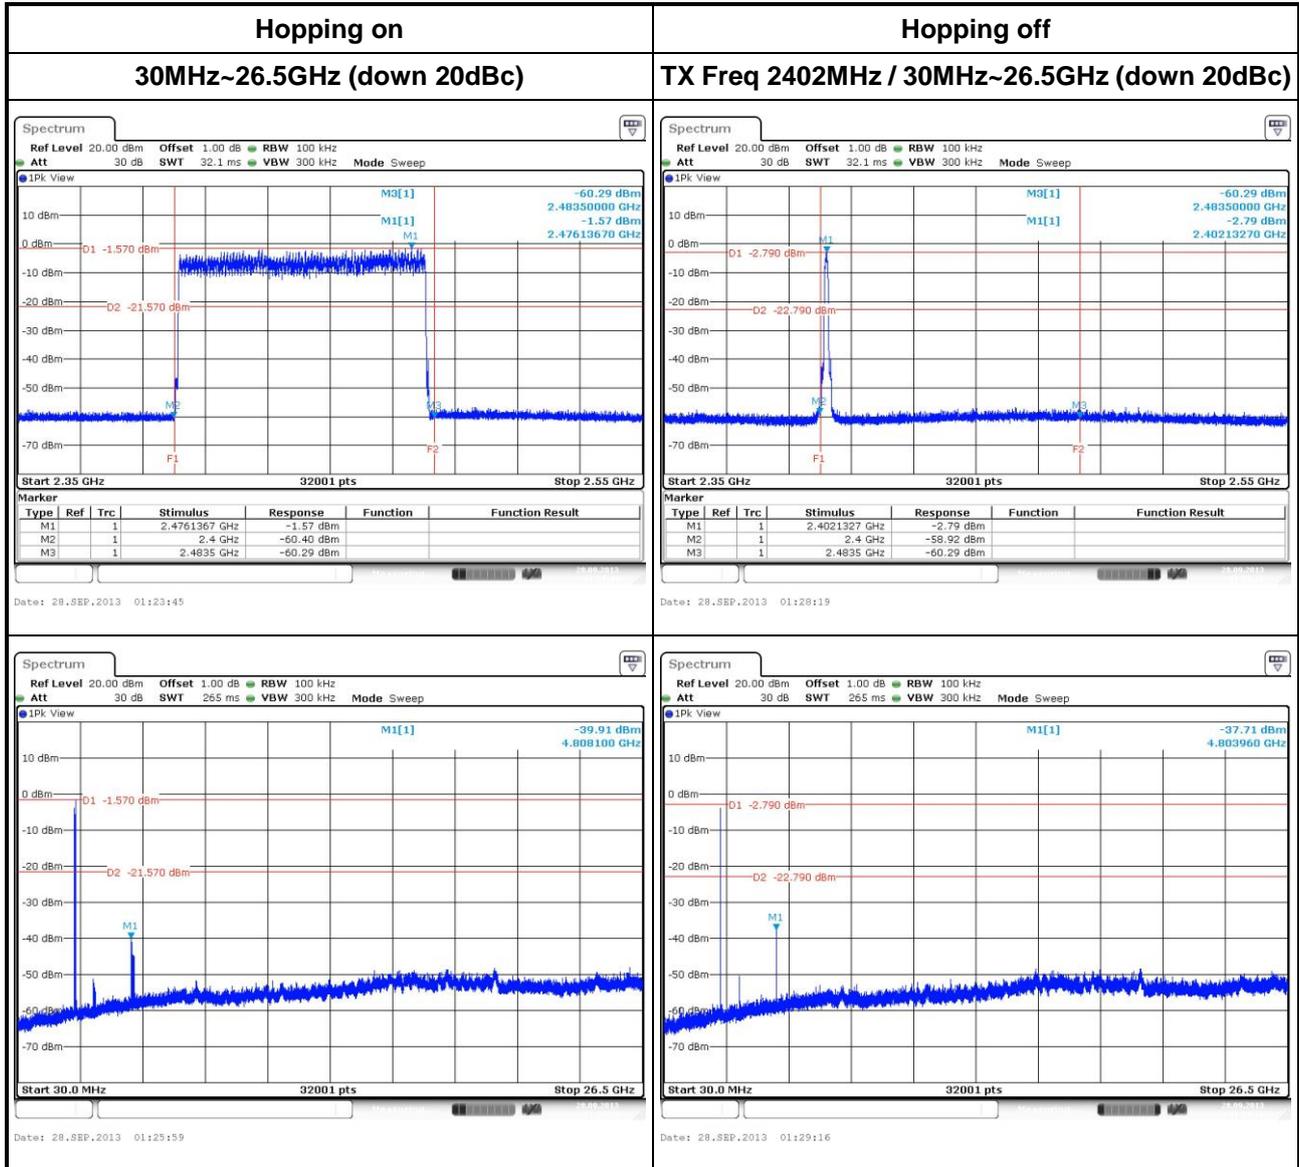

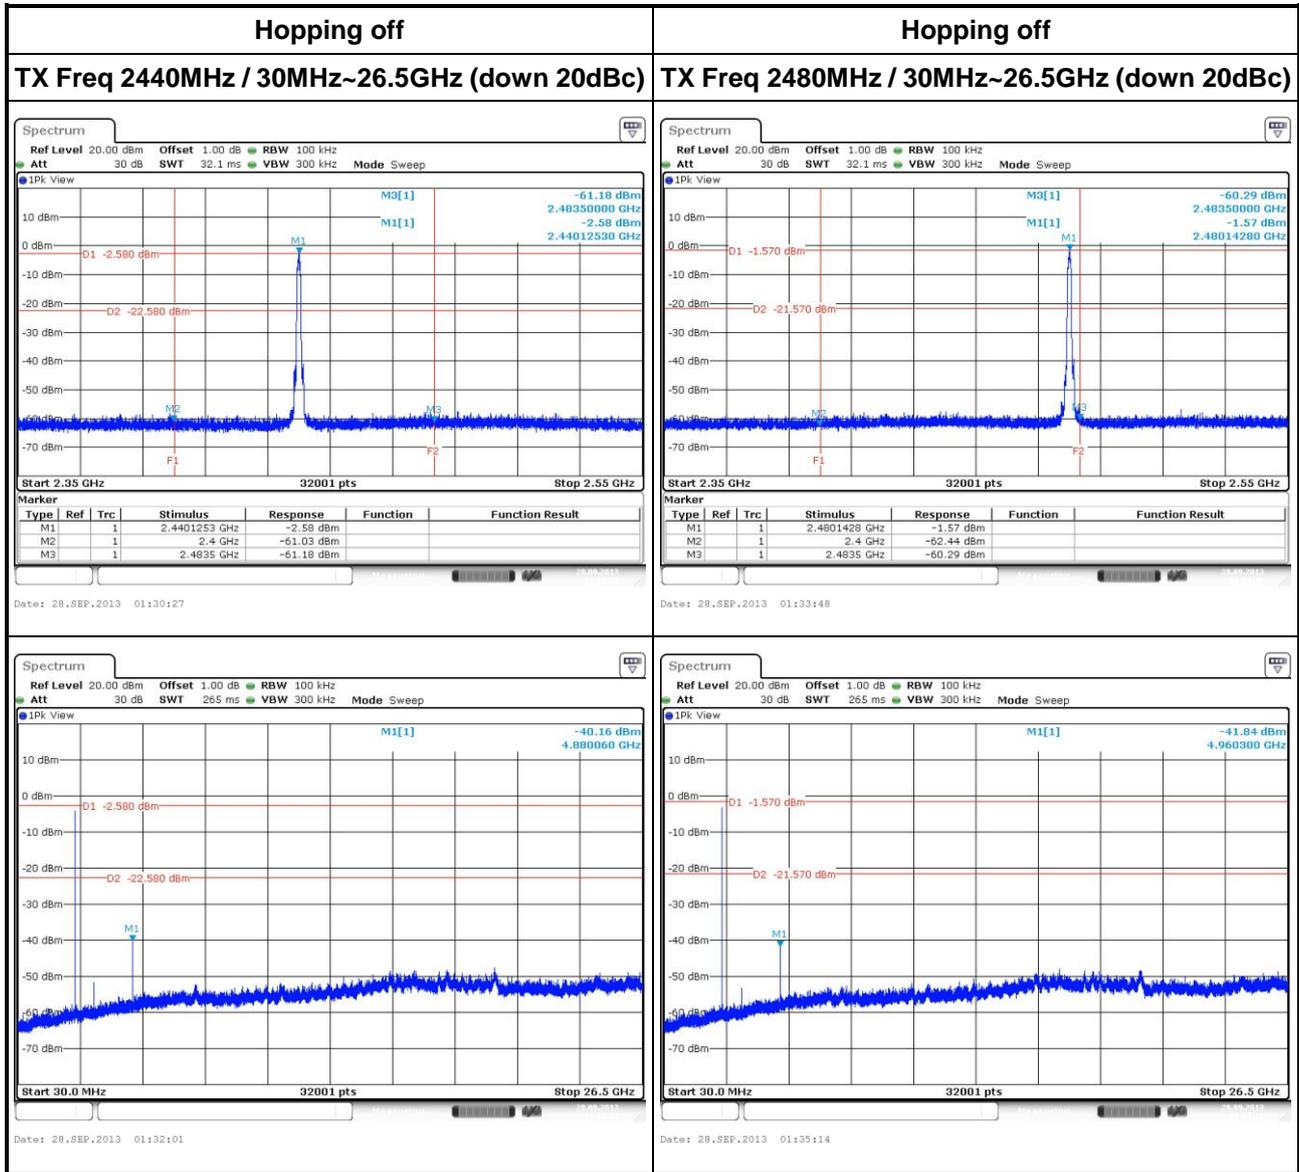

### 3.7 Transmitter Radiated Unwanted Emissions

#### 3.7.1 Transmitter Radiated Unwanted Emissions Limit

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Un-restricted Band Emissions Limit	
RF output power procedure	Limit (dB)
Peak output power procedure	20
Average output power procedure	30

Note 1: If the peak output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level.

Note 2: If the average output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the power in any 100 kHz outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum measured in-band average PSD level.


#### 3.7.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.7.3 Test Procedures

Test Method – General Information	
<input checked="" type="checkbox"/>	Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).
<input checked="" type="checkbox"/>	For the transmitter unwanted emissions shall be measured using following options below:
<input checked="" type="checkbox"/>	Refer as FCC DA 00-0705, for spurious radiated emissions. The dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a “duty cycle correction factor”, derived from $20\log(\text{dwell time}/100 \text{ ms})$
<input checked="" type="checkbox"/>	For unwanted emissions into non-restricted bands, 20 dB relative to the in-band peak output power in 100 kHz.
<input checked="" type="checkbox"/>	For unwanted emissions into restricted bands.
<input type="checkbox"/>	Refer as ANSI C63.10, clause 4.2.3.2.3 (Reduced VBW) – Duty cycle $\geq 98\%$ .
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 4.2.3.2.4 average value of pulsed emissions.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 4.2.3.2.2 measurement procedure peak limit.
<input type="checkbox"/>	Refer as FCC DA 00-0705, for conducted measurement.
<input checked="" type="checkbox"/>	For radiated measurement.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.4 for radiated emissions from below 30 MHz.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.5 for radiated emissions from 30 MHz to 1000 MHz.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.5 for radiated emissions from above 1 GHz.


### 3.7.4 Test Setup

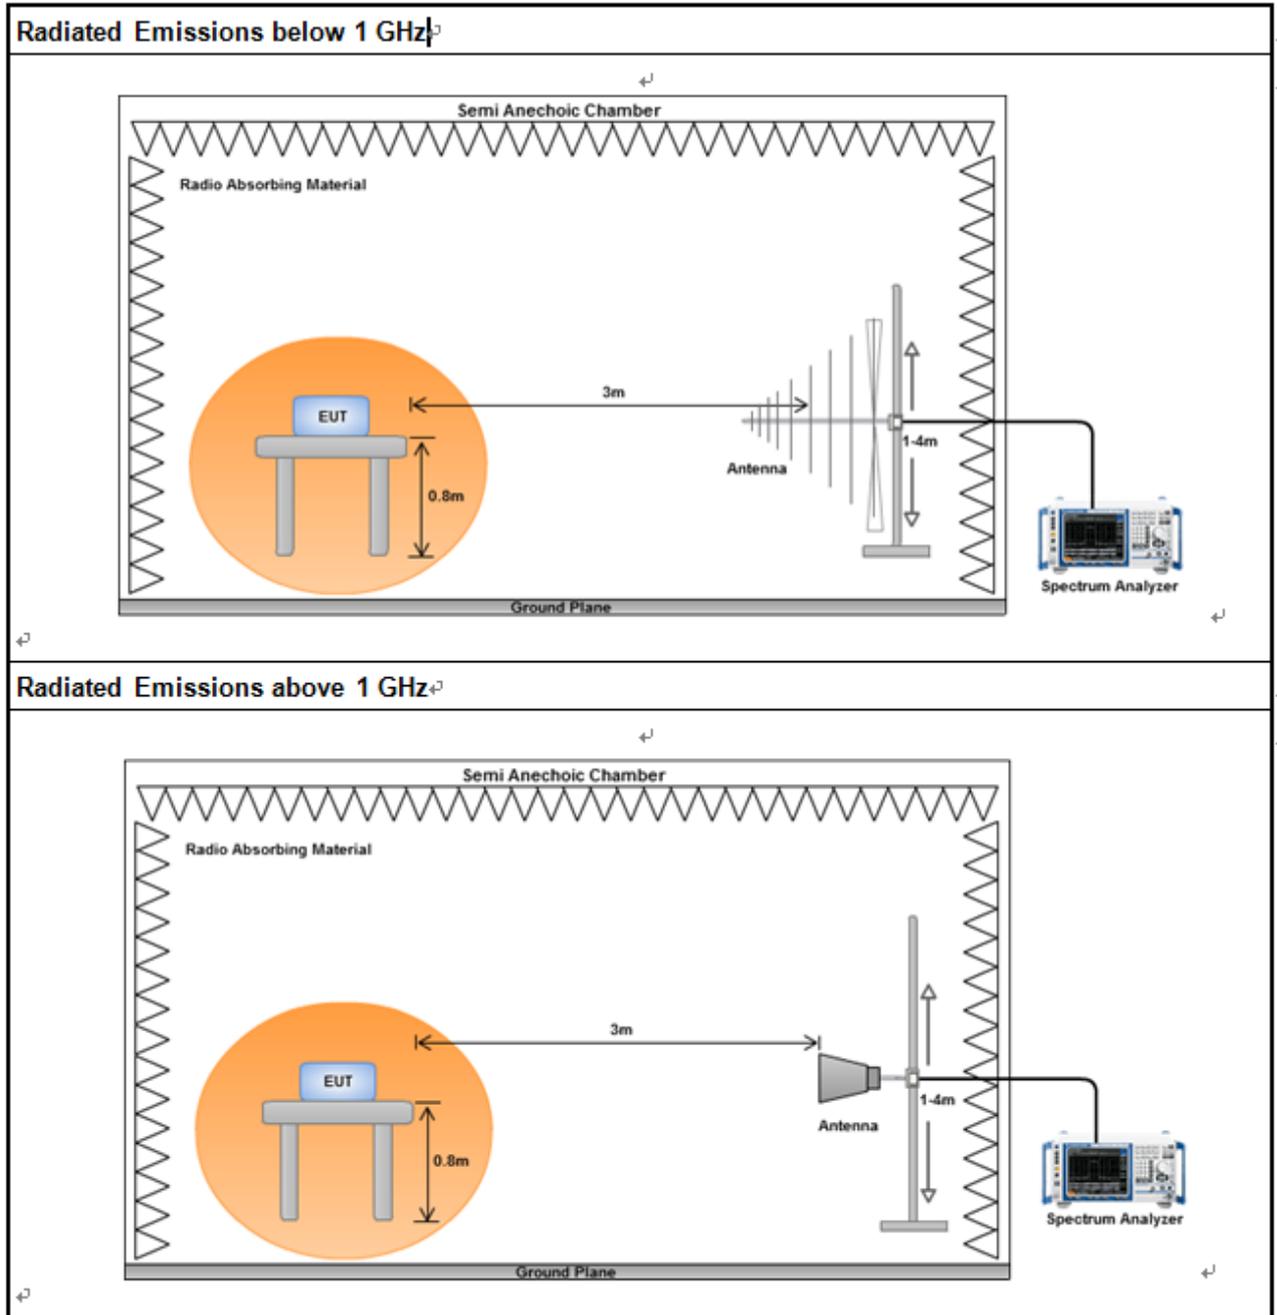

### 3.7.5 Transmitter Radiated Unwanted Emissions (Below 30MHz)

All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

### 3.7.6 Transmitter Radiated Unwanted Emissions (Below 1GHz)

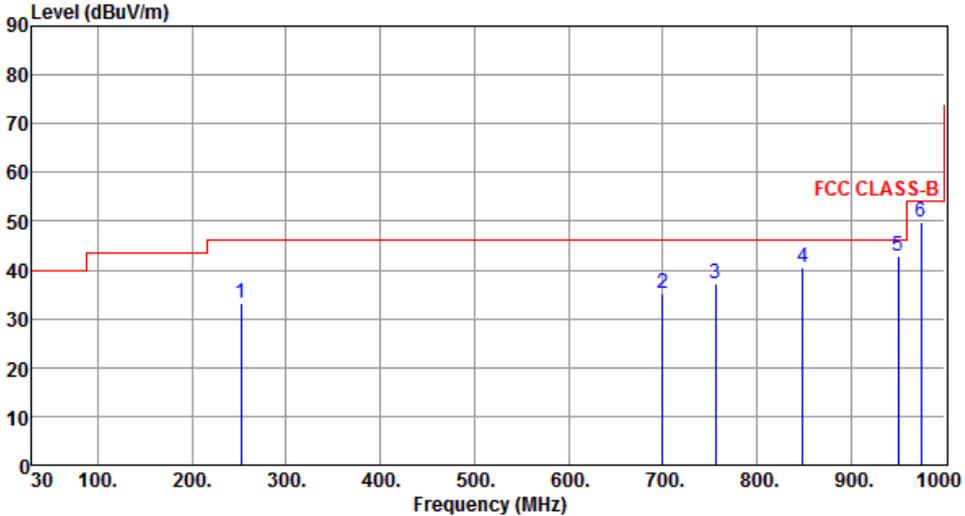Transmitter Radiated Unwanted Emissions (Below 1GHz)									
Modulation Mode	EDR-3Mbps			Test Freq. (MHz)	2480				
Operating Function	Transmit			Polarization	H				
 <p>The graph plots Level (dBuV/m) on the y-axis (0 to 90) against Frequency (MHz) on the x-axis (30 to 1000). A red line represents the FCC CLASS-B limit, which is constant at 46 dBuV/m from 30 MHz to 1000 MHz. Six peaks are identified with blue vertical lines and numbered 1 through 6. Peak 1 is at 252.13 MHz (33.06 dBuV/m), peak 2 at 700.27 MHz (35.20 dBuV/m), peak 3 at 756.53 MHz (37.22 dBuV/m), peak 4 at 848.68 MHz (40.60 dBuV/m), peak 5 at 950.53 MHz (42.93 dBuV/m), and peak 6 at 974.78 MHz (49.94 dBuV/m). All peaks are below the 46 dBuV/m limit.</p>									
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	252.13	33.06	46.00	-12.94	50.34	-17.28	Peak	---	---
2	700.27	35.20	46.00	-10.80	42.70	-7.50	Peak	---	---
3	756.53	37.22	46.00	-8.78	43.76	-6.54	Peak	---	---
4	848.68	40.60	46.00	-5.40	46.03	-5.43	Peak	---	---
5	950.53	42.93	46.00	-3.07	46.77	-3.84	Peak	---	---
6	974.78	49.94	54.00	-4.06	53.59	-3.65	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.  
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)  
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)




Transmitter Radiated Unwanted Emissions (Below 1GHz)									
Modulation Mode	EDR-3Mbps			Test Freq. (MHz)	2480				
Operating Function	Transmit			Polarization	V				
<p>The graph plots Level (dBuV/m) on the y-axis (0 to 90) against Frequency (MHz) on the x-axis (30 to 1000). A red step function represents the FCC CLASS-B limit, which is 40 dBuV/m from 30 to 100 MHz, 45 dBuV/m from 100 to 200 MHz, 46 dBuV/m from 200 to 1000 MHz, and 55 dBuV/m from 1000 to 10000 MHz. Six blue vertical lines indicate emission peaks at 50.37, 186.17, 384.05, 431.58, 904.94, and 928.22 MHz. The peak levels are 31.54, 33.94, 38.39, 39.24, 39.43, and 40.75 dBuV/m respectively. The margins relative to the 46 dBuV/m limit are -8.46, -9.56, -7.61, -6.76, -6.57, and -5.25 dB.</p>									
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	50.37	31.54	40.00	-8.46	47.52	-15.98	Peak	---	---
2	186.17	33.94	43.50	-9.56	52.62	-18.68	Peak	---	---
3	384.05	38.39	46.00	-7.61	51.86	-13.47	Peak	---	---
4	431.58	39.24	46.00	-6.76	51.49	-12.25	Peak	---	---
5	904.94	39.43	46.00	-6.57	44.25	-4.82	Peak	---	---
6	928.22	40.75	46.00	-5.25	45.06	-4.31	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.  
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)  
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

3.7.7 Transmitter Radiated Unwanted Emissions (Above 1GHz) for GFSK

Transmitter Radiated Unwanted Emissions (Above 1GHz)			
Modulation Mode	BR-1Mbps	Test Freq. (MHz)	2402
Operating Mode	Transmit	Polarization	H

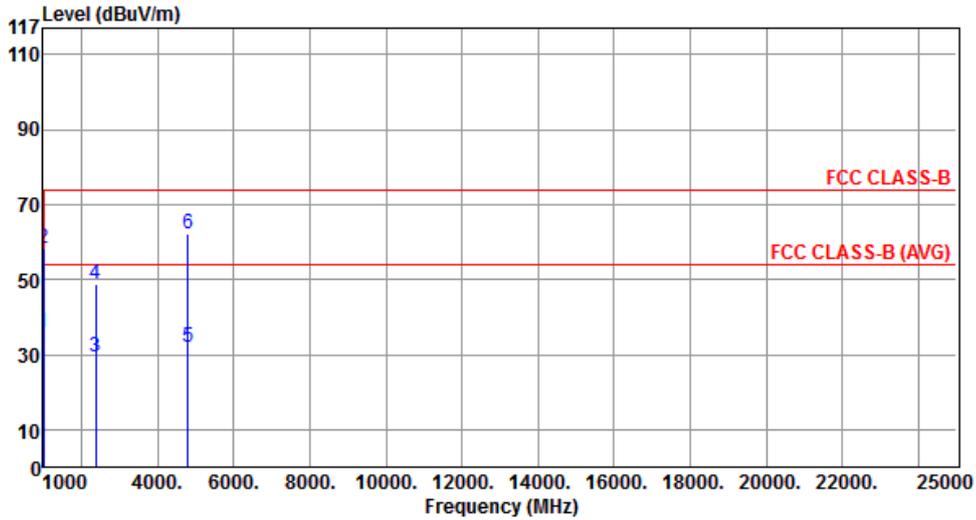


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	1001.00	35.85	54.00	-18.15	45.97	-10.12	Average	---	---
2	1001.00	58.33	74.00	-15.67	68.45	-10.12	Peak	---	---
3	2390.00	29.19	54.00	-24.81	32.09	-2.90	Average	---	---
4	2390.00	49.00	74.00	-25.00	51.90	-2.90	Peak	---	---
5	4804.00	32.10	54.00	-21.90	27.45	4.65	Average	---	---
6	4804.00	62.20	74.00	-11.80	57.55	4.65	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.  
 Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)  
 Note 3: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.  
 Note 4: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.  
 Note 5: For spurious radiated emissions. The dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a "duty cycle correction factor", derived from 20log (dwell time/100 ms).



Transmitter Radiated Unwanted Emissions (Above 1GHz)			
Modulation Mode	BR-1Mbps	Test Freq. (MHz)	2402
Operating Mode	Transmit	Polarization	V

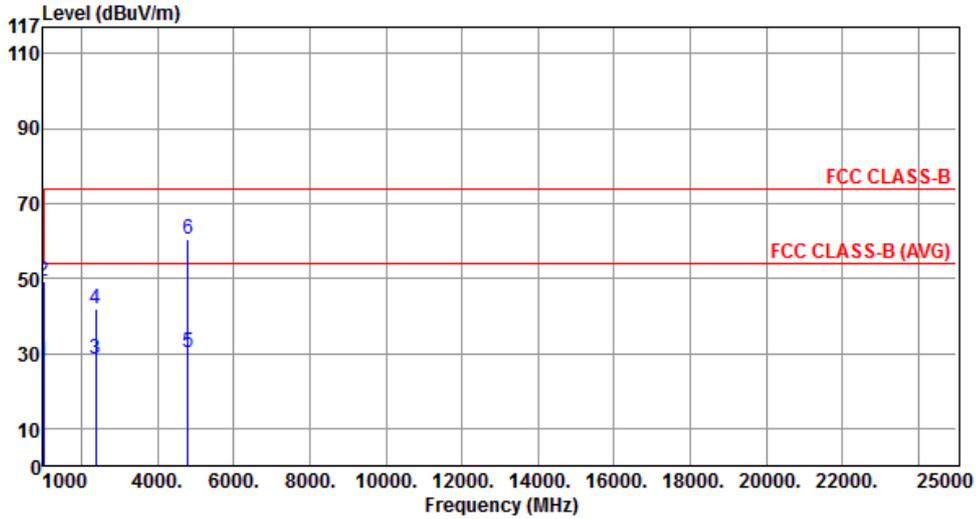

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	1001.00	27.69	54.00	-26.31	37.81	-10.12	Average	---	---
2	1001.00	49.33	74.00	-24.67	59.45	-10.12	Peak	---	---
3	2390.00	28.49	54.00	-25.51	31.39	-2.90	Average	---	---
4	2390.00	42.00	74.00	-32.00	44.90	-2.90	Peak	---	---
5	4804.00	30.15	54.00	-23.85	25.50	4.65	Average	---	---
6	4804.00	60.25	74.00	-13.75	55.60	4.65	Peak	---	---


Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.  
 Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)  
 Note 3: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.  
 Note 4: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.  
 Note 5: For spurious radiated emissions. The dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a "duty cycle correction factor", derived from 20log (dwell time/100 ms).



Transmitter Radiated Unwanted Emissions (Above 1GHz)									
Modulation Mode	BR-1Mbps	Test Freq. (MHz)	2440						
Operating Mode	Transmit	Polarization	H						
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High cm	Turn Table deg
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB			
1	1001.00	35.33	54.00	-18.67	45.45	-10.12	Average	---	---
2	1001.00	58.61	74.00	-15.39	68.73	-10.12	Peak	---	---
3	4882.00	26.72	54.00	-27.28	21.94	4.78	Average	---	---
4	4882.00	56.82	74.00	-17.18	52.04	4.78	Peak	---	---
5	7323.00	20.78	54.00	-33.22	11.19	9.59	Average	---	---
6	7323.00	50.88	74.00	-23.12	41.29	9.59	Peak	---	---
<p>Note 1: "&gt;20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.</p> <p>Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)</p> <p>Note 3: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.</p> <p>Note 4: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.</p> <p>Note 5: For spurious radiated emissions. The dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a "duty cycle correction factor", derived from 20log (dwell time/100 ms).</p>									



Transmitter Radiated Unwanted Emissions (Above 1GHz)			
Modulation Mode	BR-1Mbps	Test Freq. (MHz)	2440
Operating Mode	Transmit	Polarization	V

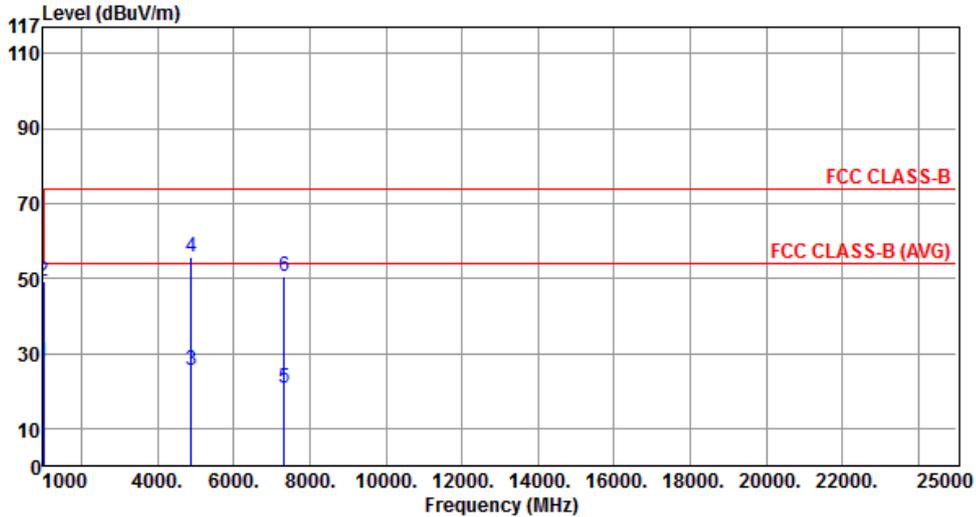


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	1001.00	27.52	54.00	-26.48	37.64	-10.12	Average	---	---
2	1001.00	49.34	74.00	-24.66	59.46	-10.12	Peak	---	---
3	4882.00	25.59	54.00	-28.41	20.81	4.78	Average	---	---
4	4882.00	55.69	74.00	-18.31	50.91	4.78	Peak	---	---
5	7323.00	20.53	54.00	-33.47	10.94	9.59	Average	---	---
6	7323.00	50.63	74.00	-23.37	41.04	9.59	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.  
 Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)  
 Note 3: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.  
 Note 4: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.  
 Note 5: For spurious radiated emissions. The dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a "duty cycle correction factor", derived from 20log (dwell time/100 ms).



Transmitter Radiated Unwanted Emissions (Above 1GHz)			
Modulation Mode	BR-1Mbps	Test Freq. (MHz)	2480
Operating Mode	Transmit	Polarization	H

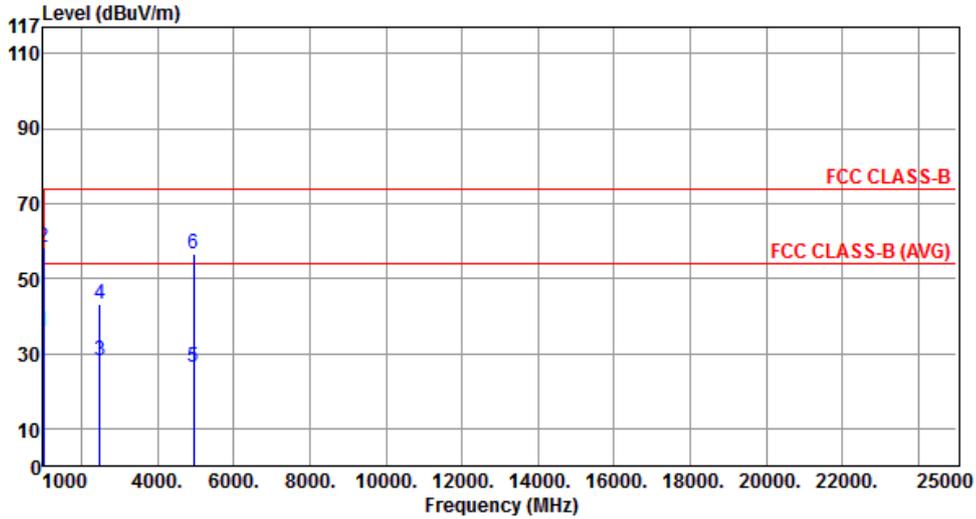


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	1001.00	35.72	54.00	-18.28	45.84	-10.12	Average	---	---
2	1001.00	58.44	74.00	-15.56	68.56	-10.12	Peak	---	---
3	2483.50	28.24	54.00	-25.76	30.66	-2.42	Average	---	---
4	2483.50	43.27	74.00	-30.73	45.69	-2.42	Peak	---	---
5	4960.00	26.53	54.00	-27.47	21.62	4.91	Average	---	---
6	4960.00	56.63	74.00	-17.37	51.72	4.91	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.  
 Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)  
 Note 3: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.  
 Note 4: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.  
 Note 5: For spurious radiated emissions. The dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a "duty cycle correction factor", derived from 20log (dwell time/100 ms).

Transmitter Radiated Unwanted Emissions (Above 1GHz)


Modulation Mode	BR-1Mbps	Test Freq. (MHz)	2480
Operating Mode	Transmit	Polarization	V

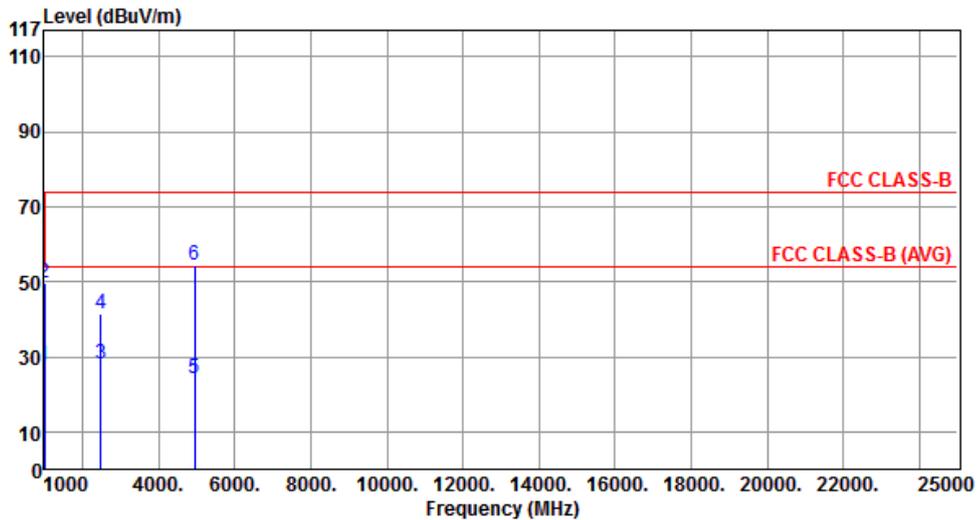

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	1001.00	27.55	54.00	-26.45	37.67	-10.12	Average	---	---
2	1001.00	49.63	74.00	-24.37	59.75	-10.12	Peak	---	---
3	2483.50	28.18	54.00	-25.82	30.60	-2.42	Average	---	---
4	2483.50	41.31	74.00	-32.69	43.73	-2.42	Peak	---	---
5	4960.00	24.19	54.00	-29.81	19.28	4.91	Average	---	---
6	4960.00	54.29	74.00	-19.71	49.38	4.91	Peak	---	---


- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 3: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 4: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.
- Note 5: For spurious radiated emissions. The dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a "duty cycle correction factor", derived from 20log (dwell time/100 ms).

3.7.8 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 8DPSK

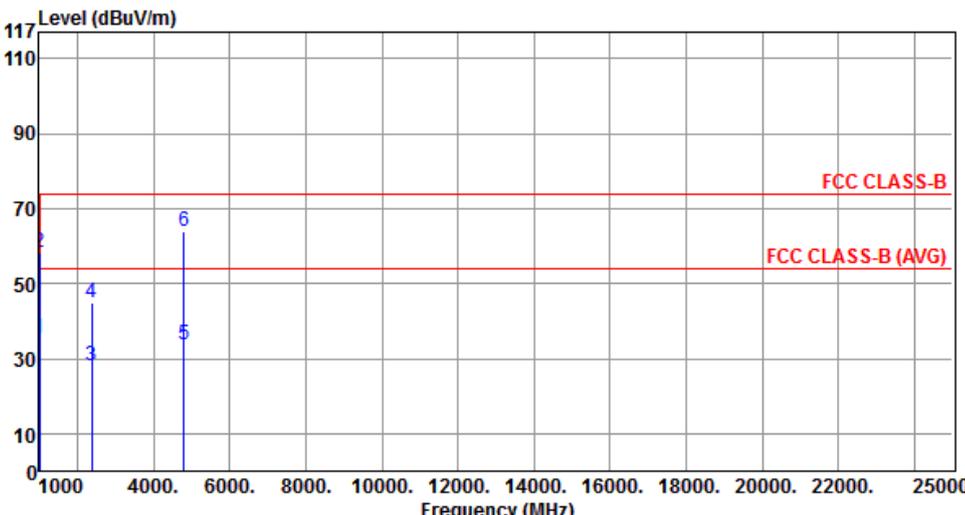Transmitter Radiated Unwanted Emissions (Above 1GHz)									
Modulation Mode	EDR-3Mbps			Test Freq. (MHz)	2402				
Operating Mode	Transmit			Polarization	H				
									
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	1001.00	35.33	54.00	-18.67	45.45	-10.12	Average	---	---
2	1001.00	58.24	74.00	-15.76	68.36	-10.12	Peak	---	---
3	2390.00	28.22	54.00	-25.78	31.12	-2.90	Average	---	---
4	2390.00	45.08	74.00	-28.92	47.98	-2.90	Peak	---	---
5	4804.00	33.65	54.00	-20.35	29.00	4.65	Average	---	---
6	4804.00	63.75	74.00	-10.25	59.10	4.65	Peak	---	---
<p>Note 1: "&gt;20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.</p> <p>Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)</p> <p>Note 3: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.</p> <p>Note 4: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.</p> <p>Note 5: For spurious radiated emissions. The dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a "duty cycle correction factor", derived from 20log (dwell time/100 ms).</p>									




Transmitter Radiated Unwanted Emissions (Above 1GHz)									
Modulation Mode	EDR-3Mbps	Test Freq. (MHz)	2402						
Operating Mode	Transmit	Polarization	V						
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High cm	Turn Table deg
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB			
1	1001.00	27.39	54.00	-26.61	37.51	-10.12	Average	---	---
2	1001.00	49.35	74.00	-24.65	59.47	-10.12	Peak	---	---
3	2390.00	26.66	54.00	-27.34	29.56	-2.90	Average	---	---
4	2390.00	39.32	74.00	-34.68	42.22	-2.90	Peak	---	---
5	4804.00	29.95	54.00	-24.05	25.30	4.65	Average	---	---
6	4804.00	60.05	74.00	-13.95	55.40	4.65	Peak	---	---
<p>Note 1: "&gt;20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.</p> <p>Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)</p> <p>Note 3: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.</p> <p>Note 4: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.</p> <p>Note 5: For spurious radiated emissions. The dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a "duty cycle correction factor", derived from 20log (dwell time/100 ms).</p>									

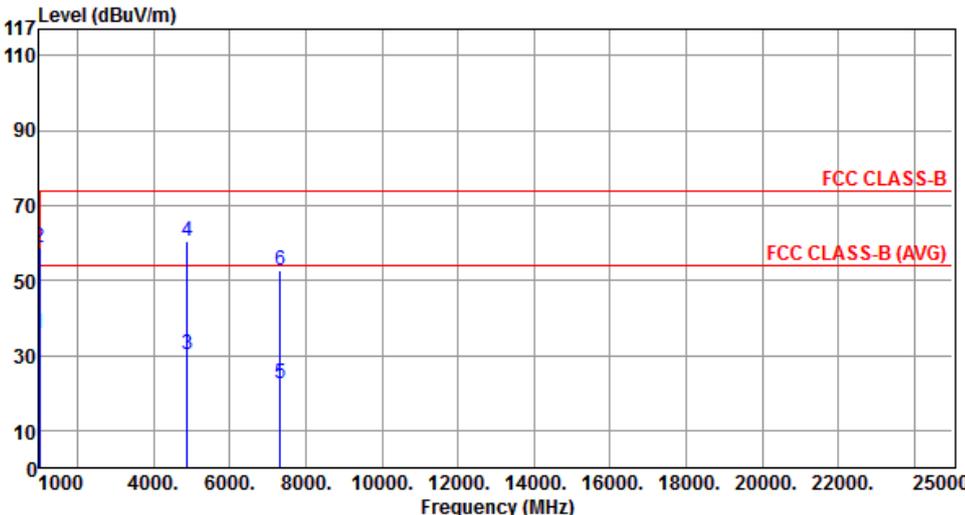Transmitter Radiated Unwanted Emissions (Above 1GHz)									
Modulation Mode	EDR-3Mbps			Test Freq. (MHz)	2440				
Operating Mode	Transmit			Polarization	H				
									
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High cm	Turn Table deg
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB			
1	1001.00	35.78	54.00	-18.22	45.90	-10.12	Average	---	---
2	1001.00	58.66	74.00	-15.34	68.78	-10.12	Peak	---	---
3	4882.00	30.38	54.00	-23.62	25.60	4.78	Average	---	---
4	4882.00	60.48	74.00	-13.52	55.70	4.78	Peak	---	---
5	7323.00	22.58	54.00	-31.42	12.99	9.59	Average	---	---
6	7323.00	52.68	74.00	-21.32	43.09	9.59	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.  
 Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)  
 Note 3: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.  
 Note 4: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.  
 Note 5: For spurious radiated emissions. The dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a "duty cycle correction factor", derived from 20log (dwell time/100 ms).



Transmitter Radiated Unwanted Emissions (Above 1GHz)			
Modulation Mode	EDR-3Mbps	Test Freq. (MHz)	2440
Operating Mode	Transmit	Polarization	V

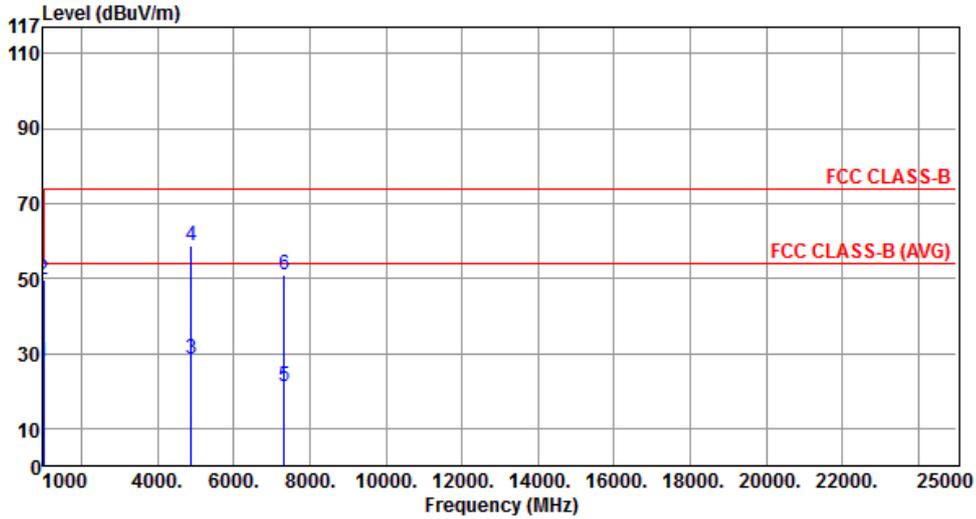

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	1001.00	27.69	54.00	-26.31	37.81	-10.12	Average	---	---
2	1001.00	49.72	74.00	-24.28	59.84	-10.12	Peak	---	---
3	4882.00	28.58	54.00	-25.42	23.80	4.78	Average	---	---
4	4882.00	58.68	74.00	-15.32	53.90	4.78	Peak	---	---
5	7323.00	20.98	54.00	-33.02	11.39	9.59	Average	---	---
6	7323.00	51.08	74.00	-22.92	41.49	9.59	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.  
 Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)  
 Note 3: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.  
 Note 4: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.  
 Note 5: For spurious radiated emissions. The dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a "duty cycle correction factor", derived from 20log (dwell time/100 ms).




Transmitter Radiated Unwanted Emissions (Above 1GHz)									
Modulation Mode	EDR-3Mbps			Test Freq. (MHz)	2480				
Operating Mode	Transmit			Polarization	H				
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	1001.00	35.55	54.00	-18.45	45.67	-10.12	Average	---	---
2	1001.00	58.48	74.00	-15.52	68.60	-10.12	Peak	---	---
3	2483.50	36.48	54.00	-17.52	38.90	-2.42	Average	---	---
4	2483.50	49.38	74.00	-24.62	51.80	-2.42	Peak	---	---
5	4960.00	28.91	54.00	-25.09	24.00	4.91	Average	---	---
6	4960.00	59.01	74.00	-14.99	54.10	4.91	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.  
 Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)  
 Note 3: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.  
 Note 4: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.  
 Note 5: For spurious radiated emissions. The dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a "duty cycle correction factor", derived from 20log (dwell time/100 ms).



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	EDR-3Mbps	Test Freq. (MHz)	2480
Operating Mode	Transmit	Polarization	V

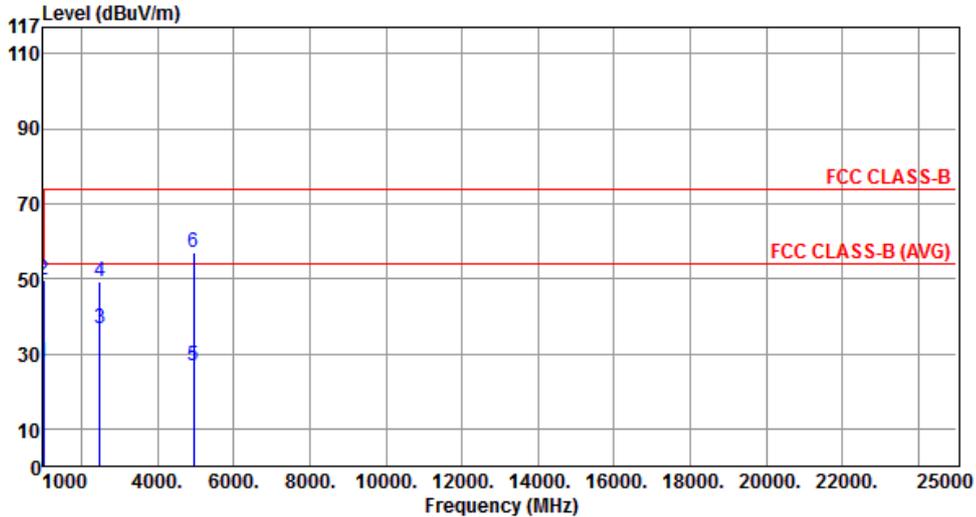

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	1001.00	27.49	54.00	-26.51	37.61	-10.12	Average	---	---
2	1001.00	49.52	74.00	-24.48	59.64	-10.12	Peak	---	---
3	2483.50	36.54	54.00	-17.46	38.96	-2.42	Average	---	---
4	2483.50	49.08	74.00	-24.92	51.50	-2.42	Peak	---	---
5	4960.00	26.91	54.00	-27.09	22.00	4.91	Average	---	---
6	4960.00	57.01	74.00	-16.99	52.10	4.91	Peak	---	---

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 3: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 4: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.
- Note 5: For spurious radiated emissions. The dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a "duty cycle correction factor", derived from 20log (dwell time/100 ms).



## 4 Test Equipment and Calibration Data

<b>Test Item</b>	Conducted Emission				
<b>Test Site</b>	Conduction room 1 / (CO01-WS)				
<b>Instrument</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Serial No.</b>	<b>Calibration Date</b>	<b>Calibration Until</b>
EMC Receiver	R&S	ESCS 30	100169	Oct. 02, 2012	Oct. 01, 2013
LISN	SCHWARZBECK MESS-ELEKTRONIK	Schwarzbeck 8127	8127-667	Dec. 04, 2012	Dec. 03, 2013
LISN (Support Unit)	SCHWARZBECK MESS-ELEKTRONIK	Schwarzbeck 8127	8127-666	Dec. 04, 2012	Dec. 03, 2013
RF Cable-CON	Woken	CFD200-NL	CFD200-NL-001	Dec. 25, 2012	Dec. 24, 2013
50 ohm terminal	NA	50	01	Apr. 22, 2013	Apr. 21, 2014
50 ohm terminal	NA	50	02	Apr. 22, 2013	Apr. 21, 2014
50 ohm terminal	NA	50	03	Apr. 22, 2013	Apr. 21, 2014
50 ohm terminal (Support Unit)	NA	50	04	Apr. 22, 2013	Apr. 21, 2014
Note: Calibration Interval of instruments listed above is one year.					

<b>Test Item</b>	Radiated Emission above 1GHz				
<b>Test Site</b>	966 chamber1 / (03CH01-WS)				
<b>Instrument</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Serial No.</b>	<b>Calibration Date</b>	<b>Calibration Until</b>
3m semi-anechoic chamber	CHAMPRO	SAC-03	03CH02-WS	Jan. 02, 2013	Jan. 01, 2014
Spectrum Analyzer	R&S	FSV40	101499	Jan. 28, 2013	Jan. 27, 2014
Receiver	R&S	ESR3	101657	Jan. 30, 2013	Jan. 29, 2014
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-524	Jan. 11, 2013	Jan. 10, 2014
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120D	BBHA 9120 D 1095	Jan. 29, 2013	Jan. 28, 2014
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Jan. 14, 2013	Jan. 13, 2014
Amplifier	Burgeon	BPA-530	100218	Dec. 14, 2012	Dec. 13, 2013
Amplifier	Agilent	83017A	MY39501309	Dec. 18, 2012	Dec. 17, 2013
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16140/4	Dec. 25, 2012	Dec. 24, 2013
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16018/4	Dec. 25, 2012	Dec. 24, 2013
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16015/4	Dec. 25, 2012	Dec. 24, 2013
RF Cable-R03m	Woken	CFD400NL-LW	CFD400NL-003	Dec. 25, 2012	Dec. 24, 2013
RF Cable-R10m	Woken	CFD400NL-LW	CFD400NL-004	Dec. 25, 2012	Dec. 24, 2013
control	EM Electronics	EM1000	060608	N/A	N/A
Note: Calibration Interval of instruments listed above is one year.					

Loop Antenna	R&S	HFH2-Z2	100330	Nov. 15, 2012	Nov. 14, 2014
Amplifier	MITEQ	AMF-6F-260400	9121372	Apr. 19, 2013	Apr. 18, 2015
Note: Calibration Interval of instruments listed above is two year.					



<b>Test Item</b>	RF Conducted				
<b>Test Site</b>	TH01-HY				
<b>Instrument</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Serial No.</b>	<b>Calibration Date</b>	<b>Calibration Until</b>
Spectrum Analyzer	R&S	FSV 40	101063	Feb. 18, 2013	Feb. 17, 2014
Spectrum Analyzer	R&S	FSP 40	100305	Mar. 20, 2013	Mar. 19, 2014
Temp. and Humidity Chamber	Giant Force	GTH-225-20-SP-SD	MAA1112-007	Nov. 21, 2012	Nov. 20, 2013
Signal Generator	R&S	SMB100A	175727	Jan. 14, 2013	Jan. 14, 2014
Power Sensor	Anritsu	MA2411B	0917017	Feb. 02, 2013	Feb. 01, 2014
Power Meter	Anritsu	ML2495A	0949003	Feb. 02, 2013	Feb. 01, 2014
Note: Calibration Interval of instruments listed above is one year.					