

FCC RF Test Report

APPLICANT : Sony Corporation
EQUIPMENT : Tablet device
BRAND NAME : VAIO
MODEL NAME : SVJ202B15L
FCC ID : AK8SVJ202B15L
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DSS) Spread Spectrum Transmitter

The product was received on Feb. 20, 2013 and completely tested on Mar. 11, 2013. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the procedures and shown the compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:



Joseph Lin / Supervisor

Reviewed by:



Jones Tsai / Manager



SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.



TABLE OF CONTENTS

REVISION HISTORY..... 3

SUMMARY OF TEST RESULT 4

1 GENERAL DESCRIPTION..... 5

 1.1 Applicant 5

 1.2 Manufacturer..... 5

 1.3 Feature of Equipment Under Test 5

 1.4 Product Specification of Equipment Under Test..... 6

 1.5 Testing Site..... 6

 1.6 Applied Standards 7

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST..... 8

 2.1 Descriptions of Test Mode 8

 2.2 Test Mode..... 9

 2.3 Connection Diagram of Test System..... 10

 2.4 Support Unit used in test configuration and system 11

 2.5 Description of RF Function Operation Test Setup..... 11

 2.6 Measurement Results Explanation Example..... 12

3 TEST RESULT 14

 3.1 Number of Channel Measurement 14

 3.2 Hopping Channel Separation Measurement 16

 3.3 Dwell Time Measurement..... 23

 3.4 20dB and 99% Bandwidth Measurement 26

 3.5 Peak Output Power Measurement 39

 3.6 Conducted Band Edges Measurement..... 46

 3.7 Conducted Spurious Emission Measurement 53

 3.8 Radiated Band Edges and Spurious Emission Measurement 63

 3.9 AC Conducted Emission Measurement..... 76

 3.10 Antenna Requirements 80

4 LIST OF MEASURING EQUIPMENT..... 81

5 UNCERTAINTY OF EVALUATION..... 82

APPENDIX A. PHOTOGRAPHS OF EUT

APPENDIX B. SETUP PHOTOGRAPHS

**SUMMARY OF TEST RESULT**

Report Section	FCC Rule	IC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(1)	RSS-210 A8.4(2)	Number of Channels	$\geq 15\text{Chs}$	Pass	-
3.2	15.247(a)(1)	RSS-210 A8.1(b)	Hopping Channel Separation	$\geq 2/3$ of 20dB BW	Pass	-
3.3	15.247(a)(1)	RSS-210 A8.1(d)	Dwell Time of Each Channel	$\leq 0.4\text{sec}$ in 31.6sec period	Pass	-
3.4	15.247(a)(1)	RSS-210 A8.1(a)	20dB Bandwidth	NA	Pass	-
3.4	-	RSS-Gen 4.6.1	99% Bandwidth	-	Pass	-
3.5	15.247(b)(1)	RSS-210 A8.1(b)	Peak Output Power	$\leq 1\text{ W}$ for 1Mbps $\leq 125\text{ mW}$ for 2, 3Mbps	Pass	-
3.6	15.247(d)	RSS-210 A8.5	Conducted Band Edges	$\leq 20\text{dBc}$	Pass	-
3.7	15.247(d)	RSS-210 A8.5	Conducted Spurious Emission	$\leq 20\text{dBc}$	Pass	-
3.8	15.247(d)	RSS-210 A8.5	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 3.40 dB at 30.000 MHz
3.9	15.207	RSS-Gen 7.2.4	AC Conducted Emission	15.207(a)	Pass	Under limit 8.90 dB at 0.158 MHz
3.10	15.203 & 15.247(b)	RSS-210 A8.4	Antenna Requirement	N/A	Pass	-

1 General Description

1.1 Applicant

Sony Corporation

1-7-1 Konan Minato-ku, Tokyo, 108-0075 JAPAN

1.2 Manufacturer

Foxconn

Foxconn Industrial District, Export Processing Zone, No. 50, Beijing Zhong Road, Yantai Economic And Technological Development Area, Shandong, P.R.China

1.3 Feature of Equipment Under Test

Product Feature	
Equipment	Tablet device
Brand Name	VAIO
Model Name	SVJ202B15L
Integrated Module	Brand Name: Intel Model Name: 6235ANHMW
FCC ID	AK8SVJ202B15L
EUT supports Radios application	WLAN 11abgn / Bluetooth 2.1/3.0/4.0/NFC
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Product Specification subjective to this standard	
Tx/Rx Frequency Range	2402 MHz ~ 2480 MHz
Number of Channels	79
Carrier Frequency of Each Channel	2402+n*1 MHz; n=0~78
Maximum Output Power to Antenna	Bluetooth (1Mbps) : 6.77 dBm (0.0048 W) Bluetooth EDR (2Mbps) : 5.41 dBm (0.0035 W) Bluetooth EDR (3Mbps) : 5.75 dBm (0.0038 W)
99% Occupied Bandwidth	Bluetooth (1Mbps) : 0.856MHz Bluetooth EDR (2Mbps) : 1.184MHz Bluetooth EDR (3Mbps) : 1.152MHz
Antenna Type	PIFA Antenna type with gain 1.75 dBi
Type of Modulation	Bluetooth 2.1 BDR (1Mbps) : GFSK Bluetooth 2.1 EDR (2Mbps) : $\pi/4$ -DQPSK Bluetooth 2.1 EDR (3Mbps) : 8-DPSK Bluetooth 3.0 BDR (1Mbps) : GFSK Bluetooth 3.0 EDR (2Mbps) : $\pi/4$ -DQPSK Bluetooth 3.0 EDR (3Mbps) : 8-DPSK

1.5 Testing Site

Test Site	SPORTON INTERNATIONAL INC.			
Test Site Location	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL: +886-3-3273456 / FAX: +886-3-3284978			
Test Site No.	Sporton Site No.			FCC/IC Registration No.
	TH02-HY	CO05-HY	03CH06-HY	722060/4086B-1

The test site complies with ANSI C63.4 2003 requirement.



1.6 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC Public Notice DA 00-705
- ♦ ANSI C63.10-2009
- ♦ IC RSS-210 Issue 8
- ♦ IC RSS-Gen Issue 3
- ♦ NOTICE 2012-DRS0126

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. Per the section 2.2.3 of Notice of 2012-DRS0126, " Receivers Excluded from Industry Canada Requirements", only radiocommunication receivers operating in stand-alone mode within the band 30-960 MHz and scanner receivers are subject to Industry Canada requirements.

2 Test Configuration of Equipment Under Test

2.1 Descriptions of Test Mode

Preliminary tests were performed in different data rates and recorded the RF output power in the following table:

Channel	Frequency	Bluetooth RF Output Power		
		Data Rate / Modulation		
		GFSK	$\pi/4$ -DQPSK	8-DPSK
		1Mbps	2Mbps	3Mbps
Ch00	2402MHz	6.52 dBm	4.47 dBm	4.80 dBm
Ch39	2441MHz	6.77 dBm	5.14 dBm	5.49 dBm
Ch78	2480MHz	6.76 dBm	5.41 dBm	5.75 dBm

Remark:

1. All the test data for each data rate were verified, but only the worst case was reported.
 2. The data rate was set in 1Mbps for all the test items due to the highest RF output power.
- a. The EUT has been associated with peripherals pursuant to ANSI C63.10-2009 and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction (150 KHz to 30 MHz), radiation (9 KHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). Pre-scanned tests, X, Y, Z in three orthogonal panels, and different data rates were conducted to determine the final configuration (X plane as worst plane) from all possible combinations, and the worst mode of radiated spurious emissions is Bluetooth 3Mbps mode, and recorded in this report.
 - b. AC power line Conducted Emission was tested under maximum output power.


2.2 Test Mode

The following summary table is showing all test modes to demonstrate in compliance with the standard.


Summary table of Test Cases			
Test Item	Data Rate / Modulation		
	Bluetooth 1Mbps GFSK	Bluetooth EDR 2Mbps $\pi/4$ -DQPSK	Bluetooth EDR 3Mbps 8-DPSK
Conducted Test Cases	Mode 1: CH00_2402 MHz Mode 2: CH39_2441 MHz Mode 3: CH78_2480 MHz	Mode 4: CH00_2402 MHz Mode 5: CH39_2441 MHz Mode 6: CH78_2480 MHz	Mode 7: CH00_2402 MHz Mode 8: CH39_2441 MHz Mode 9: CH78_2480 MHz
Radiated Test Cases	Bluetooth EDR 1Mbps GFSK Mode 1: CH00_2402 MHz Mode 2: CH39_2441 MHz Mode 3: CH78_2480 MHz		
AC Conducted Emission	Mode 1 :WLAN (2.4G) Link +Bluetooth Link + Camera + H Pattern + MPEG4 + Adapter + RJ-45 + USB 3.0 HD + SD Card + Earphne Mode 2 :WLAN (5G) Link +Bluetooth Link + Camera + H Pattern + MPEG4 + Adapter + RJ-45 + USB 3.0 HD + SD Card + Earphne		
Remark:			
<ol style="list-style-type: none"> For radiated test cases, the worst mode data rate 1Mbps was reported only, because this data rate has the highest RF output power at preliminary tests, and the conducted spurious emissions and conducted band edge measurement for each data rate are no worse than 1Mbps, and no other significantly frequencies found in conducted spurious emission . The worst case of conducted emission is mode 2; only the test data of it was reported. 			

2.3 Connection Diagram of Test System

<Bluetooth Tx Mode>

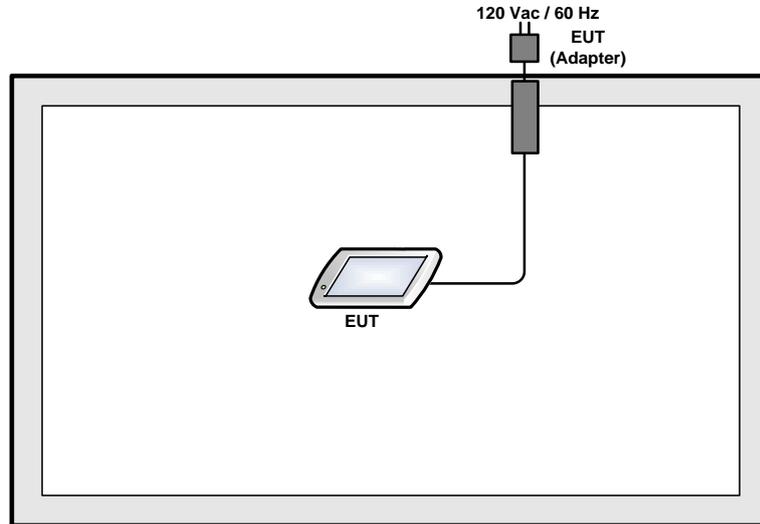

<AC Conducted Emission Mode>

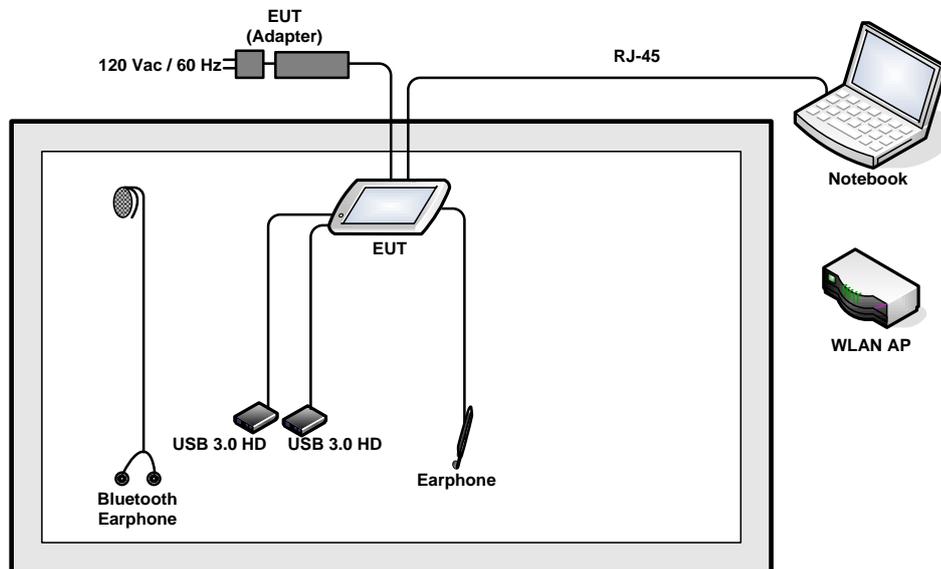

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	WLAN AP	D-Link	DIR-628	KA2DIR628A2	N/A	Unshielded, 1.8 m
2.	Notebook	DELL	Latitude E6320	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
3.	Bluetooth Earphone	Sony Ericsson	MW600	PY7DDA-2029	N/A	N/A
4.	Earphone	Ergotech	ET-E200	FCC DoC	Unshielded, 1.8 m	N/A
5.	USB 3.0 HD	WD	WDBPCK5000ABK-PESN	FCC DoC	Shielded, 0.5 m	N/A
6.	SD Card	SanDisk	MicroSD HC	FCC DoC	N/A	N/A

2.5 Description of RF Function Operation Test Setup

For Bluetooth function, the RF utility, "DRTU.exe" was installed in EUT which was programmed in order to make the EUT continuous transmitting and receiving signals.



2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

Example :

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 4.2 + 10 = 14.2 \text{ (dB)} \end{aligned}$$



For radiated band edges and spurious emission test :

Per part 15.35(c), the EUT Bluetooth average emission level could be determined by the peak emission level applying duty cycle correction factor, to represent averaging over the whole pulse train.

The average level is derived from the peak level corrected with "Duty cycle correction factor".

$$\text{Average Emission Level(dB}\mu\text{V/m)} = \text{Peak Emission Level(dB}\mu\text{V/m)} + \text{Duty cycle correction factor(dB)}$$

$$\text{Duty cycle correction factor(dB)} = 20 * \log(\text{Duty cycle}).$$

Duty cycle = On time / 100 milliseconds

On time = worst case dwell time * hopping number in 100 ms

For example : bluetooth with worst case dwell time 2.9ms and 2 hops in 100 ms, then

$$\text{Duty cycle correction factor(dB)} = 20 * \log((2.9 * 2) / 100) = -24.73 \text{ dB}$$

Following shows an average computation example with duty cycle correction factor = -24.73dB, and the peak emission level is 45.61 dB μ V/m.

Example :

$$\begin{aligned} \text{Average Emission Level(dB}\mu\text{V/m)} &= \text{Peak Emission Level(dB}\mu\text{V/m)} + \text{duty cycle correction factor(dB)} \\ &= 45.61 + (-24.73) = 20.88 \text{ (dB}\mu\text{V/m)} \end{aligned}$$

3 Test Result

3.1 Number of Channel Measurement

3.1.1 Limits of Number of Hopping Frequency

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.


3.1.2 Measuring Instruments

See list of measuring instruments of this test report.

3.1.3 Test Procedure

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings: Span = the frequency band of operation; RBW \geq 1% of the span; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold.
6. The number of hopping frequency used is defined as the number of total channel.
7. Record the measurement data derived from spectrum analyzer.

3.1.4 Test Setup

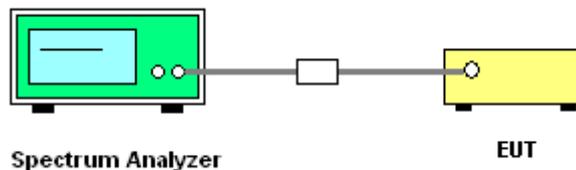


3.1.5 Test Result of Number of Hopping Frequency

Test Mode :	1Mbps	Temperature :	24~26°C
Test Engineer :	Bill Kuo	Relative Humidity :	50~53%


Number of Hopping (Channel)	Adaptive Frequency Hopping (Channel)	Limits (Channel)	Pass/Fail
79	20	> 15	Pass



Number of Hopping Channel Plot on Channel 00 - 78

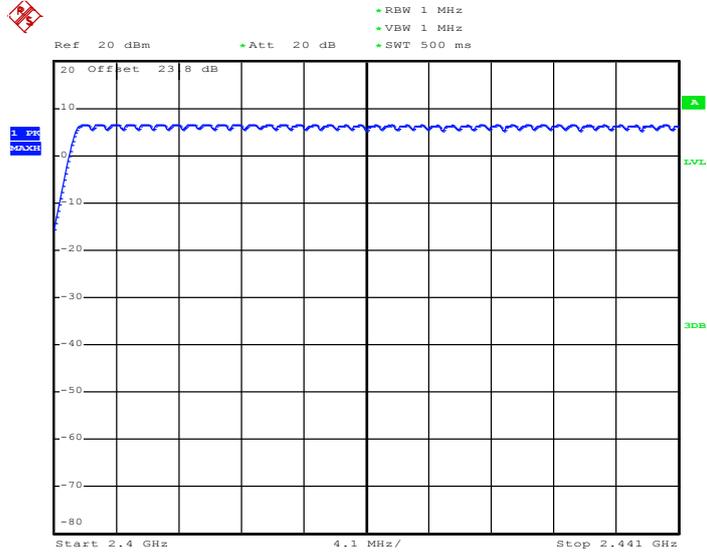

Date: 5.MAR.2013 21:44:03

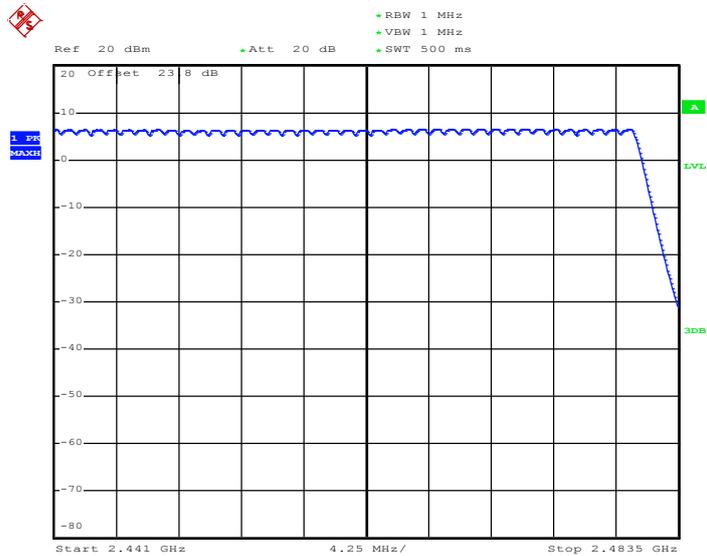

Date: 5.MAR.2013 21:49:16

3.2 Hopping Channel Separation Measurement

3.2.1 Limit of Hopping Channel Separation

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 KHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.


3.2.2 Measuring Instruments

See list of measuring instruments of this test report.

3.2.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings:
Span = wide enough to capture the peaks of two adjacent channels; $RBW \geq 1\%$ of the span;
 $VBW \geq RBW$; Sweep = auto; Detector function = peak; Trace = max hold.
6. Measure and record the results in the test report.

3.2.4 Test Setup

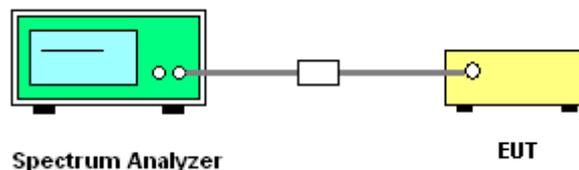




3.2.5 Test Result of Hopping Channel Separation

Test Mode :	1Mbps	Temperature :	24~26°C
Test Engineer :	Bill Kuo	Relative Humidity :	50~53%

Channel	Frequency (MHz)	Frequency Separation (MHz)	(2/3 of 20dB BW) Limits (MHz)	Pass/Fail
00	2402	1.002	0.5947	Pass
39	2441	1.002	0.5947	Pass
78	2480	1.002	0.5947	Pass


Channel Separation Plot on Channel 00 - 01

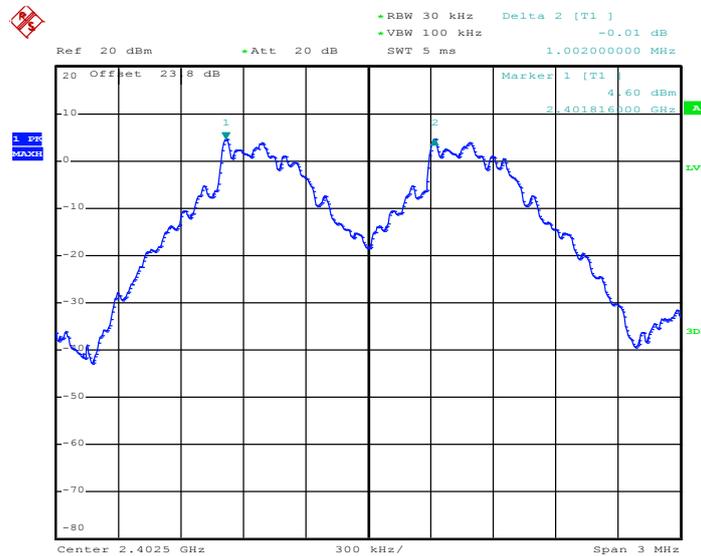

Date: 5.MAR.2013 20:48:09




Channel Separation Plot on Channel 39 - 40

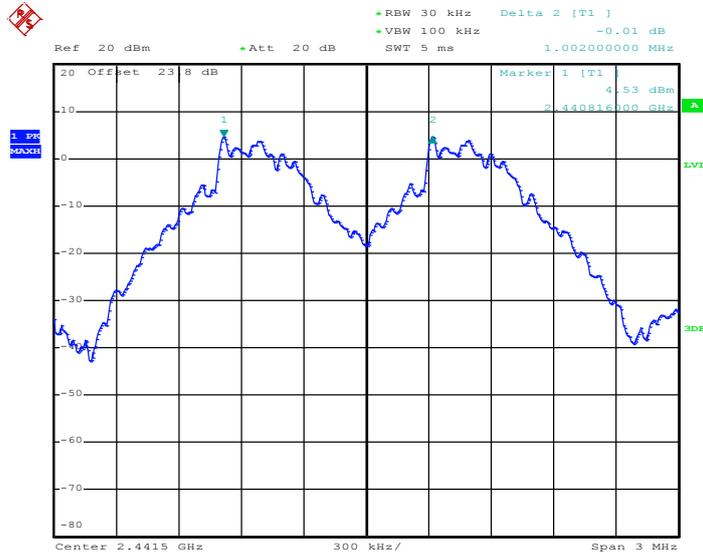

Date: 5.MAR.2013 20:48:56

Channel Separation Plot on Channel 77 - 78

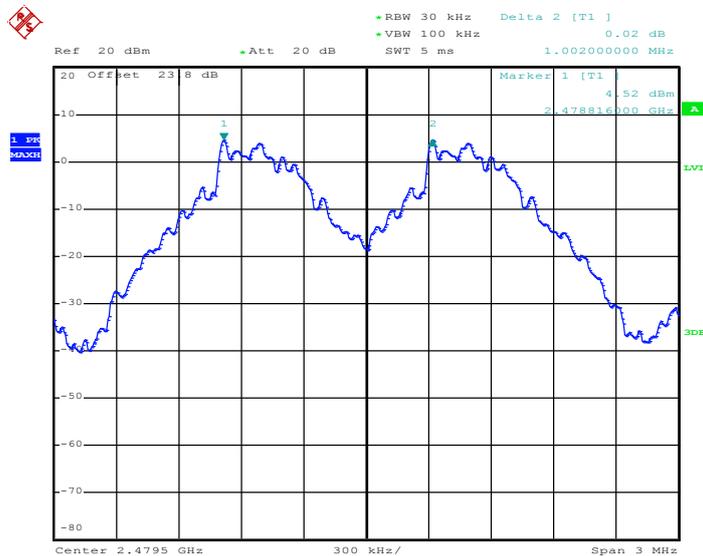


Date: 5.MAR.2013 20:49:39



Test Mode :	2Mbps	Temperature :	24~26°C
Test Engineer :	Bill Kuo	Relative Humidity :	50~53%

Channel	Frequency (MHz)	Frequency Separation (MHz)	(2/3 of 20dB BW) Limits (MHz)	Pass/Fail
00	2402	1.002	0.8560	Pass
39	2441	1.002	0.8560	Pass
78	2480	1.002	0.8560	Pass


Channel Separation Plot on Channel 00 - 01

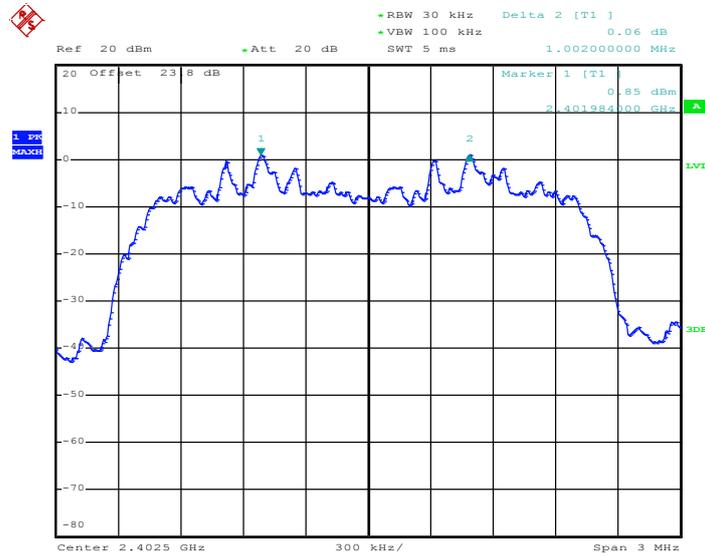

Date: 5.MAR.2013 20:51:11




Channel Separation Plot on Channel 39 - 40

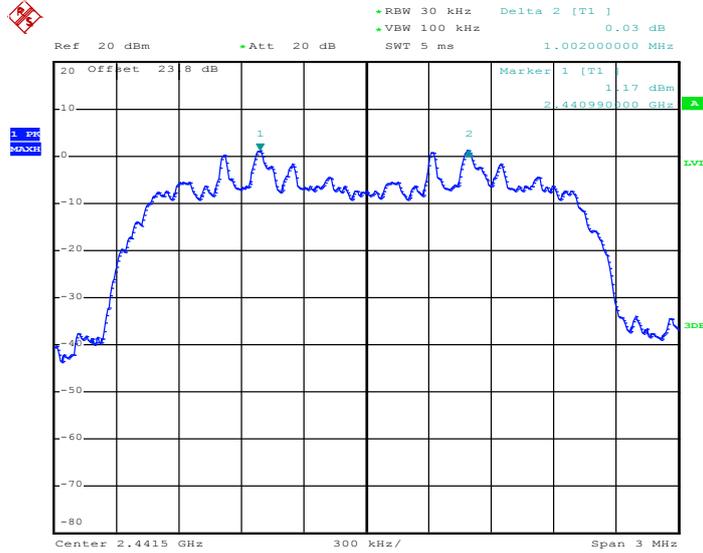

Date: 5.MAR.2013 20:52:46

Channel Separation Plot on Channel 77 - 78

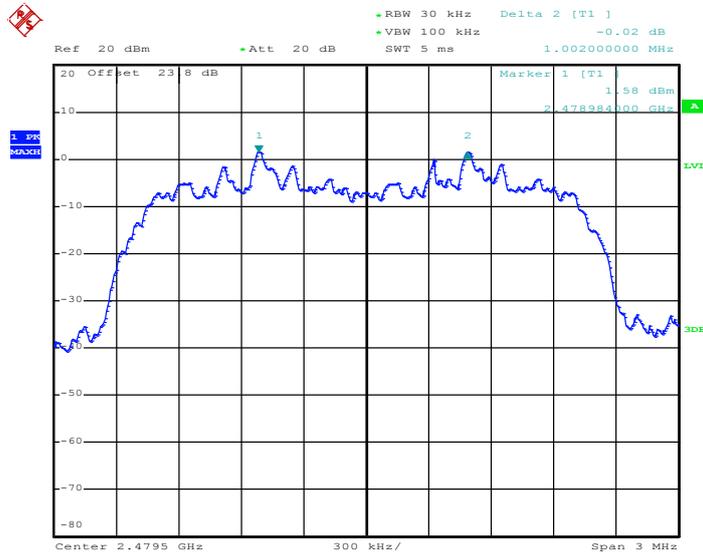


Date: 5.MAR.2013 20:54:23



Test Mode :	3Mbps	Temperature :	24~26°C
Test Engineer :	Bill Kuo	Relative Humidity :	50~53%

Channel	Frequency (MHz)	Frequency Separation (MHz)	(2/3 of 20dB BW) Limits (MHz)	Pass/Fail
00	2402	1.002	0.8120	Pass
39	2441	1.002	0.8200	Pass
78	2480	1.002	0.8160	Pass


Channel Separation Plot on Channel 00 - 01

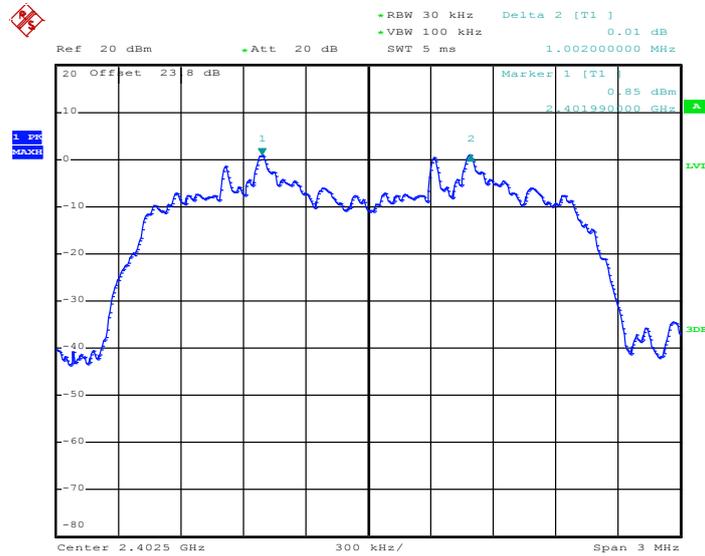

Date: 5.MAR.2013 20:56:29




Channel Separation Plot on Channel 39 - 40

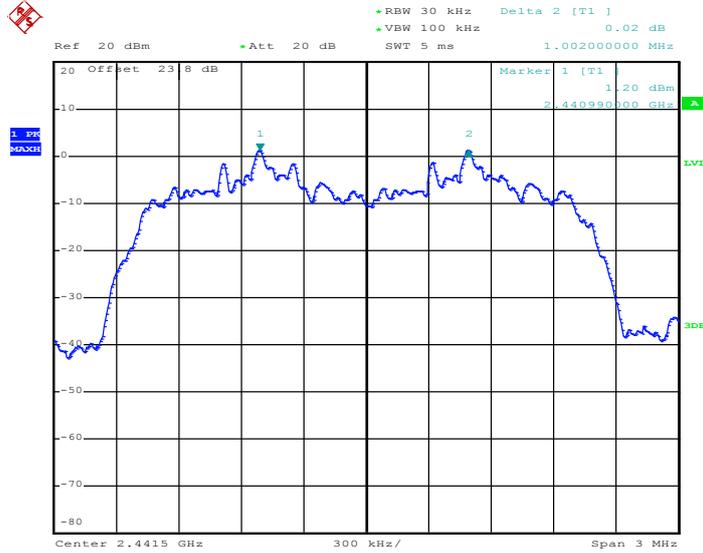

Date: 5.MAR.2013 21:01:03

Channel Separation Plot on Channel 77 - 78

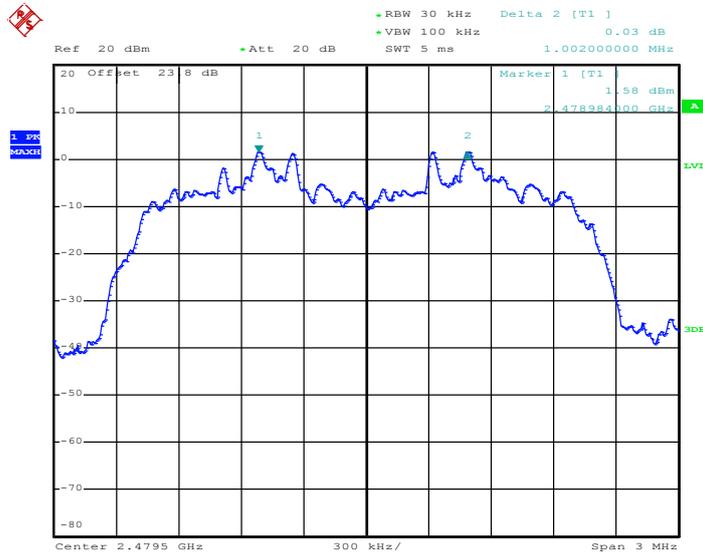

Date: 5.MAR.2013 21:02:17

3.3 Dwell Time Measurement

3.3.1 Limit of Dwell Time

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.


3.3.2 Measuring Instruments

See list of measuring instruments of this test report.

3.3.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings: Span = zero span, centered on a hopping channel; RBW = 1 MHz; VBW \geq RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak; Trace = max hold.
6. Measure and record the results in the test report.

3.3.4 Test Setup

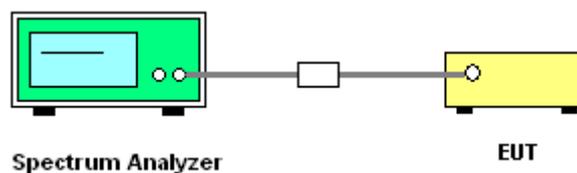



3.3.5 Test Result of Dwell Time

Test Mode :	DH5	Temperature :	24~26°C
Test Engineer :	Bill Kuo	Relative Humidity :	50~53%


Mode	Hopping Channel Number	Hops Over Occupancy Time(hops)	Package Transfer Time (msec)	Dwell Time (sec)	Limits (sec)	Pass/Fail
Normal	79	106.67	2.99	0.32	0.4	Pass
AFH	20	53.33	2.99	0.16	0.4	Pass

Remark:

1. In normal mode, hopping rate is 1600hops/s with 6 slots in 79 hopping channels.
With channel hopping rate (1600 / 6 / 79) in Occupancy Time Limit (0.4 x 79) (s),
Hops Over Occupancy Time comes to (1600 / 6 / 79) x (0.4 x 79) = 106.67 hops.
2. In AFH mode, hopping rate is 800hops/s with 6 slots in 20 hopping channels.
With channel hopping rate (800 / 6 / 20) in Occupancy Time Limit (0.4 x 20) (s),
Hops Over Occupancy Time comes to (800 / 6 / 20) x (0.4 x 20) = 53.33 hops.
3. Dwell Time(s) = Hops Over Occupancy Time (hops) x Package Transfer Time



Package Transfer Time Plot

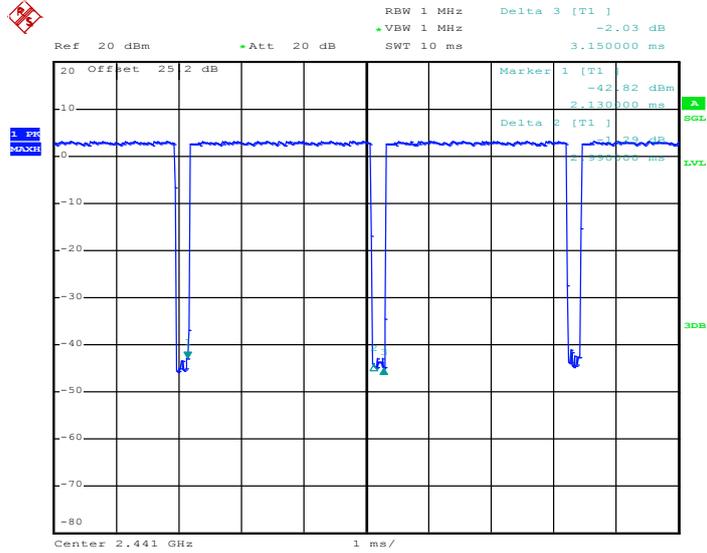

Date: 21.FEB.2013 09:19:27

3.4 20dB and 99% Bandwidth Measurement

3.4.1 Limit of 20dB and 99% Bandwidth

Reporting only


3.4.2 Measuring Instruments

See list of measuring instruments of this test report.

3.4.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Use the following spectrum analyzer settings for 20dB Bandwidth measurement.
Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel;
RBW \geq 1% of the 20 dB bandwidth; VBW \geq RBW; Sweep = auto; Detector function = peak;
Trace = max hold.
5. Use the following spectrum analyzer settings for 99 % Bandwidth measurement.
For 99% Bandwidth measurement, the RBW=30kHz, and VBW = 100kHz. Sweep = auto ;
Detector function = sample. Trace = max hold.
6. Measure and record the results in the test report.

3.4.4 Test Setup

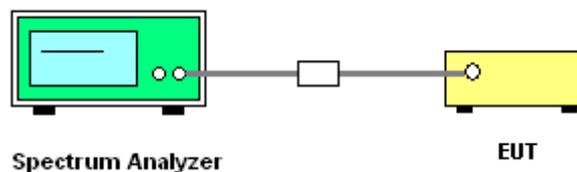




3.4.5 Test Result of 20dB Bandwidth

Test Mode :	1Mbps	Temperature :	24~26°C
Test Engineer :	Bill Kuo	Relative Humidity :	50~53%

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	0.892
39	2441	0.892
78	2480	0.892


20 dB Bandwidth Plot on Channel 00

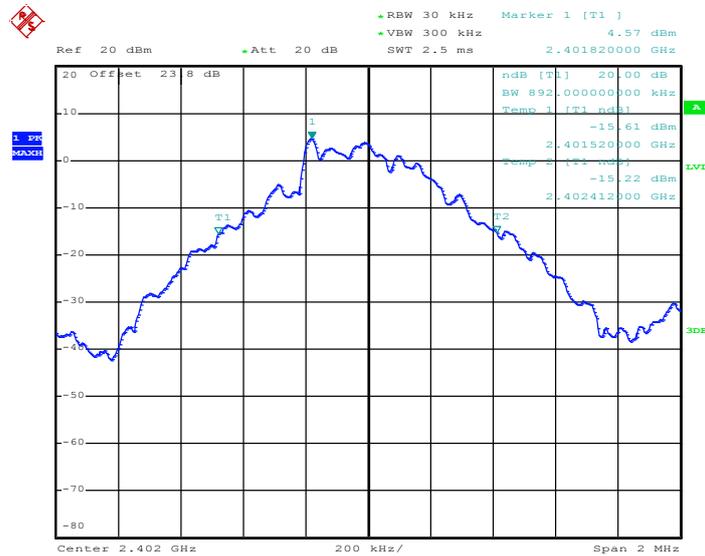

Date: 5.MAR.2013 21:06:07




20 dB Bandwidth Plot on Channel 39

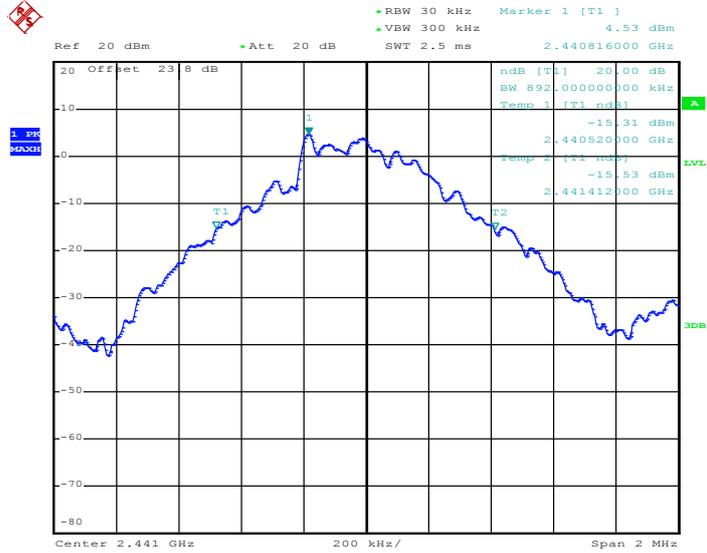

Date: 5.MAR.2013 21:08:53

20 dB Bandwidth Plot on Channel 78

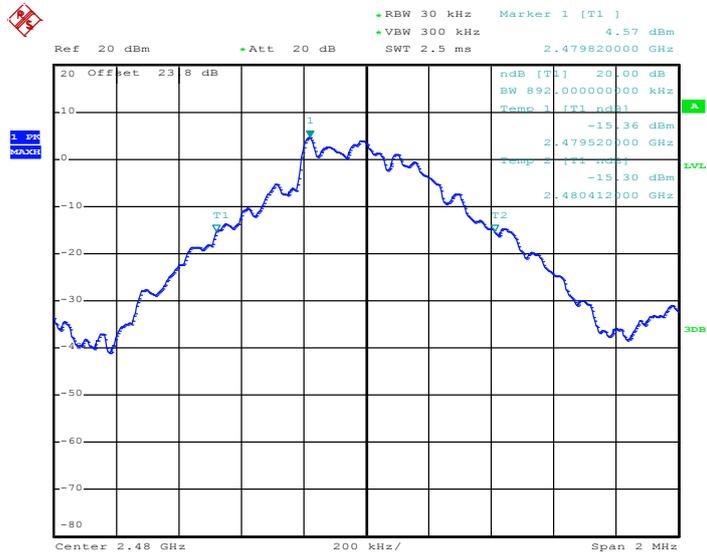


Date: 5.MAR.2013 21:09:29



Test Mode :	2Mbps	Temperature :	24~26°C
Test Engineer :	Bill Kuo	Relative Humidity :	50~53%

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	1.284
39	2441	1.284
78	2480	1.284


20 dB Bandwidth Plot on Channel 00

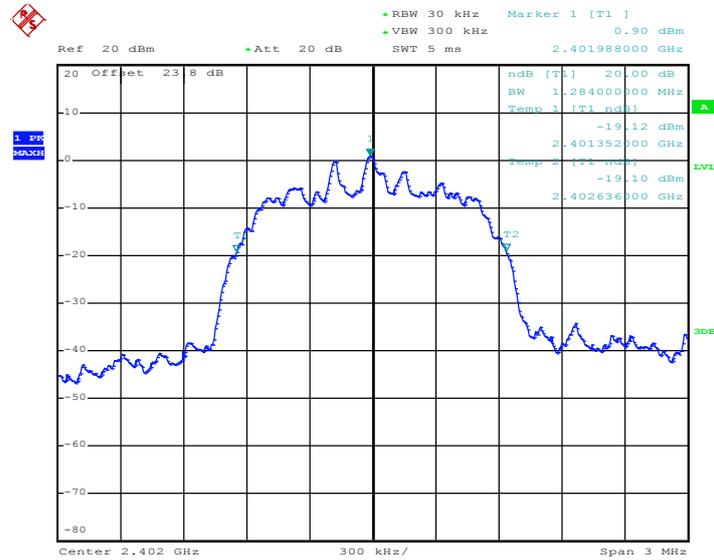

Date: 5.MAR.2013 21:11:30




20 dB Bandwidth Plot on Channel 39

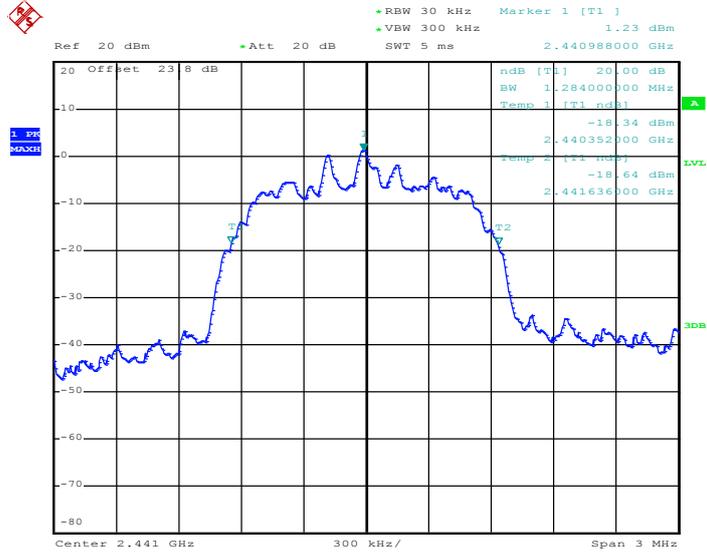

Date: 5.MAR.2013 21:10:53

20 dB Bandwidth Plot on Channel 78

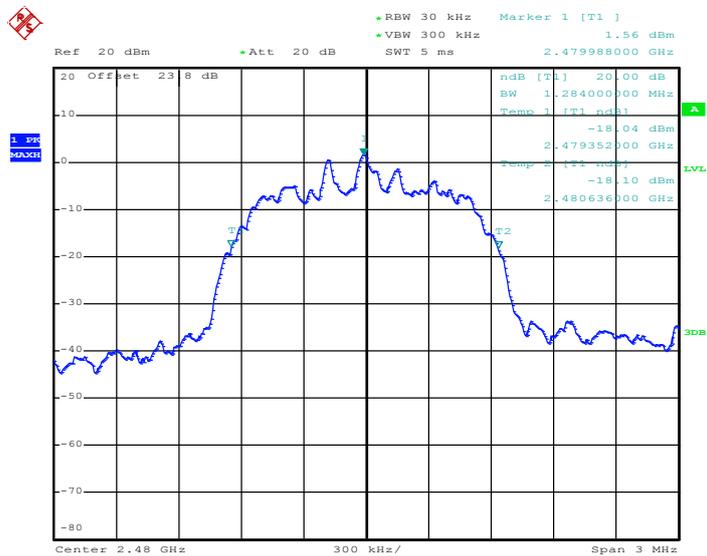


Date: 5.MAR.2013 21:10:16



Test Mode :	3Mbps	Temperature :	24~26°C
Test Engineer :	Bill Kuo	Relative Humidity :	50~53%

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	1.218
39	2441	1.230
78	2480	1.224


20 dB Bandwidth Plot on Channel 00

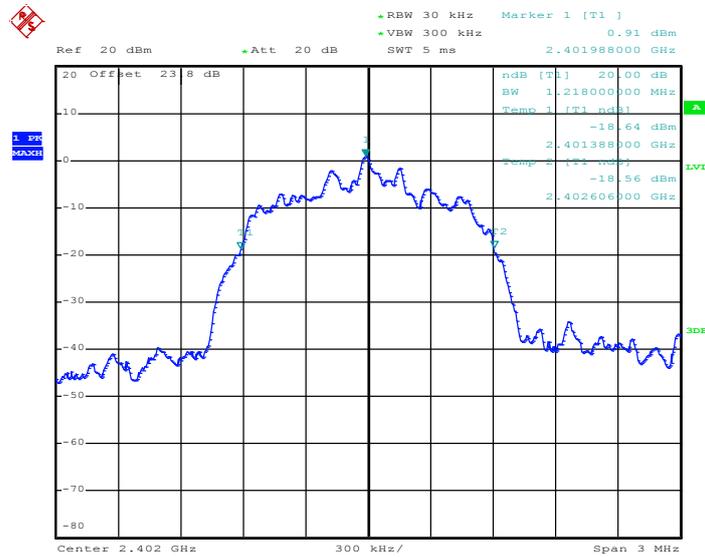

Date: 5.MAR.2013 21:16:17




20 dB Bandwidth Plot on Channel 39

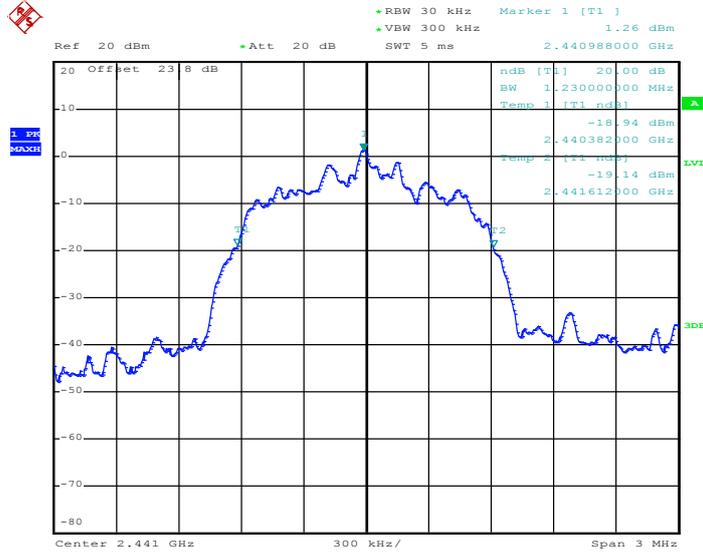

Date: 5.MAR.2013 21:16:49

20 dB Bandwidth Plot on Channel 78

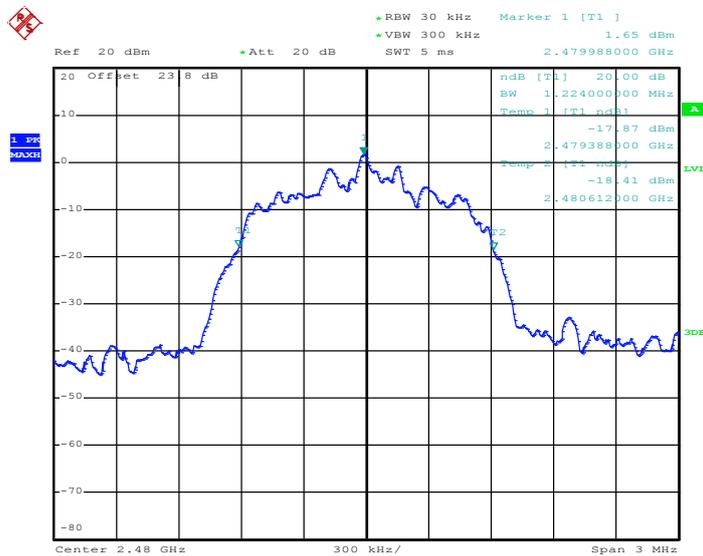


Date: 5.MAR.2013 21:17:24

3.4.6 Test Result of 99% Occupied Bandwidth

Test Mode :	1Mbps	Temperature :	24~26°C
Test Engineer :	Bill Kuo	Relative Humidity :	50~53%

Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)
00	2402	0.852
39	2441	0.856
78	2480	0.856


99% Bandwidth Plot on Channel 00

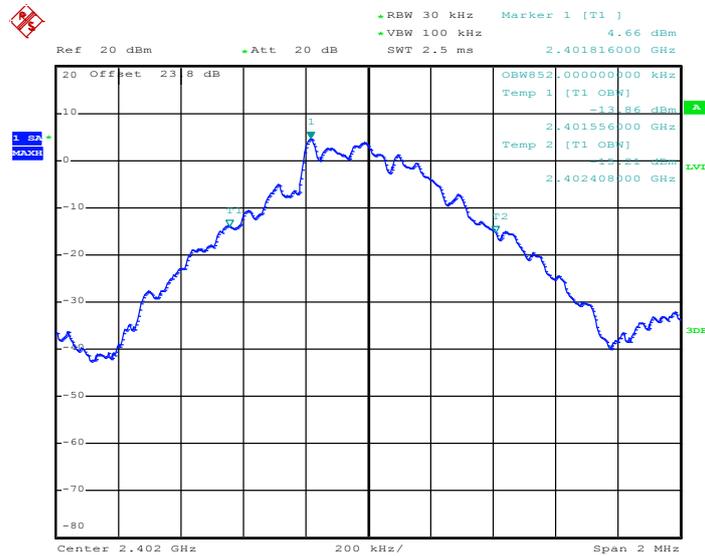

Date: 5.MAR.2013 21:24:35




99% Occupied Bandwidth Plot on Channel 39

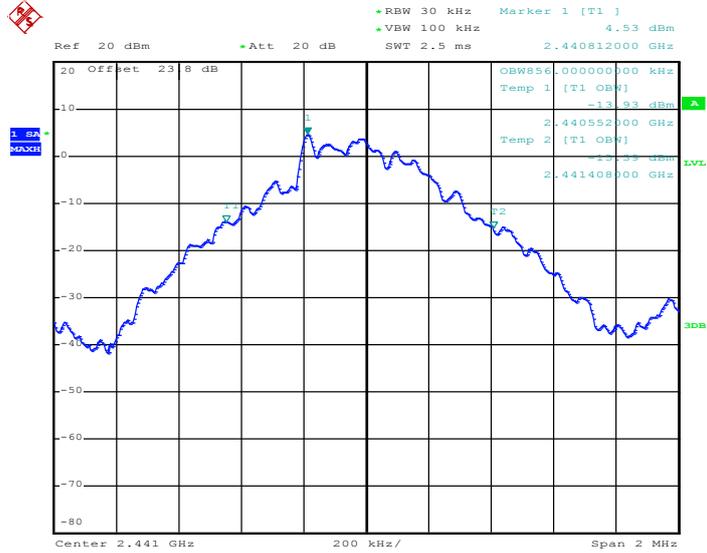

Date: 5.MAR.2013 21:25:20

99% Occupied Bandwidth Plot on Channel 78

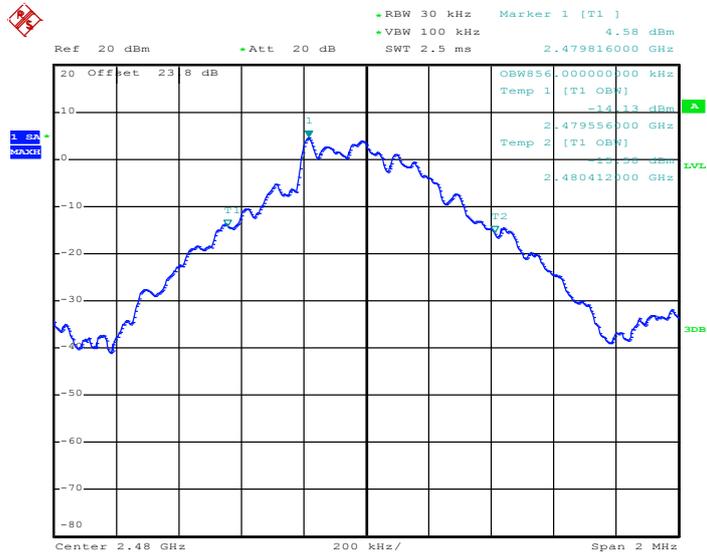


Date: 5.MAR.2013 21:26:26



Test Mode :	2Mbps	Temperature :	24~26°C
Test Engineer :	Bill Kuo	Relative Humidity :	50~53%

Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)
00	2402	1.180
39	2441	1.180
78	2480	1.184


99% Bandwidth Plot on Channel 00

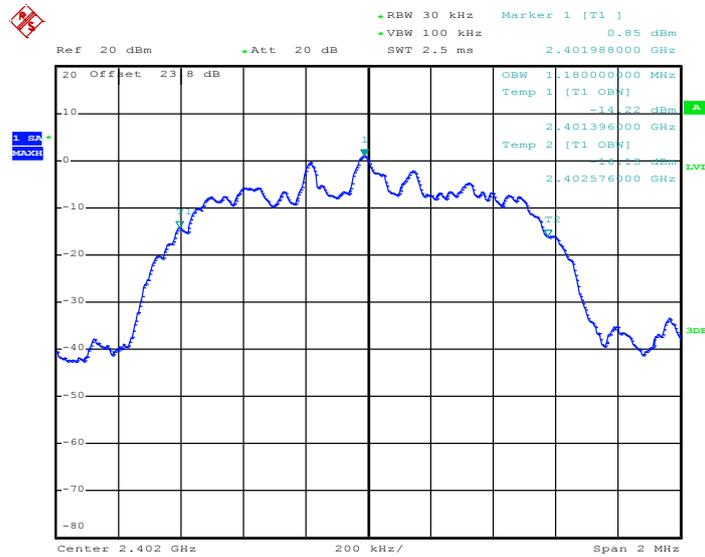

Date: 5.MAR.2013 21:29:15




99% Occupied Bandwidth Plot on Channel 39

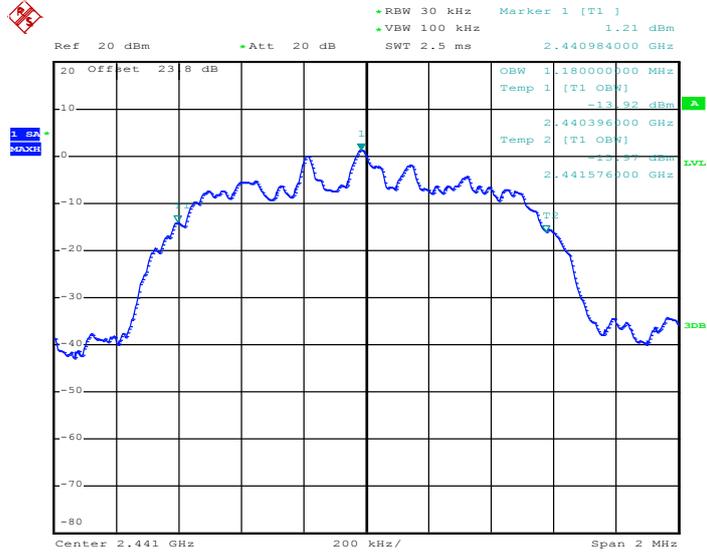

Date: 5.MAR.2013 21:28:26

99% Occupied Bandwidth Plot on Channel 78

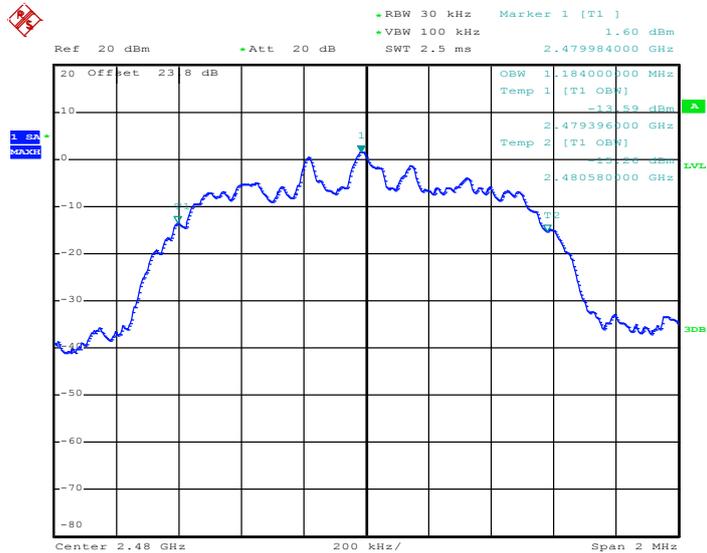


Date: 5.MAR.2013 21:27:15



Test Mode :	3Mbps	Temperature :	24~26°C
Test Engineer :	Bill Kuo	Relative Humidity :	50~53%

Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)
00	2402	1.152
39	2441	1.152
78	2480	1.152


99% Bandwidth Plot on Channel 00

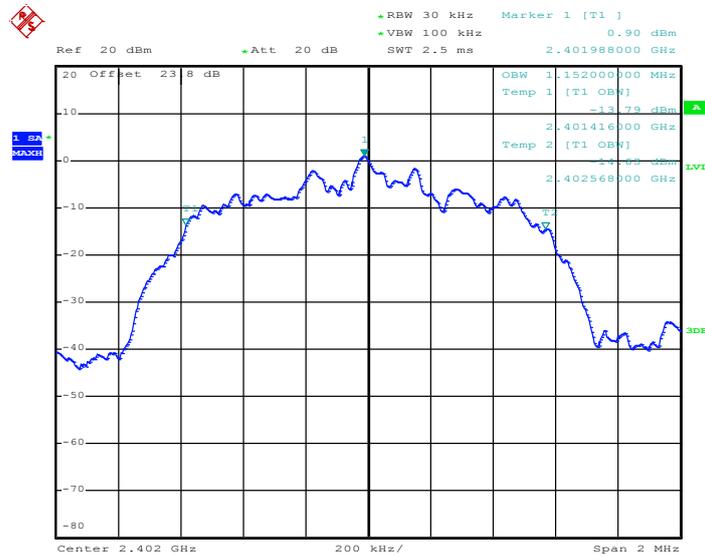

Date: 5.MAR.2013 21:30:26




99% Occupied Bandwidth Plot on Channel 39

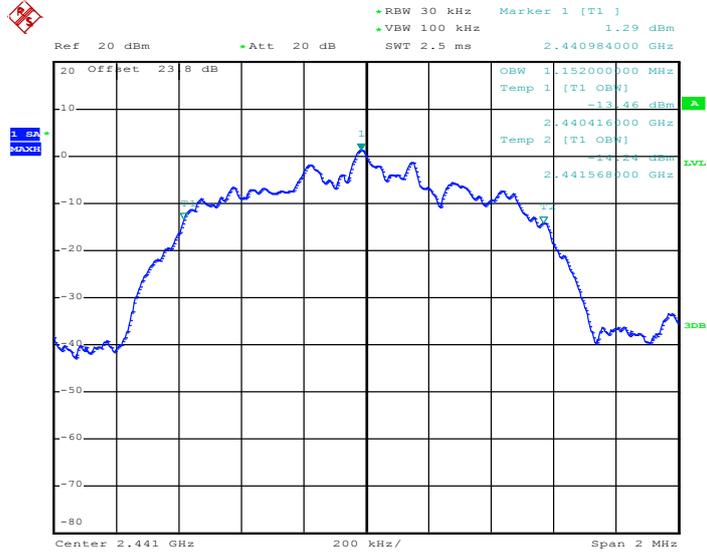

Date: 5.MAR.2013 21:31:40

99% Occupied Bandwidth Plot on Channel 78

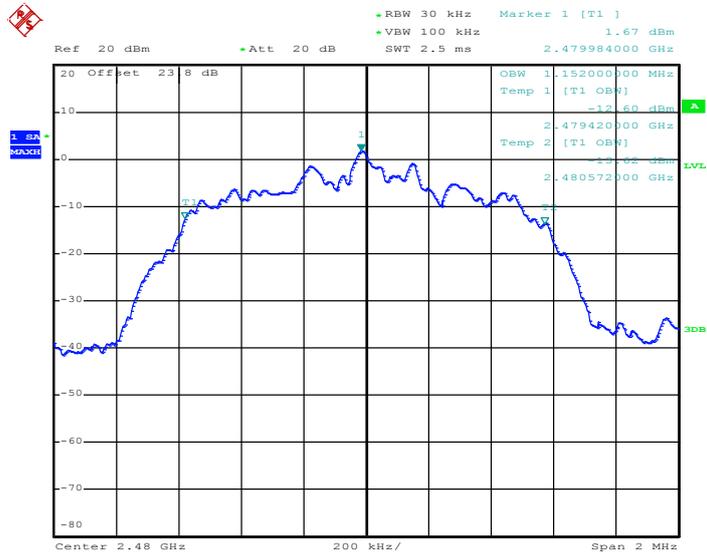

Date: 5.MAR.2013 21:32:30

3.5 Peak Output Power Measurement

3.5.1 Limit of Peak Output Power

Section 15.247 (b) The maximum peak conducted output power of the intentional radiator shall not exceed the following: (1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band 0.125 watts. The power limit for 1Mbps is 1watt, and for 2Mbps, 3Mbps and AFH are 0.125 watts.


3.5.2 Measuring Instruments

See list of measuring instruments of this test report.

3.5.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power with cable loss and record the results in the test report.
5. Measure and record the results in the test report.

3.5.4 Test Setup

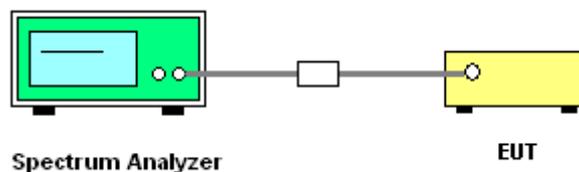




3.5.5 Test Result of Peak Output Power

Test Mode :	1Mbps	Temperature :	24~26°C
Test Engineer :	Bill Kuo	Relative Humidity :	50~53%

Channel	Frequency (MHz)	RF Power (dBm)		
		GFSK	Max. Limits (dBm)	Pass/Fail
		1 Mbps		
00	2402	6.52	20.97	Pass
39	2441	6.77	20.97	Pass
78	2480	6.76	20.97	Pass


Note: For AFH mode using 20 hopping channels, the maximum output power limit is 20.97dBm.

Peak Output Power Plot on Channel 00

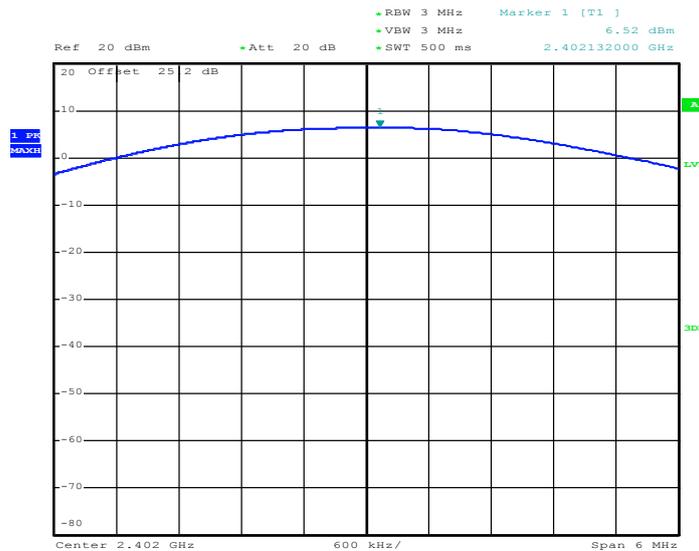




Peak Output Power Plot on Channel 39

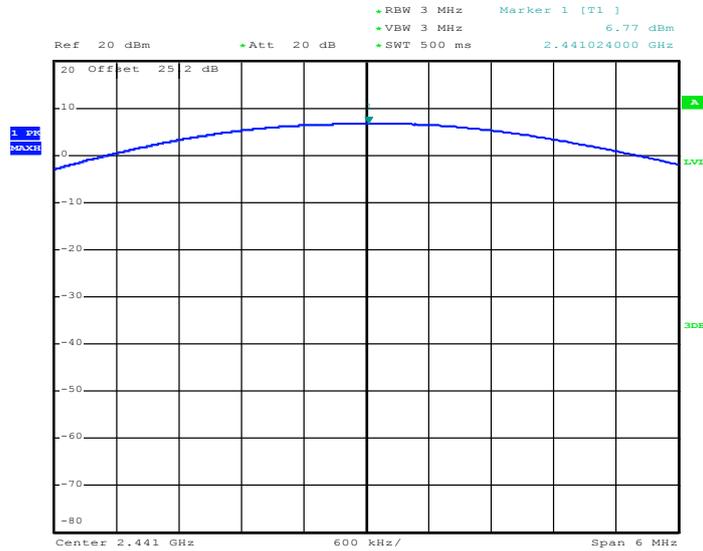

Peak Output Power Plot on Channel 78

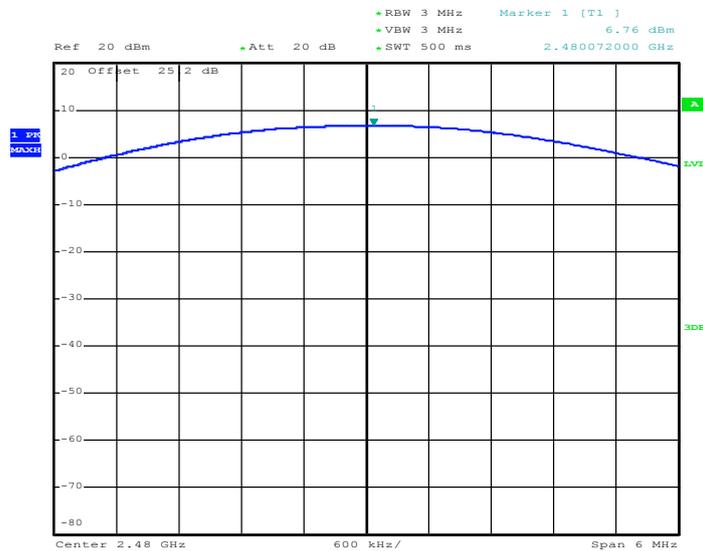




Test Mode :	2Mbps	Temperature :	24~26°C
Test Engineer :	Bill Kuo	Relative Humidity :	50~53%


Channel	Frequency (MHz)	RF Power (dBm)		
		π /4-DQPSK	Max. Limits (dBm)	Pass/Fail
		2 Mbps		
00	2402	4.47	20.97	Pass
39	2441	5.14	20.97	Pass
78	2480	5.41	20.97	Pass

Peak Output Power Plot on Channel 00

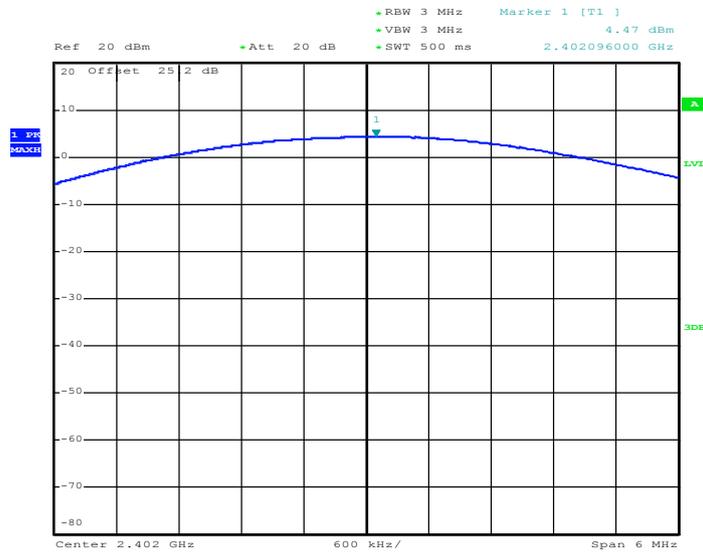




Peak Output Power Plot on Channel 39

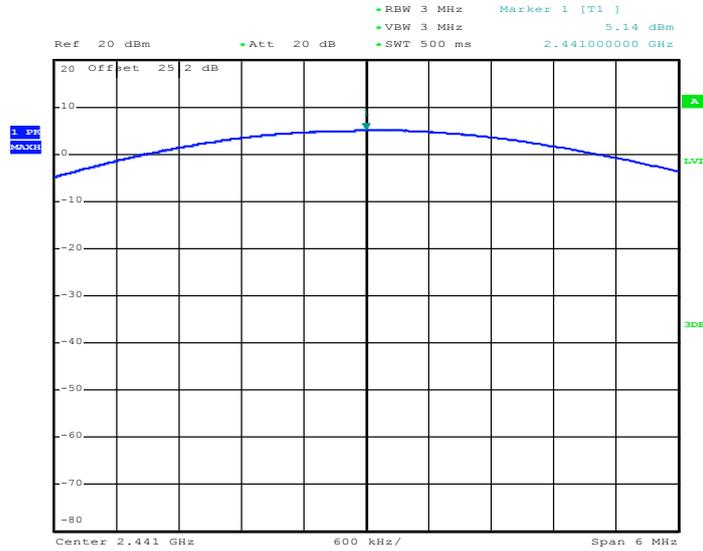

Peak Output Power Plot on Channel 78

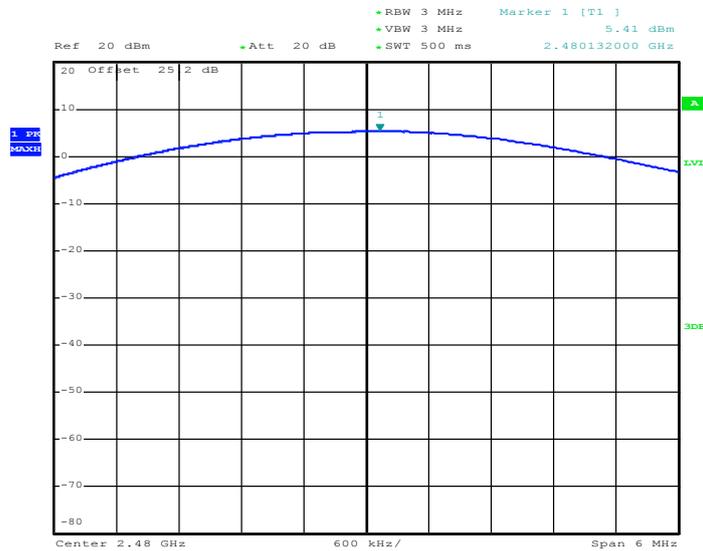




Test Mode :	3Mbps	Temperature :	24~26°C
Test Engineer :	Bill Kuo	Relative Humidity :	50~53%


Channel	Frequency (MHz)	RF Power (dBm)		
		8-DPSK	Max. Limits (dBm)	Pass/Fail
		3 Mbps		
00	2402	4.80	20.97	Pass
39	2441	5.49	20.97	Pass
78	2480	5.75	20.97	Pass

Peak Output Power Plot on Channel 00

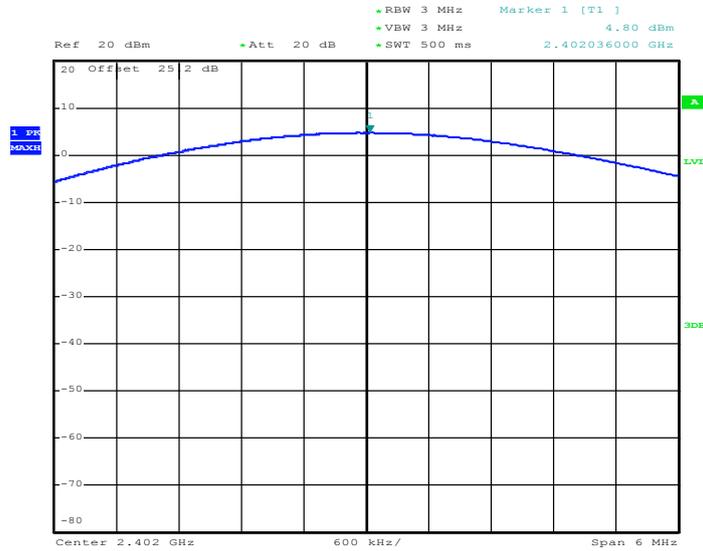




Peak Output Power Plot on Channel 39

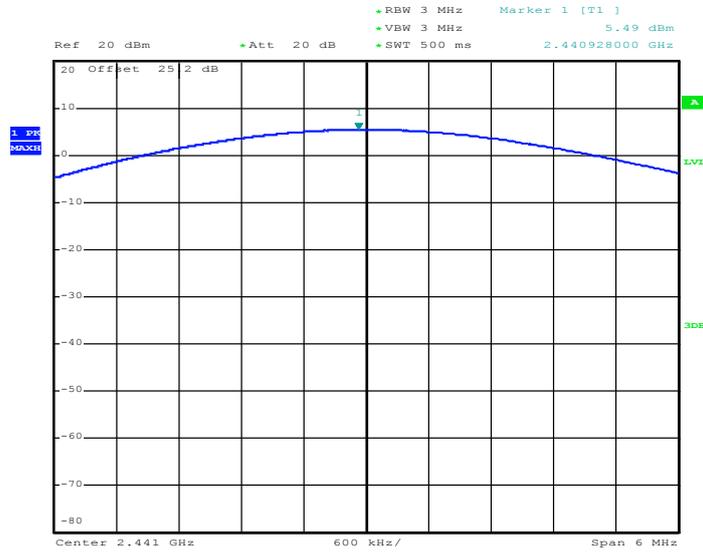

Peak Output Power Plot on Channel 78

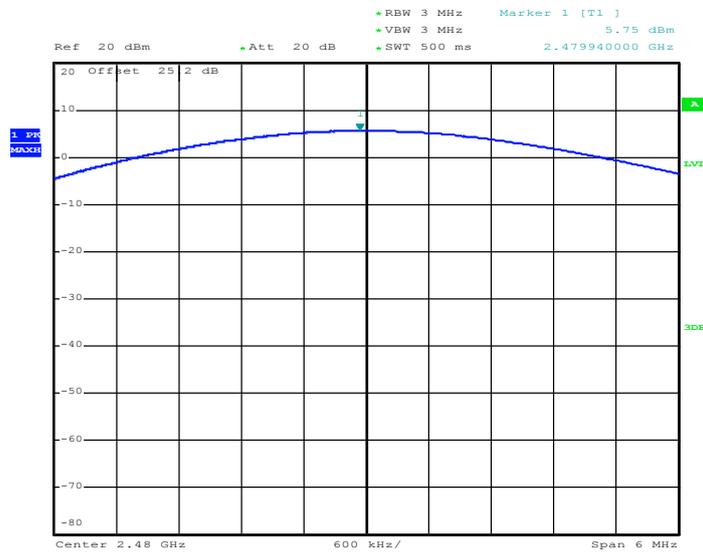

3.6 Conducted Band Edges Measurement

3.6.1 Limit of Band Edges

In any 100 KHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.


3.6.2 Measuring Instruments

See list of measuring instruments of this test report.

3.6.3 Test Procedures

1. The testing follows the guidelines in Band-edge Compliance of RF Conducted Emissions of FCC Public Notice DA 00-705 Measurement Guidelines.
2. Set to the maximum power setting and enable the EUT transmit continuously.
3. Set RBW = 300KHz ($\geq 1\%$ span=30MHz), VBW = 300KHz (\geq RBW). Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 300KHz RBW. The attenuation shall be 30 dB instead of 20 dB when RMS conducted output power procedure is used.
4. Enable hopping function of the EUT and then repeat step 2. and 3.
5. Measure and record the results in the test report.

3.6.4 Test Setup

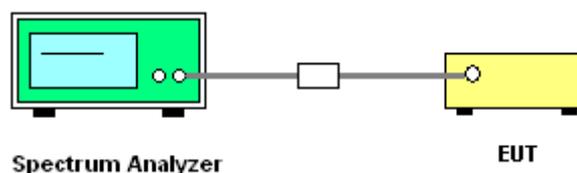




3.6.6 Test Result of Conducted Band Edges


Test Mode :	1Mbps	Temperature :	24~26°C
Test Channel :	00 and 78	Relative Humidity :	50~53%
		Test Engineer :	Bill Kuo

Low Band Edge Plot on Channel 00

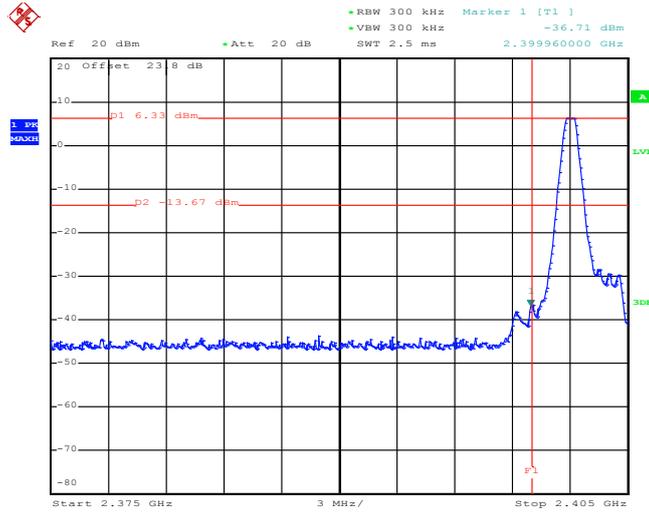

Date: 5.MAR.2013 21:23:05

High Band Edge Plot on Channel 78

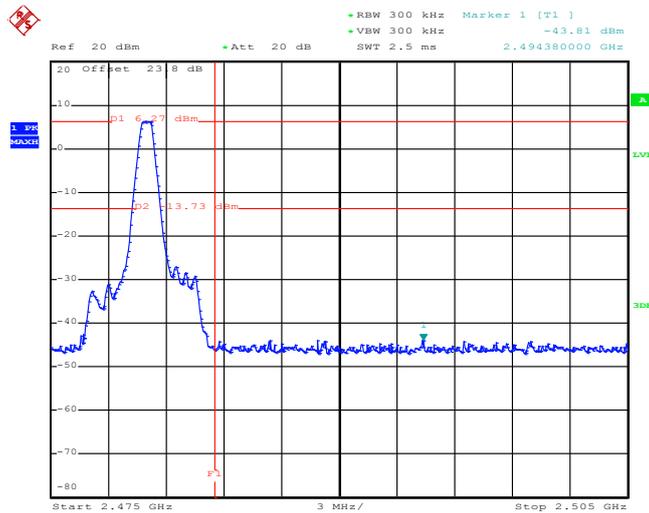


Date: 5.MAR.2013 21:22:36




Test Mode :	2Mbps	Temperature :	24~26°C
Test Channel :	00 and 78	Relative Humidity :	50~53%
		Test Engineer :	Bill Kuo

Low Band Edge Plot on Channel 00

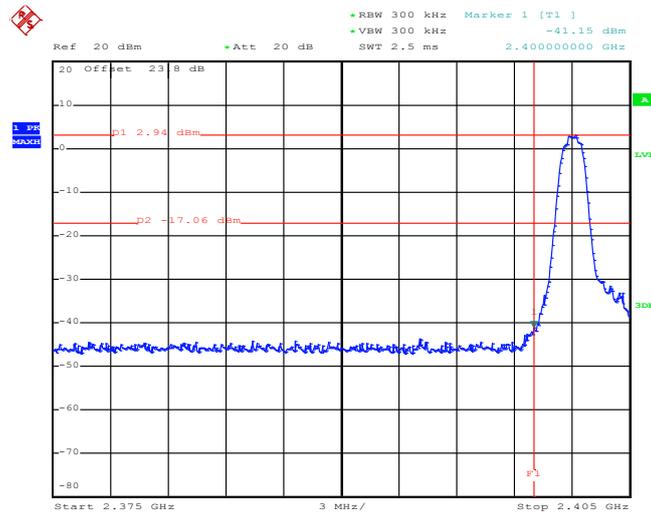

Date: 5.MAR.2013 21:21:02

High Band Edge Plot on Channel 78

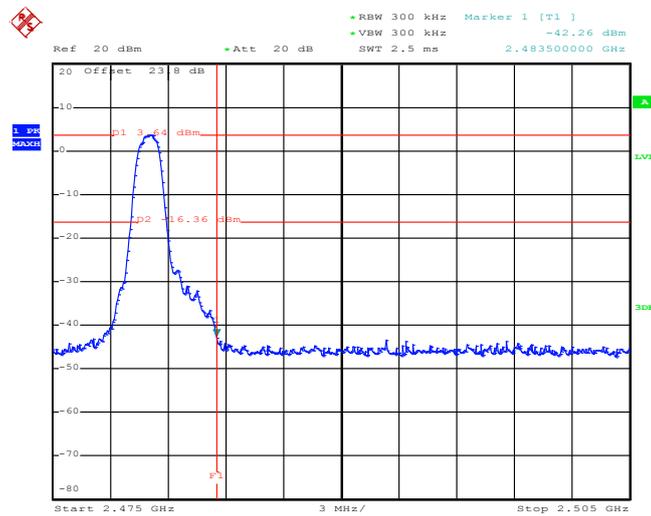


Date: 5.MAR.2013 21:21:56




Test Mode :	3Mbps	Temperature :	24~26°C
Test Channel :	00 and 78	Relative Humidity :	50~53%
		Test Engineer :	Bill Kuo

Low Band Edge Plot on Channel 00

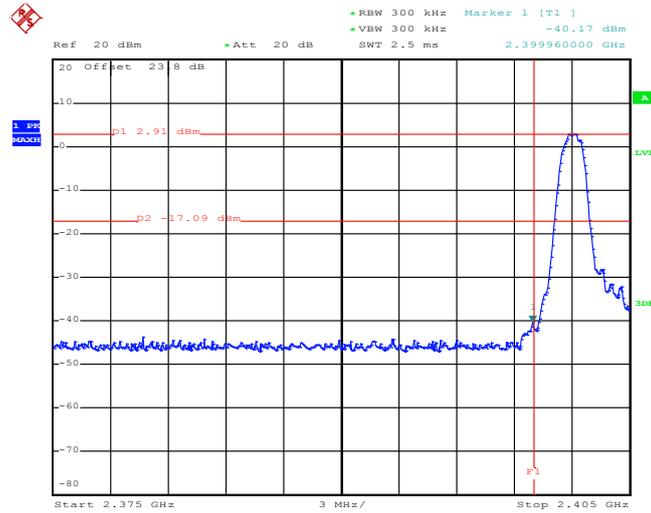

Date: 5.MAR.2013 21:20:12

High Band Edge Plot on Channel 78

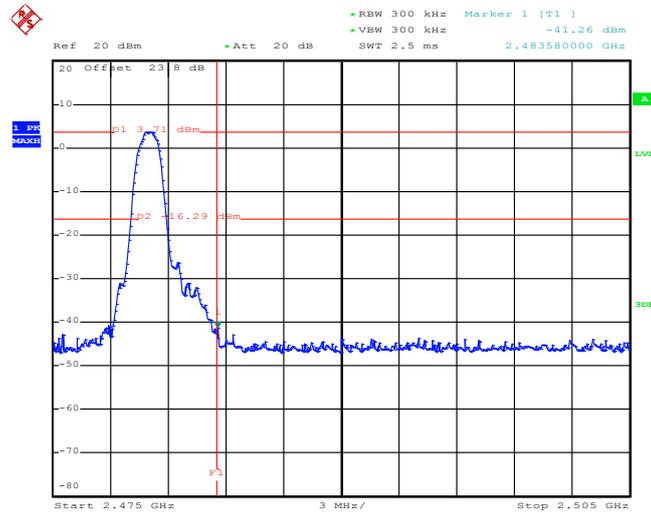


Date: 5.MAR.2013 21:19:48



3.6.7 Test Result of Conducted Hopping Mode Band Edges


Test Mode :	1Mbps	Temperature :	24~26°C
Test Engineer :	Bill Kuo	Relative Humidity :	50~53%

1Mbps Hopping Mode Low Band Edge Plot

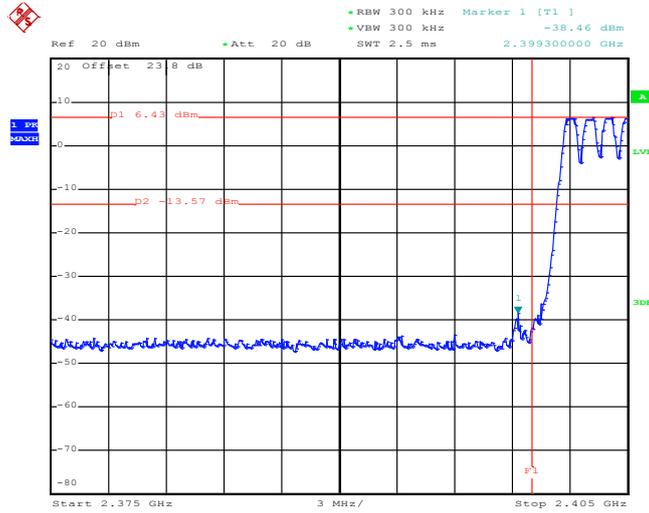

Date: 5.MAR.2013 23:02:07

1Mbps Hopping Mode High Band Edge Plot

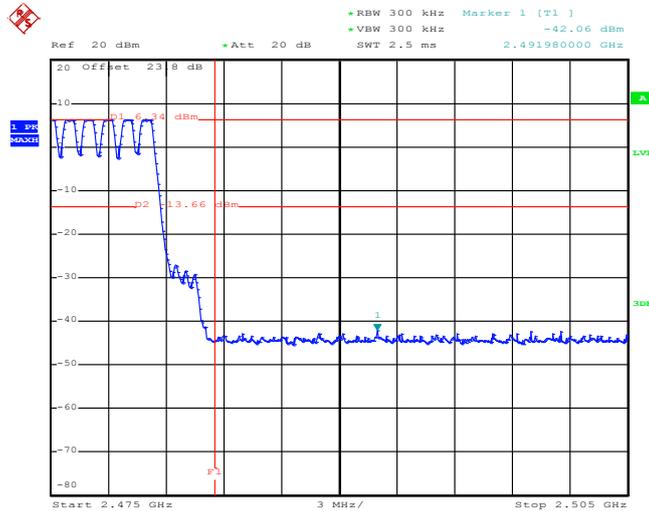


Date: 5.MAR.2013 23:09:07




Test Mode :	2Mbps	Temperature :	24~26°C
Test Engineer :	Bill Kuo	Relative Humidity :	50~53%

2Mbps Hopping Mode Low Band Edge Plot

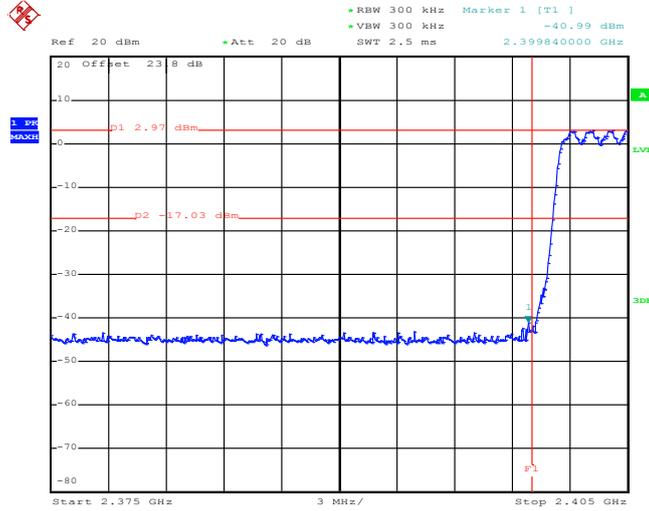

Date: 5.MAR.2013 23:11:15

2Mbps Hopping Mode High Band Edge Plot

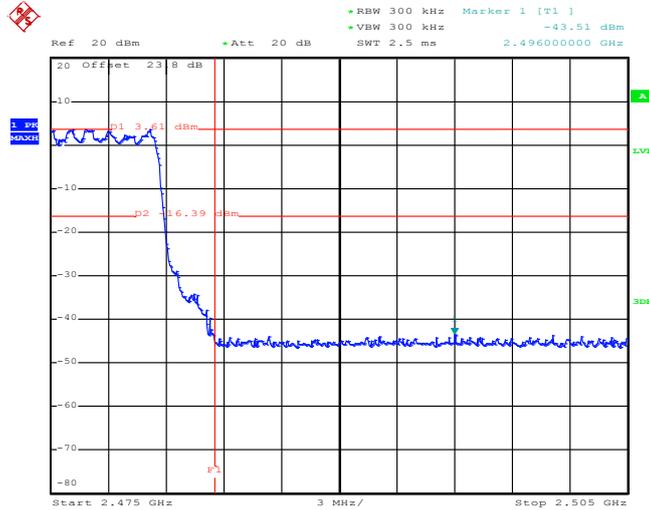


Date: 5.MAR.2013 23:12:13




Test Mode :	3Mbps	Temperature :	24~26°C
Test Engineer :	Bill Kuo	Relative Humidity :	50~53%

3Mbps Hopping Mode Low Band Edge Plot

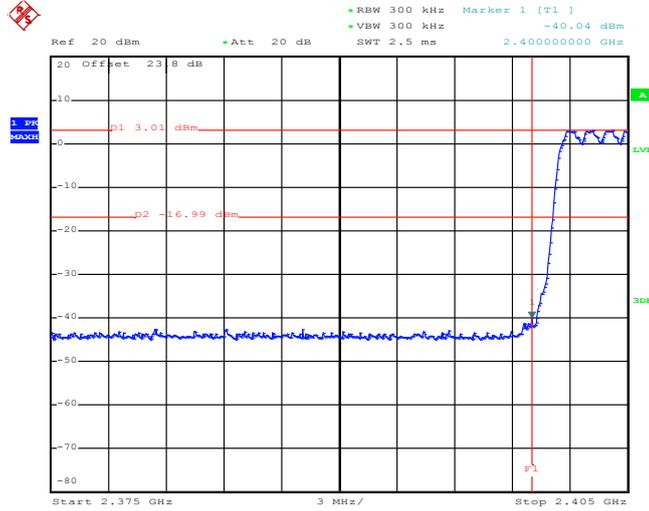

Date: 5.MAR.2013 23:27:50

3Mbps Hopping Mode High Band Edge Plot

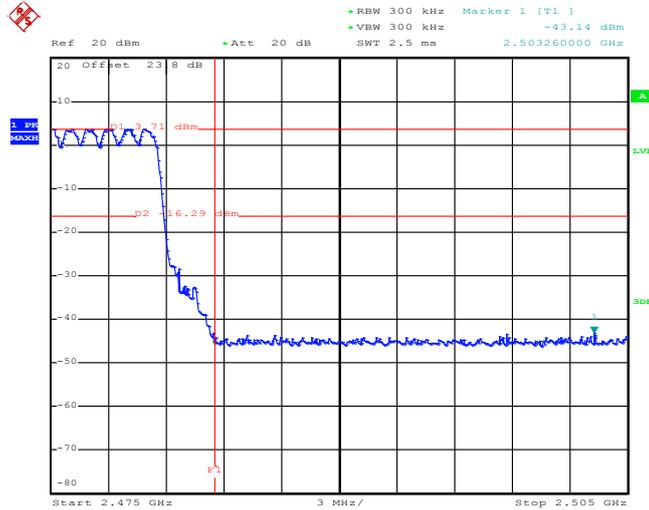

Date: 5.MAR.2013 23:13:31

3.7 Conducted Spurious Emission Measurement

3.7.1 Limit of Spurious Emission Measurement

In any 100 KHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.


3.7.2 Measuring Instruments

See list of measuring instruments of this test report.

3.7.3 Test Procedure

1. The testing follows the guidelines in Spurious RF Conducted Emissions of FCC Public Notice DA 00-705 Measurement Guidelines
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 KHz, VBW = 300KHz, scan up through 10th harmonic. All harmonics / spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 KHz RBW.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.


3.7.4 Test Setup

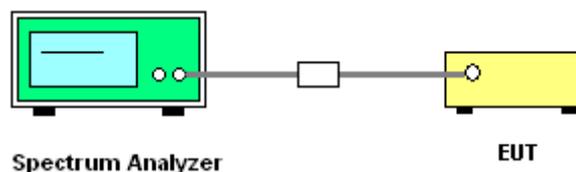

3.7.5 Test Result of Conducted Spurious Emission


Test Mode :	1Mbps	Temperature :	24~26°C
Test Channel :	00	Relative Humidity :	50~53%
		Test Engineer :	Bill Kuo

1Mbps CSE Plot on Ch 00 between 30MHz ~ 3 GHz

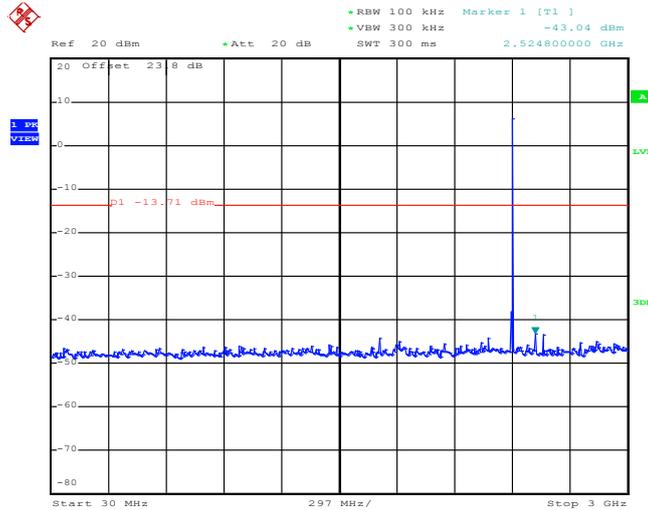

Date: 5.MAR.2013 21:35:58

1Mbps CSE Plot on Ch 00 between 2 GHz ~ 25 GHz

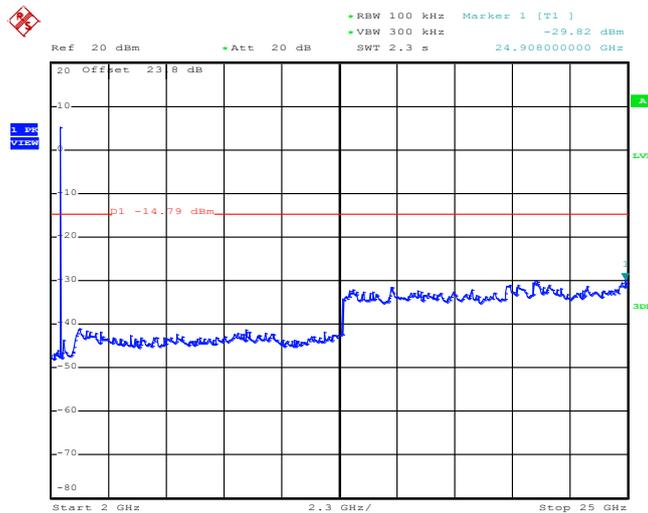


Date: 5.MAR.2013 21:36:20




Test Mode :	1Mbps	Temperature :	24~26°C
Test Channel :	39	Relative Humidity :	50~53%
		Test Engineer :	Bill Kuo

1Mbps CSE Plot on Ch 39 between 30MHz ~ 3 GHz

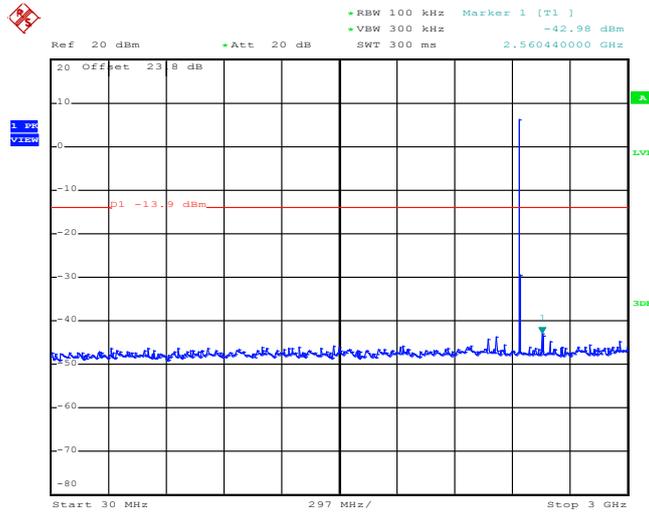

Date: 5.MAR.2013 21:37:08

1Mbps CSE Plot on Ch 39 between 2 GHz ~ 25 GHz

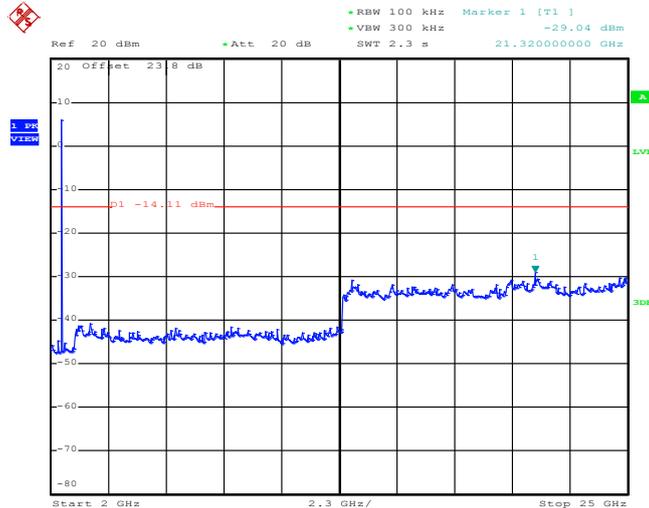


Date: 5.MAR.2013 21:37:30




Test Mode :	1Mbps	Temperature :	24~26°C
Test Channel :	78	Relative Humidity :	50~53%
		Test Engineer :	Bill Kuo

1Mbps CSE Plot on Ch 78 between 30MHz ~ 3 GHz

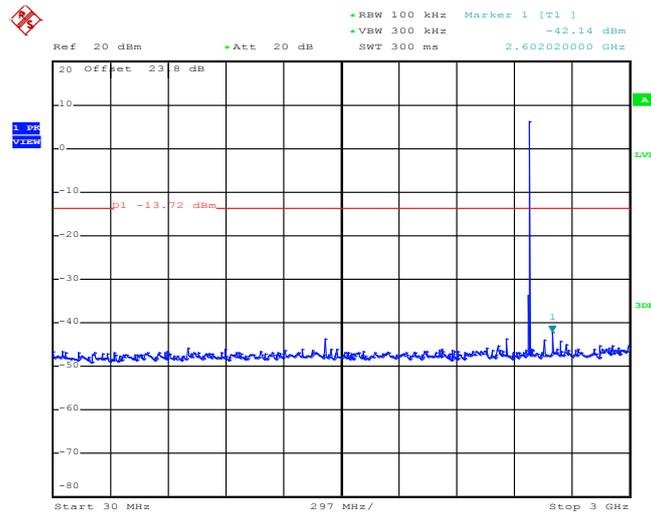

Date: 5.MAR.2013 21:38:12

1Mbps CSE Plot on Ch 78 between 2 GHz ~ 25 GHz

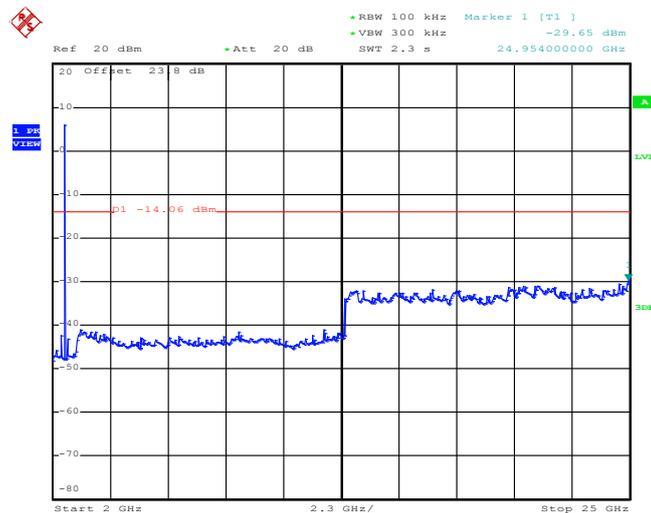


Date: 5.MAR.2013 21:38:33




Test Mode :	2Mbps	Temperature :	24~26°C
Test Channel :	00	Relative Humidity :	50~53%
		Test Engineer :	Bill Kuo

2Mbps CSE Plot on Ch 00 between 30MHz ~ 3 GHz

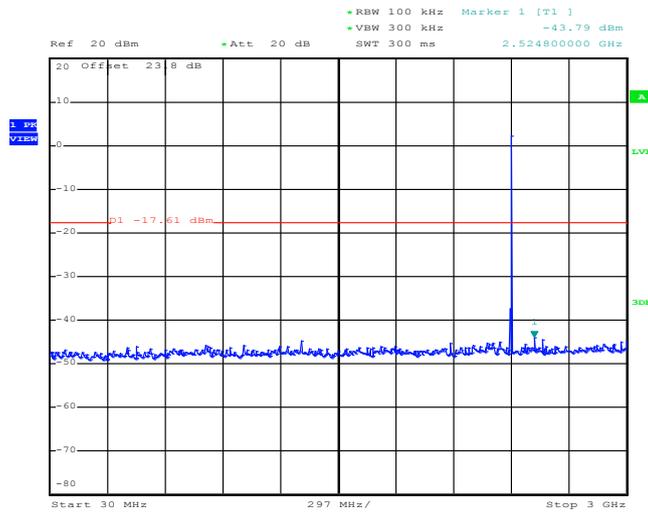

Date: 11.MAR.2013 22:03:45

2Mbps CSE Plot on Ch 00 between 2 GHz ~ 25 GHz

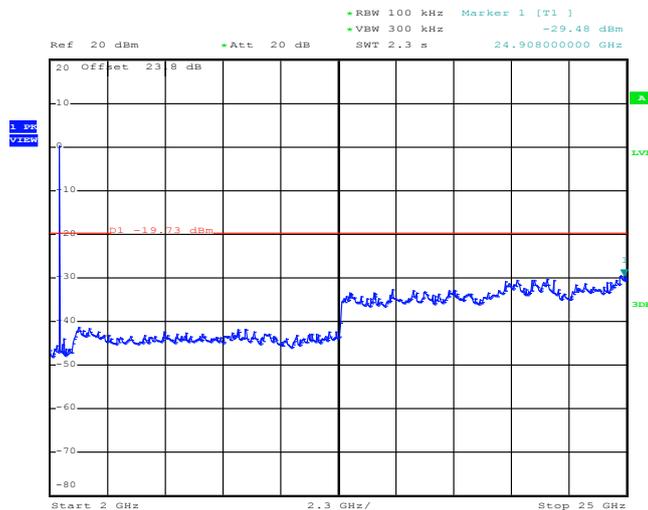


Date: 11.MAR.2013 22:04:06




Test Mode :	2Mbps	Temperature :	24~26°C
Test Channel :	39	Relative Humidity :	50~53%
		Test Engineer :	Bill Kuo

2Mbps CSE Plot on Ch 39 between 30MHz ~ 3 GHz

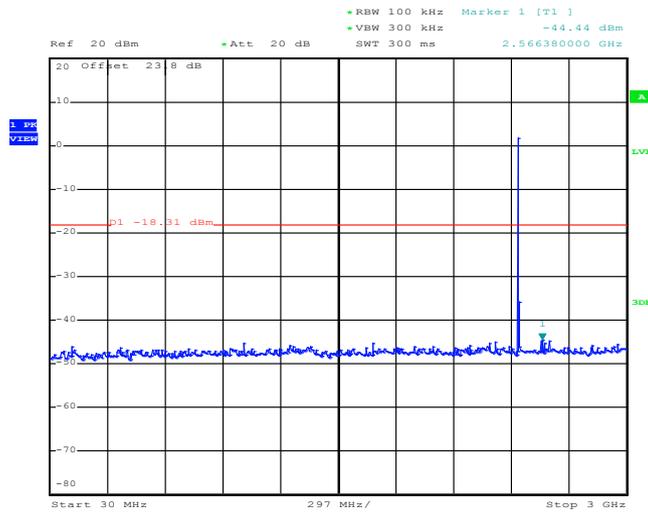

Date: 11.MAR.2013 22:02:49

2Mbps CSE Plot on Ch 39 between 2 GHz ~ 25 GHz

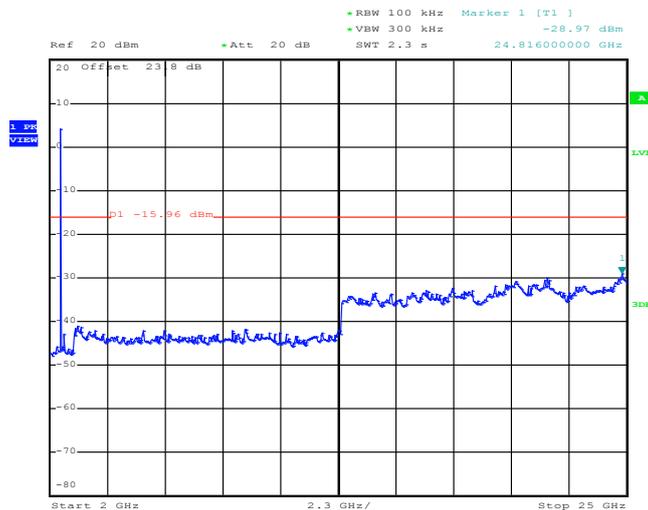


Date: 11.MAR.2013 22:03:10




Test Mode :	2Mbps	Temperature :	24~26°C
Test Channel :	78	Relative Humidity :	50~53%
		Test Engineer :	Bill Kuo

2Mbps CSE Plot on Ch 78 between 30MHz ~ 3 GHz

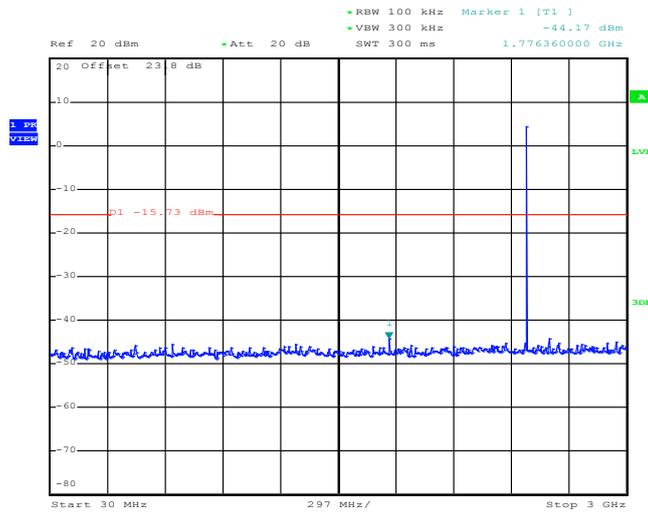

Date: 11.MAR.2013 22:01:48

2Mbps CSE Plot on Ch 78 between 2 GHz ~ 25 GHz

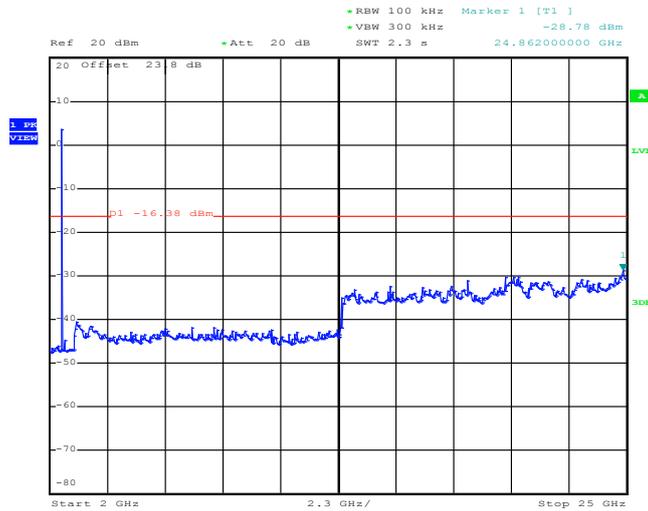


Date: 11.MAR.2013 22:02:10




Test Mode :	3Mbps	Temperature :	24~26°C
Test Channel :	00	Relative Humidity :	50~53%
		Test Engineer :	Bill Kuo

3Mbps CSE Plot on Ch 00 between 30MHz ~ 3 GHz

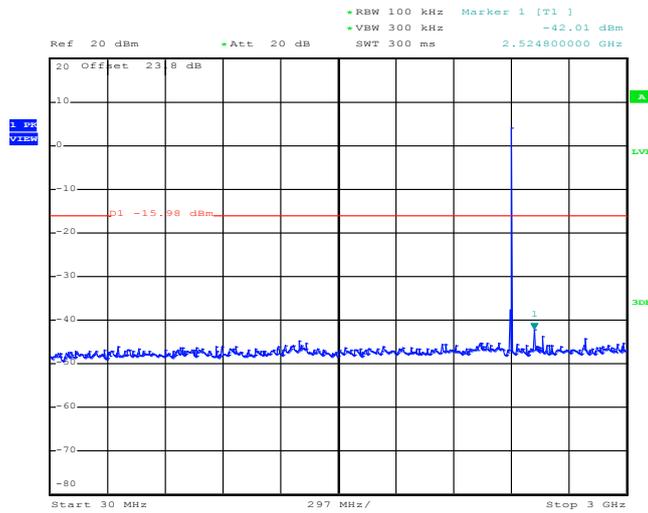

Date: 11.MAR.2013 21:58:48

3Mbps CSE Plot on Ch 00 between 2 GHz ~ 25 GHz

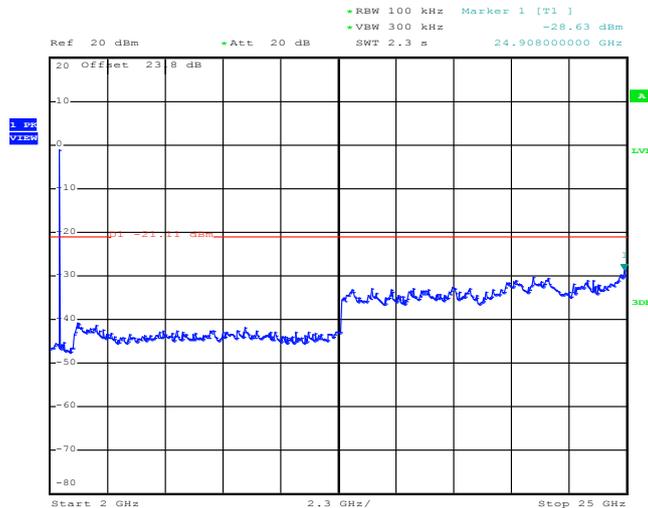


Date: 11.MAR.2013 21:59:10




Test Mode :	3Mbps	Temperature :	24~26°C
Test Channel :	39	Relative Humidity :	50~53%
		Test Engineer :	Bill Kuo

3Mbps CSE Plot on Ch 39 between 30MHz ~ 3 GHz

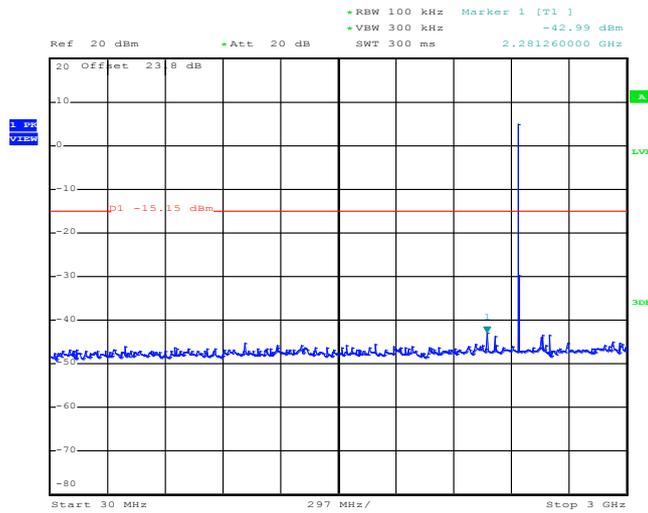

Date: 11.MAR.2013 21:59:47

3Mbps CSE Plot on Ch 39 between 2 GHz ~ 25 GHz

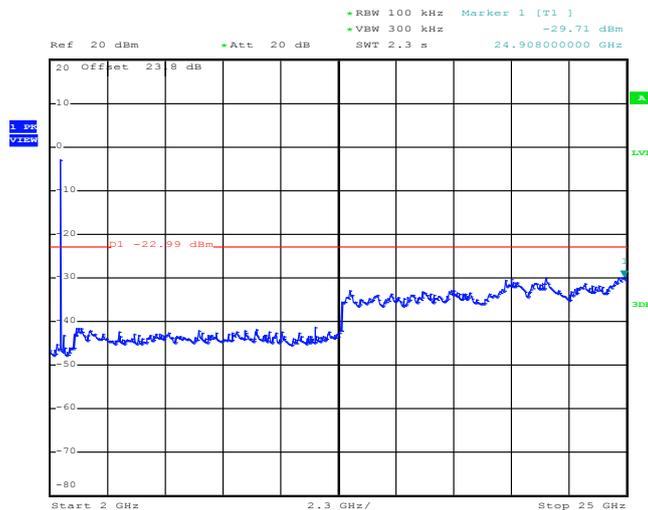


Date: 11.MAR.2013 22:00:09




Test Mode :	3Mbps	Temperature :	24~26°C
Test Channel :	78	Relative Humidity :	50~53%
		Test Engineer :	Bill Kuo

3Mbps CSE Plot on Ch 78 between 30MHz ~ 3 GHz

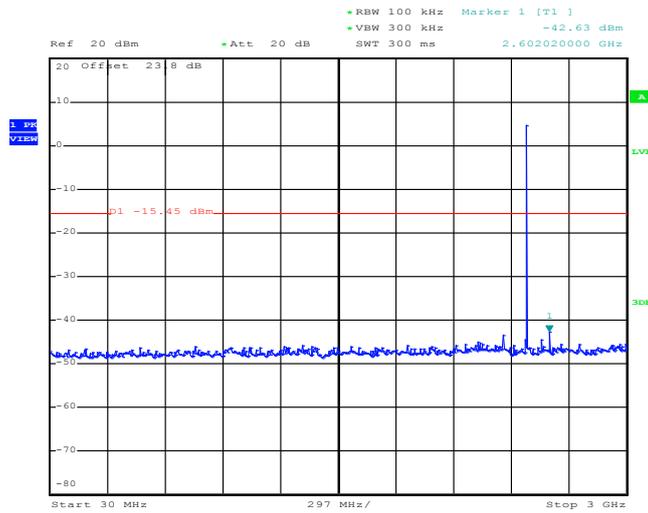

Date: 11.MAR.2013 22:00:44

3Mbps CSE Plot on Ch 78 between 2 GHz ~ 25 GHz

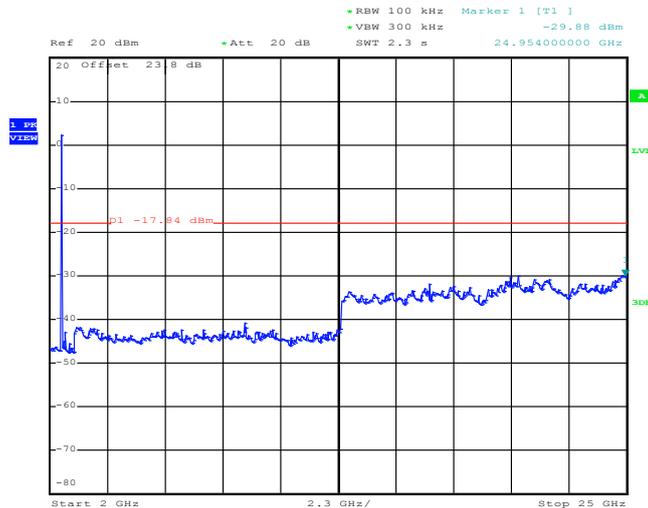

Date: 11.MAR.2013 22:01:06



3.8 Radiated Band Edges and Spurious Emission Measurement

3.8.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 KHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(KHz)	300
0.490 – 1.705	24000/F(KHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.8.2 Measuring Instruments

See list of measuring instruments of this test report.




3.8.3 Test Procedures

1. The testing follows the guidelines in Spurious Radiated Emissions of FCC Public Notice DA 00-705 Measurement Guidelines and the guidelines in ANSI C63.10-2009.
2. The EUT was placed on a turntable with 0.8 meter above ground.
3. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 KHz for $f < 1$ GHz, RBW=1MHz for $f > 1$ GHz ; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold for peak
 - (3) For average measurement: use duty cycle correction factor method per 15.35(c).
Duty cycle = On time/100 milliseconds
On time = $N_1 * L_1 + N_2 * L_2 + \dots + N_{n-1} * L_{n-1} + N_n * L_n$
Where N_1 is number of type 1 pulses, L_1 is length of type 1 pulses, etc.
Average Emission Level = Peak Emission Level + $20 * \log(\text{Duty cycle})$
7. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level


Note: The average levels were calculated from the peak level corrected with duty cycle correction factor (-30.80dB) derived from $20 \log(\text{dwell time}/100\text{ms})$.

3.8.4 Test Setup


For radiated emissions below 30MHz

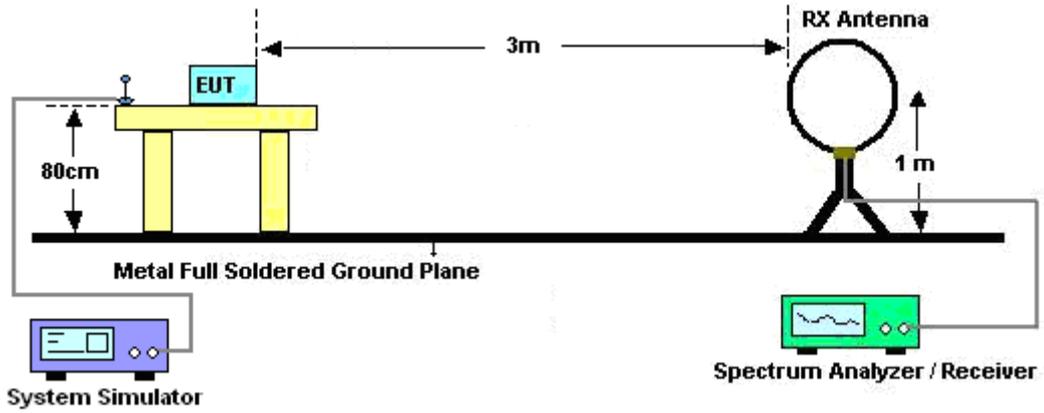

For radiated emissions from 30MHz to 1GHz

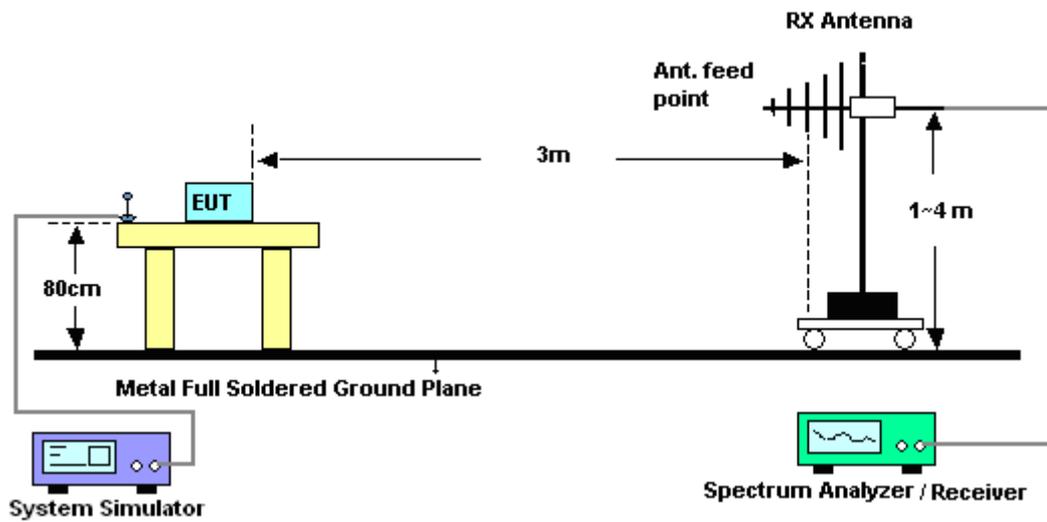

For radiated emissions above 1GHz

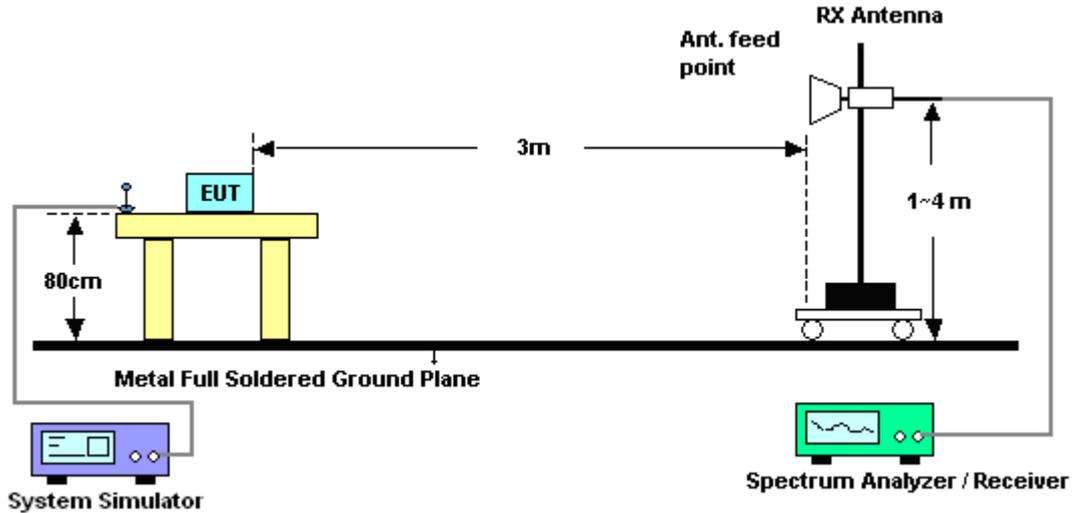


3.8.5 Test Results of Radiated Emissions (9 KHz ~ 30 MHz)

The low frequency, which started from 9 KHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.


3.8.6 Duty cycle correction factor for average measurement

DH5 on time (One Pulse) Plot on Channel 39

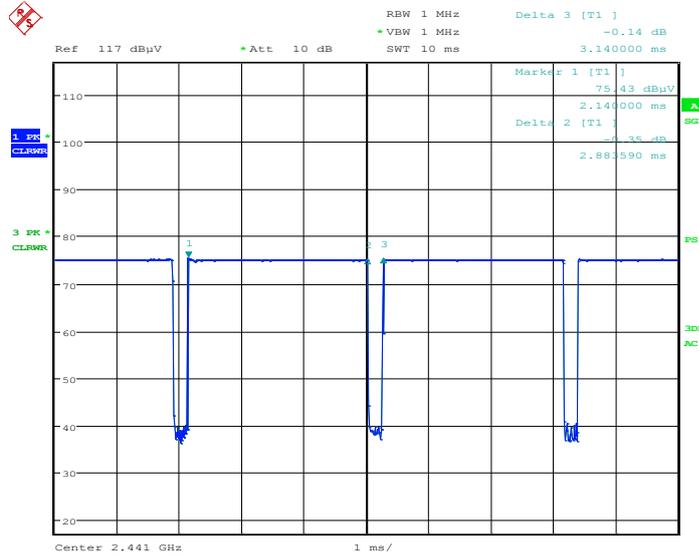

Date: 26.FEB.2013 20:07:44

DH5 on time/100ms (Count Pulses) Plot on Channel 39

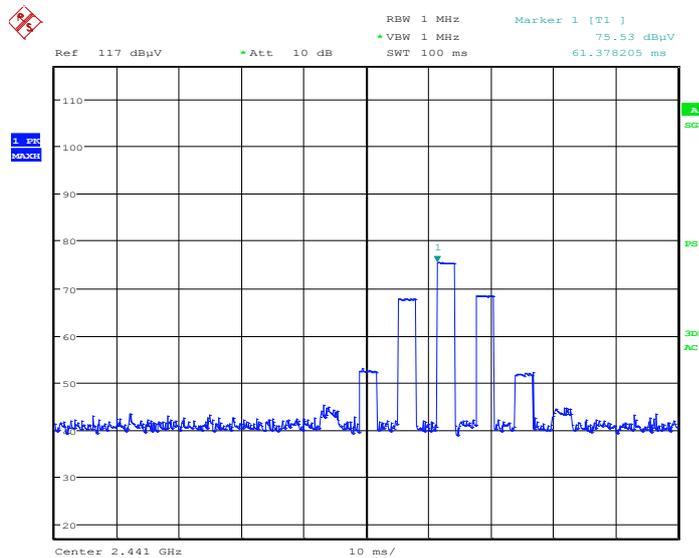

Date: 26.FEB.2013 20:25:09

Note:

1. Worst case Duty cycle = on time/100 milliseconds = 1 * 2.88 / 100 = 2.88 %
2. Worst case Duty cycle correction factor = 20*log(Duty cycle) = -30.80 dB
3. DH5 has the highest duty cycle worst case and is reported.



Duty Cycle Correction Factor Consideration for AFH mode:

There cannot be 2 complete hopping sequences within 100ms period, considering the random hopping behavior, maximum 2 hops can be possibly observed within the period. $[100\text{ms} / 2.88 * 79\text{ms}] = 1 \text{ hop}$

Thus, the maximum possible ON time:

$$2.88\text{ms} \times 1 = 2.88\text{ms}$$

Worst case Duty Cycle Correction factor, which is derived from the maximum possible ON time,

$$20 \times \log(2.88\text{ms}/100\text{ms}) = -30.80 \text{ dB}$$



3.8.7 Test Result of Radiated Band Edges

Test Mode :	1Mbps	Temperature :	26~27°C
Test Channel :	00	Relative Humidity :	46~47%
		Test Engineer :	Kai Wang, Timberland Lin, and Hayden Wu

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2320.44	49.92	-24.08	74	45.88	32.26	6.35	34.57	195	171	Peak
2320.44	19.12	-34.88	54	-	-	-	-	-	-	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2389.83	50.18	-23.82	74	45.93	32.36	6.45	34.56	174	83	Peak
2389.83	19.38	-34.62	54	-	-	-	-	-	-	Average

Test Mode :	1Mbps	Temperature :	26~27°C
Test Channel :	78	Relative Humidity :	46~47%
		Test Engineer :	Kai Wang, Timberland Lin, and Hayden Wu

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.5	55.05	-18.95	74	50.53	32.48	6.59	34.55	100	168	Peak
2483.5	24.25	-29.75	54	-	-	-	-	-	-	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.5	54.86	-19.14	74	50.34	32.48	6.59	34.55	200	85	Peak
2483.5	24.06	-29.94	54	-	-	-	-	-	-	Average



3.8.8 Test Result of Radiated Emission (30 MHz ~ 10th Harmonic)

Test Mode :	1Mbps	Temperature :	26~27°C
Test Channel :	00	Relative Humidity :	46~47%
Test Engineer :	Kai Wang, Timberland Lin, and Hayden Wu	Polarization :	Horizontal
Remark :	1. 2402 MHz is fundamental signal which can be ignored. 2. 3198 MHz and 7206 MHz are not within a restricted band, and its limit line is 20dB below the highest emission level. For example, 95.05dBμV/m - 20dB = 75.05 dBμV/m.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
94.26	27.49	-16.01	43.5	48.52	9.58	1.07	31.68	-	-	Peak
239.79	37.29	-8.71	46	55.93	11.3	1.71	31.65	100	269	Peak
298.65	35.11	-10.89	46	51.7	13.18	1.9	31.67	-	-	Peak
307	36.87	-9.13	46	53.24	13.35	1.93	31.65	-	-	Peak
865.6	36.42	-9.58	46	44.67	20.35	3.21	31.81	-	-	Peak
974.1	37.02	-16.98	54	43.61	21.1	3.29	30.98	-	-	Peak
1594	50.33	-23.67	74	51.67	28.6	4.95	34.89	195	171	Peak
1594	19.53	-34.47	54	-	-	-	-	-	-	Average
2402	95.05	-	-	90.8	32.36	6.45	34.56	195	171	Peak
2402	64.25	-	-	-	-	-	-	-	-	Average
3198	58.55	-16.5	75.05	71.71	33.1	7.78	54.04	100	0	Peak
4806	52.19	-21.81	74	62.7	34.88	10.17	55.56	100	0	Peak
4806	21.39	-32.61	54	-	-	-	-	-	-	Average
7206	49.2	-25.85	75.05	58.56	36.16	10.97	56.49	100	0	Peak

Note: Other harmonics are lower than background noise.



Test Mode :	1Mbps	Temperature :	26~27°C
Test Channel :	00	Relative Humidity :	46~47%
Test Engineer :	Kai Wang, Timberland Lin, and Hayden Wu	Polarization :	Vertical
Remark :	1. 2402 MHz is fundamental signal which can be ignored. 2. 3195 MHz and 7206 MHz are not within a restricted band, and its limit line is 20dB below the highest emission level.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
30	36.6	-3.4	40	48.82	18.9	0.6	31.72	100	352	Peak
161.76	30.33	-13.17	43.5	50.52	10	1.46	31.65	-	-	Peak
240.33	37.82	-8.18	46	56.37	11.4	1.71	31.66	-	-	Peak
649.3	38.53	-7.47	46	48.5	19.2	2.8	31.97	-	-	Peak
754.3	37.3	-8.7	46	46.63	19.75	3.02	32.1	-	-	Peak
862.1	37.1	-8.9	46	45.34	20.38	3.21	31.83	-	-	Peak
1596	51.33	-22.67	74	52.67	28.6	4.95	34.89	174	83	Peak
1596	20.53	-33.47	54	-	-	-	-	-	-	Average
2402	92.73	-	-	88.48	32.36	6.45	34.56	174	83	Peak
2402	61.93	-	-	-	-	-	-	-	-	Average
3195	57.17	-15.56	72.73	70.35	33.1	7.76	54.04	100	0	Peak
4806	53.9	-20.1	74	64.41	34.88	10.17	55.56	100	0	Peak
4806	23.1	-30.9	54	-	-	-	-	-	-	Average
7206	48.59	-24.14	72.73	57.95	36.16	10.97	56.49	100	0	Peak

Note: Other harmonics are lower than background noise.



Test Mode :	1Mbps	Temperature :	26~27°C
Test Channel :	39	Relative Humidity :	46~47%
Test Engineer :	Kai Wang, Timberland Lin, and Hayden Wu	Polarization :	Horizontal
Remark :	1. 2442 MHz is fundamental signal which can be ignored. 2. 3198 MHz is not within a restricted band, and its limit line is 20dB below the highest emission level.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
1594	51	-23	74	52.34	28.6	4.95	34.89	100	168	Peak
1594	20.2	-33.8	54	-	-	-	-	-	-	Average
2442	96	-	-	91.61	32.43	6.52	34.56	100	168	Peak
2442	65.2	-	-	-	-	-	-	-	-	Average
3198	57.4	-18.6	76	70.56	33.1	7.78	54.04	100	0	Peak
4884	50.24	-23.76	74	60.88	34.85	10.19	55.68	100	0	Peak
4884	19.44	-34.56	54	-	-	-	-	-	-	Average
7323	48.83	-25.17	74	58	36.13	10.94	56.24	100	0	Peak
7323	18.03	-35.97	54	-	-	-	-	-	-	Average

Note: Other harmonics are lower than background noise.



Test Mode :	1Mbps	Temperature :	26~27°C
Test Channel :	39	Relative Humidity :	46~47%
Test Engineer :	Kai Wang, Timberland Lin, and Hayden Wu	Polarization :	Vertical
Remark :	1. 2442 MHz is fundamental signal which can be ignored. 2. 3195 MHz is not within a restricted band, and its limit line is 20dB below the highest emission level.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
1594	50.25	-23.75	74	51.59	28.6	4.95	34.89	200	87	Peak
1594	19.45	-34.55	54	-	-	-	-	-	-	Average
2442	93.13	-	-	88.74	32.43	6.52	34.56	200	87	Peak
2442	62.33	-	-	-	-	-	-	-	-	Average
3195	56.2	-16.93	73.13	69.38	33.1	7.76	54.04	100	0	Peak
4884	52.5	-21.5	74	63.14	34.85	10.19	55.68	100	0	Peak
4884	21.7	-32.3	54	-	-	-	-	-	-	Average
7323	49.25	-24.75	74	58.42	36.13	10.94	56.24	100	0	Peak
7323	18.45	-35.55	54	-	-	-	-	-	-	Average

Note: Other harmonics are lower than background noise.



Test Mode :	1Mbps	Temperature :	26~27°C
Test Channel :	78	Relative Humidity :	46~47%
Test Engineer :	Kai Wang, Timberland Lin, and Hayden Wu	Polarization :	Horizontal
Remark :	1. 2480 MHz is fundamental signal which can be ignored. 2. 3195 MHz is not within a restricted band, and its limit line is 20dB below the highest emission level.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
1594	51.84	-22.16	74	53.18	28.6	4.95	34.89	100	168	Peak
1594	21.04	-32.96	54	-	-	-	-	-	-	Average
2480	98.04	-	-	93.52	32.48	6.59	34.55	100	168	Peak
2480	67.24	-	-	-	-	-	-	-	-	Average
3195	59.26	-18.78	78.04	72.44	33.1	7.76	54.04	100	0	Peak
4960	48.97	-25.03	74	59.79	34.81	10.21	55.84	100	0	Peak
4960	18.17	-35.83	54	-	-	-	-	-	-	Average
7440	49.7	-24.3	74	58.69	36.11	10.9	56	100	0	Peak
7440	18.9	-35.1	54	-	-	-	-	-	-	Average

Note: Other harmonics are lower than background noise.



Test Mode :	1Mbps	Temperature :	26~27°C
Test Channel :	78	Relative Humidity :	46~47%
Test Engineer :	Kai Wang, Timberland Lin, and Hayden Wu	Polarization :	Vertical
Remark :	1. 2480 MHz is fundamental signal which can be ignored. 2. 3198 MHz is not within a restricted band, and its limit line is 20dB below the highest emission level.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
1600	51.98	-22.02	74	53.3	28.6	4.95	34.87	200	85	Peak
1600	21.18	-32.82	54	-	-	-	-	-	-	Average
2480	96.47	-	-	91.95	32.48	6.59	34.55	200	85	Peak
2480	65.67	-	-	-	-	-	-	-	-	Average
3198	60.3	-16.17	76.47	73.46	33.1	7.78	54.04	100	0	Peak
4962	51.28	-22.72	74	62.1	34.81	10.21	55.84	100	0	Peak
4962	20.48	-33.52	54	-	-	-	-	-	-	Average
7440	51.75	-22.25	74	60.74	36.11	10.9	56	100	0	Peak
7440	20.95	-33.05	54	-	-	-	-	-	-	Average

Note: Other harmonics are lower than background noise.

3.9 AC Conducted Emission Measurement

3.9.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 KHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.9.2 Measuring Instruments

See list of measuring instruments of this test report.

3.9.3 Test Procedures


1. The test follows the guidelines in ANSI C63.10-2009 test site requirement.
2. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
3. Connect EUT to the power mains through a line impedance stabilization network (LISN).
4. All the support units are connecting to the other LISN.
5. The LISN provides 50 ohm coupling impedance for the measuring instrument.
6. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
7. Both sides of AC line were checked for maximum conducted interference.
8. The frequency range from 150 KHz to 30 MHz was searched.
9. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.9.4 Test Setup

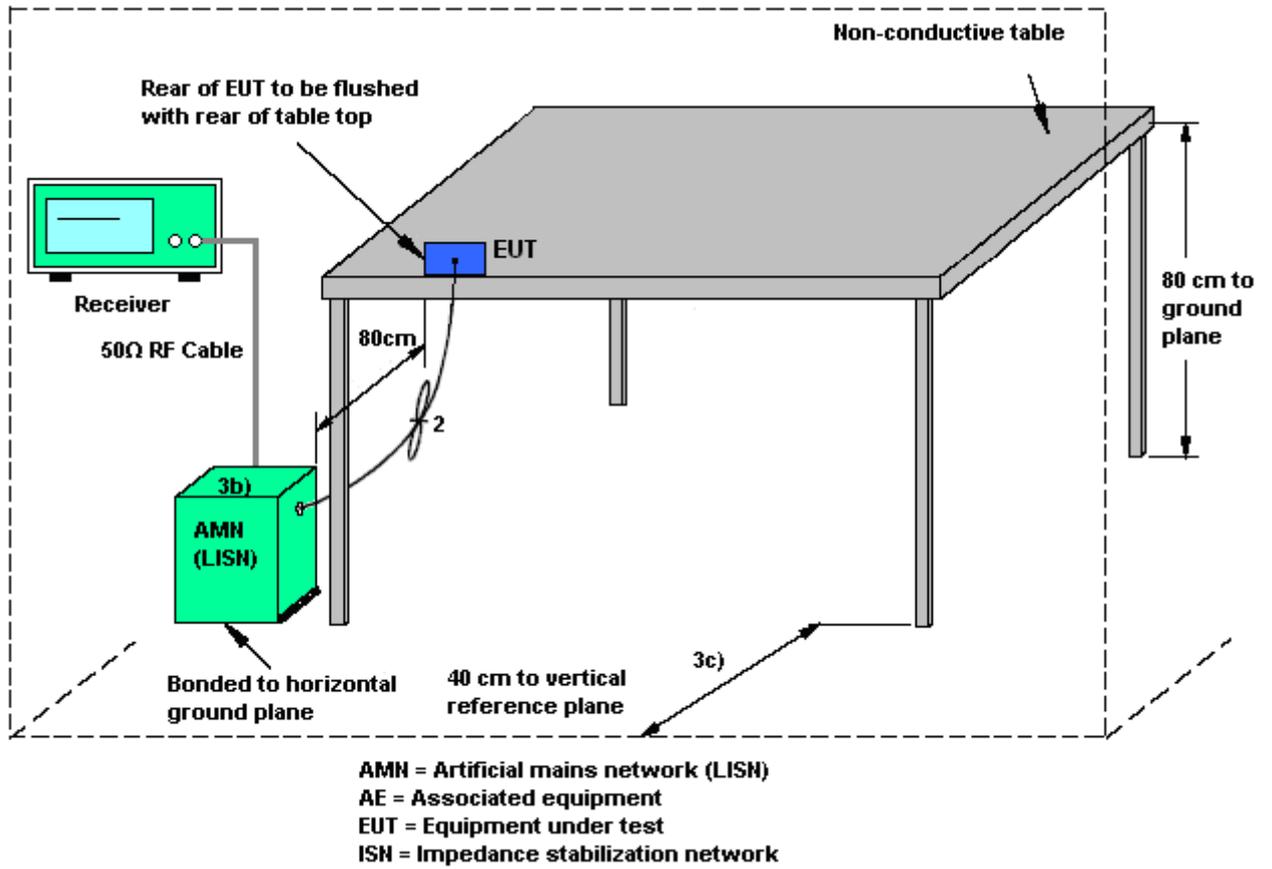

3.9.5 Test Result of AC Conducted Emission

Test Mode :	Mode 2	Temperature :	20~22°C
Test Engineer :	Slash Huang	Relative Humidity :	45~47%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	WLAN (5G) Link +Bluetooth Link + Camera + H Pattern + MPEG4 + Adapter + RJ-45 + USB 3.0 HD + SD Card + Earphne		
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

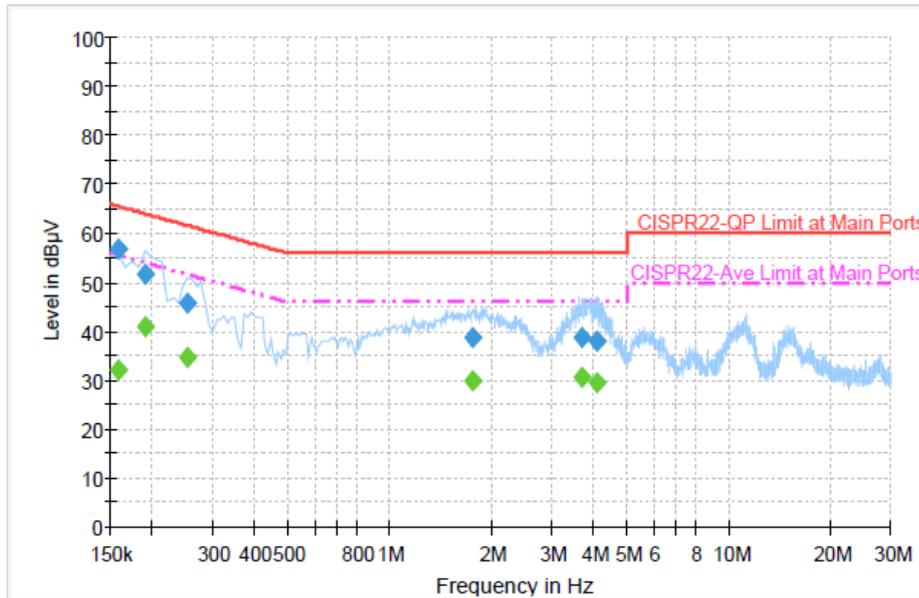


Final Result : Quasi-Peak

Frequency (MHz)	Quasi-Peak (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.158000	56.7	Off	L1	19.4	8.9	65.6
0.190000	51.7	Off	L1	19.4	12.3	64.0
0.254000	45.8	Off	L1	19.4	15.8	61.6
1.750000	38.9	Off	L1	19.5	17.1	56.0
3.678000	38.9	Off	L1	19.6	17.1	56.0
4.062000	37.9	Off	L1	19.6	18.1	56.0

Final Result : Average

Frequency (MHz)	Average (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.158000	32.0	Off	L1	19.4	23.6	55.6
0.190000	41.1	Off	L1	19.4	12.9	54.0
0.254000	34.8	Off	L1	19.4	16.8	51.6
1.750000	30.0	Off	L1	19.5	16.0	46.0
3.678000	30.6	Off	L1	19.6	15.4	46.0
4.062000	29.7	Off	L1	19.6	16.3	46.0

Test Mode :	Mode 2	Temperature :	20~22°C
Test Engineer :	Slash Huang	Relative Humidity :	45~47%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	WLAN (5G) Link +Bluetooth Link + Camera + H Pattern + MPEG4 + Adapter + RJ-45 + USB 3.0 HD + SD Card + Earphne		
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

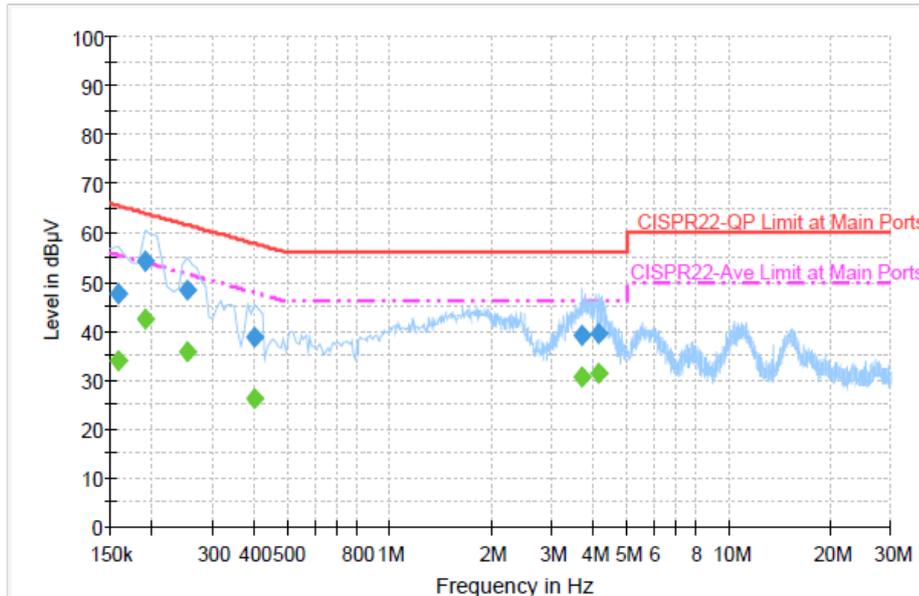

Final Result : Quasi-Peak

Frequency (MHz)	Quasi-Peak (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.158000	47.6	Off	N	19.4	18.0	65.6
0.190000	54.4	Off	N	19.4	9.6	64.0
0.254000	48.3	Off	N	19.4	13.3	61.6
0.398000	38.6	Off	N	19.5	19.3	57.9
3.678000	39.0	Off	N	19.6	17.0	56.0
4.118000	39.4	Off	N	19.6	16.6	56.0

Final Result : Average

Frequency (MHz)	Average (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.158000	33.9	Off	N	19.4	21.7	55.6
0.190000	42.3	Off	N	19.4	11.7	54.0
0.254000	35.8	Off	N	19.4	15.8	51.6
0.398000	26.3	Off	N	19.5	21.6	47.9
3.678000	30.8	Off	N	19.6	15.2	46.0
4.118000	31.4	Off	N	19.6	14.6	46.0



3.10 Antenna Requirements

3.10.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

3.10.2 Antenna Connected Construction

IPX, Or equivalent connector used.

3.10.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSP40	100055	9kHz~40GHz	Jun. 06, 2012	Feb. 21, 2013~ Mar. 11, 2013	Jun. 05, 2013	Conducted (TH02-HY)
Power Meter	Anritsu	ML2495A	1036004	300MHz~40GHz	Sep. 08, 2012	Feb. 21, 2013~ Mar. 11, 2013	Sep. 07, 2013	Conducted (TH02-HY)
Power Sensor	Anritsu	MA2411B	1027253	300MHz~40GHz	Sep. 08, 2012	Feb. 21, 2013~ Mar. 11, 2013	Sep. 07, 2013	Conducted (TH02-HY)
Spectrum Analyzer	R&S	FSP30	101352	9KHz~30GHz	Nov. 07, 2012	Feb. 26, 2013	Nov. 06, 2013	Radiation (03CH06-HY)
Spectrum Analyzer	Agilent	E4408B	MY442110 30	9KHz ~ 26.5GHz	Nov. 26, 2012	Feb. 26, 2013	Nov. 25, 2013	Radiation (03CH06-HY)
EMI Test Receiver	R&S	ESVS10	834468/00 03	20MHz ~ 1000MHz	May 04, 2012	Feb. 26, 2013	May 03, 2013	Radiation (03CH06-HY)
Bilog Antenna	SCHAFFNER	CBL6112B	2885	30MHz ~ 2GHz	Oct. 06, 2012	Feb. 26, 2013	Oct. 05, 2013	Radiation (03CH06-HY)
Double Ridge Horn Antenna	EMCO	3117	00066583	1GHz ~ 18GHz	Aug. 01, 2012	Feb. 26, 2013	Jul. 31, 2013	Radiation (03CH06-HY)
Double Ridge Horn Antenna	COM-POWER	AH-118	071025	1GHz~18GHz	Aug. 09, 2012	Feb. 26, 2013	Aug. 08, 2013	Radiation (03CH06-HY)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA 9170	BBHA9170 251	15GHz ~ 40GHz	Sep. 28, 2012	Feb. 26, 2013	Sep. 27, 2013	Radiation (03CH06-HY)
Preamplifier	Agilent	8449B	3008A019 17	1GHz ~ 26.5GHz	Apr. 13, 2012	Feb. 26, 2013	Apr. 12, 2013	Radiation (03CH06-HY)
Amplifier	Agilent	310N	186713	9KHz ~ 1GHz	Apr. 11, 2012	Feb. 26, 2013	Apr. 10, 2013	Radiation (03CH06-HY)
Pre Amplifier	EMCI	EMC051845	SN980048	1GHz ~ 18GHz	Jul. 21, 2012	Feb. 26, 2013	Jul. 20, 2013	Radiation (03CH06-HY)
Preamplifier	MITEQ	AMF-7D-0010 1800-30-10P	159087	1GHz~18GHz	Feb. 26, 2013	Feb. 26, 2013	Feb. 25, 2014	Radiation (03CH06-HY)
Loop Antenna	R&S	HFH2-Z2	860004/00 1	9KHz ~ 30MHz	Jul. 03, 2012	Feb. 26, 2013	Jul. 02, 2013	Radiation (03CH06-HY)
EMI Test Receiver	Rohde & Schwarz	ESCS 30	100356	9KHz ~ 2.75GHz	Nov. 13, 2012	Feb. 28, 2013	Nov. 12, 2013	Conduction (CO05-HY)
Two-LISN	Rohde & Schwarz	ENV216	100081	9KHz ~ 30MHz	Dec. 12, 2012	Feb. 28, 2013	Dec. 11, 2013	Conduction (CO05-HY)
Two-LISN	Rohde & Schwarz	ENV216	100080	9KHz ~ 30MHz	Dec. 06, 2012	Feb. 28, 2013	Dec. 05, 2013	Conduction (CO05-HY)
AC Power Source	APC	APC-1000W	N/A	N/A	N/A	Feb. 28, 2013	N/A	Conduction (CO05-HY)



5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.26
---	------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.54
---	------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.72
---	------



Appendix A. Photographs of EUT

Please refer to Sporton report number EP322001 as below.