

FCC Test Report

Equipment : Personal Computer
Brand Name : SONY
Model No. : SVT112A2WL
FCC ID : AK8SVT112A2WL
Standard : 47 CFR FCC Part 15.249
Operating Band : 2400 MHz – 2483.5 MHz
FCC Classification : DXX
Applicant : Sony Corporation
Manufacturer : 1-7-1 Konan, Minato-ku, Tokyo 108-0075, Japan

The product sample received on Jun. 27, 2013 and completely tested on Aug. 14, 2013. We, SPORTON, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2009 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:


Wayne Hsu / Assistant Manager





Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information.....	5
1.2	Accessories	6
1.3	Support Equipment	6
1.4	Testing Applied Standards	7
1.5	Testing Location Information	7
1.6	Measurement Uncertainty	7
2	TEST CONFIGURATION OF EUT	8
2.1	The Worst Case Modulation Configuration	8
2.2	Test Channel Frequencies Configuration.....	8
2.3	The Worst Case Measurement Configuration	8
2.4	Test Setup Diagram	9
3	TRANSMITTER TEST RESULT	11
3.1	AC Power-line Conducted Emissions	11
3.2	Emission Bandwidth.....	16
3.3	Fundamental Emissions	18
3.4	Transmitter Radiated Unwanted Emissions	20
4	TEST EQUIPMENT AND CALIBRATION DATA.....	31
APPENDIX A. TEST PHOTOS		
APPENDIX B. PHOTOGRAPHS OF EUT		



Summary of Test Result

Conformance Test Specifications					
Report Clause	Ref. Std. Clause	Description	Measured	Limit	Result
1.1.2	15.203	Antenna Requirement	Antenna connector mechanism complied	FCC 15.203	Complied
3.1	15.207	AC Power-line Conducted Emissions	[dBuV]: 0.1863950MHz 29.82 (Margin 24.38dB) - AV 49.24 (Margin 14.96dB) - QP	FCC 15.207	Complied
3.2	15.215(c)	Emission Bandwidth	2.30 MHz; fall in band	Information only	Complied
3.3	15.249(a)	Fundamental Emissions	[dBuV/m at 3m]: 67.46 (Margin 26.54dB) average	[dBuV/m at 3m]: average: 94	Complied
3.4	15.249(a)/(d)	Transmitter Radiated Unwanted Emissions	[dBuV/m at 3m]: 4804MHz 72.62 (Margin 1.38dB) - PK 45.49 (Margin 8.51dB) - AV	Harmonics: 54 dBuV/m@3m Other band: 50 dB or FCC 15.209, whichever is the lesser attenuation.	Complied



1 General Description

1.1 Information

1.1.1 RF General Information

RF General Information					
Frequency Range (MHz)	Modulation	Ch. Frequency (MHz)	Channel Number	Fundamental Field Strength (dBuV/m)	Co-location
2400-2483.5	ASK	2402~2478	77	67.46	N/A
Note 1: Field strength performed average level at 3m. Note 2: Co-location, Co-location is generally defined as simultaneously transmitting (co-transmitting) antennas within 20 cm of each other. (i.e., EUT has simultaneously co-transmitting that operating 2.4GHz and 5GHz.)					

1.1.2 Antenna Information

Antenna Category	
<input checked="" type="checkbox"/>	Integral antenna (antenna permanently attached)
<input type="checkbox"/>	External antenna (dedicated antennas) ; Unique antenna connector

1.1.3 Type of EUT

Identify EUT	
EUT Serial Number	N/A
Presentation of Equipment	<input type="checkbox"/> Production ; <input type="checkbox"/> Pre-Production ; <input checked="" type="checkbox"/> Prototype
Type of EUT	
<input checked="" type="checkbox"/>	Stand-alone
<input type="checkbox"/>	Combined (EUT where the radio part is fully integrated within another device) Combined Equipment - Brand Name / Model No.:
<input type="checkbox"/>	Plug-in radio (EUT intended for a variety of host systems) Host System - Brand Name / Model No.:
<input type="checkbox"/>	Other:

1.1.4 Test Signal Duty Cycle

Operated Mode for Worst Duty Cycle	
<input type="checkbox"/>	Operated normally mode for worst duty cycle
<input checked="" type="checkbox"/>	Operated test mode for worst duty cycle
Test Signal Duty Cycle (x)	Duty Cycle Correction Factor [dB] = (20 log x)
<input checked="" type="checkbox"/> 4.4%	-27.13
If worst duty < 100%, average emission = peak emission + 20 log x	

1.1.5 EUT Operational Condition

Supply Voltage	<input checked="" type="checkbox"/> AC mains	<input checked="" type="checkbox"/> DC	
Type of DC Source	<input type="checkbox"/> Internal DC supply	<input checked="" type="checkbox"/> External DC adapter	<input checked="" type="checkbox"/> Li-on Battery



1.2 Accessories

Accessories Information				
AC Adapter	Brand Name	SONY	Model Name	VGP-AC19V74
	Power Rating	INPUT: 100-240Vac, 1.0 A OUTPUT 1: 19.5Vdc, 2.0 A ; OUTPUT 2: 5.0Vdc, 1.0 A		
Li-ion Battery	Brand Name	SONY	Model Name	VGP-BPS39
	Power Rating	7.5Vdc,3800mAh		
2.4G RF receiver	Brand Name	SONY	Model Name	VGP-WRC9

Reminder: Regarding to more detail and other information, please refer to user manual.

1.3 Support Equipment

Support Equipment- AC Line Conducted Emission Test				
No.	Equipment	Brand Name	Model Name	Serial No.
1	Keyboard (Client Provide)	SONY	VGP-WKB16	DoC
2	Headset	INTOPIC	JAZZ-368	DoC
3	iPod Nano	Apple	A1199	DoC
4	Identity Badge	-	-	-
5	Wireless AP (Remote Workstation)	ZO TECH	WR110B	DoC
6	Bluetooth Headset (Remote Workstation)	SONY	Z354	DoC

Support Equipment- Radiated Emission Test				
No.	Equipment	Brand Name	Model Name	Serial No.
1	Keyboard (Client Provide)	SONY	VGP-WKB16	DoC
2	Headset	INTOPIC	JAZZ-368	DoC
3	iPod Nano	Apple	A1199	DoC
4	Identity Badge	-	-	-

1.4 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ◆ 47 CFR FCC Part 15
- ◆ ANSI C63.10-2009

1.5 Testing Location Information

Testing Location			
<input checked="" type="checkbox"/>	HWA YA	ADD : No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.	
		TEL : 886-3-327-3456	FAX : 886-3-327-0973
Test Condition	Test Site No.	Test Engineer	Test Environment
AC Conduction	CO04-HY	Zeus	24°C / 46%
RF Conducted	TH06-HY	Wei	25.2°C / 56%
Radiated Emission	03CH02-HY	Daniel	24.8°C / 53%

1.6 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Measurement Uncertainty			
Test Item		Uncertainty	Limit
AC power-line conducted emissions		±2.26 dB	N/A
Emission bandwidth,		±1.42 %	N/A
Unwanted emissions, conducted	30 – 1000 MHz	±0.51 dB	N/A
	1 – 18 GHz	±0.67 dB	N/A
	18 – 40 GHz	±0.83 dB	N/A
	40 – 200 GHz	N/A	N/A
All emissions, radiated	30 – 1000 MHz	±2.56 dB	N/A
	1 – 18 GHz	±3.59 dB	N/A
	18 – 40 GHz	±3.82 dB	N/A
	40 – 200 GHz	N/A	N/A
Temperature		±0.8 °C	N/A
Humidity		±3 %	N/A
DC and low frequency voltages		±3 %	N/A
Time		±1.42 %	N/A
Duty Cycle		±1.42 %	N/A

2 Test Configuration of EUT

2.1 The Worst Case Modulation Configuration

Modulation Used for Conformance Testing	
Test Mode	Field Strength (dBuV/m at 3 m)
ASK-Transmit	67.46

2.2 Test Channel Frequencies Configuration


Test Channel Frequencies Configuration	
Test Mode	Test Channel Frequencies (MHz)
ASK-Transmit	2402-(F1), 2441-(F2), 2478-(F3)


2.3 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	AC power-line conducted emissions
Condition	AC power-line conducted measurement for line and neutral (120Vac / 60Hz)
Operating Mode	Operating Mode Description
1	AC Power & Radio link


The Worst Case Mode for Following Conformance Tests			
Tests Item	Emission Bandwidth, Fundamental Emissions, Radiated Unwanted Emissions		
Test Condition	Radiated measurement		
User Position	<input checked="" type="checkbox"/> EUT will be placed in fixed position. The worst planes is Z.		
	<input type="checkbox"/> EUT will be placed in mobile position and operating multiple positions. EUT shall be performed two orthogonal planes.		
	<input type="checkbox"/> EUT will be a hand-held or body-worn battery-powered devices and operating multiple positions. EUT shall be performed two or three orthogonal planes.		
Operating Mode	<input checked="" type="checkbox"/> 1. AC Power & Radio link		
Test Mode	ASK-Transmit		
Orthogonal Planes of EUT	X Plane	Y Plane	Z Plane
			

2.4 Test Setup Diagram

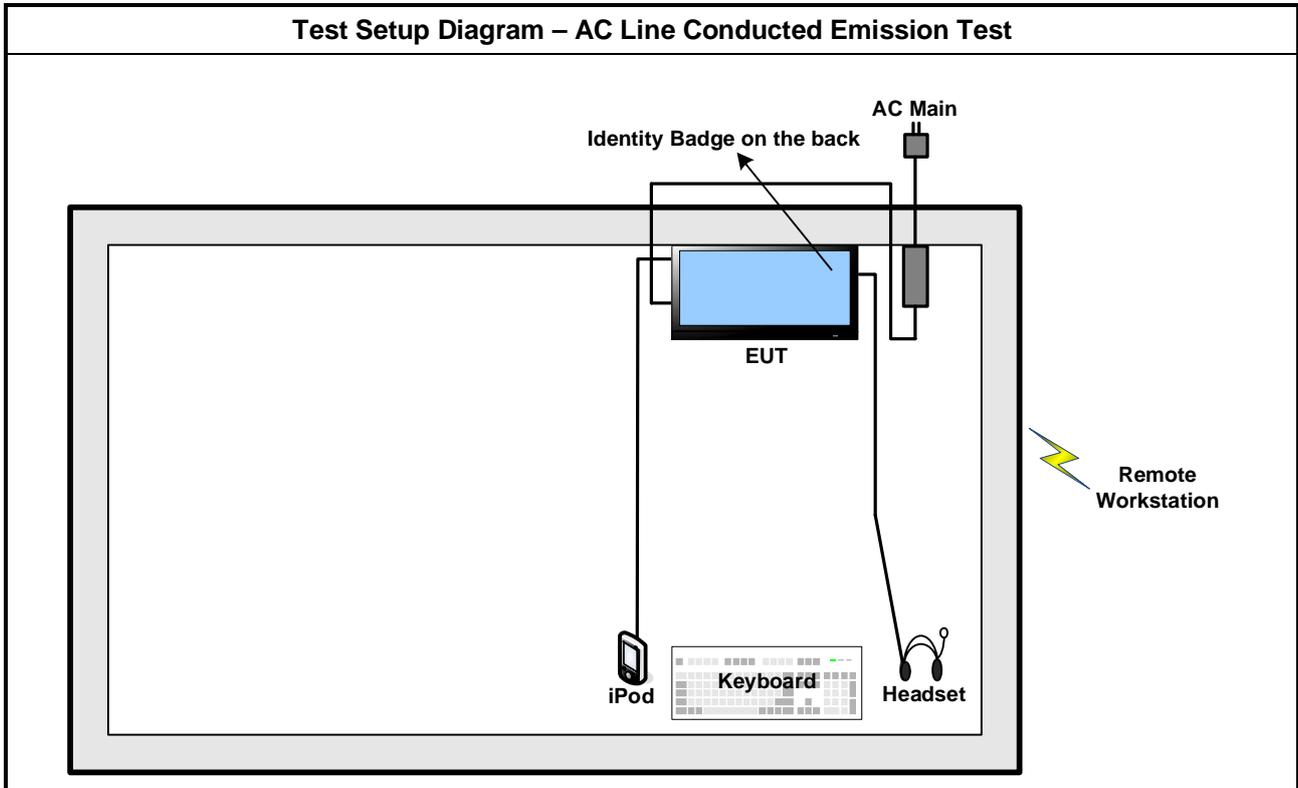


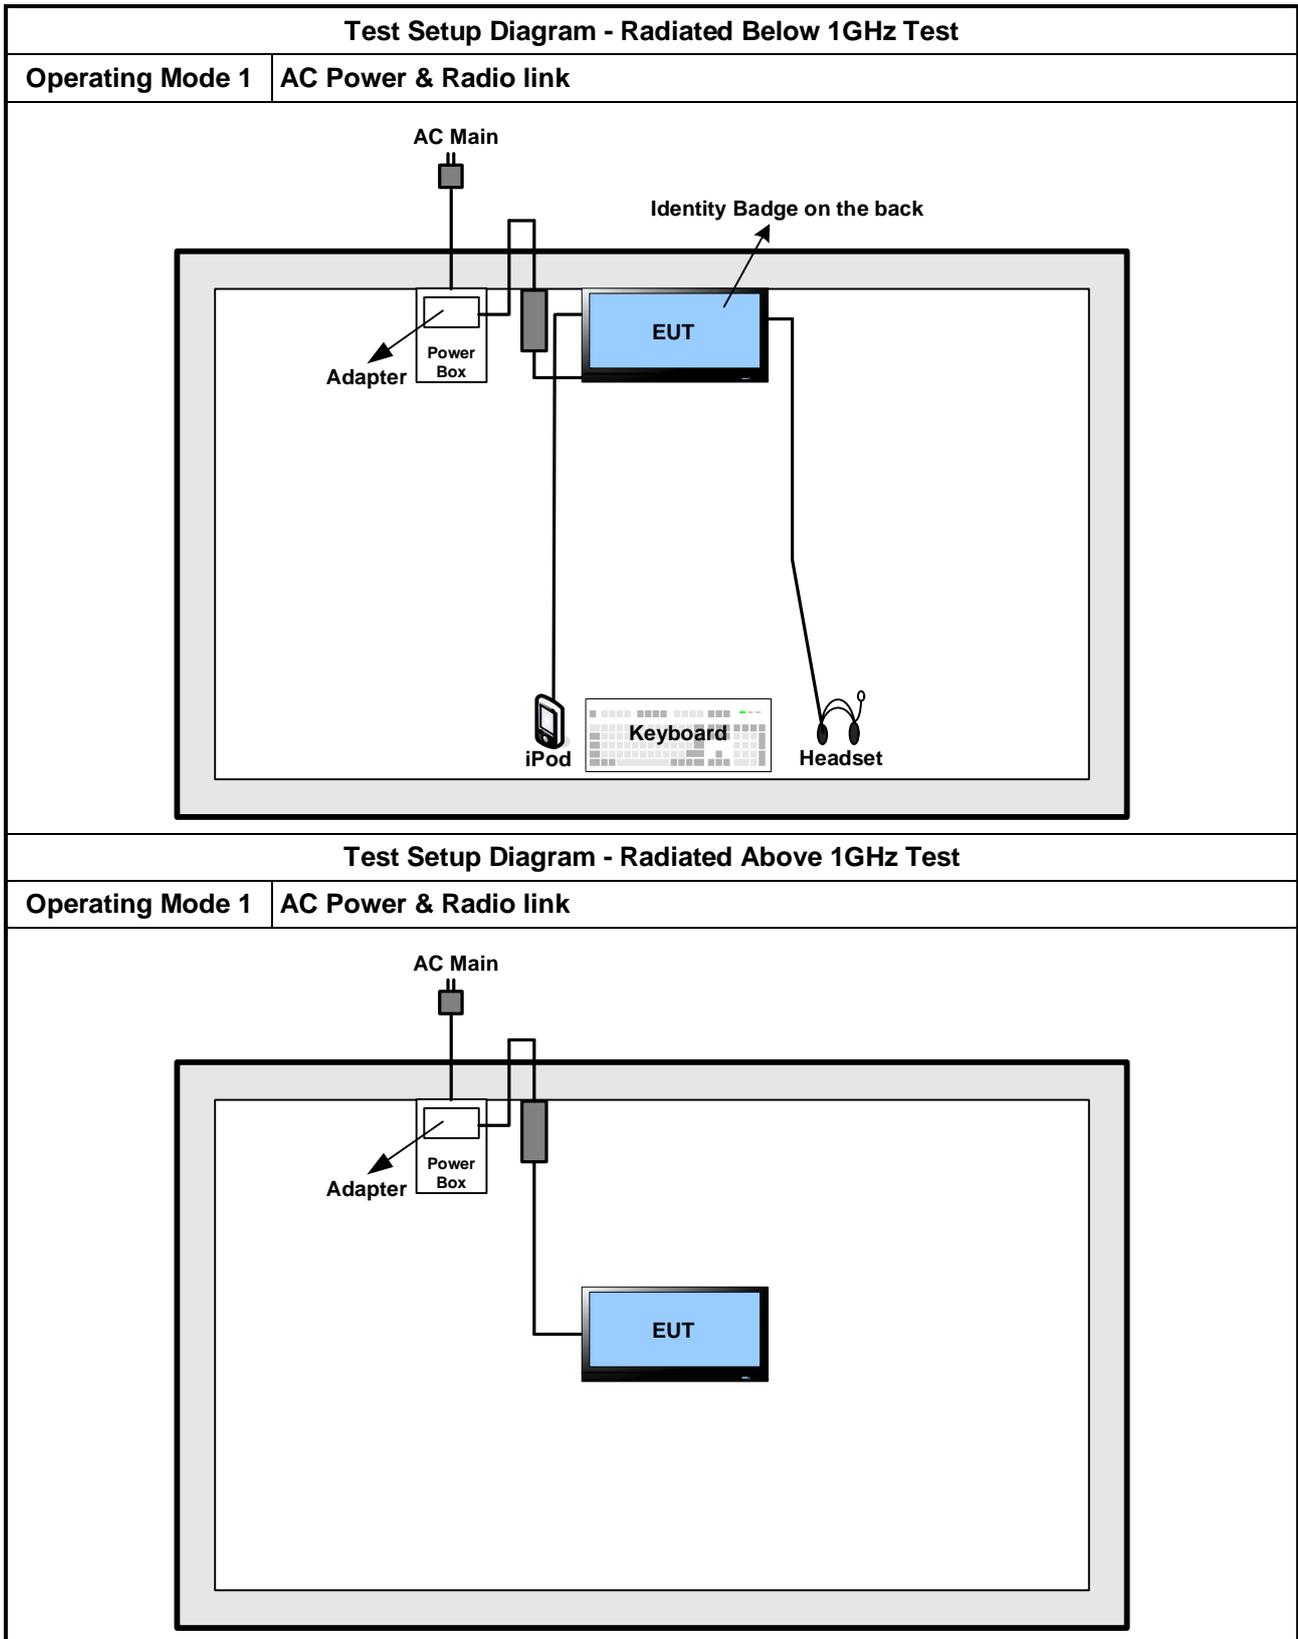

3.1.5 Test Result of AC Power-line Conducted Emissions

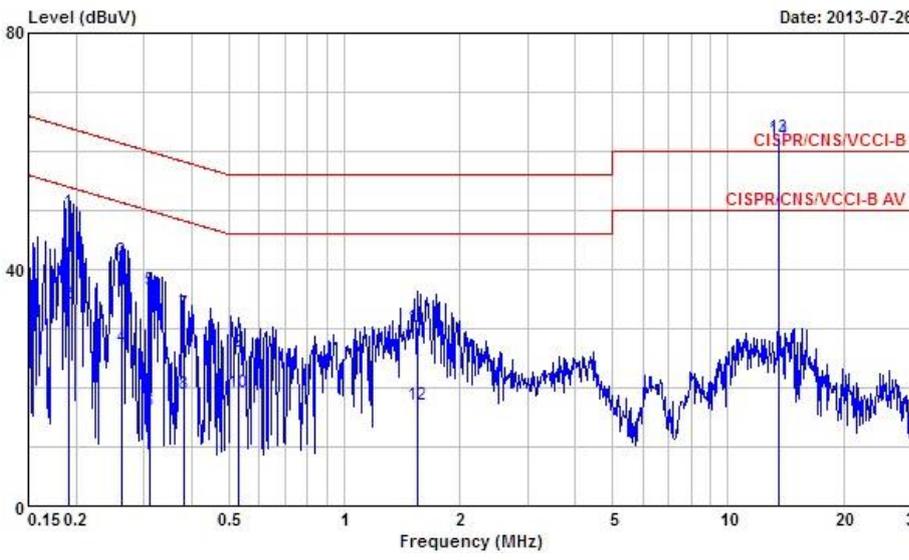AC Power-line Conducted Emissions Result																																																																																																																																																			
Operating Mode	1	Power Phase	Neutral																																																																																																																																																
Operating Function	AC Power & Radio link with NFC antenna																																																																																																																																																		
 <p style="text-align: right;">Date: 2013-07-26</p>																																																																																																																																																			
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th></th> <th>Freq</th> <th>Level</th> <th>Over Limit</th> <th>Limit Line</th> <th>Read Level</th> <th>LISN Factor</th> <th>Cable Loss</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV</th> <th>dB</th> <th>dBuV</th> <th>dBuV</th> <th>dB</th> <th>dB</th> <th></th> </tr> </thead> <tbody> <tr><td>1</td><td>0.1903870</td><td>49.76</td><td>-14.26</td><td>64.02</td><td>49.40</td><td>0.23</td><td>0.13</td><td>QP</td></tr> <tr><td>2</td><td>0.1903870</td><td>34.14</td><td>-19.88</td><td>54.02</td><td>33.78</td><td>0.23</td><td>0.13</td><td>Average</td></tr> <tr><td>3</td><td>0.2630270</td><td>41.46</td><td>-19.88</td><td>61.34</td><td>41.13</td><td>0.23</td><td>0.10</td><td>QP</td></tr> <tr><td>4</td><td>0.2630270</td><td>26.82</td><td>-24.52</td><td>51.34</td><td>26.49</td><td>0.23</td><td>0.10</td><td>Average</td></tr> <tr><td>5</td><td>0.3099790</td><td>36.50</td><td>-23.47</td><td>59.97</td><td>36.18</td><td>0.22</td><td>0.10</td><td>QP</td></tr> <tr><td>6</td><td>0.3099790</td><td>16.02</td><td>-33.95</td><td>49.97</td><td>15.70</td><td>0.22</td><td>0.10</td><td>Average</td></tr> <tr><td>7</td><td>0.3811300</td><td>32.55</td><td>-25.70</td><td>58.25</td><td>32.23</td><td>0.22</td><td>0.10</td><td>QP</td></tr> <tr><td>8</td><td>0.3811300</td><td>18.96</td><td>-29.29</td><td>48.25</td><td>18.64</td><td>0.22</td><td>0.10</td><td>Average</td></tr> <tr><td>9</td><td>0.5293420</td><td>25.96</td><td>-30.04</td><td>56.00</td><td>25.61</td><td>0.22</td><td>0.13</td><td>QP</td></tr> <tr><td>10</td><td>0.5293420</td><td>19.22</td><td>-26.78</td><td>46.00</td><td>18.87</td><td>0.22</td><td>0.13</td><td>Average</td></tr> <tr><td>11</td><td>1.550</td><td>30.25</td><td>-25.75</td><td>56.00</td><td>29.75</td><td>0.24</td><td>0.26</td><td>QP</td></tr> <tr><td>12</td><td>1.550</td><td>17.12</td><td>-28.88</td><td>46.00</td><td>16.62</td><td>0.24</td><td>0.26</td><td>Average</td></tr> <tr><td>13</td><td>13.560</td><td>62.40</td><td>12.40</td><td>50.00</td><td>61.75</td><td>0.48</td><td>0.17</td><td>Average</td></tr> <tr><td>14</td><td>13.560</td><td>61.90</td><td>1.90</td><td>60.00</td><td>61.25</td><td>0.48</td><td>0.17</td><td>QP</td></tr> </tbody> </table>					Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark		MHz	dBuV	dB	dBuV	dBuV	dB	dB		1	0.1903870	49.76	-14.26	64.02	49.40	0.23	0.13	QP	2	0.1903870	34.14	-19.88	54.02	33.78	0.23	0.13	Average	3	0.2630270	41.46	-19.88	61.34	41.13	0.23	0.10	QP	4	0.2630270	26.82	-24.52	51.34	26.49	0.23	0.10	Average	5	0.3099790	36.50	-23.47	59.97	36.18	0.22	0.10	QP	6	0.3099790	16.02	-33.95	49.97	15.70	0.22	0.10	Average	7	0.3811300	32.55	-25.70	58.25	32.23	0.22	0.10	QP	8	0.3811300	18.96	-29.29	48.25	18.64	0.22	0.10	Average	9	0.5293420	25.96	-30.04	56.00	25.61	0.22	0.13	QP	10	0.5293420	19.22	-26.78	46.00	18.87	0.22	0.13	Average	11	1.550	30.25	-25.75	56.00	29.75	0.24	0.26	QP	12	1.550	17.12	-28.88	46.00	16.62	0.24	0.26	Average	13	13.560	62.40	12.40	50.00	61.75	0.48	0.17	Average	14	13.560	61.90	1.90	60.00	61.25	0.48	0.17	QP
	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark																																																																																																																																											
	MHz	dBuV	dB	dBuV	dBuV	dB	dB																																																																																																																																												
1	0.1903870	49.76	-14.26	64.02	49.40	0.23	0.13	QP																																																																																																																																											
2	0.1903870	34.14	-19.88	54.02	33.78	0.23	0.13	Average																																																																																																																																											
3	0.2630270	41.46	-19.88	61.34	41.13	0.23	0.10	QP																																																																																																																																											
4	0.2630270	26.82	-24.52	51.34	26.49	0.23	0.10	Average																																																																																																																																											
5	0.3099790	36.50	-23.47	59.97	36.18	0.22	0.10	QP																																																																																																																																											
6	0.3099790	16.02	-33.95	49.97	15.70	0.22	0.10	Average																																																																																																																																											
7	0.3811300	32.55	-25.70	58.25	32.23	0.22	0.10	QP																																																																																																																																											
8	0.3811300	18.96	-29.29	48.25	18.64	0.22	0.10	Average																																																																																																																																											
9	0.5293420	25.96	-30.04	56.00	25.61	0.22	0.13	QP																																																																																																																																											
10	0.5293420	19.22	-26.78	46.00	18.87	0.22	0.13	Average																																																																																																																																											
11	1.550	30.25	-25.75	56.00	29.75	0.24	0.26	QP																																																																																																																																											
12	1.550	17.12	-28.88	46.00	16.62	0.24	0.26	Average																																																																																																																																											
13	13.560	62.40	12.40	50.00	61.75	0.48	0.17	Average																																																																																																																																											
14	13.560	61.90	1.90	60.00	61.25	0.48	0.17	QP																																																																																																																																											
								→ This frequency is NFC signal.																																																																																																																																											
<p>Note 1: ">20dB" means emission levels that exceed the level of 20 dB below the applicable limit.</p> <p>Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)</p>																																																																																																																																																			

AC Power-line Conducted Emissions Result			
Operating Mode	1	Power Phase	Line
Operating Function	AC Power & Radio link with NFC antenna		

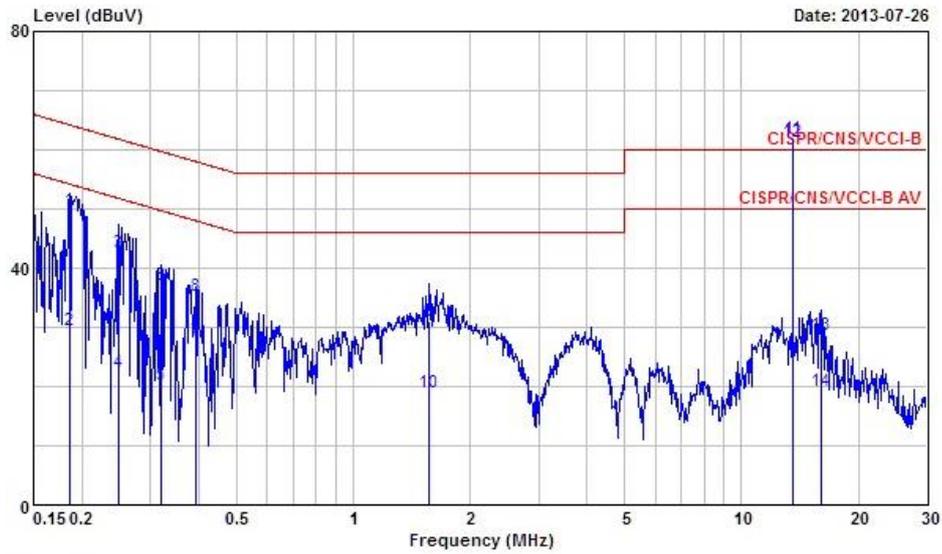


	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.1854100	49.67	-14.57	64.24	49.42	0.11	0.14	QP
2	0.1854100	29.44	-24.80	54.24	29.19	0.11	0.14	Average
3	0.2481360	42.74	-19.08	61.82	42.53	0.11	0.10	QP
4	0.2481360	22.45	-29.37	51.82	22.24	0.11	0.10	Average
5	0.3183010	20.33	-29.42	49.75	20.13	0.10	0.10	Average
6	0.3183010	37.23	-22.52	59.75	37.03	0.10	0.10	QP
7	0.3934400	27.71	-20.28	47.99	27.51	0.10	0.10	Average
8	0.3934400	35.39	-22.60	57.99	35.19	0.10	0.10	QP
9	1.560	31.09	-24.91	56.00	30.71	0.12	0.26	QP
10	1.560	19.04	-26.96	46.00	18.66	0.12	0.26	Average
11	13.560	61.89	11.89	50.00	61.45	0.27	0.17	Average
12	13.560	61.33	1.33	60.00	60.89	0.27	0.17	QP
13	16.050	28.61	-31.39	60.00	28.12	0.29	0.20	QP
14	16.050	19.20	-30.80	50.00	18.71	0.29	0.20	Average

→ This frequency is NFC signal.

Note 1: ">20dB" means emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)

AC Power-line Conducted Emissions Result			
Operating Mode	1	Power Phase	Neutral
Operating Function	AC Power & Radio link with NFC dummy load		

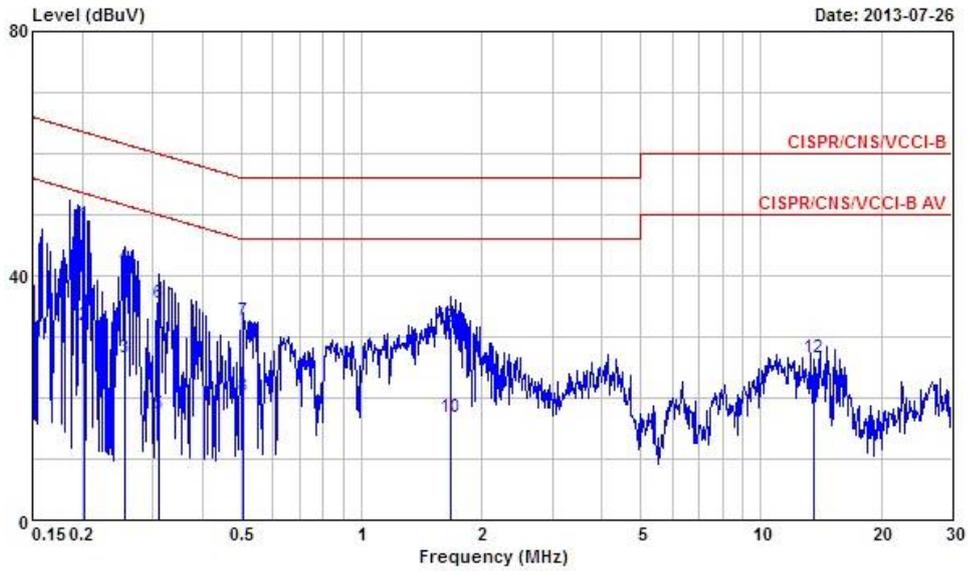


	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.2018130	48.53	-15.01	63.54	48.20	0.23	0.10	QP
2	0.2018130	31.83	-21.71	53.54	31.50	0.23	0.10	Average
3	0.2547970	26.56	-25.04	51.60	26.23	0.23	0.10	Average
4	0.2547970	41.53	-20.07	61.60	41.20	0.23	0.10	QP
5	0.3116260	17.44	-32.49	49.93	17.12	0.22	0.10	Average
6	0.3116260	35.42	-24.51	59.93	35.10	0.22	0.10	QP
7	0.5046930	32.52	-23.48	56.00	32.18	0.22	0.12	QP
8	0.5046930	20.39	-25.61	46.00	20.05	0.22	0.12	Average
9	1.670	31.61	-24.39	56.00	31.10	0.24	0.27	QP
10	1.670	16.93	-29.07	46.00	16.42	0.24	0.27	Average
11	13.560	21.27	-28.73	50.00	20.62	0.48	0.17	Average
12	13.560	26.53	-33.47	60.00	25.88	0.48	0.17	QP

Note 1: ">20dB" means emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)

AC Power-line Conducted Emissions Result

Operating Mode	1	Power Phase	Line
Operating Function	AC Power & Radio link with NFC dummy load		

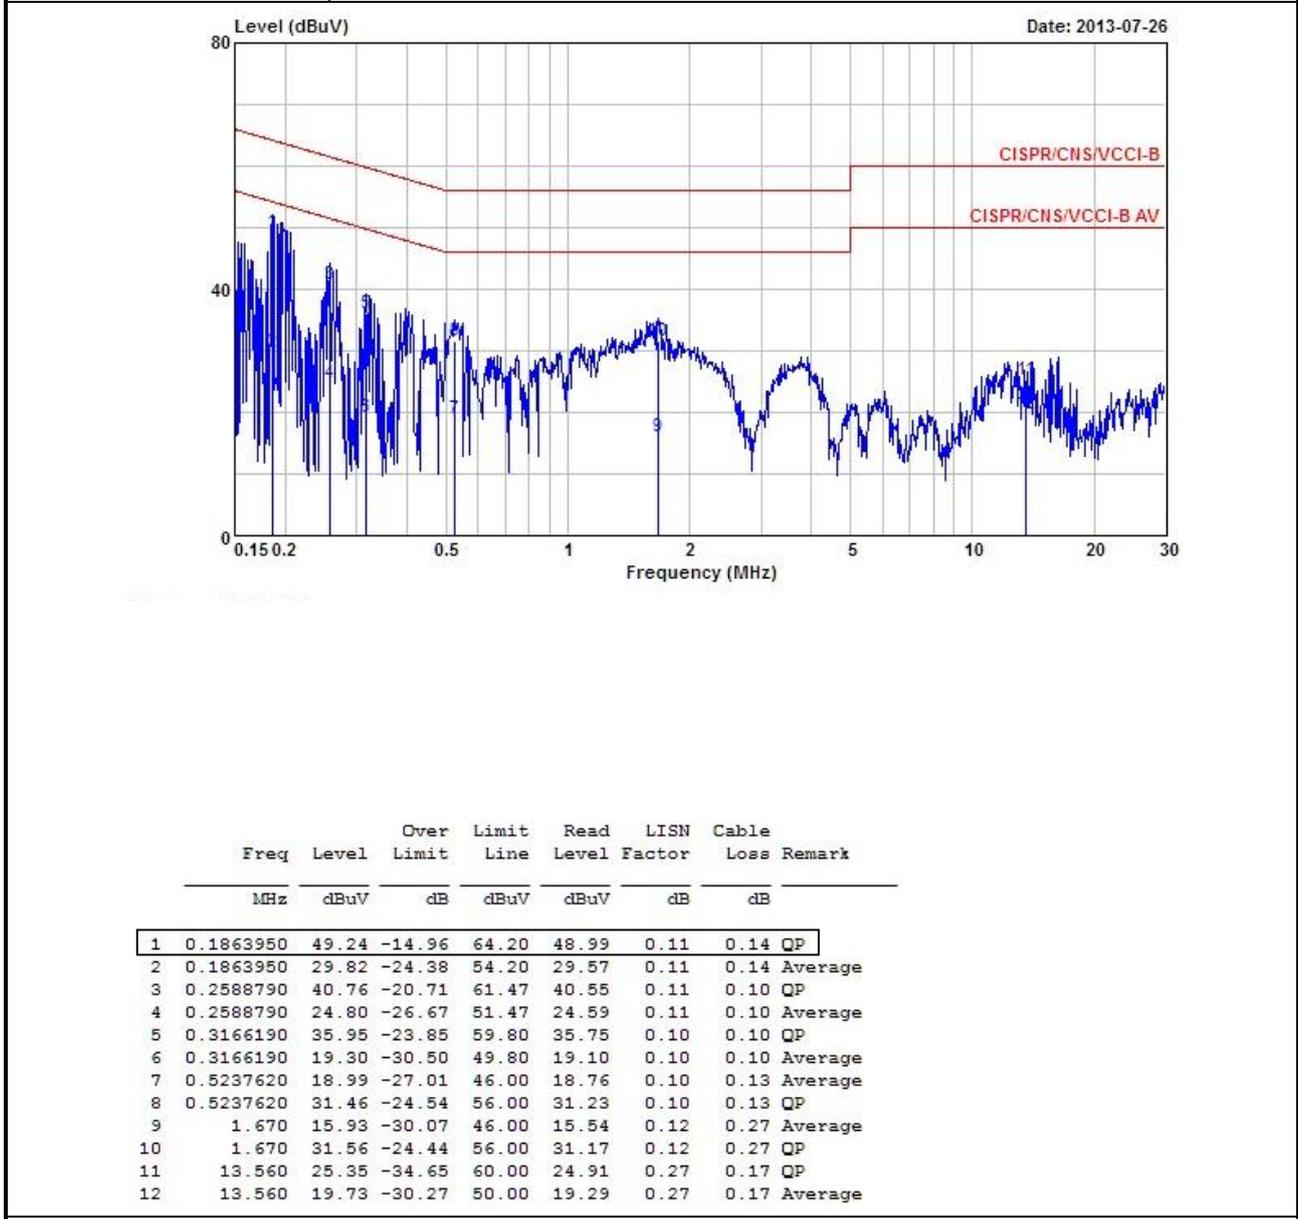

Note 1: ">20dB" means emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)

3.2 Emission Bandwidth

3.2.1 Emission Bandwidth Limit

Emission Bandwidth Limit
<input checked="" type="checkbox"/> Emission bandwidth falls completely within authorized band.


3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

Test Method
<input checked="" type="checkbox"/> Refer as ANSI C63.10, clause 6.9.1 for 20 dB emission bandwidth and 99% occupied bandwidth measurement.


3.2.4 Test Setup

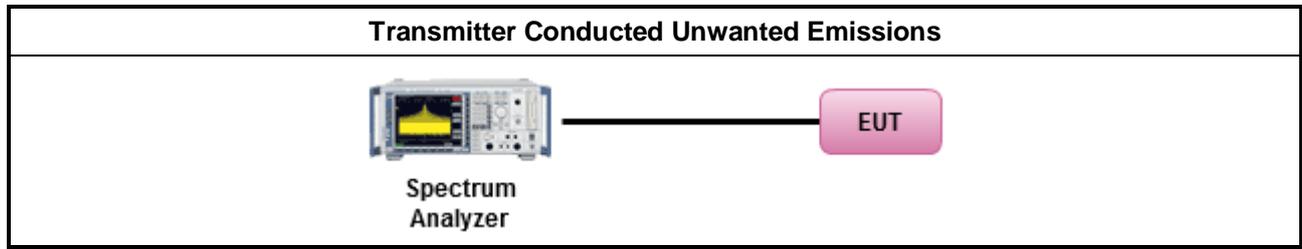



3.2.5 Test Result of Emission Bandwidth

Emission Bandwidth Result					
Modulation Mode	Frequency (MHz)	20dB BW (MHz)	99% Bandwidth (MHz)	F _L at 20dB BW (MHz)	F _H at 20dB BW (MHz)
ASK-Transmit	2402	1.96	1.76	2400.7800	-
ASK-Transmit	2441	2.02	1.84	-	-
ASK-Transmit	2478	2.30	2.12	-	2479.0200
Limit		N/A	N/A	2400	2483.5
Result		Complied			

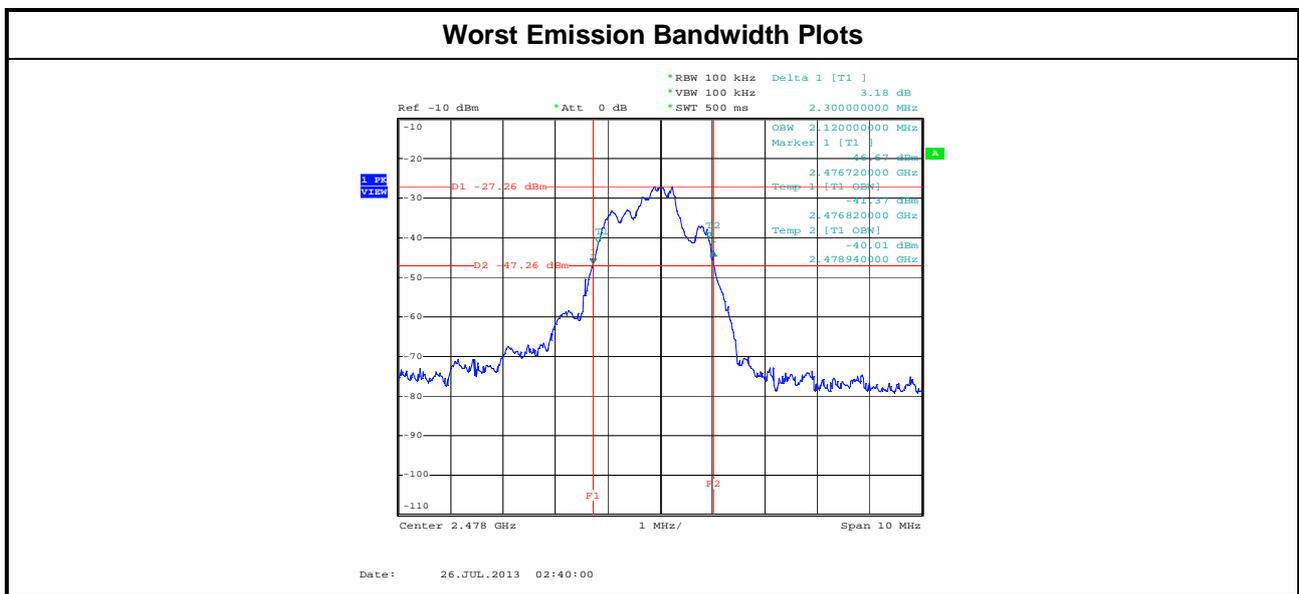

3.3 Fundamental Emissions

3.3.1 Fundamental Emissions Limit

Fundamental Emissions E-Field Strength Limit (3m)	
<input type="checkbox"/>	902-928 MHz Band: 94 dBuV/m (quasi peak)
<input checked="" type="checkbox"/>	2400-2483.5 MHz Band: 94 dBuV/m (average)
<input type="checkbox"/>	5725-5785 MHz Band: 94 dBuV/m (average)


3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures

<input checked="" type="checkbox"/>	The average emission levels shall be measured in [duty cycle \leq 100 or by duty cycle correction factor].
<input checked="" type="checkbox"/>	For the transmitter emissions shall be measured using following options below:
<input type="checkbox"/>	Refer as ANSI C63.10, clause 4.2.3.2.3 (Reduced VBW) – Duty cycle \geq 100%.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 4.2.3.2.4 average value of pulsed emissions. Adjusted by a “duty cycle correction factor”, derived from $20\log(\text{dwell time}/100 \text{ ms})$. Average emission = peak emission + 20 log (duty cycle).
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 4.2.3.2.2 measurement procedure peak limit.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.6 for radiated emissions and test distance is 3m .

3.3.4 Test Setup

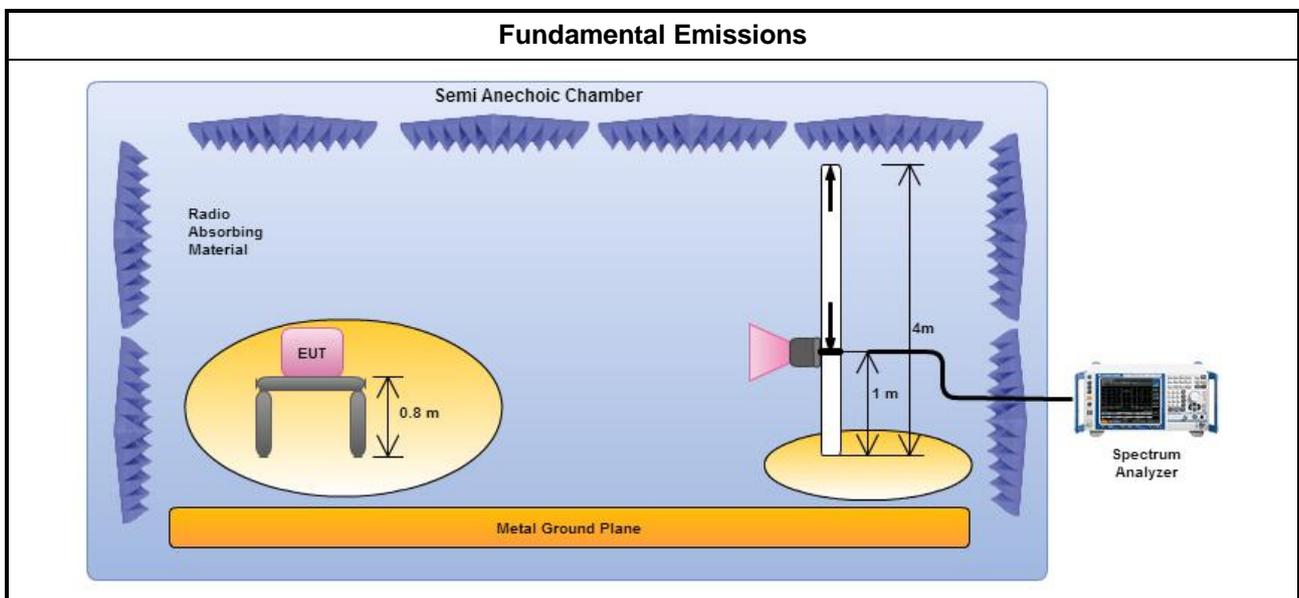



3.3.5 Test Result of Fundamental Emissions

Field Strength of Fundamental Emissions Result					
Modulation Mode	Frequency (MHz)	Fundamental (dBuV/m)@3m	Margin (dB)	Limit (dBuV/m)@3m	Type
ASK-Transmit	2402	92.77	21.23	114	peak
ASK-Transmit	2402	65.64	58.36	94	average
ASK-Transmit	2441	94.53	19.47	114	peak
ASK-Transmit	2441	67.40	26.60	94	average
ASK-Transmit	2478	94.59	19.41	114	peak
ASK-Transmit	2478	67.46	26.54	94	average
Result		Complied			
Note 1: Measurement worst emissions of receive antenna polarization: Vertical.					
Note 2: If duty cycle < 100%, average emission = peak emission + 20 log (duty cycle).					



3.4 Transmitter Radiated Unwanted Emissions

3.4.1 Transmitter Radiated Unwanted Emissions Limit

Transmitter Radiated Unwanted Emissions Limit	
Harmonics:	
<input checked="" type="checkbox"/>	54 dBuV/m (average)
Other Unwanted Emissions:	
<input checked="" type="checkbox"/>	50 dB below the level of the fundamental or FCC 15.209, whichever is the lesser attenuation.


3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.4.3 Test Procedures

Test Method – General Information	
<input checked="" type="checkbox"/>	Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).
<input checked="" type="checkbox"/>	The average emission levels shall be measured in [duty cycle \geq 98 or duty factor].
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.9.2.2 bandedge testing shall be performed at the lowest frequency channel and highest frequency channel within the allowed operating band.
<input checked="" type="checkbox"/>	For the transmitter unwanted emissions shall be measured using following options below:
<input type="checkbox"/>	Refer as ANSI C63.10, clause 4.2.3.2.3 (Reduced VBW) – Duty cycle \geq 100%.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 4.2.3.2.4 average value of pulsed emissions. Adjusted by a “duty cycle correction factor”, derived from $20\log(\text{dwell time}/100 \text{ ms})$. Average emission = peak emission + 20 log (duty cycle).
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 4.2.3.2.2 measurement procedure peak limit.
<input checked="" type="checkbox"/>	For the transmitter bandedge emissions shall be measured using following options below:
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.9.2 for band-edge testing.
<input type="checkbox"/>	Refer as ANSI C63.10, clause 6.9.3 for marker-delta method for band-edge measurements.
<input checked="" type="checkbox"/>	For radiated measurement.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.4 for radiated emissions below 30 MHz and test distance is 3m.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.5 for radiated emissions 30 MHz to 1 GHz and test distance is 3m.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1 GHz and test distance is 3m.
<input checked="" type="checkbox"/>	The any unwanted emissions level shall not exceed the fundamental emission level.
<input checked="" type="checkbox"/>	All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

3.4.4 Test Setup

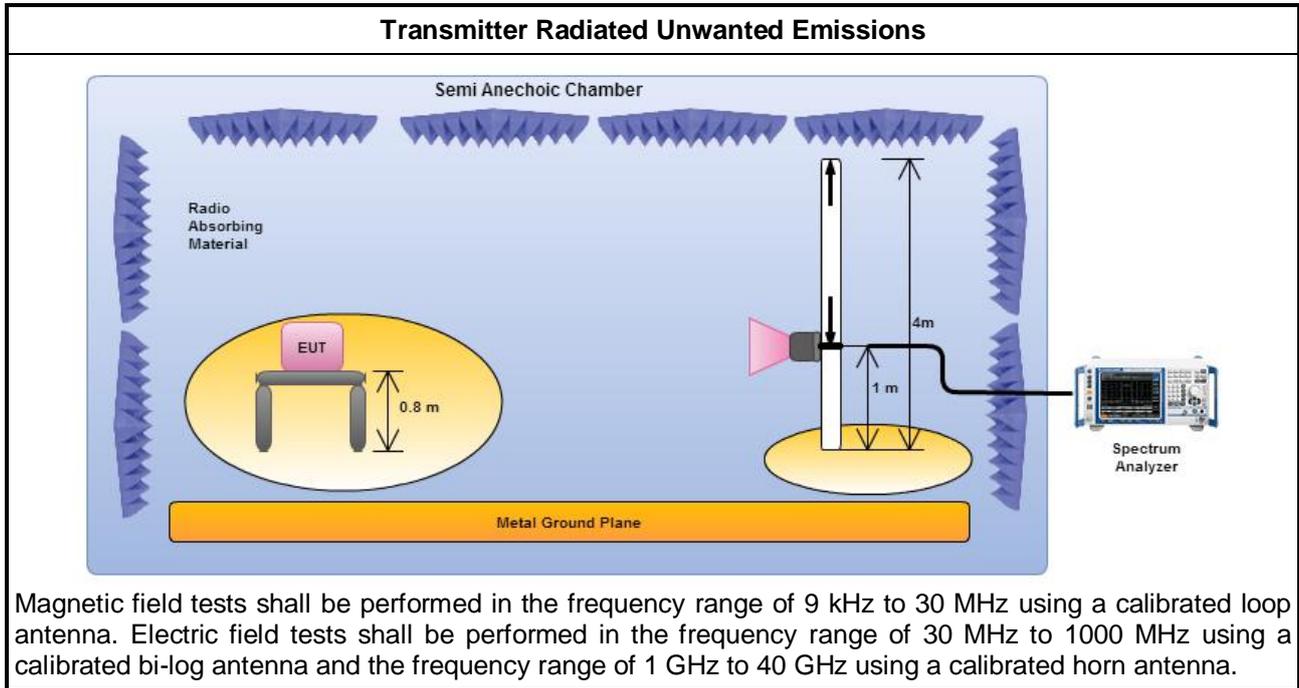


3.4.5 Transmitter Radiated Unwanted Emissions (Below 30MHz)

All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.



3.4.6 Transmitter Radiated Unwanted Emissions (Below 1GHz)

Transmitter Radiated Unwanted Emissions (Below 1GHz)			
Operating Mode	1	Polarization	V
Operating Function	AC Power & Radio link		

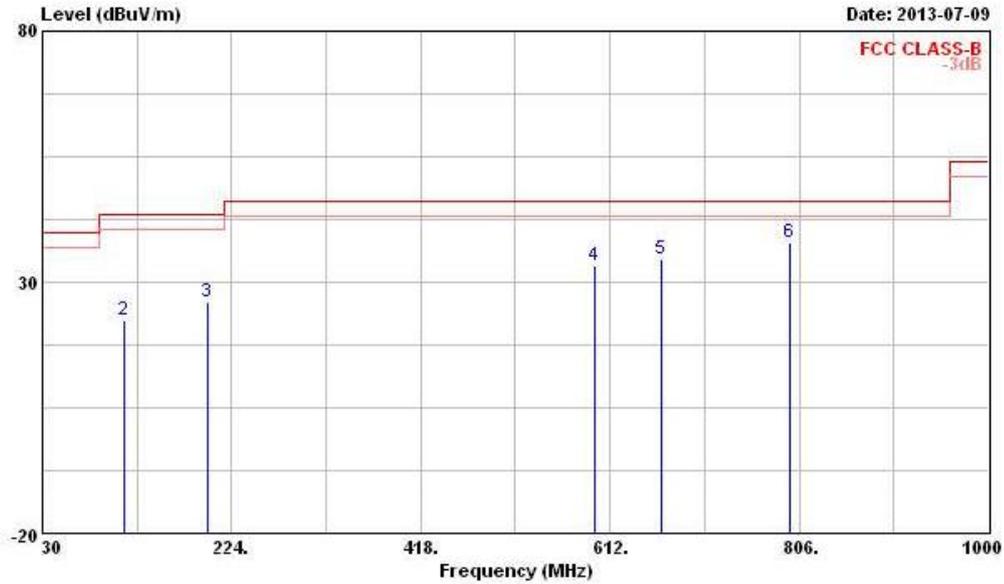


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	30.000	29.93	-10.07	40.00	40.91	16.22	0.78	27.98	Peak	---	---
2	113.420	22.56	-20.94	43.50	36.11	12.80	1.50	27.85	Peak	---	---
3	198.780	25.96	-17.54	43.50	40.13	11.28	2.06	27.51	Peak	---	---
4	595.510	33.25	-12.75	46.00	38.10	20.04	3.67	28.56	Peak	---	---
5	665.350	34.76	-11.24	46.00	39.97	19.31	3.95	28.47	Peak	---	---
6	796.300	37.96	-8.04	46.00	41.45	20.21	4.40	28.10	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical).
 Note 4: No level of unwanted emissions exceeds the level of the fundamental emission.



Transmitter Radiated Unwanted Emissions (Below 1GHz)

Operating Mode	1	Polarization	H
Operating Function	AC Power & Radio link		

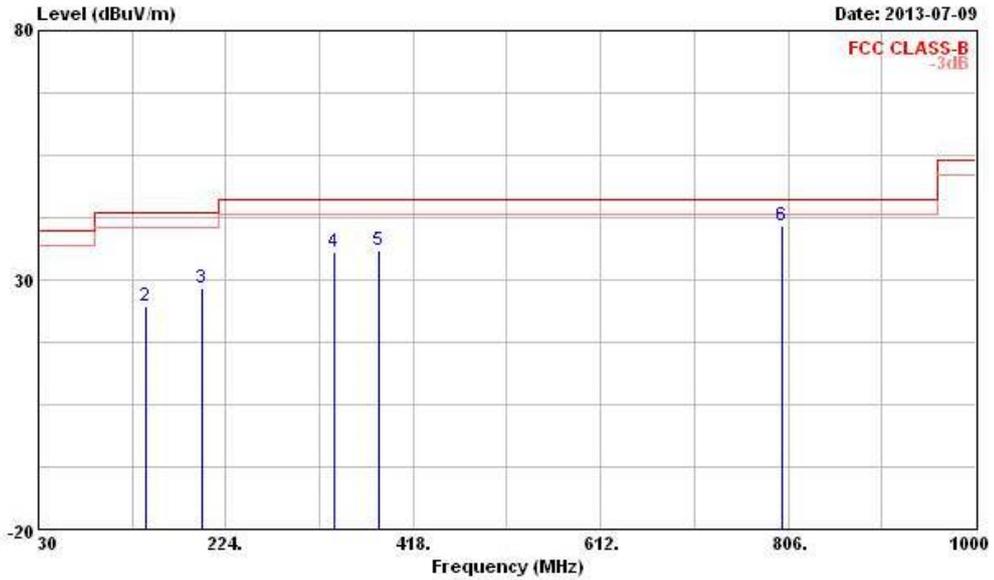


	Freq	Level	Over Limit	Limit	ReadAntenna	Cable	Preamp	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	30.000	31.31	-8.69	40.00	42.29	16.22	0.78	27.98	Peak	---
2	141.550	24.73	-18.77	43.50	38.97	11.78	1.71	27.73	Peak	---
3	198.780	28.47	-15.03	43.50	42.64	11.28	2.06	27.51	Peak	---
4	335.550	35.56	-10.44	46.00	46.02	14.26	2.75	27.47	Peak	---
5	382.110	35.88	-10.12	46.00	45.80	14.98	2.92	27.82	Peak	---
6	800.180	40.95	-5.05	46.00	44.35	20.27	4.42	28.09	Peak	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical).
 Note 4: No level of unwanted emissions exceeds the level of the fundamental emission.



3.4.7 Transmitter Radiated Unwanted Emissions (Above 1GHz)

Transmitter Radiated Unwanted Emissions (Above 1GHz)			
Modulation Mode	ASK-Transmit	Test Freq. (FX)	F1
Operating Function	Transmit	Polarization	V

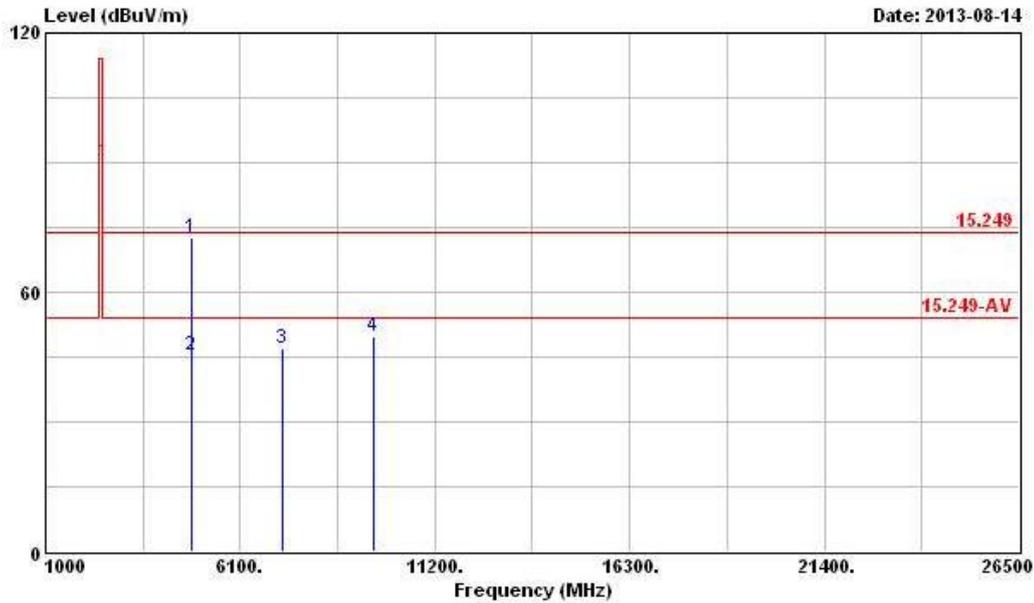


Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Remark	Ant	Table
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB		cm	deg
1 @ 4804.000	72.62	-1.38	74.00	67.99	34.81	4.70	34.88 Peak	---	---
2 4804.000	45.49	-8.51	54.00	40.86	34.81	4.70	34.88 Average	---	---
3 7206.000	46.78	-7.22	54.00	40.69	35.90	5.33	35.14 PK	---	---
4 9608.000	49.60	-4.40	54.00	41.98	36.87	6.32	35.57 PK	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 3: For the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 4: If duty cycle < 100%, average emission = peak emission + 20 log (duty cycle).
 Note 5: No level of unwanted emissions exceeds the level of the fundamental emission.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	ASK-Transmit	Test Freq. (FX)	F1
Operating Function	Transmit	Polarization	H

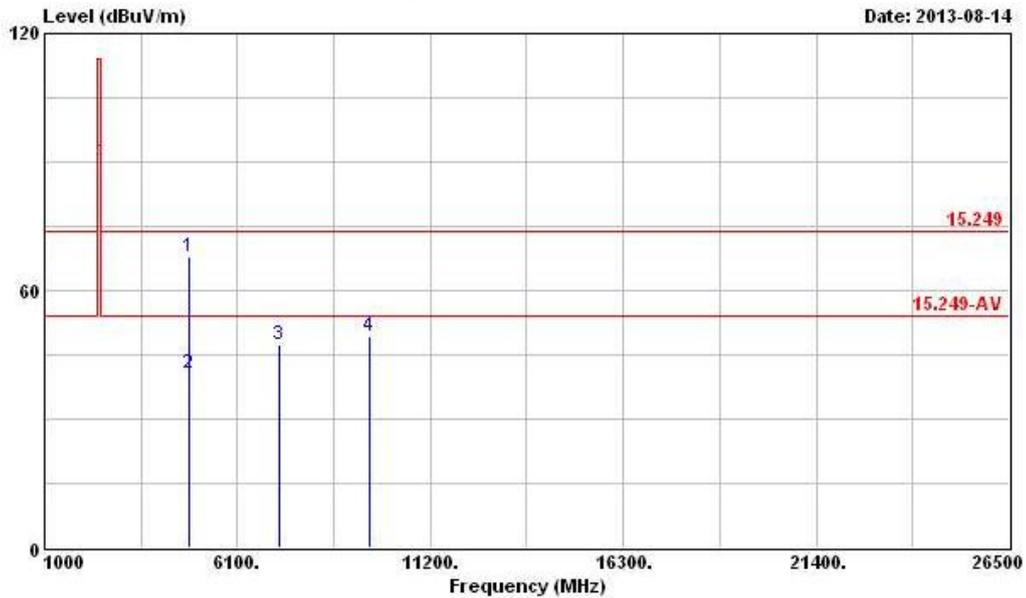


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4804.000	67.93	-6.07	74.00	63.30	34.81	4.70	34.88	Peak	---	---
2	4804.000	40.80	-13.20	54.00	36.17	34.81	4.70	34.88	Average	---	---
3	7206.000	47.20	-6.80	54.00	41.11	35.90	5.33	35.14	PK	---	---
4	9608.000	49.21	-4.79	54.00	41.59	36.87	6.32	35.57	PK	---	---

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 3: For the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 4: If duty cycle < 100%, average emission = peak emission + 20 log (duty cycle).
- Note 5: No level of unwanted emissions exceeds the level of the fundamental emission.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	ASK-Transmit	Test Freq. (FX)	F2
Operating Function	Transmit	Polarization	V

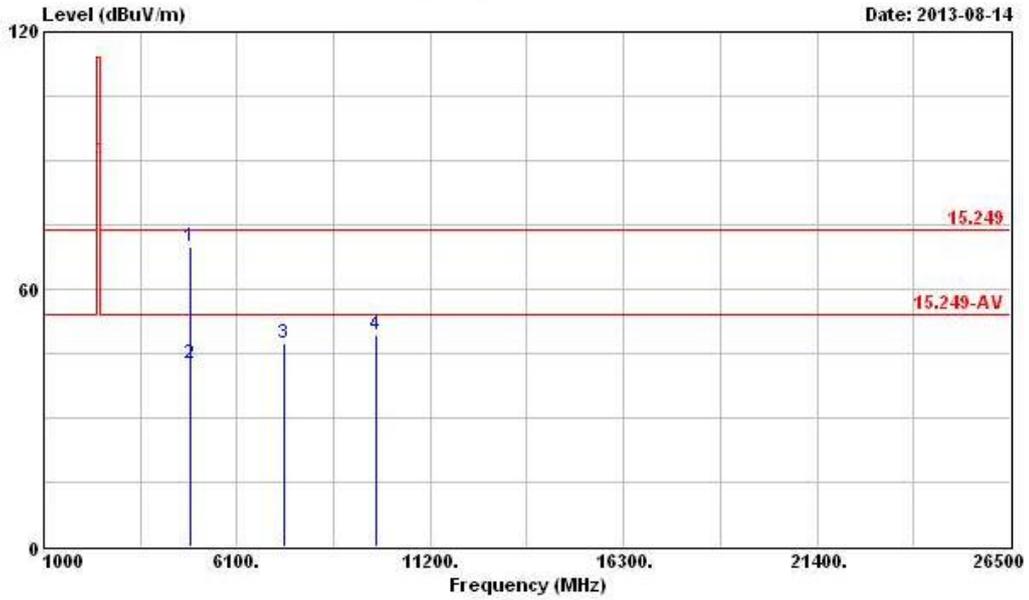


Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4882.000	69.83	-4.17	74.00	65.16	34.77	4.76	34.86 Peak	---	---
2	4882.000	42.70	-11.30	54.00	38.03	34.77	4.76	34.86 Average	---	---
3	7323.000	47.39	-6.61	54.00	41.19	35.90	5.47	35.17 PK	---	---
4	9764.000	49.52	-4.48	54.00	41.52	37.14	6.44	35.58 PK	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 3: For the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 4: If duty cycle < 100%, average emission = peak emission + 20 log (duty cycle).
 Note 5: No level of unwanted emissions exceeds the level of the fundamental emission.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	ASK-Transmit	Test Freq. (FX)	F2
Operating Function	Transmit	Polarization	H

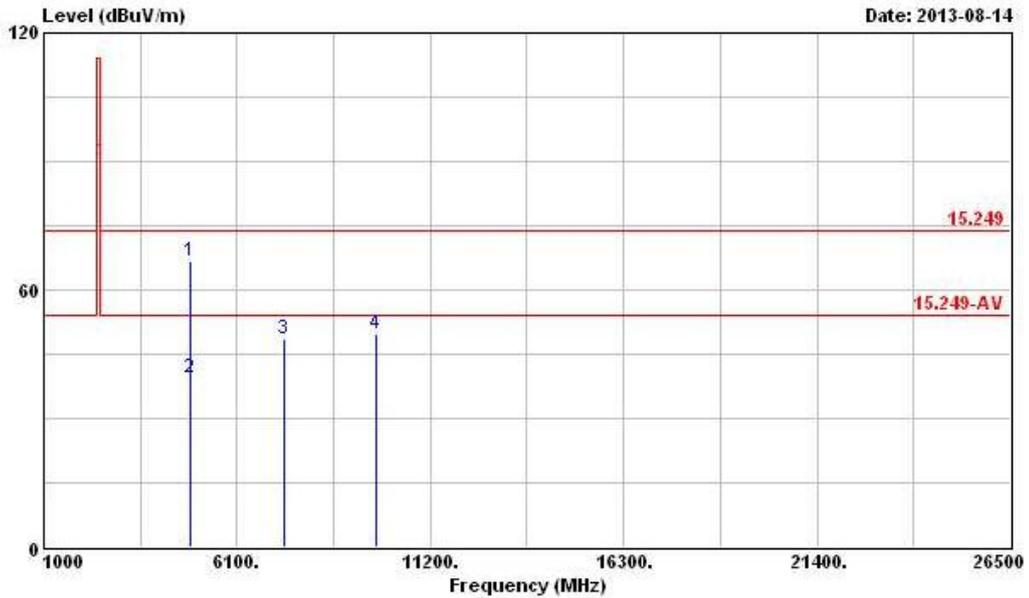


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4882.000	66.57	-7.43	74.00	61.90	34.77	4.76	34.86	Peak	---	---
2	4882.000	39.44	-14.56	54.00	34.77	34.77	4.76	34.86	Average	---	---
3	7323.000	48.66	-5.34	54.00	42.46	35.90	5.47	35.17	PK	---	---
4	9764.000	49.62	-4.38	54.00	41.62	37.14	6.44	35.58	PK	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 3: For the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 4: If duty cycle < 100%, average emission = peak emission + 20 log (duty cycle).
 Note 5: No level of unwanted emissions exceeds the level of the fundamental emission.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	ASK-Transmit	Test Freq. (FX)	F3
Operating Function	Transmit	Polarization	V

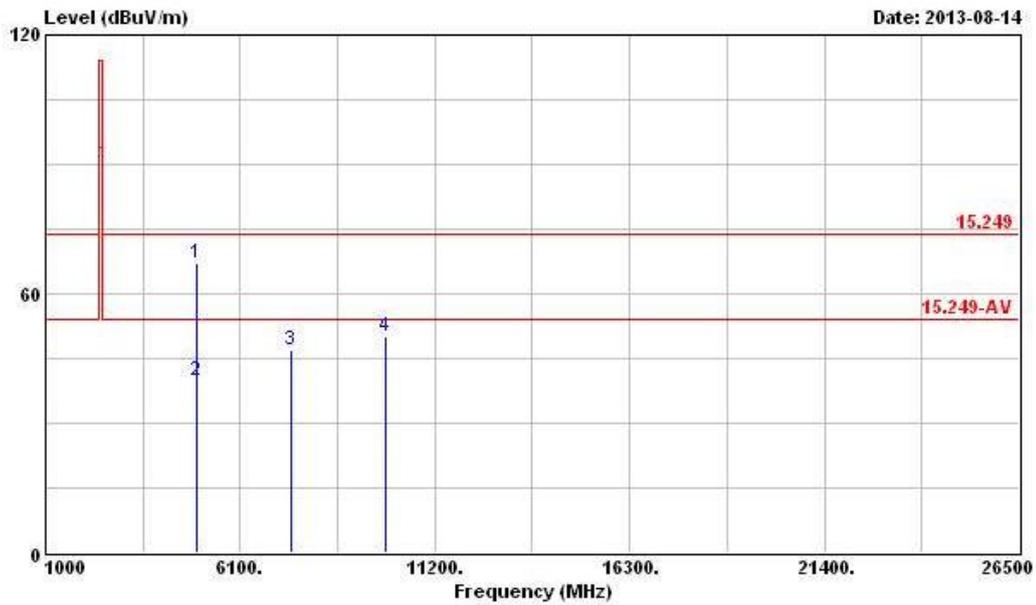


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4956.000	67.05	-6.95	74.00	62.38	34.72	4.79	34.84	Peak	---	---
2	4956.000	39.92	-14.08	54.00	35.25	34.72	4.79	34.84	Average	---	---
3	7434.000	46.82	-7.18	54.00	40.51	35.90	5.61	35.20	PK	---	---
4	9912.000	50.25	-3.75	54.00	41.91	37.36	6.56	35.58	PK	---	---

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 3: For the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 4: If duty cycle < 100%, average emission = peak emission + 20 log (duty cycle).
- Note 5: No level of unwanted emissions exceeds the level of the fundamental emission.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	ASK-Transmit	Test Freq. (FX)	F3
Operating Function	Transmit	Polarization	H

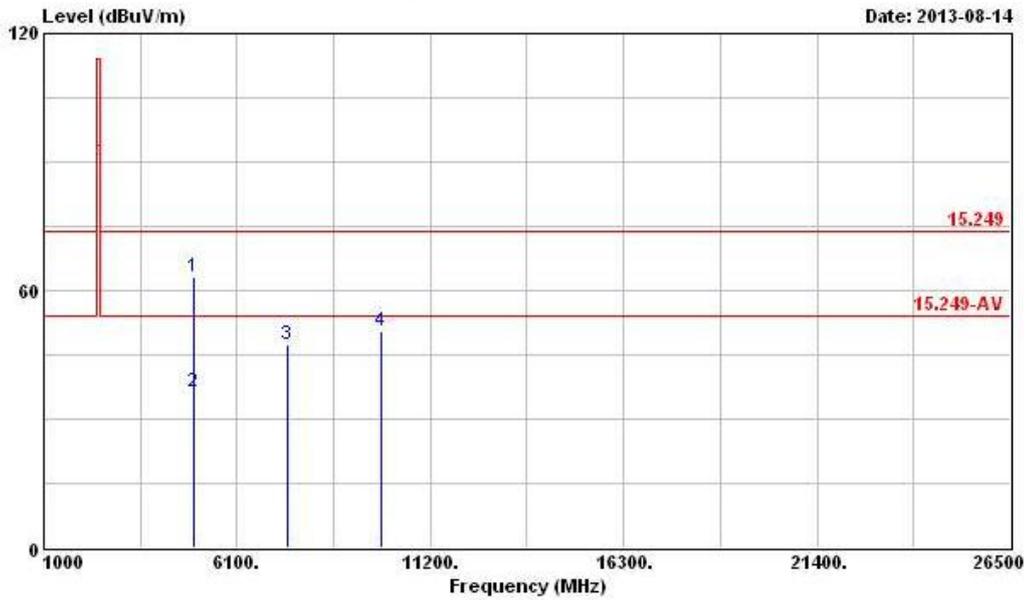

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4956.000	63.33	-10.67	74.00	58.66	34.72	4.79	34.84	Peak	---	---
2	4956.000	36.20	-17.80	54.00	31.53	34.72	4.79	34.84	Average	---	---
3	7434.000	47.21	-6.79	54.00	40.90	35.90	5.61	35.20	PK	---	---
4	9912.000	50.49	-3.51	54.00	42.15	37.36	6.56	35.58	PK	---	---

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 3: For the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 4: If duty cycle < 100%, average emission = peak emission + 20 log (duty cycle).
- Note 5: No level of unwanted emissions exceeds the level of the fundamental emission.



3.4.8 Transmitter Radiated Bandedge Emissions

Transmitter Radiated Bandedge Emissions (Restricted Band)									
Modulation Mode	Test Freq. (MHz)	Measure Distance (m)	Freq. (MHz) PK	Level (dBuV/m) PK	Limit (dBuV/m) PK	Freq. (MHz) AV	Level (dBuV/m) AV	Limit (dBuV/m) AV	Pol.
ASK-Transmit	2402	3	2400.00	68.51	74	2400.00	47.51	54	H
ASK-Transmit	2478	3	2494.11	60.76	74	2499.03	47.50	54	H

Note 1: Measurement worst emissions of receive antenna polarization.



4 Test Equipment and Calibration Data

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMC Receiver	R&S	ESCS 30	100174	9kHz ~ 2.75GHz	Mar. 26, 2013	Conduction (CO04-HY)
LISN	SCHWARZBECK MESS-ELEKTRONIK	NSLK 8127	8127-477	9kHz ~ 30MHz	Jan. 21, 2013	Conduction (CO04-HY)
LISN (Support Unit)	EMCO	3810/2NM	9703-1839	9kHz ~ 30MHz	Apr. 18, 2013	Conduction (CO04-HY)
RF Cable-CON	HUBER+SUHNER	RG213/U	7.61183201e+012	9kHz ~ 30MHz	Nov. 09, 2012	Conduction (CO04-HY)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Spectrum Analyzer	R&S	FSV 40	101013	9KHz~40GHz	Jan. 29, 2013	Conducted (TH06-HY)
AC Power Source	G.W	APS-9102	EL920581	AC 0V ~ 300V	Jul. 16, 2013	Conducted (TH06-HY)
Temp. and Humidity Chamber	Giant Force	GTH-225-20-S	MAB0103-001	-20 ~ 100°C	Nov. 21, 2012	Conducted (TH06-HY)
RF Cable-2m	HUBER+SUHNER	SUCOFLEX_104	SN 345673/4	1GHz ~ 26.5GHz	Dec. 04, 2012	Conducted (TH06-HY)

Note: Calibration Interval of instruments listed above is one year.



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Spectrum Analyzer	R&S	FSP40	100593	9kHz ~ 40GHz	Sep. 14, 2012	Radiation (03CH02-HY)
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH02-HY	30MHz ~ 1GHz 3m	May 11, 2013	Radiation (03CH02-HY)
Amplifier	Agilent	8447D	2944A11146	100kHz ~ 1.3GHz	Jul. 23, 2012	Radiation (03CH02-HY)
Amplifier	Agilent	8449B	3008A02364	1GHz ~ 26.5GHz	May. 06, 2013	Radiation (03CH02-HY)
Horn Antenna	ETS-LINDGREN	3117	00091920	1GHz ~ 18GHz	Nov. 16, 2012	Radiation (03CH02-HY)
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA9170154	15GHz ~ 40GHz	Jan. 08, 2013	Radiation (03CH02-HY)
RF Cable-R03m	Jye Bao	RG142	CB021	9kHz ~ 1GHz	Nov. 10, 2012	Radiation (03CH02-HY)
RF Cable-high	SUHNER	SUCOFLEX106	03CH02-HY	1GHz ~ 40GHz	Mar. 05, 2013	Radiation (03CH02-HY)
Bilog Antenna	SCHAFFNER	CBL61128	2723	30MHz ~ 2GHz	Oct. 22, 2012	Radiation (03CH02-HY)
Turn Table	Chaintek Instruments	3000	MF7802058	0~ 360 degree	N/A	Radiation (03CH02-HY)
Antenna Mast	MF	MF7802	MF780208205	1 ~ 4 m	N/A	Radiation (03CH02-HY)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Loop Antenna	TESEQ	HLA 6120	31244	9 kHz - 30 MHz	Dec. 02, 2012	Radiation (03CH02-HY)

Note: Calibration Interval of instruments listed above is two year.