



RADIO TEST REPORT

Test Report No.: 30DE0120-YK-A

Applicant : Sony EMCS Corporation Kisarazu TEC
Type of Equipment : Digital Stereo Transmitter
Model No. : TMR-RF4000
FCC ID : AK8TMR4000
Test regulation : FCC Part15 Subpart C: 2009
Test result : Complied

1. This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
2. The results in this report apply only to the sample tested.
3. This sample tested is in compliance with the limits of the above regulation.
4. The test results in this test report are traceable to the national or international standards.

Date of test: November 20 and 24, 2009

Tested by: *M. Nakatake*
Minoru Nakatake

Approved by: *T. Imamura*
Toyokazu Imamura
Manager of Yamakita EMC Lab.

UL Japan, Inc.

Yamakita EMC Lab.

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011
Facsimile: +81 465 77 2112

MF060b (06.08.09)

Table of Contents	Page
1 Applicant information	3
2 Equipment under test (E.U.T.)	3
3 Test specification, procedures and results	4
4 System test configuration	6
5 Conducted emission	7
6 6dB bandwidth & Occupied bandwidth (99%)	7
7 Maximum peak output power	7
8 Out of band emissions (Antenna port conducted)	7
9 Out of band emissions (Radiated)	8
10 Peak power density	9
<u>Contents of Appendixes</u>	10
APPENDIX 1: Photographs of test setup	11
APPENDIX 2: Test data	14
APPENDIX 3: Test instruments	39

UL Japan, Inc.

Yamakita EMC Lab.

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011

Facsimile: +81 465 77 2112

1 Applicant information

Company Name : SONY EMCS Corporation Kisarazu TEC
Address : Shinagawa INTERCITY C Tower, 2-15-3 Konan, Minato-ku, Tokyo, Japan
Telephone Number : +81-3-5769-5640
Facsimile Number : +81-3-5769-5915
Contact Person : Shigeru Higai

2 Equipment under test (E.U.T.)

2.1 Identification of E.U.T.

Type of Equipment : Digital Stereo Transmitter
Model No. : TMR-RF4000
Serial No. : Refer to 4.2 in this report.
Rating : DC5.2V (AC120V/60Hz)
Country of Mass-production : China
Condition of EUT : Engineering prototype
(Not for Sale: This sample is equivalent to mass-produced items.)
Modification of EUT : No modification by the test lab.
Receipt Date of Sample : November 17, 2009

2.2 Product description

Model: TMR-RF4000 (referred to as the EUT in this report) is a Digital Stereo Transmitter.

Equipment type : Transceiver
Frequency of operation : 2404-2476MHz
Clock frequency : 16MHz
Bandwidth & channel spacing : 2MHz & 3MHz
Type of modulation : GFSK
Antenna type : Planar Inverted F Antenna
Antenna connector type : None
Antenna gain : -1.7dBi
ITU code : G1D
Operation temperature range : 0 ~ +40 deg.C.

FCC 15.31 (e)

This EUT provides stable voltage (DC2.0V) constantly to RF transmitter regardless of input voltage. Therefore, this EUT complies with the requirement.

FCC Part 15.203

The antenna is not removable from the EUT. Therefore, the equipment complies with the antenna requirement.

UL Japan, Inc.

Yamakita EMC Lab.

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011
Facsimile: +81 465 77 2112

3 Test specification, procedures and results

3.1 Test specification

Test specification : FCC Part 15 Subpart C: 2009, final revised on December 2, 2009
 Title : FCC 47CFR Part15 Radio Frequency Device Subpart C Intentional Radiators
 Section 15.207 Conducted limits
 Section 15.209 Radiated emission limits, general requirements
 Section 15.247 Operation within the bands 902-928MHz, 2400-2483.5MHz,
 and 5725-5850MHz

*The revision on December 2, 2009 does not affect the test specification applied to the EUT.
 The EUT complies with FCC Part 15 Subpart B: 2009, final revised on December 2, 2009. Refer to the test report 30DE0120-YK-E.

3.2 Procedures & Results

Item	Test Procedure	Specification	Remarks	Deviation	Worst Margin	Results
Conducted emission	ANSI C63.4:2003 7. AC powerline conducted emission measurements	FCC 15.207	-	N/A	17.2dB (0.2029MHz, AV, Tx 2476MHz)	Complied
6dB bandwidth	"Guidance on Measurement for Digital Transmission Systems Section 15.247" & ANSI C63.4:2003 13. Measurement of intentional radiators	FCC 15.247 (a)(2)	Conducted	N/A	-	Complied
Maximum peak Output power	"Guidance on Measurement for Digital Transmission Systems Section 15.247" & ANSI C63.4:2003 13. Measurement of intentional radiators	FCC 15.247 (b)(3)	Conducted	N/A	-	Complied
Out of band emission & Restricted band edges	"Guidance on Measurement for Digital Transmission Systems Section 15.247" & ANSI C63.4:2003 13. Measurement of intentional radiators	FCC 15.109, 15.247 (d) and 15.209	Conducted / Radiated	N/A	4.2dB (12380.00MHz, Horizontal, Tx 2476MHz)	Complied
Power density	"Guidance on Measurement for Digital Transmission Systems Section 15.247" & ANSI C63.4:2003 13. Measurement of intentional radiators	FCC 15.247 (e)	Conducted	N/A	-	Complied

Note: UL Japan's EMI Work Procedures No.QPM05 and QPM15.

3.3 Addition to standard

Item	Test Procedure	Specification	Remarks	Worst Margin	Results
Occupied Bandwidth (99%)	ANSI C63.4:2003 13. Measurement of intentional radiators RSS-Gen 4.6.1	RSS-Gen 4.6.1	Conducted	-	Complied

* Other than above, no addition, exclusion nor deviation has been made from the standard.

UL Japan, Inc.

Yamakita EMC Lab.

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011

Facsimile: +81 465 77 2112

3.4 Uncertainty

The following uncertainties have been calculated to provide a confidence level of 95% using a coverage factor k=2.

	No.1 open site (±)	No.2 open site (±)	No.1 anechoic chamber (±)
Conducted emission			
150kHz-30MHz	2.7 dB	2.7 dB	2.8 dB
Radiated emission (3m)			
<30MHz	2.4 dB	2.4 dB	2.7 dB
30-300MHz	4.3 dB	4.3 dB	4.6 dB
300-1000MHz	4.3 dB	4.3 dB	4.5 dB
1GHz<	5.7 dB	5.8 dB	5.7 dB

Antenna port conducted test	(±)
Below 1GHz	0.4dB
1GHz and above	0.7dB

Conducted emission test

The data listed in this test report has enough margin, more than site margin.

Radiated emission test

The data listed in this report meets the limits unless the uncertainty is taken into consideration.

3.5 Test location

UL Japan, Inc. Yamakita EMC Lab.

907, Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken 258-0124 JAPAN

Telephone number : +81 465 77 1011

Facsimile number : +81 465 77 2112

JAB Accreditation No. : RTL02610

No. 1 test site has been fully described in a report submitted to FCC office, and accepted on July 23, 2008 (Registration No.: 95486).

IC Registration No. : 2973B-1

No. 2 test site has been fully described in a report submitted to FCC office, and accepted on February 27, 2008 (Registration No.: 466226).

IC Registration No. : 2973B-3

No. 1 anechoic chamber has been fully described in a report submitted to FCC office, and accepted on October 22, 2008 (Registration No.: 95967).

IC Registration No. : 2973B-2

Test room	Width x Depth x Height (m)	Test room	Width x Depth x Height (m)
No.1 shielded room	8.0 x 5.0 x 2.5	No.1 Semi-anechoic chamber	10.0 x 7.5 x 5.7
No.2 shielded room	5.0 x 4.0 x 2.5		
No.3 shielded room	4.0 x 5.0 x 2.7		

Open test site	Maximum measurement distance
No.1 open test site	30m
No.2 open test site	10m

UL Japan, Inc.

Yamakita EMC Lab.

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011

Facsimile: +81 465 77 2112


4 System test configuration

4.1 Justification

The system was configured in typical fashion (as a customer would normally use it) for testing.

Test item	Operating mode	Tested frequency
Conducted emission Spurious emission 6dB bandwidth Maximum peak output power Power density 99% occupied bandwidth	Transmitting (Pseudo random sequence)	2404MHz, 2440MHz, 2476MHz
Restricted band edge	Transmitting (Pseudo random sequence)	2404MHz, 2476MHz

4.2 Configuration of tested system

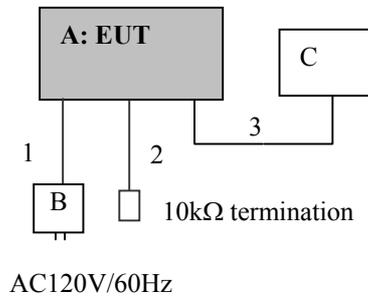

* Test data was taken under worse case conditions.

Description of EUT and support equipment

No.	Item	Model number	Serial number	Manufacturer	Remarks
A	Digital Stereo Transmitter	TMR-RF4000	*1)	SONY	EUT
B	AC Adaptor	AC-E5212	A000016	SONY	-
C	Radio Cassette Player	WM-FX193	-	SONY	-

*1) Radiated emission: 1, Other test: 3

List of cables used

No.	Name	Length (m)	Shield		Remark
			Cable	Connector	
1	DC cable	1.9	Unshielded	Unshielded	-
2	LINE IN cable	3.0	Shielded	Shielded	-
3	PHONES IN cable	3.0	Shielded	Shielded	-

UL Japan, Inc.

Yamakita EMC Lab.

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011

Facsimile: +81 465 77 2112

5 Conducted emissions

5.1 Operating environment

The test was carried out in No.1 shielded room.

5.2 Test configuration

EUT was placed on a wooden platform of nominal size, 1m by 1.8m, raised 80cm above the conducting ground plane. The rear of tabletop was located 40cm to the vertical conducting plane. The rear of peripherals was aligned and flushed with rear of tabletop. All other surfaces of tabletop were at least 80cm from any other grounded conducting surface. EUT was located 80cm from a Line Impedance Stabilization Network (LISN) and excess AC cable was bundled in center. Photographs of the set up are shown in Appendix 1.

5.3 Test conditions

Frequency range : 0.15 - 30MHz

5.4 Test procedure

The host device, PC was connected to a LISN (AMN). An overview sweep with peak detection has been performed. The Conducted emission measurements were made with the following detector function of the test receiver.

Detector: QP/AV
IF Bandwidth: 9kHz

5.5 Results

Summary of the test results : Pass

6 6dB bandwidth & Occupied bandwidth (99%)

Test procedure

The bandwidth was measured with a spectrum analyzer connected to the antenna port.

Summary of the test results: Pass

7 Maximum peak output power

Test procedure

The Maximum Peak Output Power was measured with a power meter connected to the antenna port.

Summary of the test results: Pass

8 Out of band emissions (Antenna port conducted)

Test procedure

The Out of Band Emissions was measured with a spectrum analyzer connected to the antenna port. In any 100kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator confirmed 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on a radiated measurement.

Summary of the test results: Pass

UL Japan, Inc.

Yamakita EMC Lab.

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011
Facsimile: +81 465 77 2112

9 Out of band emissions (Radiated)

9.1 Operating environment

The test was carried out in No.1 anechoic chamber.

9.2 Test configuration

EUT was placed on a urethane platform of nominal size, 1.8m by 0.9m, raised 80cm above the conducting ground plane to prevent the reflection influence. The configuration was set in accordance with ANSI C63.4: 2003. Photographs of the set up are shown in Appendix 1.

9.3 Test conditions

Frequency range : 30MHz - 26GHz
 Test distance : 3m

9.4 Test procedure

The Radiated Electric Field Strength intensity has been measured with a ground plane and at a distance of 3m. The measuring antenna height was varied between 1 and 4m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field intensity. The measurements were performed for both vertical and horizontal antenna polarization. Measurements were performed with QP, PK, and AV detector.

The radiated emission measurements were made with the following detector function of the test receiver.

Frequency	Below 1GHz	Above 1GHz
Instrument used	Test Receiver	Spectrum Analyzer
Detector IF Bandwidth	QP: BW 120kHz	PK: RBW: 1MHz/VBW: 1MHz, AV*1): RBW: 1MHz/VBW: 10Hz
Measuring antenna	Biconical (30-300MHz) Logperiodic (300MHz-1GHz)	Horn

*1) When using Spectrum analyzer, the test was made with adjusting span to zero by using peak hold.

The carrier level and noise levels were confirmed at each position of X, Y and Z axes of EUT to see the position of maximum noise, and the test was made at the position that has the maximum noise.

Model	Worst position	
	Horizontal	Vertical
Below 1GHz	X	Y
Above 1GHz	Z	X

9.5 Band edge

Band edge level at 2390MHz, 2400MHz and 2483.5MHz is below the limits of FCC 15.209. Refer to the data of Radiated emission.

9.6 Results

Summary of the test results : Pass *No noise was detected above the 5th order harmonics.

UL Japan, Inc.

Yamakita EMC Lab.

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011
 Facsimile: +81 465 77 2112

10 Peak power density

Test procedure

The peak power density was measured with a spectrum analyzer connected to the antenna port.

Summary of the test results: Pass

UL Japan, Inc.

Yamakita EMC Lab.

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011

Facsimile: +81 465 77 2112

APPENDIX 1: Photographs of test setup

Page 11	:	Conducted emission
Page 12	:	Radiated emission
Page 13	:	Pre-check of the worst position

APPENDIX 2: Test data

Page 14 - 18	:	Conducted emission
Page 19	:	6dB bandwidth
Page 20	:	Maximum peak output power
Page 21 - 26	:	Out of band emissions (Antenna port conducted)
Page 27 - 35	:	Out of band emissions (Radiated)
Page 36 - 37	:	Peak power density
Page 38	:	Occupied bandwidth

APPENDIX 3: Test instruments

Page 39	:	Test instruments
---------	---	------------------

UL Japan, Inc.

Yamakita EMC Lab.

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011

Facsimile: +81 465 77 2112