

APPENDIX 2: Data of EMI test

Conducted Emission

DATA OF CONDUCTED EMISSION TEST

UL Apex Co., Ltd. Head Office EMC Lab. No.4 Semi Anechoic Chamber
 Date : 2007/01/19

Applicant	: Sony EMCS Corporation Saitama TEC	Report No.	: 27EE0160-HO
Kind of EUT	: RF Stereo Transmitter	Power	: AC120V / 60Hz
Model No.	: TMR-RF925R	Temp°C/Humi%	: 24deg. C / 30%
Serial No.	: 1	Operator	: Takumi Shimada

Mode / Remarks : Transmitting ch_1

LIMIT : FCC15.207 QP
 FCC15.207 AV

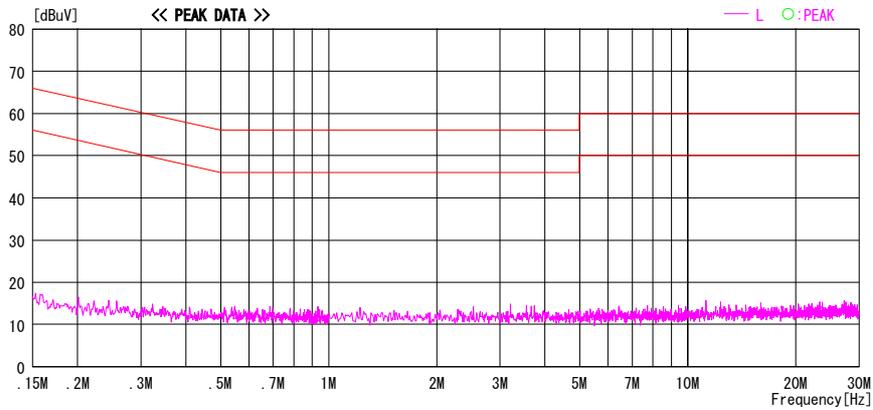
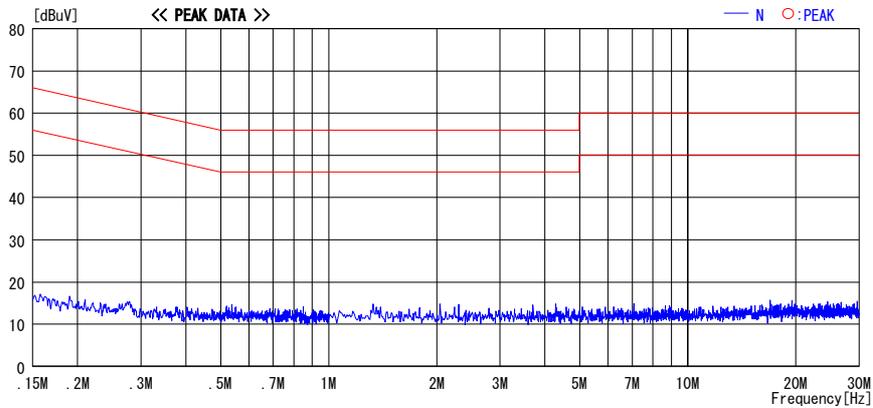


CHART: WITH FACTOR. Peak hold data. Data is uncorrected. CALCURATION: RESULT=READING+C.F.(LISN LOSS+CABLE LOSS)
 Except for the above table : adequate margin data below the limits.

Conducted Emission

DATA OF CONDUCTED EMISSION TEST

UL Apex Co., Ltd. Head Office EMC Lab. No. 4 Semi Anechoic Chamber
Date : 2007/01/19

Applicant	: Sony EMCS Corporation Saitama TEC	Report No.	: 27EE0160-H0
Kind of EUT	: RF Stereo Transmitter	Power	: AC120V / 60Hz
Model No.	: TMR-RF925R	Temp°C/Humi%	: 24deg. C / 30%
Serial No.	: 1	Operator	: Takumi Shimada

Mode / Remarks : Transmitting ch_2

LIMIT : FCC15.207 QP
FCC15.207 AV

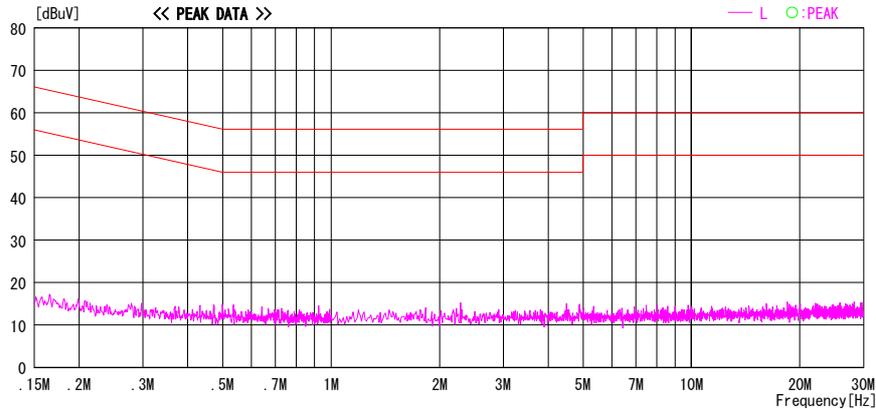
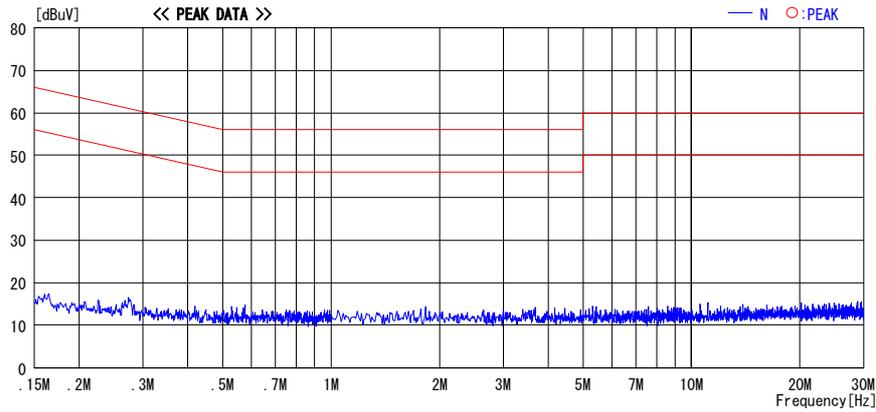


CHART: WITH FACTOR. Peak hold data. Data is uncorrected. CALCURATION: RESULT=READING+C.F (LISN LOSS+CABLE LOSS)
Except for the above table : adequate margin data below the limits.

Conducted Emission

DATA OF CONDUCTED EMISSION TEST

UL Apex Co., Ltd. Head Office EMC Lab. No. 4 Semi Anechoic Chamber
 Date : 2007/01/19

Applicant : Sony EMCS Corporation Saitama TEC	Report No. : 27EE0160-H0
Kind of EUT : RF Stereo Transmitter	Power : AC120V / 60Hz
Model No. : TMR-RF925R	Temp°C/Humi% : 24deg. C / 30%
Serial No. : 1	Operator : Takumi Shimada

Mode / Remarks : Transmitting ch_3

LIMIT : FCC15.207 QP
 FCC15.207 AV

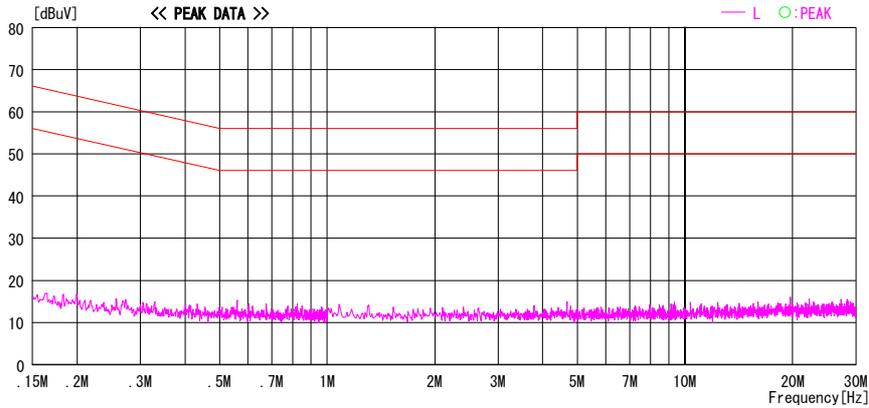
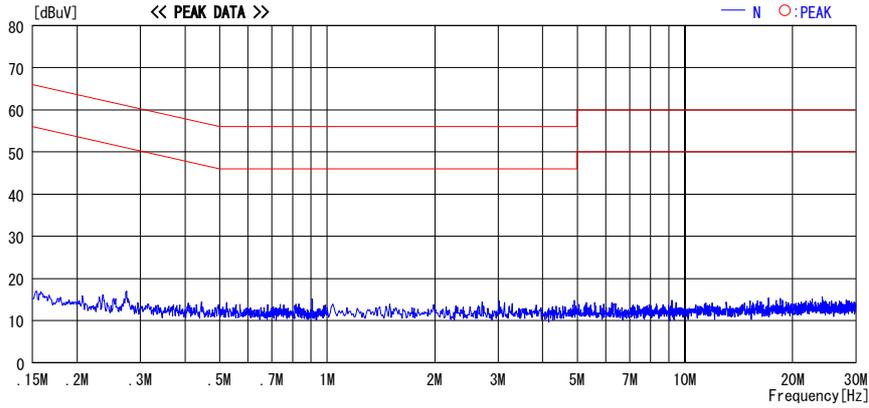


CHART: WITH FACTOR, Peak hold data. Data is uncorrected. CALCULATION: RESULT=READING+C.F(LISN LOSS+CABLE LOSS)
 Except for the above table : adequate margin data below the limits.

Conducted Emission


DATA OF CONDUCTED EMISSION TEST

UL Apex Co., Ltd. Head Office EMC Lab. No. 4 Semi Anechoic Chamber
Date : 2007/01/19

Applicant : Sony EMCS Corporation Saitama TEC
 Kind of EUT : RF Stereo Transmitter
 Model No. : TMR-RF925R
 Serial No. : 1
 Report No. : 27EE0160-HO
 Power : AC120V / 60Hz
 Temp°C/Humi% : 24deg. C / 30%
 Operator : Takumi Shimada

Mode / Remarks : Transmitting ch_3

LIMIT : FCC15.207 QP
 FCC15.207 AV

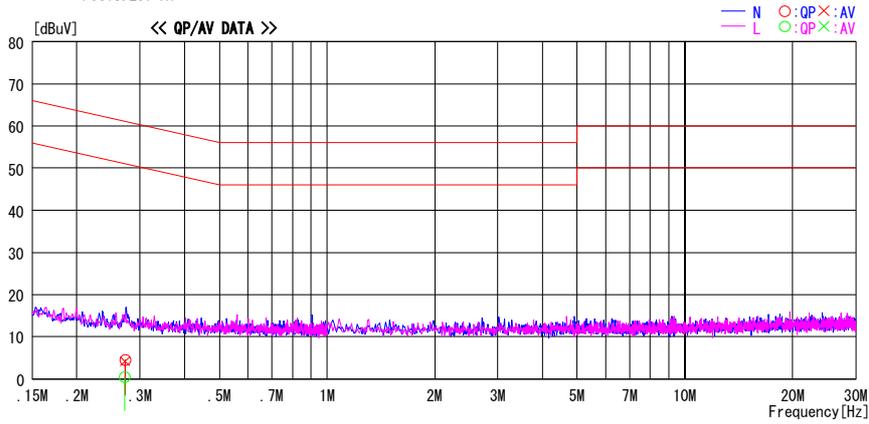

Frequency [MHz]	Reading Level		Corr. Factor	Results		Limit		Margin		Phase
	QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dB]	AV [dB]	
0.27259	4.4	4.1	0.1	4.5	4.2	61.0	51.0	56.5	46.8	N
0.67942	-2.7	-5.3	0.3	-2.4	-5.0	56.0	46.0	58.4	51.0	N
0.81747	-1.0	-2.7	0.3	-0.7	-2.4	56.0	46.0	56.7	48.4	N
0.95459	-0.5	-2.0	0.3	-0.2	-1.7	56.0	46.0	56.2	47.7	N
1.22814	-2.4	-4.6	0.3	-2.1	-4.3	56.0	46.0	58.1	50.3	N
1.36148	-3.3	-6.0	0.3	-3.0	-5.7	56.0	46.0	59.0	51.7	N
0.27223	0.4	-0.8	0.1	0.5	-0.7	61.0	51.0	60.5	51.7	L
0.67942	-4.8	-8.4	0.3	-4.5	-8.1	56.0	46.0	60.5	54.1	L
0.81747	-2.4	-4.7	0.3	-2.1	-4.4	56.0	46.0	58.1	50.4	L
0.95459	-2.5	-4.9	0.3	-2.2	-4.6	56.0	46.0	58.2	50.6	L
1.22814	-3.2	-5.9	0.3	-2.9	-5.6	56.0	46.0	58.9	51.6	L
1.36148	-4.1	-7.3	0.3	-3.8	-7.0	56.0	46.0	59.8	53.0	L

CHART: WITH FACTOR, Peak hold data. Data is uncorrected. CALCULATION: RESULT=READING+C.F.(LISN LOSS+CABLE LOSS)
 Except for the above table : adequate margin data below the limits.

* The result is rounded off to the second decimal place. Therefore, there may be 0.1 difference for the result.

Radiated Emission (Fundamental and Spurious emission)below 1GHz
 (Tx: Ch. 1)


DATA OF RADIATED EMISSION TEST

UL Apex Co., Ltd. Head Office EMC Lab. No. 3 Semi Anechoic Chamber

Company : Sony EMCS Corporation Saitama TEC Report No. : 27EE0160-HO 2006/12/26
 Kind of EUT : RF Stereo Transmitter Power : AC 120V / 60Hz
 Model No. : TMR-RF925R Temp./Humi. : 24deg. C. /38%
 Serial No. : 1 Operator : Norihisa Hashimoto

Mode / Remarks : Transmitting ch_1

LIMIT : FCC15.249(a)&(d) (902-928MHz) 3m. below 1GHz:QP, above 1GHz:PK
 Except for the data below : adequate margin data below the limits.

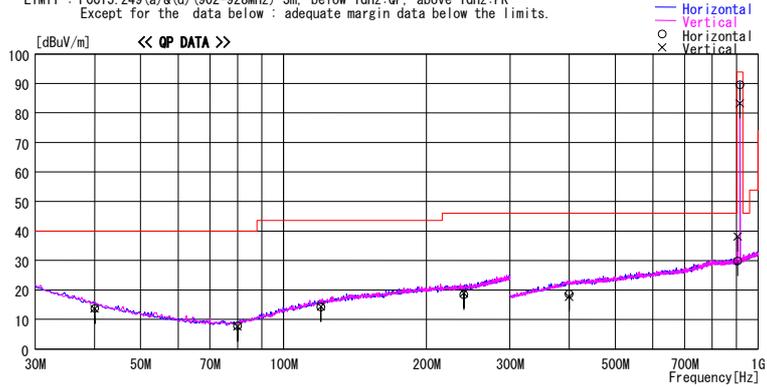

Frequency [MHz]	Reading [dBuV]	DET	Antenna	Loss	Level [dBuV/m]	Angle [Deg]	Height [cm]	Polar.	Limit [dBuV/m]	Margin [dB]
			Factor [dB/m]	Gain [dB]						
40.000	24.5	QP	14.2	-24.9	13.8	23	100	Hori.	40.0	26.2
40.000	24.3	QP	14.2	-24.9	13.6	312	100	Vert.	40.0	26.4
80.000	25.0	QP	7.1	-24.2	7.9	121	100	Hori.	40.0	32.1
80.000	24.7	QP	7.1	-24.2	7.6	218	100	Vert.	40.0	32.4
120.000	24.5	QP	13.5	-23.7	14.3	31	100	Hori.	43.5	29.2
120.000	24.6	QP	13.5	-23.7	14.4	332	100	Vert.	43.5	29.1
240.000	23.3	QP	17.8	-22.7	18.4	129	100	Hori.	46.0	27.6
240.000	23.9	QP	17.8	-22.7	19.0	296	100	Vert.	46.0	27.0
400.000	21.5	QP	17.9	-21.7	17.7	0	100	Vert.	46.0	26.3
400.000	22.4	QP	17.9	-21.7	18.6	101	100	Hori.	46.0	27.4
904.832	26.6	QP	21.6	-18.3	29.9	308	273	Hori.	46.0	16.1
904.832	34.8	QP	21.6	-18.3	38.1	102	100	Vert.	46.0	7.9
915.505	85.9	QP	21.8	-18.1	89.6	171	100	Hori.	93.9	4.3 (Fundamental)
915.505	79.6	QP	21.8	-18.1	83.3	293	100	Vert.	93.9	10.6 (Fundamental)

CHART WITH FACTOR ANT TYPE: -30MHz: LOOP, 30-300MHz: BICONICAL, 300MHz-1000MHz: LOGPERIODIC, 1000MHz: HORN
 CALCULATION: RESULT = READING + ANT FACTOR + LOSS (CABLE+ATTEN.) - GAIN (AMP)

*The limit is rounded down to one decimal place.
 *The test result is round off to one or two decimal places, so some differences might be observed.

Radiated Emission (Fundamental and Spurious emission)below 1GHz
 (Tx: Ch. 2)

DATA OF RADIATED EMISSION TEST


UL Apex Co., Ltd. Head Office EMC Lab. No.3 Semi Anechoic Chamber

Company : Sony EMCS Corporation Saitama TEC Report No. : 27EE0160-HO
 Kind of EUT : RF Stereo Transmitter Power : AC 120V / 60Hz
 Model No. : TMR-RF925R Temp./Humi. : 24deg. C. /38%
 Serial No. : 1 Operator : Norihisa Hashimoto

2006/12/26

Mode / Remarks : Transmitting ch_2

LIMIT : FCC15.249(a)&(d)(902-928MHz) 3m, below 1GHz:QP, above 1GHz:AV
 Except for the data below : adequate margin data below the limits.

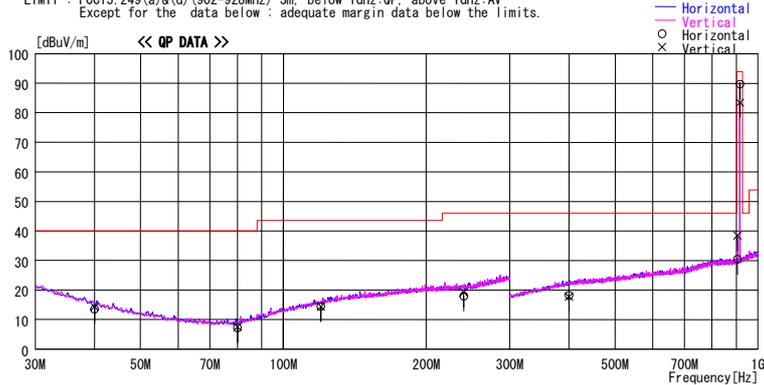

Frequency [MHz]	Reading [dBuV]	DET	Antenna		Level [dBuV/m]	Angle [Deg]	Height [cm]	Polar.	Limit [dBuV/m]	Margin [dB]
			Factor [dB/m]	Loss& Gain [dB]						
40.000	24.2	QP	14.2	-24.9	13.5	0	100	Hori.	40.0	26.5
40.000	25.1	QP	14.2	-24.9	14.4	2	100	Vert.	40.0	25.6
80.000	24.3	QP	7.1	-24.2	7.2	21	100	Hori.	40.0	32.8
80.000	24.6	QP	7.1	-24.2	7.5	0	100	Vert.	40.0	32.5
120.000	24.7	QP	13.5	-23.7	14.5	321	100	Hori.	43.5	29.0
120.000	24.6	QP	13.5	-23.7	14.4	274	100	Vert.	43.5	29.1
240.000	22.9	QP	17.8	-22.7	18.0	10	100	Hori.	46.0	28.0
240.000	24.2	QP	17.8	-22.7	19.3	228	100	Vert.	46.0	26.7
400.000	22.1	QP	17.9	-21.7	18.3	0	100	Hori.	46.0	27.7
400.000	21.5	QP	17.9	-21.7	17.7	0	100	Vert.	46.0	28.3
905.325	35.1	QP	21.6	-18.3	38.4	94	100	Vert.	46.0	7.6
905.325	27.1	QP	21.6	-18.3	30.4	312	274	Hori.	46.0	15.6
916.017	79.6	QP	21.9	-18.1	83.4	294	148	Vert.	93.9	10.5 (Fundamental)
916.020	85.9	QP	21.9	-18.1	89.7	173	100	Hori.	93.9	4.2 (Fundamental)

CHART: WITH FACTOR ANT TYPE: -30MHz: LOOP, 30-300MHz: BICONICAL, 300MHz-1000MHz: LOGPERIODIC, 1000MHz-: HORN
 CALCULATION: RESULT = READING + ANT FACTOR + LOSS (CABLE+ATTEN.) - GAIN (AMP)

*The limit is rounded down to one decimal place.
 *The test result is round off to one or two decimal places, so some differences might be observed.

Radiated Emission (Fundamental and Spurious emission)below 1GHz
 (Tx: Ch. 3)


DATA OF RADIATED EMISSION TEST

UL Apex Co., Ltd. Head Office EMC Lab. No. 3 Semi Anechoic Chamber

Company : Sony EMCS Corporation Saitama TEC Report No. : 27EE0160-HO 2006/12/26
 Kind of EUT : RF Stereo Transmitter Power : AC 120V / 60Hz
 Model No. : TMR-RF925R Temp./Humi. : 24deg. C. /38%
 Serial No. : 1 Operator : Norihisa Hashimoto

Mode / Remarks : Transmitting ch_3

LIMIT : FCC15.249 (a)&(d) (902-928MHz) 3m. below 1GHz:QP, above 1GHz:AV
 Except for the data below : adequate margin data below the limits.

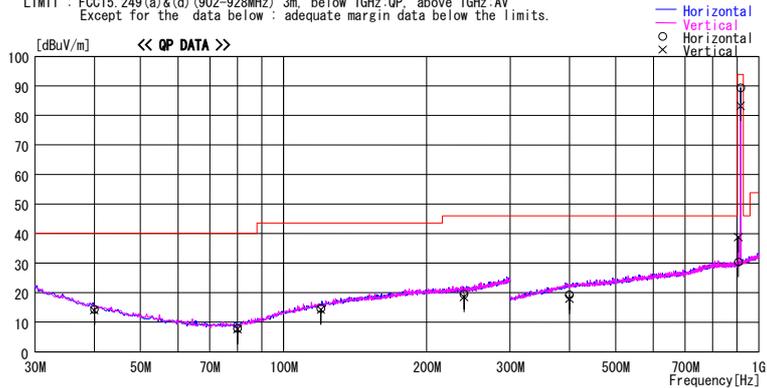

Frequency [MHz]	Reading [dBuV]	DET	Antenna	Loss&	Level	Angle	Height	Polar.	Limit	Margin
			Factor	Gain						
			[dB/m]	[dB]	[dBuV/m]	[Deg]	[cm]		[dBuV/m]	[dB]
40.000	25.1	QP	14.2	-24.9	14.4	0	100	Hori.	40.0	25.6
40.000	24.8	QP	14.2	-24.9	14.1	216	100	Vert.	40.0	25.9
80.000	25.0	QP	7.1	-24.2	7.9	18	100	Hori.	40.0	32.1
80.000	24.7	QP	7.1	-24.2	7.6	281	106	Vert.	40.0	32.4
120.000	24.9	QP	13.5	-23.7	14.7	25	100	Hori.	43.5	28.8
120.000	24.5	QP	13.5	-23.7	14.3	100	100	Vert.	43.5	29.2
240.000	24.4	QP	17.8	-22.7	19.5	0	100	Hori.	46.0	26.5
240.000	23.4	QP	17.8	-22.7	18.5	212	100	Vert.	46.0	27.5
400.000	23.1	QP	17.9	-21.7	19.3	0	100	Hori.	46.0	26.7
400.000	21.7	QP	17.9	-21.7	17.9	320	102	Vert.	46.0	28.1
905.844	27.1	QP	21.6	-18.3	30.4	314	257	Hori.	46.0	15.6
905.844	35.4	QP	21.6	-18.3	38.7	100	100	Vert.	46.0	7.3
916.503	85.6	QP	21.9	-18.1	89.4	166	100	Hori.	93.9	4.5 (Fundamental)
916.510	79.4	QP	21.9	-18.1	83.2	288	100	Vert.	93.9	10.7 (Fundamental)

CHART:WITH FACTOR ANT TYPE: -30MHz:LOOP, 30-300MHz:BICONICAL, 300MHz-1000MHz:LOGPERIODIC, 1000MHz--HORN
 CALCULATION:RESULT = READING + ANT FACTOR + LOSS (CABLE+ATTEN.) - GAIN (AMP)

*The limit is rounded down to one decimal place.
 *The test result is round off to one or two decimal places, so some differences might be observed.

Radiated Emission (Spurious emission)above 1GHz
 (Tx: Ch. 1)


DATA OF RADIATED EMISSION TEST

UL Apex Co., Ltd. Head Office EMC Lab. No. 3 Semi Anechoic Chamber
 2006/12/29

Company : Sony EMCS Corporation Saitama TEC Report No. : 27EE0160-HO
 Kind of EUT : RF Stereo Transmitter Power : AC 120V / 60Hz
 Model No. : TMR-RF925R Temp./Humi. : 23deg. C. /32%
 Serial No. : 1 Operator : Norihisa Hashimoto

Mode / Remarks : Transmitting ch_1

LIMIT : FCC15.249 (a) & (d) (902-928MHz) 3m, below 1GHz:QP, above 1GHz:PK
 FCC15.249 (a) & (d) (902-928MHz) 3m, below 1GHz:QP, above 1GHz:AV

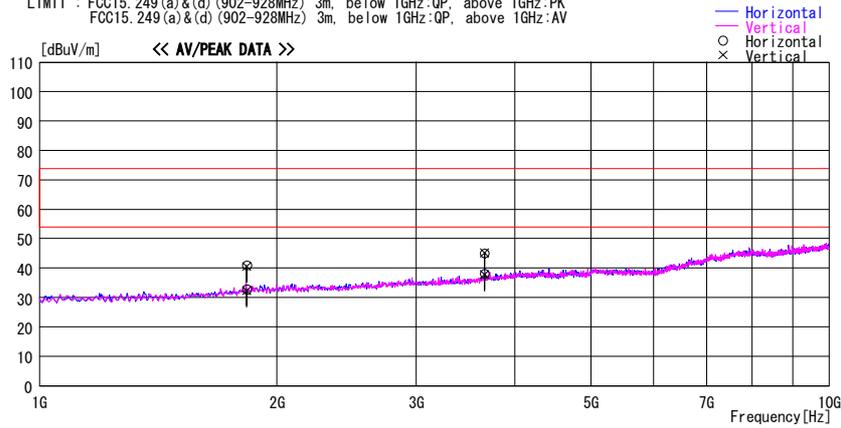

Frequency [MHz]	Reading [dBuV]	DET	Antenna	Loss	Level	Angle	Height	Polar.	Limit	Margin
			Factor	Gain						
			[dB/m]	[dB]	[dBuV/m]	[Deg]	[cm]		[dBuV/m]	[dB]
1831.000	44.4	PK	27.8	-31.3	40.9	0	100	Hori.	73.9	33.0
1831.000	44.1	PK	27.8	-31.3	40.6	0	100	Vert.	73.9	33.3
1831.000	36.3	AV	27.8	-31.3	32.8	0	100	Hori.	53.9	21.1
1831.000	35.8	AV	27.8	-31.3	32.3	0	100	Vert.	53.9	21.6
3662.000	43.0	PK	31.1	-29.1	45.0	0	100	Hori.	73.9	28.9
3662.000	43.2	PK	31.1	-29.1	45.2	0	100	Vert.	73.9	28.7
3662.000	36.1	AV	31.1	-29.1	38.1	0	100	Hori.	53.9	15.8
3662.000	35.7	AV	31.1	-29.1	37.7	0	100	Vert.	53.9	16.2

CHART: WITH FACTOR ANT TYPE: -30MHz: LOOP, 30-300MHz: BICONICAL, 300MHz-1000MHz: LOGPERIODIC, 1000MHz-: HORN
 CALCULATION: RESULT = READING + ANT FACTOR + LOSS (CABLE+ATTEN.) - GAIN (AMP)

*The limit is rounded down to one decimal place.
 *The test result is round off to one or two decimal places, so some differences might be observed.


Radiated Emission (Spurious emission)above 1GHz
 (Tx: Ch. 2)

DATA OF RADIATED EMISSION TEST

UL Apex Co., Ltd. Head Office EMC Lab. No.3 Semi Anechoic Chamber
 2006/12/29

Company : Sony EMCS Corporation Saitama TEC Report No. : 27EE0160-HO
 Kind of EUT : RF Stereo Transmitter Power : AC 120V / 60Hz
 Model No. : TMR-RF925R Temp./Humi. : 23deg.C / 32%
 Serial No. : 1 Operator : Norihisa Hashimoto
 Mode / Remarks : Transmitting ch_2

LIMIT : FCC15.249(a)&(d) (902-928MHz) 3m, below 1GHz:QP, above 1GHz:PK
 FCC15.249(a)&(d) (902-928MHz) 3m, below 1GHz:QP, above 1GHz:AV

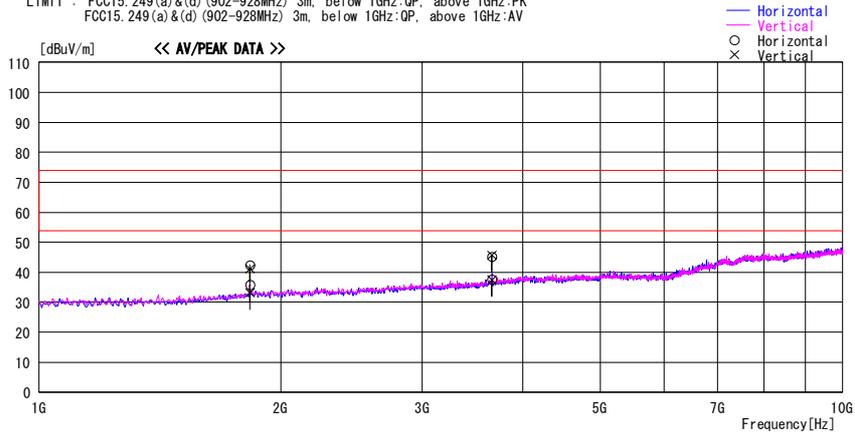

Frequency [MHz]	Reading [dBuV]	DET	Antenna		Level [dBuV/m]	Angle [Deg]	Height [cm]	Polar.	Limit [dBuV/m]	Margin [dB]
			Factor [dB/m]	Loss & Gain [dB]						
1832.000	44.6	PK	27.8	-31.3	41.1	0	100	Vert.	73.9	32.8
1832.000	45.8	PK	27.8	-31.3	42.3	0	100	Hori.	73.9	31.6
1832.000	36.6	AV	27.8	-31.3	33.1	0	100	Vert.	53.9	20.8
1832.000	39.3	AV	27.8	-31.3	35.8	0	100	Hori.	53.9	18.1
3664.000	43.3	PK	31.1	-29.1	45.3	0	100	Hori.	73.9	28.7
3664.000	43.7	PK	31.1	-29.1	45.7	0	100	Vert.	73.9	28.2
3664.000	35.6	AV	31.1	-29.1	37.6	0	100	Hori.	53.9	16.3
3664.000	35.4	AV	31.1	-29.1	37.4	0	100	Vert.	53.9	16.5

CHART: WITH FACTOR ANT TYPE: -30MHz: LOOP, 30-300MHz: BICONICAL, 300MHz-1000MHz: LOGPERIODIC, 1000MHz-: HORN
 CALCULATION: RESULT = READING + ANT FACTOR + LOSS (CABLE+ATTEN.) - GAIN (AMP)

*The limit is rounded down to one decimal place.
 *The test result is round off to one or two decimal places, so some differences might be observed.


Radiated Emission (Spurious emission)above 1GHz
 (Tx: Ch. 3)

DATA OF RADIATED EMISSION TEST

UL Apex Co., Ltd. Head Office EMC Lab. No.3 Semi Anechoic Chamber
 2006/12/29

Company : Sony EMCS Corporation Saitama TEC
 Kind of EUT : RF Stereo Transmitter
 Model No. : TMR-RF925R
 Serial No. : 1
 Report No. : 27EE0160-H0
 Power : AC 120V / 60Hz
 Temp./Humi. : 23deg. C. /32%
 Operator : Norihisa Hashimoto
 Mode / Remarks : Transmitting ch_3

LIMIT : FCC15.249(a)&(d)(902-928MHz) 3m, below 1GHz:QP, above 1GHz:PK
 FCC15.249(a)&(d)(902-928MHz) 3m, below 1GHz:QP, above 1GHz:AV

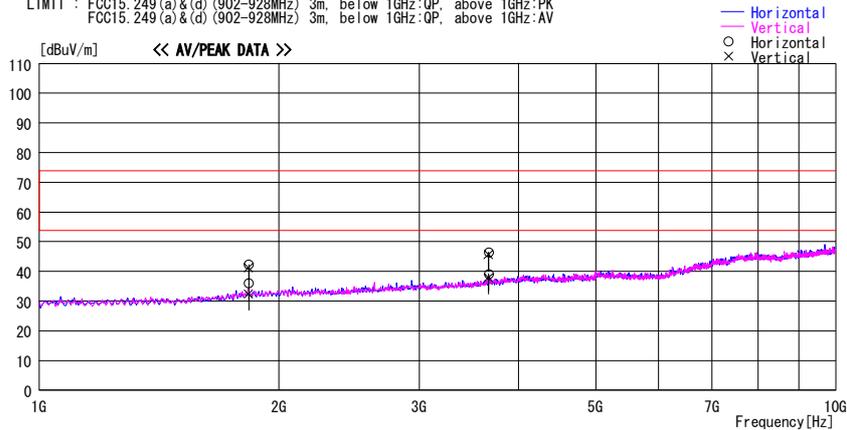

Frequency [MHz]	Reading [dBuV]	DET	Antenna	Loss&	Level [dBuV/m]	Angle [Deg]	Height [cm]	Polar.	Limit [dBuV/m]	Margin [dB]
			Factor [dB/m]	Gain [dB]						
1833.000	45.9	PK	27.8	-31.3	42.4	0	100	Hori.	73.9	31.5
1833.000	44.6	PK	27.8	-31.3	41.1	0	100	Vert.	73.9	32.8
1833.000	39.5	AV	27.8	-31.3	36.0	0	100	Hori.	53.9	17.9
1833.000	35.9	AV	27.8	-31.3	32.4	0	100	Vert.	53.9	21.5
3666.000	44.4	PK	31.1	-29.1	46.4	0	100	Hori.	73.9	27.5
3666.000	43.6	PK	31.1	-29.1	45.6	0	100	Vert.	73.9	28.3
3666.000	37.2	AV	31.1	-29.1	39.2	0	100	Hori.	53.9	14.7
3666.000	35.9	AV	31.1	-29.1	37.9	0	100	Vert.	53.9	16.1

CHART: WITH FACTOR ANT TYPE: -30MHz: LOOP, 30-300MHz: BICONICAL, 300MHz-1000MHz: LOGPERIODIC, 1000MHz-: HORN
 CALCULATION: RESULT = READING + ANT FACTOR + LOSS (CABLE+ATTEN.) - GAIN (AMP)

*The limit is rounded down to one decimal place.
 *The test result is round off to one or two decimal places, so some differences might be observed.

-20dB Bandwidth


UL-Apex
 Head Office EMC Lab. No.7 Semi Anechoic Chamber

Company : SONY EMCS Corporation Saitama TEC
 Equipment : RF Stereo Transmitter
 Model : TMR-RF925R
 S/N : 1
 Power : AC120V/60Hz
 Mode : Transmitting


Regulation : FCC 15.215
 Test Distance : 3m
 Date : 12/29/2006
 Temperature : 23 deg.C.
 Humidity : 32 %
 Engineer : Norihisa Hashimoto

FREQ [MHz]	-20dB Bandwidth [kHz]
915.5000	218.00
916.0000	222.20
916.5000	223.00


Ch.: Low

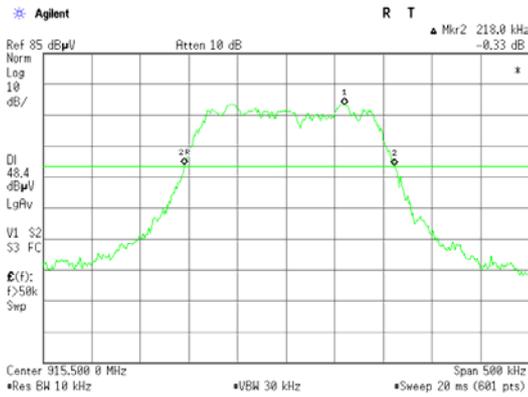

Ch.: Mid

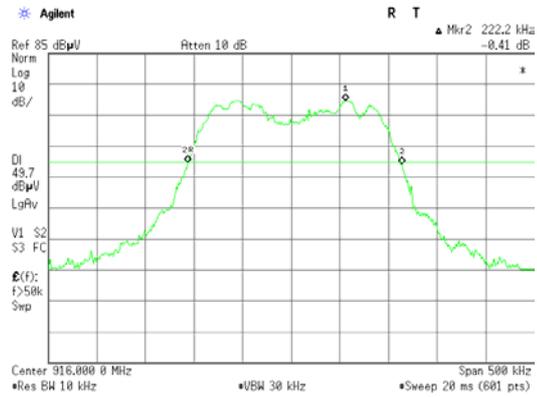

Ch.: High

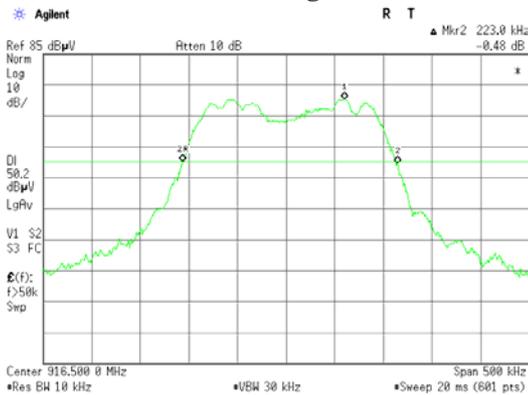


99% Occupied Bandwidth

UL-Apex
 Head Office EMC Lab. No.7 Semi Anechoic Chamber


Company	: SONY EMCS Corporation Saitama TEC	Regulation	: FCC 15.215
Equipment	: RF Stereo Transmitter	Test Distance	: 3m
Model	: TMR-RF925R	Date	: 12/29/2006
S/N	: 1	Temperature	: 23 deg.C.
Power	: AC120V/60Hz	Humidity	: 32 %
Mode	: Transmitting	Engineer	: Norihisa Hashimoto

FREQ [MHz]	99% Occupied Bandwidth [kHz]
915.5000	229.75
916.0000	231.57
916.5000	233.87


Ch.: Low

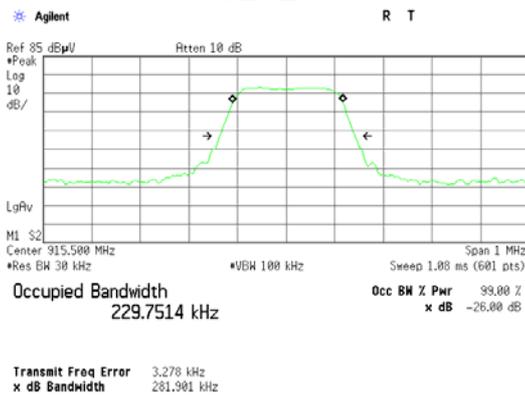

Ch.: Mid

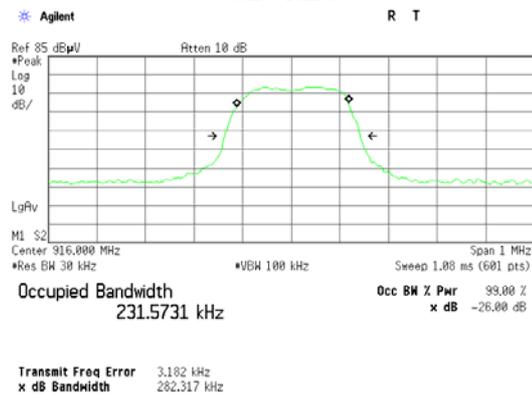

Ch.: High

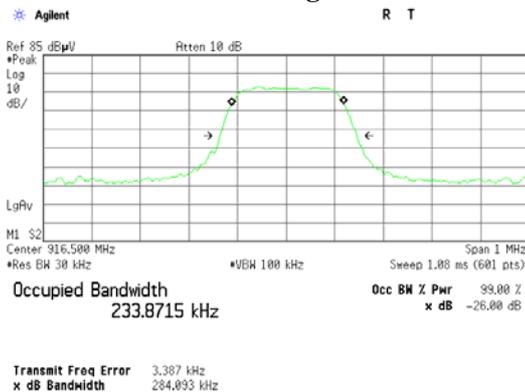

UL Apex Co., Ltd.
Head Office EMC Lab.
 4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN
 Telephone : +81 596 24 8116
 Facsimile : +81 596 24 8124

APPENDIX 3:Test instruments

EMI test equipment

Control No.	Instrument	Manufacturer	Model No	Test Item	Calibration Date * Interval(month)
MAEC-03	Anechoic Chamber	TDK	Semi Anechoic Chamber 3m	RE	2006/03/03 * 12
MBA-03	Biconical Antenna	Schwarzbeck	BBA9106	RE	2007/01/19 * 12
MLA-03	Logperiodic Antenna	Schwarzbeck	USLP9143	RE	2007/01/19 * 12
MCC-51	Coaxial cable	UL Apex	-	RE	2006/03/11 * 12
MSA-09	Spectrum Analyzer	Advantest	R3273	RE	2006/12/08 * 12
TR-07	Test Receiver	Rohde & Schwarz	ESCS30	RE	2006/09/12 * 12
MAT-30	Attenuator(6dB)	TME	UFA-01	RE	2006/03/11 * 12
MSTW-14	EMI measurement program	TSJ	TEPTO-DV	RE/CE	-
MOS-12	Thermo-Hygrometer	Custom	CTH-180	RE	2006/01/19 * 24
MHA-20	Horn Antenna 1-18GHz	Schwarzbeck	BBHA9120D	RE	2006/04/06 * 12
MCC-56	Microwave Cable 1G-26.5GHz	Suhner	SUCOFLEX104	RE	2006/04/15 * 12
MPA-11	MicroWave System Amplifier	Agilent	83017A	RE	2006/03/27 * 12
MAEC-04	Anechoic Chamber	TDK	Semi Anechoic Chamber 3m	RE/CE	2006/03/06 * 12
MSA-05	Spectrum Analyzer	Advantest	R3273	RE/CE	2006/05/20 * 12
MTR-02	Test Receiver	Rohde & Schwarz	ESCS30	CE	2006/02/02 * 12
MCC-50	Coaxial cable	UL Apex	-	CE	2006/03/09 * 12
MLS-06	LISN(AMN)	Schwarzbeck	NSLK8127	CE (EUT)	2006/02/06 * 12
MHA-21	Horn Antenna 1-18GHz	Schwarzbeck	BBHA9120D	RE	2006/08/17 * 12
MCC-57	Microwave Cable 1G-26.5GHz	Suhner	SUCOFLEX104	RE	2006/04/15 * 12
MPA-12	MicroWave System Amplifier	Agilent	83017A	RE	2006/03/27 * 12
MOS-15	Thermo-Hygrometer	Custom	CTH-180	RE/CE	2006/01/19 * 24
MSA-06	Spectrum Analyzer	Agilent	E4408A	RE	2006/06/02

All equipment is calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

Test Item:

CE: Conducted emission

RE: Radiated emission

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b(01.06.05)