


材料構成図

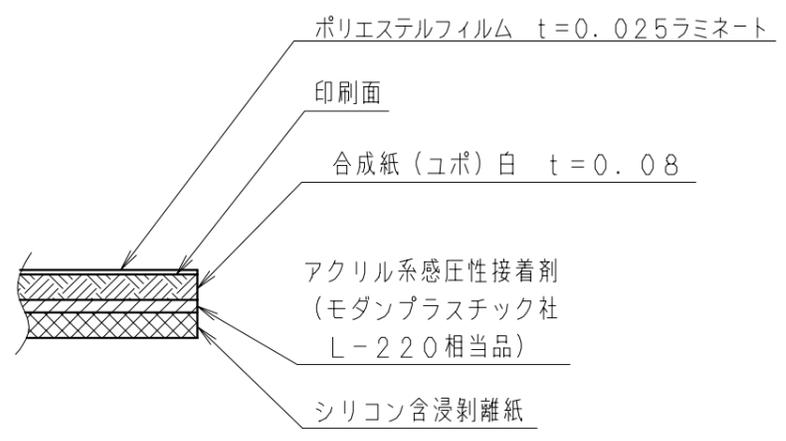

品質特性： ソニー部品設計基準：ラベルの第7-1項に定める各特性を満足する事。
 使用注意事項：耐薬品特性の試験は製品に貼付した状態にて行われるので貼付条件には十分留意する事。
 (ソニー部品設計基準：ラベル第7-1-4項)

- 注1) 10枚/1シート状にて納入のこと。この部品には SS-00259-1 に指定する成形用樹脂・インキ・塗料・被覆電線はグリーンパートナー認定取引先物質を含んだ材料は、使用してはならない。
 2) 版下は校正、承認を要す。This part should not contain any substances which are specified in SS-00259-1.
 3) 耐薬品試験で問題の無いこと。Purchase ink, paint, wire rods, and molding resins only from the business partners that Sony approves as Green Partners.

記載文字/Written Letter	字高/LETTER HEIGHT	タイプフェイス/TYPE FACE
SONY®	L=13	清刷参照
Sony Corporation	h=1.6	
FC	h=4.0	
==	a=1.5	
HARD DISK DRIVE	h=2.0	
VGP-UHDP04 Complies Canada ICES/NMB-003	h=1.5	SONY ID TYPE HR
DC 5V		
MADE IN JAPAN FCC ID:AK8VGPUDHM08 IC:409B-VGPDHDM8	h=1.2	SONY ID TYPE HRC
2-664-400-01	h=1.0	
総務省指定 第**-*****号	h=1.5	SONY ID TYPE ND

△x						UNIT mm	TOLERANCE STS-2	USED ON	RANK
△x						ANGLE	L ≤ 4 ± 0.1 4 < L ≤ 16 ± 0.2 16 < L ≤ 63 ± 0.3 63 < L ≤ 250 ± 0.4 250 < L ± 0.6		FAMILY
△x						SCALE	2:1	ORIGINAL MODEL	IRX-9236
△x						MATERIAL (COLOR)	上記	FINISH (COLOR)	ネガティブ印刷(黒) (文字白)
△x						DESCRIPTION	(E) LABEL, MODEL NUMBER		
△x							(J) キメイバン		
HISTORY	SUFFIX	ECN-NO.	REVISION	SIGN.					
X COUNT	REPL.	DATE							
DRAWN BY PHOENIA '05.11.02 Y. FUKUI	PLANNED BY PHOENIA '05.08.30 Y. FUKUI	CHECKED BY	APPROVED BY	MODEL	IRX-9236	PART NO.	0-631-495-01	PART NO.	2-664-400-01
THIS DOCUMENT IS THE PROPRIETARY PROPERTY OF SONY. ITS USE IS AUTHORIZED ONLY FOR RESPONDING TO A REQUEST FOR QUOTATION, OR FOR THE PERFORMANCE OF WORK FOR SONY. ALL QUESTIONS MUST BE REFERRED TO THE LOCAL PURCHASING DEPARTMENT OF SONY.					ISSUED	'05.08.30			

SONY STANDARD \ 90.10 DRAWING \ (TYPE 032)