

Test Report No. 7191163606-EEC17/05
dated 13 Jun 2017



PSB Singapore

Note: This report is issued subject to the Testing and Certification Regulations of the TÜV SÜD Group and the General Terms and Conditions of Business of TÜV SÜD PSB Pte Ltd. In addition, this report is governed by the terms set out within this report.

Choose certainty.
Add value.

FORMAL REPORT ON TESTING IN ACCORDANCE WITH
47 CFR FCC Parts 15B & C
(BLUETOOTH CLASSIC)
OF A
WIRELESS NOISE CANCELING STEREO HEADSET
[Model : WH-1000XM2]
[FCC ID : AK8WH1000XM2]

TEST FACILITY TÜV SÜD PSB Pte Ltd
Electrical & Electronics Centre (EEC), Product Services,
No. 1 Science Park Drive, Singapore 118221

FCC REG. NO. 99142 (3m and 10m Semi-Anechoic Chamber, Science Park)

IND. CANADA REG. NO. 2932I-1 (3m and 10m Semi-Anechoic Chamber, Science Park)

PREPARED FOR Sony EMCS (Malaysia) Sdn. Bhd.
Prai Free Industrial Zone
Prai Industrial Estate
13600 Prai, Penang, Malaysia
Tel : +60 4 383 6649 Fax : +60 4 399 0703

QUOTATION NUMBER 2191062013

JOB NUMBER 7191163606

TEST PERIOD 19 May 2017 – 01 June 2017

PREPARED BY

Quek Keng Hua
Higher Associate Engineer

APPROVED BY

Foo Kai Maun
Executive Engineer



LA-2007-0380-A LA-2007-0384-G
LA-2007-0381-F LA-2007-0385-E
LA-2007-0382-B LA-2007-0386-C
LA-2007-0383-G LA-2010-0464-D

The results reported herein have been performed in accordance with the terms of accreditation under the Singapore Accreditation Council. Inspections/Calibrations/Tests marked "Not SAC-SINGLAS Accredited" in this Report are not included in the SAC-SINGLAS Accreditation Schedule for our inspection body/laboratory.

Laboratory:
TÜV SÜD PSB Pte. Ltd.
No.1 Science Park Drive
Singapore 118221

Phone : +65-6885 1333
Fax : +65-6776 8670
E-mail: enquiries@tuv-sud-psb.sg
www.tuv-sud-psb.sg
Co. Reg : 199002667R

Regional Head Office:
TÜV SÜD Asia Pacific Pte. Ltd.
1 Science Park Drive, #02-01
Singapore 118221
TUV®



TABLE OF CONTENTS

TEST SUMMARY	3
PRODUCT DESCRIPTION	5
SUPPORTING EQUIPMENT DESCRIPTION.....	6
EUT OPERATING CONDITIONS.....	7
CONDUCTED EMISSION TEST	8
RADIATED EMISSION TEST.....	11
CARRIER FREQUENCY SEPARATION TEST	17
SPECTRUM BANDWIDTH (20dB BANDWIDTH MEASUREMENT) TEST	21
NUMBER OF HOPPING FREQUENCIES TEST	29
AVERAGE FREQUENCY DWELL TIME TEST.....	33
MAXIMUM PEAK POWER TEST	41
RF CONDUCTED SPURIOUS EMISSIONS TEST	43
BAND EDGE COMPLIANCE (CONDUCTED) TEST	54
BAND EDGE COMPLIANCE (RADIATED) TEST.....	62
PEAK POWER SPECTRAL DENSITY TEST.....	67
RF EXPOSURE EVALUATION	75
ANNEX A TEST SETUP / EUT PHOTOGRAPHS / DIAGRAMS	77
ANNEX B USER MANUAL TECHNICAL DESCRIPTION BLOCK & CIRCUIT DIAGRAMS.....	92
ANNEX C FCC LABEL & POSITION.....	93

TEST SUMMARY

The product was tested in accordance with the customer's specifications.

Test Results Summary

Test Standard	Description	Pass / Fail
47 CFR FCC Part 15		
15.107(a), 15.207	Conducted Emissions	Pass
15.109(a), 15.205, 15.209	Radiated Emissions (Spurious Emissions inclusive Restricted Bands Requirement)	Pass
15.247(a)(1)	Carrier Frequency Separation	Pass
	Spectrum Bandwidth (20dB Bandwidth Measurement)	Pass
15.247(a)(1)(iii)	Number of Hopping Frequencies	Pass
	Average Frequency Dwell Time	Pass
15.247(b)(1)	Maximum Peak Power	Pass
15.247(d)	RF Conducted Spurious Emissions	Pass
15.247(d)	Band Edge Compliance (Conducted)	Pass
15.247(d)	Band Edge Compliance (Radiated)	Pass
15.247(e)	Peak Power Spectral Density	Pass
2.1093	RF Exposure Evaluation	Pass



TEST SUMMARY

Notes


1. Three channels as listed below, which respectively represent the lower, middle and upper channels of the Equipment Under Test (EUT) were chosen and tested. For each channel, the EUT was configured to operate in the test mode.

<u>Transmit Channel</u>	<u>Frequency (GHz)</u>
Channel 0	2.402
Channel 39	2.441
Channel 78	2.480

2. All the measurements in section 15.247 were done based on conducted measurements except Band Edge Compliance (Radiated) test.
3. The EUT is a Class B device when in non-transmitting state and meets the 47 CFR FCC Part15B Class B requirements.
4. All test measurement procedures are according to ANSI C63.4: 2014 and ANSI C63.10: 2013.
5. The maximum measured RF power of the Equipment Under Test is 0.79dBm.
6. The Equipment Under Test (EUT) does not allow Bluetooth transmission during charging mode. It will enter charging mode when it is connected to a 5Vdc USB charger.
7. The EUT was tested using fully charged batteries with DC voltage of 3.7V.

Modifications

No modifications were made.

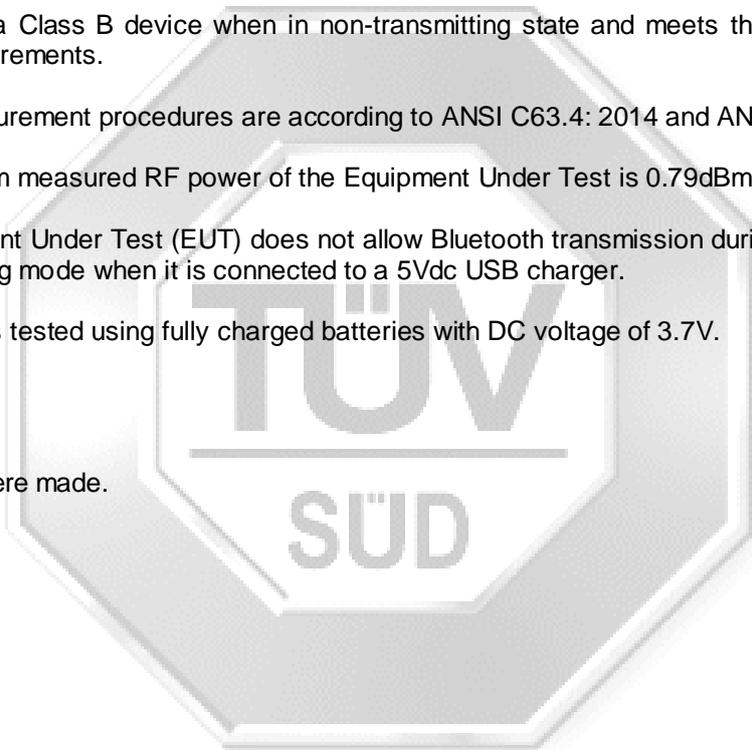


PRODUCT DESCRIPTION

Description	: The Equipment Under Test (EUT) is a Wireless Noise Canceling Stereo Headset.
Applicant	: Sony EMCS (Malaysia) Sdn. Bhd. Prai Free Industrial Zone Prai Industrial Estate 13600 Prai, Penang, Malaysia
Manufacturer	: Sony Corporation 1-7-1 Konan Minato-ku Tokyo , 108-0075, Japan
Factory (ies)	: Sony EMCS (Malaysia) Sdn. Bhd. Prai Free Industrial Zone Prai Industrial Estate 13600 Prai, Penang, Malaysia
Model Number(s)	: WH-1000XM2
Serial Number(s)	: Nil
Microprocessor(s)	: CSR8675 (Bluetooth) NFC (RC-S967)
Operating Frequency	: i. 2402MHz-2480MHz (Bluetooth) ii. 13.56MHz (Passive NFC tag)
Clock / Oscillator Frequency	: 122.88MHz
Modulation	: <u>Bluetooth</u> i. Gaussian Frequency Shift Keying (GFSK) ii. $\pi/4$ -Differential Quadrature Phase-Shift Keying (DQPSK) iii. 8 Differential Phase Shift Keying (DPSK) <u>NFC (Passive NFC tag, receiver only)</u> i. Amplitude Shift Keying (ASK)
Antenna Gain	: 1.6 dBi
Port / Connectors	: i. USB ii. NFC Reader iii. Bluetooth V4.1
Rated Input Power	: 3.7Vdc (Built-in lithium-ion rechargeable battery) 5Vdc (Charging via USB)
Accessories	: i. 1 x 0.5m micro-USB cable ii. 1 x 1.5m headphone cable iii. 1 x plug adaptor for airplane



SUPPORTING EQUIPMENT DESCRIPTION

Equipment Description (Including Brand Name)	Model, Serial & FCC ID Number	Cable Description (List Length, Type & Purpose)
Fujitsu S Series Lifebook Laptop	M/N: S6410 S/N: R7Y00054 FCC ID: DoC	0.8m unshielded USB cable
Fujitsu AC Adapter	M/N: CP311808-01 S/N: 08903690B FCC ID: DoC	1.80m unshielded power cable
Sony Digital Media Player	M/N: NW-ZX2 S/N: 2000643 FCC ID: DoC	Nil
Sony AC Adapter	M/N: AC-UD20 S/N: 12016000083 FCC ID: DoC	0.5m unshielded USB cable

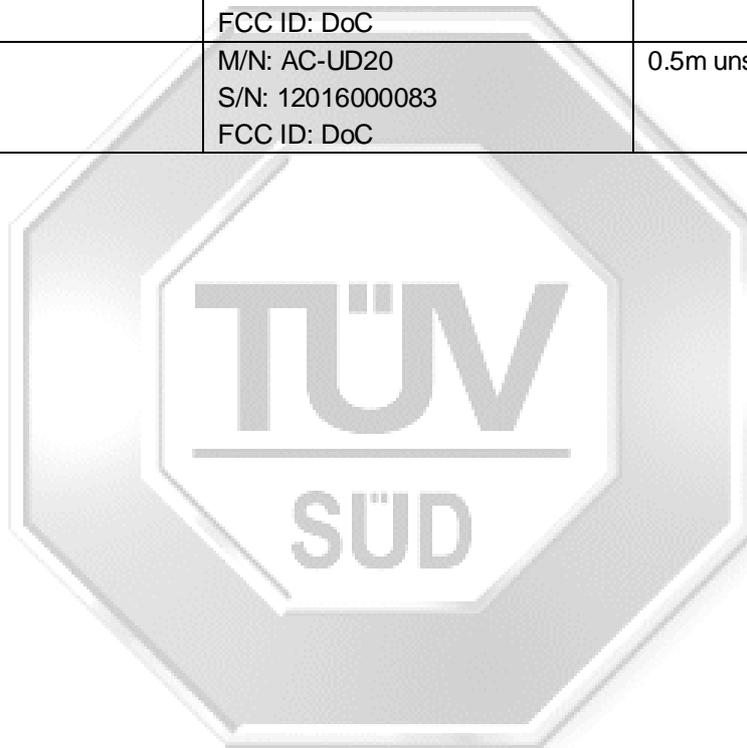



EUT OPERATING CONDITIONS


47 CFR FCC Part 15

1. **Conducted Emissions**
2. **Radiated Emissions (Spurious Emissions inclusive Restricted Bands Requirement)**
3. **Spectrum Bandwidth (20dB Bandwidth Measurement)**
4. **Maximum Peak Power**
5. **RF Conducted Spurious Emissions**
6. **Band Edge Compliance (Conducted)**
7. **Band Edge Compliance (Radiated)**
8. **Peak Power Spectral Density**
9. **RF Exposure Evaluation**

The EUT was exercised by operating in maximum continuous transmission with frequency hopping off, i.e transmitting at lower, middle and upper channels respectively at one time. For Band Edge Compliance, only lower and upper channels were evaluated.

10. **Carrier Frequency Separation**
11. **Number of Hopping Frequencies**
12. **Average Frequency Dwell Time**
13. **Band Edge Compliance (Conducted)**

The EUT was exercised by operating in maximum continuous transmission with frequency hopping on.

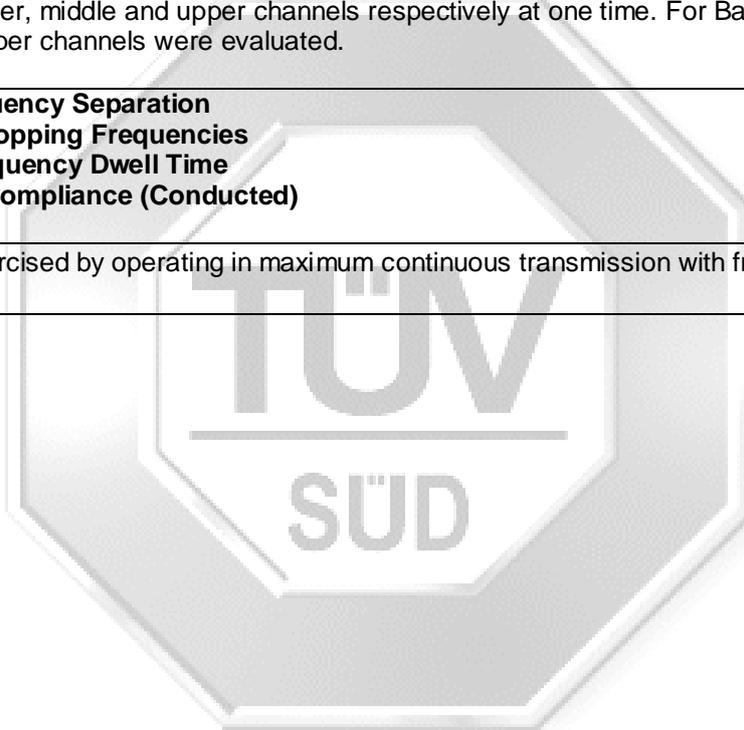



CONDUCTED EMISSION TEST

47 CFR FCC Parts 15.107(a) and 15.207 Conducted Emission Limits

Frequency Range (MHz)	Limit Values (dB μ V)	
	Quasi-peak (Q-P)	Average (AV)
0.15 - 0.5	66 – 56 *	56 – 46 *
0.5 - 5.0	56	46
5.0 - 30.0	60	50

* Decreasing linearly with the logarithm of the frequency

47 CFR FCC Parts 15.107(a) and 15.207 Conducted Emission Test Instrumentation

Instrument	Model	S/No	Cal Due Date
Schaffner EMI Receiver	SMR4503	040	22 Mar 2018
Agilent EMC Analyzer-SA7	E7403A	US41160167	24 Aug 2017
Schaffner LISN –LISN7 (Ref)	NNB42	00008	11 Jan 2018
EMCO LISN (for supporting) – LISN6	3825/2	9309-2127	04 Oct 2017





CONDUCTED EMISSION TEST

47 CFR FCC Parts 15.107(a) and 15.207 Conducted Emission Test Setup

1. The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m x 1m x 0.8m high, non-metallic table.
2. The power supply for the EUT was fed through a 50Ω/50μH EUT LISN, connected to filtered mains.
3. The RF OUT of the EUT LISN was connected to the EMI test receiver via a low-loss coaxial cable.
4. All other supporting equipment were powered separately from another LISN.

47 CFR FCC Parts 15.107(a) and 15.207 Conducted Emission Test Method

1. The EUT was switched on and allowed to warm up to its normal operating condition.
2. A scan was made on the NEUTRAL line over the required frequency range using an EMI test receiver.
3. High peaks, relative to the limit line, were then selected.
4. The EMI test receiver was then tuned to the selected frequencies and the necessary measurements made with a receiver bandwidth setting of 9kHz. Both Quasi-peak and Average measurements were made.
5. Steps 2 to 4 were then repeated for the LIVE line.

Sample Calculation Example

At 20 MHz	Q-P limit = 60.0 dBμV
Transducer factor of LISN, pulse limiter & cable loss at 20 MHz = 11.2 dB	
Q-P reading obtained directly from EMI Receiver = 40.0 dBμV (Calibrated for system losses)	
Therefore, Q-P margin = 60.0 - 40.0 = 20.0	i.e. 20.0 dB below Q-P limit



CONDUCTED EMISSION TEST

47 CFR FCC Parts 15.107(a) and 15.207 Conducted Emission Results

Operating Mode	Charging Mode	Temperature	22°C
Test Input Power	120V 60Hz	Relative Humidity	55%
Line Under Test	AC Mains	Atmospheric Pressure	1030mbar
		Tested By	Dylan Lin

Frequency (MHz)	Q-P Value (dBµV)	Q-P Limit (dBµV)	Q-P Margin (dB)	AV Value (dBµV)	AV Limit (dBµV)	AV Margin (dB)	Line	Channel
0.1797	27.1	64.5	37.4	2.9	54.5	51.6	Live	-
0.2095	32.9	63.2	30.4	12.4	53.2	40.9	Neutral	-
0.2124	32.1	63.1	31.0	13.5	53.1	39.6	Live	-
0.3050	27.1	60.1	33.0	5.8	50.1	44.3	Neutral	-
0.3174	26.9	59.8	32.9	5.4	49.8	44.4	Neutral	-
0.4044	22.2	57.8	35.7	1.3	47.8	46.6	Neutral	-

Notes

1. All possible modes of operation were investigated from 150kHz to 30MHz. Only the worst case emissions measured, using the correct CISPR detectors, are reported. All other emissions were relatively insignificant.
2. A "positive" margin indicates a PASS as it refers to the margin present below the limit line at the particular frequency. Conversely, a "negative" margin indicates a FAIL.
3. EMI receiver Resolution Bandwidth (RBW) and Video Bandwidth (VBW) settings:
9kHz - 30MHz
RBW: 9kHz VBW: 30kHz
4. Conducted Emissions Measurement Uncertainty
All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95%, with a coverage factor of 2, in the range 9kHz – 30MHz is ±2.2dB.

RADIATED EMISSION TEST

47 CFR FCC Part 15.205 Restricted Bands

MHz		MHz		MHz		GHz	
0.090	- 0.110	16.42	- 16.423	399.9	- 410	4.5	- 5.15
0.495	- 0.505	16.69475	- 16.69525	608	- 614	5.35	- 5.46
2.1735	- 2.1905	16.80425	- 16.80475	960	- 1240	7.25	- 7.75
4.125	- 4.128	25.5	- 25.67	1300	- 1427	8.025	- 8.5
4.17725	- 4.17775	37.5	- 38.25	1435	- 1626.5	9.0	- 9.2
4.20725	- 4.20775	73	- 74.6	1645.5	- 1646.5	9.3	- 9.5
6.215	- 6.218	74.8	- 75.2	1660	- 1710	10.6	- 12.7
6.26775	- 6.26825	108	- 121.94	1718.8	- 1722.2	13.25	- 13.4
6.31175	- 6.31225	123	- 138	2200	- 2300	14.47	- 14.5
8.291	- 8.294	149.9	- 150.05	2310	- 2390	15.35	- 16.2
8.362	- 8.366	156.52475	- 156.52525	2483.5	- 2500	17.7	- 21.4
8.37625	- 8.38675	156.7	- 156.9	2690	- 2900	22.01	- 23.12
8.41425	- 8.41475	162.0125	- 167.17	3260	- 3267	23.6	- 24.0
12.29	- 12.293	167.72	- 173.2	3332	- 3339	31.2	- 31.8
12.51975	- 12.52025	240	- 285	3345.8	- 3358	36.43	- 36.5
12.57675	- 12.57725	322	- 335.4	3600	- 4400	Above 38.6	
13.36	- 13.41						

47 CFR FCC Parts 15.109(a) and 15.209 Radiated Emission Limits

Frequency Range (MHz)	Quasi-Peak Limit Values (dB μ V/m)
0.009 - 0.490	20 log [2400 / F (kHz)] @ 300m
0.490 - 1.705	20 log [24000 / F (kHz)] @ 30m
1.705 - 30.0	30.0 @ 30m
30 - 88	40.0 @ 3m
88 - 216	43.5 @ 3m
216 - 960	46.0 @ 3m
Above 960	54.0* @ 3m

* For frequency bands 9kHz – 90kHz, 110kHz – 490kHz and above 1GHz, average detector was used. A peak limit of 20dB above the average limit does apply.

47 CFR FCC Parts 15.109(a) and 15.209 Radiated Emission Test Instrumentation

Instrument	Model	S/No	Cal Due Date
R&S Test Receiver – ESI1	ESI40	100010	11 Oct 2017
Schaffner Bilog Antenna –(30MHz-2GHz) BL4	CBL6112B	2593	18 Jan 2018
Com-Power Preamplifier (1MHz-1GHz)	PAM-103	441056	22 Jul 2017
TDK-RF Horn Antenna	HRN-0118	130256	18 Oct 2017
R&S Preamplifier (1GHz -18GHz)	SCU18	102191	10 Mar 2018
Agilent Preamplifier(1GHz-26.5GHz) (PA18)	8449D	3008A02305	12 Oct 2017
ETS Horn Antenna(18GHz-40GHz)(Ref)	3116	0004-2474	18 Oct 2017
EMCO Loop Ant (ext)_red_00134413	6502	134413	28 Oct 2017
Micro-Tronics Bandstop Filter (2.4-2.5 GHz)	BRM50701	17	27 Nov 2017



RADIATED EMISSION TEST

47 CFR FCC Parts 15.109(a) and 15.209 Radiated Emission Test Setup

1. The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m X 1.0m X 0.8m high, non-metallic table for measurement up to 1GHz. For measurement above 1GHz, 1.5m height table was used.
2. The filtered power supply for the EUT and supporting equipment were tapped from the appropriate power sockets located on the turntable.
3. The relevant broadband antenna was set at the required test distance away from the EUT and supporting equipment boundary.

47 CFR FCC Parts 15.109(a) and 15.209 Radiated Emission Test Method

1. The EUT was switched on and allowed to warm up to its normal operating condition.
2. A prescan was carried out to pick the worst emission frequencies from the EUT. For EUT which is a portable device, the prescan was carried out by rotating the EUT through three orthogonal axes to determine which altitude and equipment arrangement produces such emissions.
3. The test was carried out at the selected frequency points obtained from the prescan in step 2. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner:
 - a. Vertical or horizontal polarisation (whichever gave the higher emission level over a full rotation of the EUT) was chosen.
 - b. The EUT was then rotated to the direction that gave the maximum emission.
 - c. Finally, the antenna height was adjusted to the height that gave the maximum emission.
4. A Quasi-peak measurement was made for that frequency point if it was less than or equal to 1GHz. For frequency point in the range of 9kHz – 90kHz, 110kHz – 490kHz and above 1GHz, both Peak and Average measurements were carried out.
5. Steps 3 and 4 were repeated for the next frequency point, until all selected frequency points were measured.
6. The frequency range covered was from the lowest radio frequency signal generated from the EUT, without going below 9kHz to 10th harmonics of the EUT fundamental frequency, using the loop antenna for frequency below 30MHz, Bi-log antenna for frequencies from 30MHz up to 1GHz, and the Horn antenna above 1GHz.

Sample Calculation Example

At 300 MHz	Q-P limit = 46.0 dB μ V/m
Log-periodic antenna factor & cable loss at 300 MHz = 18.5 dB	
Q-P reading obtained directly from EMI Receiver = 40.0 dB μ V/m (Calibrated level including antenna factors & cable losses)	
Therefore, Q-P margin = 46.0 - 40.0 = 6.0	i.e. 6.0 dB below Q-P limit



RADIATED EMISSION TEST

47 CFR FCC Parts 15.109(a), 15.205 and 15.209 Radiated Emission Results

Operating Mode	Bluetooth Transmit	Temperature	27°C
Test Input Power	Battery Powered	Relative Humidity	59%
Test Distance	3m (9kHz – 25GHz)	Atmospheric Pressure	1030mbar
		Tested By	Dylan Lin Lim Kay Tak

Spurious Emissions ranging from 9kHz – 30MHz (for 9kHz – 90kHz, 110kHz – 490kHz) *See Note 4

Freq (GHz)	Peak Value (dBµV/m)	Peak Limit (dBµV/m)	Peak Margin (dB)	AV Value (dBµV/m)	AV Limit (dBµV/m)	AV Margin (dB)	Height (cm)	Azimuth (Degrees)	Pol (H/V)	Ch
--	--	--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--	--	--

Spurious Emissions ranging from 9kHz – 30MHz *See Note 4

Frequency (MHz)	Q-P Value (dBµV/m)	Q-P Limit (dBµV/m)	Q-P Margin (dB)	Height (cm)	Azimuth (Degrees)	Pol (H/V)	Channel
--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--

Spurious Emissions ranging from 30MHz – 1GHz

Frequency (MHz)	Q-P Value (dBµV/m)	Q-P Limit (dBµV/m)	Q-P Margin (dB)	Height (cm)	Azimuth (Degrees)	Pol (H/V)	Channel
370.1870	31.0	46.0	15.0	158	1	V	0
383.9940	27.3	46.0	18.7	155	159	V	0
394.7480	28.8	46.0	17.2	174	185	V	0
480.0090	27.6	46.0	18.4	100	200	H	0
820.5210	26.7	46.0	19.3	100	123	H	0
888.8010	26.0	46.0	20.0	131	128	H	0

RADIATED EMISSION TEST

47 CFR FCC Parts 15.109(a), 15.205 and 15.209 Radiated Emission Results

Spurious Emissions above 1GHz – 25GHz

Freq (GHz)	Peak Value (dB μ V/m)	Peak Limit (dB μ V/m)	Peak Margin (dB)	AV Value (dB μ V/m) <small>*See Note 2</small>	AV Limit (dB μ V/m)	AV Margin (dB) <small>*See Note 3</small>	Height (cm)	Azimuth (Degrees)	Pol (H/V)	Ch
1.0101	37.6	74.0	36.4	--	54.0	16.4	100	11	V	0
4.8216	44.0	74.0	30.0	--	54.0	10.0	100	342	V	0
4.8399	44.1	74.0	29.9	--	54.0	9.9	100	334	V	0
5.9792	41.2	74.0	32.8	--	54.0	12.8	200	220	H	0
10.4448	45.4	74.0	28.6	--	54.0	8.6	200	65	H	0
14.0281	50.8	74.0	23.2	--	54.0	3.2	100	316	V	0

Spurious Emissions above 1GHz – 25GHz

Freq (GHz)	Peak Value (dB μ V/m)	Peak Limit (dB μ V/m)	Peak Margin (dB)	AV Value (dB μ V/m) <small>*See Note 2</small>	AV Limit (dB μ V/m)	AV Margin (dB) <small>*See Note 3</small>	Height (cm)	Azimuth (Degrees)	Pol (H/V)	Ch
1.2328	33.2	74.0	40.8	--	54.0	20.8	300	331	V	39
4.8520	43.9	74.0	30.1	--	54.0	10.1	300	334	V	39
4.8702	45.5	74.0	28.5	--	54.0	8.5	100	166	V	39
6.6194	41.6	74.0	32.4	--	54.0	12.4	200	306	H	39
10.4448	45.8	74.0	28.2	--	54.0	8.2	400	256	V	39
14.7082	48.0	74.0	26.0	--	54.0	6.0	300	66	H	39

Spurious Emissions above 1GHz – 25GHz

Freq (GHz)	Peak Value (dB μ V/m)	Peak Limit (dB μ V/m)	Peak Margin (dB)	AV Value (dB μ V/m) <small>*See Note 2</small>	AV Limit (dB μ V/m)	AV Margin (dB) <small>*See Note 3</small>	Height (cm)	Azimuth (Degrees)	Pol (H/V)	Ch
1.9817	32.9	74.0	41.1	--	54.0	21.1	100	173	H	78
4.8824	45.9	74.0	28.1	--	54.0	8.1	100	334	V	78
4.8945	46.1	74.0	27.9	--	54.0	7.9	100	342	V	78
6.9473	43.0	74.0	31.0	--	54.0	11.0	400	65	H	78
11.2220	46.0	74.0	28.0	--	54.0	8.0	300	160	H	78
16.2262	46.7	74.0	27.3	--	54.0	7.3	200	245	V	78



RADIATED EMISSION TEST

47 CFR FCC Parts 15.109(a), 15.205 and 15.209 Radiated Emission Results

Operating Mode	Charging Mode	Temperature	27°C
Test Input Power	120V 60Hz	Relative Humidity	59%
Test Distance	3m (≥30MHz – 13GHz)	Atmospheric Pressure	1030mbar
		Tested By	Dylan Lin Lim Kay Tak

Spurious Emissions ranging from 30MHz – 1GHz

Frequency (MHz)	Q-P Value (dBμV/m)	Q-P Limit (dBμV/m)	Q-P Margin (dB)	Height (cm)	Azimuth (Degrees)	Pol (H/V)
53.5600	22.3	40.0	17.7	100	249	V
88.9000	21.4	43.5	22.1	400	23	H
395.1790	29.0	46.0	17.0	100	258	V
442.2990	24.7	46.0	21.3	100	165	V
613.1080	27.1	46.0	18.9	202	190	H
925.2770	28.4	46.0	17.6	100	199	V

Spurious Emissions above 1GHz – 13GHz


Freq (GHz)	Peak Value (dBμV/m)	Peak Limit (dBμV/m)	Peak Margin (dB)	AV Value (dBμV/m) <small>*See Note 2</small>	AV Limit (dBμV/m)	AV Margin (dB) <small>*See Note 3</small>	Height (cm)	Azimuth (Degrees)	Pol (H/V)
1.0526	36.1	74.0	37.9	--	54.0	17.9	100	4	V
3.0668	37.6	74.0	36.4	--	54.0	16.4	100	356	H
4.9552	43.0	74.0	31.0	--	54.0	11.0	100	356	H
5.5321	41.9	74.0	32.1	--	54.0	12.1	100	342	V
7.7609	45.6	74.0	28.4	--	54.0	8.4	400	287	V
8.0038	46.1	74.0	27.9	--	54.0	7.9	200	7	V



RADIATED EMISSION TEST

Notes

1. All possible modes of operation were investigated. Only the worst case emissions measured, using the correct CISPR detectors, are reported. All other emissions were relatively insignificant.
2. As the measured peak shows compliance to the average limit, as such no average measurement was required.
3. The average margin indicates the margin of the measured peak value below the average limit.
4. The measurement was done at 3m. The measured results were extrapolated to the specified test limits as specified in § 15.209 (a) based on 40dB/decade.
5. Quasi-peak measurement was used for frequency measurement up to 1GHz. Average and peak measurements were used for emissions above 1GHz. The average measurement was done by averaging over a complete cycle of the pulse train, including the blanking interval as the pulse train duration does not exceed 0.1 second.
6. A "positive" margin indicates a PASS as it refers to the margin present below the limit line at the particular frequency. Conversely, a "negative" margin indicates a FAIL.
7. EMI receiver Resolution Bandwidth (RBW) and Video Bandwidth (VBW) settings:
30MHz - 1GHz
RBW: 120kHz VBW: 1MHz
>1GHz
RBW: 1MHz VBW: 3MHz
8. **The upper frequency of radiated emission investigations was according to requirements stated in Section 15.33(a) for intentional radiators & Section 15.33(b) for unintentional radiators.**
9. The channel in the table refers to the transmit channel of the EUT.
10. Radiated Emissions Measurement Uncertainty
All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95%, with a coverage factor of 2, in the range 30MHz – 25GHz is ± 4.0 dB.

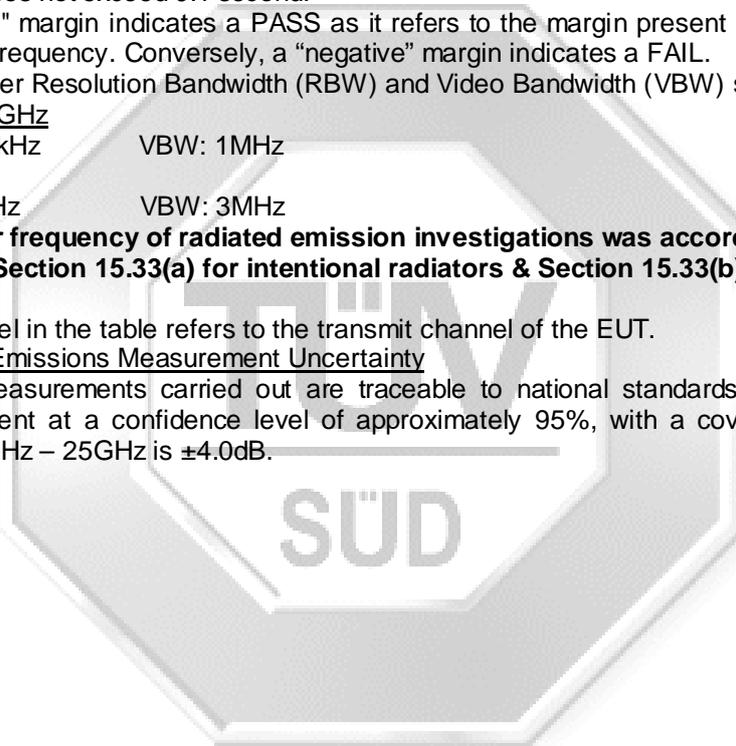



CARRIER FREQUENCY SEPARATION TEST

47 CFR FCC Part 15.247(a)(1) Carrier Frequency Separation Limits

The EUT shows compliance to the requirements of this section, which states the adjacent carrier frequencies must be separated by a minimum of 25kHz or the 20dB bandwidth of the hopping channel, whichever is greater. Alternatively, the EUT may have hopping channel carrier frequencies that are separated by 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125mW (21dBm).

47 CFR FCC Part 15.247(a)(1) Carrier Frequency Separation Test Instrumentation

Instrument	Model	S/No	Cal Due Date
Agilent Spectrum Analyzer	E4440A	MY45304764	04 Jan 2018

47 CFR FCC Part 15.247(a)(1) Carrier Frequency Separation Test Setup

1. The EUT and supporting equipment were set up as shown in the setup photo.
2. The power supply for the EUT was connected to a filtered mains.
3. The RF antenna connector was connected to the spectrum analyser via a low-loss coaxial cable.
4. The resolution bandwidth (RBW) and the video bandwidth (VBW) of the spectrum analyser were respectively set to 100kHz and 300kHz.
5. All other supporting equipment were powered separately from another filtered mains.

47 CFR FCC Part 15.247(a)(1) Carrier Frequency Separation Test Method

1. The EUT was switched on and allowed to warm up to its normal operating condition. The EUT was then configured to operate in the test mode with frequency hopping sequence on.
2. The start and stop frequencies of the spectrum analyser were set to 2.400GHz and 2.405GHz.
3. The spectrum analyser was set to max hold to capture the two adjacent transmitting frequencies within the span. The signal capturing was continuous until no further signals were detected.
4. The carrier frequency separation of the two adjacent transmitting / operating frequency was measured by finding the carrier frequency difference between the two adjacent channels.
5. The steps 2 to 4 were repeated with the following start and stop frequencies settings:
 - a. 2.4385GHz to 2.4435GHz
 - b. 2.478GHz to 2.4835GHz



CARRIER FREQUENCY SEPARATION TEST

47 CFR FCC Part 15.247(a)(1) Carrier Frequency Separation Results


Test Input Power	3.7Vdc	Temperature	24°C
Attached Plots	1 – 4	Relative Humidity	60%
		Atmospheric Pressure	1030mbar
		Tested By	Liau Lee Yin

Adjacent Channels	Channel Separation (MHz)
0 and 1 (2.402GHz and 2.403GHz)	1.000
38 and 39 (2.440GHz and 2.441GHz)	1.000
39 and 40 (2.441GHz and 2.442GHz)	1.000
77 and 78 (2.479GHz and 2.480GHz)	1.000




CARRIER FREQUENCY SEPARATION TEST

Carrier Frequency Separation Plots

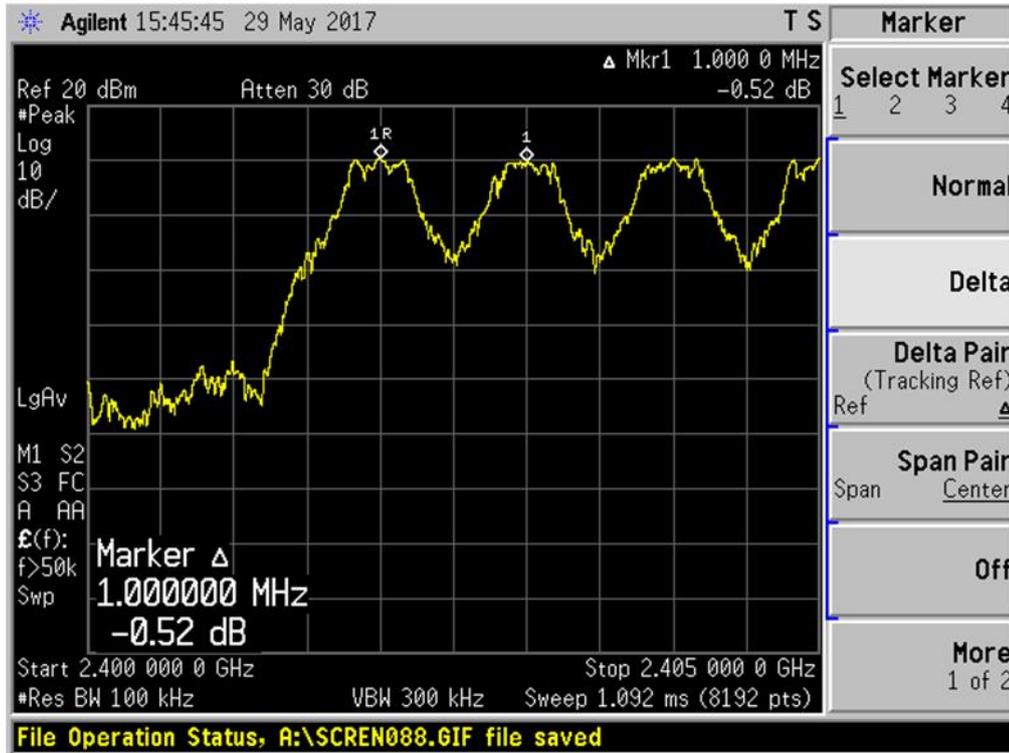


Plot 1 - Channels 0 (lower ch) and 1 (ch after lower ch) Separation

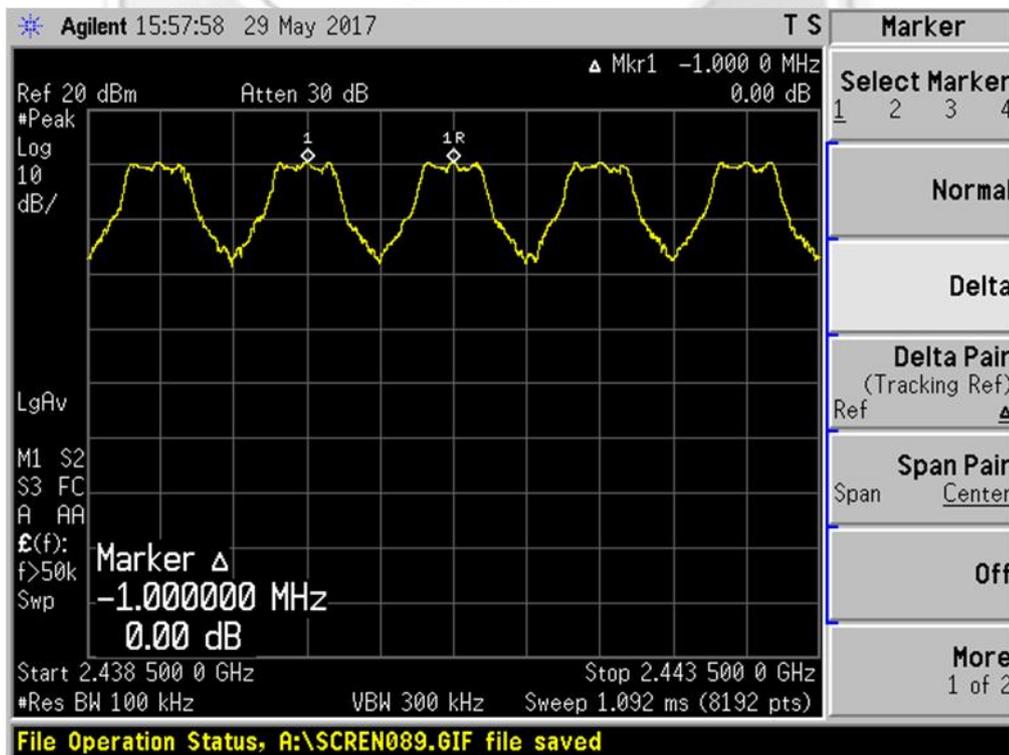


Plot 2 - Channels 38 (preceding mid ch) and 39 (mid ch) Separation

CARRIER FREQUENCY SEPARATION TEST

Carrier Frequency Separation Plots

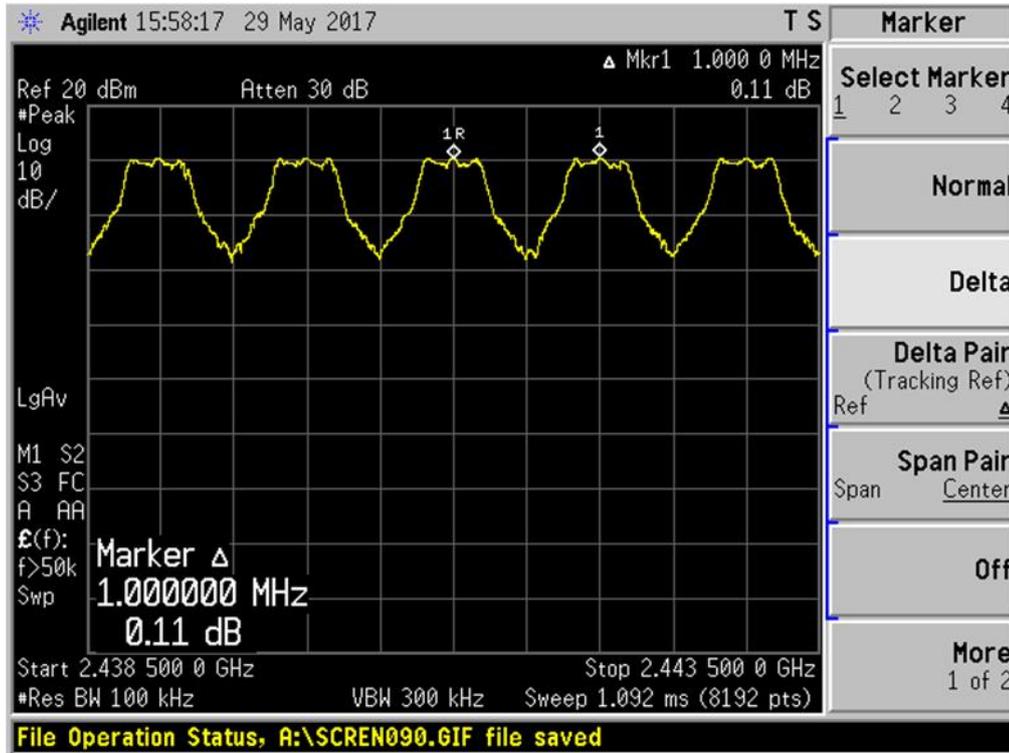

Plot 3 - Channels 39 (mid ch) and 40 (ch after mid ch) Separation

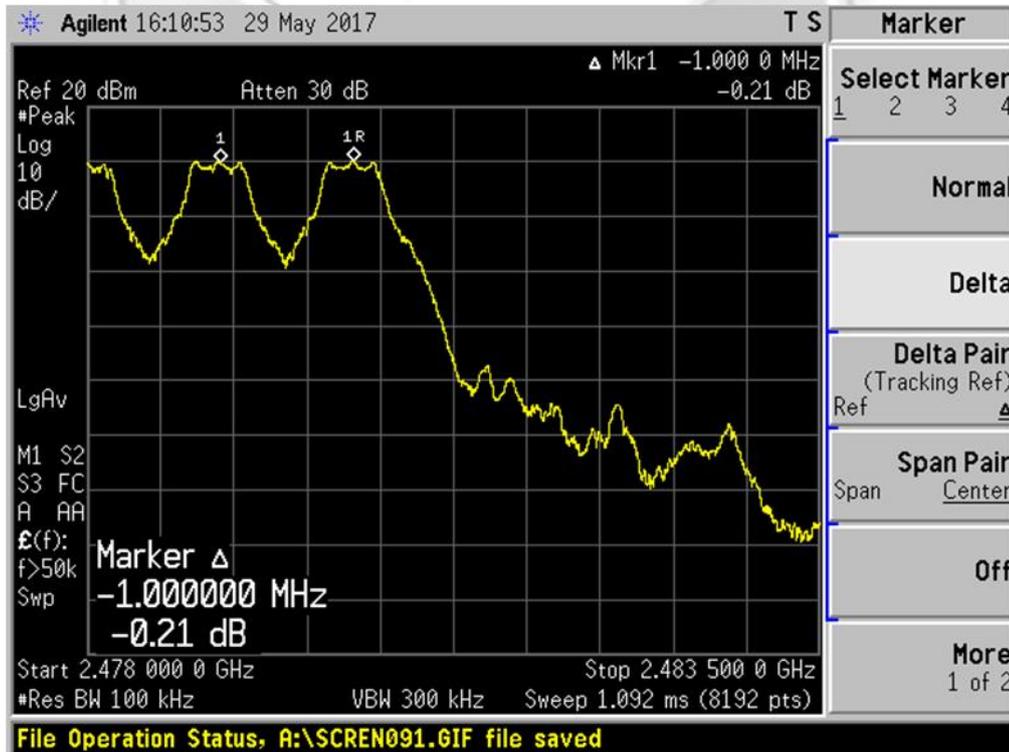

Plot 4 - Channels 77 (preceding upper ch) and 78 (upper ch) Separation

SPECTRUM BANDWIDTH (20dB BANDWIDTH MEASUREMENT) TEST

47 CFR FCC Part 15.247(a)(1) Spectrum Bandwidth (20dB Bandwidth Measurement) Limits

The EUT shows compliance to the requirements of this section, which states that the 20dB bandwidth of the hopping channel shall be the channel frequency separation by a minimum of 25kHz or the 20dB bandwidth of the hopping channel, whichever is greater.

47 CFR FCC Part 15.247(a)(1) Spectrum Bandwidth (20dB Bandwidth Measurement) Test Instrumentation

Instrument	Model	S/No	Cal Due Date
Agilent Spectrum Analyzer	E4440A	MY45304764	04 Jan 2018

47 CFR FCC Part 15.247(a)(1) Spectrum Bandwidth (20dB Bandwidth Measurement) Test Setup

1. The EUT and supporting equipment were set up as shown in the setup photo.
2. The power supply for the EUT was connected to a filtered mains.
3. The RF antenna connector was connected to the spectrum analyser via a low-loss coaxial cable.
4. The resolution bandwidth (RBW) and the video bandwidth (VBW) of the spectrum analyser were respectively set to 10kHz and 30kHz.
5. All other supporting equipment were powered separately from another filtered mains.

47 CFR FCC Part 15.247(a)(1) Spectrum Bandwidth (20dB Bandwidth Measurement) Test Method

1. The EUT was switched on and allowed to warm up to its normal operating condition. The EUT was then configured to operate in the test mode, non-hopping with transmitting frequency at Channel 0 (2.402GHz) (*lower ch*).
2. The center frequency of the spectrum analyser was set to the transmitting frequency with the frequency span was set in between two to five times of the captured 20dB bandwidth of the transmitting frequency.
3. The spectrum analyser was set to max hold to capture the transmitting frequency. The signal capturing was continuous until no further changes were observed.
4. The peak of the transmitting frequency was detected with the marker peak function of the spectrum analyser. The frequencies below the 20dB peak frequency at lower (f_L) and upper (f_H) sides of the transmitting frequency were marked and measured by using the marker-delta function of the spectrum analyser.
5. The 20dB bandwidth of the transmitting frequency is the frequency difference between the marked lower and upper frequencies, $|f_H - f_L|$.
6. The steps 2 to 5 were repeated with the transmitting frequency was set to Channel 39 (2.441GHz) (*mid ch*) and Channel 78 (2.480GHz) (*upper ch*) respectively.



SPECTRUM BANDWIDTH (20dB BANDWIDTH MEASUREMENT) TEST

47 CFR FCC Part 15.247(a)(1) Spectrum Bandwidth (20dB Bandwidth Measurement) Results

Test Input Power	3.7Vdc	Temperature	24°C
Attached Plots	5 – 7	Relative Humidity	60%
Modulation	GFSK	Atmospheric Pressure	1030mbar
		Tested By	Liau Lee Yin

Channel	Channel Frequency (GHz)	20dB Bandwidth (MHz)
0 (lower ch)	2.402	0.921
39 (mid ch)	2.441	0.924
78 (upper ch)	2.480	0.924

Test Input Power	3.7Vdc	Temperature	24°C
Attached Plots	8 – 10	Relative Humidity	60%
Modulation	($\pi/4$) DQPSK	Atmospheric Pressure	1030mbar
		Tested By	Liau Lee Yin


Channel	Channel Frequency (GHz)	20dB Bandwidth (MHz)
0 (lower ch)	2.402	1.243
39 (mid ch)	2.441	1.286
78 (upper ch)	2.480	1.306

Test Input Power	3.7Vdc	Temperature	24°C
Attached Plots	11 – 13	Relative Humidity	60%
Modulation	8DPSK	Atmospheric Pressure	1030mbar
		Tested By	Liau Lee Yin


Channel	Channel Frequency (GHz)	20dB Bandwidth (MHz)
0 (lower ch)	2.402	1.293
39 (mid ch)	2.441	1.268
78 (upper ch)	2.480	1.282

SPECTRUM BANDWIDTH (20dB BANDWIDTH MEASUREMENT) TEST

Spectrum Bandwidth (20dB Bandwidth Measurement) Plots – GFSK

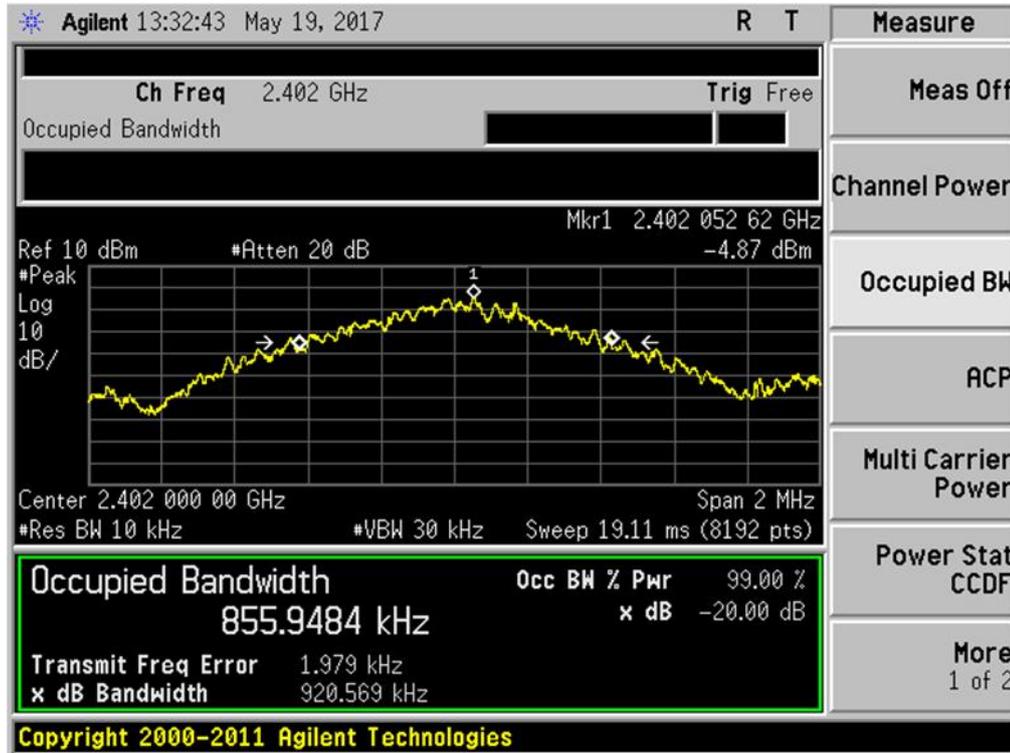


Plot 5 – Channel 0 (lower ch)

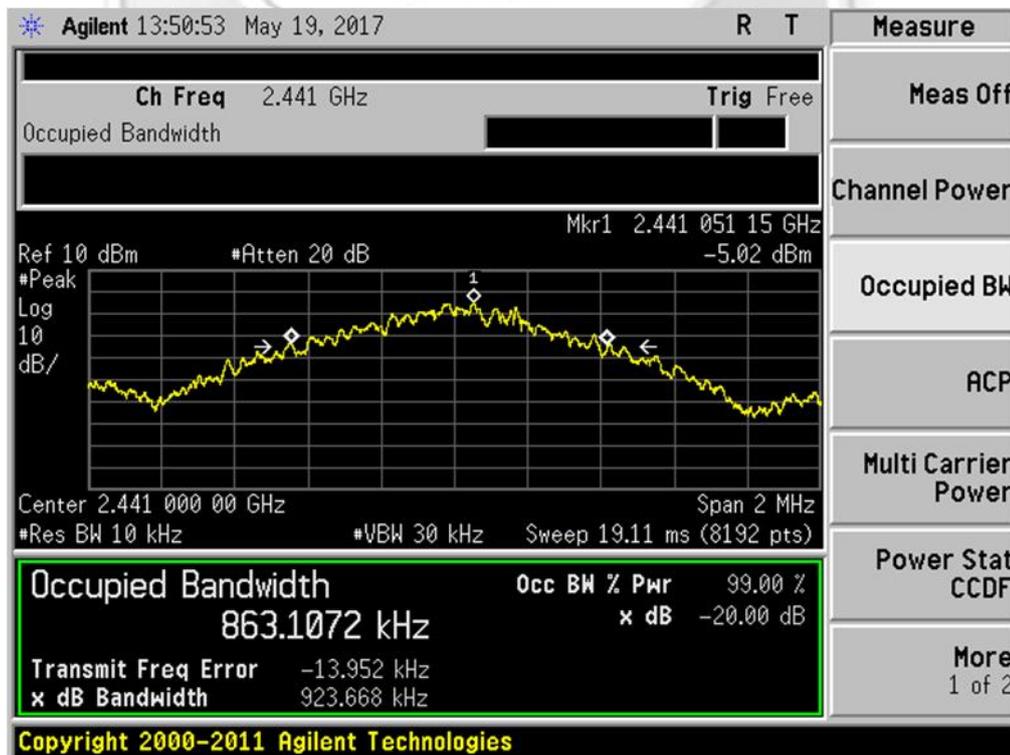

Plot 6 – Channel 39 (mid ch)

SPECTRUM BANDWIDTH (20dB BANDWIDTH MEASUREMENT) TEST


Spectrum Bandwidth (20dB Bandwidth Measurement) Plots – GFSK

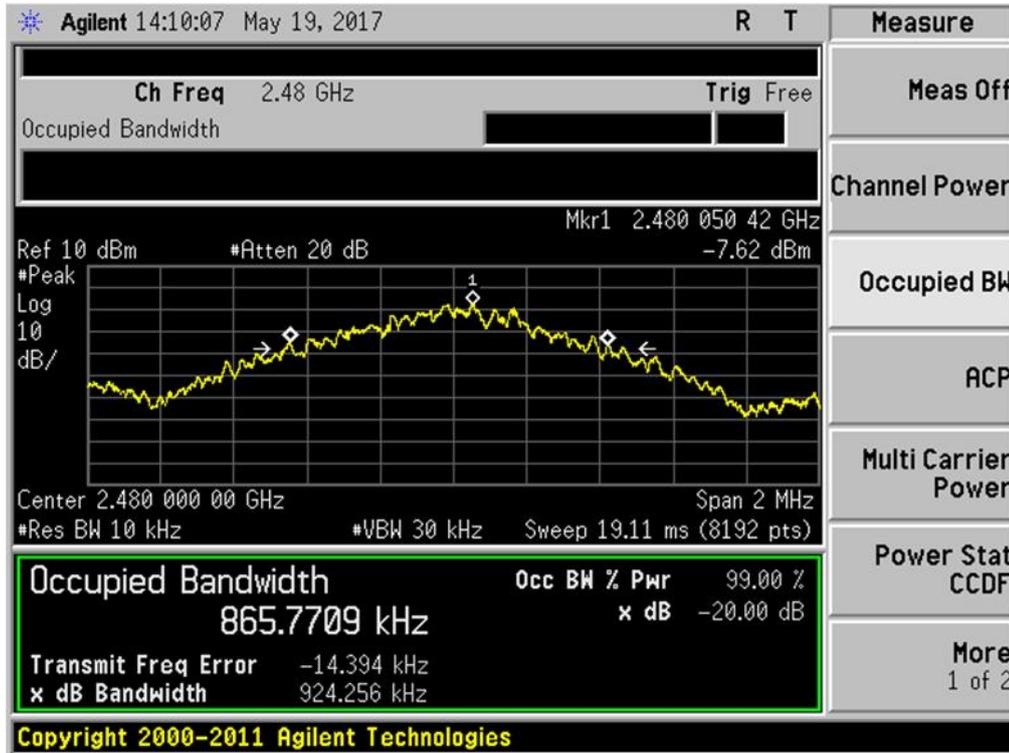


Plot 7 – Channel 78 (upper ch)

SPECTRUM BANDWIDTH (20dB BANDWIDTH MEASUREMENT) TEST

Spectrum Bandwidth (20dB Bandwidth Measurement) Plots – ($\pi/4$) DQPSK

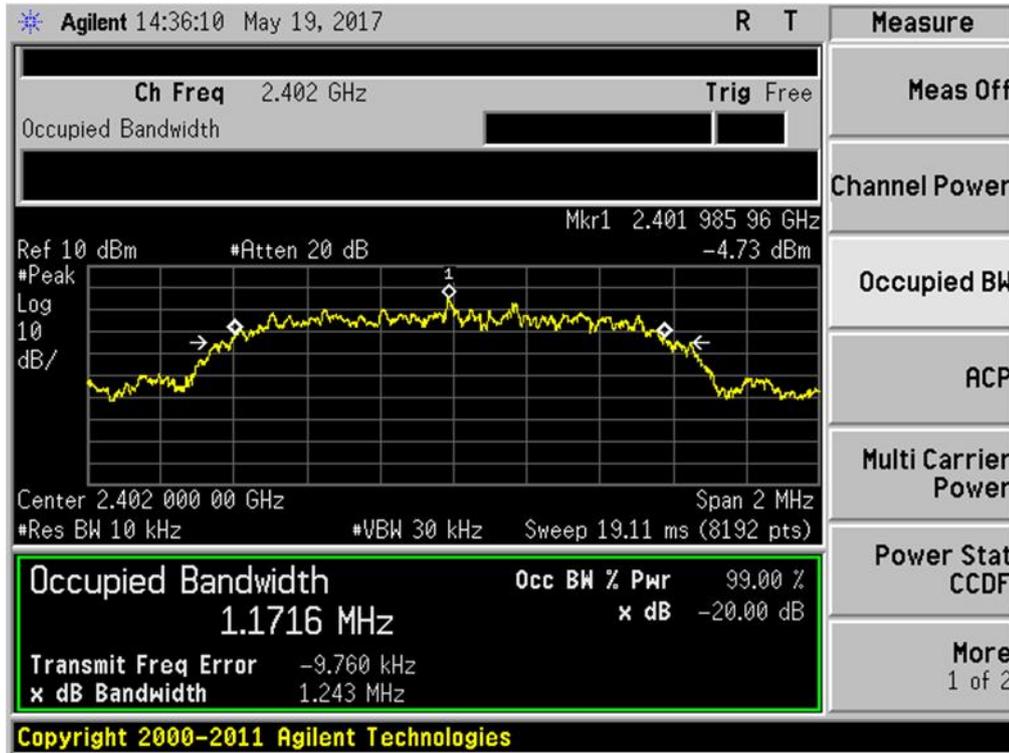


Plot 8 – Channel 0 (lower ch)

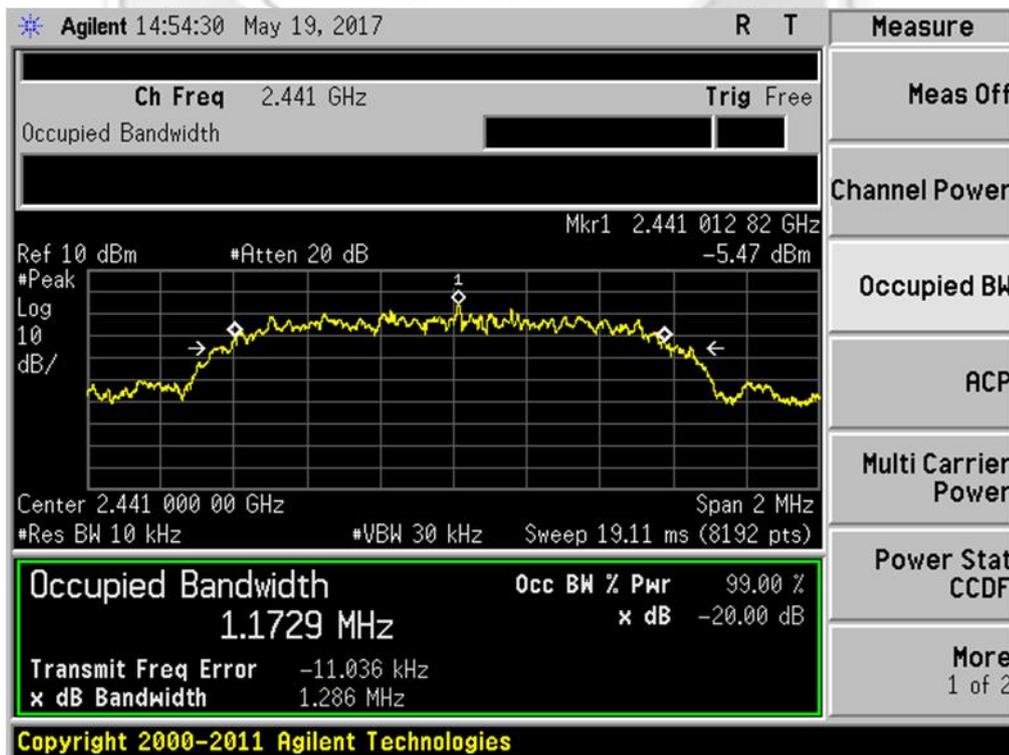

Plot 9 – Channel 39 (mid ch)

SPECTRUM BANDWIDTH (20dB BANDWIDTH MEASUREMENT) TEST


Spectrum Bandwidth (20dB Bandwidth Measurement) Plots – ($\pi/4$) DQPSK

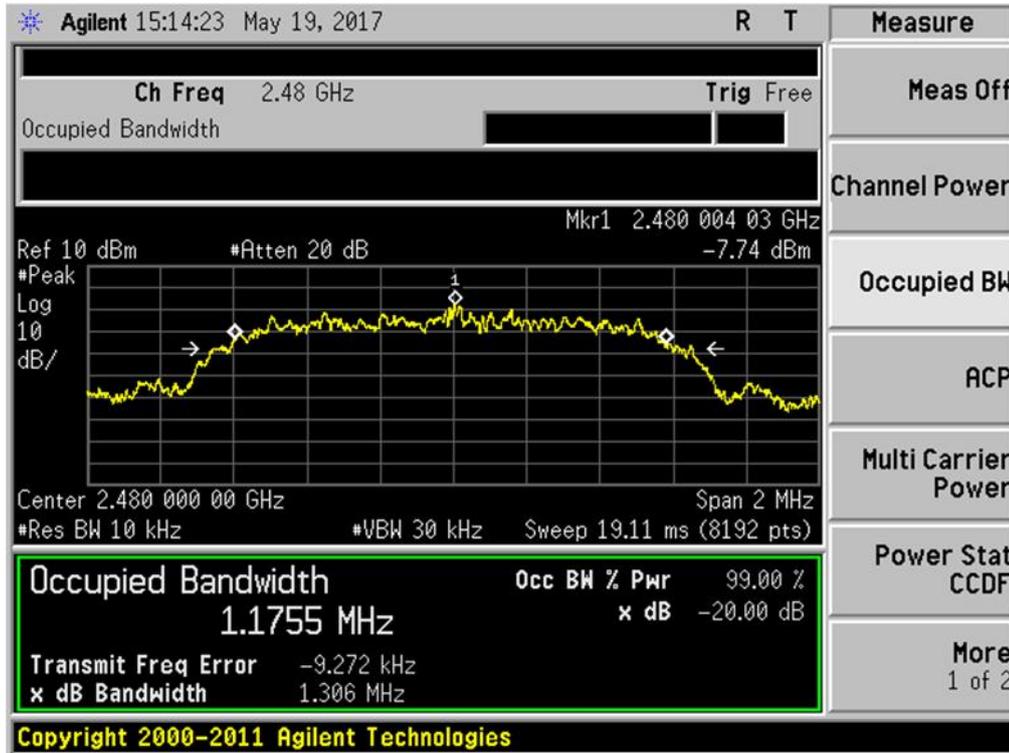


Plot 10 – Channel 78 (upper ch)

SPECTRUM BANDWIDTH (20dB BANDWIDTH MEASUREMENT) TEST

Spectrum Bandwidth (20dB Bandwidth Measurement) Plots – 8DPSK

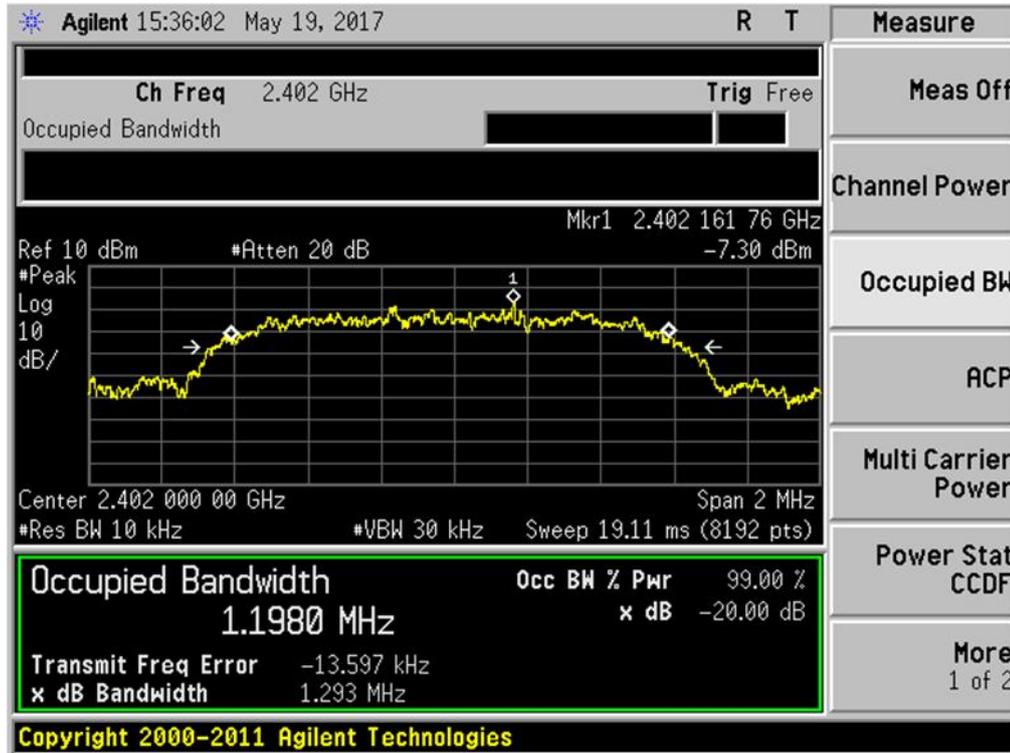


Plot 11 – Channel 0 (lower ch)

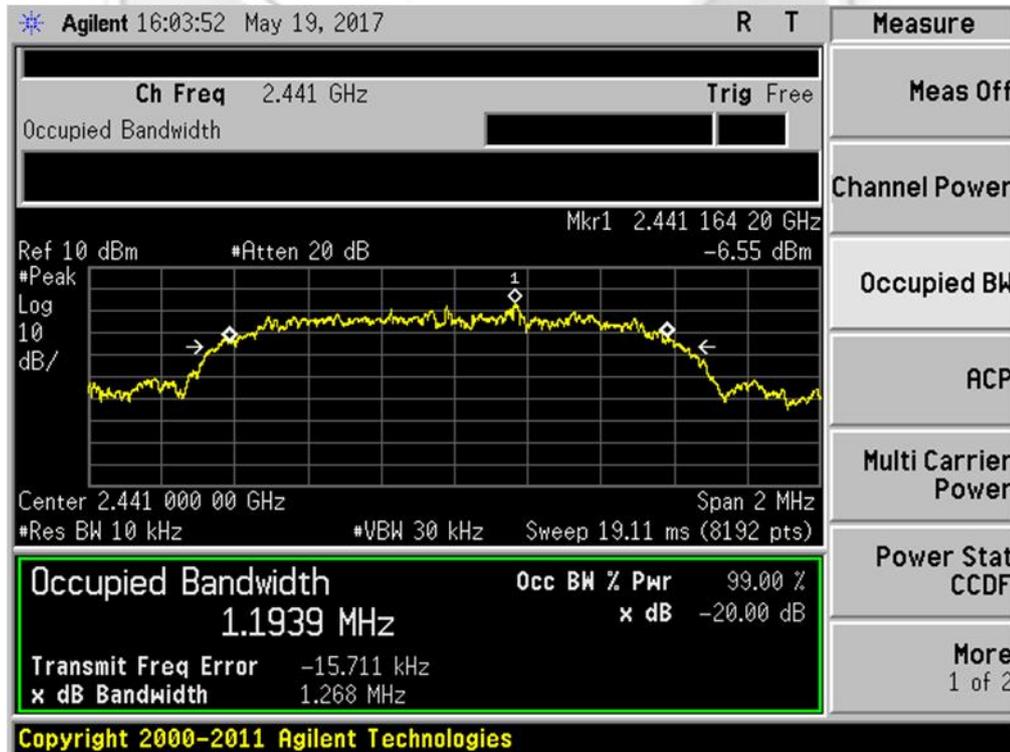

Plot 12 – Channel 39 (mid ch)

SPECTRUM BANDWIDTH (20dB BANDWIDTH MEASUREMENT) TEST

Spectrum Bandwidth (20dB Bandwidth Measurement) Plots – 8DPSK

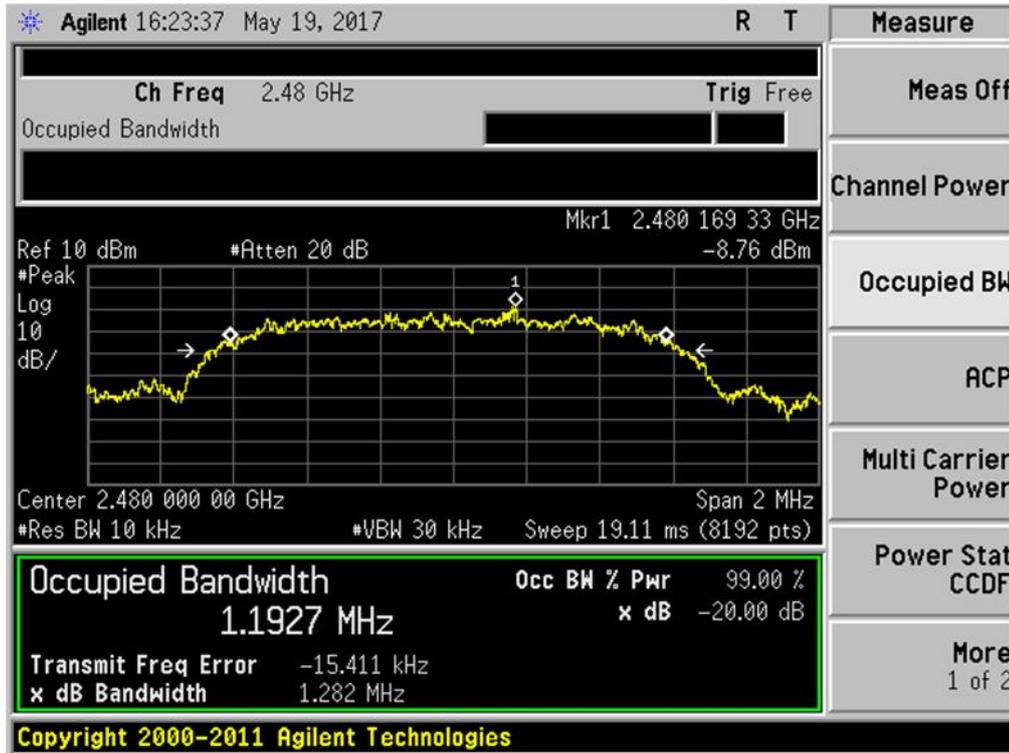



NUMBER OF HOPPING FREQUENCIES TEST

47 CFR FCC Part 15.247(a)(1)(iii) Number of Hopping Frequencies Limits

The EUT shows compliance to the requirements of this section, which states the EUT shall use at least 15 channels.

47 CFR FCC Part 15.247(a)(1)(iii) Number of Hopping Frequencies Test Instrumentation

Instrument	Model	S/No	Cal Due Date
Agilent Spectrum Analyzer	E4440A	MY45304764	04 Jan 2018

47 CFR FCC Part 15.247(a)(1)(iii) Number of Hopping Frequencies Test Setup

1. The EUT and supporting equipment were set up as shown in the setup photo.
2. The power supply for the EUT was connected to a filtered mains.
3. The RF antenna connector was connected to the spectrum analyser via a low-loss coaxial cable.
4. The resolution bandwidth (RBW) and the video bandwidth (VBW) of the spectrum analyser were respectively set to 100kHz and 300kHz.
5. All other supporting equipment were powered separately from another filtered mains.

47 CFR FCC Part 15.247(a)(1)(iii) Number of Hopping Frequencies Test Method

1. The EUT was switched on and allowed to warm up to its normal operating condition. The EUT was then configured to operate in the test mode with frequency hopping sequence on.
2. The start and stop frequencies of the spectrum analyser were set to 2.39GHz and 2.420GHz.
3. The spectrum analyser was set to max hold to capture all the transmitting frequencies within the span. The signal capturing was continuous until all the transmitting frequencies were captured and no further signals were detected.
4. The numbers of transmitting frequencies were counted and recorded.
5. The steps 2 to 4 were repeated with the following start and stop frequencies settings:
 - a. 2.420GHz to 2.441GHz
 - b. 2.441GHz to 2.461GHz
 - c. 2.461GHz to 2.4835GHz
6. The total number of hopping frequencies is the sum of the number of the hopping frequencies found for each span.



NUMBER OF HOPPING FREQUENCIES TEST

47 CFR FCC Part 15.247(a)(1)(iii) Number of Hopping Frequencies Results


Test Input Power	3.7Vdc	Temperature	24°C
Attached Plots	14 – 17	Relative Humidity	60%
		Atmospheric Pressure	1030mbar
		Tested By	Liau Lee Yin

The EUT was found to have 79 (*total number of ch*) hopping frequencies. Please refer to the attached plots.




NUMBER OF HOPPING FREQUENCIES TEST

Number Of Hopping Frequencies Plots

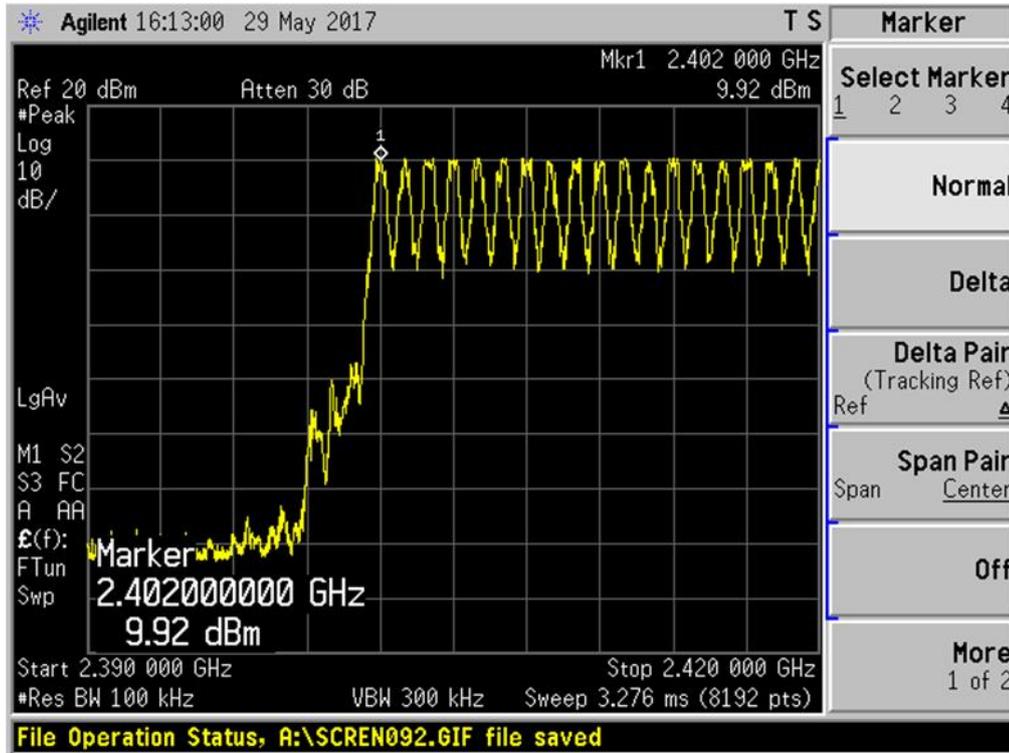


Plot 14 - Channels 0 to 18

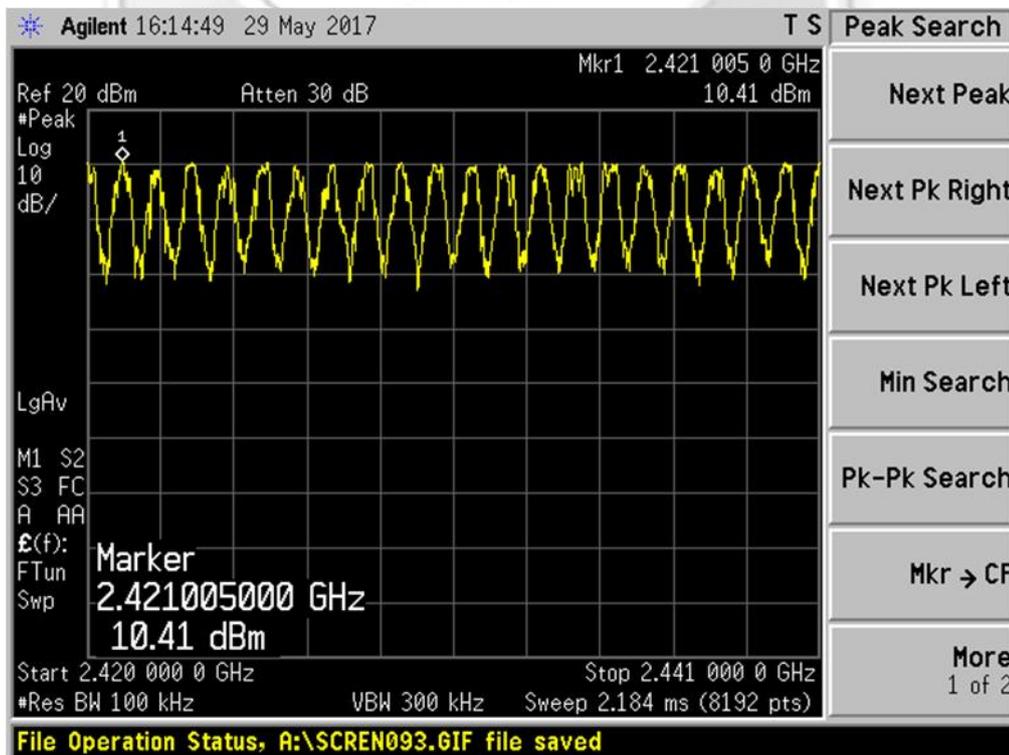


Plot 15 - Channels 18 to 39

NUMBER OF HOPPING FREQUENCIES TEST

Number Of Hopping Frequencies Plots

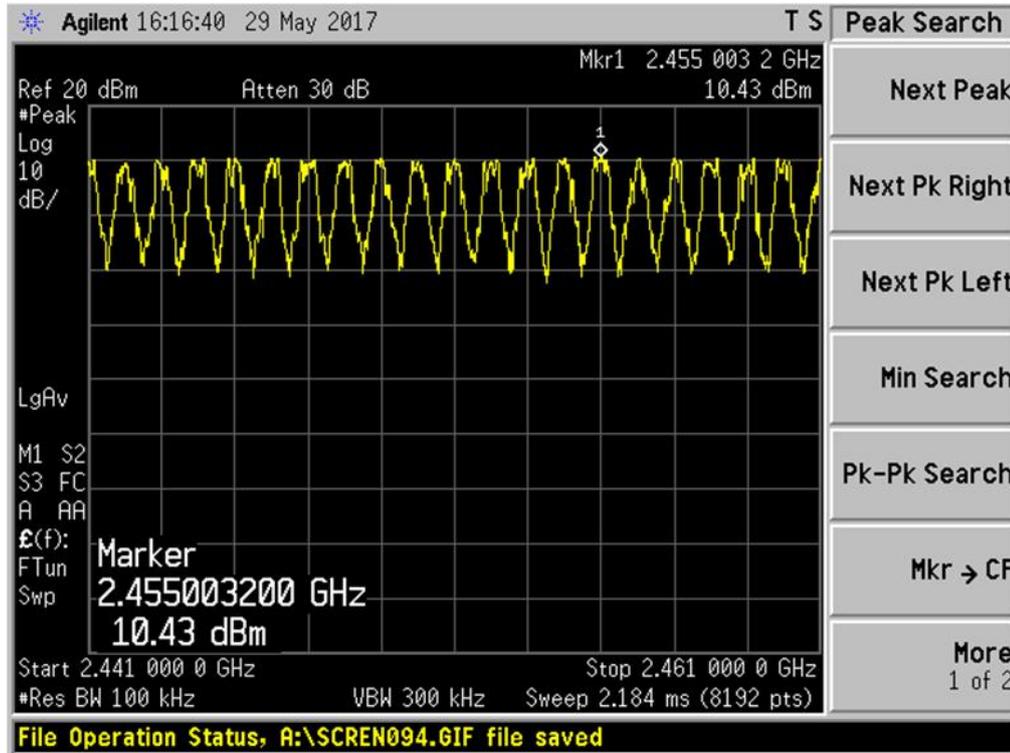

Plot 16 - Channels 39 to 59

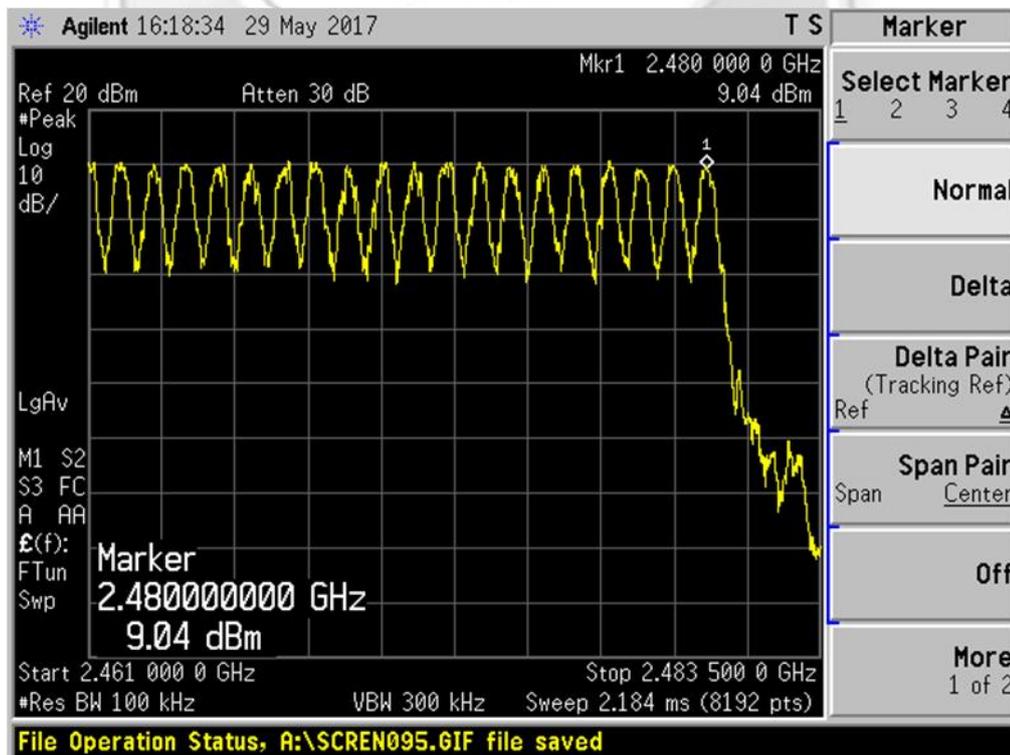

Plot 17 - Channels 59 to 78



AVERAGE FREQUENCY DWELL TIME TEST

47 CFR FCC Part 15.247(a)(1)(iii) Average Frequency Dwell Time Limits

The EUT shows compliance to the requirements of this section, which states the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

47 CFR FCC Part 15.247(a)(1)(iii) Average Frequency Dwell Time Test Instrumentation

Instrument	Model	S/No	Cal Due Date
Agilent Spectrum Analyzer	E4440A	MY45304764	04 Jan 2018

47 CFR FCC Part 15.247(a)(1)(iii) Average Frequency Dwell Test Setup

1. The EUT and supporting equipment were set up as shown in the setup photo.
2. The power supply for the EUT was connected to a filtered mains.
3. The RF antenna connector was connected to the spectrum analyser via a low-loss coaxial cable.
4. The resolution bandwidth (RBW) and the video bandwidth (VBW) of the spectrum analyser were respectively set to 1MHz and 3MHz.
5. All other supporting equipment were powered separately from another filtered mains.

47 CFR FCC Part 15.247(a)(1)(iii) Average Frequency Dwell Test Method

1. The EUT was switched on and allowed to warm up to its normal operating condition. The EUT was then configured to operate in the test mode with frequency hopping sequence on.
2. The center frequency of the spectrum analyser was set to 2.402GHz (*lower ch*) with zero frequency span (spectrum analyser acts as an oscilloscope).
3. The sweep time of the spectrum analyser was adjusted until a stable signal can be seen on the spectrum analyser.
4. The duration (dwell time) of a packet (transmit time per hop) was measured using the marker-delta function of the spectrum analyser.
5. The measurement was repeated with the sweep time was set to equal to period specified in the requirement.
6. The number of hops in the period specified in the requirement, N was computed as below:
$$N = \left[\frac{\text{number of hops on spectrum analyser} \times \left[\frac{\text{period specified in the requirement}}{\text{spectrum analyser sweep time}} \right]}{\text{spectrum analyser sweep time}} \right]$$
7. The average time of occupancy is calculated from the transmit time per hop multiplied by the number of hops in the period specified in the requirement, N.
8. The steps 2 to 7 were repeated with the center frequency of the spectrum analyser were set to 2.441GHz (*mid ch*) and 2.480GHz (*upper ch*) respectively.



AVERAGE FREQUENCY DWELL TIME TEST

47 CFR FCC Part 15.247(a)(1)(iii) Average Frequency Dwell Time Results

Test Input Power	3.7Vdc	Temperature	24°C
Attached Plots	18 – 26	Relative Humidity	60%
Hopping Rate	1600 hops / s	Atmospheric Pressure	1030mbar
Number of Hopping Channels	79 channels	Tested By	Liau Lee Yin

DH1

Channel	Channel Frequency (GHz)	Measured Time Slot Length (ms)	Average Frequency Dwell Time (s)	Average Occupancy Limit (s)
0 (lower ch)	2.402	384.2632	0.1230	0.4
39 (mid ch)	2.441	377.5485	0.1208	0.4
78 (upper ch)	2.480	383.9580	0.1229	0.4

DH3

Channel	Channel Frequency (GHz)	Measured Time Slot Length (ms)	Average Frequency Dwell Time (s)	Average Occupancy Limit (s)
0 (lower ch)	2.402	1.6408	0.2625	0.4
39 (mid ch)	2.441	1.6389	0.2622	0.4
78 (upper ch)	2.480	1.6371	0.2619	0.4

DH5


Channel	Channel Frequency (GHz)	Measured Time Slot Length (ms)	Average Frequency Dwell Time (s)	Average Occupancy Limit (s)
0 (lower ch)	2.402	2.8828	0.3075	0.4
39 (mid ch)	2.441	2.8857	0.3078	0.4
78 (upper ch)	2.480	2.8857	0.3078	0.4

Notes


- DH1 Dwell time = Measured Time Slot Length *(1600/2/79) *31.6
 DH3 Dwell time = Measured Time Slot Length *(1600/4/79) *31.6
 DH5 Dwell time = Measured Time Slot Length *(1600/6/79) *31.6

AVERAGE FREQUENCY DWELL TIME TEST

Average Frequency Dwell Time Plots – DH1

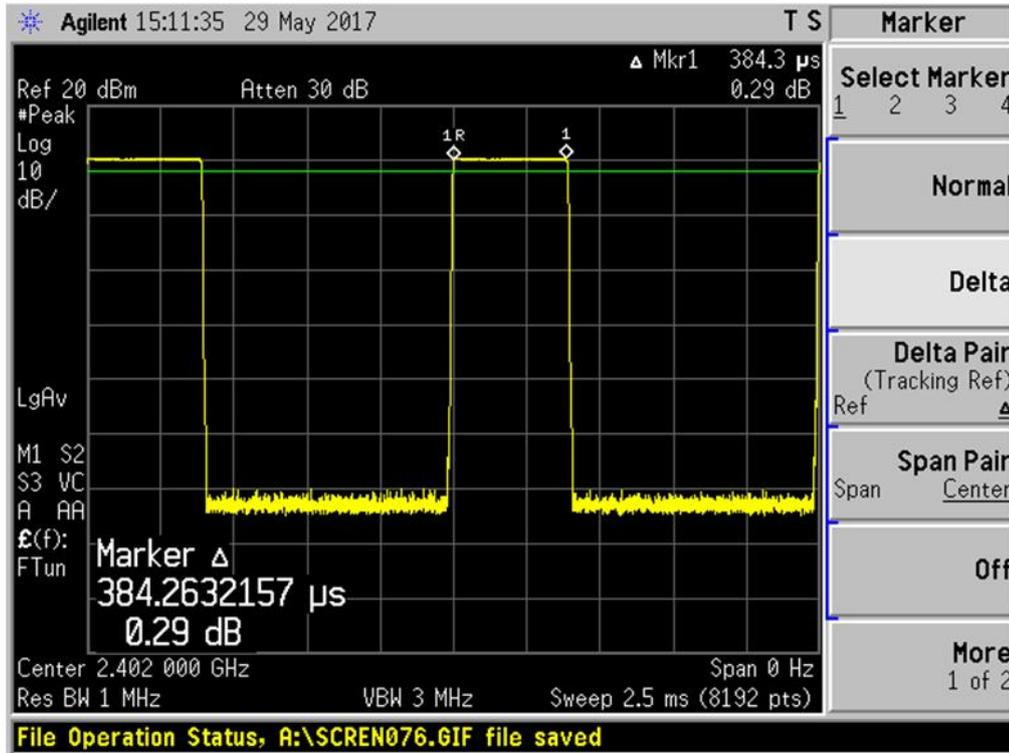

Plot 18 – Channel 0 (lower ch) – Transmit Time per Hop

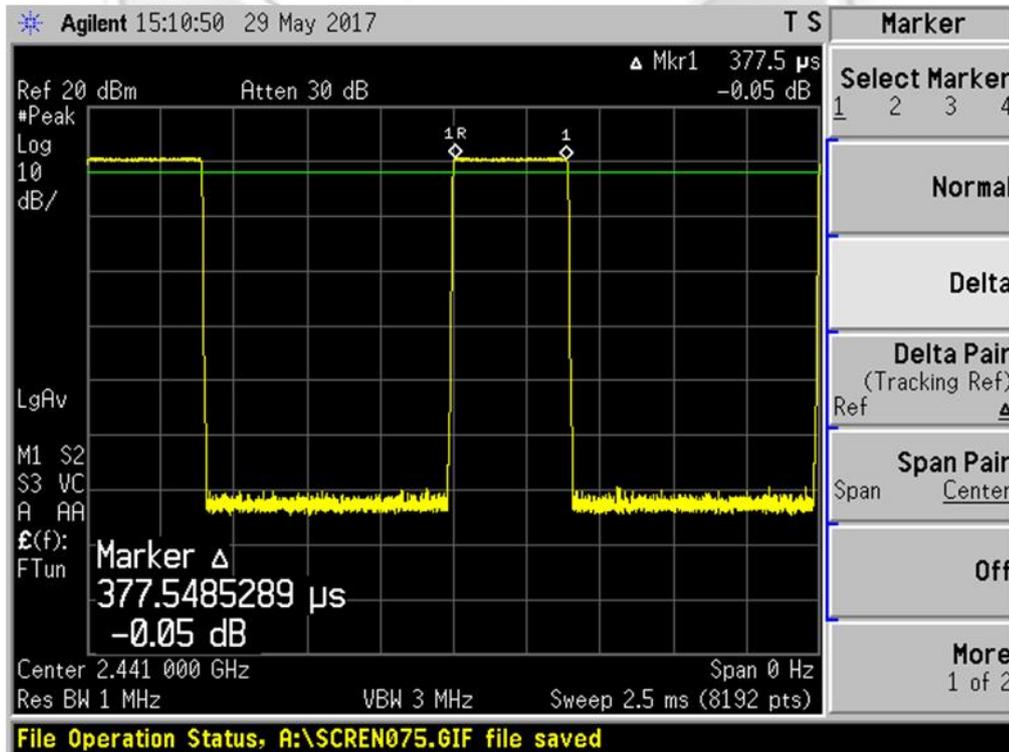


Plot 19 – Channel 39 (mid ch) – Transmit Time per Hop



AVERAGE FREQUENCY DWELL TIME TEST

Average Frequency Dwell Time Plots – DH1

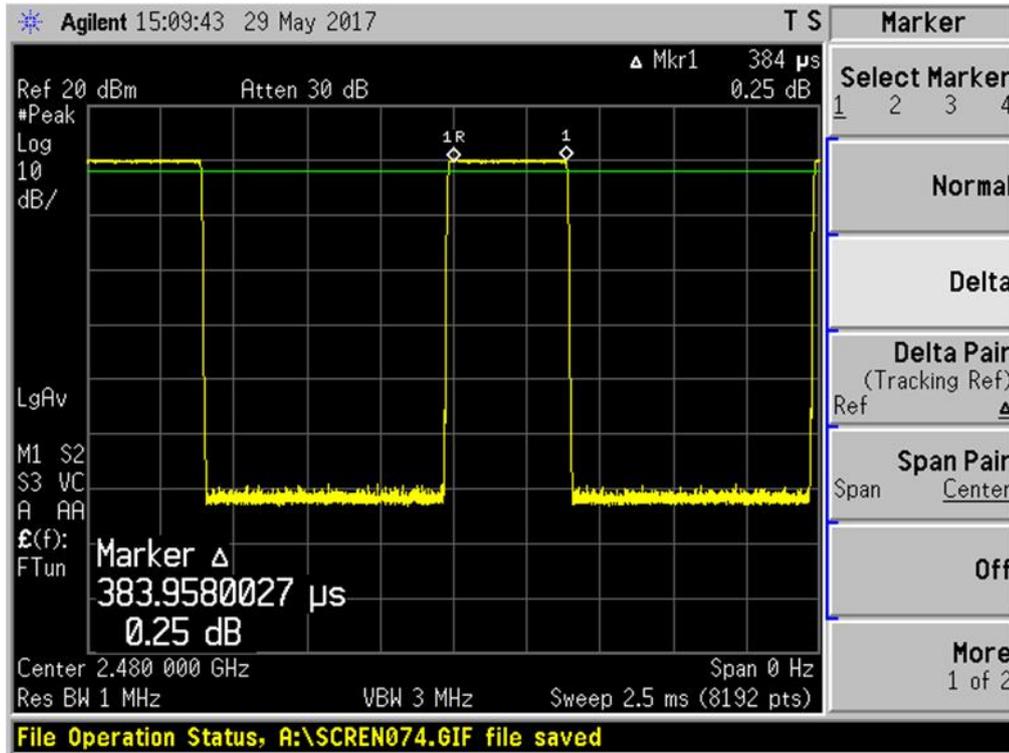


Plot 20 – Channel 78 (upper ch) – Transmit Time per Hop




AVERAGE FREQUENCY DWELL TIME TEST

Average Frequency Dwell Time Plots – DH3

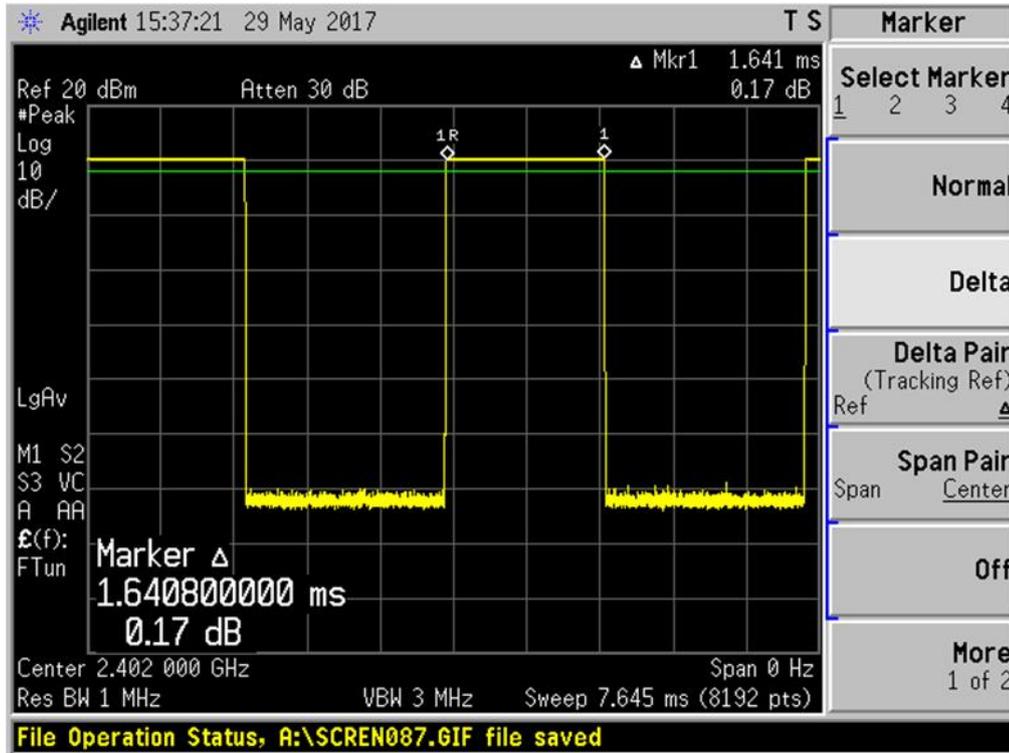


Plot 21 – Channel 0 (lower ch) – Transmit Time per Hop

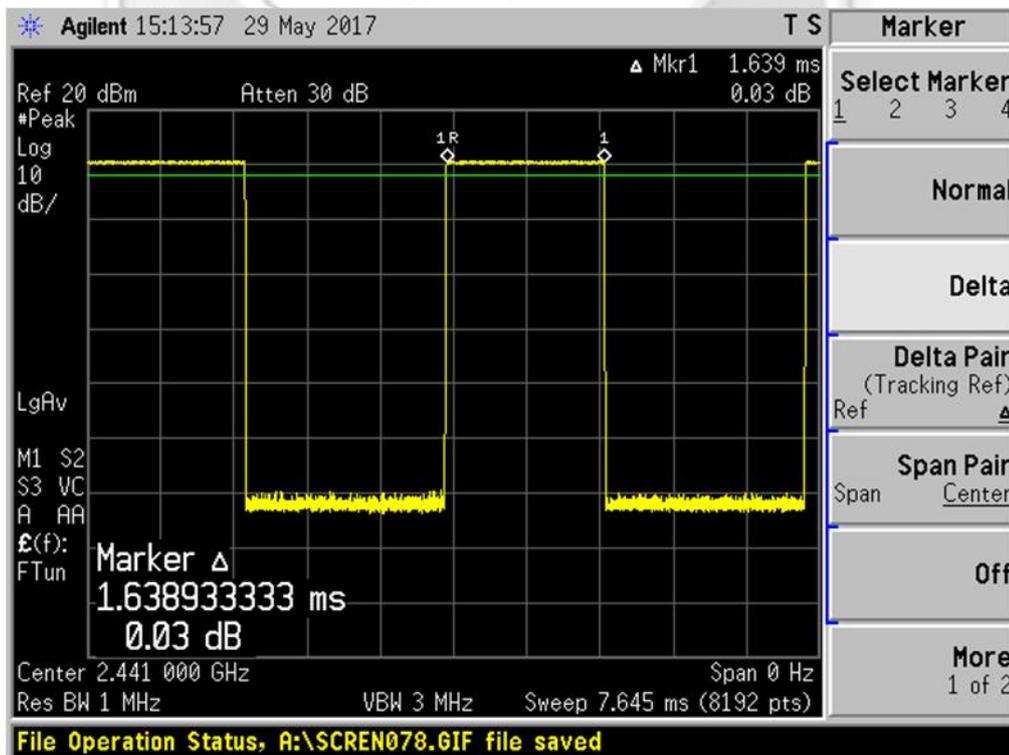

Plot 22 – Channel 39 (mid ch) – Transmit Time per Hop

AVERAGE FREQUENCY DWELL TIME TEST

Average Frequency Dwell Time Plots – DH3

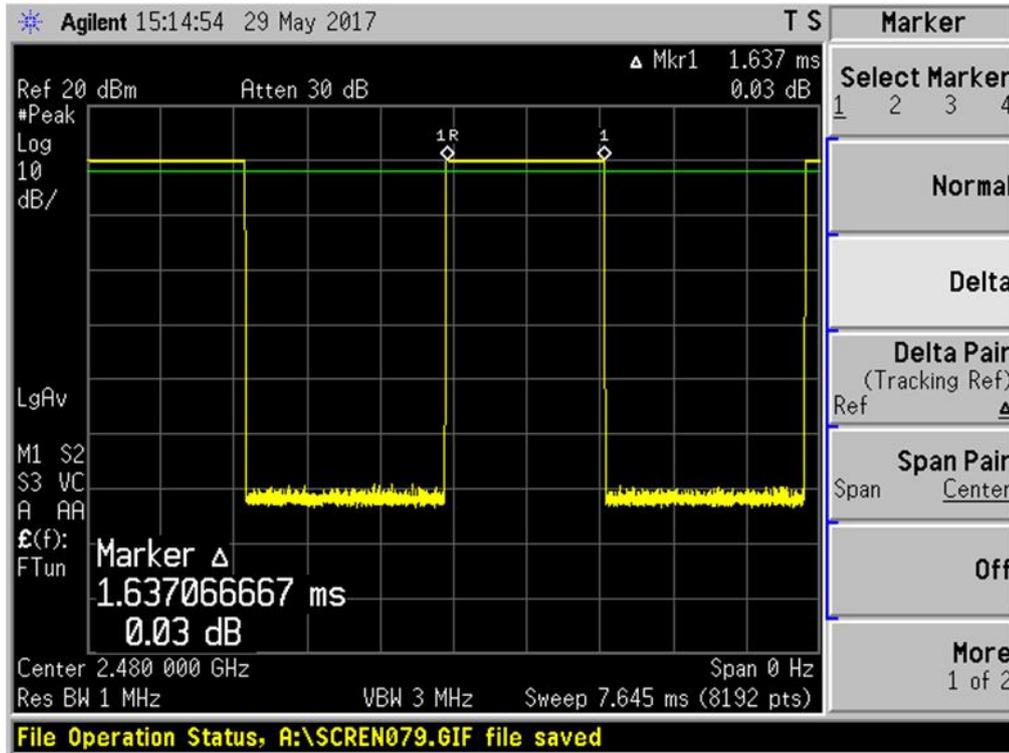


Plot 23 – Channel 78 (upper ch) – Transmit Time per Hop




AVERAGE FREQUENCY DWELL TIME TEST

Average Frequency Dwell Time Plots – DH5

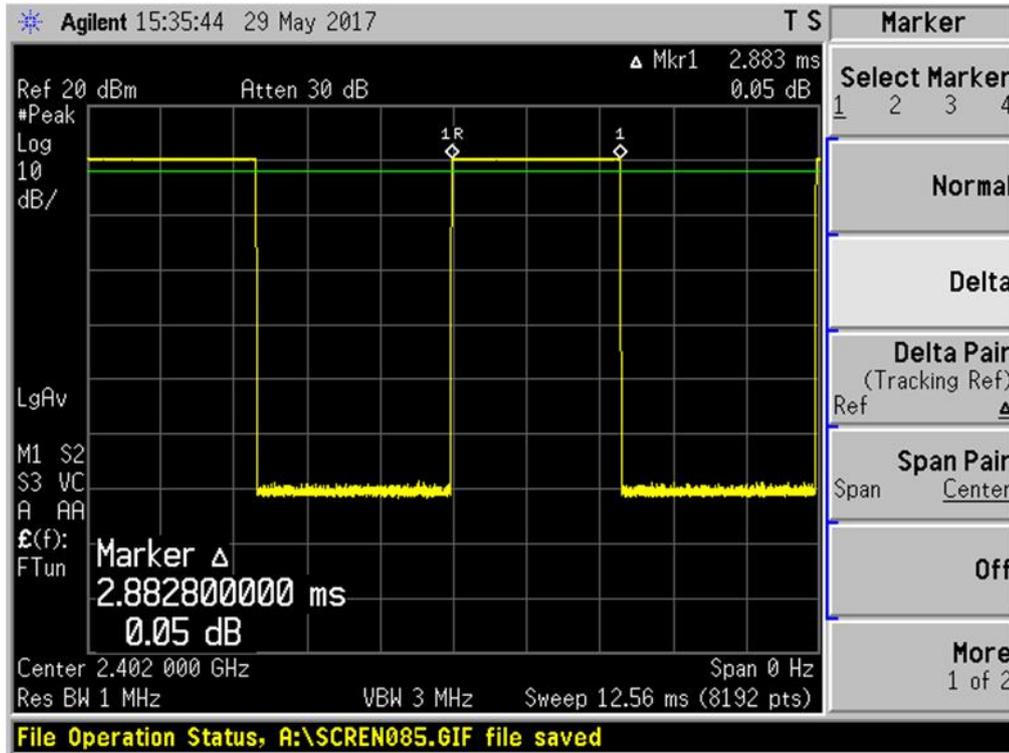

Plot 24 – Channel 0 (lower ch) – Transmit Time per Hop

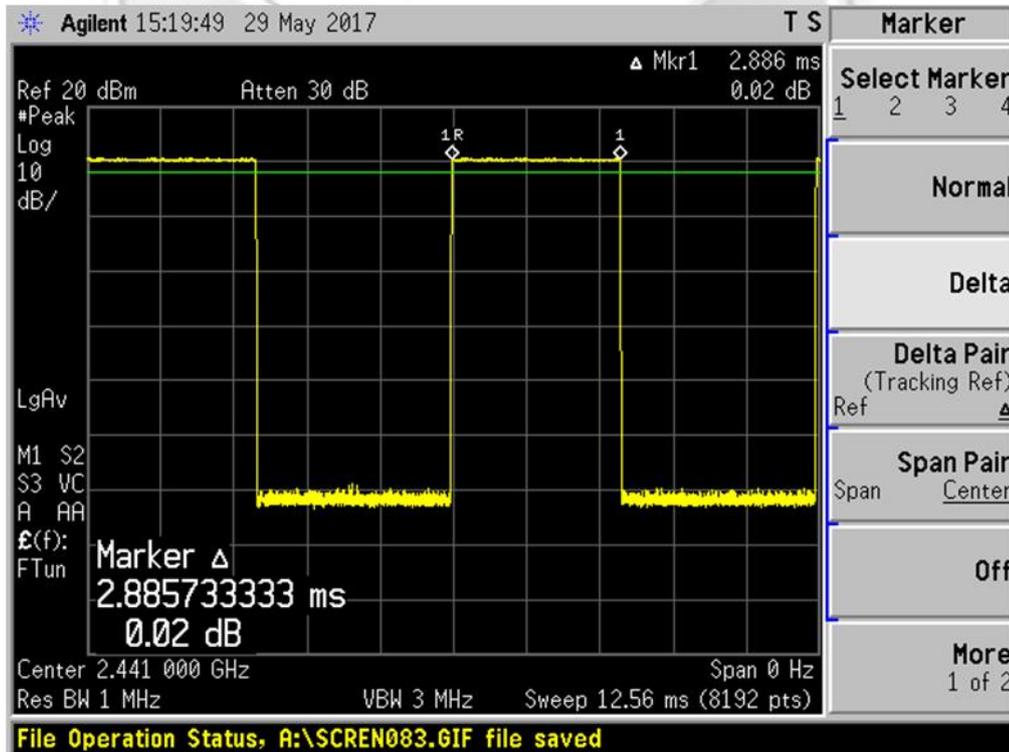


Plot 25 – Channel 39 (mid ch) – Transmit Time per Hop



AVERAGE FREQUENCY DWELL TIME TEST

Average Frequency Dwell Time Plots – DH5

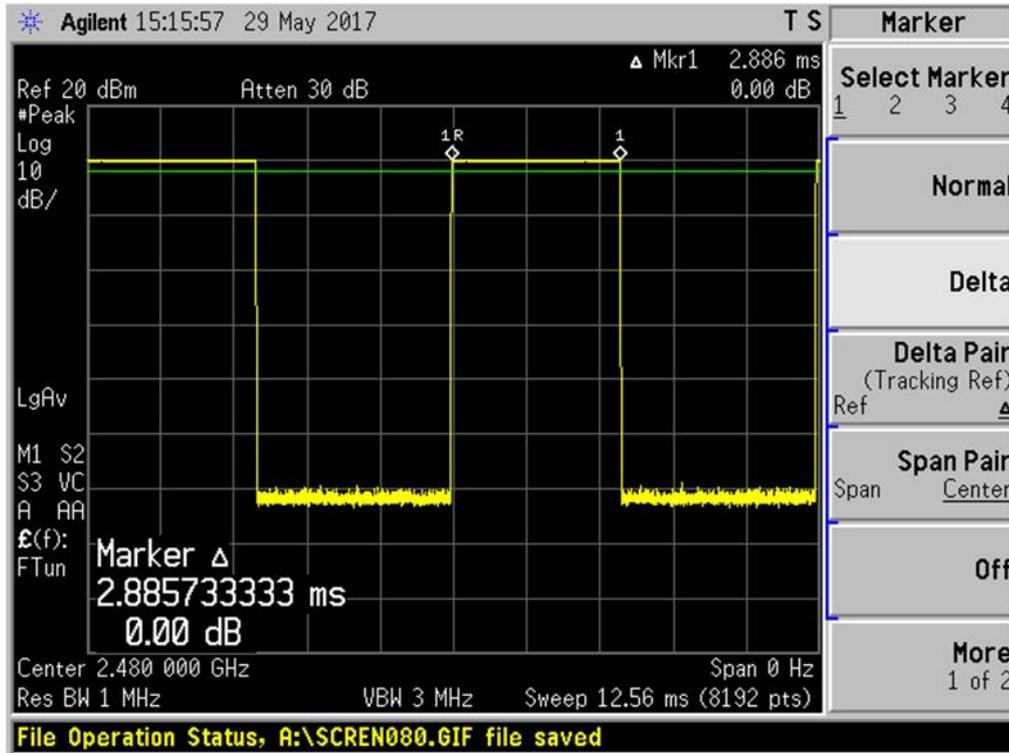

Plot 26 – Channel 78 (upper ch) – Transmit Time per Hop





MAXIMUM PEAK POWER TEST

47 CFR FCC Part 15.247(b)(1) Maximum Peak Power Limits

The EUT shows compliance to the requirements of this section, which states the EUT employing at least 75 non-overlapping hopping channels shall not exceed 1W (30dBm). For the EUT employs other frequency hopping systems, the peak power shall not greater than 0.125W (21dBm).

47 CFR FCC Part 15.247(b)(1) Maximum Peak Power Test Instrumentation

Instrument	Model	S/No	Cal Due Date
Boonton Electronics RF Power Meter	4532	72901	26 Aug 2017
Boonton Electronics Peak Power Sensor	56218-S/1	1417	26 Aug 2017

47 CFR FCC Part 15.247(b)(1) Maximum Peak Power Test Setup

1. The EUT and supporting equipment were set up as shown in the setup photo.
2. The power supply for the EUT was connected to a filtered mains.
3. The RF antenna connector was connected to the Universal Radio Communication Tester, which set into power analyser mode via a low-loss coaxial cable.
4. All other supporting equipment were powered separately from another filtered mains.

47 CFR FCC Part 15.247(b)(1) Maximum Peak Power Test Method

1. The EUT was switched on and allowed to warm up to its normal operating condition. The EUT was then configured to operate in the test mode, non-hopping with transmitting frequency at Channel 0 (2.402GHz) (*lower ch*).
2. The maximum peak power of the transmitting frequency was detected and recorded.
3. The step 2 was repeated with the transmitting frequency was set to Channel 39 (2.441GHz) (*mid ch*) and Channel 78 (2.480GHz) (*upper ch*) respectively.



MAXIMUM PEAK POWER TEST

47 CFR FCC Part 15.247(b)(1) Maximum Peak Power Results

Test Input Power	3.7Vdc	Temperature	24°C
Antenna Gain	1.6 dBi	Relative Humidity	60%
		Atmospheric Pressure	1030mbar
		Tested By	Liau Lee Yin

Channel	Channel Frequency (GHz)	Data Rate (Mbps)	Maximum Peak Power (W)	Limit (W)
0 (lower ch)	2.402	GFSK	0.0012	1.0
39 (mid ch)	2.441		0.0012	1.0
78 (upper ch)	2.480		0.0012	1.0
0 (lower ch)	2.402	$(\pi/4)$ DQPSK	0.0012	1.0
39 (mid ch)	2.441		0.0011	1.0
78 (upper ch)	2.480		0.0012	1.0
0 (lower ch)	2.402	8DPSK	0.0012	1.0
39 (mid ch)	2.441		0.0011	1.0
78 (upper ch)	2.480		0.0012	1.0

Notes

1. Nil.





RF CONDUCTED SPURIOUS EMISSIONS TEST

47 CFR FCC Part 15.247(d) RF Conducted Spurious Emissions Limits

The EUT shows compliance to the requirements of this section, which states in any 100kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator (EUT) is operating, the radio frequency power that is produced by the EUT shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of desired power.

47 CFR FCC Part 15.247(d) RF Conducted Spurious Test Instrumentation

Instrument	Model	S/No	Cal Due Date
Agilent Spectrum Analyzer	E4440A	MY45304764	04 Jan 2018

47 CFR FCC Part 15.247(d) RF Conducted Spurious Emissions Test Setup

1. The EUT and supporting equipment were set up as shown in the setup photo.
2. The power supply for the EUT was connected to a filtered mains.
3. The RF antenna connector was connected to the spectrum analyser via a low-loss coaxial cable.
4. The resolution bandwidth (RBW) and the video bandwidth (VBW) of the spectrum analyser were respectively set to 100kHz and 3 times of RBW.
5. All other supporting equipment were powered separately from another filtered mains.

47 CFR FCC Part 15.247(d) RF Conducted Spurious Emissions Test Method

1. The EUT was switched on and allowed to warm up to its normal operating condition. The EUT was then configured to operate in the test mode, non-hopping with transmitting frequency at Channel 0 (2.402GHz) (*lower ch*).
2. The start and stop frequencies of the spectrum analyser were set to 30MHz and 10GHz.
3. The spectrum analyser was set to max hold to capture any spurious emissions within the span. The signal capturing was continuous until no further spurious emissions were detected.
4. The steps 2 to 3 were repeated with frequency span was set from 10GHz to 25GHz.
5. The steps 2 to 4 were repeated with the transmitting frequency was set to Channel 39 (2.441GHz) (*mid ch*) and Channel 78 (2.480GHz) (*upper ch*) respectively.



RF CONDUCTED SPURIOUS EMISSIONS TEST

47 CFR FCC Part 15.247(d) RF Conducted Spurious Emissions Results


Test Input Power	3.7Vdc	Temperature	24°C
Attached Plots	27 – 44	Relative Humidity	60%
		Atmospheric Pressure	1030mbar
		Tested By	Liau Lee Yin

All spurious signals found were below the specified limit. Please refer to the attached plots.




RF CONDUCTED SPURIOUS EMISSIONS TEST

RF Conducted Spurious Emissions Plots – GFSK

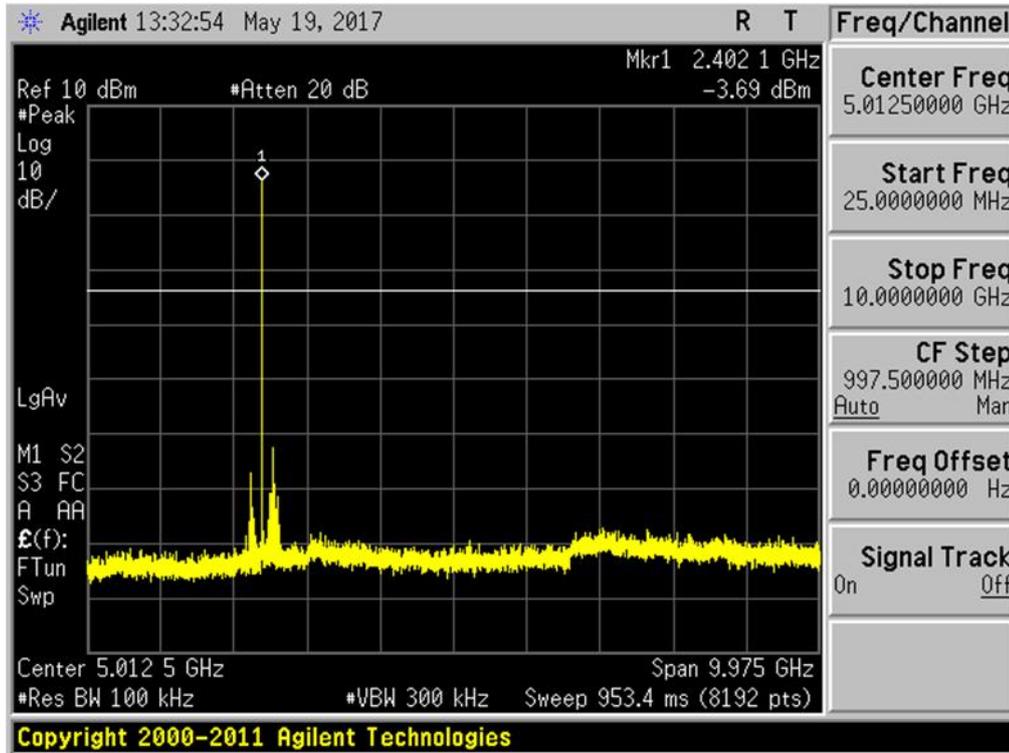

Plot 27 – Channel 0 (lower ch)

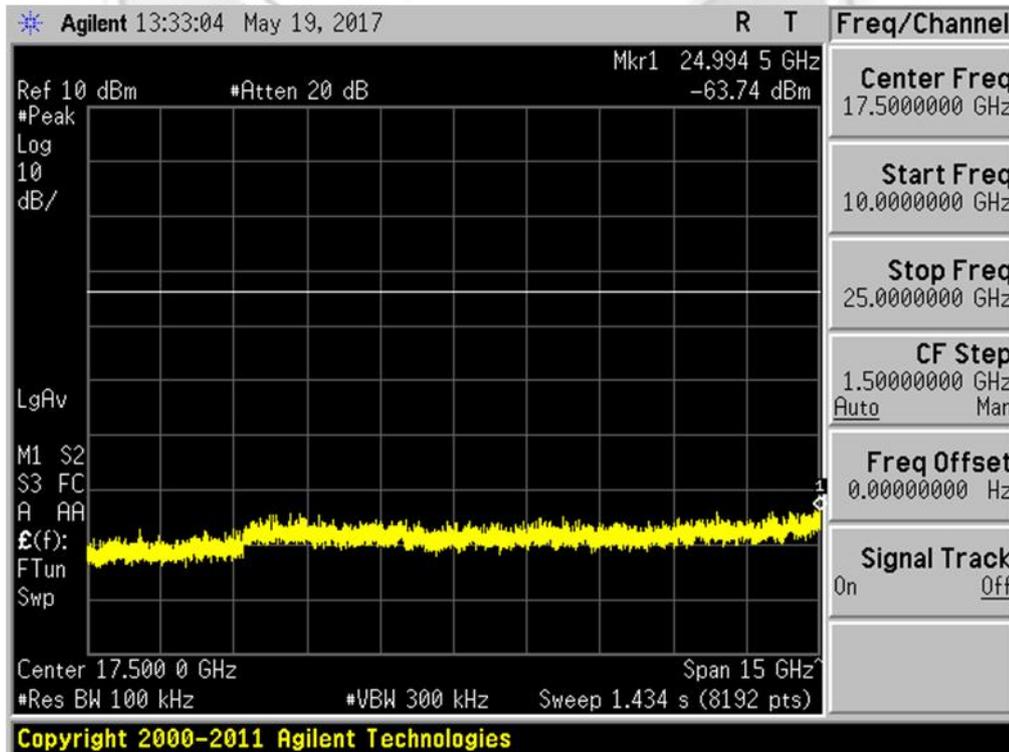


Plot 28 – Channel 0 (lower ch)




RF CONDUCTED SPURIOUS EMISSIONS TEST

RF Conducted Spurious Emissions Plots – GFSK

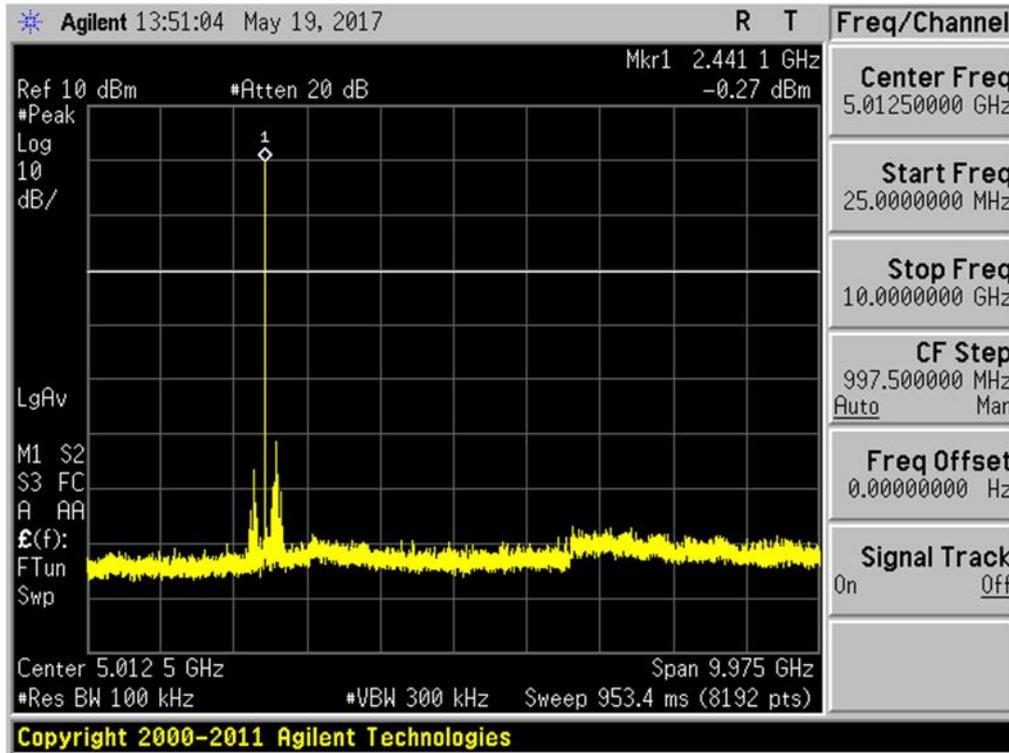


Plot 29 – Channel 39 (mid ch)

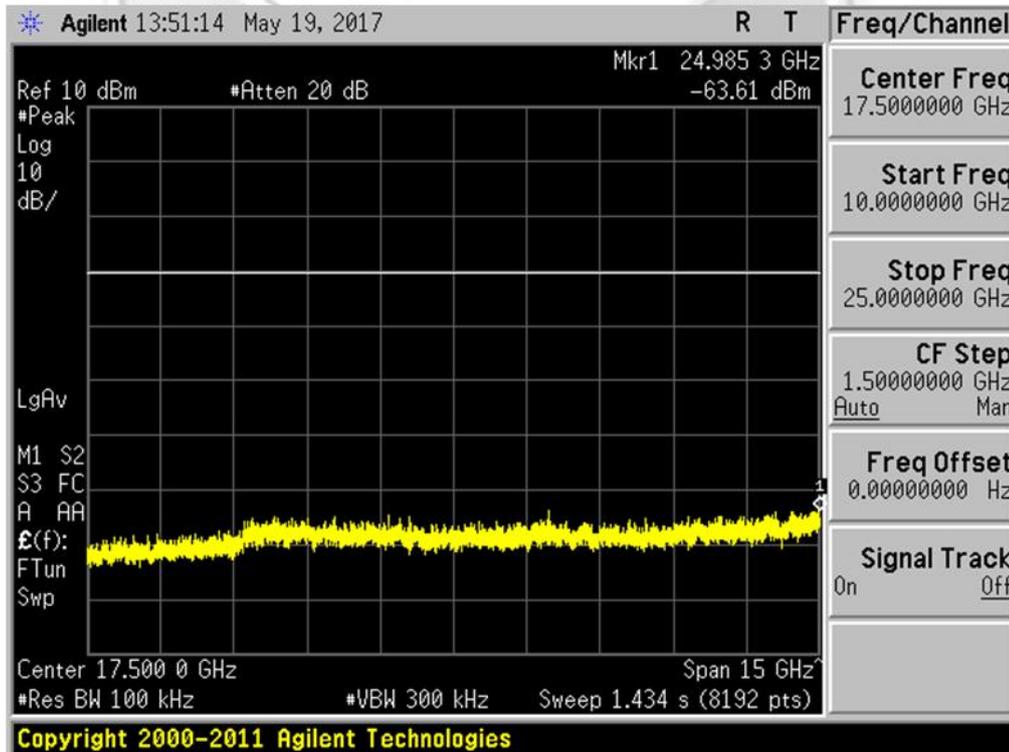


Plot 30 – Channel 39 (mid ch)

RF CONDUCTED SPURIOUS EMISSIONS TEST

RF Conducted Spurious Emissions Plots – GFSK

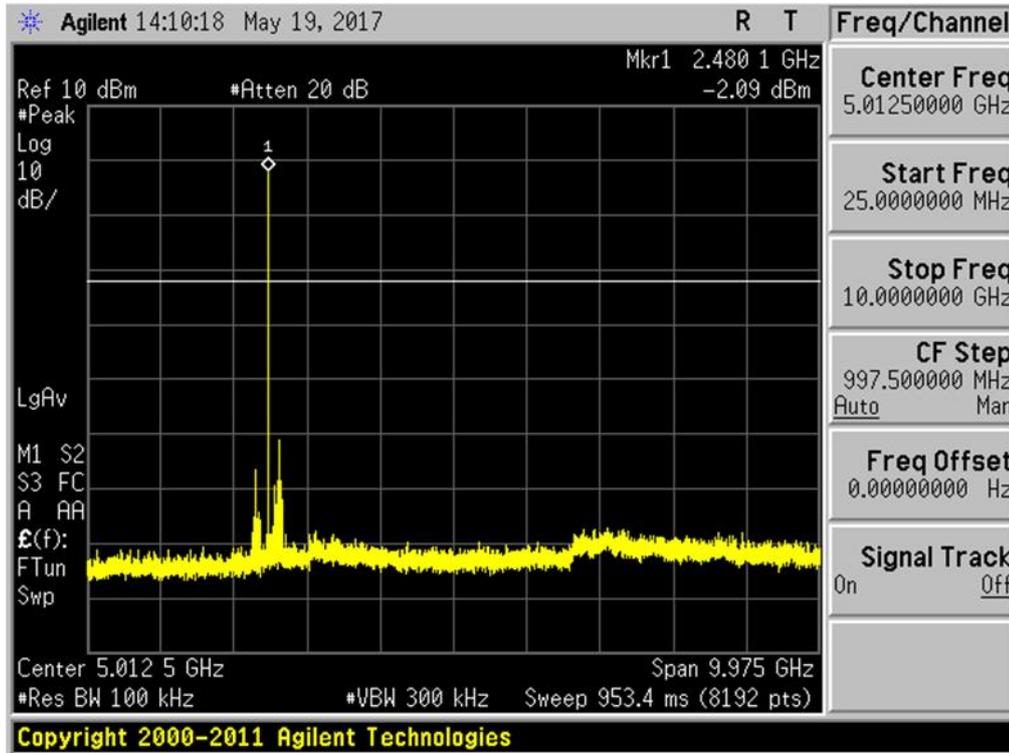

Plot 31 – Channel 78 (upper ch)

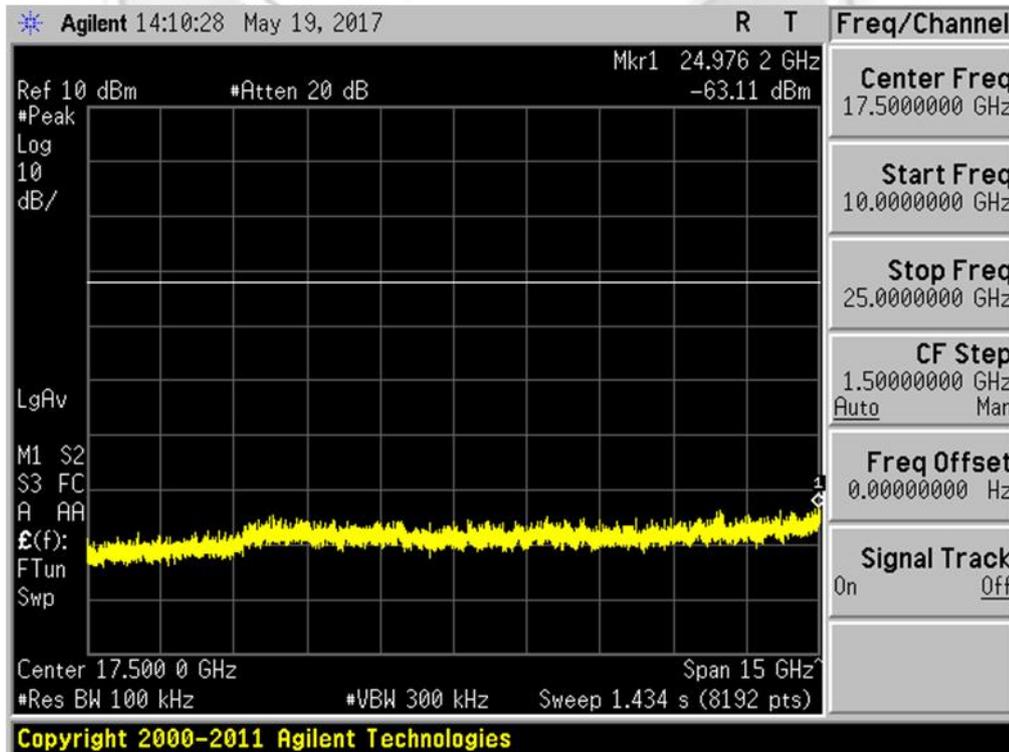


Plot 32 – Channel 78 (upper ch)




RF CONDUCTED SPURIOUS EMISSIONS TEST

RF Conducted Spurious Emissions Plots – ($\pi/4$) DQPSK

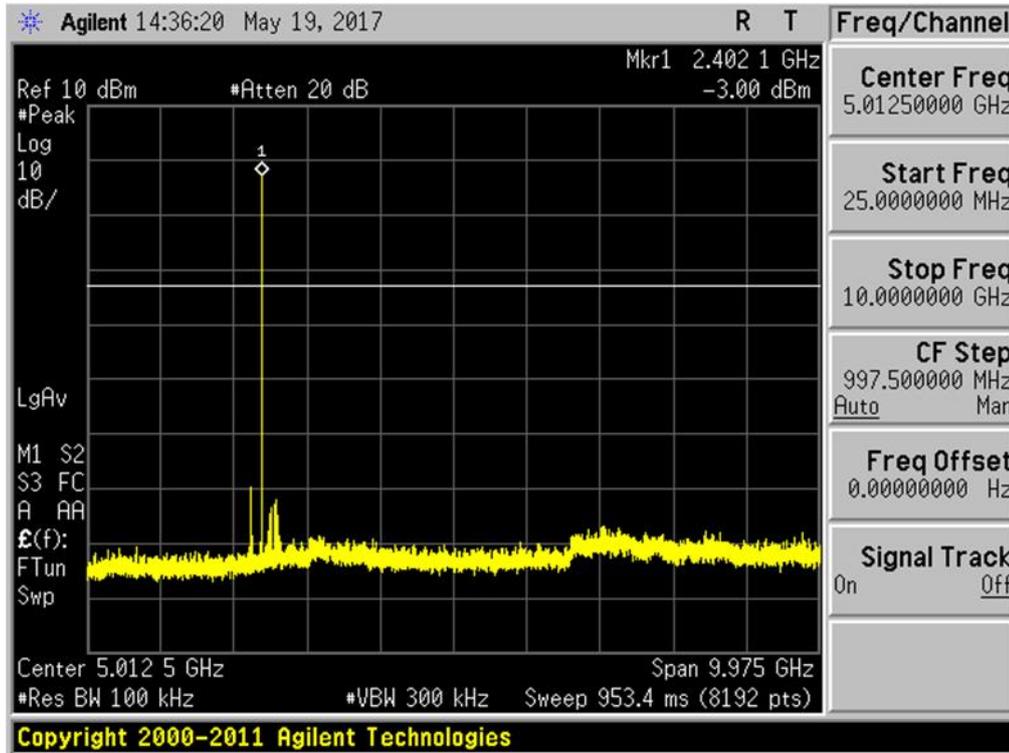


Plot 33 – Channel 0 (lower ch)

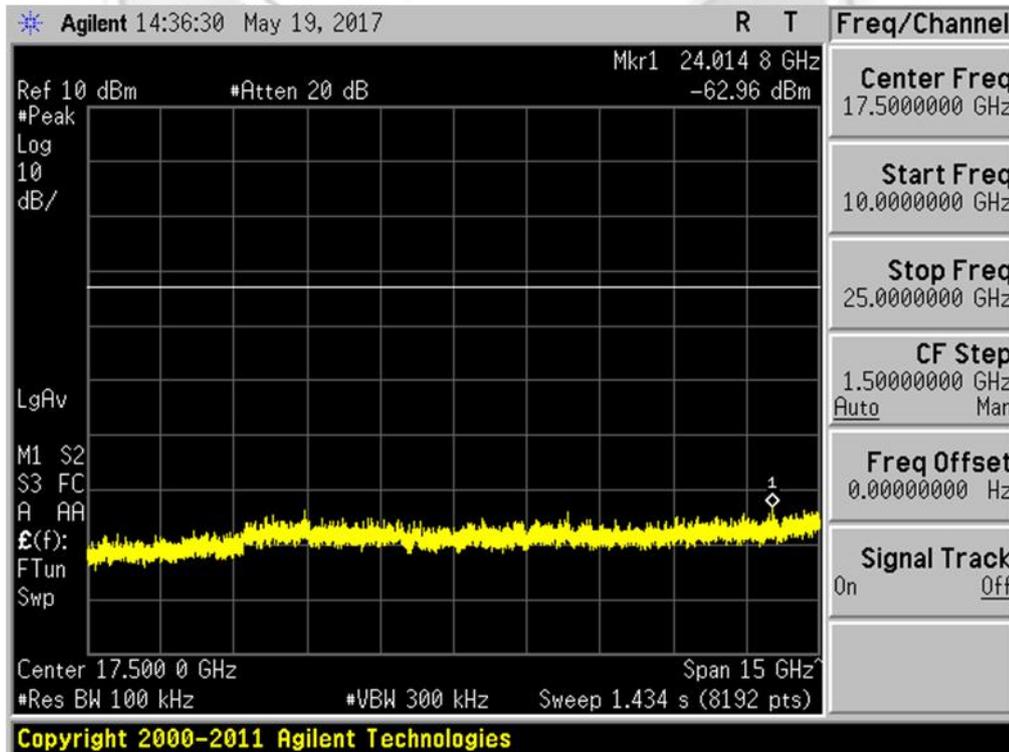


Plot 34 – Channel 0 (lower ch)

RF CONDUCTED SPURIOUS EMISSIONS TEST

RF Conducted Spurious Emissions Plots – ($\pi/4$) DQPSK

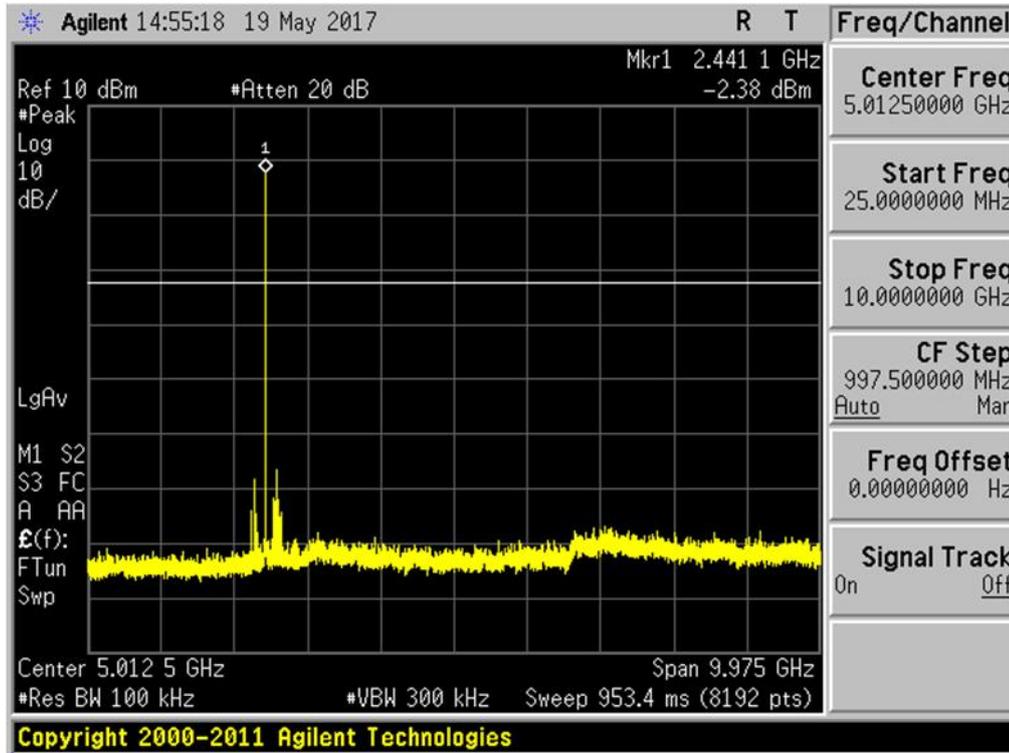


Plot 35 – Channel 39 (mid ch)

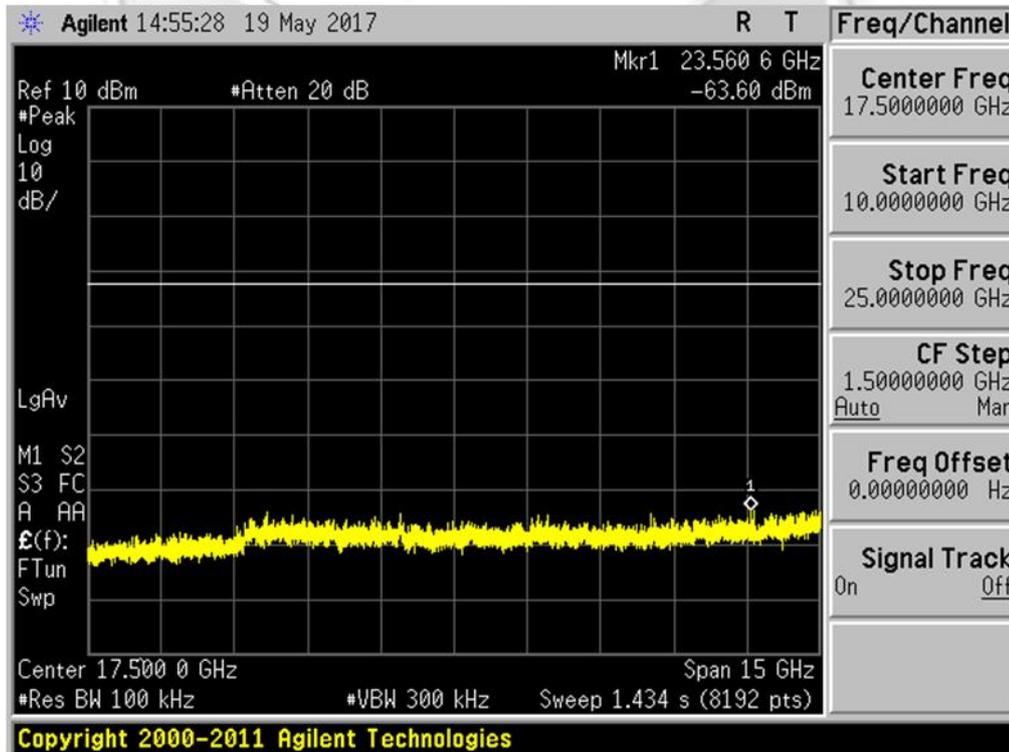


Plot 36 – Channel 39 (mid ch)

RF CONDUCTED SPURIOUS EMISSIONS TEST

RF Conducted Spurious Emissions Plots – ($\pi/4$) DQPSK

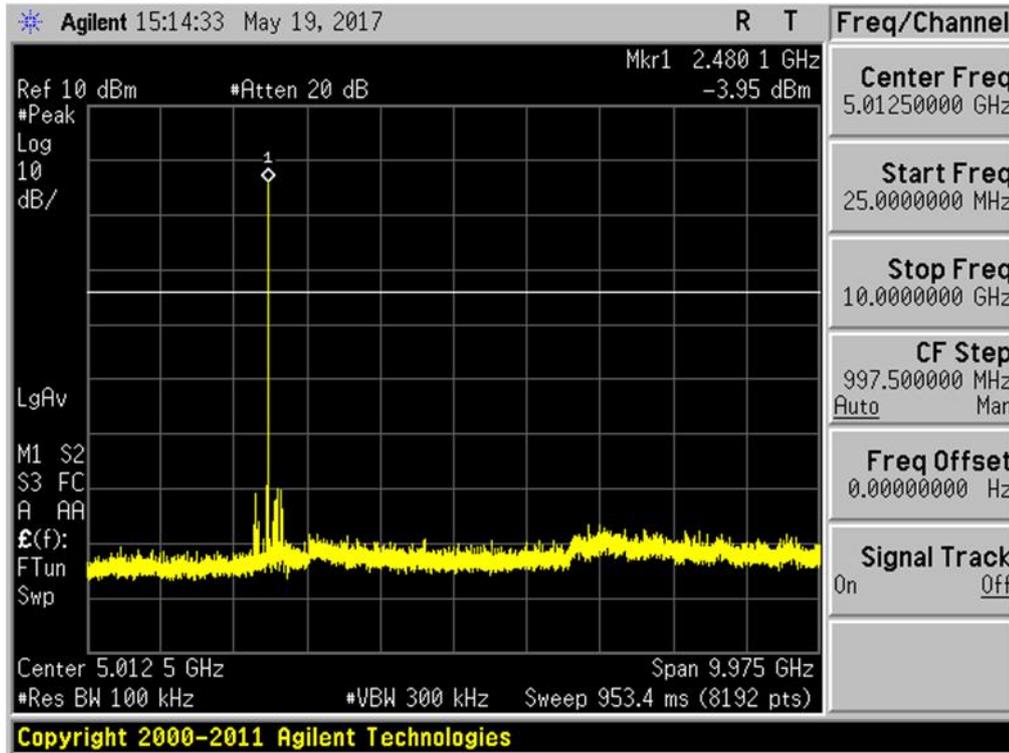

Plot 37 – Channel 78 (upper ch)

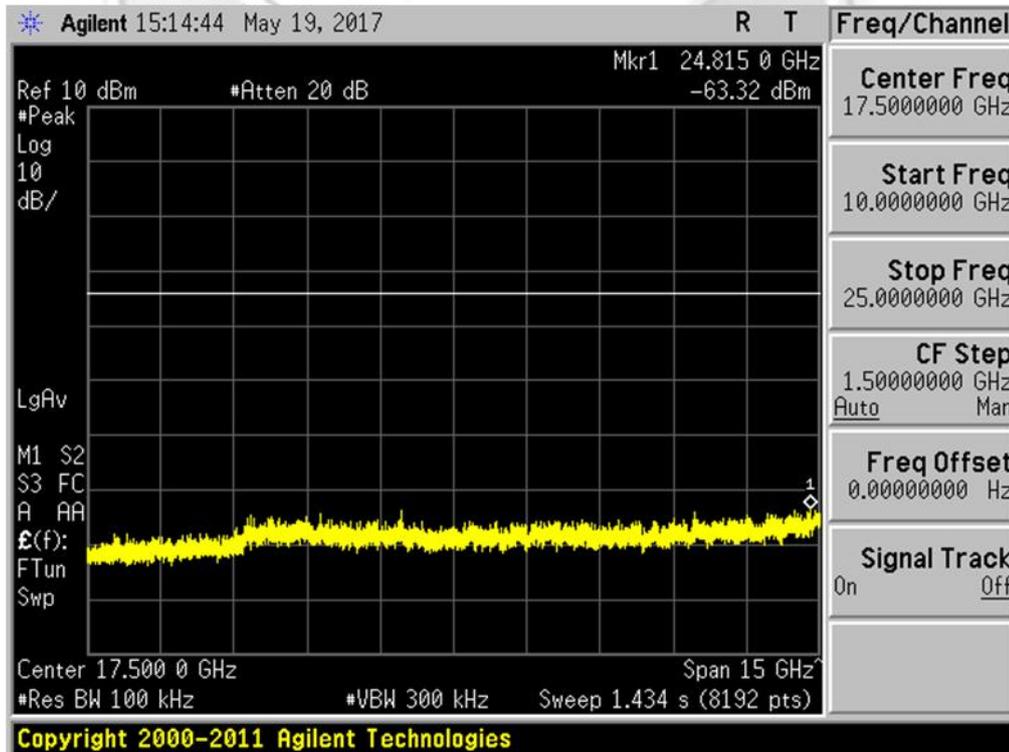


Plot 38 – Channel 78 (upper ch)




RF CONDUCTED SPURIOUS EMISSIONS TEST

RF Conducted Spurious Emissions Plots – 8DPSK

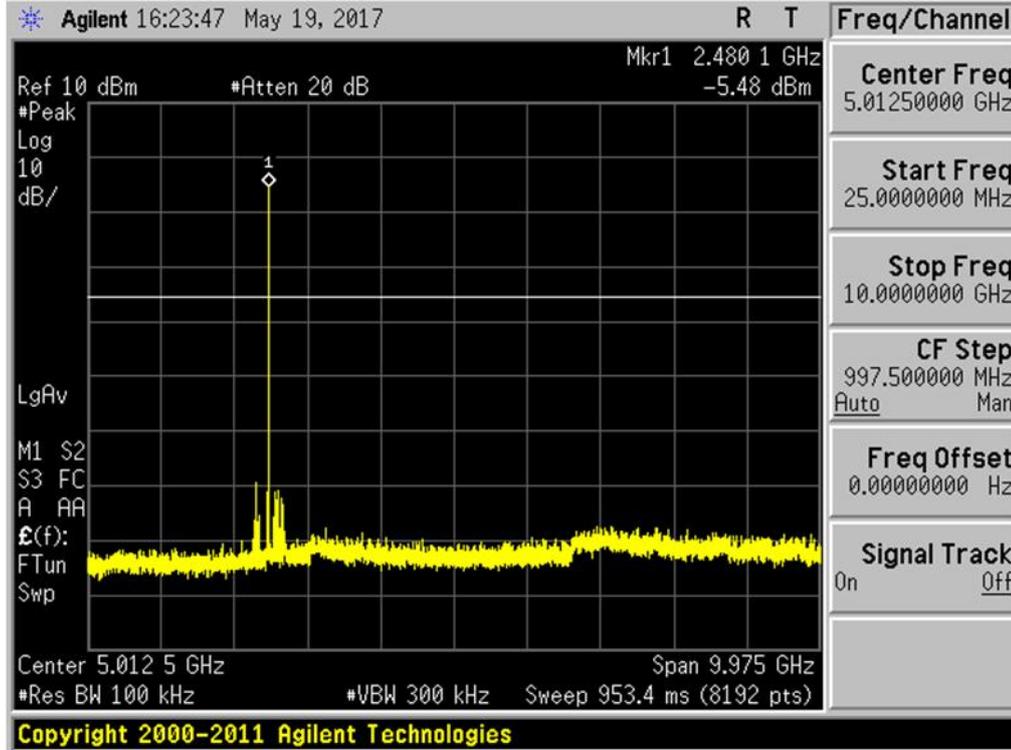

Plot 39 – Channel 0 (lower ch)

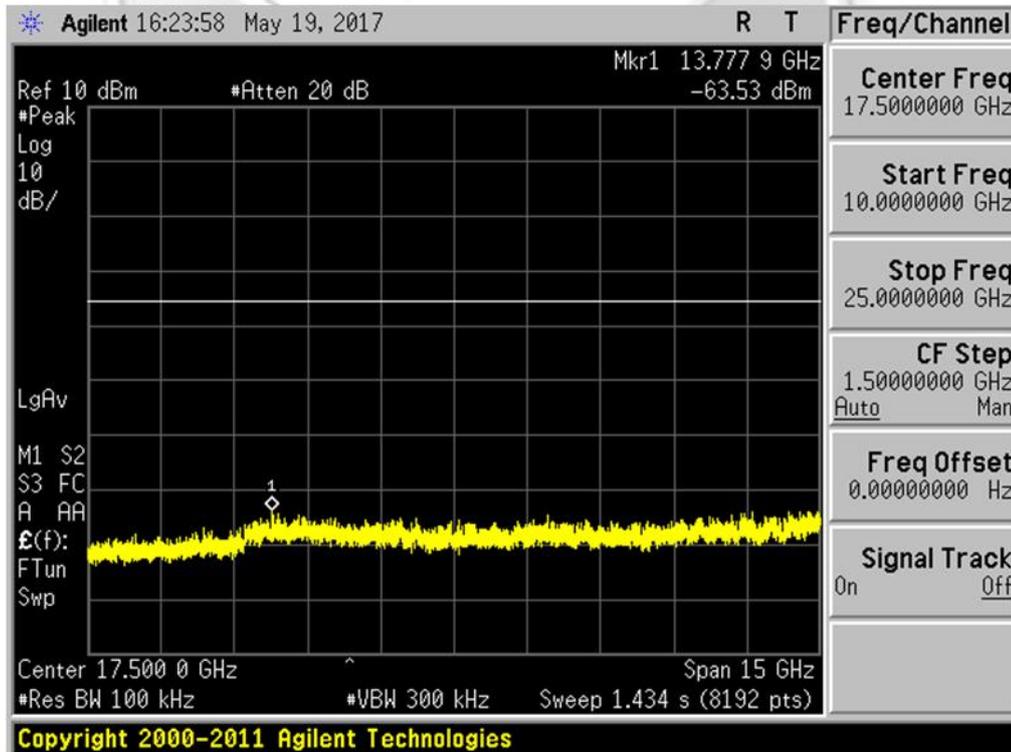


Plot 40 – Channel 0 (lower ch)




RF CONDUCTED SPURIOUS EMISSIONS TEST

RF Conducted Spurious Emissions Plots – 8DPSK

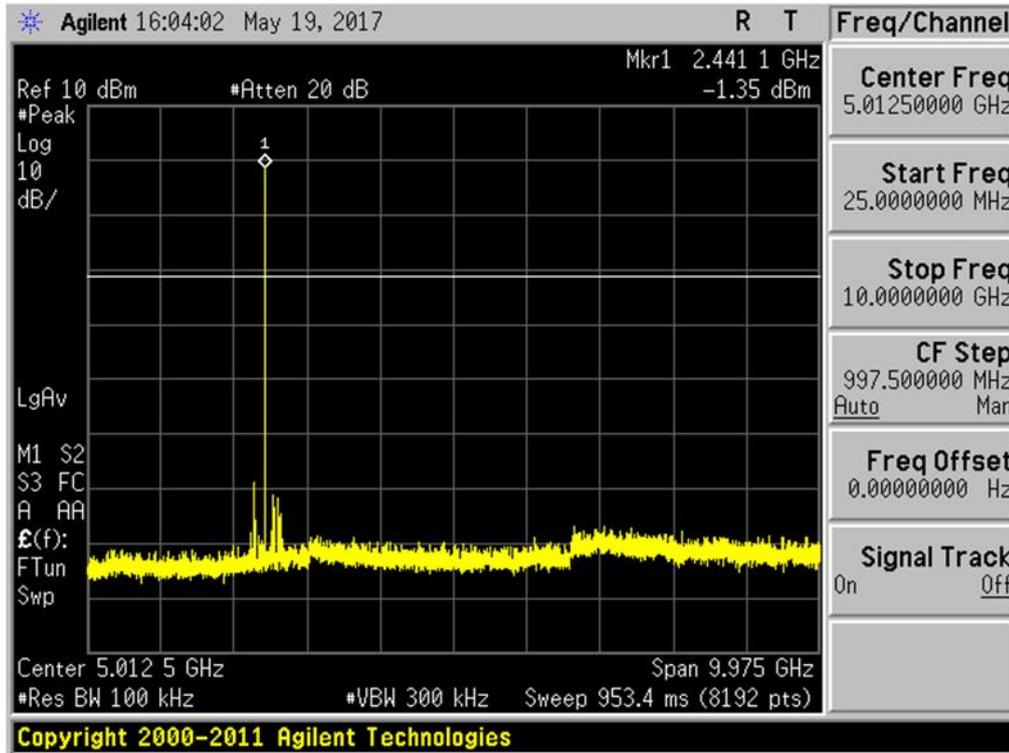

Plot 41 – Channel 39 (mid ch)

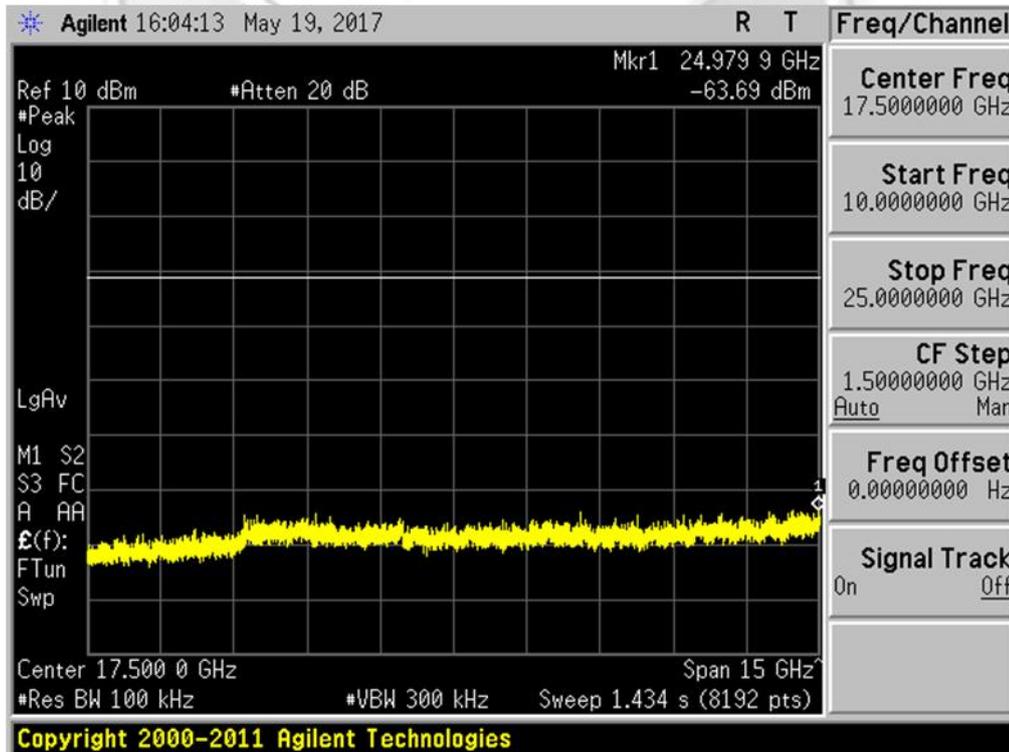


Plot 42 – Channel 39 (mid ch)




RF CONDUCTED SPURIOUS EMISSIONS TEST

RF Conducted Spurious Emissions Plots – 8DPSK

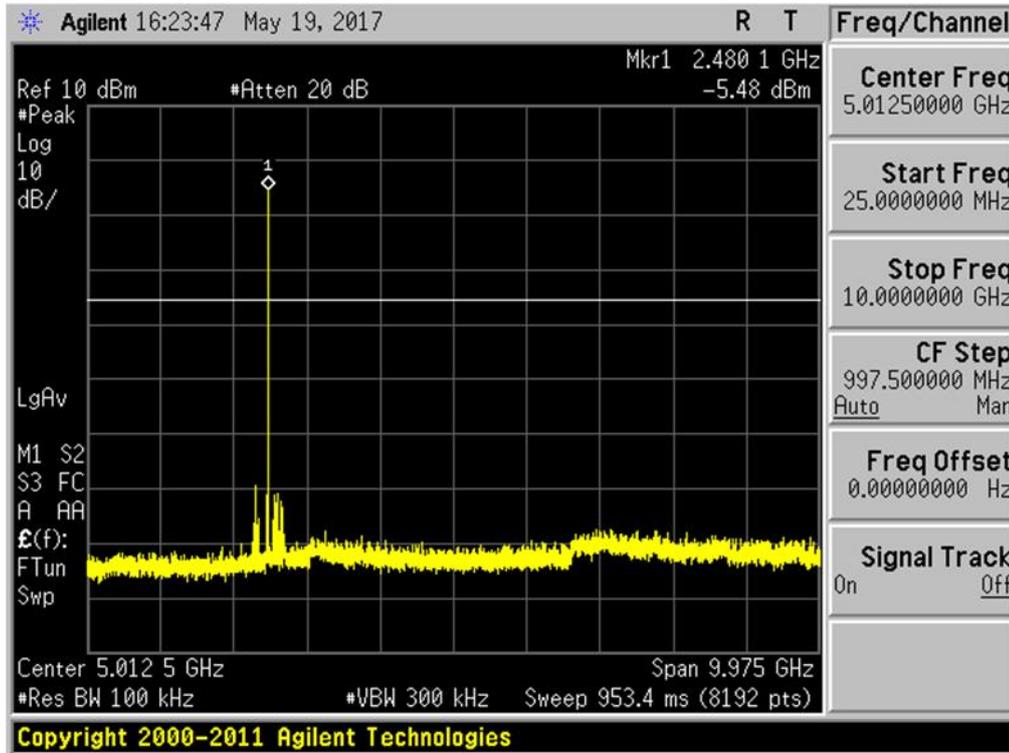

Plot 43 – Channel 78 (upper ch)

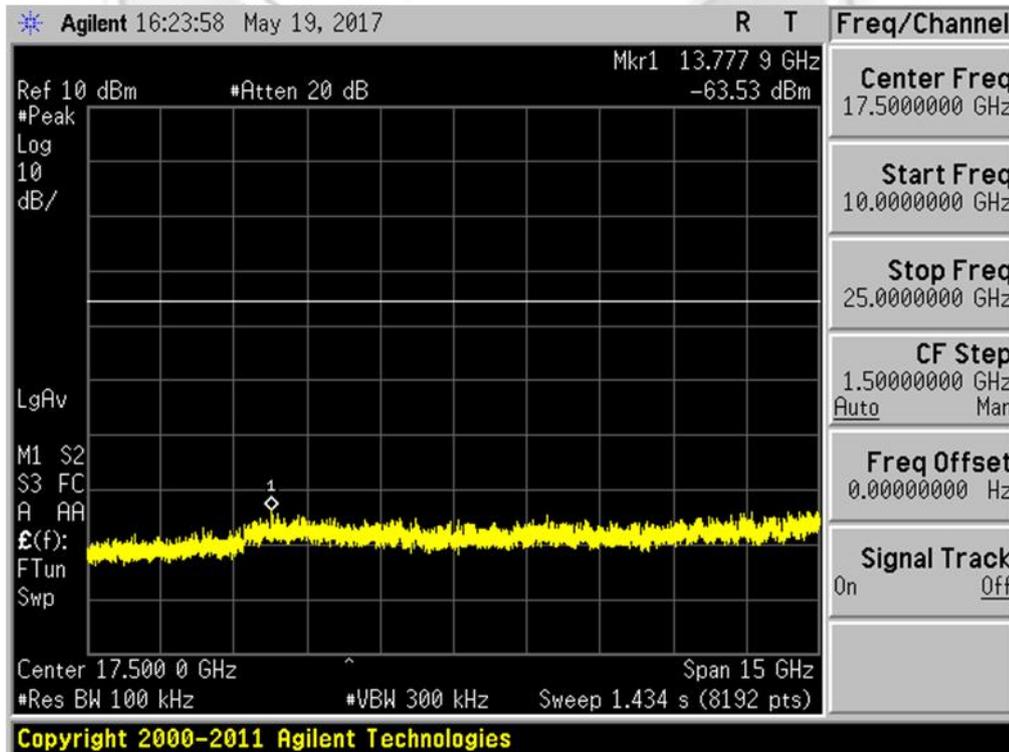

Plot 44 – Channel 78 (upper ch)



BAND EDGE COMPLIANCE (CONDUCTED) TEST

47 CFR FCC Part 15.247(d) Band Edge Compliance (Conducted) Limits

The EUT shows compliance to the requirements of this section, which states in any 100kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator (EUT) is operating, the radio frequency power that is produced by the EUT shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.

47 CFR FCC Part 15.247(d) Band Edge Compliance (Conducted) Test Instrumentation

Instrument	Model	S/No	Cal Due Date
Agilent Spectrum Analyzer	E4440A	MY45304764	04 Jan 2018

47 CFR FCC Part 15.247(d) Band Edge Compliance (Conducted) Test Setup

1. The EUT and supporting equipment were set up as shown in the setup photo.
2. The power supply for the EUT was connected to a filtered mains.
3. The RF antenna connector was connected to the spectrum analyser via a low-loss coaxial cable.
4. The resolution bandwidth (RBW) and the video bandwidth (VBW) of the spectrum analyser were respectively set to 100kHz and 300kHz.
5. All other supporting equipment were powered separately from another filtered mains.

47 CFR FCC Part 15.247(d) Band Edge Compliance (Conducted) Test Method

1. The EUT was switched on and allowed to warm up to its normal operating condition. The EUT was then configured to operate in the test mode with frequency hopping sequence on.
2. The frequency span of the spectrum analyser was set to wide enough to capture the lower band edge of the transmission band, 2.400GHz and any spurious emissions at the band edge.
3. The spectrum analyser was set to max hold to capture any spurious emissions within the span. The signal capturing was continuous until no further spurious emissions were detected.
4. The steps 2 to 3 were repeated with the frequency span of the spectrum analyser was set to wide enough to capture the upper band edge frequency of the transmission band, 2.4835GHz and the any spurious emissions at the band-edge.
5. The measurements were repeated with turning off the frequency hopping sequence of the EUT.



BAND EDGE COMPLIANCE (CONDUCTED) TEST

47 CFR FCC Part 15.247(d) Band Edge Compliance (Conducted) Results


Test Input Power	3.7Vdc	Temperature	24°C
Attached Plots	45 – 56	Relative Humidity	60%
		Atmospheric Pressure	1030mbar
		Tested By	Liau Lee Yin

No significant signal was found and they were below the specified limit.




BAND EDGE COMPLIANCE (CONDUCTED) TEST

Band Edge Compliance (Conducted) Plots – Frequency Hopping On (GFSK)

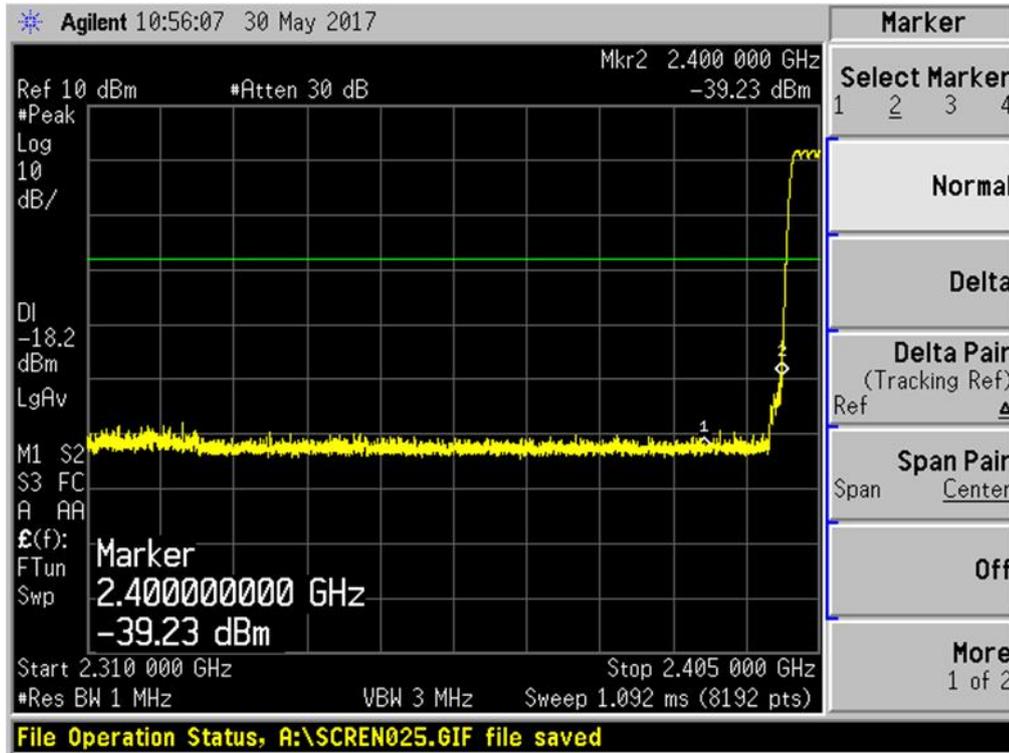


Plot 45 – Lower Band Edge at 2.4000GHz

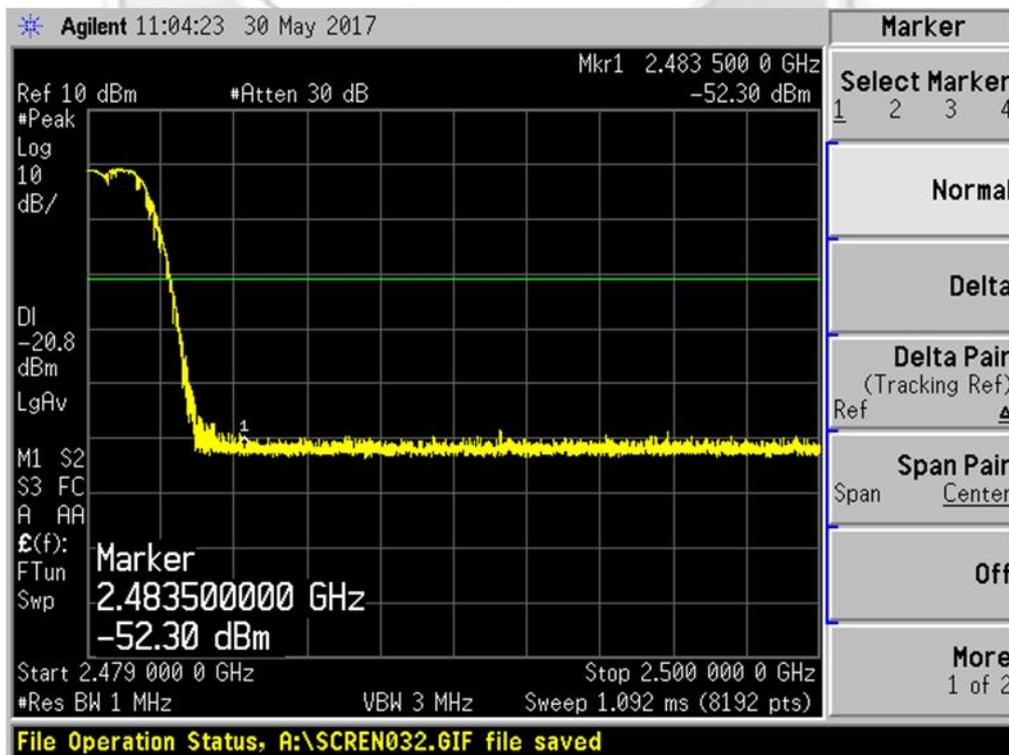


Plot 46 – Upper Band Edge at 2.4835GHz

BAND EDGE COMPLIANCE (CONDUCTED) TEST

Band Edge Compliance (Conducted) Plots – Frequency Hopping Off (GFSK)

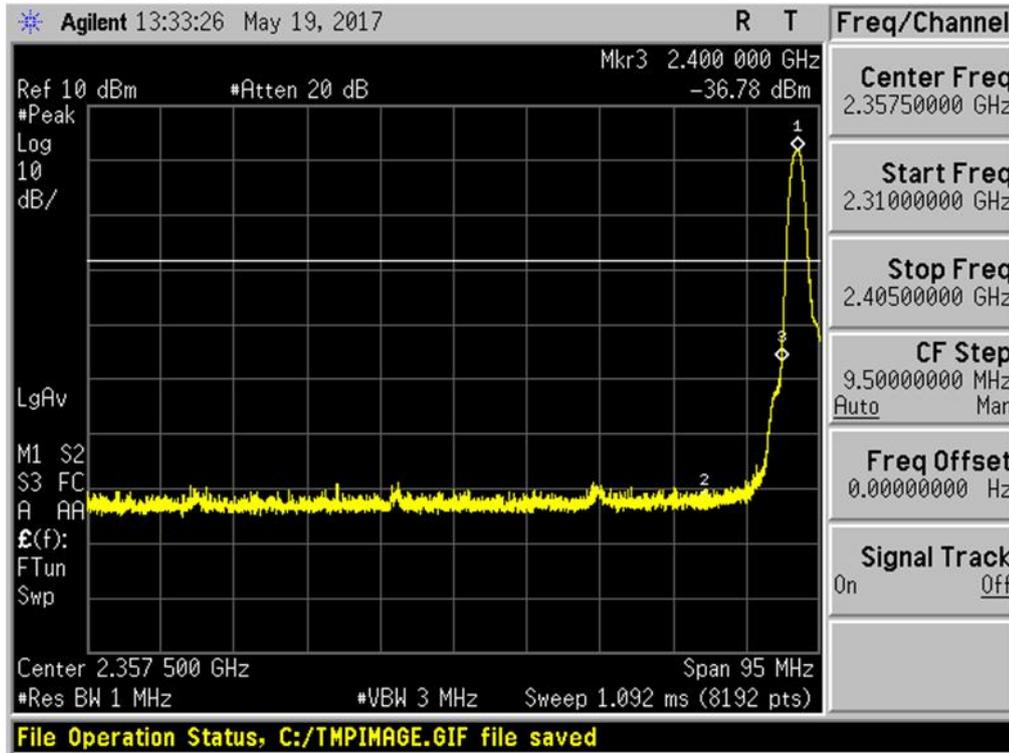


Plot 47 – Lower Band Edge at 2.400GHz

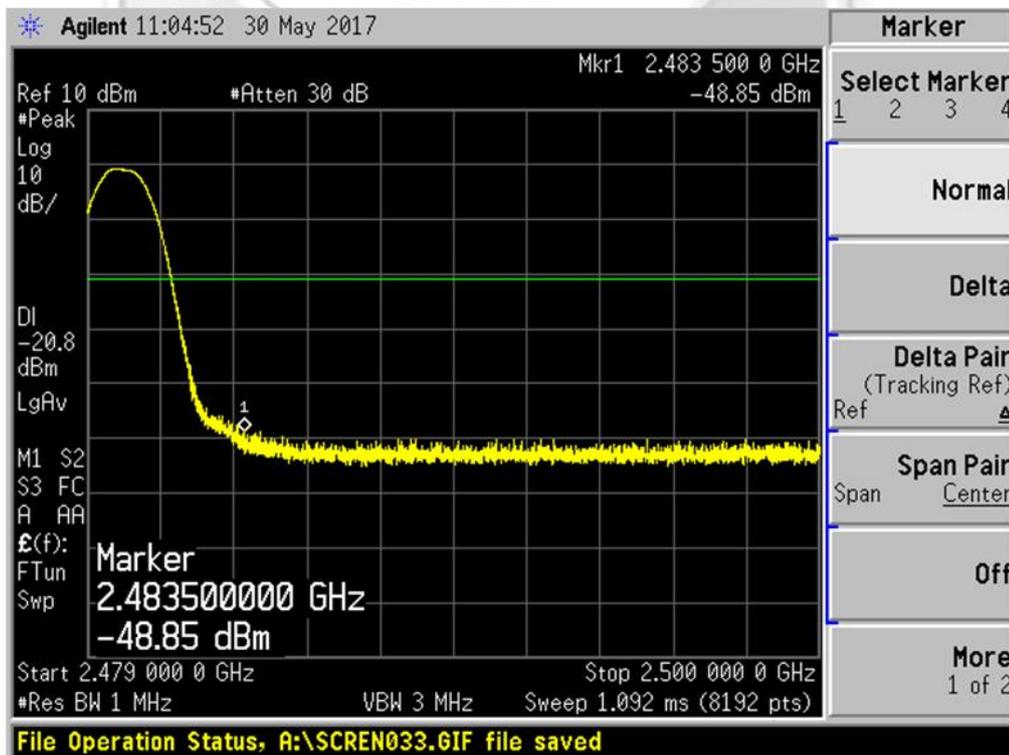


Plot 48 – Upper Band Edge at 2.4835GHz

BAND EDGE COMPLIANCE (CONDUCTED) TEST

Band Edge Compliance (Conducted) Plots – Frequency Hopping On (($\pi/4$) DQPSK)

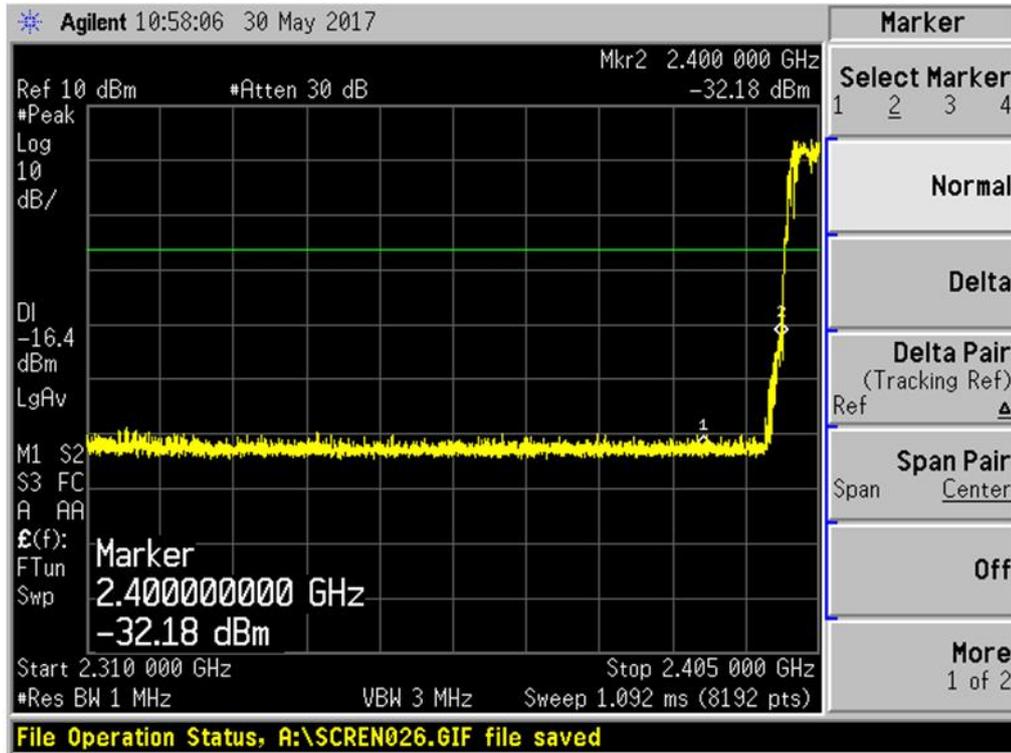

Plot 49 – Lower Band Edge at 2.4000GHz

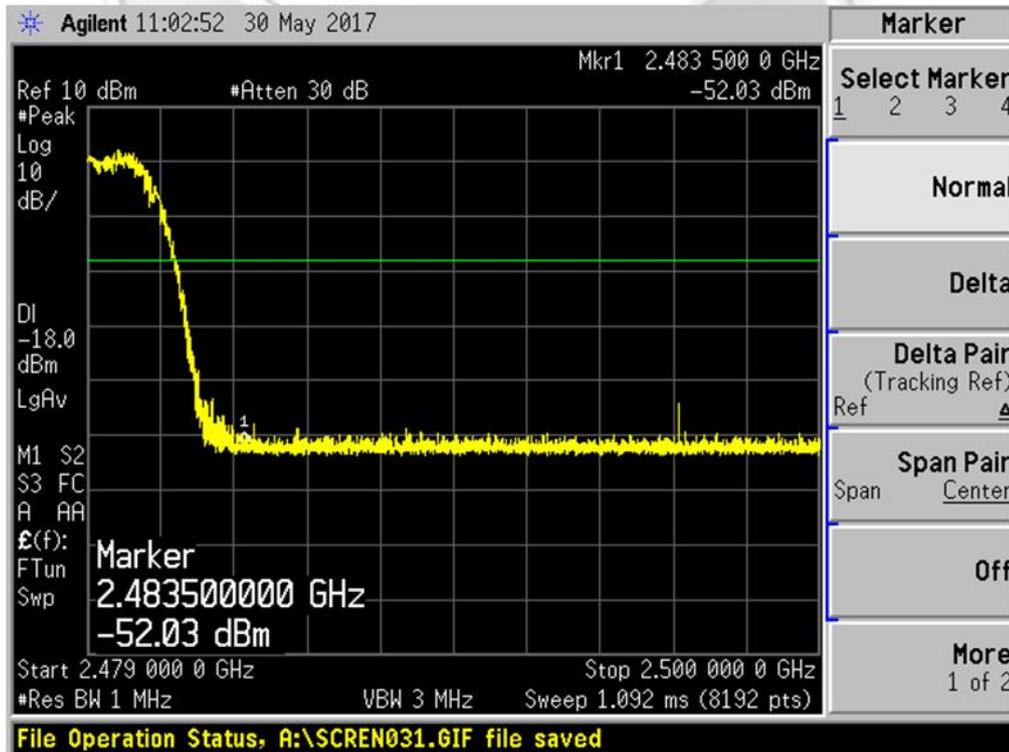


Plot 50 – Upper Band Edge at 2.4835GHz




BAND EDGE COMPLIANCE (CONDUCTED) TEST

Band Edge Compliance (Conducted) Plots – Frequency Hopping Off (($\pi/4$) DQPSK)

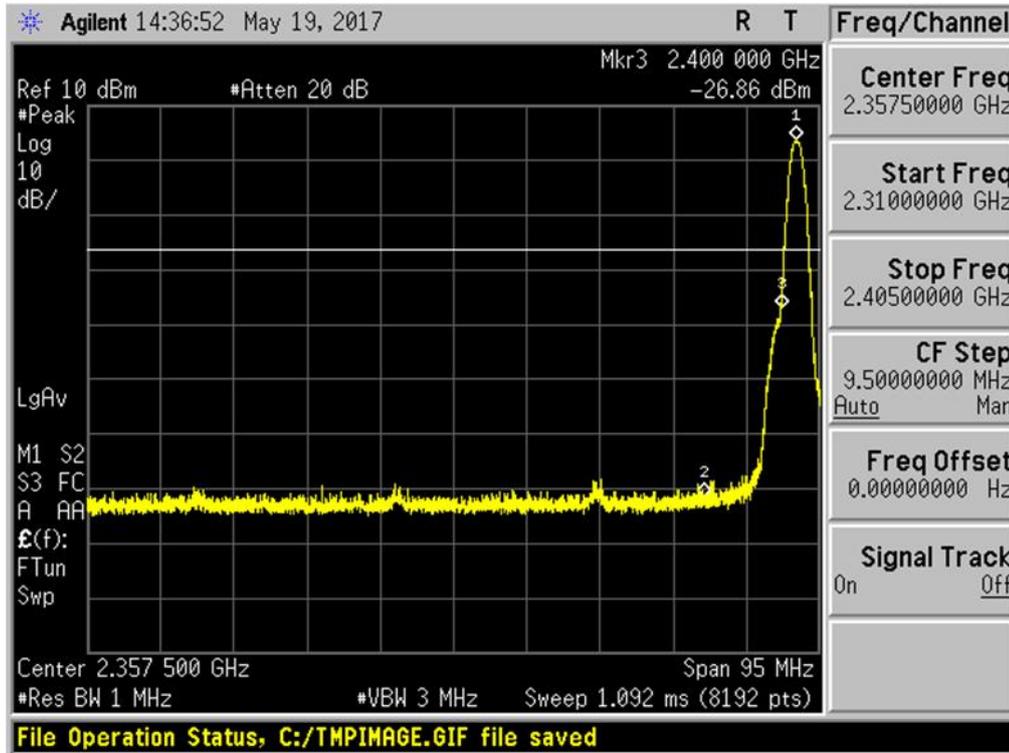


Plot 51 – Lower Band Edge at 2.400GHz

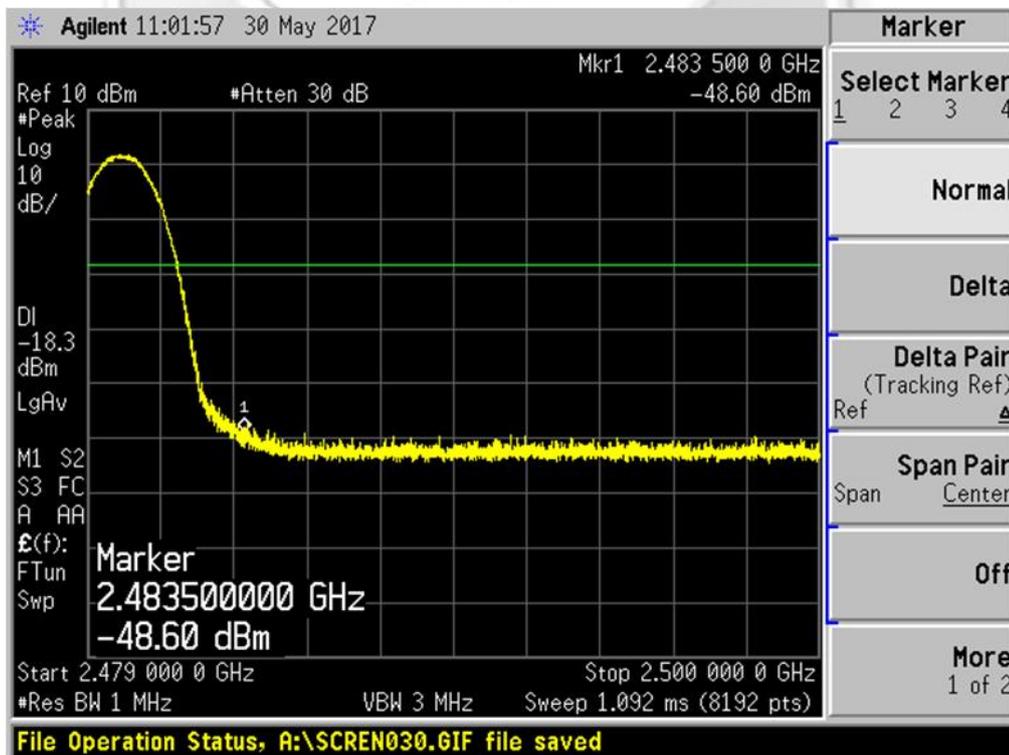


Plot 52 – Upper Band Edge at 2.4835GHz

BAND EDGE COMPLIANCE (CONDUCTED) TEST

Band Edge Compliance (Conducted) Plots – Frequency Hopping On (8DPSK)

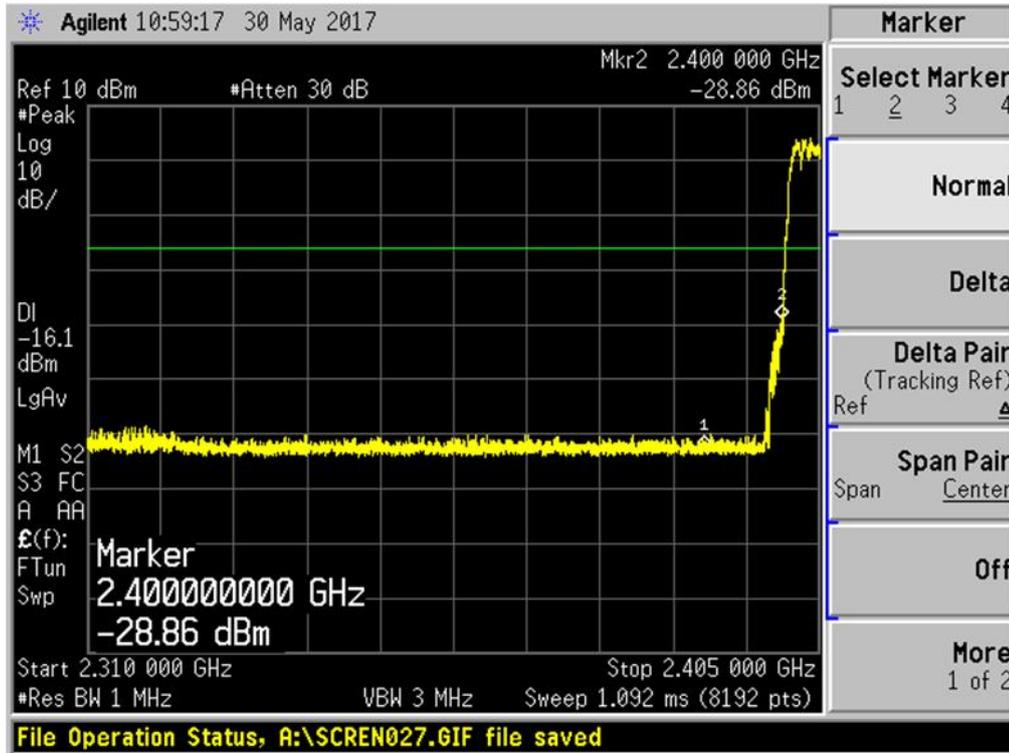

Plot 53 – Lower Band Edge at 2.4000GHz

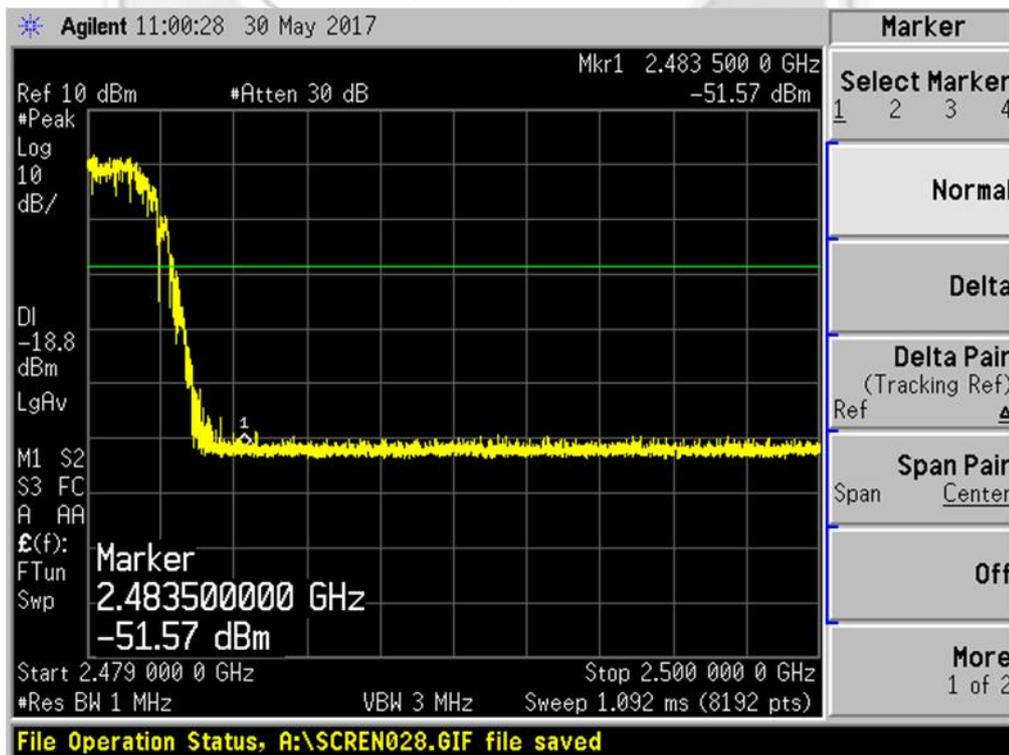


Plot 54 – Upper Band Edge at 2.4835GHz




BAND EDGE COMPLIANCE (CONDUCTED) TEST

Band Edge Compliance (Conducted) Plots – Frequency Hopping Off (8DPSK)

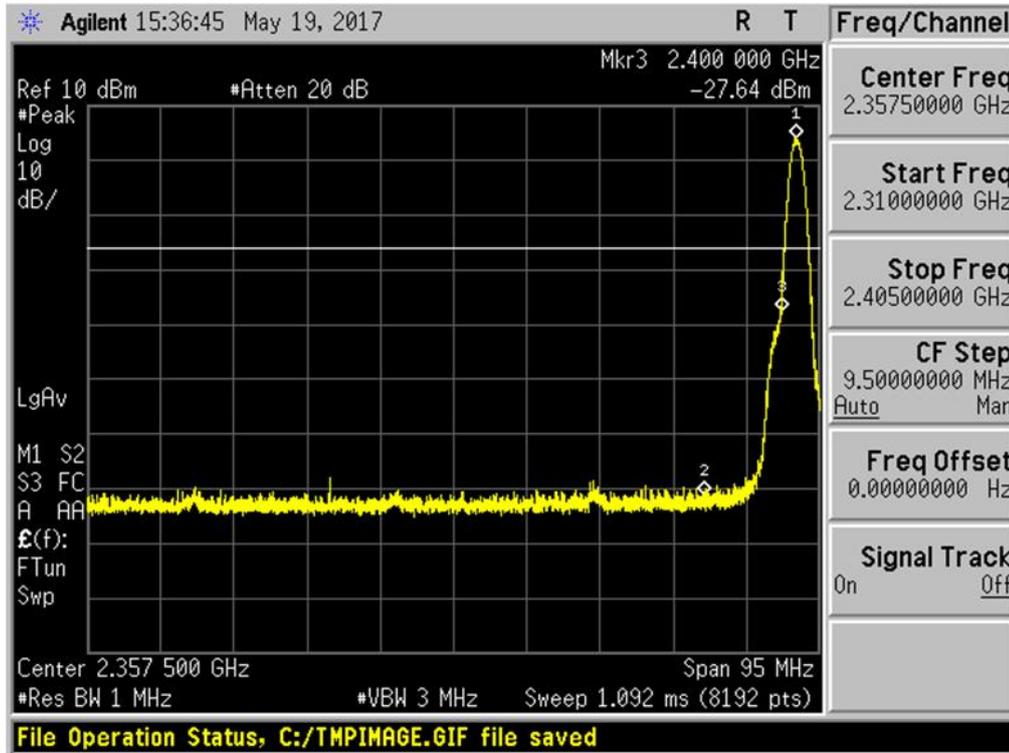

Plot 55 – Lower Band Edge at 2.400GHz

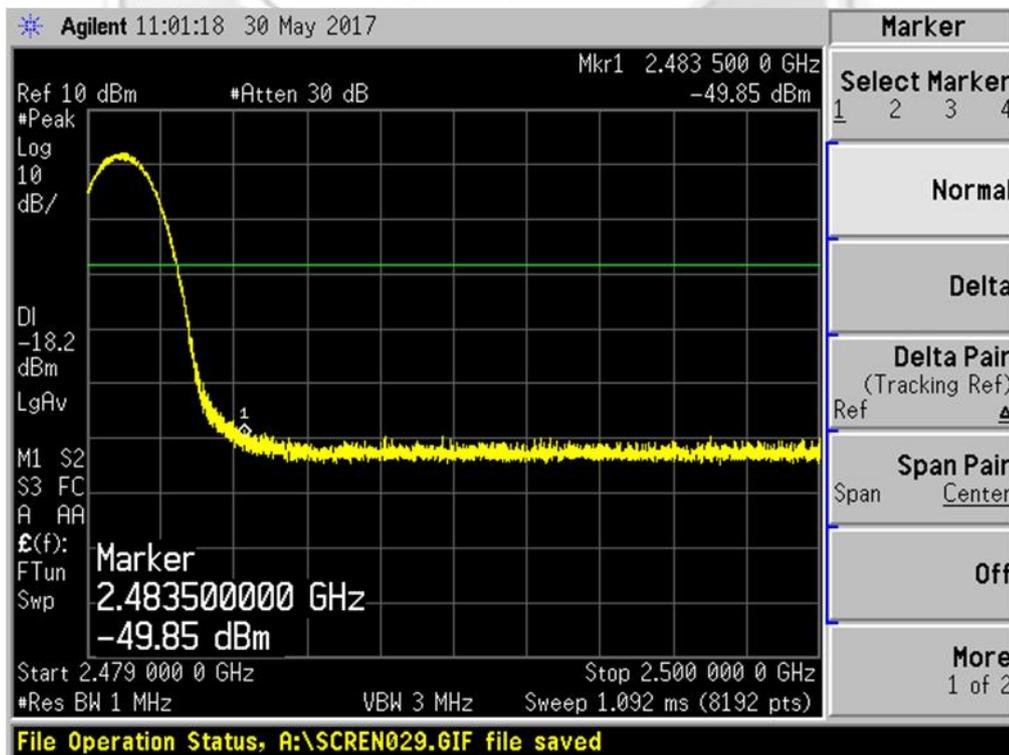

Plot 56 – Upper Band Edge at 2.4835GHz

BAND EDGE COMPLIANCE (RADIATED) TEST

47 CFR FCC Part 15.247(d) Band Edge Compliance (Radiated) Limits

The EUT shows compliance to the requirements of this section, which states in any 100kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator (EUT) is operating, the radio frequency power that is produced by the EUT shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands shall comply to the radiated emission limits specified in 15.209.

47 CFR FCC Part 15.247(d) Band Edge Compliance (Radiated) Test Instrumentation

Instrument	Model	S/No	Cal Due Date
R&S Test Receiver – ESI1	ESI40	100010	11 Oct 2017
Schaffner Bilog Antenna –(30MHz-2GHz) BL4	CBL6112B	2593	18 Jan 2018
Com-Power Preamplifier (1MHz-1GHz)	PAM-103	441056	22 Jul 2017
TDK-RF Horn Antenna	HRN-0118	130256	18 Oct 2017
R&S Preamplifier (1GHz -18GHz)	SCU18	102191	10 Mar 2018
Agilent Preamplifier(1GHz-26.5GHz) (PA18)	8449D	3008A02305	12 Oct 2017
ETS Horn Antenna(18GHz-40GHz)(Ref)	3116	0004-2474	18 Oct 2017

47 CFR FCC Part 15.247(d) Band Edge Compliance (Radiated) Test Setup

1. The EUT and supporting equipment were set up as shown in the setup photo.
2. The power supply for the EUT was connected to a filtered mains.
3. The resolution bandwidth (RBW) and the video bandwidth (VBW) of the spectrum analyser were respectively set to 100kHz and 300kHz to show compliance of spurious at band edges are at least 20dB below the carriers. For restricted band spurious at band edges, peak and average measurement plots were taken using the following setting:
 - a. Peak Plot:
RBW = 1MHz, VBW = 3RBW
 - b. Average Plot
RBW = 1MHz, VBW = 10Hz
4. All other supporting equipment were powered separately from another filtered mains.

47 CFR FCC Part 15.247(d) Band Edge Compliance (Radiated) Test Method

1. The EUT was switched on and allowed to warm up to its normal operating condition. The EUT was then configured to operate in the test mode with frequency hopping sequence on.
2. The frequency span of the spectrum analyser was set to wide enough to capture the lower band edge of the transmission band, 2.400GHz and any spurious emissions at the band edge.
3. The spectrum analyser was set to max hold to capture any spurious emissions within the span. The signal capturing was continuous until no further spurious emissions were detected.
4. The steps 2 to 3 were repeated with the frequency span of the spectrum analyser was set to wide enough to capture the upper band edge frequency of the transmission band, 2.4835GHz and the any spurious emissions at the band-edge.



BAND EDGE COMPLIANCE (RADIATED) TEST

47 CFR FCC Part 15.247(d) Band Edge Compliance (Radiated) Results


Test Input Power	3.7Vdc	Temperature	24°C
Attached Plots	57 – 71	Relative Humidity	60%
		Atmospheric Pressure	1030mbar
		Tested By	Chang Wai Kit

No significant signal was found and they were below the specified limit.




BAND EDGE COMPLIANCE (RADIATED) TEST

Band Edge Compliance (Radiated) Plots (20dB Delta from Carrier at Band Edge) – (($\pi/4$) DQPSK) (Worst)

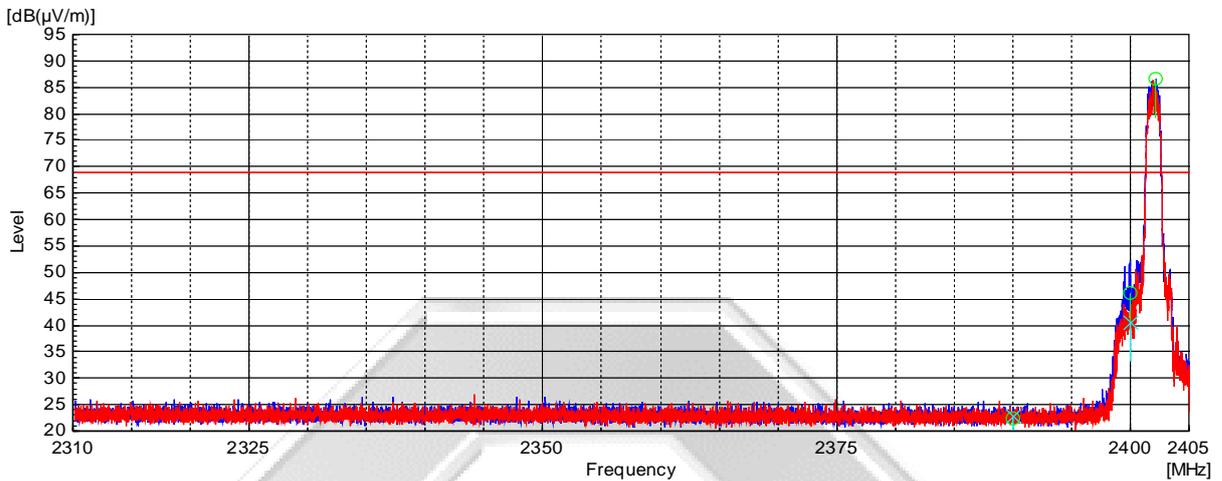


Plot 57 – Lower Band Edge at 2.4000GHz

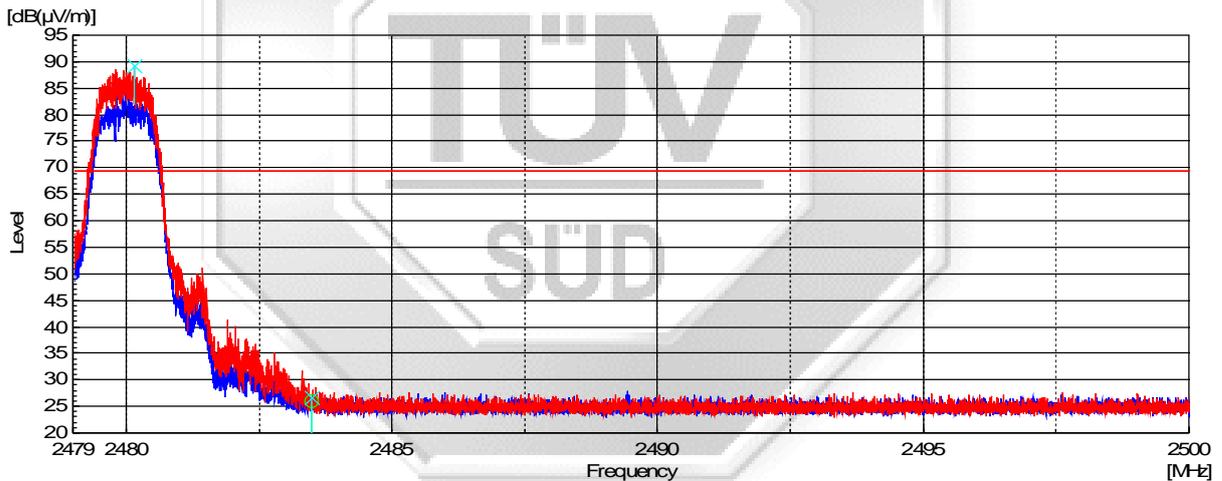


Plot 58 – Upper Band Edge at 2.4835GHz

BAND EDGE COMPLIANCE (RADIATED) TEST

Band Edge Compliance (Radiated) Plots (Restricted Band) – (($\pi/4$) DQPSK) (Worst)

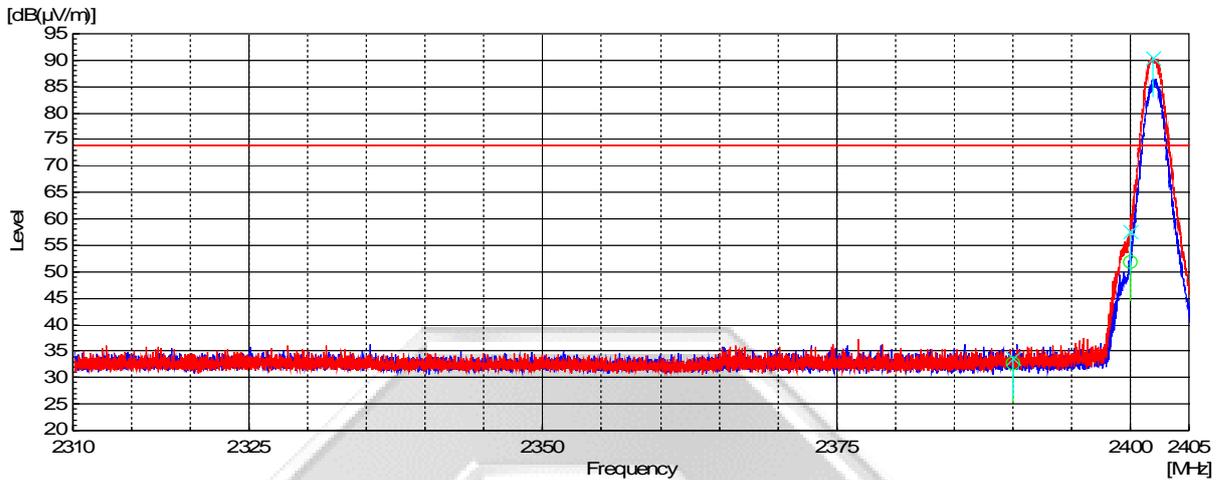


Plot 59 – Peak Plot at Lower Band Edge at 2.4000GHz

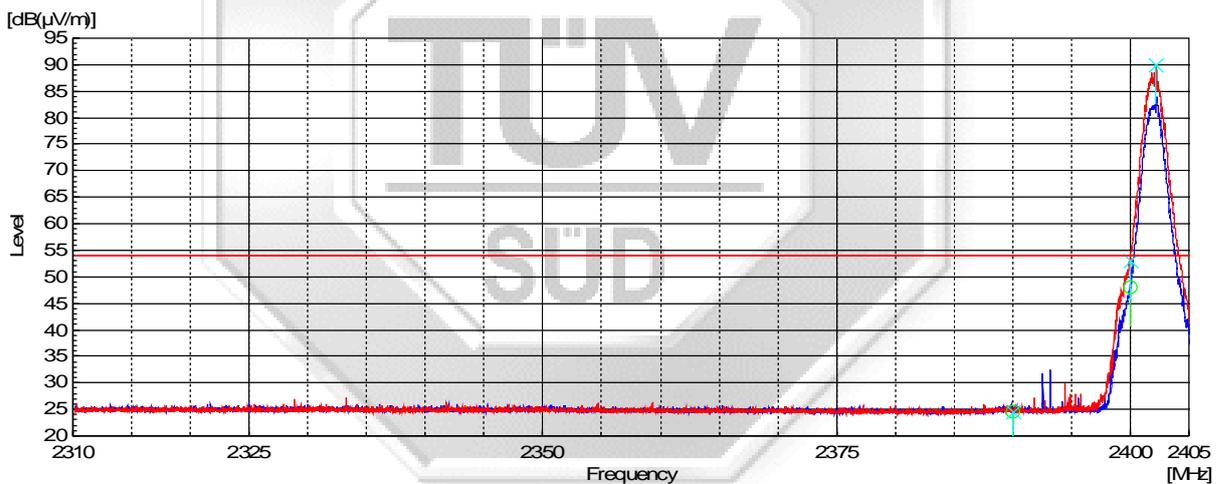


Plot 60 – Average Plot at Lower Band Edge at 2.4000GHz

BAND EDGE COMPLIANCE (RADIATED) TEST

Band Edge Compliance (Radiated) Plots (Restricted Band) – (($\pi/4$) DQPSK) (Worst)

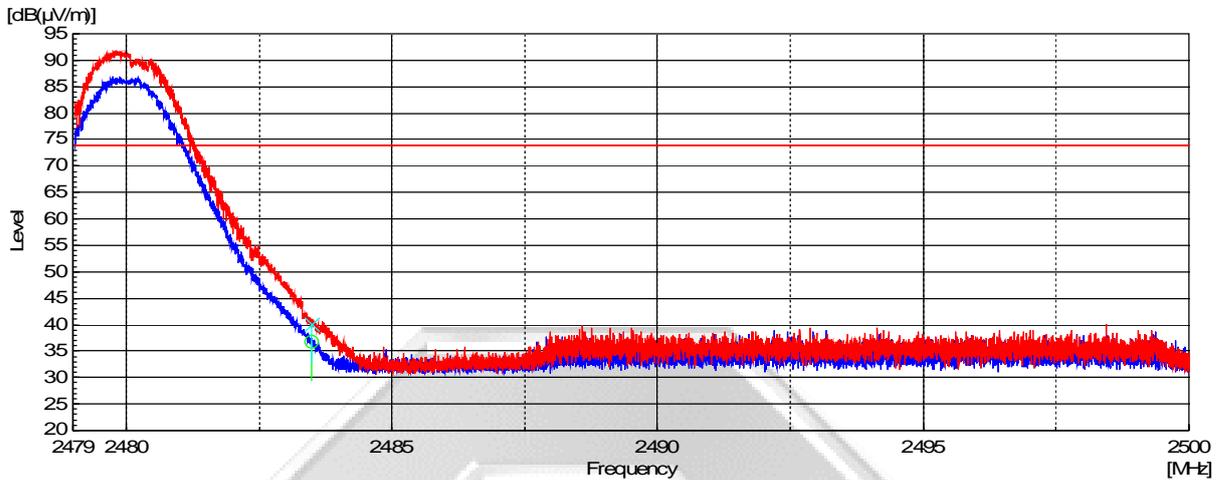

Plot 61 – Peak Plot at Upper Band Edge at 2.4835GHz

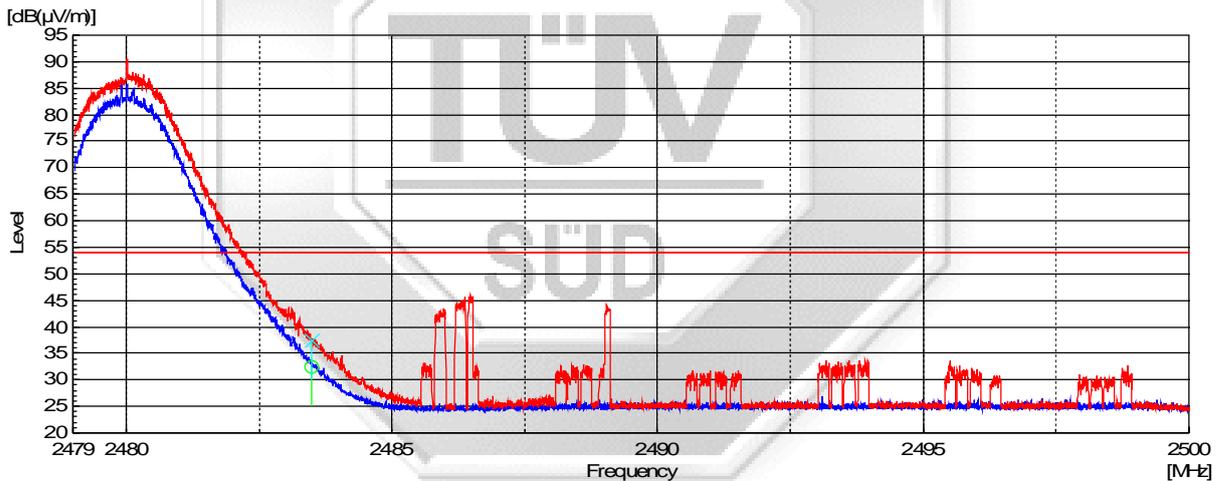

Plot 62 – Average Plot at Upper Band Edge at 2.4835GHz



PEAK POWER SPECTRAL DENSITY TEST

47 CFR FCC Part 15.247(e) Peak Power Spectral Density Limits

The EUT shows compliance to the requirements of this section, which states the peak power spectral density conducted from the intentional radiator (EUT) to the antenna shall not be greater than 8dBm (6.3mW) in any 3kHz band during any time interval of continuous transmission.

47 CFR FCC Part 15.247(e) Peak Power Spectral Density Test Instrumentation

Instrument	Model	S/No	Cal Due Date
Agilent Spectrum Analyzer	E4440A	MY45304764	04 Jan 2018

47 CFR FCC Part 15.247(e) Peak Power Spectral Density Test Setup

1. The EUT and supporting equipment were set up as shown in the setup photo.
2. The power supply for the EUT was connected to a filtered mains.
3. The RF antenna connector was connected to the spectrum via a low-loss coaxial cable.
4. The resolution bandwidth (RBW) and the video bandwidth (VBW) of the spectrum analyser were respectively set to 3kHz and 10kHz.
5. All other supporting equipment were powered separately from another filtered mains.

47 CFR FCC Part 15.247(e) Peak Power Spectral Density Test Method

1. The EUT was switched on and allowed to warm up to its normal operating condition. The EUT was then configured to operate in the test mode, non-hopping with transmitting frequency at Channel 0 (2.402GHz) (*lower ch*).
2. The sweep time of the spectrum analyser was set to the value of the ratio of the frequency span divided by the RBW.
3. The peak power density of the transmitting frequency was detected and recorded.
4. The step 3 was repeated with the transmitting frequency was set to Channel 39 (2.441GHz) (*mid ch*) and Channel 78 (2.480GHz) (*upper ch*) respectively.



PEAK POWER SPECTRAL DENSITY TEST

47 CFR FCC Part 15.247(e) Peak Power Spectral Density Results

Test Input Power	3.7Vdc	Temperature	24°C
Attached Plots	63 – 65	Relative Humidity	60%
Modulation	GFSK	Atmospheric Pressure	1030mbar
		Tested By	Liau Lee Yin

Channel	Channel Frequency (GHz)	Peak Power Spectral Density (mW)	Limit (mW)
0 (lower ch)	2.402	0.092	6.3
39 (mid ch)	2.441	0.091	6.3
78 (upper ch)	2.480	0.052	6.3

Test Input Power	3.7Vdc	Temperature	24°C
Attached Plots	66 – 68	Relative Humidity	60%
Modulation	($\pi/4$) DQPSK	Atmospheric Pressure	1030mbar
		Tested By	Liau Lee Yin


Channel	Channel Frequency (GHz)	Peak Power Spectral Density (mW)	Limit (mW)
0 (lower ch)	2.402	0.087	6.3
39 (mid ch)	2.441	0.086	6.3
78 (upper ch)	2.480	0.057	6.3

Test Input Power	3.7Vdc	Temperature	24°C
Attached Plots	69 – 71	Relative Humidity	60%
Modulation	8DPSK	Atmospheric Pressure	1030mbar
		Tested By	Liau Lee Yin


Channel	Channel Frequency (GHz)	Peak Power Spectral Density (mW)	Limit (mW)
0 (lower ch)	2.402	0.088	6.3
39 (mid ch)	2.441	0.088	6.3
78 (upper ch)	2.480	0.061	6.3

PEAK POWER SPECTRAL DENSITY TEST

Peak Power Spectral Density Plots – GFSK

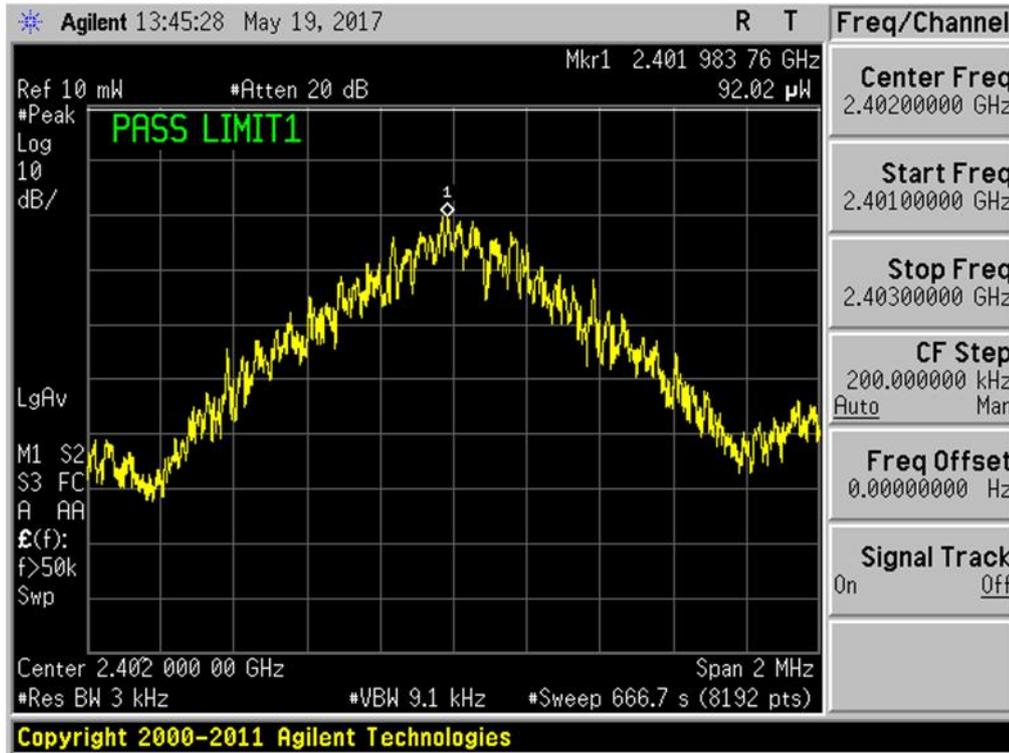

Plot 63 – Channel 0 (lower ch)

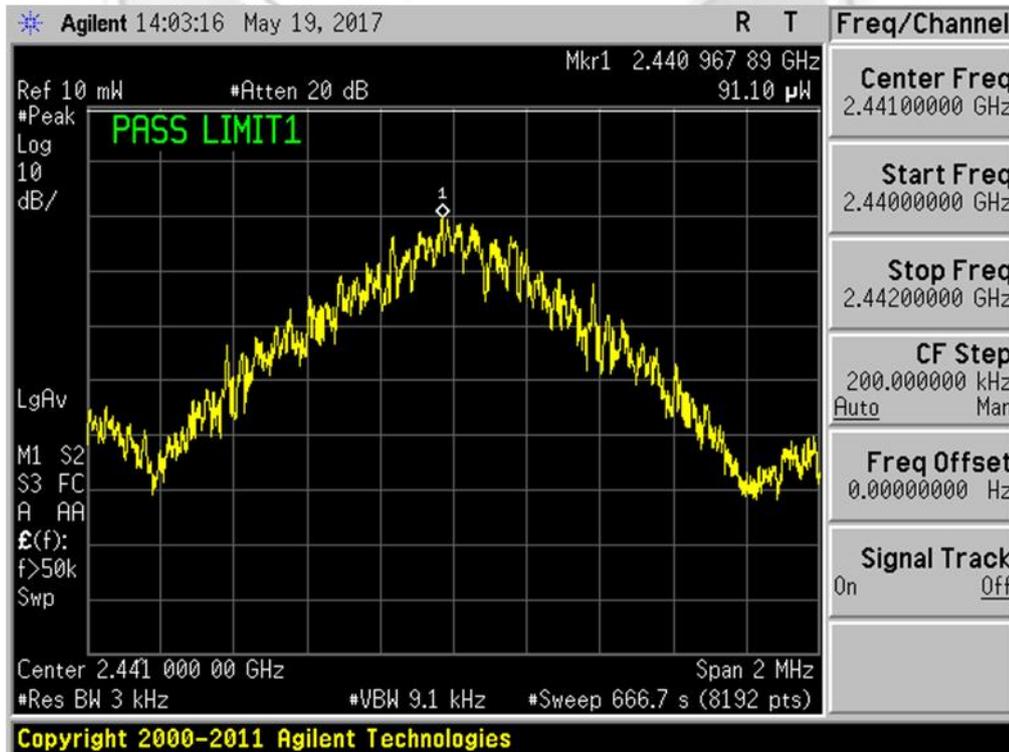


Plot 64 – Channel 39 (mid ch)



PEAK POWER SPECTRAL DENSITY TEST


Peak Power Spectral Density Plots – GFSK

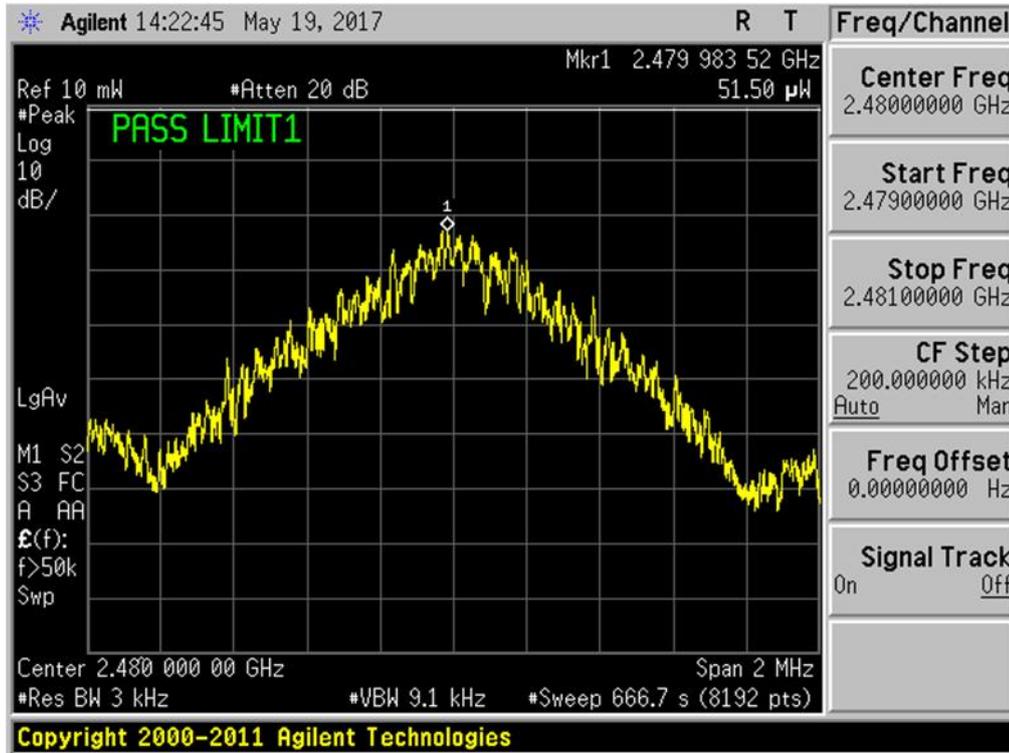


Plot 65 – Channel 78 (upper ch)

PEAK POWER SPECTRAL DENSITY TEST

Peak Power Spectral Density Plots – ($\pi/4$) DQPSK

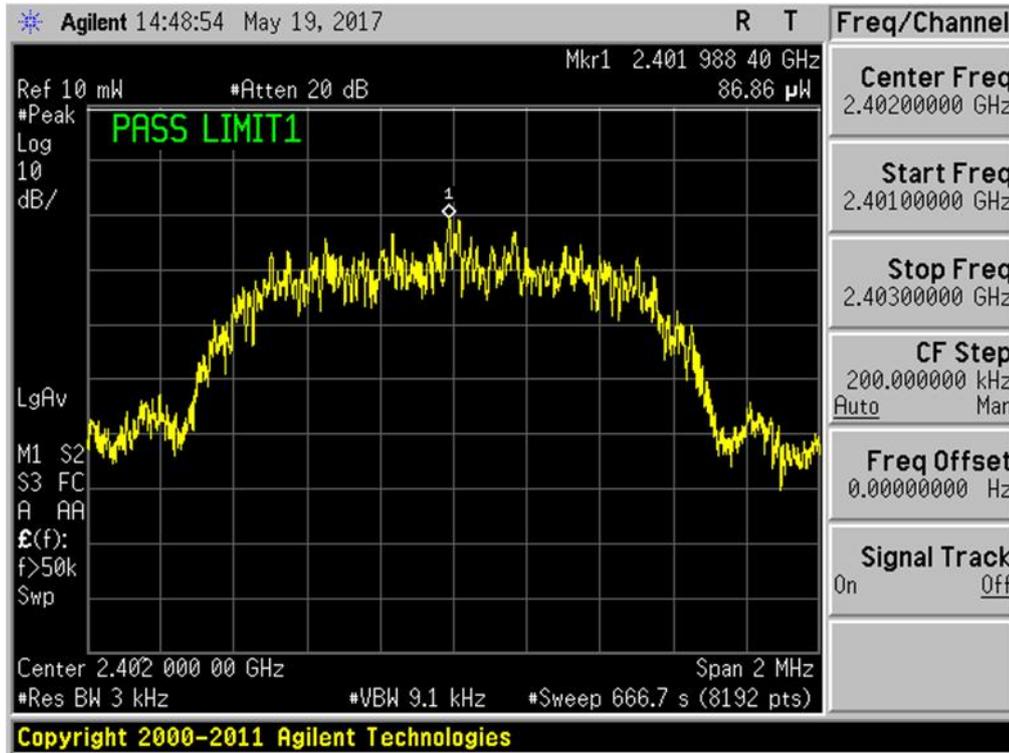

Plot 66– Channel 0 (lower ch)

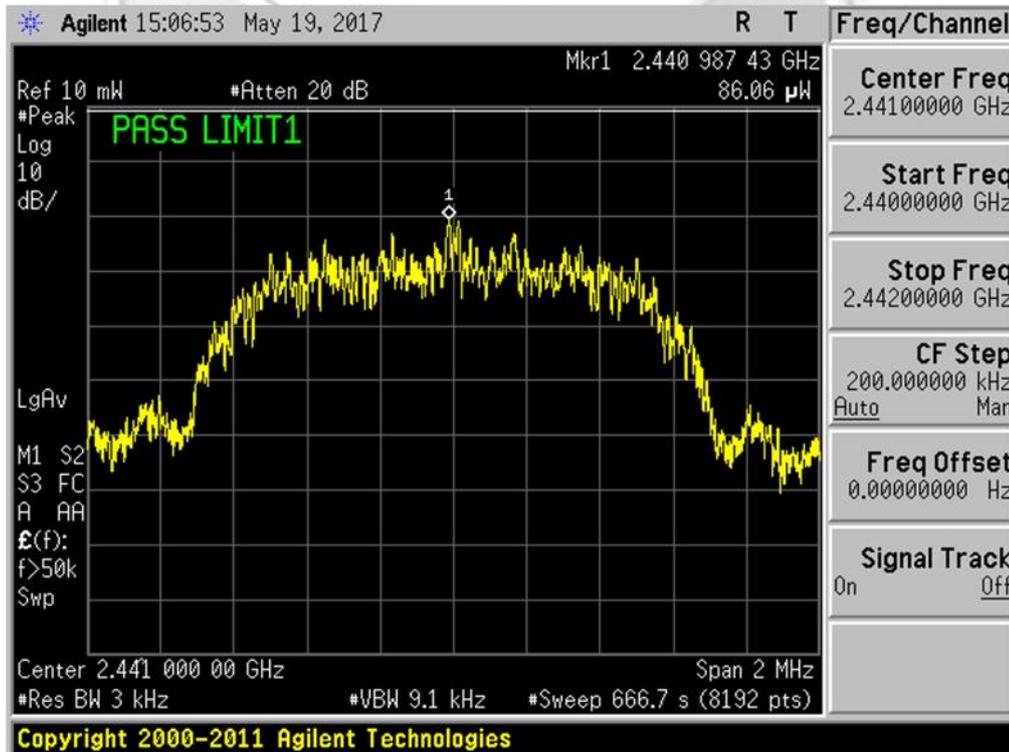


Plot 67 – Channel 39 (mid ch)



PEAK POWER SPECTRAL DENSITY TEST

Peak Power Spectral Density Plots – ($\pi/4$) DQPSK

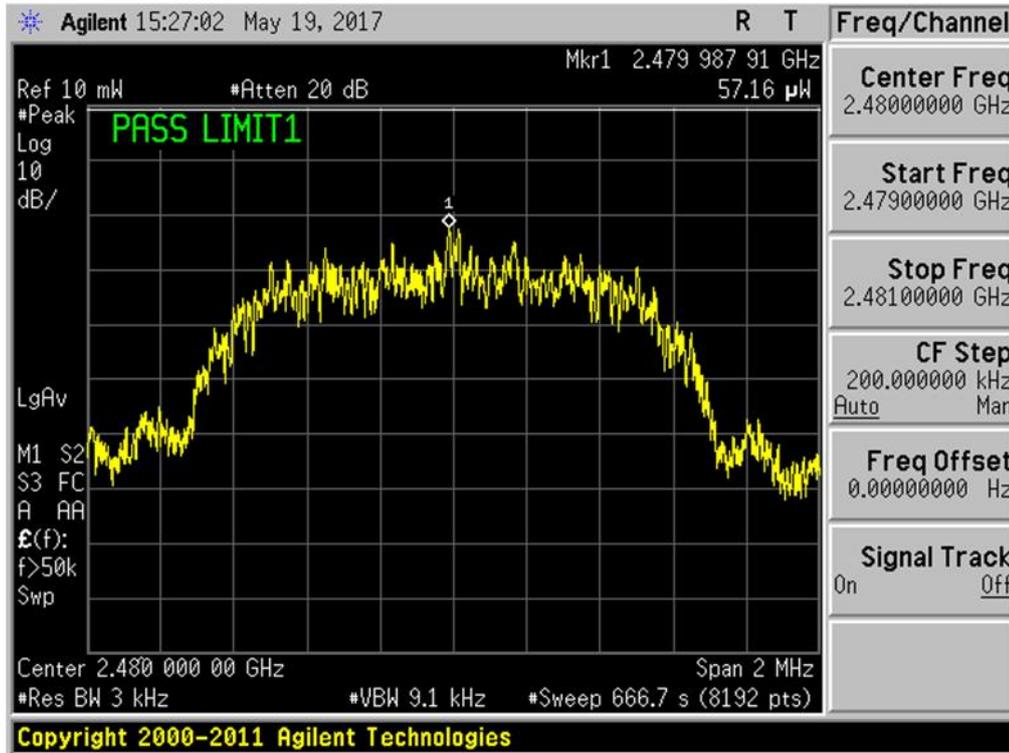


Plot 68 – Channel 78 (upper ch)




PEAK POWER SPECTRAL DENSITY TEST

Peak Power Spectral Density Plots – 8DPSK

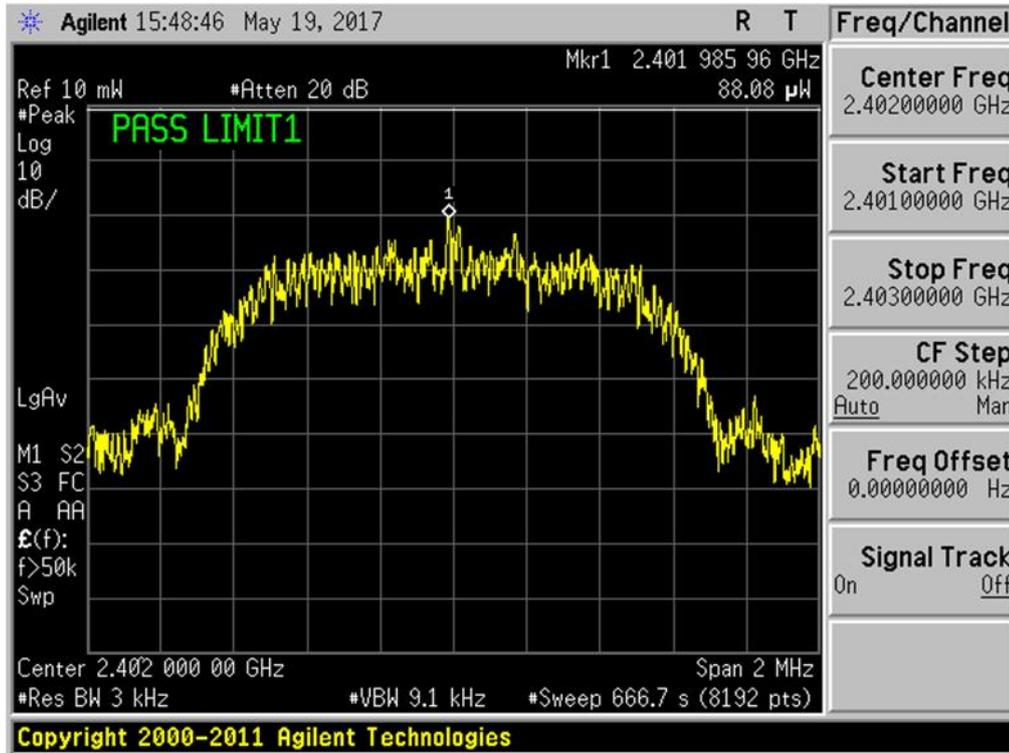

Plot 69– Channel 0 (lower ch)

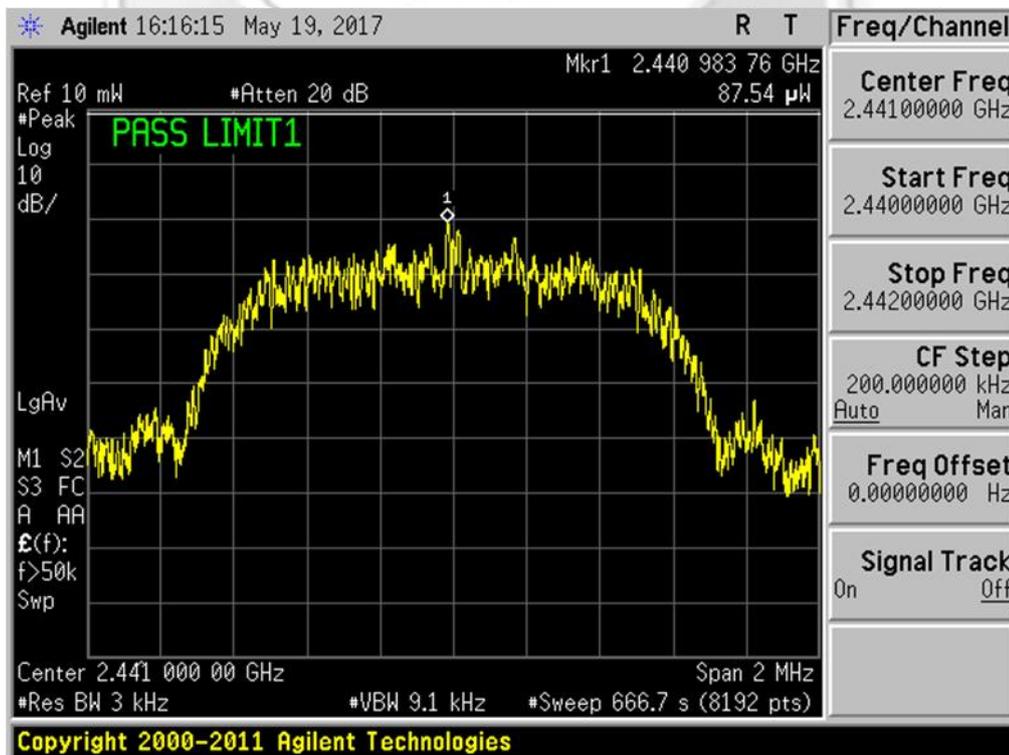


Plot 70 – Channel 39 (mid ch)



PEAK POWER SPECTRAL DENSITY TEST

Peak Power Spectral Density Plots – 8DPSK

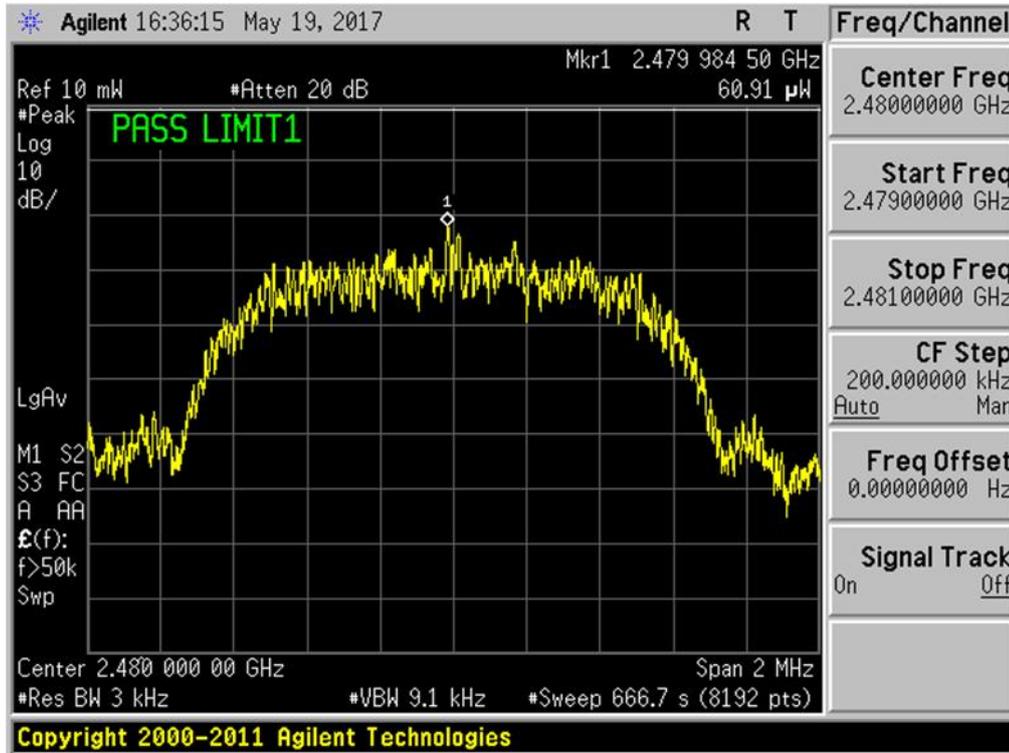

Plot 71 – Channel 78 (upper ch)



RF EXPOSURE EVALUATION

47 CFR FCC Part 2.1093 RF Exposure Evaluation Results

The EUT is exempted for RF Exposure Evaluation requirement as it is below the SAR test exclusion thresholds as stated in FCC's KDB 447498 D01 General RF Exposure Guidance V06. See below the computation of the SAR test exclusion threshold:

$$\begin{aligned} \text{SAR Test Exclusion Threshold} &= [\text{Maximum RF Power of the EUT (mW)} / \text{Minimum test separation (mm)}] \times \\ &\quad \text{RF channel frequency (GHz)} \\ &= [1.2 / 5] \times 2.402 \\ &= 0.57648 \\ &\leq 3.0 \text{ (SAR exclusion threshold for 1-g head)} \end{aligned}$$





Please note that this Report is issued under the following terms :

1. This report applies to the sample of the specific product/equipment given at the time of its testing/calibration. The results are not used to indicate or imply that they are applicable to other similar items. In addition, such results must not be used to indicate or imply that TÜV SÜD PSB approves, recommends or endorses the manufacturer, supplier or user of such product/equipment, or that TÜV SÜD PSB in any way "guarantees" the later performance of the product/equipment. Unless otherwise stated in this report, no tests were conducted to determine long term effects of using the specific product/equipment.
2. The sample/s mentioned in this report is/are submitted/supplied/manufactured by the Client. TÜV SÜD PSB therefore assumes no responsibility for the accuracy of information on the brand name, model number, origin of manufacture, consignment or any information supplied.
3. Nothing in this report shall be interpreted to mean that TÜV SÜD PSB has verified or ascertained any endorsement or marks from any other testing authority or bodies that may be found on that sample.
4. This report shall not be reproduced wholly or in parts and no reference shall be made by the Client to TÜV SÜD PSB or to the report or results furnished by TÜV SÜD PSB in any advertisements or sales promotion.
5. Unless otherwise stated, the tests were carried out in TÜV SÜD PSB Pte Ltd, No.1 Science Park Drive Singapore 118221.

July 2011

