

SAR EVALUATION REPORT

Report No. : 23EE0029-HO-1

Applicant : Sony Corporation
Type of Equipment : Wireless Camera Transmitter
Model No. : WLL-CA50
FCC ID : AK8WLLCA50
Test standard : FCC47CFR 2.1093
FCC OET Bulletin 65, Supplement C
Test Result : Complied
Max SAR Measured : 1.16W/kg(Body,Side of antenna,16QAM-OFDM, 2470MHz)

1. This test report shall not be reproduced except full or partial, without the written approval of A-PEX International Co., Ltd.
2. The results in this report apply only to the sample tested.
3. This equipment is in compliance with above regulation. We hereby certify that the data contain a true representation of the SAR profile.
4. The test results in this test report are traceable to the national or international standards.

Date of test: December 27 , 28 ,2002

Tested by: 
Miyo Ikuta
EMC Head Office Division

Approved by: 
Tetsuo Maeno
Site Manager of EMC Head Office Division

A-PEX International Co., Ltd.

EMC Head Office Division.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

CONTENTS

	PAGE
SECTION 1 : Client information	3
SECTION 2 : Equipment under test (E.U.T.)	3
SECTION 3 : Requirements for compliance testing defined by the FCC	4
SECTION 4 : Dosimetric assessment setup	4
SECTION 5 : Test system specifications	7
SECTION 6 : Test setup of EUT	8
SECTION 7 : Measurement uncertainty	9
SECTION 8 : Simulated tissue liquid parameter	10
SECTION 9 : System validation data	11
SECTION 10 : Evaluation procedure	12
SECTION 11 : Exposure limit	13
SECTION 12 : SAR Measurement results	14
SECTION 13 : Equipment & calibration information	16
SECTION 14 : References	17
SECTION 15 : APPENDIX	17
APPENDIX 1 : Photographs of test setup	
APPENDIX 2 : SAR Measurement data	
APPENDIX 3 : Validation Measurement data	
APPENDIX 4 : System Validation Dipole (D2450V2,S/N: 713)	
APPENDIX 5 : Dosimetric E-Field Probe Calibration(ET3DV6,S/N: 1684)	

A-PEX International Co., Ltd.

EMC Head Office Division.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

SECTION 1 : Client information

Company Name : Sony Corporation
Brand Name : SONY
Address : 6-7-35 Kitasinagawa Sinagawa -ku Tokyo,141-0001,Japan
Telephone Number : +81-3-5795-8716
Facsimile Number : +81-3-5795-8981
Contact Person : Saori Takada

SECTION 2 : Equipment under test (E.U.T.)

2.1 Identification of E.U.T.

APPLICANT : Sony Corporation
Type of Equipment : Wireless Camera Transmitter
Model No. : WLL-CA50
Serial No. : 10001
Rating : DC11.0V~17.0V
Country of Manufacture : UK
Receipt Date of Sample : December/20/2002
Condition of EUT : Production prototype
Tx Frequency : 2406MHz~2470MHz
Modulation : 16QAM-OFDM , QPSK-OFDM
Max.Output Power Tested : 24.1dBm Peak Conducted
Antenna Type : Dipole Antenna
Battery option : Only one model with EUT
Category Identified : Portable device



A-PEX International Co., Ltd.

EMC Head Office Division.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

SECTION 3 : Requirements for compliance testing defined by the FCC

The US Federal Communications Commission has released the report and order "Guidelines for Evaluating the Environmental Effects of RF Radiation", ET Docket No. 93-62 in August 1996. The order requires routine SAR evaluation prior to equipment authorization of portable transmitter devices, including portable telephones. For consumer products, the applicable limit is 1.6 mW/g for an uncontrolled environment and 8.0 mW/g for an occupational/controlled environment as recommended by the ANSI/IEEE standard C95.1-1992. According to the Supplement C of OET Bulletin 65 "Evaluating Compliance with FCC Guide-lines for Human Exposure to Radio frequency Electromagnetic Fields", released on Jun 29, 2001 by the FCC, the device should be evaluated at maximum output power (radiated from the antenna) under "worst-case" conditions for normal or intended use, incorporating normal antenna operating positions, device peak performance frequencies and positions for maximum RF energy coupling.

- 1 Specific Absorption Rate (SAR) is a measure of the rate of energy absorption due to exposure to an RF transmitting source (wireless portable device).
- 2 IEEE/ANSI Std. C95.1-1992 limits are used to determine compliance with FCC ET Docket 93-62.

SECTION 4 : Dosimetry assessment setup

These measurements were performed with the automated near-field scanning system DASY3 from Schmid & Partner Engineering AG (SPEAG). The system is based on a high precision robot (working range greater than 0.9 m), which positions the probes with a positional repeatability of better than +/- 0.02 mm. Special E- and H-field probes have been developed for measurements close to material discontinuity, the sensors of which are directly loaded with a Schottky diode and connected via highly resistive lines to the data acquisition unit. The SAR measurements were conducted with the dosimetry probe ET3DV6, SN: 1684 (manufactured by SPEAG), designed in the classical triangular configuration and optimized for dosimetric evaluation. The probe has been calibrated according to the procedure described in [2] with accuracy of better than +/-10%. The spherical isotropy was evaluated with the procedure described in [3] and found to be better than +/-0.25 dB. The phantom used was the SAM Twin Phantom as described in FCC supplement C, IEE P1528 and CENELEC EN50361.

A-PEX International Co., Ltd.


EMC Head Office Division.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

4.1 Configuration and peripherals

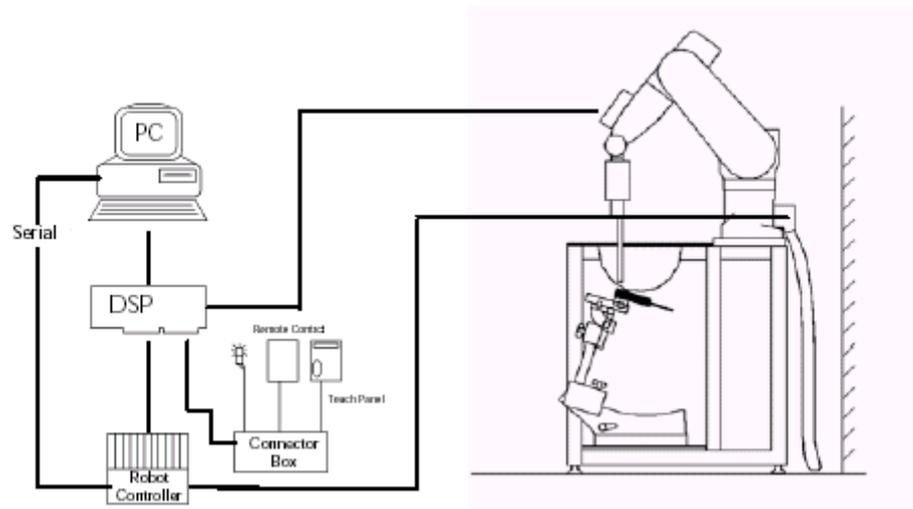

The DASY3 system for performing compliance tests consist of the following items:

1. A standard high precision 6-axis robot (Stäubli RX family) with controller and software.
2. An arm extension for accommodating the data acquisition electronics (DAE).
3. A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
4. A data acquisition electronic (DAE), which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
5. A unit to operate the optical surface detector, which is connected to the EOC.
6. The Electro-optical coupler (EOC) performs the conversion from the optical into a digital electric signal of the DAE. The EOC is connected to the PC plug-in card.
7. The functions of the PC plug-in card based on a DSP is to perform the time critical task such as signal filtering, surveillance of the robot operation fast movement interrupts.
8. A computer operating Windows 95 or larger
9. DASY3 software
10. Remote control with teaches pendant and additional circuitry for robot safety such as warning lamps, etc.
11. The SAM phantom enabling testing left-hand and right-hand usage.
12. The device holder for handheld EUT.
13. Tissue simulating liquid mixed according to the given recipes (see Application Note).
14. System validation dipoles to validate the proper functioning of the system.

A-PEX International Co., Ltd.

EMC Head Office Division.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

4.2 System components

4.2.1 ET3DV6 Probe Specification

Construction:

Symmetrical design with triangular core
Built-in optical fiber for surface detection System
Built-in shielding against static charges
PEEK enclosure material (resistant to organic solvents, e.g., glycol ether)

Calibration:

Basic Broad Band calibration in air from 10 MHz to 2.5 GHz
In brain and muscle simulating tissue at
Frequencies of 450 MHz, 900 MHz, 1.8 GHz and 2.45GHz (accuracy +/- 8%)

Frequency:

10 MHz to 3GHz; Linearity: +/-0.2 dB
(30 MHz to 3 GHz)

Directivity:

+/-0.2 dB in brain tissue (rotation around probe axis)
+/-0.4 dB in brain tissue (rotation normal probe axis)

Dynamic Range:

5 mW/g to > 100 mW/g; Linearity: +/-0.2 dB

Optical Surface Detection:


+/-0.2 mm repeatability in air and clear liquids over diffuse reflecting surfaces.

Dimensions:

Overall length: 330 mm (Tip: 16 mm)
Tip length: 16 mm
Body diameter: 12 mm (Body: 12 mm)
Tip diameter: 6.8 mm
Distance from probe tip to dipole centers: 2.7 mm

Application:

General dosimetric up to 3 GHz
Compliance tests of mobile phones
Fast automatic scanning in arbitrary phantoms

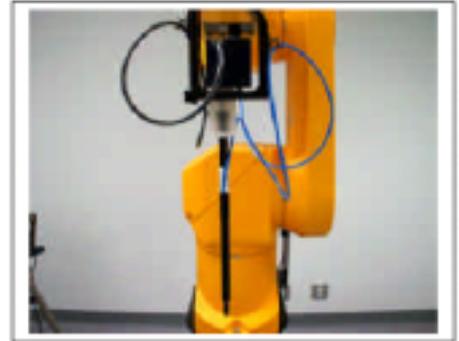

Inside view of
ET3DV6 E-field
Probe

4.2.2 SAM Phantom

Construction:

The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528-200X, CENELEC 50361 and IEC 62209. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points with the robot.

Shell Thickness:

2 +/-0.2 mm

Filling Volume:

Approx. 25 liters

Dimensions:(H x L x W): 810 x 1000 x 500 mm



SAM Phantom

A-PEX International Co., Ltd.

EMC Head Office Division.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

4.2.3 Device Holder for Transmitters

In combination with the SAM Twin Phantom V4.0, the Mounting Device enables the rotation of the mounted transmitter in spherical coordinates whereby the rotation points is the ear opening. The devices can be easily, accurately, and repeatedly positioned according to the FCC and CENELEC specifications. The device holder can be locked at different phantom locations (left head, right head, flat phantom).

* Note: A simulating human hand is not used due to the complex anatomical and geometrical structure of the hand that may produced infinite number of configurations.

To produce the worst-case condition (the hand absorbs antenna output power), the hand is omitted during the tests.

Device holder couldn't be used at this SAR measurement.



Device Holder

SECTION 5 : Test system specifications

Positioner

Robot: Stäubli Unimation Corp. Robot Model: RX60L
Repeatability: 0.02 mm
No. of axis: 6

Data Acquisition Electronic (DAE) System

Cell Controller

Processor: Pentium III
Clock Speed: 450 MHz
Operating System: Windows 98
Data Card: DASY3 PC-Board

Data Converter

Features: Signal Amplifier, multiplexer, A/D converter, and control logic
Software: DASY3 software
Connecting Lines: Optical downlink for data and status info.
Optical uplink for commands and clock

PC Interface Card

Function: 24 bit (64 MHz) DSP for real time processing
Link to DAE3
16-bit A/D converter for surface detection system
serial link to robot
direct emergency stop output for robot

E-Field Probe

Model: ET3DV6
Serial No.: 1684
Construction: Triangular core fiber optic detection system
Frequency: 10 MHz to 6 GHz
Linearity: +/-0.2 dB (30 MHz to 3 GHz)

Phantom

Type: SAM Twin Phantom V4.0
Shell Material: Fiberglass
Thickness: 2.0 +/-0.2 mm
Volume: Approx. 20 liters

A-PEX International Co., Ltd.

EMC Head Office Division.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116


Facsimile: +81 596 24 8124

SECTION 6 : Test setup of EUT

6.1 Photographs of test setup

When man uses this EUT, his body or head may touch a part of the antenna. In order to assume this situation, we performed the test at the following positions.

- 1.Side 13cm of antenna position : We performed the test at position that 13cm side position from top of antenna touched to the center of flat phantom.
2. Side 5cm of antenna position : We performed the test at position that 5cm side position from top of antenna touched to the center of flat phantom.
3. Side 30cm of antenna position : We performed the test at position that 30cm side position from top of antenna touched to the center of flat phantom.
- 4.Top of antenna position : We performed the test at position that top of antenna touched to the center of flat phantom.

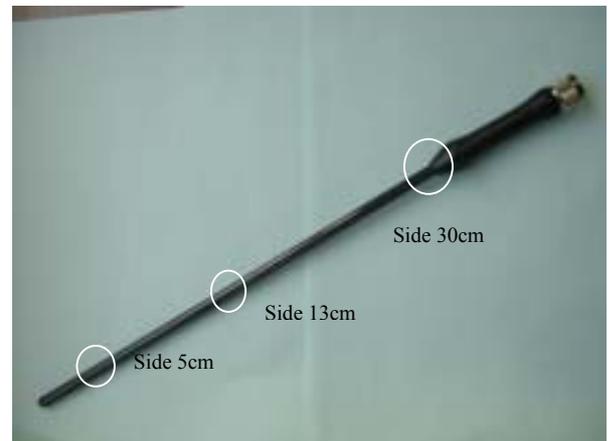

Please refer to "APPENDIX 1" for more details.

6.2 EUT Tune-up procedure

In order to measure SAR value, we used continuous transmission mode. The test set up mode was prepared by manufacturer.

Value of Crest Factor = 1 was used for SAR testing according to the nature of the EUT.

The test configuration tested at the low, middle and high frequency channels (2406MHz,2438MHz and 2470MHz).

A-PEX International Co., Ltd.

EMC Head Office Division.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

SECTION 7 : Measurement uncertainty

The uncertainty budget has been determined for the DASY3 measurement system according to the NIS81 [13] and the NIST1297 [6] documents and is given in the following Table.

Error Description	Uncertainty value \pm %	Probability distribution	divisor	(ci)1 lg	Standard Uncertainty (1g)	vi or veff
Measurement System						
Probe calibration	± 4.8	Normal	1	1	± 4.8	∞
Axial isotropy of the probe	± 4.7	Rectangular	$\sqrt{3}$	$(1-c_p)^{1/2}$	± 1.9	∞
Spherical isotropy of the probe	± 9.6	Rectangular	$\sqrt{3}$	$(c_p)^{1/2}$	± 3.9	∞
Boundary effects	± 5.5	Rectangular	$\sqrt{3}$	1	± 3.2	∞
Probe linearity	± 4.7	Rectangular	$\sqrt{3}$	1	± 2.7	∞
Detection limit	± 1.0	Rectangular	$\sqrt{3}$	1	± 0.6	∞
Readout electronics	± 1.0	Normal	1	1	± 1.0	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	± 0.5	∞
Integration time	± 1.4	Rectangular	$\sqrt{3}$	1	± 0.8	∞
RF ambient conditions	± 3.0	Rectangular	$\sqrt{3}$	1	± 1.7	∞
Mech. constraints of robot	± 0.4	Rectangular	$\sqrt{3}$	1	± 0.2	∞
Probe positioning	± 2.9	Rectangular	$\sqrt{3}$	1	± 1.7	∞
Extrap. and integration	± 3.9	Rectangular	$\sqrt{3}$	1	± 2.3	∞
Test Sample Related						
Device positioning	± 6.0	Rectangular	$\sqrt{3}$	1	± 6.7	5
Device holder uncertainty	± 5.0	Rectangular	$\sqrt{3}$	1	± 5.9	3
Power drift	± 5.0	Rectangular	$\sqrt{3}$	1	± 2.9	∞
Phantom and Setup						
Phantom uncertainty	± 4.0	Rectangular	$\sqrt{3}$	1	± 2.3	∞
Liquid conductivity (target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	± 1.8	∞
Liquid conductivity (meas.)	± 10.0	Rectangular	$\sqrt{3}$	0.64	± 3.7	∞
Liquid permittivity (target)	± 5.0	Rectangular	$\sqrt{3}$	0.6	± 1.7	∞
Liquid permittivity (meas.)	± 5.0	Rectangular	$\sqrt{3}$	0.6	± 1.7	∞
Combined Standard Uncertainty					± 13.7	
Expanded Uncertainty (k=2)					± 27.5	

A-PEX International Co., Ltd.

EMC Head Office Division.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

SECTION 8 : Simulated tissue liquid parameter

8.1 Simulated Tissue Liquid Parameter confirmation

The dielectric parameters were checked prior to assessment using the HP85070A dielectric probe kit. The dielectric parameters measured are reported in each correspondent section.

8.1.1 Head 2450MHz

Type of liquid : **Head 2450 MHz**
Ambient temperature (deg.c.) : **24.3**
Relative Humidity (%) : **36**
Liquid depth (cm) : **15.2**

Date : December 28,2002
Measured By : Miyo Ikuta

DIELECTRIC PARAMETERS MEASUREMENT RESULTS						
Liquid Temp [deg.c]		Parameters	Target Value	Measured	Deviation [%]	Limit [%]
Before	After					
24.0	24.0	Relative Permittivity ϵ_r	39.2	37.4	-4.5	+/-10
		Coductivity σ [mho/m]	1.80	1.82	+1.1	+/-5

8.1.2 Muscle 2450MHz

Type of liquid : **Muscle 2450 MHz**
Ambient temperature (deg.c.) : **22.5**
Relative Humidity (%) : **34**
Liquid depth (cm) : **15.2**

Date : December 27,2002
Measured By : Miyo Ikuta

DIELECTRIC PARAMETERS MEASUREMENT RESULTS						
Liquid Temp [deg.c]		Parameters	Target Value	Measured	Deviation [%]	Limit [%]
Before	After					
21.6	21.6	Relative Permittivity ϵ_r	52.7	50.9	-3.4	+/-10
		Conductivity σ [mho/m]	1.95	2.01	+3.1	+/-5

8.2 Simulated Tissues

Ingredient	MiXTURE(%)	
	Head 2450MHz	Muscle 2450MHz
Water	45.0	69.83
DGMBE	55.0	30.17

Note:DGMBE(Diethylen glycol-monobuthyl ether)

A-PEX International Co., Ltd.

EMC Head Office Division.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

SECTION 9 : System validation data


Prior to the assessment, the system validation kit was used to test whether the system was operating within its specifications of +/-10%. The validation results are tabulated below. And SAR plot is attached in the APPENDIX 3. IEEE P1528 Recommended Reference Value

Type of liquid : **HEAD 2450MHz**
Frequency : **2450MHz**
Liquid depth (cm) : **15.2**
Ambient temperature (deg.c.) : **24.2**
Relative Humidity (%) : **36**
Dipole : **D2450V2 SN:713**
Power : **250mW**

Date : December 27,2002
Measured By : Miyo Ikuta

SYSTEM PERFORMANCE CHECK									
Liquid (HEAD 2450MHz)						System dipole validation target & measured			
temperature (deg.c.)		Relative Permittivity ϵ_r		Conductivity σ [mho/m]		SAR 1g [W/kg]		Deviation [%]	Limit [%]
Before	After	Target	Measured	Target	Measured	Target	Measured		
24.0	23.9	39.2	37.4	1.80	1.82	13.1	13.8	+5.3	+/-10

Note: Please refer to Attachment for the result representation in plot format

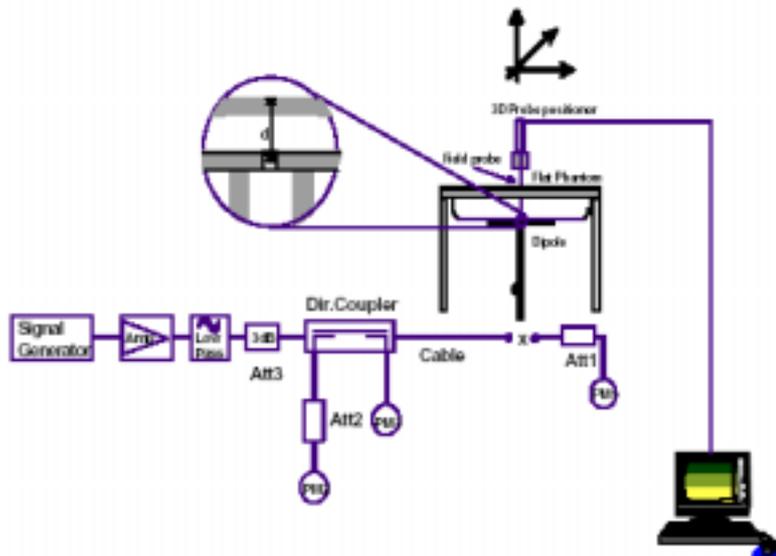

2450MHz System performance check setup

Test system for the system performance check setup diagram

SECTION 10 : Evaluation procedure

The evaluation was performed with the following procedure:

Step 1: Measurement of the SAR value at a fixed location above the ear point or central position of flat phantom was used as a reference value for assessing the power drop.

Step 2: The SAR distribution at the exposed side of head or body position was measured at a distance of each device from the inner surface of the shell. The area covered the entire dimension of the head or EUT and the horizontal grid spacing was 20 mm x 20 mm. Based on these data, the area of the maximum absorption was determined by spline interpolation.

Step 3: Around this point, a volume of 32 mm x 32 mm x 30 mm was assessed by measuring 5 x 5 x 7 points. On the basis of this data set, the spatial peak SAR value was evaluated under the following procedure:

1. The data at the surface were extrapolated, since the center of the dipoles is 2.7 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.2 mm. The extrapolation was based on a least square algorithm [4]. A polynomial of the fourth order was calculated through the points in z-axes. This polynomial was then used to evaluate the points between the surface and the probe tip.
2. The maximum interpolated value was searched with a straightforward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1 g or 10 g) were computed by the 3D-Spline interpolation algorithm. The 3D-Spline is composed of three one-dimensional splines with the "Not a knot"-condition (in x, y and z-directions) [4], [5]. The volume was integrated with the trapezoidal-algorithm. One thousand points (10 x 10 x 10) were interpolated to calculate the average.
3. All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.

Step 4: Re-measurement of the SAR value at the same location as in Step 1. If the value changed by more than 5%, the evaluation was repeated.

A-PEX International Co., Ltd.

EMC Head Office Division.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

SECTION 11 : Exposure limit

(A) Limits for Occupational/Controlled Exposure (W/kg)

Spatial Average (averaged over the whole body)	Spatial Peak (averaged over any 1g of tissue)	Spatial Peak (hands/wrists/feet/ankles averaged over 10g)
0.4	8.0	20.0

(B) Limits for General population/Uncontrolled Exposure (W/kg)

Spatial Average (averaged over the whole body)	Spatial Peak (averaged over any 1g of tissue)	Spatial Peak (hands/wrists/feet/ankles averaged over 10g)
0.08	1.6	4.0

Occupational/Controlled Environments: are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure, (i.e. as a result of employment or occupation).

General Population/Uncontrolled Environments: are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

<p>NOTE:GENERAL POPULATION/UNCONTROLLED EXPOSURE SPATIAL PEAK(averaged over any 1g of tissue) LIMIT 1.6 W/kg</p>

A-PEX International Co., Ltd.

EMC Head Office Division.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

SECTION 12 : SAR Measurement results

12.1 Head 2450MHz SAR

Liquid Depth (cm) : **15.2** Model : **WLL-CA50**
Parameters : $\epsilon_r = 37.4, \sigma = 1.82$ Serial No. : **10001**
Ambient Temperature[deg.c.] : **24.6** Modulation : **16QAM,QPSK**
Relative Humidity[%] : **33** Crest factor : **1**

Date : December 28,2002

Measured By : Miyo Ikuta

CONDUCTED POWER MEASUREMENT RESULTS							
Frequency	EUT Modulation	Before		After		Deviation[%]	Limit[%]
		[dBm]	[mW]	[dBm]	[mW]		
2406	16QAM	23.8	239.88	23.8	239.88	0.0	+/-5
2438	16QAM	24.1	257.04	24.0	251.19	-2.3	+/-5
2470	16QAM	24.1	257.04	24.1	257.04	0.0	+/-5
2406	QPSK	23.8	239.88	23.7	234.42	-2.3	+/-5
2438	QPSK	24.1	257.04	24.0	251.19	-2.3	+/-5
2470	QPSK	24.1	257.04	24.0	251.19	-2.3	+/-5

HEAD SAR MEASUREMENT RESULTS									
Frequency		Phantom Section	EUT Modulation	EUT Set-up Conditions			Liquid Temp.[deg.c]		SAR(1g) [w/kg]
Channel	MHz			Antenna	Position	Separation [mm]	Before	After	
Mid	2438	Flat	16QAM	Fixed	Side 13cm of antenna	0	24.2	24.2	0.858
Mid	2438	Flat	16QAM	Fixed	Side 30cm of antenna	0	24.4	24.4	0.0010
Mid	2438	Flat	16QAM	Fixed	Top of antenna	0	24.2	24.2	0.0047
Low	2406	Flat	16QAM	Fixed	Side 13cm of antenna	0	24.4	24.3	0.773
High	2470	Flat	16QAM	Fixed	Side 13cm of antenna	0	24.2	24.2	0.957
Mid	2438	Flat	QPSK	Fixed	Side 13cm of antenna	0	24.3	24.3	0.867
Mid	2438	Flat	QPSK	Fixed	Side 30cm of antenna	0	24.4	24.4	0.0006
Mid	2438	Flat	QPSK	Fixed	Top of antenna	0	24.2	24.2	0.0050
Low	2406	Flat	QPSK	Fixed	Side 13cm of antenna	0	24.3	24.3	0.775
High	2470	Flat	QPSK	Fixed	Side 13cm of antenna	0	24.2	24.3	0.946
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure / General Population							HeadSAR: 1.6 W/kg (averaged over 1 gram)		

A-PEX International Co., Ltd.

EMC Head Office Division.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

12.2 Body 2450MHz SAR

Liquid Depth (cm) : **15.2** Model : **WLL-CA50**
Parameters : $\epsilon_r=50.9, \sigma=2.01$ Serial No. : **10001**
Ambient Temperature[deg.c.] : **23.4** Modulation : **16QAM,QPSK**
Relative Humidity[%] : **34** Crest factor : **1**

Date : December 27,2002

Measured By : Miyo Ikuta

CONDUCTED POWER MEASUREMENT RESULTS							
Frequency	EUT Modulation	Before		After		Deviation[%]	Limit[%]
		[dBm]	[mW]	[dBm]	[mW]		
2406	16QAM	23.9	245.47	23.8	239.88	-2.3	+/-5
2438	16QAM	24.0	251.19	24.0	251.19	0.0	+/-5
2470	16QAM	24.1	257.04	24.1	263.03	2.3	+/-5
2406	QPSK	23.9	245.47	23.8	239.88	-2.3	+/-5
2438	QPSK	24.0	251.19	24.0	251.19	0.0	+/-5
2470	QPSK	24.1	257.04	24.1	263.03	2.3	+/-5

BODY SAR MEASUREMENT RESULTS									
Frequency		Phantom Section	EUT Modulation	EUT Set-up Conditions			Liquid Temp.[deg.c]		SAR (w/kg)
Channel	MHz			Antenna	Position	Separation [mm]	Before	After	
Mid	2438	Flat	16QAM	Fixed	Side 13cm of antenna	0	22.3	22.3	0.975
Mid	2438	Flat	16QAM	Fixed	Side 5cm of antenna	0	22.3	22.3	0.971
Mid	2438	Flat	16QAM	Fixed	Side 30cm of antenna	0	22.3	22.3	0.0036
Mid	2438	Flat	16QAM	Fixed	Top of antenna	0	22.3	22.3	0.0040
Low	2406	Flat	16QAM	Fixed	Side 13cm of antenna	0	22.3	22.3	0.870
High	2470	Flat	16QAM	Fixed	Side 13cm of antenna	0	22.2	22.1	1.16
Mid	2438	Flat	QPSK	Fixed	Side 13cm of antenna	0	22.3	22.3	0.974
Mid	2438	Flat	QPSK	Fixed	Side 5cm of antenna	0	22.3	22.3	0.966
Mid	2438	Flat	QPSK	Fixed	Side 30cm of antenna	0	22.3	22.3	0.0017
Mid	2438	Flat	QPSK	Fixed	Top of antenna	0	22.3	22.3	0.0046
Low	2406	Flat	QPSK	Fixed	Side 13cm of antenna	0	22.3	22.3	0.867
High	2470	Flat	QPSK	Fixed	Side 13cm of antenna	0	22.2	22.1	1.15
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure / General Population							Body SAR: 1.6 W/kg (averaged over 1 gram)		

A-PEX International Co., Ltd.

EMC Head Office Division.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

SECTION 13 : Equipment & calibration information

Name of Equipment	Manufacture	Model number	Serial number	Calibration	
				Last Cal	due date
Power Meter	Agilent	E4417A	GB41290639	2002/11/08	2003/11/07
Power Sensor	Agilent	E9300B	US40010300	2002/11/14	2003/11/13
Power Sensor	Agilent	E9327A	US40440576	2002/4/16	2003/4/15
S-Parameter Network Analyzer	Agilent	8753ES	US39174808	2000/10/5	2003/10/04
Signal Generator	Rohde&Schwarz	SMR40	100023	2002/11/25	2003/11/24
RF Amplifier	OPHIR	5056F	1005	2002/2/7	2003/02/06
Dosimetric E-Field Probe	Schmid&Partner Engineering AG	ET3DV6	1684	2002/4/10	2003/04/09
Data Acquisition Electronics	Schmid&Partner Engineering AG	DAE3 V1	509	2002/4/10	2003/04/09
Robot,SAM Phantom	Schmid&Partner Engineering AG	DASY3	I021834	N/A	N/A
Attenuator	HIROSE ELECTRIC CO.,LTD.	AT-110	N/A	2002/02/04	2003/02/03
2450MHz System Validation Dipole	Schmid&Partner Engineering AG	D2450V2	713	2002/06/15	2003/06/14
Dual Directional Coupler	N/A	Narda	3702	N/A	N/A
Head 2450MHz	N/A	N/A	N/A	N/A	N/A
Body 2450MHz	N/A	N/A	N/A	N/A	N/A

A-PEX International Co., Ltd.

EMC Head Office Division.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

SECTION 14 : References

- [1]ANSI, ANSI/IEEE C95.1-1992: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz, The Institute of Electrical and Electronics Engineers, Inc., New York, NY 10017, 1992.
- [2] Katja Pokovic, Thomas Schmid, and Niels Kuster, "Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequencies", in ICECOM '97, Dubrovnik, October 15-17, 1997, pp. 120-124.
- [3] Katja Pokovic, Thomas Schmid, and Niels Kuster, "E- field probe with improved isotropy in brain simulating liquids", in Proceedings of the ELMAR, Zadar, Croatia, 23-25 June, 1996, pp.172-175.
- [4] W. Gander, Computermathematik, Birkhaeuser, Basel, 1992.
- [5] W. H. Press, S. A. Teukolsky, W. T. Vetterling, and B. P. Flannery, Numerical Recipes in C, The Art of Scientific Computing, Second Edition, Cambridge University Press, 1992.
- [6] Barry N. Taylor and Christ E. Kuyatt, "Guidelines for evaluating and expressing the uncertainty of NIST measurement results", Tech. Rep., National Institute of Standards and Technology, 1994.

SECTION 15 : APPENDIX

APPENDIX 1 : Photographs of test setup

Page 18-20 :SET-UP PHOTOS

APPENDIX 2 : SAR Measurement based on Supplement C of OET Bulletin 65

Page 21-44 :SAR data Supplement C of OET Bulletin 65

APPENDIX 3 : Validation Measurement data

Page 45-46 :Validation data

APPENDIX 4 : System Validation Dipole (D2450V2,S/N: 713)

Page 47-56 :System Validation Dipole (D2450V2,S/N: 713)

APPENDIX 5 : Dosimetric E-Field Probe (ET3DV6,S/N: 1684)

Page 57-70 :Dosimetric E-Field Probe (ET3DV6,S/N: 1684)

A-PEX International Co., Ltd.

EMC Head Office Division.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN


Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124


APPENDIX 1: Photographs of test setup




Side of antenna position

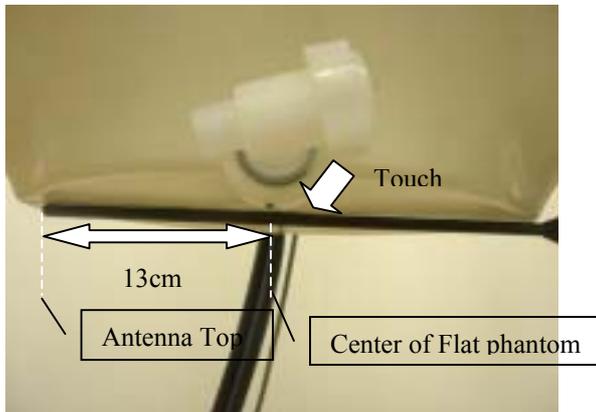

Side 13cm of antenna

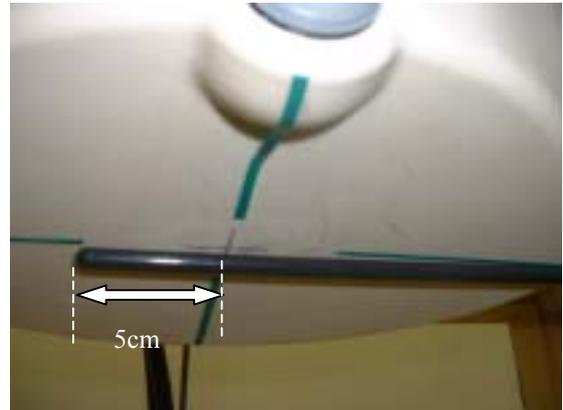

Side 5cm of antenna

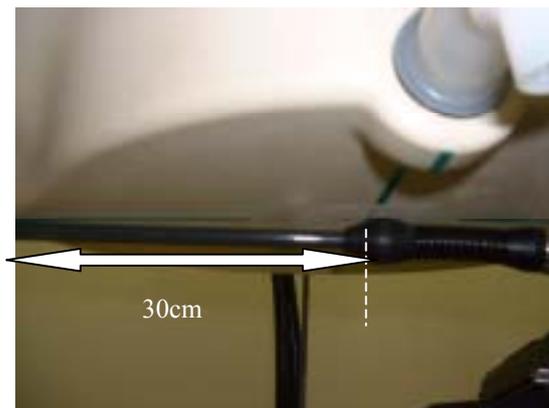

Side 30cm of antenna



Top of antenna position

