



SAR EVALUATION REPORT

Report No. : 24CE0006-HO-1

Applicant : Sony Corporation

Type of Equipment : WIRELESS CAMERA TRANSMITTER

Model No. : WLL-CA55

FCC ID : AK8WLLCA55

Test standard : FCC47CFR 2.1093
FCC OET Bulletin 65, Supplement C

Test Result : Complied

Max SAR Measured : 1.19W/kg(Head, 16QAM, 2466MHz)

1. This test report shall not be reproduced except full or partial, without the written approval of UL Apex Co., Ltd.
2. The results in this report apply only to the sample tested.
3. This equipment is in compliance with above regulation. We hereby certify that the data contain a true representation of the SAR profile.
4. The test results in this test report are traceable to the national or international standards.

Date of test : October 21 and 22 , 2003

Tested by : 

Miyo Ikuta
Head Office EMC Lab.

Approved by : 

Tetsuo Maeno
Site Manager of Head Office EMC Lab.

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

CONTENTS

	PAGE
SECTION 1 : Client information	3
SECTION 2 : Equipment under test (E.U.T.)	4
SECTION 3 : Requirements for compliance testing defined by the FCC	5
SECTION 4 : Dosimetry assessment setup	5
SECTION 5 : Test system specifications	9
SECTION 6 : Test setup of EUT	10
SECTION 7 : Measurement uncertainty	12
SECTION 8 : Simulated tissue liquid parameter	13
SECTION 9 : System validation data	15
SECTION 10 : Evaluation procedure	16
SECTION 11 : Exposure limit	17
SECTION 12 : SAR Measurement results	18
SECTION 13 : Equipment & calibration information	20
SECTION 14 : References	21
APPENDIX 1 : Photographs of test setup	22
APPENDIX 2 : SAR Measurement data	25
APPENDIX 3 : Validation Measurement data	43
APPENDIX 4 : System Validation Dipole (D2450V2,S/N: 713)	46
APPENDIX 5 : Dosimetric E-Field Probe Calibration (ET3DV6,S/N: 1684)	55

SECTION 1 : Client information

Company Name : Sony Corporation
Brand Name : SONY
Address : 6-7-35 Kitashinagawa, Shinagawa-ku, Tokyo, 141-0001 Japan
Telephone Number : +81-3-5795-5506
Facsimile Number : +81-3-5795-7955
Contact Person : Hitoshi Tanabe


SECTION 2 : Equipment under test (E.U.T.)

2.1 Identification of E.U.T.

Applicant : Sony Corporation
Type of Equipment : WIRELESS CAMERA TRANSMITTER
Model No. : WLL-CA55
Serial No. : 1011
Country of Manufacture : JAPAN
Receipt Date of Sample : October 17,2003
Condition of EUT : Production prototype
Battery option : Only one model with EUT
Category Identified : Portable device

2.2 Product Description

Tx Frequency : 2406MHz~2466MHz
Modulation : 16QAM-OFDM, QPSK-OFDM
Power supply : DC 11.0 – 17.0 V
Max.Output Power Tested : 25.2 dBm Peak Conducted
Antenna Type : Dipole Antenna
Position of Antenna : See photograph of following

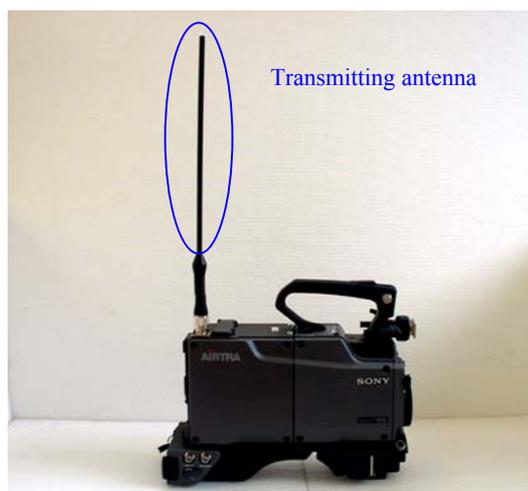

SECTION 3 : Requirements for compliance testing defined by the FCC

The US Federal Communications Commission has released the report and order "Guidelines for Evaluating the Environmental Effects of RF Radiation", ET Docket No. 93-62 in August 1996. The order requires routine SAR evaluation prior to equipment authorization of portable transmitter devices, including portable telephones. For consumer products, the applicable limit is 1.6 mW/g for an uncontrolled environment and 8.0 mW/g for an occupational/controlled environment as recommended by the ANSI/IEEE standard C95.1-1992. According to the Supplement C of OET Bulletin 65 "Evaluating Compliance with FCC Guidelines for Human Exposure to Radio frequency Electromagnetic Fields", released on Jun 29, 2001 by the FCC, the device should be evaluated at

maximum output power (radiated from the antenna) under "worst-case" conditions for normal or intended use, incorporating normal antenna operating positions, device peak performance frequencies and positions for maximum RF energy coupling.

1 Specific Absorption Rate (SAR) is a measure of the rate of energy absorption due to exposure to an RF transmitting source (wireless portable device).

2 IEEE/ANSI Std. C95.1-1992 limits are used to determine compliance with FCC ET Docket 93-62.

SECTION 4 : Dosimetry assessment setup

These measurements were performed with the automated near-field scanning system DASY4 from Schmid & Partner Engineering AG (SPEAG). The system is based on a high precision robot (working range greater than 0.9 m), which positions the probes with a positional repeatability of better than +/- 0.02 mm. Special E- and H-field probes have been developed for measurements close to material discontinuity, the sensors of which are directly loaded with a Schottky diode and connected via highly resistive lines to the data acquisition unit. The SAR measurements were conducted with the dosimetry probe ET3DV6, SN: 1684 (manufactured by SPEAG), designed in the classical triangular configuration and optimized for dosimetric evaluation. The probe has been calibrated according to the procedure described in [2] with accuracy of better than +/-10%. The spherical isotropy was evaluated with the procedure described in [3] and found to be better than +/-0.25 dB. The phantom used was the SAM Twin Phantom as described in FCC supplement C, IEE P1528 and CENELEC EN50361.

UL Apex Co., Ltd.


Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

4.1 Configuration and peripherals

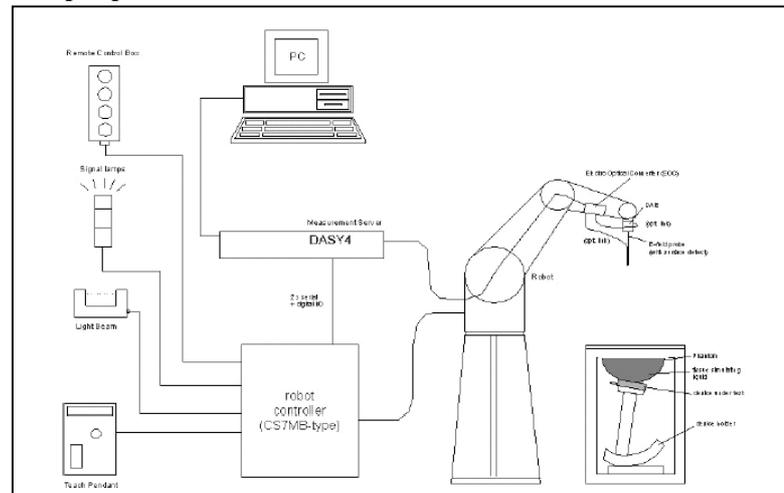

The DASYS4 system for performing compliance tests consist of the following items:

1. A standard high precision 6-axis robot (Stäubli RX family) with controller and software.
An arm extension for accommodating the data acquisition electronics (DAE).
2. A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
3. A data acquisition electronic (DAE), which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
4. The Electro-optical converter (EOC) performs the conversion between optical and electrical of the signals for the digital communication to the DAE and for the analog signal from the optical surface detection.
The EOC is connected to the measurement server.
5. The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
6. A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
7. A computer operating Windows 2000.
8. DASYS4 software.
9. Remote control with teaches pendant and additional circuitry for robot safety such as warning lamps, etc.
10. The SAM twin phantom enabling testing left-hand and right-hand usage.
11. The device holder for handheld mobile phones.
12. Tissue simulating liquid mixed according to the given recipes.
13. Validation dipole kits allowing to validate the proper functioning of the system.

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

4.2 System components

4.2.1 ET3DV6 Probe Specification

Construction:

Symmetrical design with triangular core
Built-in optical fiber for surface detection System
Built-in shielding against static charges
PEEK enclosure material (resistant to organic solvents, e.g., glycol ether)

Calibration:

Basic Broad Band calibration in air from 10 MHz to 2.5 GHz
In brain and muscle simulating tissue at
Frequencies of 450 MHz, 900 MHz, 1.8 GHz and 2.45GHz (accuracy +/-8%)

Frequency:

10 MHz to 3GHz; Linearity: +/-0.2 dB
(30 MHz to 3 GHz)

Directivity:

+/-0.2 dB in brain tissue (rotation around probe axis)
+/-0.4 dB in brain tissue (rotation normal probe axis)

Dynamic Range:

5 mW/g to > 100 mW/g; Linearity: +/-0.2 dB

Optical Surface Detection:


+/-0.2 mm repeatability in air and clear liquids over diffuse reflecting surfaces.

Dimensions:

Overall length: 330 mm (Tip: 16 mm)
Tip length: 16 mm
Body diameter: 12 mm (Body: 12 mm)
Tip diameter: 6.8 mm
Distance from probe tip to dipole centers: 2.7 mm

Application:

General dosimetric up to 3 GHz
Compliance tests of mobile phones
Fast automatic scanning in arbitrary phantoms

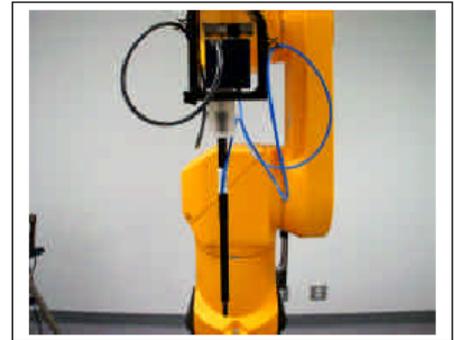

Inside view of
ET3DV6 E-field Probe

4.2.2 SAM Phantom

Construction:

The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528-200X, CENELEC 50361 and IEC 62209. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points with the robot.

Shell Thickness:


2 +/-0.2 mm

Filling Volume:

Approx. 25 liters

Dimensions:

(H x L x W): 810 x 1000 x 500 mm

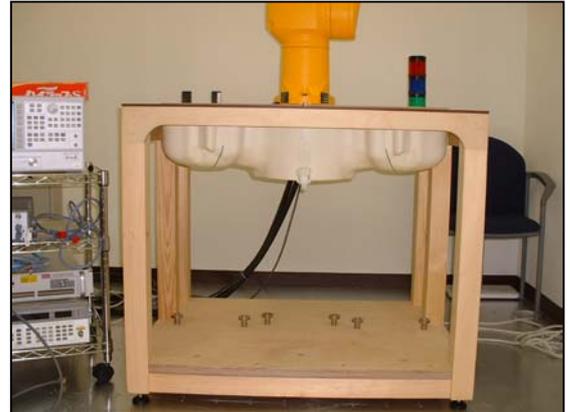

SAM Phantom

4.2.3 Device Holder for Transmitters

In combination with the SAM Twin Phantom V4.0, the Mounting Device enables the rotation of the mounted transmitter in spherical coordinates whereby the rotation points is the ear opening. The devices can be easily, accurately, and repeatedly positioned according to the FCC and CENELEC specifications. The device holder can be locked at different phantom locations (left head, right head, flat phantom).

* Note: A simulating human hand is not used due to the complex anatomical and geometrical structure of the hand that may produced infinite number of configurations.

To produce the worst-case condition (the hand absorbs antenna output power), the hand is omitted during the tests.

Device holder couldn't be used at this SAR measurement.



Device Holder

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

SECTION 5 : Test system specifications

Robot RX60L

Number of Axes	:	6
Payload	:	1.6 kg
Reach	:	800mm
Repeatability	:	+/-0.025mm
Control Unit	:	CS7M
Programming Language	:	V+
Manufacture	:	Stäubli Unimation Corp. Robot Model: RX60

DASY4 Measurement sever

Features	:	166MHz low power Pentium MMX 32MB chipdisk and 64MB RAM Serial link to DAE (with watchdog supervision) 16 Bit A/D converter for surface detection system Two serial links to robot (one for real-time communication which is supervised by watchdog) Ethernet link to PC (with watchdog supervision) Emergency stop relay for robot safety chain Two expansion slots for future applications
Manufacture	:	Schimid & Partner Engineering AG

Data Acquisition Electronic (DAE)

Features	:	Signal amplifier, multiplexer, A/D converter and control logic Serial optical link for communication with DASY4 embedded system (fully remote controlled) 2 step probe touch detector for mechanical surface detection and emergency robot stop (not in -R version)
Measurement Range	:	1 μ V to > 200 mV (16 bit resolution and two range settings: 4mV, 400mV)
Input Offset voltage	:	< 1 μ V (with auto zero)
Input Resistance	:	200 M Ω
Battery Power	:	> 10 h of operation (with two 9 V accus)
Dimension	:	60 x 60 x 68 mm
Manufacture	:	Schimid & Partner Engineering AG

Software

Item	:	Dosimetric Assesment System DASY4
Type No.	:	SD 000 401A, SD 000 402A
Software version No.	:	4.1
Manufacture / Origin	:	Schimid & Partner Engineering AG

E-Field Probe

Model	:	ET3DV6
Serial No.	:	1684
Construction	:	Triangular core fiber optic detection system
Frequency	:	10 MHz to 6 GHz
Linearity	:	+/-0.2 dB (30 MHz to 3 GHz)
Manufacture	:	Schimid & Partner Engineering AG

Phantom

Type	:	SAM Twin Phantom V4.0
Shell Material	:	Fiberglass
Thickness	:	2.0 +/-0.2 mm
Volume	:	Approx. 20 liters
Manufacture	:	Schimid & Partner Engineering AG

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

SECTION 6 : Test setup of EUT


6.1 Photographs of test setup

When users operate or carry this EUT, a part of the antenna could be considered to touch or get close to their bodies and heads. In order to assume this situation, we performed the test at the following positions. Please refer to "APPENDIX 1" for more details.

1.Side of antenna : We performed the test with side of antenna touching to the flat phantom.

2.Top of antenna : We performed the test with top of antenna touching to the flat phantom.

The detail of dipole antenna are shown below.

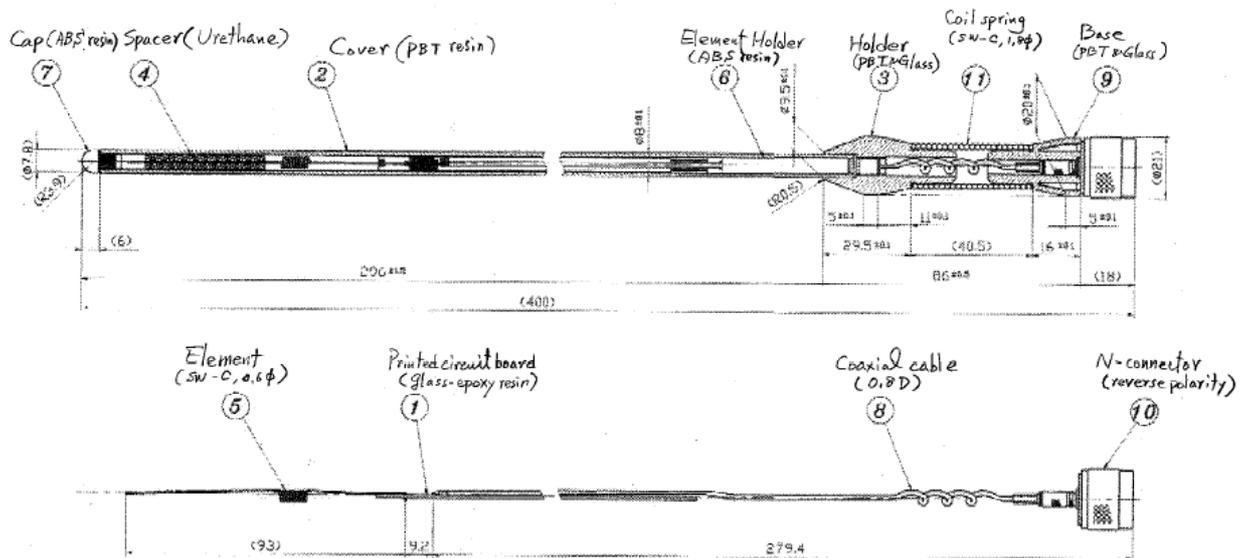



UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

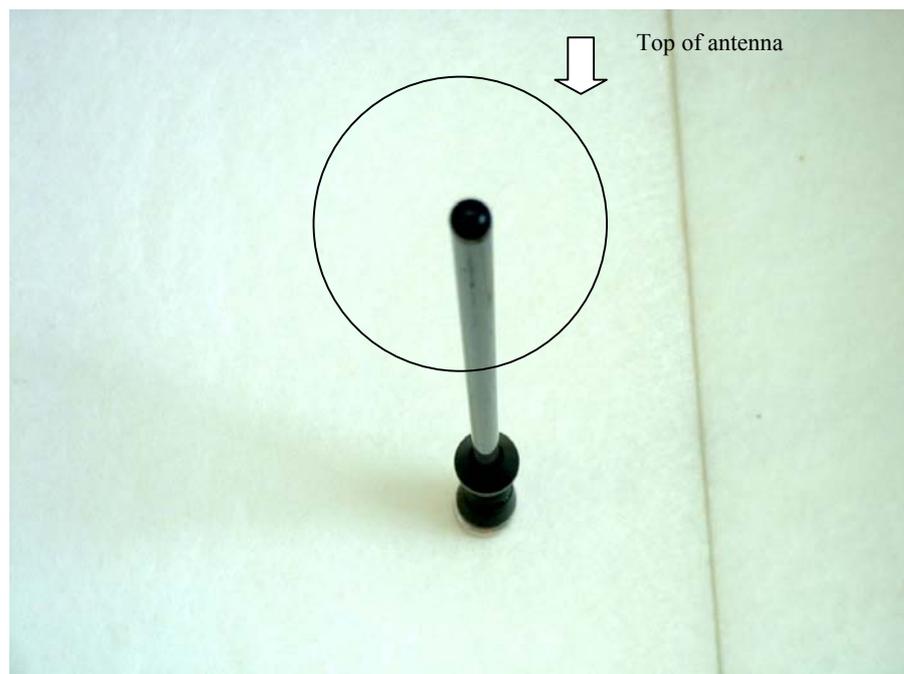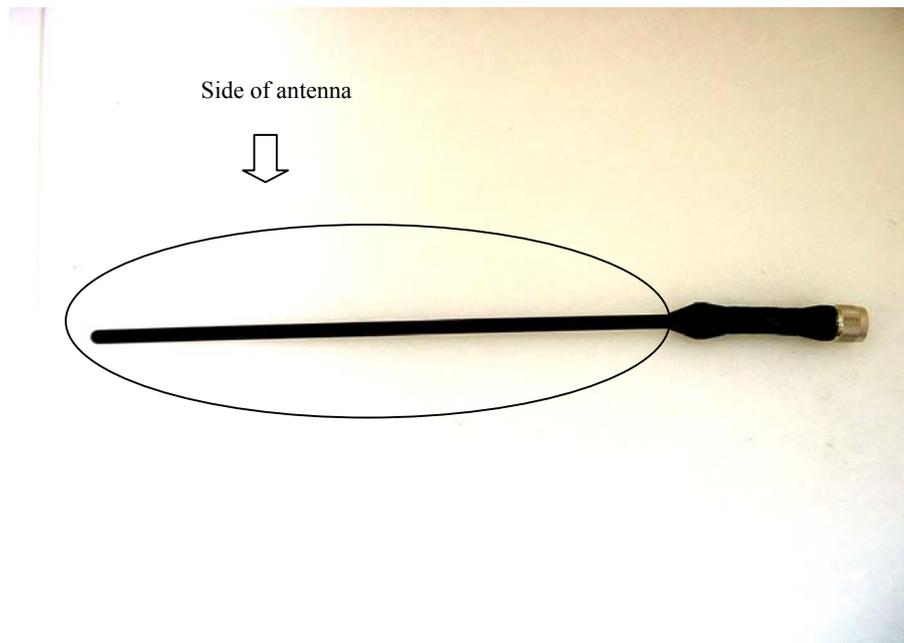

6.2 EUT Tune-up procedure
We determined following conditions ;

Transmitter was continuous mode.

Crest Factor = 1

Frequency channels were low , middle and high (2406 ,2442MHz and 2466MHz)

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

SECTION 7 : Measurement uncertainty

The uncertainty budget has been determined for the DASY4 measurement system according to the NIS81 [13] and the NIST1297 [6] documents and is given in the following Table.

Error Description	Uncertainty value \pm %	Probability distribution	divisor	(ci)1 lg	Standard Uncertainty (1g)	vi or veff
Measurement System						
Probe calibration	± 4.8	Normal	1	1	± 4.8	∞
Axial isotropy of the probe	± 4.7	Rectangular	$\sqrt{3}$	$(1-c_p)^{1/2}$	± 1.9	∞
Spherical isotropy of the probe	± 9.6	Rectangular	$\sqrt{3}$	$(c_p)^{1/2}$	± 3.9	∞
Boundary effects	± 1.0	Rectangular	$\sqrt{3}$	1	± 0.6	∞
Probe linearity	± 4.7	Rectangular	$\sqrt{3}$	1	± 2.7	∞
Detection limit	± 1.0	Rectangular	$\sqrt{3}$	1	± 0.6	∞
Readout electronics	± 1.0	Normal	1	1	± 1.0	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	± 0.5	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	± 1.5	∞
RF ambient conditions	± 3.0	Rectangular	$\sqrt{3}$	1	± 1.7	∞
Mech. constraints of robot	± 0.4	Rectangular	$\sqrt{3}$	1	± 0.2	∞
Probe positioning	± 2.9	Rectangular	$\sqrt{3}$	1	± 1.7	∞
Extrap. and integration	± 1.0	Rectangular	$\sqrt{3}$	1	± 0.6	∞
Test Sample Related						
Device positioning	± 2.9	Rectangular	$\sqrt{3}$	1	± 2.9	15
Device holder uncertainty	± 3.6	Rectangular	$\sqrt{3}$	1	± 3.6	1
Power drift	± 5.0	Rectangular	$\sqrt{3}$	1	± 2.9	∞
Phantom and Setup						
Phantom uncertainty	± 4.0	Rectangular	$\sqrt{3}$	1	± 2.3	∞
Liquid conductivity (target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	± 1.8	∞
Liquid conductivity (meas.)	± 10.0	Rectangular	$\sqrt{3}$	0.64	± 3.7	∞
Liquid permittivity (target)	± 10.0	Rectangular	$\sqrt{3}$	0.6	± 3.5	∞
Liquid permittivity (meas.)	± 5.0	Rectangular	$\sqrt{3}$	0.6	± 1.7	∞
Combined Standard Uncertainty						
					± 11.26	
Expanded Uncertainty (k=2)						
					± 22.5	

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

SECTION 8 : Simulated tissue liquid parameter

8.1 Simulated Tissue Liquid Parameter confirmation

The dielectric parameters were checked prior to assessment using the HP85070D dielectric probe kit.
The dielectric parameters measurement are reported in each correspondent section.

8.1.1 Head 2450MHz

Type of liquid : **Head 2450 MHz**
Ambient temperature (deg.c) : **24.6 (October 21) / 24.4 (October 22)**
Relative Humidity (%) : **52 (October 21) / 61 (October 22)**
Liquid depth (cm) : **15.6**

Measured By : Miyo Ikuta

DIELECTRIC PARAMETERS MEASUREMENT RESULTS							
Date	Liquid Temp [deg.c]		Parameters	Target Value	Measured	Deviation [%]	Limit [%]
	Before	After					
October 21	23.4	23.4	Relative Permittivity ϵ_r	39.2	35.6	-9.2	+/-10
			Coconductivity σ [mho/m]	1.80	1.84	2.2	+/-5
October 22	23.6	23.6	Relative Permittivity ϵ_r	39.2	35.7	-8.9	+/-10
			Coconductivity σ [mho/m]	1.80	1.83	1.7	+/-5

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

8.1.2 Muscle 2450MHz

Type of liquid : **Muscle 2450 MHz**
Ambient temperature (deg.c.) : **24.4**
Relative Humidity (%) : **61**
Liquid depth (cm) : **15.3**

Measured By : Miyo Ikuta

DIELECTRIC PARAMETERS MEASUREMENT RESULTS							
Date	Liquid Temp [deg.c]		Parameters	Target Value	Measured	Deviation [%]	Limit [%]
	Before	After					
October 22	22.6	22.6	Relative Permittivity ϵ_r	52.7	50.6	-4.0	+/-5
			Conductivity σ [mho/m]	1.95	2.00	2.6	+/-5

8.2 Simulated Tissues

Ingredient	Mixture(%)	
	Head 2450MHz	Muscle 2450MHz
Water	45.0	69.83
DGMBE	55.0	30.17

Note:DGMBE(Diethylenglycol-monobuthyl ether)

SECTION 9 : System validation data


Prior to the assessment, the system validation kit was used to test whether the system was operating within its specifications of +/- 10%. The validation results are tabulated below. Please refer to APPENDIX 3.

Type of liquid : HEAD 2450MHz
 Frequency : 2450MHz
 Liquid depth (cm) : 15.6
 Ambient temperature (deg.c.) : 24.6 (October 21) / 24.4 (October 22)
 Relative Humidity (%) : 52 (October 21) / 61 (October 22)
 Dipole : D2450V2 SN:713
 Power : 250mW

Measured By : Miyo Ikuta

SYSTEM PERFORMANCE CHECK										
Liquid (HEAD 2450MHz)							System dipole validation target & measured			
Date	Liquid Temp [deg.c.]		Relative Permittivity ϵ_r		Conductivity σ [mho/m]		SAR 1g [W/kg]		Deviation [%]	Limit [%]
	Before	After	Target	Measured	Target	Measured	Target	Measured		
October 21	23.4	23.4	39.2	35.6	1.80	1.84	13.1	13.5	3.1	+/-10
October 22	23.6	23.6	39.2	35.7	1.80	1.83	13.1	13.5	3.1	+/-10

Note: Please refer to Attachment for the result representation in plot format

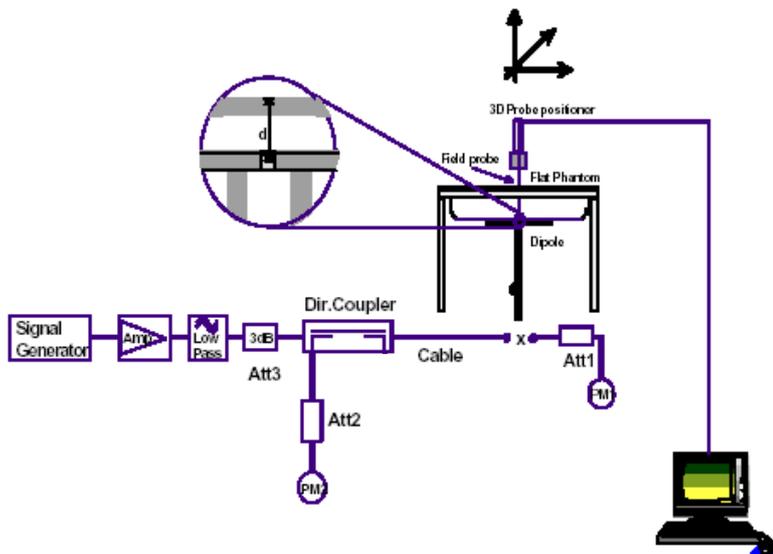

2450MHz System performance check setup

Test system for the system performance check setup diagram

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

SECTION 10 : Evaluation procedure

The evaluation was performed with the following procedure:

Step 1: Measurement of the SAR value at a fixed location above the ear point or central position of flat phantom was used as a reference value for assessing the power drop.

Step 2: The SAR distribution at the exposed side of head or body position was measured at a distance of each device from the inner surface of the shell. The area covered the entire dimension of the EUT(180 x 260) and the horizontal grid spacing was 20 mm x 20 mm. Based on these data, the area of the maximum absorption was determined by spline interpolation.

Step 3: Around this point found in the Step 2 (area scan) , a volume of 32 mm x 32 mm x 30 mm was assessed by measuring 5 x 5 x 7 points. And for any secondary peaks found in the Step2 which are within 2dB of maximum peak and not with this Step3 (Zoom scan) is repeated. On the basis of this data set, the spatial peak SAR value was evaluated under the following procedure:

1. The data at the surface were extrapolated, since the center of the dipoles is 2.7 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.3 mm. The extrapolation was based on a least square algorithm [4]. A polynomial of the fourth order was calculated through the points in z-axes. This polynomial was then used to evaluate the points between the surface and the probe tip.
2. The maximum interpolated value was searched with a straightforward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1 g or 10 g) were computed by the 3D-Spline interpolation algorithm. The 3D-Spline is composed of three one-dimensional splines with the "Not a knot"-condition (in x, y and z-directions) [4], [5]. The volume was integrated with the trapezoidal-algorithm. One thousand points (10 x 10 x 10) were interpolated to calculate the average.
3. All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.

Step 4: Re-measurement of the SAR value at the same location as in Step 1. It is measured SAR-drift(the difference between the SAR measured in Step 4 and Step 1)

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

SECTION 11 : Exposure limit

(A) Limits for Occupational/Controlled Exposure (W/kg)

Spatial Average (averaged over the whole body)	Spatial Peak (averaged over any 1g of tissue)	Spatial Peak (hands/wrists/feet/ankles averaged over 10g)
0.4	8.0	20.0

(B) Limits for General population/Uncontrolled Exposure (W/kg)

Spatial Average (averaged over the whole body)	Spatial Peak (averaged over any 1g of tissue)	Spatial Peak (hands/wrists/feet/ankles averaged over 10g)
0.08	1.6	4.0

Occupational/Controlled Environments: are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure, (i.e. as a result of employment or occupation).

General Population/Uncontrolled Environments: are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

<p>NOTE:GENERAL POPULATION/UNCONTROLLED EXPOSURE SPATIAL PEAK(averaged over any 1g of tissue) LIMIT 1.6 W/kg</p>

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

SECTION 12 : SAR Measurement results

12.1 Head 2450MHz SAR

Date : October 21,2003

Measured By : Miyo Ikuta

CONDUCTED POWER MEASUREMENT RESULTS											
EUT Modulation	Frequency [MHz]	Before				After				Deviation [%]	Limit [%]
		Reading [dBm]	Att. [dB]	Result [dBm]	Convert [mW]	Reading [dBm]	Att. [dB]	Result [dBm]	Convert [mW]		
16QAM	2406	4.7	20	24.70	295.1	4.8	20	24.80	302.0	2.3	+/-5
	2442	4.4	20	24.40	275.4	4.4	20	24.40	275.4	0.0	+/-5
	2466	5.2	20	25.20	331.1	5.1	20	25.10	323.6	-2.3	+/-5
QPSK	2406	4.4	20	24.40	275.4	4.5	20	24.50	281.8	2.3	+/-5
	2442	4.4	20	24.40	275.4	4.4	20	24.40	275.4	0.0	+/-5
	2466	5.1	20	25.10	323.6	5.2	20	25.20	331.1	2.3	+/-5

Liquid Depth (cm)

: 15.6

Model

: WLL-CA55

Parameters

: $\epsilon_r = 35.6, \sigma = 1.84$

Serial No.

: 1011

Ambient Temperature[deg.c.]

: 24.6

Modulation

: OFDM

Relative Humidity (%)

: 52

Crest factor

: 1

Date : October 21,2003

Measured By : Miyo Ikuta

HEAD SAR MEASUREMENT RESULTS									
EUT Modulation	Frequency		Phantom Section	EUT Set-up Conditions			Liquid Temp.[deg.c]		SAR(1g) [W/kg]
	Channel	[MHz]		Antenna	Position	Separation [mm]	Before	After	Maximum value of multi-peak)
16QAM	Mid	2442	Flat	Fixed	Side of antenna	0	23.3	23.3	1.02
	Mid	2442	Flat	Fixed	Top of antenna	0	23.4	23.4	0.00541
	Low	2406	Flat	Fixed	Side of antenna	0	23.6	23.6	1.03
	High	2466	Flat	Fixed	Side of antenna	0	23.6	23.6	1.19
QPSK	Mid	2442	Flat	Fixed	Side of antenna	0	23.3	23.5	1.03
	Mid	2442	Flat	Fixed	Top of antenna	0	23.4	23.5	0.00681
	Low	2406	Flat	Fixed	Side of antenna	0	23.6	23.6	1.02
	High	2466	Flat	Fixed	Side of antenna	0	23.6	23.7	1.18
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure / General Population							Head SAR: 1.6 W/kg (averaged over 1 gram)		

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

12.2 Body 2450MHz SAR

Date : October 22,2003
Measured By : Miyo Ikuta

CONDUCTED POWER MEASUREMENT RESULTS											
EUT Modulation	Frequency [MHz]	Before				After				Deviation [%]	Limit [%]
		Reading [dBm]	Att. [dB]	Result [dBm]	Convert [mW]	Reading [dBm]	Att. [dB]	Result [dBm]	Convert [mW]		
16QAM	2406	4.6	20	24.60	288.4	4.6	20	24.60	288.4	0.0	+/-5
	2442	4.6	20	24.60	288.4	4.6	20	24.60	288.4	0.0	+/-5
	2466	5.2	20	25.20	331.1	5.1	20	25.10	323.6	-2.3	+/-5
QPSK	2406	4.3	20	24.30	269.2	4.3	20	24.30	269.2	0.0	+/-5
	2442	4.6	20	24.60	288.4	4.5	20	24.50	281.8	-2.3	+/-5
	2466	5.1	20	25.10	323.6	5.1	20	25.10	323.6	0.0	+/-5

Liquid Depth (cm) : 15.3 Model : WLL-CA55
Parameters : $\epsilon_r = 50.6$, $\sigma = 2.00$ Serial No. : 1011
Ambient Temperature[deg.c.] : 24.4 Modulation : OFDM
Relative Humidity (%) : 61 Crest factor : 1

Date : October 22,2003
Measured By : Miyo Ikuta

BODY SAR MEASUREMENT RESULTS									
EUT Modulation	Frequency		Phantom Section	EUT Set-up Conditions			Liquid Temp.[deg.c]		SAR(1g) [W/kg]
	Channel	[MHz]		Antenna	Position	Separation [mm]	Before	After	Maximum value of multi-peak
16QAM	Mid	2442	Flat	Fixed	Side of antenna	0	22.6	22.6	1.16
	Mid	2442	Flat	Fixed	Top of antenna	0	22.6	22.6	0.00423
	Low	2406	Flat	Fixed	Side of antenna	0	23.0	23.0	0.991
	High	2466	Flat	Fixed	Side of antenna	0	22.6	22.8	1.11
QPSK	Mid	2442	Flat	Fixed	Side of antenna	0	23.0	23.0	0.935
	Mid	2442	Flat	Fixed	Top of antenna	0	23.0	23.0	0.0044
	Low	2406	Flat	Fixed	Side of antenna	0	23.0	23.0	0.982
	High	2466	Flat	Fixed	Side of antenna	0	23.1	23.1	1.11
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure / General Population							Body SAR: 1.6 W/kg (averaged over 1 gram)		

SECTION 13 : Equipment & calibration information

Name of Equipment	Manufacture	Model number	Serial number	Calibration	
				Last Cal	due date
Power Meter	Agilent	E4417A	GB41290639	2002/11/08	2003/11/07
Power Sensor	Agilent	E9300B	US40010300	2002/11/14	2003/11/13
Power Sensor	Agilent	E9327A	US40440545	2003/03/18	2004/03/17
S-Parameter Network Analyzer	Agilent	E8358A	US41080381	2003/08/13	2004/08/12
Signal Generator	Rohde&Schwarz	SML40	100023	2002/11/25	2003/11/24
RF Amplifier	OPHIR	5056F	1005	2003/02/06	2004/02/05
Dosimetric E-Field Probe	Schmid&Partner Engineering AG	ET3DV6	1684	2002/11/20	2003/11/19
Data Acquisition Electronics	Schmid&Partner Engineering AG	DAE3 V1	509	2003/04/10	2004/04/09
Robot,SAM Phantom	Schmid&Partner Engineering AG	DASY4	I021834	N/A	N/A
Attenuator	Agilent.	US40010300	08498-60012	2002/12/24	2003/12/23
Attenuator	HIROSE ELECTRIC CO.,LTD.	AT-120	901247	2003/02/03	2004/02/02
2450MHz System Validation Dipole	Schmid&Partner Engineering AG	D2450V2	713	2002/11/15	2004/11/14
Dual Directional Coupler	N/A	Narda	03702	N/A	N/A
Head 2450MHz	N/A	N/A	N/A	N/A	N/A
Body 2450MHz	N/A	N/A	N/A	N/A	N/A

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

SECTION 14 : References

- [1] ANSI, ANSI/IEEE C95.1-1992: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz, The Institute of Electrical and Electronics Engineers, Inc., New York, NY 10017, 1992.
- [2] Katja Pokovic, Thomas Schmid, and Niels Kuster, "Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequencies", in ICECOM '97, Dubrovnik, October 15-17, 1997, pp. 120-124.
- [3] Katja Pokovic, Thomas Schmid, and Niels Kuster, "E-field probe with improved isotropy in brain simulating liquids", in Proceedings of the ELMAR, Zadar, Croatia, 23-25 June, 1996, pp.172-175.
- [4] W. Gander, Computermathematik, Birkhaeuser, Basel, 1992.
- [5] W. H. Press, S. A. Teukolsky, W. T. Vetterling, and B. P. Flannery, Numerical Recipes in C, The Art of Scientific Computing, Second Edition, Cambridge University Press, 1992.
- [6] Barry N. Taylor and Christ E. Kuyatt, "Guidelines for evaluating and expressing the uncertainty of NIST measurement results", Tech. Rep., National Institute of Standards and Technology, 1994.

UL Apex Co., Ltd.

Head Office EMC Lab.


4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116


Facsimile: +81 596 24 8124

APPENDIX 1 : Photographs of test setup

Side of antenna

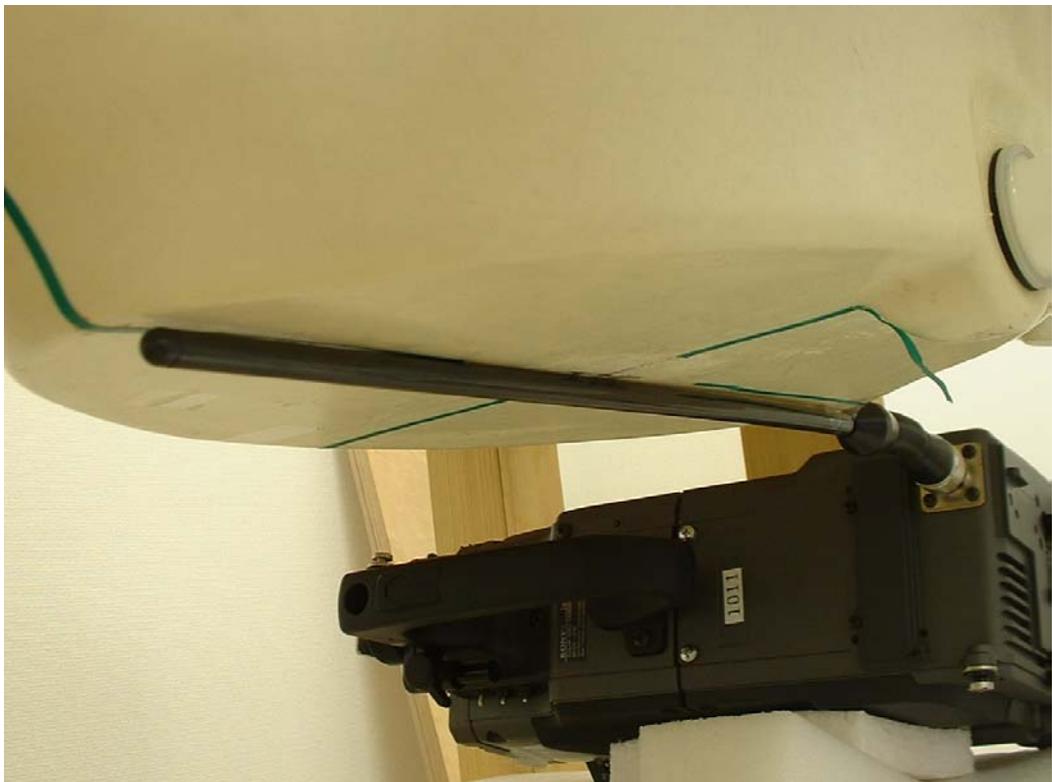

Top of antenna

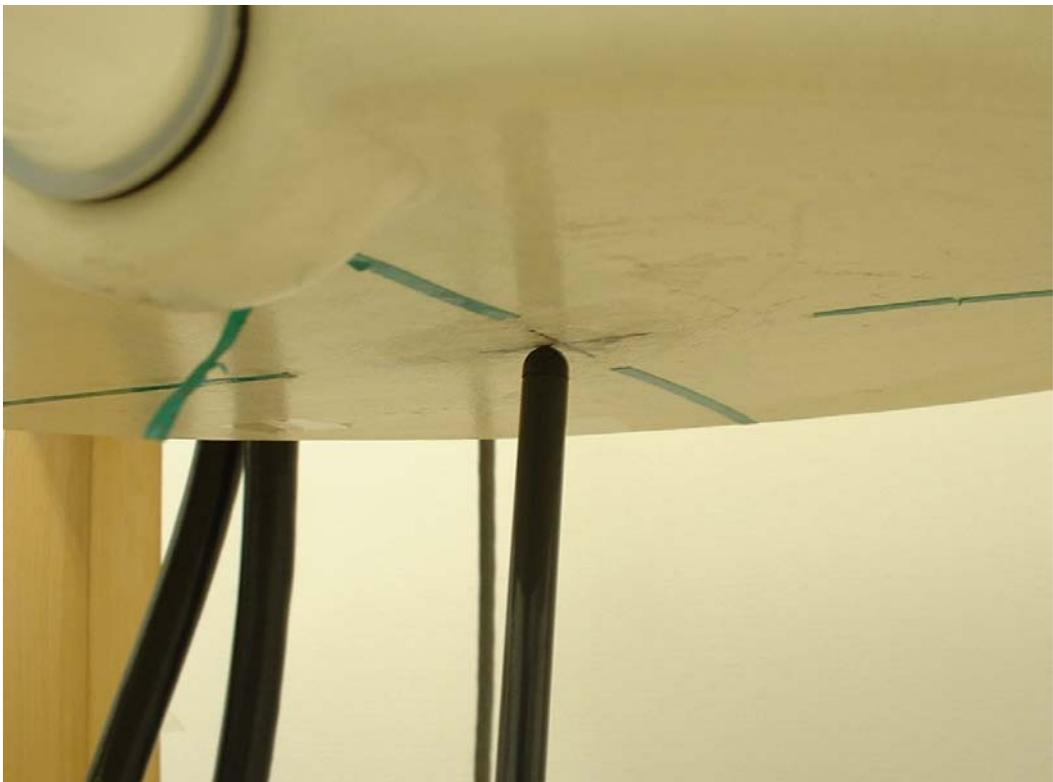

APPENDIX 2 : SAR Measurement data

WLL-CA55 / Head / Side of antenna / 16QAM / 2442MHz


Crest factor: 1
Medium: HSL2450 ($\sigma = 1.84$ mho/m, $\epsilon_r = 35.6$, $\rho = 1000$ kg/m³)
Phantom section: Flat Section

DASY4 Configuration:
- Probe: ET3DV6 - SN1684; ConvF(4.9, 4.9, 4.9); Calibrated: 2002/11/20
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Phantom: SAM 1196
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Area Scan (121x161x1): Measurement grid: dx=20mm, dy=20mm
Maximum value of SAR = 0.985 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Peak SAR (extrapolated) = 2.66 W/kg
SAR(1 g) = 1.02 mW/g; SAR(10 g) = 0.414 mW/g
Maximum value of SAR = 1.31 mW/g

Test date = 10 / 21 / 03
Reference Value = 6.99 V/m
Power Drift = 0.1 dB
Ambient Temperature = 24.6 degree.c
Liquid Temperature = Before 23.3 degree.C , After 23.3 degree.C

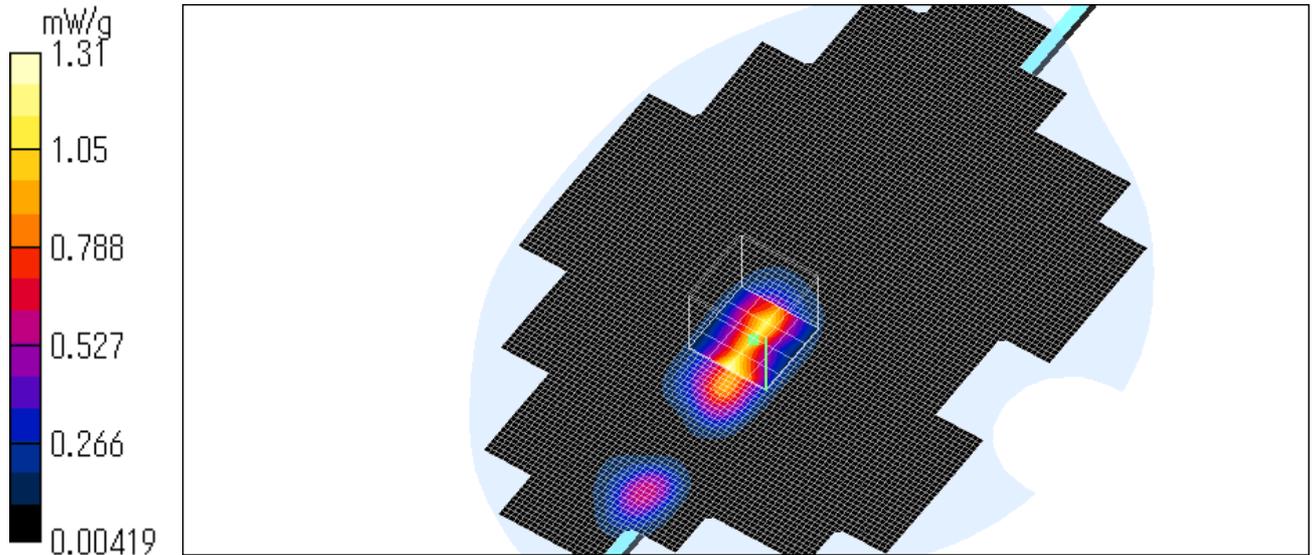

WLL-CA55 / Head / Top of antenna / 16QAM / 2442MHz

Crest factor: 1
Medium: HSL2450 ($\sigma = 1.84$ mho/m, $\epsilon_r = 35.6$, $\rho = 1000$ kg/m³)
Phantom section: Flat Section


DASY4 Configuration:
- Probe: ET3DV6 - SN1684; ConvF(4.9, 4.9, 4.9); Calibrated: 2002/11/20
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Phantom: SAM 1196
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Area Scan (121x161x1): Measurement grid: dx=20mm, dy=20mm
Maximum value of SAR = 0.00562 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Peak SAR (extrapolated) = 0.0204 W/kg
SAR(1 g) = 0.00507 mW/g; SAR(10 g) = 0.00257 mW/g
Maximum value of SAR = 0.0066 mW/g

Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Peak SAR (extrapolated) = 0.0201 W/kg
SAR(1 g) = 0.00541 mW/g; SAR(10 g) = 0.00248 mW/g
Maximum value of SAR = 0.00504 mW/g

Test date = 10 / 21 / 03
Reference Value = 1.37 V/m
Power Drift = 0.09 dB
Ambient Temperature : 24.6 degree.c
Liquid Temperature : Before 23.4 degree.C , After 23.4 degree.C

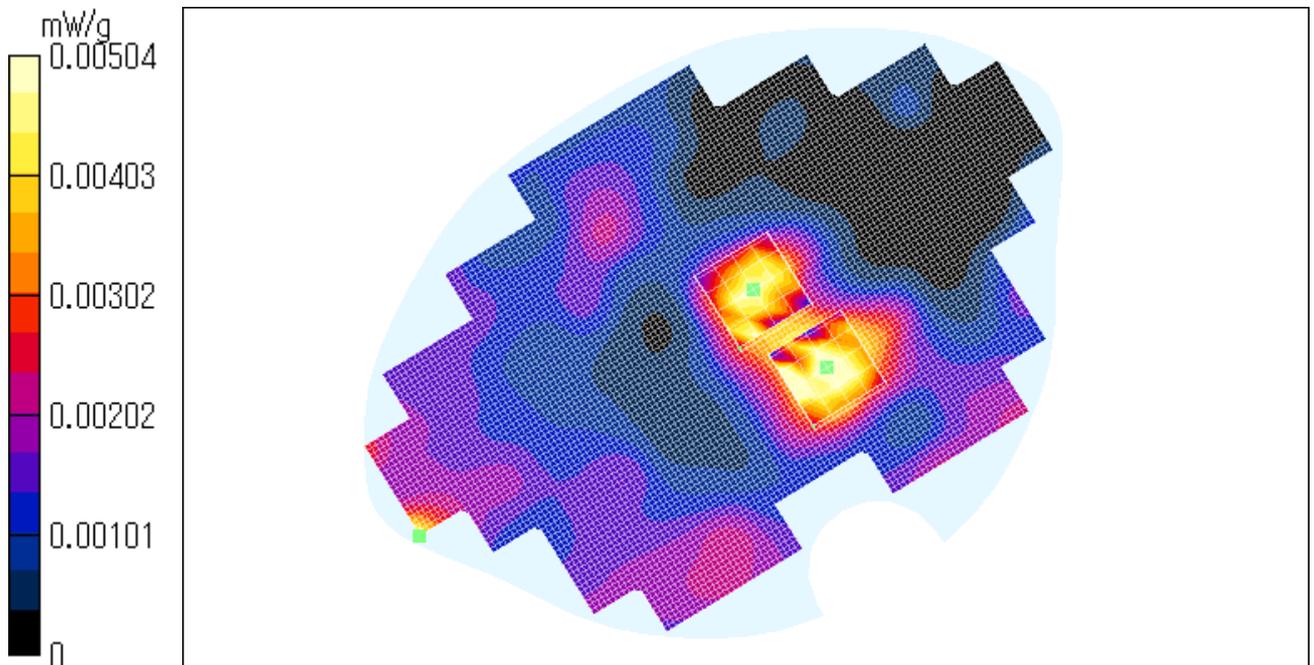

WLL-CA55 / Head / Side of antenna / 16QAM / 2406MHz

Crest factor: 1
Medium: HSL2450 ($\sigma = 1.84$ mho/m, $\epsilon_r = 35.6$, $\rho = 1000$ kg/m³)
Phantom section: Flat Section


DASY4 Configuration:
- Probe: ET3DV6 - SN1684; ConvF(4.9, 4.9, 4.9); Calibrated: 2002/11/20
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Phantom: SAM 1196
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Area Scan (121x161x1): Measurement grid: dx=20mm, dy=20mm
Maximum value of SAR = 1.01 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Peak SAR (extrapolated) = 2.26 W/kg
SAR(1 g) = 1.03 mW/g; SAR(10 g) = 0.44 mW/g
Maximum value of SAR = 1.2 mW/g

Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Peak SAR (extrapolated) = 1.42 W/kg
SAR(1 g) = 0.659 mW/g; SAR(10 g) = 0.281 mW/g
Maximum value of SAR = 0.738 mW/g

Test date = 10 / 21 / 03
Reference Value = 2.86 V/m
Power Drift = 0.4dB
Ambient Temperature : 24.6 degree.c
Liquid Temperature : Before 23.6 degree.C , After 23.6 degree.C

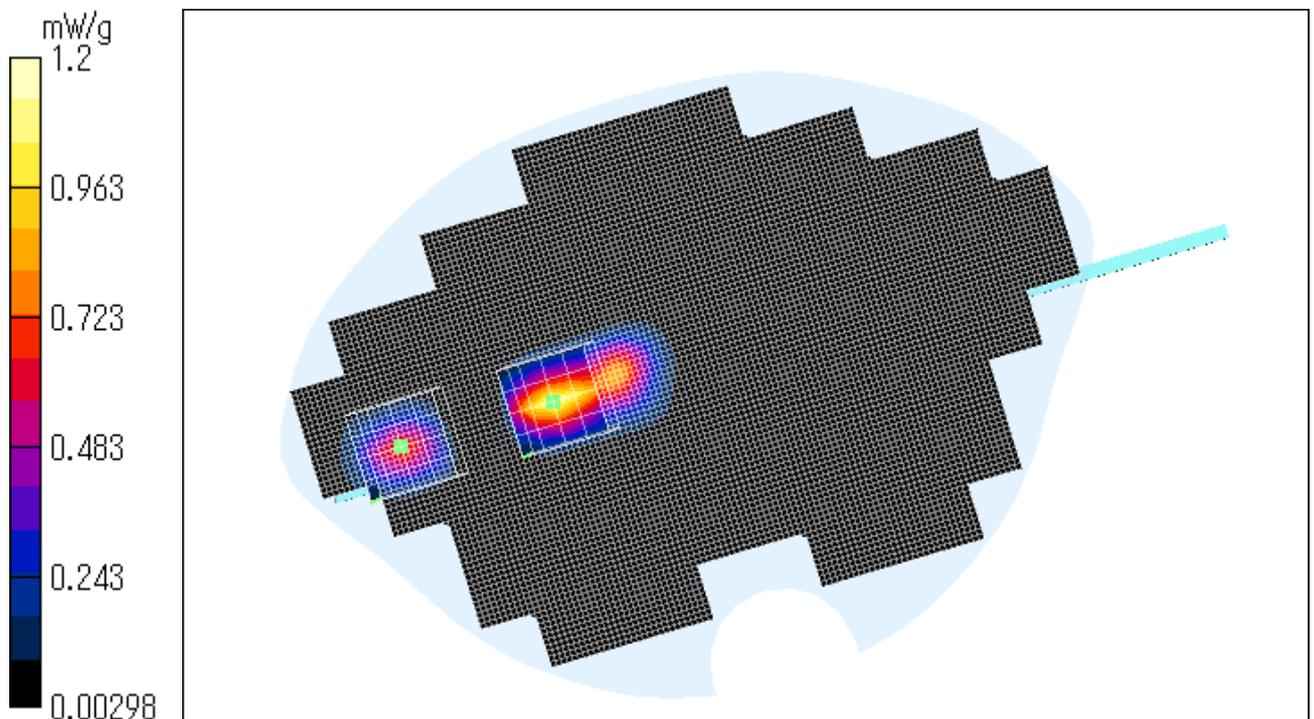

WLL-CA55 / Head / Side of antenna / 16QAM / 2466MHz

Crest factor: 1
Medium: HSL2450 ($\sigma = 1.84$ mho/m, $\epsilon_r = 35.6$, $\rho = 1000$ kg/m³)
Phantom section: Flat Section

DASY4 Configuration:


- Probe: ET3DV6 - SN1684; ConvF(4.9, 4.9, 4.9); Calibrated: 2002/11/20
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Phantom: SAM 1196
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Area Scan (121x161x1): Measurement grid: dx=20mm, dy=20mm
Maximum value of SAR = 0.896 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Peak SAR (extrapolated) = 2.72 W/kg
SAR(1 g) = 1.19 mW/g; SAR(10 g) = 0.477 mW/g
Maximum value of SAR = 1.34 mW/g

Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Peak SAR (extrapolated) = 1.43 W/kg
SAR(1 g) = 0.651 mW/g; SAR(10 g) = 0.273 mW/g
Maximum value of SAR = 0.726 mW/g

Test date = 10 / 21 / 03
Reference Value = 7.84 V/m
Power Drift = -0.4 dB
Ambient Temperature : 24.6 degree.c
Liquid Temperature : Before 23.6 degree.C , After 23.6 degree.C

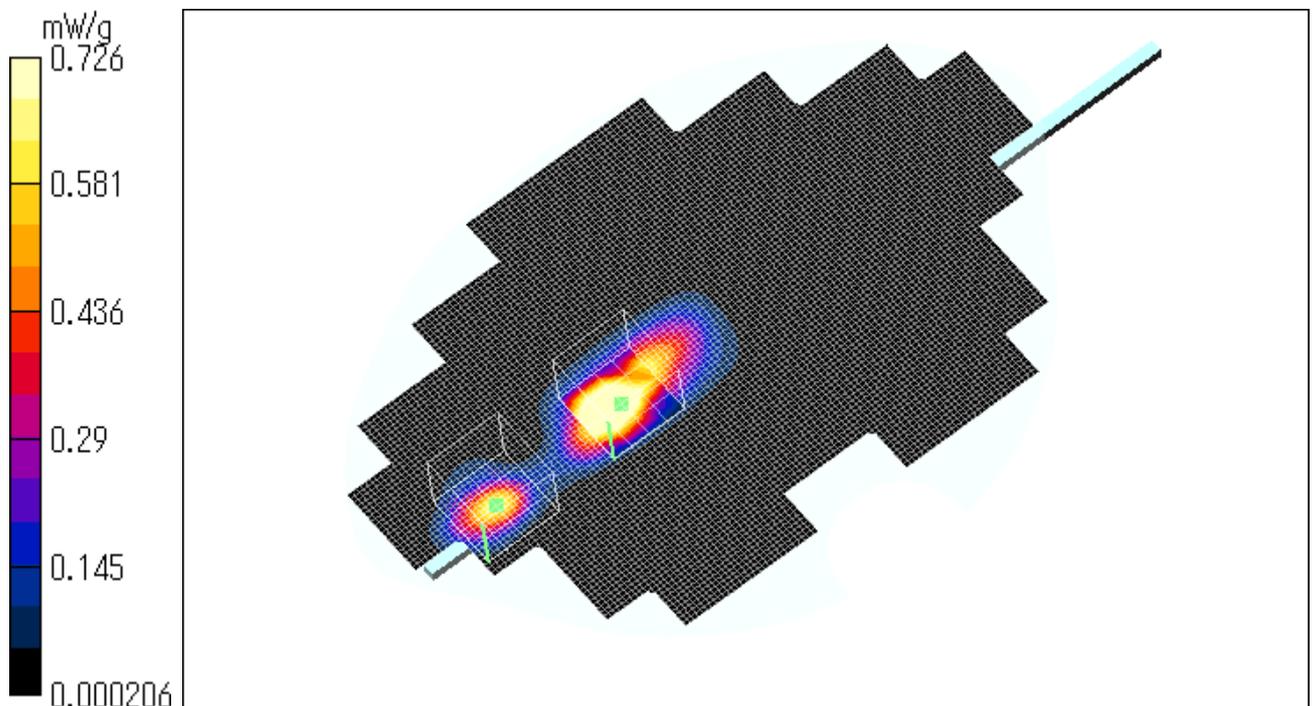

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124


Z-axis scan at max SAR location

WLL-CA55 / Head / Side of antenna / 16QAM / 2466MHz

Crest factor: 1
Medium: HSL2450 ($\sigma = 1.84$ mho/m, $\epsilon_r = 35.6$, $\rho = 1000$ kg/m³)
Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1684; ConvF(4.9, 4.9, 4.9); Calibrated: 2002/11/20
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Phantom: SAM 1196
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

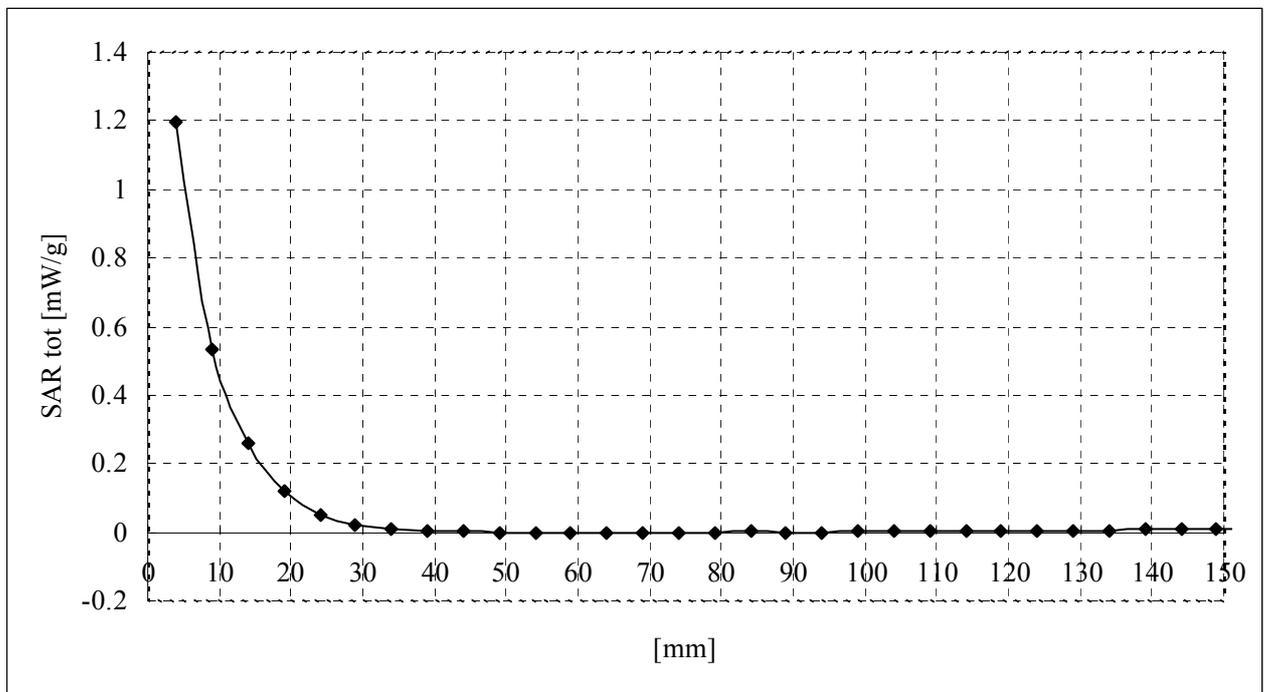

WLL-CA55 / Head / Side of antenna / QPSK / 2442MHz

Crest factor: 1

Medium: HSL2450 ($\sigma = 1.84$ mho/m, $\epsilon_r = 35.6$, $\rho = 1000$ kg/m³)

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1684; ConvF(4.9, 4.9, 4.9); Calibrated: 2002/11/20
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Phantom: SAM 1196
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Area Scan (121x161x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR = 1.33 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 2.62 W/kg

SAR(1 g) = 1.03 mW/g; SAR(10 g) = 0.415 mW/g

Maximum value of SAR = 1.24 mW/g


Test date = 10 / 21 / 03

Reference Value = 3.71 V/m

Power Drift = 0.04 dB

Ambient Temperature : 24.6 degree.c

Liquid Temperature : Before 23.3 degree.C , After 23.5 degree.C

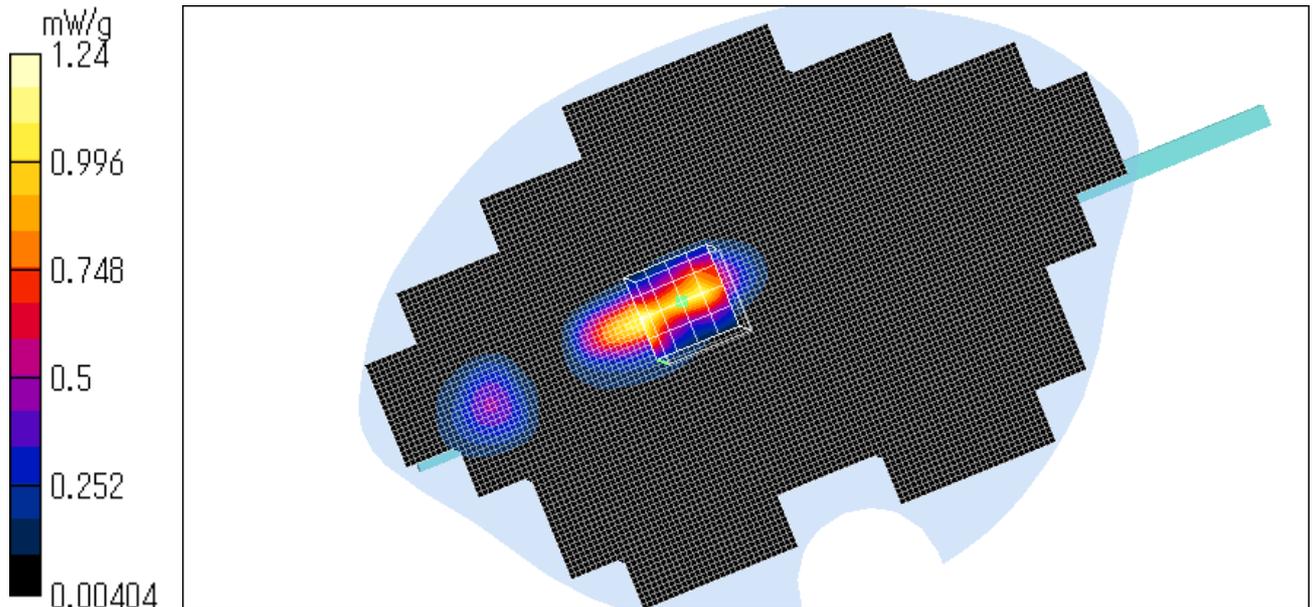

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

WLL-CA55 / Head / Top of antenna / QPSK / 2442MHz

Crest factor: 1
Medium: HSL2450 ($\sigma = 1.84$ mho/m, $\epsilon_r = 35.6$, $\rho = 1000$ kg/m³)
Phantom section: Flat Section

DASY4 Configuration:


- Probe: ET3DV6 - SN1684; ConvF(4.9, 4.9, 4.9); Calibrated: 2002/11/20
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Phantom: SAM 1196
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Area Scan (121x161x1): Measurement grid: dx=20mm, dy=20mm
Maximum value of SAR = 0.00707 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Peak SAR (extrapolated) = 0.0349 W/kg
SAR(1 g) = 0.00681 mW/g; SAR(10 g) = 0.00335 mW/g
Maximum value of SAR = 0.00687 mW/g

Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Peak SAR (extrapolated) = 0.0211 W/kg
SAR(1 g) = 0.00432 mW/g; SAR(10 g) = 0.00217 mW/g
Maximum value of SAR = 0.0047 mW/g

Test date = 10 / 21 / 03
Reference Value = 1.37 V/m
Power Drift = -0.4 dB
Ambient Temperature : 24.6 degree.c
Liquid Temperature : Before 23.4 degree.C , After 23.5 degree.C

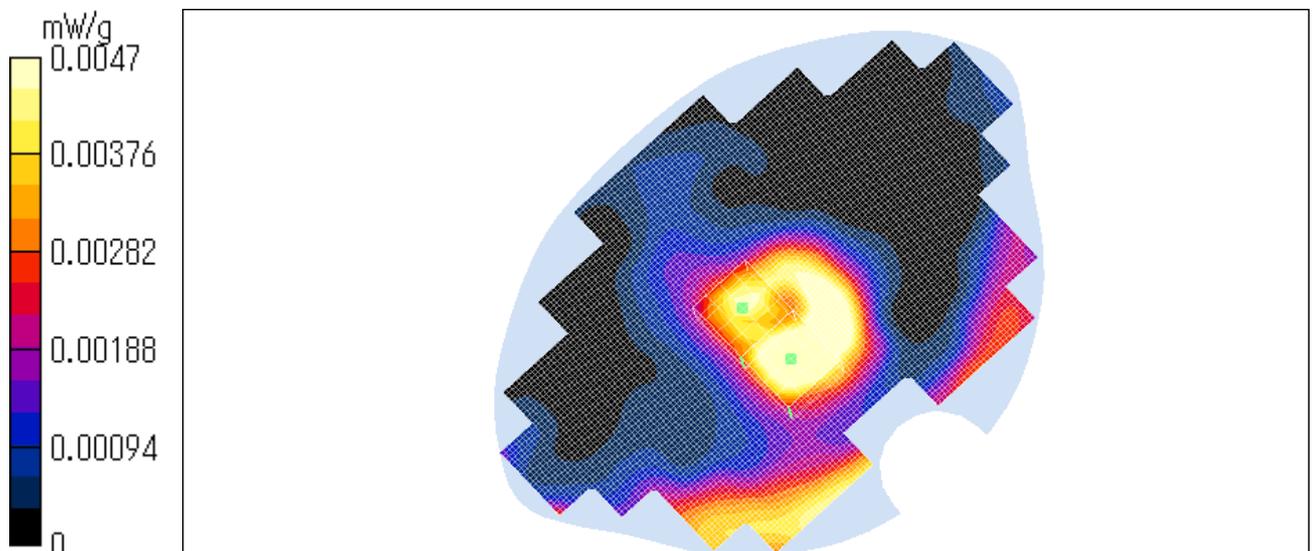

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

WLL-CA55 / Head / Side of antenna / QPSK / 2406MHz


Crest factor: 1
Medium: HSL2450 ($\sigma = 1.84$ mho/m, $\epsilon_r = 35.6$, $\rho = 1000$ kg/m³)
Phantom section: Flat Section

DASY4 Configuration:
- Probe: ET3DV6 - SN1684; ConvF(4.9, 4.9, 4.9); Calibrated: 2002/11/20
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Phantom: SAM 1196
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Area Scan (121x161x1): Measurement grid: dx=20mm, dy=20mm
Maximum value of SAR = 1.01 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Peak SAR (extrapolated) = 2.29 W/kg
SAR(1 g) = 1.02 mW/g; SAR(10 g) = 0.422 mW/g
Maximum value of SAR = 1.23 mW/g

Test date = 10 / 21 / 03
Reference Value = 8.92 V/m
Power Drift = -0.4 dB
Ambient Temperature : 24.6 degree.c
Liquid Temperature : Before 23.6 degree.C , After 23.6 degree.C

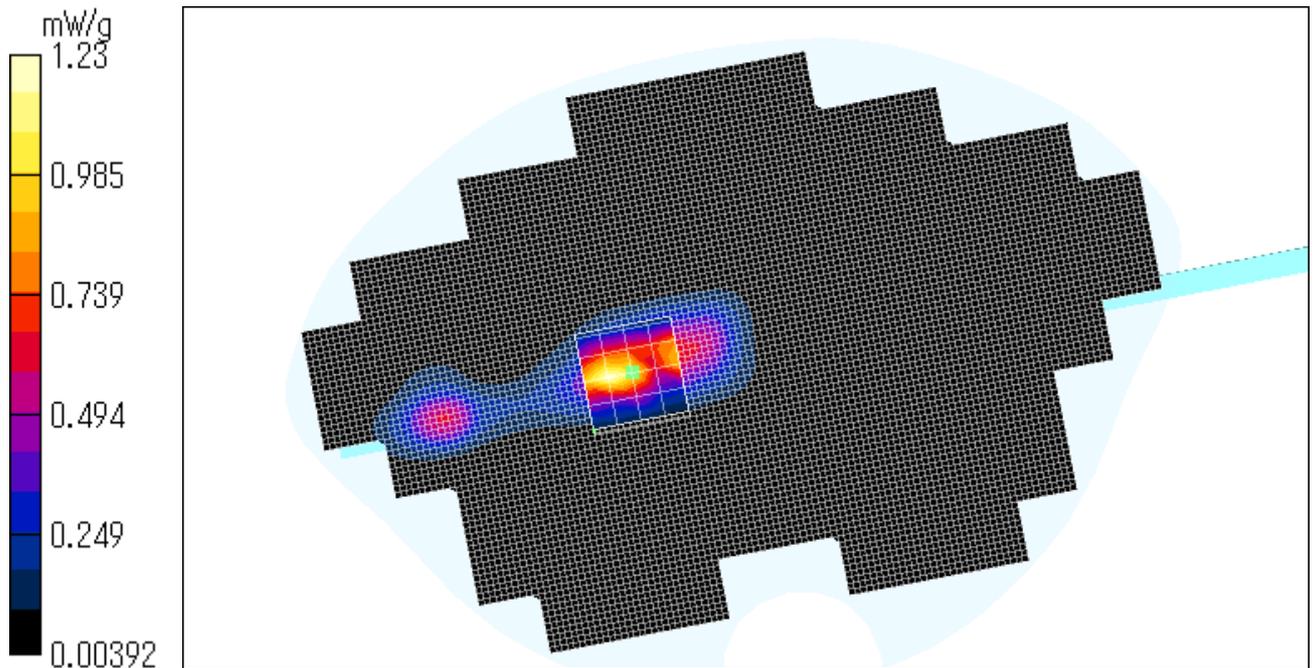

WLL-CA55 / Head / Side of antenna / QPSK / 2466MHz

Crest factor: 1
Medium: HSL2450 ($\sigma = 1.84$ mho/m, $\epsilon_r = 35.6$, $\rho = 1000$ kg/m³)
Phantom section: Flat Section

DASY4 Configuration:


- Probe: ET3DV6 - SN1684; ConvF(4.9, 4.9, 4.9); Calibrated: 2002/11/20
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Phantom: SAM 1196
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Area Scan (121x161x1): Measurement grid: dx=20mm, dy=20mm
Maximum value of SAR = 0.97 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Peak SAR (extrapolated) = 2.68 W/kg
SAR(1 g) = 1.18 mW/g; SAR(10 g) = 0.482 mW/g
Maximum value of SAR = 1.36 mW/g

Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Peak SAR (extrapolated) = 1.41 W/kg
SAR(1 g) = 0.632 mW/g; SAR(10 g) = 0.263 mW/g
Maximum value of SAR = 0.716 mW/g

Test date = 10 / 21 / 03
Reference Value = 3.61 V/m
Power Drift = 0.2 dB
Ambient Temperature : 24.6 degree.c
Liquid Temperature : Before 23.6 degree.C , After 23.7 degree.C

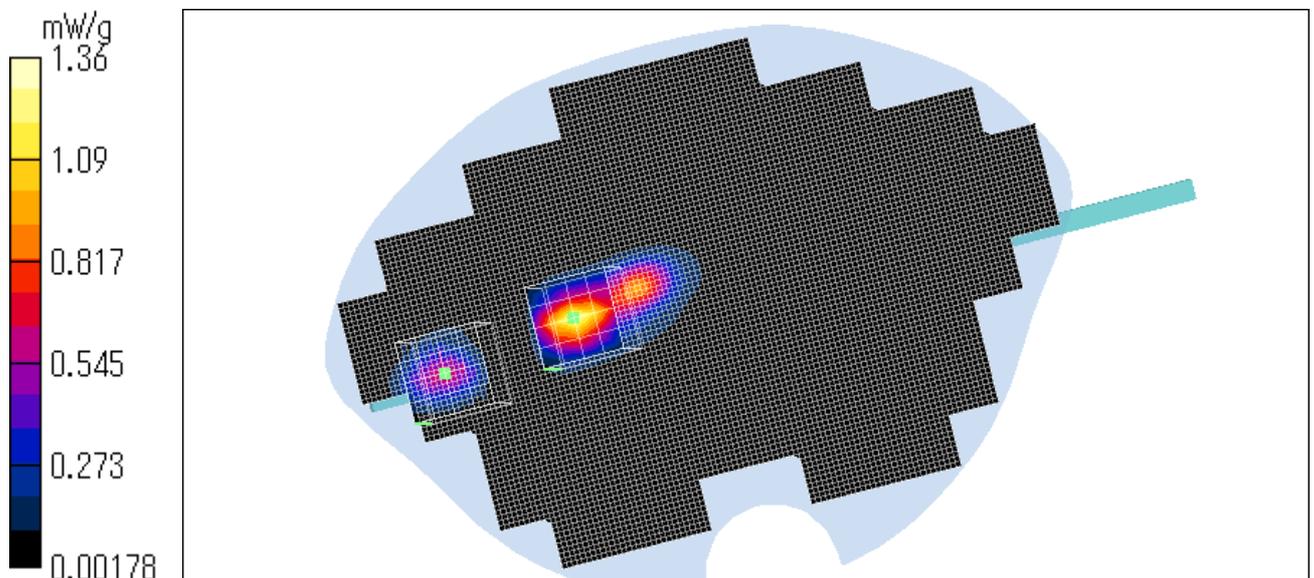

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

WLL-CA55 / Body / Side of antenna / 16QAM / 2442MHz

Crest factor: 1
Medium: M2450 ($\sigma = 2$ mho/m, $\epsilon_r = 50.6$, $\rho = 1000$ kg/m³)
Phantom section: Flat Section

DASY4 Configuration:


- Probe: ET3DV6 - SN1684; ConvF(4.4, 4.4, 4.4); Calibrated: 2002/11/20
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Phantom: SAM 1196
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Area Scan (121x161x1): Measurement grid: dx=20mm, dy=20mm
Maximum value of SAR = 0.81 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Peak SAR (extrapolated) = 2.65 W/kg
SAR(1 g) = 1.16 mW/g; SAR(10 g) = 0.415 mW/g
Maximum value of SAR = 1.34 mW/g

Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Peak SAR (extrapolated) = 1.89 W/kg
SAR(1 g) = 0.838 mW/g; SAR(10 g) = 0.347 mW/g
Maximum value of SAR = 0.886 mW/g

Test date = 10 / 22 / 03
Reference Value = 10.4 V/m
Power Drift = 0.2 dB
Ambient Temperature : 24.4 degree.c
Liquid Temperature : Before 22.6 degree.C , After 22.6 degree.C

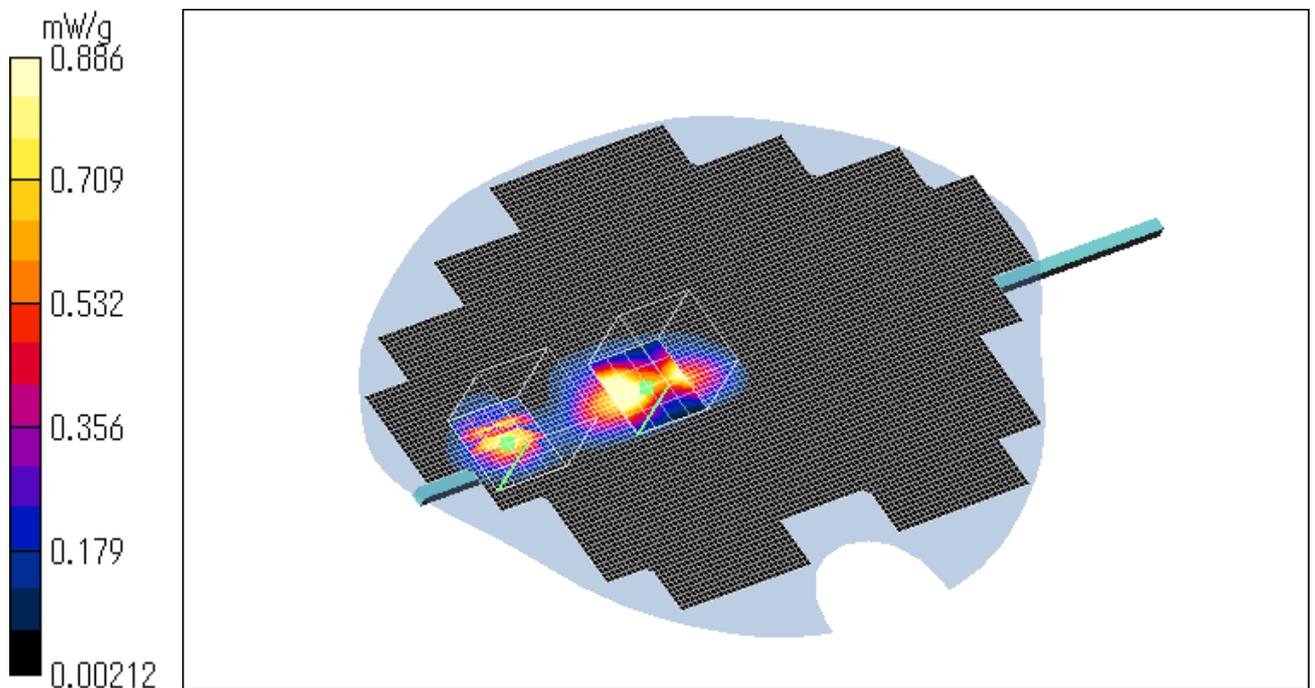

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

WLL-CA55 / Body / Top of antenna / 16QAM / 2442MHz

Crest factor: 1
Medium: M2450 ($\sigma = 2$ mho/m, $\epsilon_r = 50.6$, $\rho = 1000$ kg/m³)
Phantom section: Flat Section

DASY4 Configuration:
- Probe: ET3DV6 - SN1684; ConvF(4.4, 4.4, 4.4); Calibrated: 2002/11/20
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Phantom: SAM 1196
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115


Area Scan (121x161x1): Measurement grid: dx=20mm, dy=20mm
Maximum value of SAR = 0.00396 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Peak SAR (extrapolated) = 0.0102 W/kg
SAR(1 g) = 0.00423 mW/g; SAR(10 g) = 0.00227 mW/g
Maximum value of SAR = 0.00443 mW/g

Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Peak SAR (extrapolated) = 0.0141 W/kg
SAR(1 g) = 0.00371 mW/g; SAR(10 g) = 0.00201 mW/g
Maximum value of SAR = 0.00365 mW/g

Zoom Scan (5x5x7)/Cube 2: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Peak SAR (extrapolated) = 2.21 W/kg
SAR(1 g) = 0.00403 mW/g; SAR(10 g) = 0.0015 mW/g
Maximum value of SAR = 0.00321 mW/g

Test date = 10 / 22 / 03
Reference Value = 1.33 V/m
Power Drift = -0.3 dB
Ambient Temperature : 24.4 degree.c
Liquid Temperature : Before 22.6 degree.C , After 22.6 degree.C

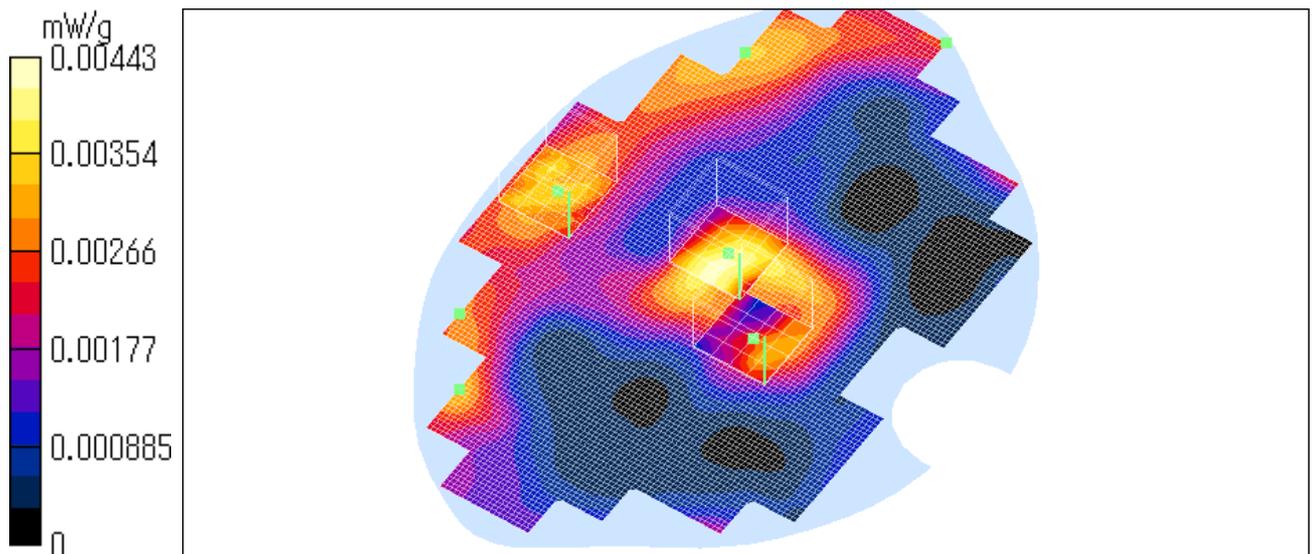

WLL-CA55 / Body / Side of antenna / 16QAM / 2406MHz


Crest factor: 1
Medium: M2450 ($\sigma = 2$ mho/m, $\epsilon_r = 50.6$, $\rho = 1000$ kg/m³)
Phantom section: Flat Section

DASY4 Configuration:
- Probe: ET3DV6 - SN1684; ConvF(4.4, 4.4, 4.4); Calibrated: 2002/11/20
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Phantom: SAM 1196
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Area Scan (121x161x1): Measurement grid: dx=20mm, dy=20mm
Reference Value = 1.17 V/m

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Peak SAR (extrapolated) = 2.56 W/kg
SAR(1 g) = 0.991 mW/g; SAR(10 g) = 0.385 mW/g
Maximum value of SAR = 1.13 mW/g

Test date = 10 / 22 / 03
Reference Value = 1.17 V/m
Power Drift = -0.09 dB
Ambient Temperature : 24.4 degree.c
Liquid Temperature : Before 23.0 degree.C , After 23.0 degree.C

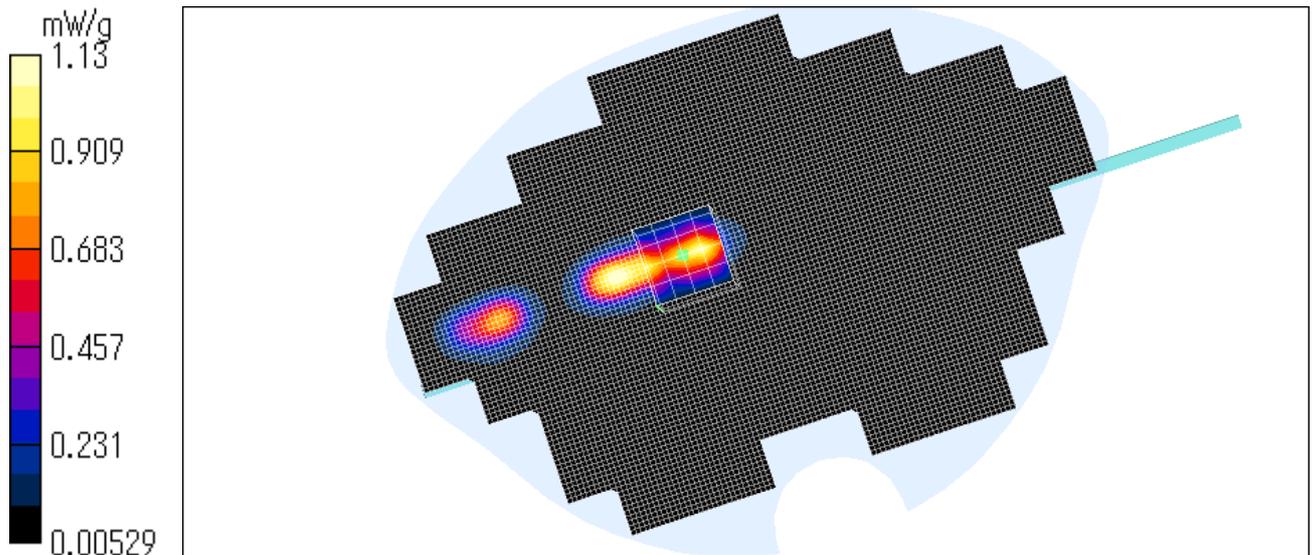

WLL-CA55 / Body / Side of antenna / 16QAM / 2466MHz

Crest factor: 1
Medium: M2450 ($\sigma = 2$ mho/m, $\epsilon_r = 50.6$, $\rho = 1000$ kg/m³)
Phantom section: Flat Section


DASY4 Configuration:
- Probe: ET3DV6 - SN1684; ConvF(4.4, 4.4, 4.4); Calibrated: 2002/11/20
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Phantom: SAM 1196
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Area Scan (121x161x1): Measurement grid: dx=20mm, dy=20mm
Maximum value of SAR = 1.2 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Peak SAR (extrapolated) = 2.53 W/kg
SAR(1 g) = 0.951 mW/g; SAR(10 g) = 0.342 mW/g
Maximum value of SAR = 1.04 mW/g

Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Peak SAR (extrapolated) = 2.46 W/kg
SAR(1 g) = 1.11 mW/g; SAR(10 g) = 0.463 mW/g
Maximum value of SAR = 1.25 mW/g

Test date = 10 / 22 / 03
Reference Value = 6.73 V/m
Power Drift = 0.02 dB
Ambient Temperature : 24.4 degree.c
Liquid Temperature : Before 22.6 degree.C , After 22.8 degree.C

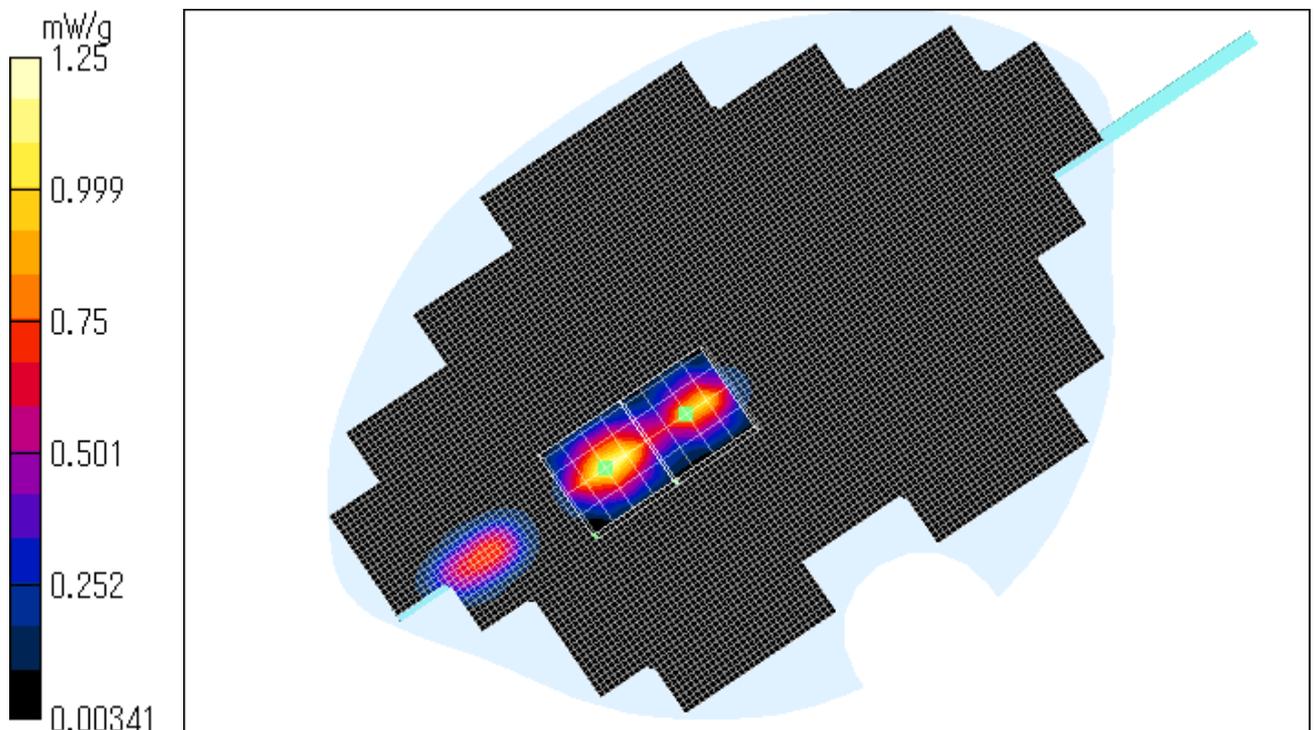

WLL-CA55 / Body / Side of antenna / QPSK / 2442MHz

Crest factor: 1
Medium: M2450 ($\sigma = 2$ mho/m, $\epsilon_r = 50.6$, $\rho = 1000$ kg/m³)
Phantom section: Flat Section

DASY4 Configuration:


- Probe: ET3DV6 - SN1684; ConvF(4.4, 4.4, 4.4); Calibrated: 2002/11/20
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Phantom: SAM 1196
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Area Scan (121x161x1): Measurement grid: dx=20mm, dy=20mm
Maximum value of SAR = 1.17 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Peak SAR (extrapolated) = 2.38 W/kg
SAR(1 g) = 0.935 mW/g; SAR(10 g) = 0.355 mW/g
Maximum value of SAR = 1.18 mW/g

Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Peak SAR (extrapolated) = 1.67 W/kg
SAR(1 g) = 0.753 mW/g; SAR(10 g) = 0.319 mW/g
Maximum value of SAR = 0.841 mW/g

Test date = 10 / 22 / 03
Reference Value = 1.91 V/m
Power Drift = 0.4 dB
Ambient Temperature : 24.4 degree.c
Liquid Temperature : Before 23.0 degree.C , After 23.0 degree.C

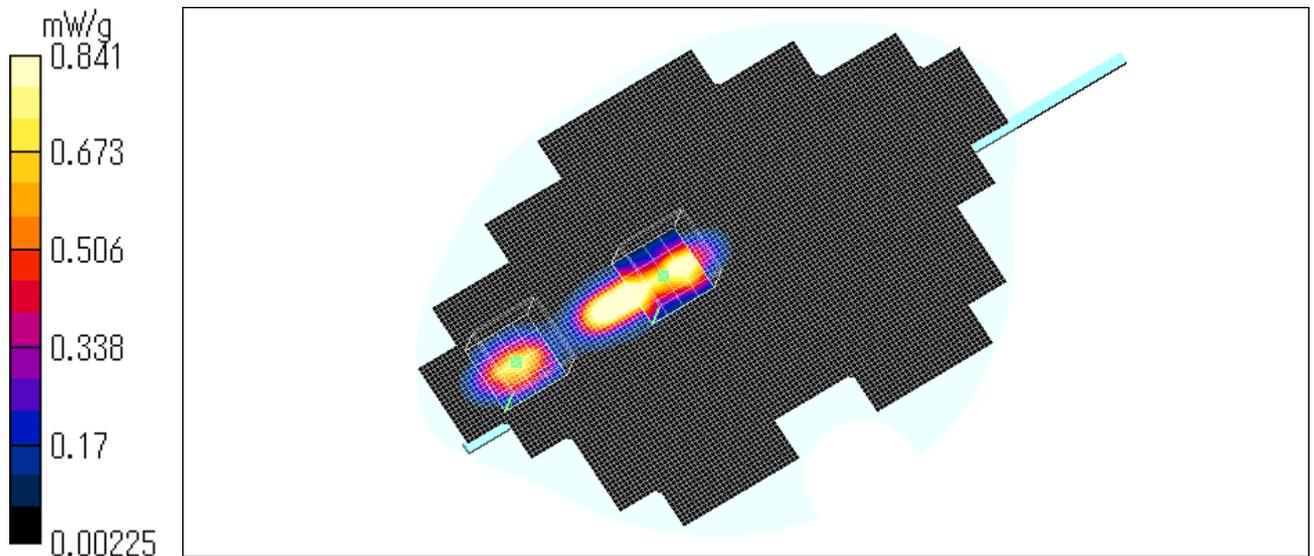

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

WLL-CA55 / Body / Top of antenna / QPSK / 2442MHz

Crest factor: 1
Medium: M2450 ($\sigma = 2$ mho/m, $\epsilon_r = 50.6$, $\rho = 1000$ kg/m³)
Phantom section: Flat Section

DASY4 Configuration:
- Probe: ET3DV6 - SN1684; ConvF(4.4, 4.4, 4.4); Calibrated: 2002/11/20
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Phantom: SAM 1196
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115


Area Scan (121x161x1): Measurement grid: dx=20mm, dy=20mm
Maximum value of SAR = 0.00415 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Peak SAR (extrapolated) = 0.0139 W/kg
SAR(1 g) = 0.0044 mW/g; SAR(10 g) = 0.00232 mW/g
Maximum value of SAR = 0.00476 mW/g

Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Peak SAR (extrapolated) = 0.0106 W/kg
SAR(1 g) = 0.00378 mW/g; SAR(10 g) = 0.00198 mW/g
Maximum value of SAR = 0.00437 mW/g

Zoom Scan (5x5x7)/Cube 2: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Peak SAR (extrapolated) = 0.015 W/kg
SAR(1 g) = 0.00353 mW/g; SAR(10 g) = 0.00165 mW/g
Maximum value of SAR = 0.0037 mW/g

Test date = 10 / 22 / 03
Reference Value = 1.23 V/m
Power Drift = 0.2 dB
Ambient Temperature : 24.4 degree.c
Liquid Temperature : Before 23.0 degree.C , After 23.0 degree.C

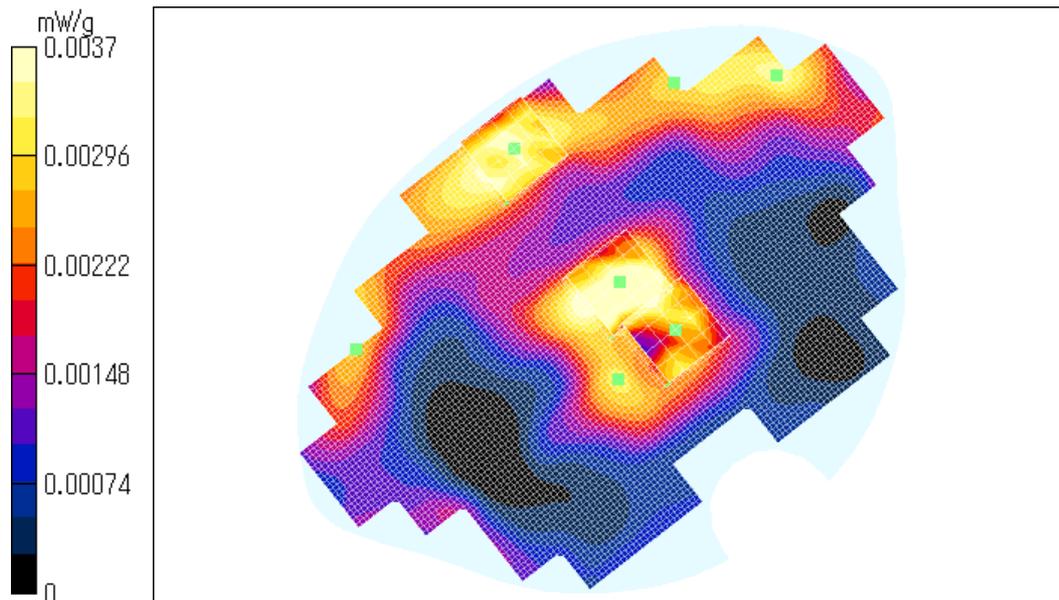

WLL-CA55 / Body / Top of antenna / QPSK / 2406MHz

Crest factor: 1
Medium: M2450 ($\sigma = 2$ mho/m, $\epsilon_r = 50.6$, $\rho = 1000$ kg/m³)
Phantom section: Flat Section

DASY4 Configuration:


- Probe: ET3DV6 - SN1684; ConvF(4.4, 4.4, 4.4); Calibrated: 2002/11/20
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Phantom: SAM 1196
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Area Scan (121x161x1): Measurement grid: dx=20mm, dy=20mm
Maximum value of SAR = 0.881 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Peak SAR (extrapolated) = 2.38 W/kg
SAR(1 g) = 0.982 mW/g; SAR(10 g) = 0.388 mW/g
Maximum value of SAR = 1.26 mW/g

Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Peak SAR (extrapolated) = 1.83 W/kg
SAR(1 g) = 0.828 mW/g; SAR(10 g) = 0.35 mW/g
Maximum value of SAR = 0.862 mW/g

Test date = 10 / 22 / 03
Reference Value = 4.85 V/m
Power Drift = 0.4 dB
Ambient Temperature : 24.4 degree.c
Liquid Temperature : Before 23.0 degree.C , After 23.0 degree.C

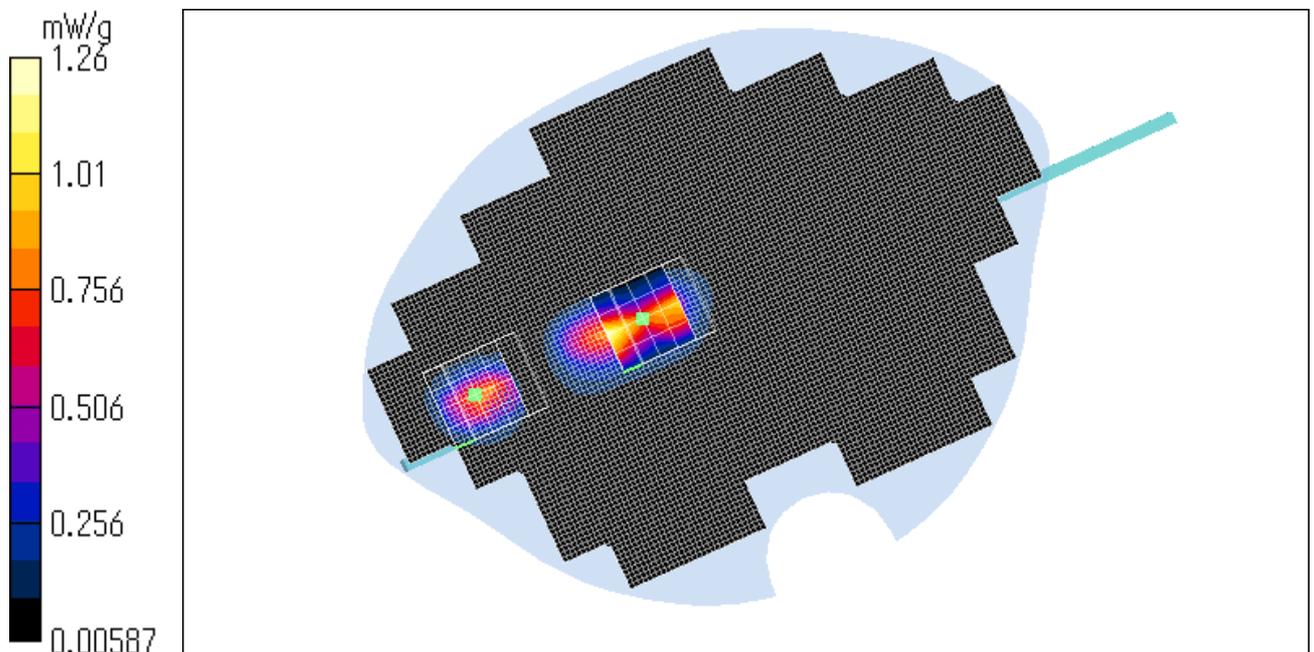

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

WLL-CA55 / Body / Top of antenna / QPSK / 2466MHz

Crest factor: 1
Medium: M2450 ($\sigma = 2$ mho/m, $\epsilon_r = 50.6$, $\rho = 1000$ kg/m³)
Phantom section: Flat Section


DASY4 Configuration:
- Probe: ET3DV6 - SN1684; ConvF(4.4, 4.4, 4.4); Calibrated: 2002/11/20
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Phantom: SAM 1196
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Area Scan (121x161x1): Measurement grid: dx=20mm, dy=20mm
Maximum value of SAR = 1.12 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Peak SAR (extrapolated) = 2.45 W/kg
SAR(1 g) = 1.11 mW/g; SAR(10 g) = 0.467 mW/g
Maximum value of SAR = 1.17 mW/g

Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Peak SAR (extrapolated) = 1.6 W/kg
SAR(1 g) = 0.706 mW/g; SAR(10 g) = 0.294 mW/g
Maximum value of SAR = 0.792 mW/g

Test date = 10 / 22 / 03
Reference Value = 2.21 V/m
Power Drift = 0.1 dB
Ambient Temperature : 24.4 degree.c
Liquid Temperature : Before 23.1 degree.C , After 23.1 degree.C

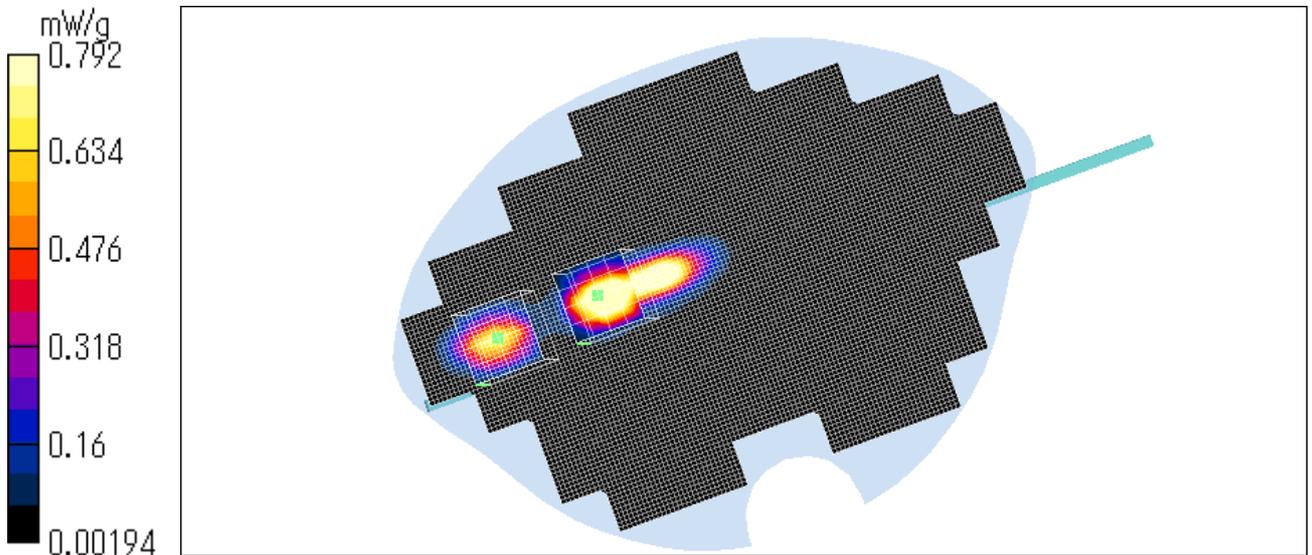

APPENDIX 3 : Validation Measurement data

System Validation / DUT: Dipole 2450 MHz / Forward Conducted Power : 250mW

Crest factor: 1

Medium: HSL2450 ($\sigma = 1.84$ mho/m, $\epsilon_r = 35.6$, $\rho = 1000$ kg/m³)

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1684; ConvF(4.9, 4.9, 4.9); Calibrated: 2002/11/20
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Phantom: SAM 1196
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Area Scan (51x51x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR = 16.4 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 27.2 W/kg

SAR(1 g) = 13.5 mW/g; SAR(10 g) = 6.19 mW/g

Maximum value of SAR = 15 mW/g


Test date = 10 / 21 / 03

Reference Value = 95.3 V/m

Power Drift = 0.05 dB

Ambient Temperature : 24.6 degree.c

Liquid Temperature : Before 23.4 degree.C , After 23.4degree.C

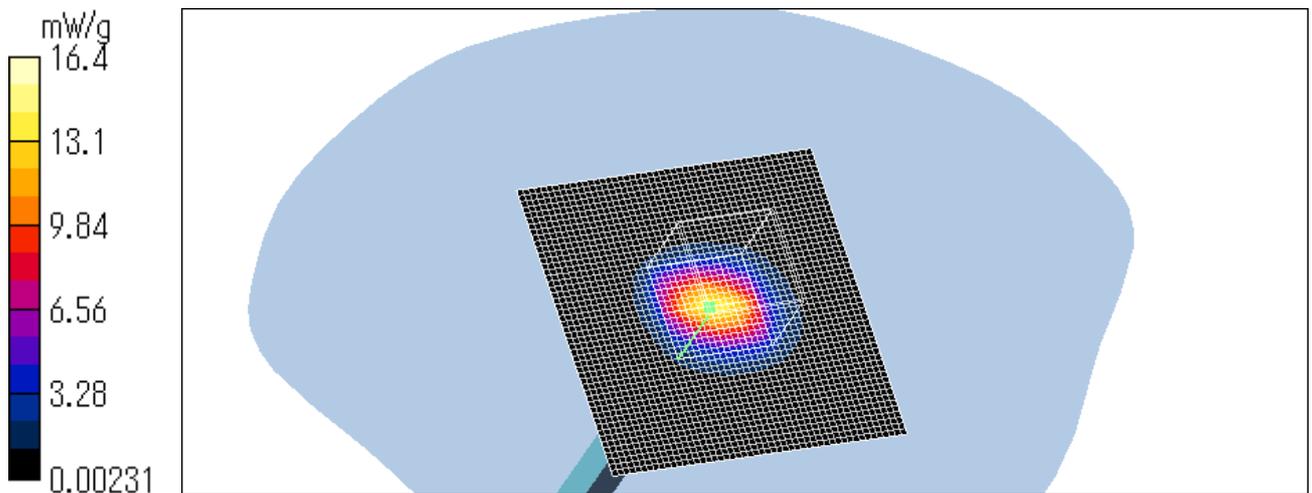

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

System Validation / DUT: Dipole 2450 MHz / Forward Conducted Power : 250mW

Crest factor: 1
Medium: HSL2450 ($\sigma = 1.83$ mho/m, $\epsilon_r = 35.7$, $\rho = 1000$ kg/m³)
Phantom section: Flat Section


DASY4 Configuration:

- Probe: ET3DV6 - SN1684; ConvF(4.9, 4.9, 4.9); Calibrated: 2002/11/20
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Phantom: SAM 1196
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Area Scan (51x51x1): Measurement grid: dx=20mm, dy=20mm
Maximum value of SAR = 16.3 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Peak SAR (extrapolated) = 27.1 W/kg
SAR(1 g) = 13.5 mW/g; SAR(10 g) = 6.2 mW/g
Maximum value of SAR = 15.1 mW/g

Test date = 10 / 22 / 03
Reference Value = 95.4 V/m
Power Drift = 0.0009 dB
Ambient Temperature : 24.4 degree.c
Liquid Temperature : Before 23.6 degree.C , After 23.6 degree.C

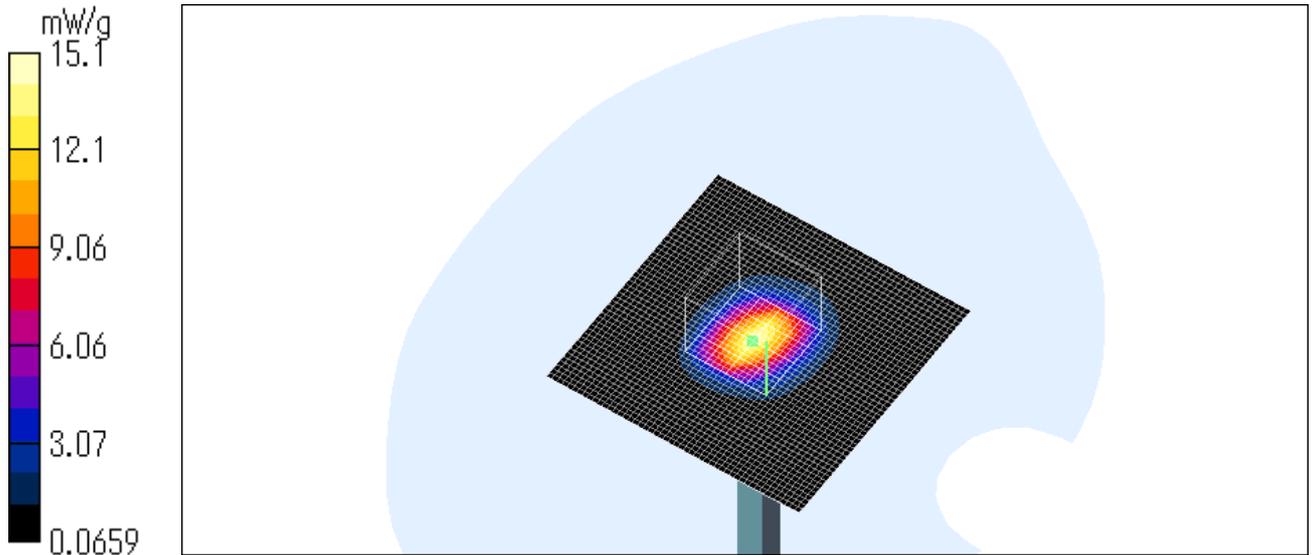

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

APPENDIX 4 : System Validation Dipole (D2450V2,S/N: 713)

Schmid & Partner Engineering AG

Zeughausstrasse 43, 8004 Zurich, Switzerland, Phone +41 1 245 97 00, Fax +41 1 245 97 79

Calibration Certificate

2450 MHz System Validation Dipole

Type:

D2450V2

Serial Number:

713

Place of Calibration:

Zurich

Date of Calibration:

November 15, 2002

Calibration Interval:

24 months

Schmid & Partner Engineering AG hereby certifies, that this device has been calibrated on the date indicated above. The calibration was performed in accordance with specifications and procedures of Schmid & Partner Engineering AG.

Wherever applicable, the standards used in the calibration process are traceable to international standards. In all other cases the standards of the Laboratory for EMF and Microwave Electronics at the Swiss Federal Institute of Technology (ETH) in Zurich, Switzerland have been applied.

Calibrated by:

D. Vetterli

Approved by:

Poloni Kofe

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

**Schmid & Partner
Engineering AG**

Zeughausstrasse 43, 8004 Zurich, Switzerland, Phone +41 1 245 97 00, Fax +41 1 245 97 79

DASY

Dipole Validation Kit

Type: D2450V2

Serial: 713

Manufactured: July 5, 2002
Calibrated: November 15, 2002

1. Measurement Conditions

The measurements were performed in the flat section of the SAM twin phantom filled with head simulating solution of the following electrical parameters at 2450 MHz:

Relative permittivity	38.0	± 5%
Conductivity	1.87 mho/m	± 10%

The DASY4 System with a dosimetric E-field probe ET3DV6 (SN:1507, conversion factor 5.0 at 2450 MHz) was used for the measurements.

The dipole feedpoint was positioned below the center marking and oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 10mm from dipole center to the solution surface. The included distance holder was used during measurements for accurate distance positioning.

The coarse grid with a grid spacing of 15mm was aligned with the dipole. The 7x7x7 fine cube was chosen for cube integration.

The dipole input power (forward power) was 250mW ± 3 %. The results are normalized to 1W input power.

2. SAR Measurement with DASY4 System

Standard SAR-measurements were performed according to the measurement conditions described in section 1. The results (see figure supplied) have been normalized to a dipole input power of 1W (forward power). The resulting averaged SAR-values measured with the dosimetric probe ET3DV6 SN:1507 and applying the advanced extrapolation are:

averaged over 1 cm ³ (1 g) of tissue:	54.4 mW/g
averaged over 10 cm ³ (10 g) of tissue:	24.2 mW/g

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

3. Dipole impedance and return loss

The impedance was measured at the SMA-connector with a network analyzer and numerically transformed to the dipole feedpoint. The transformation parameters from the SMA-connector to the dipole feedpoint are:

Electrical delay: **1.158 ns** (one direction)
Transmission factor: **0.997** (voltage transmission, one direction)

The dipole was positioned at the flat phantom sections according to section 1 and the distance holder was in place during impedance measurements.

Feedpoint impedance at 2450 MHz: $\text{Re}\{Z\} = \mathbf{51.3 \Omega}$

$\text{Im}\{Z\} = \mathbf{2.4 \Omega}$

Return Loss at 2450 MHz **- 31.4 dB**

4. Measurement Conditions

The measurements were performed in the flat section of the SAM twin phantom filled with body simulating solution of the following electrical parameters at 2450 MHz:

Relative permittivity **51.2** $\pm 5\%$
Conductivity **1.96 mho/m** $\pm 10\%$

The DASY4 System with a dosimetric E-field probe ET3DV6 (SN:1507, conversion factor 4.5 at 2450 MHz) was used for the measurements.

The dipole feedpoint was positioned below the center marking and oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 10mm from dipole center to the solution surface. The included distance holder was used during measurements for accurate distance positioning.

The coarse grid with a grid spacing of 15mm was aligned with the dipole. The 7x7x7 fine cube was chosen for cube integration.

The dipole input power (forward power) was 250mW $\pm 3\%$. The results are normalized to 1W input power.

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

Date/Time: 11/13/02 21:52:22

Test Laboratory: SPEAG, Zurich, Switzerland
File Name: SN713_SN1507_HSL2450_131102.da4


DUT: Dipole 2450 MHz Type & Serial Number: D2450V2 - SN713
Program: Dipole Calibration; Pin = 250 mW; d = 10 mm

Communication System: CW-2450; Frequency: 2450 MHz; Duty Cycle: 1:1
Medium: HSL 2450 MHz ($\sigma = 1.87$ mho/m, $\epsilon = 38.03$, $\rho = 1000$ kg/m³)
Phantom section: FlatSection

DASY4 Configuration:

- Probe: ET3DV6 - SN1507; ConvF(5, 5, 5); Calibrated: 1/24/2002
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 - SN410; Calibrated: 7/18/2002
- Phantom: SAM 4.0 - TP:1006
- Software: DASY4, V4.0 Build 35

Area Scan (81x81x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm
Reference Value = 94.4 V/m
Peak SAR = 29.6 mW/g
SAR(1 g) = 13.6 mW/g; SAR(10 g) = 6.04 mW/g
Power Drift = 0.01 dB

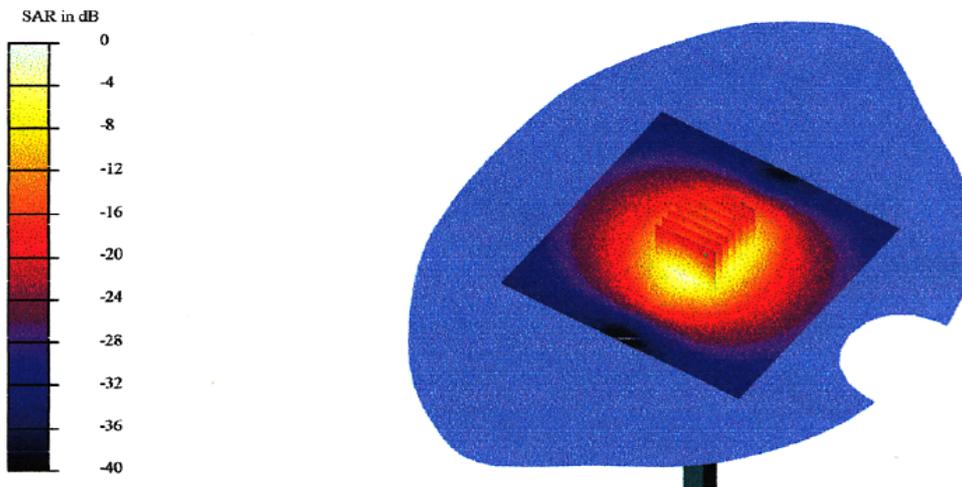

UL Apex Co., Ltd.



Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

13 Nov 2002 20:32:38
CH1 S11 1 U FS 1: 51.254 ϕ 2.4414 ϕ 158.60 pH 2 450.000 000 MHz

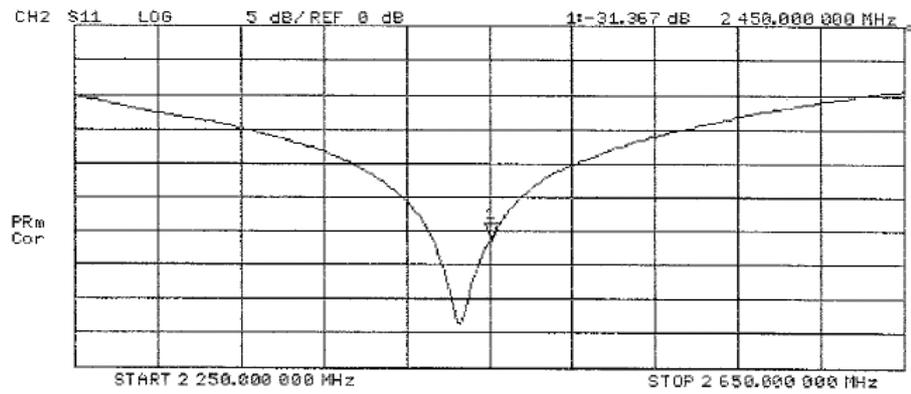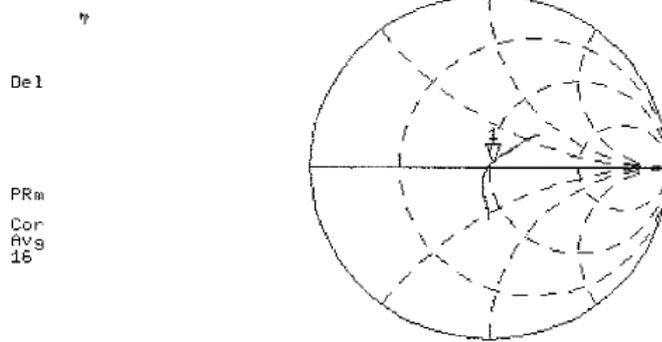

Date/Time: 11/15/02 14:25:17

Test Laboratory: SPEAG, Zurich, Switzerland
File Name: SN713_SN1507_M2450_141102.da4


DUT: Dipole 2450 MHz Type & Serial Number: D2450V2 - SN713
Program: Dipole Calibration; Pin = 250 mW; d = 10 mm

Communication System: CW-2450; Frequency: 2450 MHz; Duty Cycle: 1:1
Medium: Muscle 2450 MHz ($\sigma = 1.96$ mho/m, $\epsilon = 51.15$, $\rho = 1000$ kg/m³)
Phantom section: FlatSection

DASY4 Configuration:

- Probe: ET3DV6 - SN1507; ConvF(4.5, 4.5, 4.5); Calibrated: 1/24/2002
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 - SN410; Calibrated: 7/18/2002
- Phantom: SAM 4.0 - TP:1006
- Software: DASY4, V4.0 Build 35

Area Scan (81x81x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm
Reference Value = 95.2 V/m
Peak SAR = 25 mW/g
SAR(1 g) = 12.9 mW/g; SAR(10 g) = 5.99 mW/g
Power Drift = 0.02 dB

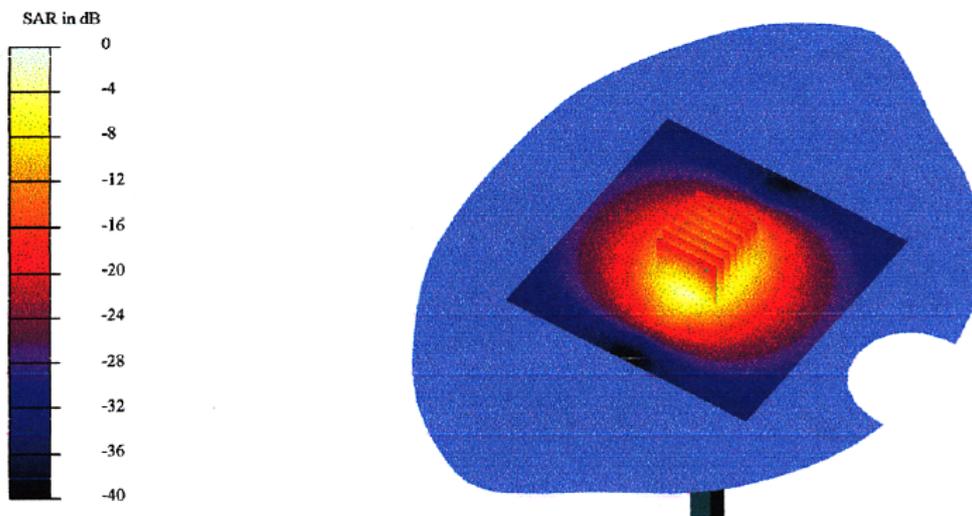


UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

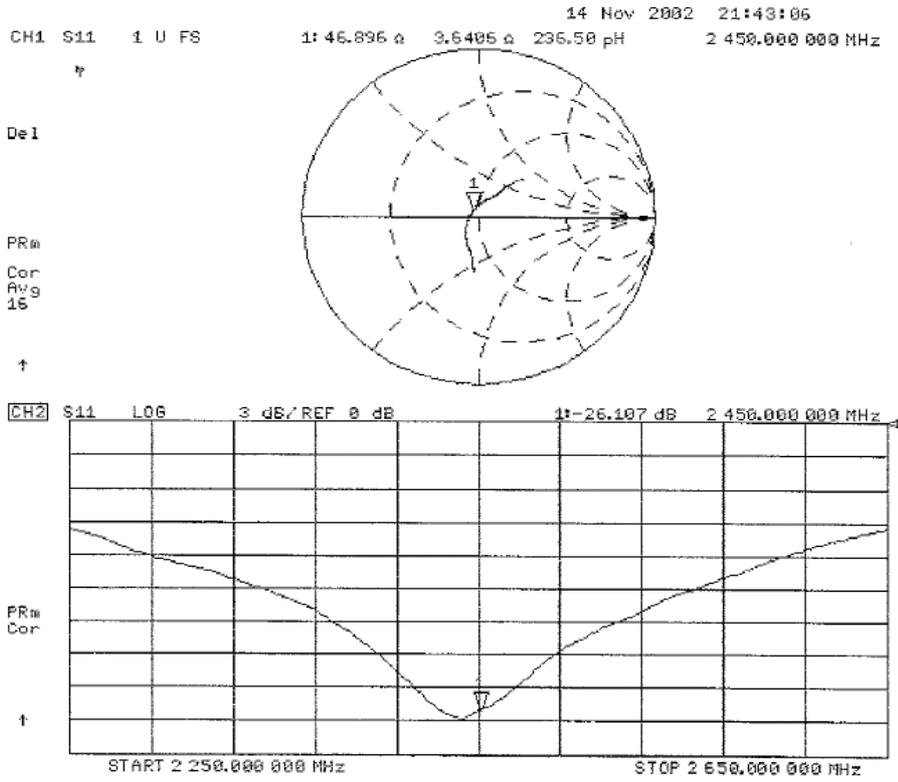

APPENDIX 5 : Dosimetric E-Field Probe Calibration (ET3DV6,S/N: 1684)

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

Schmid & Partner Engineering AG

Zeughausstrasse 43, 8004 Zurich, Switzerland, Phone +41 1 245 97 00, Fax +41 1 245 97 79

IMPORTANT NOTICE

USAGE OF PROBES IN ORGANIC SOLVENTS

Diethylene Glycol Monobuthy Ether (the basis for HSL1800 and M1800 liquids), as many other organic solvents, is a very effective softener for synthetic materials. These solvents can cause irreparable damage to certain SPEAG products, except those which are explicitly declared as compliant with organic solvents.

Compatible Probes:

- ET3DV6
- ET3DV6R
- ES3DV2
- ER3DV6
- H3DV6

Important Note for ET3DV6 Probes:

The ET3DV6 probes shall not be exposed to solvents longer than necessary for the measurements and shall be cleaned daily after use with warm water and stored dry.

Schmid & Partner Engineering AG

Zeughausstrasse 43, CH-8004 Zurich
Tel. +41 1 245 97 00, Fax +41 1 245 97 79

Schmid & Partner Engineering AG

Schmid & Partner Engineering AG

Zeughausstrasse 43, 8004 Zurich, Switzerland, Phone +41 1 245 97 00, Fax +41 1 245 97 79

Calibration Certificate

Dosimetric E-Field Probe

Type:

ET3DV6

Serial Number:

1684

Place of Calibration:

Zurich

Date of Calibration:

November 20, 2002

Calibration Interval:

12 months

Schmid & Partner Engineering AG hereby certifies, that this device has been calibrated on the date indicated above. The calibration was performed in accordance with specifications and procedures of Schmid & Partner Engineering AG.

Wherever applicable, the standards used in the calibration process are traceable to international standards. In all other cases the standards of the Laboratory for EMF and Microwave Electronics at the Swiss Federal Institute of Technology (ETH) in Zurich, Switzerland have been applied.

Calibrated by:

D. Vetter

Approved by:

Thomas Vetter

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

**Schmid & Partner
Engineering AG**

Zeughausstrasse 43, 8004 Zurich, Switzerland, Telephone +41 1 245 97 00, Fax +41 1 245 97 79

Probe ET3DV6

SN:1684

Manufactured: April 3, 2002
Last calibration: May 10, 2002
Recalibrated: November 20, 2002

Calibrated for DASY Systems

(Note: non-compatible with DASY2 system!)

ET3DV6 SN:1684

November 20, 2002

DASY - Parameters of Probe: ET3DV6 SN:1684

Sensitivity in Free Space

NormX	1.55 $\mu\text{V}/(\text{V}/\text{m})^2$
NormY	1.54 $\mu\text{V}/(\text{V}/\text{m})^2$
NormZ	1.58 $\mu\text{V}/(\text{V}/\text{m})^2$

Diode Compression

DCP X	96	mV
DCP Y	96	mV
DCP Z	96	mV

Sensitivity in Tissue Simulating Liquid

Head	900 MHz	$\epsilon_r = 41.5 \pm 5\%$	$\sigma = 0.97 \pm 5\%$ mho/m
Head	835 MHz	$\epsilon_r = 41.5 \pm 5\%$	$\sigma = 0.90 \pm 5\%$ mho/m
ConvF X	6.8 $\pm 9.5\%$ (k=2)		Boundary effect:
ConvF Y	6.8 $\pm 9.5\%$ (k=2)		Alpha 0.31
ConvF Z	6.8 $\pm 9.5\%$ (k=2)		Depth 2.51
Head	1800 MHz	$\epsilon_r = 40.0 \pm 5\%$	$\sigma = 1.40 \pm 5\%$ mho/m
Head	1900 MHz	$\epsilon_r = 40.0 \pm 5\%$	$\sigma = 1.40 \pm 5\%$ mho/m
ConvF X	5.5 $\pm 9.5\%$ (k=2)		Boundary effect:
ConvF Y	5.5 $\pm 9.5\%$ (k=2)		Alpha 0.40
ConvF Z	5.5 $\pm 9.5\%$ (k=2)		Depth 2.61

Boundary Effect

Head	900 MHz	Typical SAR gradient: 5 % per mm	
	Probe Tip to Boundary	1 mm	2 mm
	SAR _{be} [%] Without Correction Algorithm	7.8	4.5
	SAR _{be} [%] With Correction Algorithm	0.2	0.4
Head	1800 MHz	Typical SAR gradient: 10 % per mm	
	Probe Tip to Boundary	1 mm	2 mm
	SAR _{be} [%] Without Correction Algorithm	10.6	7.4
	SAR _{be} [%] With Correction Algorithm	0.2	0.2


Sensor Offset

Probe Tip to Sensor Center	2.7	mm
Optical Surface Detection	1.5 \pm 0.2	mm

ET3DV6 SN:1684

November 20, 2002

Receiving Pattern (ϕ), $\theta = 0^\circ$

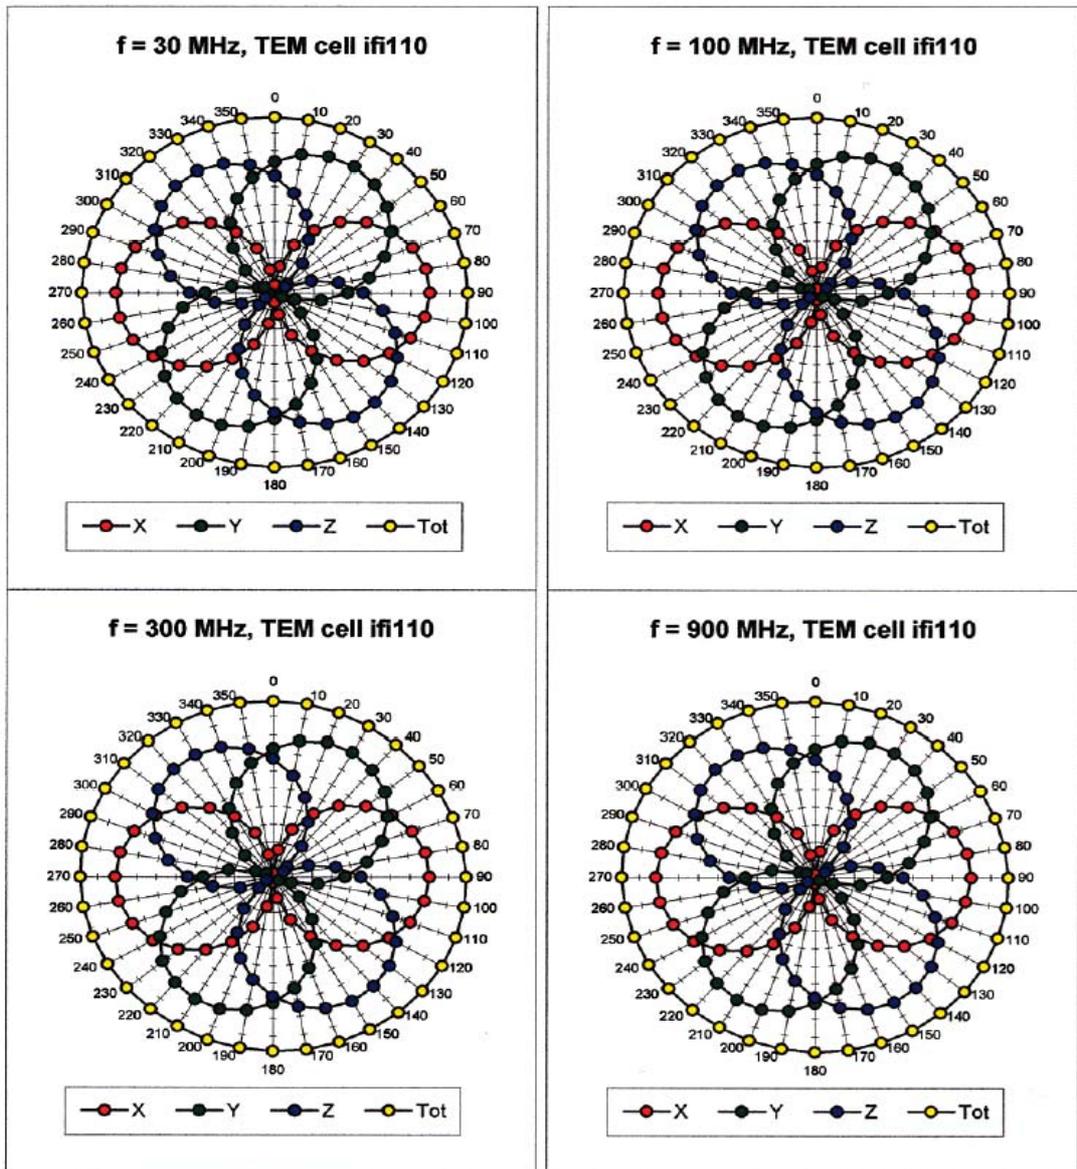

UL Apex Co., Ltd.

Head Office EMC Lab.



4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116


Facsimile: +81 596 24 8124

ET3DV6 SN:1684

November 20, 2002

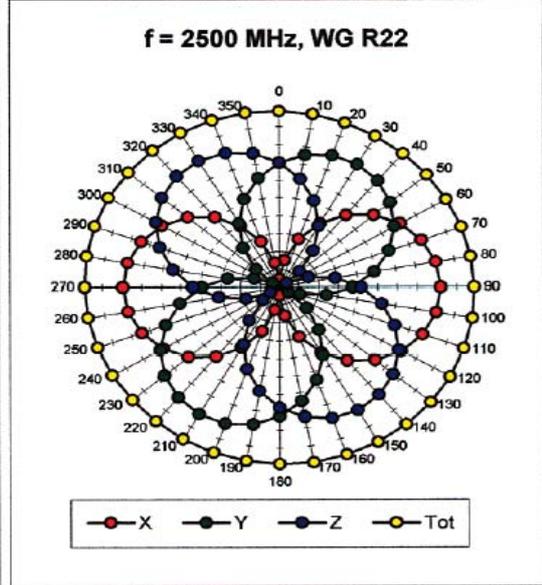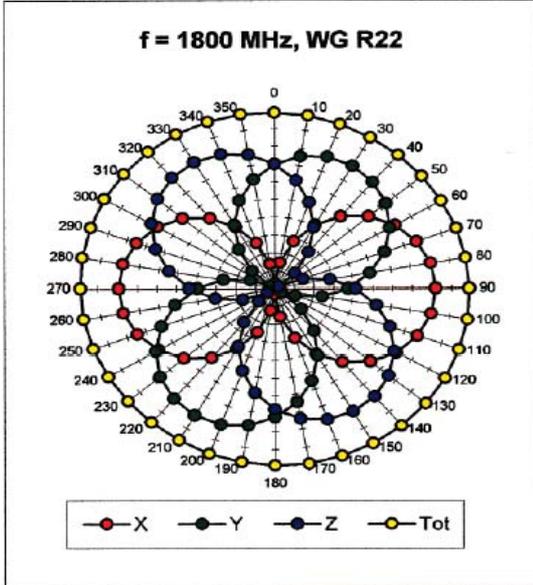

Isotropy Error (ϕ), $\theta = 0^\circ$

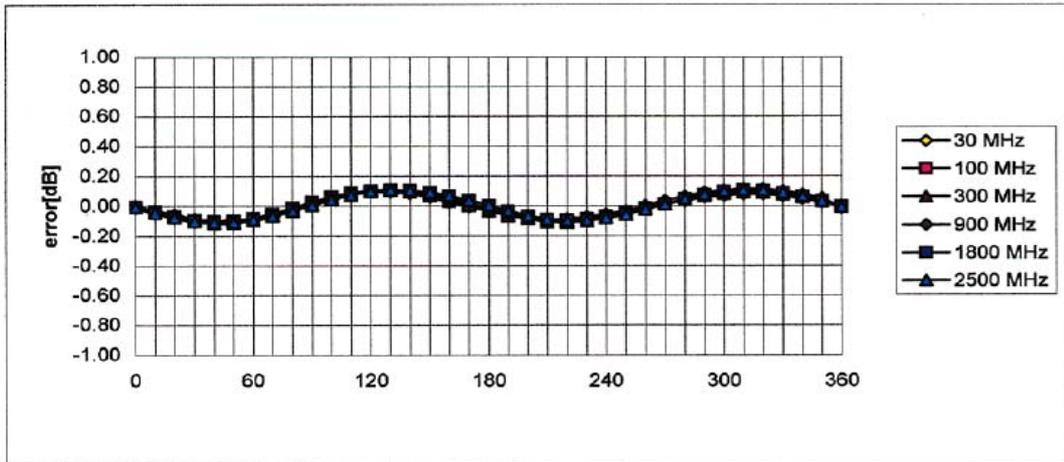


ET3DV6 SN:1684

November 20, 2002

Frequency Response of E-Field



(TEM-Cell:ifi110, Waveguide R22)

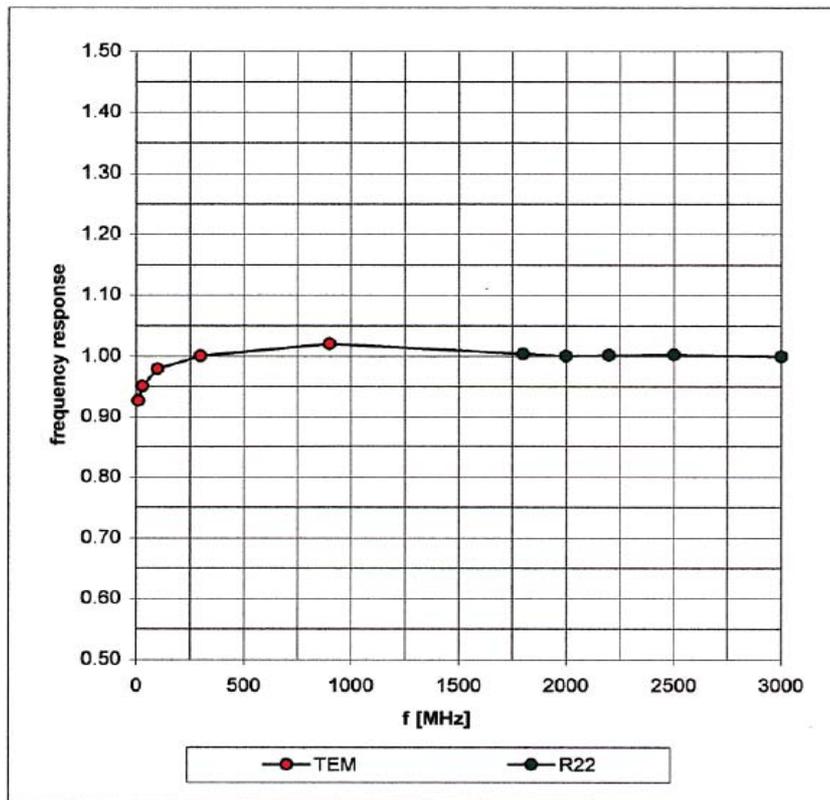

ET3DV6 SN:1684

November 20, 2002


Dynamic Range $f(\text{SAR}_{\text{brain}})$ (Waveguide R22)

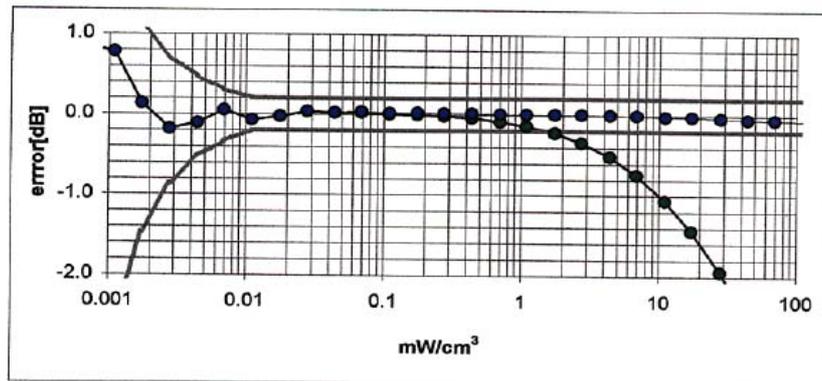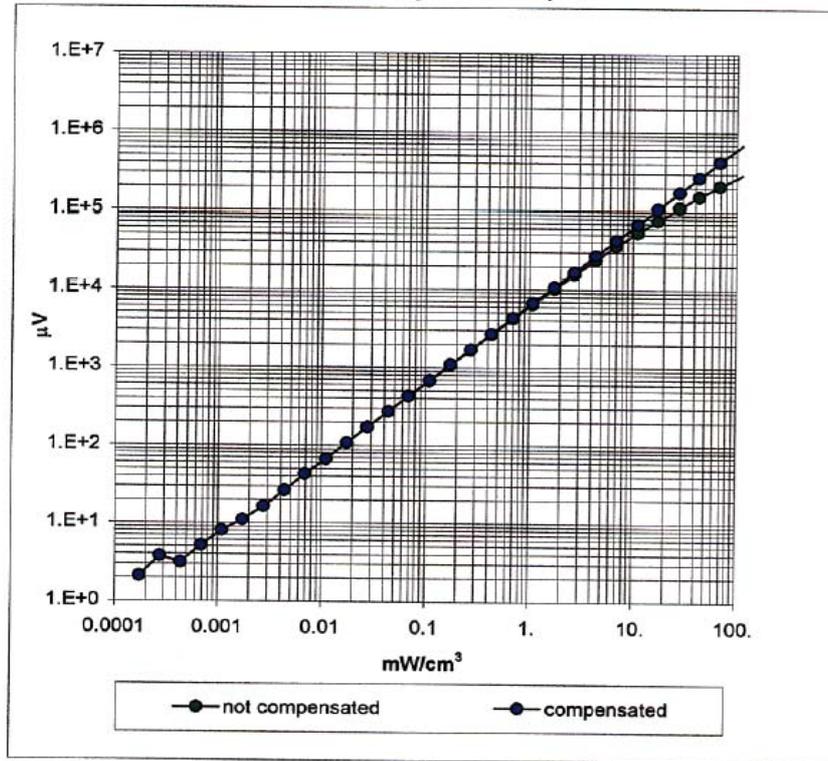

ET3DV6 SN:1684

November 20, 2002

Conversion Factor Assessment

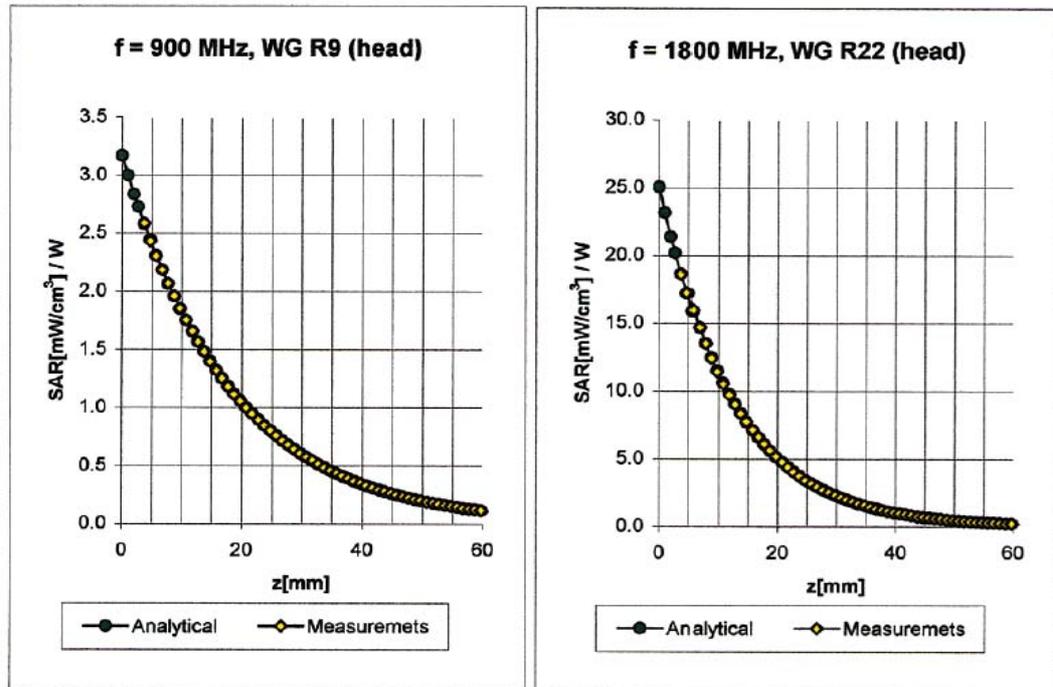

Head	900 MHz	$\epsilon_r = 41.5 \pm 5\%$	$\sigma = 0.97 \pm 5\% \text{ mho/m}$
Head	835 MHz	$\epsilon_r = 41.5 \pm 5\%$	$\sigma = 0.90 \pm 5\% \text{ mho/m}$
	ConvF X	6.8 $\pm 9.5\%$ (k=2)	Boundary effect:
	ConvF Y	6.8 $\pm 9.5\%$ (k=2)	Alpha 0.31
	ConvF Z	6.8 $\pm 9.5\%$ (k=2)	Depth 2.51
Head	1800 MHz	$\epsilon_r = 40.0 \pm 5\%$	$\sigma = 1.40 \pm 5\% \text{ mho/m}$
Head	1900 MHz	$\epsilon_r = 40.0 \pm 5\%$	$\sigma = 1.40 \pm 5\% \text{ mho/m}$
	ConvF X	5.5 $\pm 9.5\%$ (k=2)	Boundary effect:
	ConvF Y	5.5 $\pm 9.5\%$ (k=2)	Alpha 0.40
	ConvF Z	5.5 $\pm 9.5\%$ (k=2)	Depth 2.61

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN


Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

ET3DV6 SN:1684

November 20, 2002

Conversion Factor Assessment

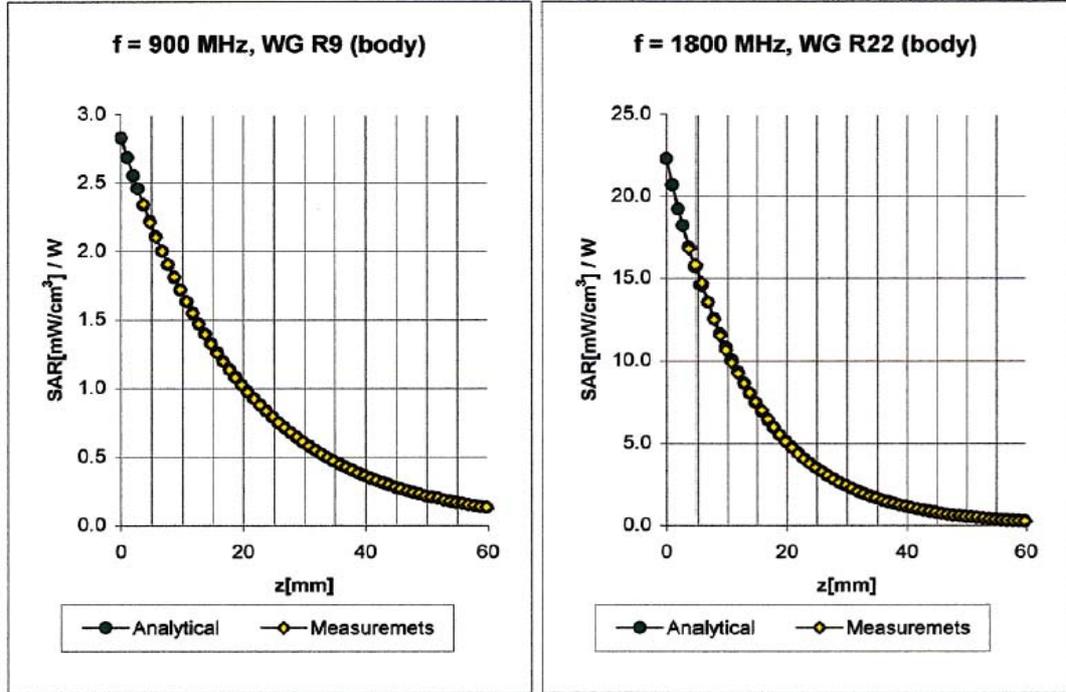


Body	900 MHz	$\epsilon_r = 55.0 \pm 5\%$	$\sigma = 1.05 \pm 5\%$ mho/m
Body	835 MHz	$\epsilon_r = 55.2 \pm 5\%$	$\sigma = 0.97 \pm 5\%$ mho/m
	ConvF X	6.5 $\pm 9.5\%$ (k=2)	Boundary effect:
	ConvF Y	6.5 $\pm 9.5\%$ (k=2)	Alpha 0.26
	ConvF Z	6.5 $\pm 9.5\%$ (k=2)	Depth 3.22
Body	1800 MHz	$\epsilon_r = 53.3 \pm 5\%$	$\sigma = 1.52 \pm 5\%$ mho/m
Body	1900 MHz	$\epsilon_r = 53.3 \pm 5\%$	$\sigma = 1.52 \pm 5\%$ mho/m
	ConvF X	5.1 $\pm 9.5\%$ (k=2)	Boundary effect:
	ConvF Y	5.1 $\pm 9.5\%$ (k=2)	Alpha 0.50
	ConvF Z	5.1 $\pm 9.5\%$ (k=2)	Depth 2.57

ET3DV6 SN:1684

November 20, 2002

Conversion Factor Assessment

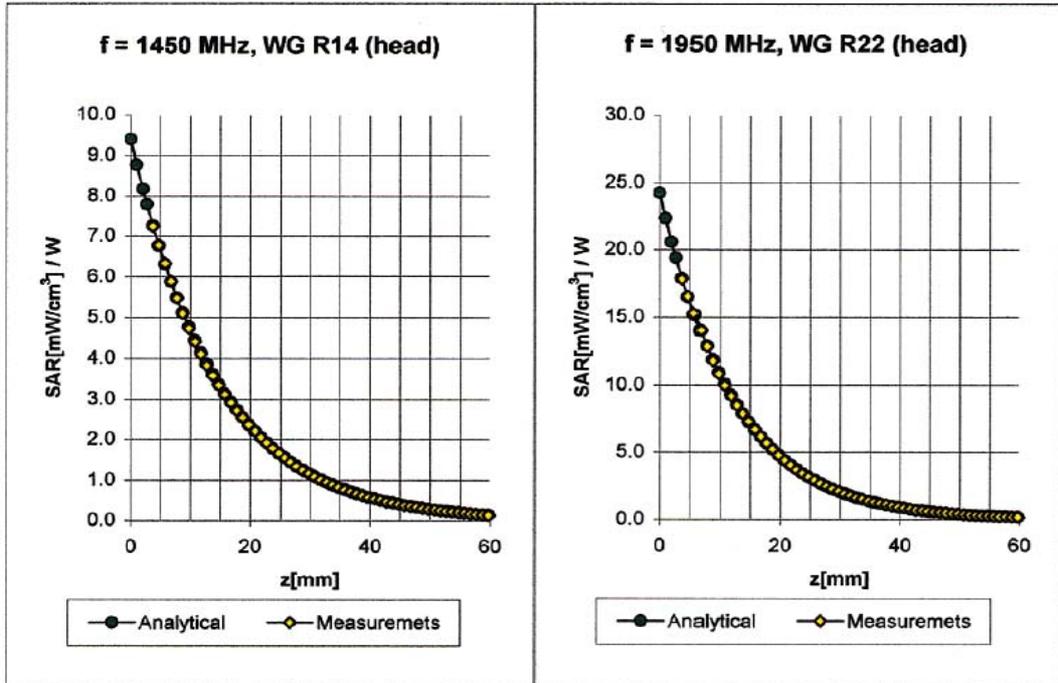


Head	1450 MHz	$\epsilon_r = 40.5 \pm 5\%$	$\sigma = 1.20 \pm 5\% \text{ mho/m}$
	ConvF X	6.1 $\pm 8.9\%$ (k=2)	Boundary effect:
	ConvF Y	6.1 $\pm 8.9\%$ (k=2)	Alpha 0.49
	ConvF Z	6.1 $\pm 8.9\%$ (k=2)	Depth 2.34
Head	1950 MHz	$\epsilon_r = 40.0 \pm 5\%$	$\sigma = 1.40 \pm 5\% \text{ mho/m}$
	ConvF X	5.2 $\pm 8.9\%$ (k=2)	Boundary effect:
	ConvF Y	5.2 $\pm 8.9\%$ (k=2)	Alpha 0.47
	ConvF Z	5.2 $\pm 8.9\%$ (k=2)	Depth 2.68

ET3DV6 SN:1684

November 20, 2002

Conversion Factor Assessment

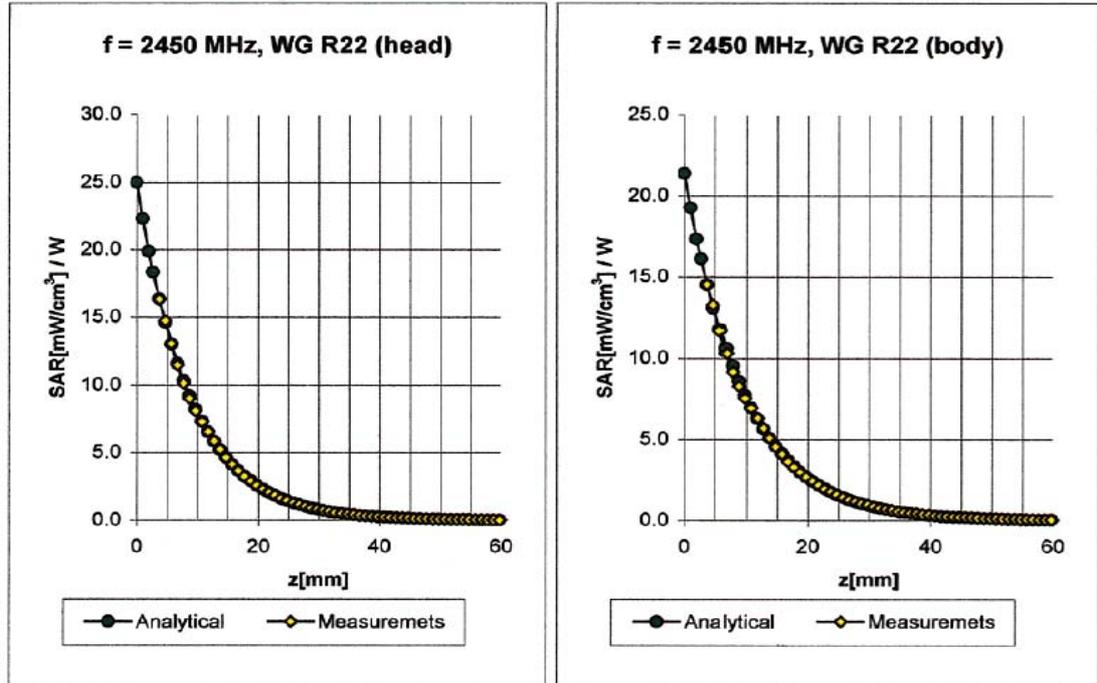


2450	Head	MHz	$\epsilon_r = 39.2 \pm 5\%$	$\sigma = 1.80 \pm 5\% \text{ mho/m}$
	ConvF X		4.9 $\pm 8.9\%$ (k=2)	Boundary effect:
	ConvF Y		4.9 $\pm 8.9\%$ (k=2)	Alpha 1.00
	ConvF Z		4.9 $\pm 8.9\%$ (k=2)	Depth 1.66
2450	Body	MHz	$\epsilon_r = 52.7 \pm 5\%$	$\sigma = 1.95 \pm 5\% \text{ mho/m}$
	ConvF X		4.4 $\pm 8.9\%$ (k=2)	Boundary effect:
	ConvF Y		4.4 $\pm 8.9\%$ (k=2)	Alpha 1.00
	ConvF Z		4.4 $\pm 8.9\%$ (k=2)	Depth 1.72

ET3DV6 SN:1684

November 20, 2002

Deviation from Isotropy in HSL

Error (θ, ϕ), $f = 900$ MHz

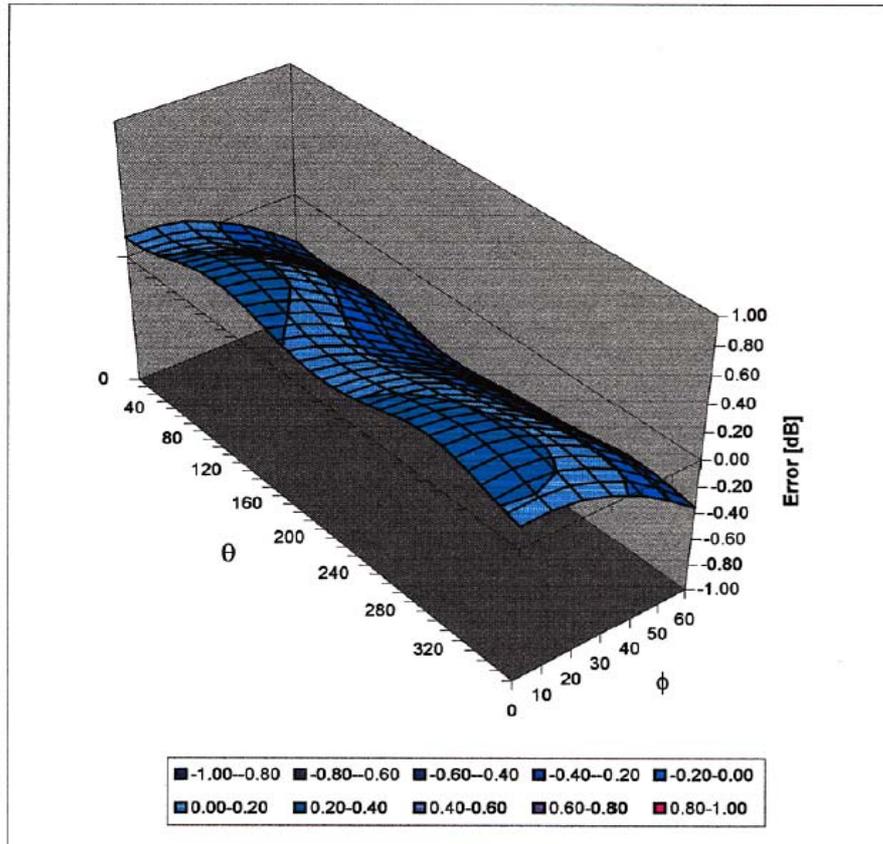

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124