




11AX20MIMO Ant-3 6535

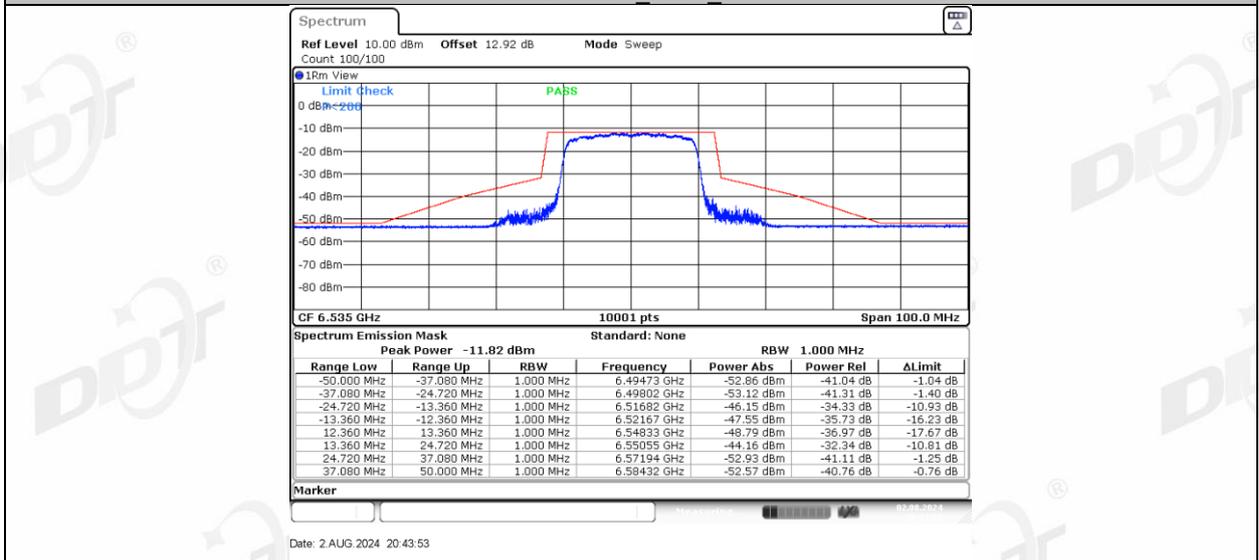


11AX20MIMO Ant-1 6695

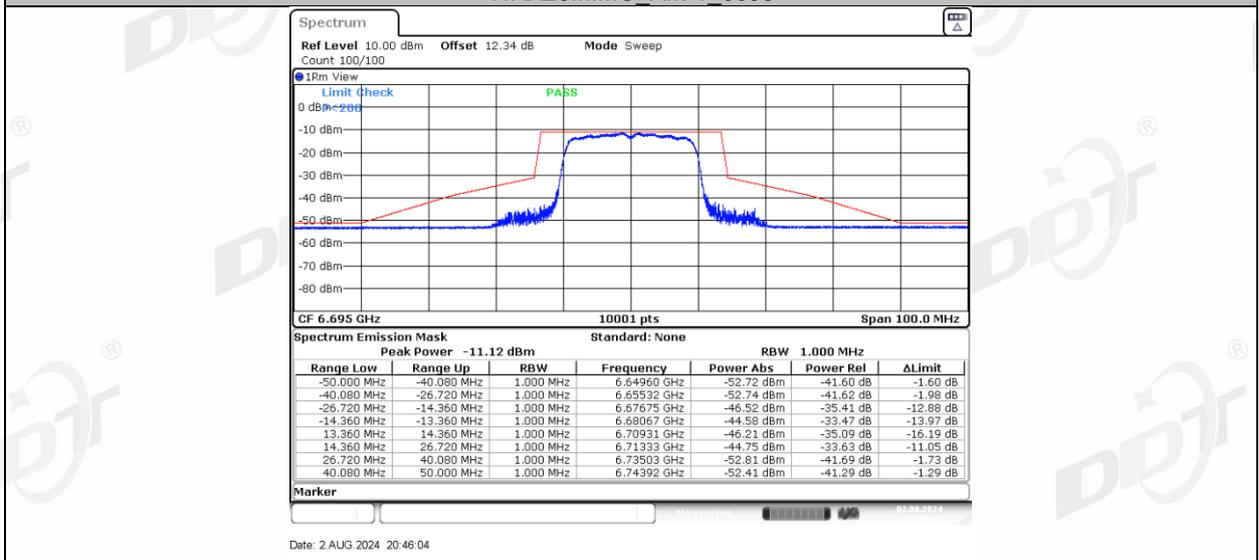


11AX20MIMO Ant-3 6695

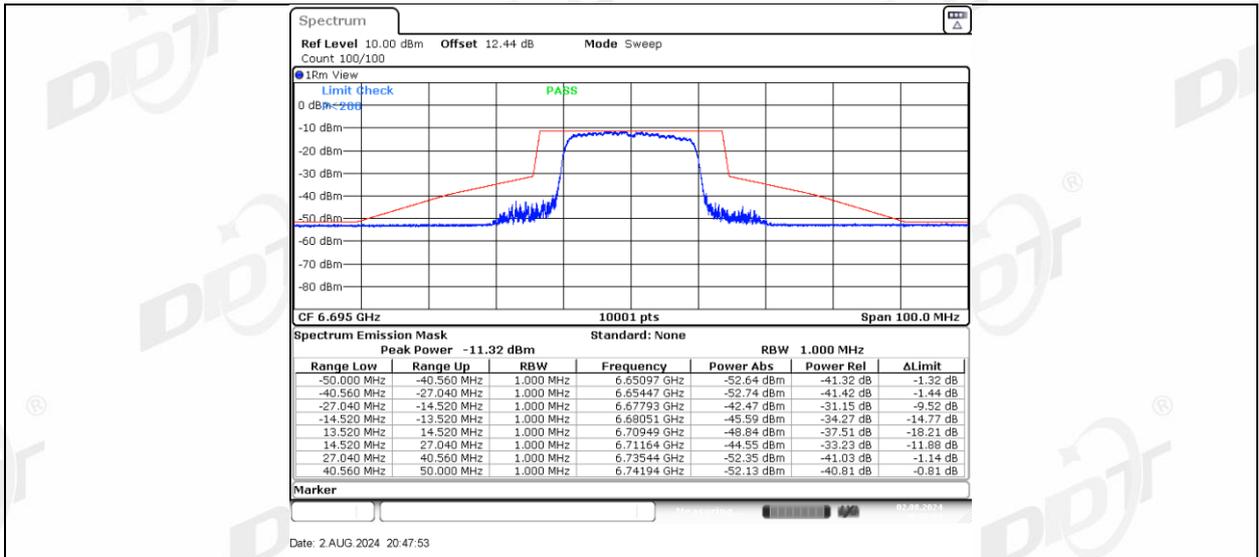

11AX20MIMO Ant-1\_6855

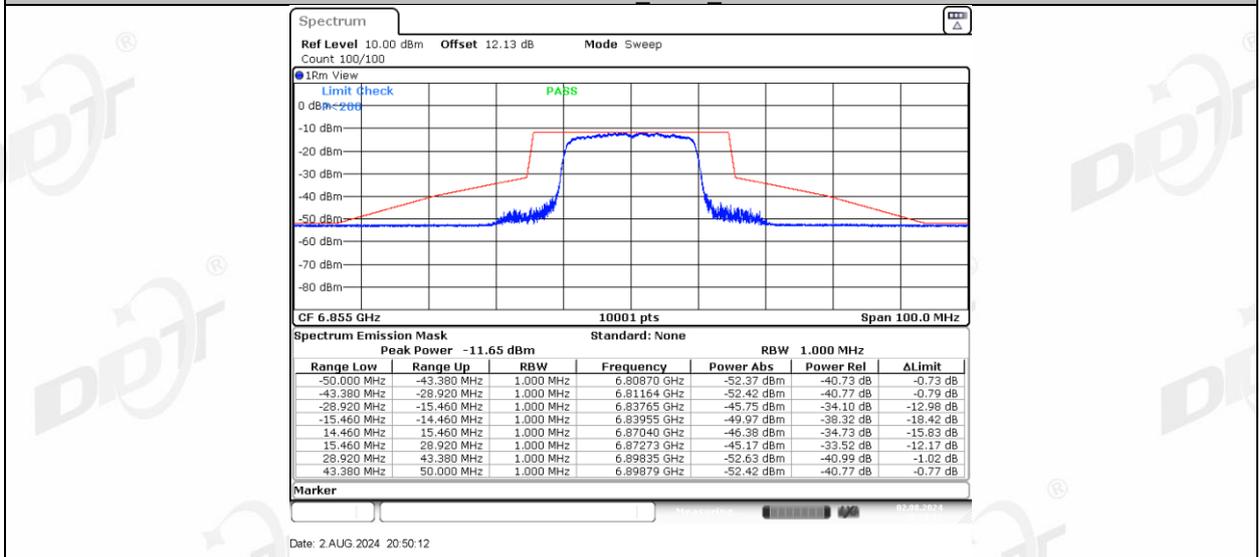


11AX20MIMO Ant-2\_6855

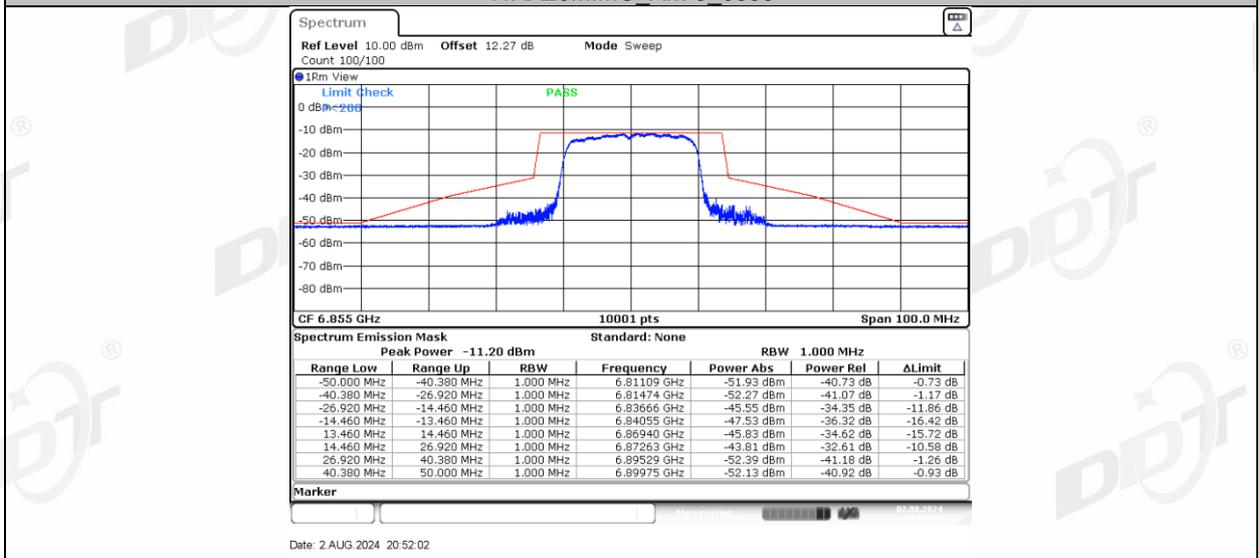


11AX20MIMO Ant-3\_6855




11AX20MIMO Ant-1\_6875

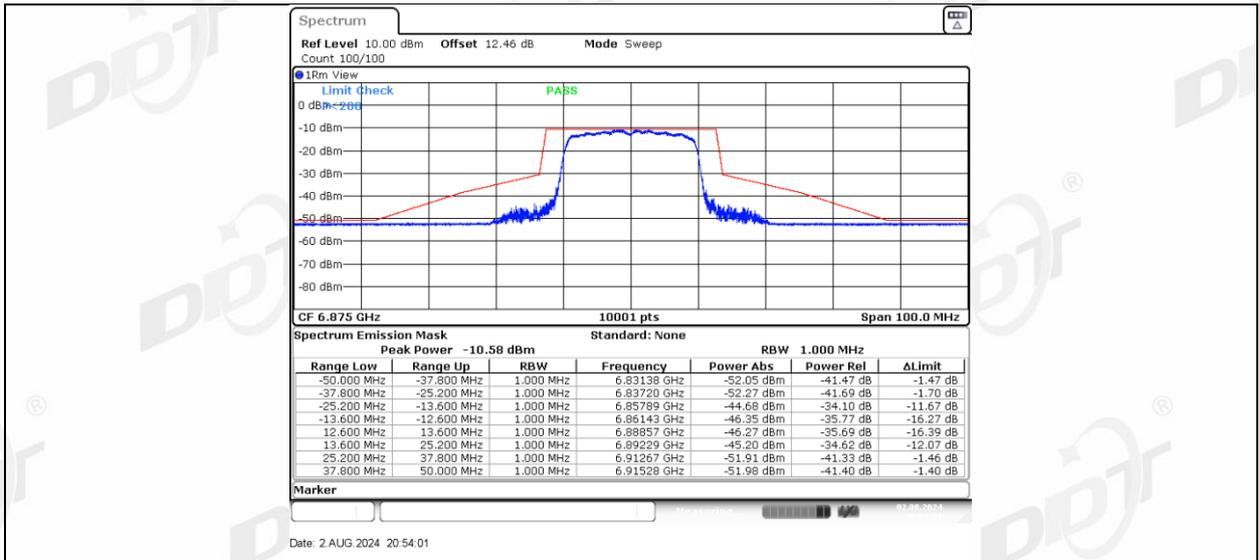


11AX20MIMO Ant-3 6875

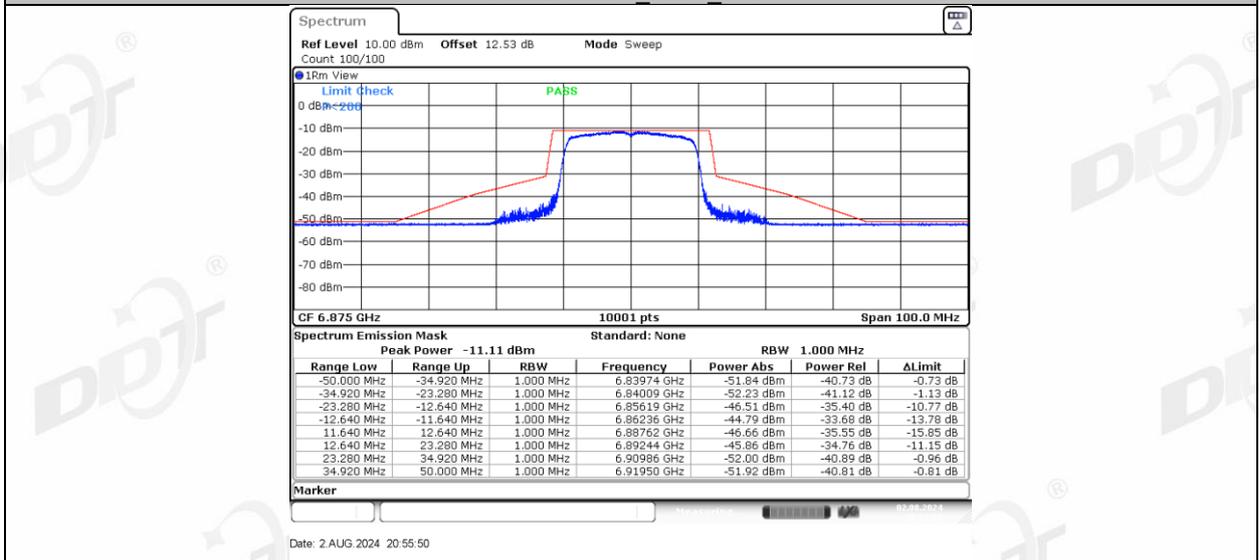


11AX20MIMO Ant-1 6895

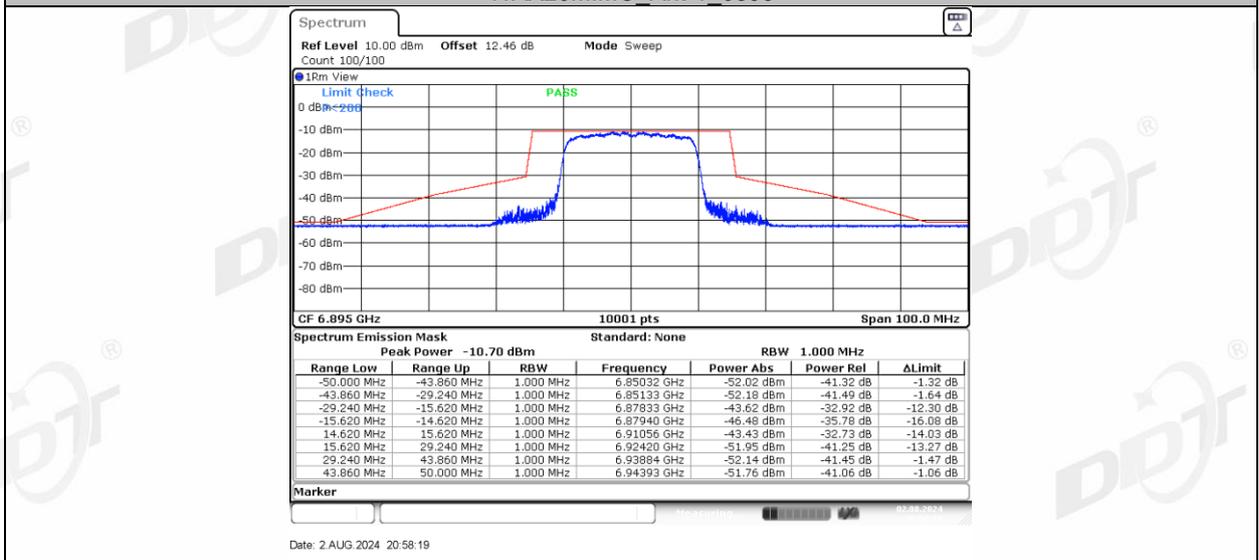


11AX20MIMO Ant-3 6895

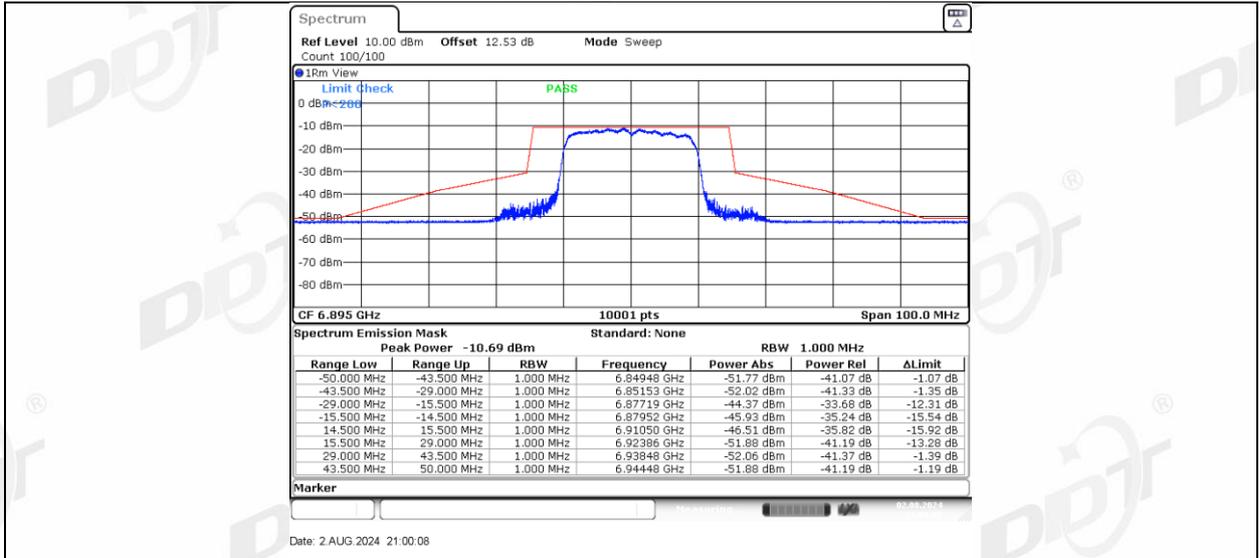


11AX20MIMO Ant-1\_6995

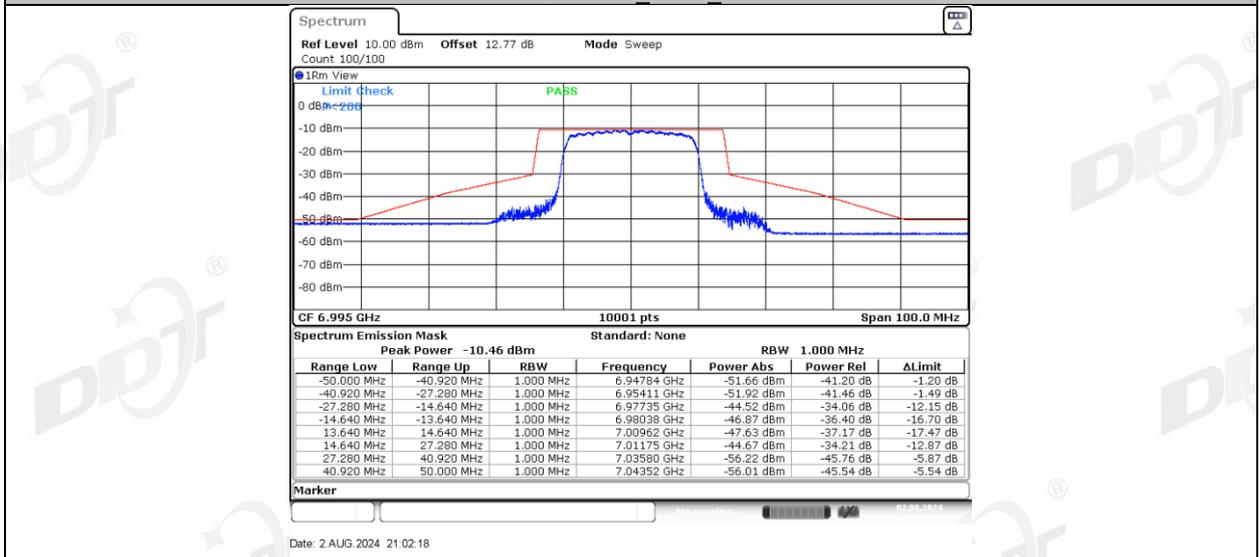


11AX20MIMO Ant-2\_6995

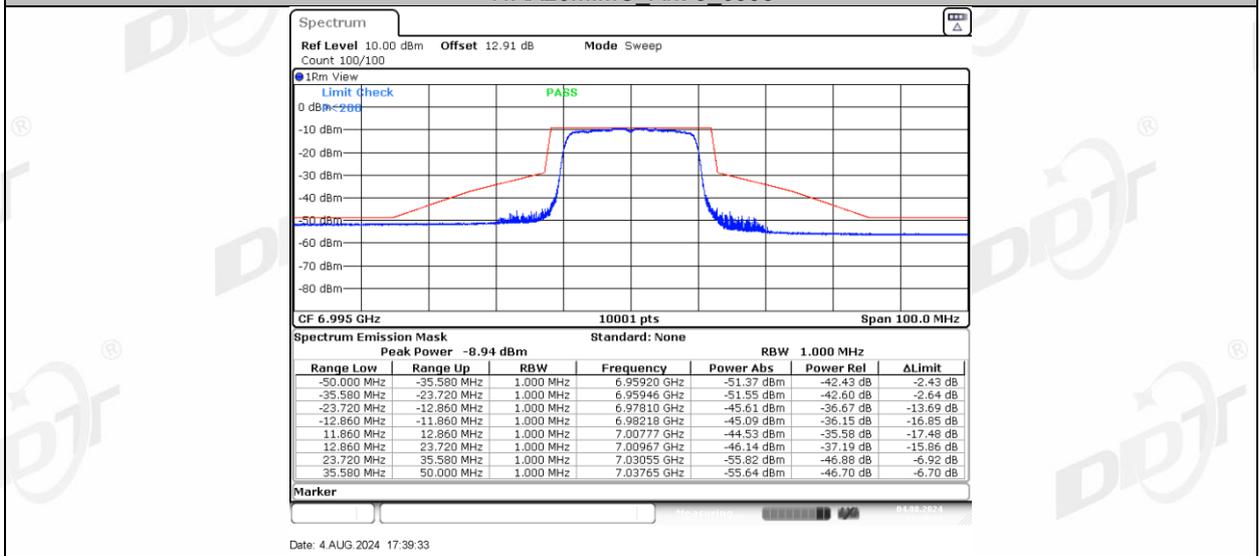


11AX20MIMO Ant-1\_7095

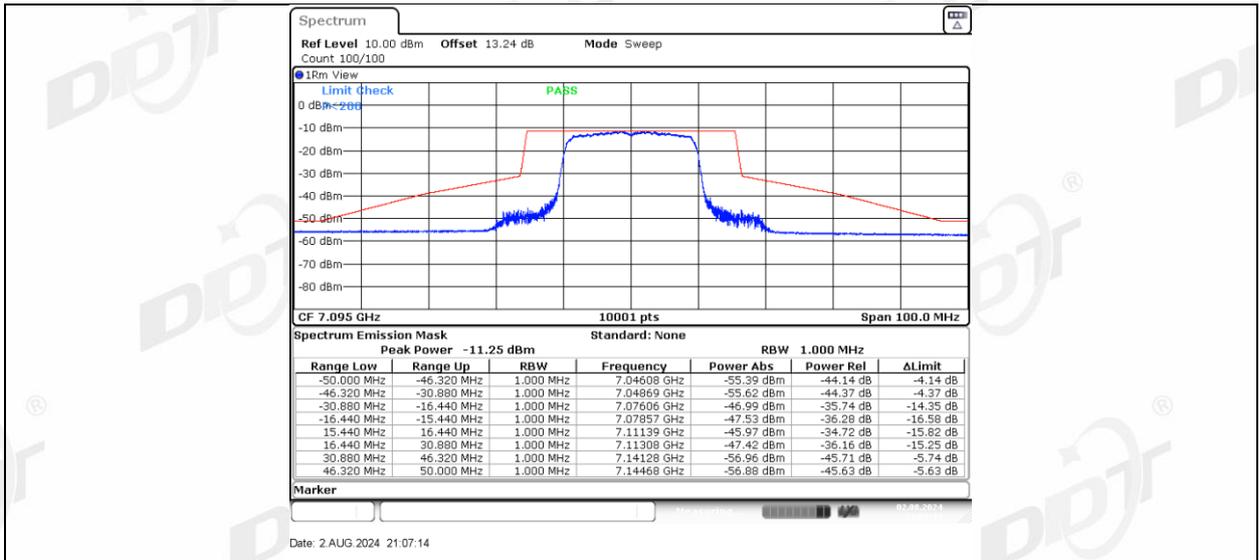


11AX20MIMO Ant-3\_7095

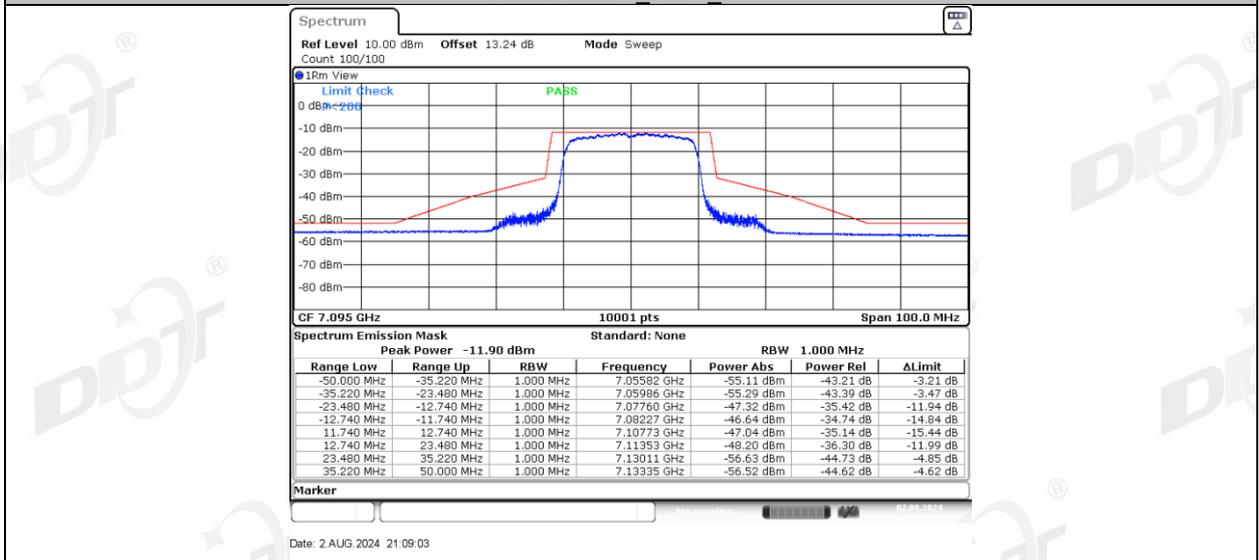


11AX20MIMO Ant-1\_7115

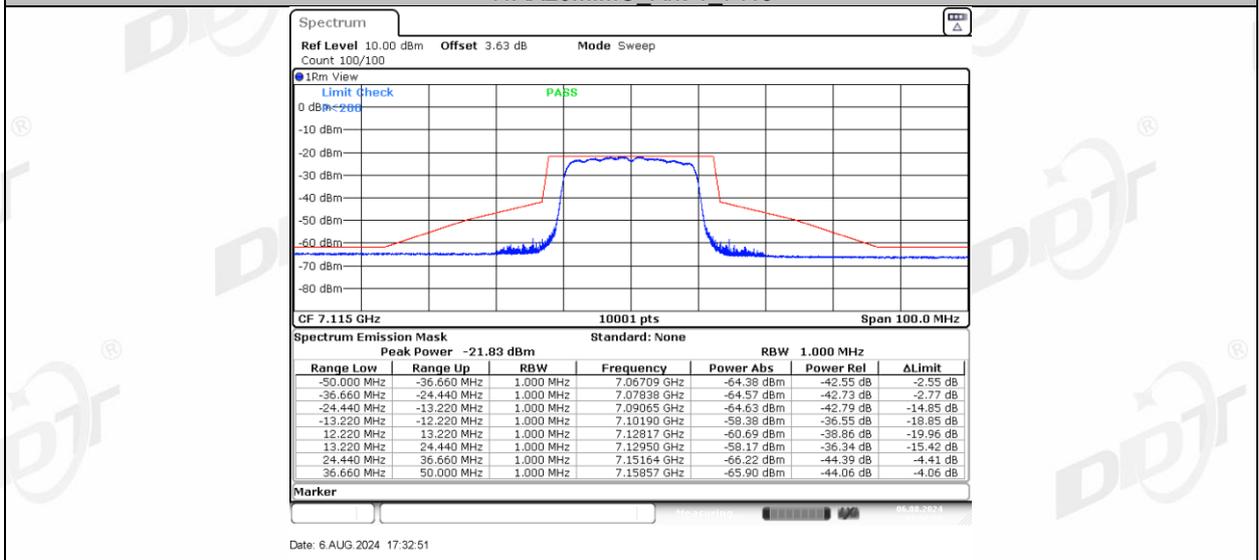


11AX20MIMO Ant-3\_7115

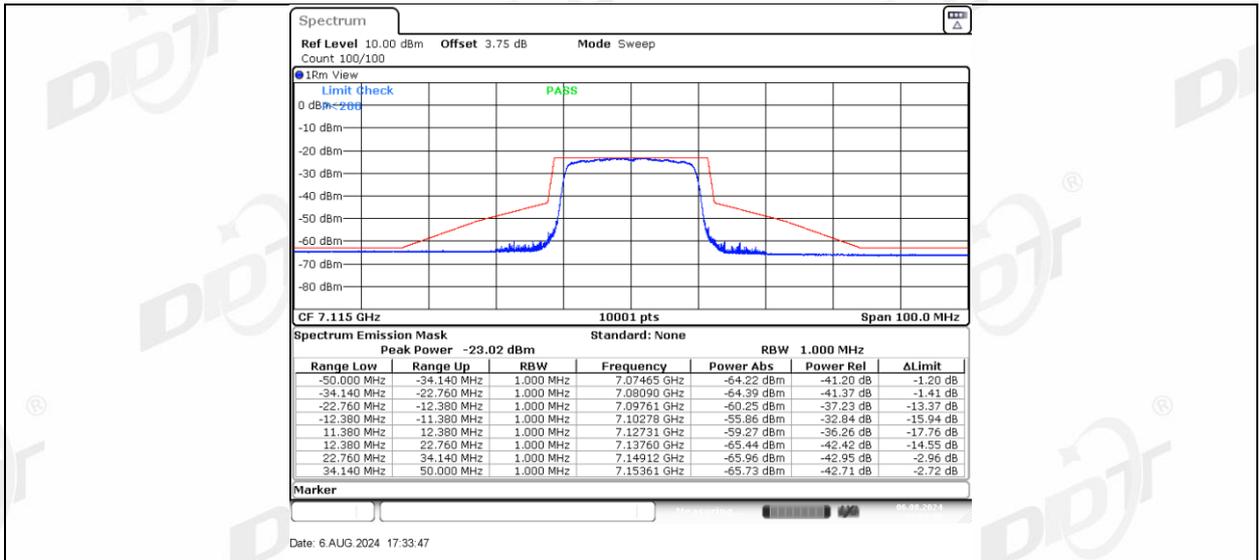


11AX40MIMO Ant-1\_5965

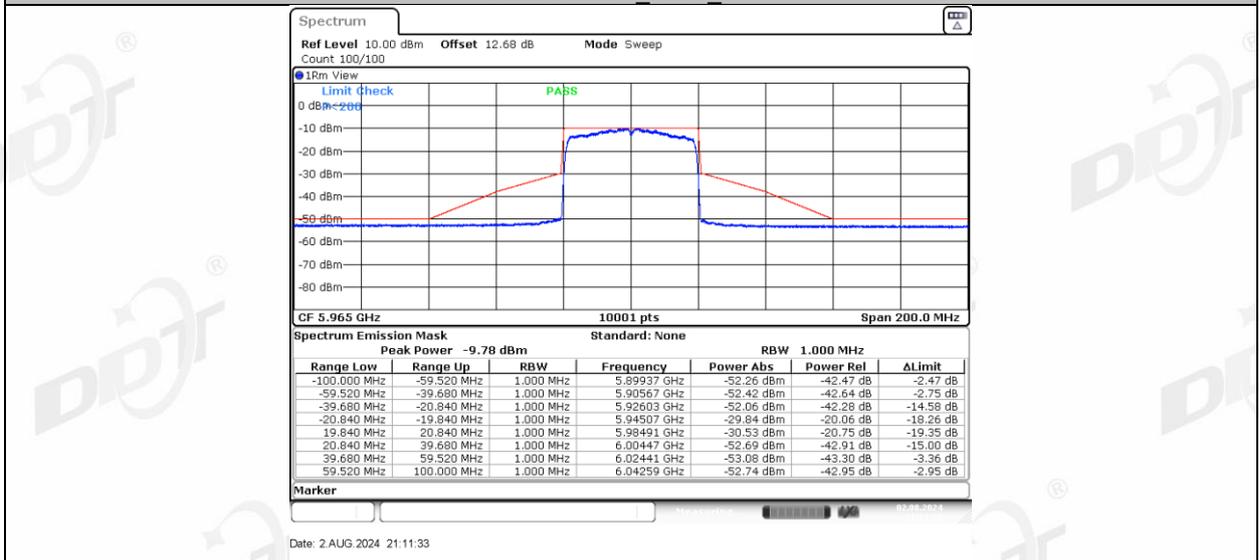


11AX40MIMO Ant-3\_5965

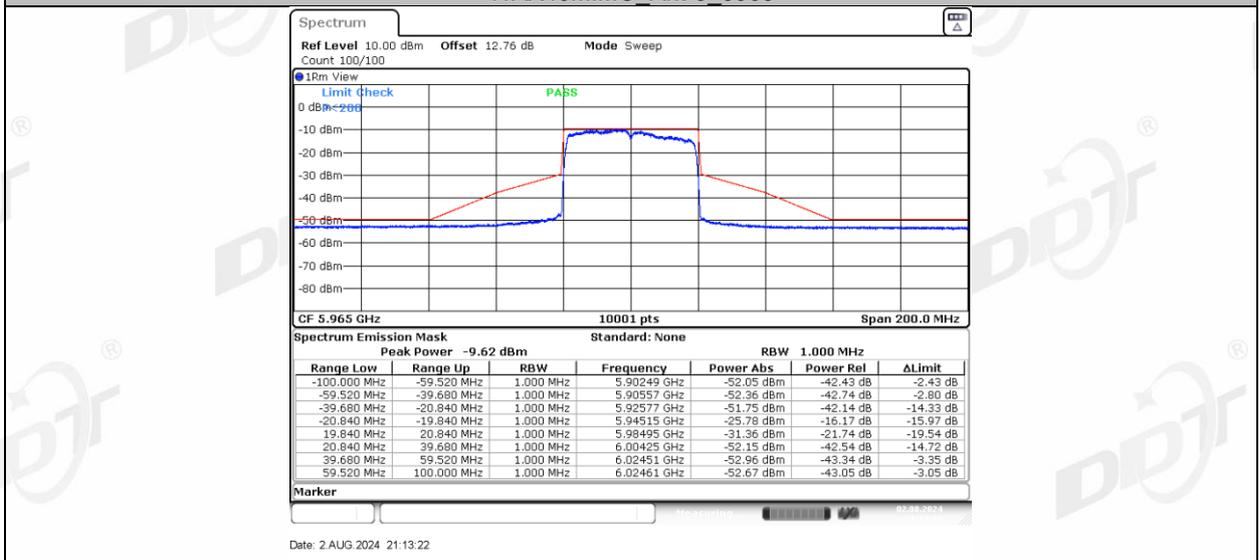


11AX40MIMO Ant-1\_6165

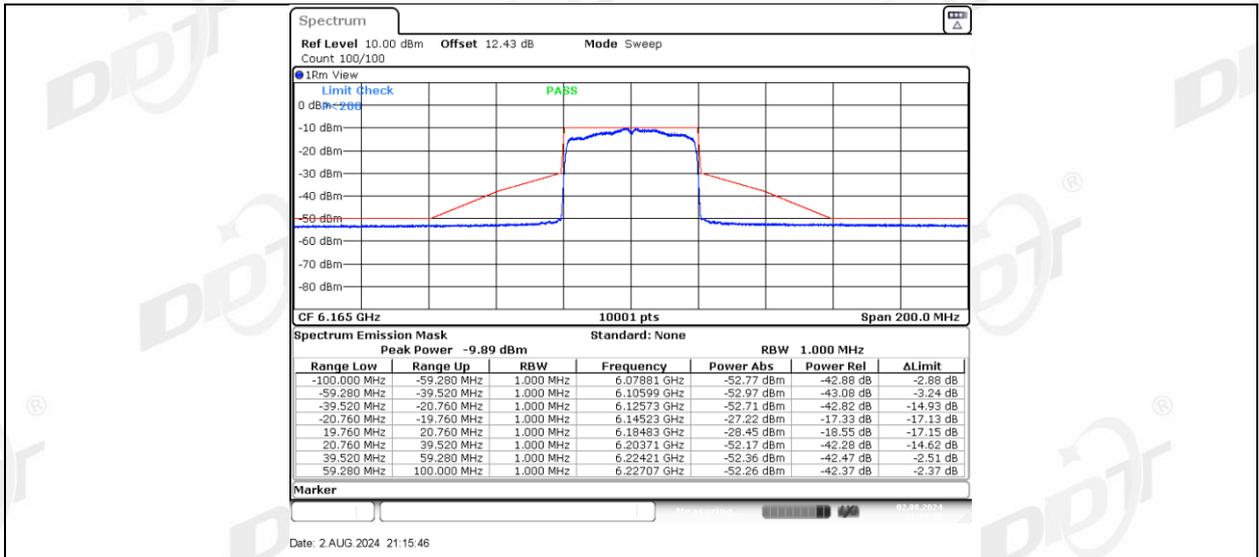


11AX40MIMO Ant-3 6165

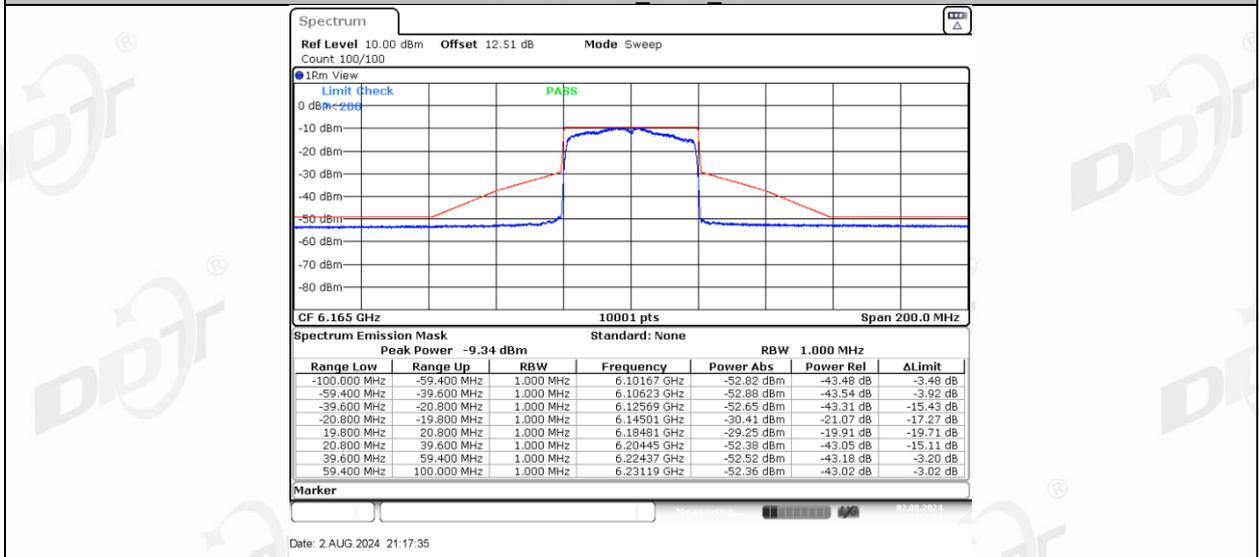


11AX40MIMO Ant-1 6405

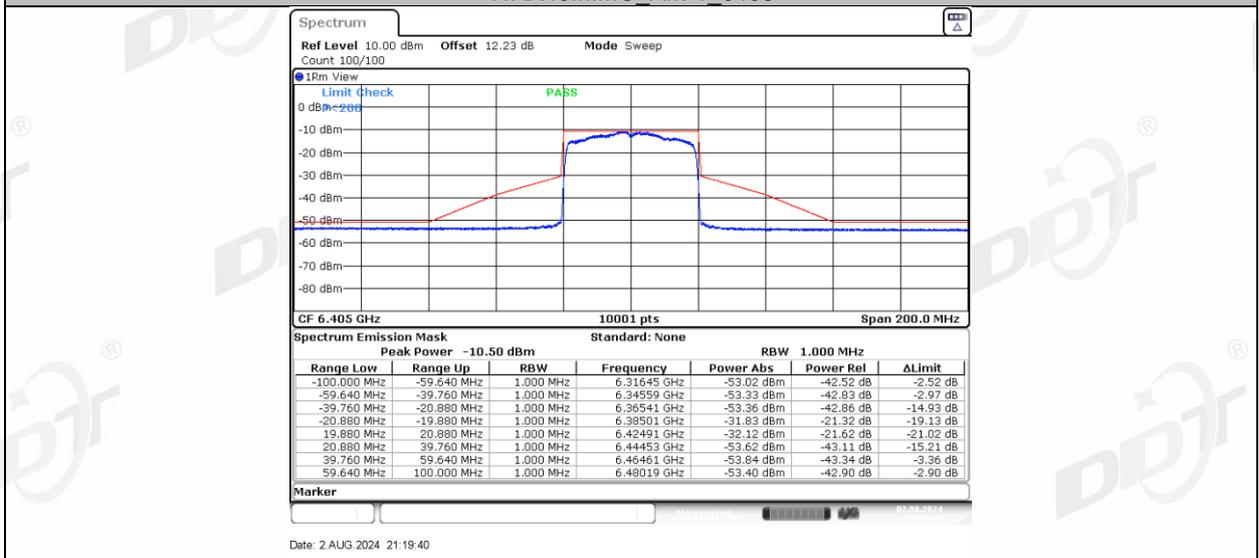


11AX40MIMO Ant-3 6405

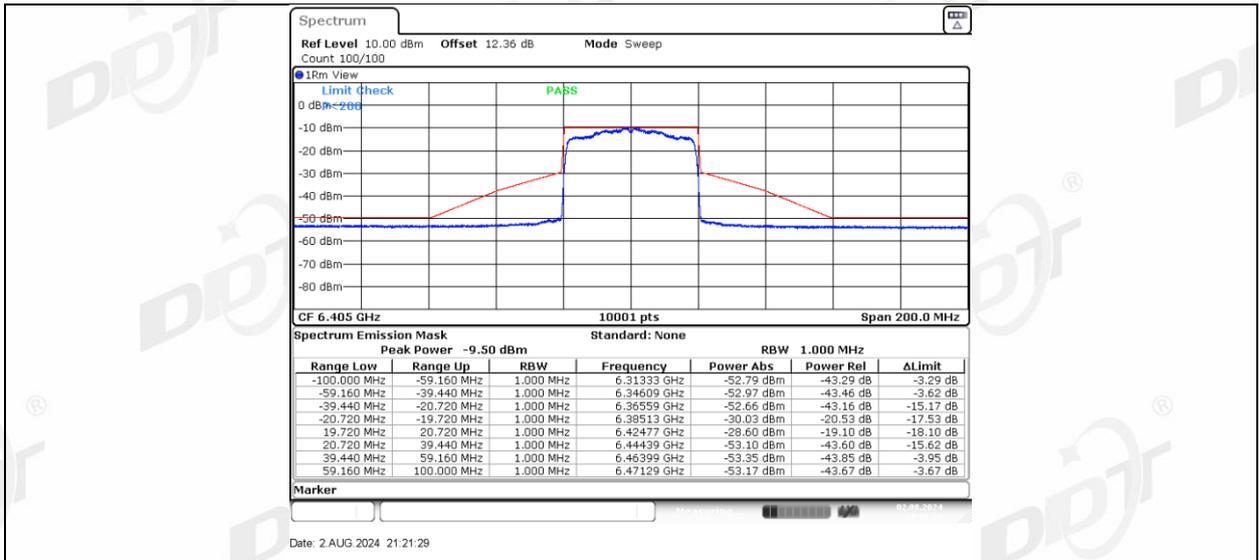




11AX40MIMO Ant-1\_6445

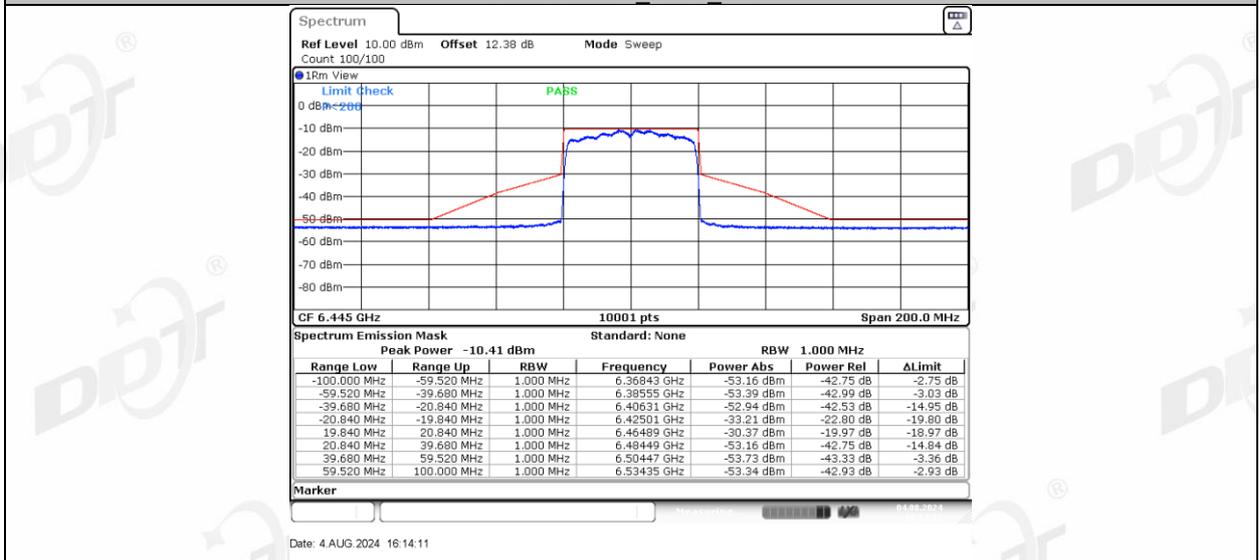


11AX40MIMO Ant-3\_6445

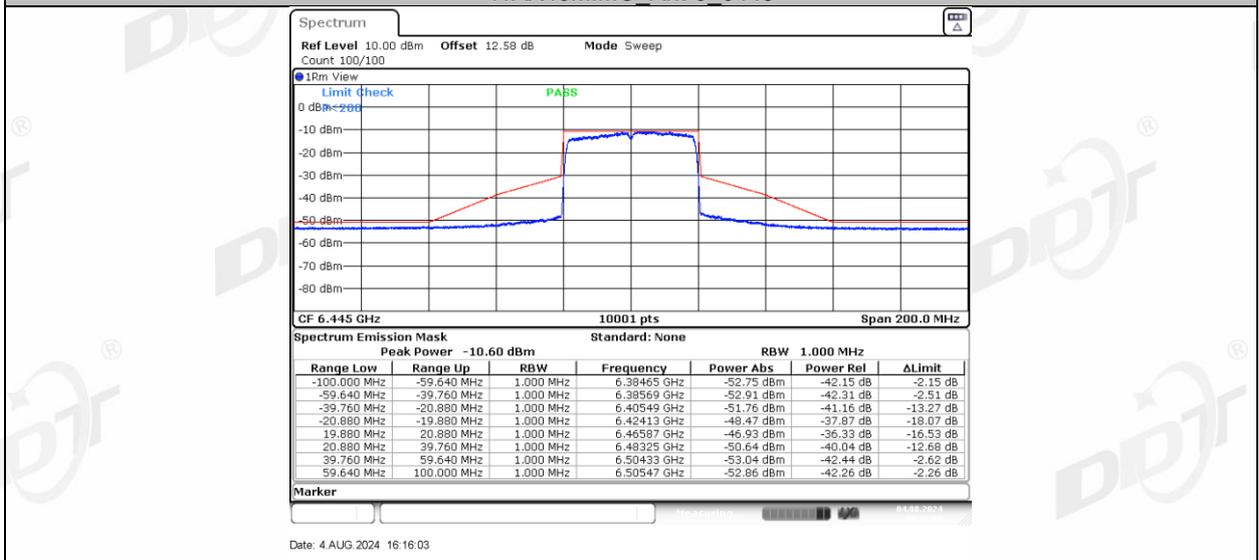


11AX40MIMO Ant-1\_6485

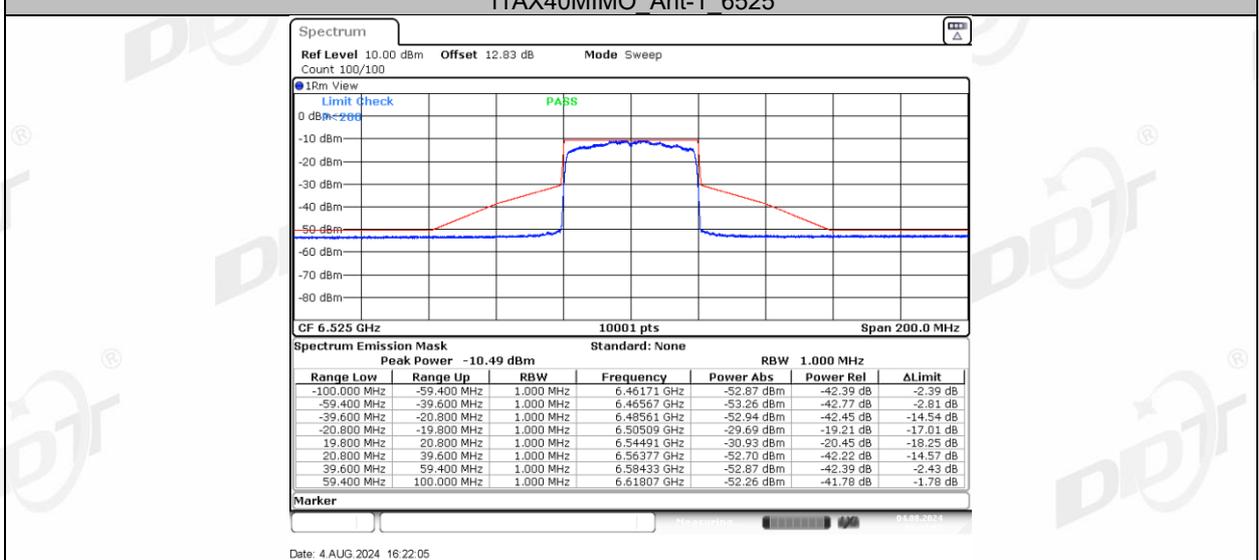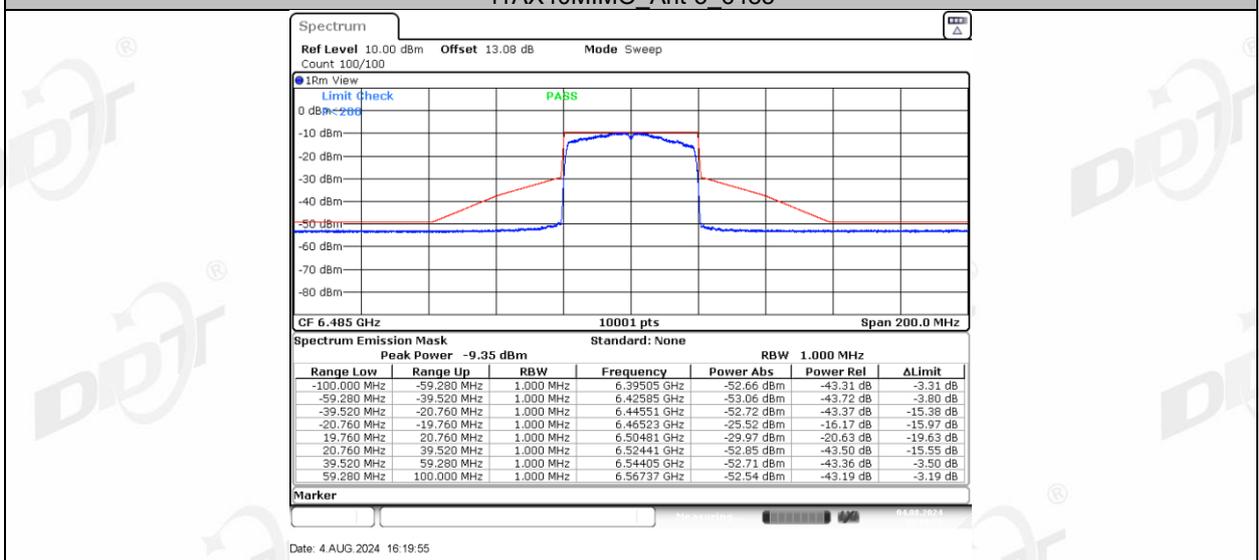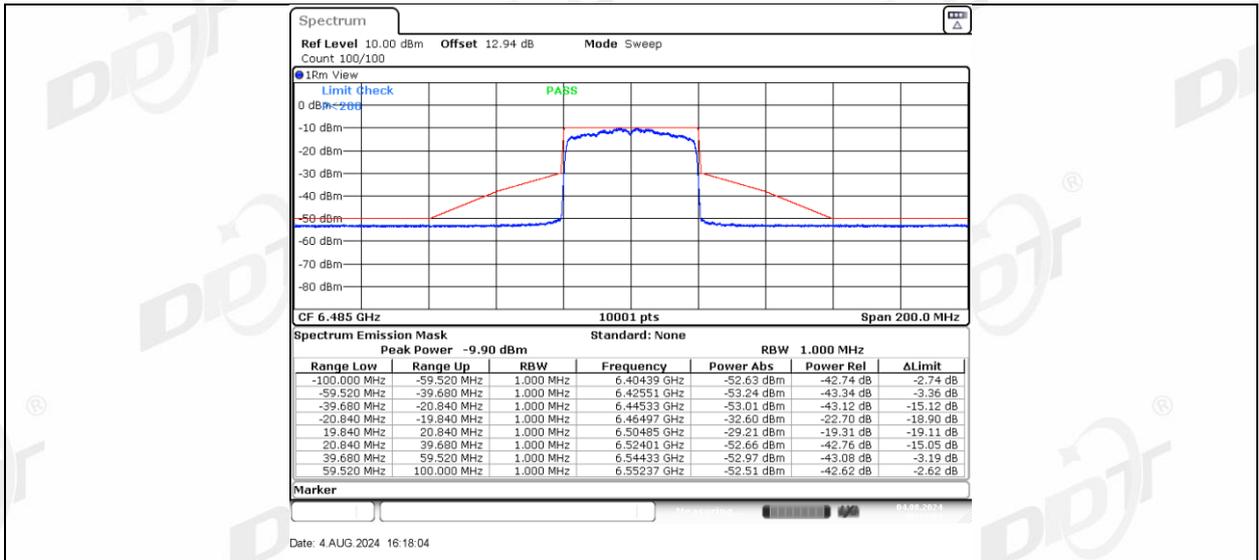


**11AX40MIMO Ant-3 6525**

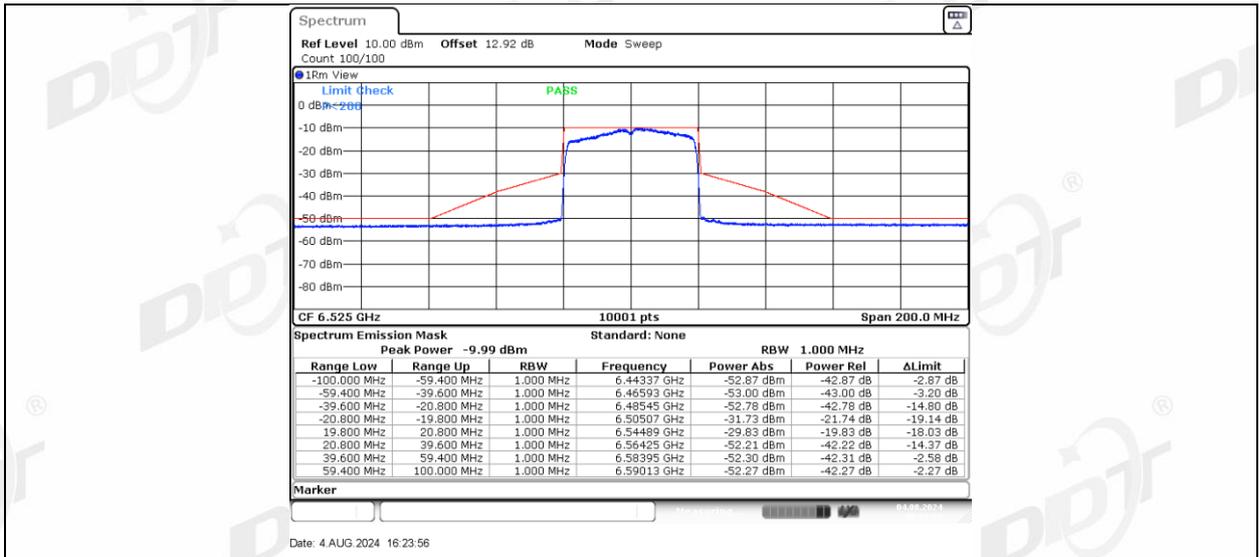

11AX40MIMO Ant-1\_6565

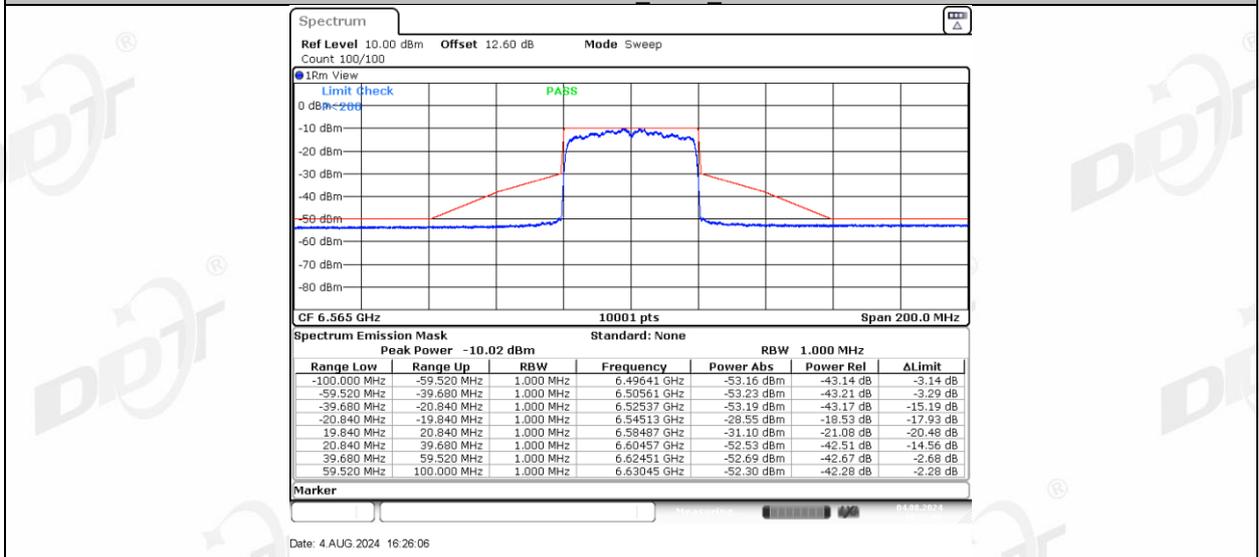


11AX40MIMO Ant-2\_6565

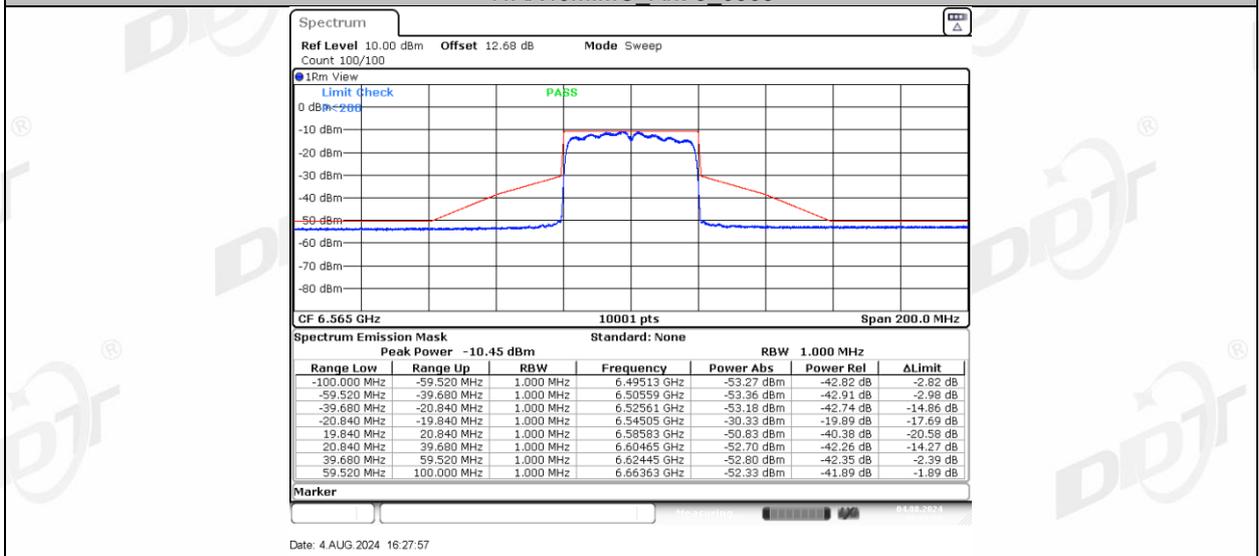


11AX40MIMO Ant-3\_6565




11AX40MIMO Ant-1\_6685

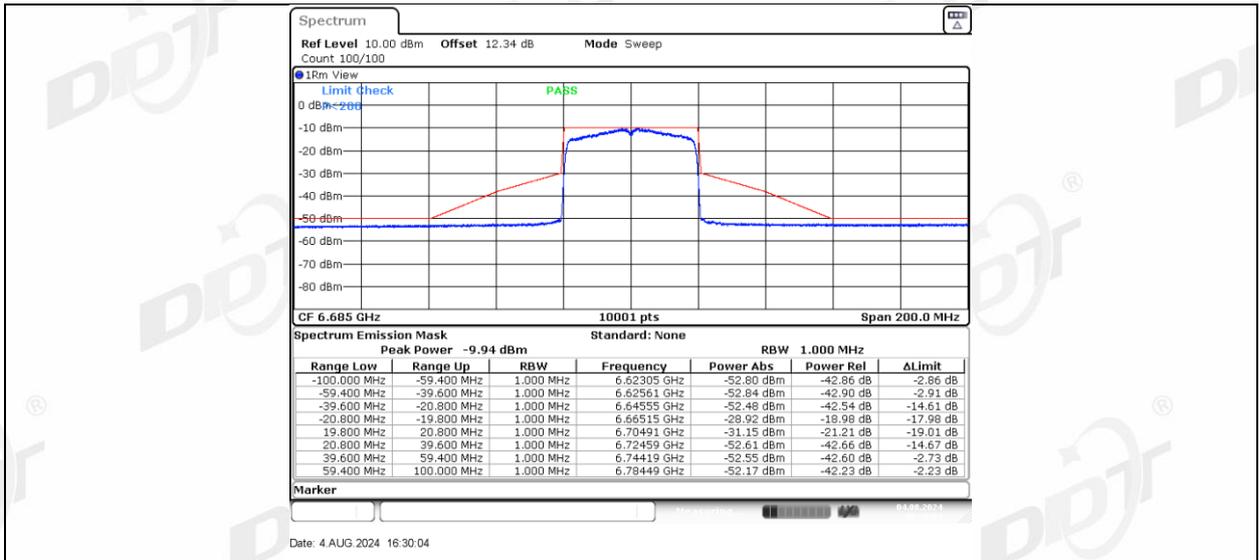


11AX40MIMO Ant-3 6685

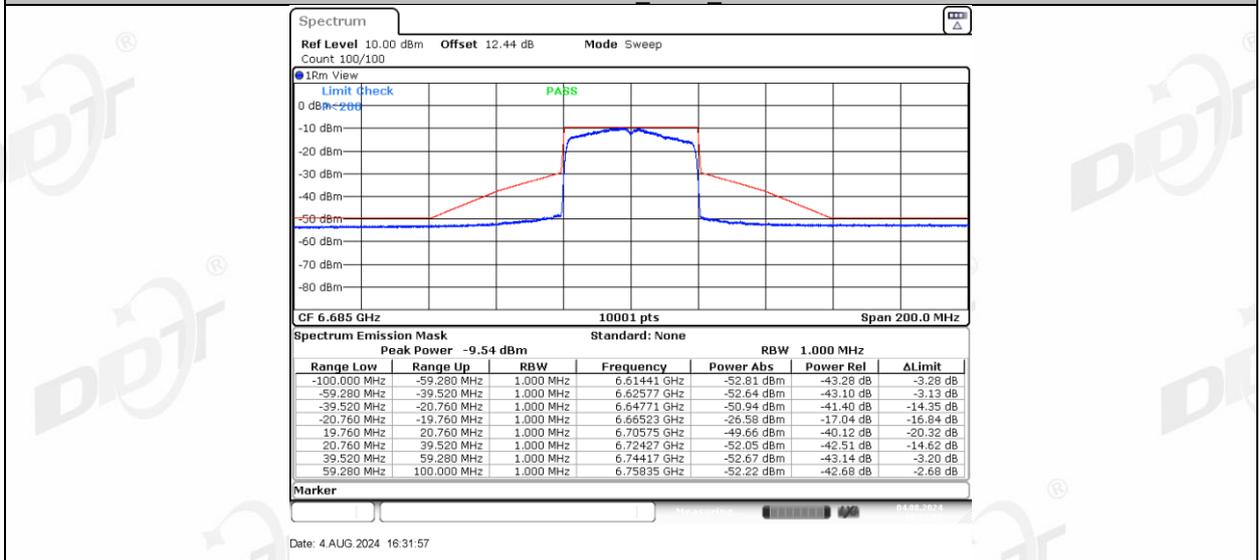


11AX40MIMO Ant-1 6845

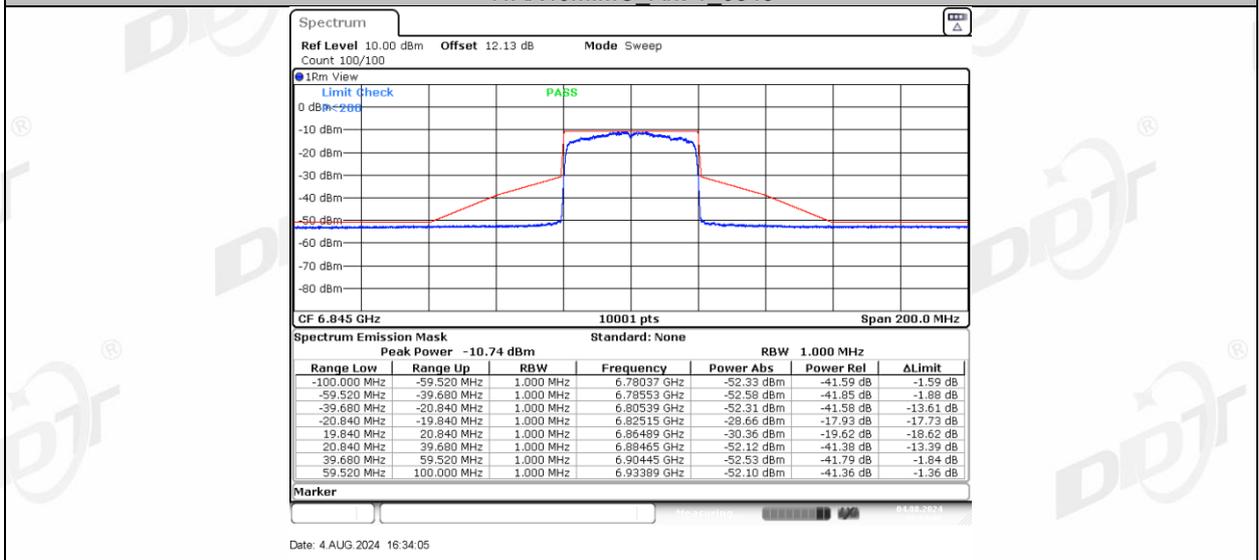


11AX40MIMO Ant-3 6845

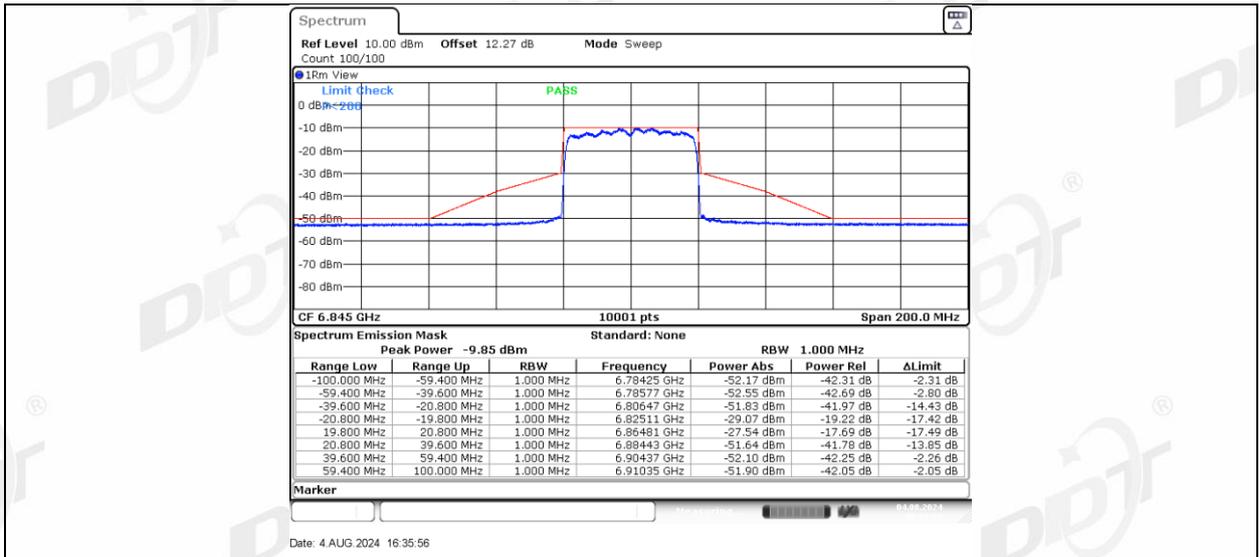




11AX40MIMO Ant-1\_6885

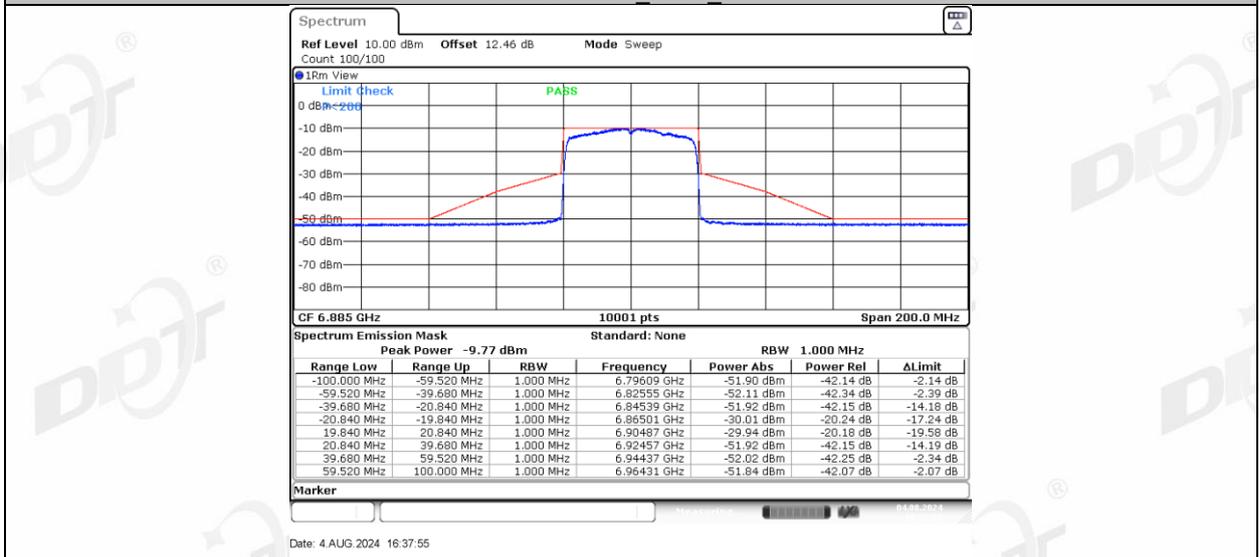


11AX40MIMO Ant-3\_6885

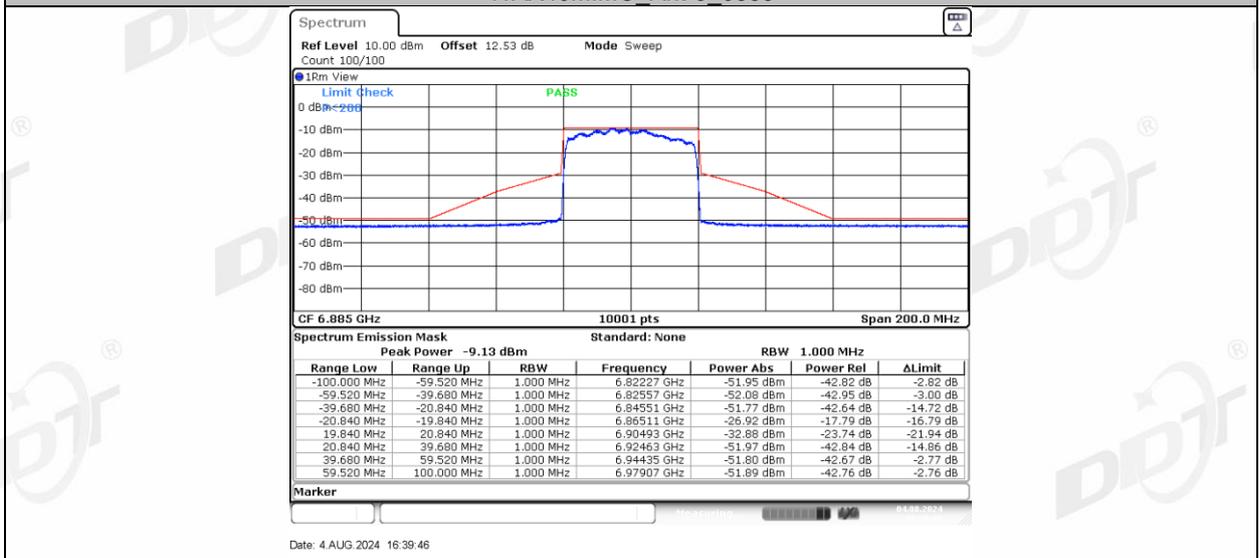


11AX40MIMO Ant-1\_6925

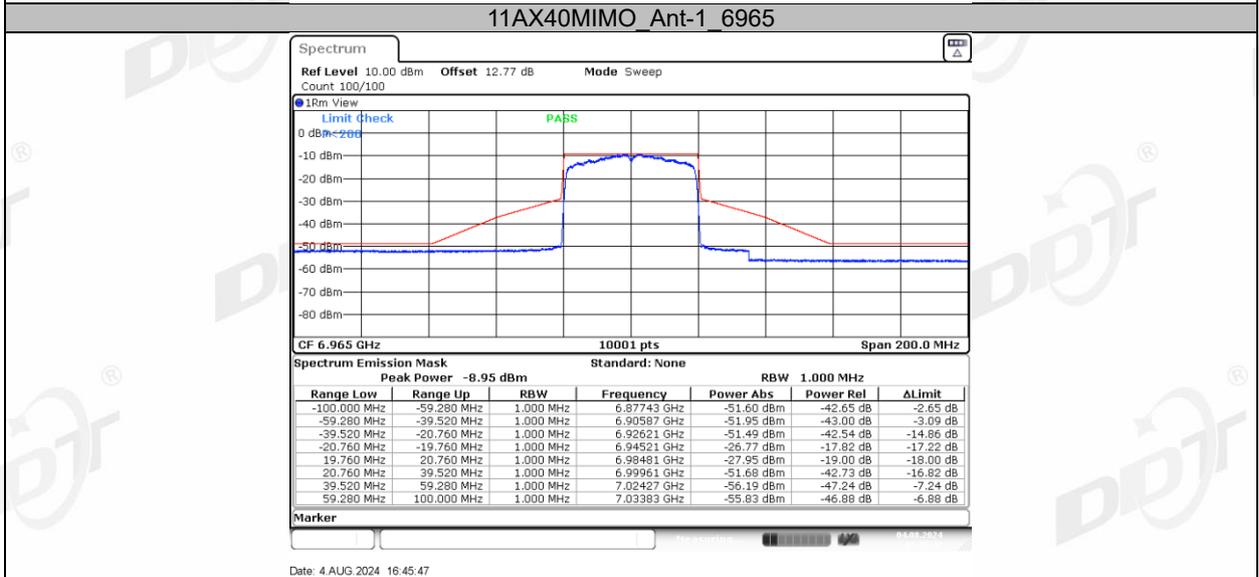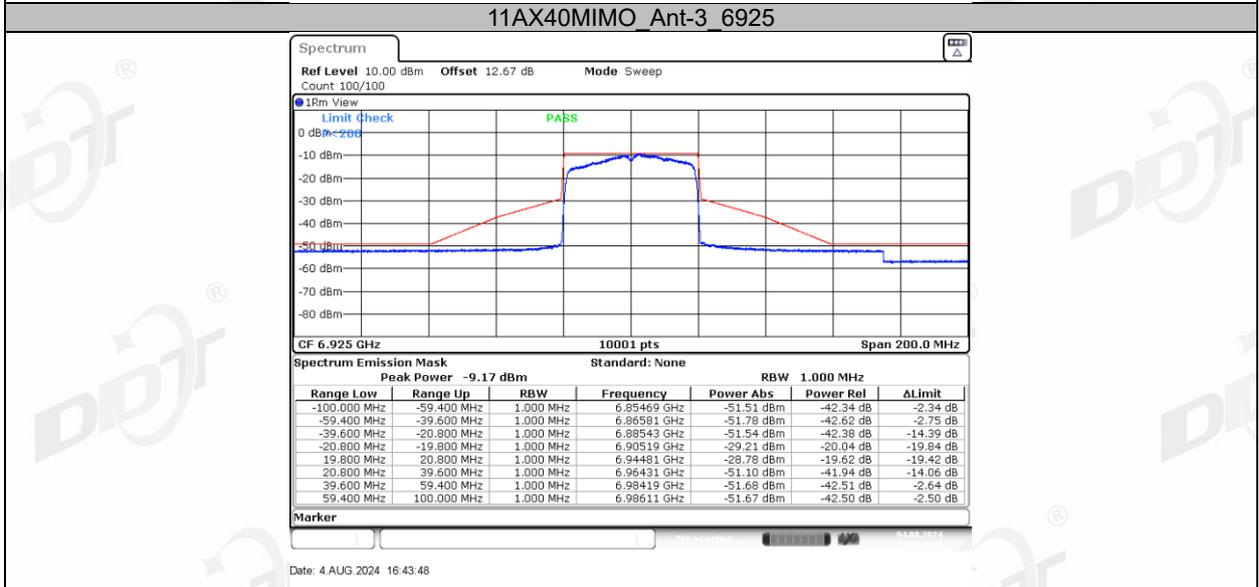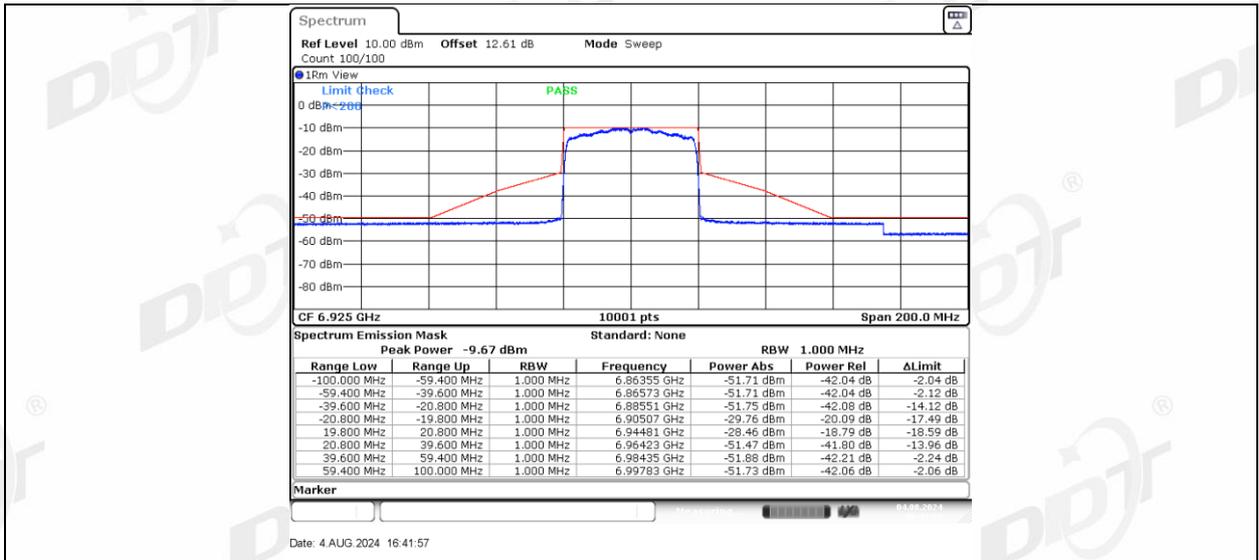


**11AX40MIMO Ant-3 6965**

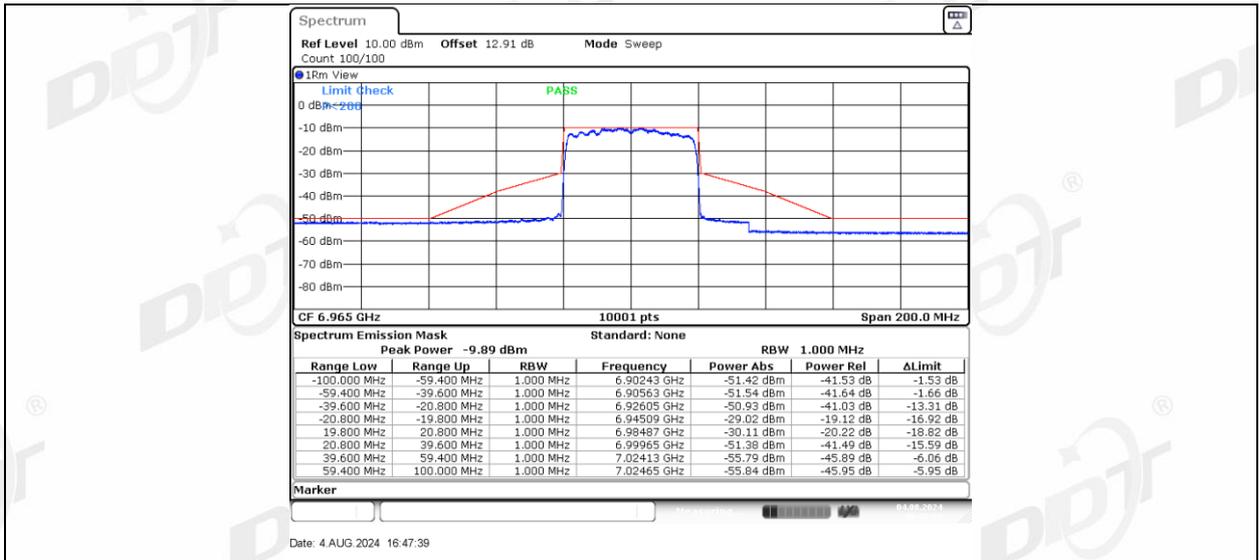

11AX40MIMO Ant-1\_7085

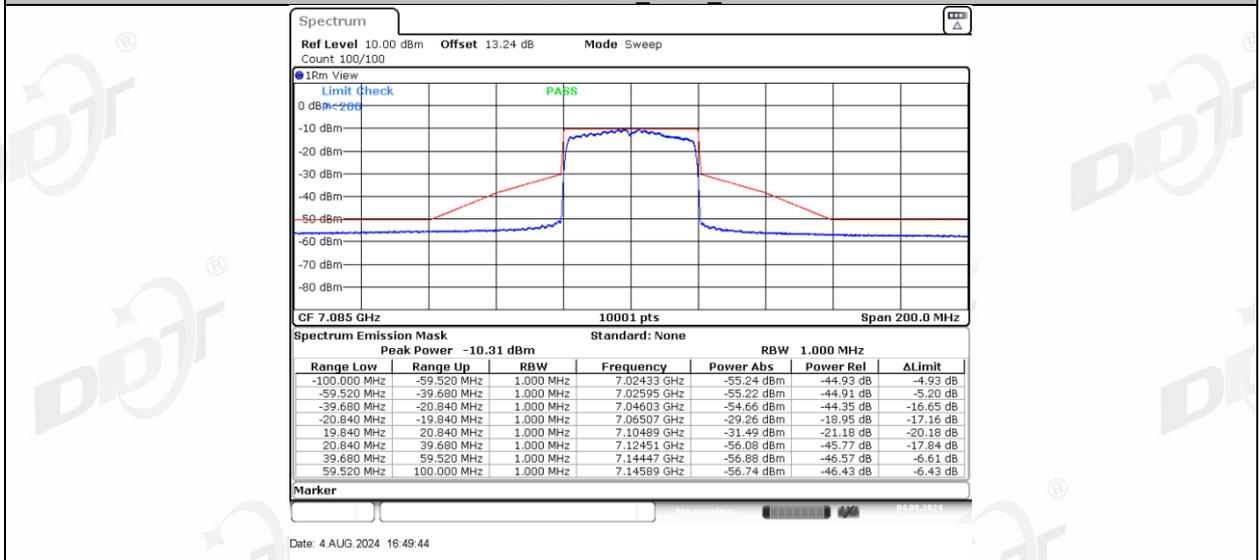


11AX40MIMO Ant-2\_7085

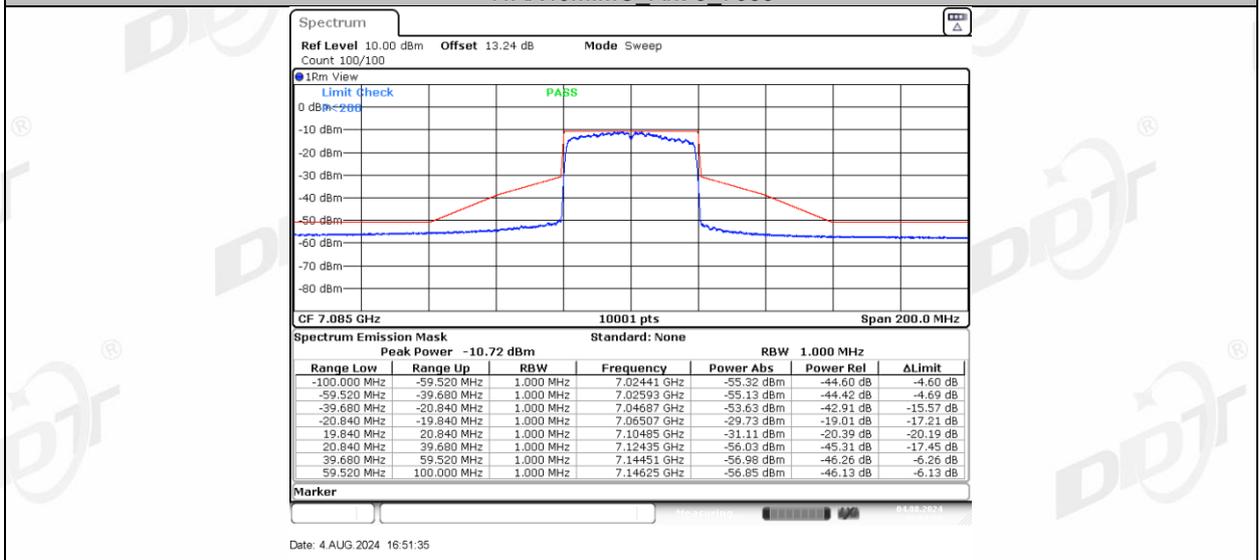


11AX40MIMO Ant-3\_7085




11AX80MIMO Ant-1\_5985

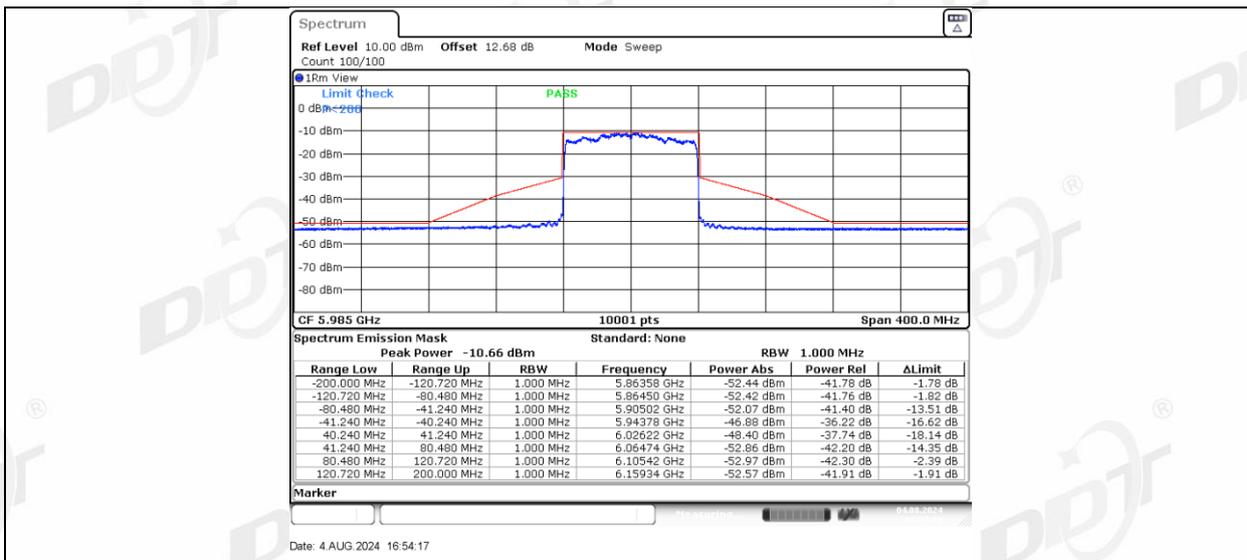


11AX80MIMO Ant-3 5985

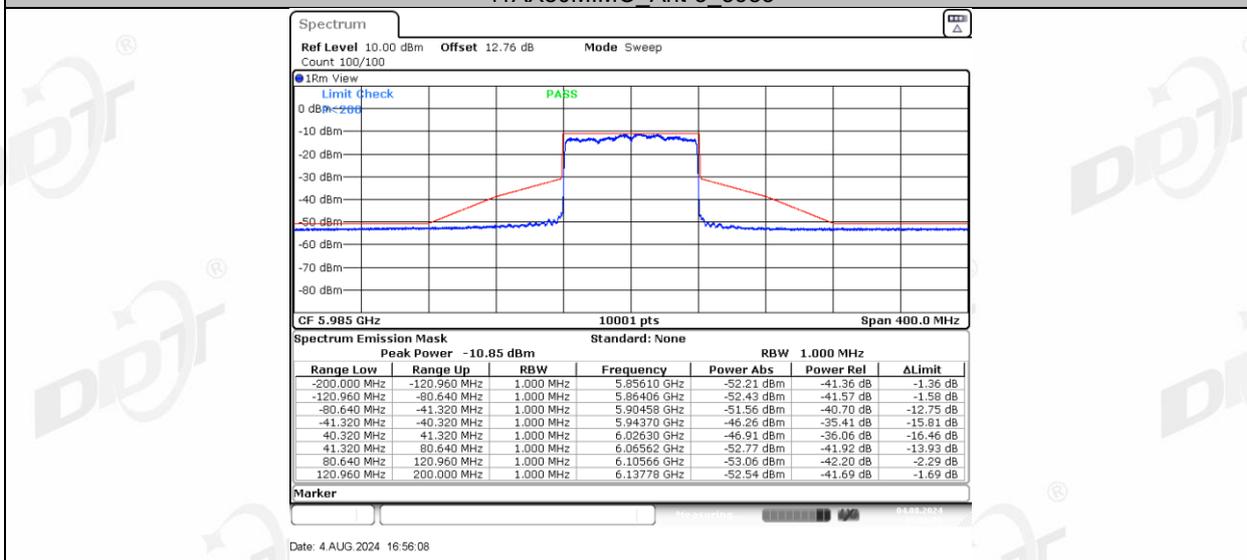


11AX80MIMO Ant-1\_6145

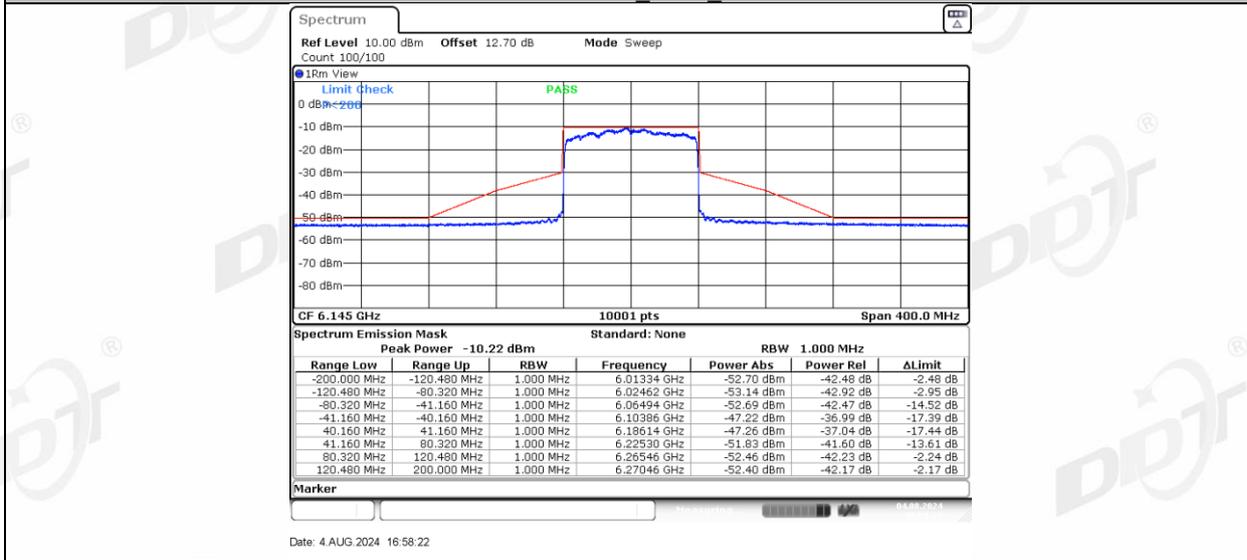


11AX80MIMO Ant-3 6145

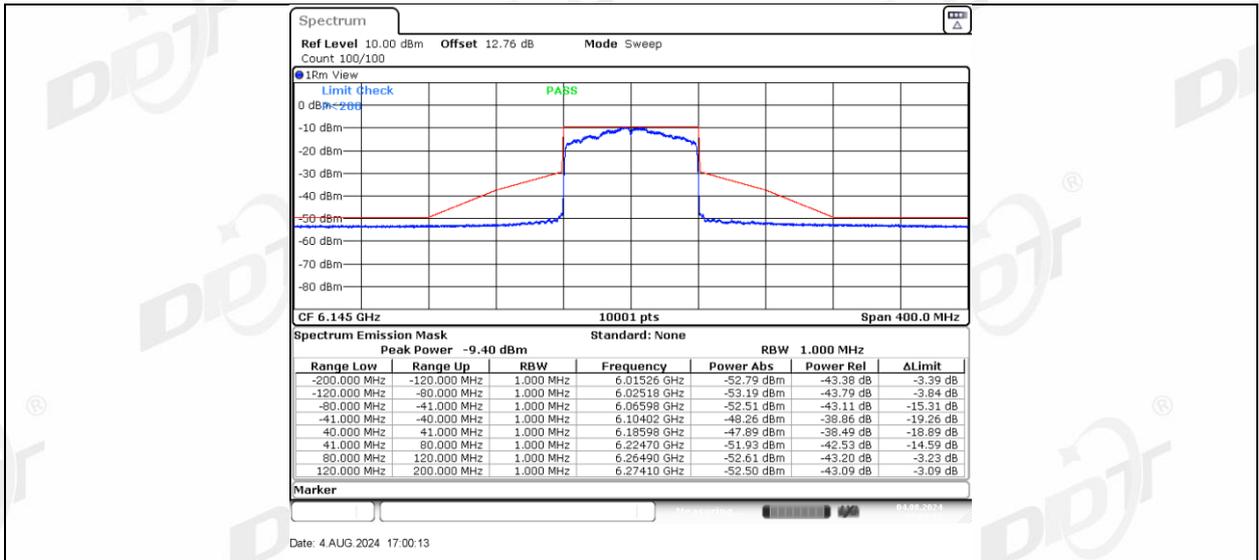


11AX80MIMO Ant-1\_6385

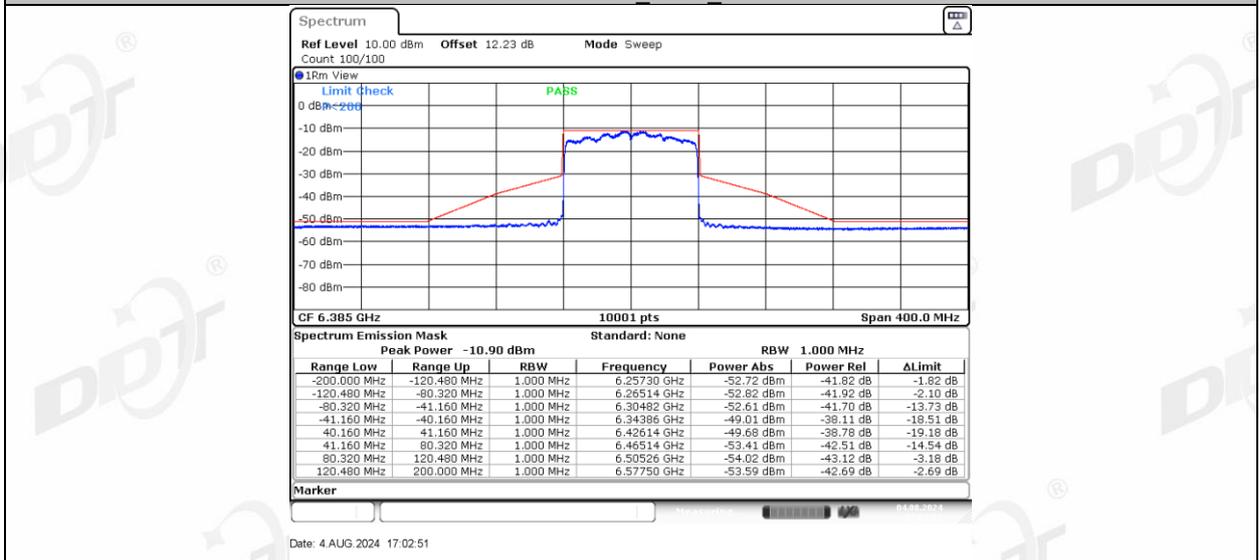


11AX80MIMO Ant-2\_6385

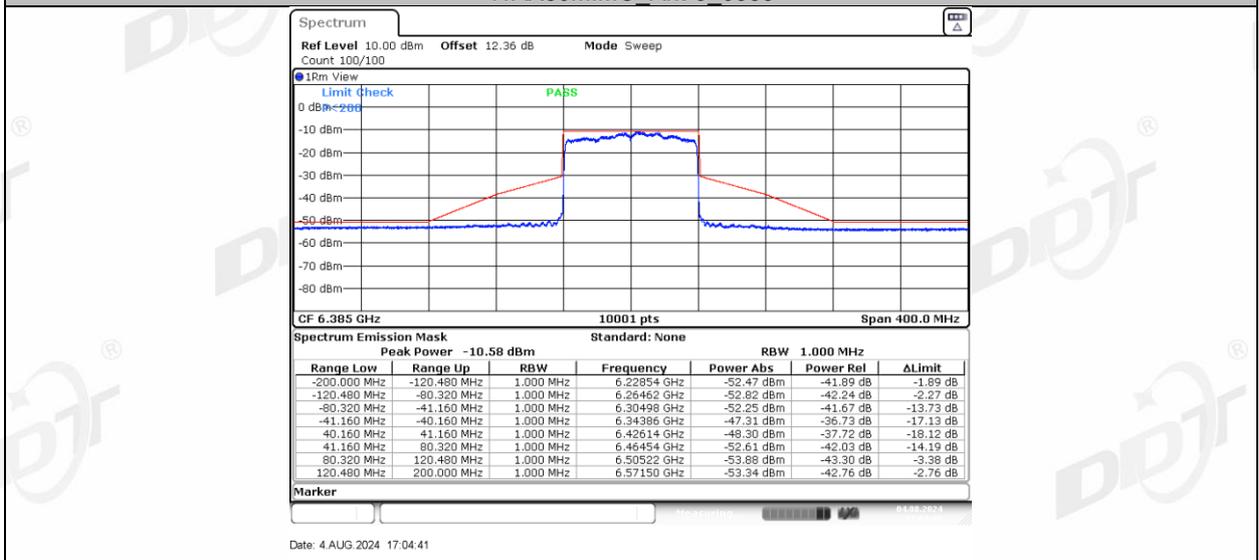


11AX80MIMO Ant-3\_6385




11AX80MIMO Ant-1\_6465

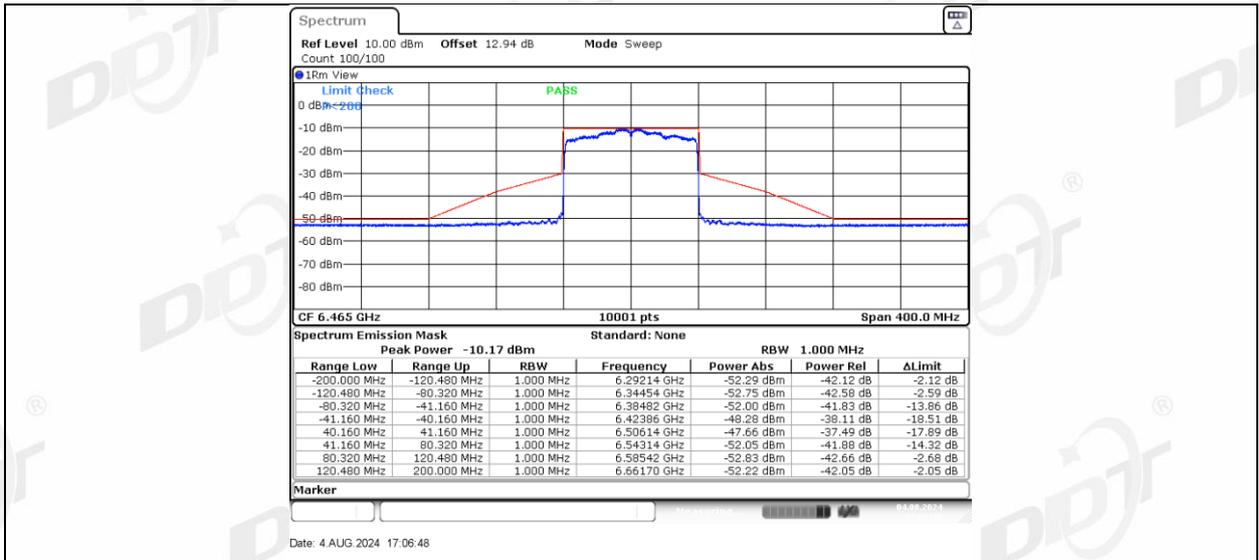


11AX80MIMO Ant-3 6465

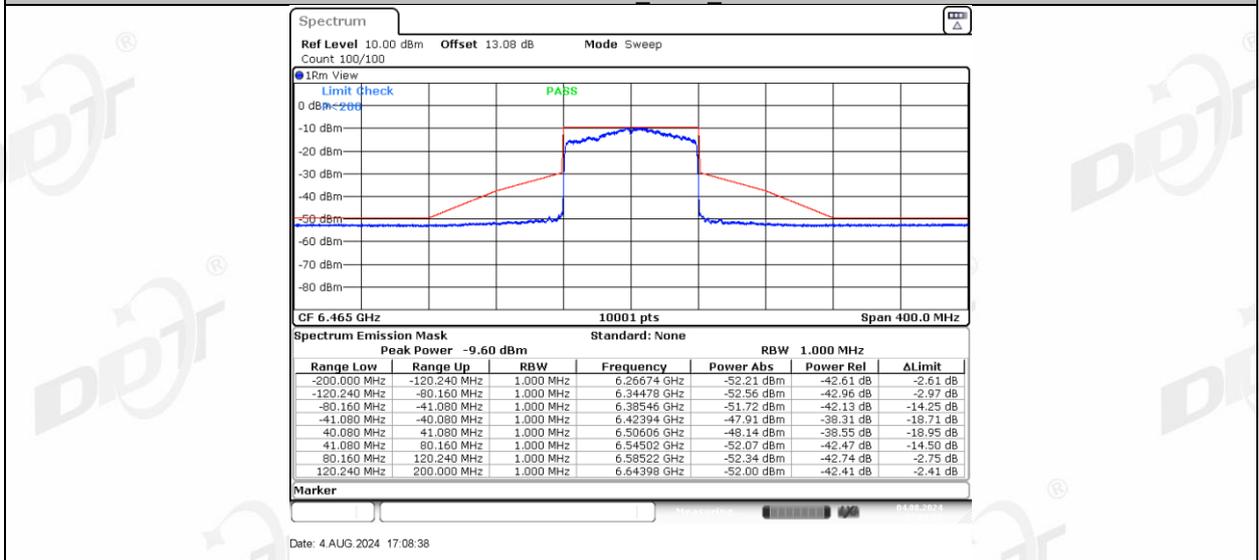


11AX80MIMO Ant-1 6545

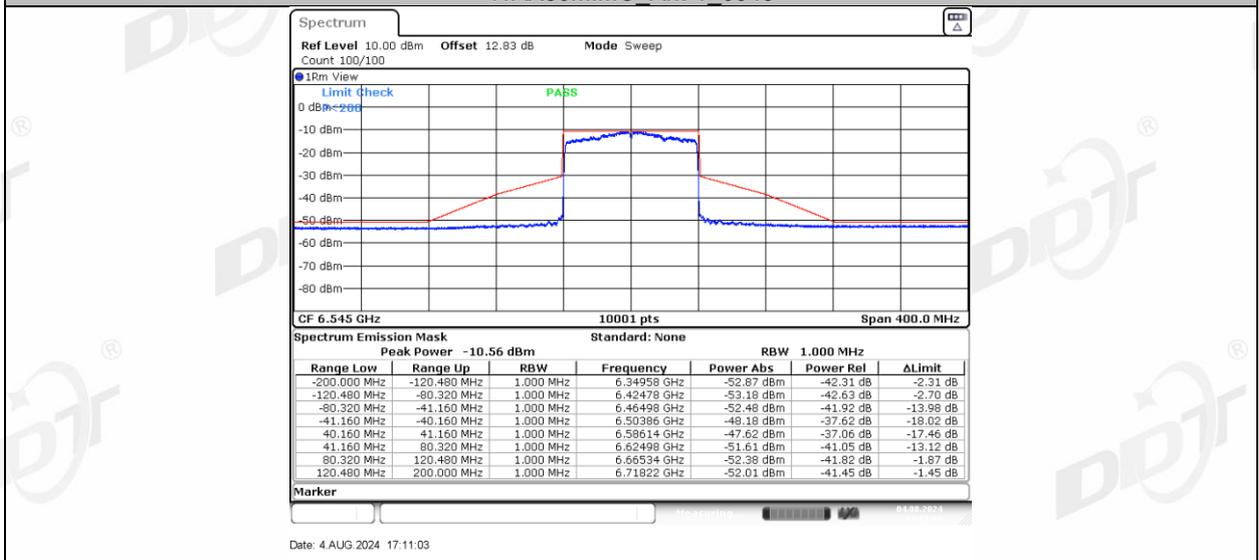


11AX80MIMO Ant-3 6545

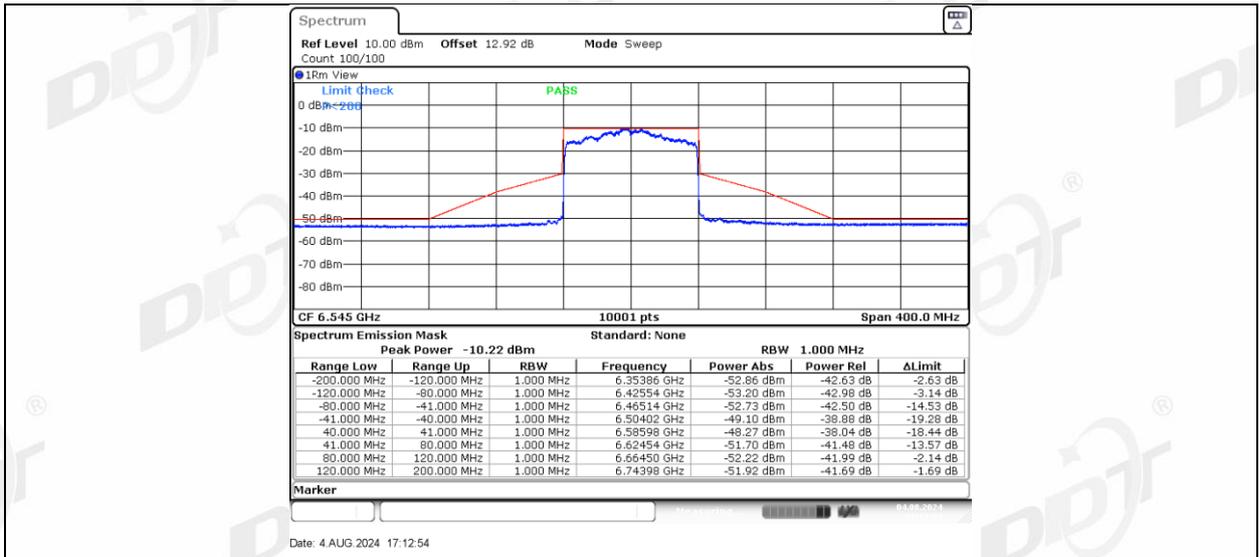


11AX80MIMO Ant-1\_6625

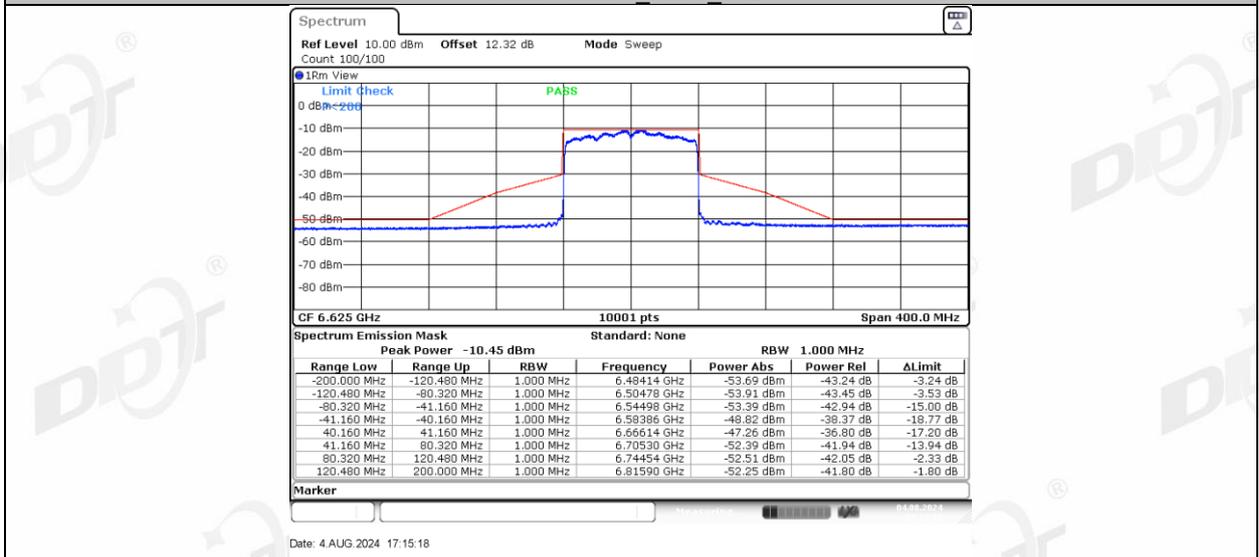


11AX80MIMO Ant-3\_6625

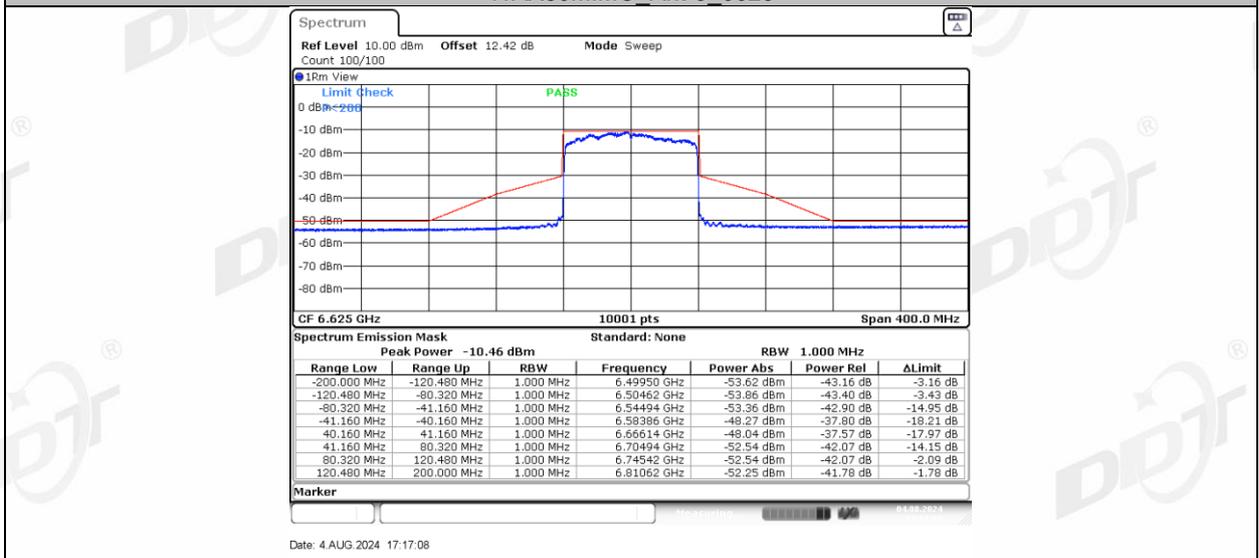


11AX80MIMO Ant-1\_6705

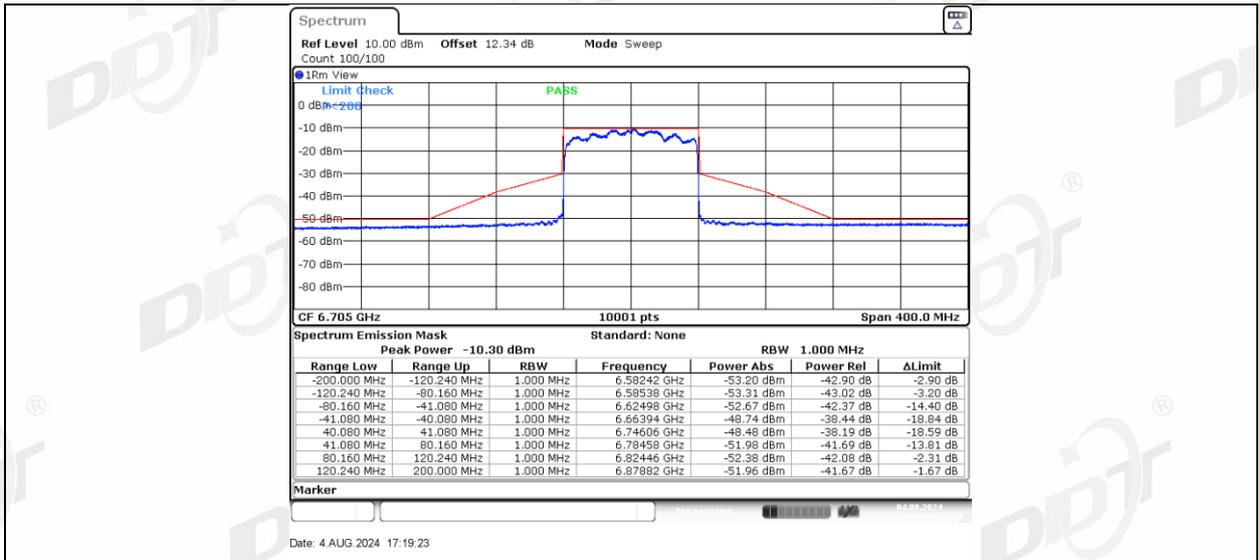


11AX80MIMO Ant-3 6705

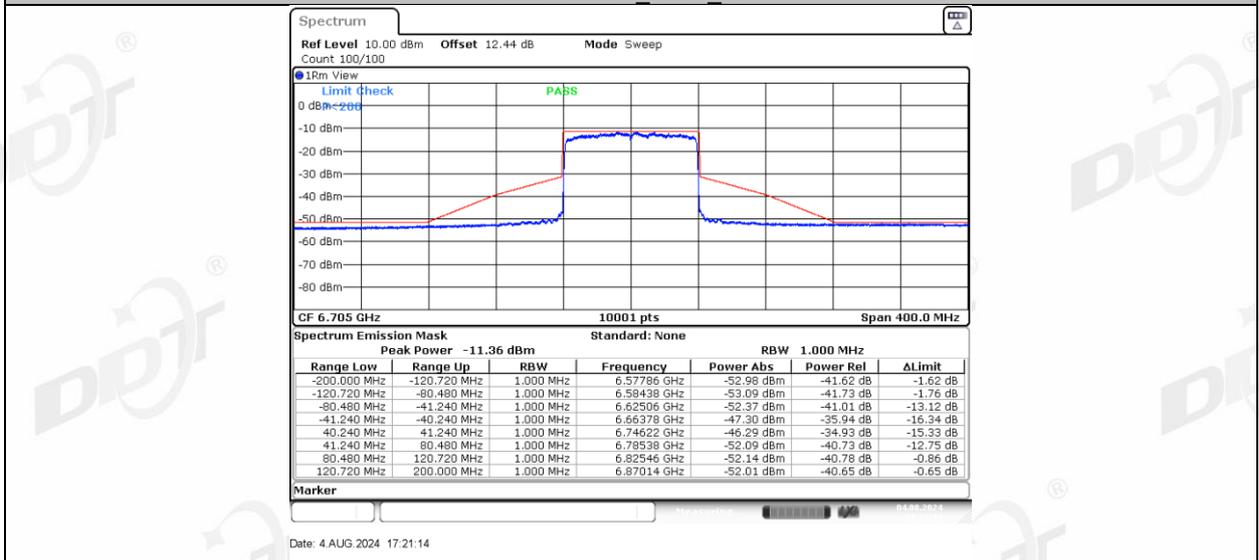


11AX80MIMO Ant-1 6785

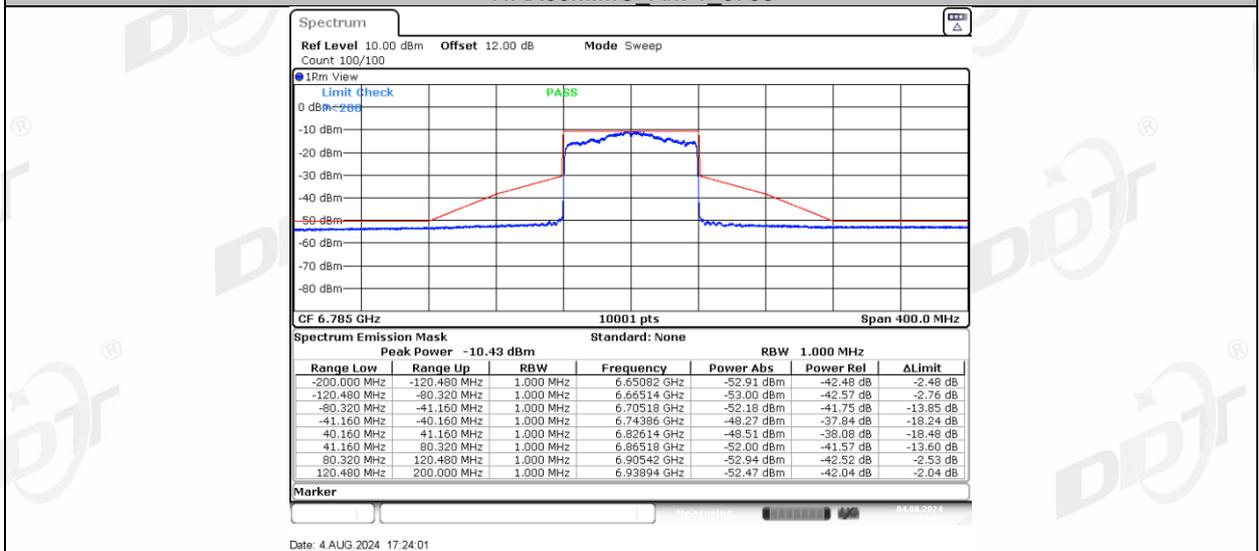


11AX80MIMO Ant-3 6785

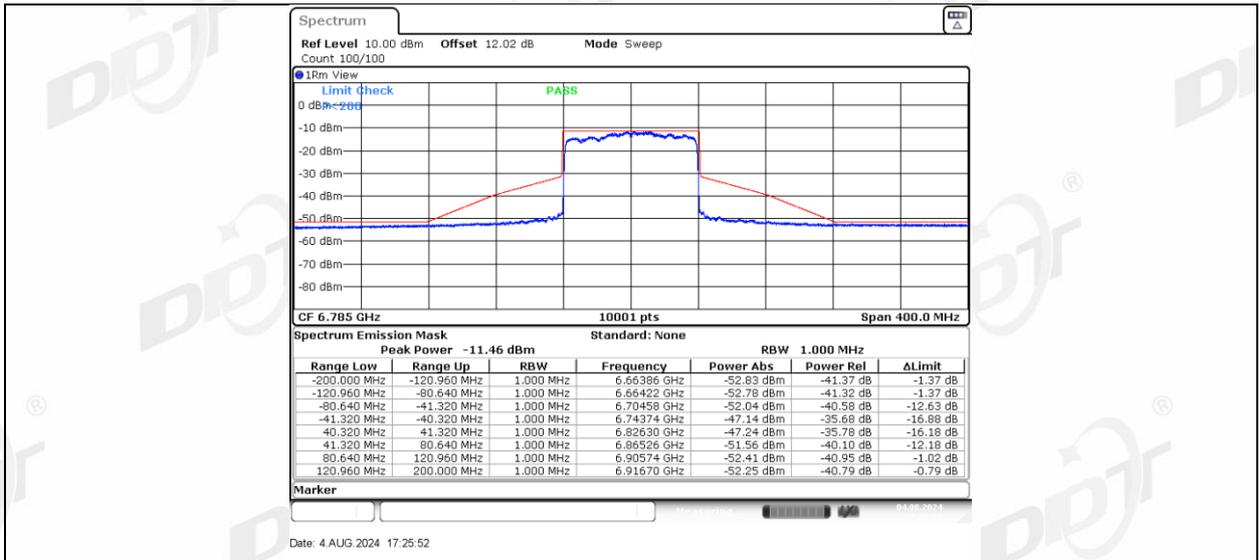


11AX80MIMO Ant-1\_6865

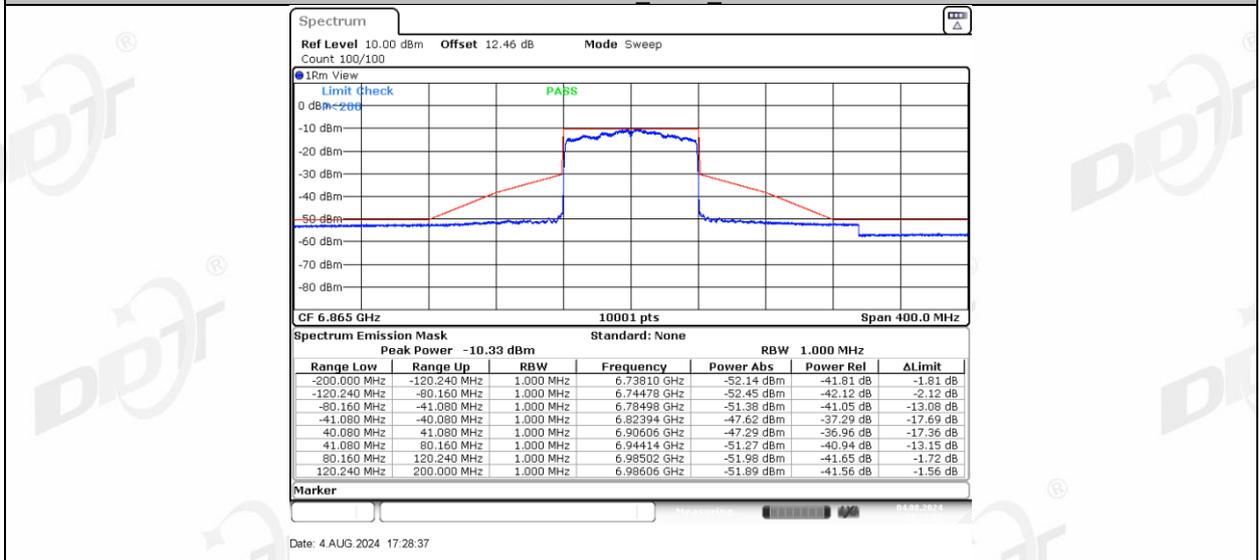


11AX80MIMO Ant-3\_6865

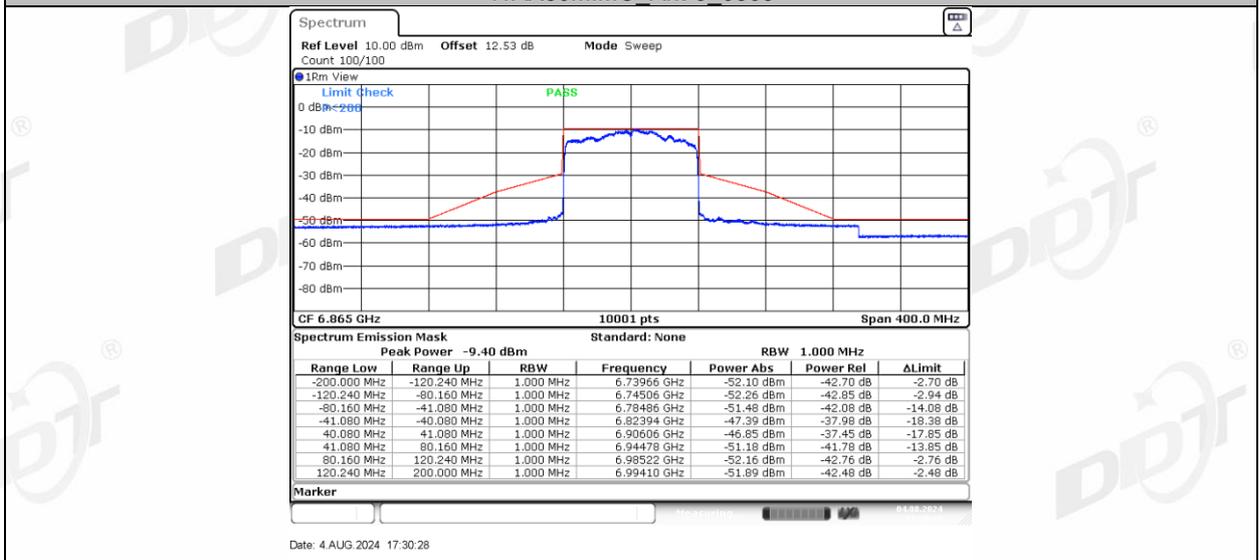


11AX80MIMO Ant-1\_6945

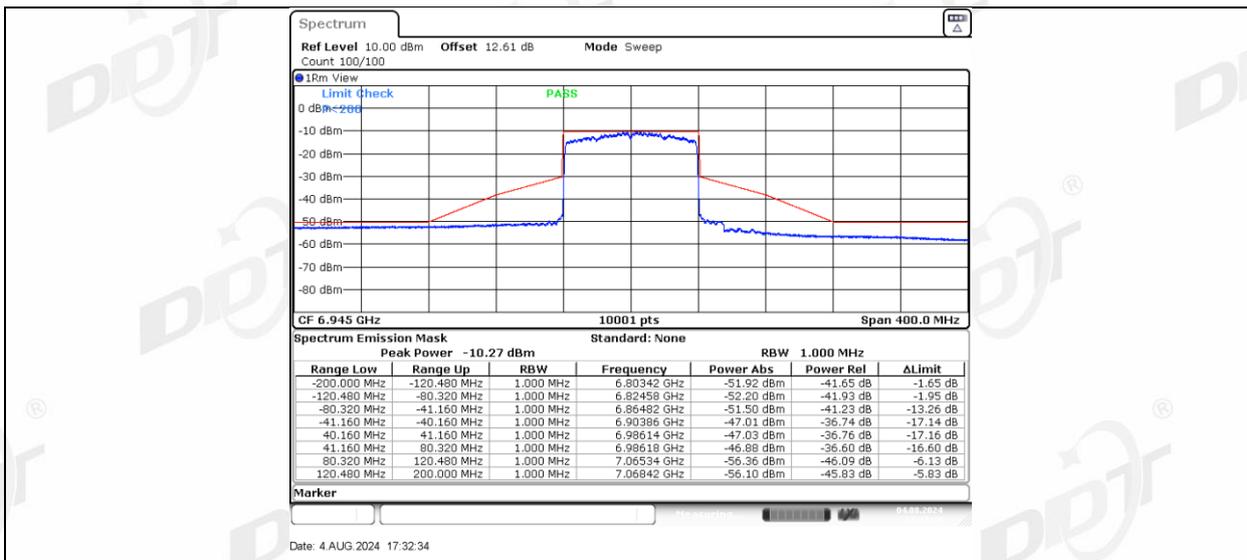


11AX80MIMO Ant-3 6945

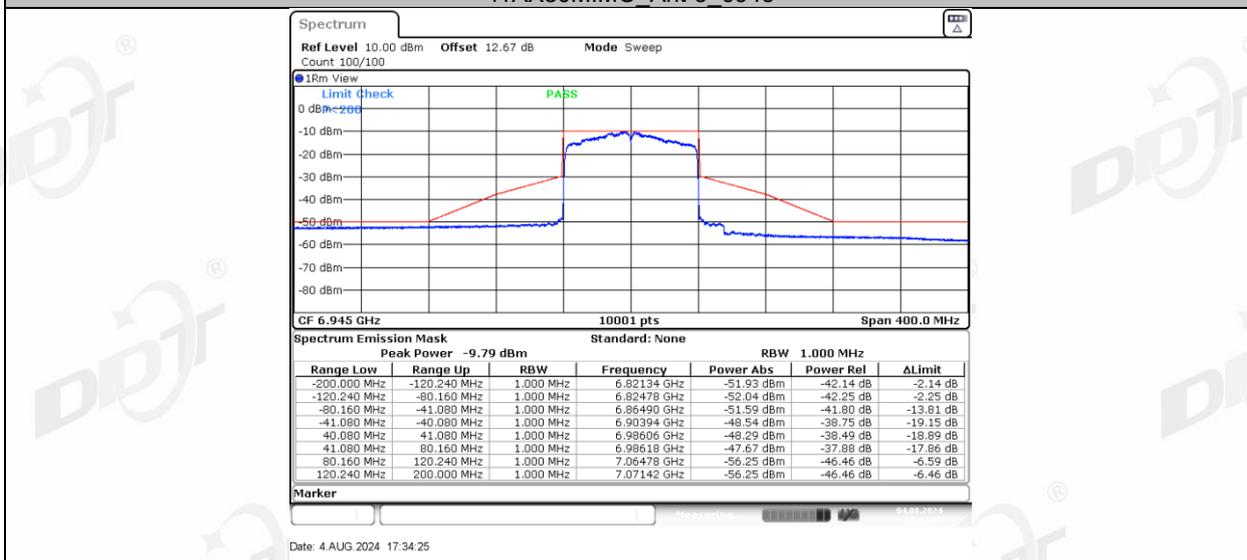

11AX80MIMO Ant-1\_ 7025

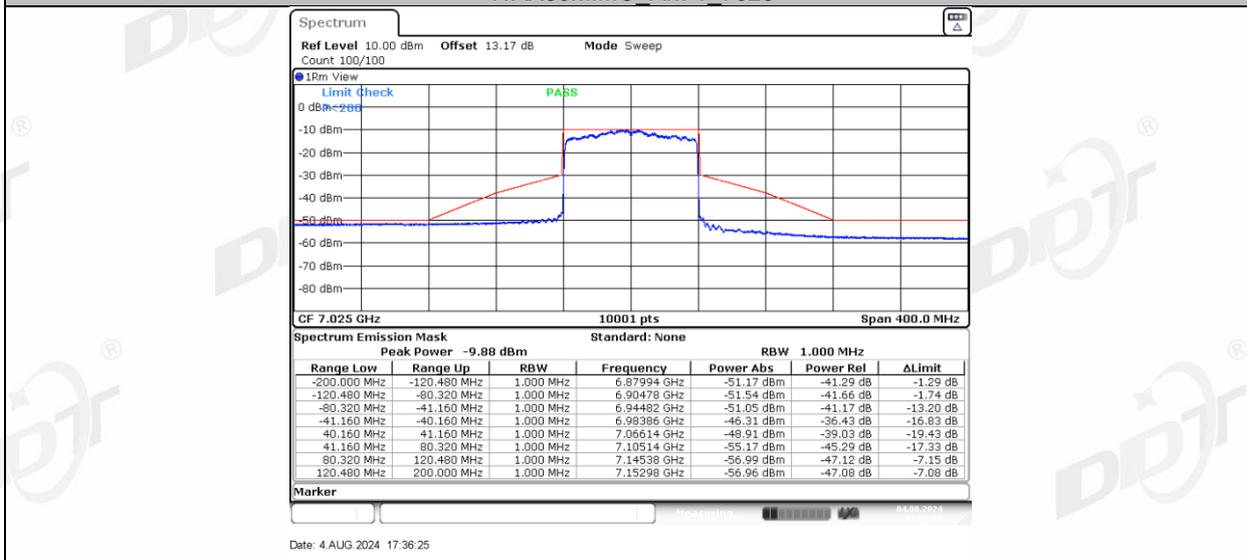


11AX80MIMO Ant-3 7025

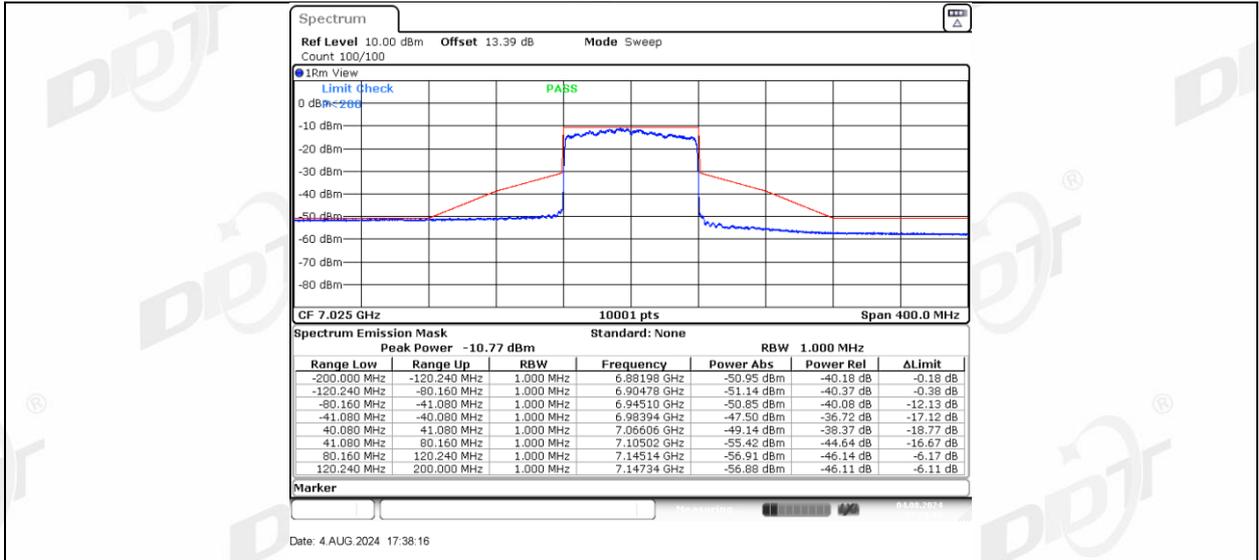

## 10. Contention Based Protocol

### 10.1. Block diagram of test setup

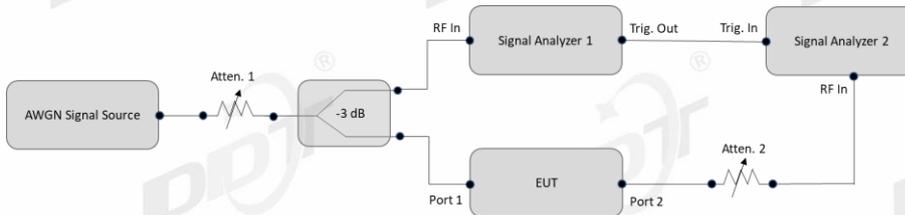

### 10.2. Limits

Indoor access points, subordinate devices and client devices operating in the 5.925-7.125 GHz band (herein referred to as unlicensed devices) are required to use technologies that include a contention-based protocol to avoid co-channel interference with incumbent devices sharing the band. To ensure incumbent co-channel operations are detected in a technology-agnostic manner, unlicensed devices are required to detect co-channel radio frequency energy (energy detect) and avoid simultaneous transmission.

Unlicensed low-power indoor devices must detect co-channel radio frequency power that is at least -62 dBm or lower. Upon detection of energy in the band, unlicensed low power indoor devices must vacate the channel (in which incumbent signal is transmitted) and stay off the incumbent channel as long as

detected radio frequency power is equal to or greater than the threshold (-62 dBm)<sup>1</sup>. The -55.01 dBm (or lower) threshold is referenced to a 6.99 dBi antenna gain.

To ensure incumbent operations are reliably detected in the band, low power indoor devices must detect RF energy throughout their intended operating channel. For example, an 802.11 device that plans to transmit a 40 MHz- wide signal (on a primary 20 MHz channel and a secondary 20 MHz channel) must detect energy throughout the entire 40 MHz channel. Additionally, low-power indoor devices must detect co-channel energy with 90% or greater certainty.

### 10.3. Test procedure

**Table 1. Criteria to determine number of times detection threshold test may be performed**

If	Number of Tests	Placement of Incumbent Transmission
$BW_{EUT} \leq BW_{Inc}$	Once	Tune incumbent and EUT transmissions ( $f_{c1} = f_{c2}$ )
$BW_{Inc} < BW_{EUT} \leq 2BW_{Inc}$	Once	Incumbent transmission is contained within $BW_{EUT}$
$2BW_{Inc} < BW_{EUT} \leq 4BW_{Inc}$	Twice. Incumbent transmission is contained within $BW_{EUT}$	Incumbent transmission is located as closely as possible to the lower edge and upper edge, respectively, of the EUT channel
$BW_{EUT} > 4BW_{Inc}$	Three times	Incumbent transmission is located as closely as possible to the lower edge of the EUT channel, in the middle of EUT channel, and as closely as possible to the upper edge of the EUT channel

1. Configure the EUT to transmit with a constant duty cycle.
2. Set the operating parameters of the EUT including power level, operating frequency, modulation and bandwidth.
3. Set the signal analyzer center frequency to the nominal EUT channel center frequency. The span range of the signal analyzer shall be between two times and five times the OBW of the EUT. Connect the output port of the EUT to the signal analyzer 2, as shown in Figure 2. Ensure that the attenuator 2 provides enough attenuation to not overload the signal analyzer 2 receiver.
4. Monitoring the signal analyzer 2, verify the EUT is operating and transmitting with the parameters set at step two.
5. Using an AWGN signal source, generate (but do not transmit, i.e., RF OFF) a 10 MHz-wide AWGN signal. Use Table 1 to determine the center frequency of the 10 MHz AWGN signal relative to the EUT's channel bandwidth and center frequency.
6. Set the AWGN signal power to an extremely low level (more than 20 dB below the -62 dBm threshold). Connect the AWGN signal source, via a 3-dB splitter, to the signal analyzer 1 and the EUT as shown in Figure 2.
7. Transmit the AWGN signal (RF ON) and verify its characteristics on the signal analyzer 1.
8. Monitor the signal analyzer 2 to verify if the AWGN signal has been detected and the EUT has ceased transmission. If the EUT continues to transmit, then incrementally increase the AWGN signal power level until the EUT stops transmitting.
9. (Including all losses in the RF paths) Determine and record the AWGN signal power level (at the EUT's antenna port) at which the EUT ceased transmission. Repeat the procedure at least 10 times to verify the EUT can detect an AWGN signal with 90% (or better) level of certainty.
10. Refer to Table 1 to determine number of times the detection threshold testing needs to be repeated. If testing is required more than once, then go back to step 5, choose a different center frequency for the AWGN signal and repeat the process.