

APPENDIX 2: Data of EMI test


20dB Bandwidth and Carrier Frequency Separation

Test place UL Japan, Inc. Shonan EMC Lab. No.6 Shielded Room
Date 2010/10/6
Temperature / Humidity 20deg.C. , 51%
Engineer Hikaru Shirasawa
Mode Tx,

Mode	Freq. [MHz]	20dB Bandwidth [MHz]	Carrier Frequency Separation [MHz]	Limit for Carrier Frequency Separation [MHz]
DH5	2402.0	0.930	1.003	>= 0.620
DH5	2441.0	0.933	1.005	>= 0.622
DH5	2480.0	0.933	1.005	>= 0.622
3DH5	2402.0	1.280	1.008	>= 0.853
3DH5	2441.0	1.265	1.003	>= 0.843
3DH5	2480.0	1.263	1.003	>= 0.842
Inquiry	2441.0	0.818	2.004	>= 0.545


Limit: Two-thirds of 20dB Bandwidth or 25kHz (whichever is greater).
No limit applies to 20dB Bandwidth.

20dB Bandwidth and Carrier Frequency Separation

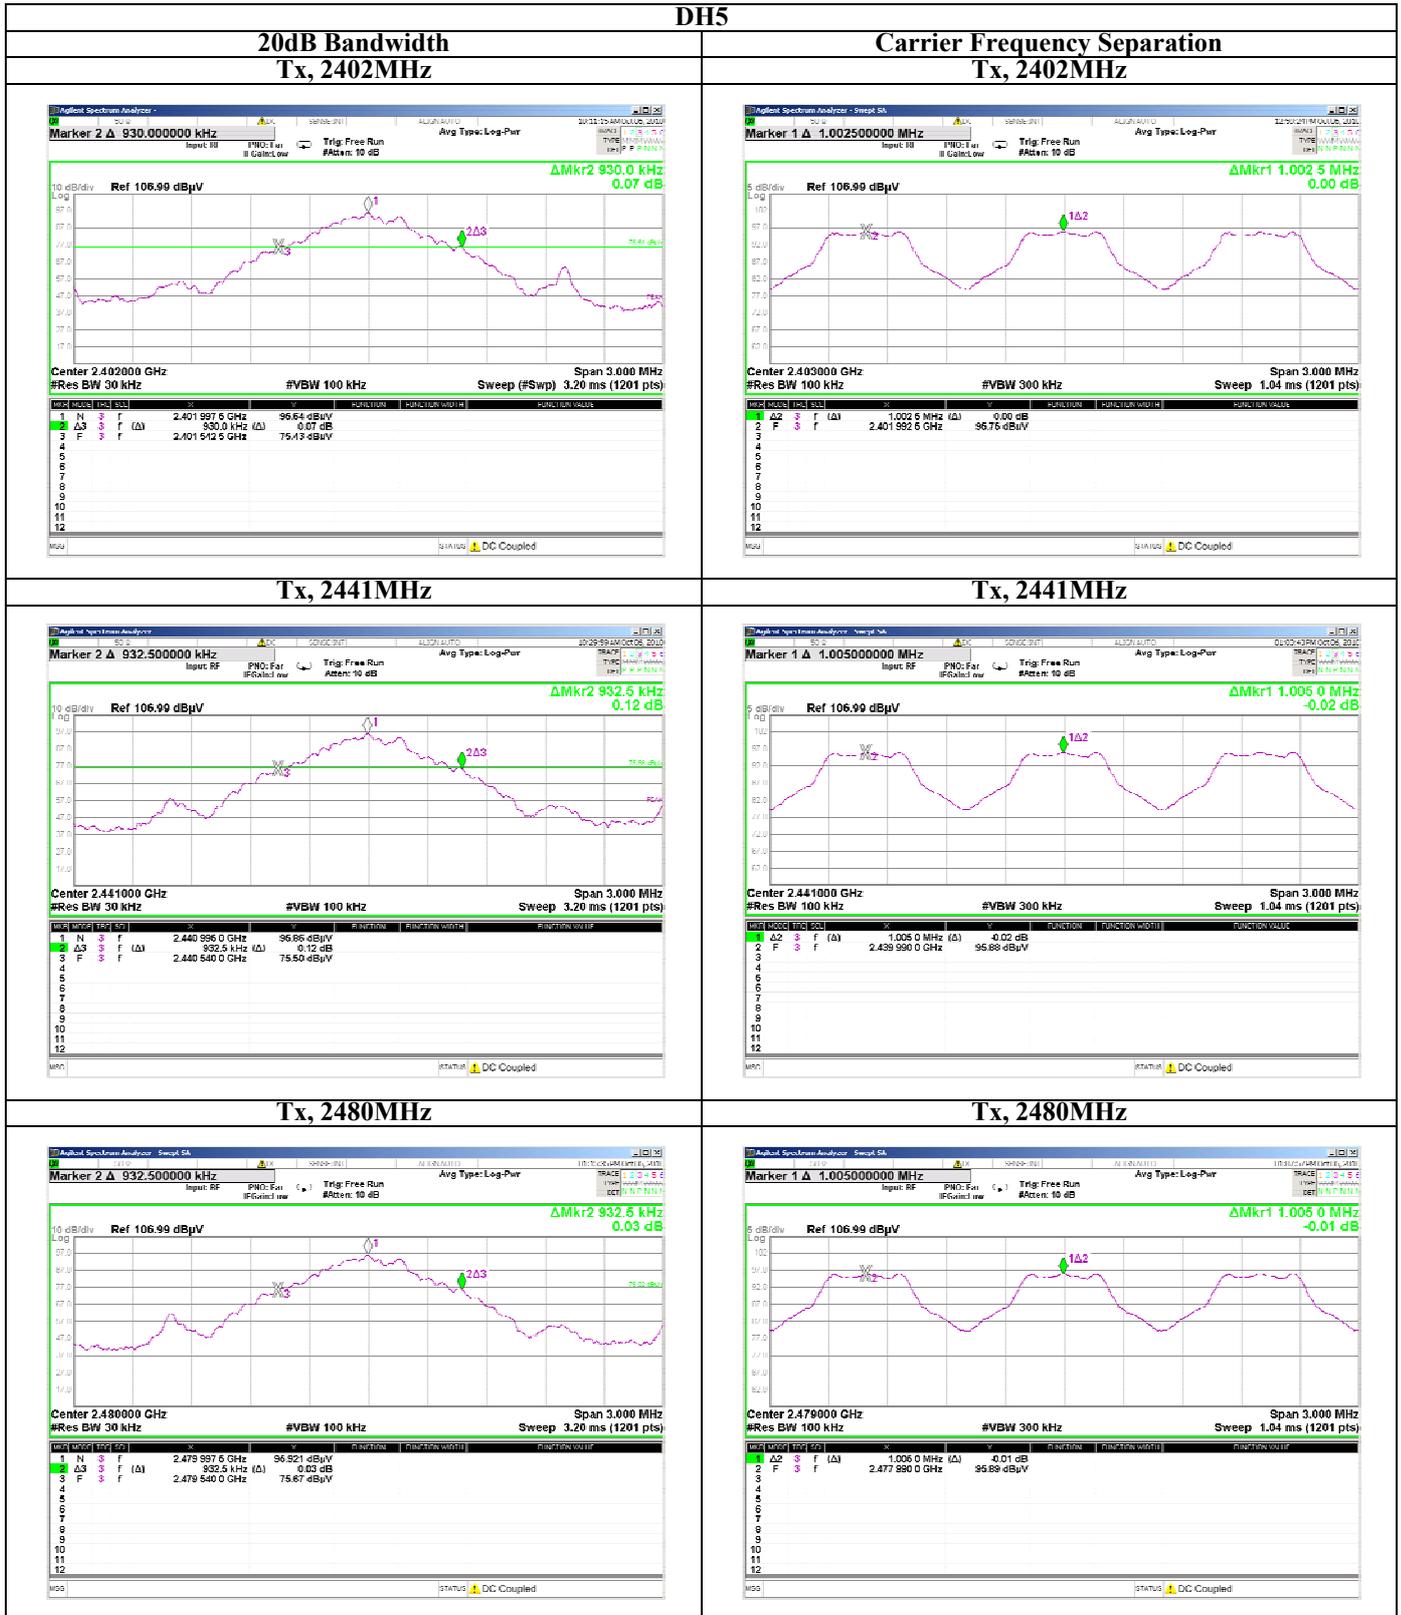


20dB Bandwidth and Carrier Frequency Separation

3-DH5

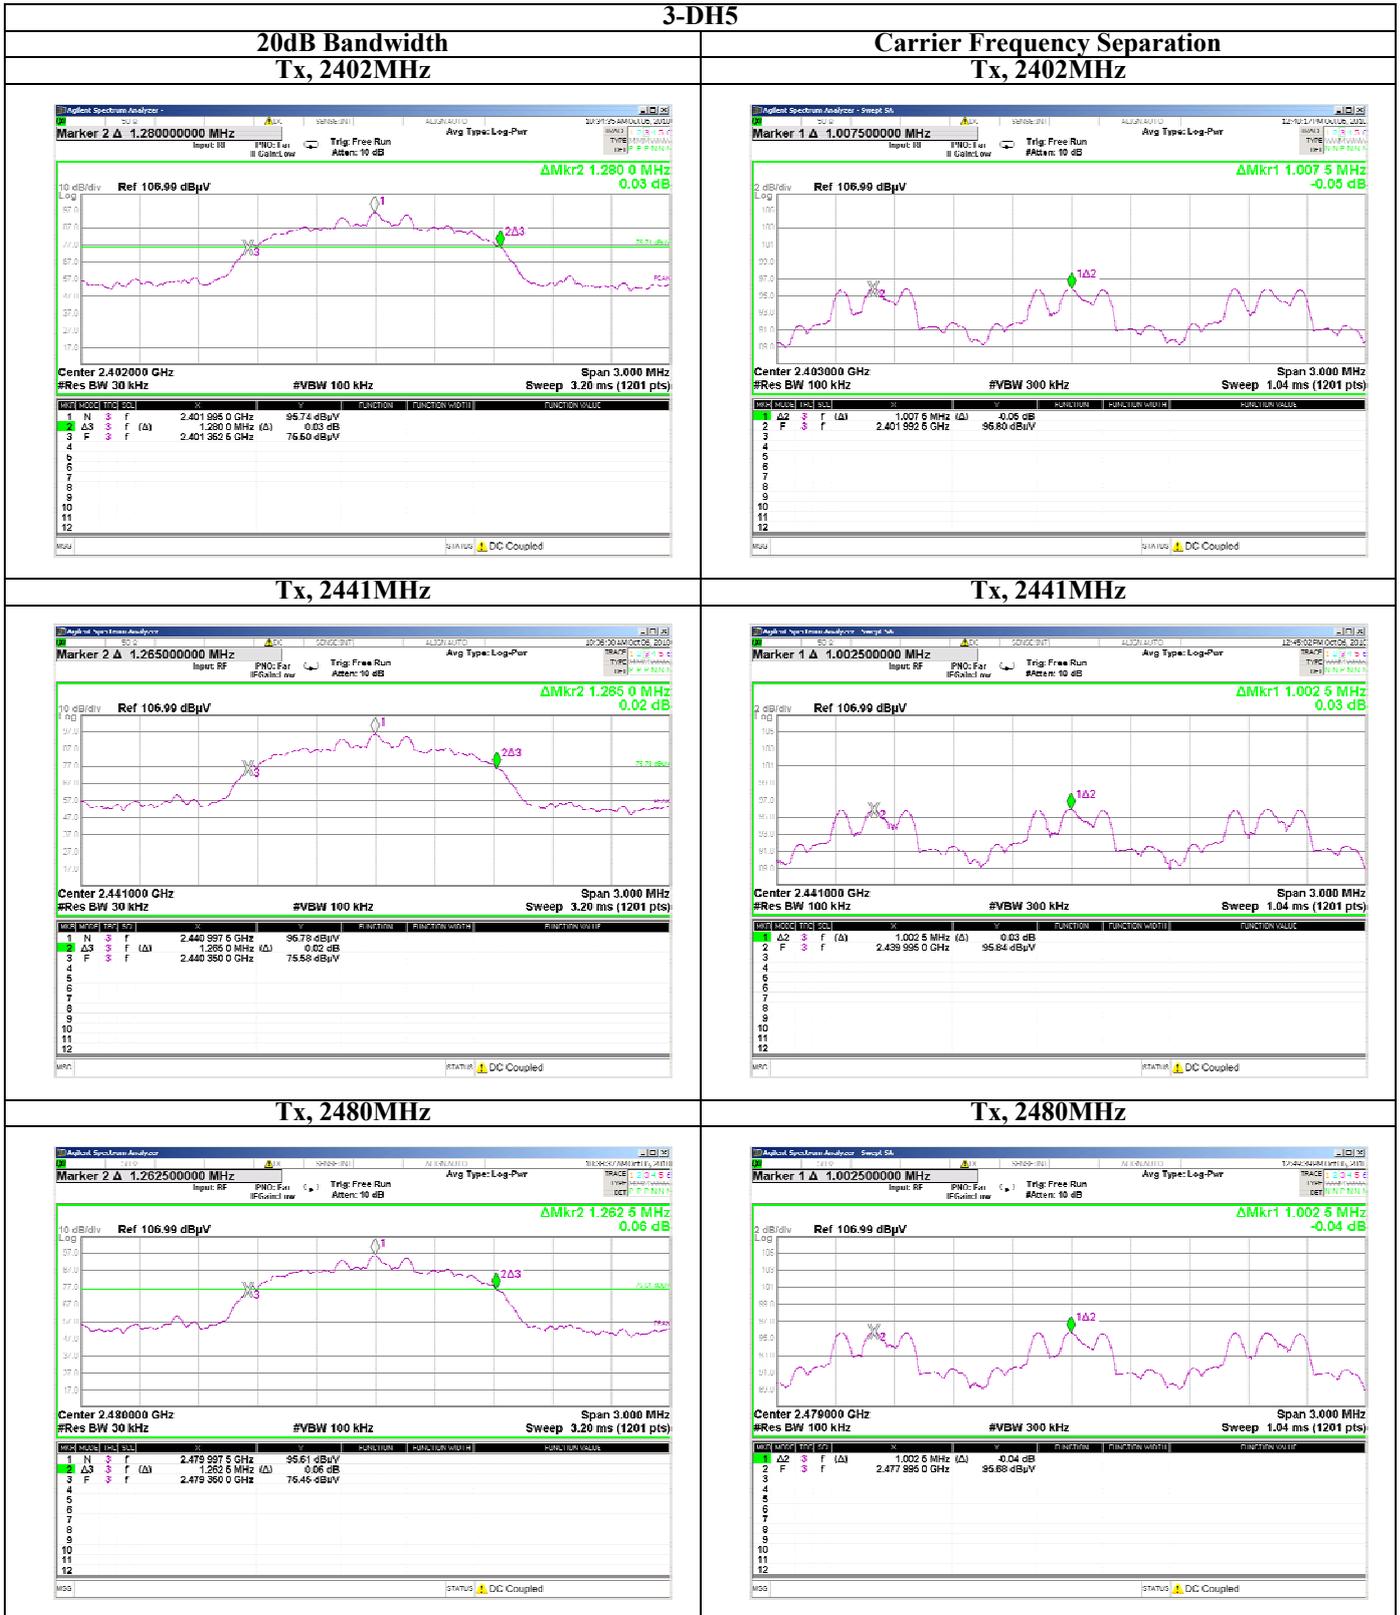

20dB Bandwidth and Carrier Frequency Separation

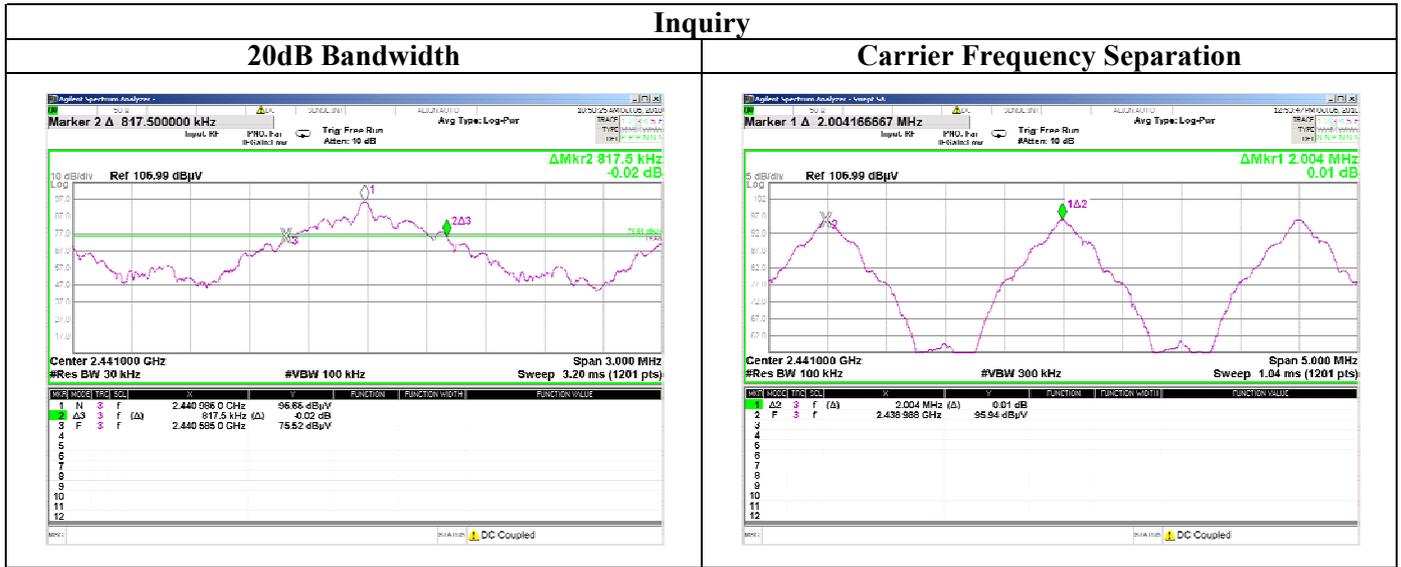

UL Japan, Inc.
Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN
 Telephone : +81 463 50 6400
 Facsimile : +81 463 50 6401