



Test Report No.: RF2502WDG0042-3



TEST REPORT

Applicant	Sony Group Corporation
Address	1-7-1 Konan Minato-ku Tokyo, 108-0075 Japan

Manufacturer or Supplier	Sony Group Corporation
Address	1-7-1 Konan Minato-ku Tokyo, 108-0075 Japan
Product	Wireless Noise Canceling Gaming Headset
Brand Name	SONY
Model	YY2987
Additional Models & Model Difference	N/A
Date of tests	Feb. 12, 2025 ~ Mar. 03, 2025

The tests have been carried out according to the requirements of the following standards:

FCC Part 15, Subpart C, Section 15.247

CONCLUSION: The submitted sample was found to COMPLY with the test requirement

Prepared by Lucas Chen
Project Engineer / EMC Department

Approved by Glyn He
Assistant Manager / EMC Department

Date: Apr. 14, 2025

This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents



TABLE OF CONTENTS

RELEASE CONTROL RECORD	4
1 SUMMARY OF TEST RESULTS.....	5
2 MEASUREMENT UNCERTAINTY	5
3 GENERAL INFORMATION	6
3.1 GENERAL DESCRIPTION OF EUT	6
3.2 DESCRIPTION OF TEST MODES	8
3.2.1 CONFIGURATION OF SYSTEM UNDER TEST	9
3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL.....	9
3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS	11
3.4 DESCRIPTION OF SUPPORT UNITS	11
3.5 CONFIGURATION OF SYSTEM UNDER TEST	12
3.6 DUTY CYCLE OF TEST SIGNAL.....	13
4 TEST TYPES AND RESULTS.....	14
4.1. CONDUCTED EMISSION MEASUREMENT	14
4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT	14
4.1.2 TEST INSTRUMENTS.....	14
4.1.3 TEST PROCEDURES	15
4.1.4 DEVIATION FROM TEST STANDARD	15
4.1.5 TEST SETUP	16
4.1.6 EUT OPERATING CONDITIONS	16
4.1.7 TEST RESULTS.....	17
4.2. RADIATED EMISSION AND BANDEDGE MEASUREMENT.....	19
4.2.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT	19
4.2.2 TEST INSTRUMENTS.....	20
4.2.3 TEST PROCEDURES	21
4.2.4 DEVIATION FROM TEST STANDARD	22
4.2.5 TEST SETUP	22
4.2.6 EUT OPERATING CONDITIONS	23
4.2.7 TEST RESULTS.....	24
4.3 NUMBER OF HOPPING FREQUENCY USED	32
4.3.1 LIMIT OF HOPPING FREQUENCY USED	32
4.3.2 TEST SETUP	32
4.3.3 TEST INSTRUMENTS.....	32
4.3.4 TEST PROCEDURES	33
4.3.5 DEVIATION FROM TEST STANDARD	33
4.3.6 TEST RESULTS.....	33
4.4 DWELL TIME ON EACH CHANNEL	36
4.4.1 LIMIT OF DWELL TIME USED	36
4.4.2 TEST SETUP	36
4.4.3 TEST INSTRUMENTS.....	36
4.4.4 TEST PROCEDURES	36
4.4.5 DEVIATION FROM TEST STANDARD	37
4.4.6 TEST RESULTS.....	37
4.5 CHANNEL BANDWIDTH	39



Test Report No.: RF2502WDG0042-3

4.5.1	LIMITS OF CHANNEL BANDWIDTH	39
4.5.2	TEST SETUP	39
4.5.3	TEST INSTRUMENTS.....	39
4.5.4	TEST PROCEDURE	39
4.5.5	DEVIATION FROM TEST STANDARD	39
4.5.6	EUT OPERATING CONDITION.....	39
4.5.7	TEST RESULTS.....	40
4.6	HOPPING CHANNEL SEPARATION.....	44
4.6.1	LIMIT OF HOPPING CHANNEL SEPARATION	44
4.6.2	TEST SETUP	44
4.6.3	TEST INSTRUMENTS.....	44
4.6.4	TEST PROCEDURES	44
4.6.5	DEVIATION FROM TEST STANDARD	44
4.6.6	TEST RESULTS.....	45
4.7	CONDUCTED OUTPUT POWER.....	49
4.7.1	LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT.....	49
4.7.2	TEST SETUP	49
4.7.3	TEST INSTRUMENTS.....	49
4.7.4	TEST PROCEDURES	50
4.7.5	DEVIATION FROM TEST STANDARD	50
4.7.6	EUT OPERATING CONDITION.....	50
4.7.7	TEST RESULTS.....	51
4.8	OUT OF BAND EMISSION MEASUREMENT	53
4.8.1	LIMITS OF OUT OF BAND EMISSION MEASUREMENT	53
4.8.2	TEST INSTRUMENTS.....	53
4.8.3	TEST PROCEDURE	53
4.8.4	DEVIATION FROM TEST STANDARD	53
4.8.5	EUT OPERATING CONDITION.....	53
4.8.6	TEST RESULTS.....	53
5	PHOTOGRAPHS OF THE TEST CONFIGURATION	58
6	APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING	
	CHANGES TO THE EUT BY THE LAB.....	59



Test Report No.: RF2502WDG0042-3

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF2502WDG0042-3	Original release	Apr. 14, 2025

1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart C			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit.
15.247(a)(1)(iii)	Number of Hopping Frequency Used	PASS	Meet the requirement of limit.
15.247(a)(1)(iii)	Dwell Time on Each Channel	PASS	Meet the requirement of limit.
15.247(a)(1)	1. Hopping Channel Separation 2. Spectrum Bandwidth of a Frequency Hopping Sequence Spread Spectrum System	PASS	Meet the requirement of limit.
15.247(b)	Conducted Output Power	PASS	Meet the requirement of limit.
15.247(d)&15.209	Transmitter Radiated Emission	PASS	Meet the requirement of limit.
15.247(d)	Out of Band Emission Measurement	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	No antenna connector is used.

2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9kHz~30MHz	3.36dB
Radiated emissions	9KHz ~ 30MHz	2.48dB
	30MHz ~ 1GMHz	4.32dB
	1GHz ~ 18GHz	4.76dB
	18GHz ~ 40GHz	4.50dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Wireless Noise Canceling Gaming Headset
MODEL NO.	YY2987
ADDITIONAL MODELS	N/A
FCC ID	AK8YY2987
POWER SUPPLY	DC 3.85V from Li-ion Battery or Powered by USB Host Unit
MODULATION TECHNOLOGY	FHSS
MODULATION TYPE	GFSK
OPERATING FREQUENCY	2402MHz ~ 2480MHz for 2.4GHz Wireless (1Mbps) 2404MHz ~ 2478MHz for 2.4GHz Wireless (2Mbps)
NUMBER OF CHANNEL	40 for 2.4GHz Wireless (1Mbps) 37 for 2.4GHz Wireless (2Mbps)
PEAK OUTPUT POWER	2.958mW (Max. Measured)
ANTENNA TYPE	FPC Antenna, 3.63dBi Gain
I/O PORTS	Refer to user's manual
CABLE SUPPLIED	For mass production product: Aux in Cable: Unshielded, detachable, 200cm USB Cable: Shielded, detachable, 200cm Microphone: Unshielded, detachable, 15cm
	For demo product: USB& Aux in Cable: Unshielded, Non-detachable, 290cm Microphone: Unshielded, non-detachable, 15cm

NOTES:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
2. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.
3. Please refer to the EUT photo document (Reference No.: 2502WDG0042-2) for detailed product photo.



Test Report No.: RF2502WDG0042-3

4. For trade convenience, this product has types of headsets, one is a mass production product, the other is a demonstration product, they are identical in RF circuitry. In appearance, the AUX jack position of the demo prototype is fixed with a rechargeable Y-shaped wire for playing audio signals (Type C port is vacant and microphone accessories are unremovable), while the microphone, AUX In port and Type C port of the mass production prototype work independently as well as wire and microphone accessories are removable. On PCBA, some components and layout are different, the demo prototype PCBA does not have AUX jack, and the Type-C seat does not support charging function, while the mass production prototype has AUX jack and Type C seat, and the Type C seat supports charging function. In terms of function, the demo prototype does not support the microphone function, and it needs to work under the Y-shaped wire power supply. The mass production prototype works on both battery and charge. In view of the differences between the two types, all tests were carried out on the mass production prototype, the radiated emission(below 1GHz) test was carried out on the demonstration prototype, but only the worst case (mass production prototype) was shown in test report.

3.2 DESCRIPTION OF TEST MODES

40 channels are provided to GFSK 1M, 37 channels are provided to GFSK 2M.

CHANNEL	FREQ. (MHZ)						
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

Remark: GFSK 2M does not use the CH0/CH12/CH39 channel.

3.2.1 CONFIGURATION OF SYSTEM UNDER TEST

Please see section 5 photograph of the test configuration for reference.

3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, power supply voltage range and antenna ports. Following channel(s) was (were) selected for the final test as listed below:

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE<1G	RE≥1G	PLC	APCM	
A	√	√	√	-	Powered by adapter
B	-	-	-	√	Powered by Li-ion Battery

Where RE<1G: Radiated Emission below 1GHz
PLC: Power Line Conducted Emission

RE≥1G: Radiated Emission above 1GHz
APCM: Antenna Port Conducted Measurement

RADIATED EMISSION TEST (BELOW 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, X/Y/Z axis, antenna ports (if EUT with antenna diversity architecture) and packet type.
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	0 to 39	39	FHSS	GFSK	1

For the test results, only the worst case was shown in test report.

RADIATED EMISSION TEST (ABOVE 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, X/Y/Z axis, antenna ports (if EUT with antenna diversity architecture) and packet type.
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	0 to 39	0,19, 39	FHSS	GFSK	1
A	1 to 38	1,19, 38	FHSS	GFSK	2

POWER LINE CONDUCTED EMISSION TEST:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, antenna ports (if EUT with antenna diversity architecture), and packet types.
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	TESTED CONDITION
A	2.4GHz Wireless Link

ANTENNA PORT CONDUCTED MEASUREMENT:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, antenna ports (if EUT with antenna diversity architecture), and packet types.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
B	0 to 39	0,19, 39	FHSS	GFSK	1
B	1 to 38	1,19, 38	FHSS	GFSK	2

- Following channel(s) was (were) selected for the final test as listed below.

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	TEST VOLTAGE	TESTED BY
RE<1G	24deg. C, 58%RH	Powered by Adapter Input AC 120V 60Hz	Ludius
RE≥1G	24deg. C, 58%RH	Powered by Adapter Input AC 120V 60Hz	Ludius
PLC	25deg. C, 56%RH	Powered by Adapter Input AC 120V 60Hz	Summer
APCM	25deg. C, 60%RH	DC 3.85V from Fully Battery	Vincent



3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

- FCC Part 15, Subpart C. Section 15.247**
- KDB 558074 D01 15.247 Meas Guidance v05r02**
- ANSI C63.10-2013**

All test items have been performed and recorded as per the above standards.

3.4 DESCRIPTION OF SUPPORT UNITS


The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	Remark
1	Adaptor	N/A	N/A	N/A	N/A
2	Dongle	SONY	YY2988	N/A	N/A

NO.	DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	N/A
2	N/A


3.5 CONFIGURATION OF SYSTEM UNDER TEST

For Conducted Emission Test

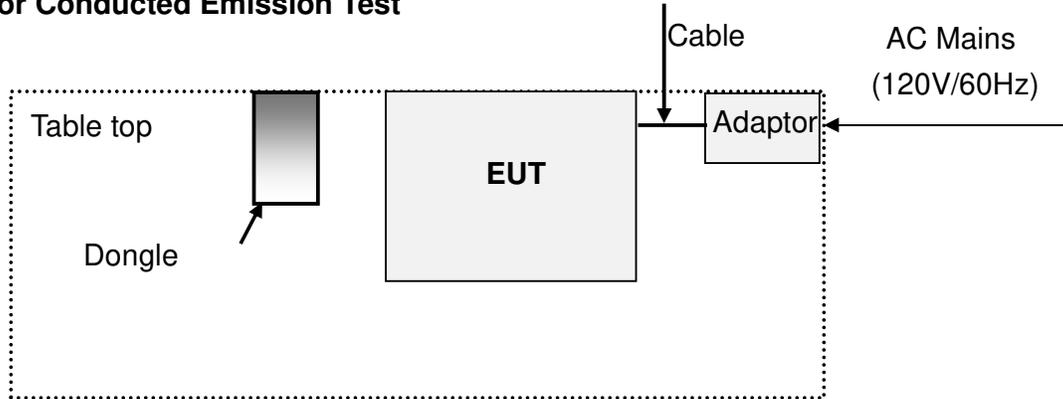

Note: For the actual test configuration, please refer to the attached file (Test Setup Photo).


For Radiated Emission Test

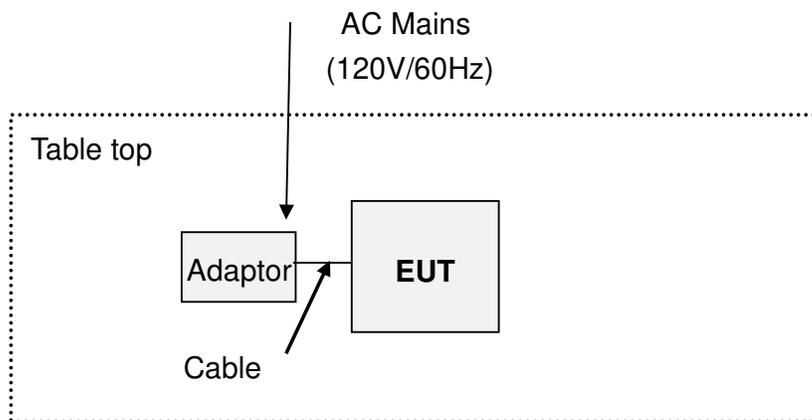

Note: For the actual test configuration, please refer to the attached file (Test Setup Photo).

3.6 DUTY CYCLE OF TESET SIGNAL

Test Mode	On Time (ms)	Period (ms)	Duty Cycle (%)	1/T Min. VBW (KHz)	VBW Setting
GFSK (1Mbps)	2.113	6.872	30.75	0.473	500Hz
GFSK (2Mbps)	1.060	2.501	42.38	0.943	1KHz

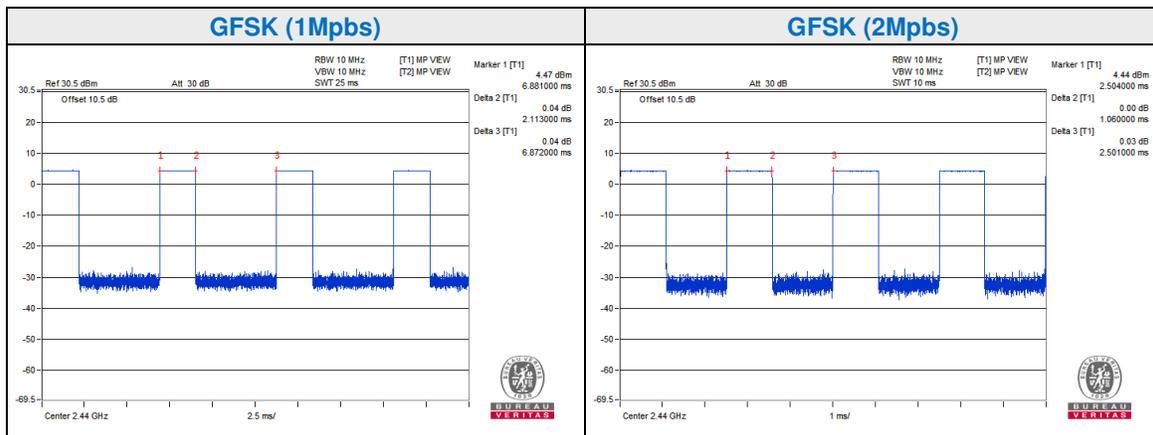

4 TEST TYPES AND RESULTS

4.1. CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

- NOTES:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESR7	101494	Oct. 09, 25
Artificial Mains Network	Rohde&Schwarz	ENV216	101173	Oct. 10, 25
Artificial Mains Network	Rohde&Schwarz	ESH3-Z5	100317	Oct. 09, 25
Artificial Mains Network	SCHWARZBECK	NSLK 8122	8122-05001	Apr. 09, 25
V-LISN (CISPR 25)	SCHWARZBECK	NNBM 8124-200	8124-200 05857	Apr. 09, 25
V-LISN (CISPR 25)	SCHWARZBECK	NNBM 8124-200	8124-200 05858	Apr. 09, 25
Voltage probe	SCHWARZBECK	TK 9421	TK 9421-176	Jul. 10, 25
Coaxial RF Cable	SUHNER	RG 223/U-CE	G2310066DG	Jun. 23, 25
Test software	ADT	ADT_Cond_V7.3.7	N/A	N/A

- NOTES:**
1. The test was performed in shielded room 553.
 2. Equipment are calibrated by calibration laboratory accredited to ISO/IEC 17025 by a mutually recognized Accreditation and all tests are conducted within a valid calibration cycle.



4.1.3 TEST PROCEDURES


- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation.

4.1.5 TEST SETUP

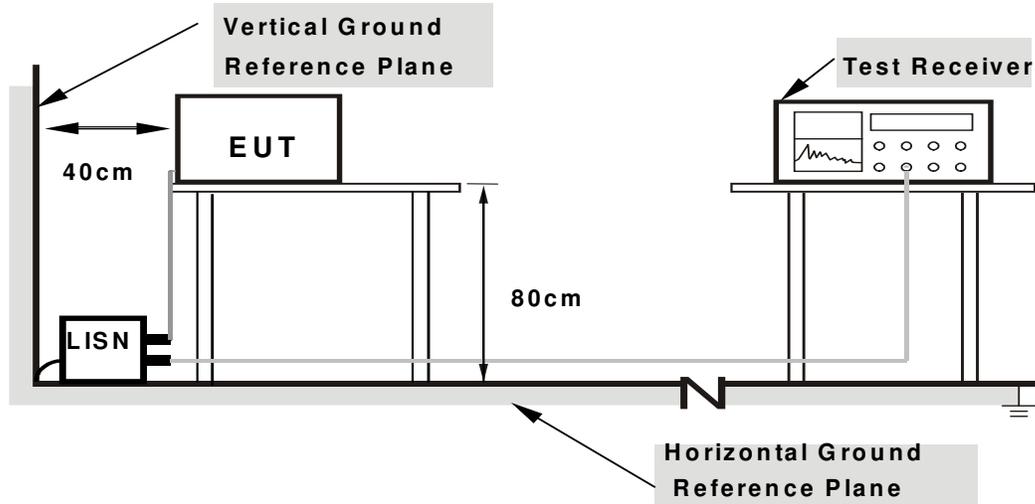

- Note: 1.Support units were connected to second LISN.**
2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT OPERATING CONDITIONS

- a. Turned on the power and connected of all equipment.
- b. EUT was operated according to the type used was description in manufacturer's specifications or the User's Manual.


4.1.7 TEST RESULTS

CONDUCTED WORST-CASE DATA: 2.4GHz Wireless Link

PHASE	Line	6dB BANDWIDTH	9kHz
--------------	------	----------------------	------

No.	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15715	9.75	22.72	4.77	32.47	14.52	65.61	55.61	-33.14	-41.09
2	0.25144	9.80	18.36	3.21	28.16	13.01	61.71	51.71	-33.55	-38.70
3	0.62687	9.84	19.54	11.33	29.38	21.17	56.00	46.00	-26.62	-24.83
4	3.26625	10.01	7.50	1.25	17.51	11.26	56.00	46.00	-38.49	-34.74
5	6.06300	10.14	9.22	2.08	19.36	12.22	60.00	50.00	-40.64	-37.78
6	17.06100	11.11	16.81	9.62	27.92	20.73	60.00	50.00	-32.08	-29.27


REMARKS: The emission levels of other frequencies were very low against the limit.

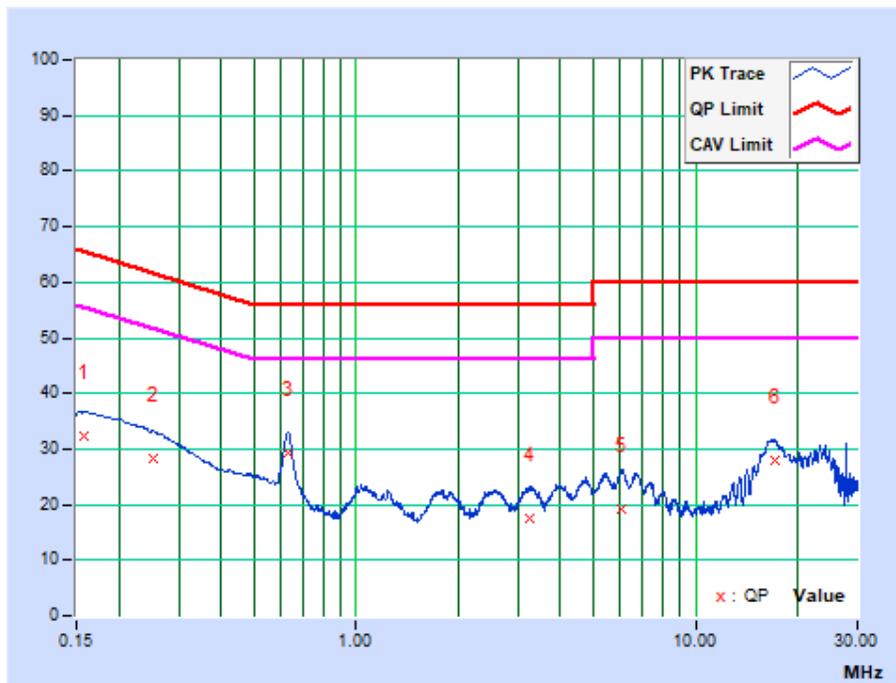

PHASE	Neutral	6dB BANDWIDTH	9kHz
--------------	---------	----------------------	------

No.	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15509	9.78	22.62	3.89	32.40	13.67	65.72	55.72	-33.33	-42.06
2	0.22875	9.73	19.73	1.46	29.46	11.19	62.49	52.49	-33.04	-41.31
3	0.63019	9.69	12.18	3.65	21.87	13.34	56.00	46.00	-34.13	-32.66
4	3.91200	9.91	1.82	-3.19	11.73	6.72	56.00	46.00	-44.27	-39.28
5	6.42300	10.07	1.90	-3.12	11.97	6.95	60.00	50.00	-48.03	-43.05
6	17.13300	11.10	11.08	6.80	22.18	17.90	60.00	50.00	-37.82	-32.10

REMARKS: The emission levels of other frequencies were very low against the limit.

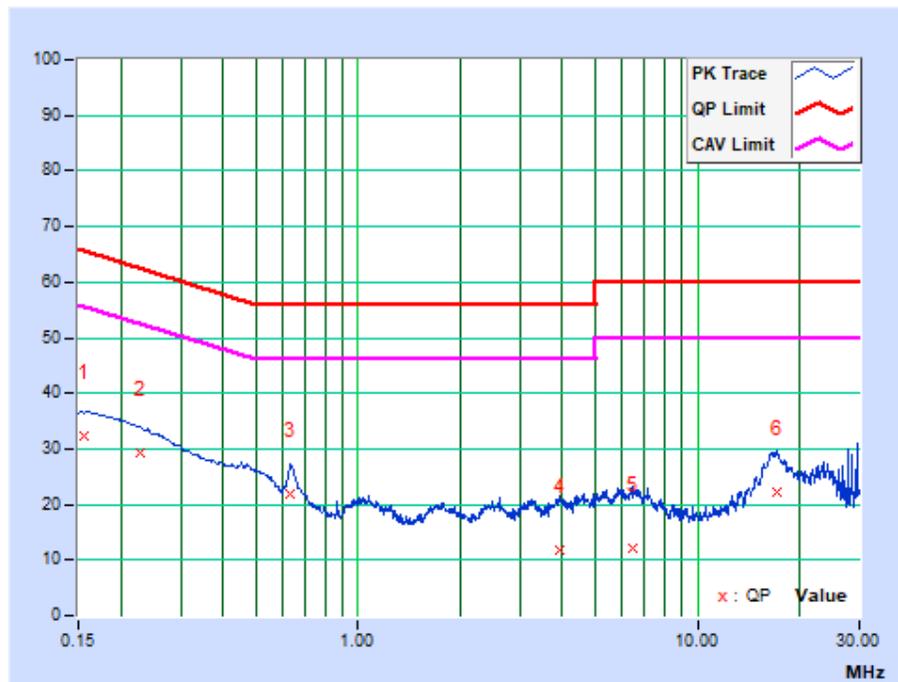



4.2. RADIATED EMISSION AND BANDEDGE MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a). Other emissions shall be at least 20dB below the highest level of the desired power.

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTES:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



Test Report No.: RF2502WDG0042-3

4.2.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESU40	100449	Oct. 10, 25
Signal and Spectrum Analyzer	Rohde&Schwarz	FSV7	102331	Apr. 07, 25
Active Loop Antenna (9KHz -30MHz)	SCHWARZBECK	FMZB 1519B	1519B-045	Apr. 13, 25
Amplifier (9KHz -1GHz)	Burgeon	BPA-530	100210	Feb. 21, 26
Trilog-Broadband Antenna	SCHWARZBECK	VULB 9168	9168-554	Dec. 25, 25
Horn Antenna (1GHz -18GHz)	ETS -Lindgren	3117	0085519	Oct. 19, 25
Horn Antenna (18GHz -40GHz)	SCHWARZBECK	BBHA 9170	BBHA9170147	Apr. 12, 25
3m Semi-anechoic Chamber	ETS-LINDGREN	9m*6m*6m	NSEMC003	May. 20, 25
Test Software	ADT	ADT_Radiated_V7.6.15.9.2	N/A	N/A
Broadband Preamplifier (1GHz~18GHz)	SCHWARZBECK	BBV9718	305	Apr. 24, 25
Pre-Amplifier (18GHz-40GHz)	EMCI	EMC 184045	980102	Jan. 02, 26
BLUETOOTH TESTER	Rohde&Schwarz	CBT32	100811	N/A

NOTES:

1. The test was performed in 966 Chamber.
2. Equipment are calibrated by calibration laboratory accredited to ISO/IEC 17025 by a mutually recognized Accreditation.
3. The horn antenna is used only for the measurement of emission frequency above 1GHz if tested.
4. The FCC Site registration No. is 749762, and the designation number is CN1174.

4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 1.5 meters (above 1GHz) and 0.8 meters (below 1GHz) above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. For below 1GHz was used bilog antenna, and above 1GHz was used horn antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. For below 30MHz, a loop antenna with its vertical plane is place 3m from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT, the lowest height of the magnetic antenna shall be 1m above the ground.
- g. During the test, each emission was maximized by having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, for battery operated equipment, the equipment tests shall be perform using fresh batteries. The turntable was rotated to maximize the emission level.

NOTES:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated, and the worst-case emissions are reported.
5. The testing of the EUT was performed on all 3 orthogonal axes; the worst-case test configuration was reported on the file test setup photo.

4.2.4 DEVIATION FROM TEST STANDARD


No deviation.

4.2.5 TEST SETUP

Below 30MHz test setup

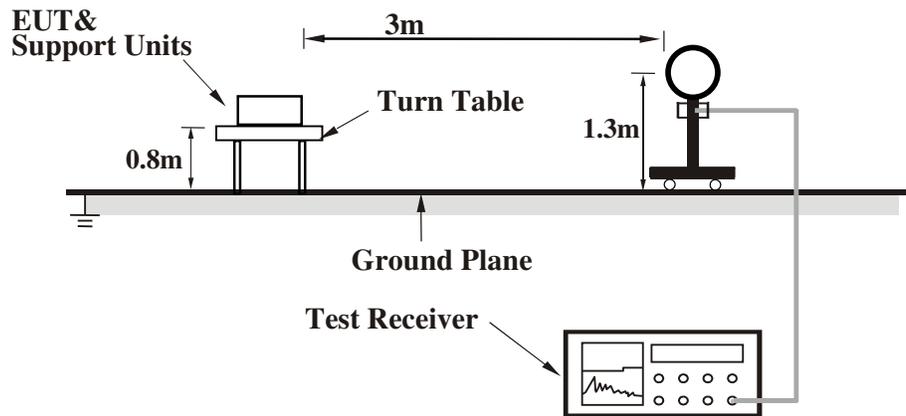


Below 1GHz test setup

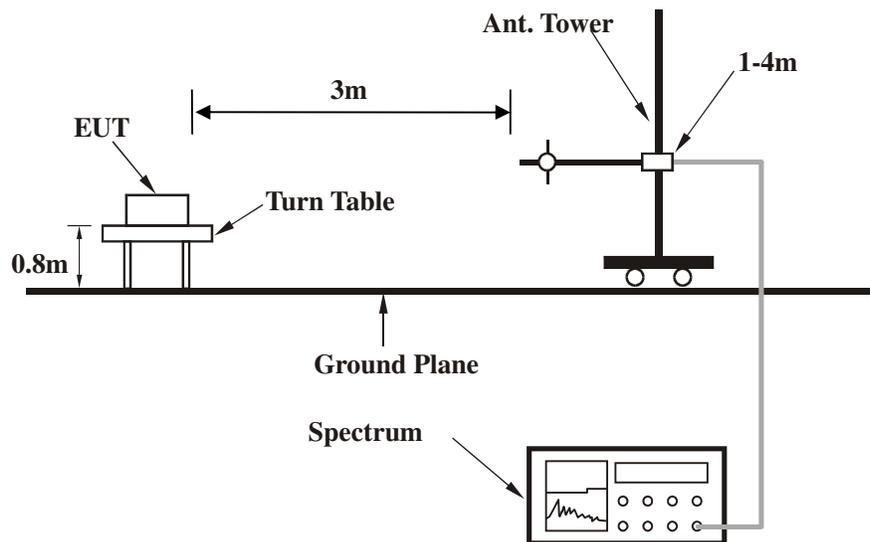

Note: For the actual test configuration, please refer to the attached file (Test Setup Photo).

Above 1GHz test setup

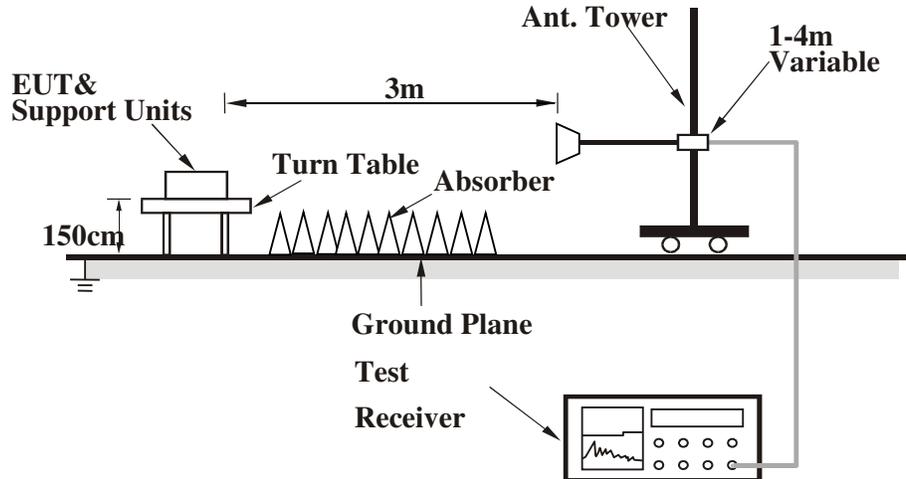

Note: For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT OPERATING CONDITIONS

- a. Set the EUT under full load condition and placed them on a testing table.
- b. Set the transmitter part of EUT under transmission condition continuously at specific channel frequency.
- c. The necessary accessories enable the EUT in full functions.

4.2.7 TEST RESULTS

BELOW 1GHz WORST-CASE DATA:


GFSK 1M

CHANNEL	Channel 39	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9KHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTIO N FACTOR (dB/m)
1	33.11	22.31 QP	40.00	-17.69	1.75 H	90	41.33	-19.02
2	45.54	17.46 QP	40.00	-22.54	1.89 H	104	35.30	-17.84
3	99.95	15.98 QP	43.50	-27.52	2.04 H	119	37.58	-21.60
4	163.69	22.93 QP	43.50	-20.57	1.58 H	73	39.86	-16.93
5	238.30	15.76 QP	46.00	-30.24	2.20 H	134	33.62	-17.86
6	773.04	31.43 QP	46.00	-14.57	1.38 H	54	36.16	-4.73

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. 9KHz~30MHz have been test and test data more than 20dB margin.
5. Margin value = Emission level – Limit value

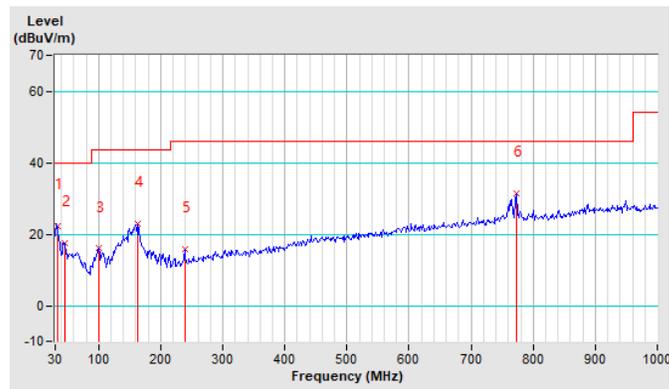


CHANNEL	Channel 39	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9KHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTIO N FACTOR (dB/m)
1	67.31	21.69 QP	40.00	-18.31	1.46 V	1	40.44	-18.75
2	98.40	22.08 QP	43.50	-21.42	1.28 V	16	43.89	-21.81
3	138.81	26.39 QP	43.50	-17.11	1.16 V	29	43.65	-17.26
4	188.56	15.11 QP	43.50	-28.39	1.99 V	0	34.32	-19.21
5	765.27	31.01 QP	46.00	-14.99	1.61 V	0	35.82	-4.81
6	872.53	27.81 QP	46.00	-18.19	1.76 V	0	31.05	-3.24

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. 9KHz~30MHz have been test and test data more than 20dB margin.
5. Margin value = Emission level – Limit value

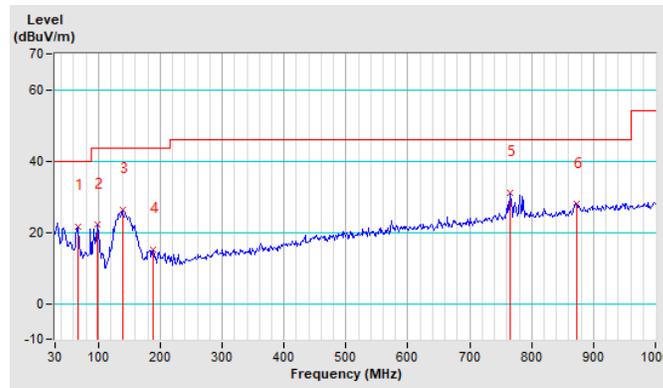



ABOVE 1GHz DATA

GFSK 1M

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE : HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	46.02 PK	74.00	-27.98	1.02 H	141	43.14	2.88
2	2390.00	34.41 AV	54.00	-19.59	1.02 H	141	31.53	2.88
3	*2402.00	102.01 PK			1.01 H	12	99.10	2.91
4	*2402.00	100.80 AV			1.01 H	12	97.89	2.91
5	4804.00	51.01 PK	74.00	-22.99	1.01 H	111	44.04	6.97
6	4804.00	37.11 AV	54.00	-16.89	1.01 H	111	30.14	6.97
7	#7206.00	54.09 PK	74.00	-19.91	1.09 H	159	43.26	10.83
8	#7206.00	40.59 AV	54.00	-13.41	1.09 H	159	29.76	10.83

ANTENNA POLARITY & TEST DISTANCE : VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	44.77 PK	74.00	-29.23	1.77 V	170	41.89	2.88
2	2390.00	33.70 AV	54.00	-20.30	1.77 V	170	30.82	2.88
3	*2402.00	94.94 PK			1.94 V	185	92.03	2.91
4	*2402.00	93.85 AV			1.94 V	185	90.94	2.91
5	4804.00	50.77 PK	74.00	-23.23	1.77 V	171	43.80	6.97
6	4804.00	37.71 AV	54.00	-16.29	1.77 V	171	30.74	6.97
7	#7206.00	54.49 PK	74.00	-19.51	1.48 V	5	43.66	10.83
8	#7206.00	40.77 AV	54.00	-13.23	1.48 V	5	29.94	10.83

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.



Test Report No.: RF2502WDG0042-3

CHANNEL	TX Channel 19	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE : HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2440.00	102.77 PK			1.77 H	121	99.75	3.02
2	*2440.00	101.21 AV			1.77 H	121	98.19	3.02
3	4880.00	50.61 PK	74.00	-23.39	1.61 H	111	43.42	7.19
4	4880.00	37.15 AV	54.00	-16.85	1.61 H	111	29.96	7.19
5	7320.00	53.86 PK	74.00	-20.14	1.86 H	360	42.65	11.21
6	7320.00	40.19 AV	54.00	-13.81	1.86 H	360	28.98	11.21

ANTENNA POLARITY & TEST DISTANCE : VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2440.00	95.23 PK			1.23 V	118	92.21	3.02
2	*2440.00	94.18 AV			1.23 V	118	91.16	3.02
3	4880.00	50.67 PK	74.00	-23.33	1.67 V	195	43.48	7.19
4	4880.00	37.95 AV	54.00	-16.05	1.67 V	195	30.76	7.19
5	7320.00	53.68 PK	74.00	-20.32	1.68 V	135	42.47	11.21
6	7320.00	40.35 AV	54.00	-13.65	1.68 V	135	29.14	11.21

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.



Test Report No.: RF2502WDG0042-3

CHANNEL	TX Channel 39	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE : HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	103.48 PK			1.48 H	111	100.34	3.14
2	*2480.00	102.11 AV			1.48 H	111	98.97	3.14
3	2483.50	52.31 PK	74.00	-21.69	1.31 H	148	49.15	3.16
4	2483.50	42.47 AV	54.00	-11.53	1.31 H	148	39.31	3.16
5	4960.00	50.97 PK	74.00	-23.03	1.97 H	196	43.56	7.41
6	4960.00	37.96 AV	54.00	-16.04	1.97 H	196	30.55	7.41
7	7440.00	53.49 PK	74.00	-20.51	1.49 H	121	41.88	11.61
8	7440.00	40.21 AV	54.00	-13.79	1.49 H	121	28.60	11.61

ANTENNA POLARITY & TEST DISTANCE : VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	95.70 PK			1.70 V	158	92.56	3.14
2	*2480.00	94.58 AV			1.70 V	158	91.44	3.14
3	2483.50	51.08 PK	74.00	-22.92	1.08 V	157	47.92	3.16
4	2483.50	41.57 AV	54.00	-12.43	1.08 V	157	38.41	3.16
5	4960.00	51.51 PK	74.00	-22.49	1.51 V	182	44.10	7.41
6	4960.00	37.82 AV	54.00	-16.18	1.51 V	182	30.41	7.41
7	7440.00	53.32 PK	74.00	-20.68	1.32 V	123	41.71	11.61
8	7440.00	40.23 AV	54.00	-13.77	1.32 V	123	28.62	11.61

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. Margin value = Emission level – Limit value.
5. " * " : Fundamental frequency.

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 96, Guantai Road (Houjie Section), Houjie
Town, Dongguan City, Guangdong Province.
523942. People's Republic of China.

Tel: +86 769 8998 2098
Fax: +86 769 8593 1080
Email: customerservice.dg@bureauveritas.com



BUREAU VERITAS

Test Report No.: RF2502WDG0042-3

GFSK 2M

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE : HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	46.11 PK	74.00	-27.89	1.11 H	123	43.23	2.88
2	2390.00	34.23 AV	54.00	-19.77	1.11 H	123	31.35	2.88
3	*2404.00	99.23 PK			1.23 H	180	96.31	2.92
4	*2404.00	97.80 AV			1.23 H	180	94.88	2.92
5	4808.00	50.98 PK	74.00	-23.02	1.98 H	122	44.00	6.98
6	4808.00	37.22 AV	54.00	-16.78	1.98 H	122	30.24	6.98
7	#7212.00	53.43 PK	74.00	-20.57	1.43 H	196	42.58	10.85
8	#7212.00	40.96 AV	54.00	-13.04	1.43 H	196	30.11	10.85

ANTENNA POLARITY & TEST DISTANCE : VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	44.62 PK	74.00	-29.38	1.62 V	192	41.74	2.88
2	2390.00	33.92 AV	54.00	-20.08	1.62 V	192	31.04	2.88
3	*2404.00	95.92 PK			1.92 V	150	93.00	2.92
4	*2404.00	94.50 AV			1.92 V	150	91.58	2.92
5	4808.00	51.34 PK	74.00	-22.66	1.34 V	167	44.36	6.98
6	4808.00	37.67 AV	54.00	-16.33	1.34 V	167	30.69	6.98
7	#7212.00	54.01 PK	74.00	-19.99	1.01 V	107	43.16	10.85
8	#7212.00	40.07 AV	54.00	-13.93	1.01 V	107	29.22	10.85

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 96, Guantai Road (Houjie Section), Houjie
Town, Dongguan City, Guangdong Province.
523942. People's Republic of China.

Tel: +86 769 8998 2098
Fax: +86 769 8593 1080
Email: customerservice.dg@bureauveritas.com



Test Report No.: RF2502WDG0042-3

CHANNEL	TX Channel 19	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE : HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2440.00	100.62 PK			1.62 H	199	97.60	3.02
2	*2440.00	98.99 AV			1.62 H	199	95.97	3.02
3	4880.00	51.19 PK	74.00	-22.81	1.19 H	101	44.00	7.19
4	4880.00	37.01 AV	54.00	-16.99	1.19 H	101	29.82	7.19
5	7320.00	54.36 PK	74.00	-19.64	1.36 H	165	43.15	11.21
6	7320.00	40.65 AV	54.00	-13.35	1.36 H	165	29.44	11.21

ANTENNA POLARITY & TEST DISTANCE : VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2440.00	96.88 PK			1.88 V	121	93.86	3.02
2	*2440.00	95.12 AV			1.88 V	121	92.10	3.02
3	4880.00	50.70 PK	74.00	-23.30	1.70 V	123	43.51	7.19
4	4880.00	37.23 AV	54.00	-16.77	1.70 V	123	30.04	7.19
5	7320.00	53.03 PK	74.00	-20.97	1.03 V	152	41.82	11.21
6	7320.00	40.53 AV	54.00	-13.47	1.03 V	152	29.32	11.21

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. Margin value = Emission level – Limit value.
5. " * " : Fundamental frequency.



Test Report No.: RF2502WDG0042-3

CHANNEL	TX Channel 38	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE : HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2478.00	99.73 PK			1.73 H	100	96.60	3.13
2	*2478.00	98.00 AV			1.73 H	100	94.87	3.13
3	2483.50	48.51 PK	74.00	-25.49	1.51 H	102	45.35	3.16
4	2483.50	37.02 AV	54.00	-16.98	1.51 H	102	33.86	3.16
5	4956.00	50.62 PK	74.00	-23.38	1.62 H	103	43.21	7.41
6	4956.00	37.03 AV	54.00	-16.97	1.62 H	103	29.62	7.41
7	7434.00	53.59 PK	74.00	-20.41	1.59 H	182	42.01	11.58
8	7434.00	40.89 AV	54.00	-13.11	1.59 H	182	29.31	11.58

ANTENNA POLARITY & TEST DISTANCE : VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2478.00	96.62 PK			1.62 V	191	93.49	3.13
2	*2478.00	94.91 AV			1.62 V	191	91.78	3.13
3	2483.50	44.41 PK	74.00	-29.59	1.41 V	177	41.25	3.16
4	2483.50	35.77 AV	54.00	-18.23	1.41 V	177	32.61	3.16
5	4956.00	51.64 PK	74.00	-22.36	1.64 V	142	44.23	7.41
6	4956.00	37.42 AV	54.00	-16.58	1.64 V	142	30.01	7.41
7	7434.00	53.09 PK	74.00	-20.91	1.09 V	182	41.51	11.58
8	7434.00	40.82 AV	54.00	-13.18	1.09 V	182	29.24	11.58

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. Margin value = Emission level – Limit value.
5. " * " : Fundamental frequency.

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 96, Guantai Road (Houjie Section), Houjie
Town, Dongguan City, Guangdong Province.
523942. People's Republic of China.


Tel: +86 769 8998 2098
Fax: +86 769 8593 1080
Email: customerservice.dg@bureauveritas.com

4.3 NUMBER OF HOPPING FREQUENCY USED

4.3.1 LIMIT OF HOPPING FREQUENCY USED

At least 15 channels frequencies and should be equally spaced.

4.3.2 TEST SETUP

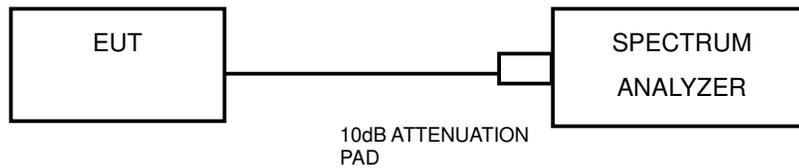

4.3.3 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Next Cal.
Power Sensor	Keysight	U2021XA	MY57320002	Apr. 07, 25
Digital Multimeter	FLUKE	15B	A1220010DG	N/A
Humid & Temp Programmable Tester	Haida	HD-225T	110807201	Oct. 10, 25
Oscilloscope	Agilent	DSO9254A	MY51260160	Jul. 07, 25
Signal and Spectrum Analyzer	Rohde&Schwarz	FSV40	101094	Oct. 09, 25
Signal Generator	Agilent	N5183A	MY50140980	Jul. 11, 25
MXG-B RF Vector Signal Generator	Keysight	N5182B	MY56200288	Jul. 11, 25
BLUETOOTH TESTER	Rohde&Schwarz	CBT32	100811	N/A
Attenuator	MINI	BW-S10W2+	S130129FGE2	N/A

NOTES:

1. The test was performed in RF Test Shielded Room.
2. Equipment are calibrated by calibration laboratory accredited to ISO/IEC 17025 by a mutually recognized Accreditation.



4.3.4 TEST PROCEDURES

- a. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- c. Set the SA on MaxHold Mode, and then keep the EUT in hopping mode. Record all the signals from each channel until each one has been recorded.
- d. Set the SA on View mode and then plot the result on SA screen.
- e. Repeat above procedures until all frequencies measured were completed.

4.3.5 DEVIATION FROM TEST STANDARD

No deviation.



4.3.6 TEST RESULTS

There are 40 hopping frequencies in the 1Mbps hopping mode, and 37 hopping frequencies in the 2Mbps hopping mode. Please refer to next two pages for the test result. On the plots, it shows that the hopping frequencies are equally spaced.



Test Report No.: RF2502WDG0042-3

GFSK 1M

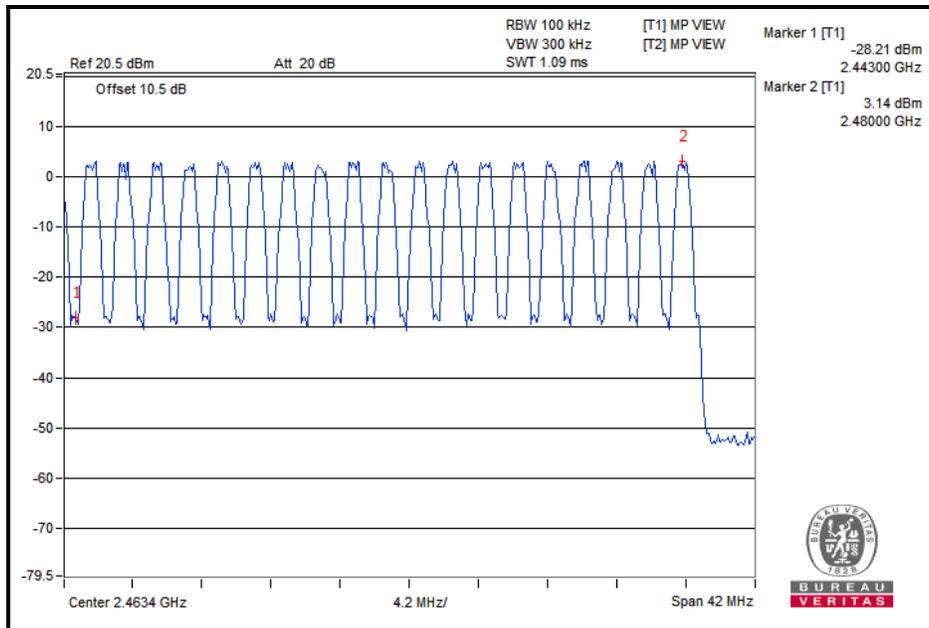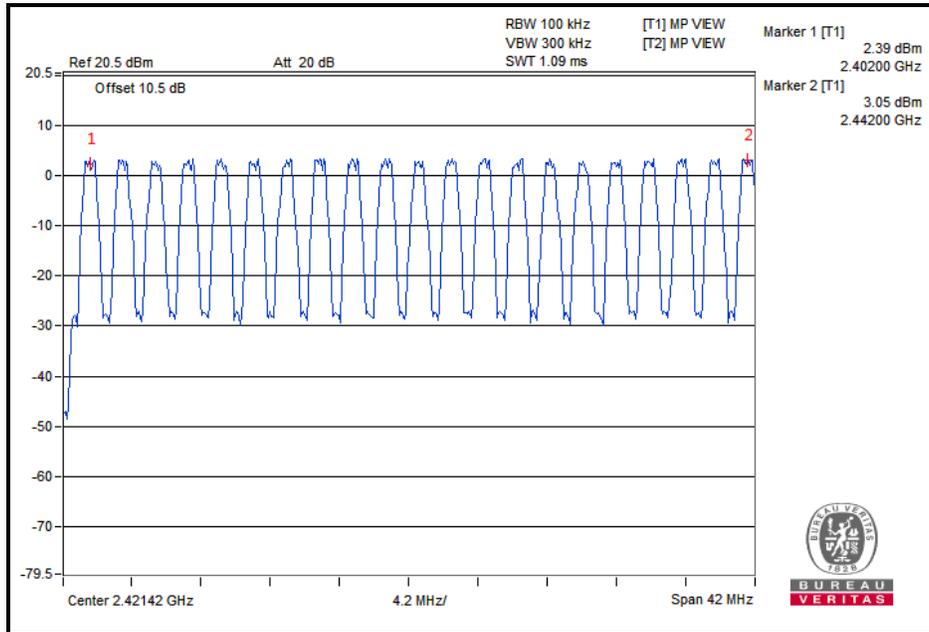

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch



No. 96, Guantai Road (Houjie Section), Houjie
Town, Dongguan City, Guangdong Province.
523942, People's Republic of China.

Tel: +86 769 8998 2098
Fax: +86 769 8593 1080
Email: customerservice.dg@bureauveritas.com



Test Report No.: RF2502WDG0042-3

GFSK 2M

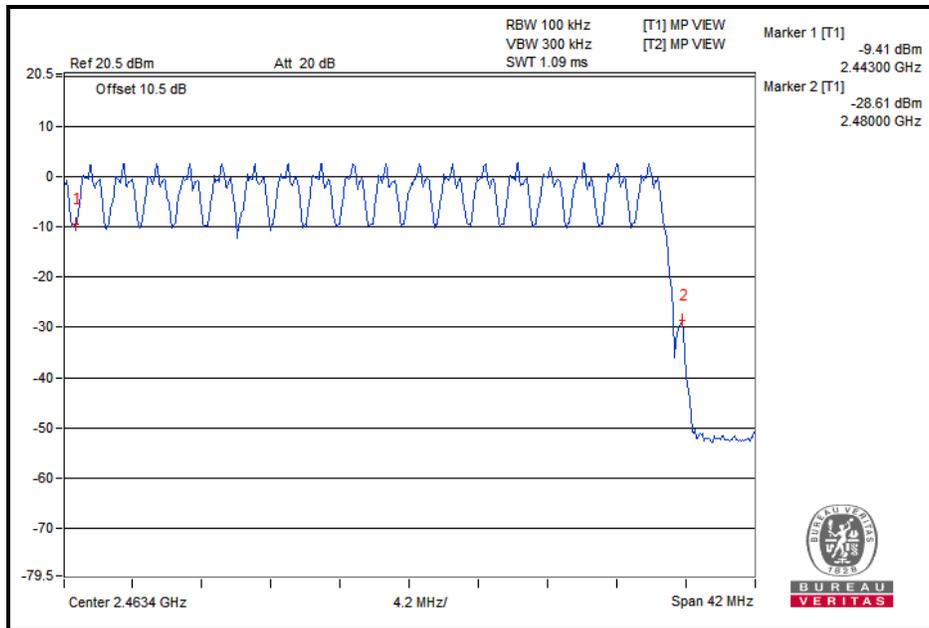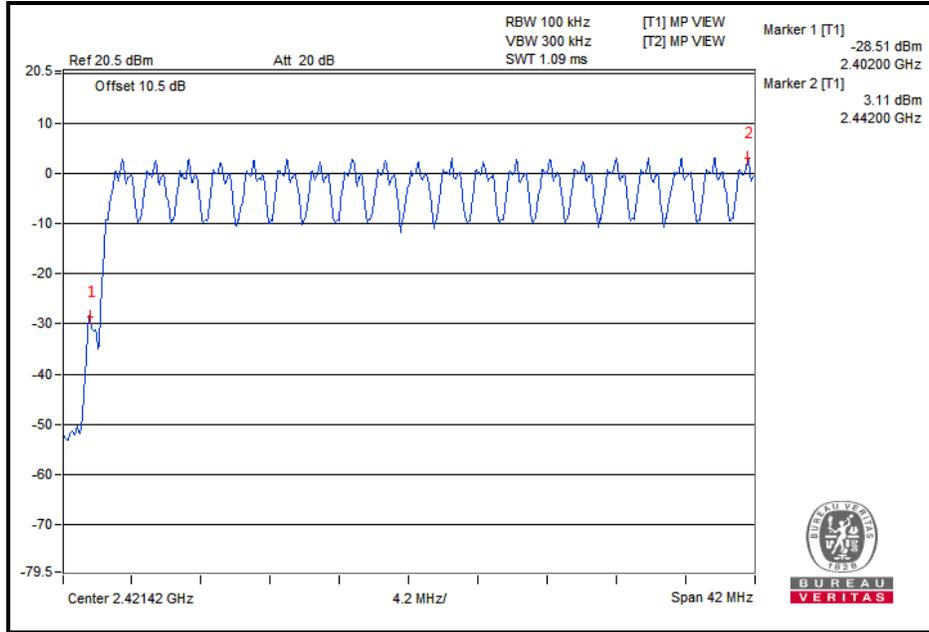

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 96, Guantai Road (Houjie Section), Houjie
Town, Dongguan City, Guangdong Province.
523942, People's Republic of China.

Tel: +86 769 8998 2098
Fax: +86 769 8593 1080
Email: customerservice.dg@bureauveritas.com

4.4 DWELL TIME ON EACH CHANNEL

4.4.1 LIMIT OF DWELL TIME USED

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

4.4.2 TEST SETUP



4.4.3 TEST INSTRUMENTS

Refer to section 4.3.3 to get information of above instrument.

4.4.4 TEST PROCEDURES

- a. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- c. Adjust the center frequency of SA on any frequency be measured and set SA to zero span mode. And then, set RBW and VBW of spectrum analyzer to proper value.
- d. Measure the time duration of one transmission on the measured frequency. And then plot the result with time difference of this time duration.
- e. Repeat above procedures until all different time-slot modes have been completed.



4.4.5 DEVIATION FROM TEST STANDARD

No deviation.

4.4.6 TEST RESULTS


GFSK 1M

Mode	Number of Hopping Channel	Number of transmission in a period(channel number*0.4 sec)				Length of transmission time (msec)	Result (msec)	Limit (msec)	PASS / FAIL
		period (sec)	sweep time (sec)	times in a sweep	times in a period				
-	40	16	5	19	60.8	2.208	134.2	400	PASS

GFSK 2M

Mode	Number of Hopping Channel	Number of transmission in a period(channel number*0.4 sec)				Length of transmission time (msec)	Result (msec)	Limit (msec)	PASS / FAIL
		period (sec)	sweep time (sec)	times in a sweep	times in a period				
-	37	14.8	5	50	148	1.11	164.3	400	PASS

NOTE: Test plots of the transmitting time slot are shown on next page.

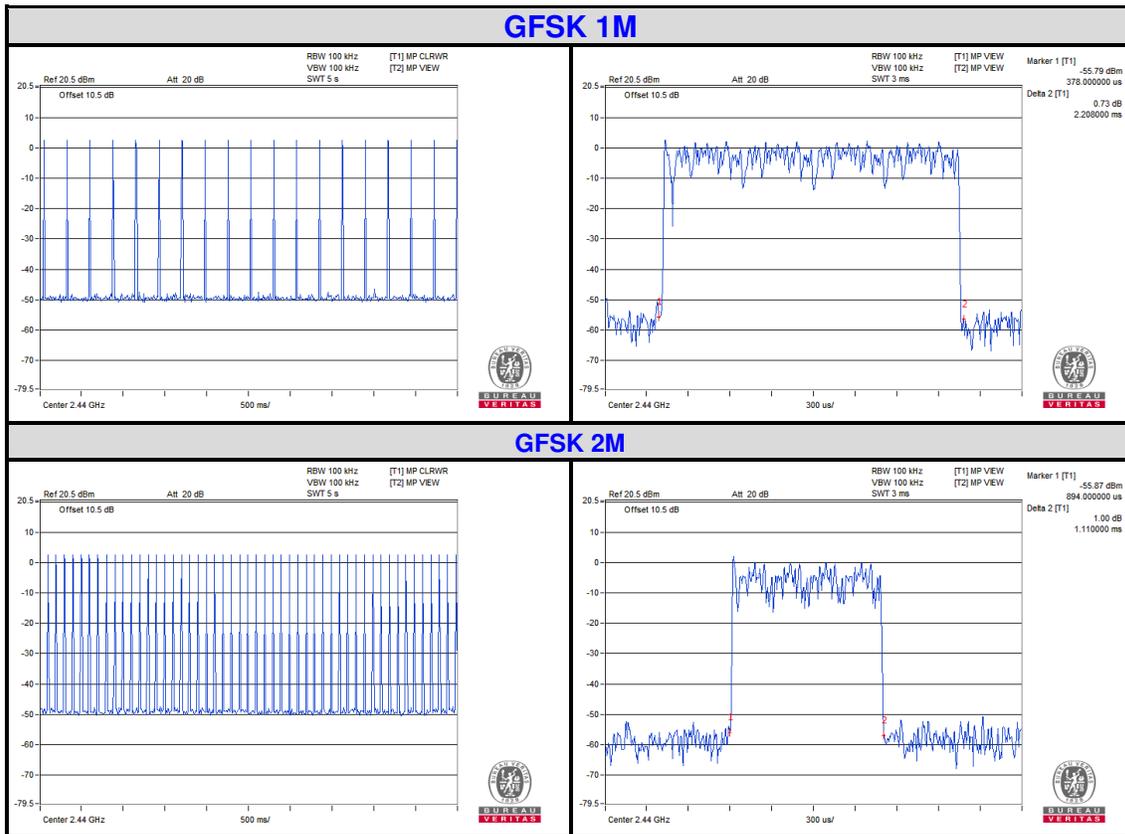


4.5 CHANNEL BANDWIDTH

4.5.1 LIMITS OF CHANNEL BANDWIDTH

For frequency hopping system operating in the 2400-2483.5MHz, If the 20dB bandwidth of hopping channel is greater than 25kHz, two-thirds 20dB bandwidth of hopping channel shall be a minimum limit for the hopping channel separation.

4.5.2 TEST SETUP

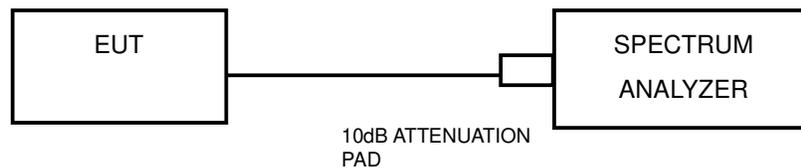

4.5.3 TEST INSTRUMENTS

Refer to section 4.3.3 to get information of above instrument.

4.5.4 TEST PROCEDURE

- a. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- c. Measure the frequency difference of two frequencies that were attenuated 20dB from the reference level. Record the frequency difference as the emission bandwidth.
- d. Repeat above procedures until all frequencies measured were complete.

4.5.5 DEVIATION FROM TEST STANDARD

No deviation.

4.5.6 EUT OPERATING CONDITION


The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.5.7 TEST RESULTS


GFSK 1M

CHANNEL	CHANNEL FREQUENCY (MHz)	20dB BANDWIDTH (MHz)
1	2402	1.14
19	2440	1.14
39	2480	1.14


CH 0

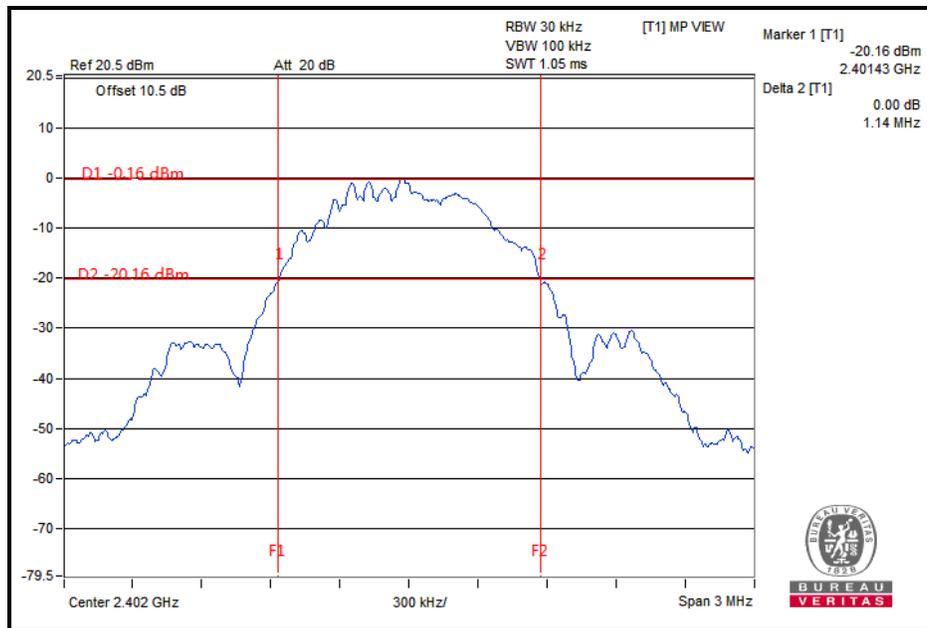

CH 19

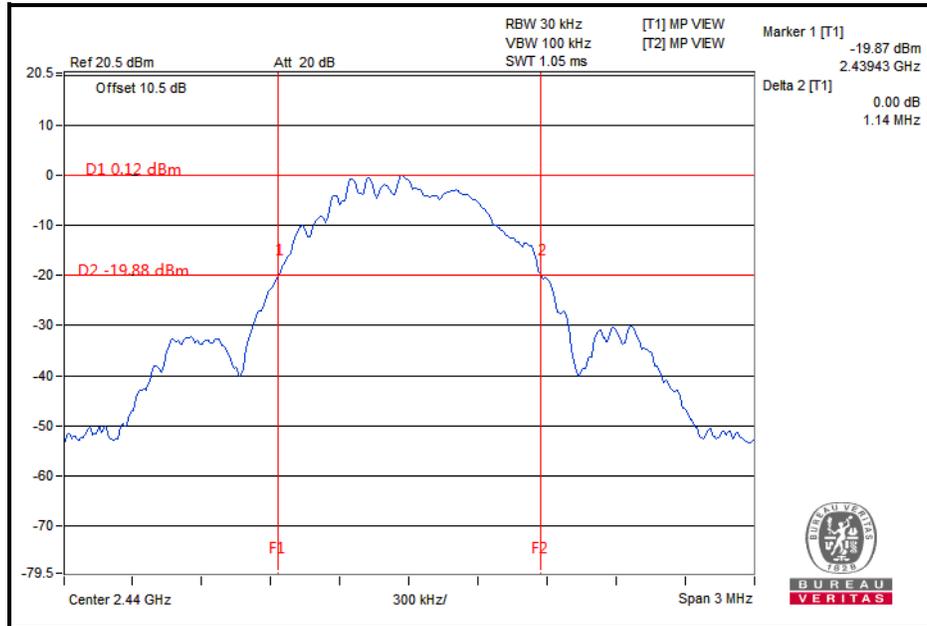


CH 39

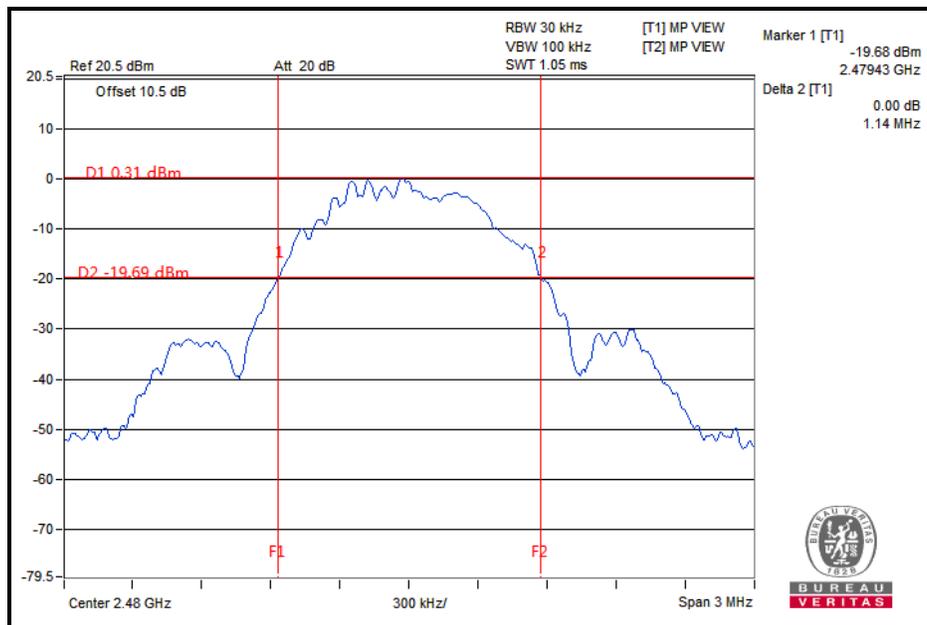


GFSK 2M

CHANNEL	CHANNEL FREQUENCY (MHz)	20dB BANDWIDTH (MHz)
1	2404	2.23
19	2440	2.24
38	2478	2.24


CH 1

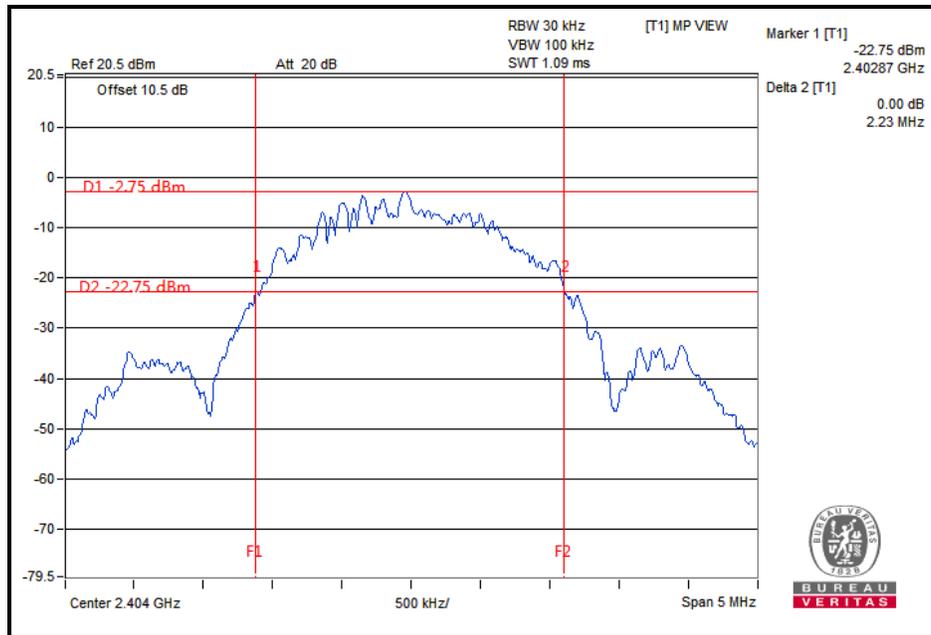

CH 19

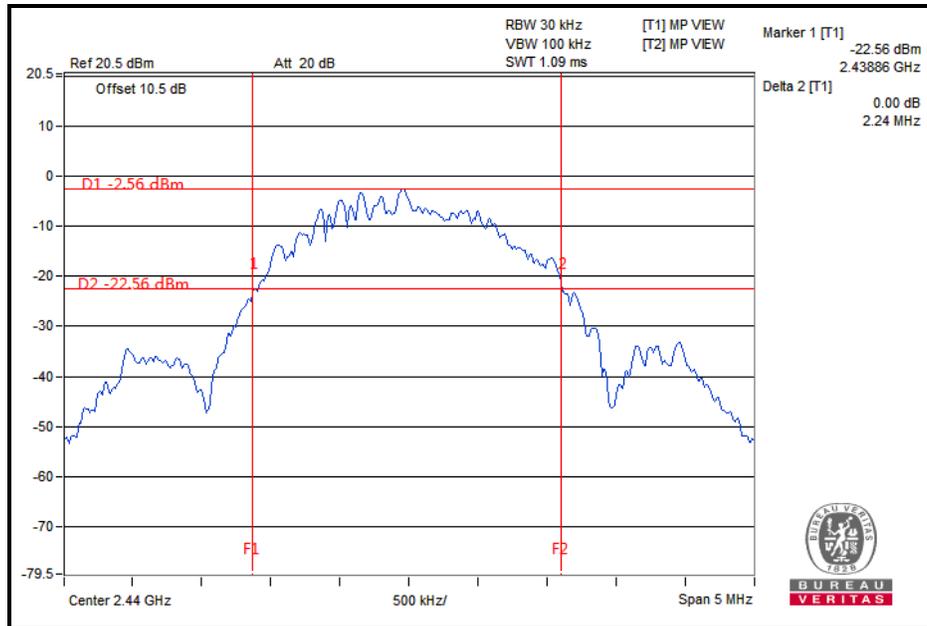

CH 38

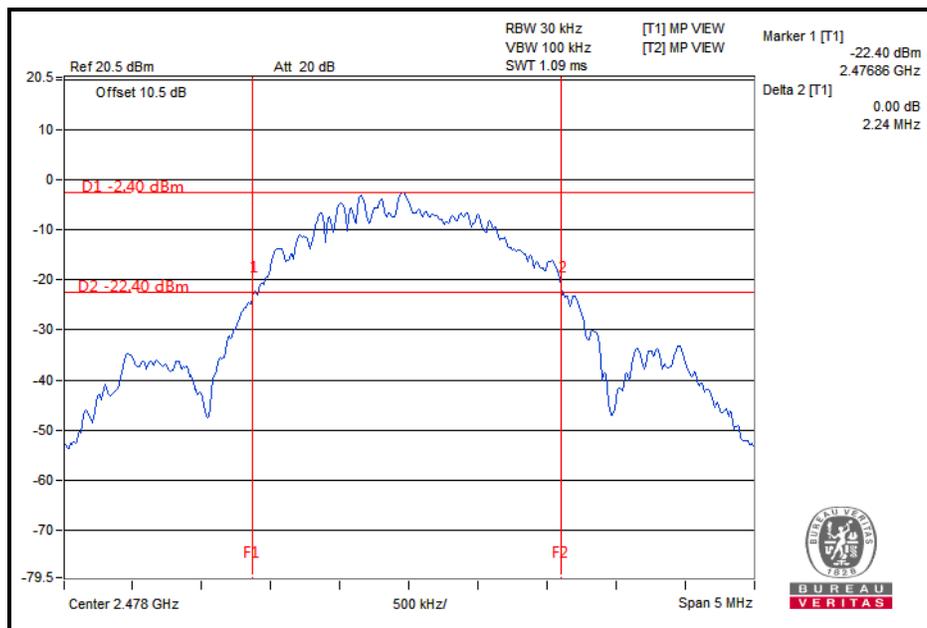


4.6 HOPPING CHANNEL SEPARATION

4.6.1 LIMIT OF HOPPING CHANNEL SEPARATION

At least 25kHz or two-third of 20dB hopping channel bandwidth (whichever is greater).

4.6.2 TEST SETUP

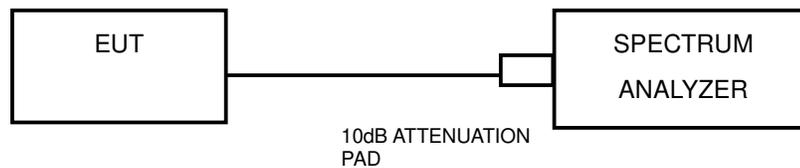

4.6.3 TEST INSTRUMENTS

Refer to section 4.3.3 to get information of above instrument.

4.6.4 TEST PROCEDURES

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range.
3. By using the MaxHold function record the separation of two adjacent channels.
4. Measure the frequency difference of these two adjacent channels by SA MARK function. And then plot the result on SA screen.
5. Repeat above procedures until all frequencies measured were complete.

4.6.5 DEVIATION FROM TEST STANDARD

No deviation.


4.6.6 TEST RESULTS

GFSK 1M


CHANNEL	FREQUENCY (MHz)	ADJACENT CHANNEL SEPARATION (MHz)	20dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2402	2.00	1.14	0.76	PASS
19	2440	2.00	1.14	0.76	PASS
39	2480	2.00	1.14	0.76	PASS

NOTE: The minimum limit is two-third 20dB bandwidth.


CH 1

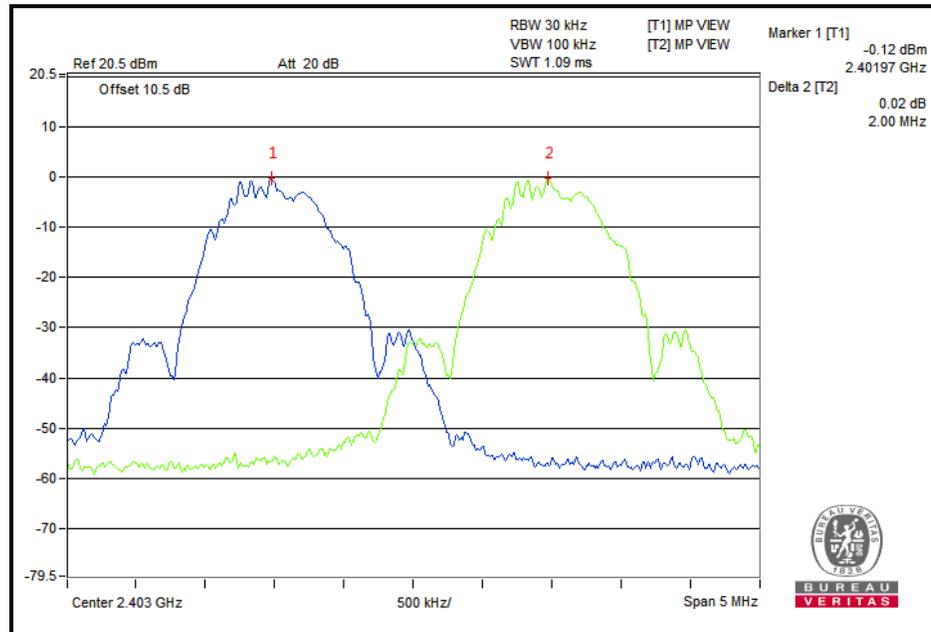


CH 19

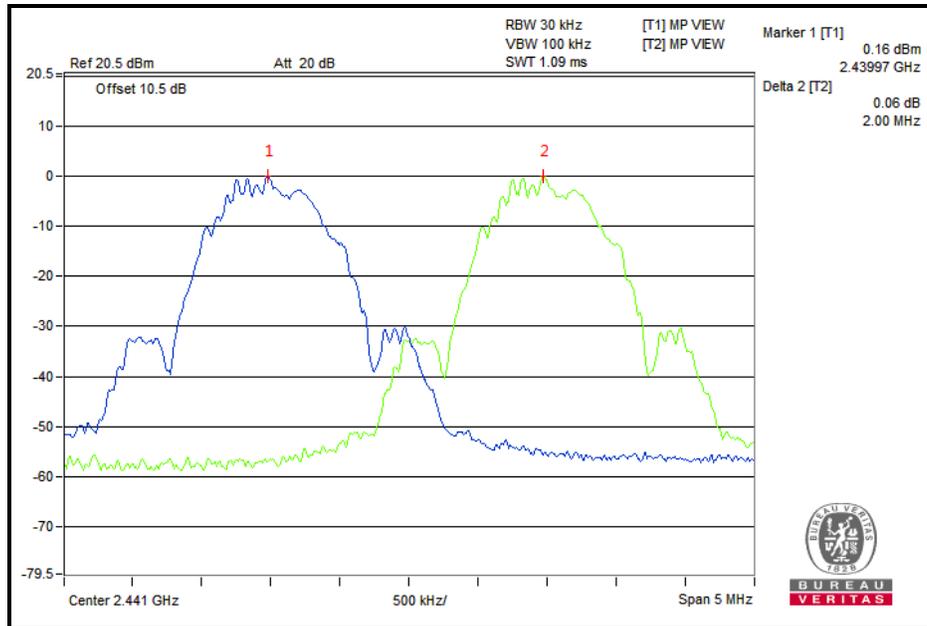


CH 39

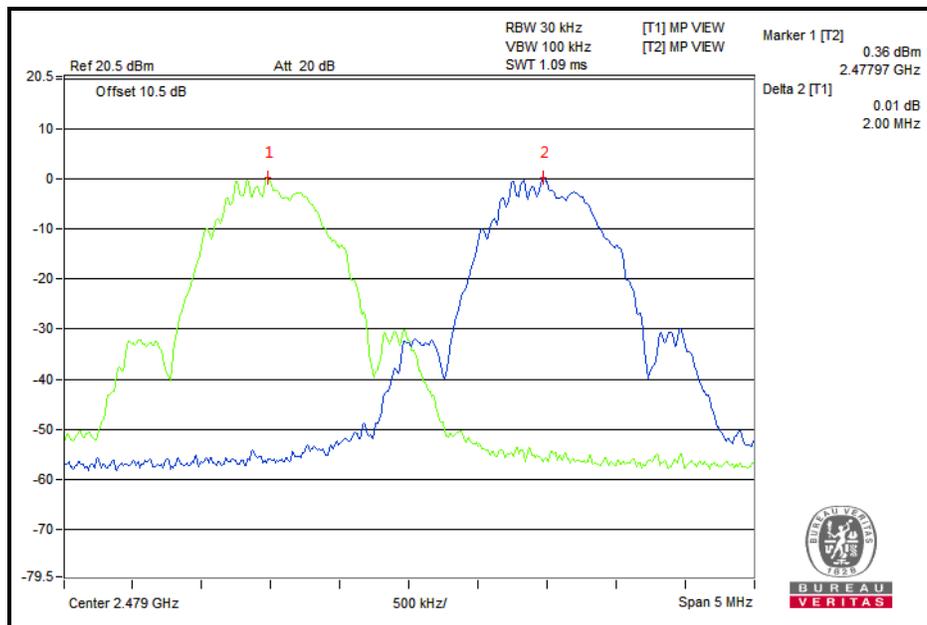

CH 19

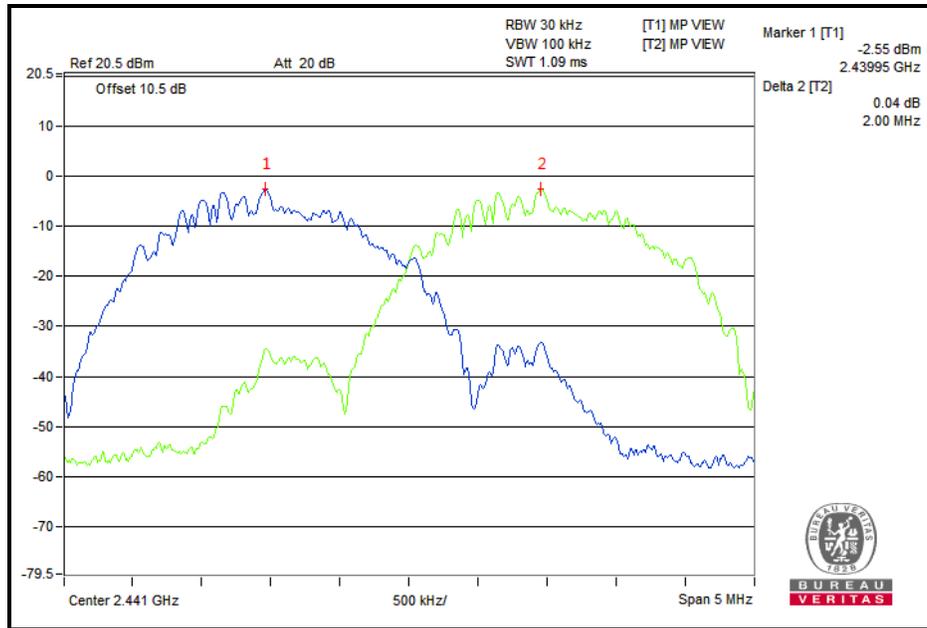

CH 38

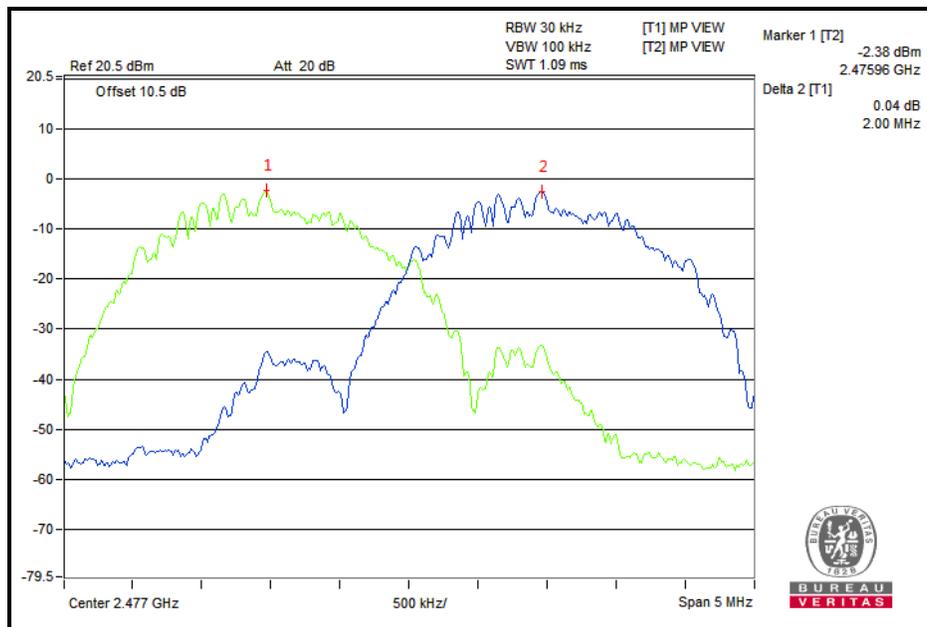


4.7 CONDUCTED OUTPUT POWER

4.7.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT


The Maximum Output Power Measurement is 125mW.

4.7.2 TEST SETUP

MAXIMUM PEAK OUTPUT POWER :

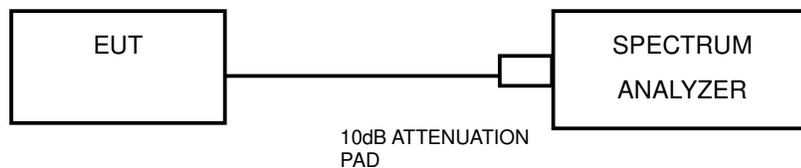

AVERAGE OUTPUT POWER :

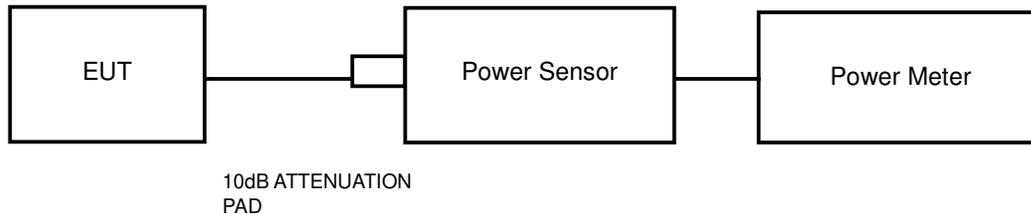

4.7.3 TEST INSTRUMENTS

Refer to section 4.3.3 to get information of above instrument.



4.7.4 TEST PROCEDURES

MAXIMUM PEAK OUTPUT POWER :

- a. Set the span to approximately five times the 20 dB bandwidth, centered on a hopping channel.
- b. Set the RBW = 3 MHz, VBW \geq 3 x RBW, Detector = peak.
- c. Sweep time = auto couple, Trace mode = max hold, allow trace to fully stabilize.

AVERAGE OUTPUT POWER:

Use the peak marker function to determine the maximum amplitude level. An average power sensor was used on the output port of the EUT. A power meter was used to read the response of the average power sensor and set the detector to AVERAGE. Record the power level.

4.7.5 DEVIATION FROM TEST STANDARD

No deviation.

4.7.6 EUT OPERATING CONDITION

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.7.7 TEST RESULTS

MAXIMUM PEAK OUTPUT POWER

GFSK 1M

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER (dBm)	PEAK POWER (mW)	EIRP (mW)	PEAK POWER LIMIT (W)	EIRP LIMIT (W)	PASS/FAIL
0	2402	4.24	2.655	6.124	0.125	/	PASS
19	2440	4.50	2.818	6.501	0.125	/	PASS
39	2480	4.71	2.958	6.823	0.125	/	PASS

Note: EIRP=Conducted output power + Ant gain(3.63dBi)

GFSK 2M

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER (dBm)	PEAK POWER (mW)	EIRP (mW)	PEAK POWER LIMIT (W)	EIRP LIMIT (W)	PASS/FAIL
1	2404	4.20	2.63	6.067	0.125	/	PASS
19	2440	4.46	2.793	6.442	0.125	/	PASS
38	2478	4.65	2.917	6.730	0.125	/	PASS

Note: EIRP=Conducted output power + Ant gain(3.63dBi)

AVERAGE OUTPUT POWER (FOR REFERENCE)

GFSK 1M

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)
0	2402	3.88
19	2440	4.06
39	2480	4.36

GFSK 2M


CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)
1	2404	3.83
19	2440	4.00
38	2478	4.28



BUREAU VERITAS

Test Report No.: RF2502WDG0042-3

Peak power test plot

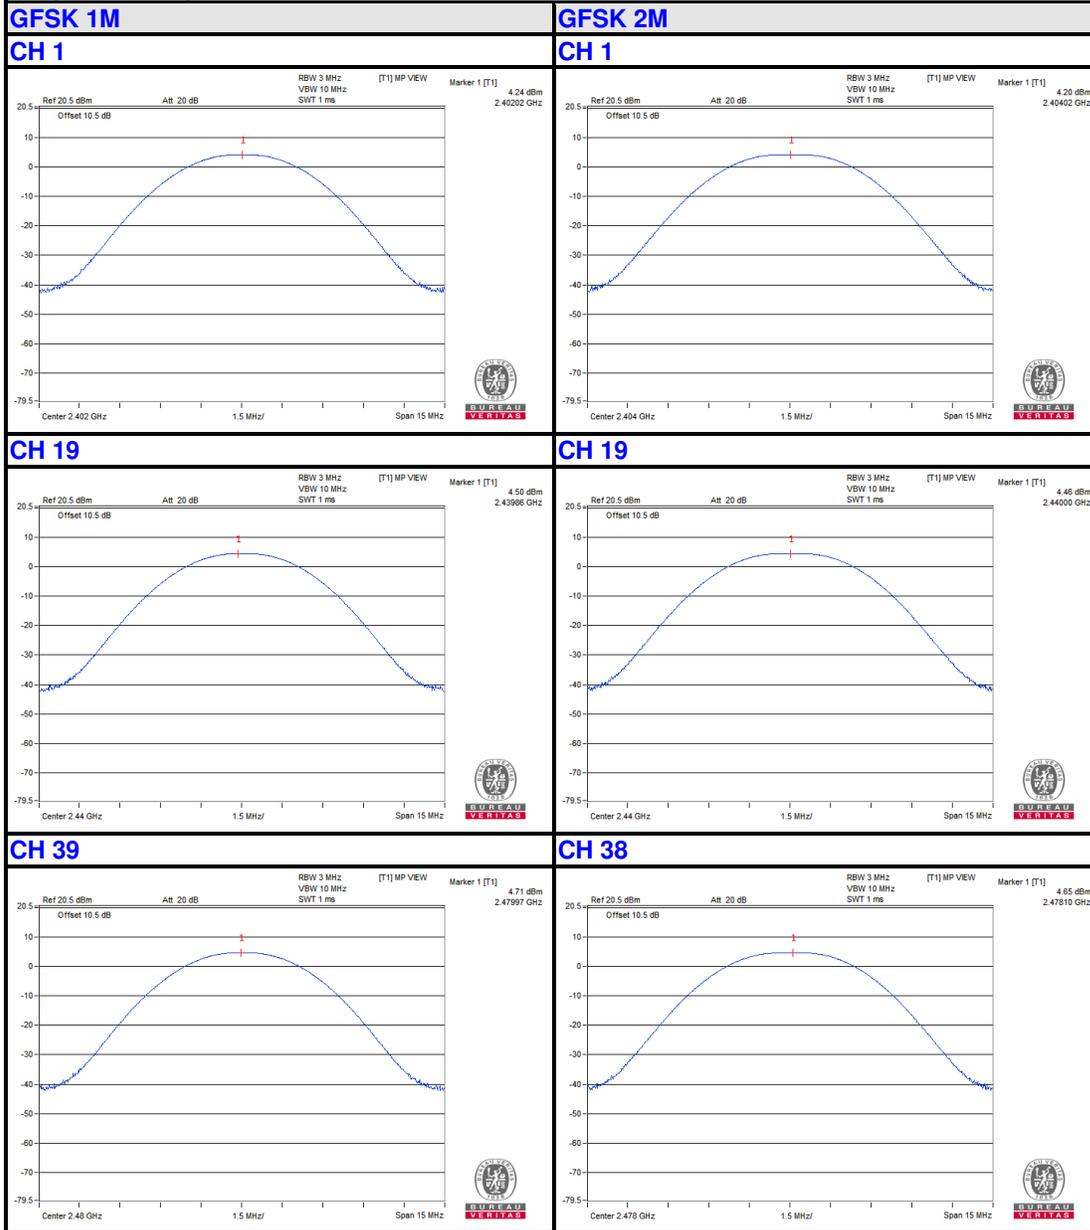

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 96, Guantai Road (Houjie Section), Houjie
Town, Dongguan City, Guangdong Province.
523942, People's Republic of China.

Tel: +86 769 8998 2098
Fax: +86 769 8593 1080
Email: customerservice.dg@bureauveritas.com



4.8 OUT OF BAND EMISSION MEASUREMENT

4.8.1 LIMITS OF OUT OF BAND EMISSION MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100KHz RBW).

4.8.2 TEST INSTRUMENTS

Refer to section 4.3.3 to get information of above instrument.

4.8.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low loss cable. of Spectrum Analyzer was set RBW to 100 kHz and VBW to 300 kHz with suitable frequency span including 100 MHz bandwidth from band edge. Detector = PEAK and Trace mode = Max Hold. The band edges were measured and recorded.

4.8.4 DEVIATION FROM TEST STANDARD

No deviation.

4.8.5 EUT OPERATING CONDITION


The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.8.6 TEST RESULTS

The spectrum plots are attached on the following images. D1 line indicates the highest level. D2 line indicates the 20dB offset below D1. It shows compliance to the requirement.



GFSK 1M

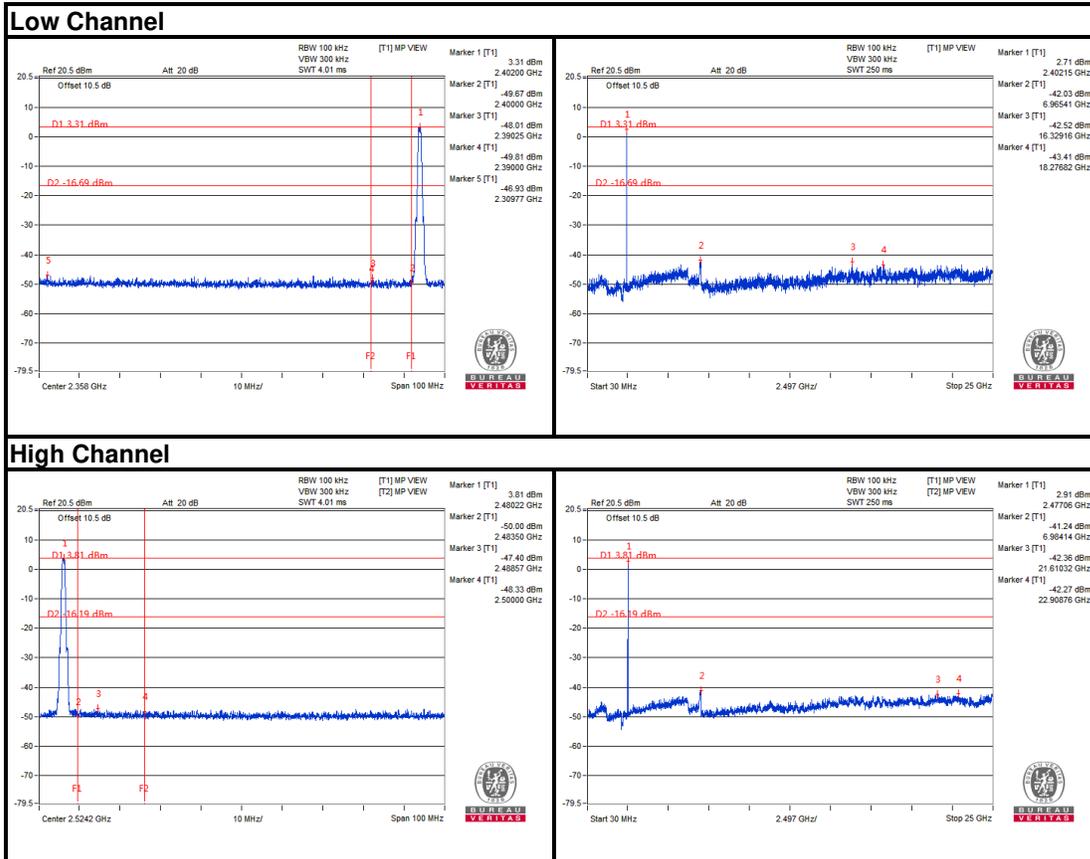




BUREAU VERITAS

Test Report No.: RF2502WDG0042-3

GFSK 2M

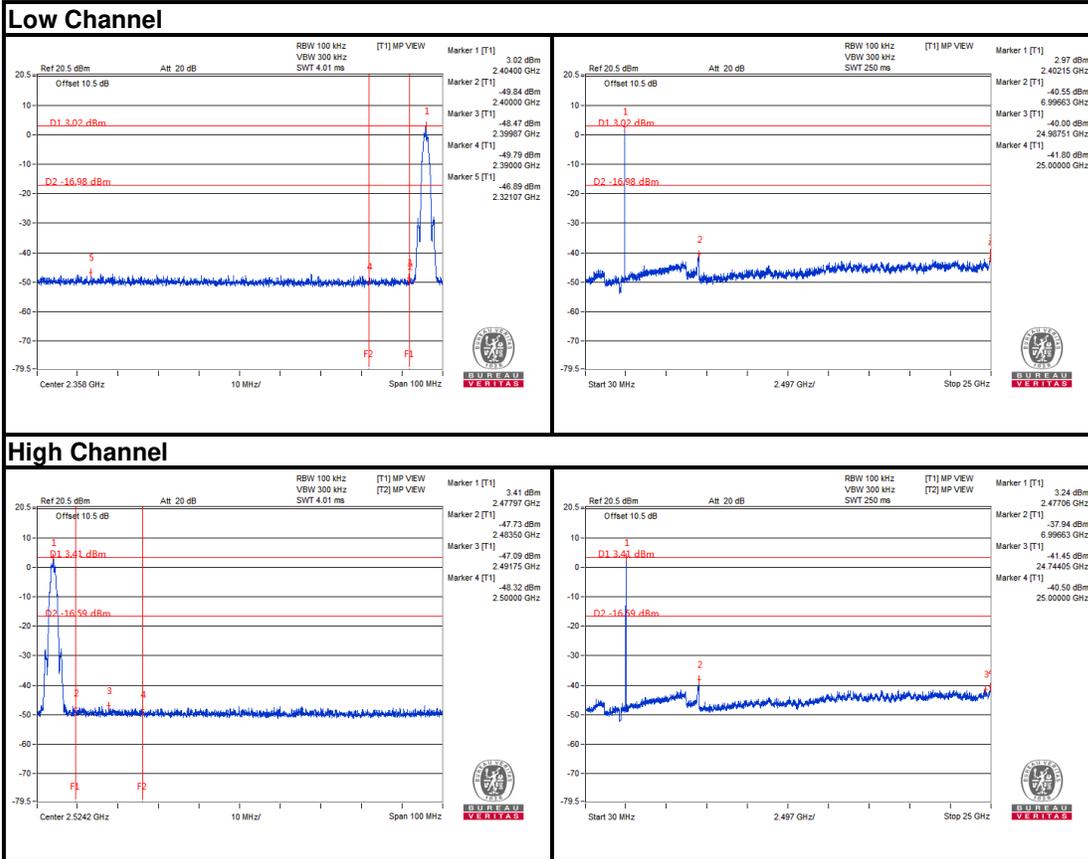


Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 96, Guantai Road (Houjie Section), Houjie
Town, Dongguan City, Guangdong Province.
523942, People's Republic of China.

Tel: +86 769 8998 2098
Fax: +86 769 8593 1080
Email: customerservice.dg@bureauveritas.com




GFSK 1M

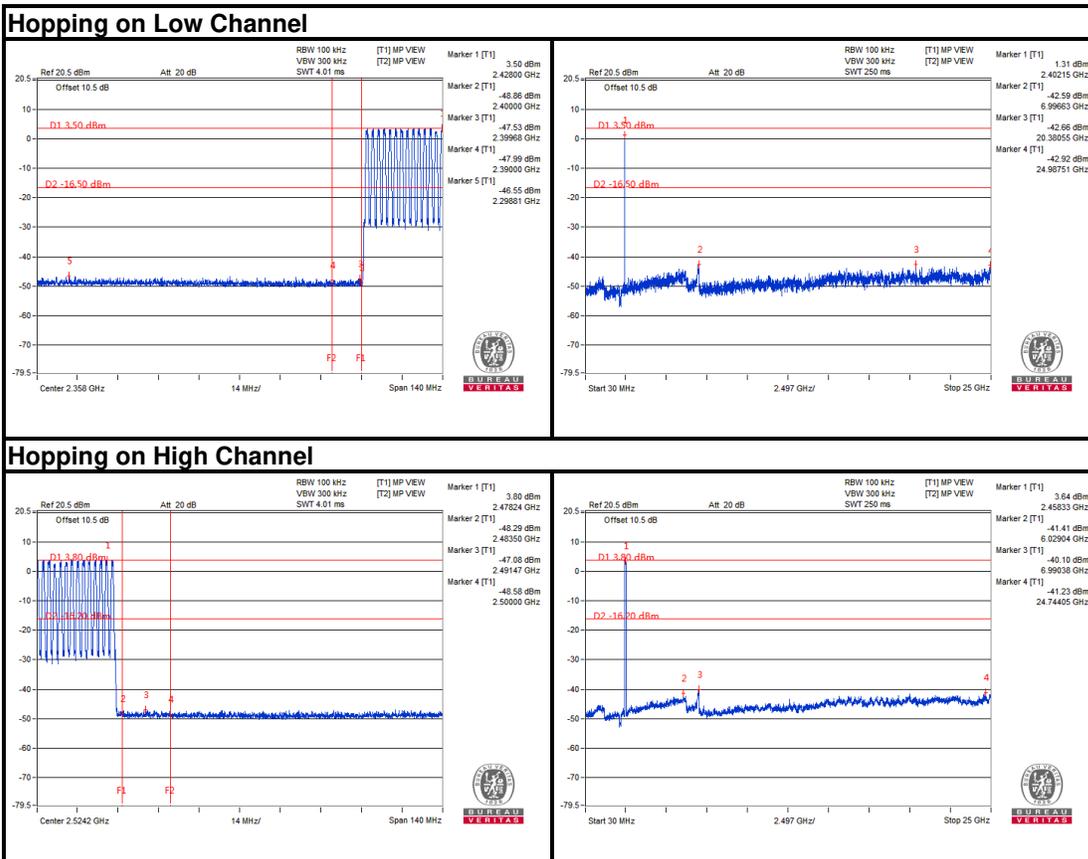



GFSK 2M

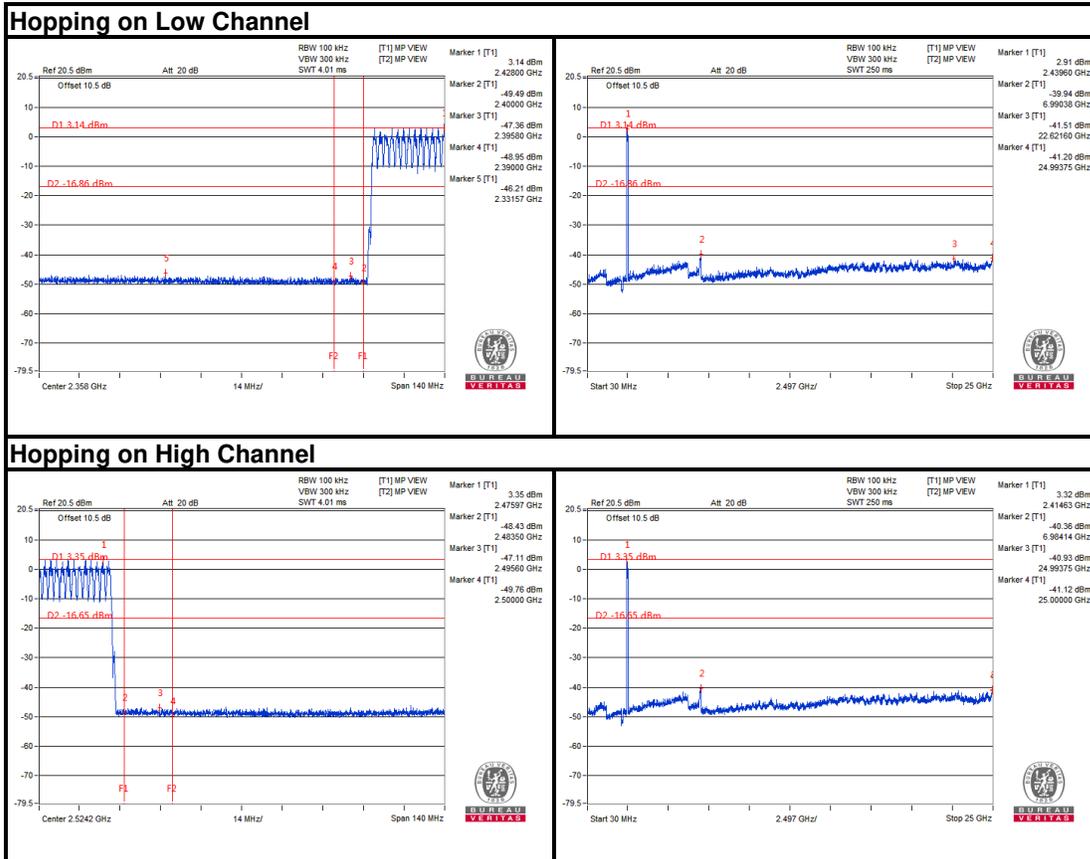

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 96, Guantai Road (Houjie Section), Houjie
Town, Dongguan City, Guangdong Province.
523942, People's Republic of China.

Tel: +86 769 8998 2098
Fax: +86 769 8593 1080
Email: customerservice.dg@bureauveritas.com



Test Report No.: RF2502WDG0042-3

5 PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



Test Report No.: RF2502WDG0042-3

6 APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No modifications are made to the EUT by the lab during the test.

---END---