

FCC PART 15C TEST REPORT FOR CERTIFICATION
On Behalf of

Sony Group Corporation

Product: Wireless Dongle

Model No.: YY2994

FCC ID: AK8YY2994

Prepared for : Sony Group Corporation
1-7-1 Konan Minato-ku Tokyo, 108-0075 Japan

Prepared By : Audix Technology (Shenzhen) Co., Ltd.
No. 6, Kefeng Road, Science & Technology Park,
Nanshan District , Shenzhen, Guangdong, China

Tel: (0755) 26639496



Report Number : ACS-F25026
Date of Test : Dec.23, 2024~Feb.07, 2025
Date of Report : Mar.10, 2025

TABLE OF CONTENTS

Description	Page
1. SUMMARY OF STANDARDS AND RESULTS.....	5
1.1. Description of Standards and Results	5
2. GENERAL INFORMATION.....	6
2.1. Description of Equipment Under Test	6
2.2. Channel list of EUT	7
2.3. Tested Supporting System Details	8
2.4. Block diagram of connection between the EUT and simulators.....	8
2.5. Test Facility	9
2.6. Measurement Uncertainty (95% confidence levels, k=2).....	9
3. POWER LINE CONDUCTED EMISSION TEST	10
3.1. Test Equipments.....	10
3.2. Block Diagram of Test Setup.....	10
3.3. Power Line Conducted Emission Test Limits.....	10
3.4. Configuration of EUT on Test	10
3.5. Operating Condition of EUT.....	11
3.6. Test Procedure	11
3.7. Power Line Conducted Emission Test Results	11
4. RADIATED EMISSION TEST	14
4.1. Test Equipment	14
4.2. Block Diagram of Test Setup.....	15
4.3. Radiated Emission Limit.....	16
4.4. EUT Configuration on Test	16
4.5. Operating Condition of EUT.....	16
4.6. Test Procedure	17
4.7. Radiated Emission Test Results.....	17
5. CONDUCTED SPURIOUS EMISSIONS.....	40
5.1. Test Equipment	40
5.2. Block Diagram of Test Setup.....	40
5.3. Limit.....	40
5.4. Test Procedure	40
5.5. Test result.....	40
6. BAND EDGE COMPLIANCE TEST	44
6.1. Test Equipment	44
6.2. Limit.....	44
6.3. Test Procedure.....	44
6.4. Test Results	44
7. 6dB & 99% Bandwidth Test	53
7.1. Test Equipment	53
7.2. Block Diagram of Test Setup.....	53
7.3. Limit.....	53
7.4. Test Procedure	53
7.5. Test Results	54
8. OUTPUT POWER TEST	59
8.1. Test Equipment	59
8.2. Limit (FCC Part 15C 15.247 b(3)).....	59
8.3. Test Procedure	59
8.4. Test Results	60

9.	POWER SPECTRAL DENSITY TEST.....	62
9.1.	Test Equipment	62
9.2.	Limit.....	62
9.3.	Test Procedure	62
9.4.	Test Results	62
10.	ANTENNA REQUIREMENT.....	64
10.1.	Standard Applicable.....	64
10.2.	Antenna Connected Construction	64
11.	DEVIATION TO TEST SPECIFICATIONS.....	65

- Appendix A. Setup Photographs
- Appendix B. General Appearance of the EUT
- Appendix C. Inside Configuration of the EUT

TEST REPORT

Applicant : Sony Group Corporation
 Product : Wireless Dongle
 Model No. : YY2994
 Brand : SONY
 FCC ID : AK8YY2994
 Test Voltage : DC 5V From PC Input AC 120V/60Hz

Tested for comply with:
 FCC CFR 47 Part 15 Subpart C

Test procedure used:
 ANSI C63.10:2020+COR1:2023
 KDB 558074 D01v05r02

The device described above is tested by AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. to confirm comply with all the FCC Part 15 Subpart C requirements. The test results are contained in this test report and AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. is assumed full responsibility for the accuracy and completeness of these tests. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC and IC requirements. This report contains data that are not covered by the NVLAP accreditation.

This Report is made under FCC Part 2.1074. No modifications were required during testing to bring this product into compliance.

This report applies to single evaluation of one sample of above mentioned product. This report shall not be reproduced in part without written approval of AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government.

Date of Test : Dec.23, 2024~Feb.07, 2025 Date of Report: Mar.10, 2025

Prepared by : Dora Yang / Assistant Manager
 Reviewed by : Thomas Chen / Assistant Manager



信華科技(深圳)有限公司
 Audix Technology (Shenzhen) Co., Ltd.
 EMC 部門報告專用章
 Stamp only for EMC Dept. Report
 Signature: Sunny Lu
 Sunny Lu / Manager

Approved & Authorized Signer : _____

1. SUMMARY OF STANDARDS AND RESULTS

1.1. Description of Standards and Results

The EUT has been tested according to the applicable standards as referenced below.

EMISSION		
Description of Test Item	Standard	Results
Power Line Conducted Emission	FCC Part 15: 15.207 ANSI C63.10:2020+COR1:2023	PASS
Radiated Emission	FCC Part 15: 15.209 FCC Part 15: 15.205 FCC Part 15: 15.247(d) ANSI C63.10:2020+COR1:2023	PASS
Band Edge Compliance	FCC Part 15: 15.247(d) ANSI C63.10:2020+COR1:2023	PASS
Conducted spurious emissions	FCC Part 15: 15.247(d) ANSI C63.10:2020+COR1:2023	PASS
6dB Bandwidth Test	FCC Part 15: 15.247(a)(2) ANSI C63.10:2020+COR1:2023	PASS
Peak Output Power	FCC Part 15: 15.247(b)(3) ANSI C63.10:2020+COR1:2023	PASS
Power Spectral Density	FCC Part 15: 15.247(e) ANSI C63.10:2020+COR1:2023	PASS
Antenna requirement	FCC Part 15: 15.203	PASS

Note: Measurement uncertainty affection to the result is not considered, the EUT is technically compliant with standard requirements.

2. GENERAL INFORMATION

2.1. Description of Equipment Under Test

Applicant	Sony Group Corporation
Applicant Address	1-7-1 Konan Minato-ku Tokyo, 108-0075 Japan
Manufacturer	Sony Group Corporation
Manufacturer Address	1-7-1 Konan Minato-ku Tokyo, 108-0075 Japan
Product	Wireless Dongle
Model No.	YY2994
Brand	SONY
FCC ID	AK8YY2994
Radio	SRD
Frequency Range	2402-2479MHz
Type of Modulation(SRD)	GFSK
USB-A to Type-C Cable	Shielded, Detachable, 1.8m
Sample Type	Prototype production
Date of Receipt	Dec.16, 2024
Date of Test	Dec.23, 2024~Feb.07, 2025

Antenna System

Type of Antenna	PIFA Antenna
Antenna Peak Gain	5.5dBi

Product consist two parts as below:

Part	Name
Wireless Dongle #1	YY2994
Wireless Gaming Mouse #2	YY2991

2.2.Channel list of EUT


EUT work in 2.4G mode, tested with manually triggered the physical switch and did not involve software control.

CH	Frequency (MHz)						
1	2402	21	2422	41	2442	61	2462
2	2403	22	2423	42	2443	62	2463
3	2404	23	2424	43	2444	63	2464
4	2405	24	2425	44	2445	64	2465
5	2406	25	2426	45	2446	65	2466
6	2407	26	2427	46	2447	66	2467
7	2408	27	2428	47	2448	67	2468
8	2409	28	2429	48	2449	68	2469
9	2410	29	2430	49	2450	69	2470
10	2411	30	2431	50	2451	70	2471
11	2412	31	2432	51	2452	71	2472
12	2413	32	2433	52	2453	72	2473
13	2414	33	2434	53	2454	73	2474
14	2415	34	2435	54	2455	74	2475
15	2416	35	2436	55	2456	75	2476
16	2417	36	2437	56	2457	76	2477
17	2418	37	2438	57	2458	77	2478
18	2419	38	2439	58	2459	78	2479
19	2420	39	2440	59	2460		
20	2421	40	2441	60	2461		

2.3. Tested Supporting System Details

No.	Description	ACS No.	Manufacturer	Model	Serial Number
1.	Notebook	N/A	ACER	ZOW	N/A
		Power Cord(3C): Unshielded, Detachabled, 1.8m Power Adaptor: Manufacturer: Lite-On, M/N: PA-1900-32 Cable: Unshielded, Undetectable, 4.0m(Bond one ferrite core)			

2.4. Block diagram of connection between the EUT and simulators

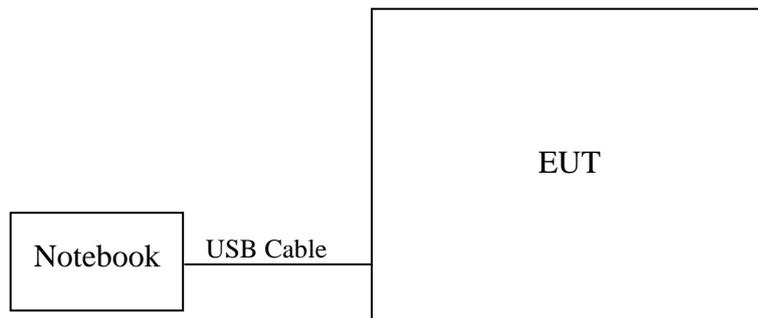

(EUT: Wireless Dongle)

2.5. Test Facility

Site Description

Name of Firm : Audix Technology (Shenzhen) Co., Ltd.
 : No. 6, Kefeng Road, Science & Technology Park,
 Nanshan District , Shenzhen, Guangdong, China

EMC Lab. : Certified by ISED, Canada
 : Company Number: 5183A
 : CAB identifier: CN0034
 : Valid Date: Mar.31, 2025

: Certified by FCC, USA
 : Designation No.: CN5022
 : Valid Date: Mar.31, 2025

: Accredited by NVLAP, USA
 : NVLAP Code: 200372-0
 : Valid Date: Mar.31, 2026

2.6.Measurement Uncertainty (95% confidence levels, k=2)

Test Item	Uncertainty
Uncertainty for Conduction emission test in No. 1 Conduction	$\pm 2.6\text{dB}(150\text{KHz to } 30\text{MHz})$
Uncertainty for Radiation Emission test in 3m chamber	$\pm 3.8\text{dB}(30\sim 200\text{MHz, Polarization: H})$
	$\pm 3.8\text{dB}(30\sim 200\text{MHz, Polarization: V})$
	$\pm 4.0\text{dB}(200\text{M}\sim 1\text{GHz, Polarization: H})$
	$\pm 4.0\text{dB}(200\text{M}\sim 1\text{GHz, Polarization: V})$
Uncertainty for Radiation Emission test in 3m chamber(1GHz-18GHz)	$\pm 4.0\text{dB}(1\sim 6\text{GHz, Distance: } 3\text{m})$
	$\pm 4.0\text{dB}(6\sim 18\text{GHz, Distance: } 3\text{m})$
Uncertainty for S_{vswr} in 3m Chamber	$\pm 2.8\text{dB}(1\sim 6\text{GHz})$
	$\pm 2.8\text{dB}(6\sim 18\text{GHz})$
Uncertainty for Radiated Spurious Emission test in RF chamber	$\pm 3.7\text{dB}(30\text{MHz}\sim 1000\text{MHz})$
	$\pm 3.3\text{dB}(1\sim 26.5\text{GHz})$
Uncertainty for Conduction Spurious emission test	$\pm 2.0\text{dB}$
Uncertainty for Output power test	$\pm 0.8\text{dB}$
Uncertainty for Bandwidth test	$\pm 4.6\%$
Uncertainty for DC power test	$\pm 0.1\%$
Uncertainty for test site temperature and humidity	$\pm 0.6^{\circ}\text{C}$
	$\pm 3\%$


3. POWER LINE CONDUCTED EMISSION TEST

3.1. Test Equipments

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	1# Shielding Room	AUDIX	N/A	N/A	Nov.09,22	3 Year
2.	EMI Test Receiver	Rohde & Schwarz	ESCI	100842	Mar.16,24	1 Year
3.	L.I.S.N.#1	Rohde & Schwarz	ENV216	102160	Jun.19,24	1 Year
4.	RF Cable	Eastsheep	RG223	190424	Sep.12,24	1 Year
5.	Test Software	AUDIX	e3	6.100913a	N/A	N/A

Note: N/A means Not applicable.

3.2. Block Diagram of Test Setup

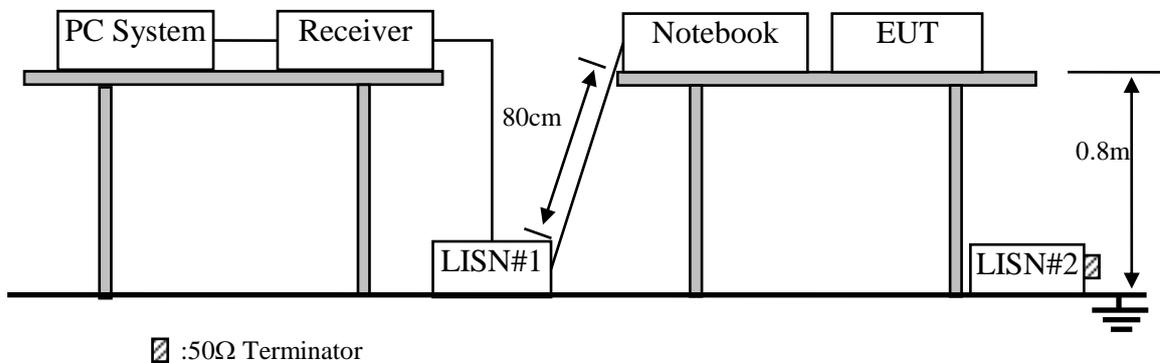

3.3. Power Line Conducted Emission Test Limits

Frequency	Maximum RF Line Voltage	
	Quasi-Peak Level dB(μV)	Average Level dB(μV)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

Notes: 1. * Decreasing linearly with logarithm of frequency.
2. The lower limit shall apply at the transition frequencies.

3.4. Configuration of EUT on Test

The following equipment are installed on Power Line Conducted Emission Test to meet the commission requirement and operating regulations in a manner which tends to maximize its emission characteristics in a normal application.

3.4.1. Wireless Dongle (EUT)

Model No. : YY2994
Serial No. : N/A

3.4.2. Support Equipment: As Tested Supporting System Details, in Section 2.2.

3.5. Operating Condition of EUT

- 3.5.1. Setup the EUT and simulator as shown as Section 3.2.
- 3.5.2. Turn on the power of all equipments.
- 3.5.3. Control EUT work in General 2.4G Tx mode.

3.6. Test Procedure

The EUT was placed on a non-metallic table, 80cm above the ground plane. The EUT Power Via AC unit connected to the power mains through a line impedance stabilization network (L.I.S.N). This provides a 50 ohm coupling impedance for the EUT (Please refer the block diagram of the test setup and photographs). The AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.10 on Conducted Emission Test.


The bandwidth of test receiver (R & S ESCI) is set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.

3.7. Power Line Conducted Emission Test Results

PASS. (All emissions not reported below are too low against the prescribed limits.)

Data: 1 File: E:\1#CE\2025 Report Data\SI\SONYA\Z2412035-FCC-RF-EM6 (2) Date: 2025-02-07

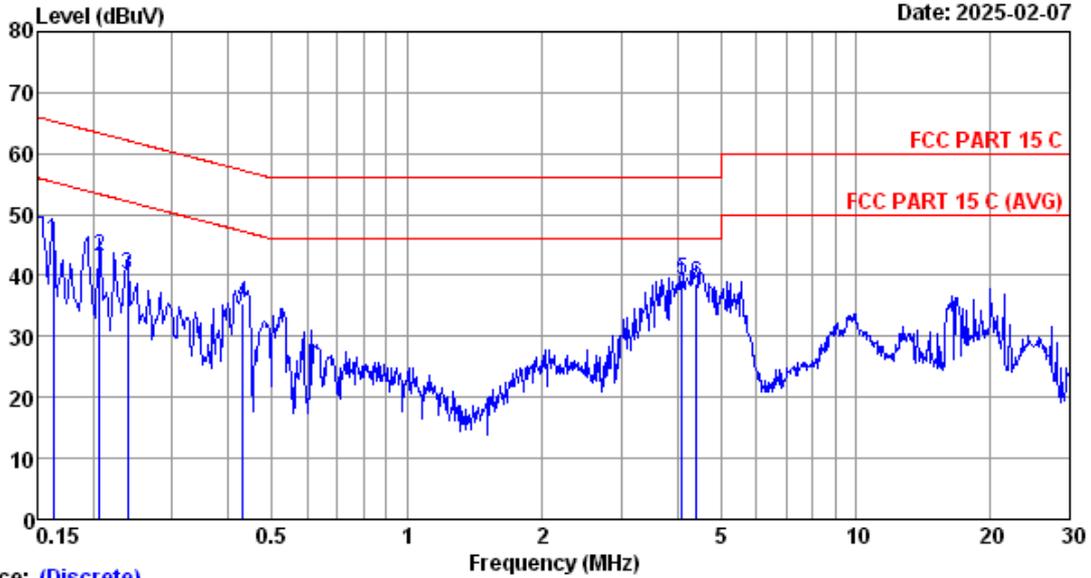


Trace: (Discrete)

Site no :1# CE Data No :1
 Dis./Lisn :2024 ENV216-N
 Limit :FCC PART 15 C
 Env./Ins. :22.7*C/48% Engineer :Hongjie
 Power Rating :AC 120V/60Hz
 Test Mode :2.4G TX Mode

No	Freq (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.162	9.76	0.01	35.93	45.70	65.34	19.64	QP
2	0.206	9.78	0.01	33.32	43.11	63.36	20.25	QP
3	0.238	9.78	0.01	30.34	40.13	62.17	22.04	QP
4	0.431	9.78	0.01	25.75	35.54	57.24	21.70	QP
5	4.092	9.82	0.03	29.40	39.25	56.00	16.75	QP
6	4.407	9.82	0.03	28.88	38.73	56.00	17.27	QP

Remarks: 1.Emission Level=LISN Factor+Cable Loss+Reading.
 2.If the average limit is met when using a quasi-peak detector. the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

Data: 2 File: E:\1#CE\2025 Report Data\SI\SONYA1Z2412035-FCC-RF.EM6 (2) Date: 2025-02-07

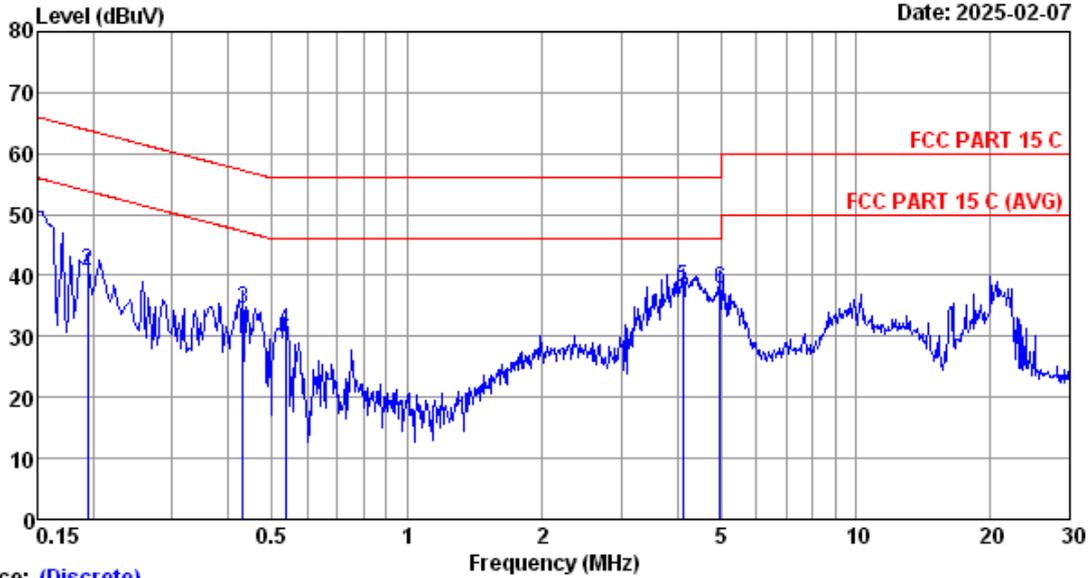

Trace: (Discrete)

Site no :1# CE Data No :2
 Dis./Lisn :2024 ENV216-L
 Limit :FCC PART 15 C
 Env./Ins. :22.7*C/48% Engineer :Hongjie
 Power Rating :AC 120V/60Hz
 Test Mode :2.4G TX Mode

No	Freq (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.150	9.77	0.01	37.66	47.44	66.00	18.56	QP
2	0.194	9.76	0.01	31.06	40.83	63.84	23.01	QP
3	0.431	9.76	0.01	24.75	34.52	57.24	22.72	QP
4	0.535	9.76	0.01	21.35	31.12	56.00	24.88	QP
5	4.114	9.81	0.03	28.28	38.12	56.00	17.88	QP
6	4.978	9.82	0.03	27.86	37.71	56.00	18.29	QP

Remarks: 1.Emission Level=LISN Factor+Cable Loss+Reading.
 2.If the average limit is met when using a quasi-peak detector.
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.

4. RADIATED EMISSION TEST

4.1. Test Equipment

4.1.1. For frequency range 30MHz~1000MHz (In 3m Anechoic Chamber)

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	3m Chamber(NSA)	AUDIX	N/A	N/A	Aug.11,22	3Year
2.	3m Chamber(SE)	AUDIX	N/A	N/A	Sep.16,22	3 Year
3.	Signal Analyzer	Rohde & Schwarz	FSV40	101608	Nov.07,24	1 Year
4.	Tri-log-Broadband Antenna	SCHWARZBECK	VULB 9168	01313	Sep.26,24	1 Year
5.	NSA Cable	HUBER+SUHNER	CFD400NL-LW	No.3+190411	Sep.13,24	1 Year
6.	Coaxial Switch	Anritsu	MP59B	6201397223	Mar.17,24	1 Year
7.	EMI Test Receiver	Rohde & Schwarz	ESR3	101931	Mar.17,24	1 Year
8.	Amplifier	HP	8447D	2944A11159	Mar.17,24	1 Year
9.	Test Software	AUDIX	e3	6.100913a	N/A	N/A

Note: N/A means Not applicable.


4.1.2. For frequency range 1GHz~25GHz (In 3m Anechoic Chamber)

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	3mChamber(Svswr)	AUDIX	N/A	N/A	Aug.09,22	3Year
2.	3mChamber(SE)	AUDIX	N/A	N/A	Sep.16,22	3Year
3.	Signal Analyzer	Rohde & Schwarz	FSV40	101608	Nov.07,24	1 Year
4.	Amplifier	EMCI	EMC0518A45SE	980965	Aug.13,24	1 Year
5.	RF Cable	TIMES MICROWAVE	SFT205-NMSM-1 0.00M	689241	Aug.13,24	1 Year
6.	Test Software	AUDIX	e3	6.100913a	N/A	N/A
7.	Horn Antenna	ETC	MCTD 1209	DRH15F03006	Sep.08,24	1 Year


Note: N/A means Not applicable.

4.2. Block Diagram of Test Setup

For frequency range 30MHz-1000MHz

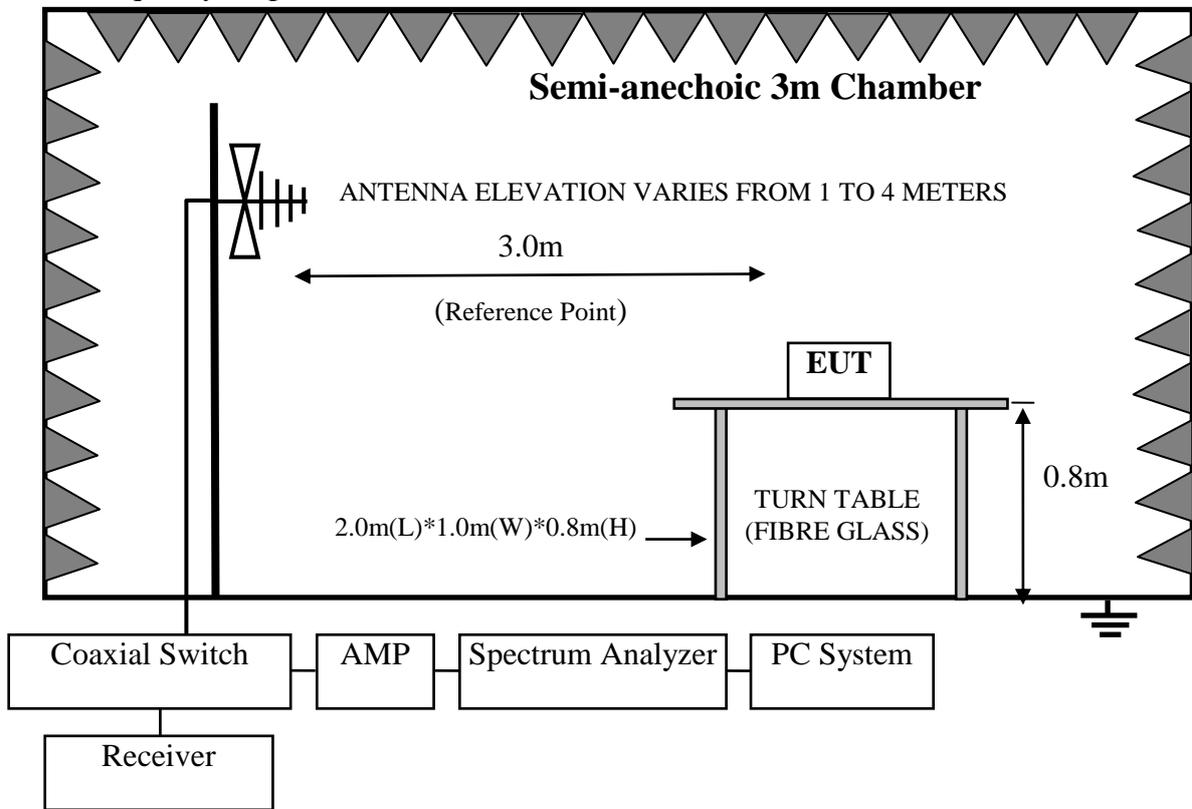

For frequency range 1GHz-25GHz

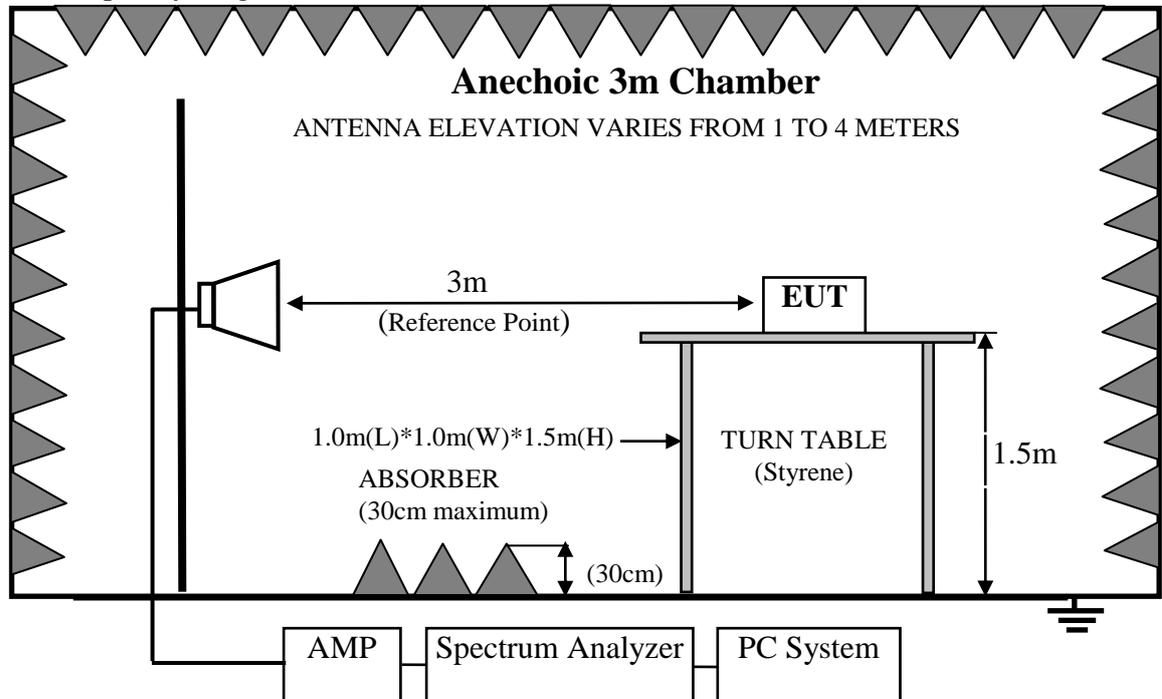

4.3.Radiated Emission Limit

4.3.1. 15.247&209 limits

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		μV/m	dB(μV)/m
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 dB(μV)/m (Peak) 54.0 dB(μV)/m (Average)	

Remark : (1) Emission level dBμV = 20 log Emission level μV/m

(2) The smaller limit shall apply at the cross point between two frequency bands.

(3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

4.3.2. 15.205 Restricted bands of operation

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

4.4.EUT Configuration on Test

The configurations of EUT are listed in Section 3.4.

4.5.Operating Condition of EUT

Same as Conducted Emission test that is listed in Section 3.5.

4.6. Test Procedure

Frequency below 30MHz:

The EUT setup on the turn table which has 0.8 m height to the ground. The turn table rotated 360 degrees and antenna fixed to 1 m to find the maximum emission level. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10 regulation.

EUT and its simulators are placed on a turn table, which is 0.8 meter high above ground for frequency 30MHz~1000MHz, 1.5 meter high above ground for frequency above 1GHz and put the absorbing with 2.4m(L)*2.4m(W)*0.3m(H) on the ground . The turn table can rotate 360 degrees to determine the position of the maximum emission level. Power on the EUT and let it working in test mode, then test it. EUT is set 3 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna for frequency 30MHz~1000MHz, and the Horn antenna is used as receiving antenna for frequency above 1GHz. Both horizontal and vertical polarization of the antenna is set on Test. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.10 on radiated emission Test.

This test was performed with EUT in X, Y, Z position, and the worse case was found when EUT in X position as test photo indicated.

The bandwidth of the EMI test receiver (R&S ESR3) is set at 120kHz for frequency range from 30MHz to 1000 MHz.

The bandwidth of the Spectrum's VBW is set at 3MHz and RBW is set at 1MHz for peak emissions measurement above 1GHz.

This device is pulse modulated, a duty cycle factor was used to calculate average level based measured peak level.

The frequency range from 30MHz to 10th harmonic (25GHz) is checked. And no any emissions were found from 18GHz to 25 GHz, So the radiated emissions from 18GHz to 25GHz were not record.

4.7. Radiated Emission Test Results


PASS.

All the emissions from 30MHz to 25 GHz were comply with 15.209 limits.


Note 1: The duty cycle factor for calculate average level is -19.49dB.

Note 2: The emissions (9kHz~30MHz) not reported for there is no emission be found.

Duty cycle Factor = $20 * \log(\text{duty cycle}) = -19.49$

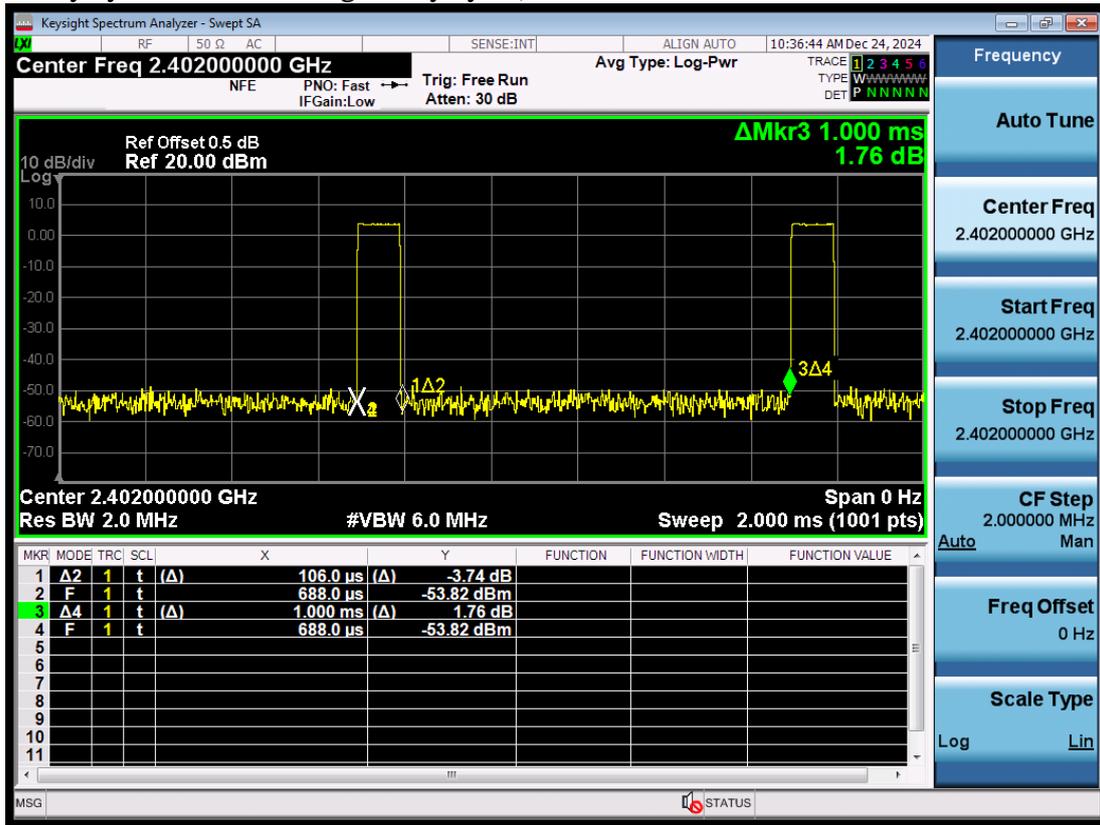

Frequency: 30MHz~1GHz

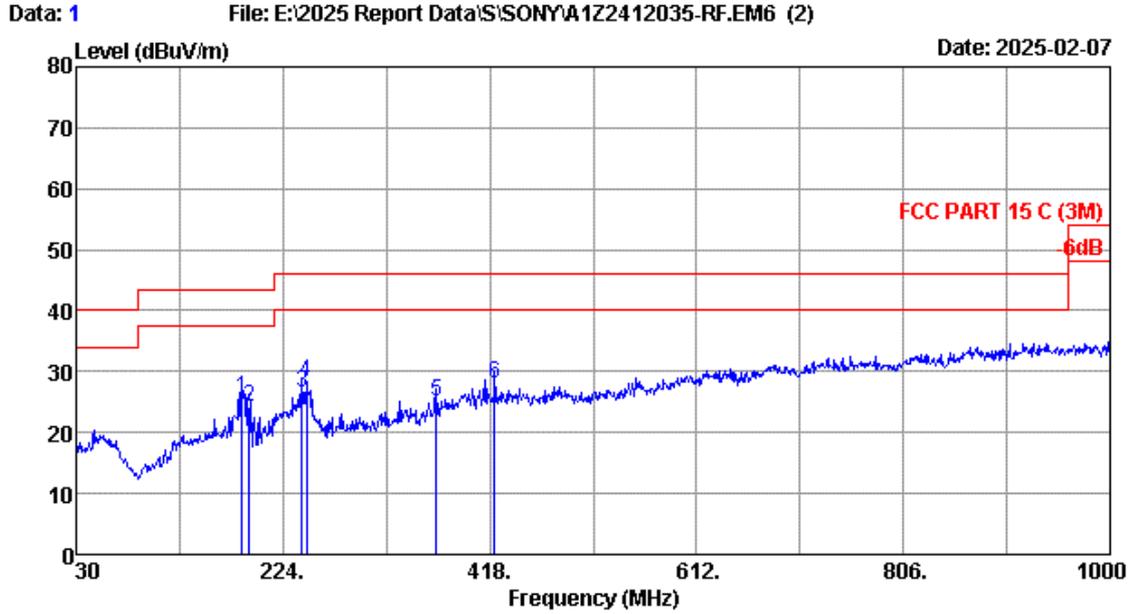


Site no. : 3m Chamber Data no. : 1
 Dis. / Ant. : 3m 2024 VULB 9168-01313 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 C (3M)
 Env. / Ins. : 23.0°C/50% Engineer : Abel
 Test Mode : 2.4G TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	185.200	16.98	1.54	7.04	25.56	43.50	17.94	QP
2	191.990	16.40	1.57	6.34	24.31	43.50	19.19	QP
3	241.460	17.46	1.81	7.40	26.67	46.00	19.33	QP
4	246.310	17.65	1.84	8.85	28.34	46.00	17.66	QP
5	367.560	20.95	2.59	1.55	25.09	46.00	20.91	QP
6	422.850	22.30	2.90	2.97	28.17	46.00	17.83	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Data: 2 File: E:\2025 Report Data\SONY\A1Z2412035-RF.EM6 (2) Date: 2025-02-07

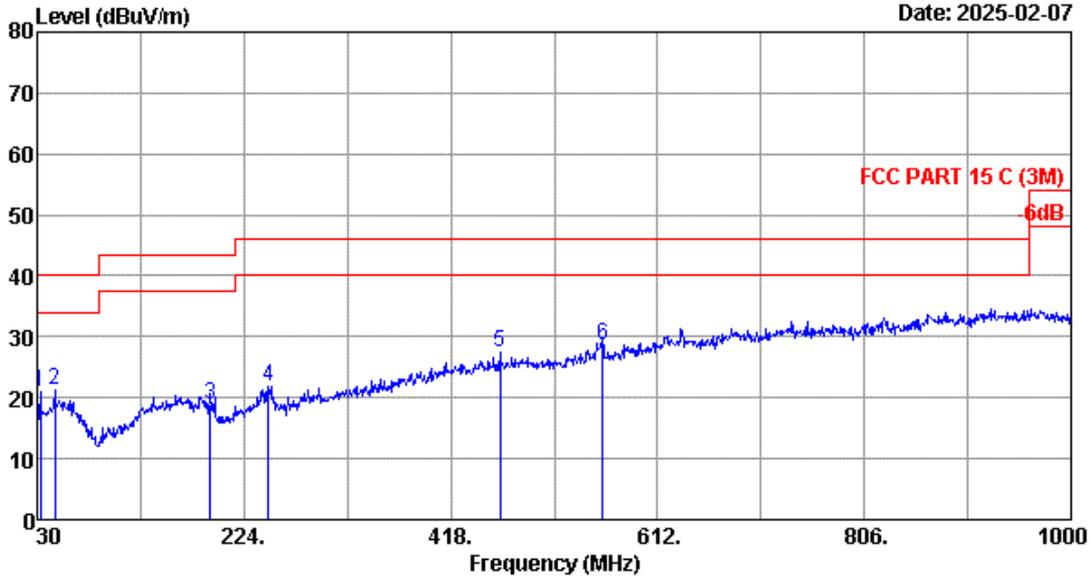

Site no. : 3m Chamber Data no. : 2
 Dis. / Ant. : 3m 2024 VULB 9168-01313 Ant. pol. : VERTICAL
 Limit : FCC PART 15 C (3M)
 Env. / Ins. : 23.0°C/50% Engineer : Abel
 Test Mode : 2.4G TX Mode


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	32.910	18.60	0.69	1.68	20.97	40.00	19.03	QP
2	46.490	19.85	0.81	0.54	21.20	40.00	18.80	QP
3	191.990	16.40	1.57	0.84	18.81	43.50	24.69	QP
4	247.280	17.69	1.84	2.44	21.97	46.00	24.03	QP
5	464.560	23.00	3.09	1.35	27.44	46.00	18.56	QP
6	560.590	24.89	3.49	0.16	28.54	46.00	17.46	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Frequency: 1GHz~18GHz

Test Mode	ANT. PLO.	Frequency (MHz)	Peak(dBuV/m)		Margin	Duty cycle factor (dB)	AV(dBuV/m)		Margin	Conclusion
			Emission Level	Limit			Emission Level	Limit		
GFSK	H	4804	50.99	74	23.01	-19.49	31.50	54	22.50	Pass
GFSK	V	4804	51.99	74	22.01	-19.49	32.50	54	21.50	Pass
GFSK	V	4882	51.25	74	22.75	-19.49	31.76	54	22.24	Pass
GFSK	H	4882	52.25	74	21.75	-19.49	32.76	54	21.24	Pass
GFSK	H	4958	51.15	74	22.85	-19.49	31.66	54	22.34	Pass
GFSK	V	4958	51.15	74	22.85	-19.49	31.66	54	22.34	Pass

Data: 1 File: F:\2025 Report\SONY\A1Z2412035.EM6 (6) Date: 2025-02-06

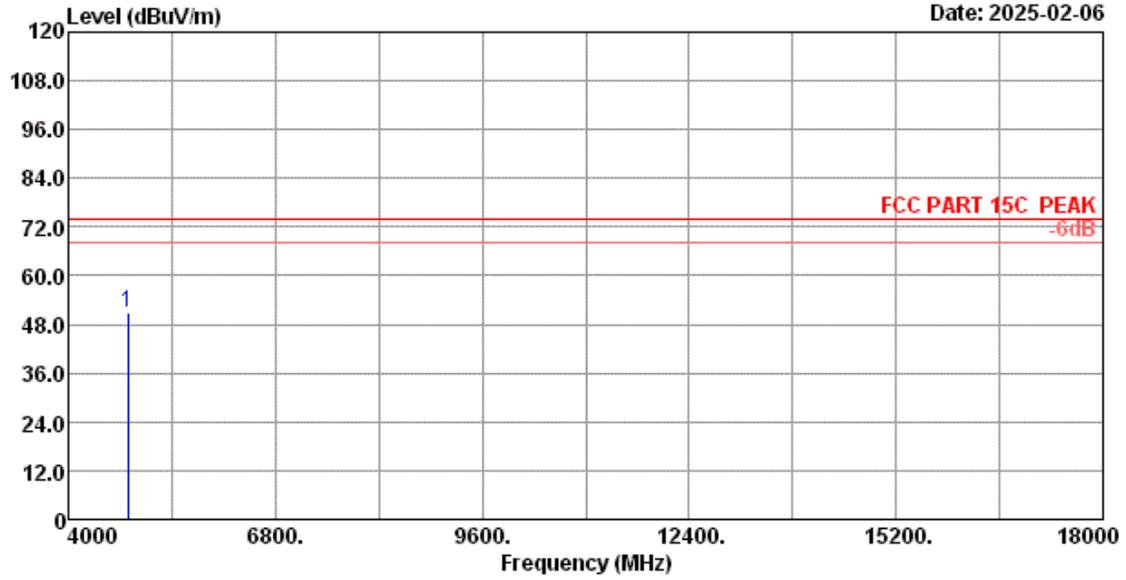


Site no. : 3m Chamber Data no. : 1
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2*C/52.6% Engineer : Epoch
 Test Mode : 2.4G 2402MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4804.00	31.30	7.14	42.97	30.42	50.99	74.00	23.01	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

Data: 2 File: F:\2025 Report\SONYA1Z2412035.EM6 (6) Date: 2025-02-06

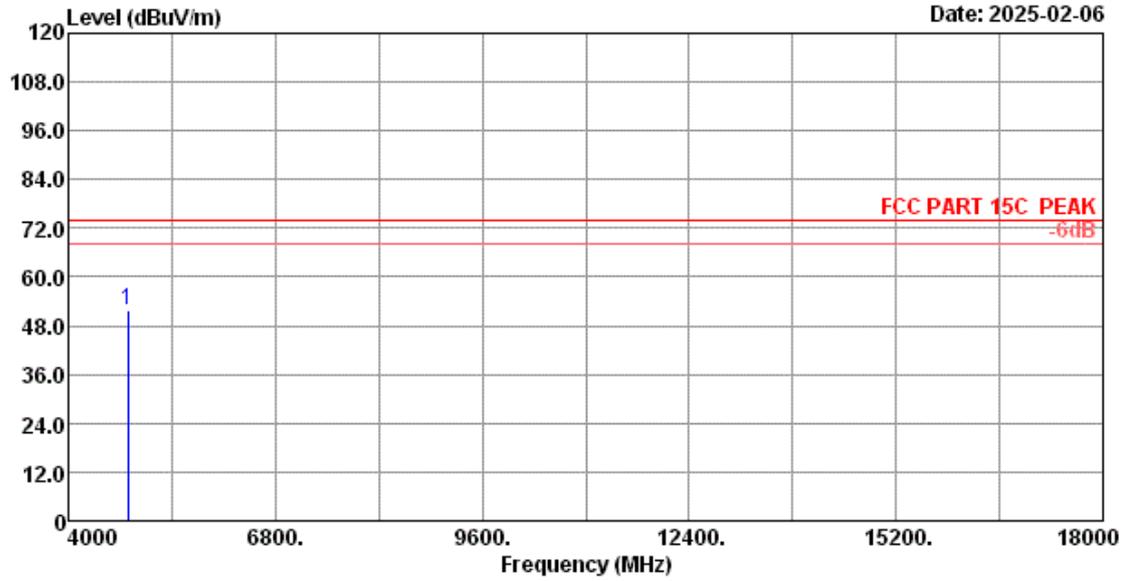


Site no. : 3m Chamber Data no. : 2
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2*C/52.6% Engineer : Epoch
 Test Mode : 2.4G 2402MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBUV)	Amp factor (dB)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	4804.00	31.30	7.14	43.97	30.42	51.99	74.00	22.01	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

Data: 3 File: F:\2025 Report\SONYA1Z2412035.EM6 (6) Date: 2025-02-06

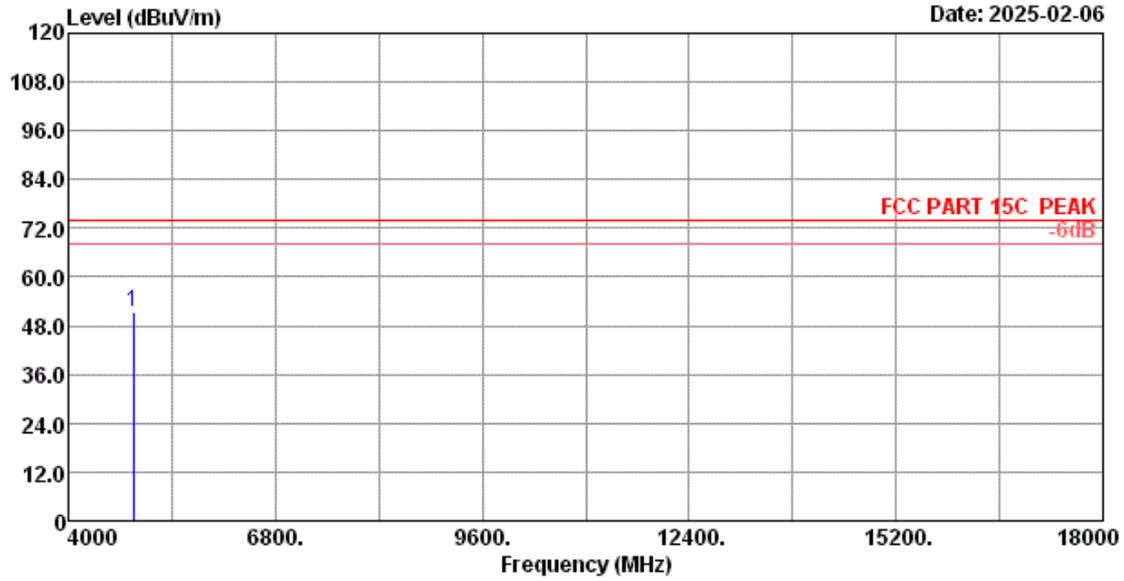


Site no. : 3m Chamber Data no. : 3
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2*C/52.6% Engineer : Epoch
 Test Mode : 2.4G 2441MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4882.00	31.36	7.18	43.12	30.41	51.25	74.00	22.75	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

Data: 4 File: F:\2025 Report\SONYA1Z2412035.EM6 (6) Date: 2025-02-06

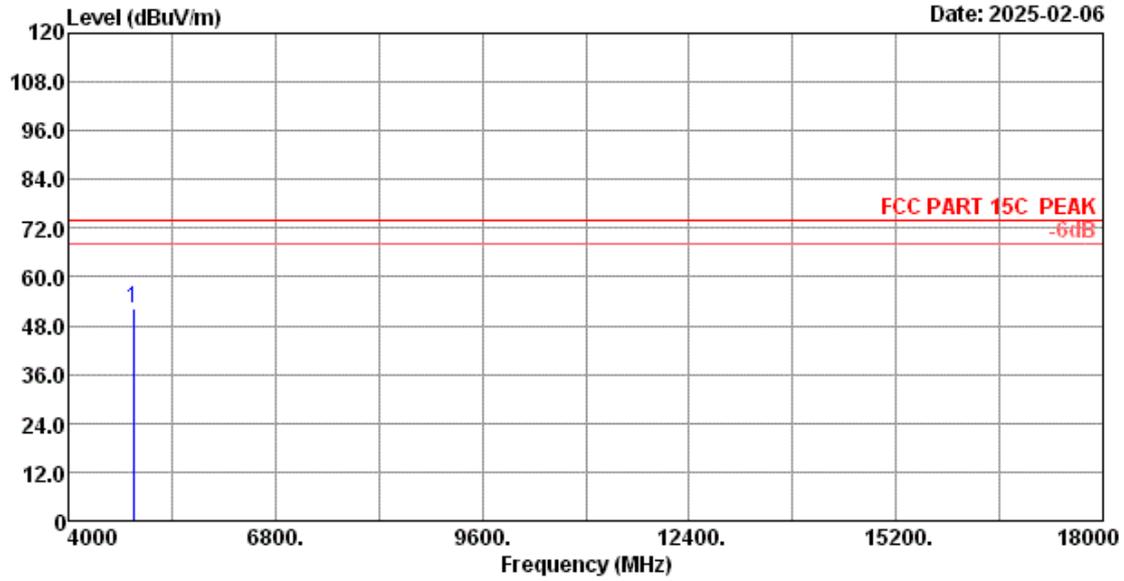


Site no. : 3m Chamber Data no. : 4
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2*C/52.6% Engineer : Epoch
 Test Mode : 2.4G 2441MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBUV)	Amp factor (dB)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	4882.00	31.36	7.18	44.12	30.41	52.25	74.00	21.75	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

Data: 5 File: F:\2025 Report\SONYA1Z2412035.EM6 (6) Date: 2025-02-06

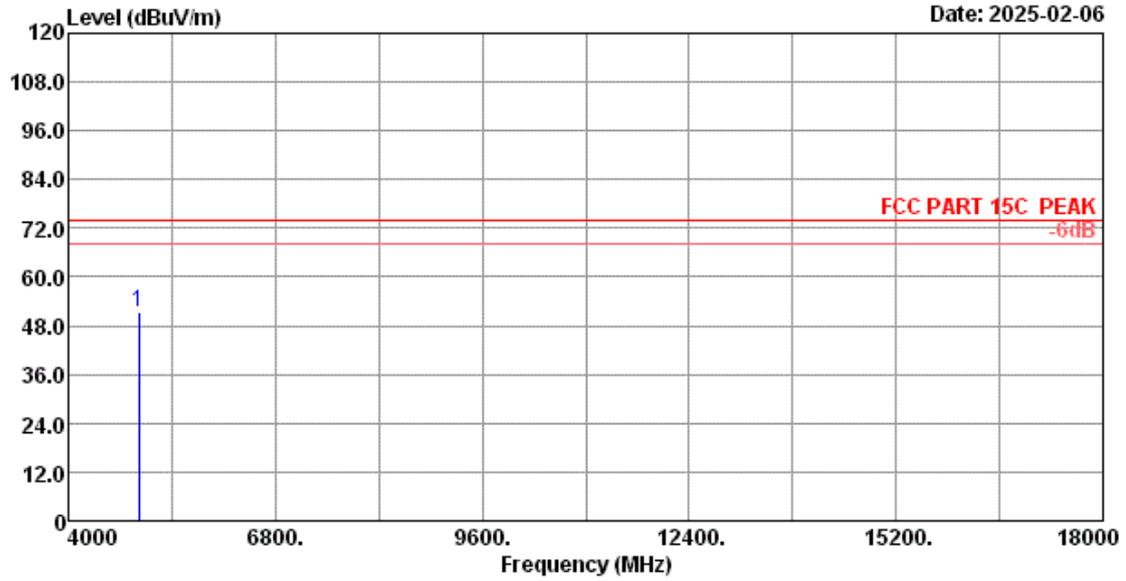


Site no. : 3m Chamber Data no. : 5
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2*C/52.6% Engineer : Epoch
 Test Mode : 2.4G 2479MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBUV)	Amp factor (dB)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	4958.00	31.93	7.22	42.40	30.40	51.15	74.00	22.85	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

Data: 6 File: F:\2025 Report\SONYA1Z2412035.EM6 (6) Date: 2025-02-06

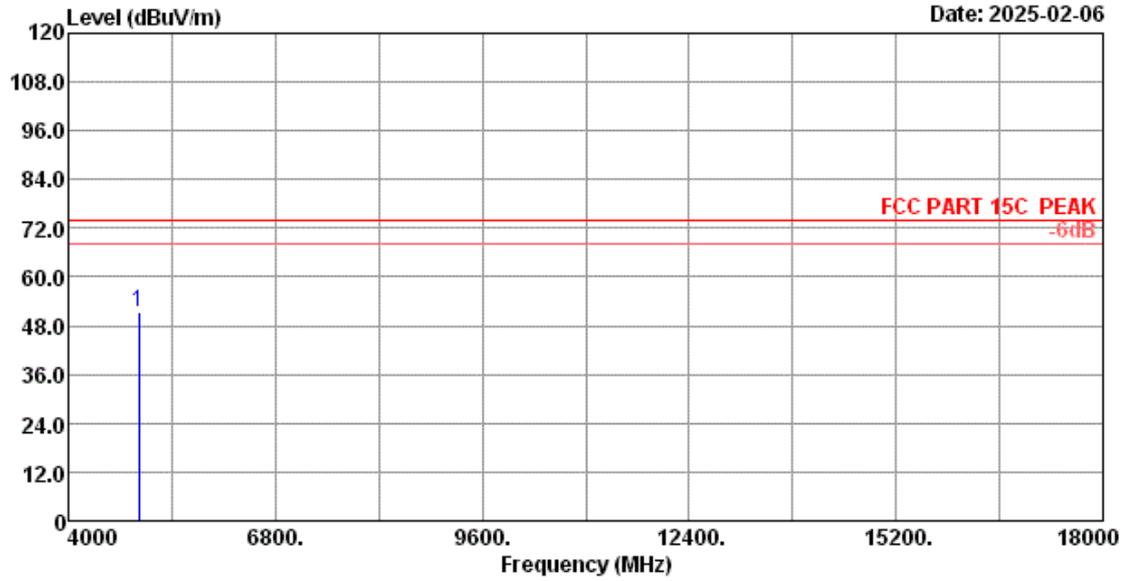


Site no. : 3m Chamber Data no. : 6
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2*C/52.6% Engineer : Epoch
 Test Mode : 2.4G 2479MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBUV)	Amp factor (dB)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	4958.00	31.93	7.22	42.40	30.40	51.15	74.00	22.85	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.


Data: 9 File: F:\2025 Report\SONYA1Z2412035.EM6 (26) Date: 2025-02-06

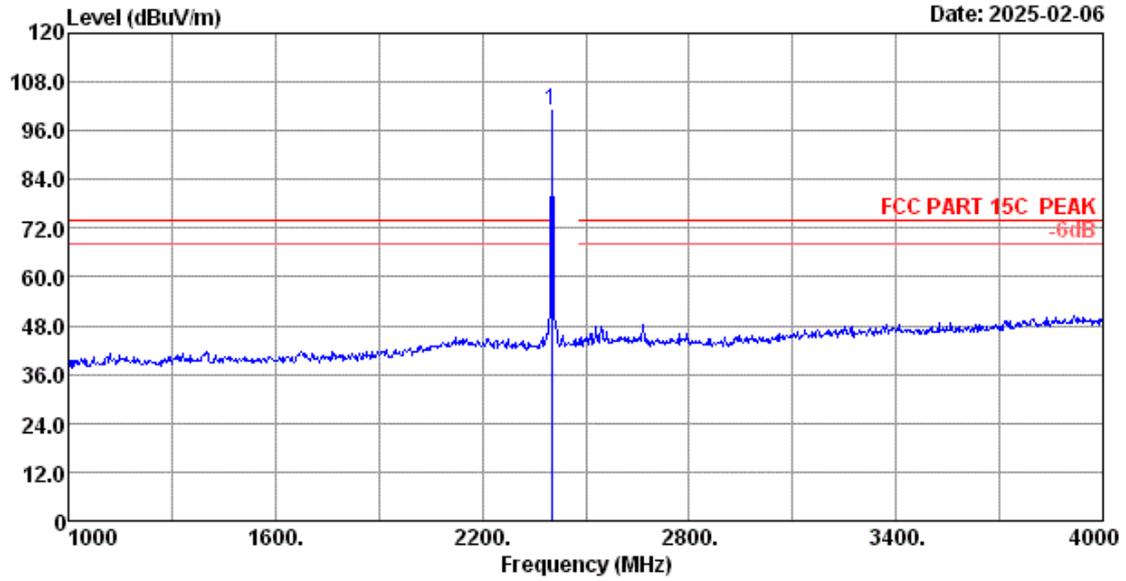

Site no. : 3m Chamber Data no. : 9
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2*C/52.6% Engineer : Epoch
 Test Mode : 2.4G 2402MHz TX Mode


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2402.00	27.70	5.22	99.75	31.70	100.97	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

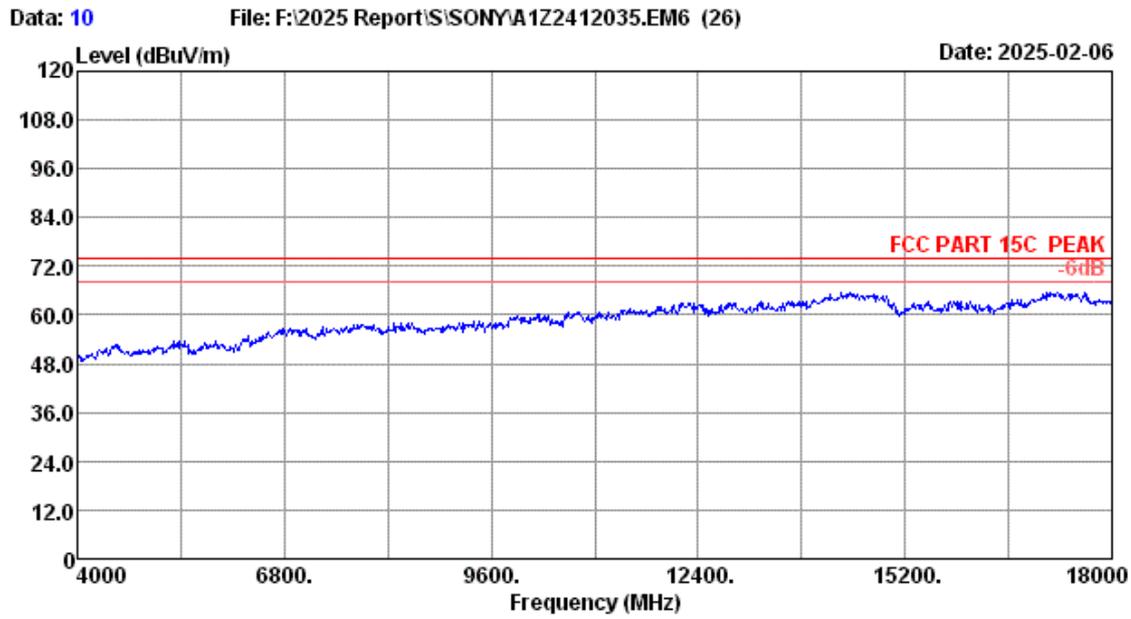

Site no.	: 3m Chamber	Data no.	: 10
Dis. / Ant.	: 3m 2024 MCTD1209-3006	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23.2°C/52.6%	Engineer	: Epoch
Test Mode	: 2.4G 2402MHz TX Mode		


Data: 12 File: F:\2025 Report\SONYA\1Z2412035.EM6 (26) Date: 2025-02-06

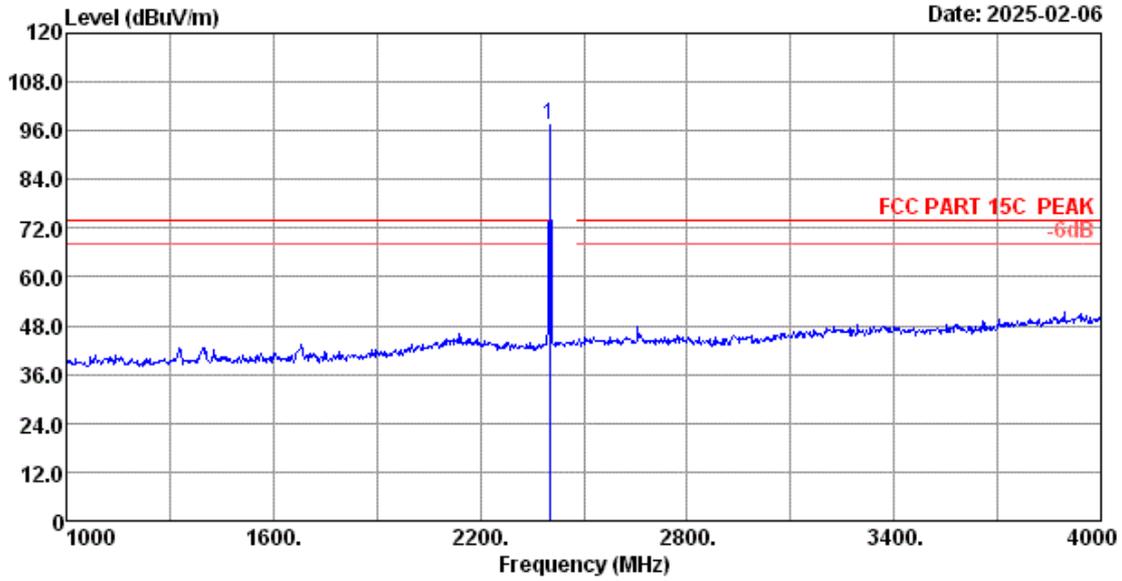

Site no. : 3m Chamber Data no. : 12
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2*C/52.6% Engineer : Epoch
 Test Mode : 2.4G 2402MHz TX Mode


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2402.00	27.70	5.22	96.08	31.70	97.30	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

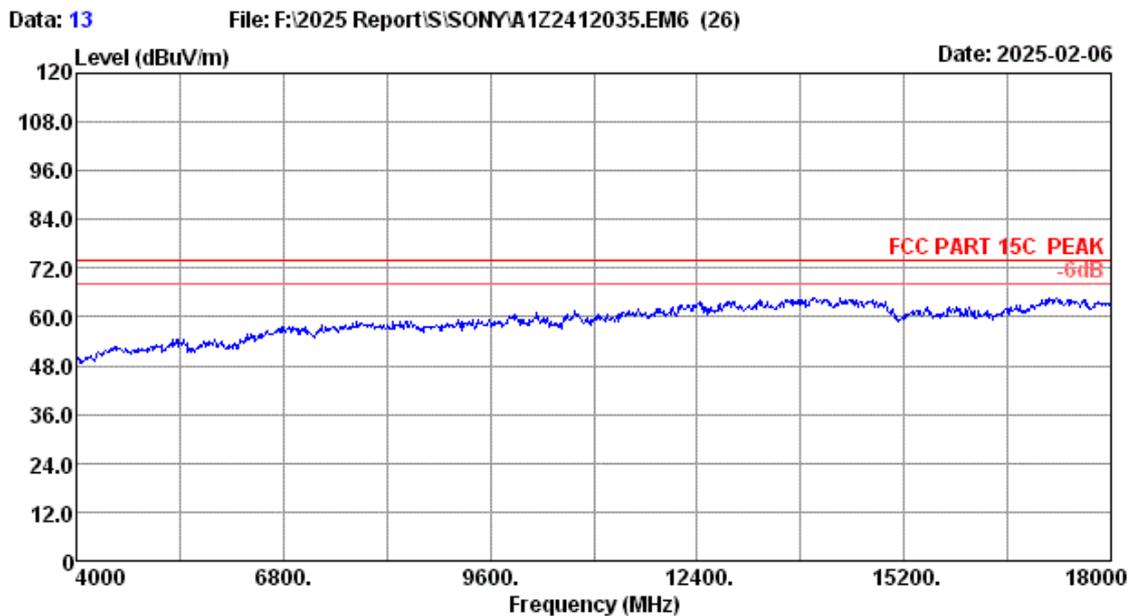

Site no.	: 3m Chamber	Data no.	: 13
Dis. / Ant.	: 3m 2024 MCTD1209-3006	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23.2°C/52.6%	Engineer	: Epoch
Test Mode	: 2.4G 2402MHz TX Mode		


Data: 15 File: F:\2025 Report\SONYA\1Z2412035.EM6 (26) Date: 2025-02-06

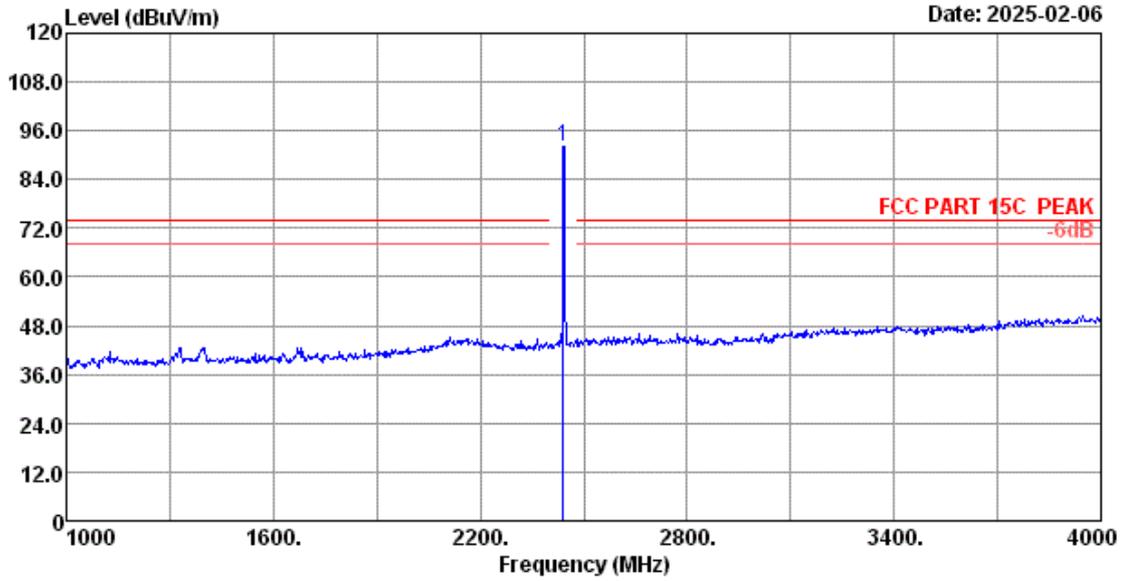

Site no. : 3m Chamber Data no. : 15
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2*C/52.6% Engineer : Epoch
 Test Mode : 2.4G 2441MHz TX Mode


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2441.00	27.70	5.26	90.98	31.68	92.26	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

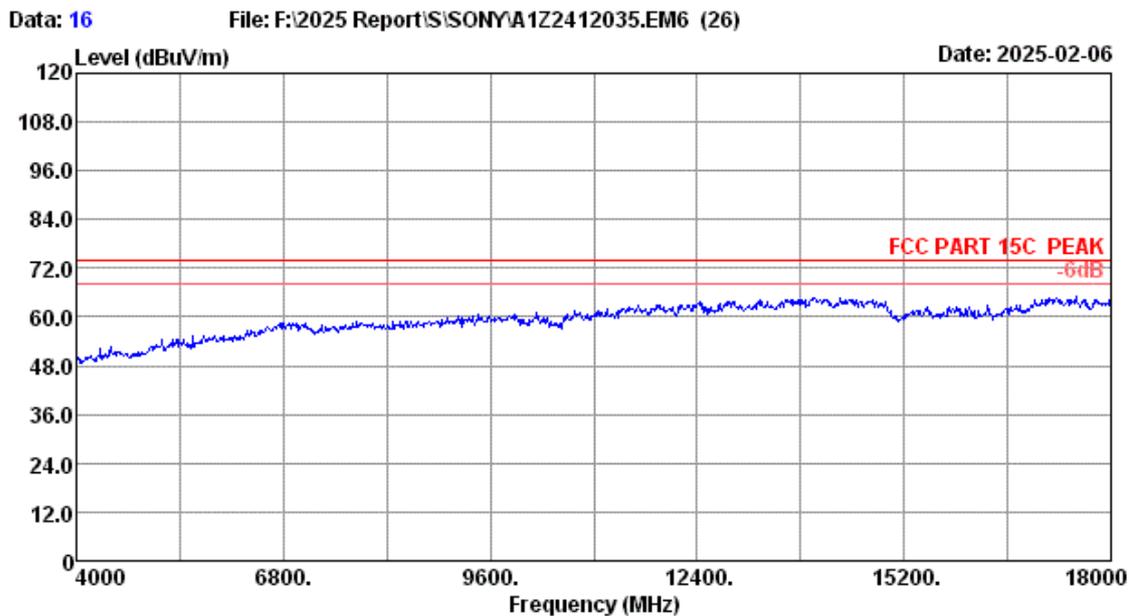

Site no.	: 3m Chamber	Data no.	: 16
Dis. / Ant.	: 3m 2024 MCTD1209-3006	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23.2*C/52.6%	Engineer	: Epoch
Test Mode	: 2.4G 2441MHz TX Mode		

Data: 18 File: F:\2025 Report\SONYA\1Z2412035.EM6 (26) Date: 2025-02-06

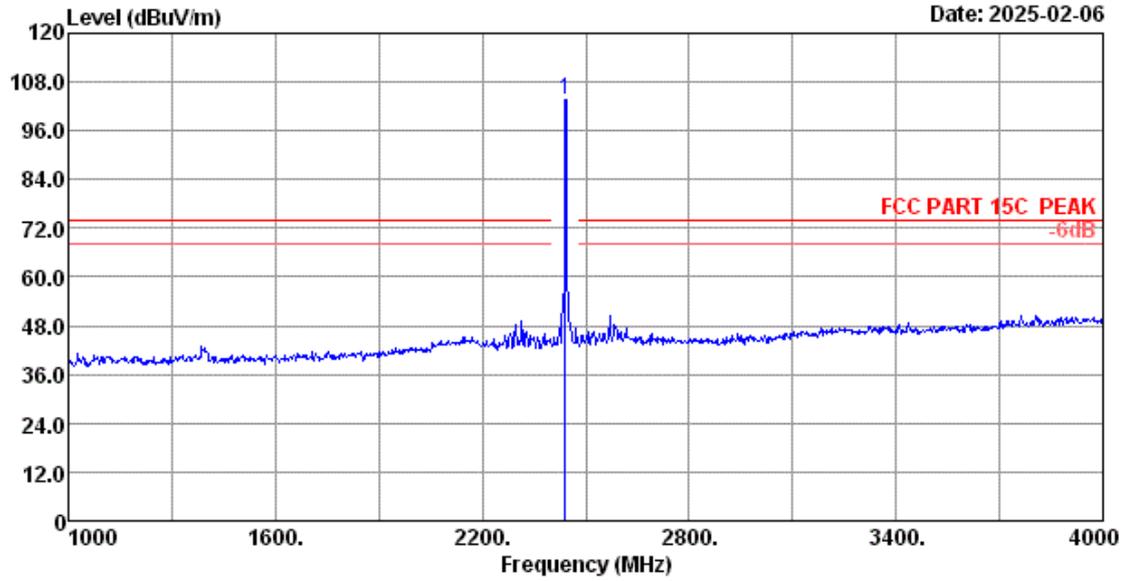


Site no. : 3m Chamber Data no. : 18
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2*C/52.6% Engineer : Epoch
 Test Mode : 2.4G 2441MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2441.00	27.70	5.26	102.31	31.68	103.59	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

Data: 19 File: F:\2025 Report\SONYA1Z2412035.EM6 (26) Date: 2025-02-06

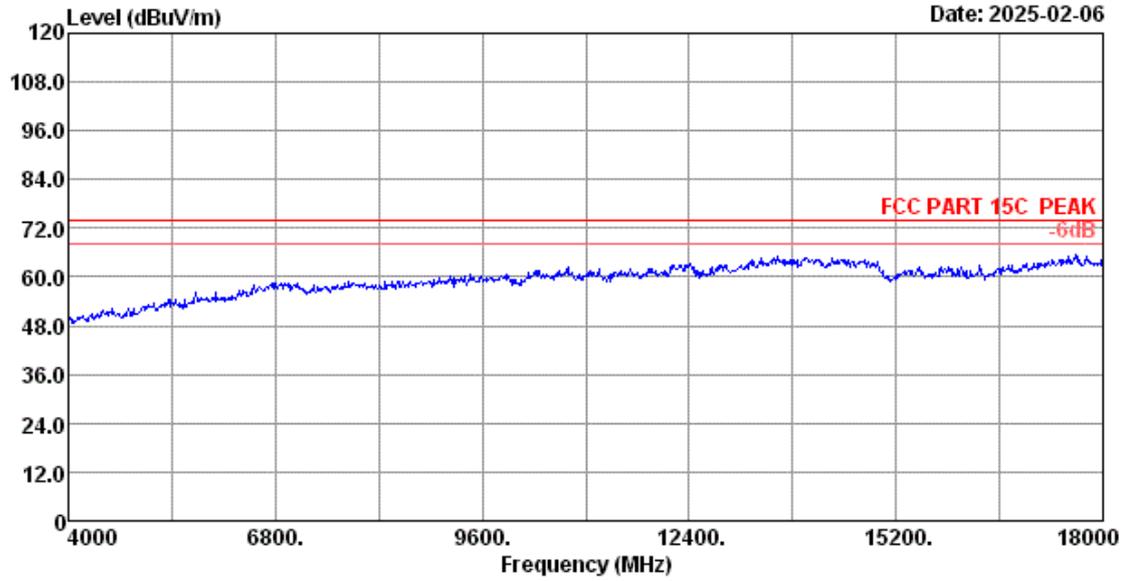

Site no.	: 3m Chamber	Data no.	: 19
Dis. / Ant.	: 3m 2024 MCTD1209-3006	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23.2*C/52.6%	Engineer	: Epoch
Test Mode	: 2.4G 2441MHz TX Mode		

Data: 21 File: F:\2025 Report\SONYA1Z2412035.EM6 (26) Date: 2025-02-06

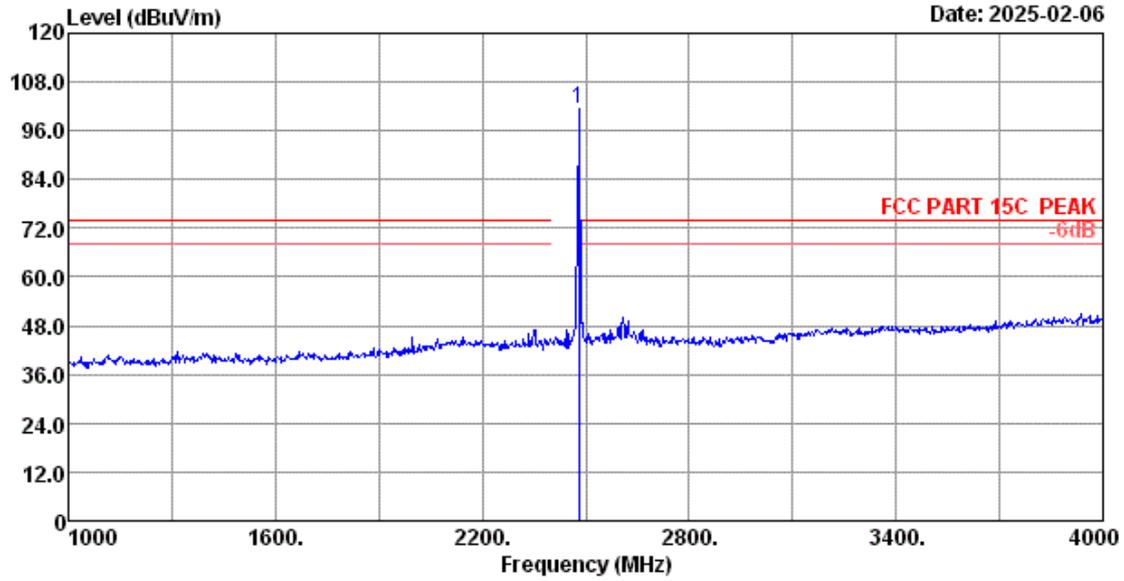


Site no. : 3m Chamber Data no. : 21
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2*C/52.6% Engineer : Epoch
 Test Mode : 2.4G 2479MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2479.00	27.82	5.30	100.02	31.66	101.48	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

Data: 22 File: F:\2025 Report\SONYA1Z2412035.EM6 (26) Date: 2025-02-06

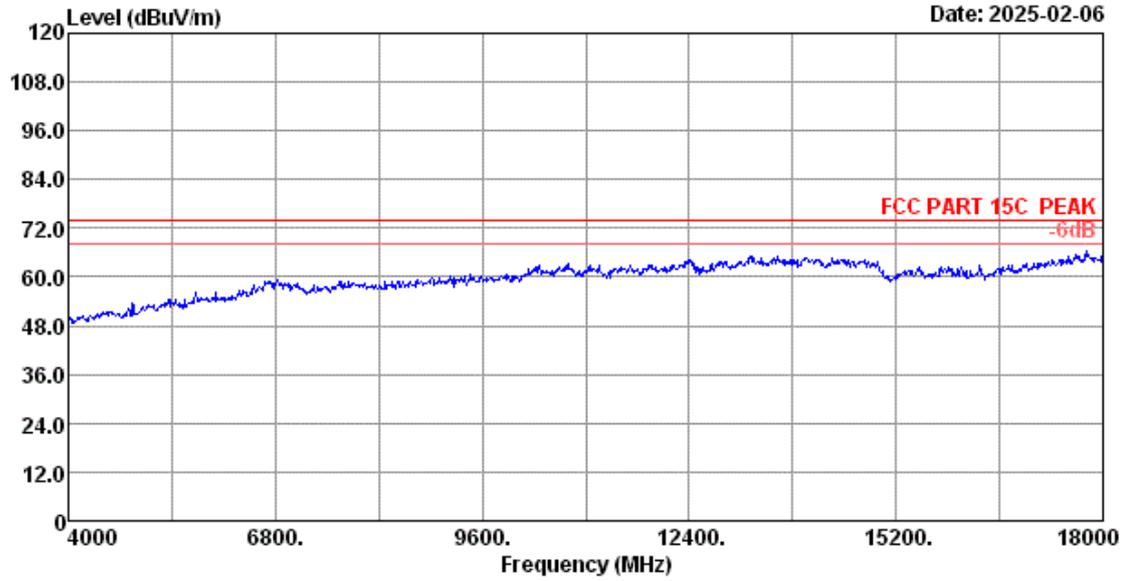

Site no.	: 3m Chamber	Data no.	: 22
Dis. / Ant.	: 3m 2024 MCTD1209-3006	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23.2*C/52.6%	Engineer	: Epoch
Test Mode	: 2.4G 2479MHz TX Mode		


Data: 24 File: F:\2025 Report\SONYA1Z2412035.EM6 (26) Date: 2025-02-06

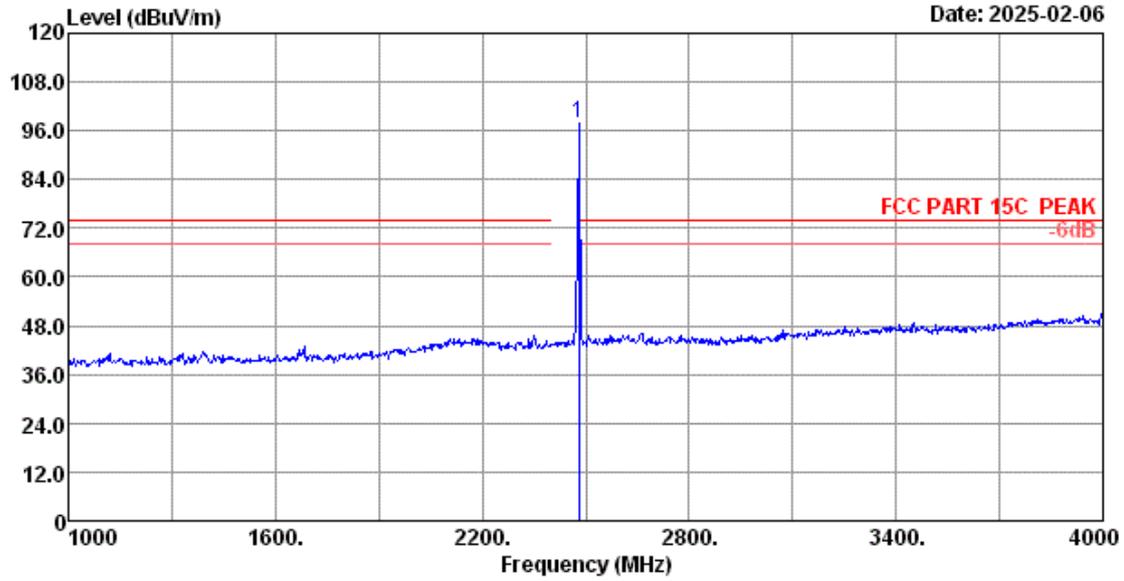

Site no. : 3m Chamber Data no. : 24
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2*C/52.6% Engineer : Epoch
 Test Mode : 2.4G 2479MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2479.00	27.82	5.30	96.55	31.66	98.01	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

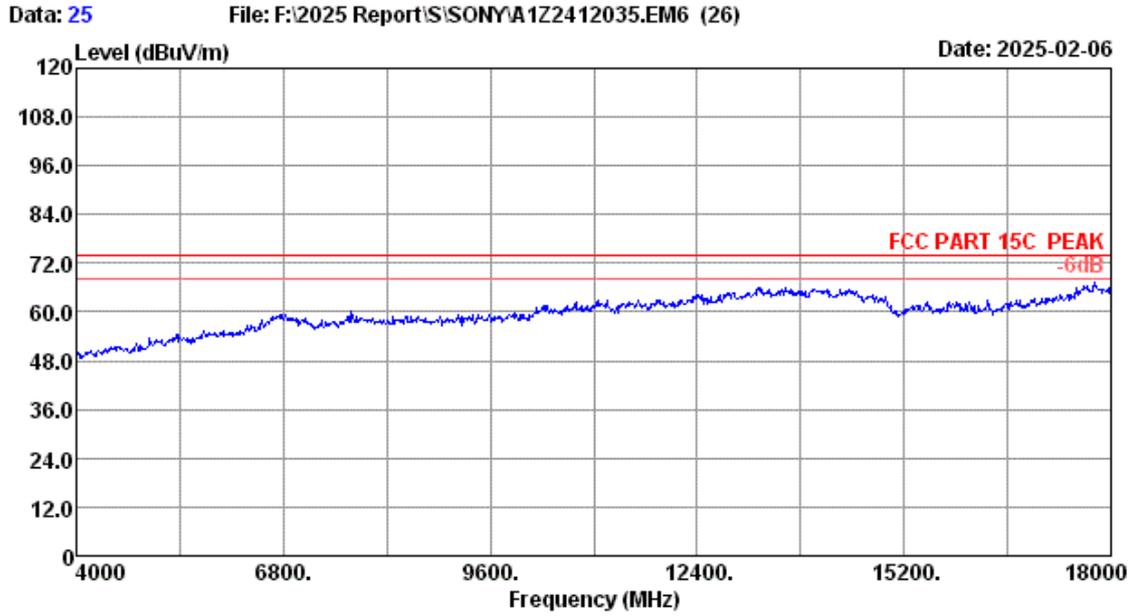

Site no.	: 3m Chamber	Data no.	: 25
Dis. / Ant.	: 3m 2024 MCTD1209-3006	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23.2*C/52.6%	Engineer	: Epoch
Test Mode	: 2.4G 2479MHz TX Mode		

5. CONDUCTED SPURIOUS EMISSIONS

5.1. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	PXA Signal Analyzer	Agilent	N9030A	MY51380221	Mar.16,24	1 Year
2.	RF Cable	Eastsheep	RM086-SMA/N-JJ-2000	NO.1	Jun.19,24	1 Year
3.	Attenuator(10dB)	Agilent	8491B	MY39269201	Mar.16,24	1 Year

5.2. Block Diagram of Test Setup



5.3. Limit

In any 100kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.

5.4. Test Procedure

Use the test method described in ANSI C63.10:

The transmitter output was connected to a spectrum analyzer, The resolution bandwidth is set to 100 kHz, The video bandwidth is set to 300 kHz and measure all the emissions with peak detector.

Note: The cable loss and attenuator loss were offset into spectrum analyzer as an amplitude offset.

5.5. Test result


PASS (The testing data was attached in the next pages.)

EUT: Wireless Dongle		
M/N: YY2994		
Test date: 2025-01-22	Pressure: 102.1±1.0 kpa	Humidity: 51.1±3.0%
Tested by: Lili	Test site: RF site	Temperature: 22.8±0.6 °C


2402MHz




2402MHz(2.3GHz – 2.4GHz)

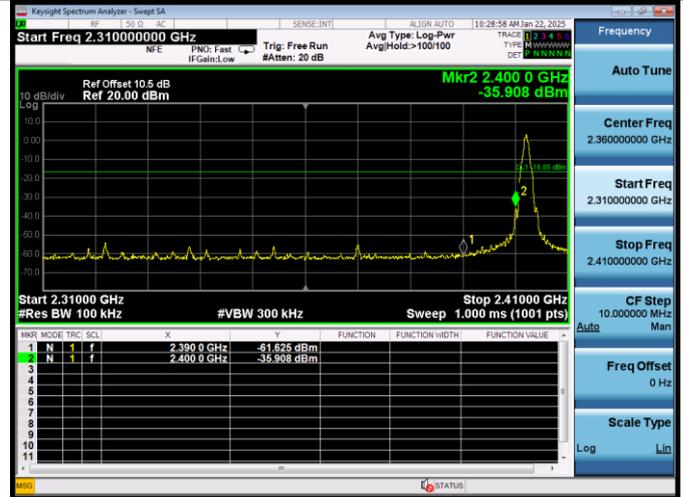



2402MHz(30MHz – 1GHz)

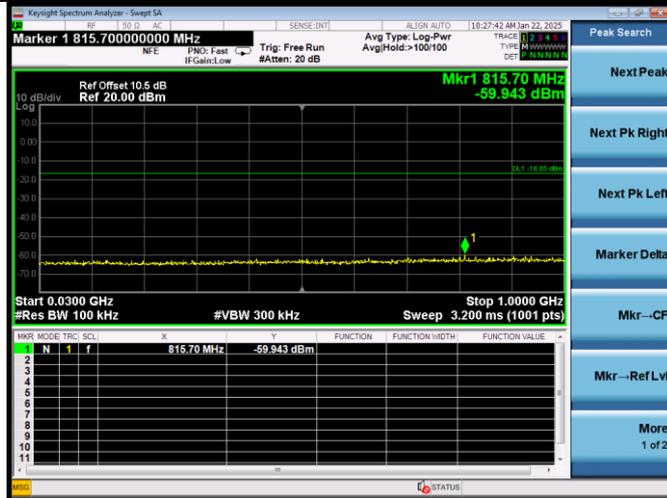

2402MHz(10GHz – 26GHz)

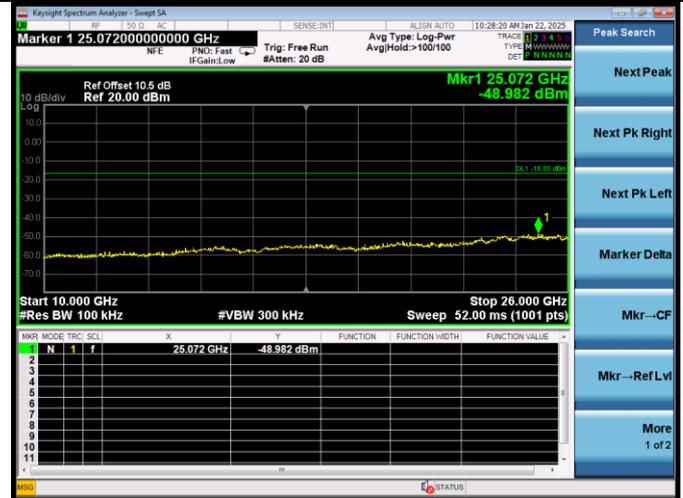


2402MHz(1GHz – 10GHz)

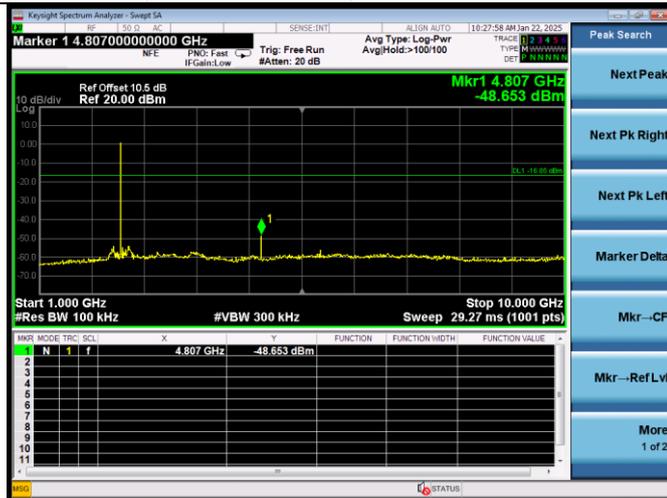


2441MHz




2441MHz(1GHz – 10GHz)

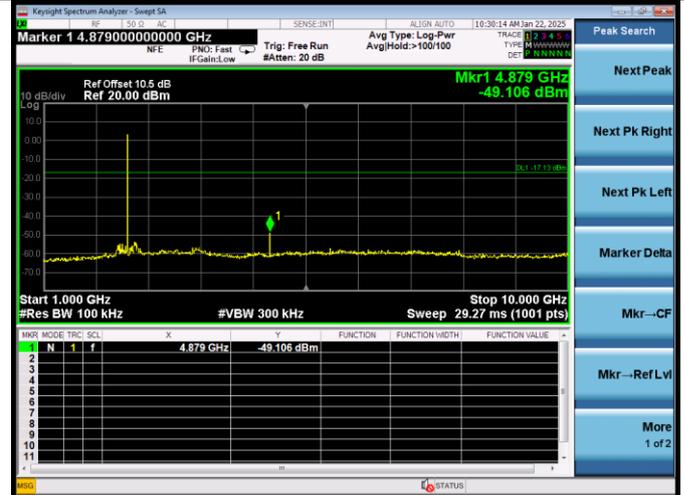

2441MHz(30MHz – 1GHz)

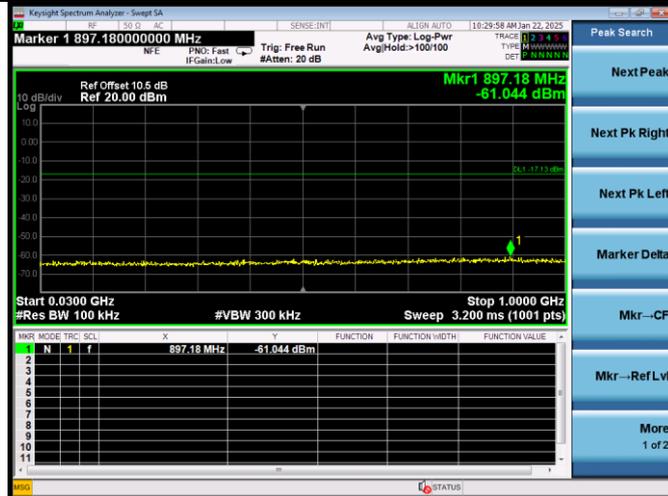


2441MHz(10GHz – 26GHz)

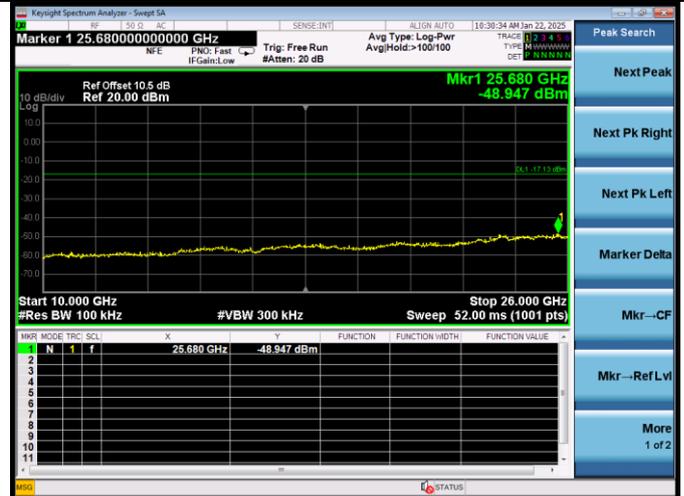


2479MHz




2479MHz(2.4GHz – 2.5GHz)

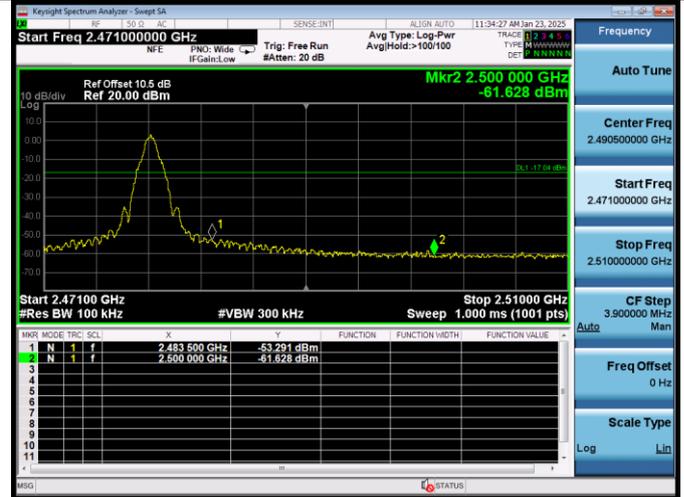



2479MHz(30MHz – 1GHz)

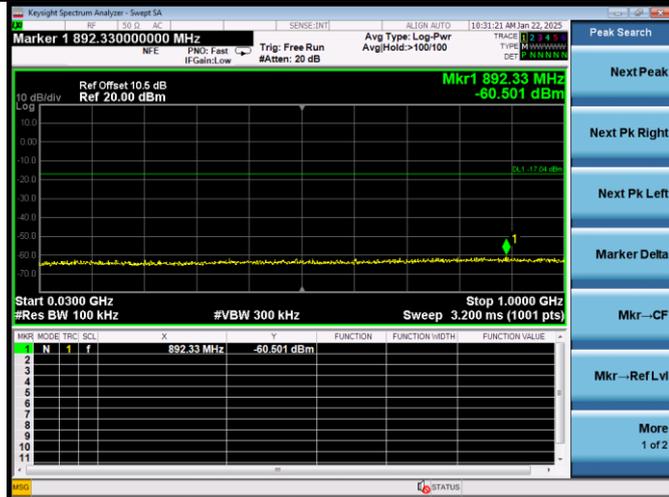

2479MHz(10GHz – 26GHz)

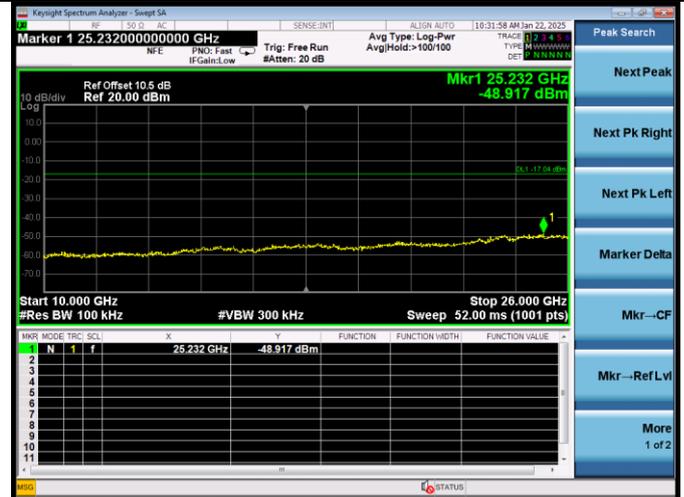

2479MHz(1GHz – 10GHz)

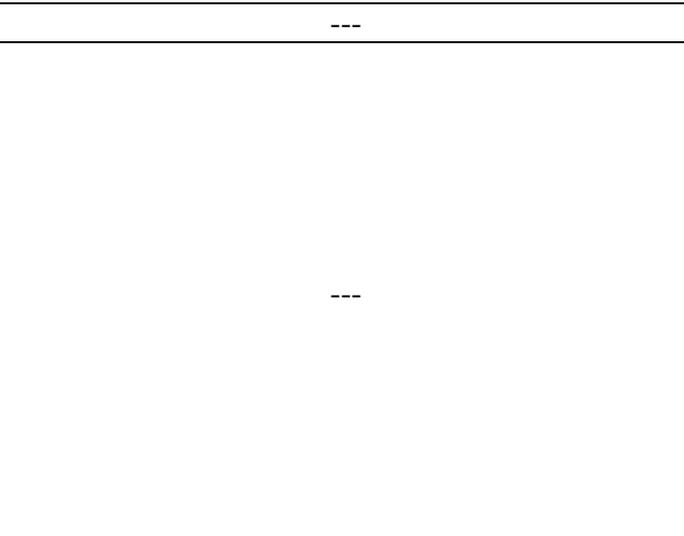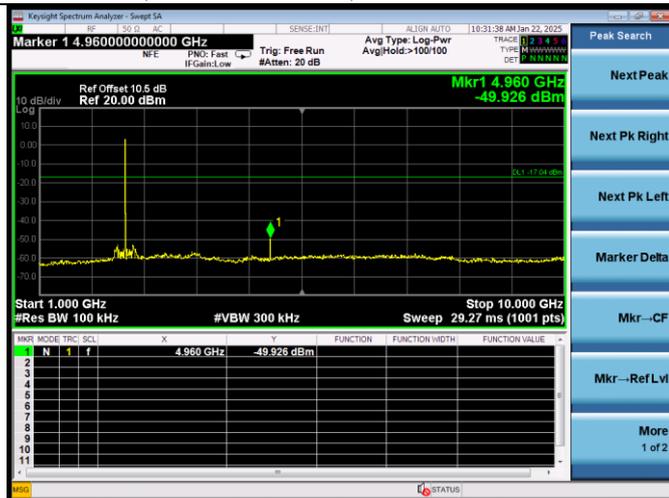

6. BAND EDGE COMPLIANCE TEST

6.1. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	3m Chamber(NSA)	AUDIX	N/A	N/A	Aug.11,22	3Year
2.	3m Chamber(SE)	AUDIX	N/A	N/A	Sep.16,22	3 Year
3.	Signal Analyzer	Rohde & Schwarz	FSV40	101608	Nov.07,24	1 Year
4.	Amplifier	HP	8447D	2944A11159	Mar.17,24	1 Year
5.	RF Cable	TIMES MICROWAVE	SFT205-NMSM-10.00M	689241	Aug.13,24	1 Year
6.	Test Software	AUDIX	e3	6.100913a	N/A	N/A
7.	Horn Antenna	ETC	MCTD 1209	DRH15F03006	Sep.08,24	1 Year

Note: N/A means Not applicable.

6.2. Limit


All the lower and upper band-edges emissions appearing within 2310MHz to 2390MHz and 2483.5MHz to 2500MHz restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions outside operation frequency band 2400MHz to 2483.5MHz shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

6.3. Test Procedure

1. The EUT is placed on a turntable, which is 1.5m above the ground plane and worked at highest radiated power.
2. The turntable was rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - (a) PEAK: RBW=1MHz ; VBW=3MHz, PK detector, Sweep=AUTO
 - (b) This device is pulse modulated, a duty cycle factor was used to calculate average level based measured peak level

6.4. Test Results


Pass (The testing data was attached in the next pages.)

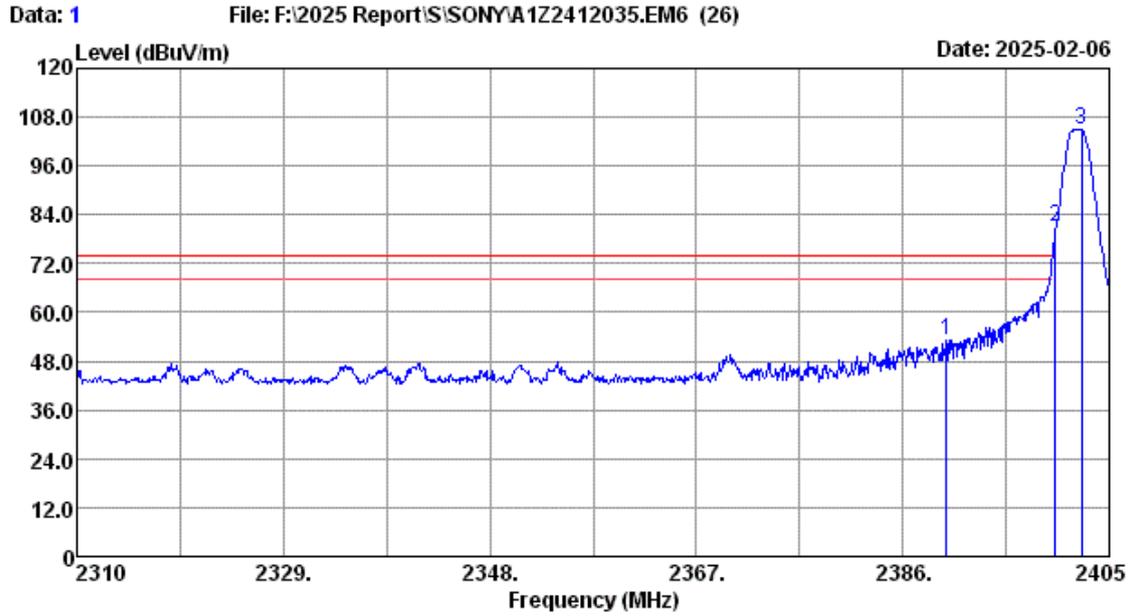

Site no. : 3m Chamber Data no. : 1
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2*C/52.6% Engineer : Epoch
 Test Mode : 2.4G 2402MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBUV)	Amp factor (dB)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	2390.00	27.64	5.20	52.05	31.70	53.19	74.00	20.81	Peak
2	2400.00	27.70	5.22	79.69	31.70	80.91	-----	-----	Peak
3	2402.44	27.70	5.22	103.66	31.70	104.88	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

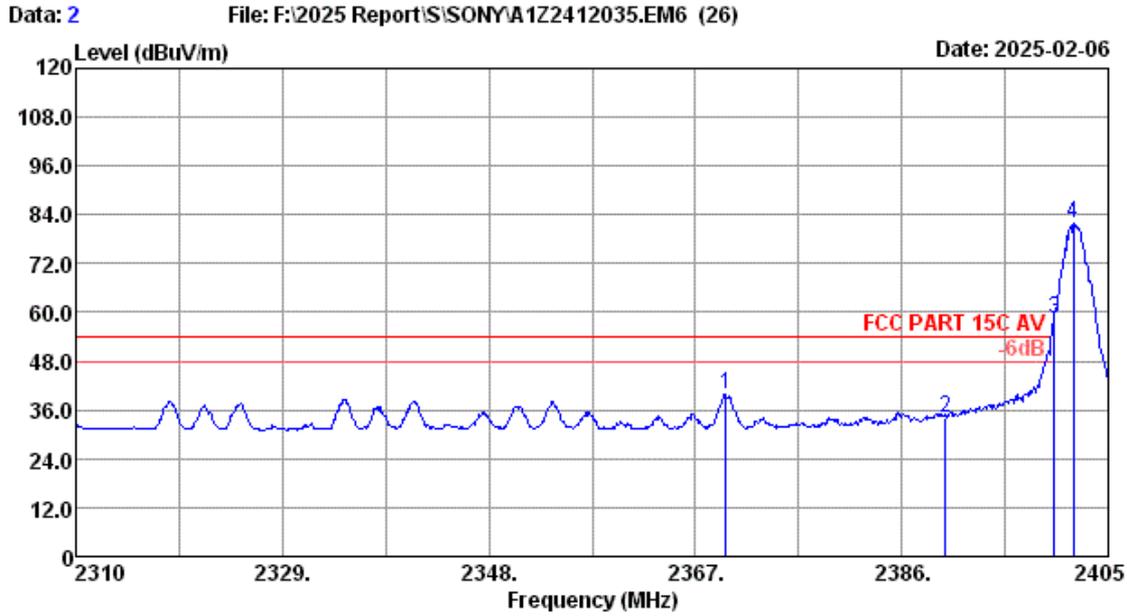

Site no. : 3m Chamber Data no. : 2
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.2*C/52.6% Engineer : Epoch
 Test Mode : 2.4G 2402MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBUV)	Amp factor (dB)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	2369.85	27.52	5.18	38.80	31.72	39.78	54.00	14.22	Average
2	2390.00	27.64	5.20	33.07	31.70	34.21	54.00	19.79	Average
3	2400.00	27.70	5.22	57.18	31.70	58.40	-----	-----	Average
4	2401.77	27.70	5.22	80.66	31.70	81.88	-----	-----	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

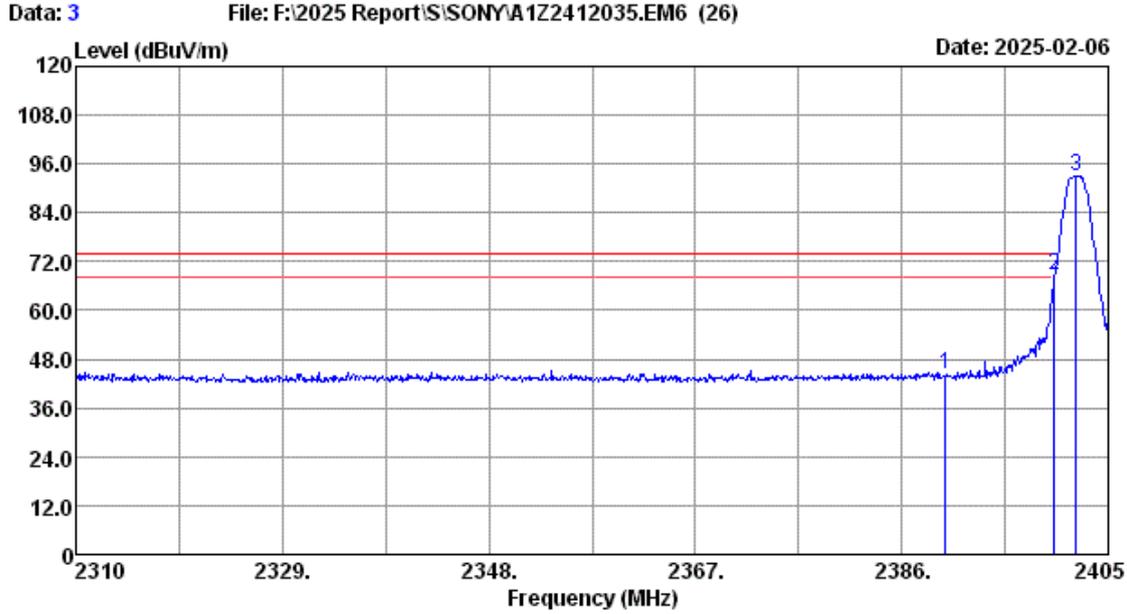

Site no. : 3m Chamber Data no. : 3
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2°C/52.6% Engineer : Epoch
 Test Mode : 2.4G 2402MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBUV)	Amp factor (dB)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	2390.00	27.64	5.20	43.11	31.70	44.25	74.00	29.75	Peak
2	2400.00	27.70	5.22	67.29	31.70	68.51	-----	-----	Peak
3	2402.06	27.70	5.22	91.67	31.70	92.89	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

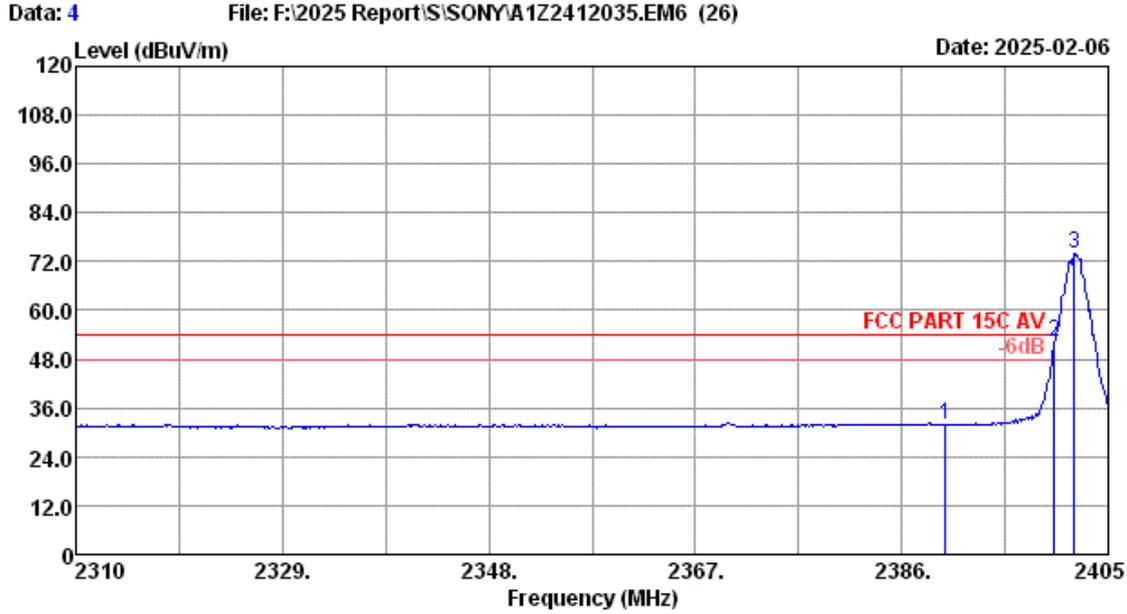

Site no. : 3m Chamber Data no. : 4
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.2°C/52.6% Engineer : Epoch
 Test Mode : 2.4G 2402MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBUV)	Amp factor (dB)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	2390.00	27.64	5.20	30.59	31.70	31.73	54.00	22.27	Average
2	2400.00	27.70	5.22	50.83	31.70	52.05	-----	-----	Average
3	2401.87	27.70	5.22	72.75	31.70	73.97	-----	-----	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

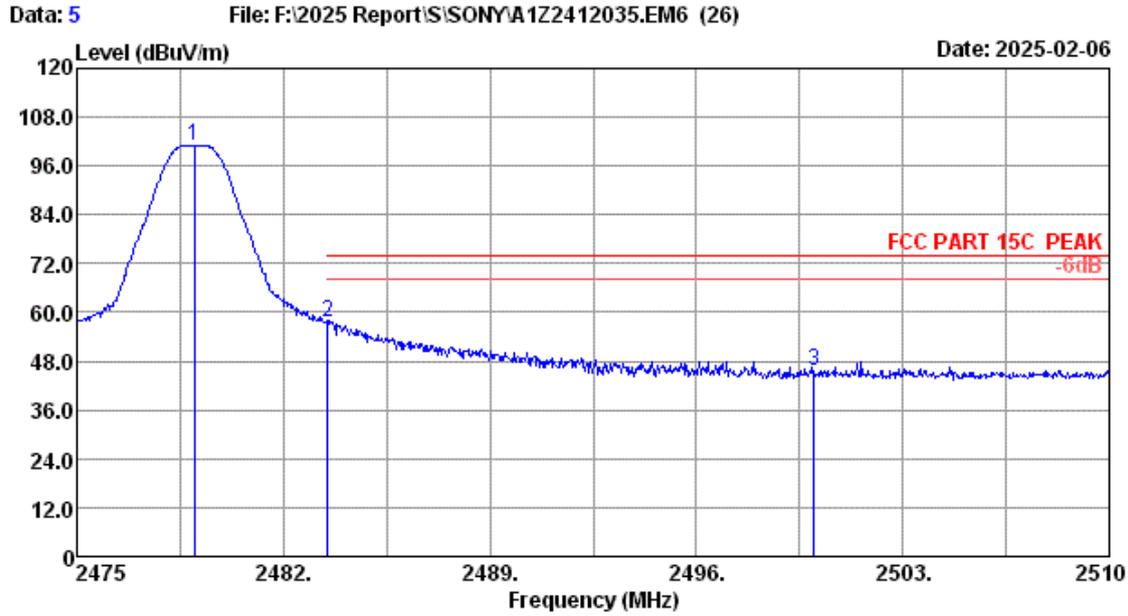

Site no. : 3m Chamber Data no. : 5
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2°C/52.6% Engineer : Epoch
 Test Mode : 2.4G 2479MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBUV)	Amp factor (dB)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	2478.99	27.82	5.30	99.65	31.66	101.11	74.00	27.11	Peak
2	2483.50	27.83	5.30	56.05	31.66	57.52	74.00	16.48	Peak
3	2500.00	27.90	5.32	44.14	31.65	45.71	74.00	28.29	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

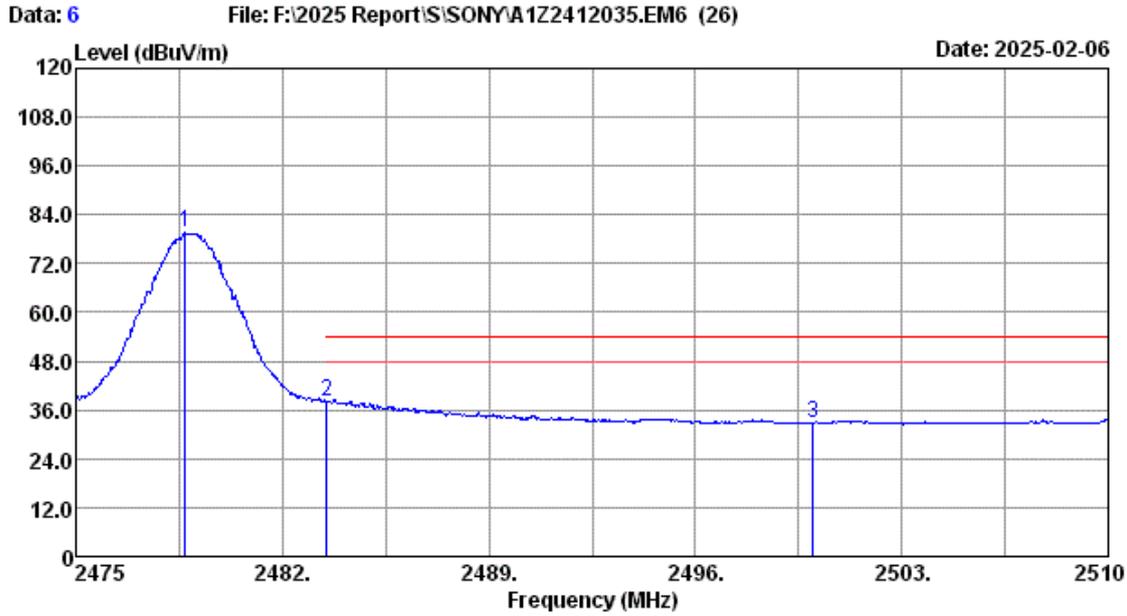

Site no. : 3m Chamber Data no. : 6
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.2°C/52.6% Engineer : Epoch
 Test Mode : 2.4G 2479MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBUV)	Amp factor (dB)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	2478.71	27.81	5.30	78.11	31.66	79.56	-----	-----	Average
2	2483.50	27.83	5.30	36.52	31.66	37.99	54.00	16.01	Average
3	2500.00	27.90	5.32	31.15	31.65	32.72	54.00	21.28	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

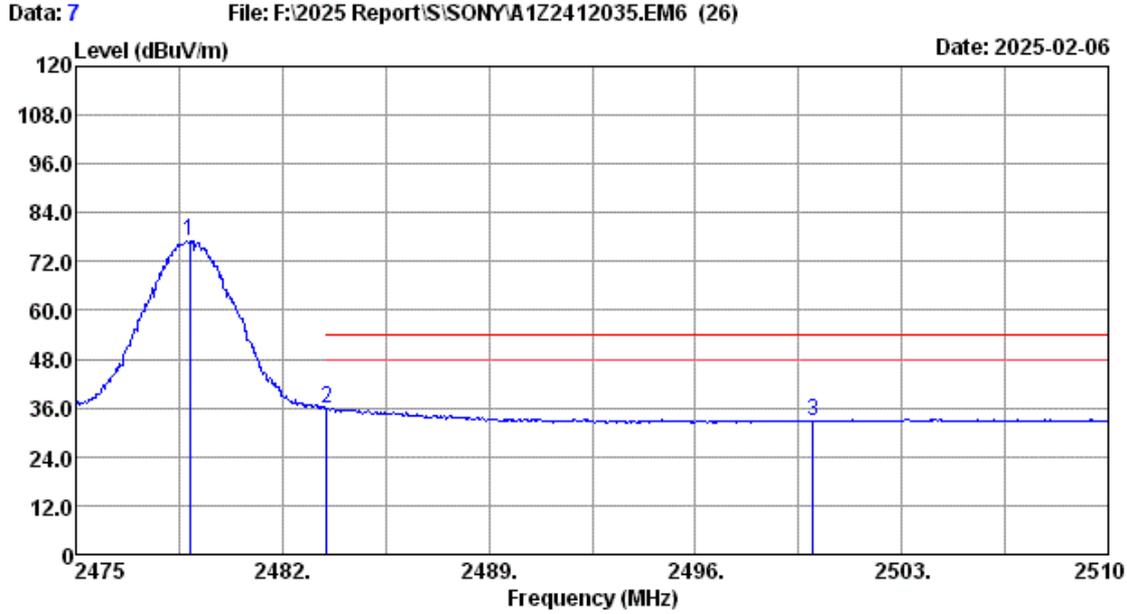

Site no. : 3m Chamber Data no. : 7
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.2°C/52.6% Engineer : Epoch
 Test Mode : 2.4G 2479MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBUV)	Amp factor (dB)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	2478.85	27.82	5.30	75.52	31.66	76.98	-----	-----	Average
2	2483.50	27.83	5.30	34.52	31.66	35.99	54.00	18.01	Average
3	2500.00	27.90	5.32	31.13	31.65	32.70	54.00	21.30	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

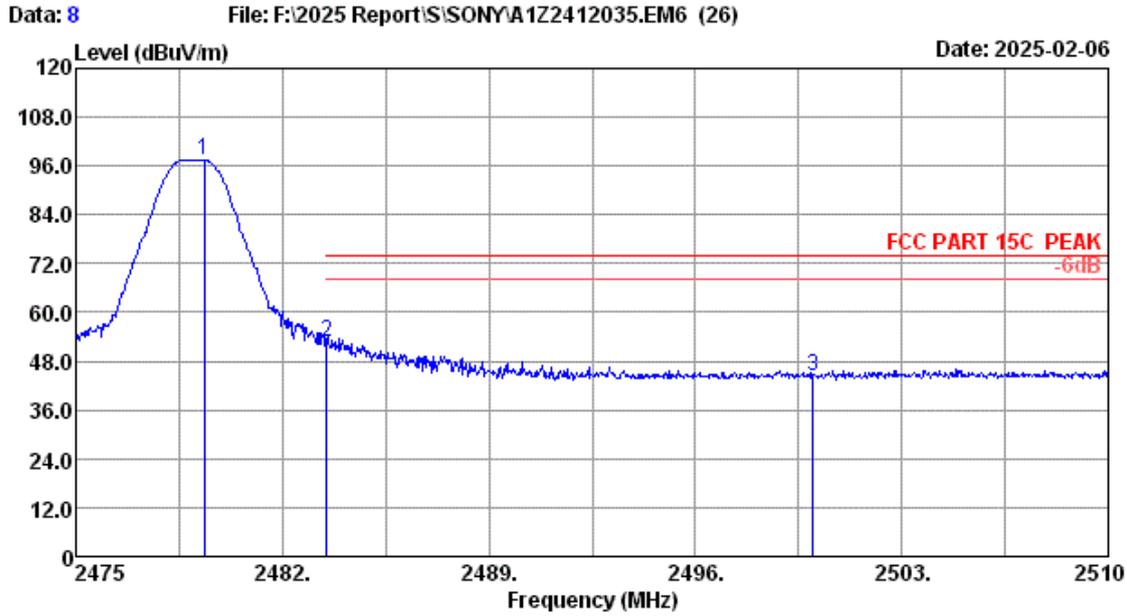

Site no. : 3m Chamber Data no. : 8
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2°C/52.6% Engineer : Epoch
 Test Mode : 2.4G 2479MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBUV)	Amp factor (dB)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	2479.34	27.82	5.30	96.04	31.66	97.50	-----	-----	Peak
2	2483.50	27.83	5.30	51.31	31.66	52.78	74.00	21.22	Peak
3	2500.00	27.90	5.32	42.62	31.65	44.19	74.00	29.81	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

7. 6dB & 99% Bandwidth Test

7.1. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	PXA Signal Analyzer	Agilent	N9030A	MY51380221	Mar.16,24	1 Year
2.	RF Cable	Eastsheep	RM086-SMA/N-JJ-2000	NO.1	Jun.19,24	1 Year
3.	Attenuator(10dB)	Agilent	8491B	MY39269201	Mar.16,24	1 Year

7.2. Block Diagram of Test Setup



7.3. Limit

For direct sequence systems, the minimum 6dB bandwidth shall be at least 500kHz

7.4. Test Procedure

Use the test method described in ANSI C63.10 Section 11.8:

The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described in 11.8.1 (i.e., $RBW = 100\text{ kHz}$, $VBW \geq 3 \times RBW$, and peak detector with maximum hold) is implemented by the instrumentation function. When using this capability, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be $\geq 6\text{ dB}$.

Use the test method described in ANSI C63.10 Section 6.9.2:

The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. The following procedure shall be used for measuring 99% power bandwidth:

- The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW.
- The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be approximately three times the RBW, unless otherwise specified by the applicable requirement.
- Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (OBW/RBW)]$ below the reference level. Specific guidance is given in 4.1.5.2.
- Step a) through step c) might require iteration to adjust within the specified range.
- Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
- Use the 99% power bandwidth function of the instrument (if available) and report the measured bandwidth.


- g) If the instrument does not have a 99% power bandwidth function, then the trace data points are recovered and directly summed in linear power terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% power bandwidth is the difference between these two frequencies.
- h) The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

7.5.Test Results


EUT: Wireless Dongle		
M/N: YY2994		
Test date:2025-01-22	Pressure: 102.1±1.0 kpa	Humidity: 51.1±3.0%
Tested by: Lili	Test site: RF site	Temperature:22.8±0.6 °C

Test Mode	Frequency (MHz)	6dB bandwidth (KHz)	Limit (KHz)
GFSK	2402	869.5	≥ 500
	2441	842.0	
	2479	822.2	
Conclusion : PASS			


2402MHz:

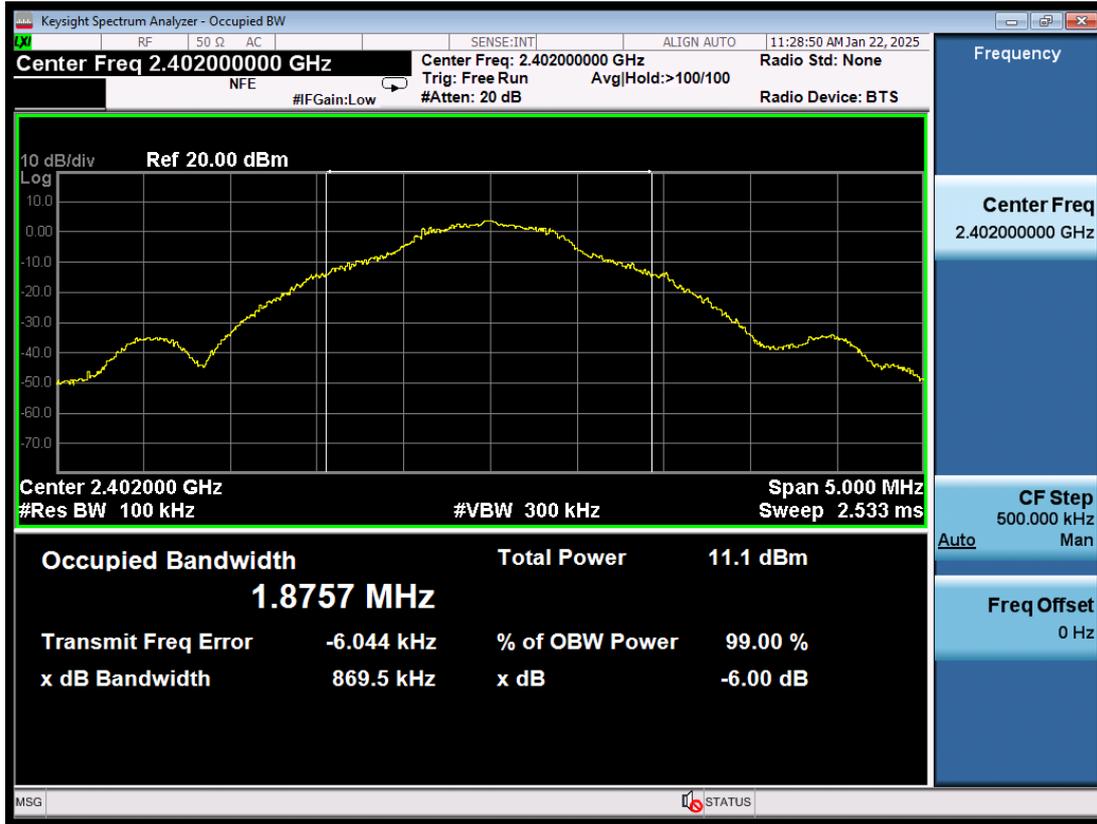

2441MHz:

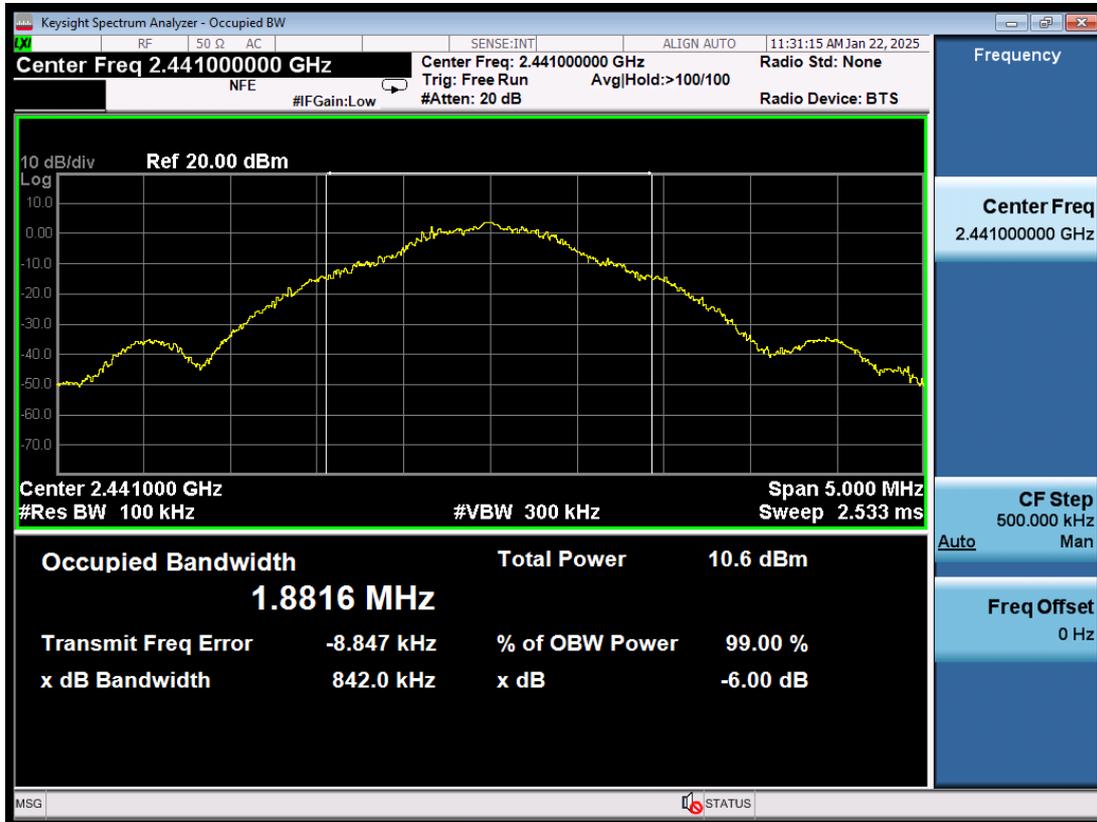

2479MHz:

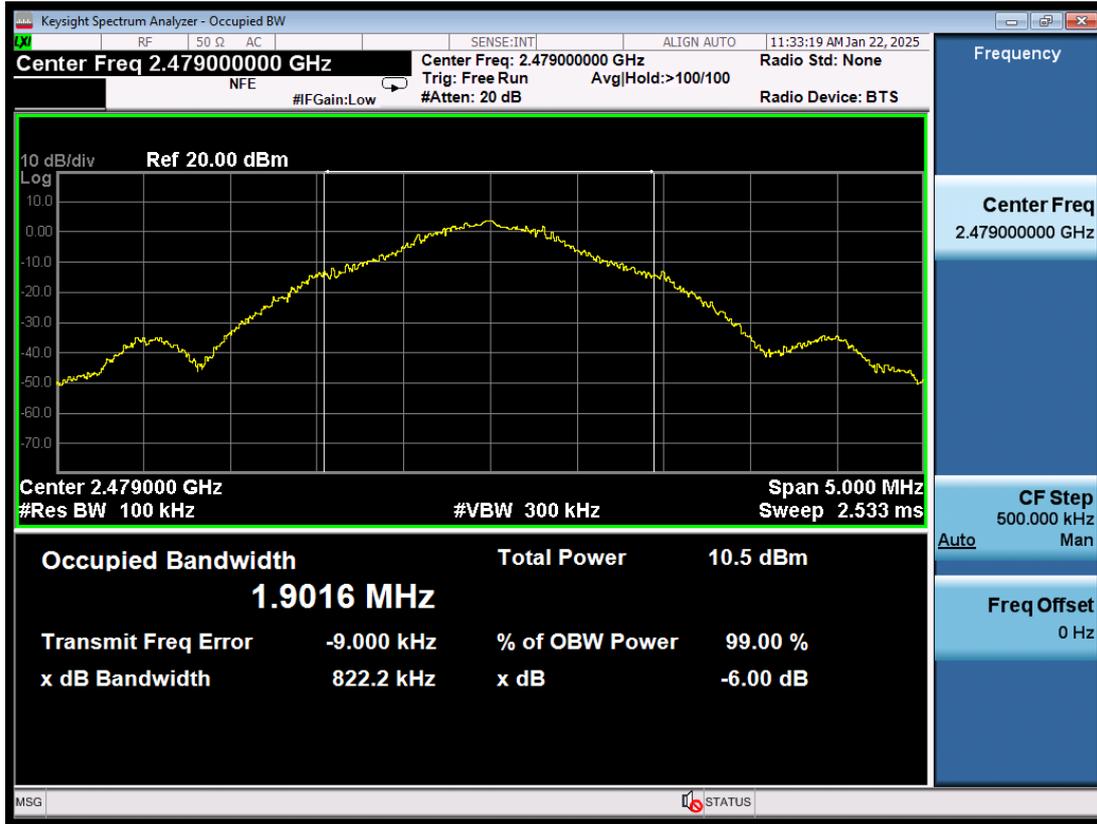

EUT: Wireless Dongle		
M/N: YY2994		
Test date: 2025-01-22	Pressure: 102.3±1.0 kpa	Humidity: 53.6±3.0%
Tested by:Lili	Test site: RF site	Temperature: 25.5±0.6°C


Test Mode	Frequency (MHz)	99% bandwidth (MHz)	Limit (KHz)
GFSK	2402	1.7913	N/A
	2441	1.8057	
	2479	1.7857	

Conclusion : PASS


2402MHz:



2441MHz:

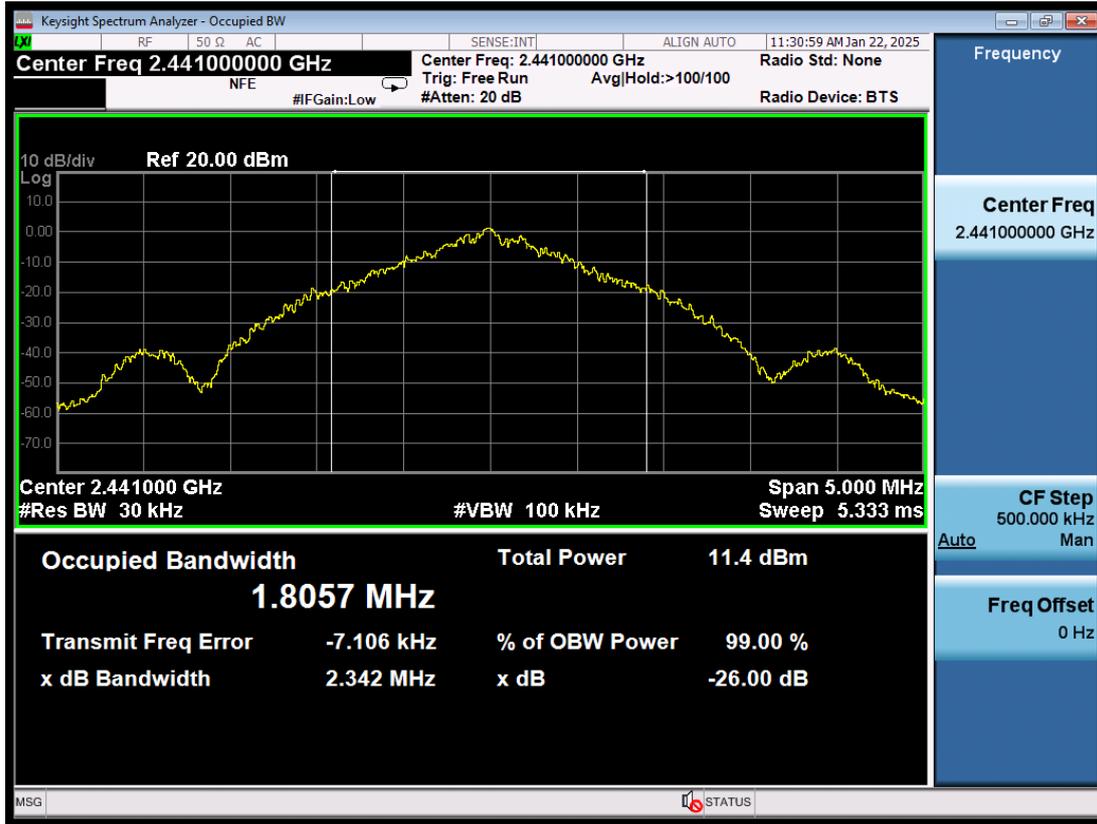

2479MHz:

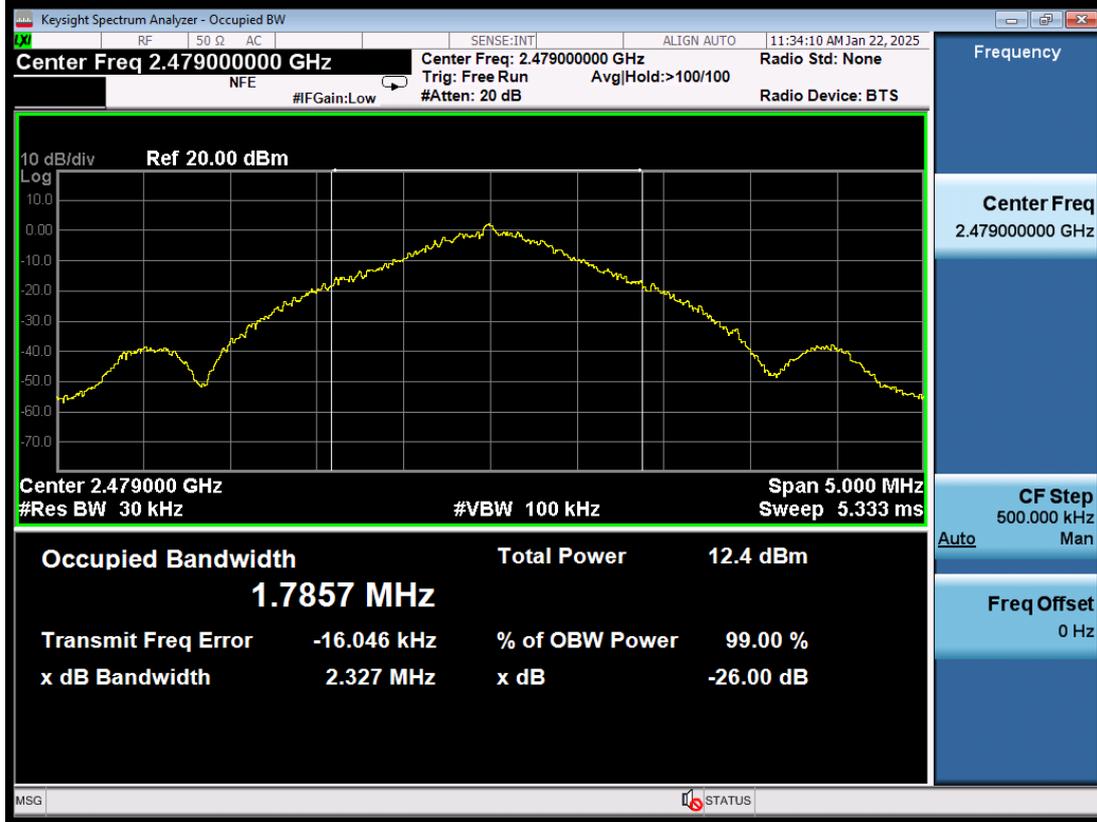

8. OUTPUT POWER TEST

8.1. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	PXA Signal Analyzer	Agilent	N9030A	MY51380221	Mar.16,24	1 Year
2.	RF Cable	Eastsheep	RM086-SMA/N-JJ-2000	NO.1	Jun.19,24	1 Year
3.	Attenuator(10dB)	Agilent	8491B	MY39269201	Mar.16,24	1 Year
4.	Power Meter	Anritsu	ML2487A	6K00003262	Jun.19,24	1 Year

8.2. Limit (FCC Part 15C 15.247 b(3))

For systems using digital modulation in the 2400—2483.5MHz, The Peak output Power shall not exceed 1W(30dBm), As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level.

8.3. Test Procedure

- 1, Connected the EUT's antenna port to Spectrum Analyzer.
- 2, Use the test method described in ANSI C63.10 clause 11.9.1:
 - 1) Set the RBW \geq DTS bandwidth.
 - 2) Set VBW \geq $[3 \times \text{RBW}]$.
 - 3) Set span \geq $[3 \times \text{RBW}]$.
 - 4) Sweep time = auto couple.
 - 5) Detector = peak.
 - 6) Trace mode = max hold.
 - 7) Allow trace to fully stabilize.
 - 8) Use peak marker function to determine the peak amplitude level.
 - 9) For Peak output power: Connected the EUT's Antenna port to PXA signal analyzer.
For Average power: Connected the EUT's Antenna port to power meter.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

8.4.Test Results


EUT: Wireless Dongle		
M/N: YY2994		
Test date:2024-12-23	Pressure: 102.1±1.0 kpa	Humidity: 51.1±3.0%
Tested by: Lili	Test site: RF site	Temperature:22.8±0.6 °C

Test Mode	Frequency (MHz)	Power Setting	Peak Output Power (dBm)	Average Power (dBm) (Without Duty cycle Factor)	Duty cycle Factor	Average Power (dBm) (Add Duty cycle Factor)	EIRP	Limit (dBm)
GFSK	2402	Default	3.763	-6.82	9.747	2.927	9.263	30
	2441		3.782	-6.86	9.747	2.887	9.282	
	2479		3.779	-6.91	9.747	2.837	9.279	

Conclusion: PASS

Remark: Duty cycle Factor=10*log(1/duty cycle)


2402MHz

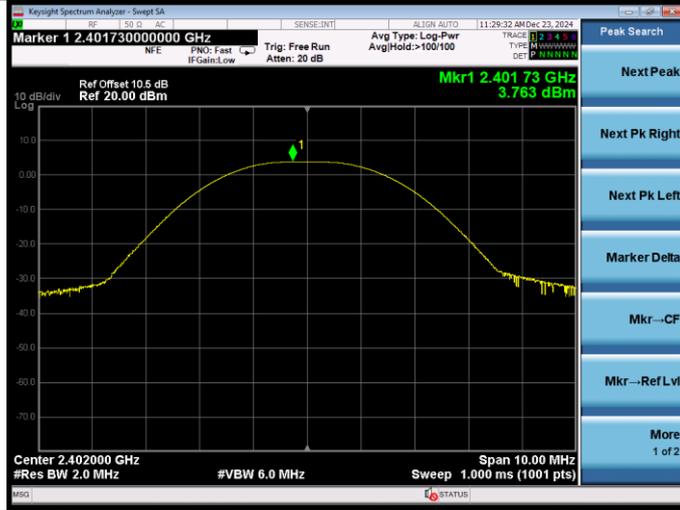

2441MHz



2479MHz



9. POWER SPECTRAL DENSITY TEST

9.1. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	PXA Signal Analyzer	Agilent	N9030A	MY51380221	Mar.16,24	1 Year
2.	RF Cable	Eastsheep	RM086-SMA/N-J J-2000	NO.1	Jun.19,24	1 Year

9.2. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.

9.3. Test Procedure

Use the test method described in ANSI C63.10 clause 11.10.2:

- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to 1.5 times the DTS bandwidth.
- c) Set the RBW to $3\text{ kHz} \leq \text{RBW} \leq 100\text{ kHz}$.
- d) Set the VBW $\geq [3 \times \text{RBW}]$.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.
- j) If measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat.

9.4. Test Results

EUT: Wireless Dongle		
M/N: YY2994		
Test date:2025-01-22	Pressure: 102.3±1.0 kpa	Humidity: 53.6±3.0%
Tested by: Lili	Test site: RF site	Temperature: 25.5±0.6 °C

Test Mode	Frequency (MHz)	Power density (dBm/3KHz)	Limit (dBm/3KHz)
GFSK	2402	-10.894	≤8
	2441	-11.158	
	2479	-10.283	
Conclusion : PASS			


2402MHz



2441MHz



2479MHz



10. ANTENNA REQUIREMENT

10.1. Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

10.2. Antenna Connected Construction

The antennas used for this product are PIFA Antenna that no antenna other than that furnished by the responsible party shall be used with the device, the maximum peak gain of the transmit antenna is 5.5dBi.

11.DEVIATION TO TEST SPECIFICATIONS

[NONE]

..... **THE END**