



## Compliance Testing, LLC

Previously Flom Test Lab

*RF, EMC and Safety Testing Experts Since 1963*

toll-free: (866) 311-3268

fax: (480) 926-3598

<http://www.ComplianceTesting.com>

[info@ComplianceTesting.com](mailto:info@ComplianceTesting.com)

**Date:** June 30, 2010

**Applicant:** Kenwood USA Corporation  
Communications Division  
3970 Johns Creek Court, Suite 100  
Suwanee, GA 30024

**Attention of:** Joel E. Berger, Research & Development  
JBerger@kenwoodusa.com  
(678) 474-4722; FAX: -4731

**Equipment:** TK-2312-1, TK-2317-1  
**FCC ID:** ALH413700  
**FCC Rules:** Part 22, 74, 90

Enclosed please find your copy of the Engineering Test Report for which you are subject to the restrictions as listed on the attached summary.

Once a Telecommunication Certification Body (TCB) issues a Grant the Federal Communication Commission (FCC) has 30 days to review the application and request added information. It is your decision whether or not to market the equipment subject to a possible recall before the end of the 30 days.

If your equipment is still retained by us, it will be returned to you 30 days after approval is achieved. Our invoice for services has been directed to your Accounts Payable Department.

For any additional information please contact us.

Thank you.

Sincerely yours,

John Erhard: Engineering Manager



## Summary of Restrictions

1. All submissions to the FCC are subject to **their** Examiner's interpretation.
2. Please allow from 60 to 90 days before hearing from the FCC with regard to any submission.
3. The FCC can set aside any action; modify or set aside any action, within 30 days.  
(Rule Parts 1.108, 1.113)
4. Under Rule 2.803, if device is not type accepted/certificated then it must **not** be sold, leased, offered for sale, imported, shipped or distributed or advertised for sale.
5. FCC can revoke its certificates at any time if the equipment does not meet or **continue** to meet their Rules. (Rule Parts 2.927, 2.939)
6. FCC can request a sample at any time. (2.936)



## Compliance Testing, LLC

Previously Flom Test Lab

*RF, EMC and Safety Testing Experts Since 1963*

toll-free: (866) 311-3268

fax: (480) 926-3598

<http://www.ComplianceTesting.com>

[info@ComplianceTesting.com](mailto:info@ComplianceTesting.com)

**Date:** June 30, 2010

Federal Communications Commission  
Via: Electronic Filing

**Attention:** Authorization & Evaluation Division

**Applicant:** Kenwood USA Corporation

**Equipment:** TK-2312-1, TK-2317-1

**FCC ID:** ALH413700

**FCC Rules:** Part 22, 74, 90

To Whom It May Concern:

On behalf of the Applicant, enclosed please find Engineering Test Report and all pertinent documentation, the whole for approval of the referenced equipment as shown.

We trust the same is in order. If you should need any further information, kindly contact the writer who is authorized to act as agent.

Best regards,

John Erhard: Engineering Manager



# Compliance Testing, LLC

Previously Flom Test Lab

RF, EMC and Safety Testing Experts Since 1963

toll-free: (866) 311-3268

fax: (480) 926-3598

<http://www.ComplianceTesting.com>

[info@ComplianceTesting.com](mailto:info@ComplianceTesting.com)

## Test Report

for

**FCC ID:** ALH413700

**Model:** TK-2312-1, TK-2317-1

to

**Federal Communications Commission**

Rule Part(s) 22, 74, 90, 90.210

Date of report: June 30, 2010

**On the Behalf of the Applicant:** Kenwood USA Corporation

**At the Request of:** Kenwood USA Corporation  
Communications Division  
3970 Johns Creek Court, Suite 100  
Suwanee, GA 30024

**Attention of:** Joel E. Berger, Research & Development  
[JBerger@kenwoodusa.com](mailto:JBerger@kenwoodusa.com)  
(678) 474-4722; FAX: -4731

Reviewed by:

John Erhard: Engineering Manager



### Test Report Revision History

| Revision | Date            | Revised By  | Reason for revision                                                |
|----------|-----------------|-------------|--------------------------------------------------------------------|
| 1.0      | June 30, 2010   | J. Erhard   | Original Document                                                  |
| 2.0      | July 16, 2010   | K. Springer | Added complete listing of standards                                |
| 3.0      | August 1, 2010  | J. Erhard   | Edit report to indicate RSS-119 only test data                     |
| 4.0      | August 10, 2010 | J. Erhard   | Add differentiation for FCC and IC band specific frequency ranges. |



List of Exhibits

(FCC **Certification** (Transmitters) - Revised 9/28/98)

**Applicant:** Kenwood USA Corporation

**FCC ID:** ALH413700

**By Applicant:**

1. Letter of Authorization
2. Confidentiality Request: 0.457 And 0.459
3. Identification Drawings, 2.1033(c)(11)
  - Label
  - Location of Label
  - Compliance Statement
  - Location of Compliance Statement
4. Photographs, 2.1033(c)(12)
5. Documentation: 2.1033(c)
  - (3) User Manual
  - (9) Tune Up Info
  - (10) Schematic Diagram
  - (10) Circuit Description
  - Block Diagram
  - Parts List
  - Active Devices
6. MPE/SAR Report

**By Compliance Testing:**

- A. Testimonial & Statement of Certification



## **The Applicant has been cautioned as to the following:**

### **15.21 Information to the User**

The user's manual or instruction manual for an intentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

### **15.27(a) Special Accessories**

Equipment marketed to a consumer must be capable of complying with the necessary regulations in the configuration in which the equipment is marketed. Where special accessories, such as shielded cables and/or special connectors are required to enable an unintentional or intentional radiator to comply with the emission limits in this part, the equipment must be marketed with, i.e. shipped and sold with, those special accessories. However, in lieu of shipping or packaging the special accessories with the unintentional or intentional radiator, the responsible party may employ other methods of ensuring that the special accessories are provided to the consumer, without additional charge.

Information detailing any alternative method used to supply the special accessories for a grant of equipment authorization or retained in the verification records, as appropriate. The party responsible for the equipment, as detailed in § 2.909 of this chapter, shall ensure that these special accessories are provided with the equipment. The instruction manual for such devices shall include appropriate instructions on the first page of text concerned with the installation of the device that these special accessories must be used with the device. It is the responsibility of the user to use the needed special accessories supplied with the equipment.



## Testimonial and Statement of Certification

**This is to Certify:**

1. **That** the application was prepared either by, or under the direct supervision of, the undersigned.
2. **That** the technical data supplied with the application was taken under my direction and supervision.
3. **That** the data was obtained on representative units, randomly selected.
4. **That**, to the best of my knowledge and belief, the facts set forth in the application and accompanying technical data is true and correct.

A handwritten signature in black ink, appearing to read "John Erhard".

Certifying Engineer:

John Erhard: Engineering Manager



## Table of Contents

| <b><u>Rule</u></b> | <b><u>Description</u></b>                          | <b><u>Page</u></b> |
|--------------------|----------------------------------------------------|--------------------|
|                    | Test Report                                        | 2                  |
| 2.1033(c)(14)      | Rule Summary                                       | 3                  |
|                    | Standard Test Conditions and Engineering Practices | 4                  |
| 2.1033(c)          | General Information Required                       | 5                  |
|                    | Test Results Summary                               | 7                  |
| 2.1046             | Carrier Output Power (Conducted)                   | 8                  |
| 2.1051             | Conducted Spurious Emissions                       | 9                  |
| 2.1053             | Field Strength of Spurious Radiation               | 17                 |
| 90.210             | Emission Masks (Occupied Bandwidth)                | 21                 |
| 90.214             | Transient Frequency Behavior                       | 32                 |
| 2.1047             | Audio Low Pass Filter (Voice Input)                | 35                 |
| 2.1047             | Audio Frequency Response                           | 36                 |
| 2.1047             | Modulation Limiting                                | 37                 |
| 90.213             | Frequency Stability (Temperature Variation)        | 40                 |
| 90.213             | Frequency Stability (Voltage Variation)            | 41                 |
| RSS-GEN            | Receiver Spurious Emissions                        | 42                 |
|                    | Necessary Bandwidth Calculations                   | 45                 |
|                    | Test Equipment Utilized                            | 46                 |



Required information per ISO 17025-2005, paragraph 5.10.2:

a) **Test Report**

b) Laboratory: Compliance Testing  
(FCC: 933597) 3356 N. San Marcos Place, Suite 107  
(Canada: IC 2044-A) Chandler, AZ 85225

c) Report Number: d1060010

d) Client: Kenwood USA Corporation  
Communications Division  
3970 Johns Creek Court, Suite 100  
Suwanee, GA 30024

e) Identification: TK-2312-1, TK-2317-1

EUT Description: VHF FM Transceiver

f) EUT Condition: Not required unless specified in individual tests.

g) Report Date: June 30, 2010

h, j, k): As indicated in individual tests.

i) Sampling method: No sampling procedure used.

l) Measurement Uncertainty: In accordance with Compliance Testing internal quality manual.

m) Reviewed by:

John Erhard: Engineering Manager

n) Results: The results presented in this report relate only to the item tested.

o) Reproduction: This report must not be reproduced, except in full, without written permission from this laboratory.



Sub-part

2.1033(c)(14):

### **Test and Measurement Data**

All tests and measurement data shown were performed in accordance with FCC Rules and Regulations, Volume II; Part 2, Sub-part J, Sections 2.947, 2.1033(c), 2.1041, 2.1046, 2.1047, 2.1079, 2.1051, 2.1053, 2.1055, 2.1057 and the following individual Parts: 22, 74, 90, 90.210.



## Standard Test Conditions and Engineering Practices

Except as noted herein, the following conditions and procedures were observed during the testing:

In accordance with ANSI/C63.4-2009, and unless otherwise indicated in the specific measurement results, the ambient temperature of the actual EUT was maintained within the range of 10° to 40°C (50° to 104 °F) unless the particular equipment requirements specify testing over a different temperature range. Also, unless otherwise indicated, the humidity levels were in the range of 10% to 90% relative humidity.

Measurement results, unless otherwise noted, are worst-case measurements.

### A2LA

"A2LA has accredited Compliance Testing in Chandler, AZ for technical competence in the field of Electrical testing. The accreditation covers the specific tests and types of tests listed on the agreed scope of accreditation. This laboratory meets the requirements of ISO 17025:2005 'General Requirements for the Competence of Testing and Calibration Laboratories' and any additional program requirements in the identified field of testing."

Please refer to [www.a2la.org](http://www.a2la.org) for current scope of accreditation.

Certificate number: 2152.01



TESTING CERT# 2152.01

FCC OATS Reg. #933597

IC Reg. # 2044A-1



## List of General Information Required for Certification

In Accordance with FCC Rules and Regulations,  
Volume II, Part 2 and to Parts 22, 74, 90

Sub-part 2.1033

(c)(1):

**Name and Address of Applicant:** Kenwood USA Corporation  
Communications Division  
3970 Johns Creek Court, Suite 100  
Suwanee, GA 30024

**Manufacturer:** Kenwood Corporation  
14-6, Dogenzaka 1-Chome  
Shibuya-ku, Tokyo 150, Japan  
OR  
Kenwood Electronics Technologies PTE Ltd.  
1 Ang Mo Kio Street 63  
Singapore 569110

(c)(2): **FCC ID:** ALH413700

**Model Number:** TK-2312-1, TK-2317-1

(c)(3): **Instruction Manual(s):**

Please see attached exhibits

(c)(4): **Type of Emission:** FM

(c)(5): **Frequency Range, MHz:** 150 – 174 (FCC)  
138 - 144 and 148 – 174 (IC)

(c)(6): **Power Rating, Watts:** 5 Continuously variable to 1W

☐ Switchable

☒ Variable

☐ N/A

### FCC Grant Note:

(c)(7): **Maximum Allowable Power, Watts:** 5

**DUT Results:** Passes ☒ Fails ☐



Subpart 2.1033 (continued)

(c)(8): Voltages & currents in all elements in final RF stage, including final transistor or solid-state device:

|                        |   |     |
|------------------------|---|-----|
| Collector Current, A   | = | 2   |
| Collector Voltage, Vdc | = | 7.5 |
| Supply Voltage, Vdc    | = | 7.5 |

(c)(9): **Tune-Up Procedure:**

Please see attached exhibits

(c)(10): **Circuit Diagram/Circuit Description:**

Including description of circuitry & devices provided for determining and stabilizing frequency, for suppression of spurious radiation, for limiting modulation and limiting power.

Please see attached exhibits

(c)(11): **Label Information:**

Please see attached exhibits

(c)(12): **Photographs:**

Please see attached exhibits

(c)(13): **Digital Modulation Description:**

☐ Attached Exhibits  
☒ N/A

(c)(14): **Test and Measurement Data:**

Follows



### Test Results Summary

| Specification | Test Name                                   | Pass, Fail, N/A | Comments |
|---------------|---------------------------------------------|-----------------|----------|
| 2.1046        | Carrier Output Power (Conducted)            | Pass            |          |
| 2.1051        | Unwanted Emissions (Transmitter Conducted)  | Pass            |          |
| 2.1053        | Field Strength of Spurious Radiation        | Pass            |          |
| 90.210        | Emission Masks (Occupied Bandwidth)         | Pass            |          |
| 2.1047        | Audio Low Pass Filter (Voice Input)         | Pass            |          |
| 2.1047        | Audio Frequency Response                    | Pass            |          |
| 2.1047        | Modulation Limiting                         | Pass            |          |
| 90.213        | Frequency Stability (Temperature Variation) | Pass            |          |
| 90.213        | Frequency Stability (Voltage Variation)     | Pass            |          |
| RSS-GEN       | Receiver Spurious Emissions                 | Pass            |          |




**Name of Test:** Carrier Output Power (Conducted)  
**Specification:** 2.1046  
**Test Equipment Utilized:** i00331

**Engineer:** J. Erhard  
**Test Date:** 6/25/2010

### Measurement Procedure

The Equipment Under Test (EUT) was connected to a Spectrum analyzer through an attenuator. The cable and attenuator losses were summed and input into the analyzer as a reference level offset to ensure accurate readings.

### Test Setup



### High Power Transmitter Peak Output Power

| Tuned Frequency<br>MHz | Recorded Measurement<br>dBm | Result |
|------------------------|-----------------------------|--------|
| 138.05 (RSS-119 only)  | 36.99                       | Pass   |
| 141.05 (RSS-119 only)  | 36.99                       | Pass   |
| 143.95 (RSS-119 only)  | 36.99                       | Pass   |
| 148.05 (RSS-119 only)  | 36.99                       | Pass   |
| 150.05                 | 36.99                       | Pass   |
| 162.05                 | 36.99                       | Pass   |
| 173.95                 | 36.99                       | Pass   |




**Name of Test:** Conducted Spurious Emissions  
**Specification:** 2.1051  
**Test Equipment Utilized:** i00331, i00124

**Engineer:** J. Erhard  
**Test Date:** 6/28/2010

### Test Procedure

The EUT was connected directly to a spectrum analyzer to verify that the UUT met the requirements for spurious emissions. A tunable notch filter was utilized to ensure the fundamental did not put the spectrum analyzer into compression. The resolution bandwidth set for 100 kHz and the reference level was adjusted to ensure the system had sufficient dynamic range to measure spurious emissions. The frequency range from 30 MHz to the 10<sup>th</sup> harmonic of the fundamental transmitter was observed and plotted.

### Test Setup





**High Power Conducted Spurious Emissions Summary Test Table**

| Tuned Frequency (MHz) | Spurious Frequency (MHz) | Measured Spurious Level (dBm) | Specification Limit (dBm) | Result |
|-----------------------|--------------------------|-------------------------------|---------------------------|--------|
| 138.05 (RSS-119 only) | 415.6                    | -43.6                         | -25                       | Pass   |
| 141.05 (RSS-119 only) | 422.9                    | -45.86                        | -25                       | Pass   |
| 143.95 (RSS-119 only) | 289.5                    | -45.39                        | -25                       | Pass   |
| 148.05 (RSS-119 only) | 83.4                     | -45.8                         | -25                       | Pass   |
| 150.05                | 301.6                    | -45.39                        | -25                       | Pass   |
| 162.05                | 66.4                     | -44-85                        | -25                       | Pass   |
| 173.95                | 78.5                     | -44.24                        | -25                       | Pass   |





## Test Plots

138.05 MHz (RSS-119 only)

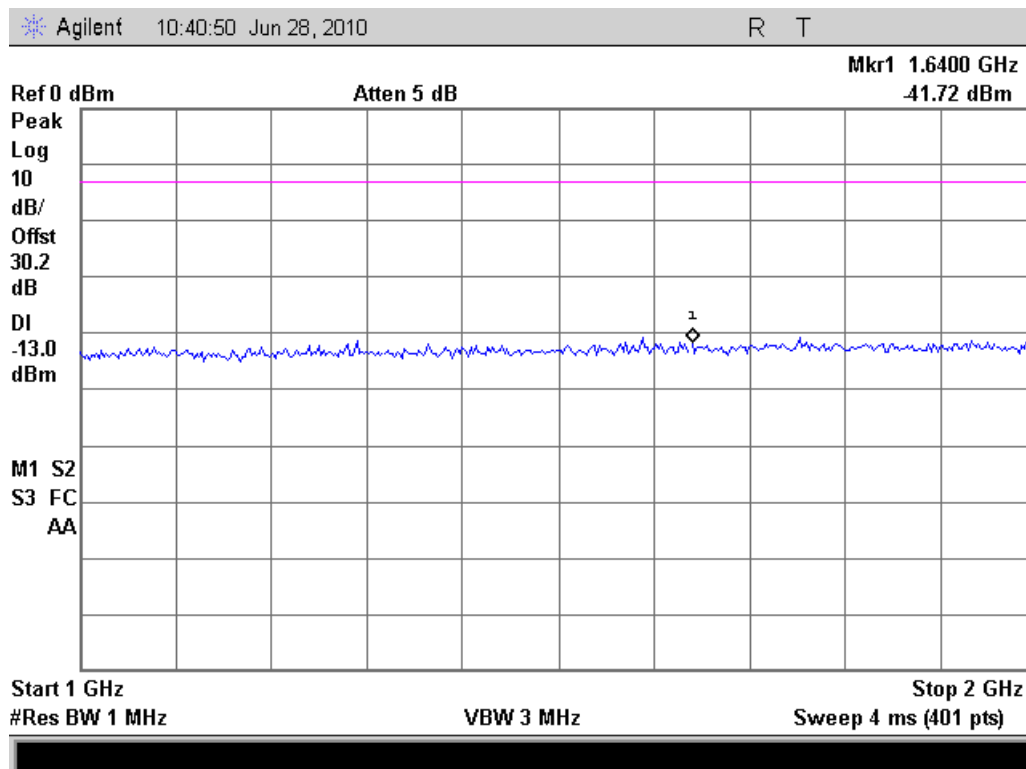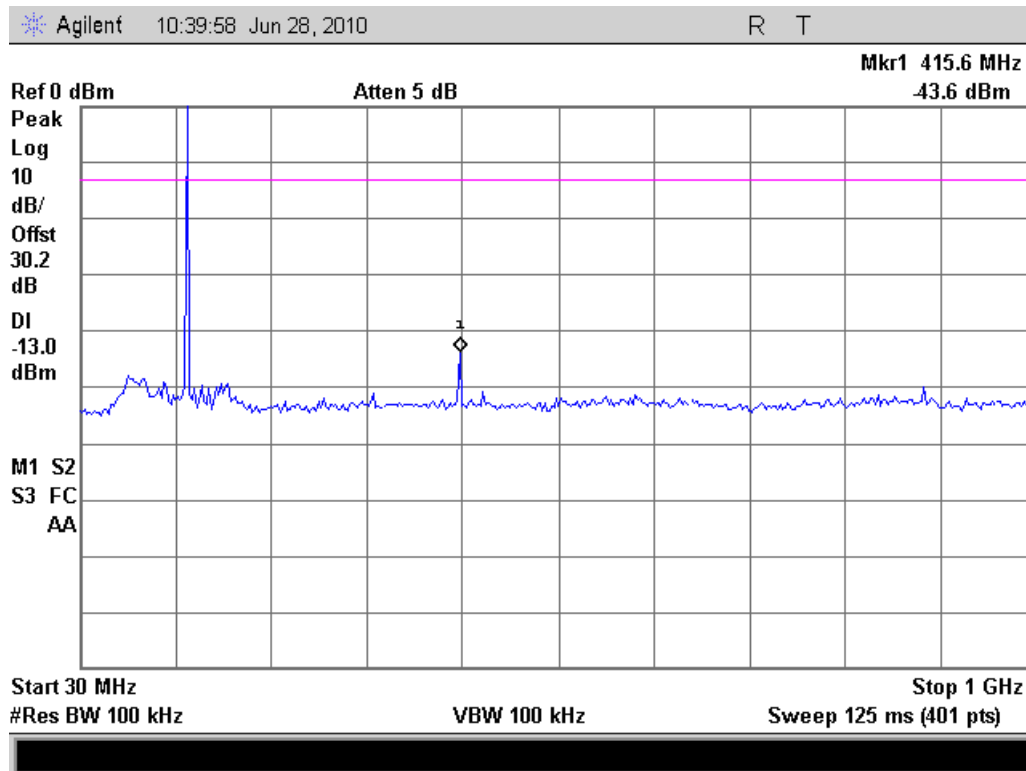





## 141.05 MHz (RSS-119 only)

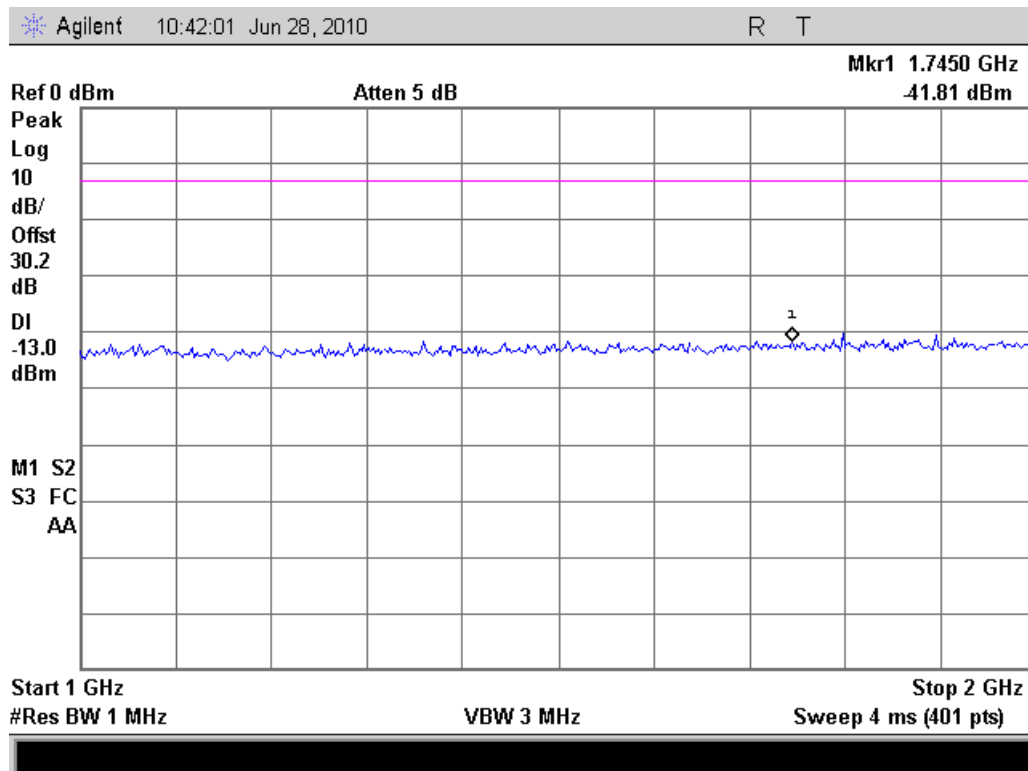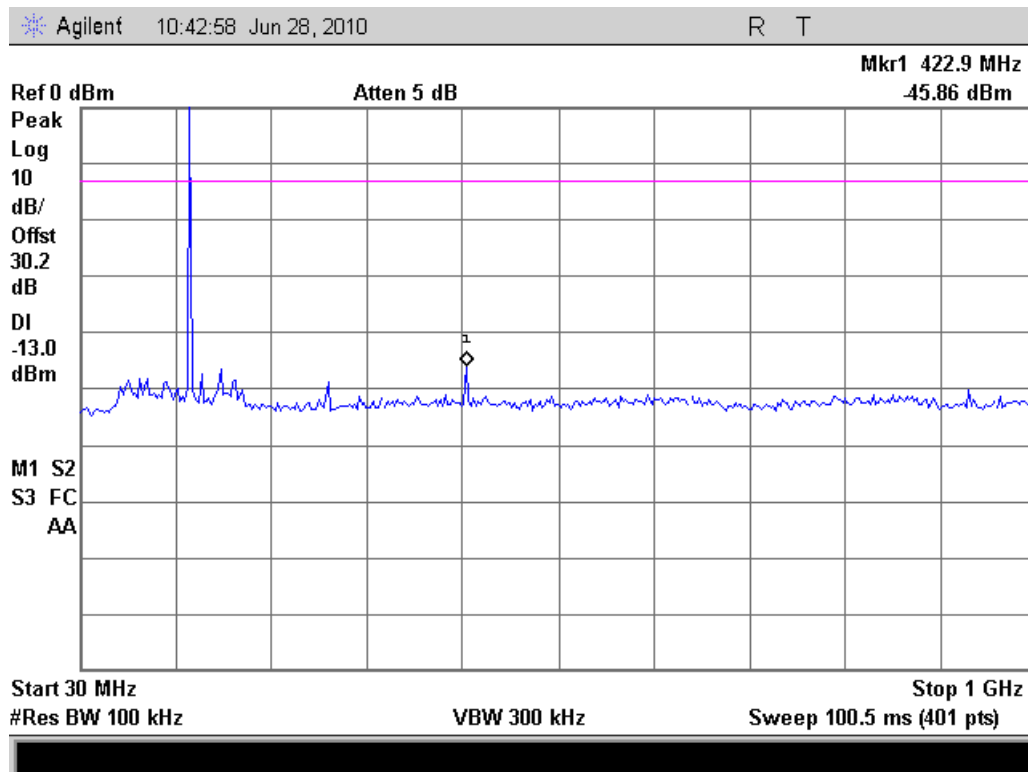





## 143.95 MHz (RSS-119 only)

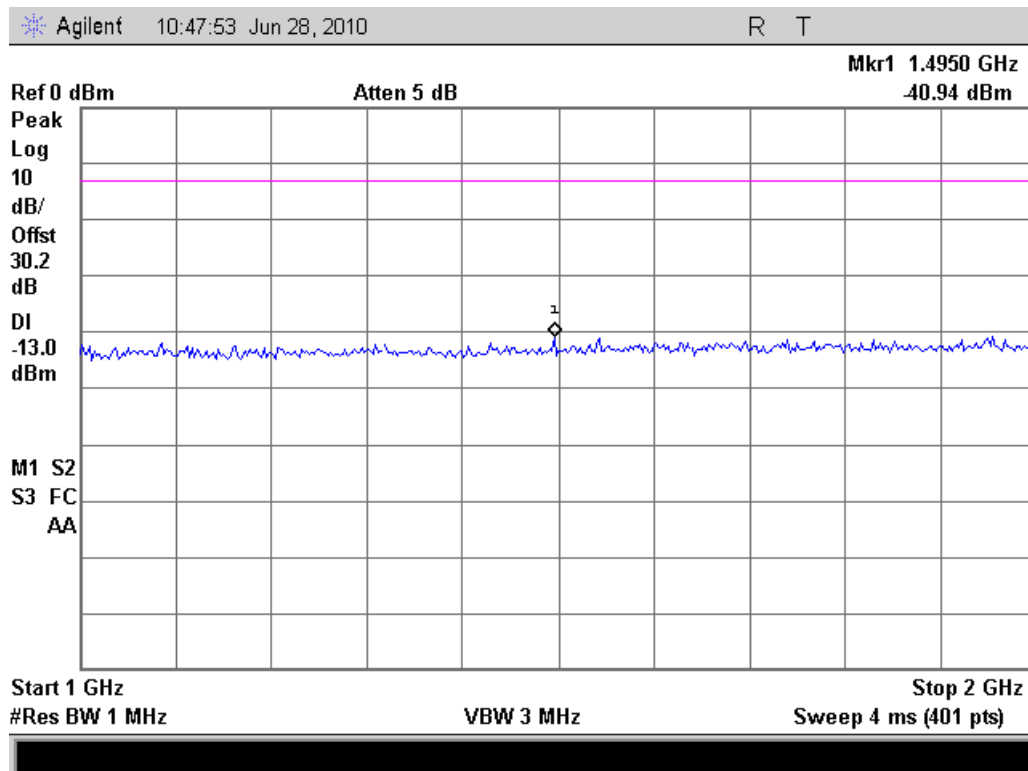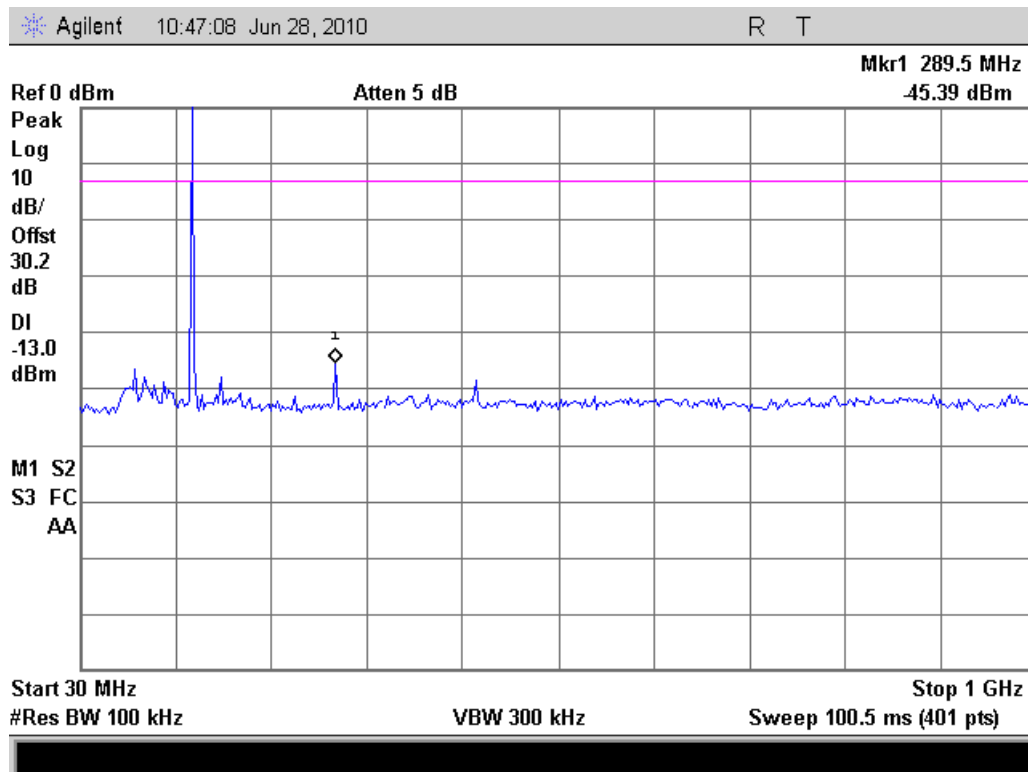





## 148.05 MHz (RSS-119 only)

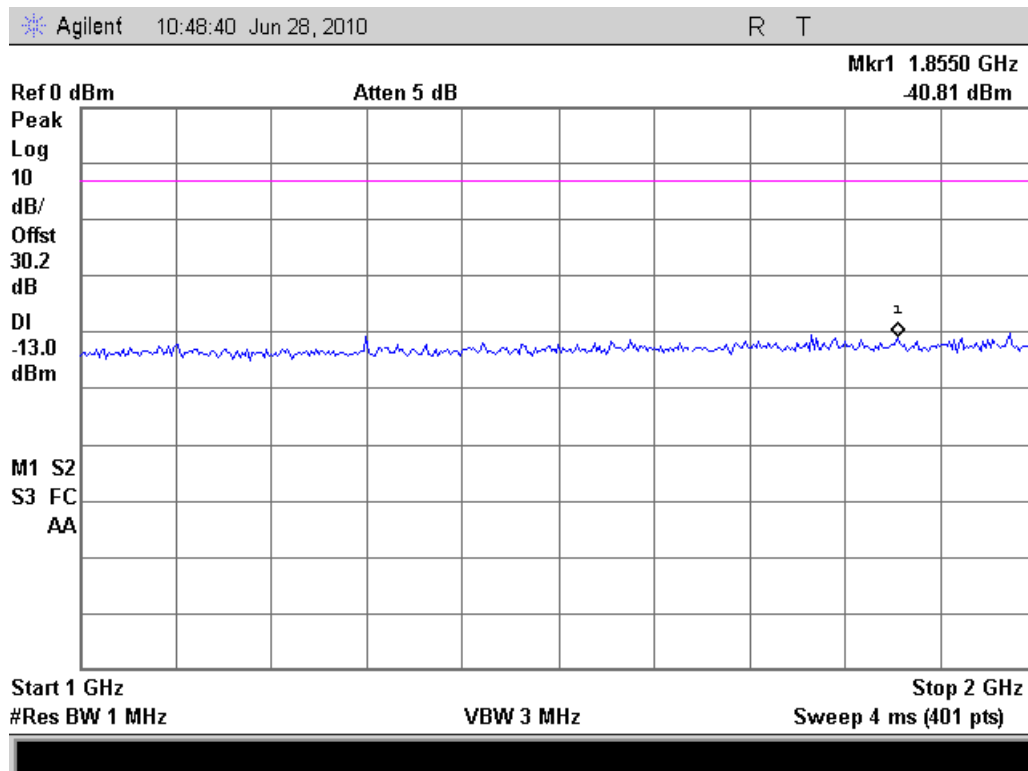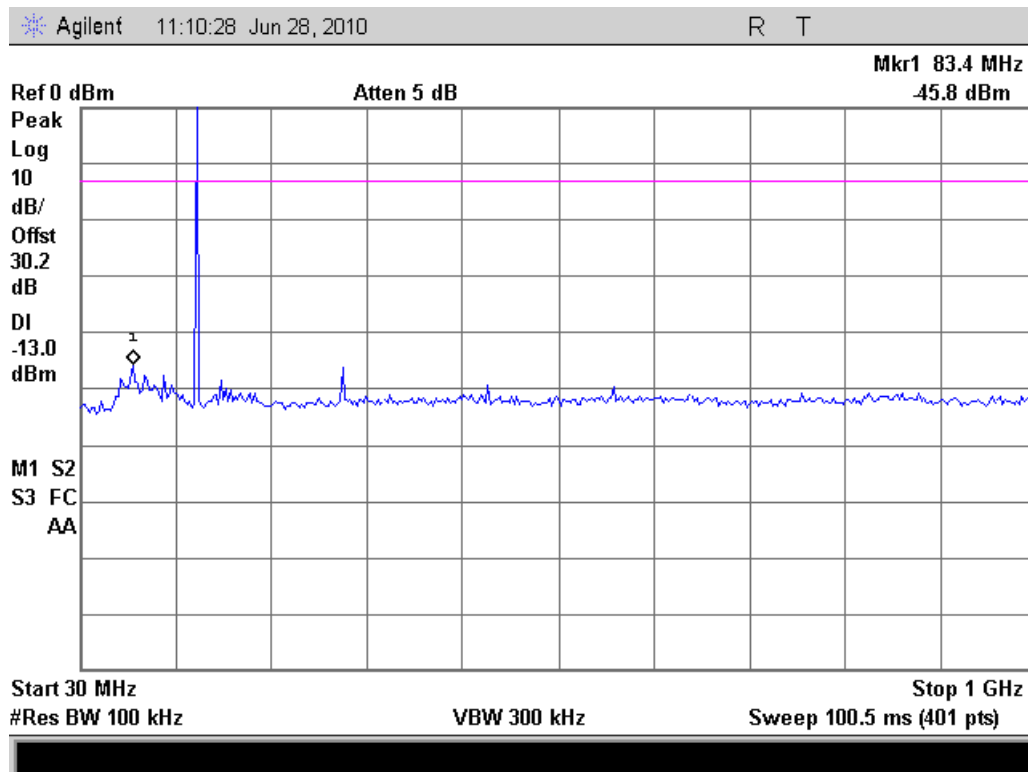





150.05 MHz

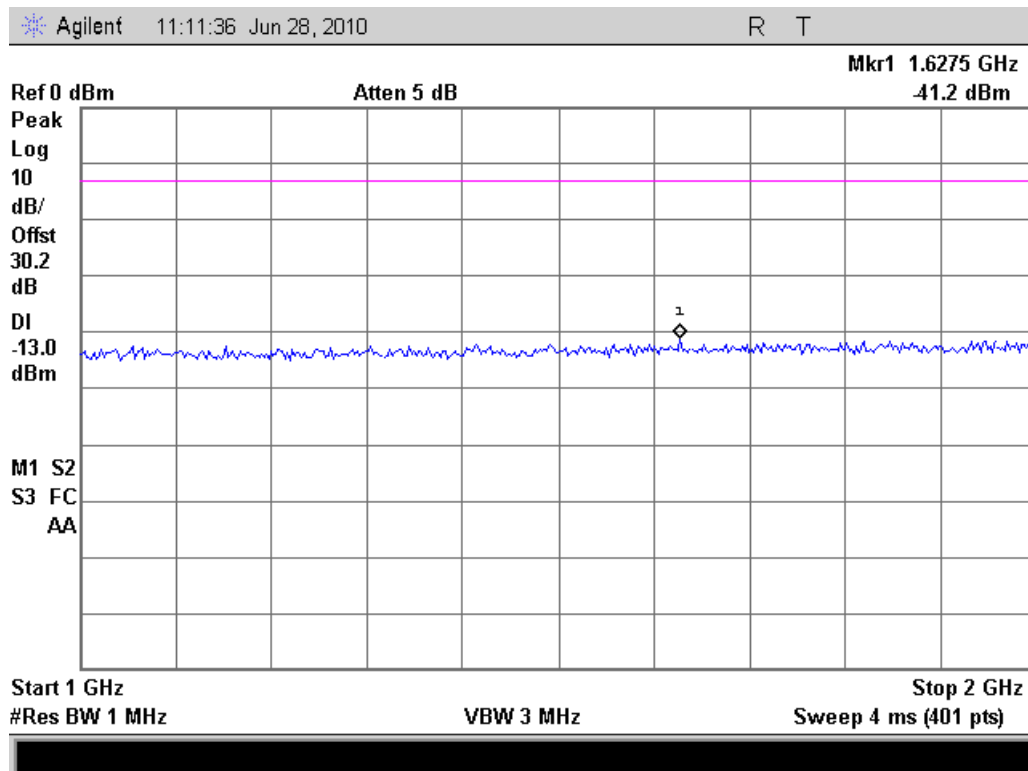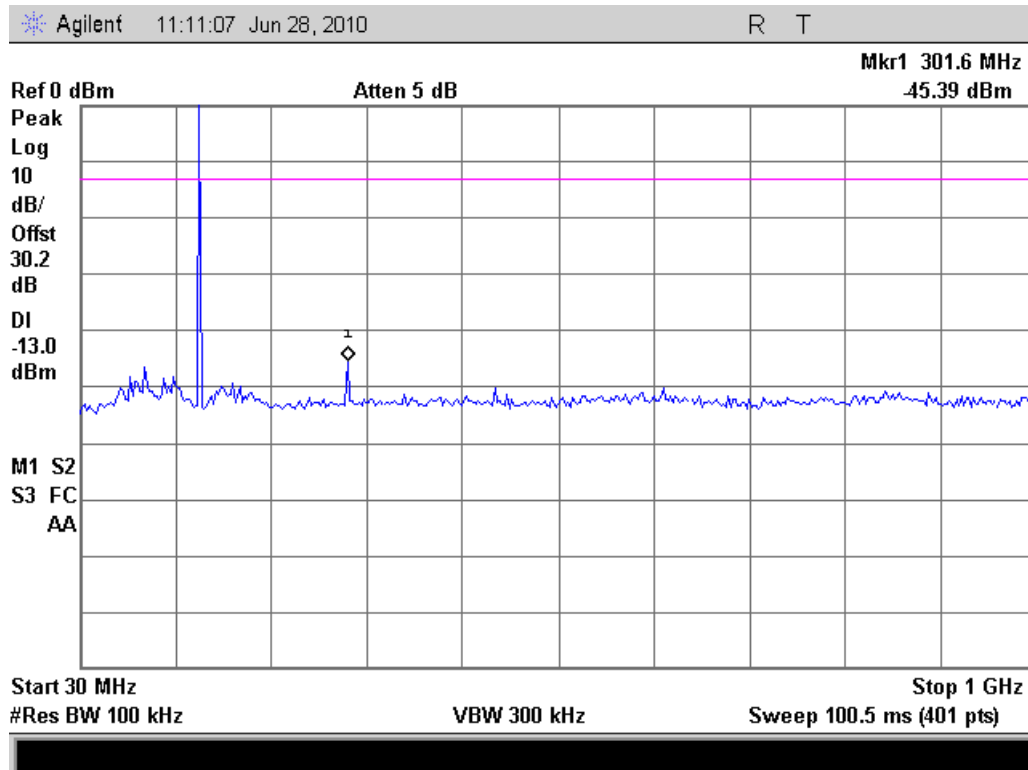





162.05 MHz

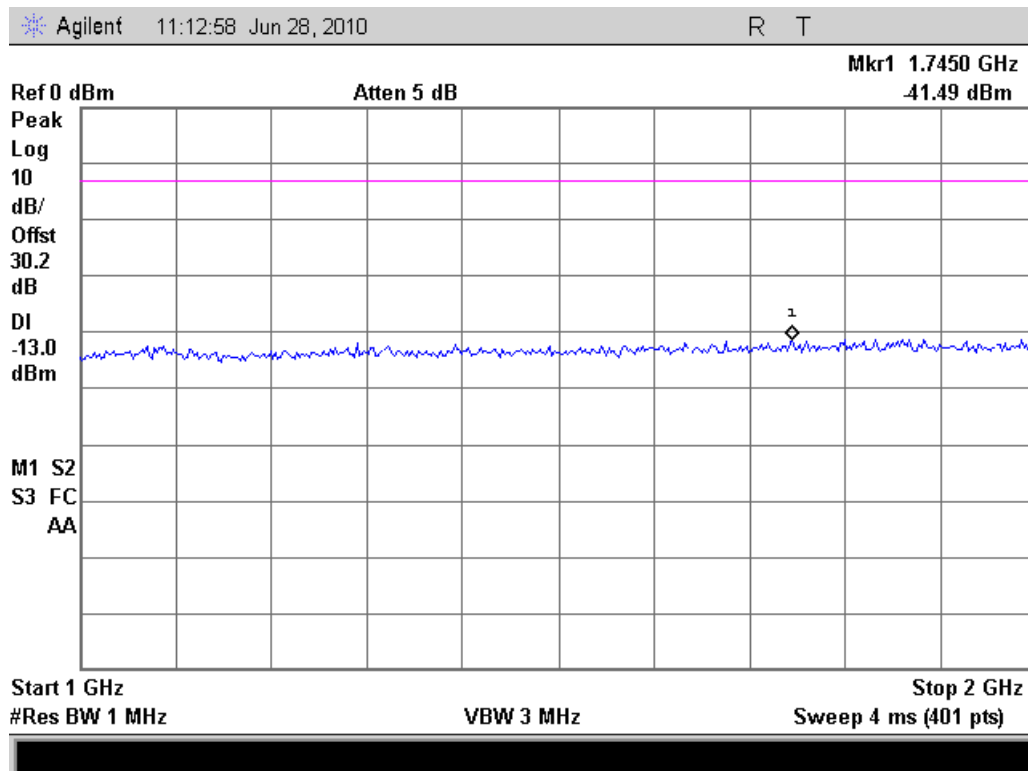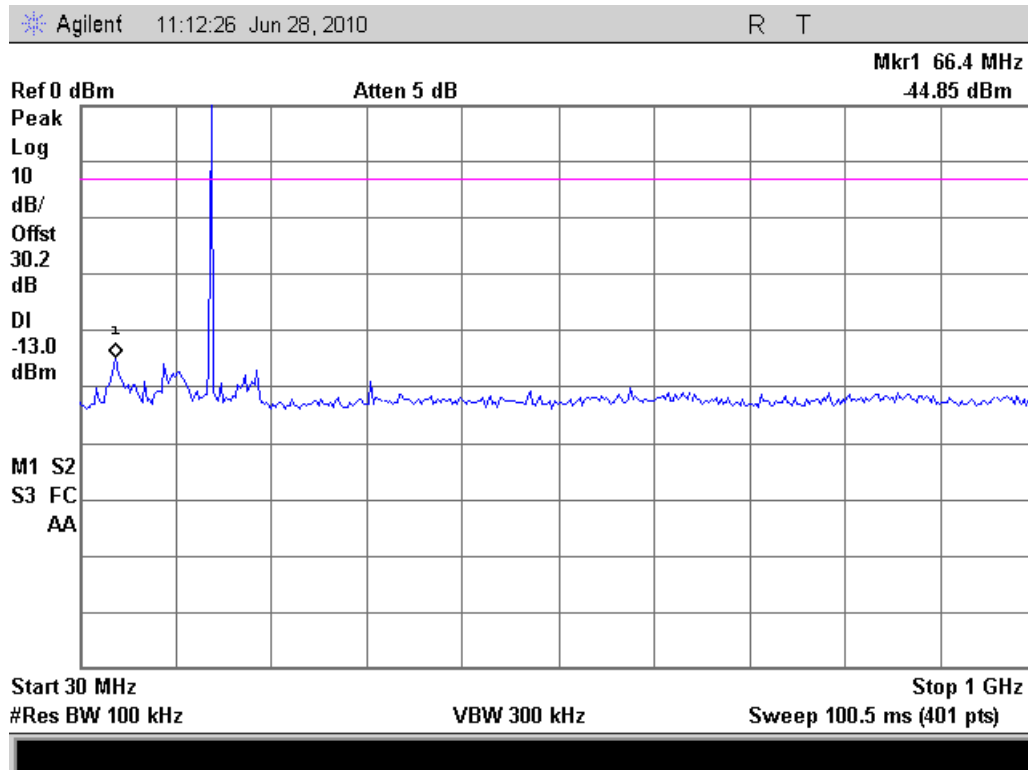



173.95 MHz

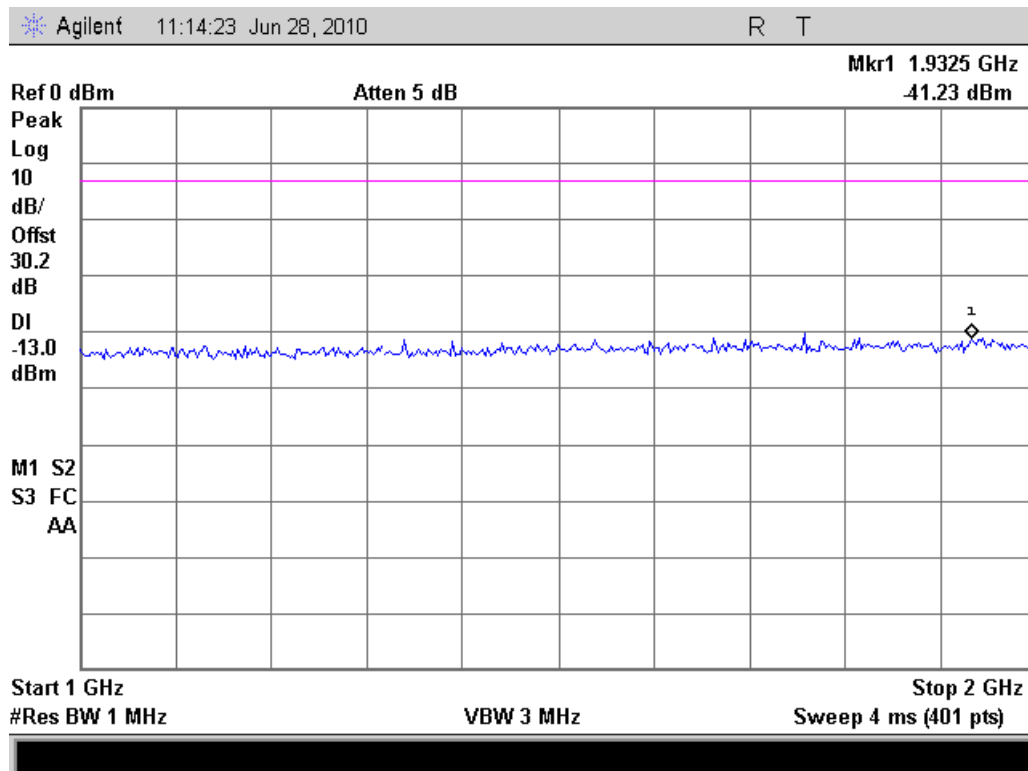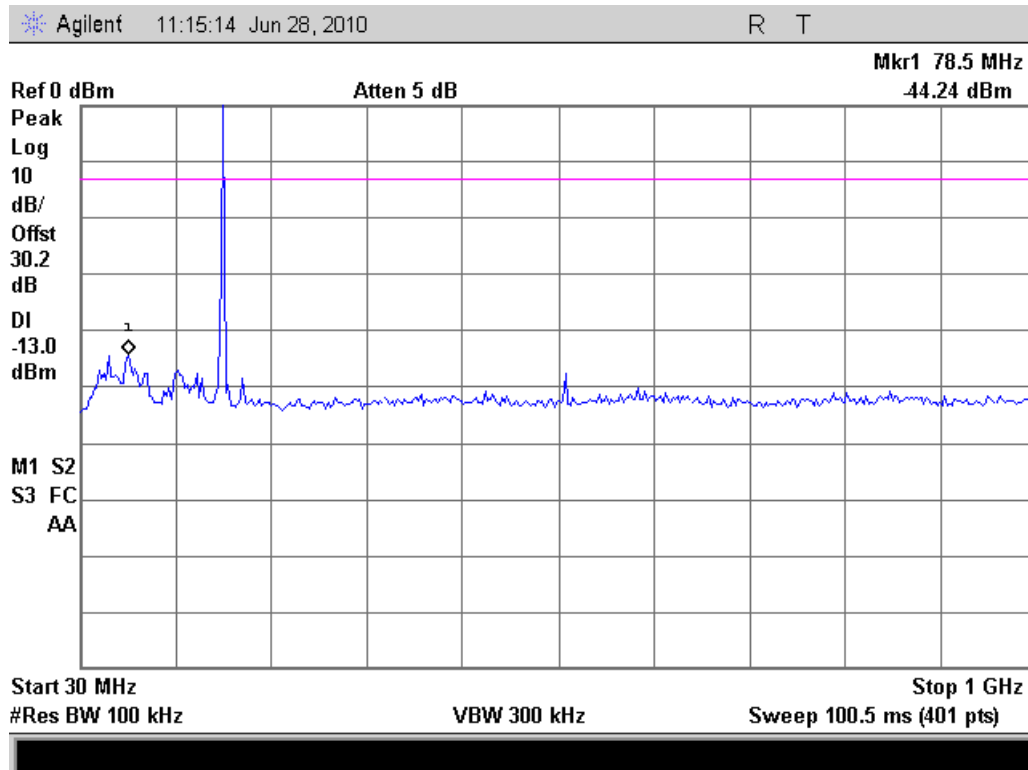



**Name of Test:** Field Strength of Spurious Radiation  
**Specification:** 2.1053  
**Test Equipment Utilized:** i00124, i00266, i00042, i00047, i00048, i00033

**Engineer: J. Erhard**  
**Test Date: 7/4/2010**

### Test Procedure



- A) Connect the equipment as illustrated
- B) Adjust the spectrum analyzer for the following settings:
  - 1) Resolution Bandwidth 100 kHz (<1 GHz), 1 MHz (> 1GHz).
  - 2) Video Bandwidth  $\geq 3$  times Resolution Bandwidth, or 30 kHz
  - 3) Sweep Speed  $\leq 2000$  Hz/second
  - 4) Detector Mode = Mean or Average Power
- C) Place the transmitter to be tested on the turntable in the standard test site. The transmitter is transmitting into a non-radiating load that is placed on the turntable. The RF cable to this load should be of minimum length.
- D) For each spurious measurement the test antenna should be adjusted to the correct length for the frequency involved. This length may be determined from a calibration ruler supplied with the equipment. Measurements shall be made from the lowest radio frequency generated in the equipment to the tenth harmonic of the carrier, except for the region close to the carrier equal to  $\pm$  the test bandwidth (see section 1.3.4.4).
- E) For each spurious frequency, raise and lower the test antenna from 1 m to 4 m to obtain a maximum reading on the spectrum analyzer with the test antenna at horizontal polarity. Repeat this procedure to obtain the highest possible reading. Record this maximum reading.
- F) Repeat step E) for each spurious frequency with the test antenna polarized vertically.
- G) Reconnect the equipment as illustrated.
- H) Keep the spectrum analyzer adjusted as in step B).
- I) Remove the transmitter and replace it with a substitution antenna (the antenna should be half-wavelength for each frequency involved). The center of the substitution antenna should be approximately at the same location as the center of the transmitter. At lower frequencies, where the substitution antenna is very long, this will be impossible to achieve when the antenna is polarized vertically. In such case the lower end of the antenna should be 0.3 m above the ground.
- J) Feed the substitution antenna at the transmitter end with a signal generator connected to the antenna by means of a non-radiating cable. With the antennas at both ends horizontally polarized and with the signal generator tuned to a particular spurious frequency, raise and lower the test antenna to obtain a maximum reading at the spectrum analyzer. Adjust the level of the signal generator output until the previously recorded maximum reading for this set of conditions is obtained. This should be done carefully repeating the adjustment of the test antenna and generator output.
- K) Repeat step J) with both antennas vertically polarized for each spurious frequency.
- L) Calculate power in dBm into a reference ideal half-wave dipole antenna by reducing the readings obtained in steps J) and K) by the power loss in the cable between the generator and the antenna and further corrected for the gain of the substitution antenna used relative to an ideal half-wave dipole antenna.
- M) The levels recorded in step L) are absolute levels of radiated spurious emissions in dBm. The radiated spurious emissions in dB can be calculated by the following:

Radiated spurious emissions dB =  $10\log_{10}(\text{TX power in watts}/0.001)$  – the levels in step I)

*NOTE: It is permissible that other antennas provided can be referenced to a dipole.*



## Test Setup

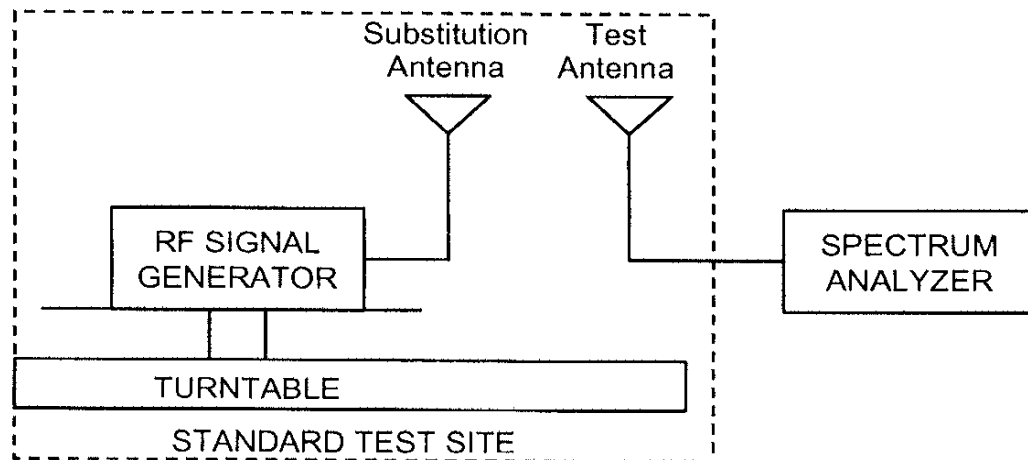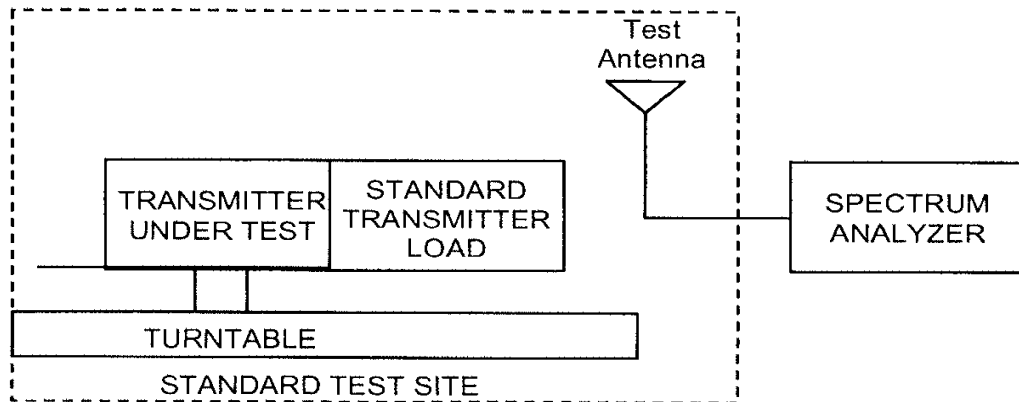

**Peak Power Test Results**

| Emission Frequency (MHz) | Measured Level (dBm) | Correction Factor (dB) | Corrected Value (dBm) | Antenna |
|--------------------------|----------------------|------------------------|-----------------------|---------|
| 138.05 (RSS-119 only)    | -5.1                 | 13.1                   | 8.0                   | 23M     |
| 141.05 (RSS-119 only)    | -1.2                 | 12.9                   | 11.7                  | 23M     |
| 143.95 (RSS-119 only)    | -3.1                 | 12.8                   | 9.7                   | 23M     |
| 148.05 (RSS-119 only)    | -6.3                 | 12.8                   | 6.5                   | 23M     |
| 148.05 (RSS-119 only)    | 9.2                  | 12.8                   | 22.0                  | 22M     |
| 148.05 (RSS-119 only)    | 12.5                 | 12.8                   | 25.3                  | 26M     |
| 150.05                   | -7                   | 12.7                   | 5.7                   | 23M     |
| 150.05                   | 6.9                  | 12.7                   | 19.6                  | 16M     |
| 150.05                   | 11.2                 | 12.7                   | 23.9                  | 22M     |
| 150.05                   | 8                    | 12.7                   | 20.7                  | 26M     |
| 162.05                   | 18.7                 | 12.2                   | 30.9                  | 16M     |
| 162.05                   | 15.2                 | 12.2                   | 27.4                  | 22M     |
| 162.05                   | 17.3                 | 12.2                   | 29.5                  | 26M     |
| 162.05                   | 10.4                 | 12.2                   | 22.6                  | 22M2    |
| 162.05                   | 12.3                 | 12.2                   | 24.5                  | 26M2    |
| 173.95                   | 18.3                 | 11.6                   | 29.9                  | 22M2    |
| 173.95                   | 21.5                 | 11.6                   | 33.1                  | 26M2    |

**Radiated Spurious Emissions 23M Test Results**

| Tuned Frequency (MHz) | Emission Frequency (MHz) | Measured Level (dBm) | Correction Factor (dB) | Corrected Value (dBm) | Limit (dBm) | Margin (dB) |
|-----------------------|--------------------------|----------------------|------------------------|-----------------------|-------------|-------------|
| 138.05 (RSS-119 only) | 276.1                    | -75.1                | 15.4                   | -59.7                 | -25         | -34.7       |
| 141.05 (RSS-119 only) | 282.2                    | -67.2                | 15.5                   | -51.7                 | -25         | -26.7       |
| 143.95 (RSS-119 only) | 287.1                    | -67.5                | 15.7                   | -51.8                 | -25         | -26.8       |
| 148.05 (RSS-119 only) | 296.1                    | -71.2                | 15.8                   | -55.4                 | -25         | -30.4       |
| 150.05                | 300.1                    | -71.3                | 15.9                   | -55.4                 | -25         | -30.4       |
| 138.05 (RSS-119 only) | 414.15                   | -69.5                | 19.4                   | -50.1                 | -25         | -25.1       |
| 141.05 (RSS-119 only) | 423.15                   | -65.3                | 19.5                   | -45.8                 | -25         | -20.8       |
| 143.95 (RSS-119 only) | 431.86                   | 29                   | 19.5                   | 48.5                  | -25         | -23.5       |
| 148.05 (RSS-119 only) | 444.15                   | -70                  | 19.5                   | -50.5                 | -25         | -25.5       |
| 150.05                | 451.15                   | -65.9                | 19.5                   | -46.4                 | -25         | -21.4       |

**Radiated Spurious Emissions 22M Test Results**

| Tuned Frequency (MHz) | Emission Frequency (MHz) | Measured Level (dBm) | Correction Factor (dB) | Corrected Value (dBm) | Limit (dBm) | Margin (dB) |
|-----------------------|--------------------------|----------------------|------------------------|-----------------------|-------------|-------------|
| 148.05 (RSS-119 only) | 296.1                    | -65.3                | 15.8                   | -49.5                 | -25         | -24.5       |
| 150.05 (RSS-119 only) | 300.1                    | -66.3                | 15.9                   | -50.4                 | -25         | -25.4       |
| 162.05                | 324.1                    | -65.1                | 16.1                   | -49.0                 | -25         | -24         |
| 148.05 (RSS-119 only) | 444.15                   | -62                  | 19.5                   | -42.5                 | -25         | -17.5       |
| 150.05                | 450.15                   | -63.8                | 19.5                   | -44.3                 | -25         | -19.3       |
| 162.05                | 468.15                   | -70.6                | 20.0                   | -50.6                 | -25         | -25.6       |

**Radiated Spurious Emissions 26M Test Results**

| Tuned Frequency (MHz) | Emission Frequency (MHz) | Measured Level (dBm) | Correction Factor (dB) | Corrected Value (dBm) | Limit (dBm) | Margin (dB) |
|-----------------------|--------------------------|----------------------|------------------------|-----------------------|-------------|-------------|
| 148.05 (RSS-119 only) | 296.1                    | -71                  | 15.8                   | -55.2                 | -25         | -30.2       |
| 150.05                | 300.1                    | -66.1                | 15.9                   | -50.2                 | -25         | -25.2       |
| 162.05                | 324.1                    | -67.3                | 16.1                   | -51.2                 | -25         | -26.2       |
| 148.05 (RSS-119 only) | 444.15                   | -69.1                | 19.5                   | -49.6                 | -25         | -24.6       |
| 150.05                | 450.15                   | -60.6                | 19.5                   | -41.1                 | -25         | -16.1       |
| 162.05                | 468.15                   | -64.2                | 20.0                   | -44.2                 | -25         | -19.2       |

**Radiated Spurious Emissions 16M Test Results**

| Tuned Frequency (MHz) | Emission Frequency (MHz) | Measured Level (dBm) | Correction Factor (dB) | Corrected Value (dBm) | Limit (dBm) | Margin (dB) |
|-----------------------|--------------------------|----------------------|------------------------|-----------------------|-------------|-------------|
| 150.05                | 300.1                    | -71                  | 15.9                   | -55.1                 | -25         | -30.1       |
| 162.05                | 324.1                    | -65.4                | 16.1                   | -49.3                 | -25         | -24.3       |
| 150.05                | 450.15                   | -67.1                | 19.5                   | -47.6                 | -25         | -22.6       |
| 162.05                | 468.15                   | -73.9                | 20.0                   | -53.9                 | -25         | -28.9       |

**Radiated Spurious Emissions 22M2 Test Results**

| Tuned Frequency (MHz) | Emission Frequency (MHz) | Measured Level (dBm) | Correction Factor (dB) | Corrected Value (dBm) | Limit (dBm) | Margin (dB) |
|-----------------------|--------------------------|----------------------|------------------------|-----------------------|-------------|-------------|
| 162.05                | 324.1                    | -69.7                | 16.1                   | -53.6                 | -25         | -28.6       |
| 173.95                | 347.9                    | -64.1                | 16.9                   | -47.2                 | -25         | -22.2       |
| 162.05                | 468.15                   | -63.4                | 20.0                   | -43.4                 | -25         | -18.4       |
| 173.95                | 521.85                   | -55.5                | 20.7                   | -34.8                 | -25         | -9.8        |

**Radiated Spurious Emissions 26M2 Test Results**

| Tuned Frequency (MHz) | Emission Frequency (MHz) | Measured Level (dBm) | Correction Factor (dB) | Corrected Value (dBm) | Limit (dBm) | Margin (dB) |
|-----------------------|--------------------------|----------------------|------------------------|-----------------------|-------------|-------------|
| 162.05                | 324.1                    | -70.1                | 16.1                   | -54.0                 | -25         | -29         |
| 173.95                | 347.9                    | -66.1                | 16.9                   | -49.2                 | -25         | -24.2       |
| 162.05                | 468.15                   | -68.6                | 20.0                   | -48.6                 | -25         | -23.6       |
| 173.95                | 521.85                   | -62.3                | 20.7                   | -41.6                 | -25         | -16.6       |

No other emissions were detected. All emissions were greater than -25 dBm.




**Name of Test:** Emission Masks (Occupied Bandwidth)  
**Specification:** 90.210  
**Test Equipment Utilized:** i00331, i00118

**Engineer:** J. Erhard  
**Test Date:** 6/28/2010


The EUT was connected directly to a spectrum analyzer to verify that the EUT meets the required emissions mask. A reference level plot is provided to verify that the peak power was established prior to testing the mask. A modulation frequency of 2.5 kHz at a level of 240 mVPP was input into the EUT for the analog tests and an internal test pattern was utilized for the digital input.

### Test Setup




### Occupied Bandwidth Plots

**Reference**  
**138.05 MHz (RSS-119 only)**

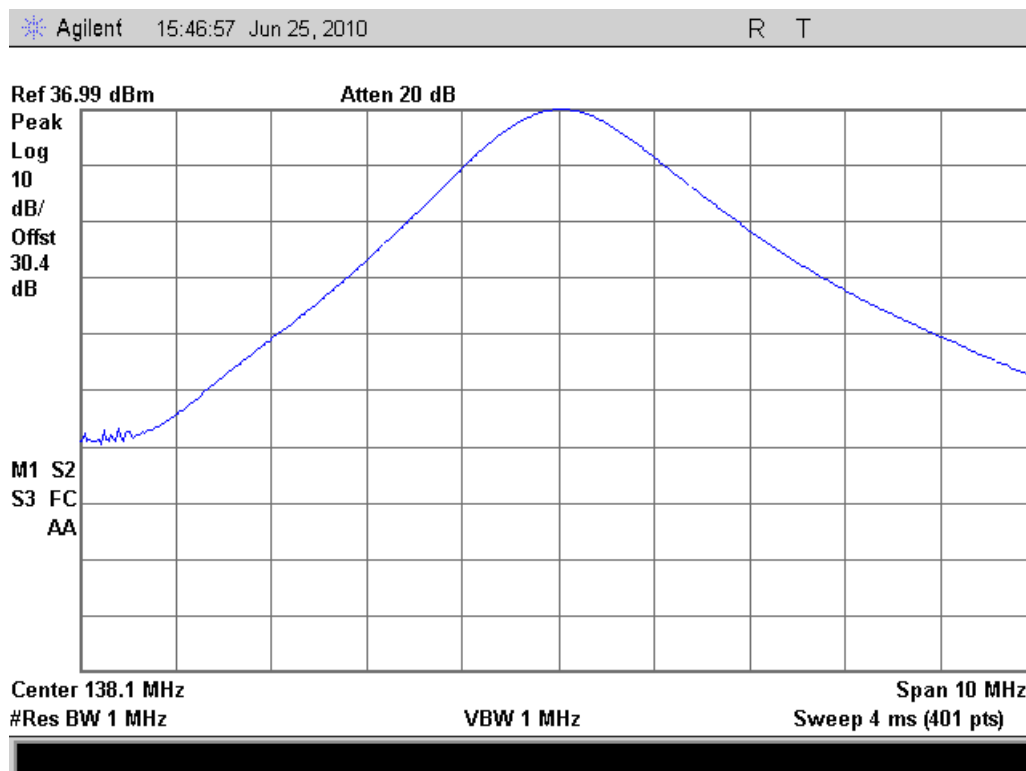




## 141.05 MHz (RSS-119 only)

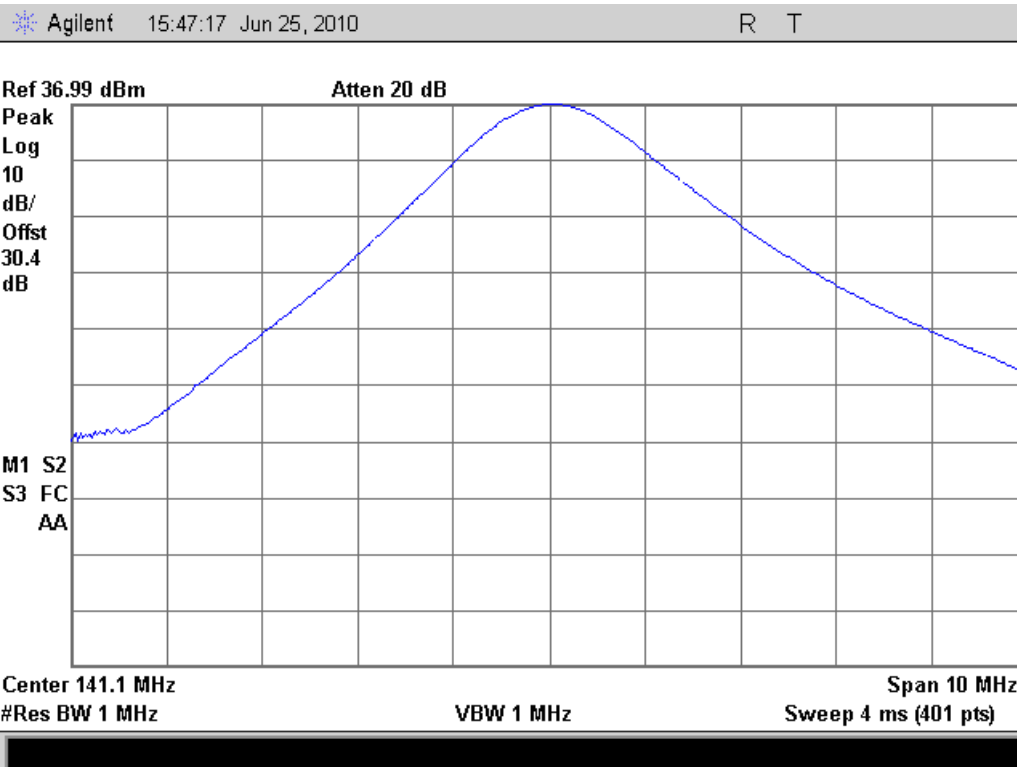


## 143.95 MHz (RSS-119 only)

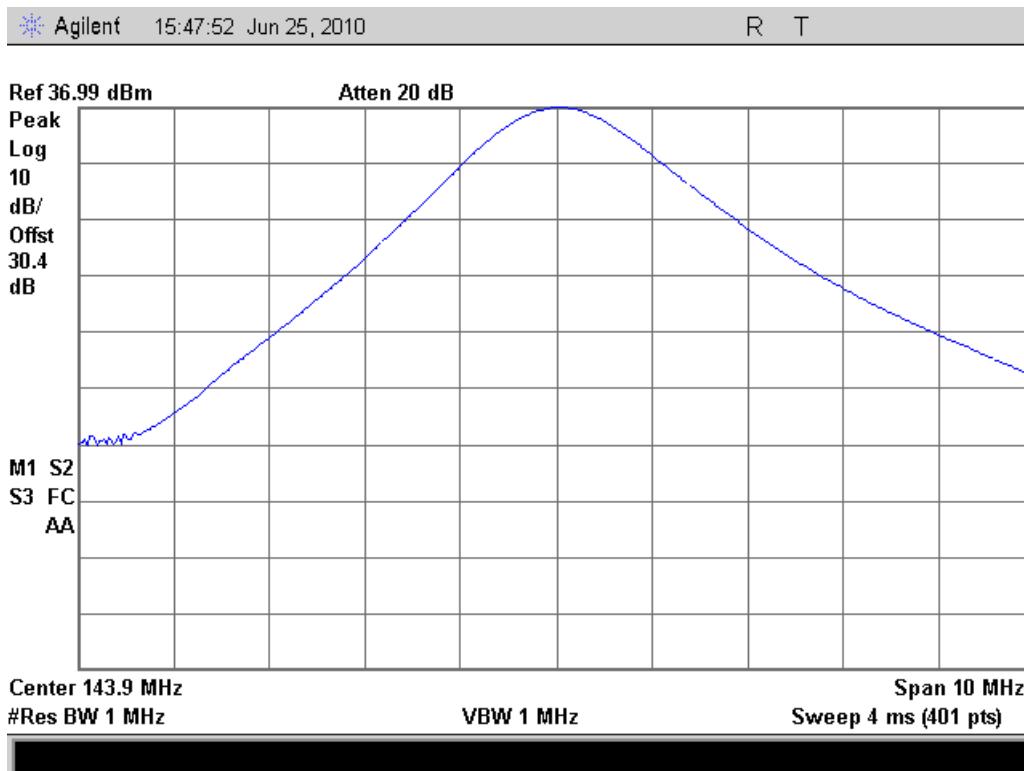




### 148.05 MHz (RSS-119 only)

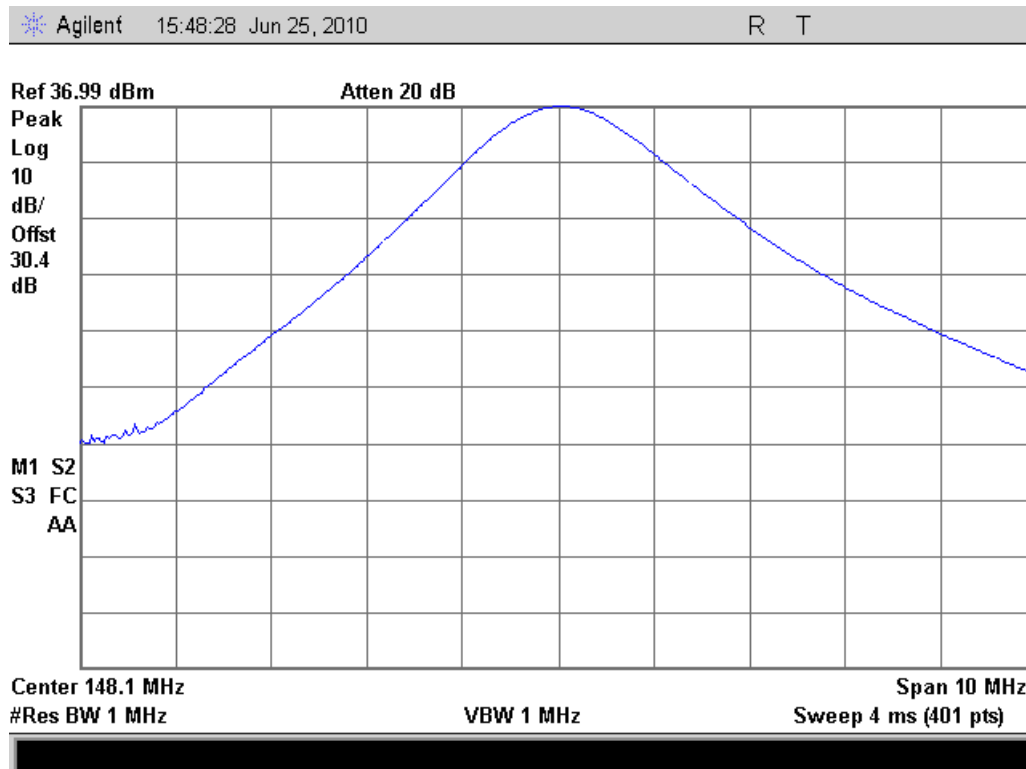

### 150.05 MHz

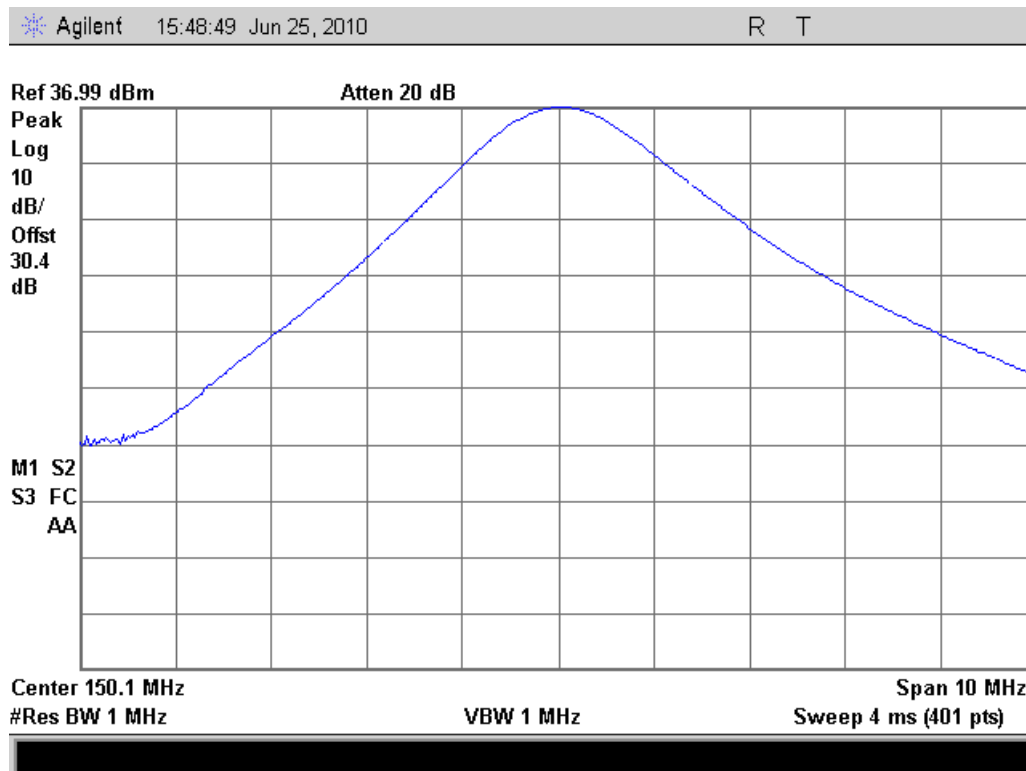




## 162.05 MHz

Agilent 15:49:11 Jun 25, 2010

R T

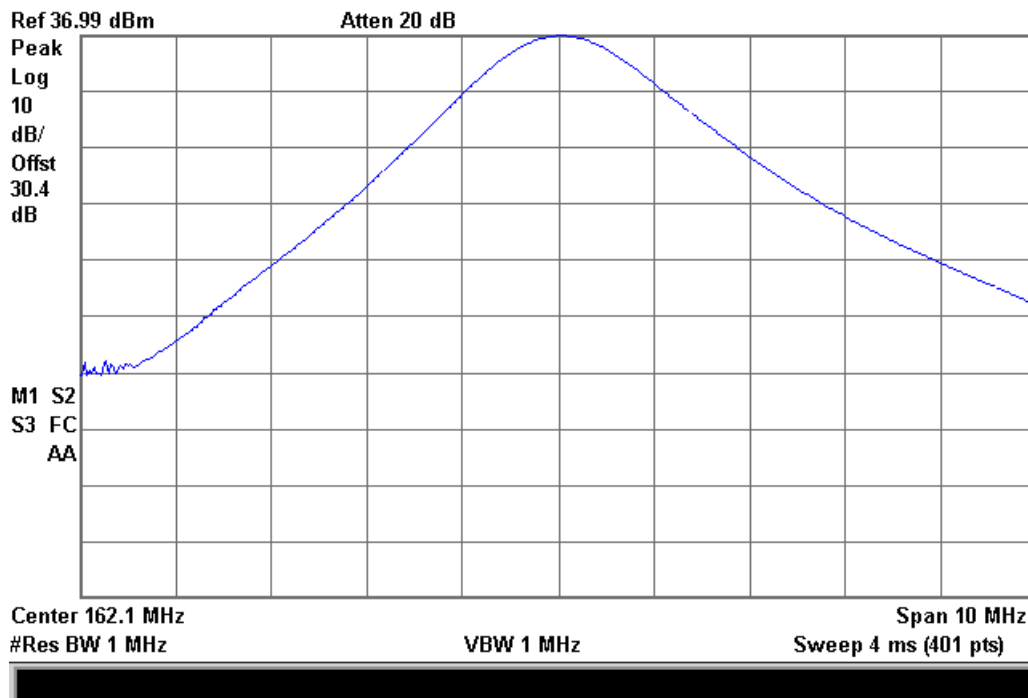

## 173.95 MHz

Agilent 15:49:30 Jun 25, 2010

R T






**Narrow Band Mask**  
**138.05 MHz (RSS-119 only)**

Agilent 13:55:12 Jun 28, 2010


R T

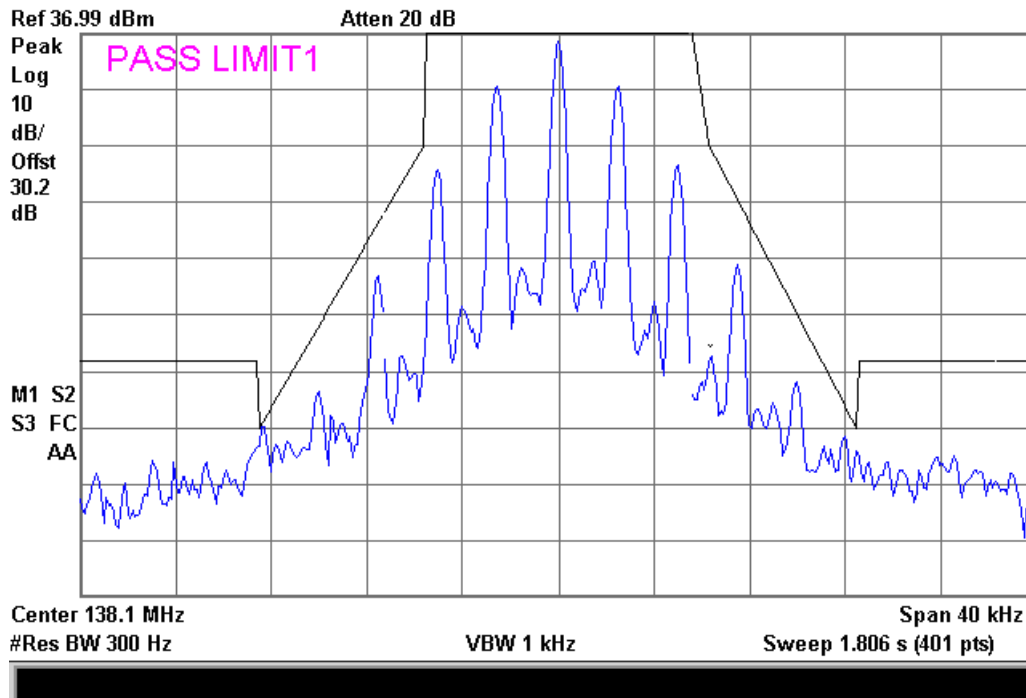

**141.05 MHz**


Agilent 13:55:51 Jun 28, 2010

R T

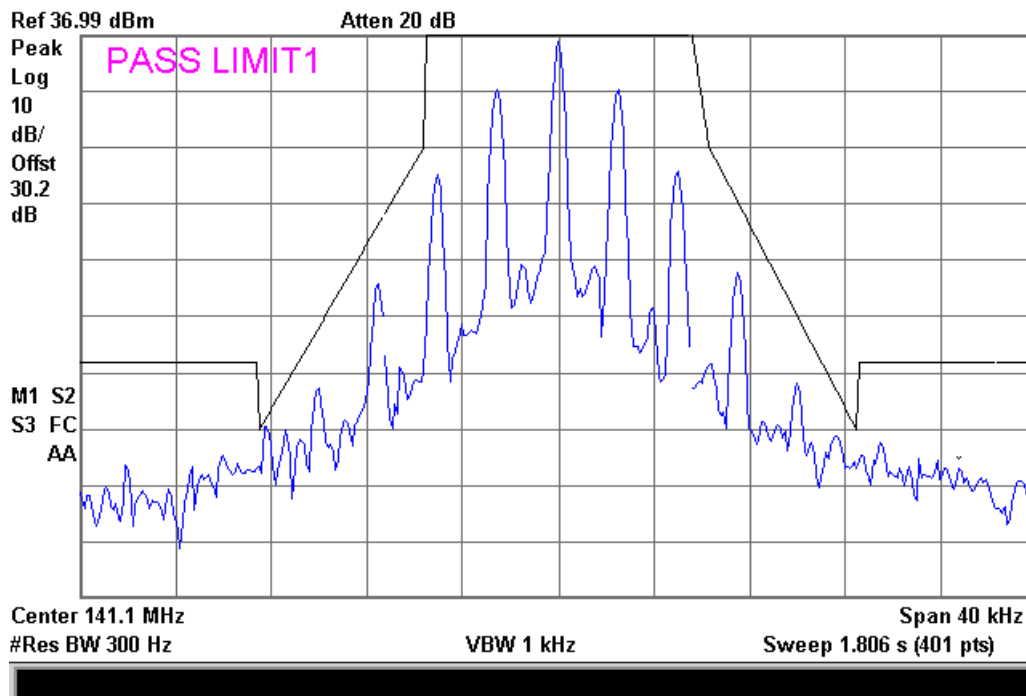




## 143.95 MHz (RSS-119 only)

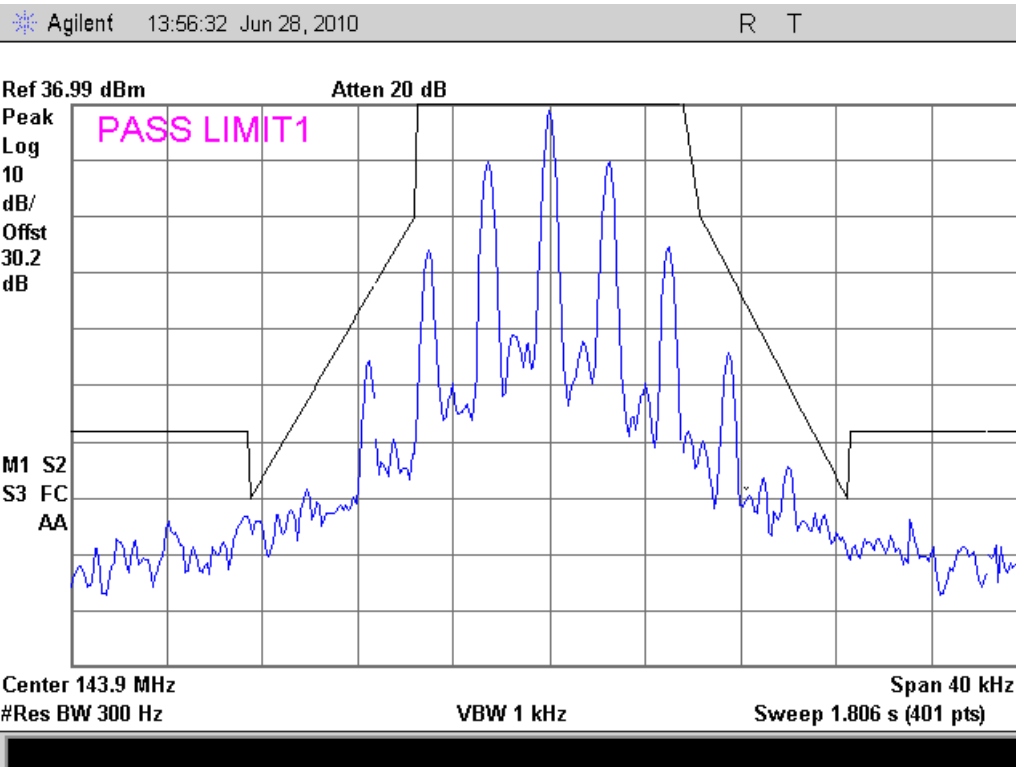

## 148.05 MHz (RSS-119 only)

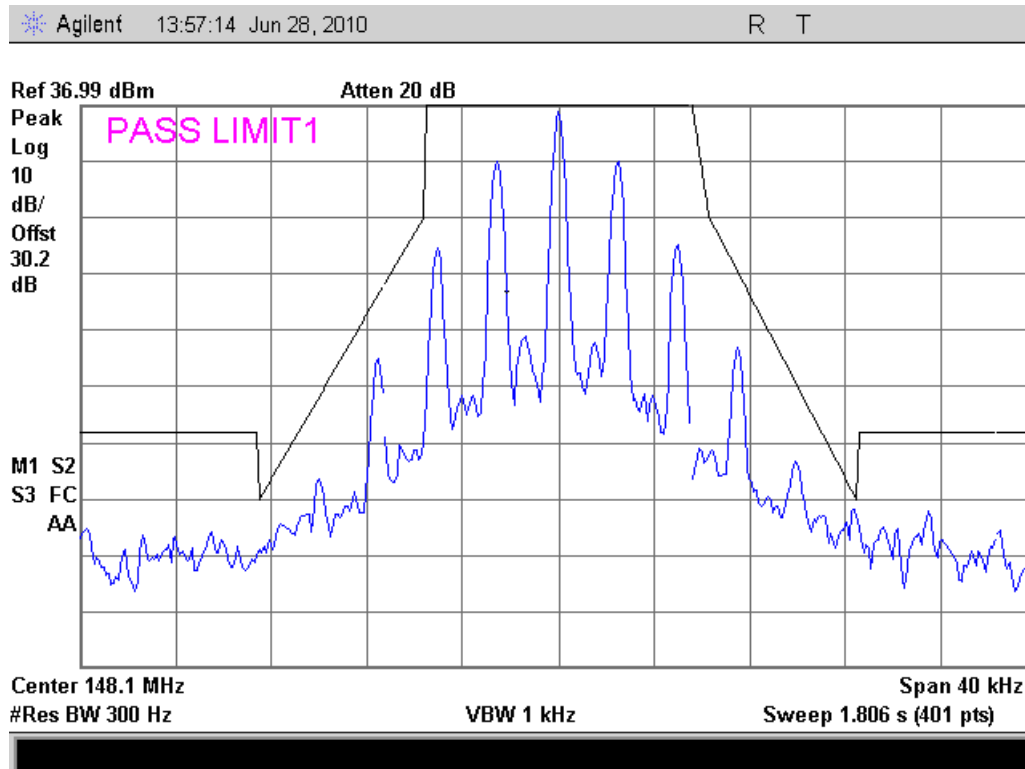




150.05 MHz

Agilent 13:58:01 Jun 28, 2010


R T

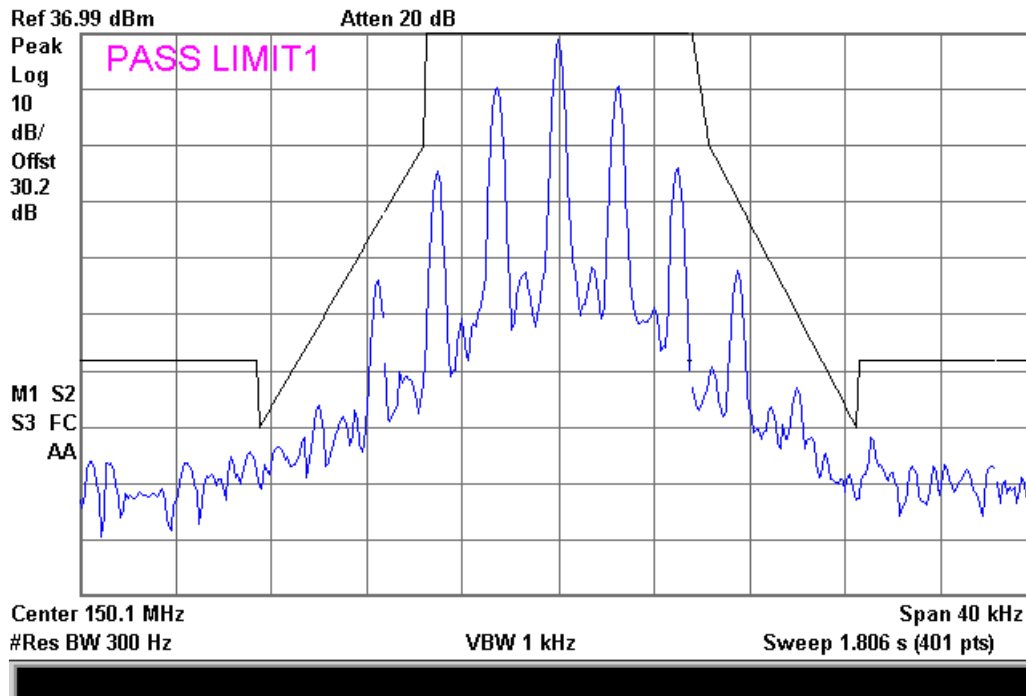

162.05 MHz


Agilent 13:58:37 Jun 28, 2010

R T

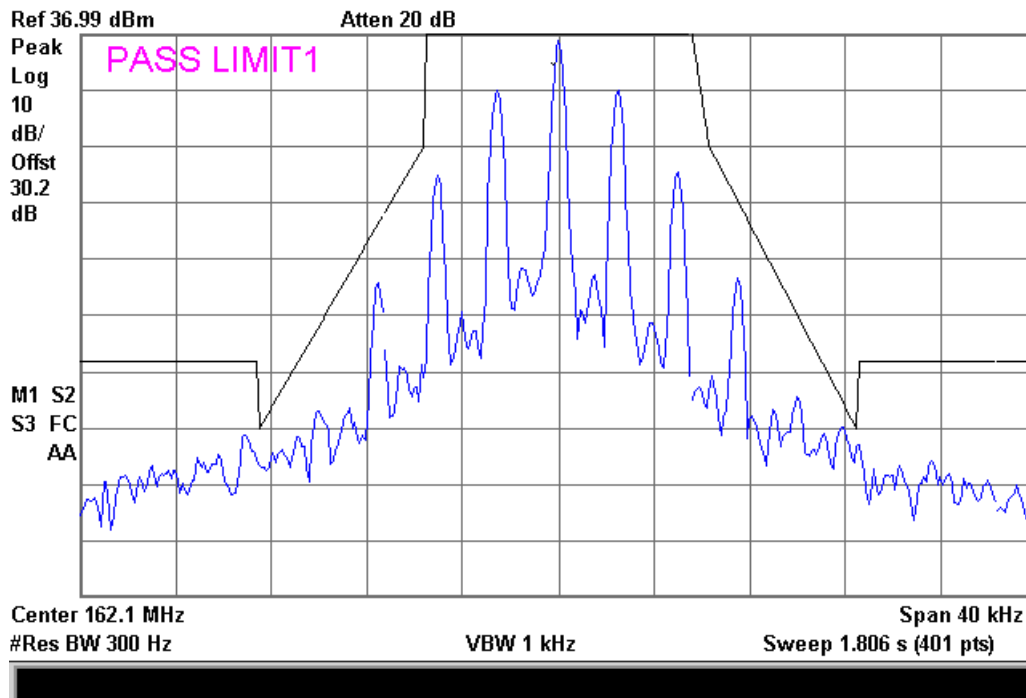




173.95 MHz

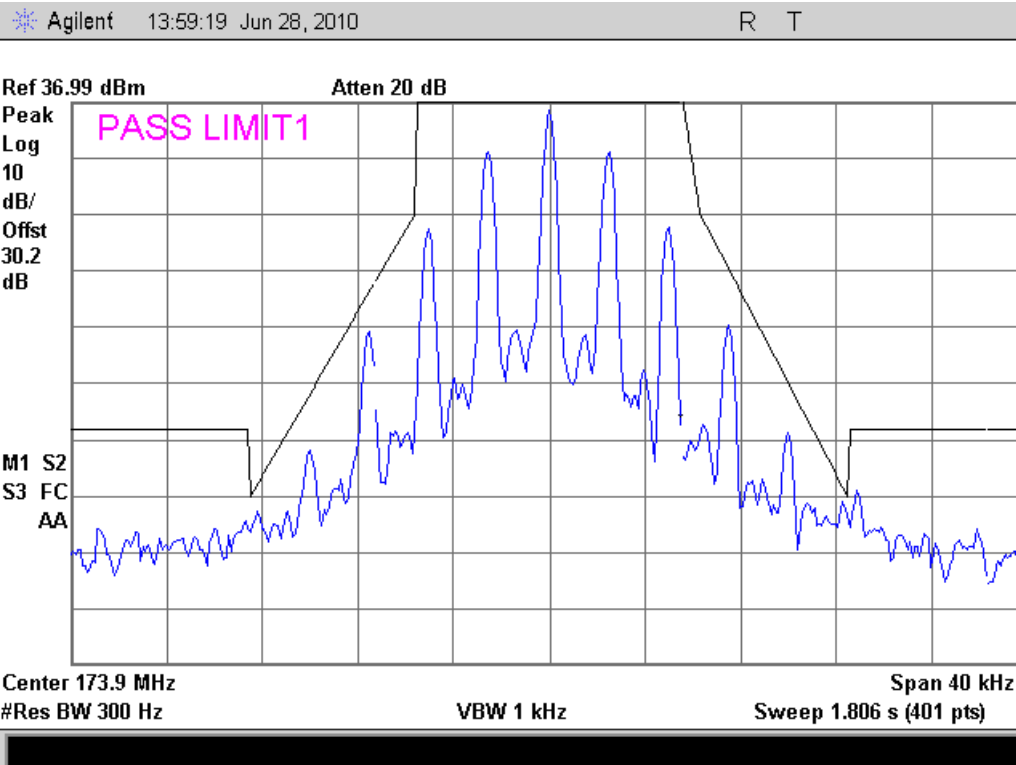


Wide Band Mask  
138.05 MHz (RSS-119 only)

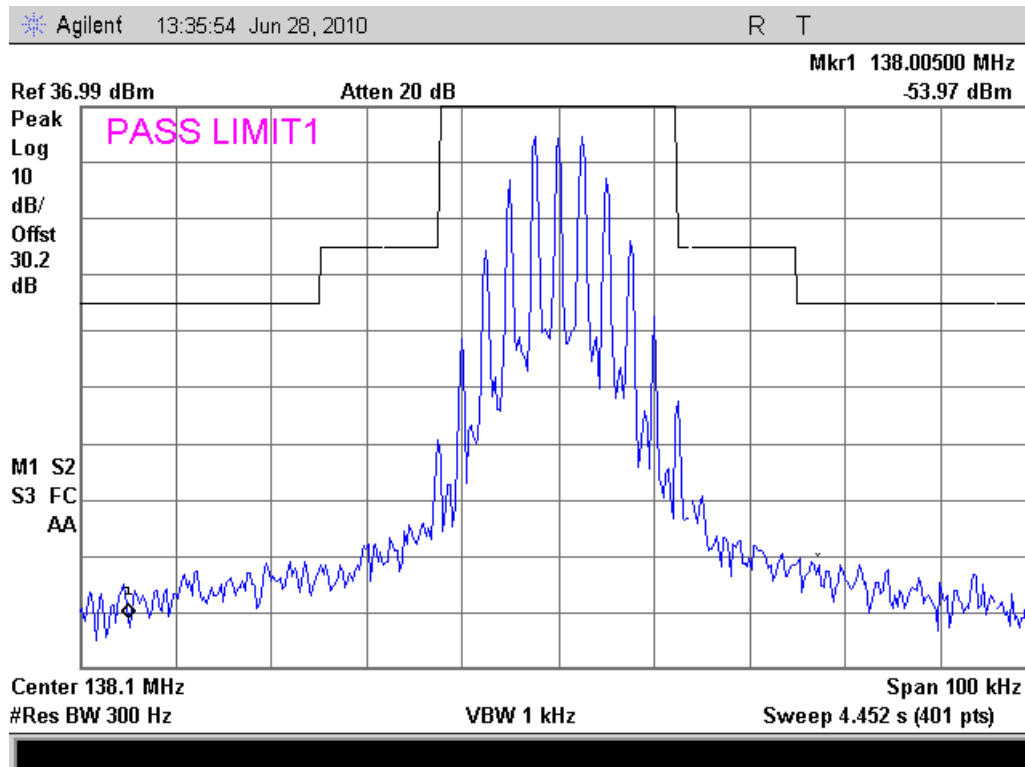




141.05 MHz (RSS-119 only)

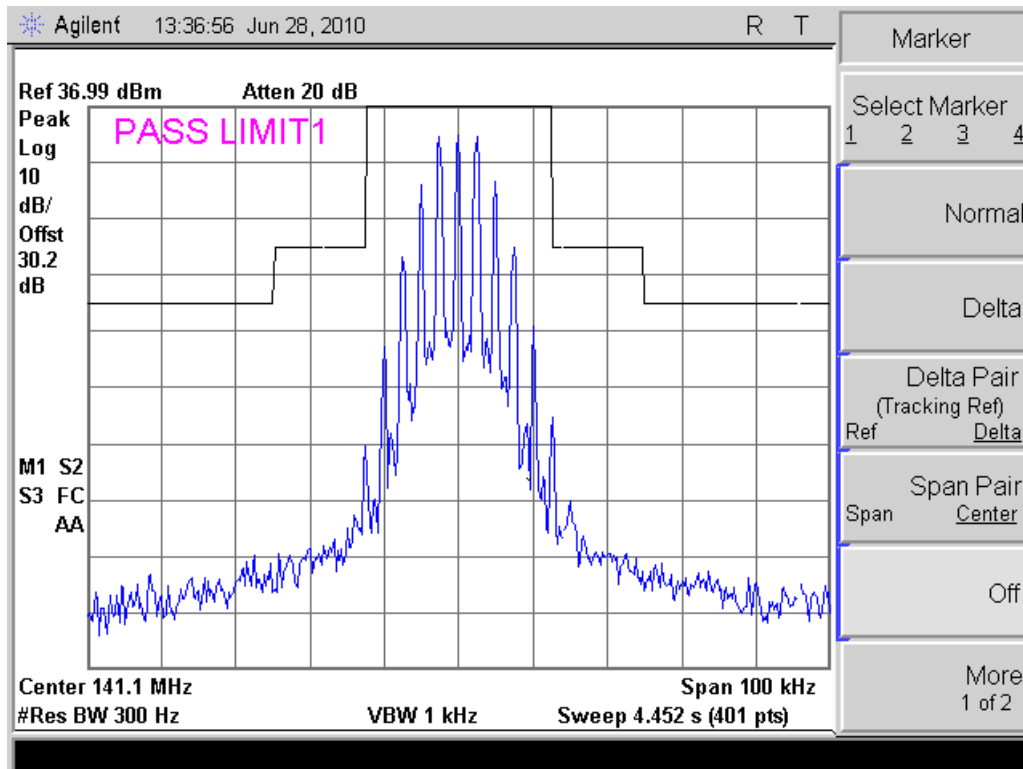


143.95 MHz (RSS-119 only)

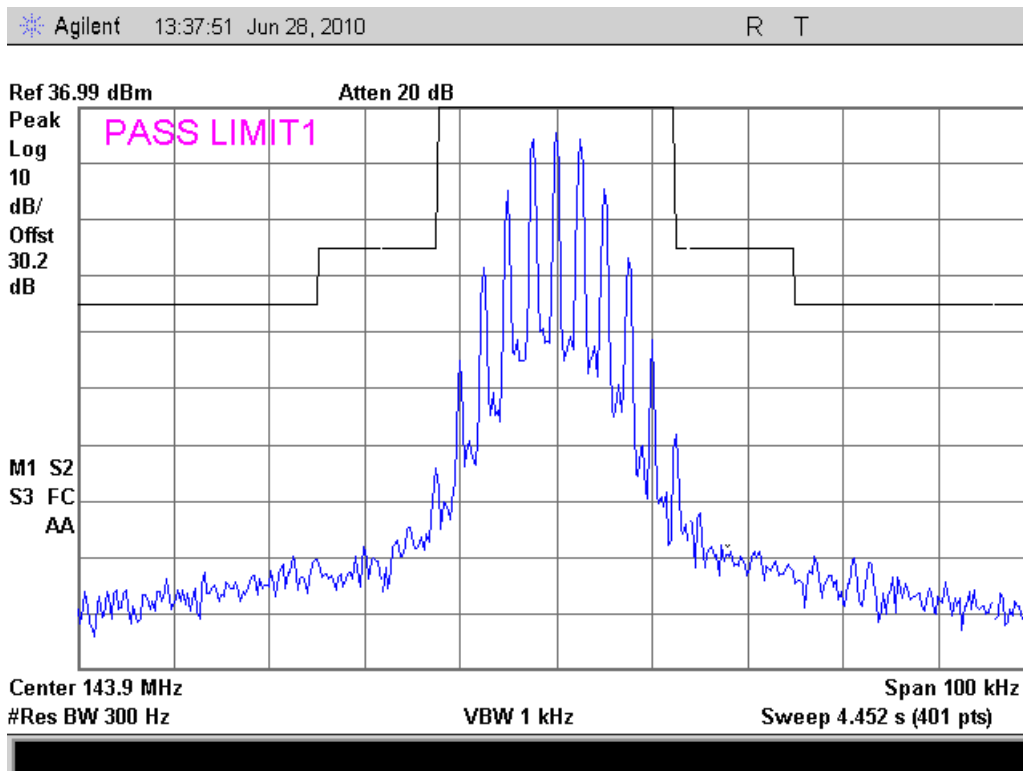




## 148.05 MHz (RSS-119 only)

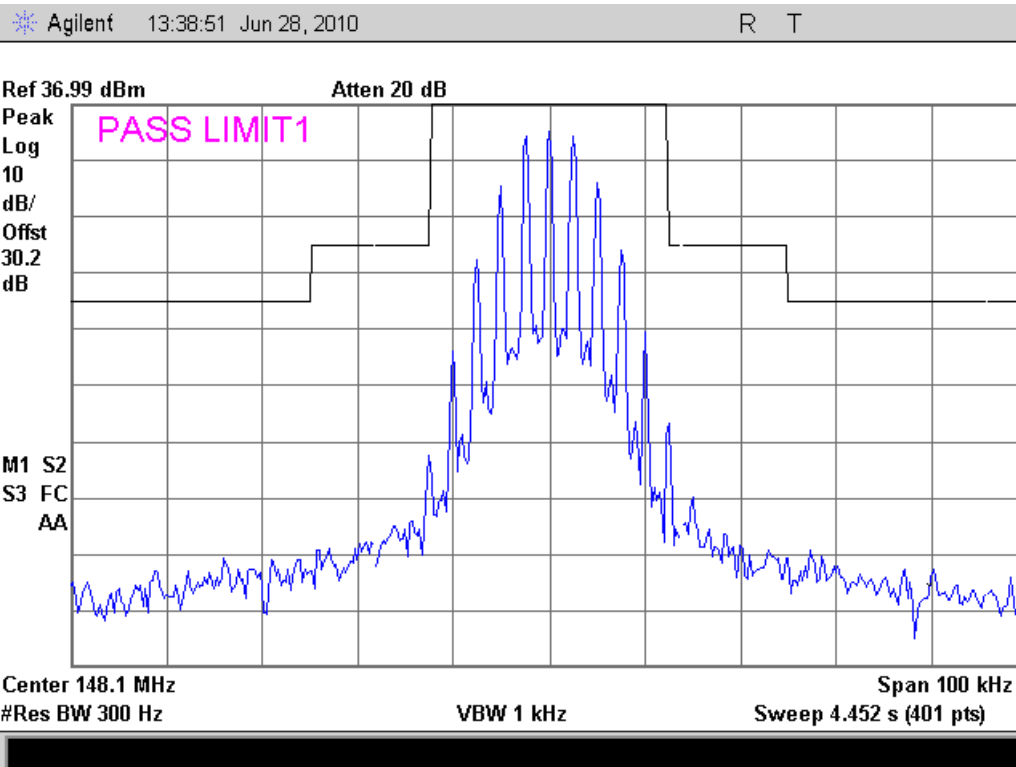

## 150.05 MHz

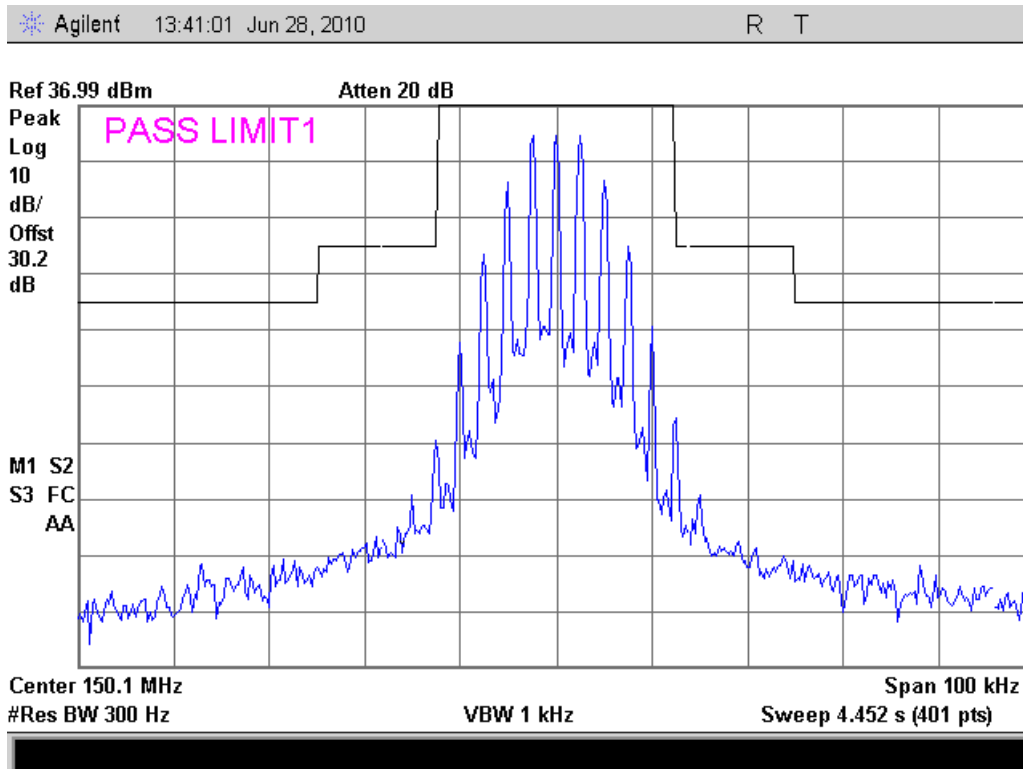




## 162.05 MHz

Agilent 13:42:26 Jun 28, 2010


R T

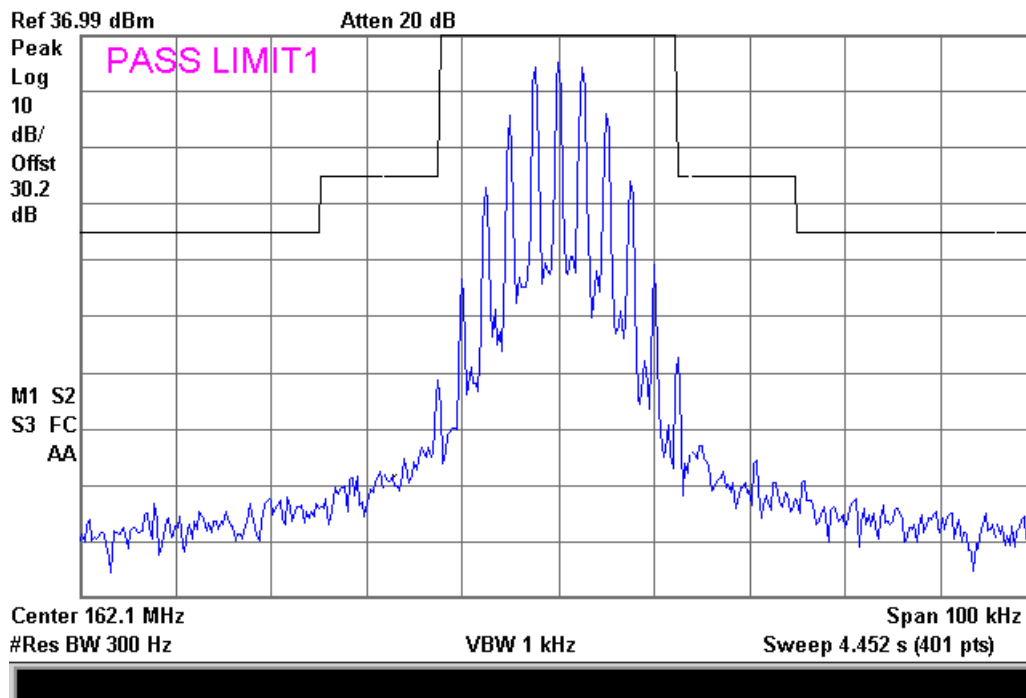

## 173.95 MHz

Agilent 13:43:15 Jun 28, 2010

R T

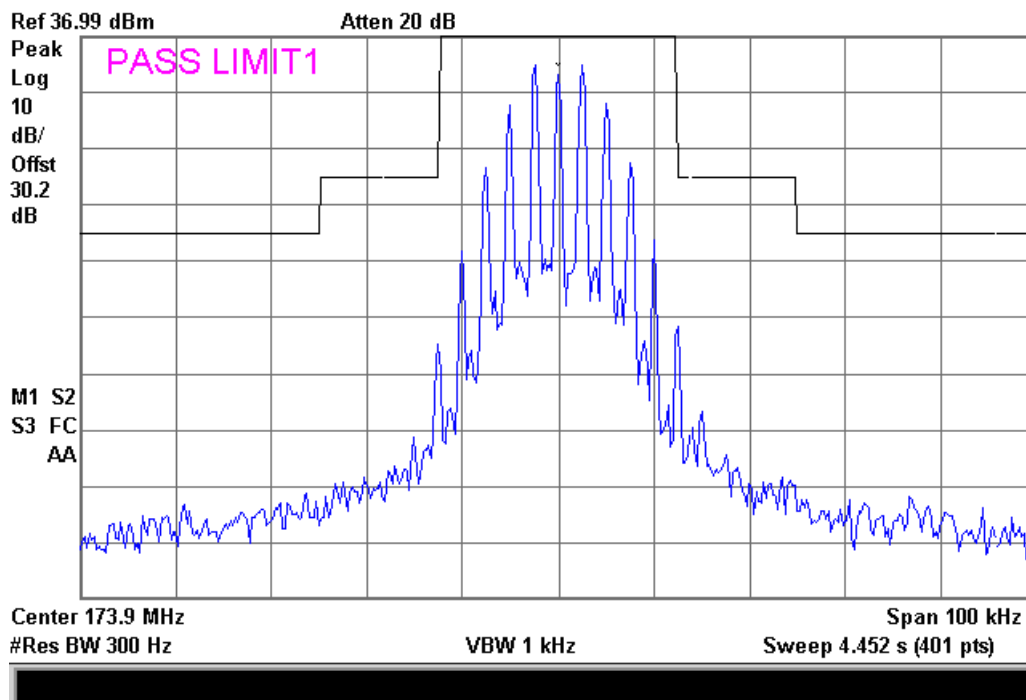




**Name of Test:** Transient Frequency Behavior  
**Specification:** 90.214  
**Test Equipment Utilized:** i00345, i00118

**Engineer: J. Erhard**  
**Test Date: 6/24/2010**

### Test Procedure


The EUT was connected to a real time spectrum analyzer with audio measurement capability. An arbitrary waveform generator was utilized to inject the required audio frequency. The low pass filter response was plotted.

### Test Set-Up






### Narrow Band Test Results On Time

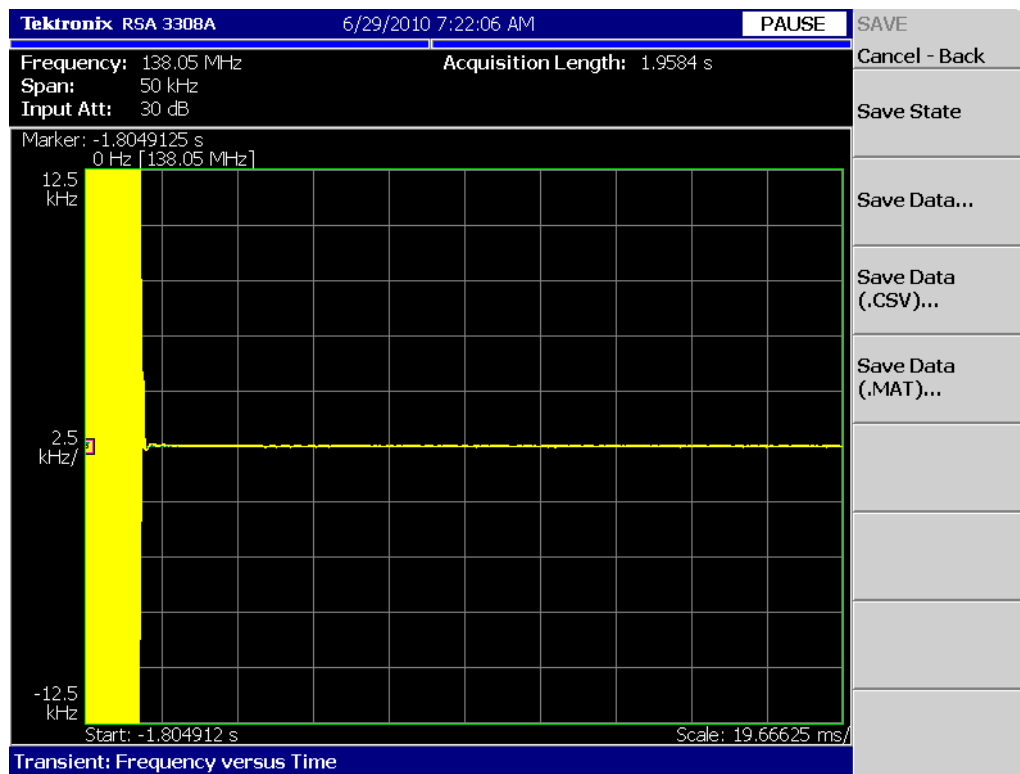


### Narrow Band Test Results Off Time

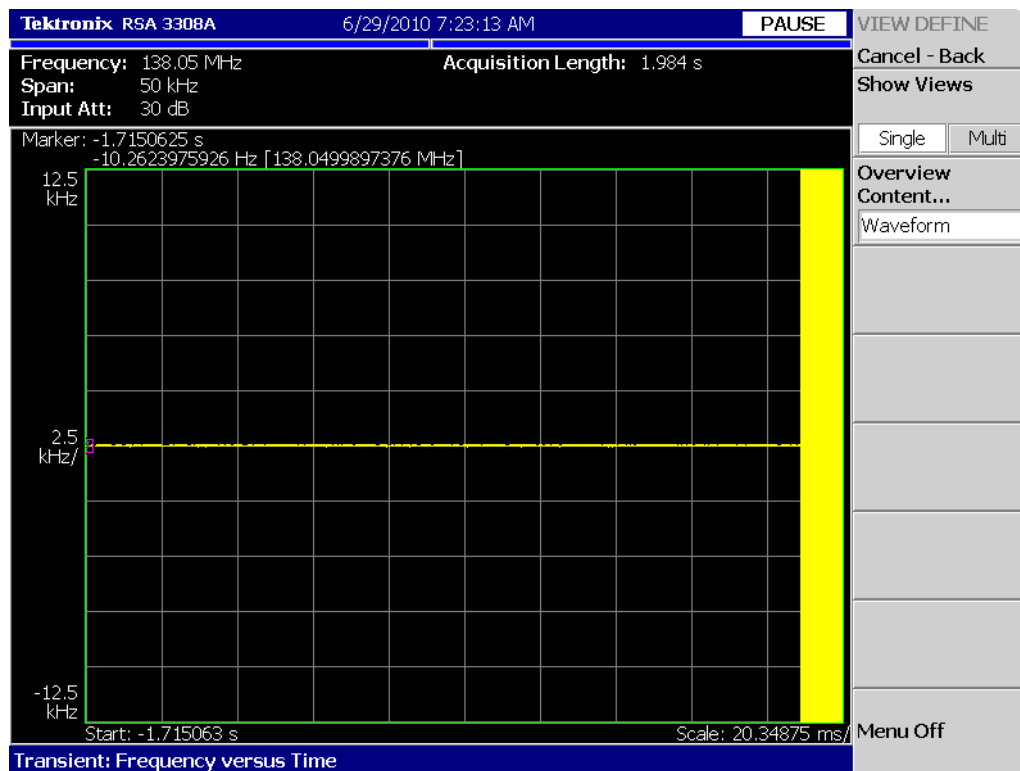




### Wide Band Test Results On Time

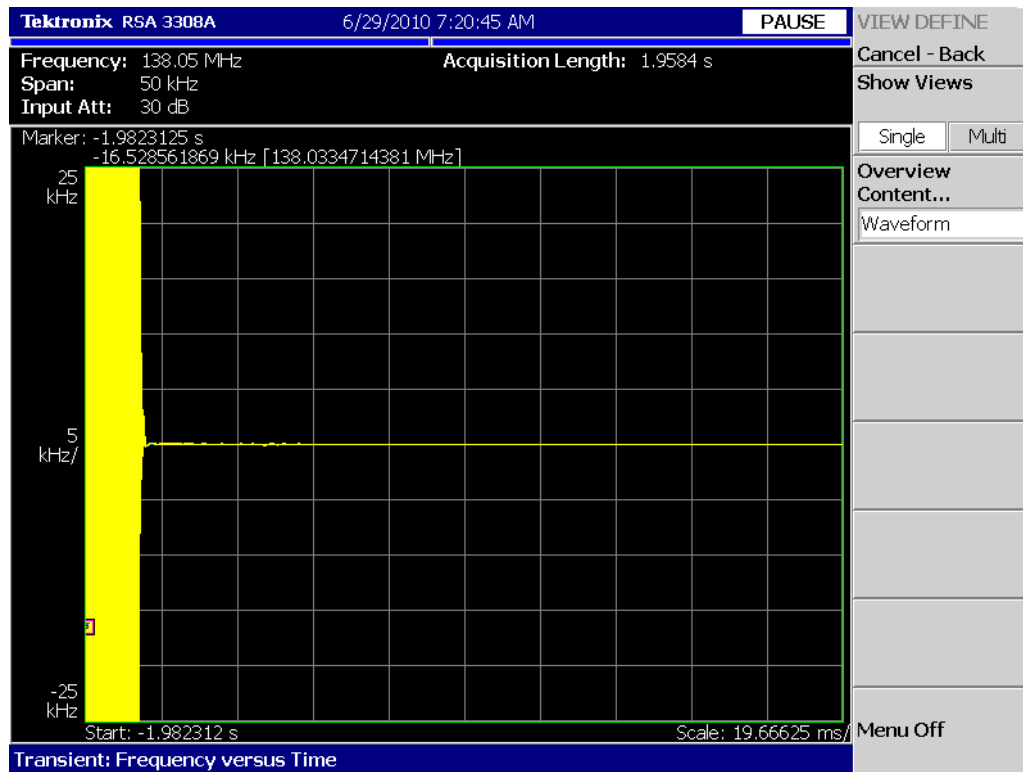

### Wide Band Test Results Off Time

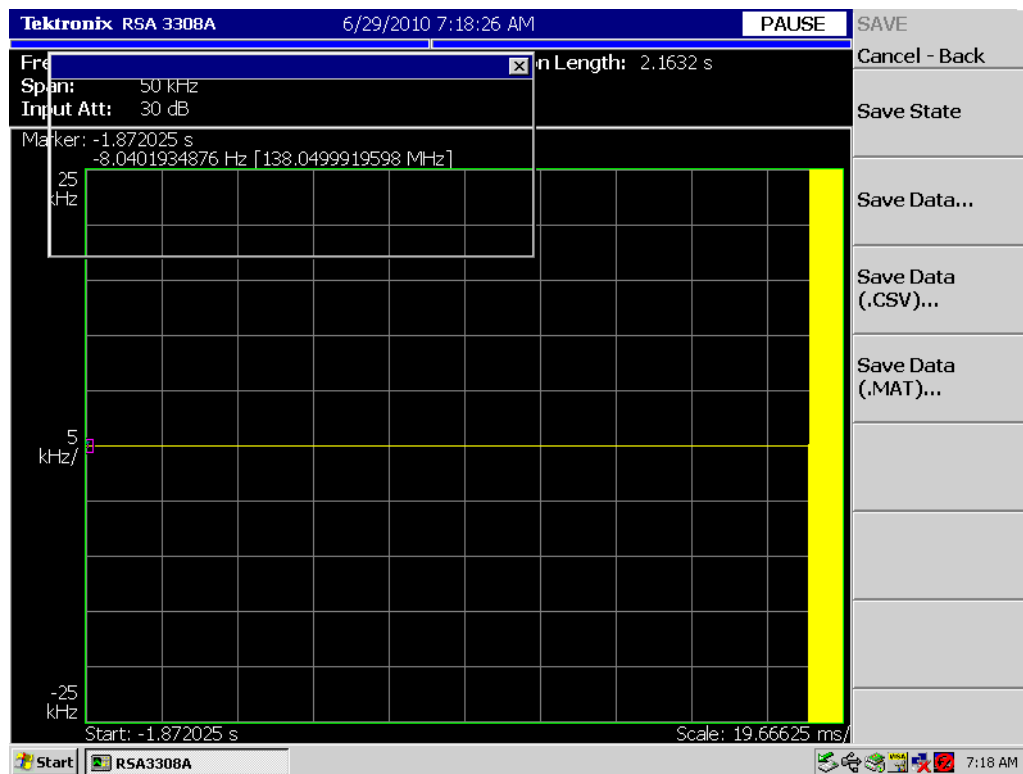




**Name of Test:** Audio Low Pass Filter (Voice Input)  
**Specification:** 2.1047  
**Test Equipment Utilized:** i00345, i00118

**Engineer:** J Erhard  
**Test Date:** 6/24/2010


### Test Procedure

The EUT was connected to a real time spectrum analyzer with audio measurement capability. An arbitrary waveform generator was utilized to inject the required audio frequency. The low pass filter response was plotted.


### Test Set-Up



### Narrow Band Test Results

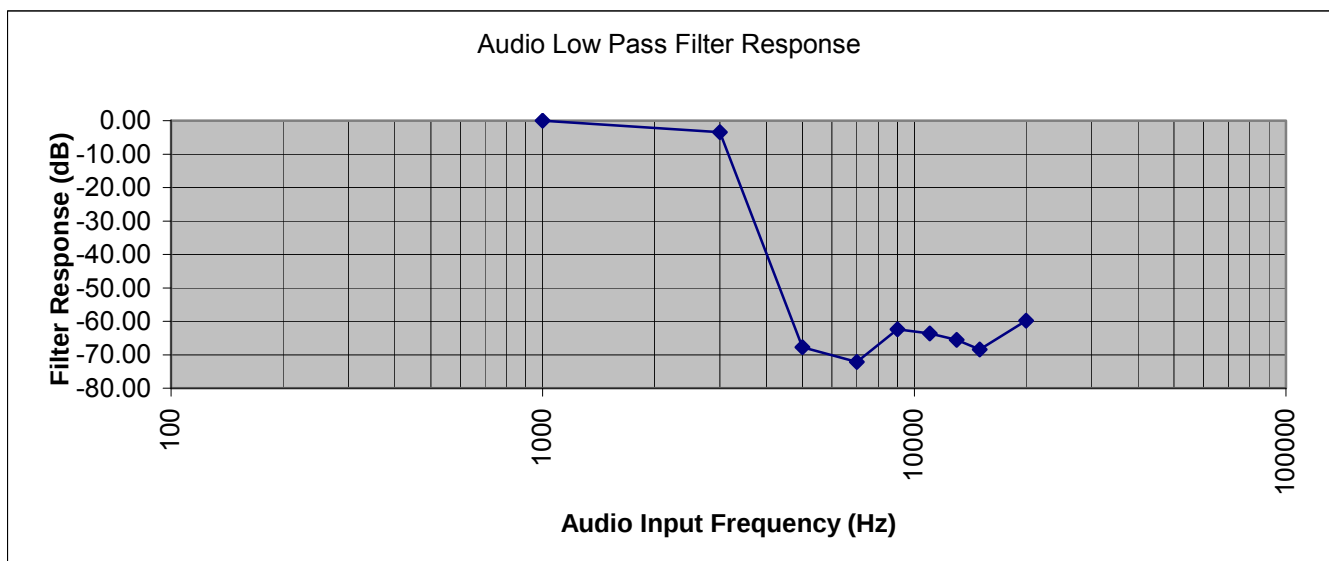

### Wide Band Test Results

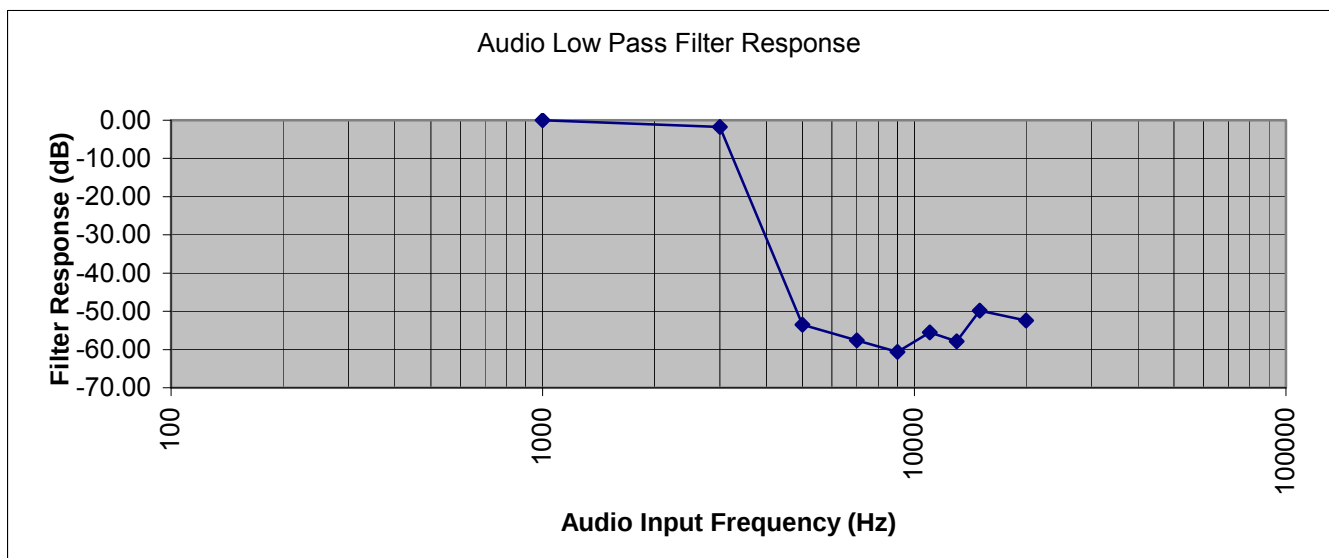




Name of Test: Audio Frequency Response  
Specification: 2.1047  
Test Equipment Utilized: i00345, i00118

Engineer: J Erhard  
Test Date: 6/24/2010


### Test Procedure

The EUT was connected to a real time spectrum analyzer with audio measurement capability. An arbitrary waveform generator was utilized to inject the required audio frequency. The low pass filter response was plotted.


### Test Set-Up



### Narrow Band Test Results

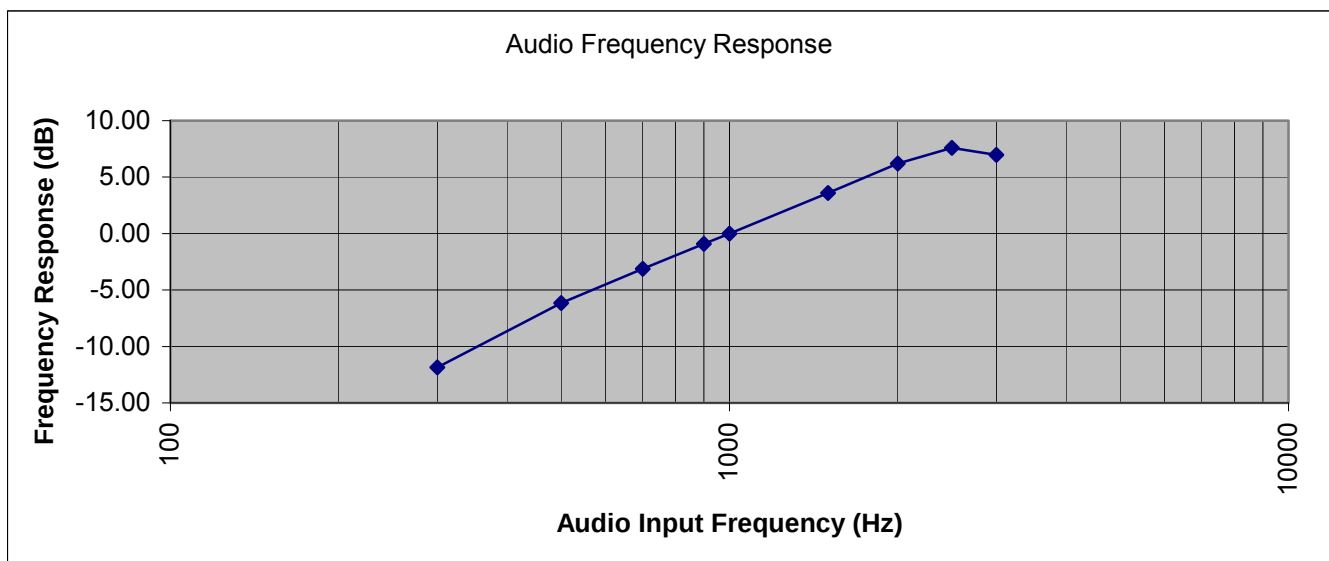

### Wide Band Test Results

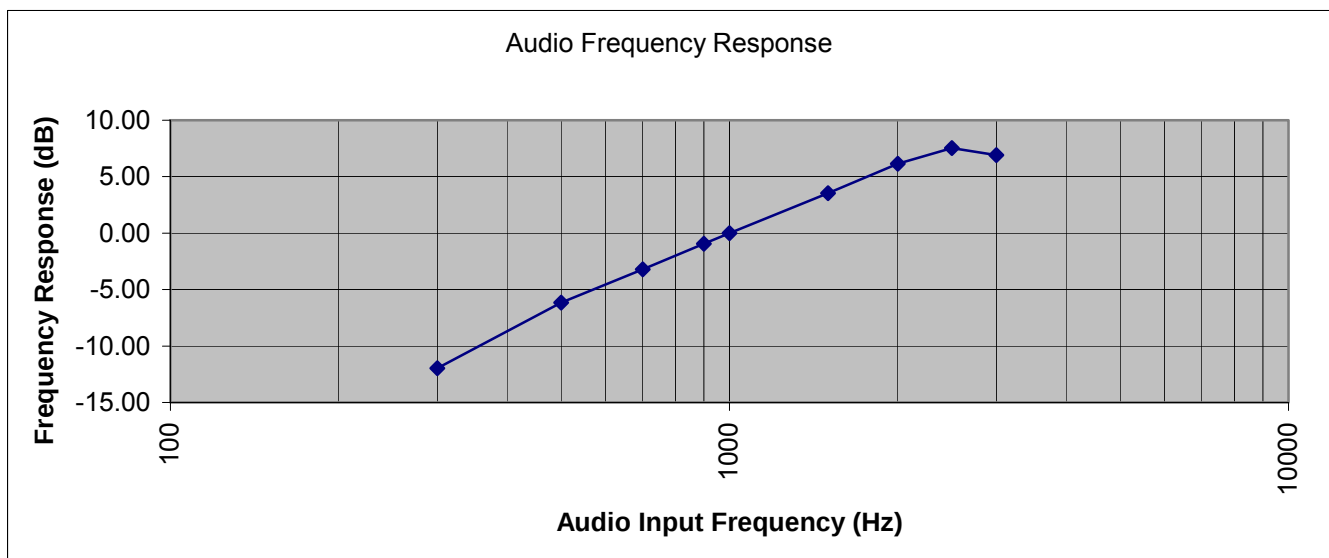




**Name of Test:** Modulation Limiting  
**Specification:** 2.1047(a)  
**Test Equipment Utilized:** i00345, i00118

**Engineer:** J. Erhard  
**Test Date:** 6/24/2010

### Test Procedure


The EUT was connected to a real time spectrum analyzer with audio measurement capability. An arbitrary waveform generator was utilized to inject the required audio frequency. The low pass filter response was plotted.

### Test Set-Up






### Narrow Band Positive Peaks

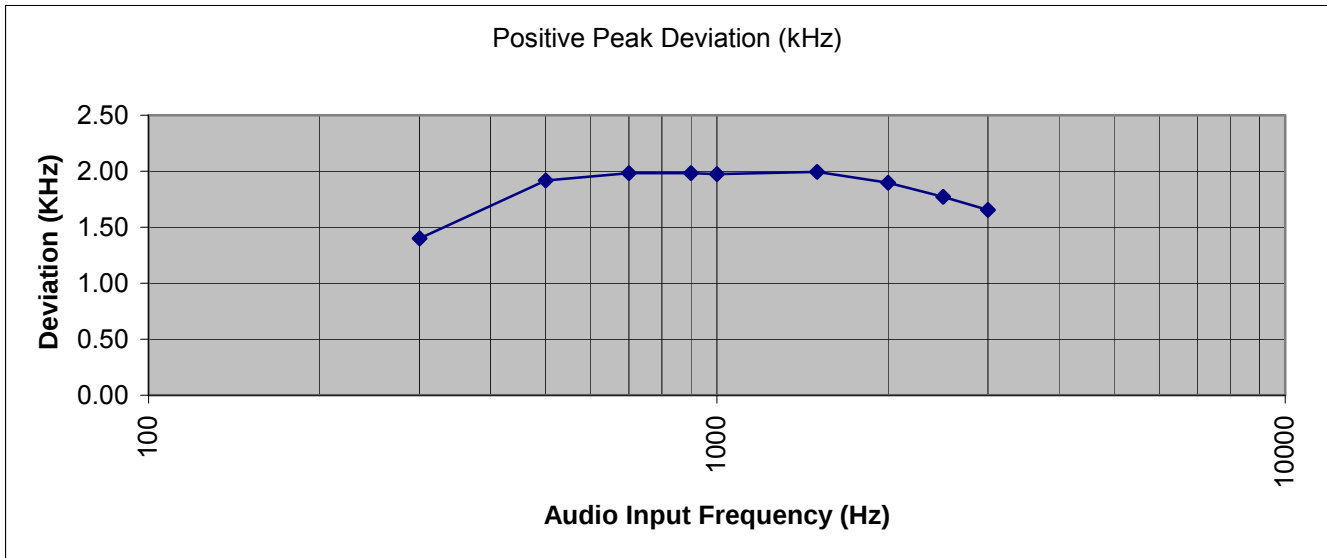


### Narrow Band Negative Peaks

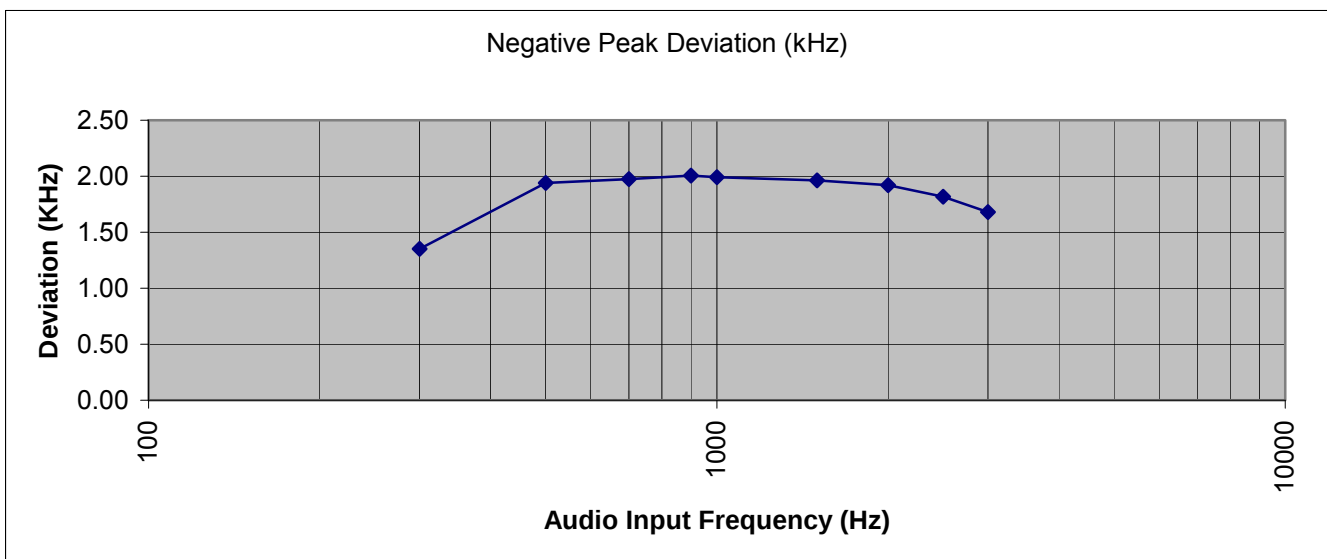




### Wide Band Positive Peaks

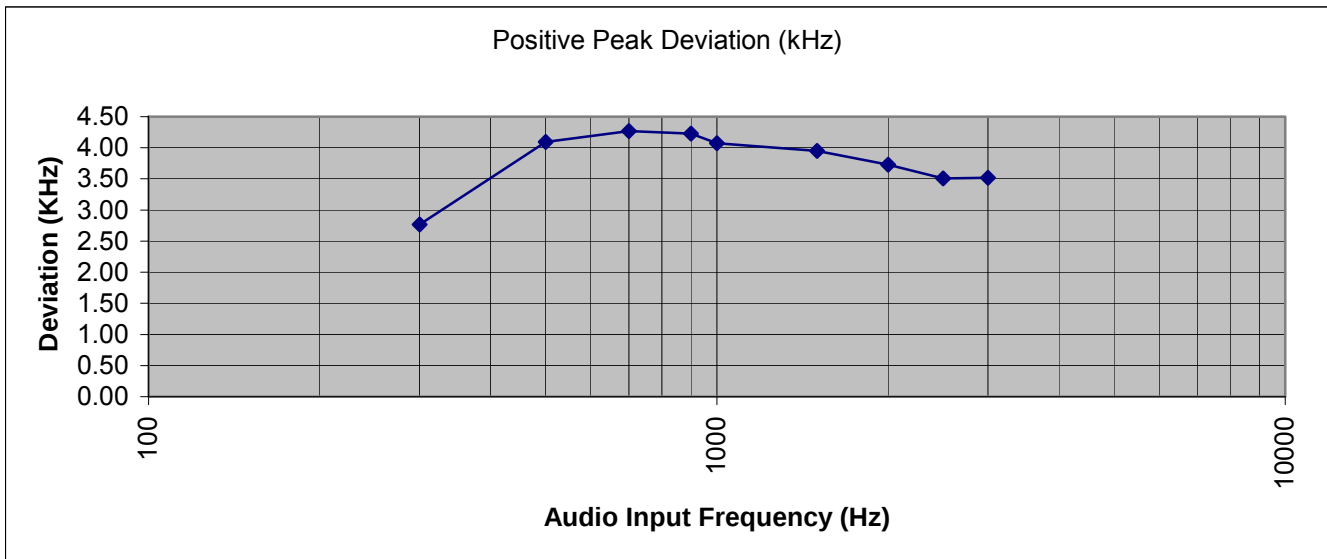

### Wide Band Test Negative Peaks

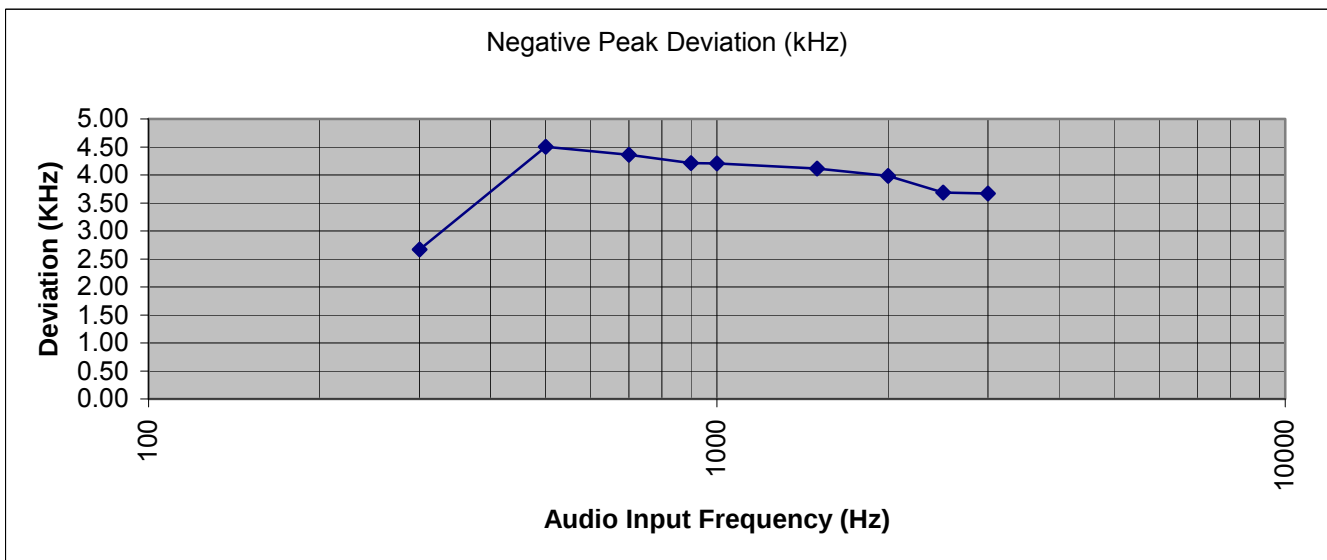




**Name of Test:** Frequency Stability (Temperature Variation)  
**Specification:** 90.213  
**Test Equipment Utilized:** i00320, i00350, i00027, i00019  
**Engineer:** J Erhard  
**Test Date:** 6/24/2010


### Test Procedure

The EUT was placed in an environmental test chamber and the RF output was connected directly to a frequency counter. The temperature was varied from -30°C to 50°C in 10°C increments. After a sufficient time for temperature stabilization the RF output frequency was measured.

### Test Setup



### Test Results

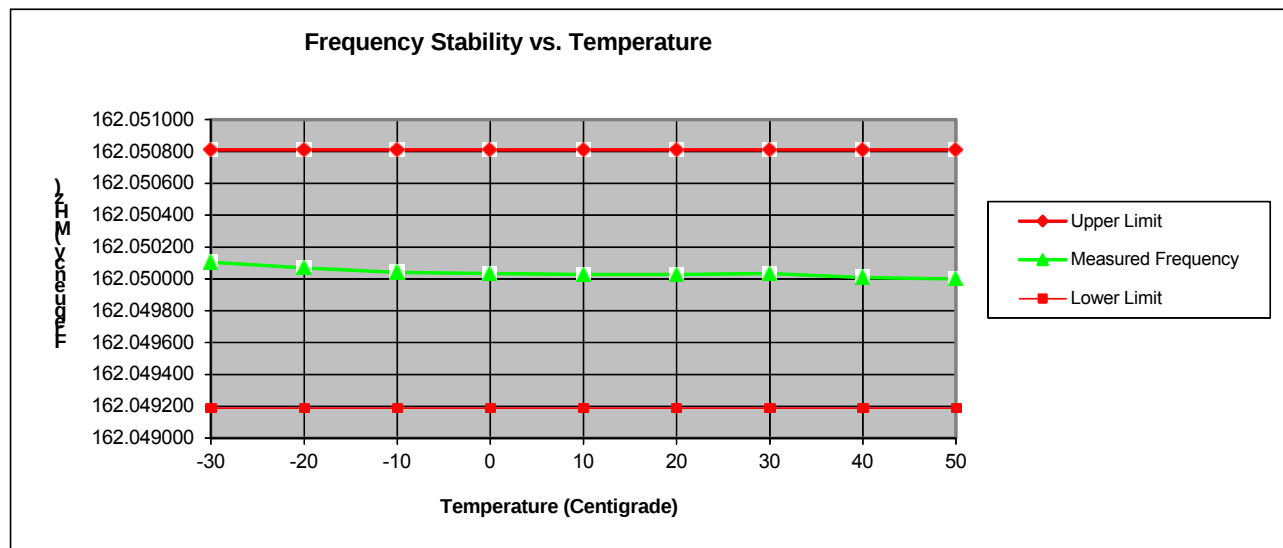




**Name of Test:** Frequency Stability (Voltage Variation)  
**Specification:** 90.213  
**Test Equipment Utilized:** i00320, i00350, i00027, i00019

**Engineer:** J. Erhard  
**Test Date:** 6/24/2010


### Test Procedure

The EUT was placed in a temperature chamber at  $25\pm 5^{\circ}\text{C}$  and connected directly to a frequency counter and variable power supply. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value and the RF output was measured.

### Test Setup

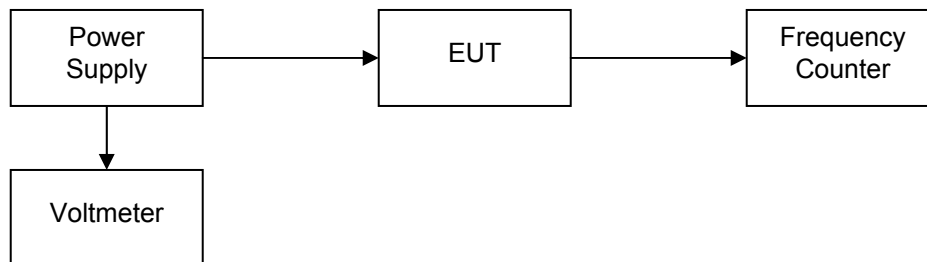

### Test Results

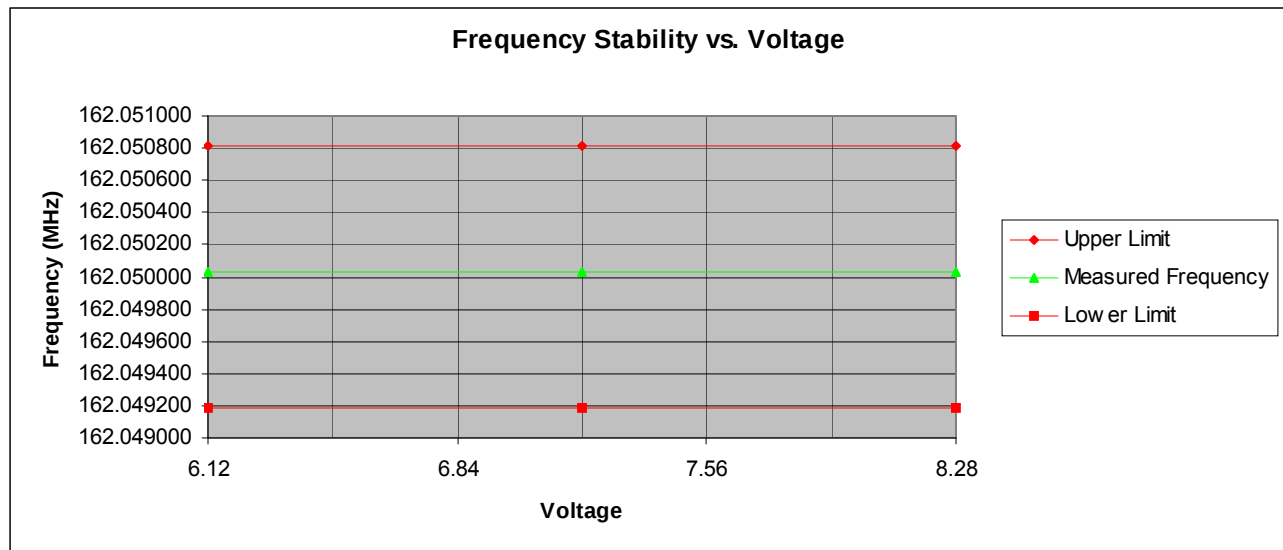




**Name of Test:** Receiver Spurious Emissions  
**Specification:** RSS-GEN  
**Test Equipment Utilized:** i00331

**Engineer:** J. Erhard  
**Test Date:** 6/28/2010

### Test Procedure

The Equipment Under Test (EUT) was connected directly to a Spectrum analyzer. The cable loss was input into the analyzer as a reference lever offset to ensure accurate readings.


### Test Setup






141.05 MHz

Agilent 10:21:18 Jun 28, 2010 R T


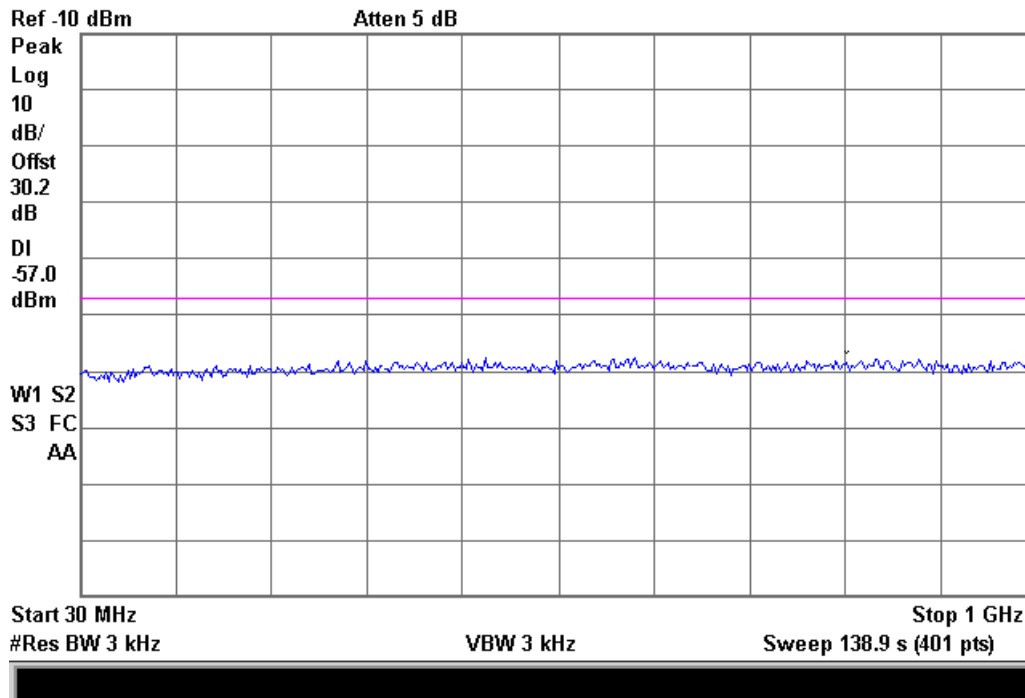


Agilent 10:27:13 Jun 28, 2010 R T

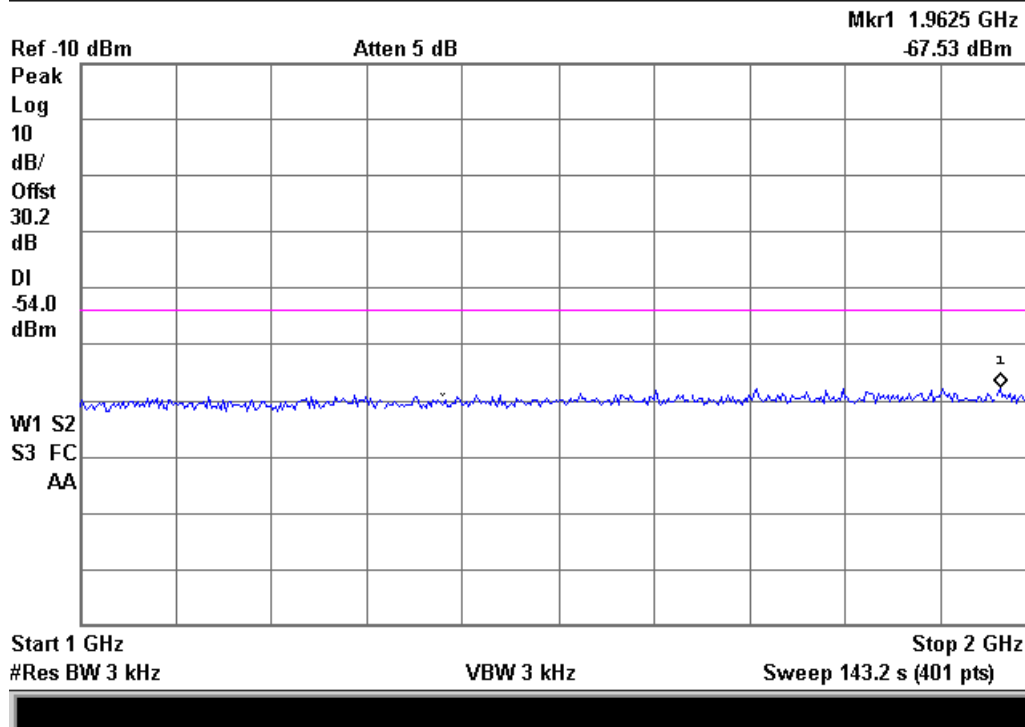



162.05 MHz

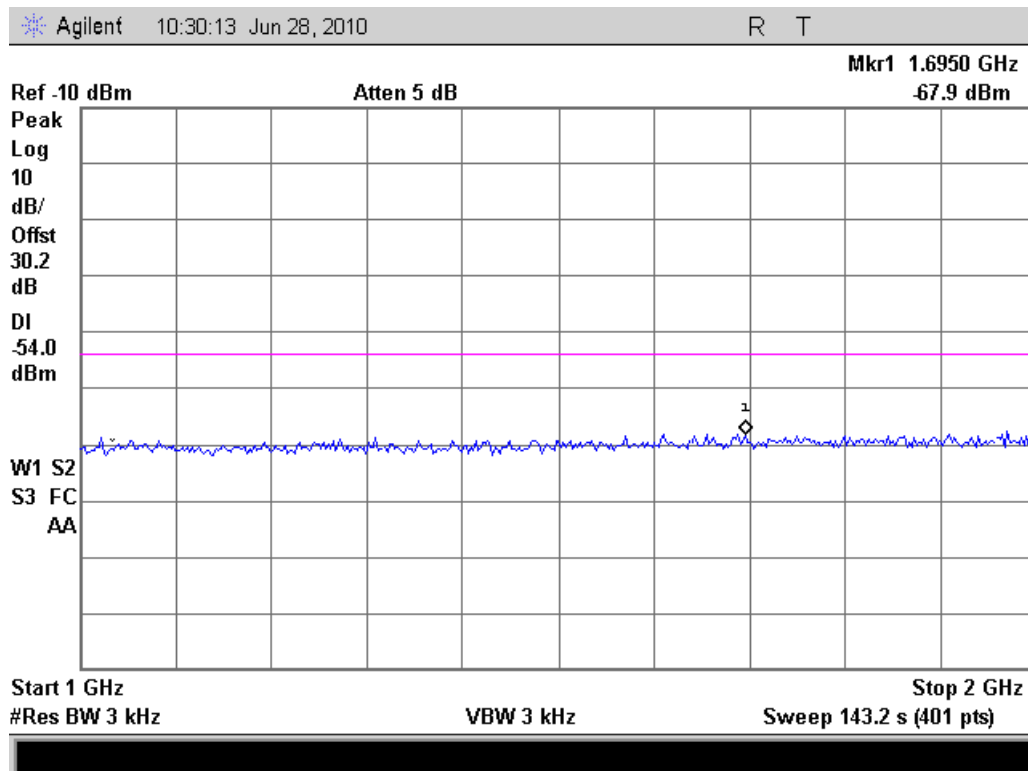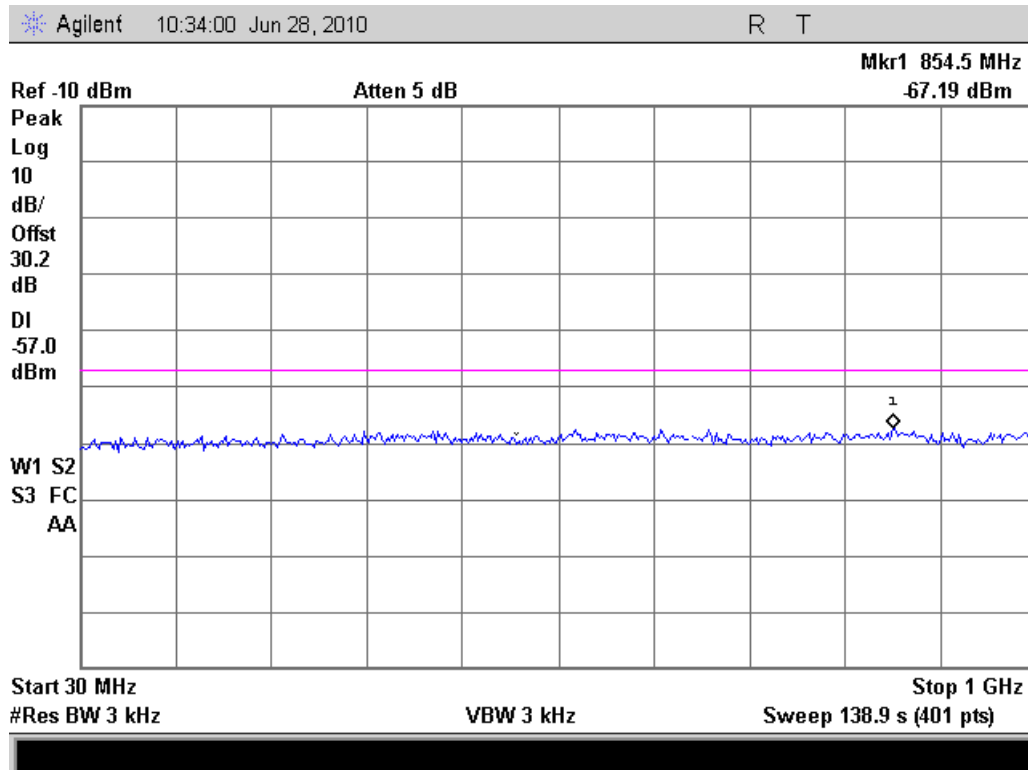



Modulation = 11K0F3E

**Necessary Bandwidth Calculation:**

|                                    |                                          |
|------------------------------------|------------------------------------------|
| Maximum Modulation (M), kHz        | = 3                                      |
| Maximum Deviation (D), kHz         | = 2.5                                    |
| Constant Factor (K)                | = 1                                      |
| Necessary Bandwidth ( $B_N$ ), kHz | = $(2 \times M) + (2 \times D \times K)$ |
|                                    | = 11.0                                   |

Modulation = 16K0F3E

**Necessary Bandwidth Calculation:**

|                                    |                                          |
|------------------------------------|------------------------------------------|
| Maximum Modulation (M), kHz        | = 3                                      |
| Maximum Deviation (D), kHz         | = 5                                      |
| Constant Factor (K)                | = 1                                      |
| Necessary Bandwidth ( $B_N$ ), kHz | = $(2 \times M) + (2 \times D \times K)$ |
|                                    | = 16.0                                   |

**Test Equipment Utilized**

| Description                  | MFG       | Model Number     | Asset Number   | Last Cal Date | Cal Due Date |
|------------------------------|-----------|------------------|----------------|---------------|--------------|
| Temperature Chamber          | Tenney    | Tenney Jr.       | i00027         | 12/8/09       | 12/08/10     |
| Tunable Notch Filter         | Eagle     | TNF-1            | i00124         | NCR           | NCR          |
| Signal Generator             | R&S       | SMT-03           | i00266         | NCR           | NCR          |
| Spectrum Analyzer            | Agilent   | E4407B           | i00331         | 11/3/09       | 11/3/10      |
| RTSA                         | Tektronix | RSA 3308A        | i00345         | 8/21/09       | 8/21/10      |
| Arbitrary Waveform Generator | HP        | 32120A           | i00118         | NCR           | NCR          |
| Dipole Antenna Set           | Ailtech   | DM105A-T1,T2, T3 | i00042, 47, 48 | NCR           | NCR          |
| Power Supply                 | HP        | 6654A            | i00350         | NCR           | NCR          |
| DMM                          | Fluke     | 75III            | i00320         | 2/16/10       | 2/16/11      |
| Frequency Counter            | HP        | 5334B            | i00019         | 2/15/10       | 2/15/11      |
| Spectrum Analyzer            | HP        | 8546A            | i00033         | 11/4/09       | 11/4/10      |

In addition to the above listed equipment standard RF connectors and cables were utilized in the testing of the described equipment. Prior to testing these components were tested to verify proper operation.

END OF TEST REPORT