



Test Report

Prepared for: Kenwood USA Corporation

Model: NX-5400-K2, NX-5400-K3, NX-5400-F2, NX-5400-F3

Description: 700/800MHz P25 TRANSCEIVER with Bluetooth

FCC ID: ALH442000
IC ID: 282D-442000

To

FCC Part 90

Date of Issue: June 19, 2014

On the behalf of the applicant: Kenwood USA Corporation
Communications Division
3970 Johns Creek Court
Suwanee, GA 30024

Attention of: Joel Berger, Research & Development
Ph: (678) 474-4722
E-Mail: jberger@kenwoodusa.com

Prepared By
Compliance Testing, LLC
1724 S. Nevada Way
Mesa, AZ 85204
(480) 926-3100 phone / (480) 926-3598 fax
www.compliancetesting.com
Project No: p1460001



Alex Macon
Project Test Engineer

This report may not be reproduced, except in full, without written permission from Compliance Testing
All results contained herein relate only to the sample tested



Test Report Revision History

Revision	Date	Revised By	Reason for Revision
1.0	June 12, 2014	Alex Macon	Original Document



Table of Contents

<u>Description</u>	<u>Page</u>
Standard Test Conditions and Engineering Practices	6
Test Result Summary	7
Carrier Output Power (Conducted)	8
Conducted Spurious Emissions	9
Field Strength of Spurious Radiation	30
Emission Masks (Occupied Bandwidth)	34
Audio Low Pass Filter (Voice Input)	47
Audio Frequency Response	49
Modulation Limiting	51
Frequency Stability (Temperature Variation)	54
Emission Limitations	56
Occupied Bandwidth	60
Necessary Bandwidth Calculations	61
Test Equipment Utilized	64



ILAC / A2LA

Compliance Testing, LLC, has been accredited in accordance with the recognized International Standard ISO/IEC 17025:2005. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer joint ISO-ILAC-IAF Communiqué dated January 2009)

The tests results contained within this test report all fall within our scope of accreditation, unless noted below.

Please refer to <http://www.compliancetesting.com/labscope.html> for current scope of accreditation.

Testing Certificate Number: **2152.01**



FCC Site Reg. #349717

IC Site Reg. #2044A-2

Non-accredited tests contained in this report:

N/A



The Applicant has been cautioned as to the following:

15.21: Information to the User

The user's manual or instruction manual for an intentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

15.27(a): Special Accessories

Equipment marketed to a consumer must be capable of complying with the necessary regulations in the configuration in which the equipment is marketed. Where special accessories, such as shielded cables and/or special connectors are required to enable an unintentional or intentional radiator to comply with the emission limits in this part, the equipment must be marketed with, i.e. shipped and sold with, those special accessories. However, in lieu of shipping or packaging the special accessories with the unintentional or intentional radiator, the responsible party may employ other methods of ensuring that the special accessories are provided to the consumer, without an additional charge.

Information detailing any alternative method used to supply the special accessories for a grant of equipment authorization or retained in the verification records, as appropriate. The party responsible for the equipment, as detailed in § 2.909 of this chapter, shall ensure that these special accessories are provided with the equipment. The instruction manual for such devices shall include appropriate instructions on the first page of text concerned with the installation of the device that these special accessories must be used with the device. It is the responsibility of the user to use the needed special accessories supplied with the equipment.



Test and Measurement Data

All tests and measurement data shown were performed in accordance with FCC Rules and Regulations, Volume II, Part 2, Subpart J, Sections 2.947, 2.1033(c), 2.1041, 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057, and the following individual Parts 90.

Standard Test Conditions and Engineering Practices

Except as noted herein, the following conditions and procedures were observed during the testing.

In accordance with ANSI/TIA 603C, and unless otherwise indicated in the specific measurement results, the ambient temperature of the actual EUT was maintained within the range of 10° to 40°C (50° to 104°F) unless the particular equipment requirements specify testing over a different temperature range. Also, unless otherwise indicated, the humidity levels were in the range of 10% to 90% relative humidity.

Environmental Conditions		
Temp (°C)	Humidity (%)	Pressure (mbar)
24.6 – 26.4	22.4 – 27.9	959.5 – 968.2

Measurement results, unless otherwise noted, are worst-case measurements.

EUT Description

Model: NX-5400-K2, NX-5400-K3, NX-5400-F2, NX-5400-F3

Description: 700/800MHz P25 TRANSCEIVER with Bluetooth

Additional Information: The EUT is a push to talk occupational radio

EUT Operation during Tests

The EUT was in a normal operating condition for testing. Both a radiated and conducted sample were provided.

Accessories: None

Cables: None

Modifications: None



Test Result Summary

Specification	Test Name	Pass, Fail, N/A	Comments
2.1046	Carrier Output Power (Conducted)	Pass	
2.1051	Unwanted Emissions (Transmitter Conducted)	Pass	
2.1053	Field Strength of Spurious Radiation	Pass	
90.210, 2.1049 90.691	Emission Masks (Occupied Bandwidth)	Pass	
2.1047	Audio Low Pass Filter (Voice Input)	Pass	
2.1047	Audio Frequency Response	Pass	
2.1047(a)	Modulation Limiting	Pass	
90.213	Frequency Stability (Temperature Variation)	Pass	
90.213	Frequency Stability (Voltage Variation)	Pass	
90.214	Transient Frequency Behavior	N/A	EUT transmits in the 700 and 800 MHz band
90.543	Emission Limitations	Pass	
2.202	Necessary Bandwidth Calculation	Pass	



Carrier Output Power (Conducted)

Name of Test: Carrier Output Power (Conducted)
Test Equipment Utilized: i00379

Engineer: Alex Macon
Test Date: 6/6/14

Measurement Procedure

The Equipment Under Test (EUT) was connected to a spectrum analyzer through a 30 dB Power attenuator. All cable and attenuator losses were input into the spectrum analyzer as a reference level offset to ensure accurate readings were obtained.

Test Setup



High Power Transmitter Peak Output Power

Tuned Frequency (MHz)	Recorded Measurement (dBm)	Result
769.05	34.79	Pass
774.95	34.80	Pass
799.05	34.83	Pass
804.95	34.81	Pass
806.05	34.82	Pass
815.05	34.83	Pass
823.95	34.83	Pass
851.05	34.83	Pass
860.05	34.80	Pass
868.95	34.81	Pass



Conducted Spurious Emissions

Name of Test:

Conducted Spurious Emissions

Engineer: Alex Macon

Test Equipment Utilized:


i00379

Test Date: 6/10/14

Test Procedure

The EUT was connected directly to a spectrum analyzer to verify that the UUT met the requirements for spurious emissions. A tunable notch filter was utilized to ensure the fundamental did not put the spectrum analyzer into compression. The resolution bandwidth set for 1 MHz and the reference level was adjusted to ensure the system had sufficient dynamic range to measure spurious emissions. The frequency range from 30 MHz to the 10th harmonic of the fundamental transmitter was observed and plotted. The limit line was set for -25 dBm for comparison to RSS-119 which is the more stringent limit.

Test Setup

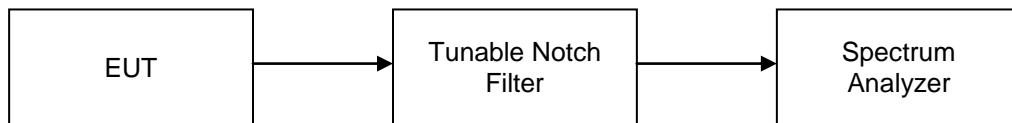


High Power Conducted Spurious Emissions Summary Test Table

Tuned Frequency (MHz)	Spurious Frequency (GHz)	Measured Spurious Level (dBm)	Specification Limit (dBm)	Result
769.05	2.98	-38.69	-25	Pass
774.95	2.98	-39.82	-25	Pass
799.05	2.98	-40.21	-25	Pass
804.95	2.97	-39.41	-25	Pass
806.05	2.99	-39.87	-25	Pass
815.05	2.97	-40.00	-25	Pass
823.95	2.98	-39.68	-25	Pass
851.05	2.99	-39.67	-25	Pass
860.05	2.90	-38.09	-25	Pass
868.95	2.79	-40.51	-25	Pass




769.05 MHz

30 MHz – 1000 MHz

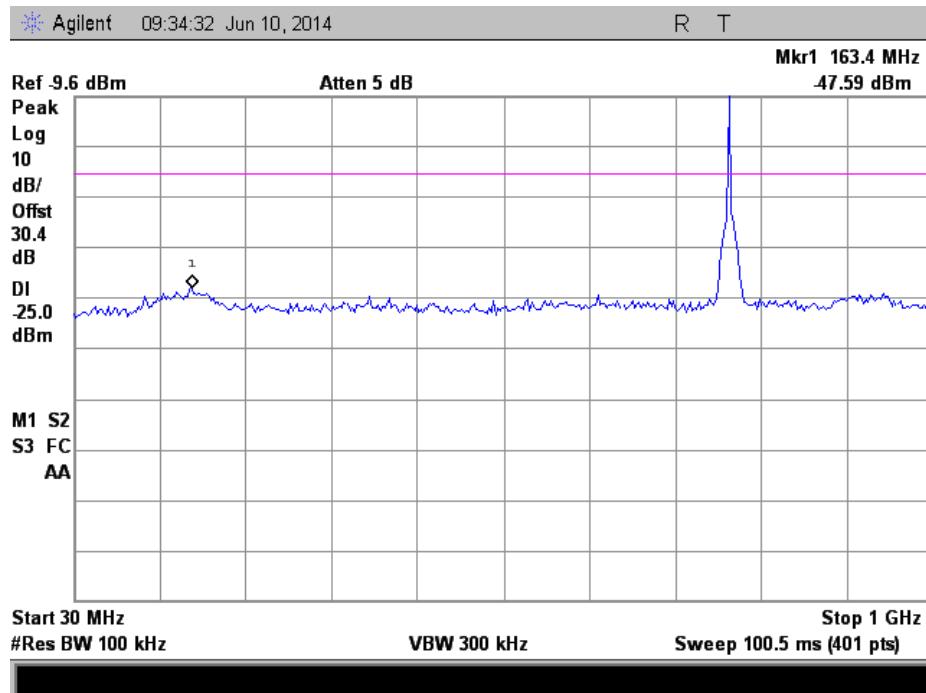


1 – 5 GHz

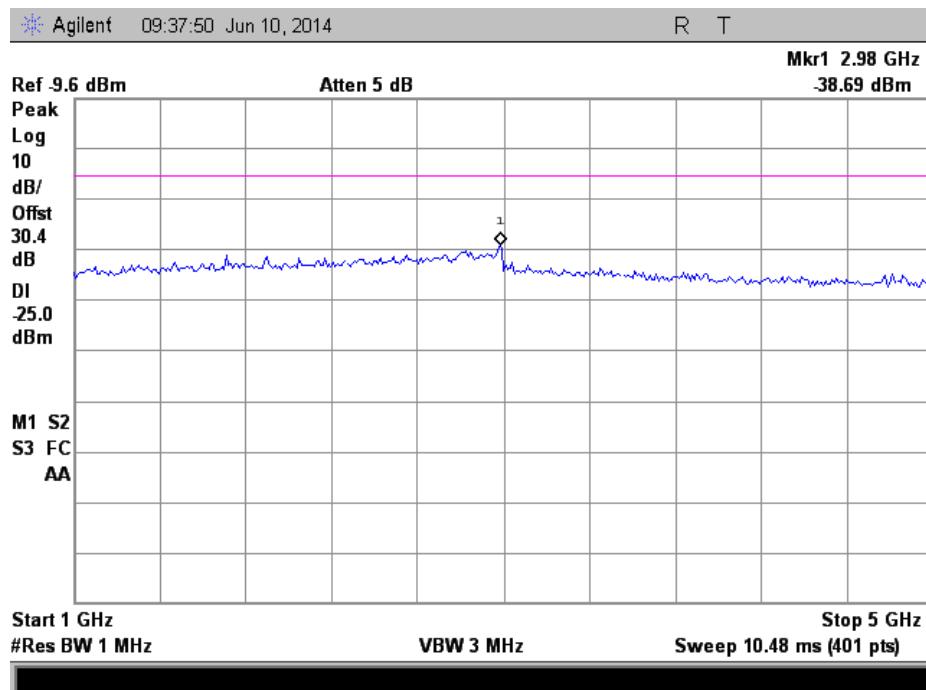




5 – 8.7 GHz

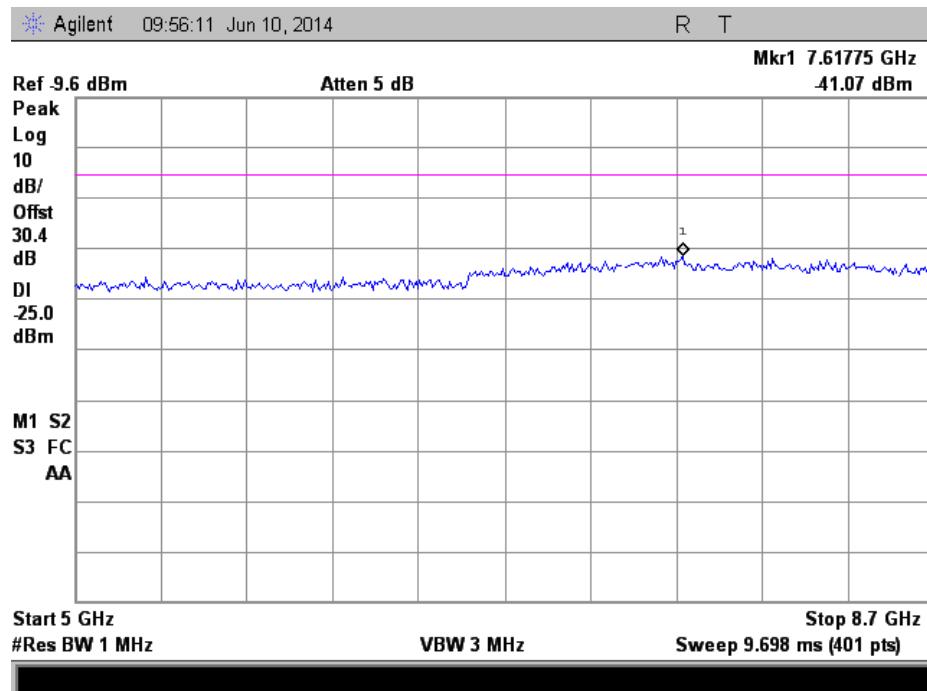




774.95 MHz

30 – 1000 MHz

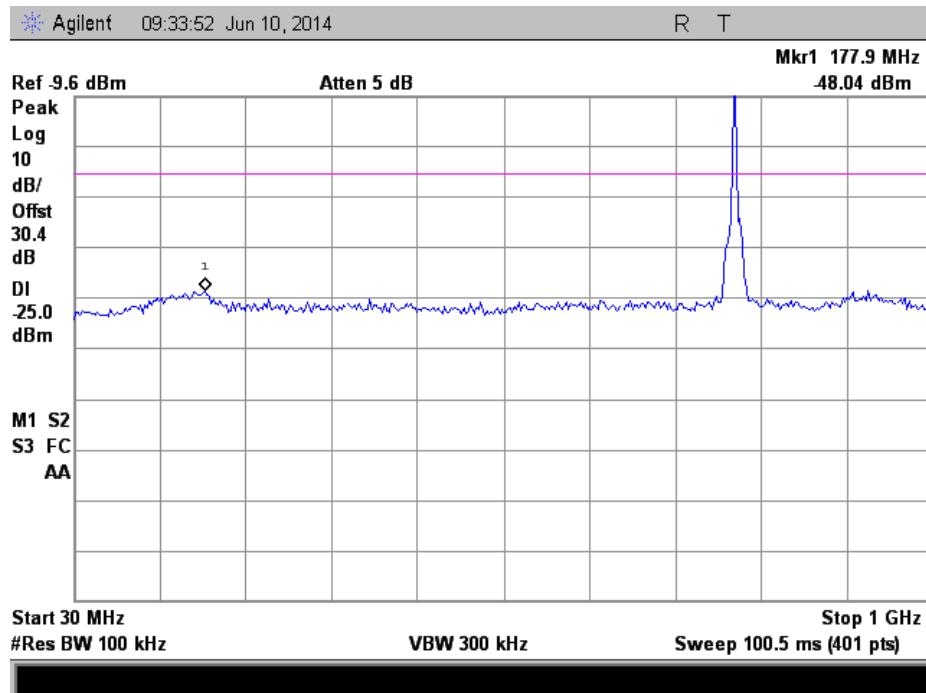


1 – 5 GHz

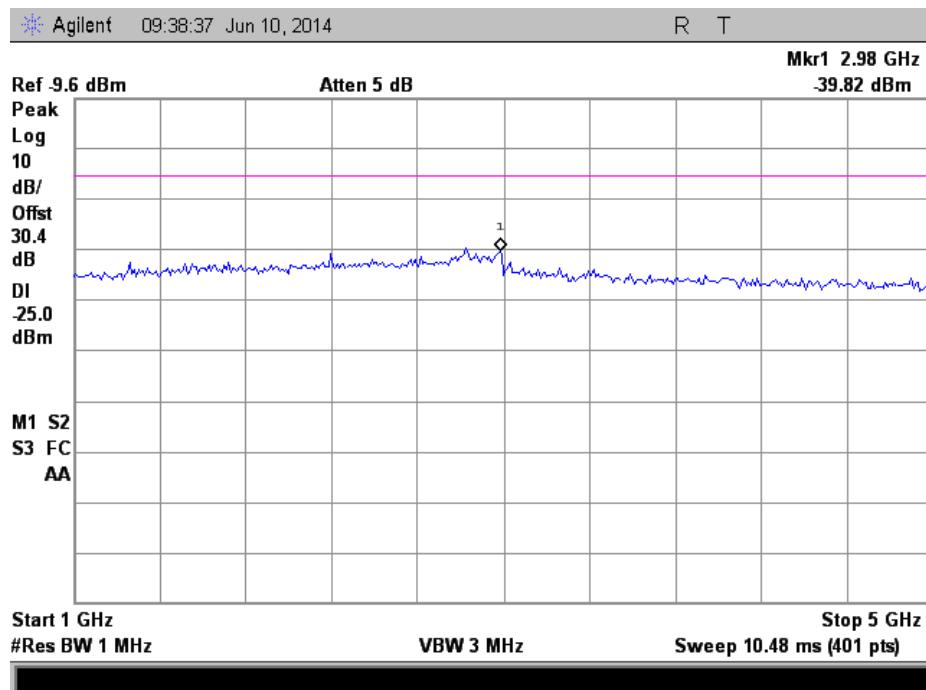




5 – 8.7 GHz

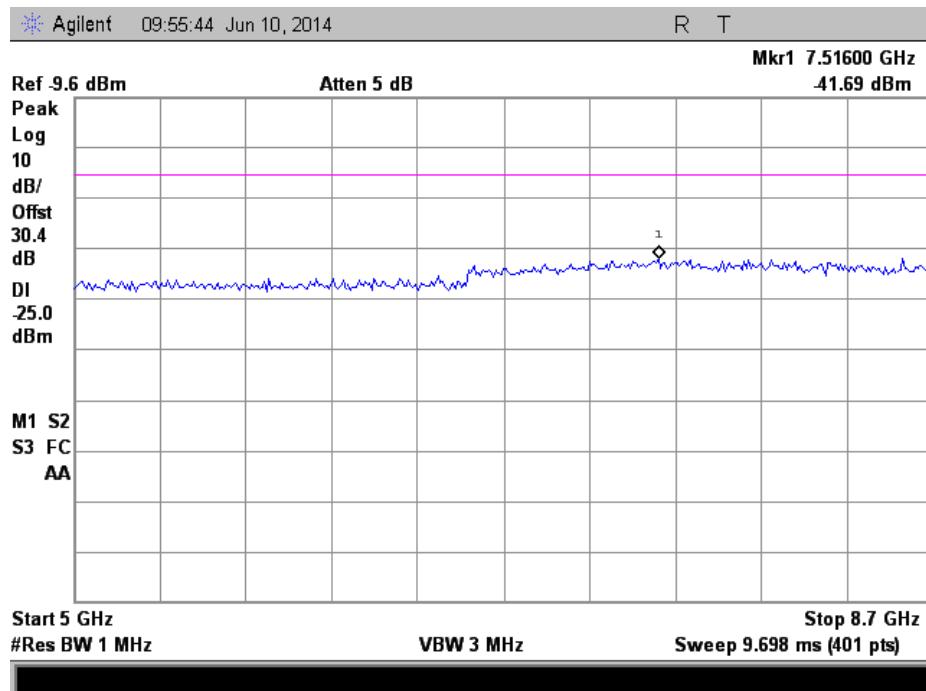




799.05 MHz

30 – 1000 MHz

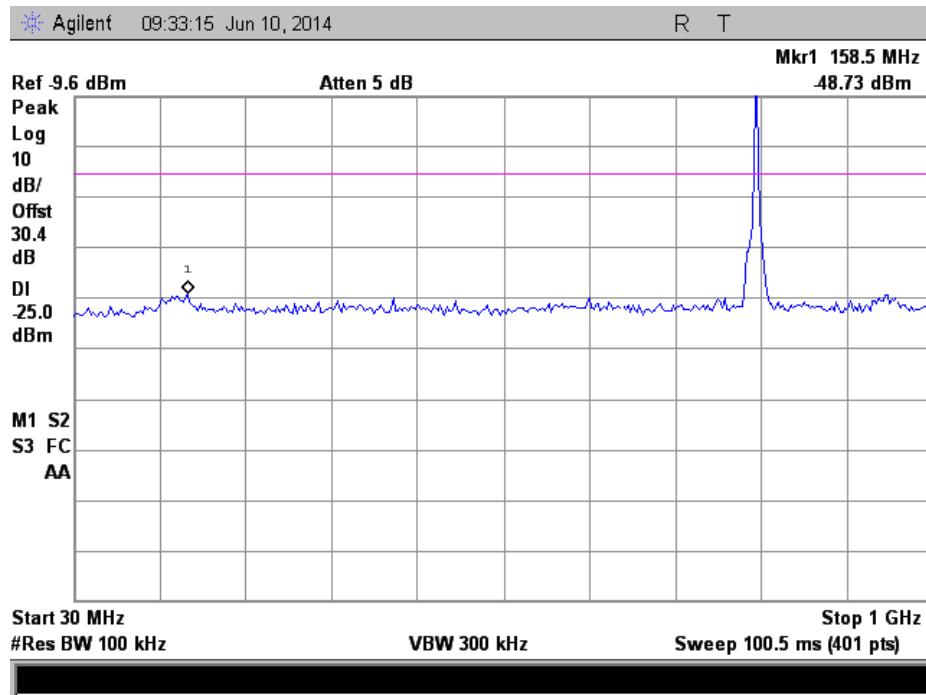


1 – 5 GHz

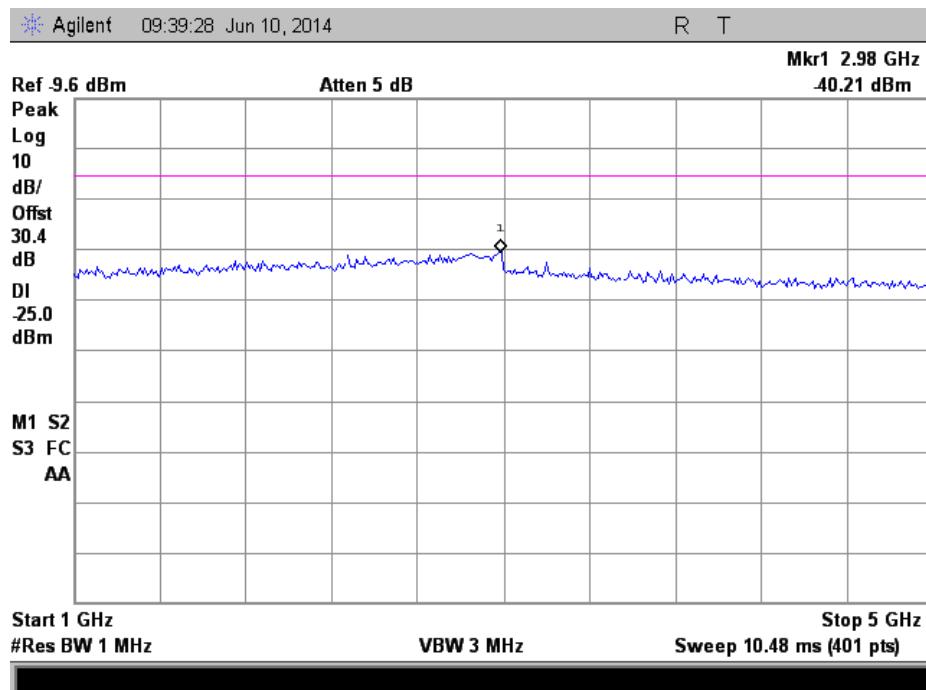




5 – 8.7 GHz

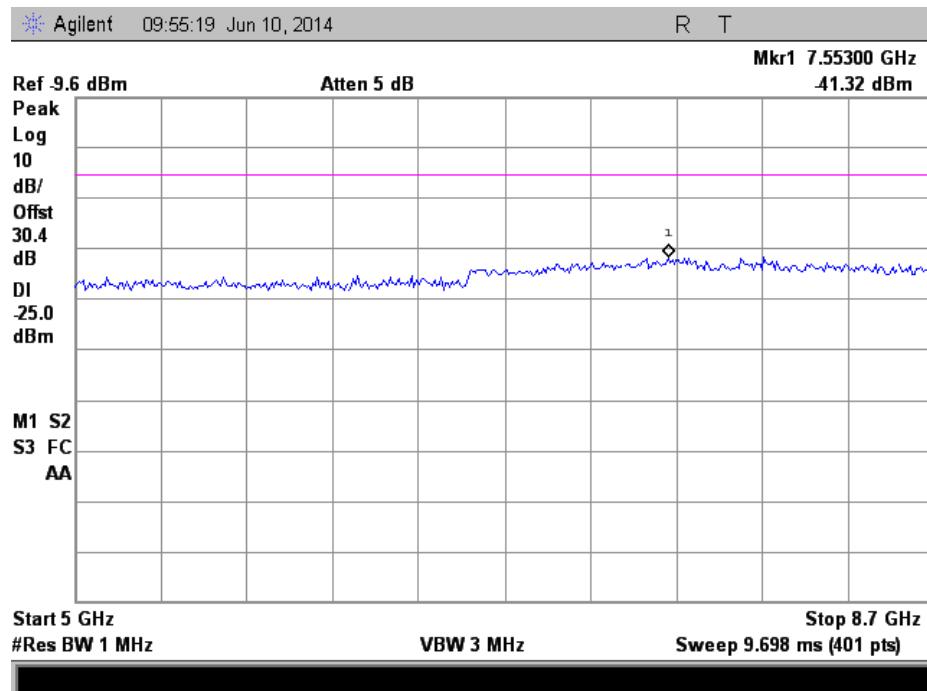




804.95 MHz

30 – 1000 MHz

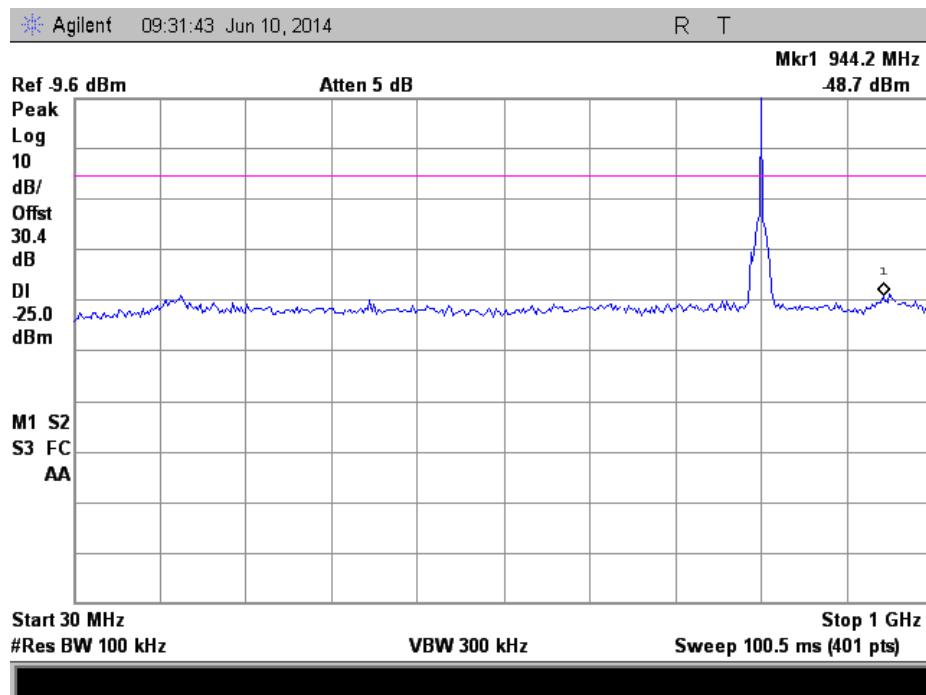


1 – 5 GHz

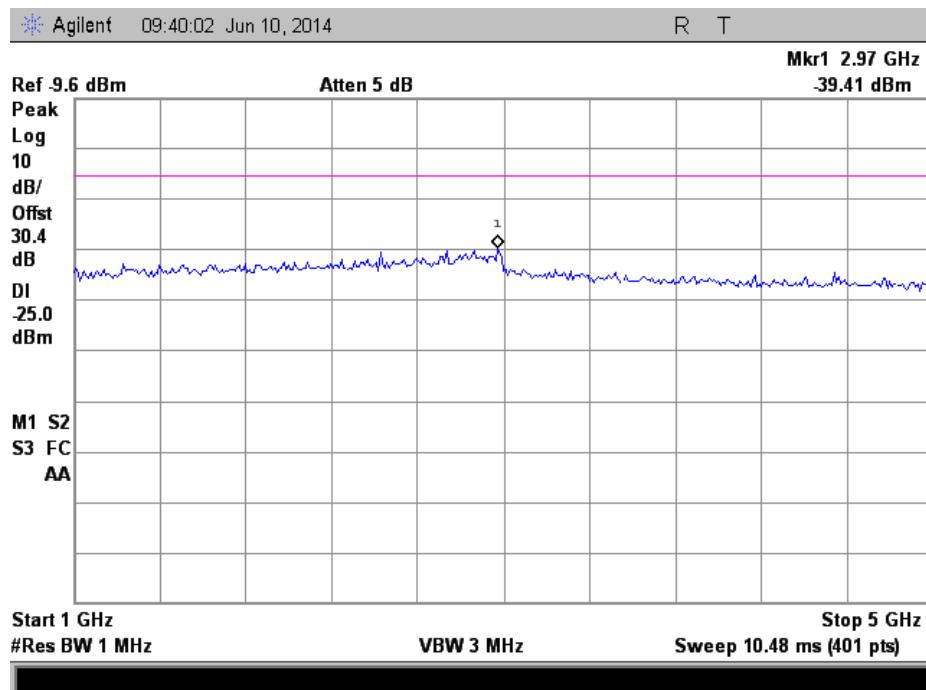




5 – 8.7 GHz

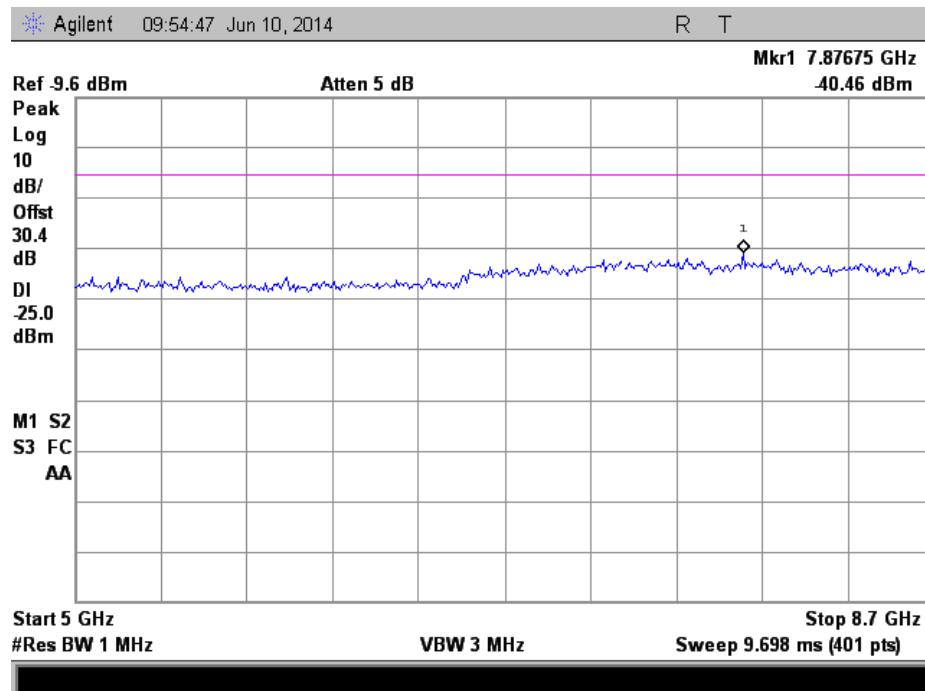




806.05 MHz

30 – 1000 MHz

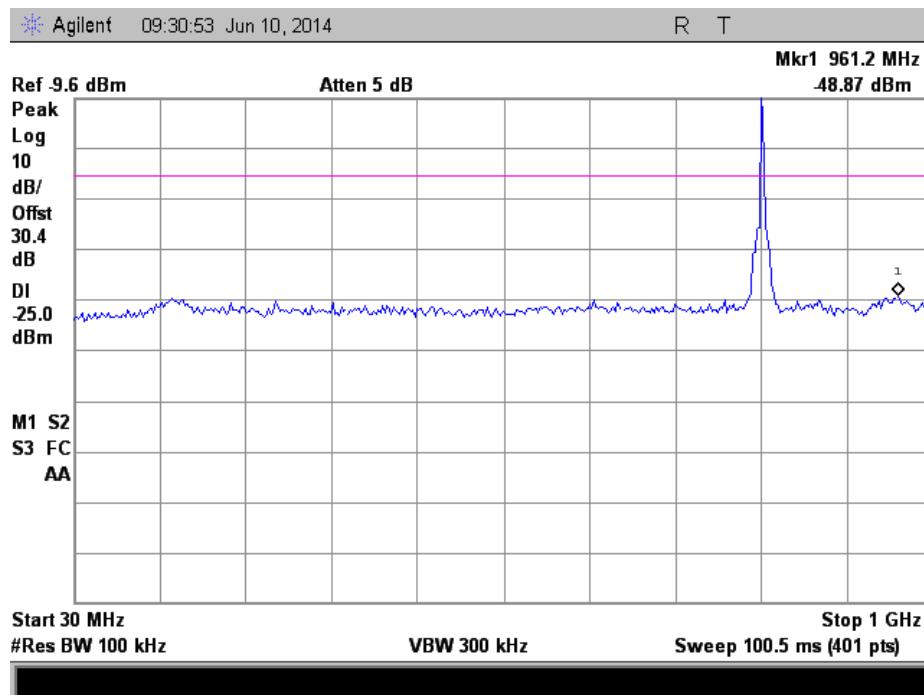


1 – 5 GHz

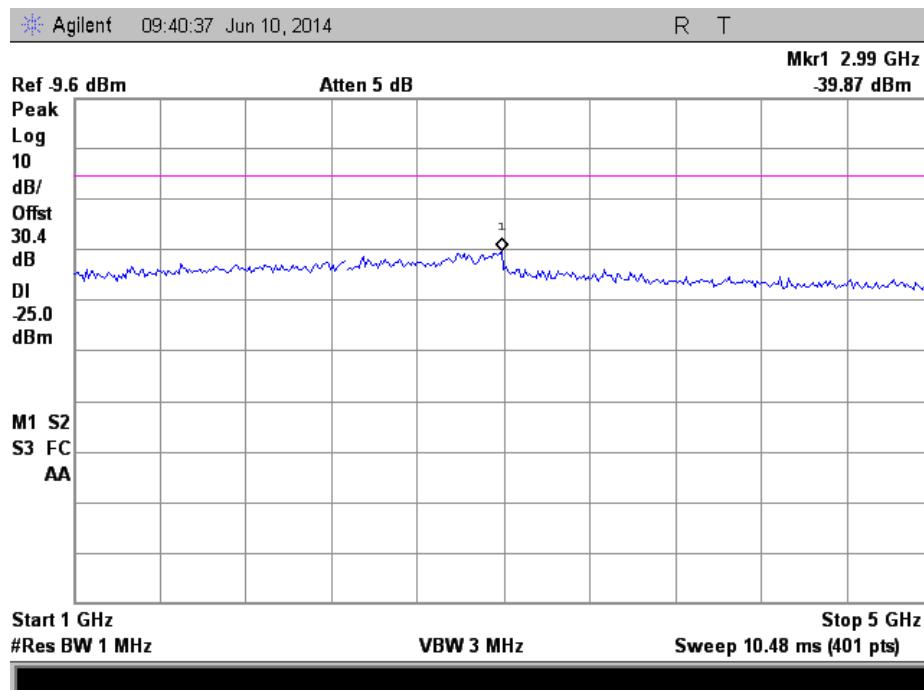




5 – 8.7 GHz

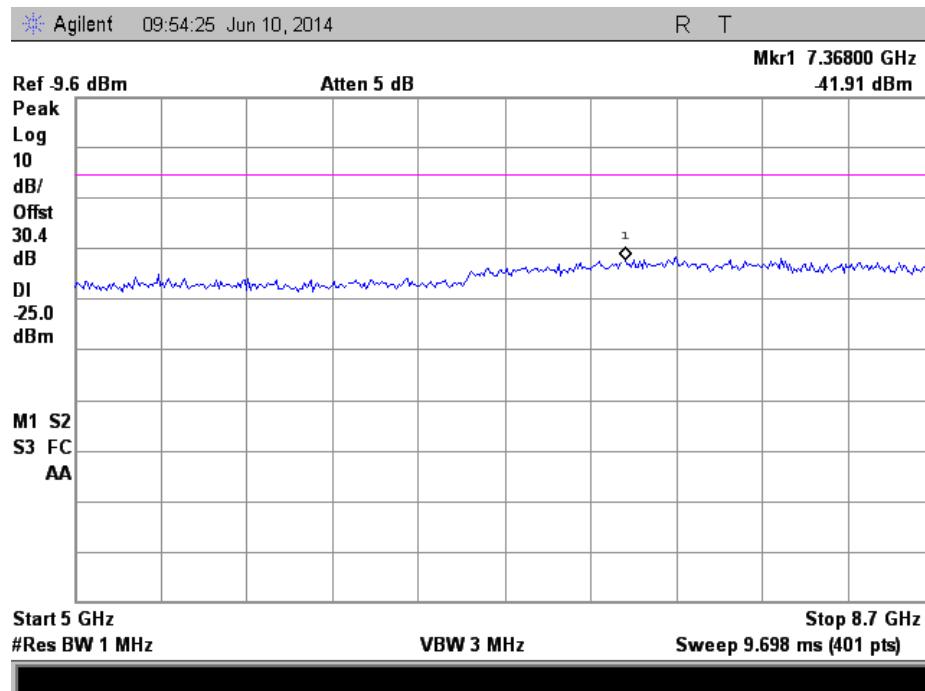




815.05 MHz

30 – 1000 MHz

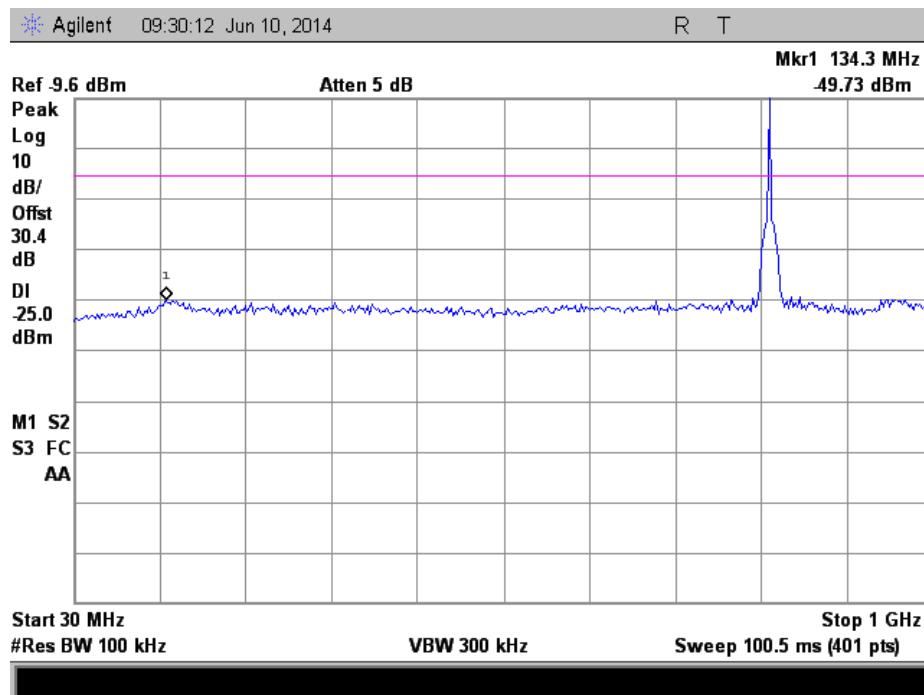


1 – 5 GHz

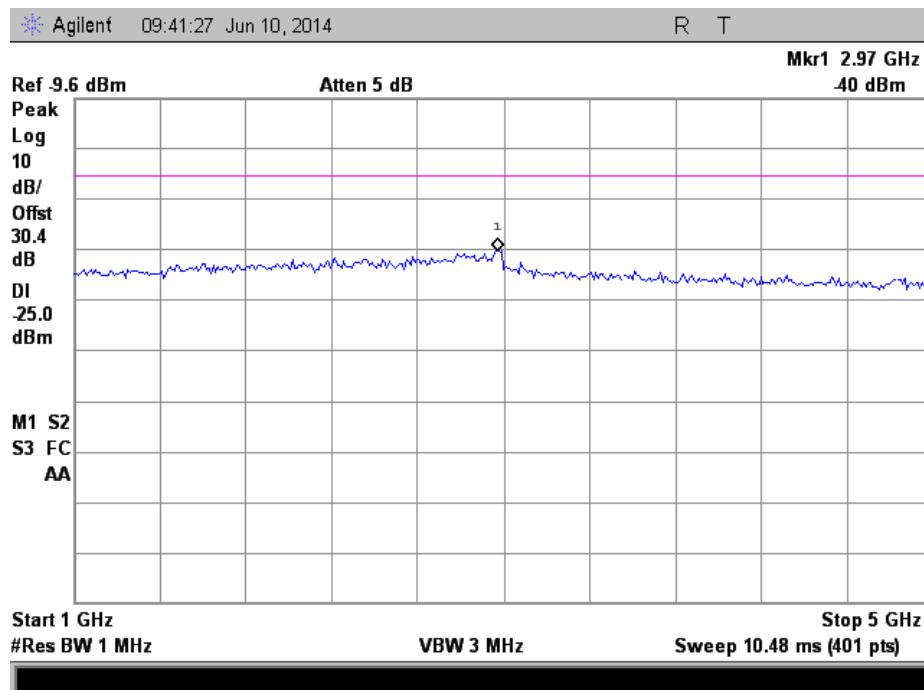




5 – 8.7 GHz

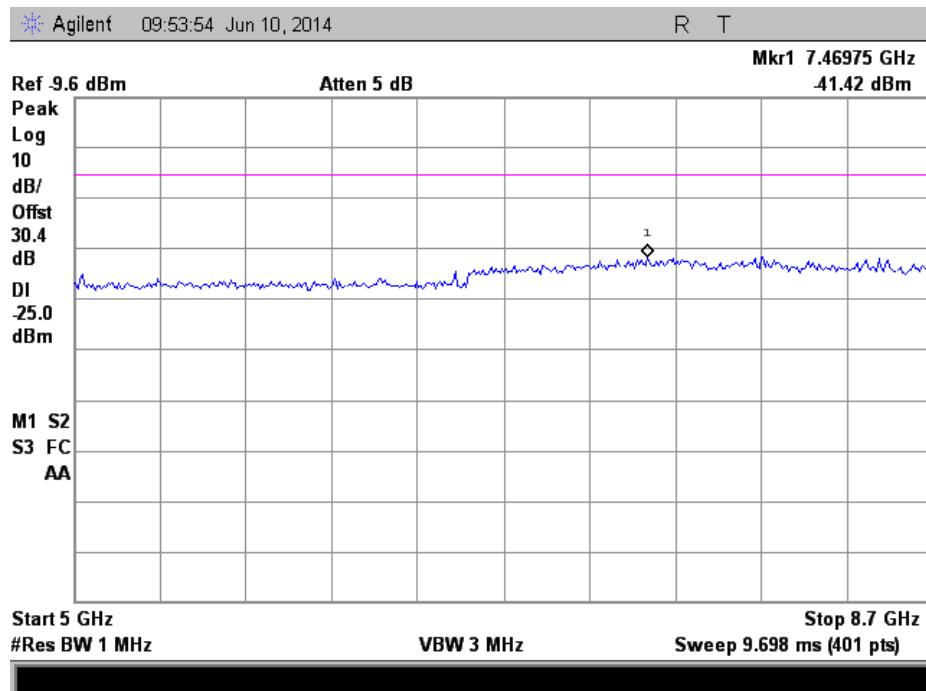




823.95 MHz

30 – 1000 MHz

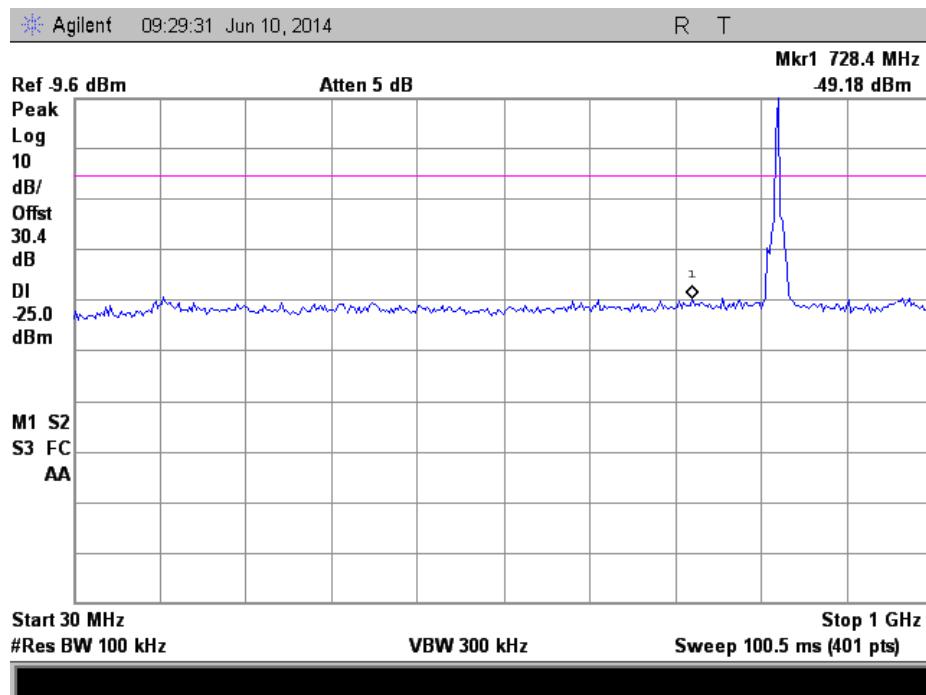


1 – 5 GHz

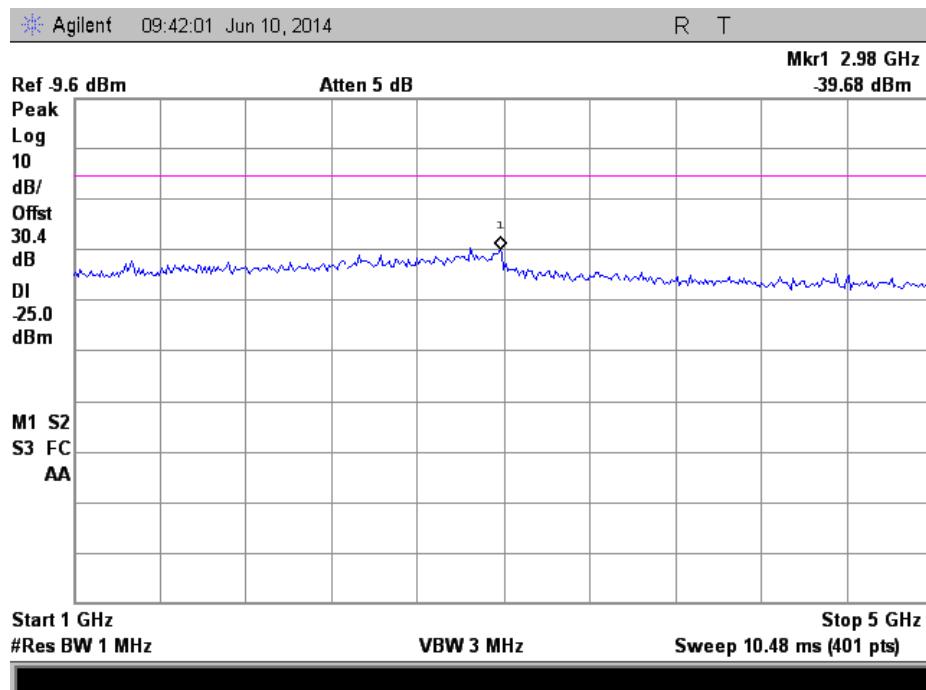




5 – 8.7 GHz

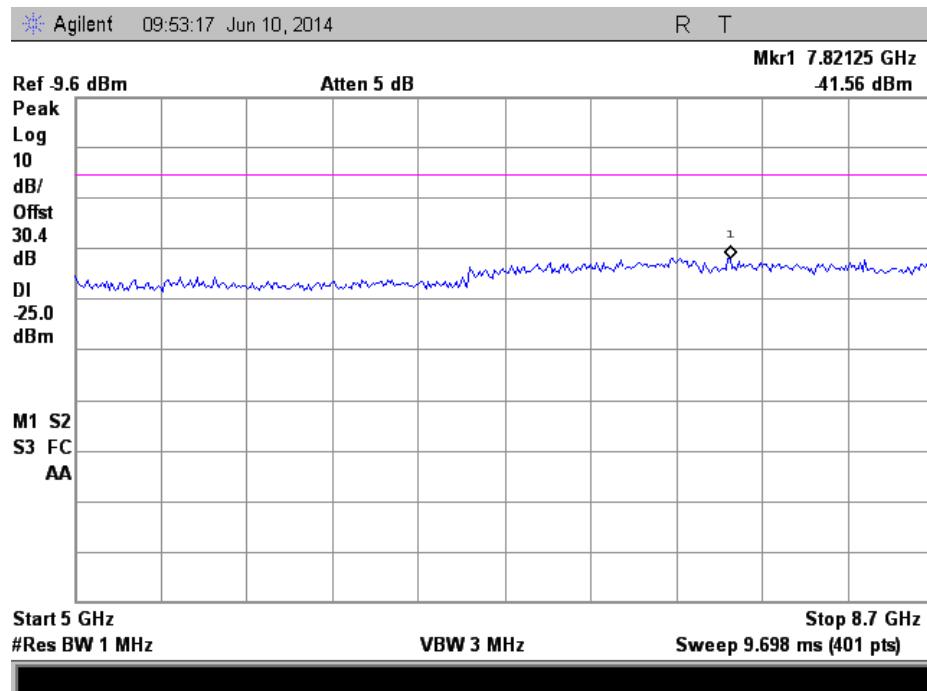




851.05 MHz

30 – 1000 MHz

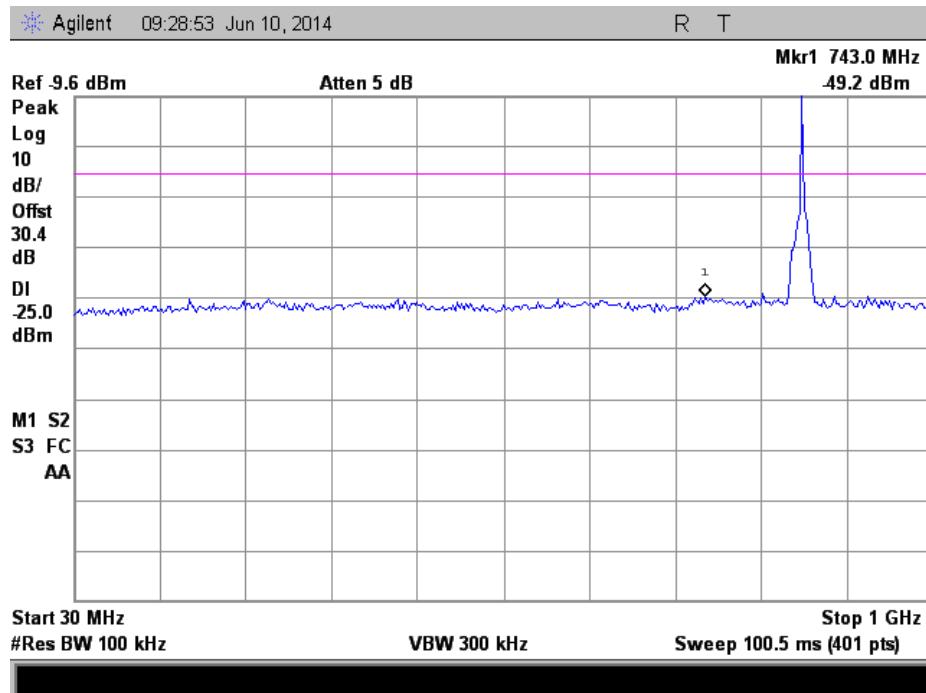


1 – 5 GHz

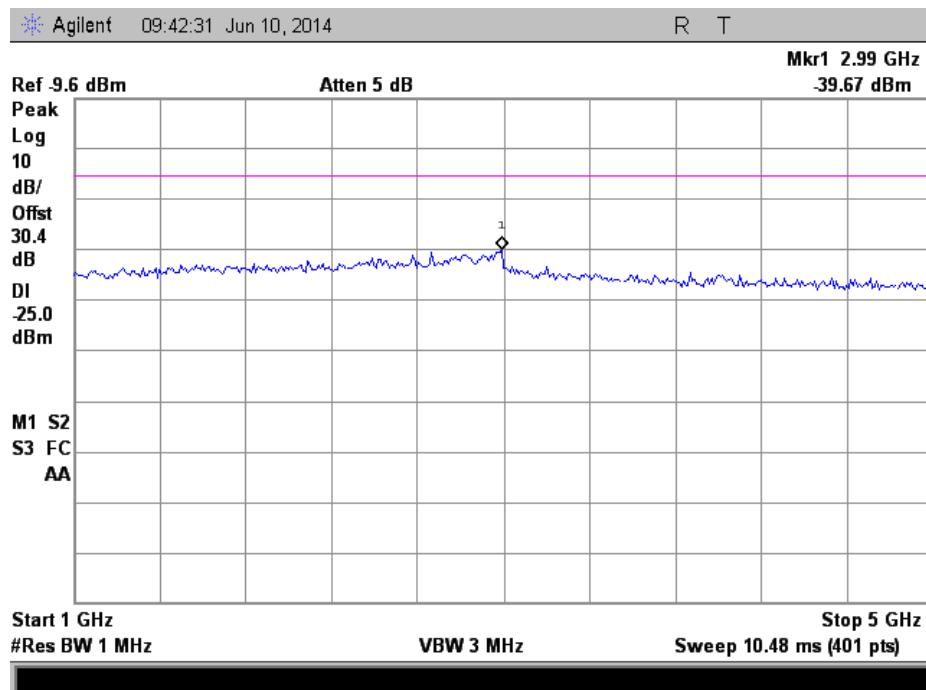




5 – 8.7 GHz

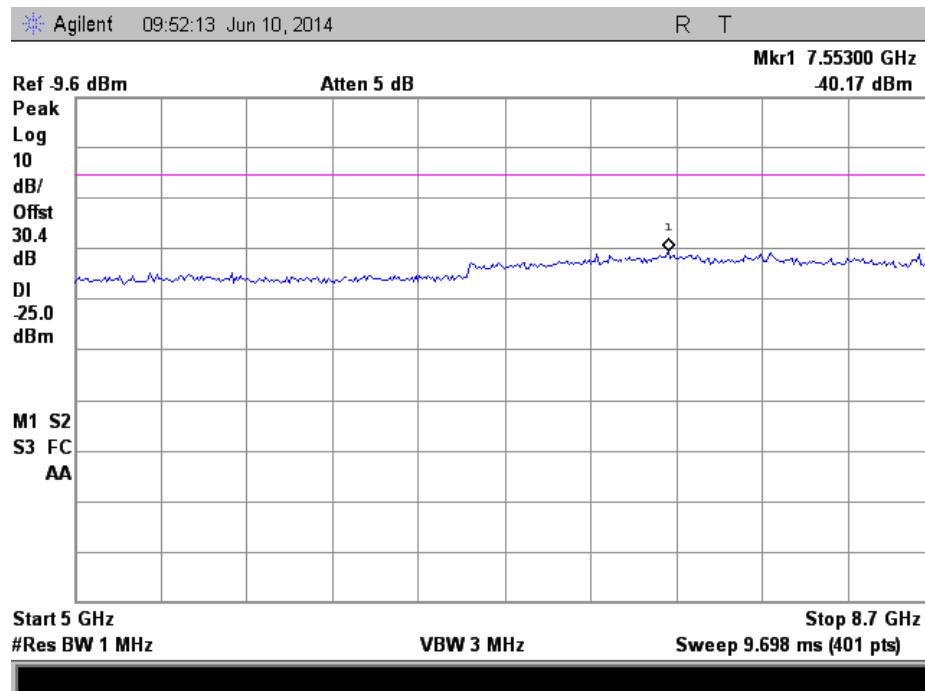




860.05 MHz

30 – 1000 MHz

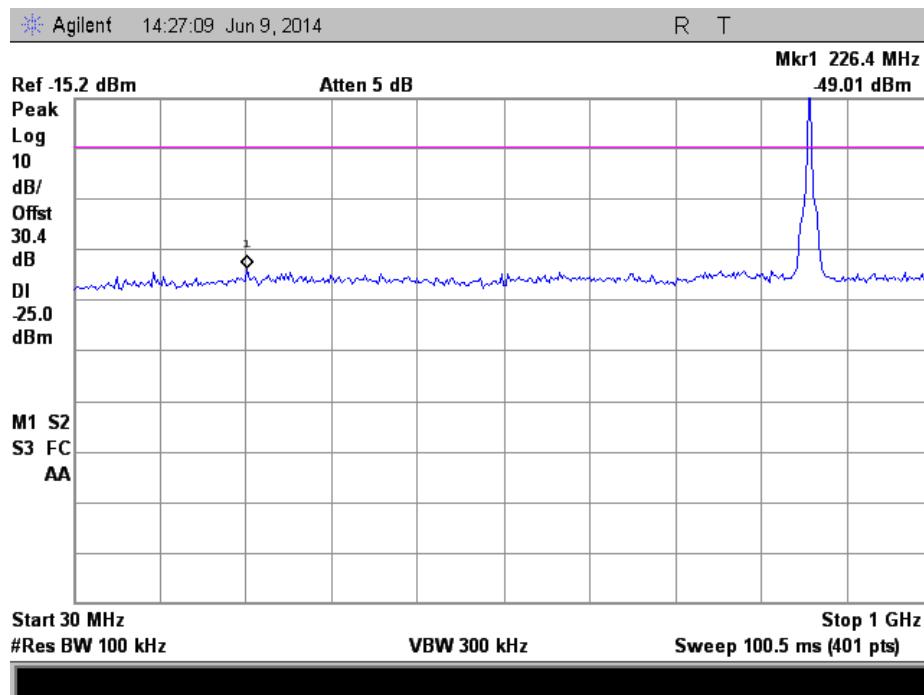


1 – 5 GHz

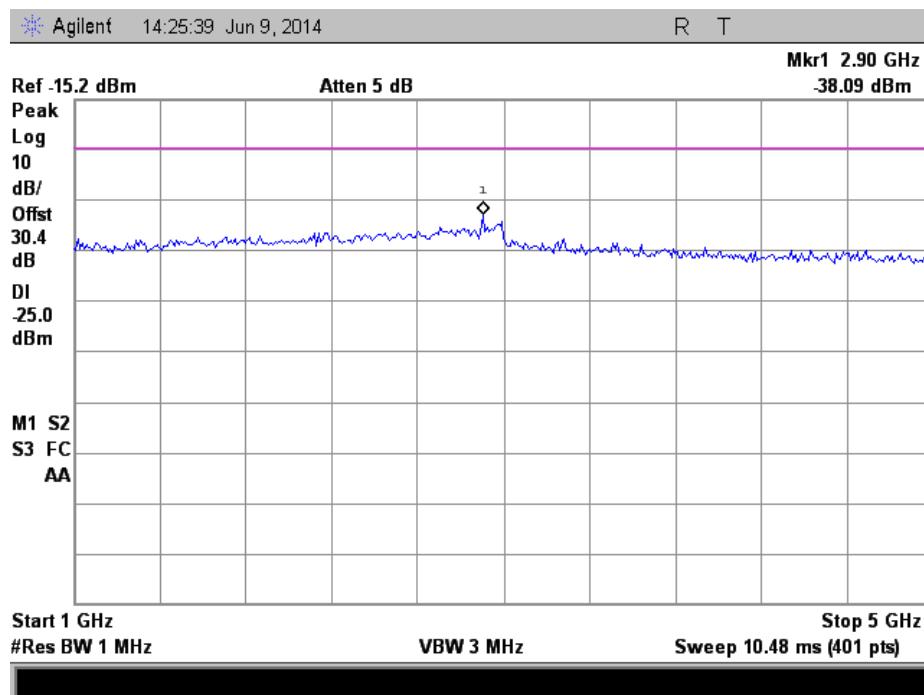




5 – 8.7 GHz

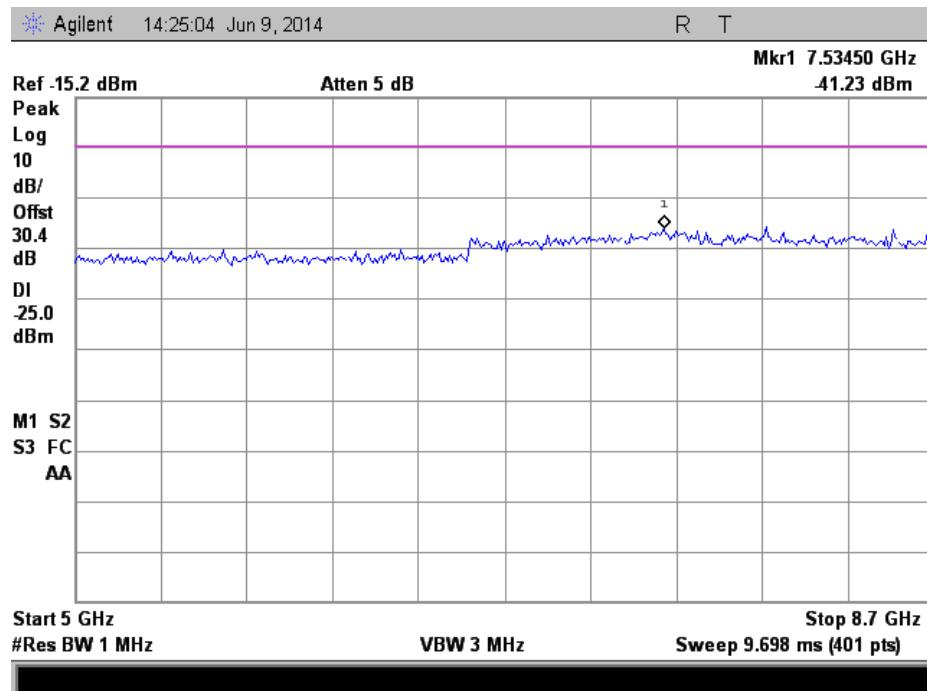




868.95 MHz

30 – 1000 MHz

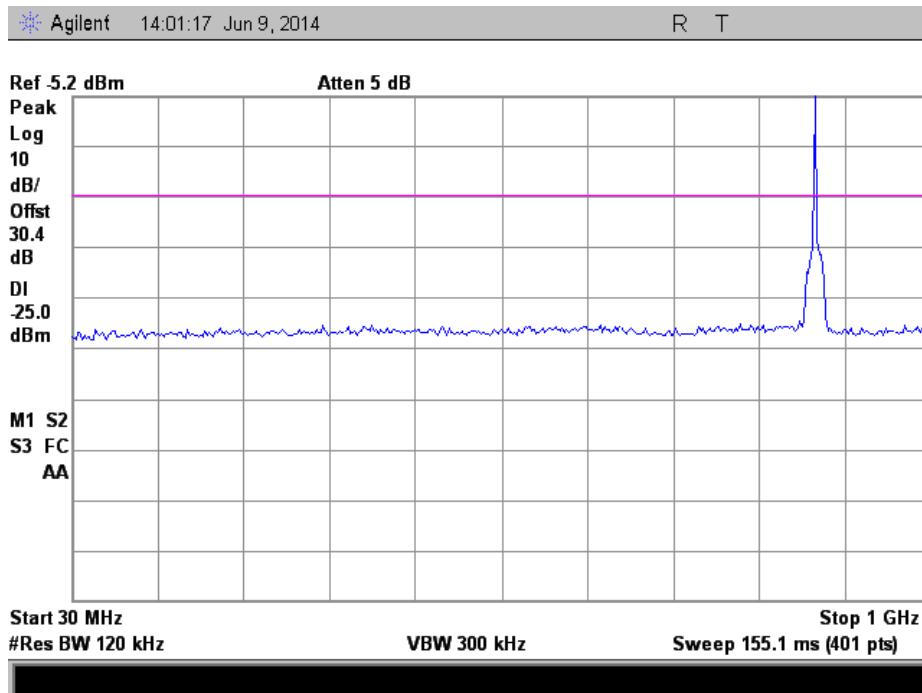


1 – 5 GHz

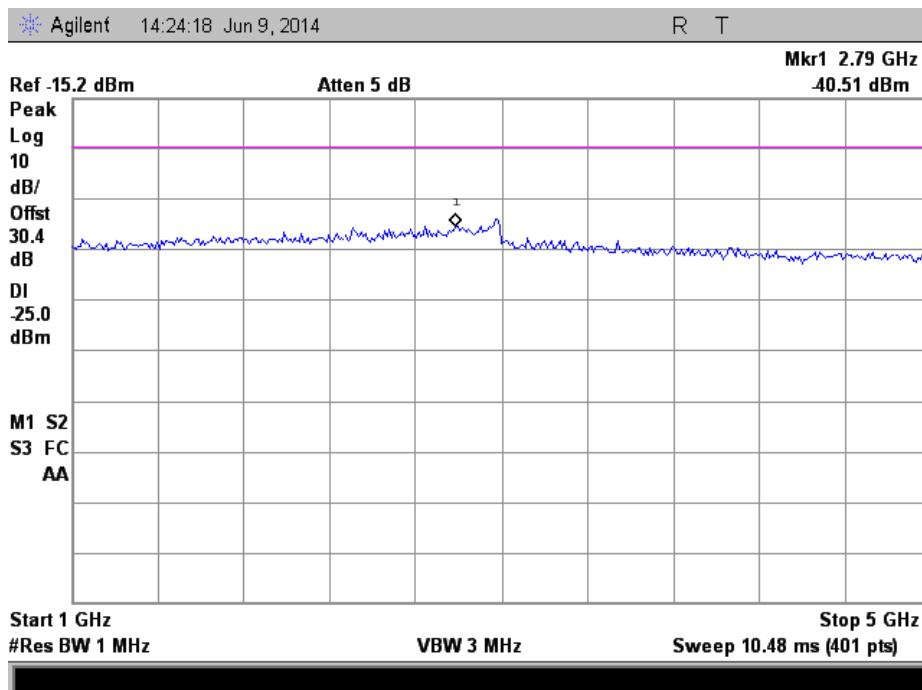



5 – 8.7 GHz

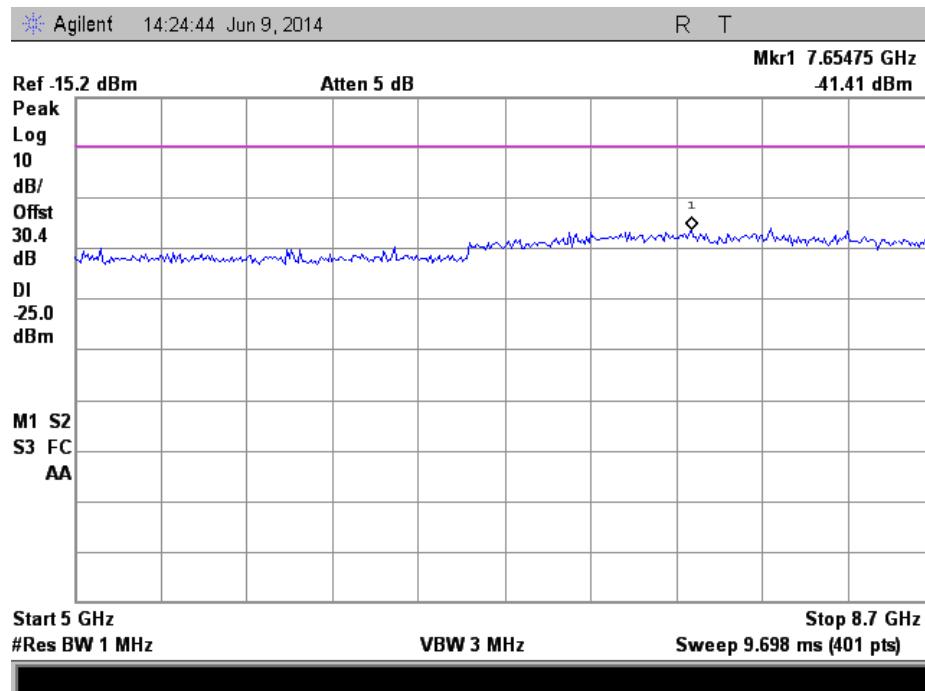



Field Strength of Spurious Radiation

Name of Test:

Field Strength of Spurious Radiation

Test Equipment Utilized:

i00271, i00349 i00379

Engineer: Alex Macon

Test Date: 6/11/14

Test Procedure



- A) Connect the equipment as illustrated below.
- B) Adjust the spectrum analyzer to the following settings:
 - 1) Resolution Bandwidth 100 kHz (< 1 GHZ), 1 MHZ (> 1GHz)
 - 2) Video Bandwidth \geq 3 times Resolution Bandwidth, or 30 kHz
 - 3) Sweep Speed \leq 2000 Hz/second
 - 4) Detector Mode = Mean or Average Power
- C) Place the transmitter to be tested on the turntable in the standard test site. The transmitter is transmitting into a non- radiating load that is placed on the turntable. The RF cable to this load should be of minimum length.
- D) For each spurious measurement the test antenna should be adjusted to the correct length for the frequency involved. This length may be determined from a calibration ruler supplied with the equipment. Measurements shall be made from the lowest radio frequency generated in the equipment to the tenth harmonic of the carrier, except for the region close to the carrier equal to \pm the test bandwidth (see Section 1.3.4.4).
- E) For each spurious frequency, raise and lower the test antenna from 1 m to 4 m to obtain a maximum reading on the spectrum analyzer with the test antenna at horizontal polarity. Repeat this procedure to obtain the highest possible reading. Record this maximum reading.
- F) Repeat Step E) for each spurious frequency with the test antenna polarized vertically.
- G) Reconnect the equipment as illustrated.
- H) Keep the spectrum analyzer adjusted as in Step B).
- I) Remove the transmitter and replace it with a substitution antenna (the antenna should be half wavelength for each frequency involved). The center of the substitution antenna should be approximately at the same location as the center of the transmitter. At lower frequencies, where the substitution antenna is very long, this will be impossible to achieve when the antenna is polarized vertically. In such case the lower end of the antenna should be 0.3 m above the ground.
- J) Feed the substitution antenna at the transmitter end with a signal generator connected to the antenna by means of a non-radiating cable. With the antennas at both ends horizontally polarized and with the signal generator tuned to a particular spurious frequency, raise and lower the test antenna to obtain a maximum reading at the spectrum analyzer. Adjust the level of the signal generator output until the previously recorded maximum reading for this set of conditions is obtained. This should be done carefully repeating the adjustment of the test antenna and generator output.
- K) Repeat Step J) with both antennas vertically polarized for each spurious frequency.
- L) Calculate power in dBm into a reference ideal half-wave dipole antenna by reducing the readings obtained in Steps J) and K) by the power loss in the cable between the generator and the antenna and further corrected for the gain of the substitution antenna used relative to an ideal half-wave dipole antenna.
- M) The levels recorded in Step L) are absolute levels of radiated spurious emissions in dBm. The radiated spurious emissions in dB can be calculated by the following:

Radiated spurious emissions dB = $10\log_{10}$ (TX power in watts/0.001) – the levels in Step I)

NOTE: It is permissible that the other antennas provided can be referenced to a dipole.



Test Setup

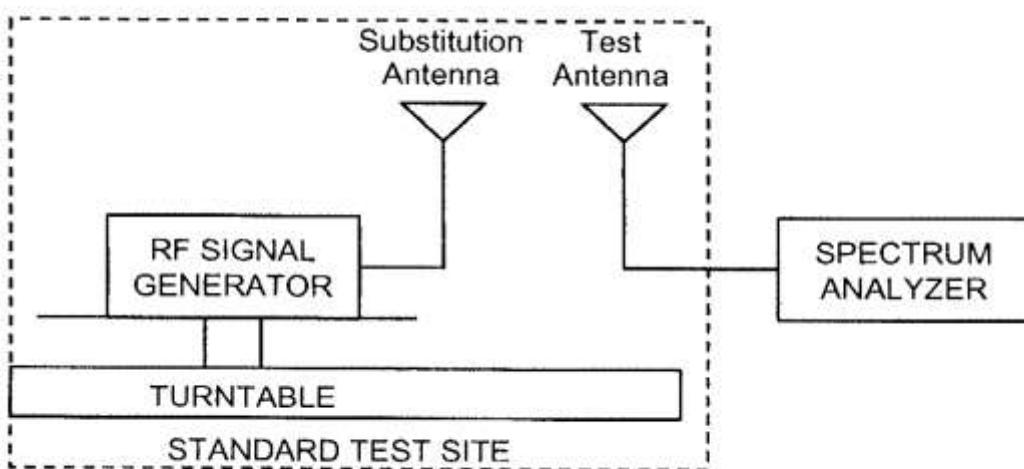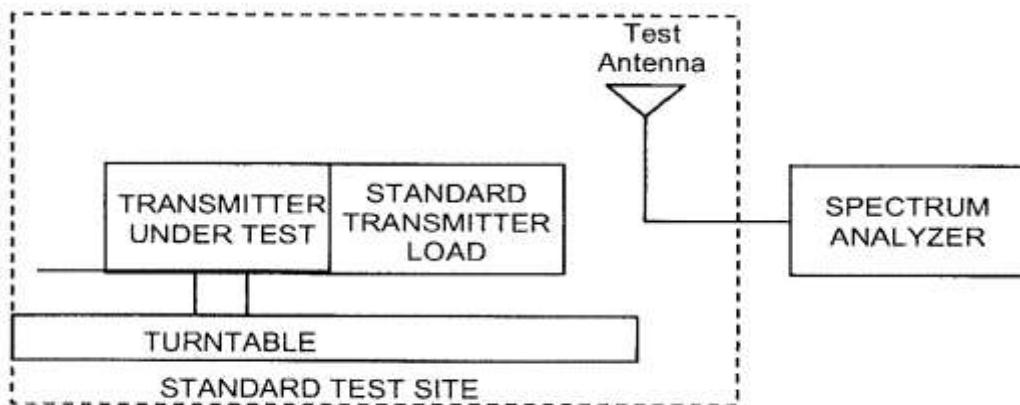



Test Results
769.05 MHz

Emission Frequency (GHz)	Measured Level (dBm)	Limit (dBm)	Result
1.538	-55.36	-25	Pass
2.307	-52.46	-25	Pass
3.076	-64.86	-25	Pass

774.95 Mhz

Emission Frequency (GHz)	Measured Level (dBm)	Limit (dBm)	Result
1.549	-57.69	-25	Pass
2.324	-48.75	-25	Pass
7.749	-59.72	-25	Pass

799.05 MHz

Emission Frequency (GHz)	Measured Level (dBm)	Limit (dBm)	Result
1.598	-60.50	-25	Pass
2.397	-48.88	-25	Pass
4.794	-63.63	-25	Pass

804.95 MHz

Emission Frequency (GHz)	Measured Level (dBm)	Limit (dBm)	Result
1.609	-60.24	-25	Pass
2.414	-47.6	-25	Pass
4.024	-59.38	-25	Pass

806.05 MHz

Emission Frequency (GHz)	Measured Level (dBm)	Limit (dBm)	Result
1.612	-50.71	-25	Pass
2.418	-42.66	-25	Pass
7.254	-43.09	-25	Pass

815.05 MHz

Emission Frequency (GHz)	Measured Level (dBm)	Limit (dBm)	Result
1.630	-51.17	-25	Pass
2.445	-43.25	-25	Pass
7.335	-43.28	-25	Pass



823.95 MHz

Emission Frequency (GHz)	Measured Level (dBm)	Limit (dBm)	Result
1.647	-51.51	-25	Pass
2.471	-46.94	-25	Pass
7.415	-49.65	-25	Pass

851.05 MHz

Emission Frequency (GHz)	Measured Level (dBm)	Limit (dBm)	Result
1.702	-44.89	-25	Pass
2.553	-51.82	-25	Pass
3.403	-58.13	-25	Pass

860.05 MHz

Emission Frequency (GHz)	Measured Level (dBm)	Limit (dBm)	Result
1.720	-44.73	-25	Pass
2.580	-53.82	-25	Pass
3.440	-58.35	-25	Pass

868.95 MHz

Emission Frequency (GHz)	Measured Level (dBm)	Limit (dBm)	Result
1.737	-46.61	-25	Pass
2.606	-54.78	-25	Pass
3.475	-58.48	-25	Pass

*The limit was set for -25 dBm for comparison to RSS-119 which is the more stringent limit.
No other emissions were detected. All emissions were less than -25 dBm.



Emission Masks (Occupied Bandwidth)

Name of Test:
Test Equipment Utilized


Emission Masks (Occupied Bandwidth)
i00118, i00379

Engineer: Alex Macon
Test Date: 6/9/14

Measurement Procedure

The EUT was connected directly to a spectrum analyzer to verify that the EUT meets the required emissions mask. A reference level plot is provided to verify that the peak power was established prior to testing the mask. A modulation frequency of 2.5 kHz at a level of 100 mVPP was input into the EUT. In order to show compliance to the EA system rules, the masks include the provisions of 90.691.


Test Setup

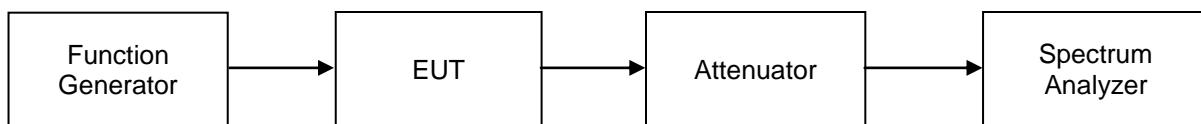




804.95 MHz

Reference

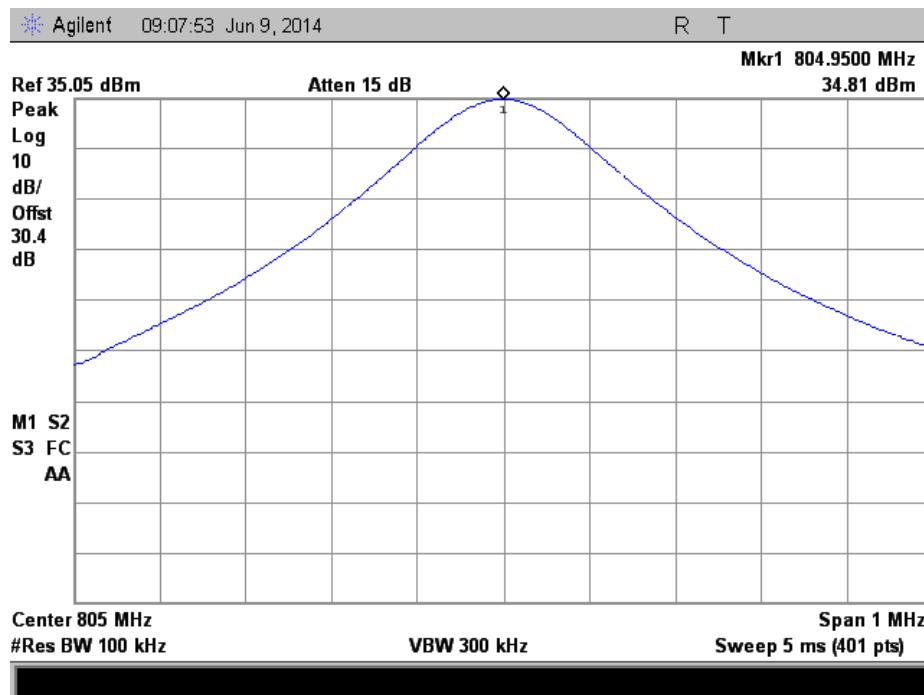


Mask B – 6.25k

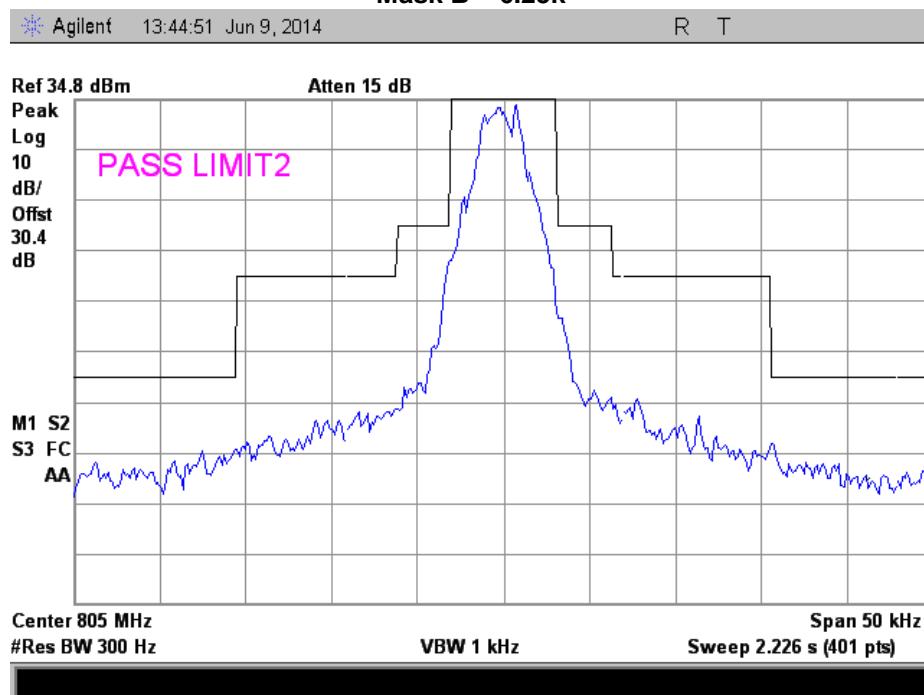




Mask B – 12.5k

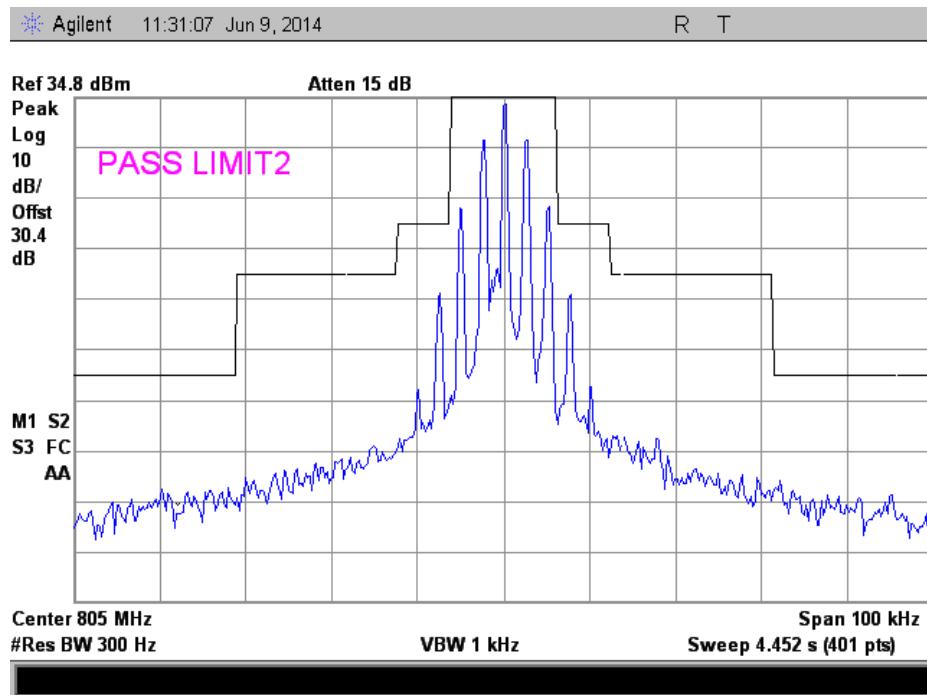


Mask B - 25k

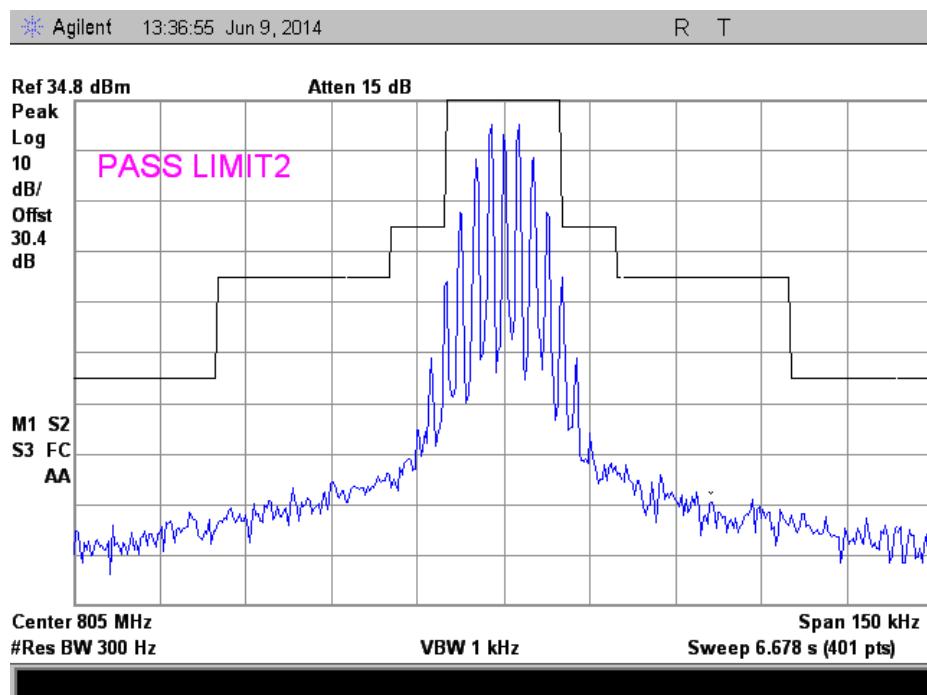




806.05 MHz

Reference

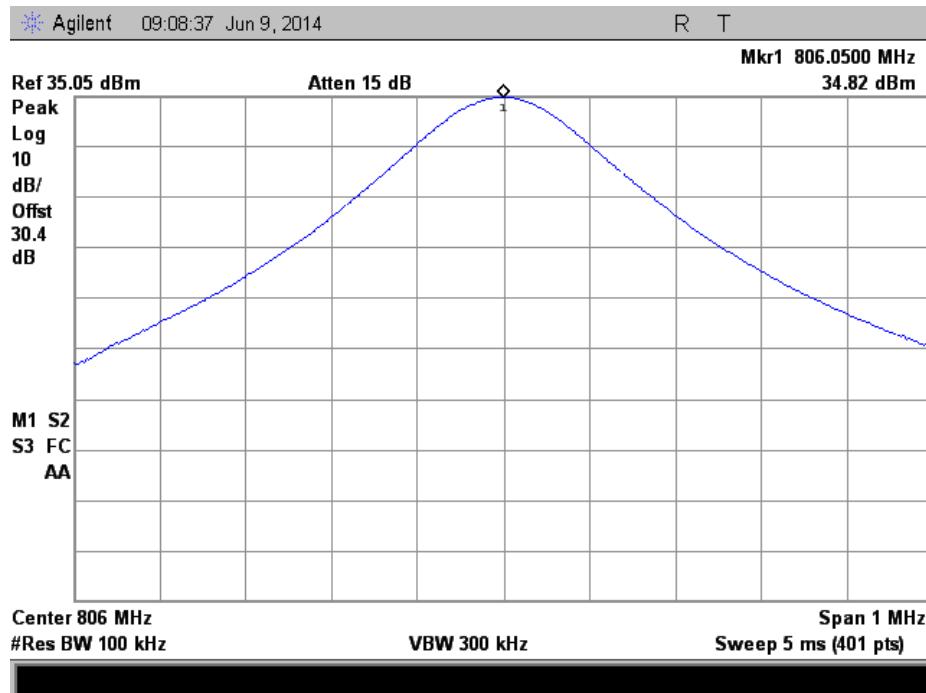


Mask B – 6.25kHz

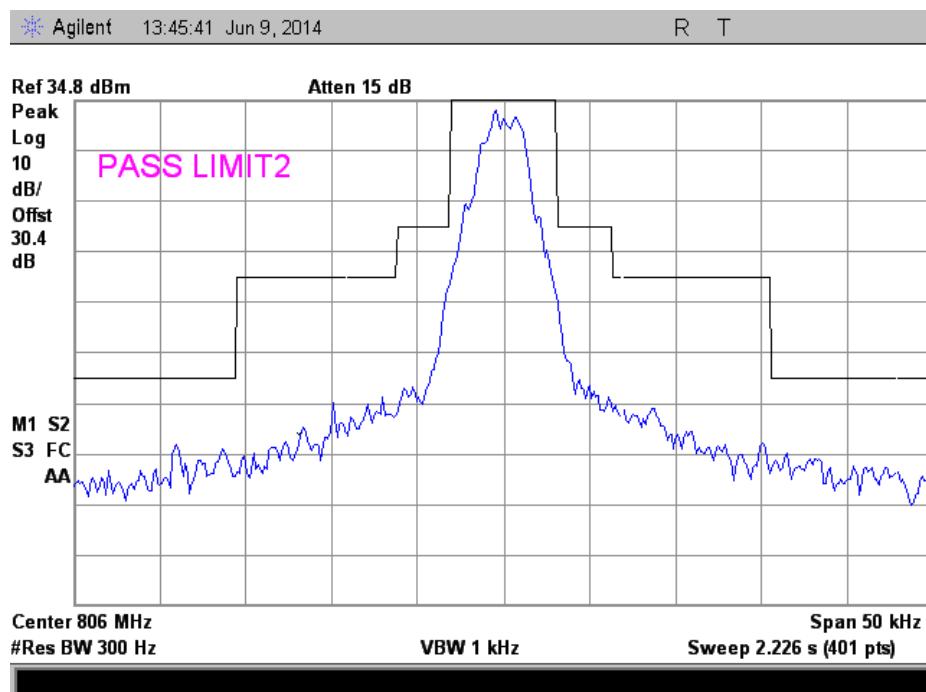




Mask B – 12.5 kHz

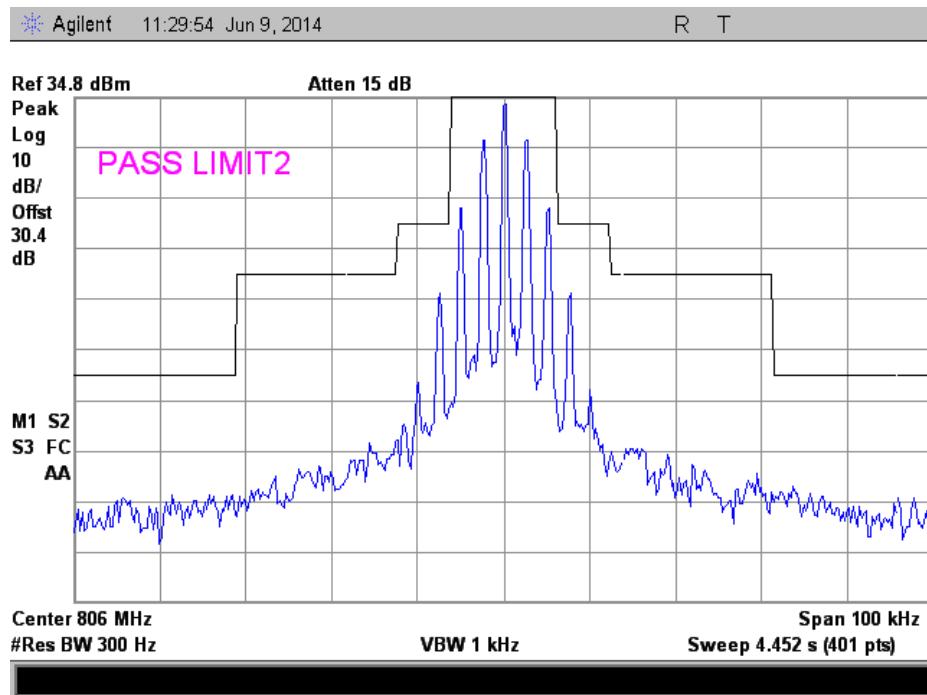


Mask B – 25 kHz

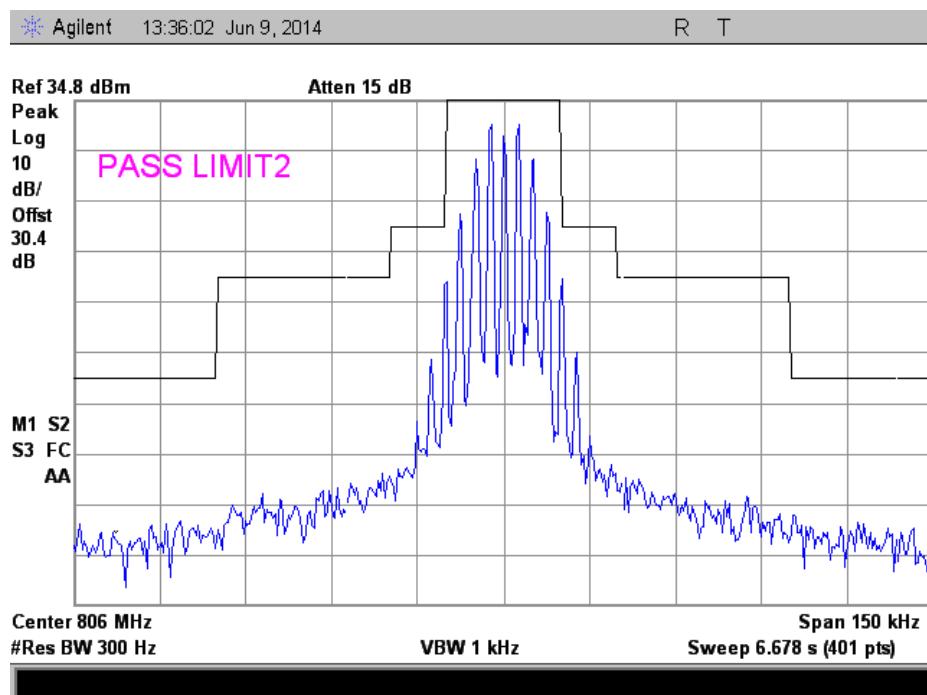




815.05 MHz

Reference

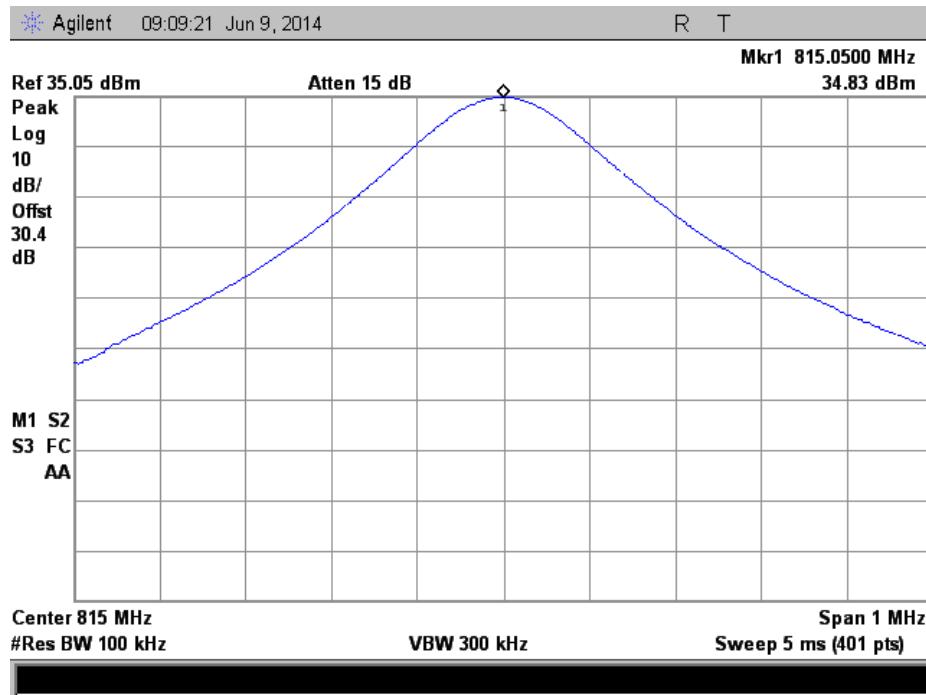


Mask B – 6.25 kHz

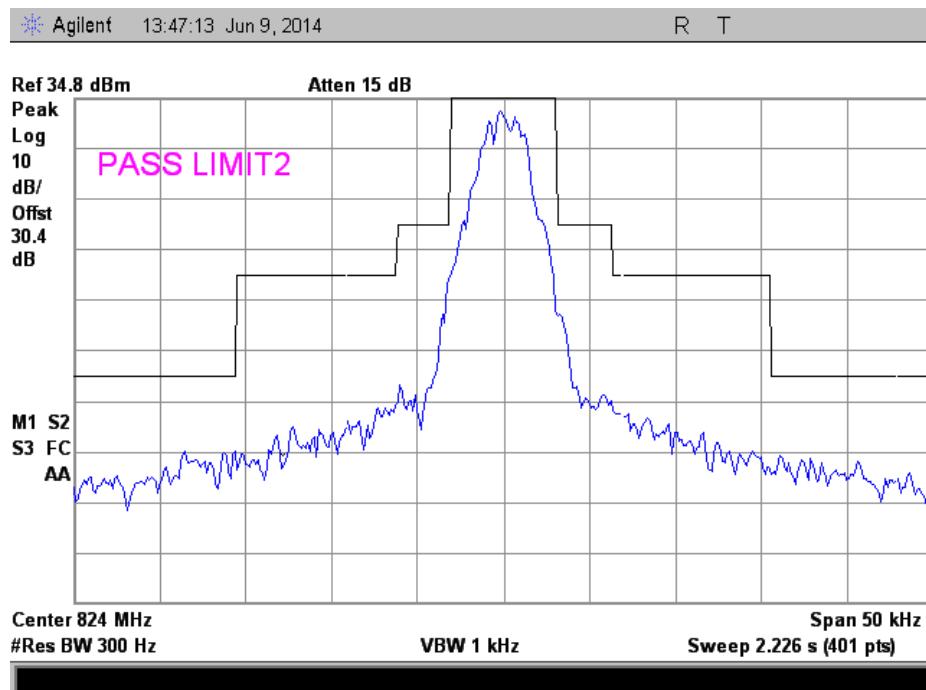




Mask B – 12.5 kHz

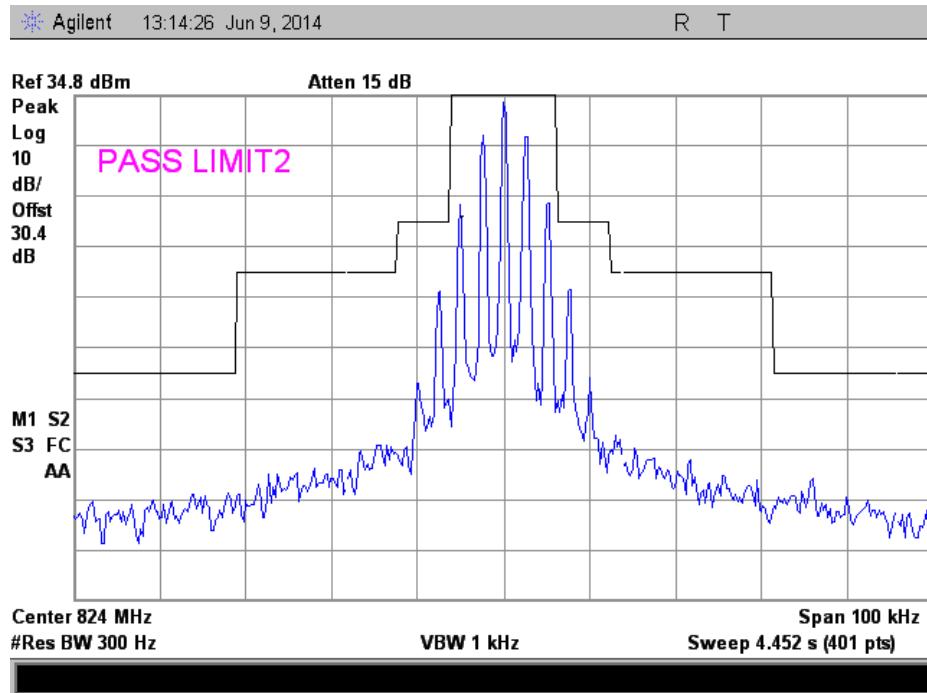


Mask B – 25 kHz

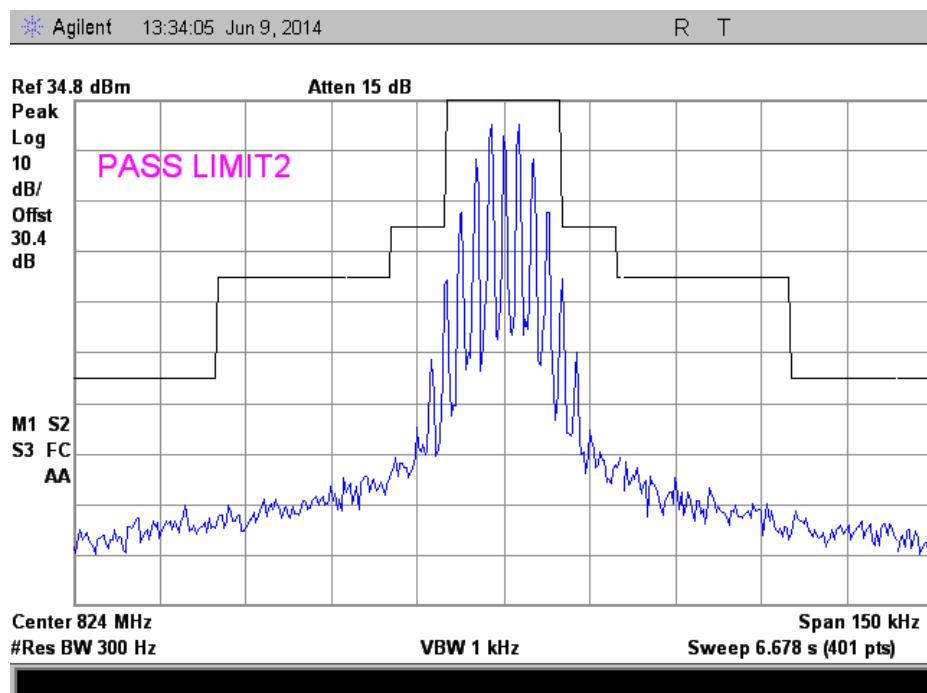




851.05 MHz

Reference

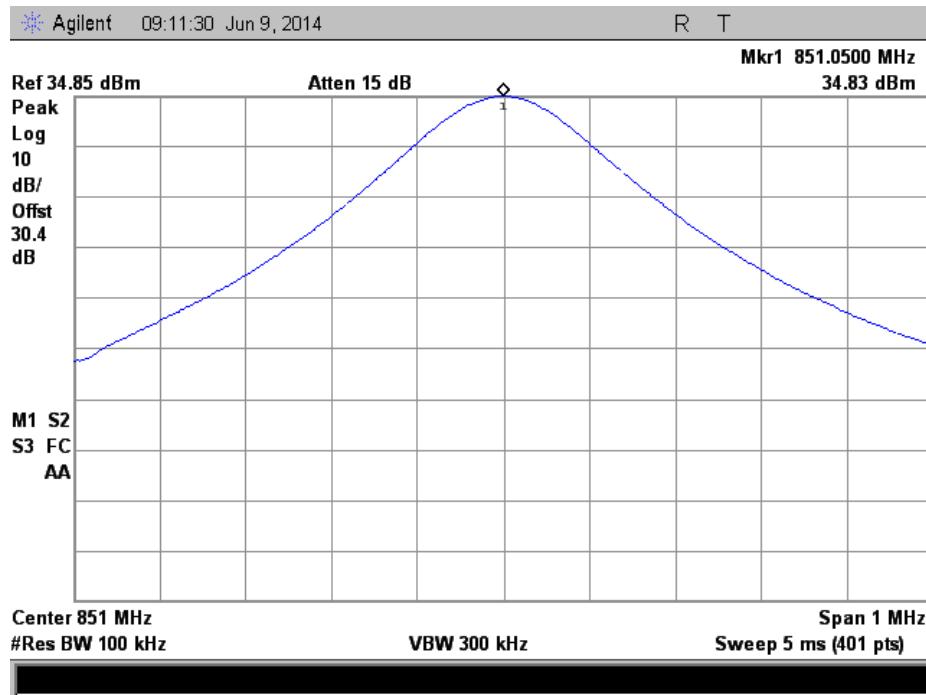


Mask B – 6.25 kHz

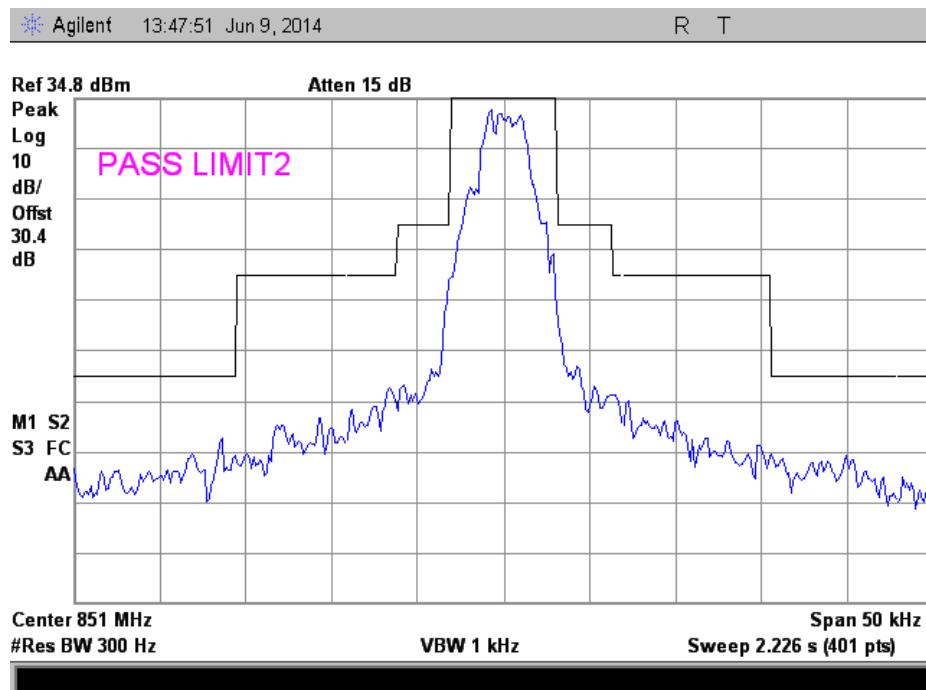




Mask B – 12.5 kHz

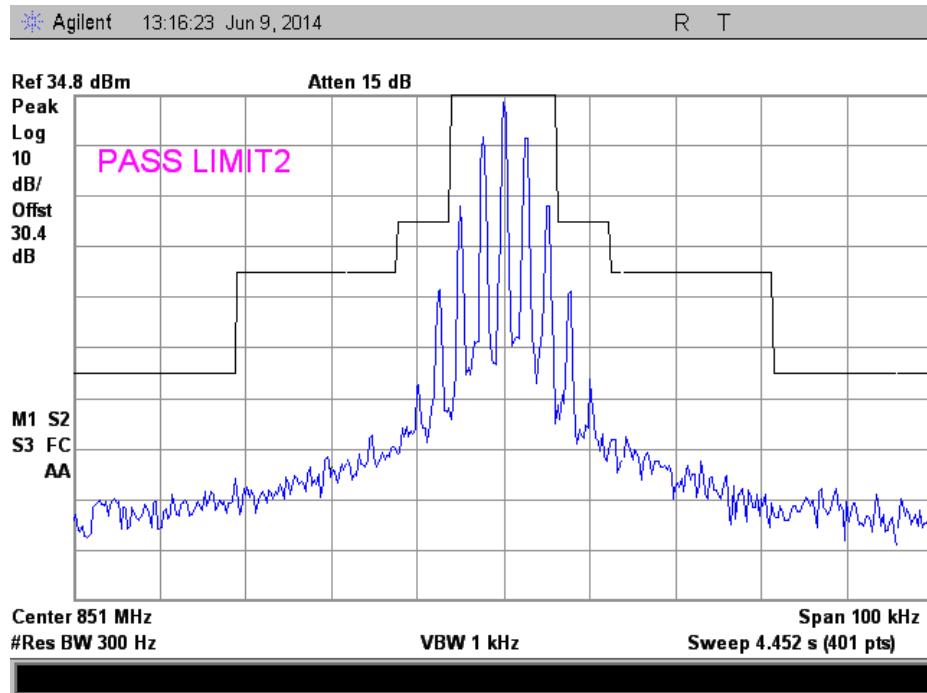


Mask B – 25 kHz

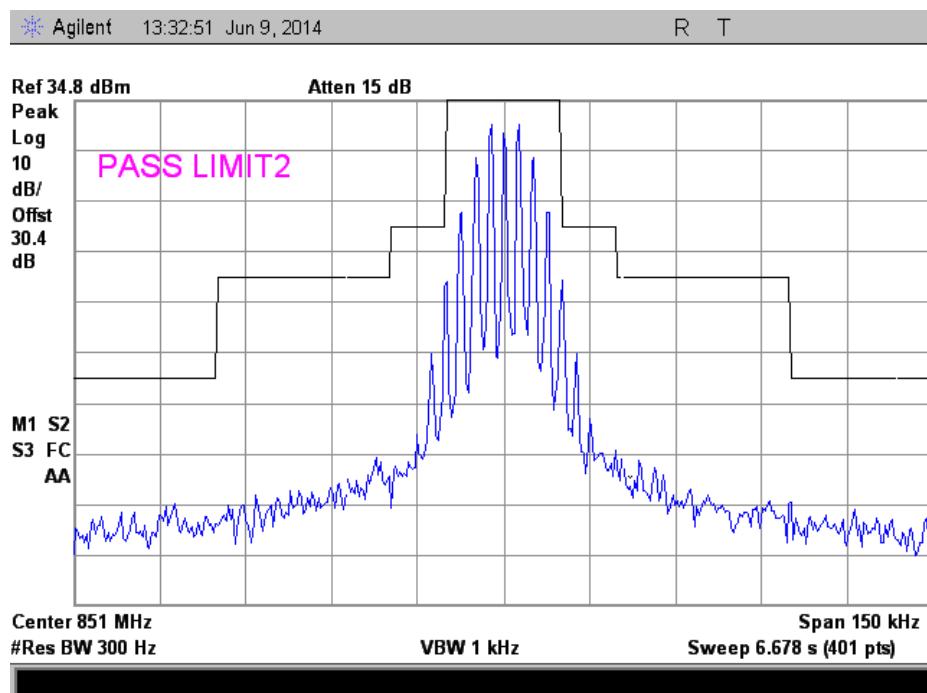




860.05 MHz

Reference

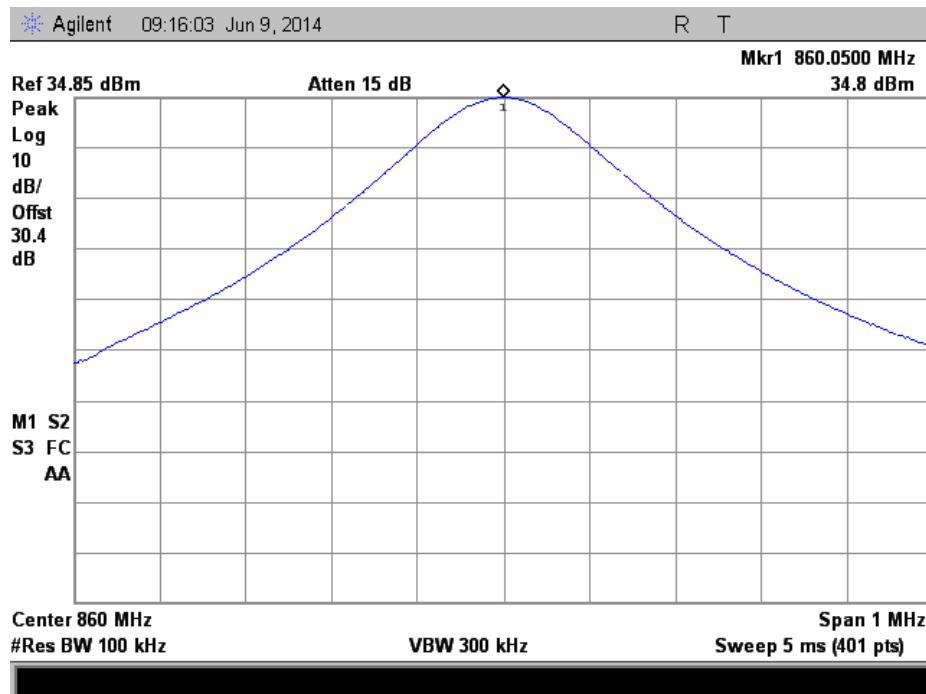


Mask B – 6.25 kHz

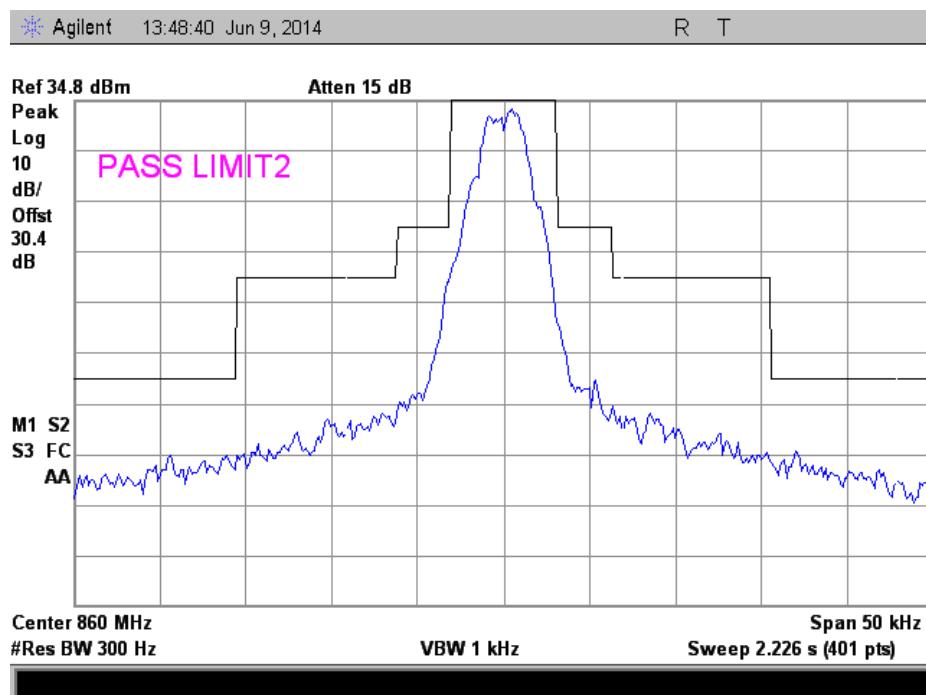




Mask B – 12.5 kHz

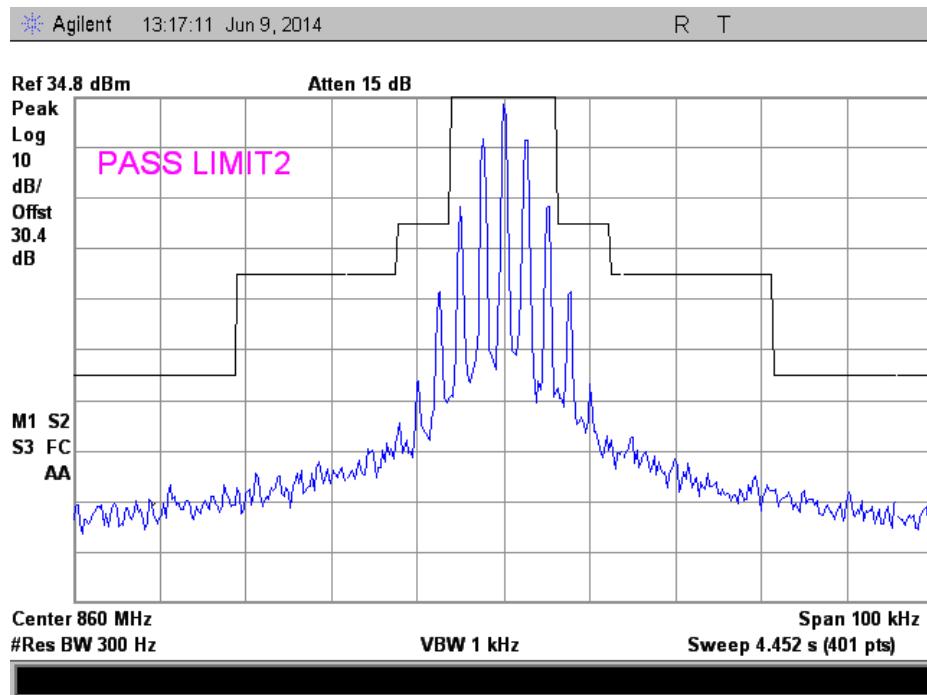


Mask B -25 kHz

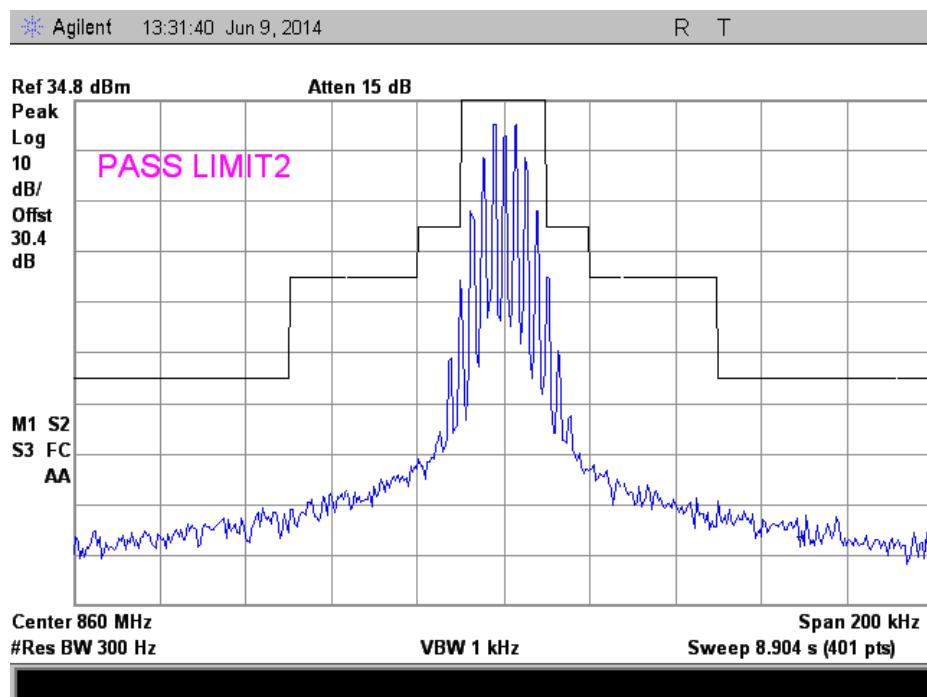




868.95 MHz

Reference

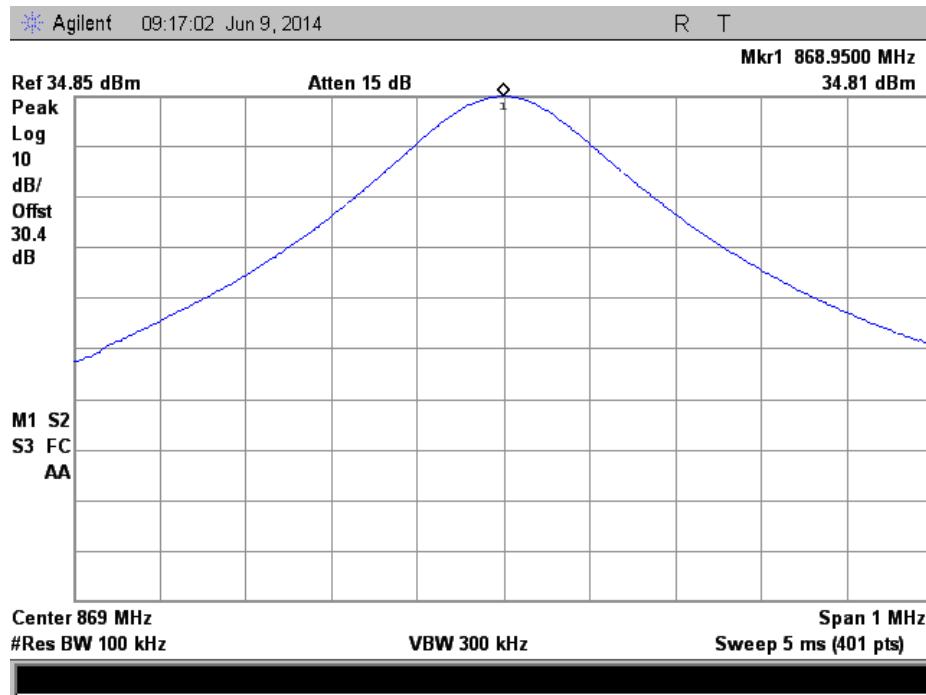


Mask B – 6.25 kHz

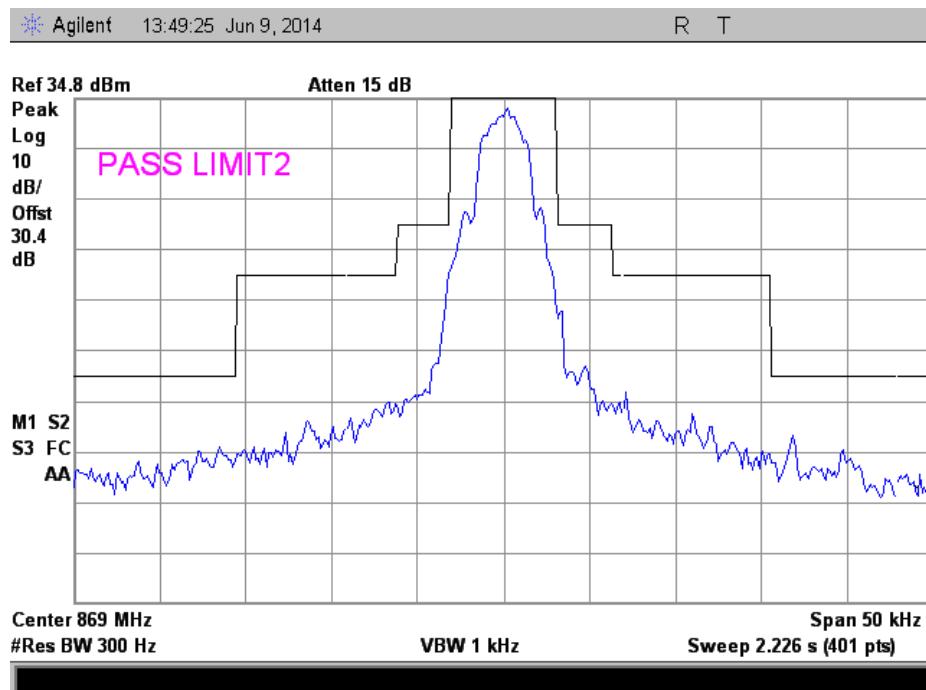




Mask B – 12.5 kHz

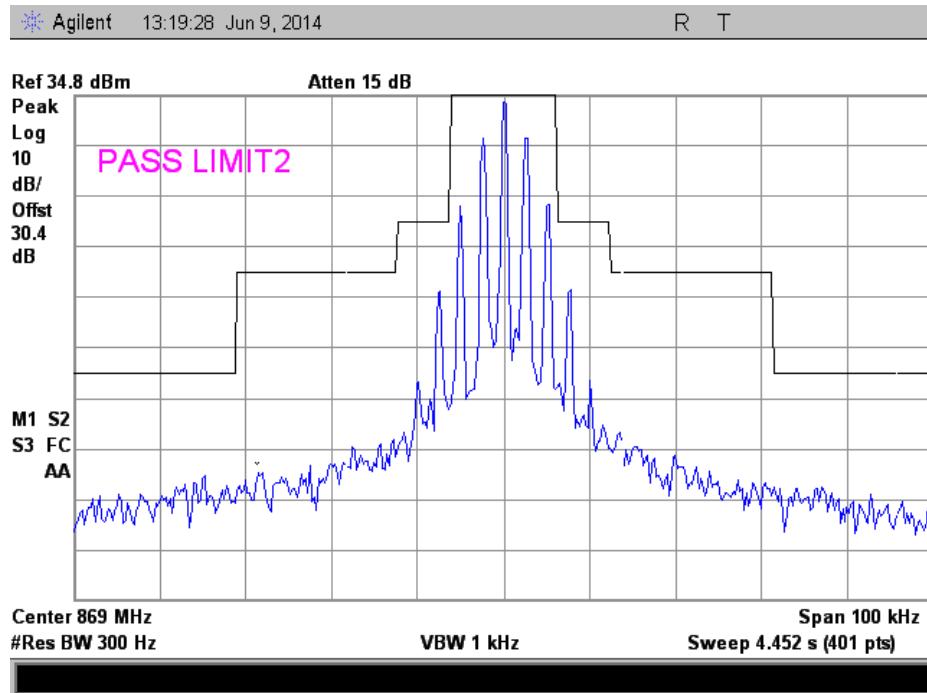

Mask B – 25 kHz

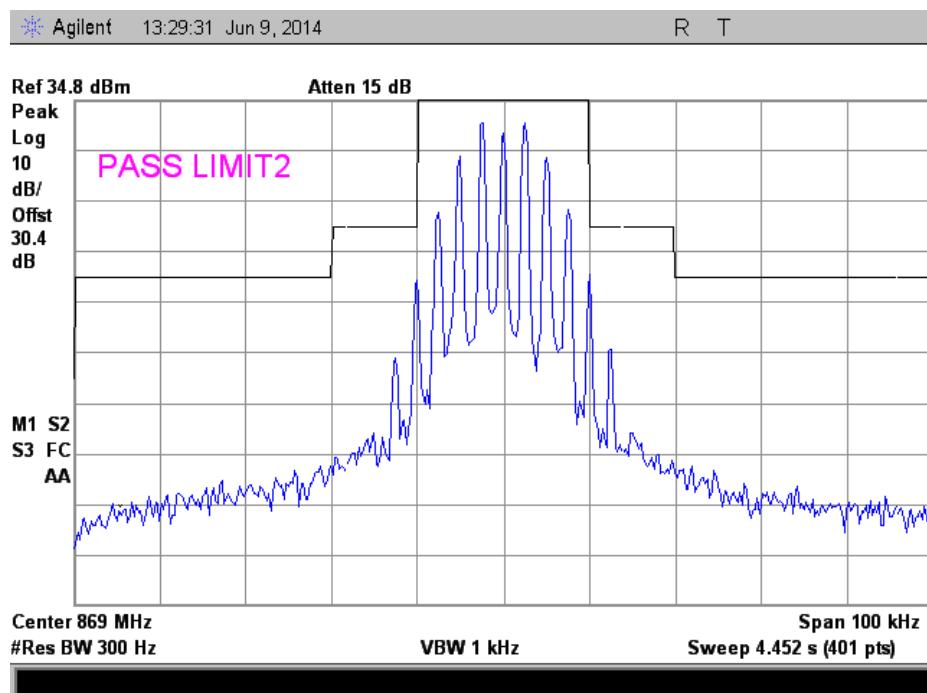



Audio Low Pass Filter (Voice Input)

Name of Test:

Audio Low Pass Filter (Voice Input)

Test Equipment Utilized:

i00118, i00345


Engineer: Alex Macon

Test Date: 6/11/14

Measurement Procedure

The EUT was connected directly to a modulation analyzer through an attenuator. The audio source was tuned across the required audio frequency range and the audio low pass filter response was measured and plotted. The modulation analyzer is a real time spectrum analyzer with integrated demodulation, audio measurement capabilities, and timing analysis.


Test Setup

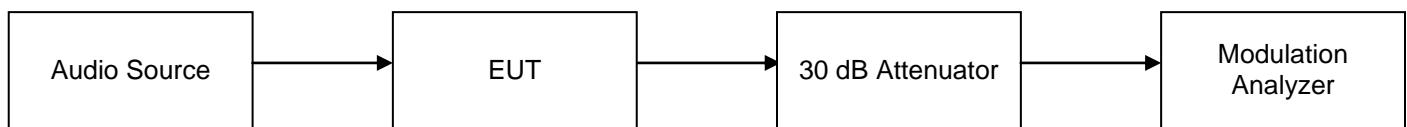




Measurement Results


12.5 kHz

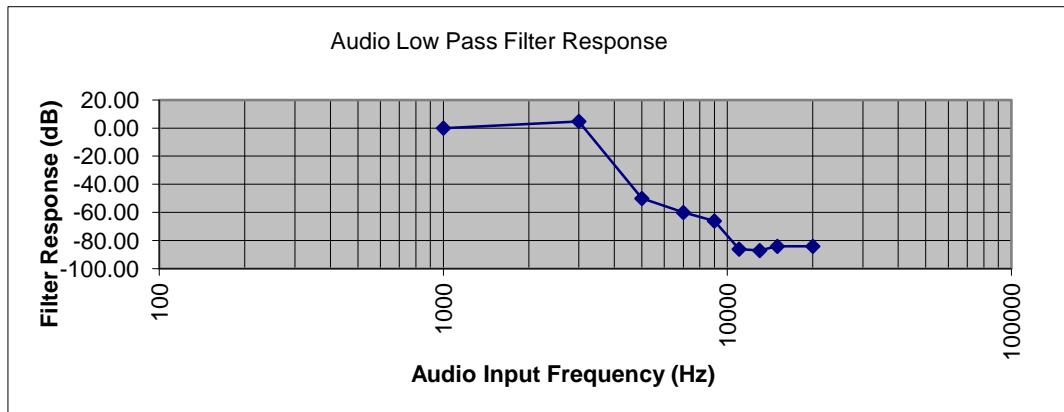

20 kHz

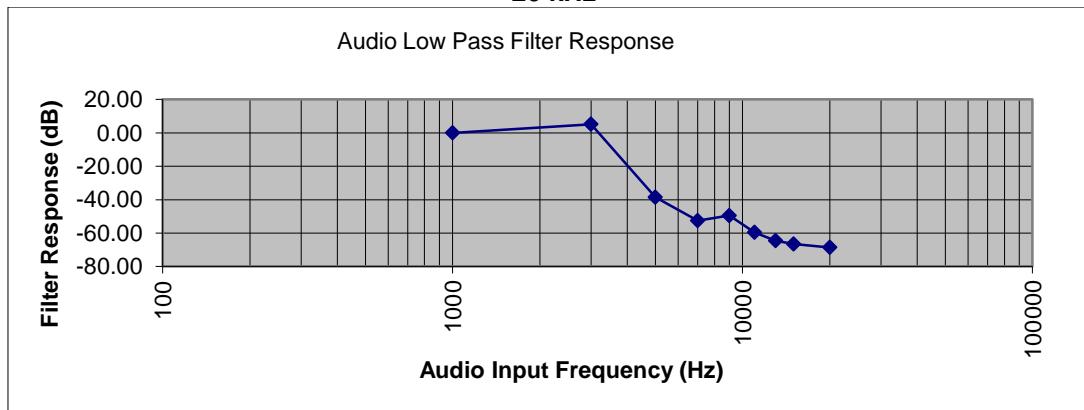

25 kHz

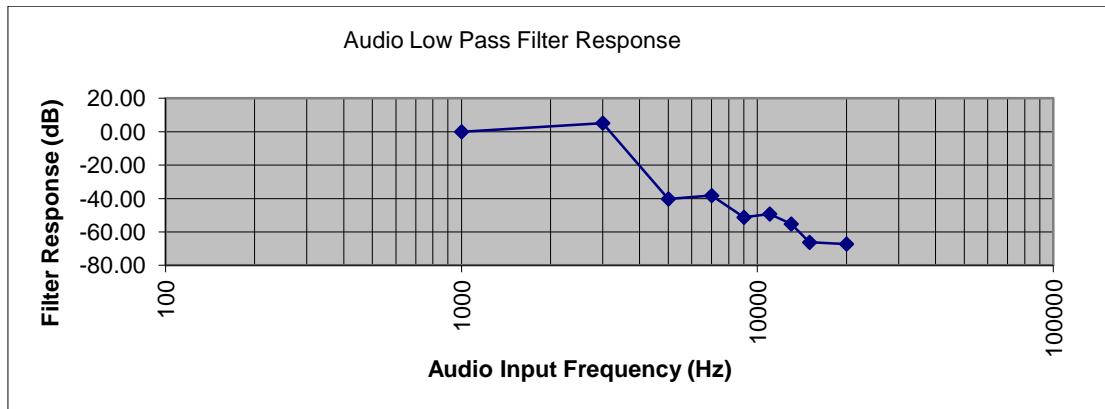

This unit is a digital radio and the roll-off for the filter is very linear in the operational band and sharp out of band.



Audio Frequency Response

Name of Tests:

Audio Frequency Response

Engineer: Alex Macon

Test Equipment Utilized:


i00118, i00345

Test Date: 6/11/14

Measurement Procedure

The EUT was connected directly to a modulation analyzer through an attenuator. The audio source was tuned across the required audio frequency range and the audio frequency response was measured and plotted. The modulation analyzer is a real time spectrum analyzer with integrated demodulation, audio measurement capabilities, and timing analysis.


Test Setup

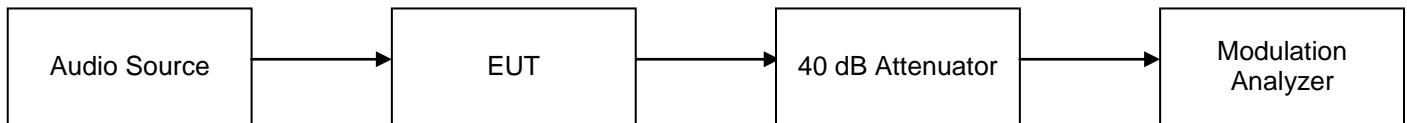




Test Results


12.5 kHz

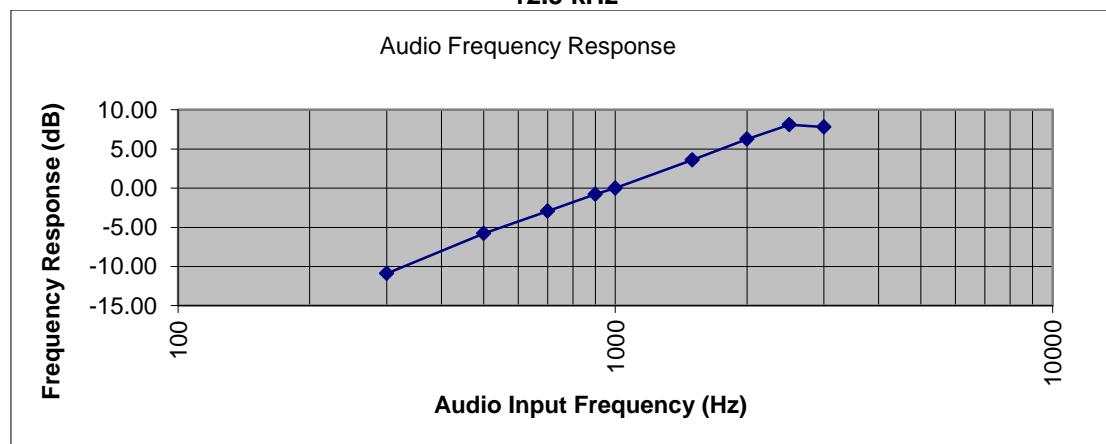

20 kHz

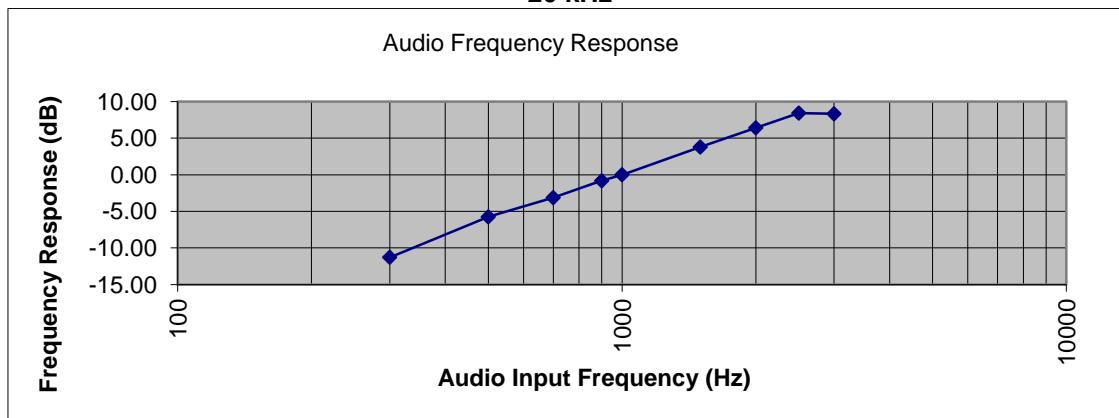

25 kHz

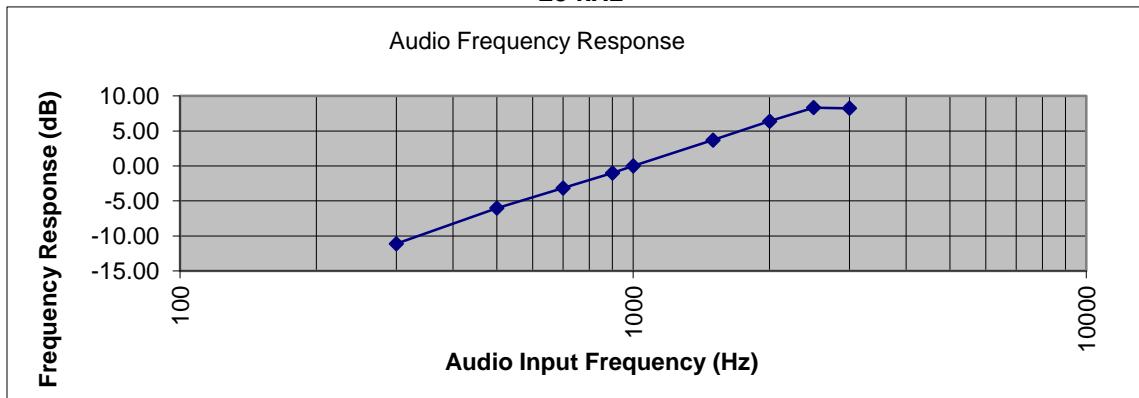



Modulation Limiting

Name of Test:

Modulation Limiting

Test Equipment Utilized:

i00118, i00345

Engineer: Alex Macon

Test Date: 6/11/14


Measurement Procedure

The EUT was connected directly to a modulation analyzer through an attenuator. The audio source was tuned across the required audio frequency range and the modulation limiting response was measured and plotted. The modulation analyzer is a real time spectrum analyzer with integrated demodulation, audio measurement capabilities, and timing analysis.


Test Setup



12.5 kHz Positive Peak Deviation

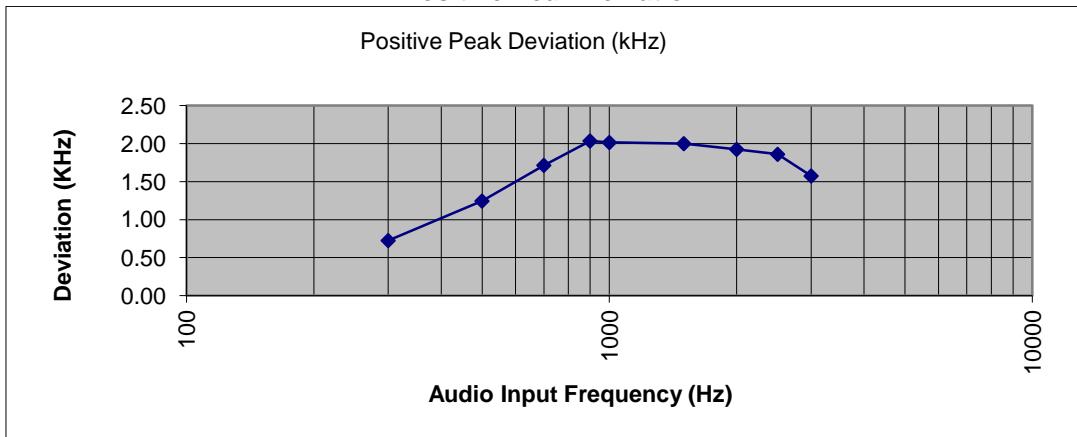


Negative Peak Deviation

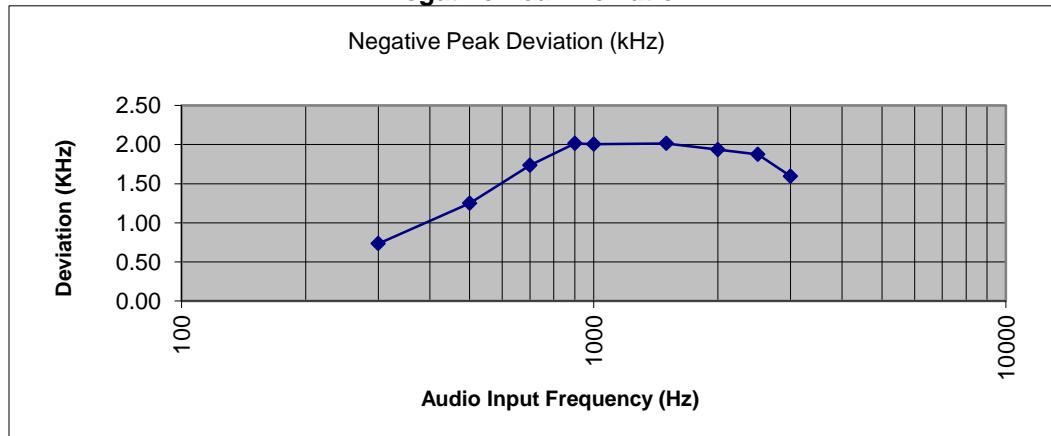




20 kHz

Positive Peak Deviation

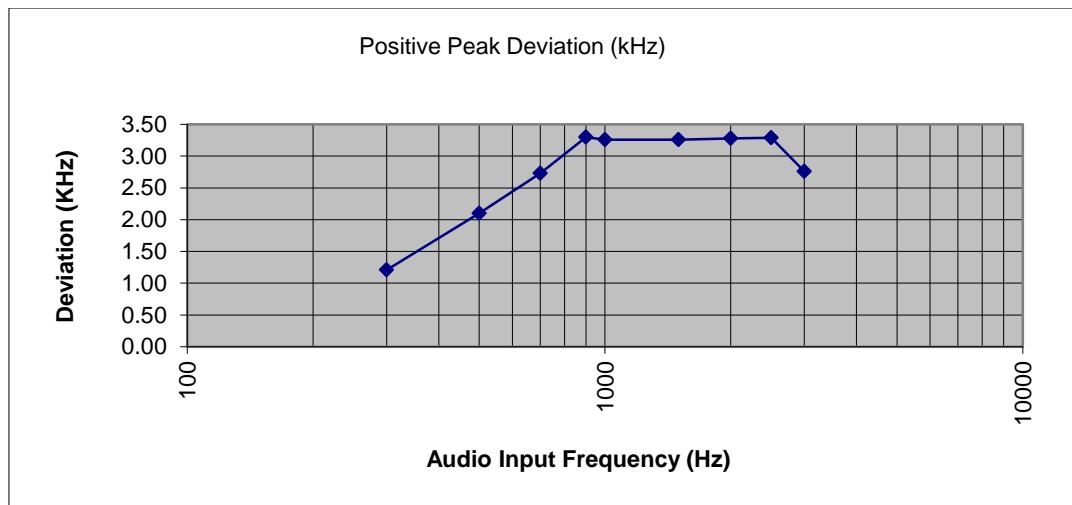


Negative Peak Deviation

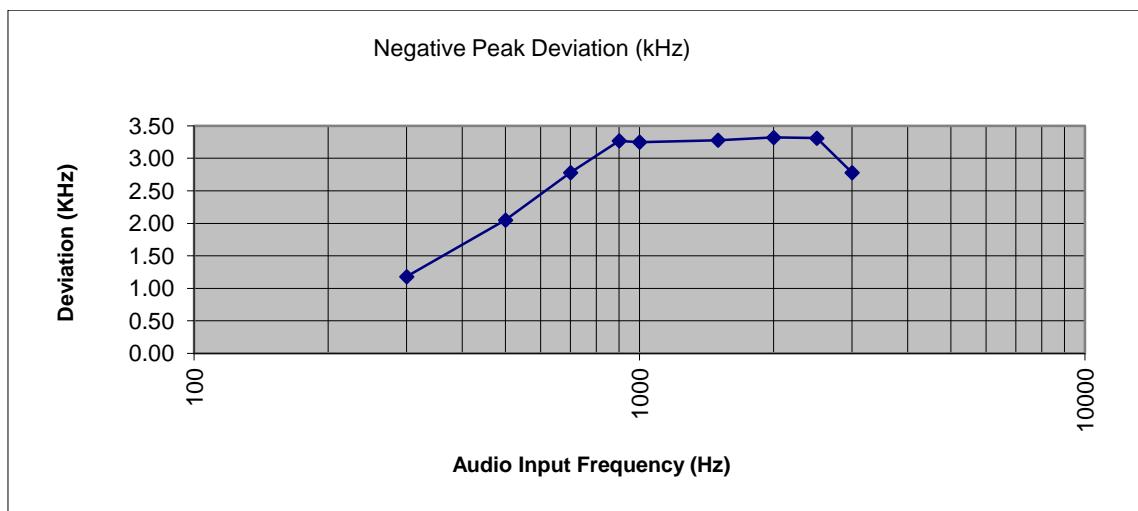




25 kHz

Positive Peak Deviation

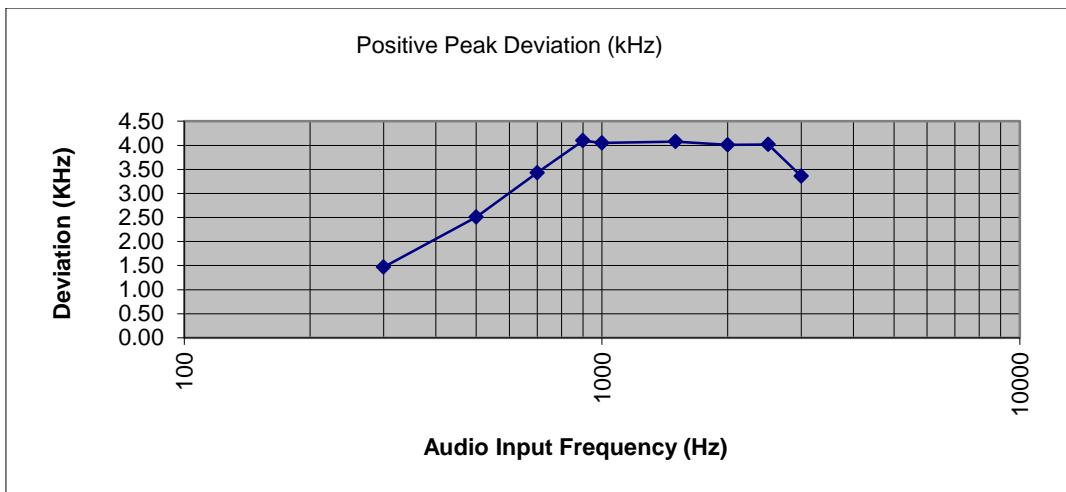

Negative Peak Deviation

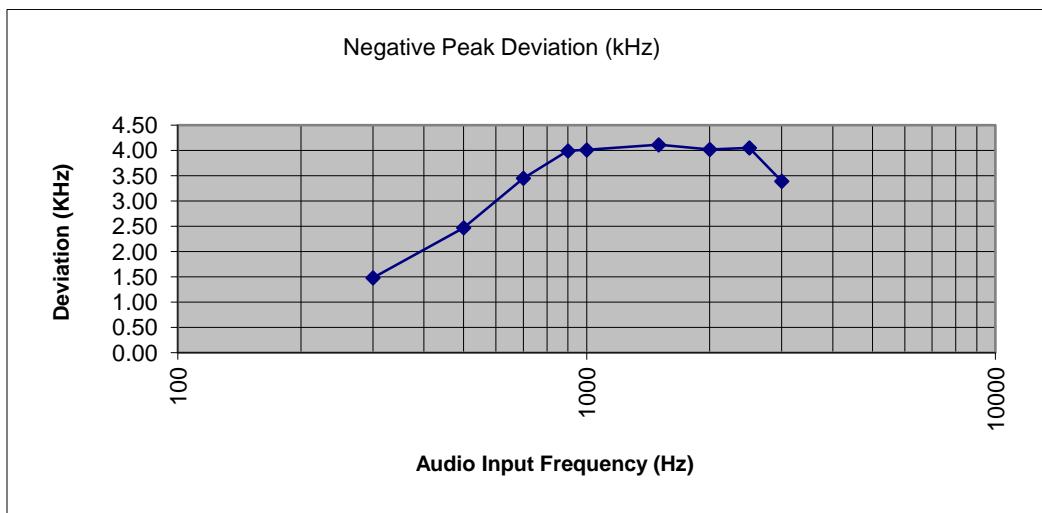



Frequency Stability (Temperature Variation)

Name of Test: Frequency Stability (Temperature Variation)

Test Equipment Utilized: i00008, i00019, i00027, i00320, i00343

Engineer: Alex Macon

Test Date: 6/6/14

Measurement Procedure

The EUT was placed in an environmental test chamber and the RF output was connected directly to a frequency counter. The temperature was varied from -30°C to 50°C in 10°C increments. After a sufficient time for temperature stabilization the RF output frequency was measured. At 20°C the power supply voltage to the EUT was varied from 85% to 115% of the nominal value and the RF output was measured.


Tuned Frequency – 823.950 MHz

Tolerance – 1.5 ppm



Upper Limit – 823.951236 MHz

Lower Limit – 823.948764 MHz

Measurement Setup


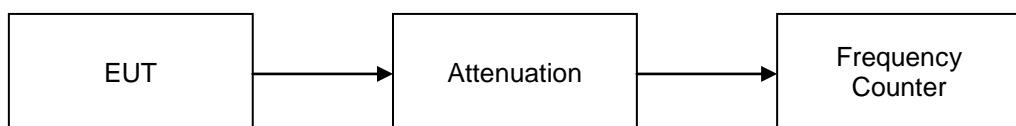


Measurement Results

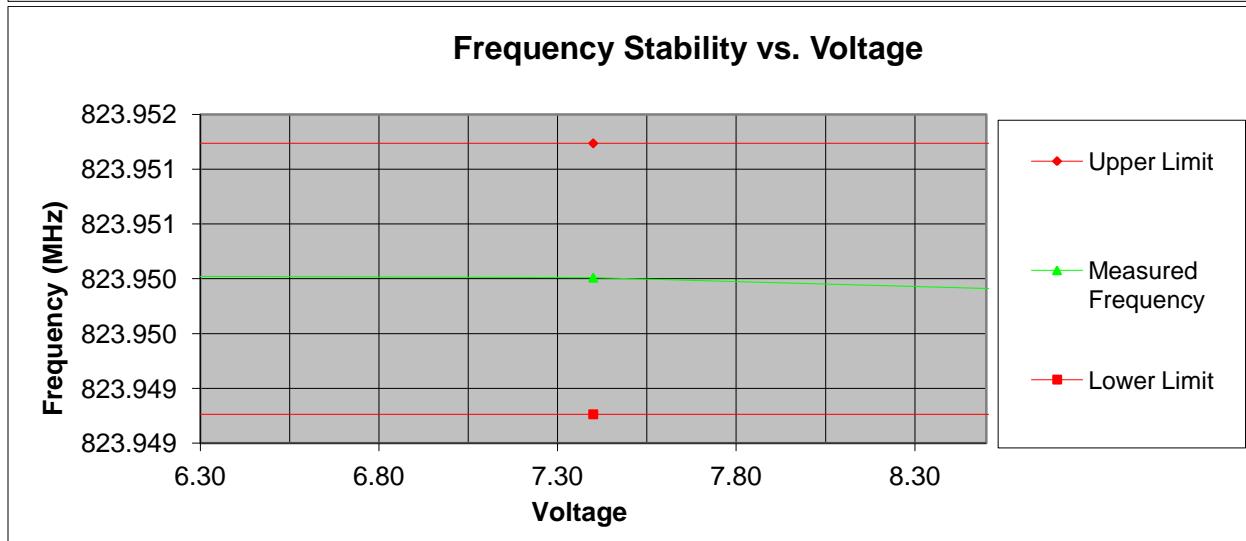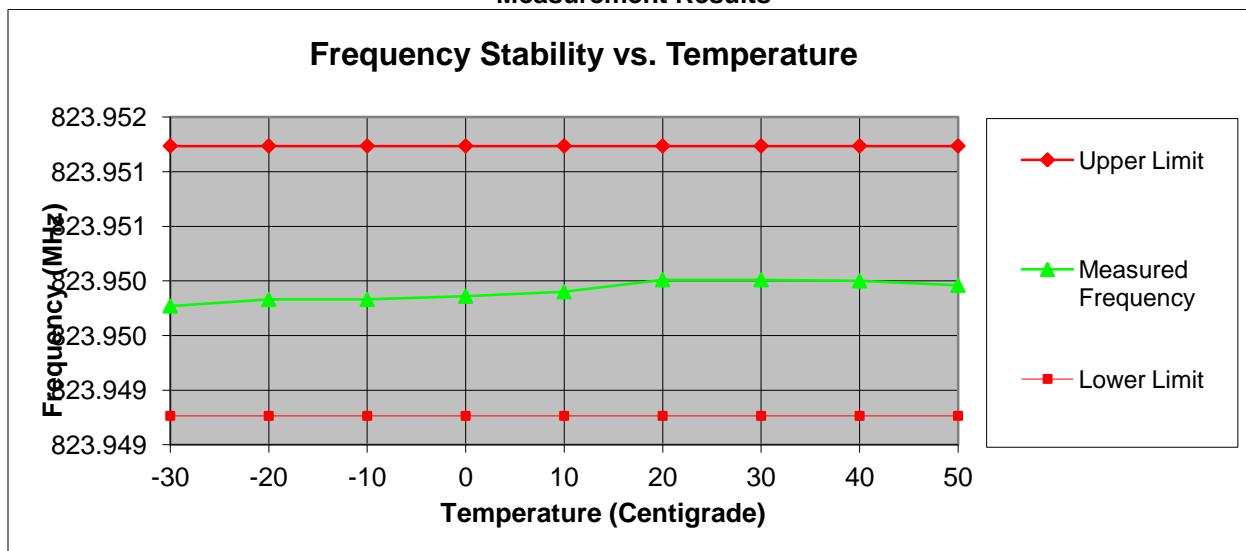



Tuned Frequency – 774.950 MHz
Tolerance – 1.5 ppm
Upper Limit – 774.951162 MHz
Lower Limit – 774.948838 MHz

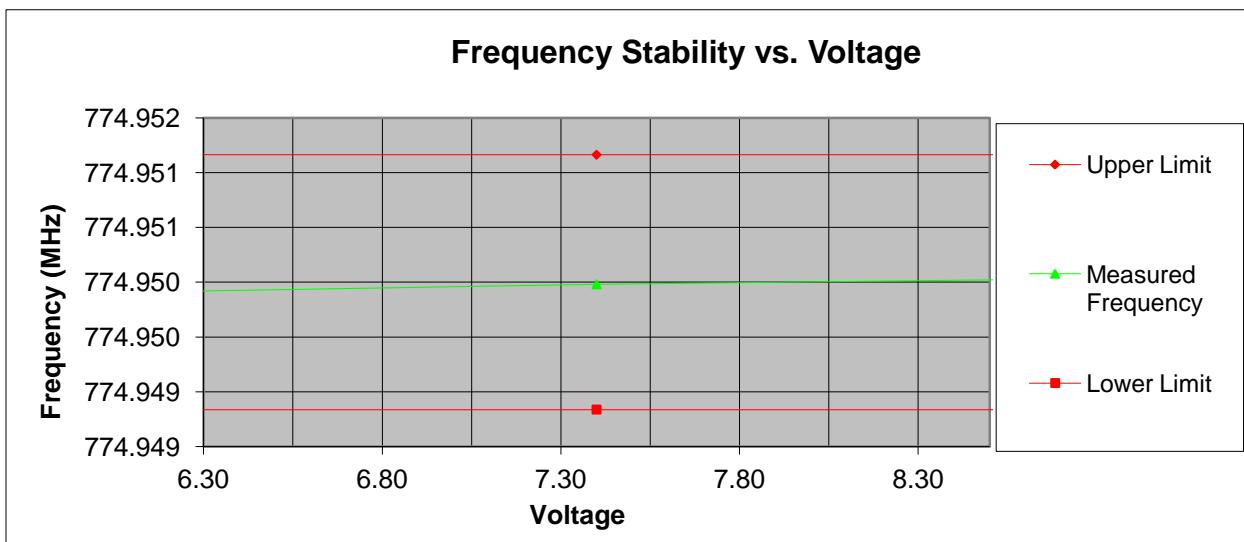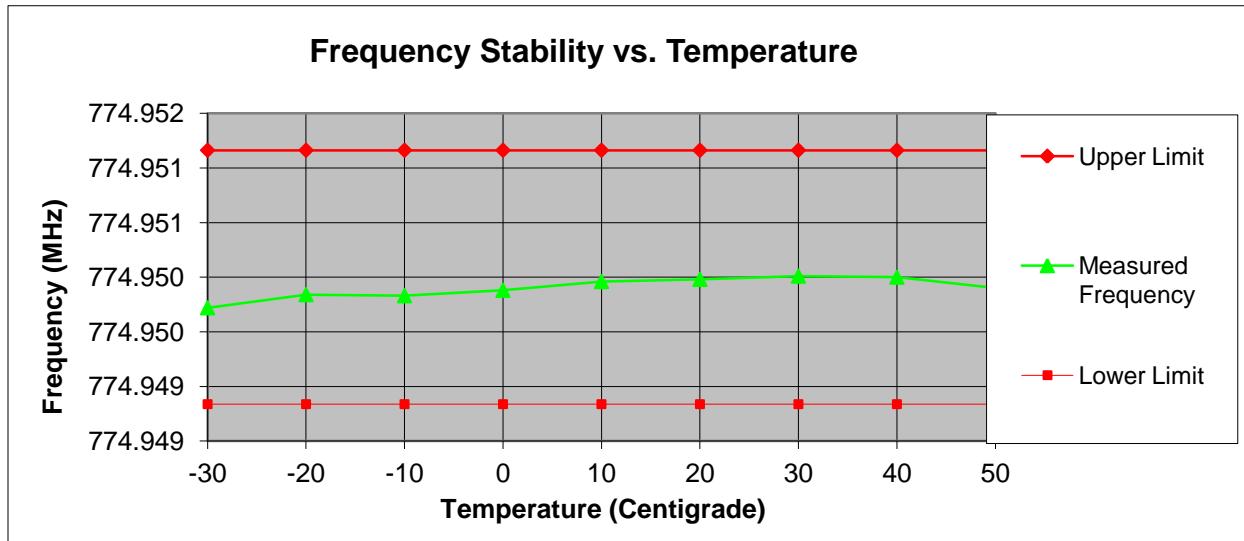



Emission Limitations


Name of Test: Adjacent Channel Power
Test Equipment Utilized: i00118, i00345

Engineer: Alex Macon
Test Date: 6/12/14

Test Procedure

The EUT was connected directly to a spectrum analyzer to verify that the EUT meets the required emissions limitations. A modulation frequency of 2.5 kHz at a level of 100 mVPP was input into the EUT.

Test Setup

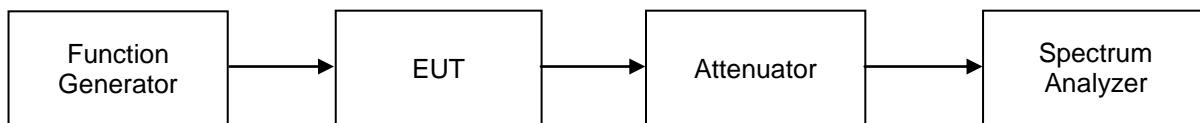

Center Frequency = 772.05 MHz
BW = 6.25 kHz

Offset from Center Frequency (kHz)	Lower ACP Results (dBc)	Upper ACP Result (dBc)	Maximum ACP Relative (dBc)	Result
6.25	-63.47	-62.6	-40	Pass
12.5	-68.66	-69.19	-60	Pass
18.75	-76.89	-74.93	-60	Pass
25.00	-81.12	-81.39	-65	Pass
37.50	-79.79	-79.27	-65	Pass
62.50	-83.42	-84.42	-65	Pass
87.50	-88.33	-86.42	-65	Pass
150.00	-83.24	-83.92	-65	Pass
250.00	-85.3	-85.32	-65	Pass
350	-86.18	-86.56	-65	Pass
>400 kHz to 12 MHz	-83.35	-82.31	-75	Pass
12 MHz to paired RX band	-98.33	-99.62	-75	Pass
In the paired RX band	-112.37	-109.37	-100	Pass



Center Frequency = 802.05 MHz
BW = 6.25 kHz

Offset from Center Frequency (kHz)	Lower ACP Results (dBc)	Upper ACP Result (dBc)	Maximum ACP Relative (dBc)	Result
6.25	-59.87	-60.59	-40	Pass
12.5	-68.62	-67.92	-60	Pass
18.75	-73.05	-73.75	-60	Pass
25.00	-79.3	-79.65	-65	Pass
37.50	-78.21	-78.27	-65	Pass
62.50	-82.06	-83.09	-65	Pass
87.50	-88.05	-86.85	-65	Pass
150.00	-82.12	-83.8	-65	Pass
250.00	-85.65	-84.44	-65	Pass
350	-85.36	-83.9	-65	Pass
>400 kHz to 12 MHz	-81.24	-82.49	-75	Pass
12 MHz to paired RX band	-100.23	-99.77	-75	Pass
In the paired RX band	-109.37	-110.37	-100	Pass



Center Frequency = 802.05 MHz
BW = 12.5 kHz

Offset from Center Frequency (kHz)	Lower ACP Results (dBc)	Upper ACP Result (dBc)	Maximum ACP Relative (dBc)	Result
9.375	-61.63	-62.1	-40	Pass
15.625	-70.03	-68.29	-60	Pass
21.875	-75.24	-75.7	-60	Pass
37.5	-78.38	-77.26	-65	Pass
62.5	-82.98	-81.56	-65	Pass
87.5	-88.43	-86.07	-65	Pass
150	-83.58	-81.26	-65	Pass
250	-84.96	-84.42	-65	Pass
350	-84.66	-85.69	-65	Pass
>400 kHz to 12 MHz	-87.1	-87.07	-75	Pass
12 MHz to paired RX band	-105.54	-106.76	-75	Pass
In the paired RX band	-110.37	-112.37	-100	Pass

Center Frequency = 772.05 MHz
BW = 12.5 kHz

Offset from Center Frequency (kHz)	Lower ACP Results (dBc)	Upper ACP Result (dBc)	Maximum ACP Relative (dBc)	Result
9.375	-64.8	-48.44	-40	Pass
15.625	-68.88	-72.57	-60	Pass
21.875	-74.57	-75.86	-60	Pass
37.5	-79.09	-80.78	-65	Pass
62.5	-81.51	-84.7	-65	Pass
87.5	-87.92	-89.03	-65	Pass
150	-82.3	-89.62	-65	Pass
250	-84.95	-84.68	-65	Pass
350	-85.88	-85.65	-65	Pass
>400 kHz to 12 MHz	-86.75	-87.48	-75	Pass
12 MHz to paired RX band	-103.39	-104.37	-75	Pass
In the paired RX band	-109.37	-112.37	-100	Pass



Center Frequency = 772.05 MHz
BW = 25 kHz

Offset from Center Frequency (kHz)	Lower ACP Results (dBc)	Upper ACP Result (dBc)	Maximum ACP Relative (dBc)	Result
15.625	-63.78	-63.43	-60	Pass
21.875	-69.83	-68.56	-60	Pass
37.5	-73.53	-72.75	-65	Pass
62.5	-77.56	-77.6	-65	Pass
87.5	-82.55	-82.71	-65	Pass
150	-84.54	-84.68	-65	Pass
250	-85.91	-85.02	-65	Pass
350	-86.58	-86.72	-65	Pass
>400 kHz to 12 MHz	-95.77	-95.97	-75	Pass
12 MHz to paired RX band	-110.37	-108.37	-75	Pass
In the paired RX band	-113.37	-112.37	-100	Pass

Center Frequency = 802.05 MHz
BW = 25 kHz

Offset from Center Frequency (kHz)	Lower ACP Results (dBc)	Upper ACP Result (dBc)	Maximum ACP Relative (dBc)	Result
15.625	-62.8	-64.03	-60	Pass
21.875	-67.27	-65.57	-60	Pass
37.5	-71.81	-74	-65	Pass
62.5	-76.47	-76.42	-65	Pass
87.5	-80.79	-82.06	-65	Pass
150	-87.36	-85.61	-65	Pass
250	-85.26	-86.32	-65	Pass
350	-86.28	-85.91	-65	Pass
>400 kHz to 12 MHz	-95.61	-95.64	-75	Pass
12 MHz to paired RX band	-109.37	-108.37	-75	Pass
In the paired RX band	-113.37	-112.37	-100	Pass



Occupied Bandwidth

Name of Test:

Occupied Bandwidth

Engineer: Alex Macon

Test Specification:

RSS-Gen

Test Date: 4/24/14

Measurement Procedure

The Equipment Under Test (EUT) was connected to a spectrum analyzer through a 30 dB Power Attenuator. All cable and attenuator losses were input into the spectrum analyzer as a reference level offset to ensure accurate readings were obtained.

Tuned Frequency = 806.05 MHz

Modulation	Measured 99% OCBW
An – 12.5k	9.756 kHz
As – 20k	12.083 kHz
Aw – 25k	14.710 kHz
P1n – 12.5k	8.110 kHz
P2n - 12.5k	7.966 kHz
Nn – 12.5k	7.680 kHz
Nv – 6.25k	3.704 kHz



Necessary Bandwidth Calculations

Name of Test:
Test Specification:

Necessary Bandwidth Calculations
2.202

Engineer: Alex Macon
Test Date: 6/12/14

Modulation = 11K0F3E	
Necessary Bandwidth Calculation:	
Maximum Modulation (M), kHz	= 3
Maximum Deviation (D), kHz	= 2.5
Constant Factor (K)	= 1
Necessary Bandwidth (B _N), kHz	= $(2 \times M) + (2 \times D \times K)$
	= 11.0

Modulation = 16K0F3E (RSS-119 Only)	
Necessary Bandwidth Calculation:	
Maximum Modulation (M) kHz	= 3
Maximum Deviation (D), kHz	= 5
Constant Factor (K)	= 1
Necessary Bandwidth (B _N), kHz	= $(2 \times M) + (2 \times D \times K)$
	= 16.0

Modulation = 8K30F1E	
Necessary Bandwidth Calculation:	
Maximum Modulation (M), kHz	= 1.65
Maximum Deviation (D), kHz	= 2.5
Constant Factor (K)	= 1
Necessary Bandwidth (B _N), kHz	= $(2 \times M) + (2 \times D \times K)$
	= 8.3

Modulation = 8K30F1D	
Necessary Bandwidth Calculation:	
Data Rate (R) Kbps	= 2.3
Maximum Deviation (D), kHz	= 2.5
Necessary Bandwidth (B _N), kHz	= $2.4D + 1.0R$
	= 8.3



Modulation = 8K30F7W	
Necessary Bandwidth Calculation:	
Data Rate (R) Kbps	= 3.973
Maximum Deviation (D), kHz	= 3.85
Signaling States	= 4
Constant Factor (K)	= 1
Necessary Bandwidth (B _N), kHz	= $(R/\log_2 S) + 2DK$
	= 8.3

Modulation = 4K00F1E	
Necessary Bandwidth Calculation:	
Maximum Modulation (M), kHz	= .75
Maximum Deviation (D), kHz	= 1.25
Constant Factor (K)	= 1
Necessary Bandwidth (B _N), kHz	= $(2xM) + (2xDxK)$
	= 4.0

Modulation = 4K00F1D	
Necessary Bandwidth Calculation:	
Data Rate (R) Kbps	= 1.0
Maximum Deviation (D), kHz	= 1.25
Necessary Bandwidth (B _N), kHz	= $2.4D + 1.0R$
	= 4.0

Modulation = 4K00F7W	
Necessary Bandwidth Calculation:	
Data Rate (R) Kbps	= 1.806
Maximum Deviation (D), kHz	= 1.77
Signaling States	= 4
Constant Factor (K)	= 1
Necessary Bandwidth (B _N), kHz	= $(R/\log_2 S) + 2DK$
	= 4.0



Modulation =4K00F2D	
Necessary Bandwidth Calculation:	
Data Rate (R) Kbps	= 1.0
Maximum Deviation (D), kHz	= 1.25
Necessary Bandwidth (B _N), kHz	= 2.4D+1.0R
	= 4.0



Test Equipment Utilized

Description	Manufacturer	Model #	CT Asset #	Last Cal Date	Cal Due Date
Power Supply	Kenwood	PR18-3A	i00008	Verified on: 6/6/14	
Frequency Counter	HP	5334B	i00019	2/19/14	2/19/15
Temperature Chamber	Tenney	Tenney Jr	i00027	Verified on: 6/6/14	
Function Generator	HP	33120A	i00118	Verified on: 6/6/14	
High Pass Filter 3.4GHz	Trilithic	23042	i00177	Verified on: 6/11/14	
Horn Antenna, Amplified	ARA	DRG-118/A	i00271	5/8/14	5/8/15
Humidity / Temp Meter	Newport	IBTHX-W-5	i00282	3/24/14	3/24/15
Voltmeter	Fluke	75III	i00320	3/24/14	3/24/15
Data Logger	Fluke	Hydra Data Bucket	i00343	3/7/14	3/7/15
Spectrum Analyzer	Tektronix	RSA3308A	i00345	3/18/14	3/18/15
Bi-Log Antenna	Schaffner	CBL 6111D	i00349	10/8/13	10/8/15
EMI Analyzer	Agilent	E7405A	i00379	1/14/14	1/14/15
3 Meter Semi-Anechoic Chamber	Panashield	3 Meter Semi-Anechoic Chamber	i00428	11/26/13	11/26/15
High Pass Filter	K&L Microwave	7IH40-980/T6000	i00432	Verified on: 6/11/14	

In addition to the above listed equipment standard RF connectors and cables were utilized in the testing of the described equipment. Prior to testing these components were tested to verify proper operation.

END OF TEST REPORT