



FCC AND ISCED CERTIFICATION TEST REPORT

Applicant	:	Harman International Industries, Inc.
Address of Applicant	:	8500 Balboa Boulevard, Northridge, CA 91329, UNITED STATES
Manufacturer	:	Harman International Industries, Inc.
Address of Manufacturer	:	8500 Balboa Boulevard, Northridge, CA 91329, UNITED STATES
Equipment under Test	:	Multi-Channel Soundbar with wireless subwoofer
Model No.	:	BAR 1000MK2
FCC ID	:	APIBAR1000MK2
IC	:	6132A-BAR1000MK2
Test Standard(s)	:	FCC Rules and Regulations Part 15 Subpart C, RSS-247 Issue 3 August 2023, ANSI C63.10:2013, RSS-Gen Issue 5, Apr. 2018, Amendment 2 (February 2021)
Report No.	:	DDT-RE24111522-2E01
Issue Date	:	2025/03/05
Issue By	:	Guangdong Dongdian Testing Service Co., Ltd. Unit 2, Building 1, No. 17, Zongbu 2nd Road, Songshan Lake Park, Dongguan, Guangdong, China, 523808

Table of Contents

1.	Summary of Test Results	7
2.	General Test Information.....	8
2.1.	Description of EUT	8
2.2.	Accessories of EUT	9
2.3.	Block diagram of EUT configuration for test	9
2.4.	Decision of final test mode	9
2.5.	Deviations of test standard	10
2.6.	Test environment conditions	10
2.7.	Test laboratory	11
2.8.	Measurement uncertainty	12
3.	Equipment Used During Conductive Test	13
4.	20 dB Bandwidth	14
4.1.	Block diagram of test setup	14
4.2.	Limits.....	14
4.3.	Test procedure	14
4.4.	Test result	15
4.5.	Test graphs	16
5.	99% Bandwidth	19
5.1.	Block diagram of test setup	19
5.2.	Limits.....	19
5.3.	Test procedure	19
5.4.	Test result	20
5.5.	Test graphs	21
6.	Maximum Peak Output Power.....	24
6.1.	Block diagram of test setup	24
6.2.	Limits.....	24
6.3.	Test procedure	24
6.4.	Test result	25
6.5.	Test graphs	26
7.	Carrier Frequency Separation	29
7.1.	Block diagram of test setup	29
7.2.	Limits.....	29
7.3.	Test procedure	29
7.4.	Test result	30
7.5.	Test graphs	31
8.	Dwell Time	32

8.1.	Block diagram of test setup	32
8.2.	Limits	32
8.3.	Test procedure	32
8.4.	Test result	33
8.5.	Test graphs	34
9.	Number of Hopping Channel	40
9.1.	Block diagram of test setup	40
9.2.	Limits	40
9.3.	Test procedure	40
9.4.	Test result	41
9.5.	Test graphs	42
10.	Band Edge Compliance (Conducted Method)	43
10.1.	Block diagram of test setup	43
10.2.	Limit	43
10.3.	Test procedure	43
10.4.	Test result	44
10.5.	Test graphs	45
11.	RF Conducted Spurious Emissions	49
11.1.	Block diagram of test setup	49
11.2.	Limits	49
11.3.	Test procedure	49
11.4.	Test result	50
11.5.	Test graphs	51
12.	Duty cycle	60
12.1.	Block diagram of test setup	60
12.2.	Limit	60
12.3.	Test procedure	60
12.4.	Test result	61
12.5.	Test graphs	62
13.	Antenna Requirements	65
13.1.	Limit	65
13.2.	Result	65
14.	Radiated Emission	66
14.1.	Test equipment	66
14.2.	Block diagram of test setup	67
14.3.	Limits	68
14.4.	Assistant equipment used for test	70
14.5.	Test procedure	70

14.6.	Test result	71
14.7.	Test data	72
15.	Band Edge Compliance.....	80
15.1.	Test equipment.....	80
15.2.	Block diagram of test setup	81
15.3.	Limits.....	81
15.4.	Assistant equipment used for test	81
15.5.	Test procedure	81
15.6.	Test result	81
15.7.	Test data	82
16.	Power Line Conducted Emissions.....	94
16.1.	Test equipment.....	94
16.2.	Block diagram of test setup	94
16.3.	Limits.....	94
16.4.	Assistant equipment used for test	94
16.5.	Test procedure	95
16.6.	Test result	95
16.7.	Test data	96
17.	Test Setup Photograph	98
18.	Photos of the EUT	100

Test Report Declare

Applicant	:	Harman International Industries, Inc.
Address of Applicant	:	8500 Balboa Boulevard, Northridge, CA 91329, UNITED STATES
Equipment under Test	:	Multi-Channel Soundbar with wireless subwoofer
Model No.	:	BAR 1000MK2
Manufacturer	:	Harman International Industries, Inc.
Address of Manufacturer	:	8500 Balboa Boulevard, Northridge, CA 91329, UNITED STATES

Test Standard Used:

FCC Rules and Regulations Part 15 Subpart C,
RSS-247 Issue 3 August 2023,
ANSI C63.10:2013,
RSS-Gen Issue 5, Apr. 2018, Amendment 2 (February 2021)

We Declare:

The equipment described above is tested by Guangdong Dongdian Testing Service Co., Ltd. and in the configuration tested the equipment complied with the standards specified above. The test results are contained in this test report and Guangdong Dongdian Testing Service Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

Report No.:	DDT-RE24111522-2E01		
Date of Receipt:	2024/11/18	Date of Test:	2024/11/18 - 2025/02/19

Created: Jacky Huang	Reviewed: Ella Gong	Approved: Damon Hu
		
2025/02/19	2025/03/05	2025/03/05

Note: This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Guangdong Dongdian Testing Service Co., Ltd.

Revision History

Version	Revision Content	Issue Date	Approved
---	Initial issue	2025/03/05	

1. Summary of Test Results

No.	Test Parameter	Clause No.	Condition	Result
1	Maximum Peak Output Power	FCC Part 15: 15.247(b)(1), RSS-247 Issue 3 clause 5.4(b)	/	Pass
2	20 dB Bandwidth	FCC Part 15: 15.247(a)(1), RSS-247 Issue 3 clause 5.1(a)	/	Pass
3	99% Bandwidth	RSS-Gen Issue 5 clause 6.7	/	Pass
4	Carrier Frequency Separation	FCC Part 15: 15.247(a)(1), RSS-247 Issue 3 clause 5.1(b)	/	Pass
5	Number of Hopping Channel	FCC Part 15: 15.247(a)(1)(iii), RSS-247 Issue 3 clause 5.1(d)	/	Pass
6	Dwell Time	FCC Part 15: 15.247(a)(1)(iii), RSS-247 Issue 3 clause 5.1(d)	/	Pass
7	RF Conducted Spurious Emissions	FCC Part 15: 15.247(d), RSS-247 Issue 3 clause 5.5	/	Pass
8	Radiated Emission	FCC Part 15: 15.205, FCC Part 15: 15.209, FCC Part 15: 15.247(d), RSS-247 Issue 3 clause 5.5, RSS-Gen Issue 5 clause 8.9, RSS-Gen Issue 5 clause 8.10	/	Pass
9	Band Edge Compliance	FCC Part 15: 15.205, FCC Part 15: 15.209, FCC Part 15: 15.247(d), RSS-247 Issue 3 clause 5.5, RSS-Gen Issue 5 clause 8.9, RSS-Gen Issue 5 clause 8.10	/	Pass
10	Power Line Conducted Emissions	FCC Part 15: 15.207(a), RSS-Gen Issue 5 clause 8.8	/	Pass
11	Antenna Requirement	FCC Part 15: 15.203, RSS-Gen Issue 5 clause 6.8	/	Pass
Note: N/A is an abbreviation for Not Applicable, and means this item is not applicable for this device or no need to test according to standard.				

2. General Test Information

2.1. Description of EUT

EUT Name	: Multi-Channel Soundbar with wireless subwoofer
Model Number	: BAR 1000MK2
EUT Function Description	: Please reference user manual of this device
Power Supply	: AC 100-240V, 50/60Hz, 70W
Antenna Type	: Bluetooth Antenna type: PIFA WiFi Antenna type: Monopole SRD Antenna type: PCB
Max Antenna Gain(dBi)	: Bluetooth Antenna: 2.31 dBi Ant1: 2.4 GHz WiFi: 2.17 dBi 5 GHz WiFi: 5150-5250MHz: 3.47 dBi 5250-5350MHz: 3.47 dBi 5470-5725MHz: 3.69 dBi 5745-5825MHz: 3.77 dBi Ant2: 2.4 GHz WiFi: 2.29 dBi 5 GHz WiFi: 5150-5250MHz: 3.57 dBi 5250-5350MHz: 3.07 dBi 5470-5725MHz: 3.37 dBi 5745-5825MHz: 3.83 dBi SRD Antenna: 2.29 dBi

Radio Specification	: Bluetooth BR/EDR
Operation Frequency	: 2402 MHz to 2480 MHz
Modulation	: GFSK, $\pi/4$ -DQPSK, 8DPSK

Bluetooth BR/EDR Channel information					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	27	2429	54	2456
1	2403	28	2430	55	2457
2	2404	29	2431	56	2458
3	2405	30	2432	57	2459
4	2406	31	2433	58	2460
5	2407	32	2434	59	2461
6	2408	33	2435	60	2462
7	2409	34	2436	61	2463
8	2410	35	2437	62	2464
9	2411	36	2438	63	2465
10	2412	37	2439	64	2466
11	2413	38	2440	65	2467

12	2414	39	2441	66	2468
13	2415	40	2442	67	2469
14	2416	41	2443	68	2470
15	2417	42	2444	69	2471
16	2418	43	2445	70	2472
17	2419	44	2446	71	2473
18	2420	45	2447	72	2474
19	2421	46	2448	73	2475
20	2422	47	2449	74	2476
21	2423	48	2450	75	2477
22	2424	49	2451	76	2478
23	2425	50	2452	77	2479
24	2426	51	2453	78	2480
25	2427	52	2454	/	
26	2428	53	2455	/	


Note: The above EUT information is declared by manufacturer and for more detailed features description please refer to the manufacturer's specifications or User's Manual. The above Antenna information is declared by manufacturer and for more detailed features description please refer to the manufacturer's specifications, the laboratory shall not be held responsible.

“☑” means to be chosen or applicable; “☐” means don't to be chosen or not applicable; This note applies to entire report.

2.2. Accessories of EUT

Accessories	Manufacturer	Model number	Description
AC cable	Harman	N/A	Length: 195cm
HDMI cable	Harman	N/A	Length: 115cm, with two magnetic rings
Remote control	Harman	N/A	N/A

2.3. Block diagram of EUT configuration for test



2.4. Decision of final test mode

According pre-test, the worst test modes were reported as below:

Test software: adb.exe

The test software was used to control EUT work in Continuous Tx mode, and select test channel, wireless mode as below table.

The pathloss of external cable: 0.5 dB (According to the manufacturer's claims)

Tested mode, Tx Power Setting, Channel, and Frequency			
Tested mode	Tx Power Setting	Channel	Frequency (MHz)
GFSK hopping on Tx mode	Default	CH0 to CH78	2402 to 2480
$\pi/4$ -DQPSK hopping on Tx mode	Default	CH0 to CH78	2402 to 2480
8DPSK hopping on Tx mode	Default	CH0 to CH78	2402 to 2480
GFSK hopping off Tx mode	Default	CH0	2402
	Default	CH39	2441
	Default	CH78	2480
$\pi/4$ -DQPSK hopping off Tx mode	Default	CH0	2402
	Default	CH39	2441
	Default	CH78	2480
8DPSK hopping off Tx mode	Default	CH0	2402
	Default	CH39	2441
	Default	CH78	2480

Note: According exploratory test, EUT will have maximum output power in those data rate, worst-case data rates were: GFSK mode: DH5, $\pi/4$ -DQPSK mode: 2DH5, 8DPSK mode: 3DH5

2.5. Deviations of test standard

No deviation.

2.6. Test environment conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature range:	+15°C to +35 °C
Humidity range:	20% to 75%
Pressure range:	86 kPa to 106 kPa

Note: The specific temperature and humidity information of each test item refers to the temperature and humidity record in the corresponding test data.

2.7. Test laboratory

Guangdong Dongdian Testing Service Co., Ltd.

Add.: Unit 2, Building 1, No. 17, Zongbu 2nd Road, Songshan Lake Park, Dongguan, Guangdong, China, 523808.

Tel.: +86-0769-38826678, <http://www.dgddt.com>, Email: ddt@dgddt.com.

CNAS Accreditation No. L6451; A2LA Accreditation Number: 3870.01

FCC Designation Number: CN1182, Test Firm Registration Number: 540522

Innovation, Science and Economic Development Canada Site Registration Number: 10288A

Conformity Assessment Body identifier: CN0048

VCCI facility registration number: C-20087, T-20088, R-20123, R-20240, G-20118

2.8. Measurement uncertainty


Test Item	Uncertainty
Bandwidth	1.1%
Peak Output Power (Conducted) (Spectrum analyzer)	0.86 dB ($10 \text{ MHz} \leq f < 3.6 \text{ GHz}$); 1.38 dB ($3.6 \text{ GHz} \leq f < 8 \text{ GHz}$)
Peak Output Power (Conducted) (Power Sensor)	0.74 dB
Power Spectral Density	0.74 dB ($10 \text{ MHz} \leq f < 3.6 \text{ GHz}$); 1.38 dB ($3.6 \text{ GHz} \leq f < 8 \text{ GHz}$)
Frequencies Stability	6.7×10^{-8} (Antenna couple method) 5.5×10^{-8} (Conducted method)
Conducted spurious emissions	0.86 dB ($10 \text{ MHz} \leq f < 3.6 \text{ GHz}$); 1.40 dB ($3.6 \text{ GHz} \leq f < 8 \text{ GHz}$) 1.66 dB ($8 \text{ GHz} \leq f < 26.5 \text{ GHz}$)
Uncertainty for radio frequency (RBW < 20 kHz)	3×10^{-8}
Temperature	0.4 °C
Humidity	2 %
Uncertainty for Radiation Emission test (9 kHz – 30 MHz)	3.44 dB
Uncertainty for Radiation Emission test (30 MHz - 1 GHz)	4.70 dB (Antenna Polarize: V) 4.84 dB (Antenna Polarize: H)
Uncertainty for Radiation Emission test (1 GHz - 40 GHz)	4.10 dB (1 - 6 GHz) 4.40 dB (6 GHz - 18 GHz) 3.54 dB (18 GHz - 26 GHz) 4.30 dB (26 GHz - 40 GHz)
Uncertainty for Power line conduction emission test	3.34dB (150KHz-30MHz) 3.72dB (9KHz-150KHz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

3. Equipment Used During Conductive Test

Equipment	Manufacturer	Model No.	Serial Number	Due Date
☑RF Connected Test (RF Measurement System 4#)				
Signal &Spectrum Analyzer	R&S	FSV3044	101173	2025/03/31
Wideband Radio Communication Tester	R&S	CMW500	168801	2025/03/31
MXG Vector Signal Generator	Agilent	N5182A	MY48180737	2025/03/31
PSG Vector Signal Generator	Agilent	E8267D	US49060192	2025/08/25
RF Control Unit	Tonsend	JS0806-2	21I8060485	2025/03/31
TEMP&HUMI Programmable Chamber	ZHIXIANG	ZXGDJS-150L	ZX170110-A	2025/04/22
Test Software	Tonscend	JS1120-3	Ver.3.2.22	N/A

4. 20 dB Bandwidth

4.1. Block diagram of test setup

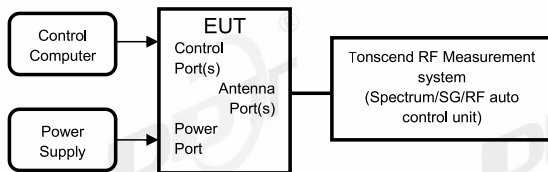

4.2. Limits

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in § 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

4.3. Test procedure

- (1) The test according to ANSI C63.10-2013 clause 6.9.2.
- (2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously
- (4) Use the following spectrum analyzer settings for the 20 dB bandwidth measurement:

RBW:	1% to 5% of the OBW
VBW:	approximately three times RBW
Span:	between 2 times and 5 times the OBW
Detector Mode:	Peak
Sweep time:	Auto
Trace mode:	Max hold
- (5) Measure and record the results in the report.


4.4. Test result

Test Engineer:	Zoe Peng	Test Site:	RF Measurement System 4#
Ambient Condition:	26.4℃,48.9%RH	Test Date:	2024.11.19-2024.11.19
Test Power Supply:	AC 100-240V	Sample Number:	S24111522-014

Test Mode	Antenna	Frequency [MHz]	20dB EBW[MHz]
DH5	Ant1	2402	0.85
		2441	0.86
		2480	0.87
2DH5	Ant1	2402	1.33
		2441	1.33
		2480	1.32
3DH5	Ant1	2402	1.31
		2441	1.34
		2480	1.30

4.5. Test graphs




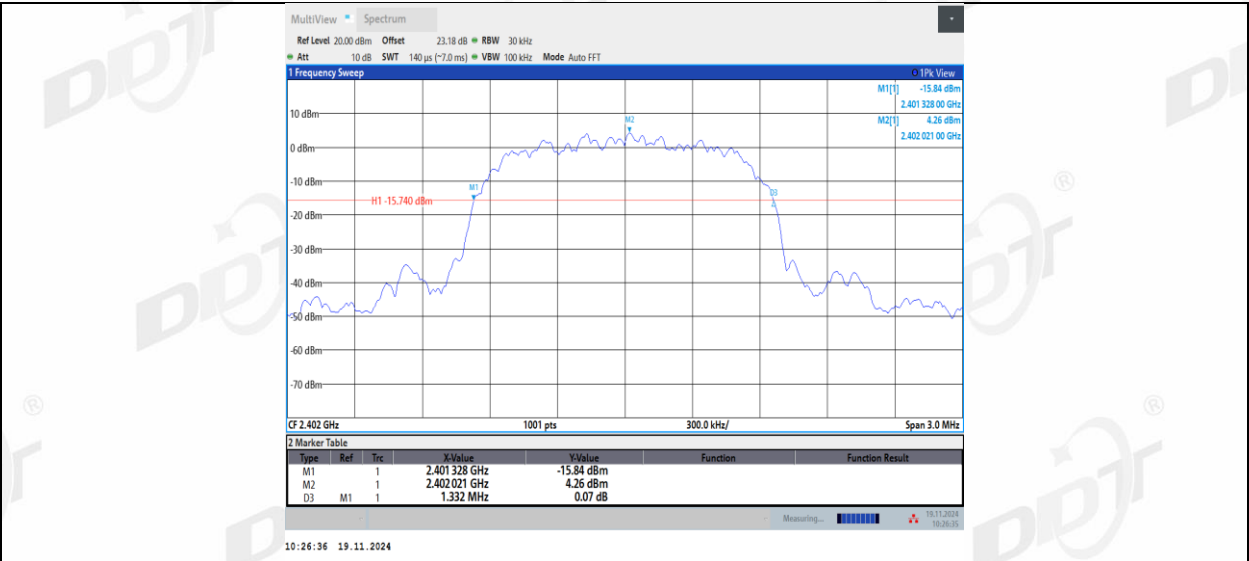


2DH5_Ant1_2441



2DH5_Ant1_2480

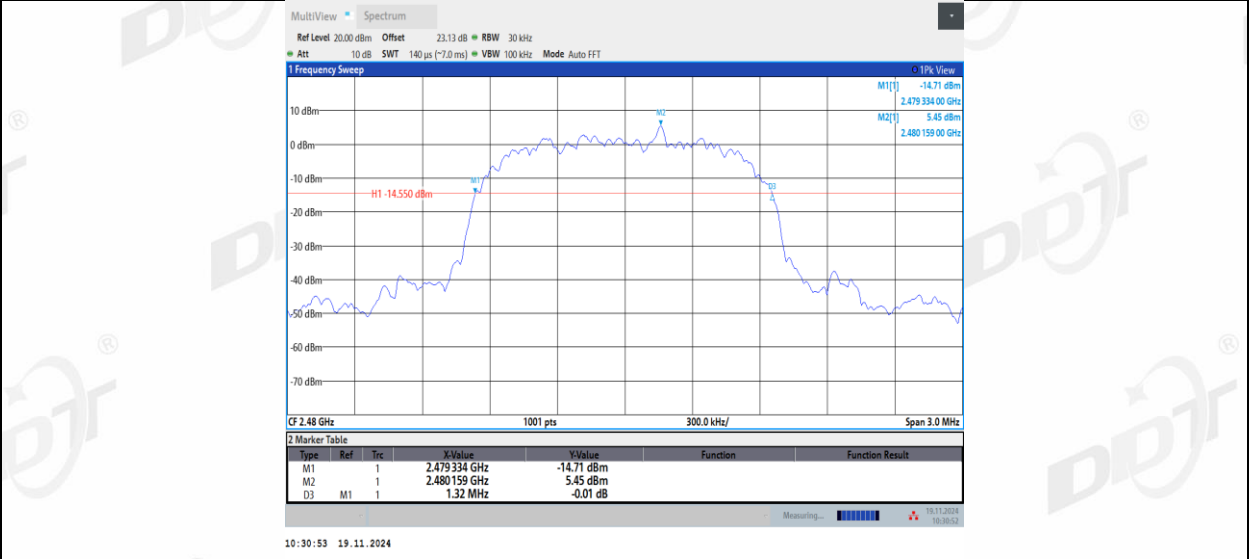

3DH5_Ant1_2402

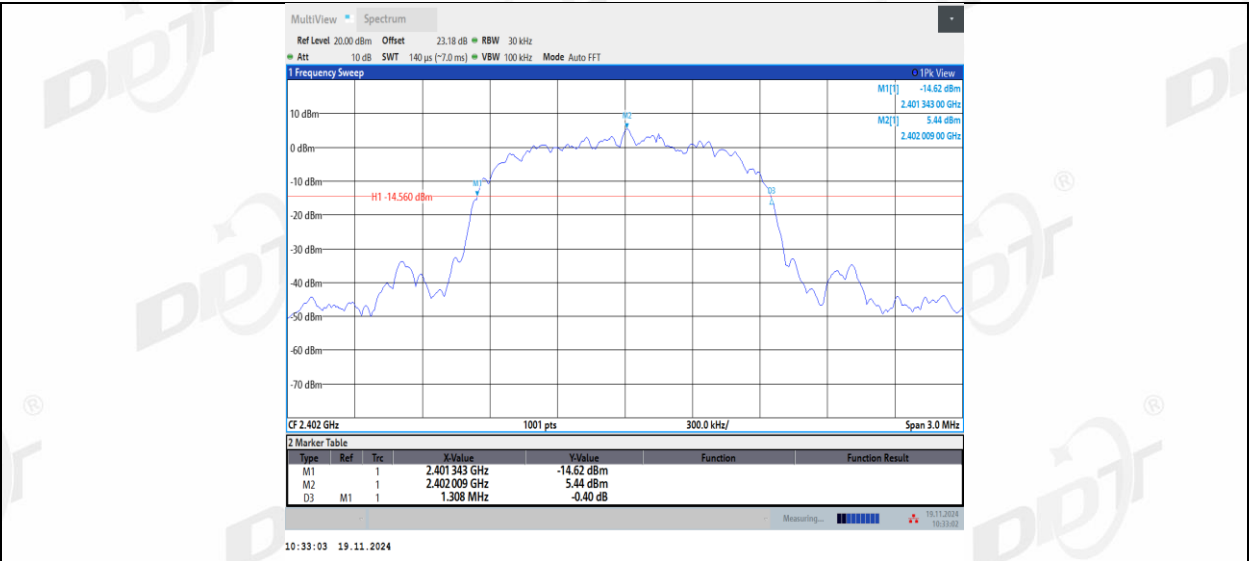

3DH5_Ant1_2441




3DH5_Ant1_2480



5. 99% Bandwidth

5.1. Block diagram of test setup

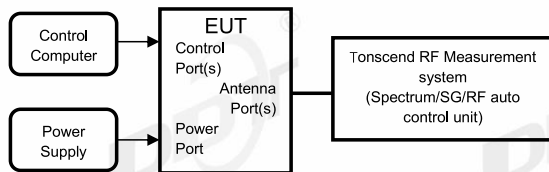

5.2. Limits

Just for Report.

5.3. Test procedure

- (1) The test according to ANSI C63.10-2013 clause 6.9.3.
- (2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously
- (4) Use the following spectrum analyzer settings for the 99% bandwidth measurement:

RBW:	1% to 5% of the OBW
VBW:	approximately three times RBW
Span:	between 1.5 times and 5.0 times the OBW
Detector Mode:	Peak
Sweep time:	Auto
Trace mode:	Max hold
- (5) Measure and record the results in the report.


5.4. Test result

Test Engineer:	Zoe Peng	Test Site:	RF Measurement System 4#
Ambient Condition:	26.4℃,48.9%RH	Test Date:	2024.11.19-2024.11.19
Test Power Supply:	AC 100-240V	Sample Number:	S24111522-014


Test Mode	Antenna	Frequency [MHz]	OCB [MHz]	FL[MHz]	FH[MHz]
DH5	Ant1	2402	0.759	2401.6178	2402.3769
		2441	0.761	2440.6163	2441.3770
		2480	0.756	2479.6203	2480.3766
2DH5	Ant1	2402	1.184	2401.4018	2402.5853
		2441	1.18	2440.4036	2441.5833
		2480	1.182	2479.4032	2480.5847
3DH5	Ant1	2402	1.181	2401.4068	2402.5877
		2441	1.178	2440.4072	2441.5850
		2480	1.181	2479.4053	2480.5868

5.5. Test graphs




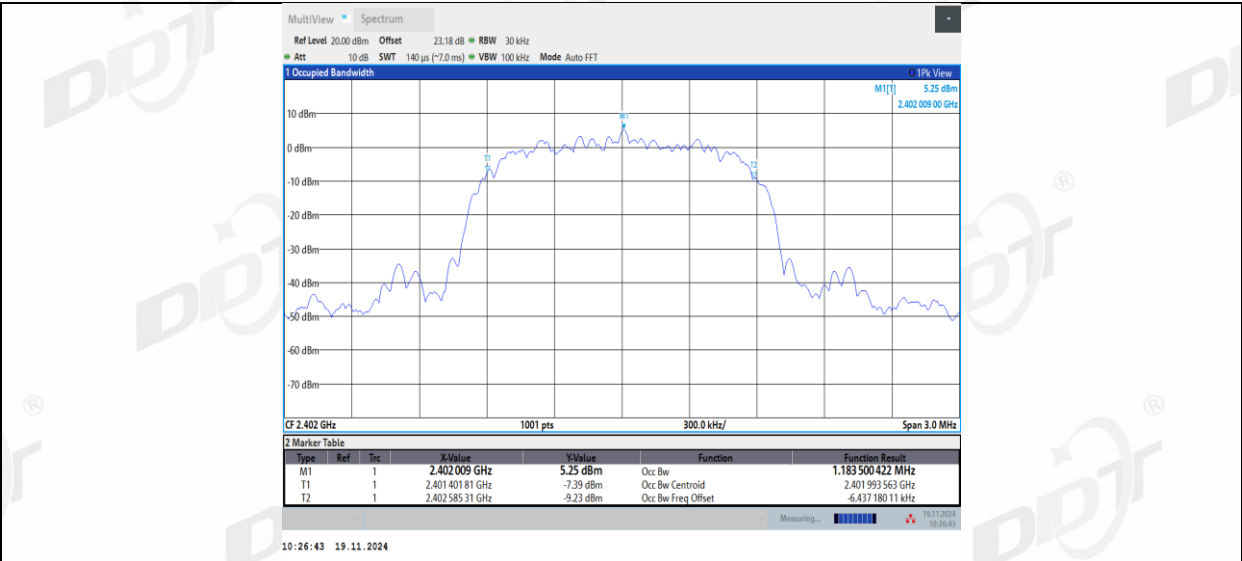


2DH5_Ant1_2441

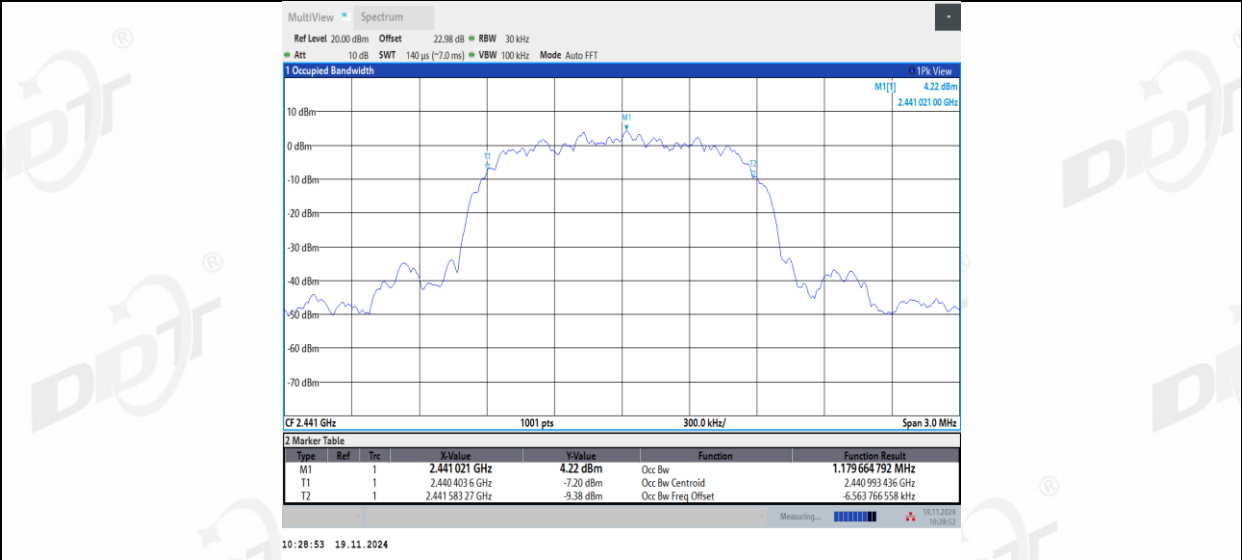


2DH5_Ant1_2480

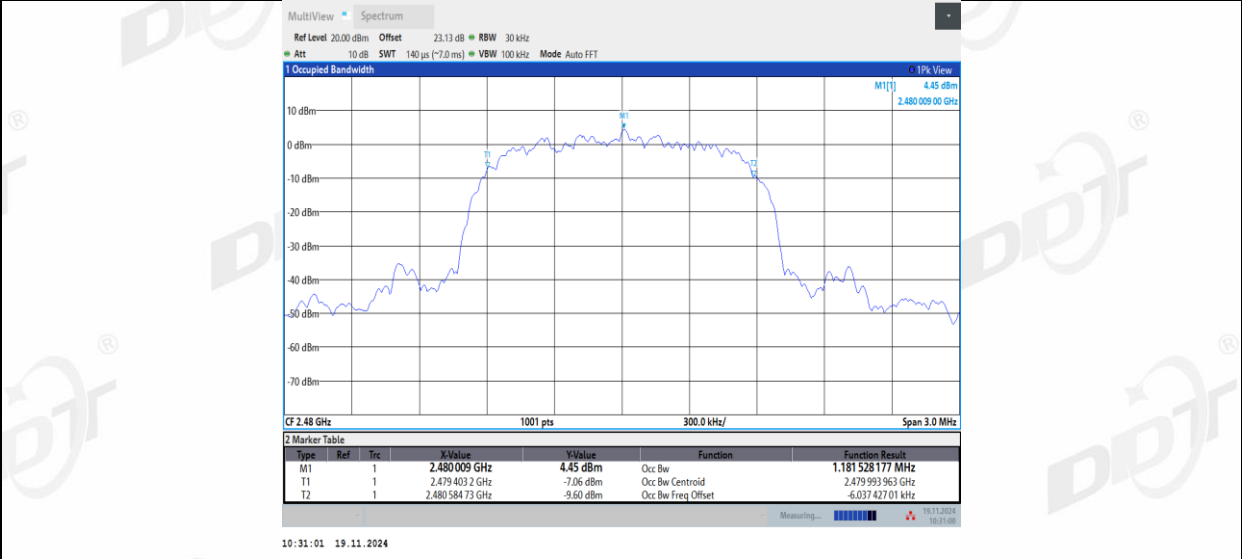


3DH5_Ant1_2402

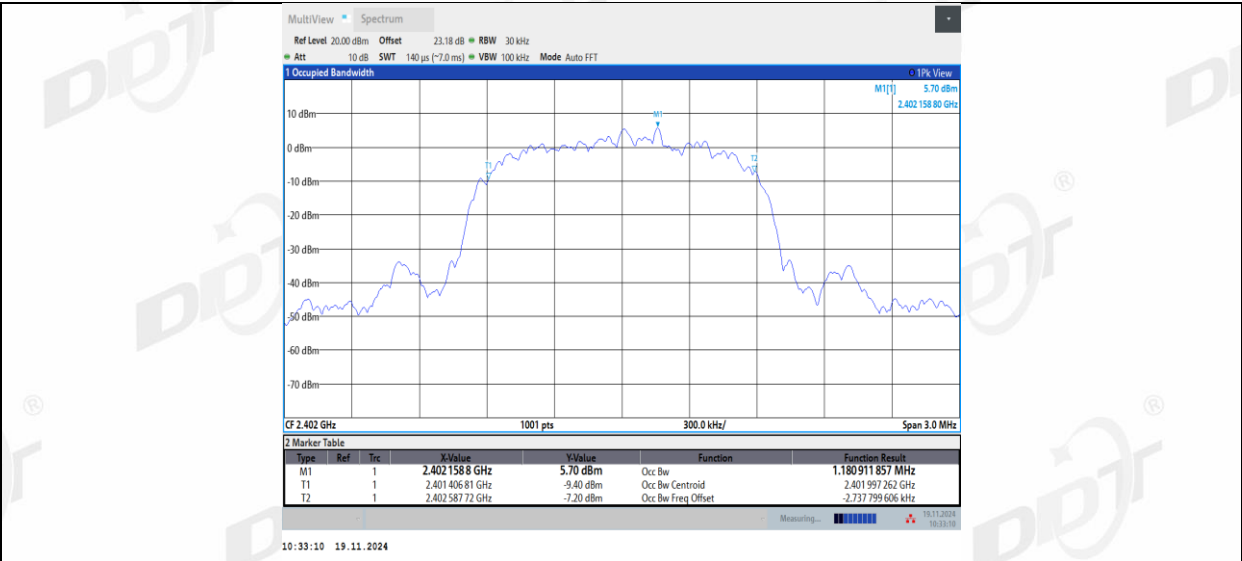

3DH5_Ant1_2441

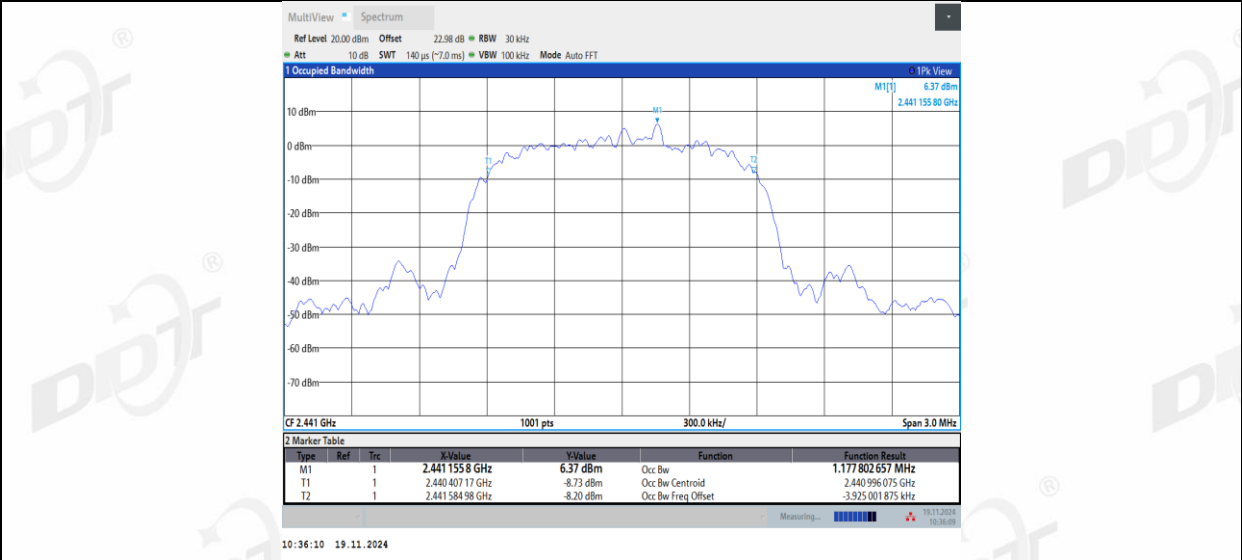


3DH5_Ant1_2480

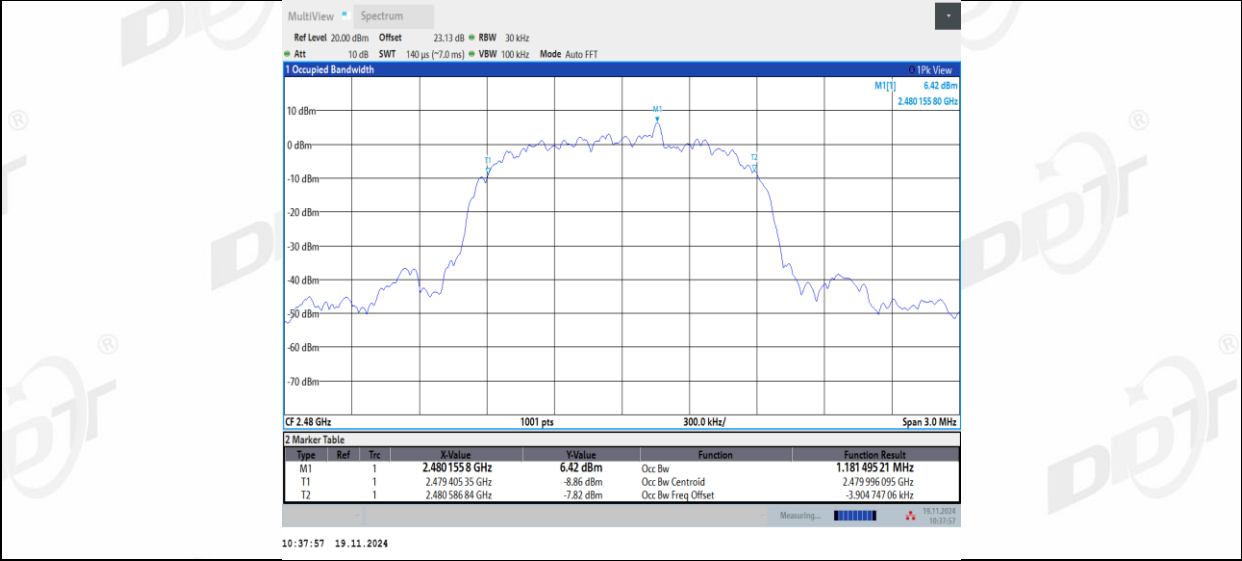

6. Maximum Peak Output Power

6.1. Block diagram of test setup

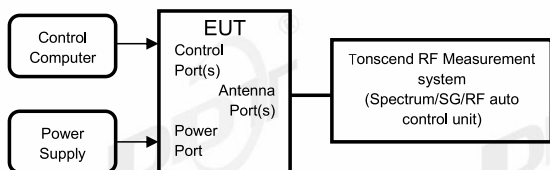

6.2. Limits

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts, the e.i.r.p shall not exceed 4W.

6.3. Test procedure

- (1) The test according to ANSI C63.10-2013 clause 7.8.5.
- (2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results.
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously.
- (4) Use the following spectrum analyzer settings for the maximum peak output power measurement:

RBW:	> 20 dB bandwidth of the emission being measured.
VBW:	VBW $\geq$ RBW.
Span:	Approximately five times the 20 dB bandwidth, centered on a hopping channel.
Detector Mode:	Peak
Sweep time:	Auto
Trace mode:	Max hold
- (5) Use the marker-to-peak function to set the marker to the peak of the emission and record the results in the report.


6.4. Test result

Test Engineer:	Zoe Peng	Test Site:	RF Measurement System 4#
Ambient Condition:	26.4℃,48.9%RH	Test Date:	2024.11.19-2024.11.19
Test Power Supply:	AC 100-240V	Sample Number:	S24111522-014


Test Mode	Antenna	Frequency [MHz]	Conducted Peak Power[dBm]	Conducted Limit[dBm]	EIRP[dBm]	EIRP Limit[dBm]	Verdict
DH5	Ant1	2402	9.94	≤20.97	12.25	≤30	PASS
		2441	9.88	≤20.97	12.19	≤30	PASS
		2480	9.80	≤20.97	12.11	≤30	PASS
2DH5	Ant1	2402	12.21	≤20.97	14.52	≤30	PASS
		2441	12.27	≤20.97	14.58	≤30	PASS
		2480	12.17	≤20.97	14.48	≤30	PASS
3DH5	Ant1	2402	12.73	≤20.97	15.04	≤30	PASS
		2441	12.57	≤20.97	14.88	≤30	PASS
		2480	12.49	≤20.97	14.80	≤30	PASS

6.5. Test graphs




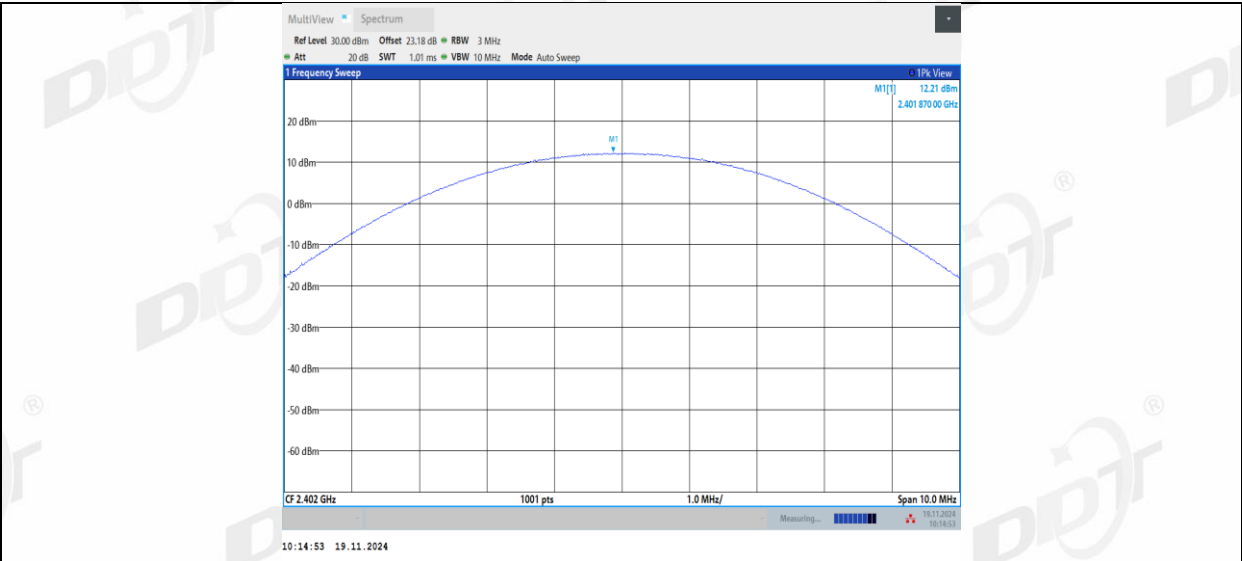


2DH5_Ant1_2441

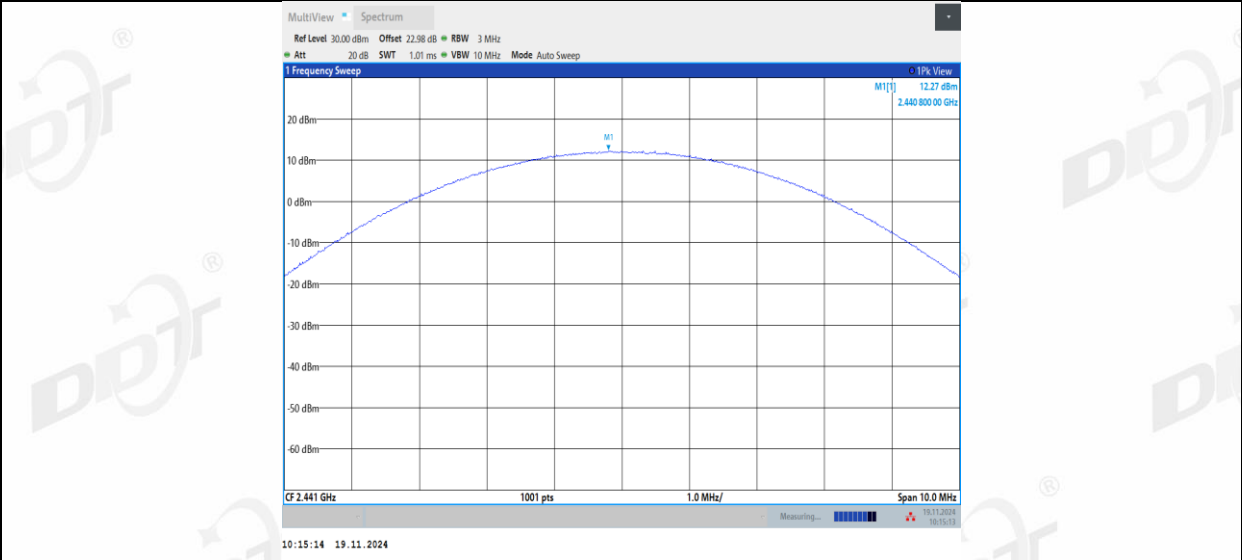


2DH5_Ant1_2480

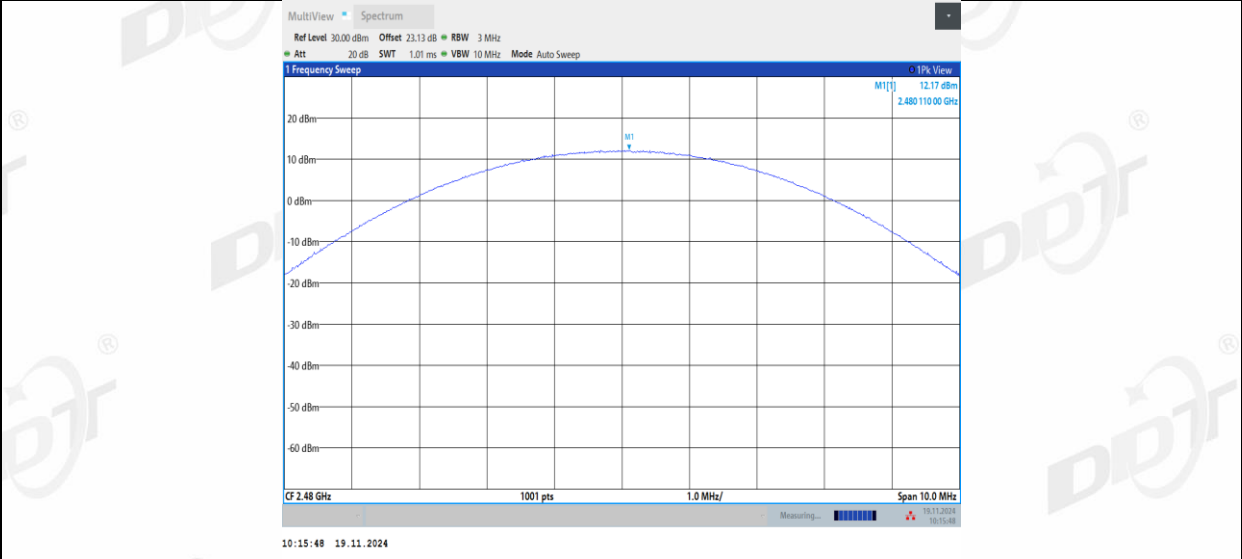


3DH5_Ant1_2402

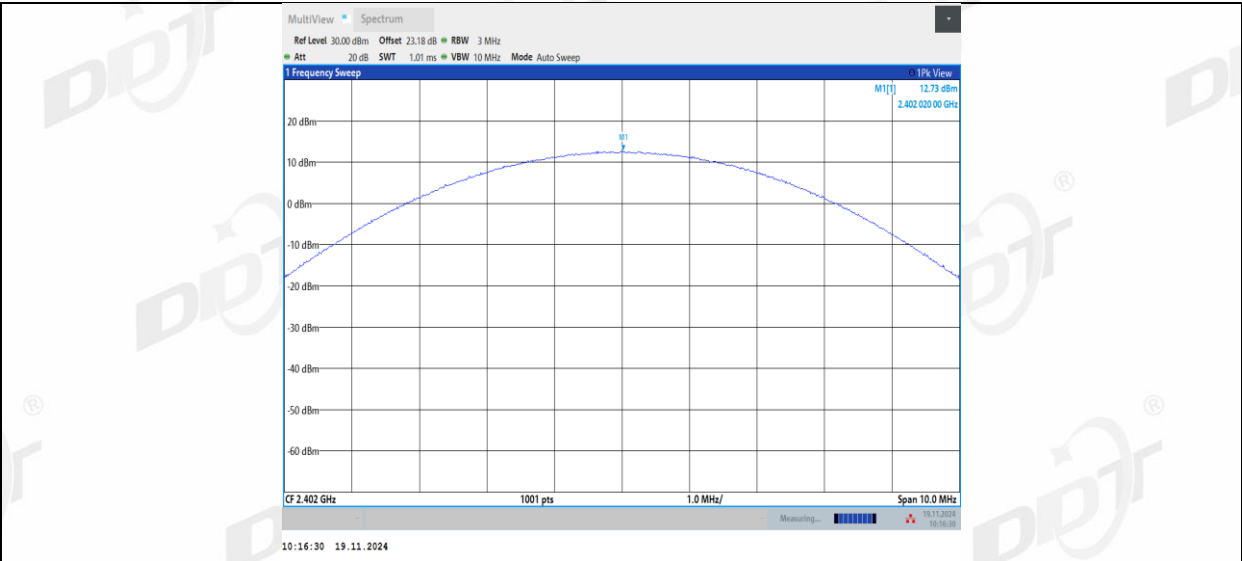

3DH5_Ant1_2441

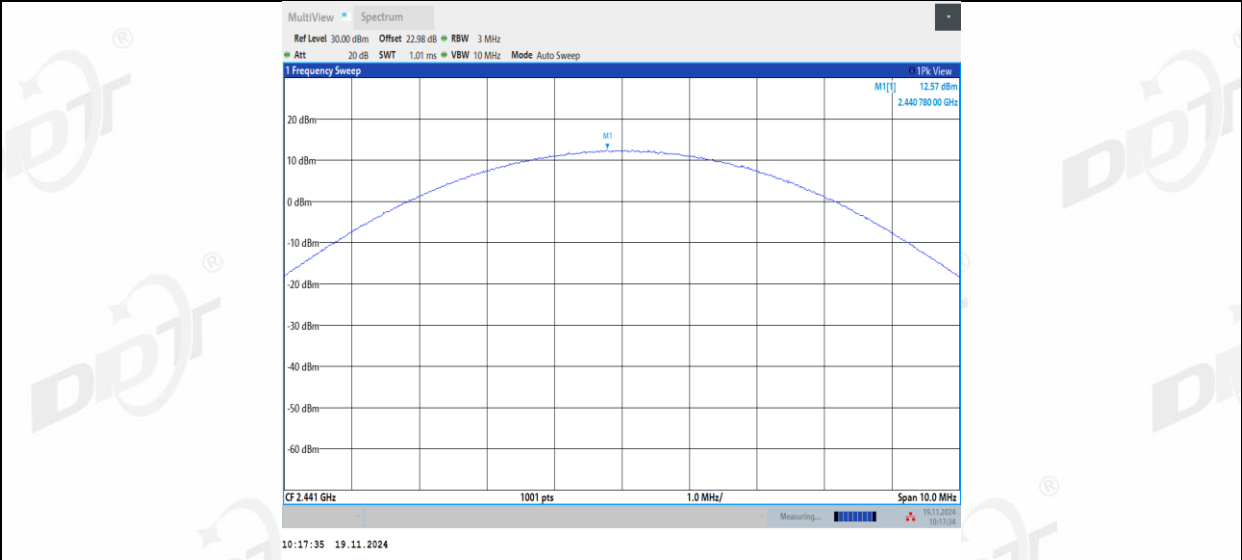


3DH5_Ant1_2480

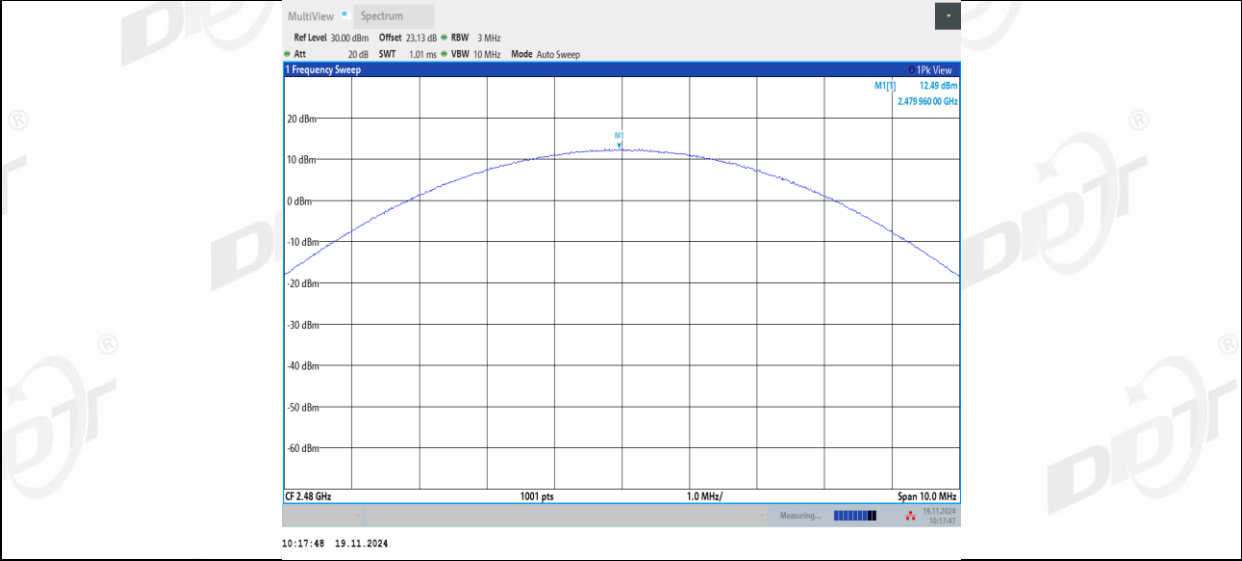

7. Carrier Frequency Separation

7.1. Block diagram of test setup

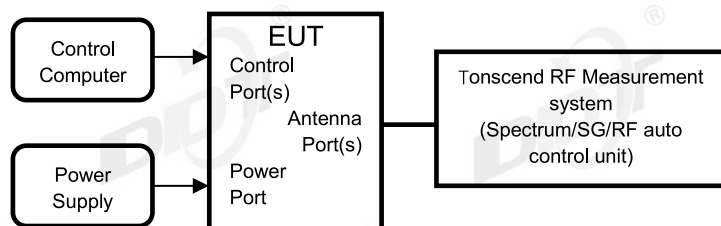

7.2. Limits

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

7.3. Test procedure

- (1) The test according to ANSI C63.10-2013 clause 7.8.2.
- (2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results.
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously.
- (4) Use the following spectrum analyzer settings for the maximum peak output power measurement:

RBW:	approximately 30% of the channel spacing
VBW:	VBW $\geq$ RBW.
Span:	Wide enough to capture the peaks of two adjacent channels.
Detector Mode:	Peak
Sweep time:	Auto
Trace mode:	Max hold
- (5) Use the marker-delta function to determine the separation between the peaks of the adjacent channels and record the results in the report.

7.4. Test result

Test Engineer:	Zoe Peng	Test Site:	RF Measurement System 4#
Ambient Condition:	26.4℃,48.9%RH	Test Date:	2024.11.19-2024.11.19
Test Power Supply:	AC 100-240V	Sample Number:	S24111522-014

Test Mode	Antenna	Frequency [MHz]	Result [MHz]	Limit [MHz]	Verdict
DH5	Ant1	Hop	1	≥0.870	PASS
2DH5	Ant1	Hop	0.996	≥0.887	PASS
3DH5	Ant1	Hop	0.992	≥0.893	PASS

The figure consists of three vertically stacked spectral plots, each showing the frequency response of a different antenna. The plots are titled 'DH5 Ant1 Hop', '2DH5_Ant1_Hop', and '3DH5_Ant1_Hop'. Each plot displays power in dBm on the y-axis (ranging from -60 dBm to 20 dBm) versus frequency in GHz on the x-axis (ranging from 2.4405 GHz to 2.4425 GHz). The plots show a flat response around 10 dBm with a slight dip at 2.441 GHz. The plots are labeled with '1 Frequency Sweep' and '1Pk View'. The plots also show the measurement parameters: Ref Level 30.00 dBm, Offset 22.98 dB, RBW 300 kHz, Att 40 dB, SWT 1.01 ms, VBW 300 kHz, and Mode Auto Sweep. The plots are also labeled with the measurement time: 11:18:44, 11:32:30, and 11:26:32, and the date: 19.11.2024.

DH5 Ant1 Hop

MultiView Spectrum
Ref Level 30.00 dBm Offset 22.98 dB RBW 300 kHz
Att 40 dB SWT 1.01 ms VBW 300 kHz Mode Auto Sweep
1 Frequency Sweep 1Pk View
M1[1] 9.64 dBm
2.44098600 GHz
D2[1] -0.05 dB
1.00000 MHz
2.4405 GHz 1001 pts 200.0 kHz/ 2.4425 GHz
Measuring... 19.11.2024 11:18:44

2DH5_Ant1_Hop


MultiView Spectrum
Ref Level 30.00 dBm Offset 22.98 dB RBW 300 kHz
Att 40 dB SWT 1.01 ms VBW 300 kHz Mode Auto Sweep
1 Frequency Sweep 1Pk View
M1[1] 9.45 dBm
2.44112200 GHz
D2[1] -0.07 dB
996.00 kHz
2.4405 GHz 1001 pts 200.0 kHz/ 2.4425 GHz
Measuring... 19.11.2024 11:32:30

3DH5_Ant1_Hop

MultiView Spectrum
Ref Level 30.00 dBm Offset 22.98 dB RBW 300 kHz
Att 40 dB SWT 1.01 ms VBW 300 kHz Mode Auto Sweep
1 Frequency Sweep 1Pk View
M1[1] 9.69 dBm
2.44102400 GHz
D2[1] -0.11 dB
992.00 kHz
2.4405 GHz 1001 pts 200.0 kHz/ 2.4425 GHz
Measuring... 19.11.2024 11:26:32

8. Dwell Time

8.1. Block diagram of test setup

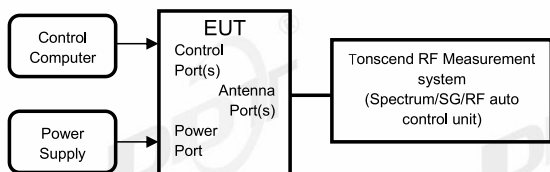

8.2. Limits

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

8.3. Test procedure


- (1) The test according to ANSI C63.10-2013 clause 7.8.4.
- (2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results.
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously.
- (4) Use the following spectrum analyzer settings for the maximum peak output power measurement:
 - RBW: $\leq$ channel spacing and where possible RBW should be set $\gg 1 / T$
 - VBW: $VBW \geq RBW$.
 - Span: Zero span, centered on a hopping channel.
 - Detector Mode: Peak
 - Sweep time: Auto
 - Trace mode: Clear Write.
- (5) The test period: $T = 0.4 \text{ Second/Channel} \times 79 \text{ Channel} = 31.6 \text{ s}$
- (6) Measure the hopping number and on time of each pulse with spectrum analyzer in zero span set, and calculate dwell time with formula Dwell time = total hops * pulse's on time.
- (7) Measure and record the results in the report.


8.4. Test result

Test Engineer:	Zoe Peng	Test Site:	RF Measurement System 4#
Ambient Condition:	26.4℃,48.9%RH	Test Date:	2024.11.19-2024.11.19
Test Power Supply:	AC 100-240V	Sample Number:	S24111522-014



Test Mode	Antenna	Frequency [MHz]	BurstWidth [ms]	TotalHops [Num]	Result[s]	Limit[s]	Verdict
DH1	Ant1	Hop	0.360	166	0.06	≤0.4	PASS
DH3	Ant1	Hop	1.610	165	0.266	≤0.4	PASS
DH5	Ant1	Hop	2.870	83	0.238	≤0.4	PASS
2DH1	Ant1	Hop	0.360	167	0.06	≤0.4	PASS
2DH3	Ant1	Hop	1.620	167	0.271	≤0.4	PASS
2DH5	Ant1	Hop	2.860	79	0.226	≤0.4	PASS
3DH1	Ant1	Hop	0.370	167	0.062	≤0.4	PASS
3DH3	Ant1	Hop	1.610	166	0.267	≤0.4	PASS
3DH5	Ant1	Hop	2.870	87	0.25	≤0.4	PASS

8.5. Test graphs

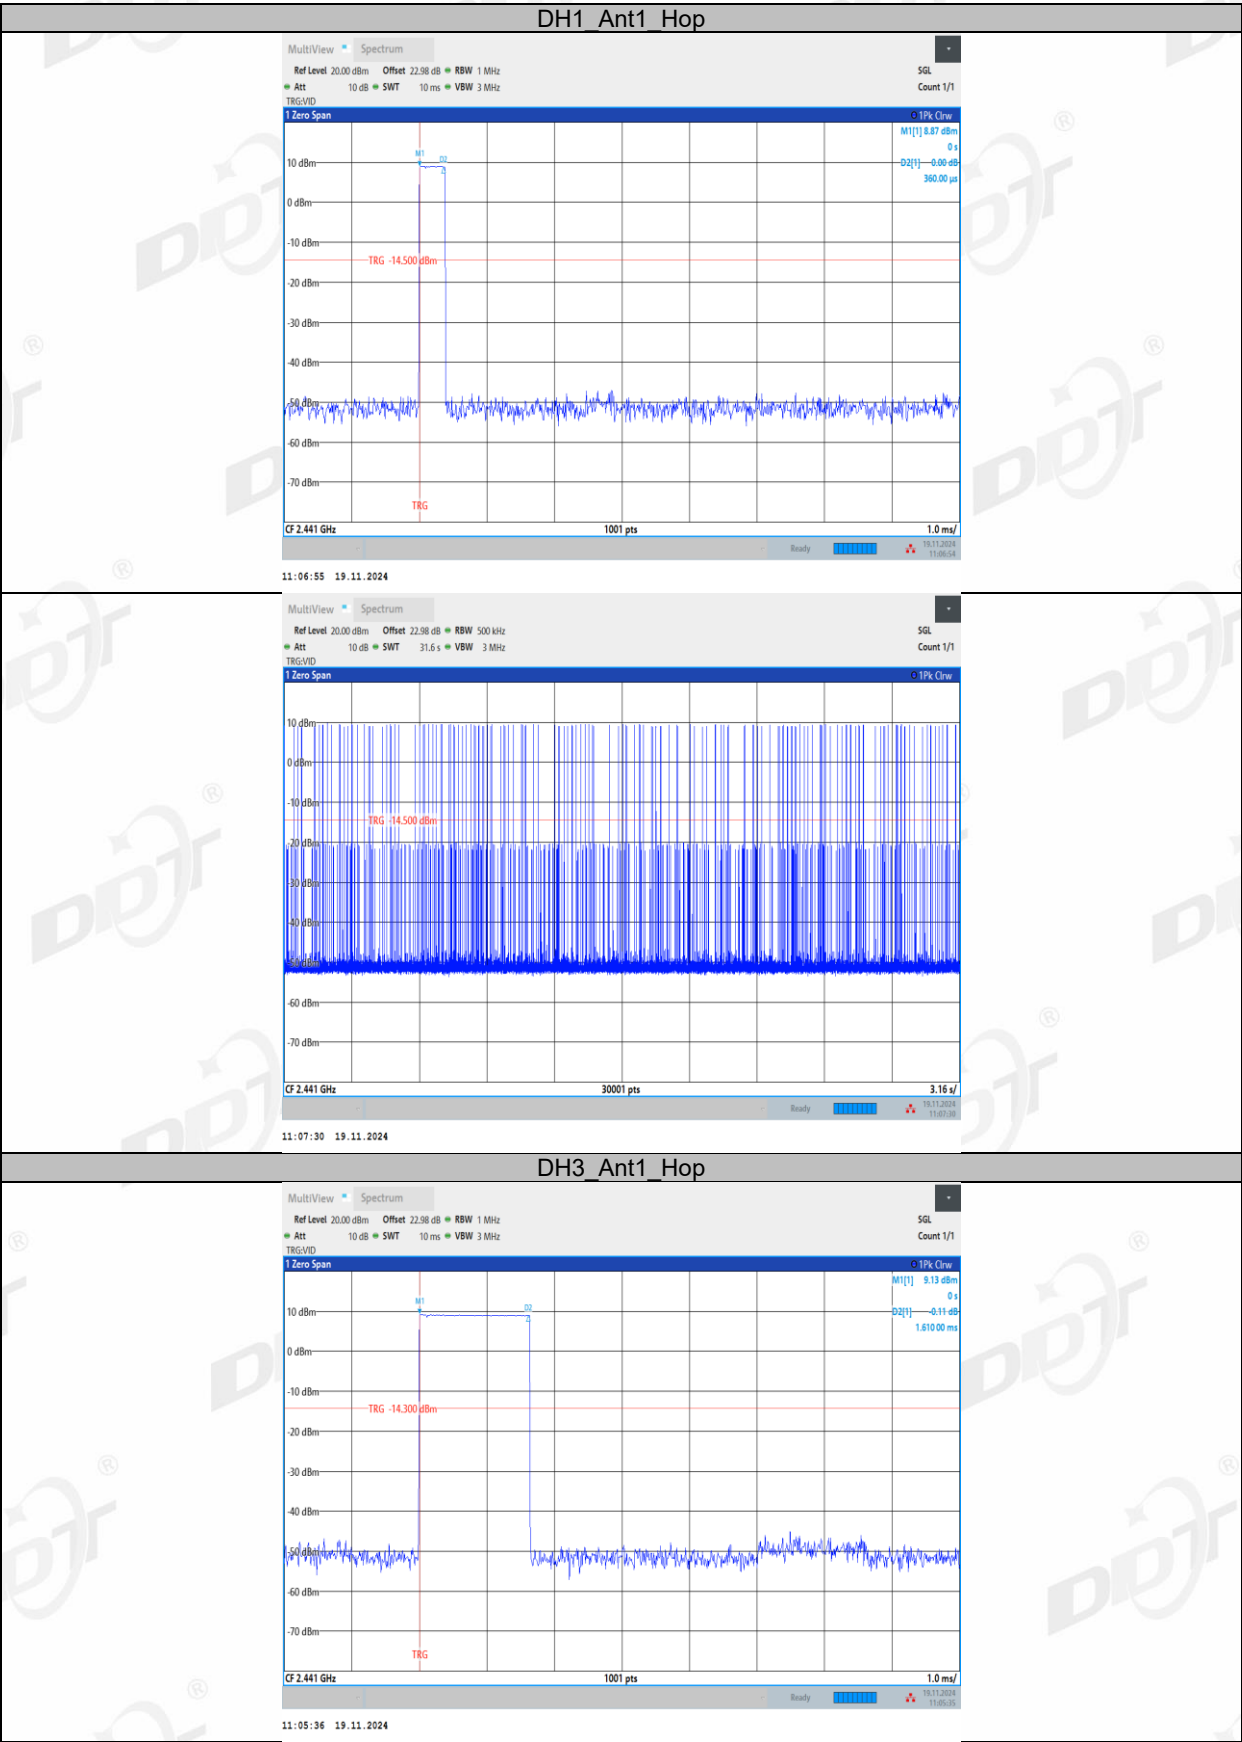


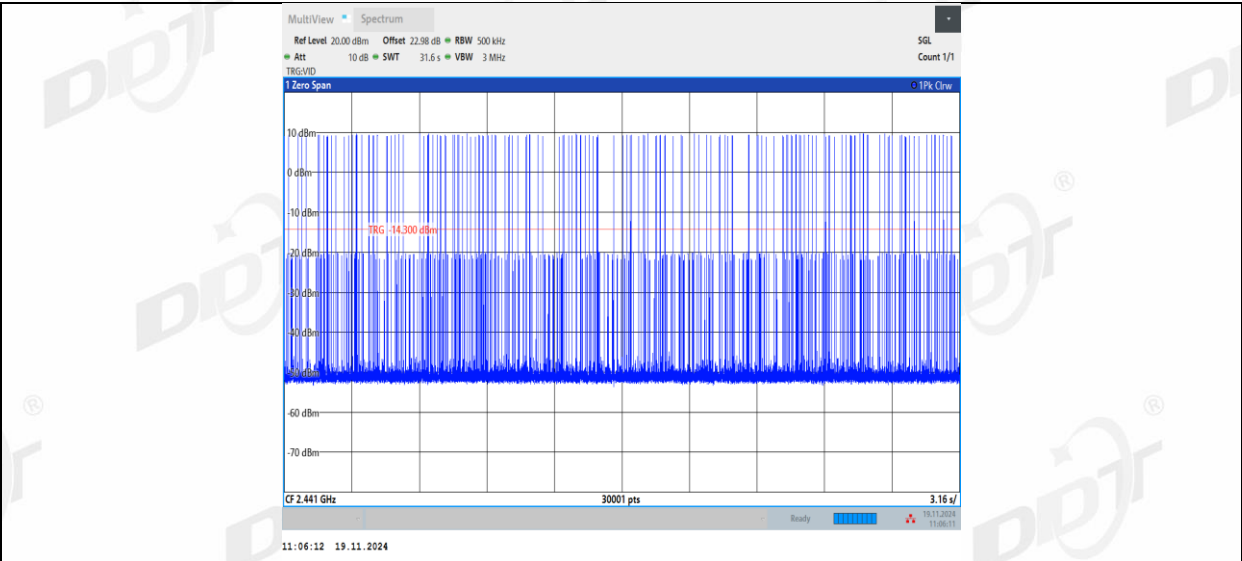


DH5_Ant1_Hop

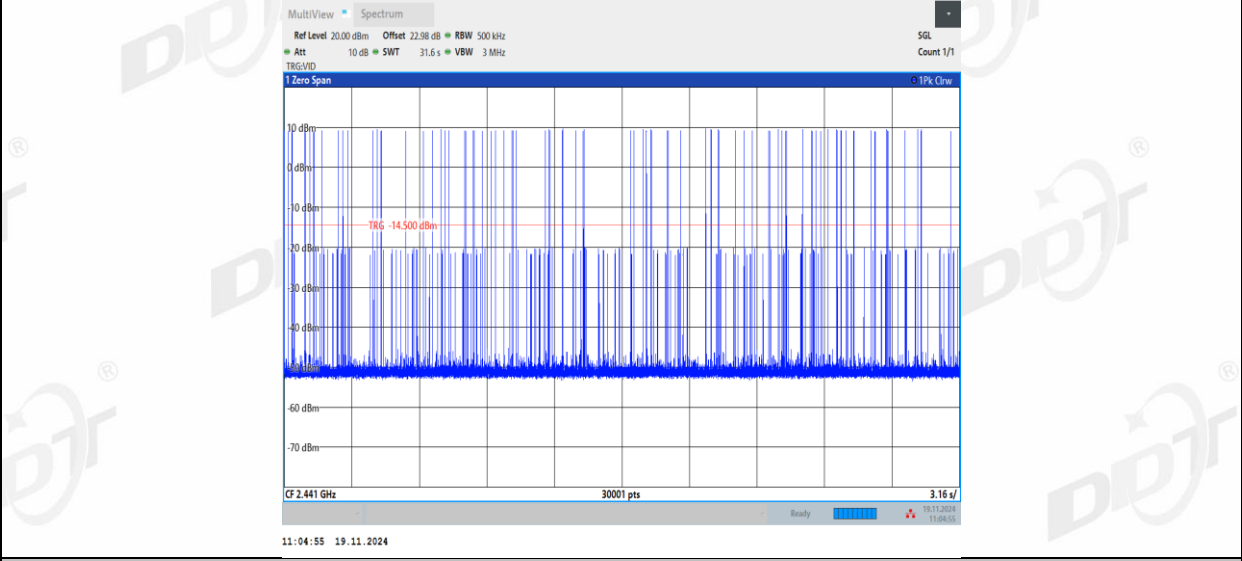
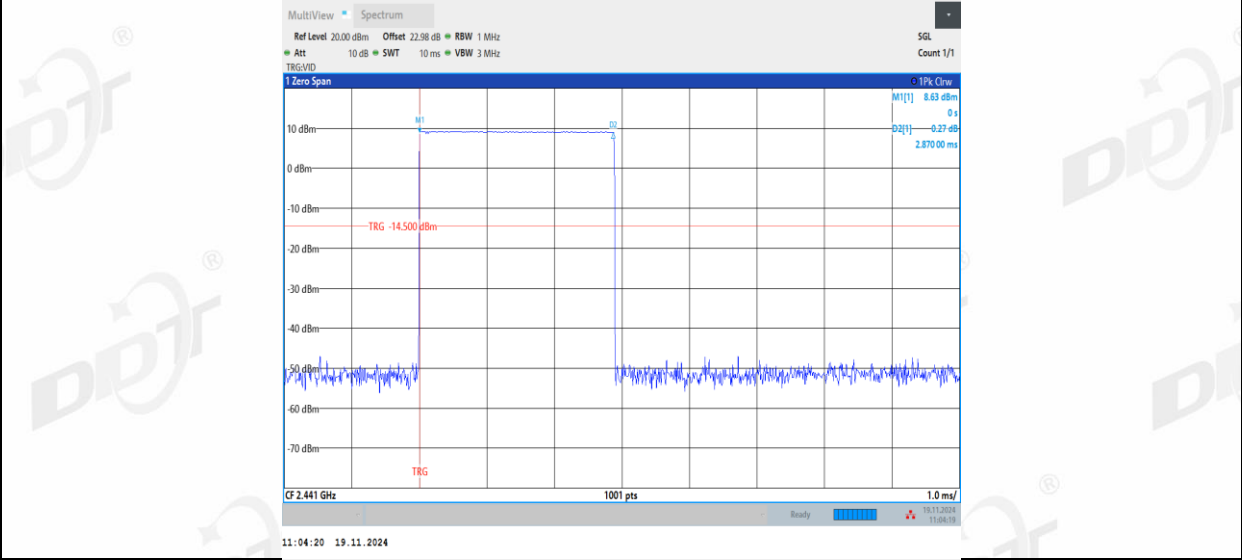


2DH1_Ant1_Hop

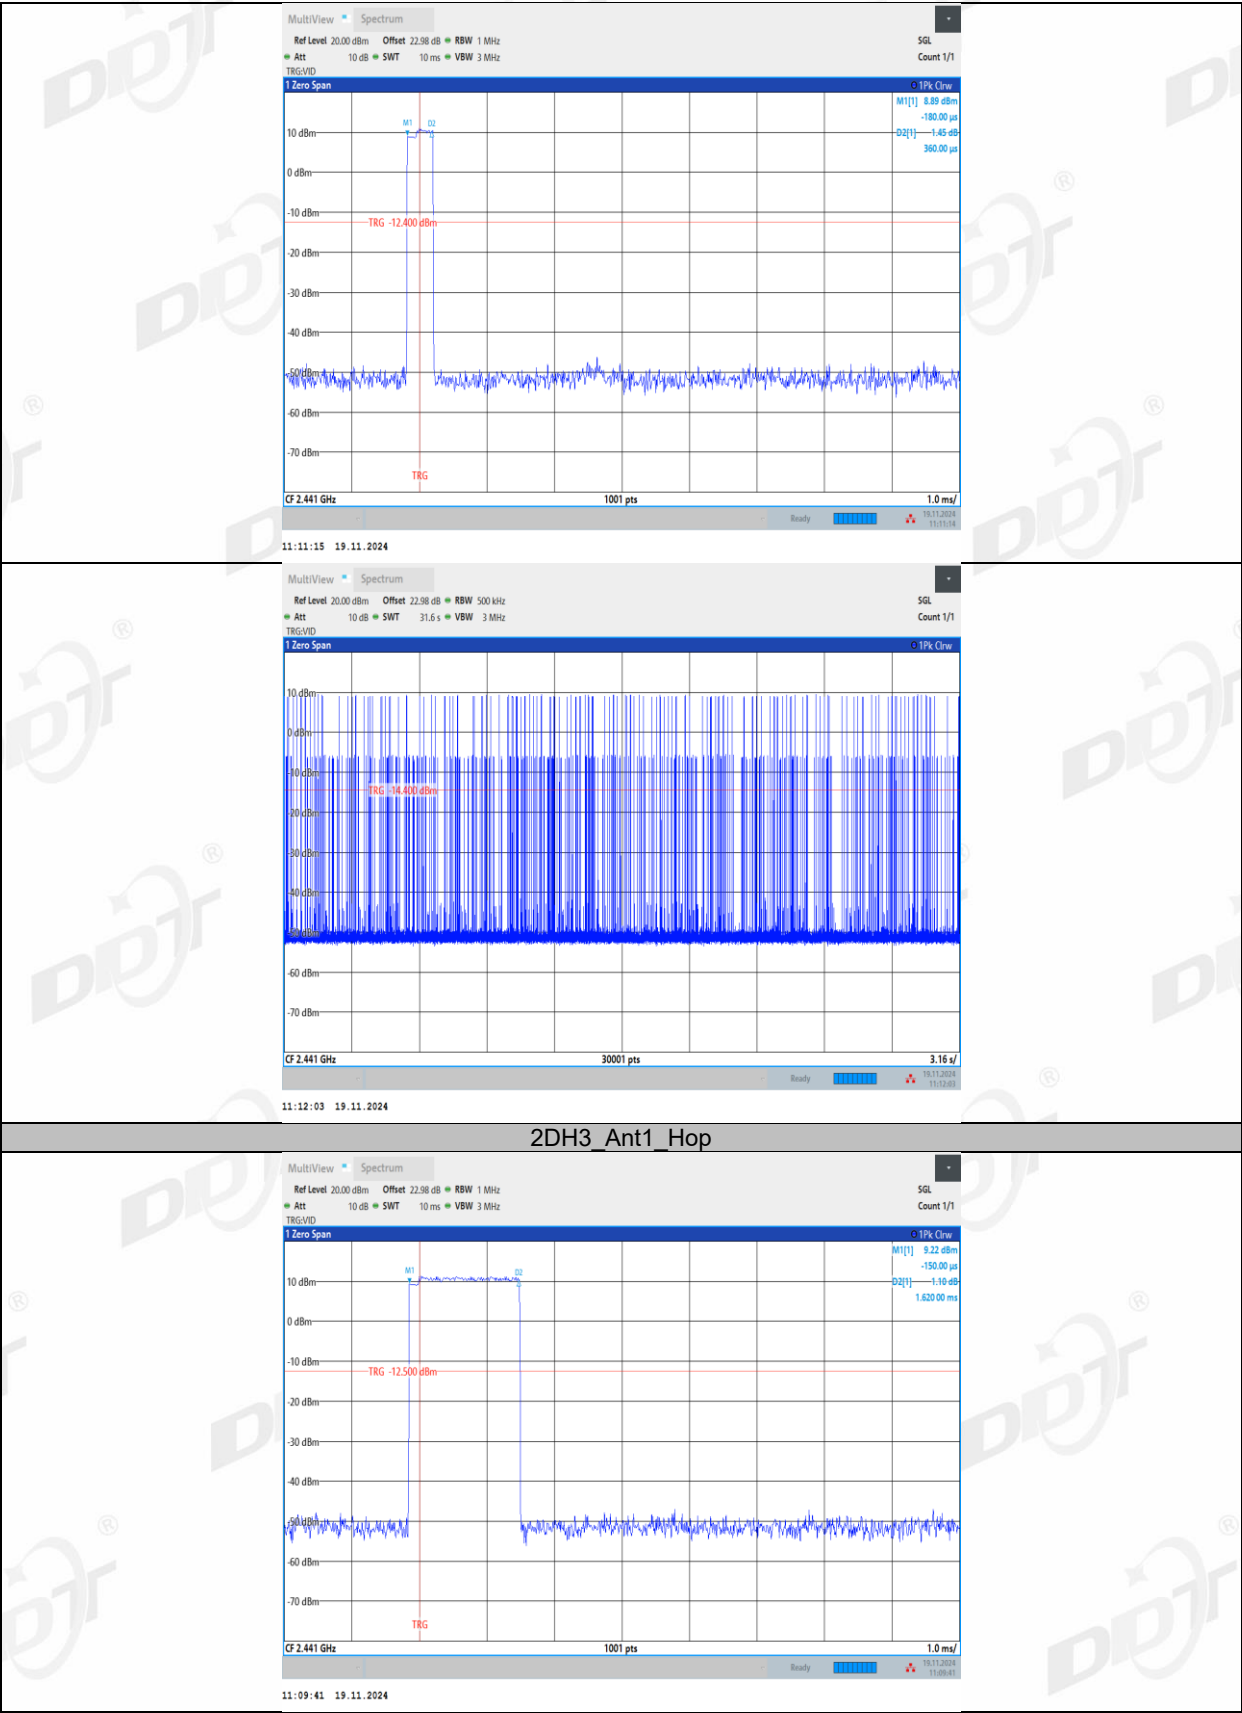


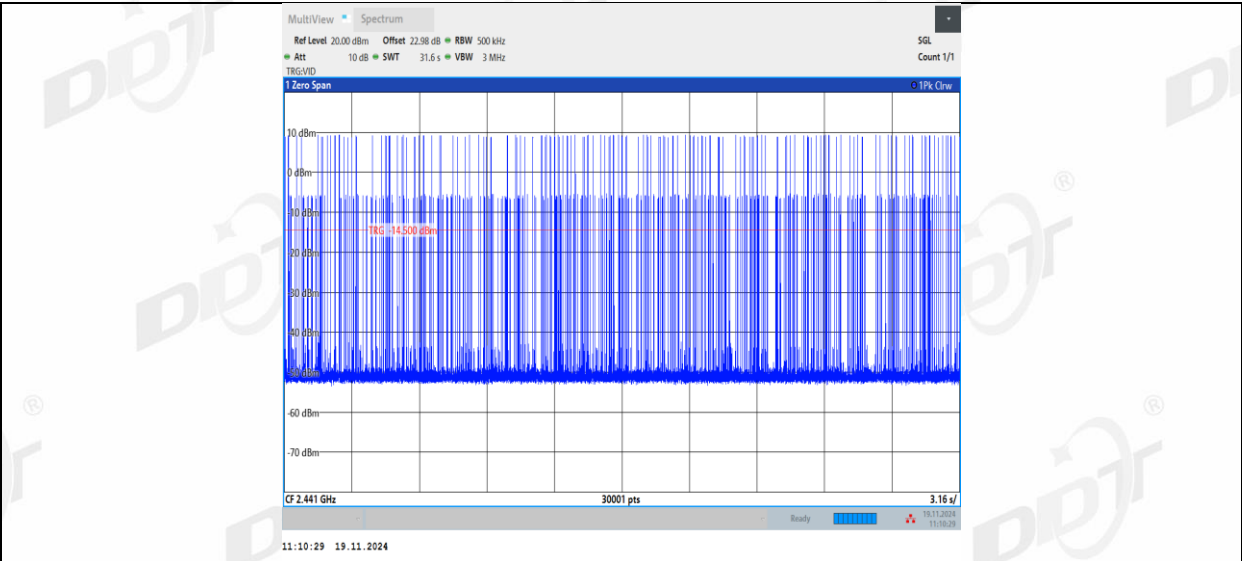


2DH5_Ant1_Hop

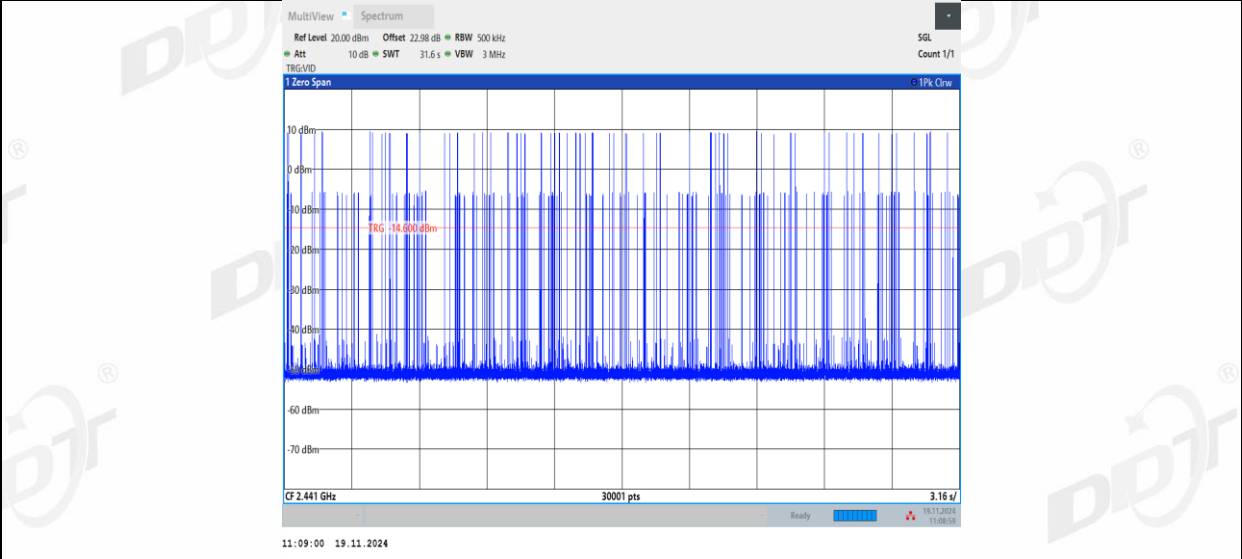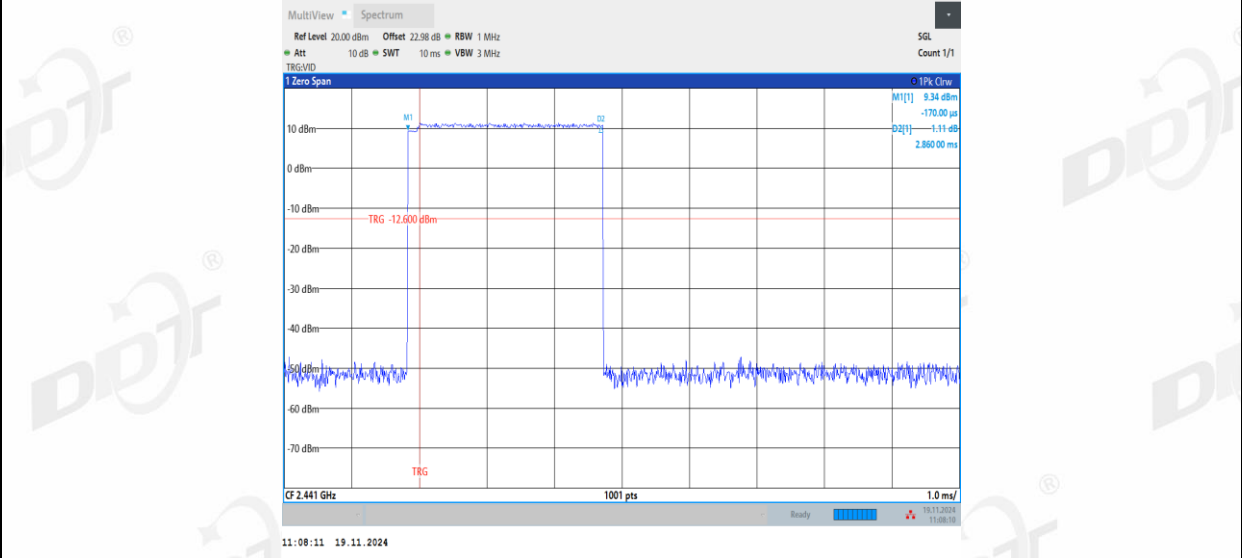


3DH1_Ant1_Hop

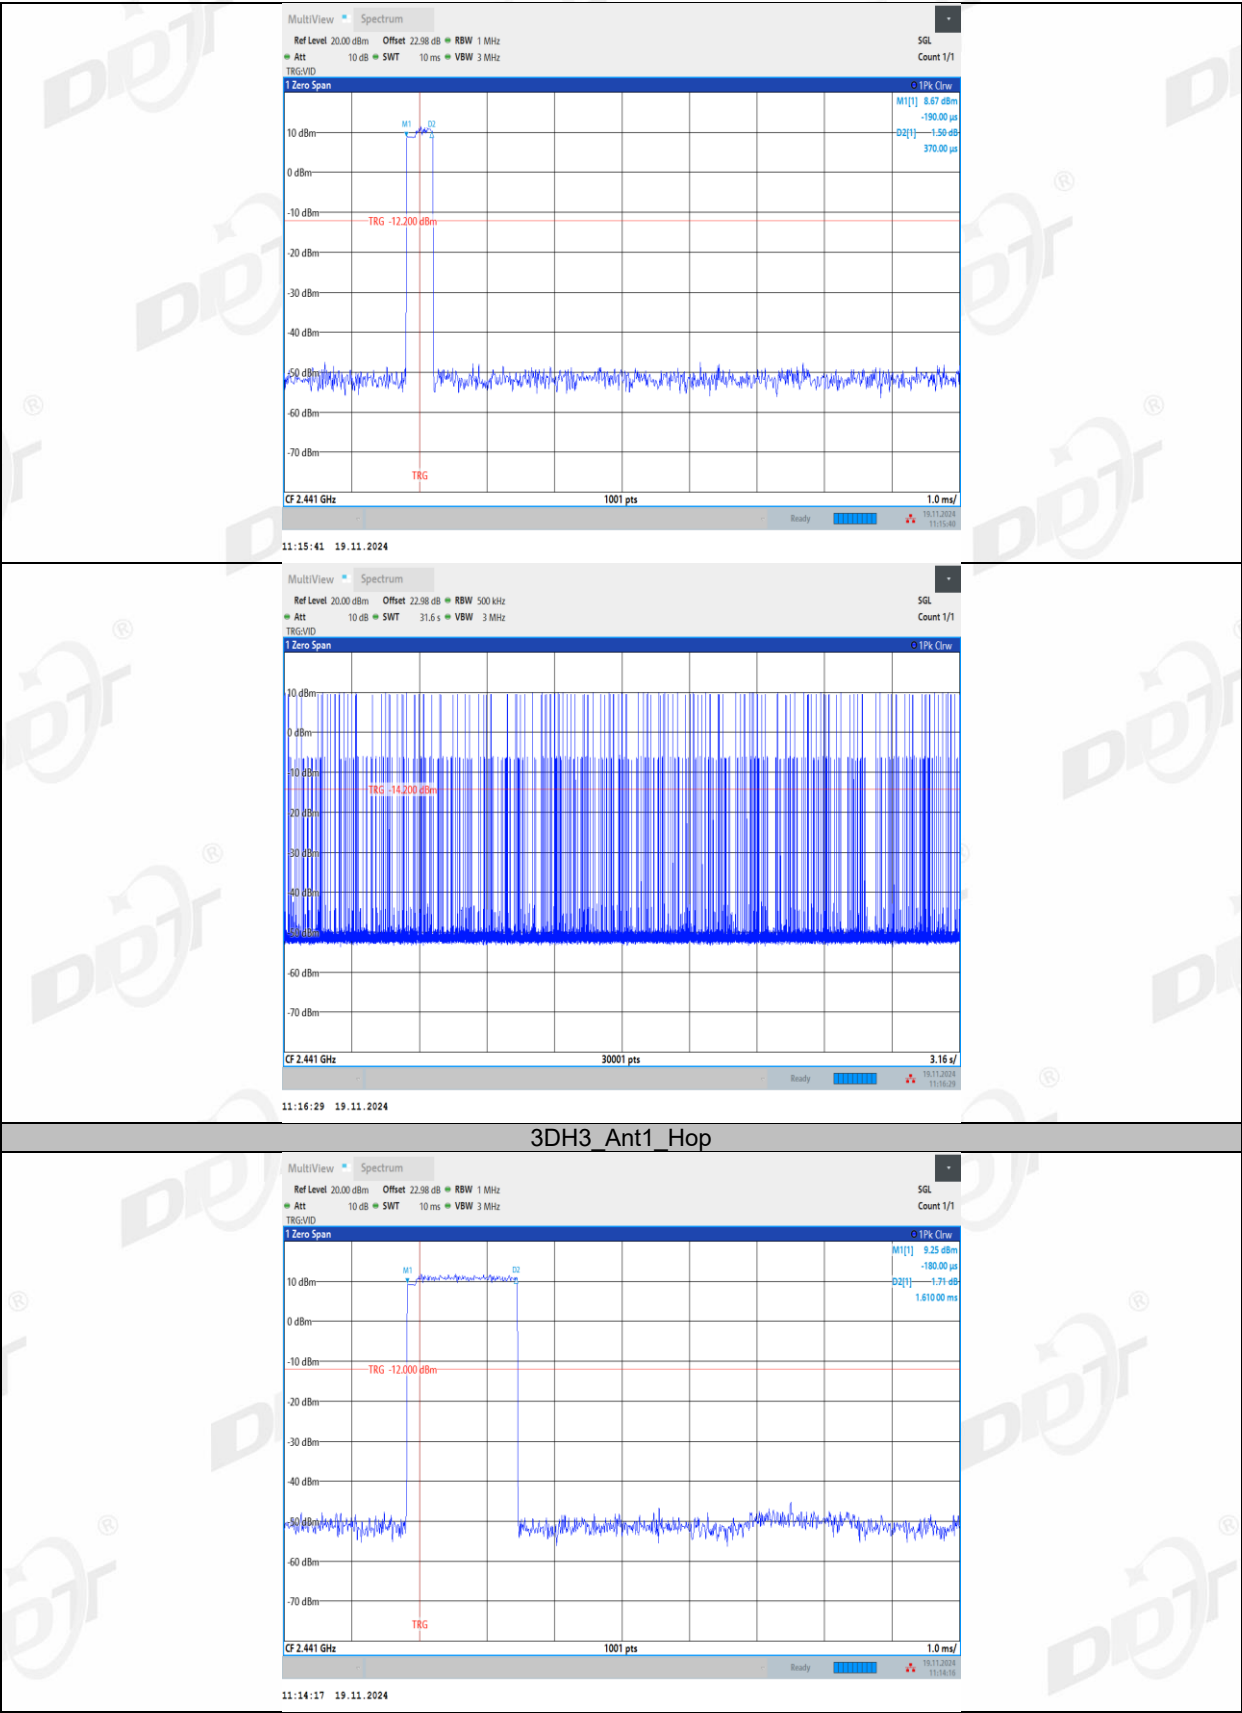

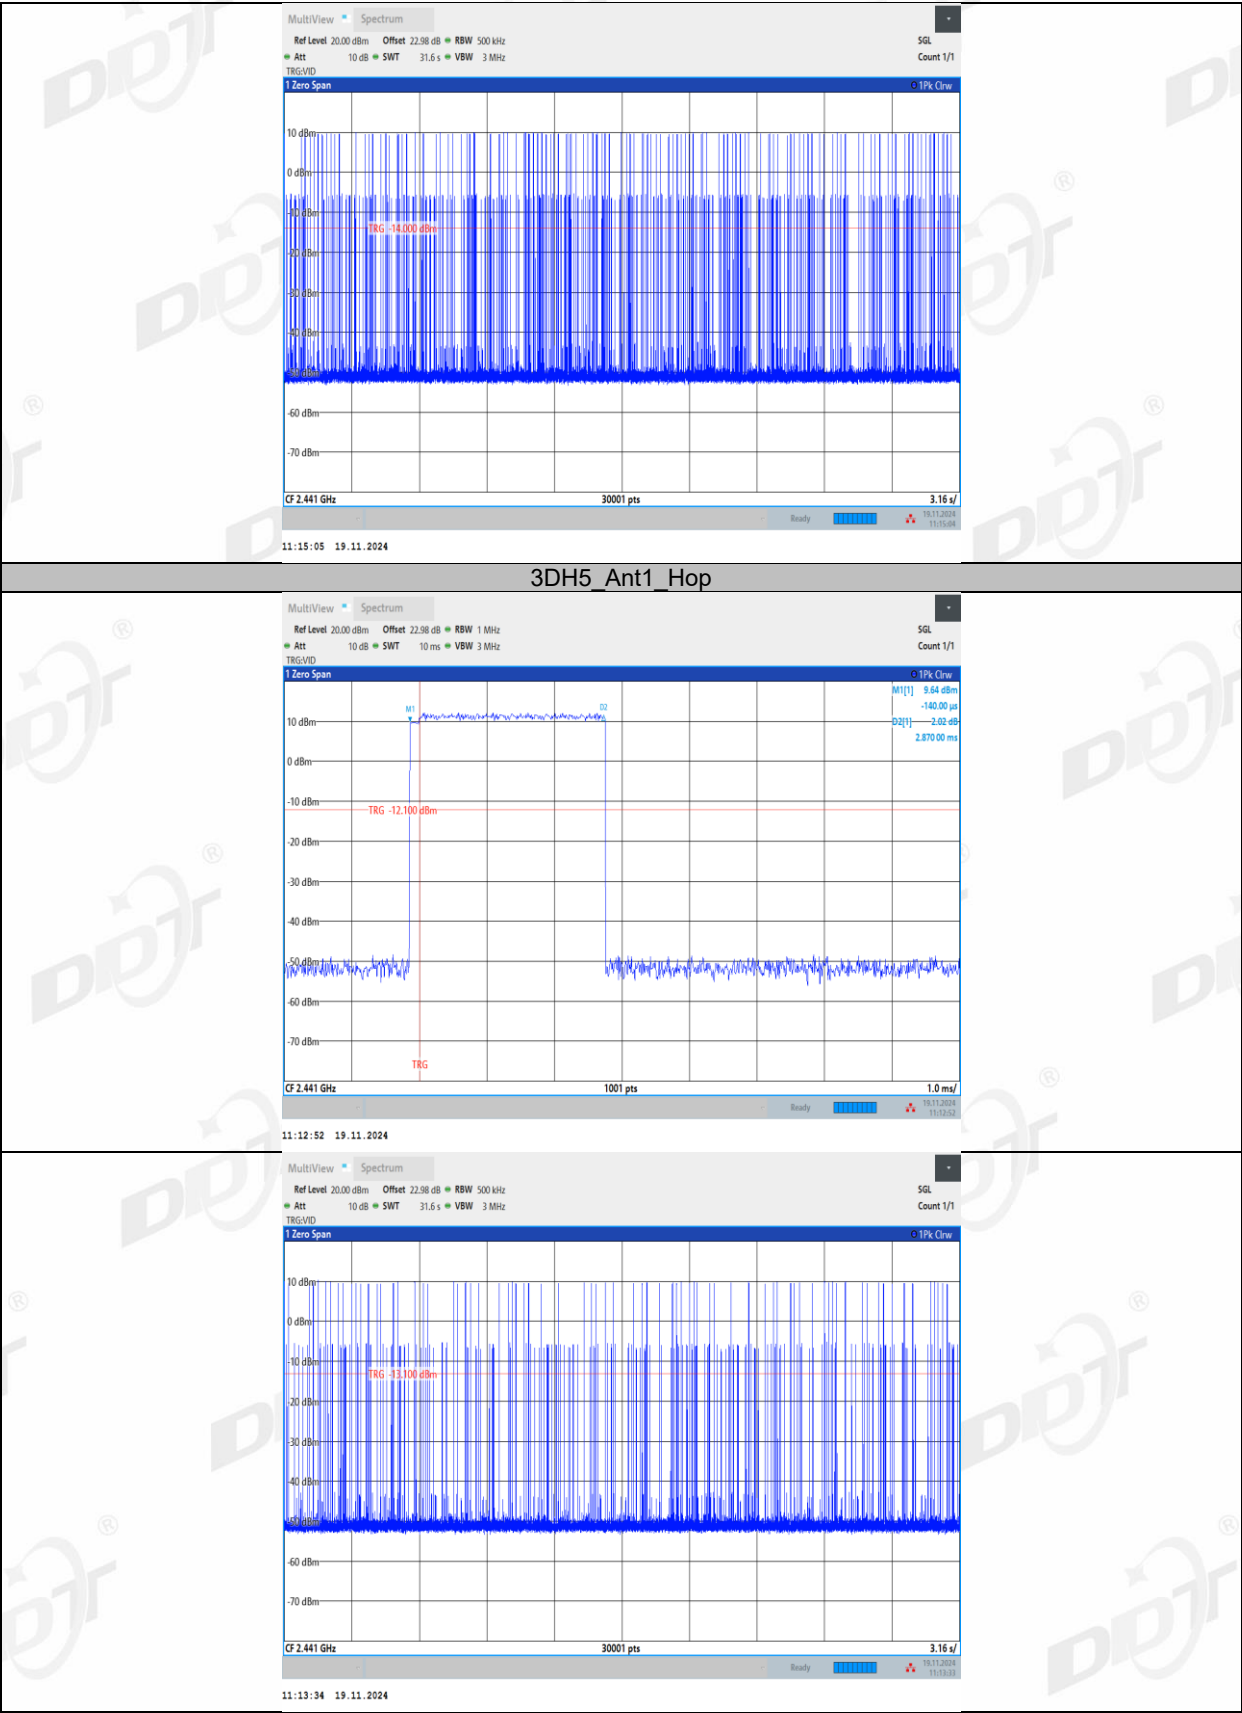

9. Number of Hopping Channel

9.1. Block diagram of test setup

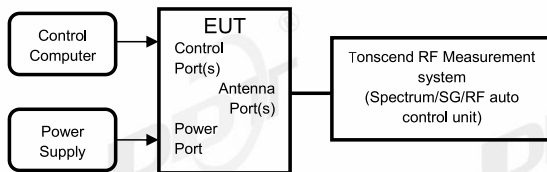

9.2. Limits

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

9.3. Test procedure

- (1) The test according to ANSI C63.10-2013 clause 7.8.3.
- (2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results.
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously.
- (4) Use the following spectrum analyzer settings for the maximum peak output power measurement:

RBW:	RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
VBW:	$VBW \geq RBW$.
Span:	The frequency band of operation
Detector Mode:	Peak
Sweep time:	Auto
Trace mode:	Max hold


- (5) Measure the hopping number and record the results in the report.
- (6) Measure and record the results in the report.

9.4. Test result

Test Engineer:	Zoe Peng	Test Site:	RF Measurement System 4#
Ambient Condition:	26.4℃,48.9%RH	Test Date:	2024.11.19-2024.11.19
Test Power Supply:	AC 100-240V	Sample Number:	S24111522-014


Test Mode	Antenna	Frequency [MHz]	Result [Num]	Limit [Num]	Verdict
DH5	Ant1	Hop	79	≥15	PASS
2DH5	Ant1	Hop	79	≥15	PASS
3DH5	Ant1	Hop	79	≥15	PASS

9.5. Test graphs

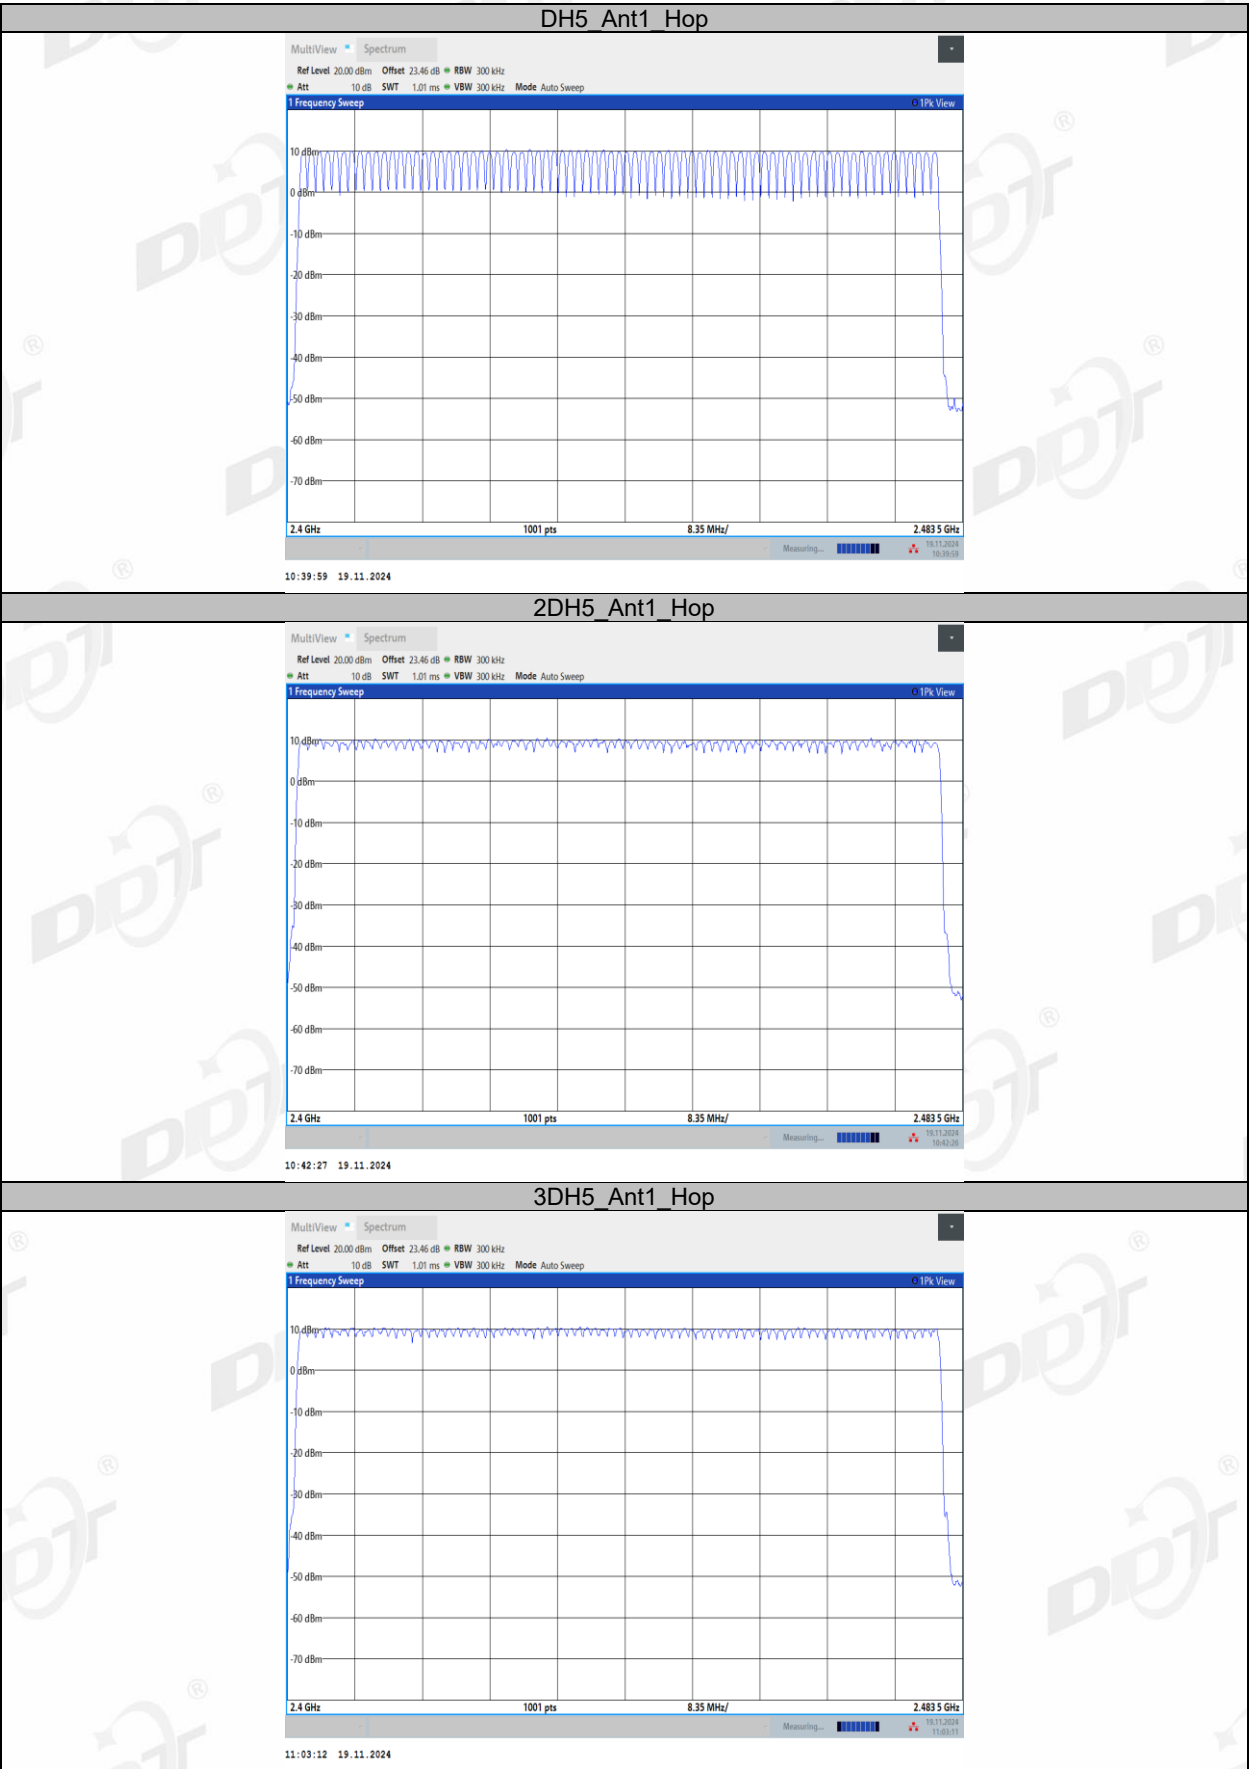

10. Band Edge Compliance (Conducted Method)

10.1. Block diagram of test setup

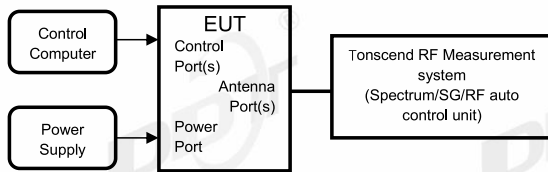

10.2. Limit

All restriction band should comply with 15.209, other emission should be at least 20dB below the fundamental.

10.3. Test procedure

- (1) Connect EUT's antenna output to spectrum analyzer by RF cable.
- (2) Establish a reference level by using the following procedure:


RBW:	100 kHz
VBW:	300 kHz
Span	Encompass frequency range to be measured
Detector Mode:	Peak
Sweep time:	Auto
Trace mode	Max hold
- (3) Allow the trace to stabilize, use the peak marker function to determine the maximum peak power level to establish the reference level.
- (4) Then mark the maximum amplitude of all unwanted emissions outside of the authorized frequency band.


10.4. Test result

Test Engineer:	Zoe Peng	Test Site:	RF Measurement System 4#
Ambient Condition:	26.4℃,48.9%RH	Test Date:	2024.11.19-2024.11.19
Test Power Supply:	AC 100-240V	Sample Number:	S24111522-014


Mode	Freq. (MHz)	Verdict
GFSK	Hopping off 2402	Pass
	Hopping off 2480	Pass
	Hopping on	Pass
$\pi/4$ -DQPSK	Hopping off 2402	Pass
	Hopping off 2480	Pass
	Hopping on	Pass
8DPSK	Hopping off 2402	Pass
	Hopping off 2480	Pass
	Hopping on	Pass

10.5. Test graphs

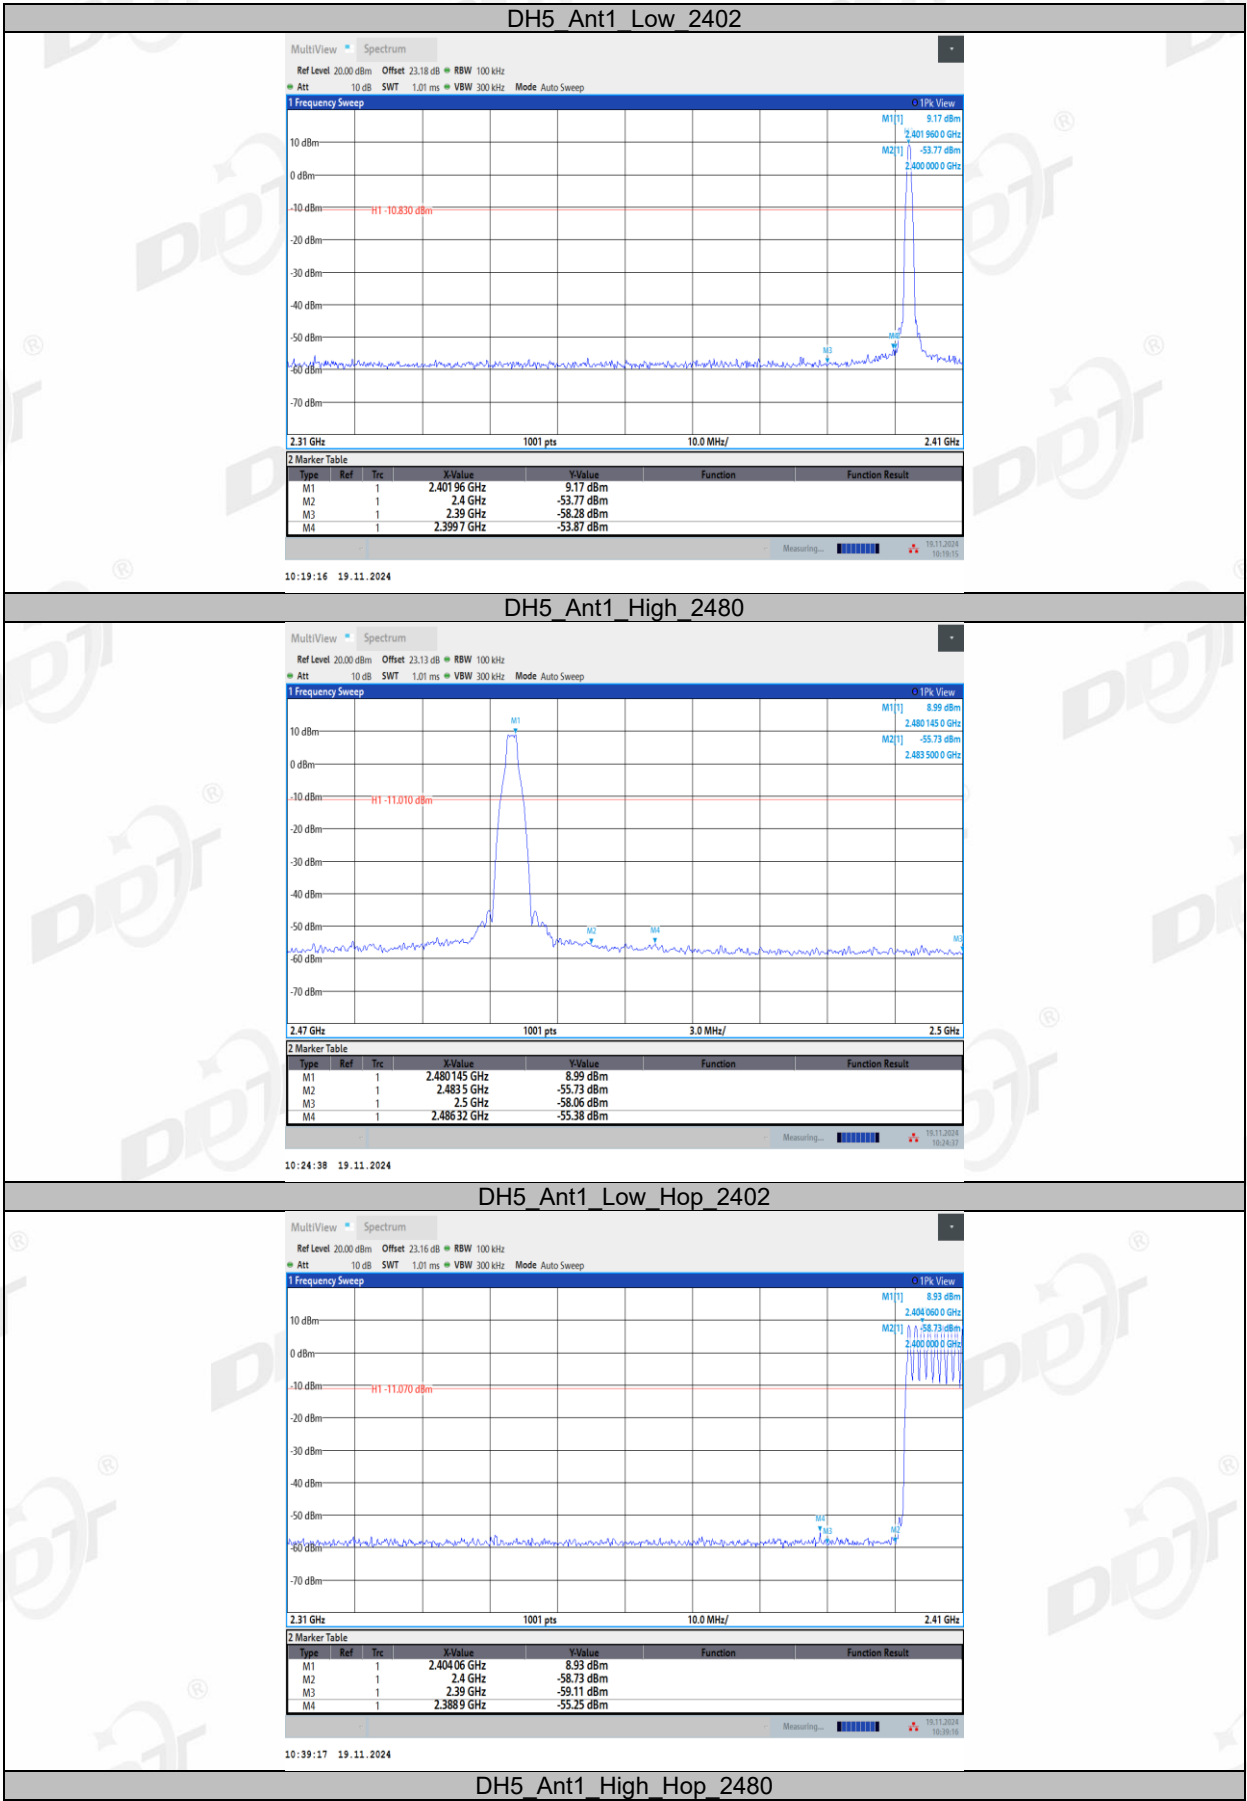


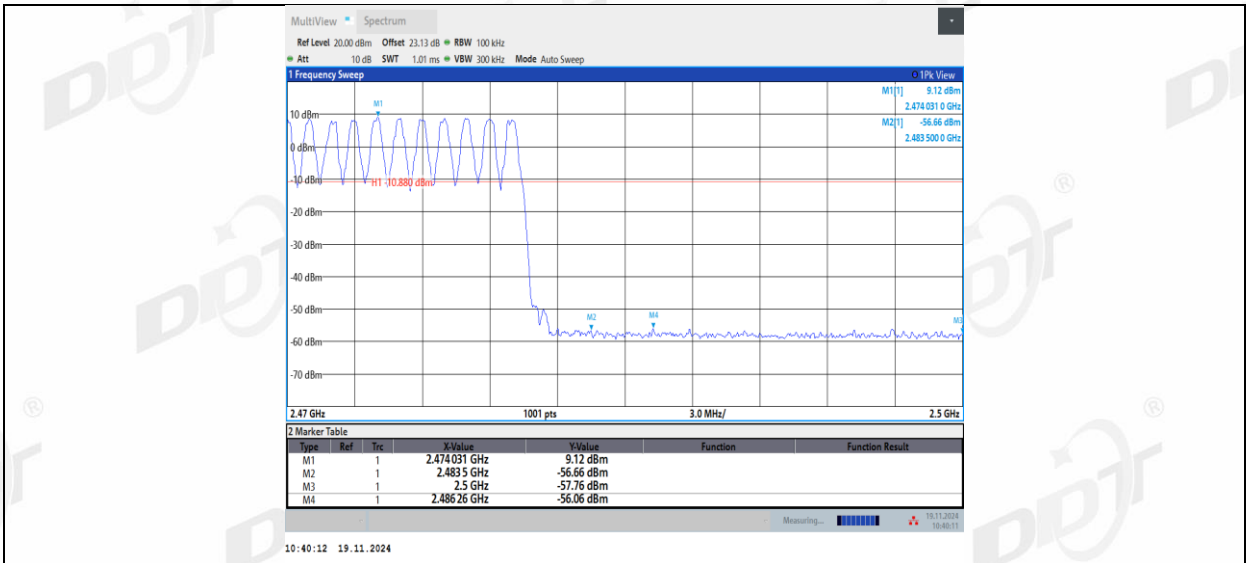


2DH5_Ant1_Low_2402

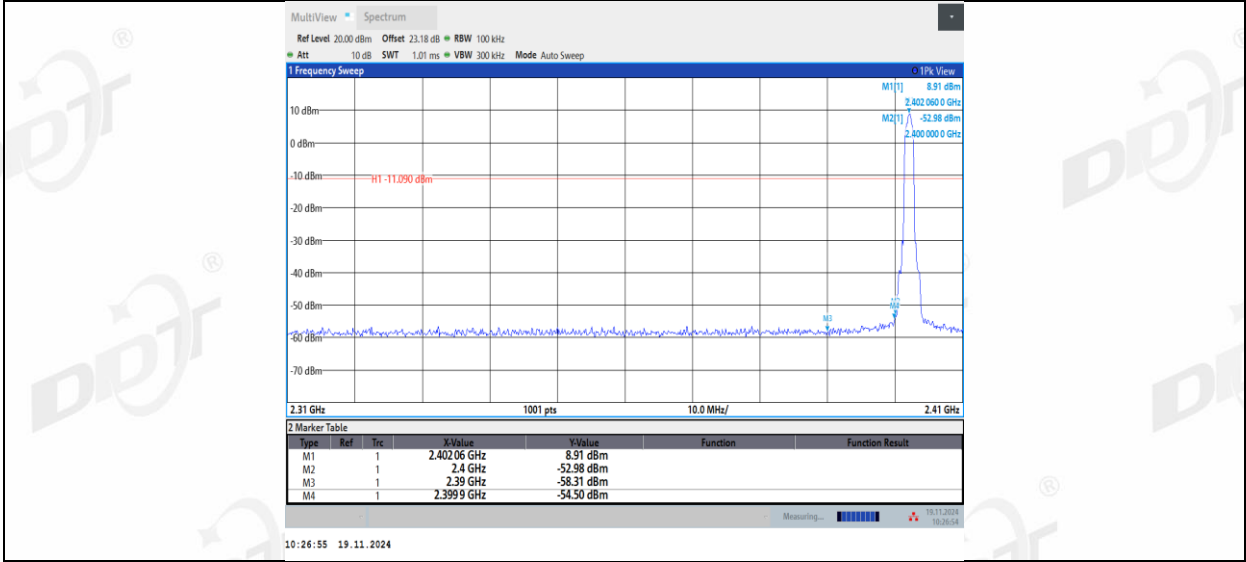


2DH5_Ant1_High_2480

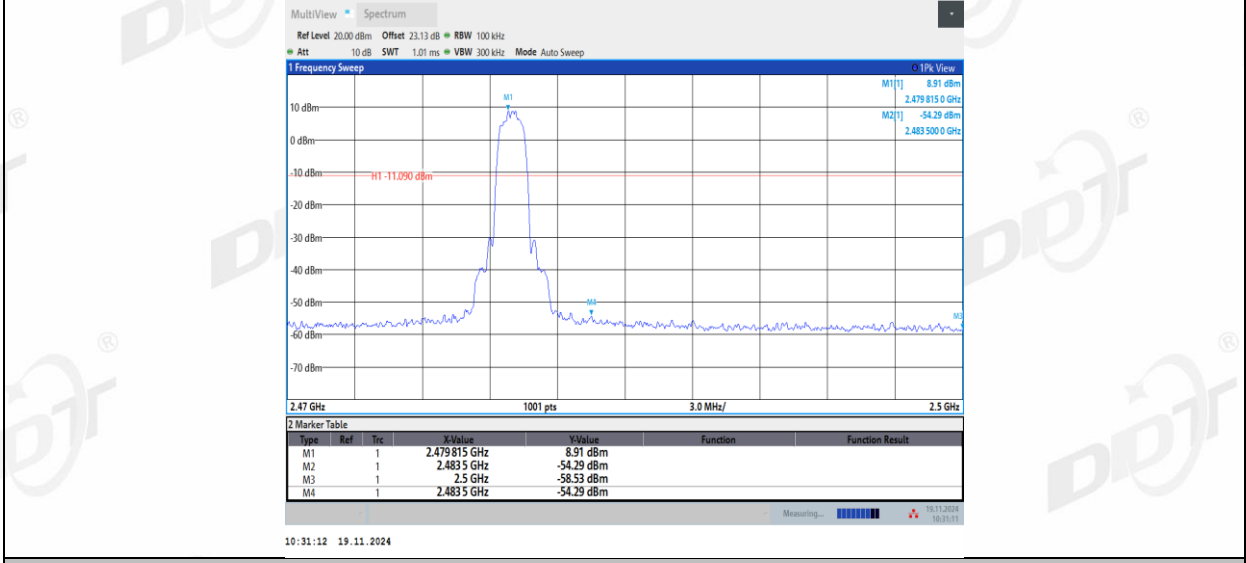


2DH5_Ant1_Low_Hop_2402

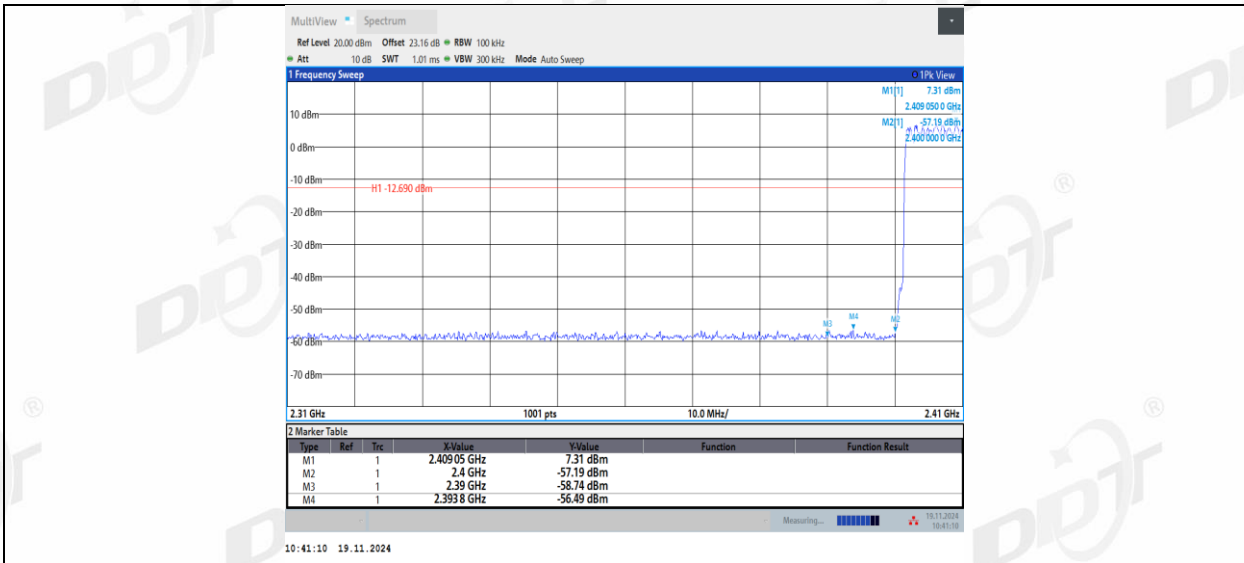


2DH5_Ant1_High_Hop_2480

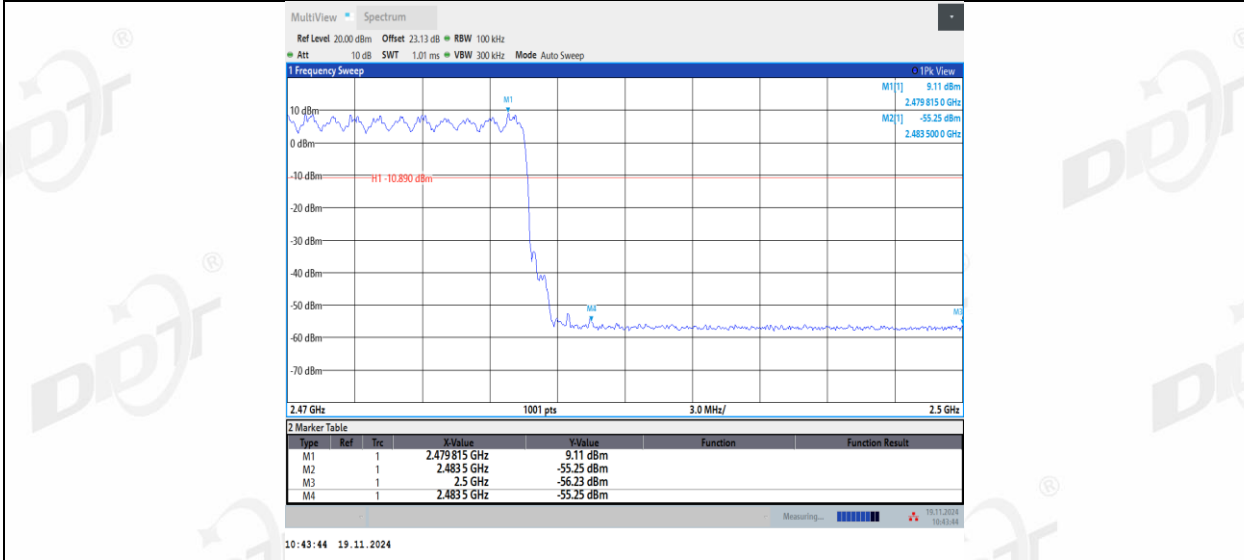


3DH5_Ant1_Low_2402

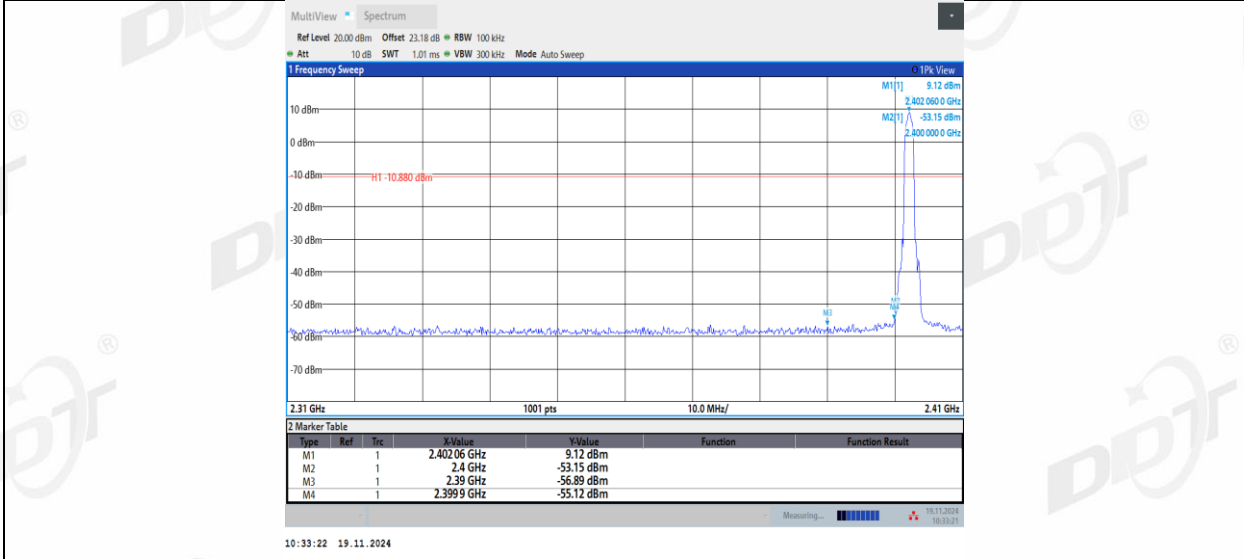


3DH5_Ant1_High_2480

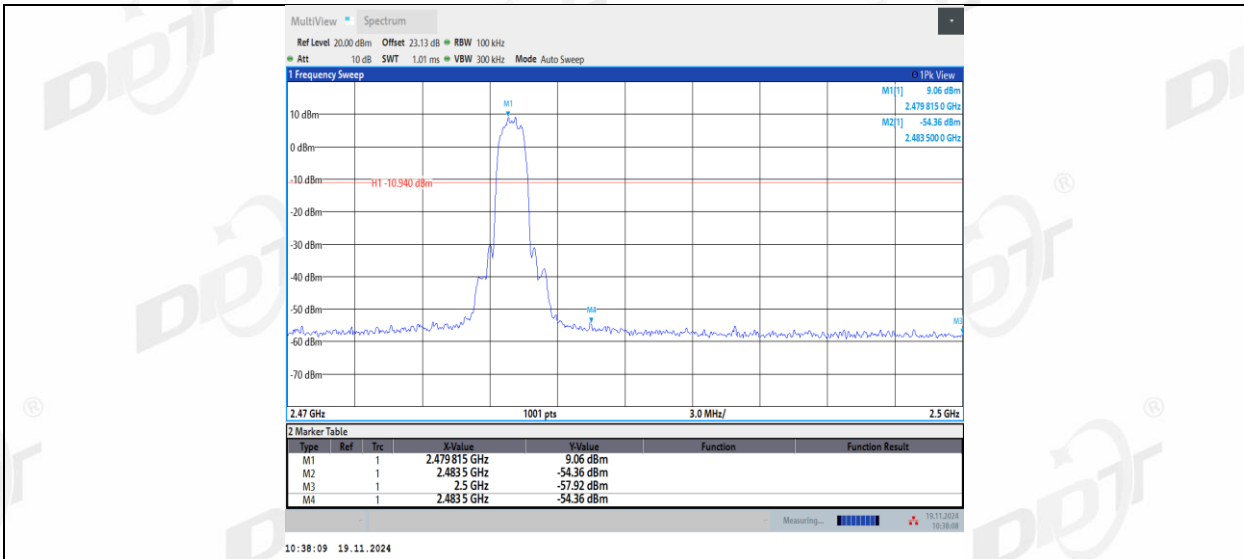

3DH5_Ant1_Low_Hop_2402

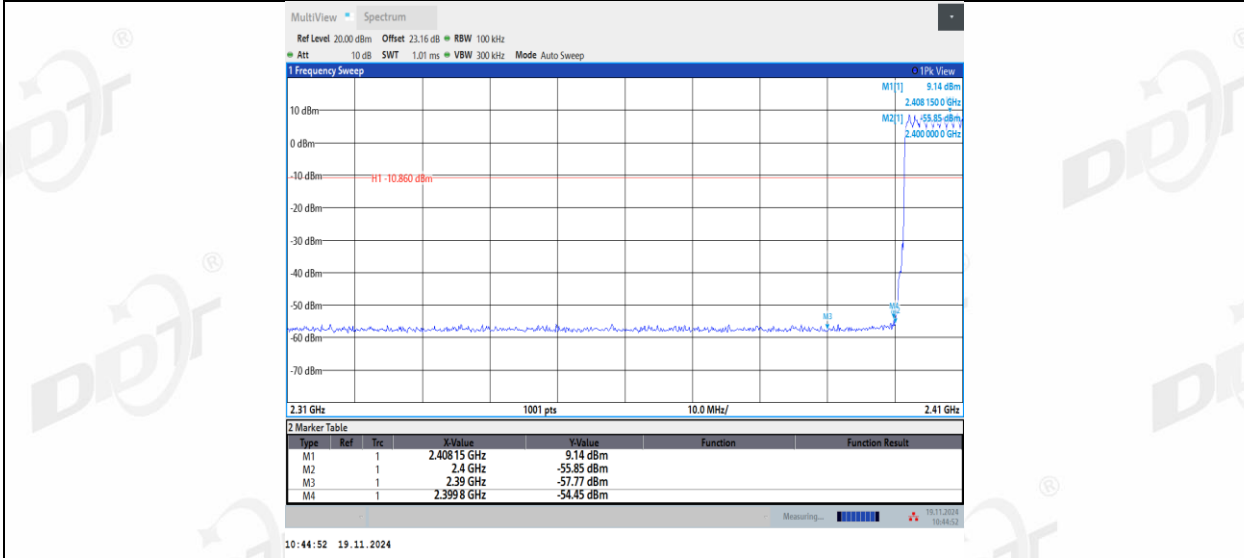


3DH5_Ant1_High_Hop_2480

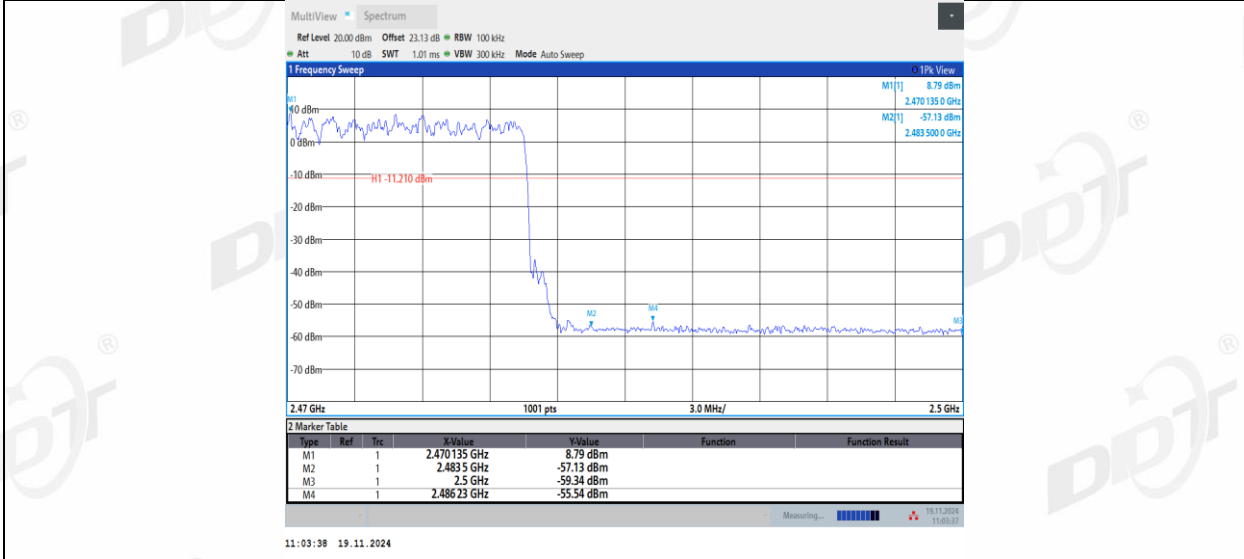

11. RF Conducted Spurious Emissions

11.1. Block diagram of test setup

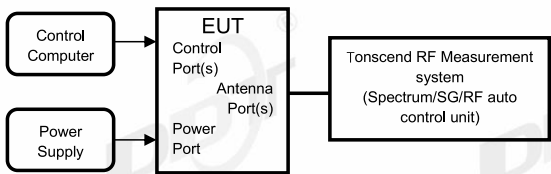

11.2. Limits

In any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

11.3. Test procedure

- (1) Connect EUT's antenna output to spectrum analyzer by RF cable.
- (2) Establish a reference level by using the following procedure:

Center frequency	Test frequency
RBW:	100 kHz
VBW:	300 kHz
Span	Wide enough to capture the peak level of the in-band emission
Detector Mode:	Peak
Sweep time:	Auto
Trace mode	Max hold
- (3) Allow the trace to stabilize, use the peak marker function to determine the maximum peak power level to establish the reference level.
- (4) Set the spectrum analyzer as follows:

RBW:	100 kHz
VBW:	300 kHz
Span	Encompass frequency range to be measured
Number of measurement points	$\geq \text{Span}/\text{RBW}$
Detector Mode:	Peak
Sweep time:	Auto
Trace mode	Max hold


Allow the trace to stabilize, use the peak marker function to determine the maximum amplitude of all unwanted emissions outside of the authorized frequency band


11.4. Test result

Test Engineer:	Zoe Peng	Test Site:	RF Measurement System 4#
Ambient Condition:	26.4℃,48.9%RH	Test Date:	2024.11.19-2024.11.19
Test Power Supply:	AC 100-240V	Sample Number:	S24111522-014


Mode	Freq. (MHz)	Verdict
GFSK	Hopping off 2402	Pass
	Hopping off 2441	Pass
	Hopping off 2480	Pass
π /4-DQPSK	Hopping off 2402	Pass
	Hopping off 2441	Pass
	Hopping off 2480	Pass
8DPSK	Hopping off 2402	Pass
	Hopping off 2441	Pass
	Hopping off 2480	Pass

11.5. Test graphs

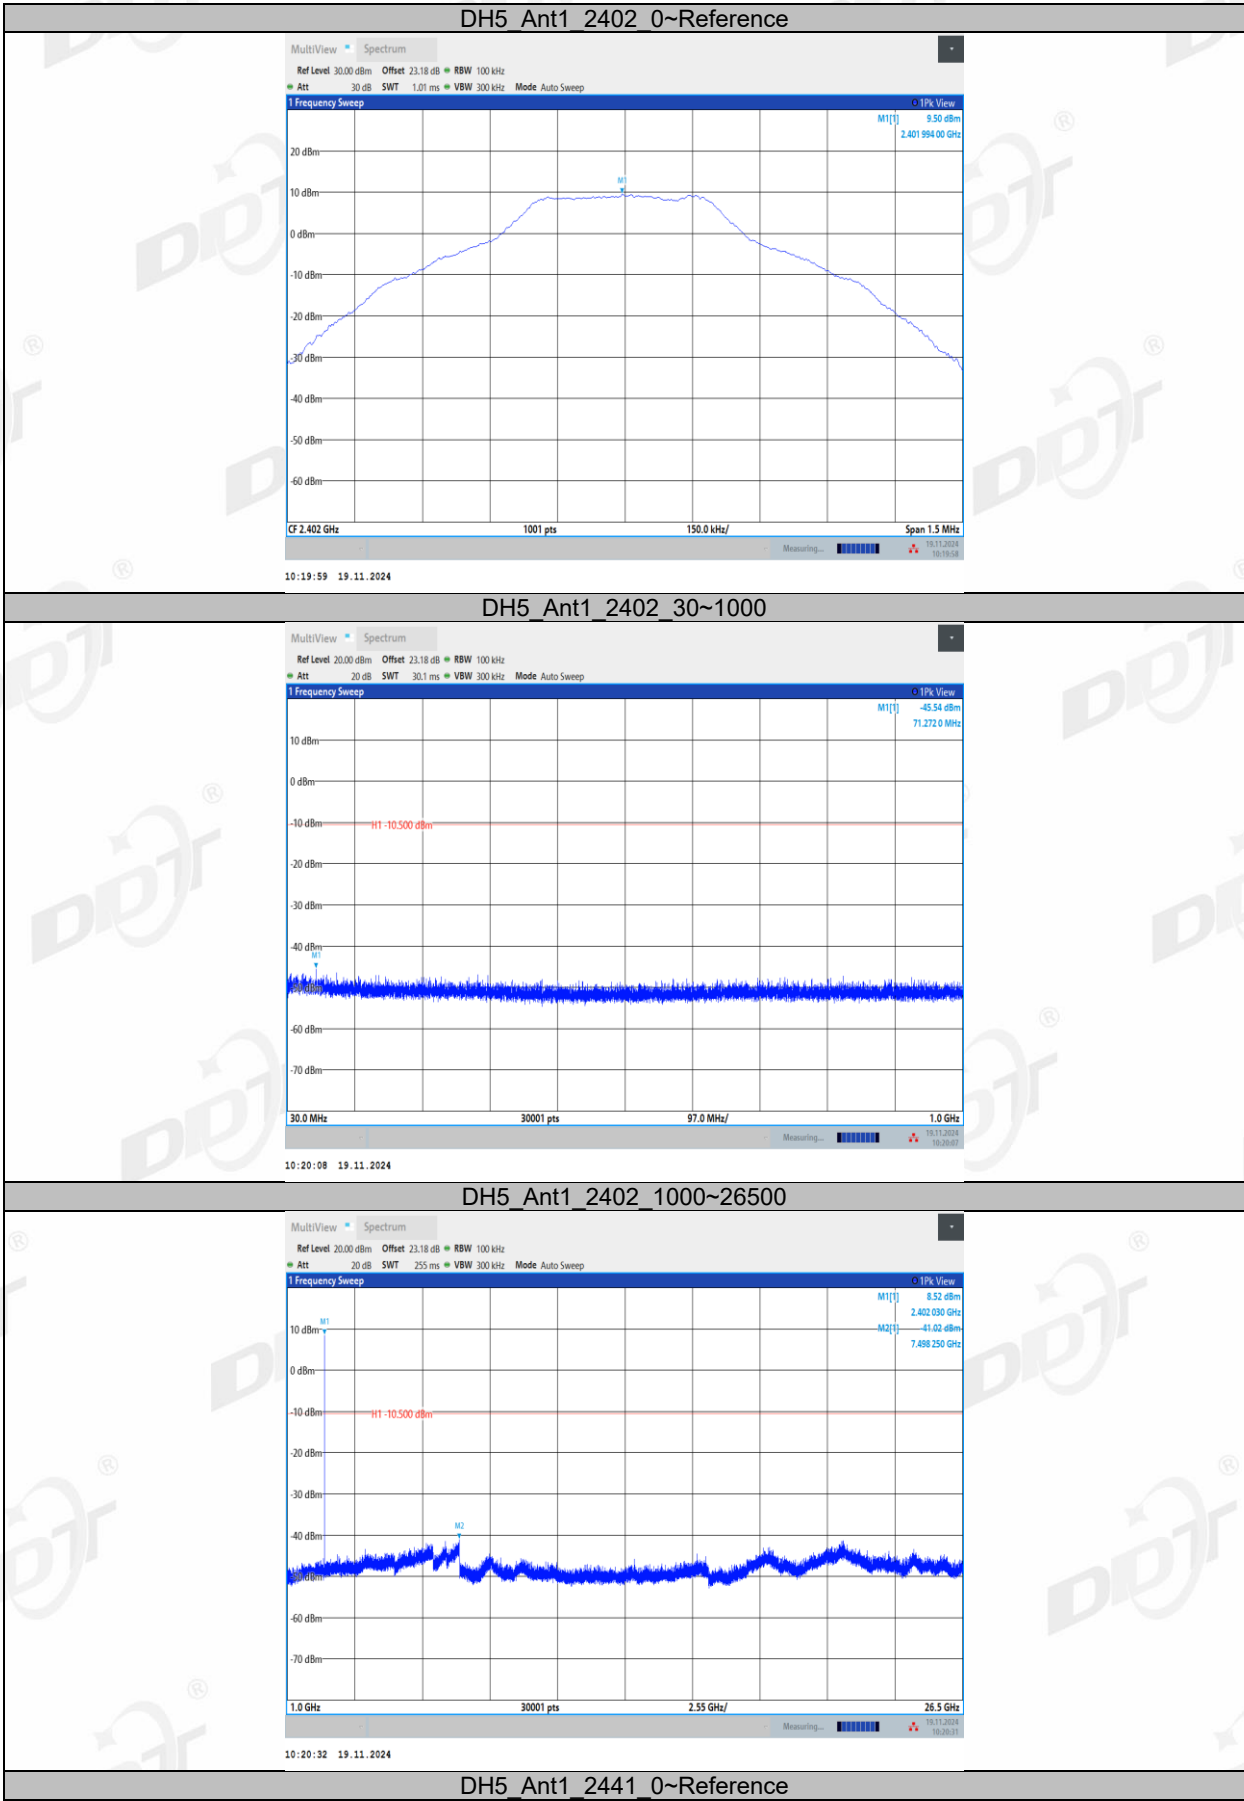


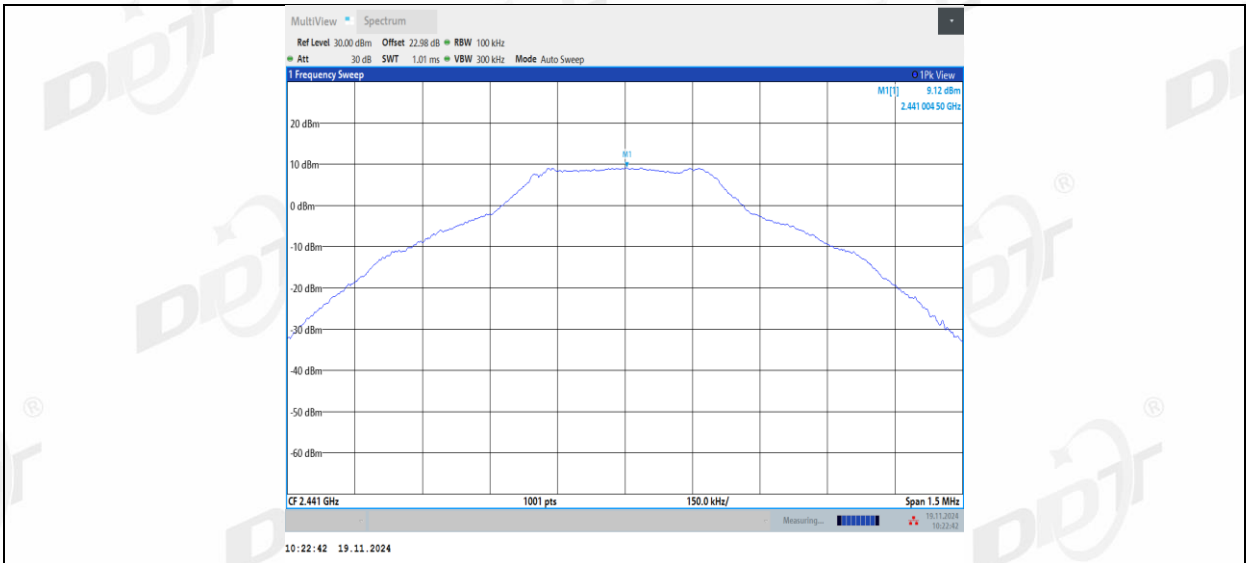


DH5_Ant1_2441_30~1000

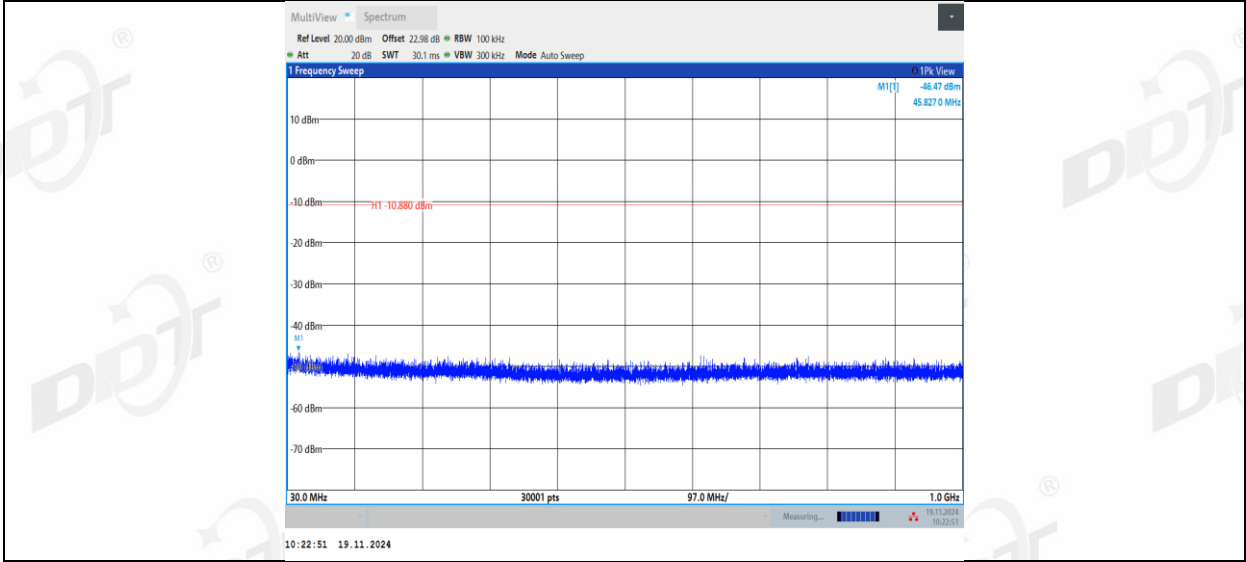


DH5_Ant1_2441_1000~26500

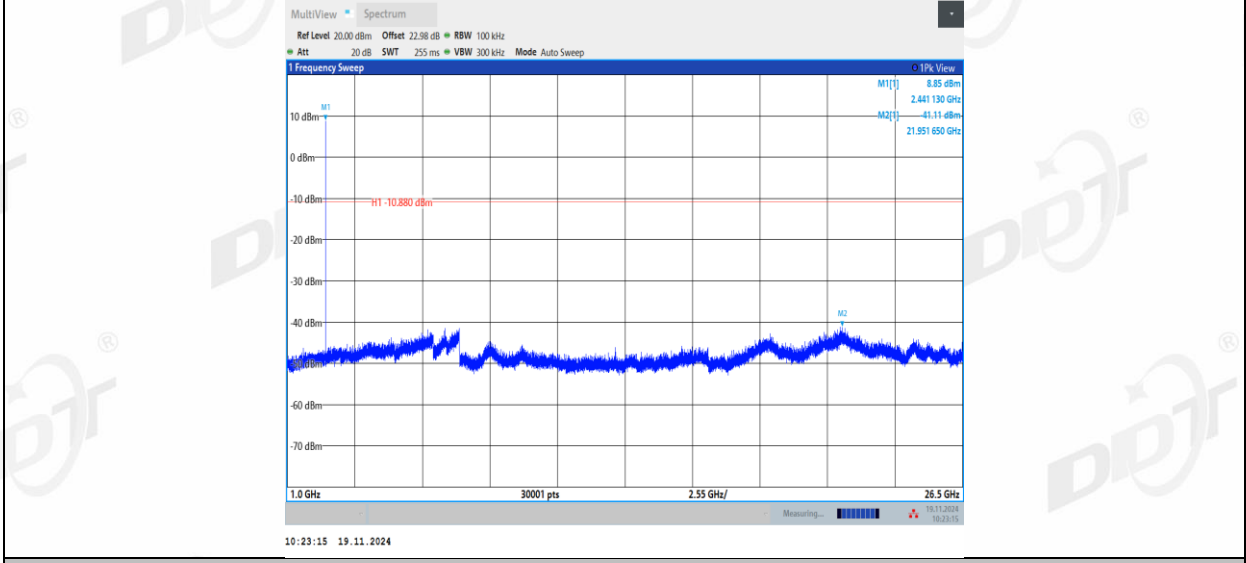


DH5_Ant1_2480_0~Reference

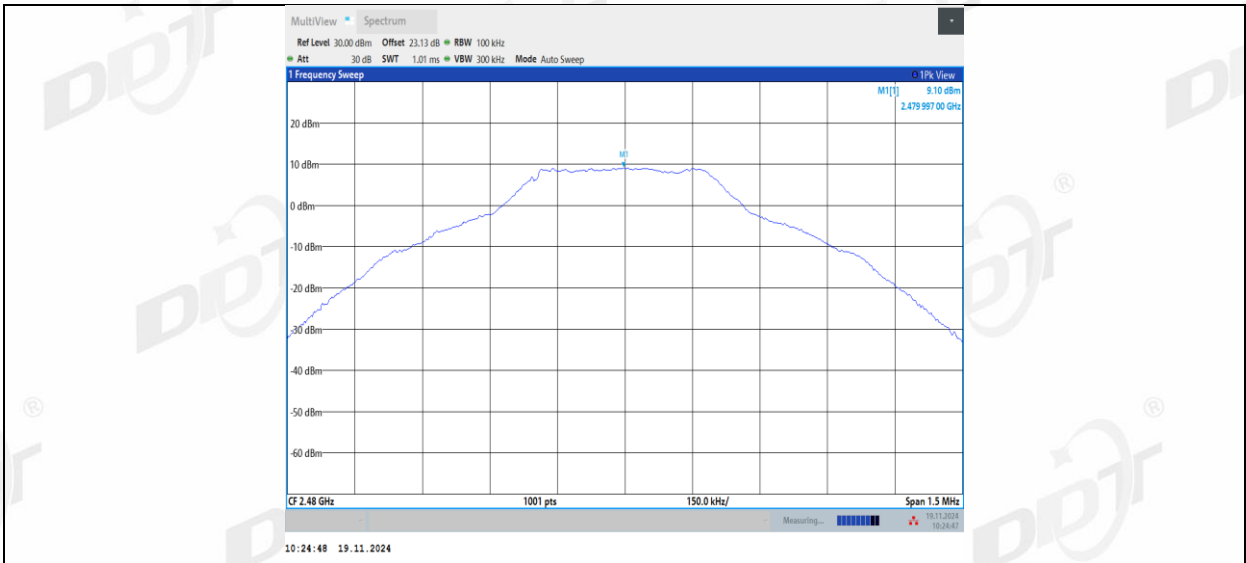

DH5_Ant1_2480_30~1000

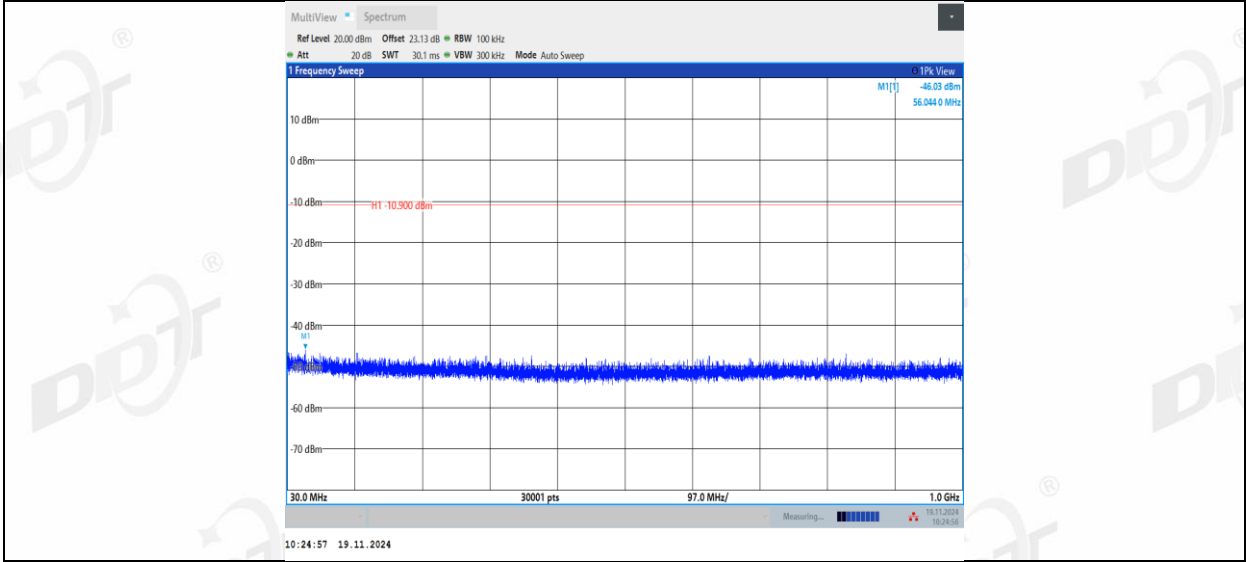

DH5_Ant1_2480_1000~26500

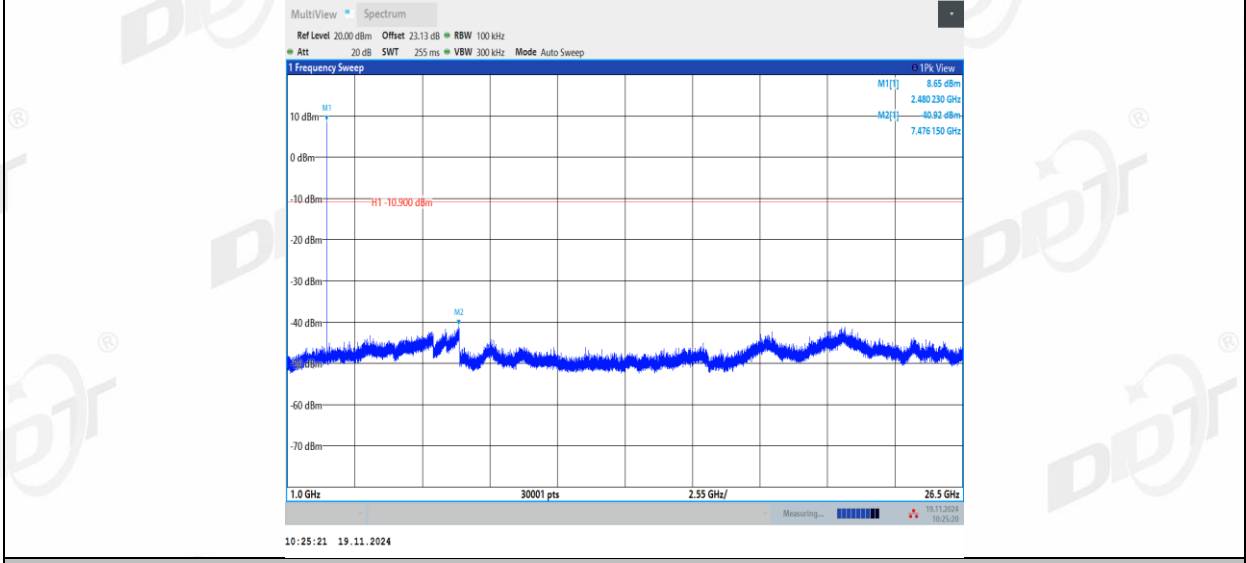

2DH5_Ant1_2402_0~Reference