


# TR-4-E-009 Radiated Emission Test Result

**Test Date:** 2025-01-10 **Tested By:** Lin Guoyuan  
**EUT:** Multi-Channel Soundbar **Model Number:** BAR 300MK2  
**Test Mode:** 11N40 MIMO 2422 MHz TX **Power Supply:** AC 120V/60Hz  
**Condition:** Temp:24.5°C;Humi:47.4% **Test Site:** DDT 3# Chamber  
**File Path:** d:\ts\2024 report data\BAR 300\0110 FCC Above 1G 2.4G\7  
**Memo:** Sample Number: S24111411-006

## Test Graph

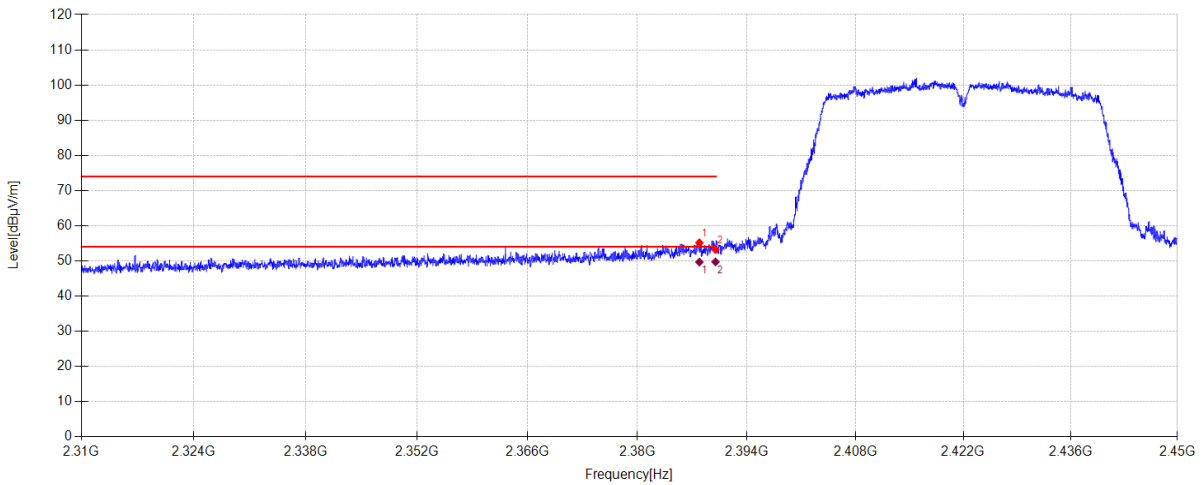

Data List										
N O.	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	2387.938	24.35	27.25	3.57	0.00	55.17	74.00	18.83	PK	Horizontal
2	2390.000	22.38	27.26	3.57	0.00	53.21	74.00	20.79	PK	Horizontal

Data List										
N O.	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	2387.938	18.86	27.25	3.57		49.68	54.00	4.32	AV	Horizontal
2	2390.000	18.89	27.26	3.57		49.72	54.00	4.28	AV	Horizontal


**Note:**

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

# TR-4-E-009 Radiated Emission Test Result

**Test Date:** 2025-01-10      **Tested By:** Lin Guoyuan  
**EUT:** Multi-Channel Soundbar      **Model Number:** BAR 300MK2  
**Test Mode:** 11N40 MIMO 2422 MHz TX      **Power Supply:** AC 120V/60Hz  
**Condition:** Temp:24.5°C;Humi:47.4%      **Test Site:** DDT 3# Chamber  
**File Path:** d:\ts\2024 report data\BAR 300\0110 FCC Above 1G 2.4G\9  
**Memo:** Sample Number: S24111411-006

## Test Graph

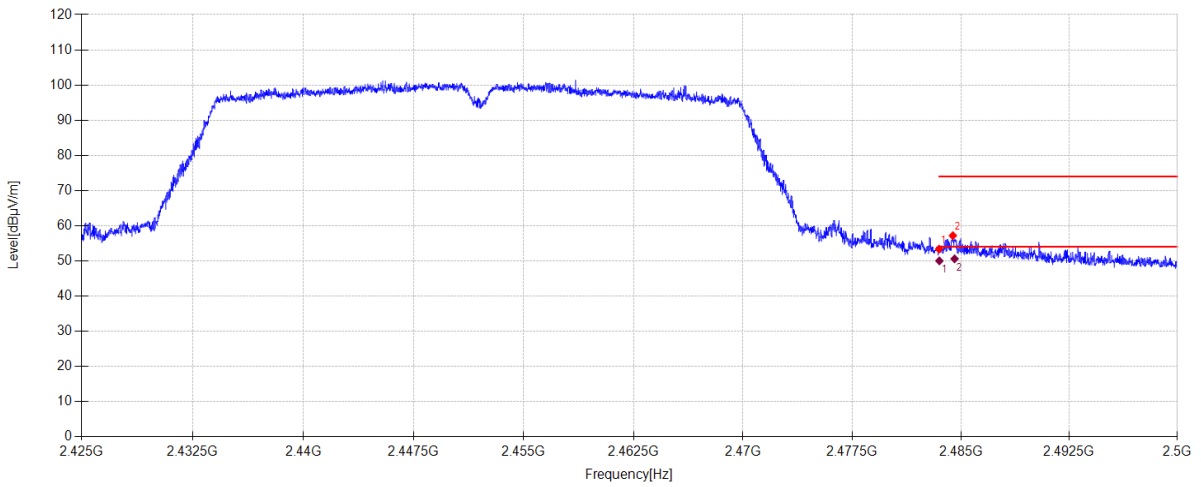

Data List										
N O.	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	2483.500	22.21	27.53	3.62	0.00	53.36	74.00	20.64	PK	Horizontal
2	2484.453	26.02	27.54	3.62	0.00	57.18	74.00	16.82	PK	Horizontal

Data List										
N O.	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity	
1	2483.521	18.86	27.53	3.62	50.01	54.00	3.99	AV	Horizontal	
2	2484.570	19.43	27.54	3.62	50.59	54.00	3.41	AV	Horizontal	


**Note:**

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

# TR-4-E-009 Radiated Emission Test Result

**Test Date:** 2025-01-10 **Tested By:** Lin Guoyuan  
**EUT:** Multi-Channel Soundbar **Model Number:** BAR 300MK2  
**Test Mode:** 11N40 MIMO 2452 MHz TX **Power Supply:** AC 120V/60Hz  
**Condition:** Temp:24.5°C;Humi:47.4% **Test Site:** DDT 3# Chamber  
**File Path:** d:\ts\2024 report data\BAR 300\0110 FCC Above 1G 2.4G\10  
**Memo:** Sample Number: S24111411-006

## Test Graph

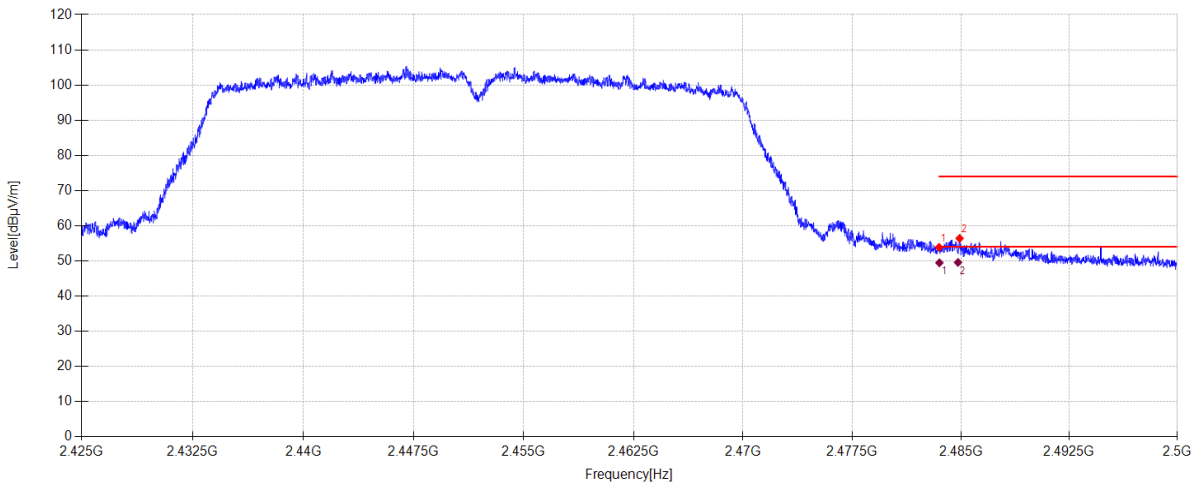

Data List										
N O.	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	2483.500	22.71	27.53	3.62	0.00	53.86	74.00	20.14	PK	Vertical
2	2484.918	25.23	27.54	3.62	0.00	56.39	74.00	17.61	PK	Vertical

Data List										
N O.	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity	
1	2483.524	18.31	27.53	3.62	49.46	54.00	4.54	AV	Vertical	
2	2484.809	18.41	27.54	3.62	49.57	54.00	4.43	AV	Vertical	


**Note:**

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

## TR-4-E-009 Radiated Emission Test Result

**Test Date:** 2024-11-22 **Tested By:** Guoyuan Lin  
**EUT:** Multi-Channel Soundbar **Model Number:** BAR 300MK2  
**Test Mode:** 11AX20 MIMO2412 MHz Tx mode **Power Supply:** AC 120V/60Hz  
**Condition:** Temp:24.5°C;Humi:47.4% **Test Site:** DDT 3# Chamber  
**File Path:** d:\ts\2024 report data\BAR 300\1122 FCC Above 1G 2.4G\49  
**Memo:** Sample Number: S24111411-006

### Test Graph

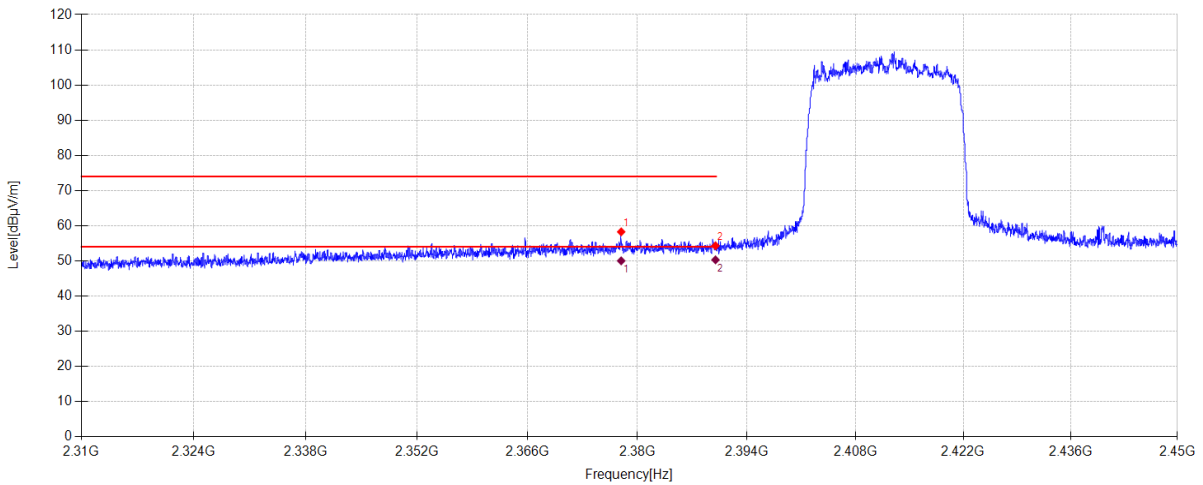

#### Data List

NO	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	2377.928	27.49	27.21	3.56	0.00	58.26	74.00	15.74	PK	Horizontal
2	2390.000	23.46	27.26	3.57	0.00	54.29	74.00	19.71	PK	Horizontal

#### Data List

NO	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	2377.928	19.25	27.21	3.56	50.02	54.00	3.98	AV	Horizontal
2	2390.000	19.47	27.26	3.57	50.30	54.00	3.70	AV	Horizontal


#### Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

## TR-4-E-009 Radiated Emission Test Result

**Test Date:** 2024-11-22 **Tested By:** Guoyuan Lin  
**EUT:** Multi-Channel Soundbar **Model Number:** BAR 300MK2  
**Test Mode:** 11AX20 MIMO2412 MHz Tx mode **Power Supply:** AC 120V/60Hz  
**Condition:** Temp:24.5°C;Humi:47.4% **Test Site:** DDT 3# Chamber  
**File Path:** d:\ts\2024 report data\BAR 300\1122 FCC Above 1G 2.4G\50  
**Memo:** Sample Number: S24111411-006

### Test Graph

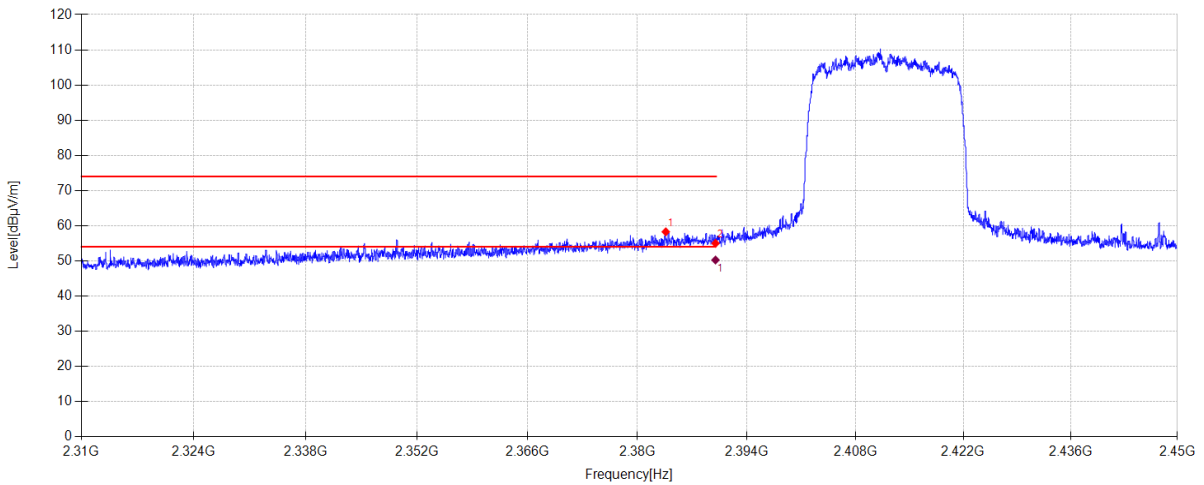

#### Data List

NO	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	2383.626	27.48	27.23	3.56	0.00	58.27	74.00	15.73	PK	Vertical
2	2390.000	24.17	27.26	3.57	0.00	55.00	74.00	19.00	PK	Vertical

#### Data List

NO	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	2389.996	19.43	27.26	3.57	50.26	54.00	3.74	AV	Vertical

#### Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.










# TR-4-E-009 Radiated Emission Test Result

**Test Date:** 2024-11-25      **Tested By:** Guoyuan Lin  
**EUT:** Multi-Channel Soundbar      **Model Number:** BAR 300MK2  
**Test Mode:** 11AX40 MIMO 2422 MHz Tx mode      **Power Supply:** AC 120V/60Hz  
**Condition:** Temp:24.5°C;Humi:47.4%      **Test Site:** DDT 3# Chamber  
**File Path:** d:\ts\2024 report data\BAR 300\1122 FCC Above 1G 2.4G\54  
**Memo:** Sample Number: S24111411-006

## Test Graph

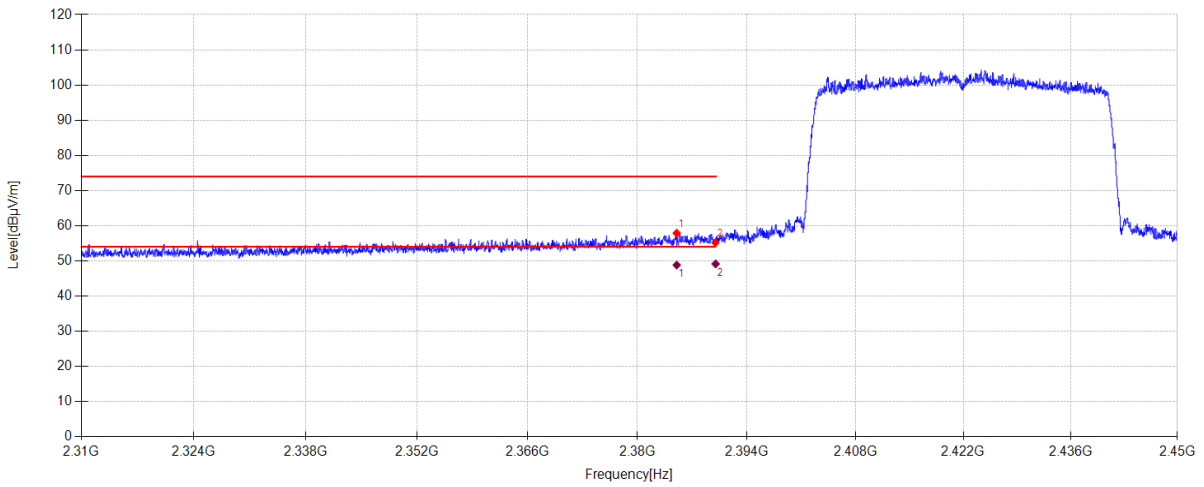

Data List										
NO	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	2385.026	27.07	27.24	3.57	0.00	57.88	74.00	16.12	PK	Vertical
2	2390.000	24.39	27.26	3.57	0.00	55.22	74.00	18.78	PK	Vertical

Data List										
NO	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	2385.031	18.01	27.24	3.57		48.82	54.00	5.18	AV	Vertical
2	2390.015	18.32	27.26	3.57		49.15	54	4.85	AV	Vertical


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

# TR-4-E-009 Radiated Emission Test Result

**Test Date:** 2024-11-22 **Tested By:** Guoyuan Lin  
**EUT:** Multi-Channel Soundbar **Model Number:** BAR 300MK2  
**Test Mode:** 11AX40 MIMO 2452 MHz Tx mode **Power Supply:** AC 120V/60Hz  
**Condition:** Temp:24.5°C;Humi:47.4% **Test Site:** DDT 3# Chamber  
**File Path:** d:\ts\2024 report data\BAR 300\1122 FCC Above 1G 2.4G\51  
**Memo:** Sample Number: S24111411-006

## Test Graph

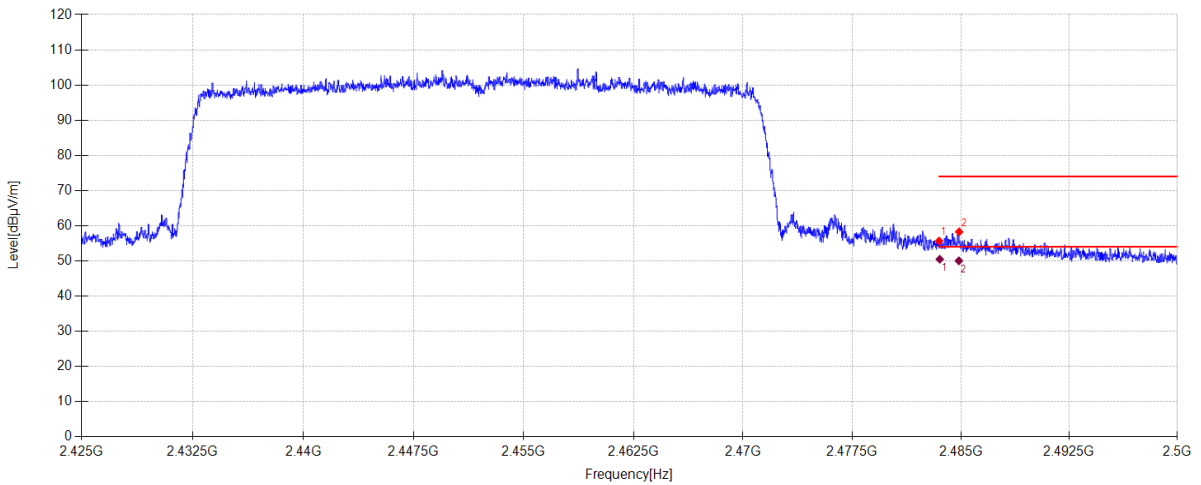

Data List										
NO	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	2483.500	24.50	27.53	3.62	0.00	55.65	74.00	18.35	PK	Horizontal
2	2484.888	27.10	27.54	3.62	0.00	58.26	74.00	15.74	PK	Horizontal

Data List										
NO	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity	
1	2483.548	19.32	27.53	3.62	50.47	54.00	3.53	AV	Horizontal	
2	2484.865	18.86	27.54	3.62	50.02	54.00	3.98	AV	Horizontal	


**Note:**

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

# TR-4-E-009 Radiated Emission Test Result

**Test Date:** 2024-11-22 **Tested By:** Guoyuan Lin  
**EUT:** Multi-Channel Soundbar **Model Number:** BAR 300MK2  
**Test Mode:** 11AX40 MIMO 2452 MHz Tx mode **Power Supply:** AC 120V/60Hz  
**Condition:** Temp:24.5°C;Humi:47.4% **Test Site:** DDT 3# Chamber  
**File Path:** d:\ts\2024 report data\BAR 300\1122 FCC Above 1G 2.4G\52  
**Memo:** Sample Number: S24111411-006

## Test Graph

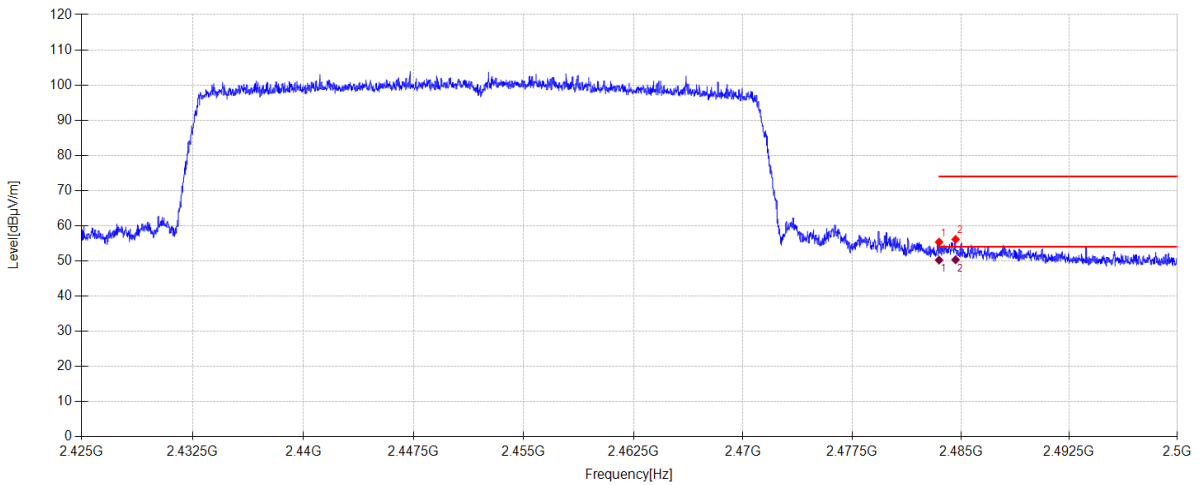

Data List										
NO	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	2483.500	24.20	27.53	3.62	0.00	55.35	74.00	18.65	PK	Vertical
2	2484.640	24.97	27.54	3.62	0.00	56.13	74.00	17.87	PK	Vertical

Data List										
NO	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity	
1	2483.500	19.08	27.53	3.62	50.23	54.00	3.77	AV	Vertical	
2	2484.640	19.17	27.54	3.62	50.33	54.00	3.67	AV	Vertical	


**Note:**

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

## TR-4-E-009 Radiated Emission Test Result

**Test Date:** 2024-11-22 **Tested By:** Guoyuan Lin  
**EUT:** Multi-Channel Soundbar **Model Number:** BAR 300MK2  
**Test Mode:** 11AX20 MIMO RU0 2412 MHz Tx mode **Power Supply:** AC 120V/60Hz  
**Condition:** Temp:24.5°C;Humi:47.4% **Test Site:** DDT 3# Chamber  
**File Path:** d:\ts\2024 report data\BAR 300\2.4G RU\13  
**Memo:** Sample Number: S24111411-006

### Test Graph

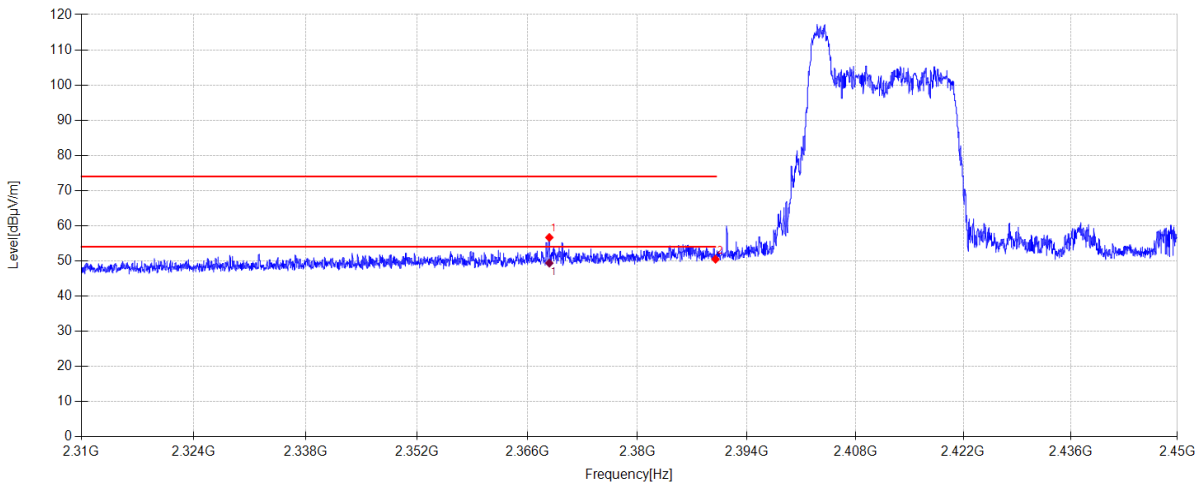

#### Data List

NO	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	2368.772	25.91	27.18	3.56	0.00	56.65	74.00	17.35	PK	Horizontal
2	2390.000	19.65	27.26	3.57	0.00	50.48	74.00	23.52	PK	Horizontal

#### Data List

NO	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	2368.772	18.63	27.18	3.56	49.37	54.00	4.63	AV	Horizontal


#### Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

# TR-4-E-009 Radiated Emission Test Result

**Test Date:** 2024-11-22 **Tested By:** Guoyuan Lin  
**EUT:** Multi-Channel Soundbar **Model Number:** BAR 300MK2  
**Test Mode:** 11AX20 MIMO RU0 2412 MHz Tx mode **Power Supply:** AC 120V/60Hz  
**Condition:** Temp:24.5°C;Humi:47.4% **Test Site:** DDT 3# Chamber  
**File Path:** d:\ts\2024 report data\BAR 300\2.4G RU\14  
**Memo:** Sample Number: S24111411-006

## Test Graph

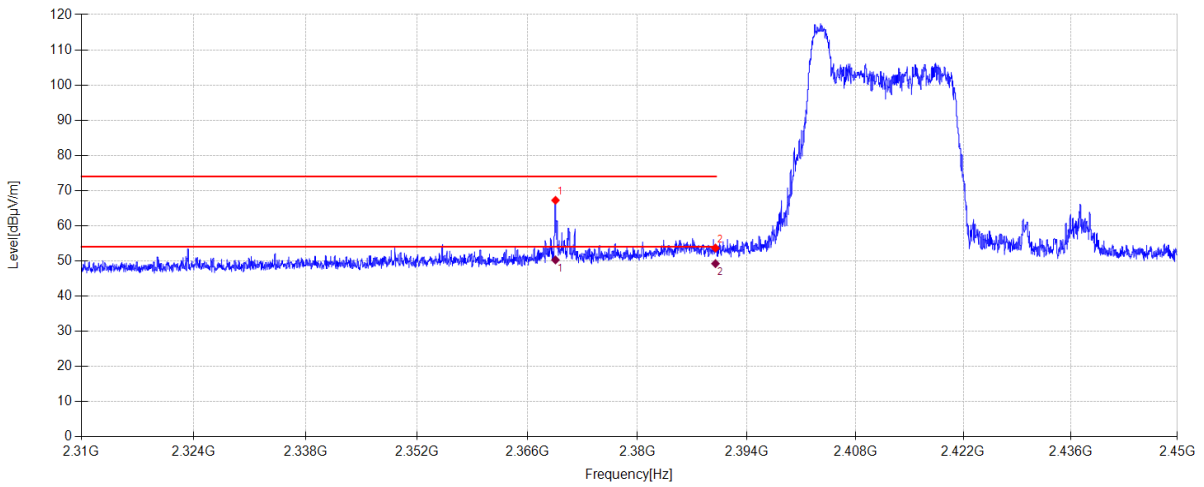

Data List										
NO	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	2369.556	36.49	27.18	3.56	0.00	67.23	74.00	6.77	PK	Vertical
2	2390.000	22.81	27.26	3.57	0.00	53.64	74.00	20.36	PK	Vertical

Data List										
NO	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity	
1	2369.553	19.54	27.18	3.56	50.28	54.00	3.72	AV	Vertical	
2	2389.995	18.40	27.26	3.57	49.23	54.00	4.77	AV	Vertical	


**Note:**

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

# TR-4-E-009 Radiated Emission Test Result

**Test Date:** 2024-11-22 **Tested By:** Guoyuan Lin  
**EUT:** Multi-Channel Soundbar **Model Number:** BAR 300MK2  
**Test Mode:** 11AX20 MIMO RU0 2462 MHz Tx mode **Power Supply:** AC 120V/60Hz  
**Condition:** Temp:24.5°C;Humi:47.4% **Test Site:** DDT 3# Chamber  
**File Path:** d:\ts\2024 report data\BAR 300\2.4G RU\15  
**Memo:** Sample Number: S24111411-006

## Test Graph

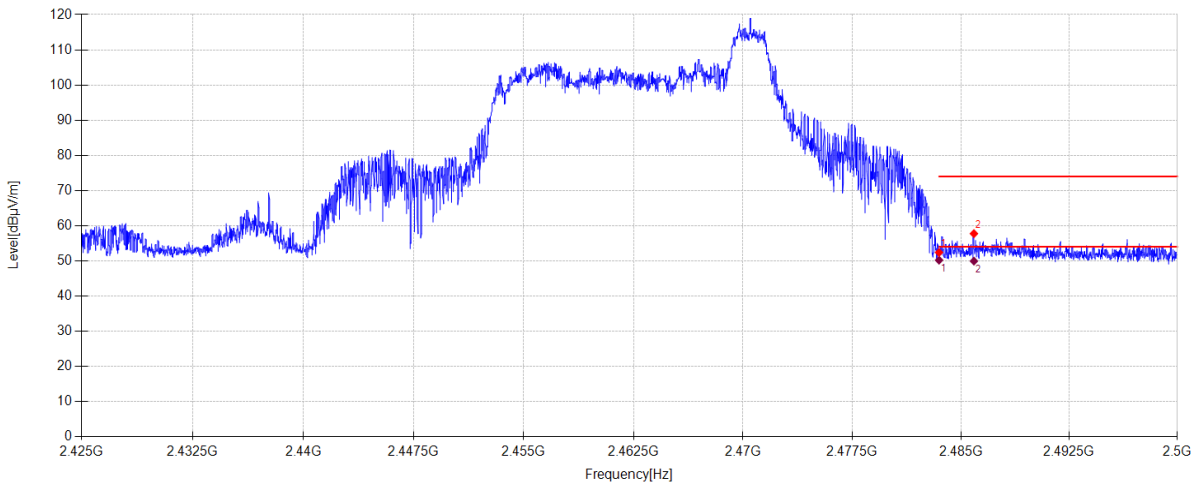

Data List										
NO	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	2483.500	21.26	27.53	3.62	0.00	52.41	74.00	21.59	PK	Horizontal
2	2485.908	26.59	27.54	3.62	0.00	57.75	74.00	16.25	PK	Horizontal

Data List										
NO	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity	
1	2483.500	19.06	27.53	3.62	50.21	54.00	3.79	AV	Horizontal	
2	2485.908	18.79	27.54	3.62	49.95	54.00	4.05	AV	Horizontal	


**Note:**

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

# TR-4-E-009 Radiated Emission Test Result

**Test Date:** 2024-11-22 **Tested By:** Guoyuan Lin  
**EUT:** Multi-Channel Soundbar **Model Number:** BAR 300MK2  
**Test Mode:** 11AX20 MIMO RU0 2462 MHz Tx mode **Power Supply:** AC 120V/60Hz  
**Condition:** Temp:24.5°C;Humi:47.4% **Test Site:** DDT 3# Chamber  
**File Path:** d:\ts\2024 report data\BAR 300\2.4G RU\16  
**Memo:** Sample Number: S24111411-006

## Test Graph

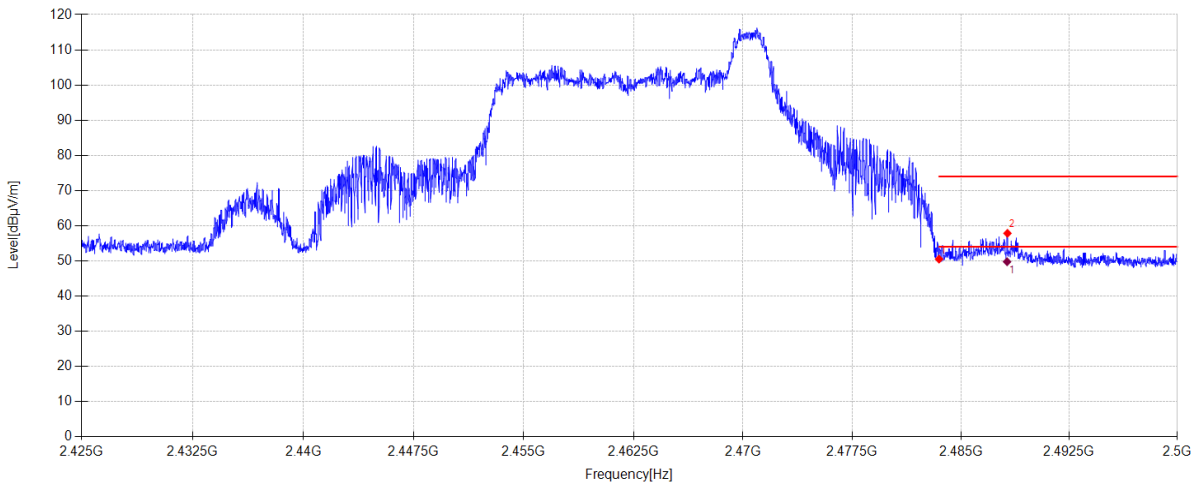

Data List										
NO	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	2483.500	19.36	27.53	3.62	0.00	50.51	74.00	23.49	PK	Vertical
2	2488.225	26.68	27.55	3.62	0.00	57.85	74.00	16.15	PK	Vertical

Data List										
NO	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity	
1	2488.199	18.60	27.55	3.62	49.77	54.00	4.23	AV	Vertical	

**Note:**


1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

## 14. Power Line Conducted Emissions

### 14.1. Test equipment

Equipment	Manufacturer	Model No.	Serial No.	Cal Due To
Two Line V-Network	R&S	ENV216	DDT-ZC02059	2025/07/08
Three-phase artificial power network	SCHWARZBEC K	NLSK 8163	DDT-ZC01572	2025/07/08
Conducted Radiated Software	Audix	E3	DDT-ZC00562	/
Two Line V-Network	R&S	ENV216	DDT-ZC02056	2025/07/08
EMI Test Receiver	R&S	ESCI/E3	DDT-ZC01297	2025/07/08
Pulse Limiter	SCHWARZBEC K	VTSD 9561	DDT-ZC02128	2025/07/08
RF Cable	Yuhu Technology	Z806-NJ-NJ-6M	DDT-ZC02004	2025/07/08
$\Delta$ -shaped artificial power network	SCHWARZBEC K	PVDC 8301	DDT-ZC03939	2025/03/31

### 14.2. Block diagram of test setup

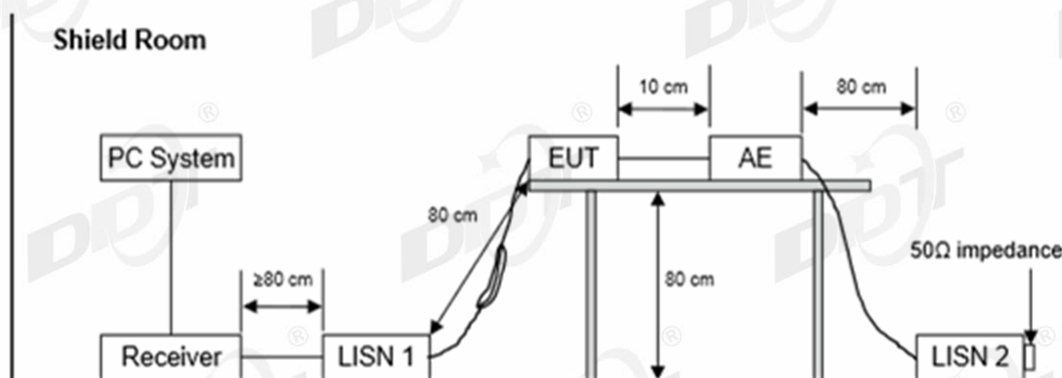

### 14.3. Limits

Frequency	Quasi-Peak Level dB(uV)	Average Level dB(uV)
150 kHz~500 kHz	66 ~ 56*	56 ~ 46*
500 kHz~5 MHz	56	46
5 MHz~30 MHz	60	50

Note 1: \* Decreasing linearly with logarithm of frequency.

Note 2: The lower limit shall apply at the transition frequencies.

### 14.4. Assistant equipment used for test

Assistant equipment	Manufacturer	Model number	Description	other
/	/	/	/	/



#### 14.5. Test procedure

The EUT and Support equipment, if needed, were put placed on a non-metallic table, 80cm above the ground plane.

All support equipment power received from a second LISN.

Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.

The Receiver scanned from 150 kHz to 30 MHz for emissions in each of the test modes.

During the above scans, the emissions were maximized by cable manipulation.

The test mode(s) described in clause 2.4 were scanned during the preliminary test.

After the preliminary scan, we found the test mode producing the highest emission level.

The EUT configuration and worse cable configuration of the above highest emission levels were recorded for reference of the final test.

EUT and support equipment were set up on the test bench as per the configuration with highest emission level in the preliminary test.

A scan was taken on both power lines, Neutral and Line, recording at least the six highest emissions.

Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit.

The test data of the worst-case condition(s) was recorded.

The bandwidth of test receiver is set at 9 kHz.

#### 14.6. Test result

##### **PASS. (See below detailed test result)**

Note1: All emissions not reported below are too low against the prescribed limits.

Note2: “-----” means Peak detection; “-----” means Average detection.


Note3: Pre-test AC conducted emission at both voltage AC 120V/60Hz and AC 240V/50Hz, recorded the worst case.

14.7. Test data

## TR-4-E-010 Conducted Emission Test Result

<b>Test Site</b>	: DDT 6# Shield Room	<b>D:\2024 Report Date\Q24111411-2E\1212 CE.EM6</b>
<b>Test Date</b>	: 2024-12-12	<b>Tested By</b> : Genliu
<b>EUT</b>	: Multi-Channel Soundbar	<b>Model Number</b> : BAR 300MK2
<b>Power Supply</b>	: AC 120V/60Hz	<b>Test Mode</b> : Tx mode
<b>Condition</b>	: Temp:21.9°C,Humi:52.5%	<b>LISN</b> : 2024 ENV216 3#/NEUTRAL
<b>Memo</b>	: Sample Number: S24111411-006	

Data: 14

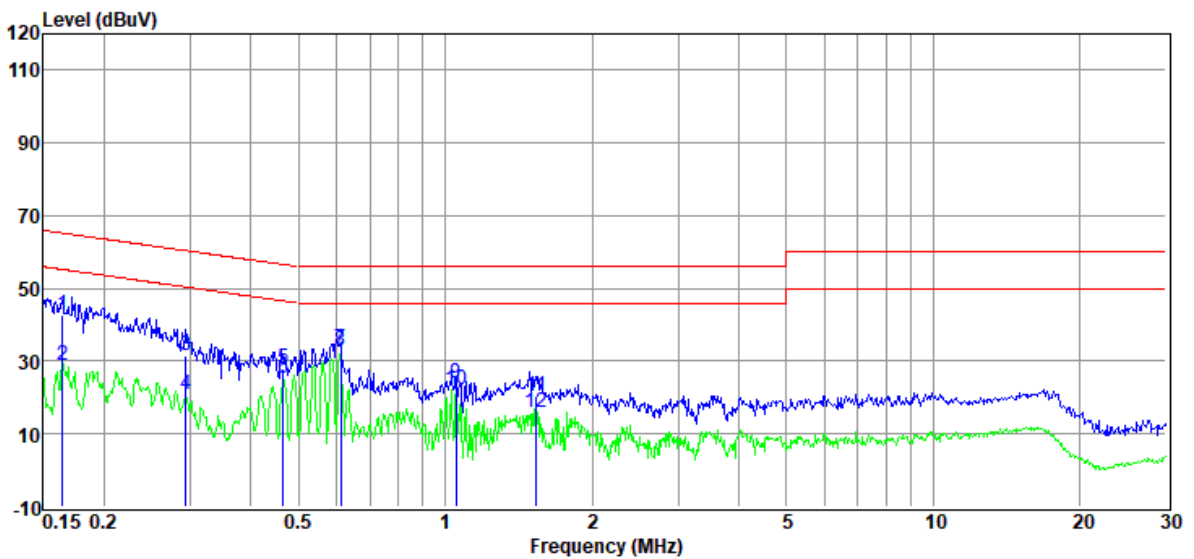


Item (Mark)	Freq. (MHz)	Read Level (dBuV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBuV)	Limit Line (dBuV)	Over Limit (dB)	Detector	Phase
1	0.16	22.84	9.77	0.07	9.83	42.51	65.25	-22.74	QP	NEUTRAL
2	0.16	9.00	9.77	0.07	9.83	28.67	55.25	-26.58	Average	NEUTRAL
3	0.29	11.89	9.76	0.06	9.83	31.54	60.41	-28.87	QP	NEUTRAL
4	0.29	1.02	9.76	0.06	9.83	20.67	50.41	-29.74	Average	NEUTRAL
5	0.47	8.27	9.77	0.10	9.83	27.97	56.58	-28.61	QP	NEUTRAL
6	0.47	5.38	9.77	0.10	9.83	25.08	46.58	-21.50	Average	NEUTRAL
7	0.61	13.64	9.75	0.08	9.83	33.30	56.00	-22.70	QP	NEUTRAL
8	0.61	13.21	9.75	0.08	9.83	32.87	46.00	-13.13	Average	NEUTRAL
9	1.05	4.30	9.76	0.12	9.84	24.02	56.00	-31.98	QP	NEUTRAL
10	1.05	2.57	9.76	0.12	9.84	22.29	46.00	-23.71	Average	NEUTRAL
11	1.54	0.48	9.77	0.11	9.84	20.20	56.00	-35.80	QP	NEUTRAL
12	1.54	-3.60	9.77	0.11	9.84	16.12	46.00	-29.88	Average	NEUTRAL

- Note: 1. Result Level = Read Level +LISN Factor + Pulse Limiter Factor + Cable loss.  
 2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).  
 4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

# TR-4-E-010 Conducted Emission Test Result

<b>Test Site</b>	: DDT 6# Shield Room	<b>D:\2024 Report Date\Q24111411-2E\1212 CE.EM6</b>	
<b>Test Date</b>	: 2024-12-12	<b>Tested By</b>	: Genliu
<b>EUT</b>	: Multi-Channel Soundbar	<b>Model Number</b>	: BAR 300MK2
<b>Power Supply</b>	: AC 120V/60Hz	<b>Test Mode</b>	: Tx mode
<b>Condition</b>	: Temp:21.9°C,Humi:52.5%	<b>LISN</b>	: 2024 ENV216 3#/LINE
<b>Memo</b>	: Sample Number: S24111411-006		

Data: 16

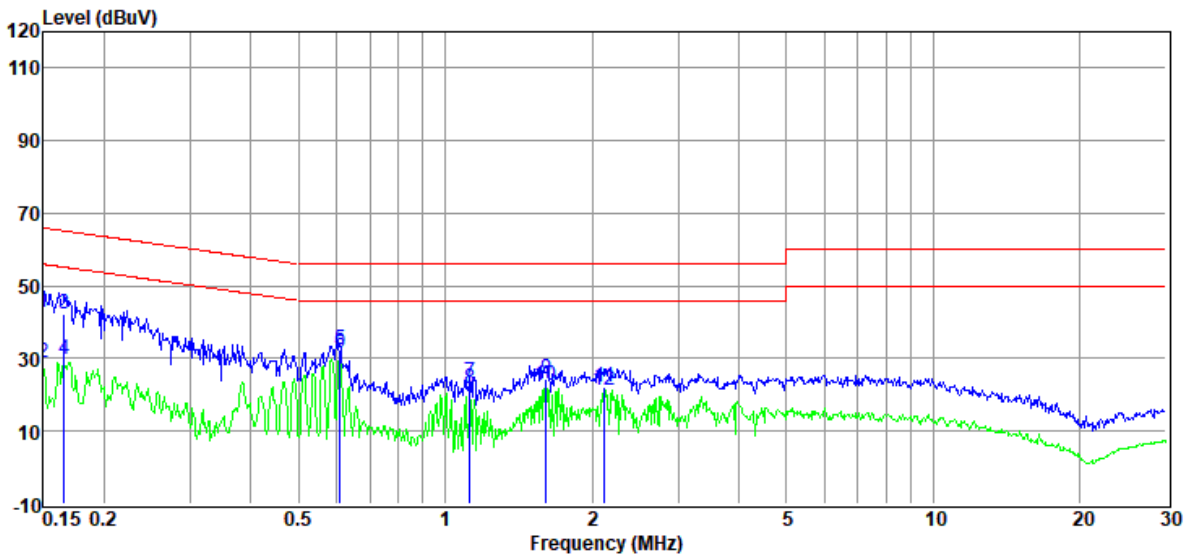

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBμV)	Limit Line (dBμV)	Over Limit (dB)	Detector	Phase
1	0.15	23.21	9.78	0.07	9.83	42.89	66.00	-23.11	QP	LINE
2	0.15	9.01	9.78	0.07	9.83	28.69	56.00	-27.31	Average	LINE
3	0.17	22.74	9.78	0.07	9.83	42.42	65.16	-22.74	QP	LINE
4	0.17	10.28	9.78	0.07	9.83	29.96	55.16	-25.20	Average	LINE
5	0.61	12.81	9.75	0.09	9.83	32.48	56.00	-23.52	QP	LINE
6	0.61	11.66	9.75	0.09	9.83	31.33	46.00	-14.67	Average	LINE
7	1.12	3.75	9.74	0.12	9.84	23.45	56.00	-32.55	QP	LINE
8	1.12	1.90	9.74	0.12	9.84	21.60	46.00	-24.40	Average	LINE
9	1.61	4.53	9.75	0.11	9.84	24.23	56.00	-31.77	QP	LINE
10	1.61	2.96	9.75	0.11	9.84	22.66	46.00	-23.34	Average	LINE
11	2.12	2.47	9.75	0.11	9.84	22.17	56.00	-33.83	QP	LINE
12	2.12	1.78	9.75	0.11	9.84	21.48	46.00	-24.52	Average	LINE

- Note: 1. Result Level = Read Level +LISN Factor + Pulse Limiter Factor + Cable loss.  
 2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).  
 4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

## 16. Photos of the EUT

Please refer to DDT-Q24111411-2E appendix I

-----End Report-----